

FCC PART 15C TEST REPORT FOR CERTIFICATION  
On Behalf of

Klipsch L.L.C.

2.0 SOUND BAR WITH INTEGRATED SUBWOOFER

Model Number: RSB-3

Additional Model: STUDIO SB 36

FCC ID: STI-RSB36J

Prepared for:	Klipsch L.L.C.
	3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, USA
Prepared By:	EST Technology Co., Ltd.
	San Tun Management Zone, Houjie District, Dongguan, China
	Tel: 86-769-83081888-808


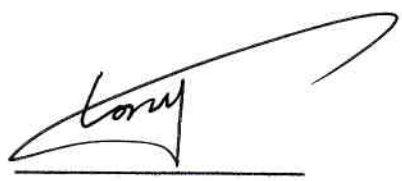

Report Number:	ESTE-R1707021
Date of Test:	June 17 ~ July 10, 2017
Date of Report:	July 12, 2017

# TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT).....	5
2. SUMMARY OF TEST.....	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Measurement uncertainty.....	8
2.4. Assistant equipment used for test.....	8
2.5. Block Diagram.....	8
2.6. Test mode.....	9
2.7. Channel List for Bluetooth.....	9
2.8. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER.....	11
3.1. Limit.....	11
3.2. Test Procedure.....	11
3.3. Test Result.....	11
3.4. Test Data.....	12
4. 20 DB BANDWIDTH.....	20
4.1. Limit.....	20
4.2. Test Procedure.....	20
4.3. Test Result.....	20
4.4. Test Data.....	21
5. CARRIER FREQUENCY SEPARATION.....	29
5.1. Limit.....	29
5.2. Test Procedure.....	29
5.3. Test Result.....	29
5.4. Test Data.....	30
6. NUMBER OF HOPPING CHANNEL.....	38
6.1. Limit.....	38
6.2. Test Procedure.....	38
6.3. Test Result.....	38
6.4. Test Data.....	39
7. DWELL TIME.....	43
7.1. Limit.....	43
7.2. Test Procedure.....	43
7.3. Test Result.....	43
7.4. Test Data.....	44
8. RADIATED EMISSIONS.....	56
8.1. Limit.....	56
8.2. Block Diagram of Test setup.....	57
8.3. Test Procedure.....	58
8.4. Test Result.....	58

- 8.5. Test Data ..... 59
- 9. BAND EDGE COMPLIANCE ..... 93
  - 9.1. Limit ..... 93
  - 9.2. Block Diagram of Test setup ..... 93
  - 9.3. Test Procedure ..... 93
  - 9.4. Test Result ..... 93
  - 9.5. Test Data ..... 94
- 10. POWER LINE CONDUCTED EMISSIONS ..... 158
  - 10.1. Limit ..... 158
  - 10.2. Test Procedure ..... 158
- 11. ANTENNA REQUIREMENTS ..... 167
  - 11.1. Limit ..... 167
  - 11.2. Result ..... 167
- 12. TEST SETUP PHOTO ..... 168
- 13. PHOTO EUT ..... 170

### Test Report Verification

<b>Applicant:</b>	Klipsch L.L.C.		
<b>Address:</b>	3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, USA		
<b>Manufacturer:</b>	Klipsch L.L.C.		
<b>Address:</b>	3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, USA		
<b>Factory:</b>	Zhao Yang Electronic (Shen Zhen) Co.,Ltd.		
<b>Address:</b>	Building 2,De Yong Jia Industrial Park,Guang Qiao Road,Yu Lv Community, Gong Ming Street,Guang Ming New District,Shenzhen,Guangdong,P.R.China		
<b>E.U.T:</b>	2.0 SOUND BAR WITH INTEGRATED SUBWOOFER		
<b>Model Number:</b>	RSB-3		
<b>Additional Model:</b>	STUDIO SB 36 (The difference among the two models is just the trademark,appearance and model name, other is the same. The RSB-3 with trade name is " <b>Klipsch</b> ", metal cover; The STUDIO SB 36 with trade name is " <b>Jamo</b> ", cloth cover.)		
<b>Power Supply:</b>	DC 18V From Adapter		
<b>Test Voltage:</b>	DC 18V From Adapter Input AC 120V/60Hz DC 18V From Adapter Input AC 240V/60Hz		
<b>Trade Name:</b>	<b>Klipsch</b> ; <b>Jamo</b>	Serial No.:	-----
<b>Date of Receipt:</b>	June 17, 2017	Date of Test:	June 17 ~ July 10, 2017
<b>Test Specification:</b>	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
<b>Test Result:</b>	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p>This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
		<b>Date: July 12, 2017</b>	
Prepared by:	Tested by:	Approved by:	
			
Amy / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Product Name	:	2.0 SOUND BAR WITH INTEGRATED SUBWOOFER	
FCC ID	:	STI-RSB36J	
Model Number	:	RSB-3	
Operation frequency	:	2402MHz~2480MHz	
Number of channel	:	79	40
Antenna	:	Antenna 1: PIFA antenna , 4.93 dBi gain Antenna 2: PCB antenna , 0.00 dBi gain	
Modulation	:	Dual-mode Bluetooth 4.2 BT BDR: GFSK BT EDR: $\pi/4$ -DQPSK BT EDR: 8-DPSK	Dual-mode Bluetooth 4.2 BLE: GFSK
Sample Type	:	Prototype production	

## 2. SUMMARY OF TEST

### 2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.247a1 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emissions	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:201 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

## 2.2. Test Facilities

EMC Lab	:	Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: December 07, 2015
		Certificated by FCC, USA Registration No.: 989591 Date of registration: November 15, 2016
		Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015
		Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011
		Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011
		Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011
		Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011
		Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011
		Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

### 2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.54dB
Uncertainty for Radiation Emission test (30MHz-1GHz)	3.62
Uncertainty for Radiation Emission test (1GHz to 18GHz)	4.86
Uncertainty for radio frequency	$7 \times 10^{-8}$
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.


### 2.4. Assistant equipment used for test

#### 2.4.1. Adapter

M/N : DYS650-180280W-K  
 Input : 100-240V~50/60Hz 1.3A MAX  
 Output : 18.0V/2.8A

### 2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 (or 1.5) meter high above ground. EUT was be set into Bluetooth test mode by software before test.



(EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER)



## 2.6. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

## 2.7. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

## 2.8. Test Equipment

### 2.8.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June 17,17	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	June 17,17	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June 17,17	1 Year

### 2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI	100435	June 17,17	1 Year
Loop Antenna	ETS-LINDGREN	6502	00071730	June 17,17	3 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

### 2.8.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June 17,17	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June 28,15	3 Year
Signal Amplifier	Agilent	310N	187037	June 17,17	1 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

### 2.8.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	BBHA9120D1 002	June 28,15	3 Year
Board-Band Horn Antenna	SCHWARZB ECK	BBHA 9170	9170-497	June 28,15	3Year
Signal Amplifier	SCHWARZB ECK	BBV9718	9718-212	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 17,17	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	June 17,17	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June 17,17	1 Year

### 3. MAXIMUM PEAK OUTPUT POWER

#### 3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

#### 3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.

#### 3.3. Test Result


EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER						
M/N: RSB-3						
Test date: 2017-06-25		Test site: RF site		Tested by: Tony Tang		
Mode	Freq (MHz)	Result (dBm)		Limit		Conclusion
		Ant 1	Ant 2	dBm	W	
GFSK	2402	2.929	0.897	30.00	1.000	Pass
	2441	4.733	2.971	30.00	1.000	Pass
	2480	3.244	2.091	30.00	1.000	Pass
8-DPSK	2402	1.594	-0.525	21.00	0.125	Pass
	2441	3.514	1.605	21.00	0.125	Pass
	2480	1.740	0.498	21.00	0.125	Pass

### 3.4. Test Data


#### Ant 1 GFSK 2402 MHz

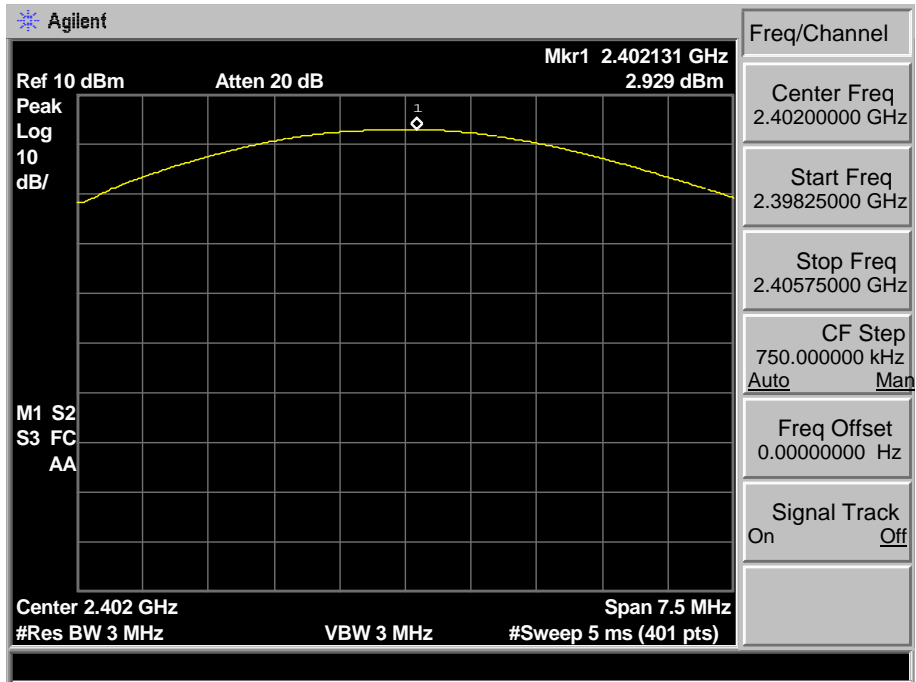


#### GFSK 2441 MHz

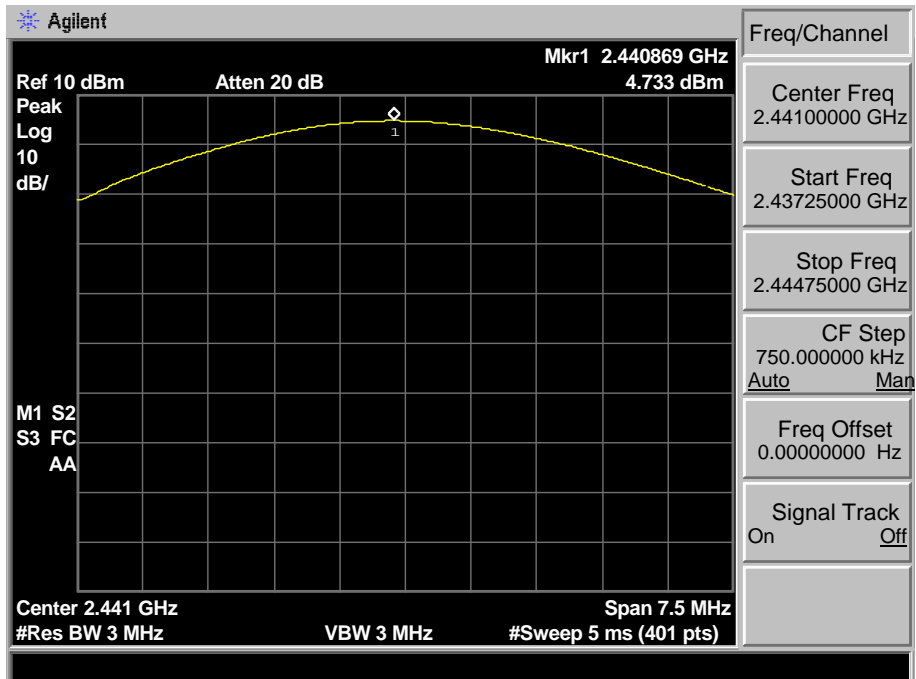


### GFSK 2480 MHz

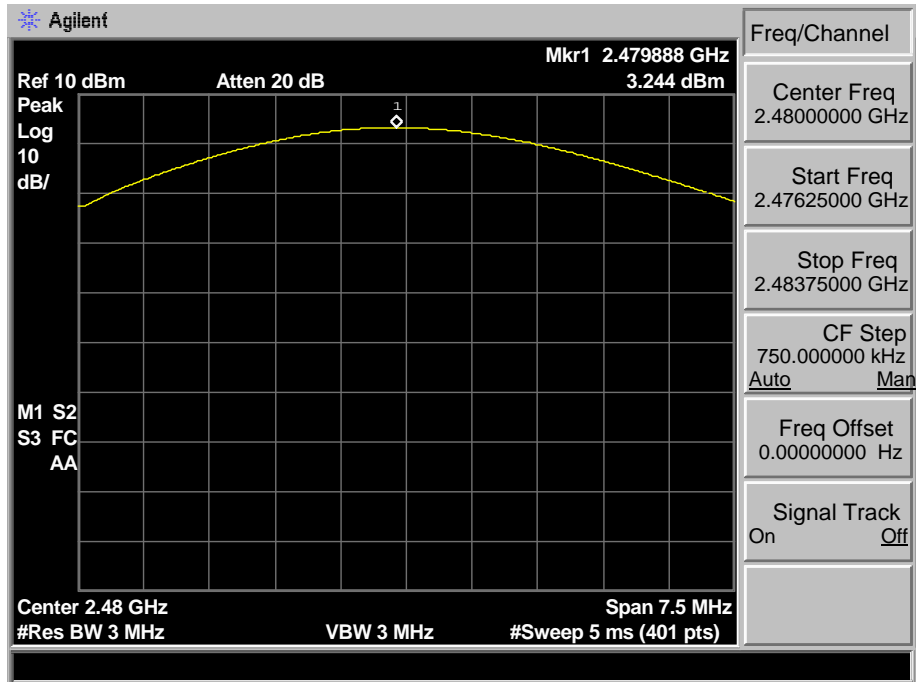


### 8-DPSK 2402 MHz

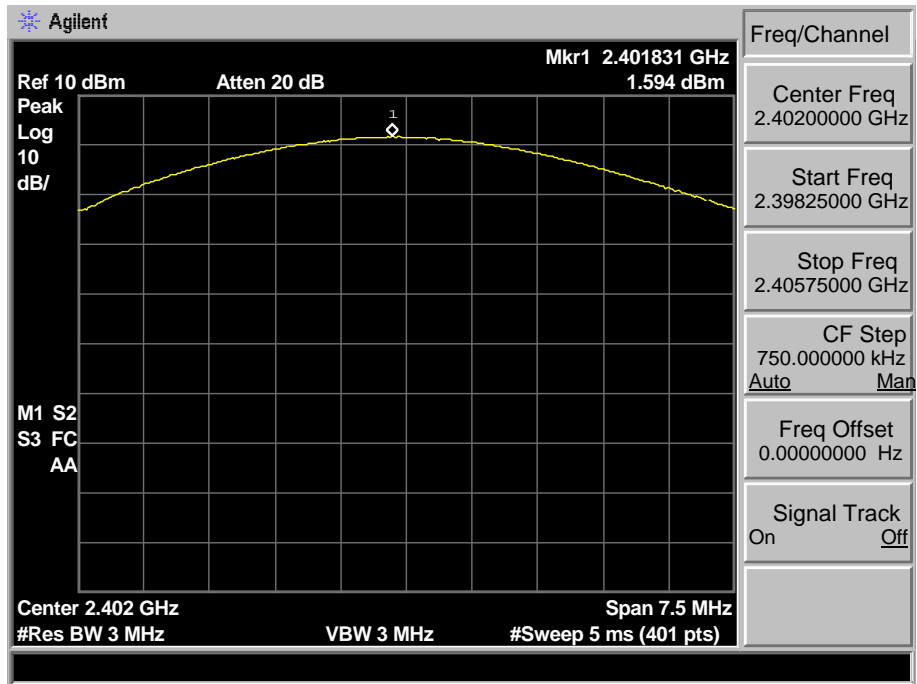


### 8-DPSK 2441 MHz

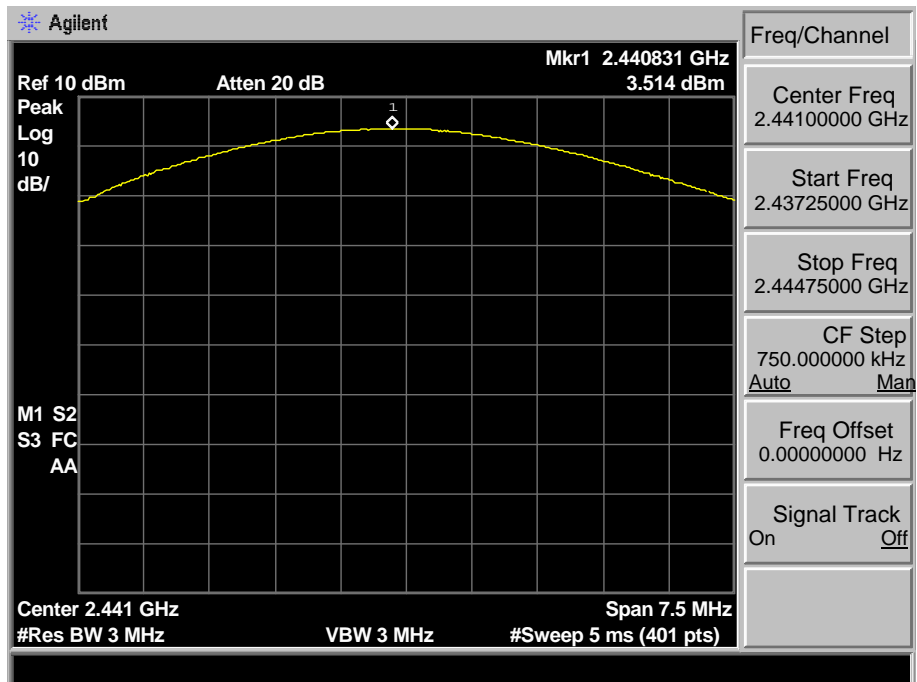


### 8-DPSK 2480 MHz

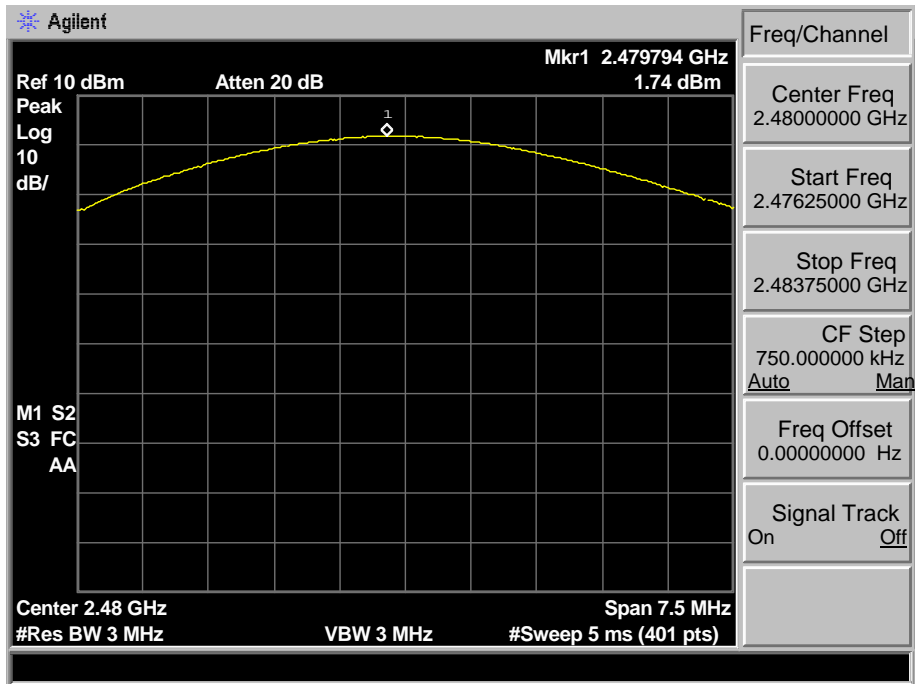

**Ant 2**  
**GFSK 2402 MHz**

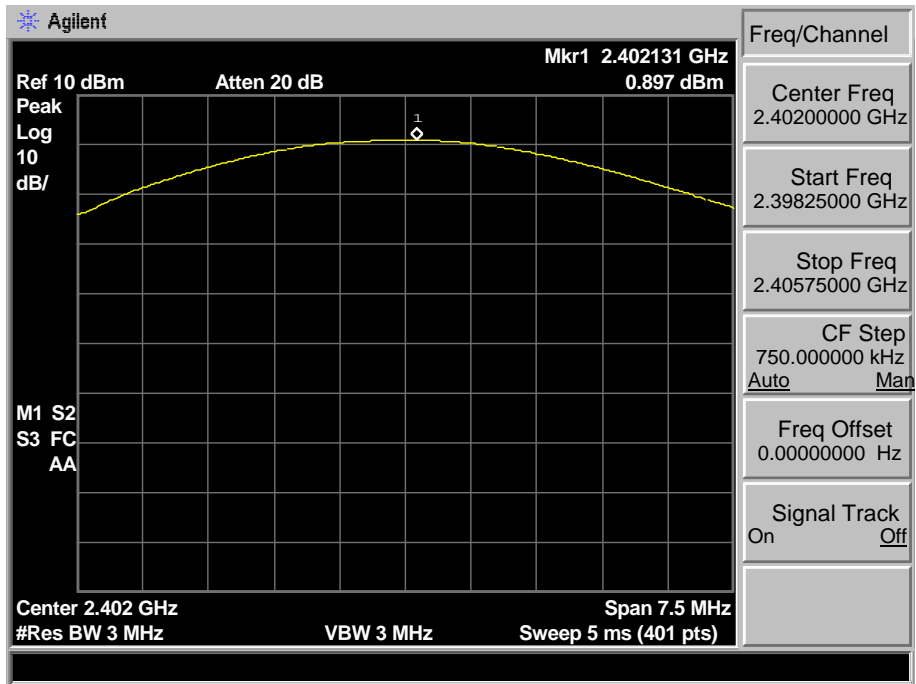


**GFSK 2441 MHz**

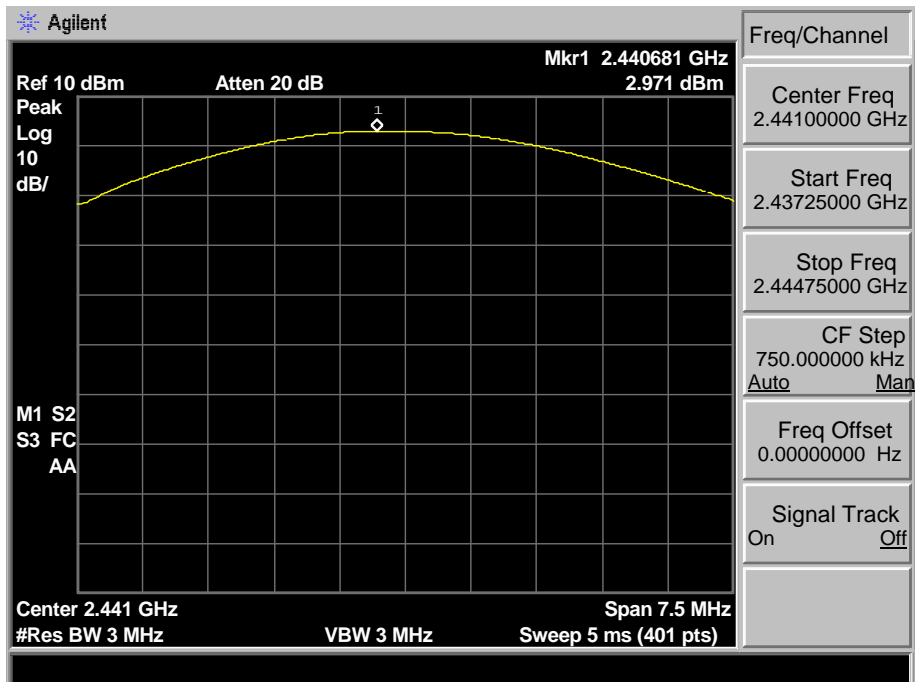





### GFSK 2480 MHz

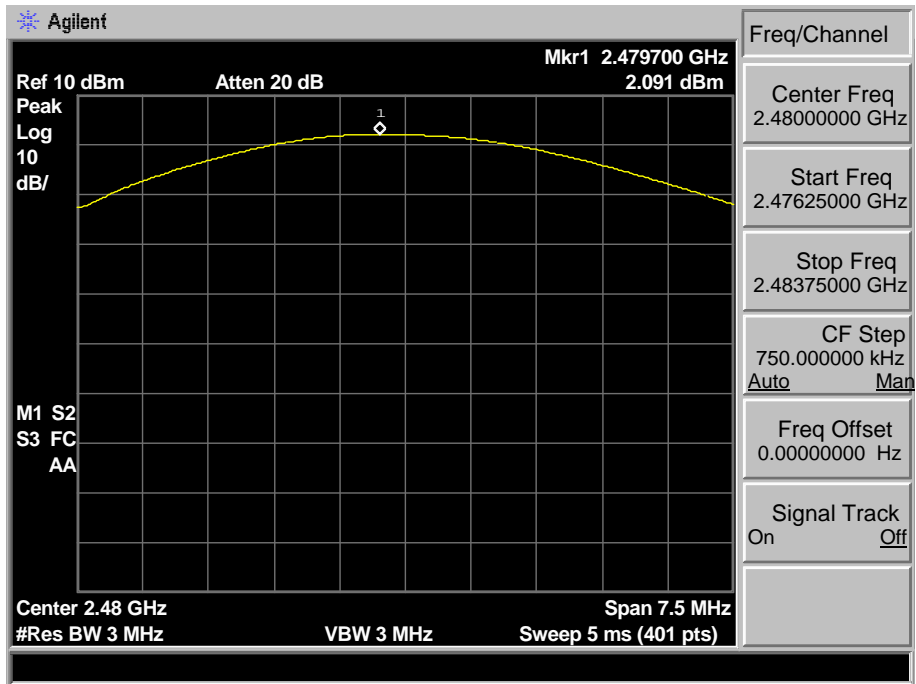


### 8-DPSK 2402 MHz

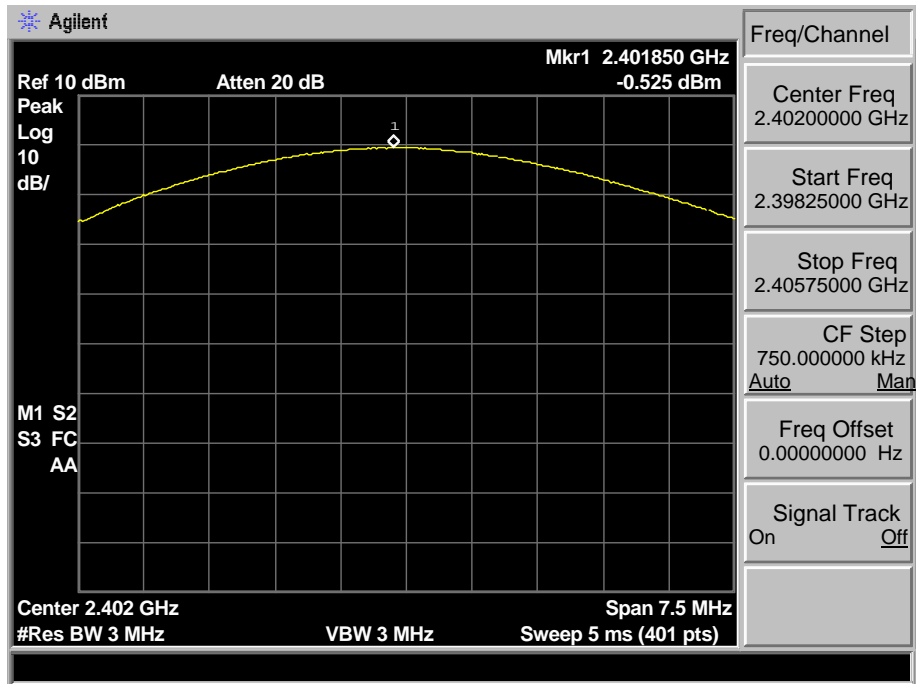

### 8-DPSK 2441 MHz

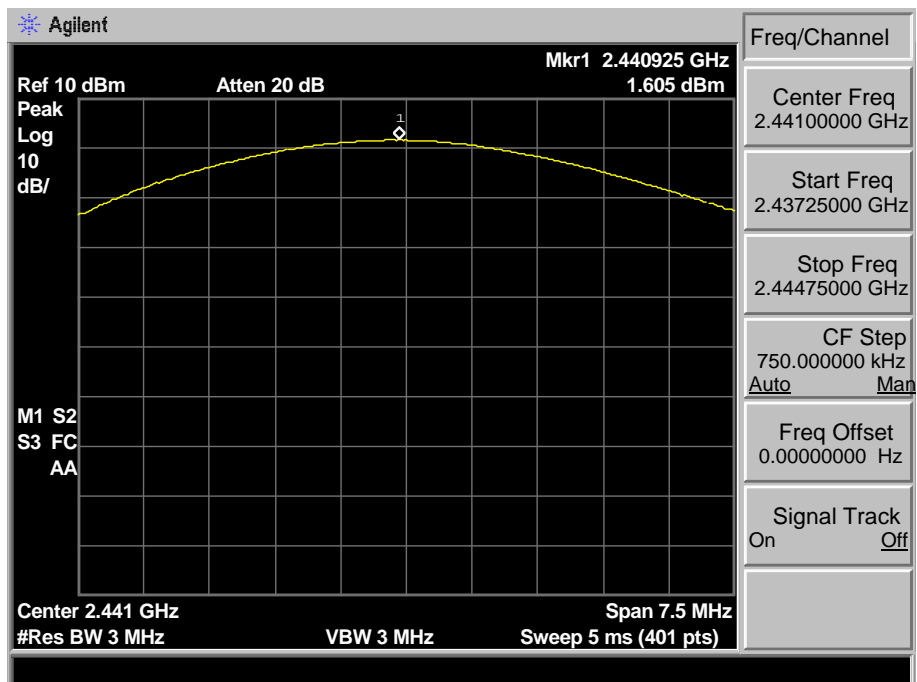

### 8-DPSK 2480 MHz

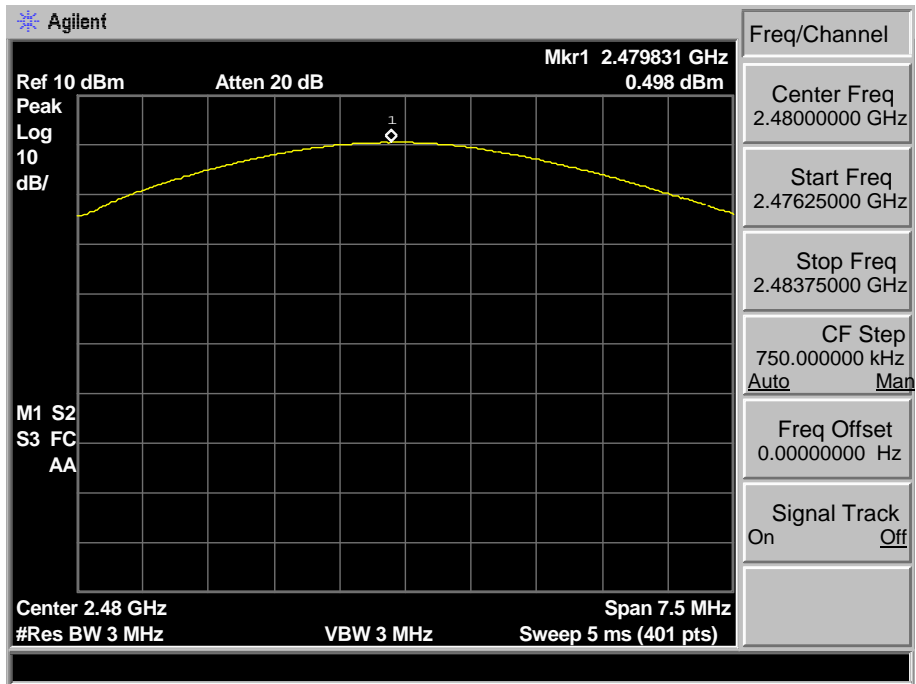

## 4. 20 DB BANDWIDTH

### 4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 4.2. Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


### 4.3. Test Result

EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER					
M/N: RSB-3					
Test date: 2017-06-25		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	20dB Bandwidth (MHz)		Limit (kHz)	Conclusion
		ANT 1	ANT 2		
GFSK	2402	0.887	0.889	/	PASS
	2441	0.871	0.872	/	PASS
	2480	0.868	0.873	/	PASS
8-DPSK	2402	1.221	1.227	/	PASS
	2441	1.222	1.224	/	PASS
	2480	1.224	1.222	/	PASS


### 4.4. Test Data

#### Ant 1


#### GFSK 2402MHz

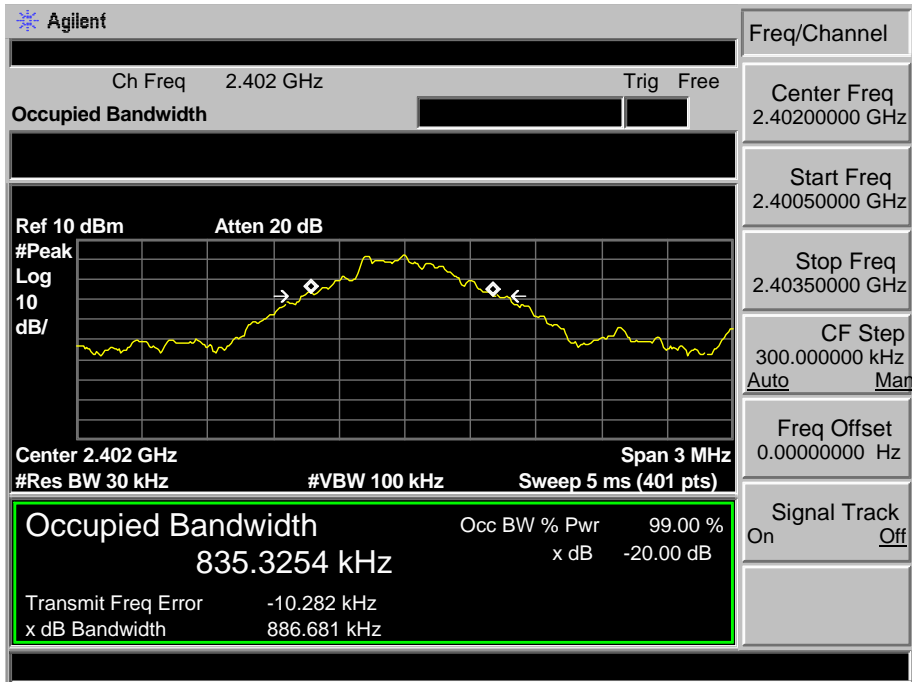


#### GFSK 2441MHz

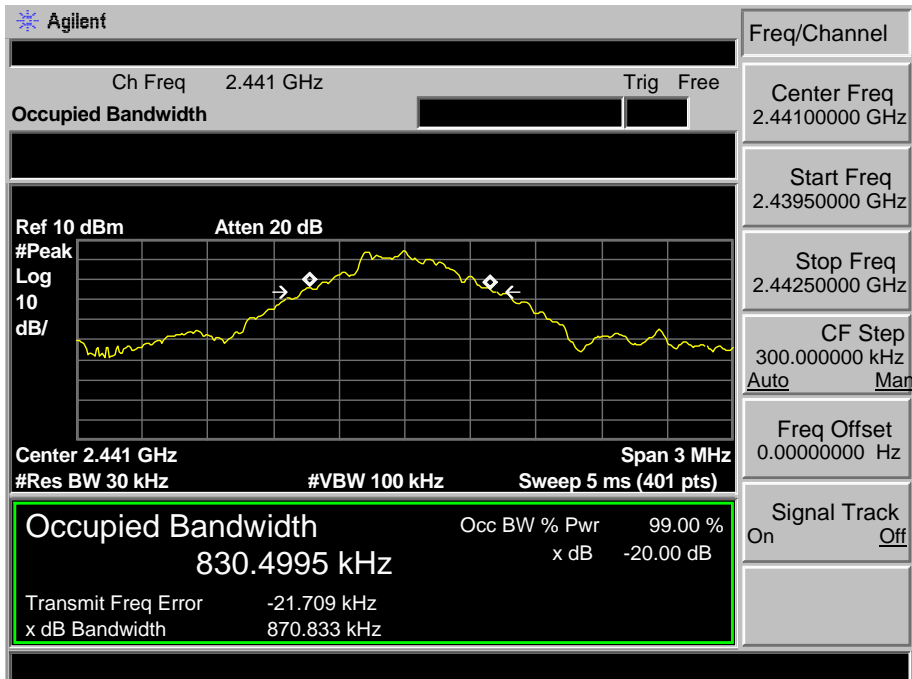


**GFSK 2480MHz**

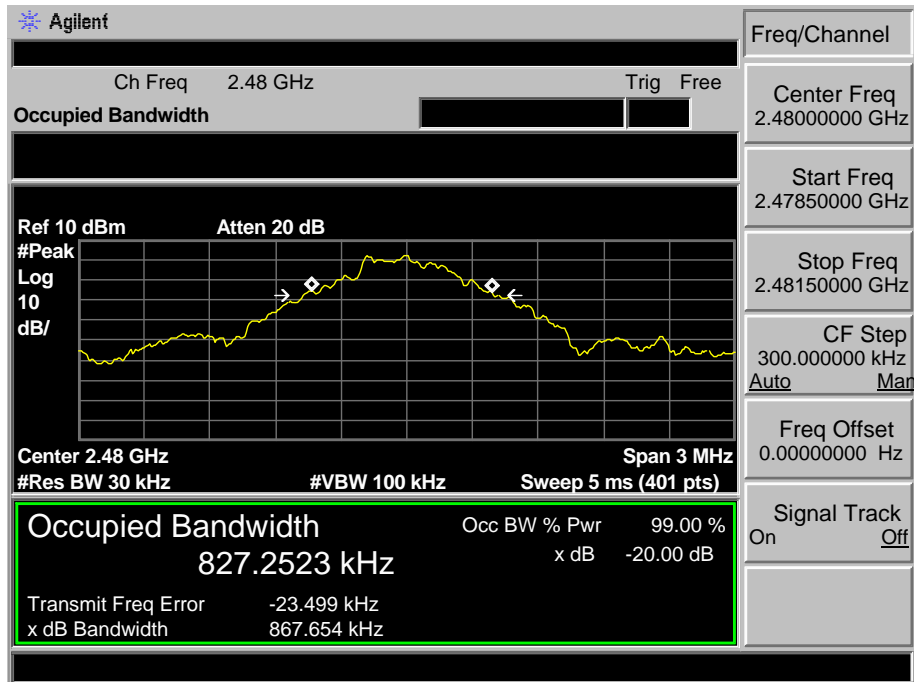


8-DPSK 2402MHz

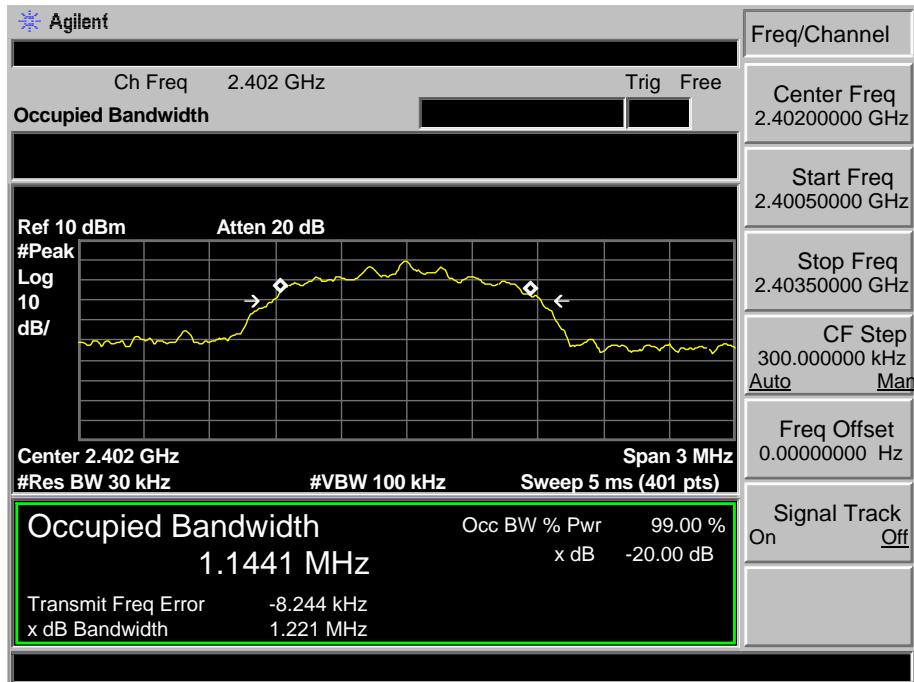

8-DPSK 2441MHz

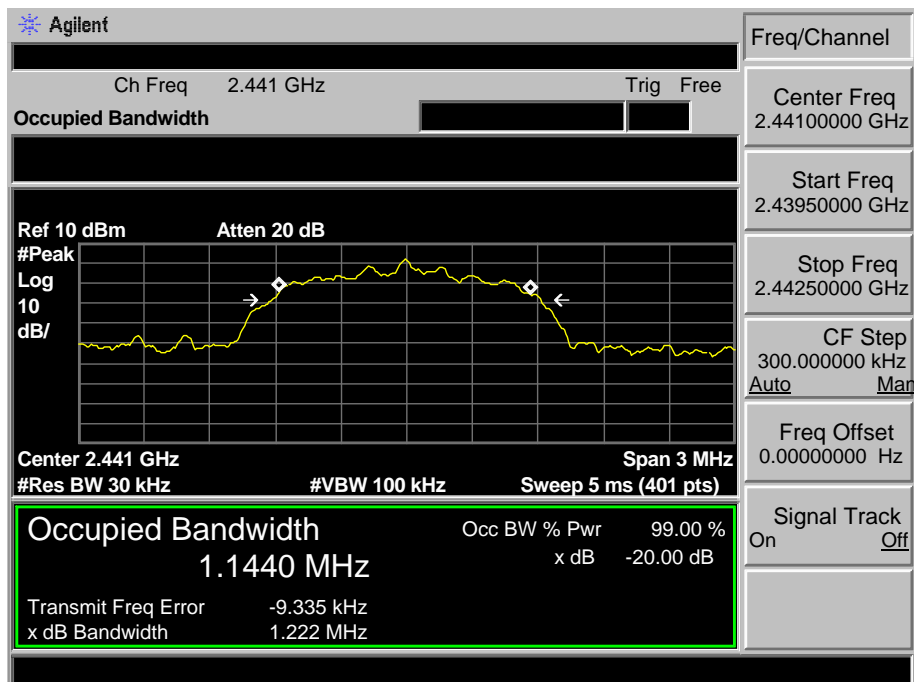


8-DPSK 2480MHz

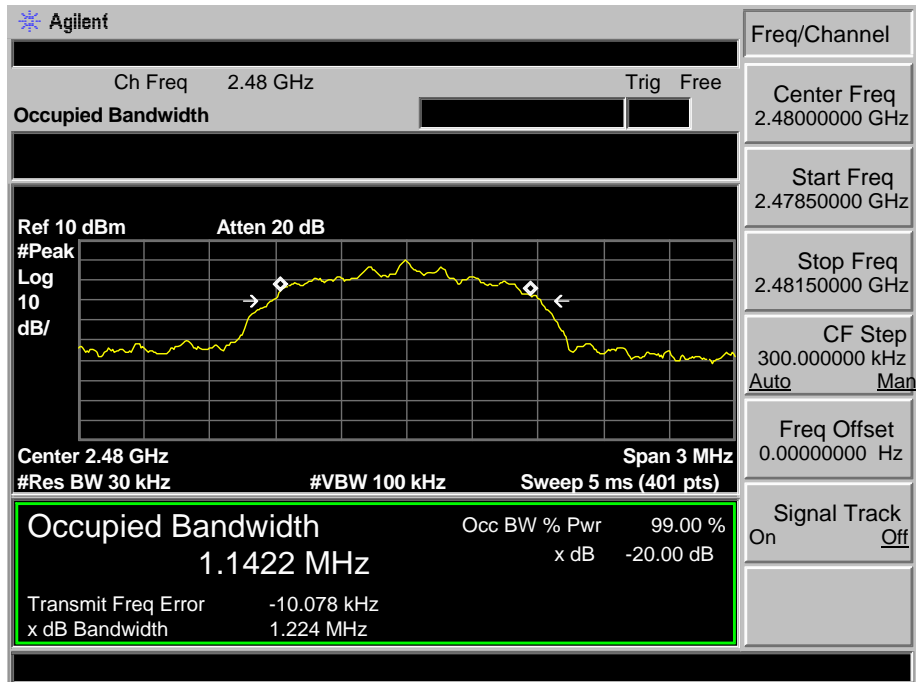





**Ant 2**  
**GFSK 2402MHz**

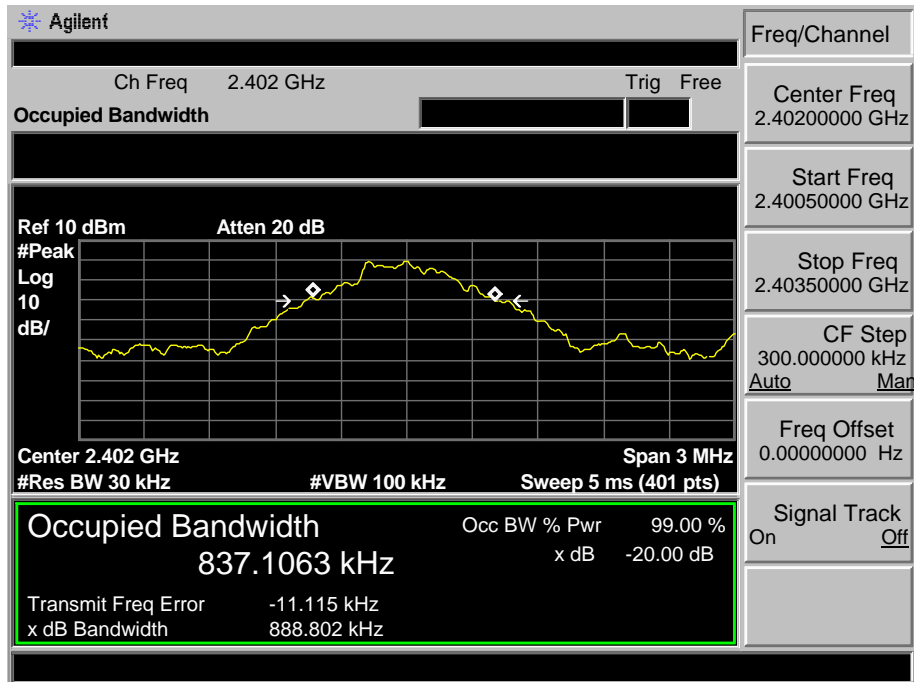


**GFSK 2441MHz**

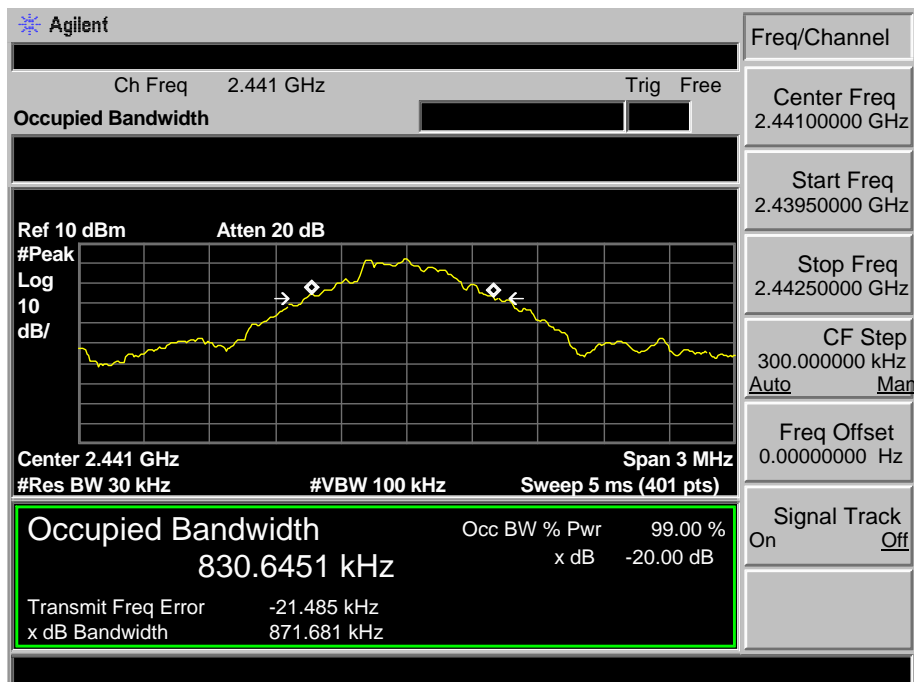


**GFSK 2480MHz**

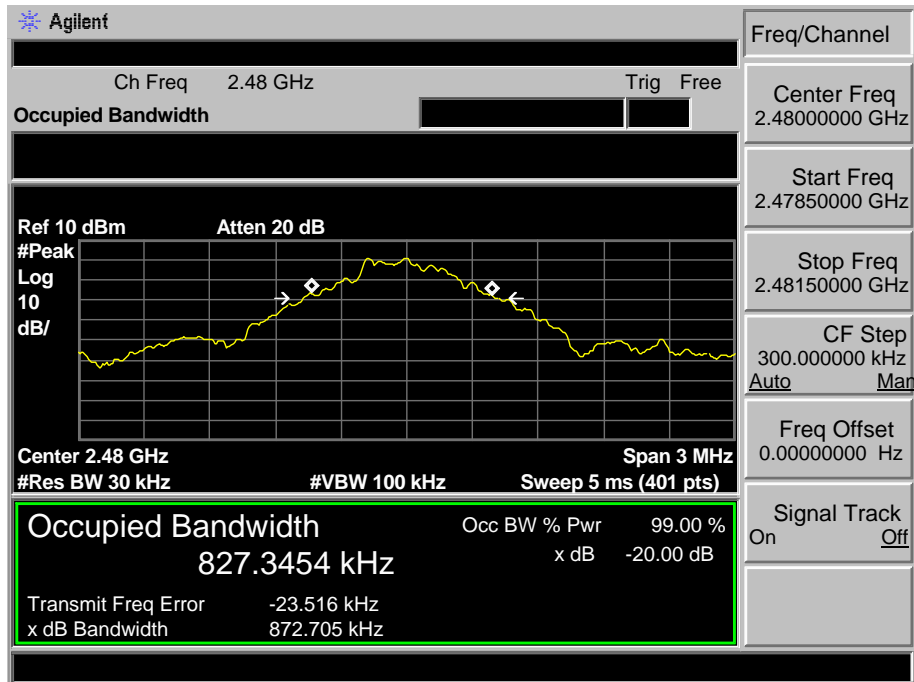


8-DPSK 2402MHz

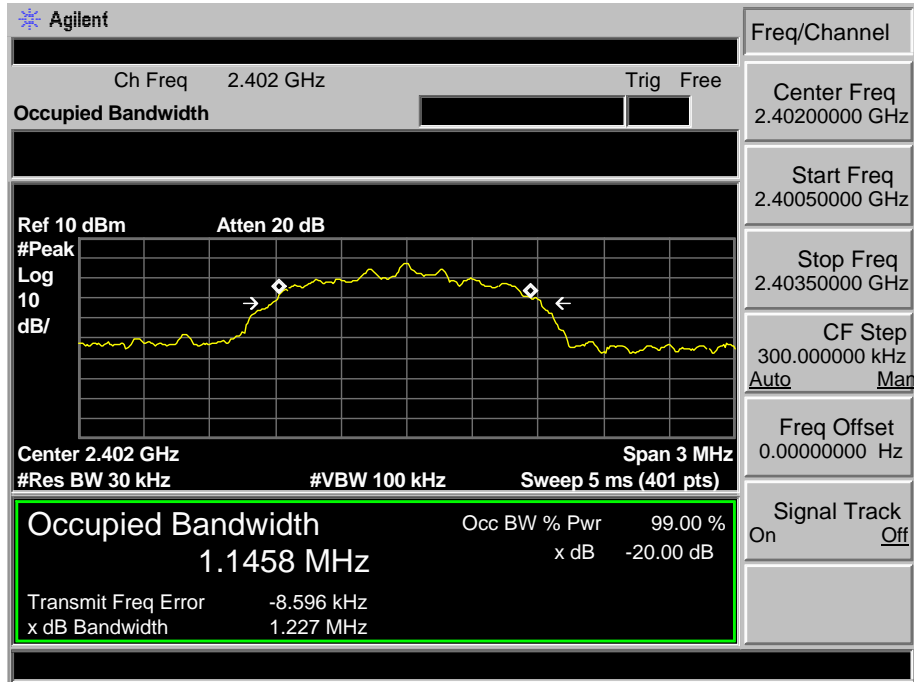

8-DPSK 2441MHz

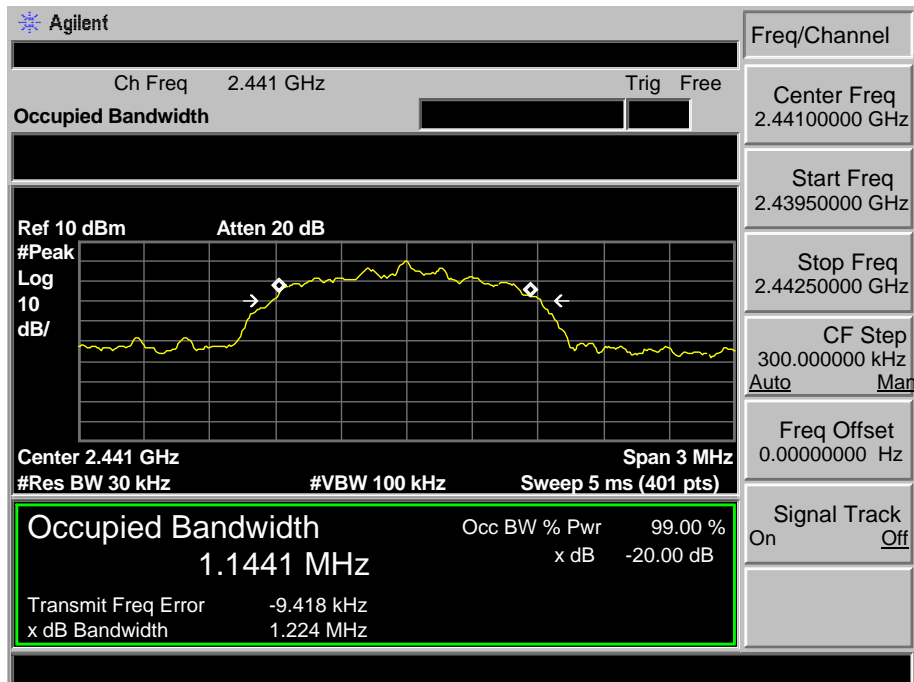

8-DPSK 2480MHz

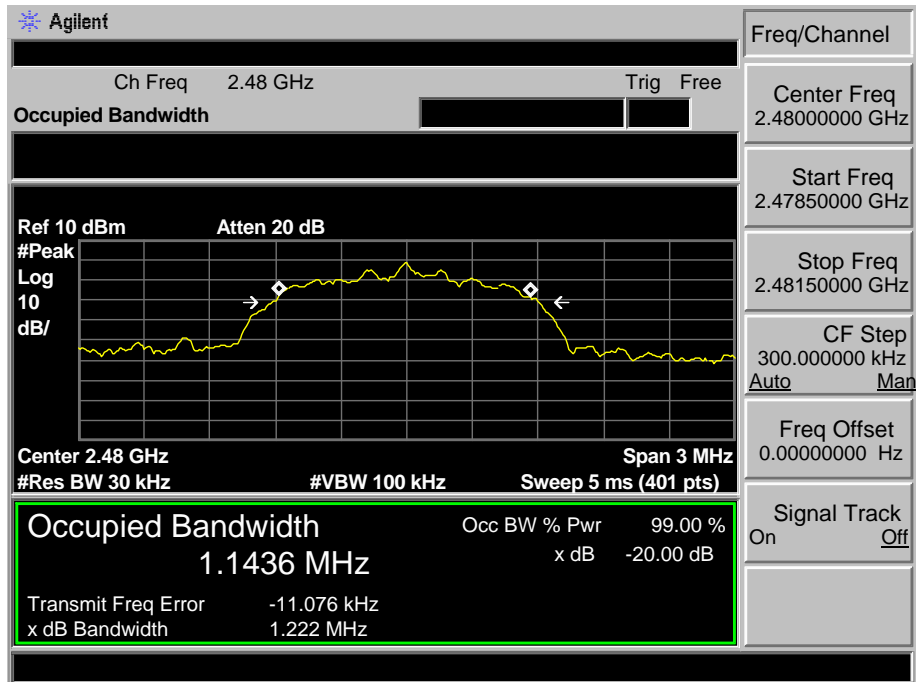

## 5. CARRIER FREQUENCY SEPARATION

### 5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 5.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.

### 5.3. Test Result


EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER					
M/N: RSB-3					
Test date: 2017-06-25			Test site: RF site		Tested by: Tony Tang
Mode		Channel	Channel separation (MHz)	Limit	Conclusion
Ant 1	GFSK	Low CH	1.000	0.887MHz	PASS
		Mid CH	1.000	0.871MHz	PASS
		High CH	1.000	0.868MHz	PASS
	8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz]( whichever is greater)	PASS
		Mid CH	1.000		PASS
		High CH	1.000		PASS
Ant 2	GFSK	Low CH	1.000	0.889MHz	PASS
		Mid CH	1.000	0.872MHz	PASS
		High CH	1.000	0.873MHz	PASS
	8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz]( whichever is greater)	PASS
		Mid CH	1.000		PASS
		High CH	1.000		PASS

5.4. Test Data


**Ant 1  
GFSK  
Low Channel**

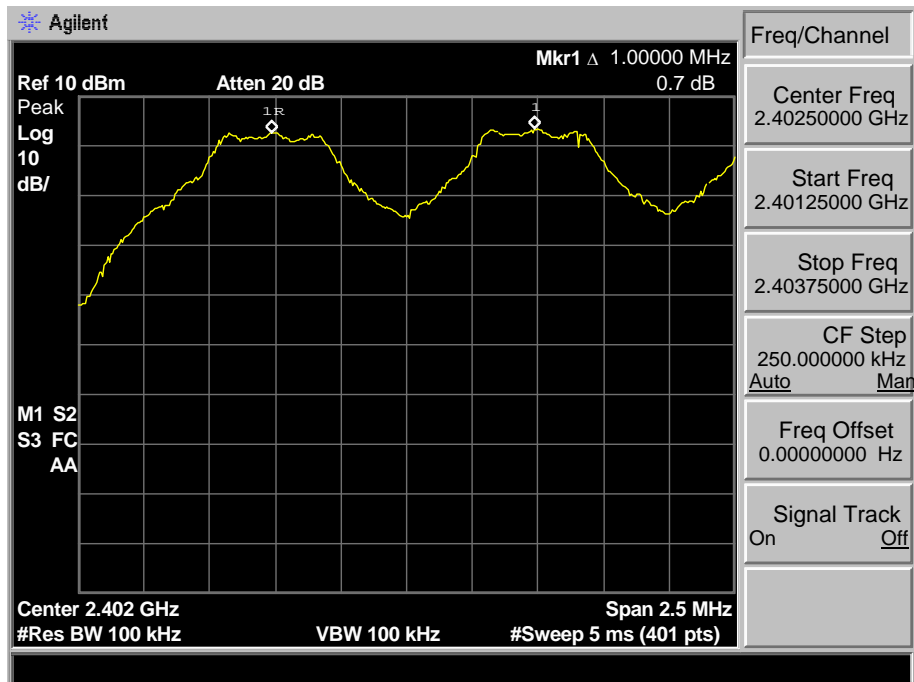


**Mid Channel**

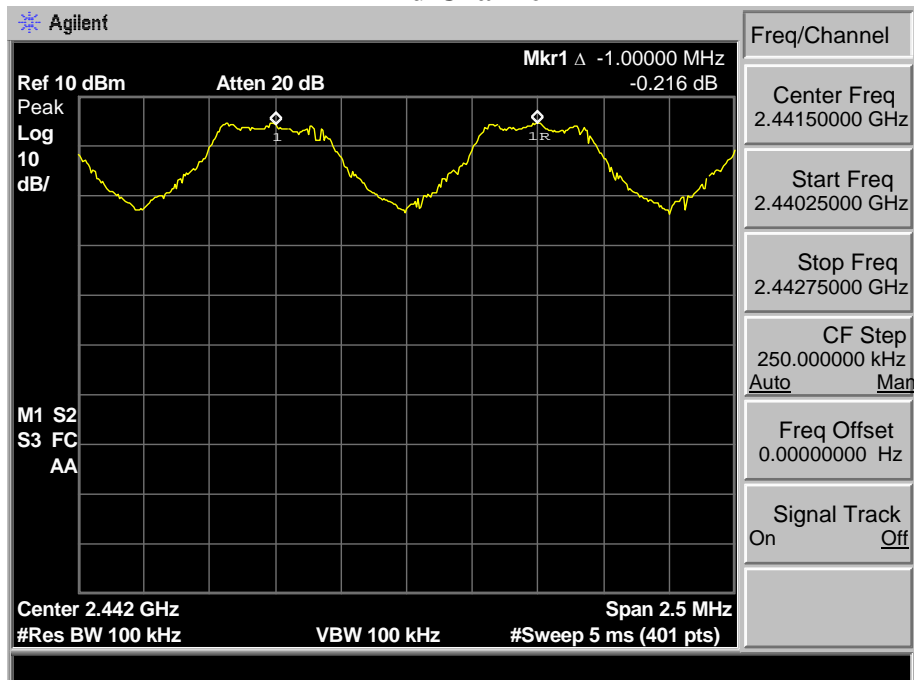


### High Channel

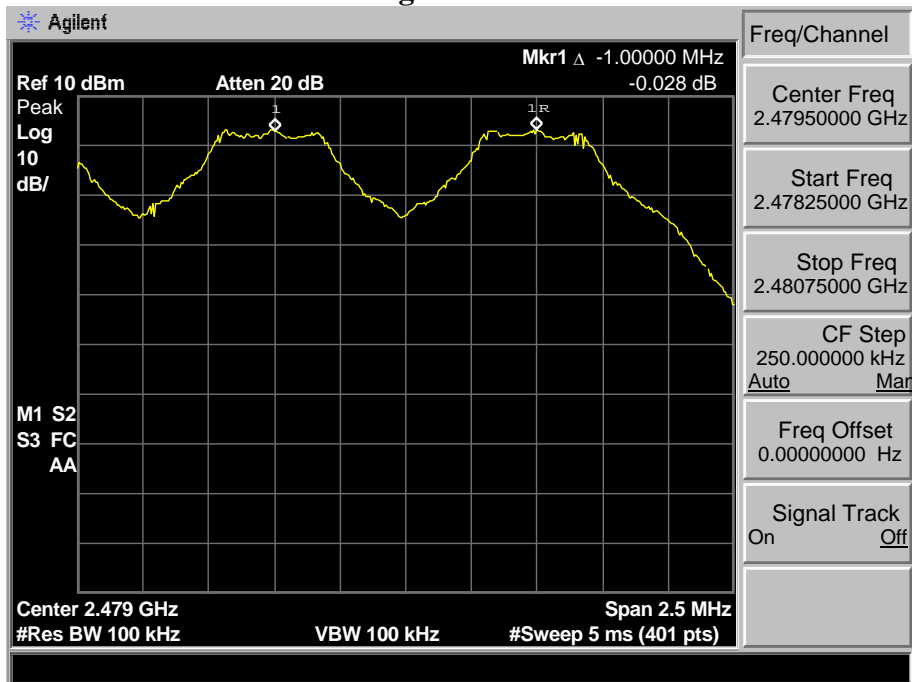

### 8-DPSK Low Channel

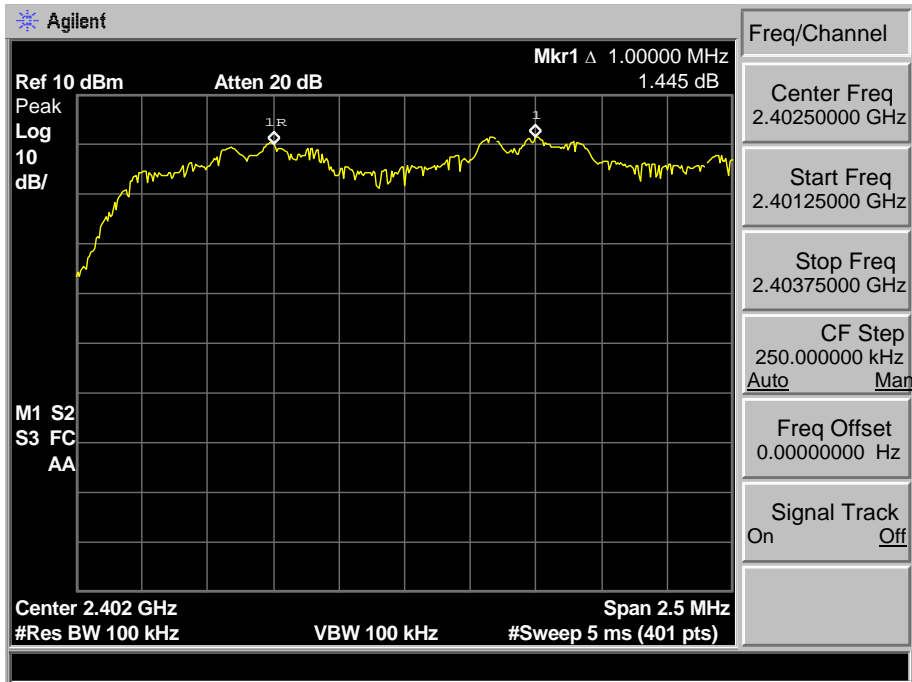


### Mid Channel

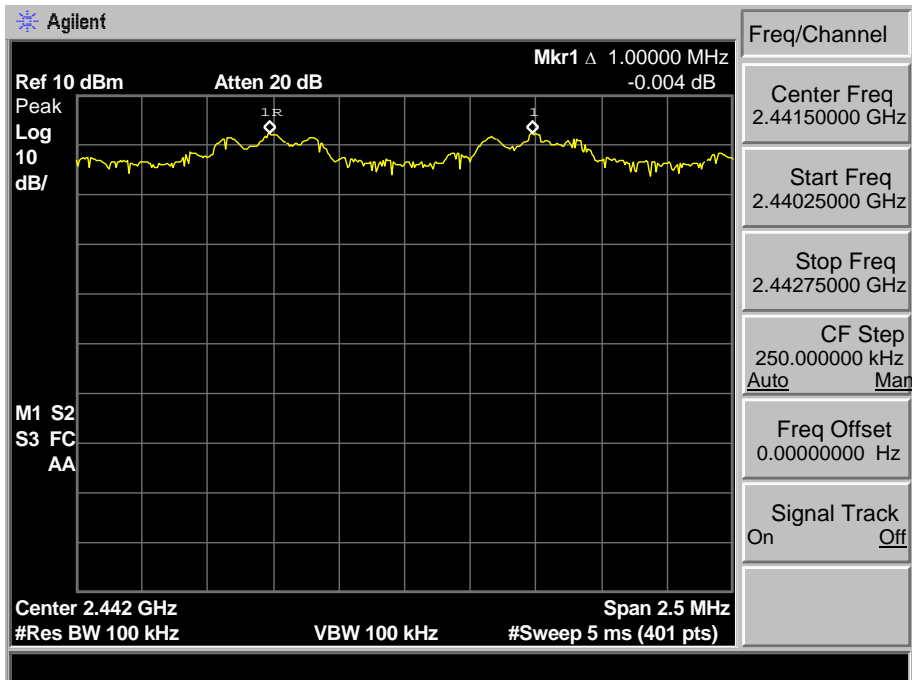





### High Channel

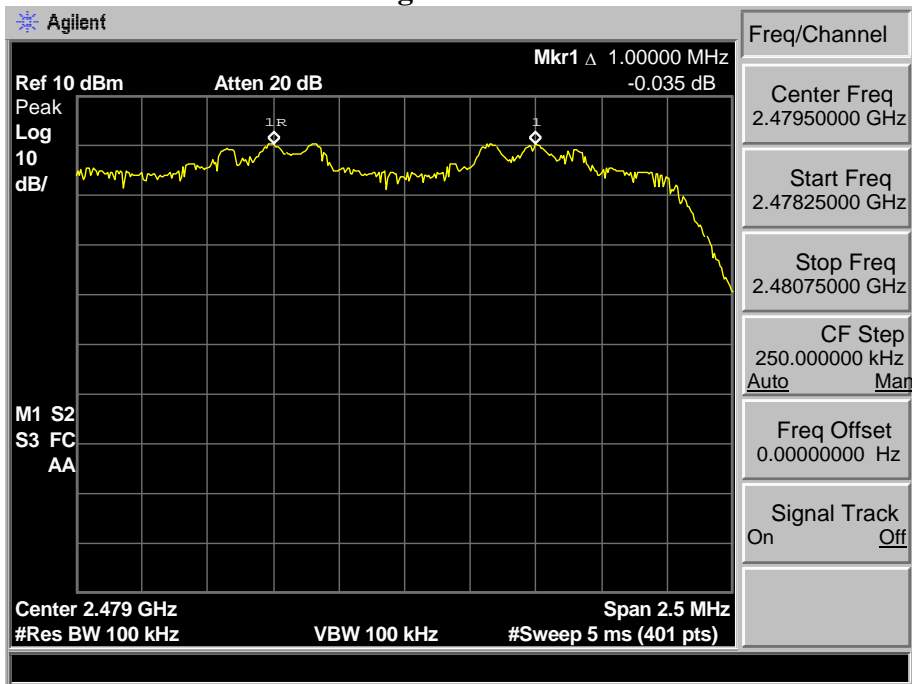


### Ant 2 GFSK Low Channel

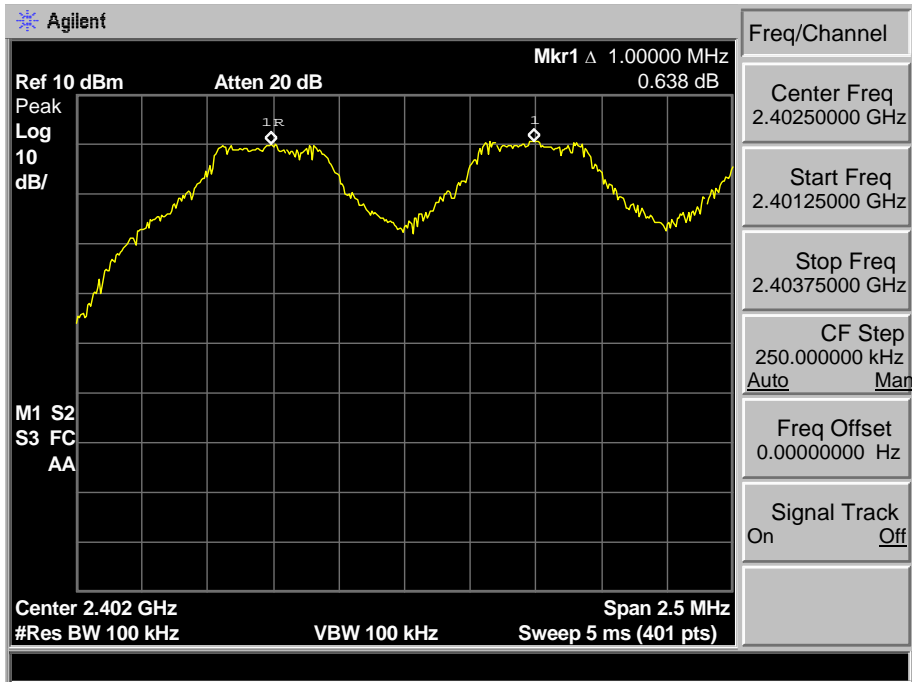


### Mid Channel

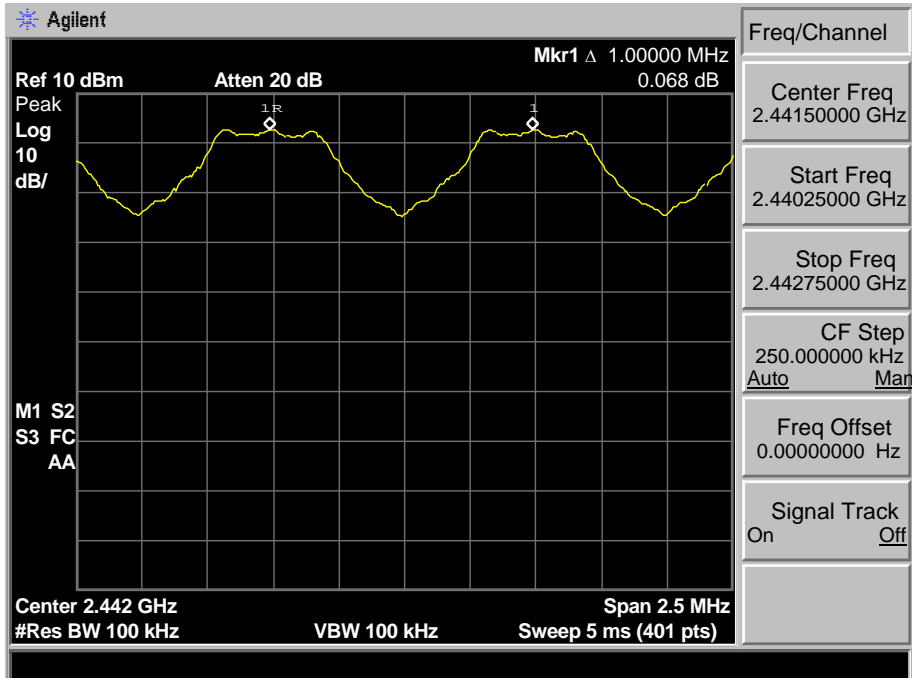


### High Channel

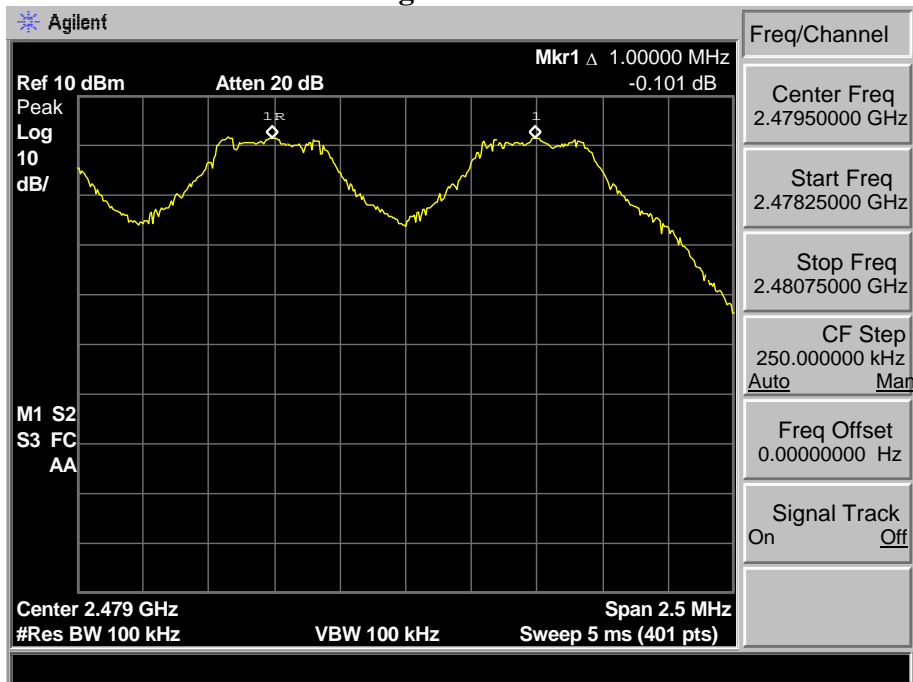


### 8-DPSK Low Channel

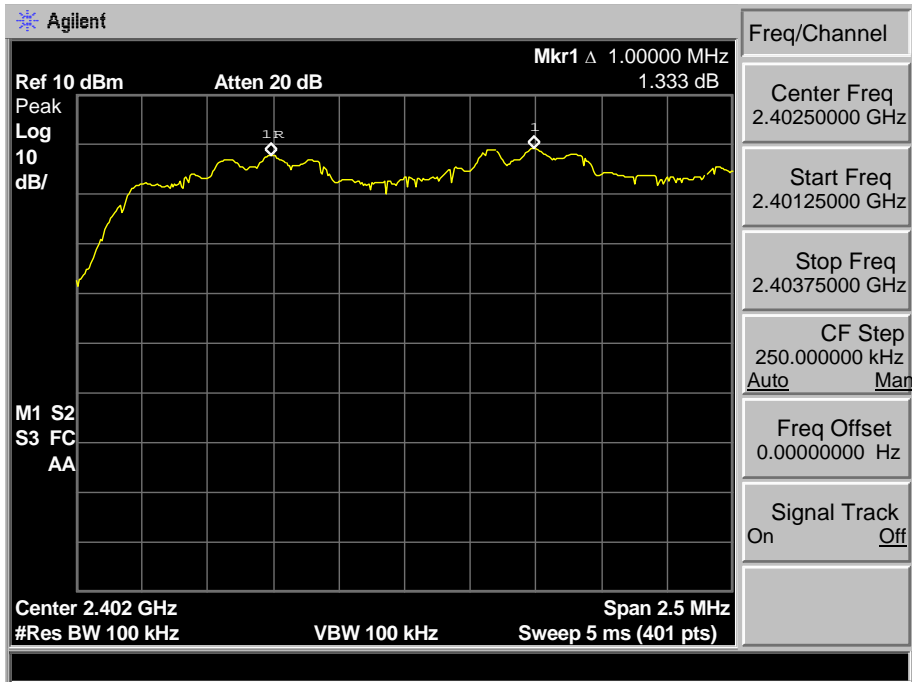

### Mid Channel

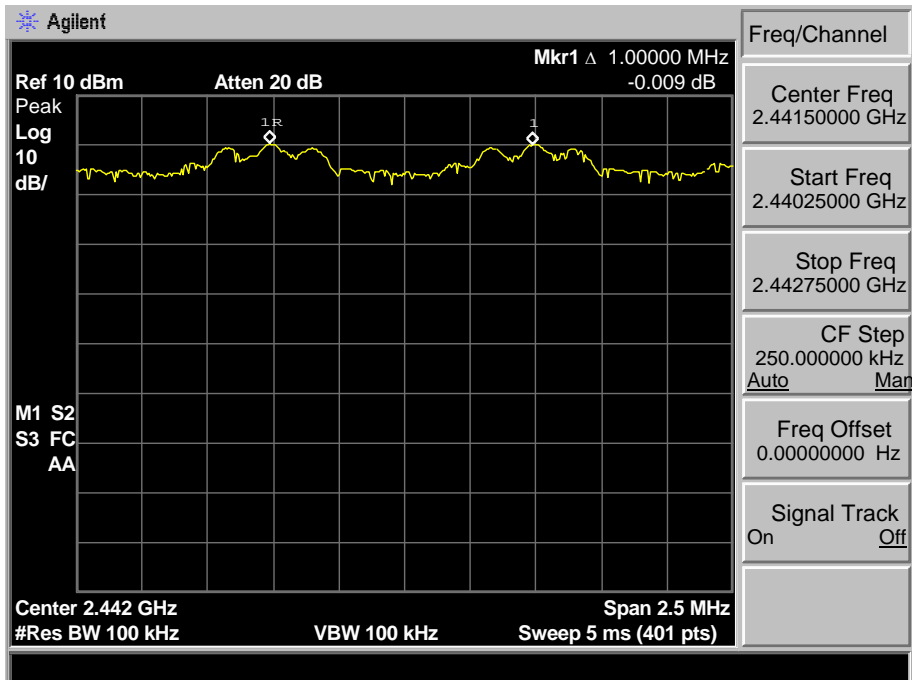

### High Channel

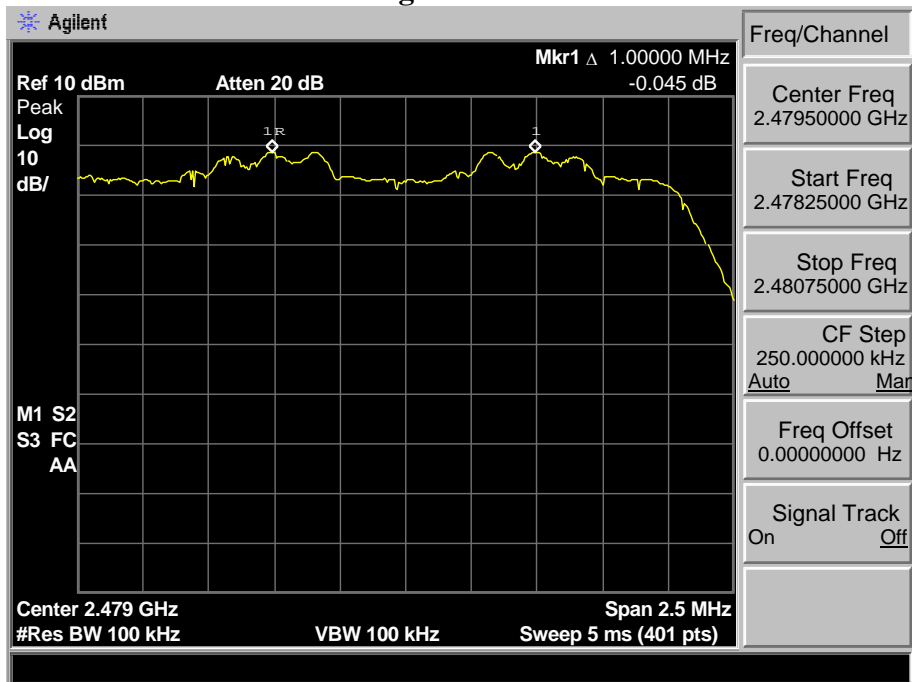

## 6. NUMBER OF HOPPING CHANNEL

### 6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

### 6.2. Test Procedure




The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

### 6.3. Test Result




EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER				
M/N: RSB-3				
Test date: 2017-06-25		Test site: RF site	Tested by: Tony.Tang	
Mode	Number of hopping channel		Limit	Conclusion
Ant 1	GFSK	79	>15	PASS
	8-DPSK	79	>15	PASS
Ant 2	GFSK	79	>15	PASS
	8-DPSK	79	>15	PASS

### 6.4. Test Data

#### Ant 1 GFSK

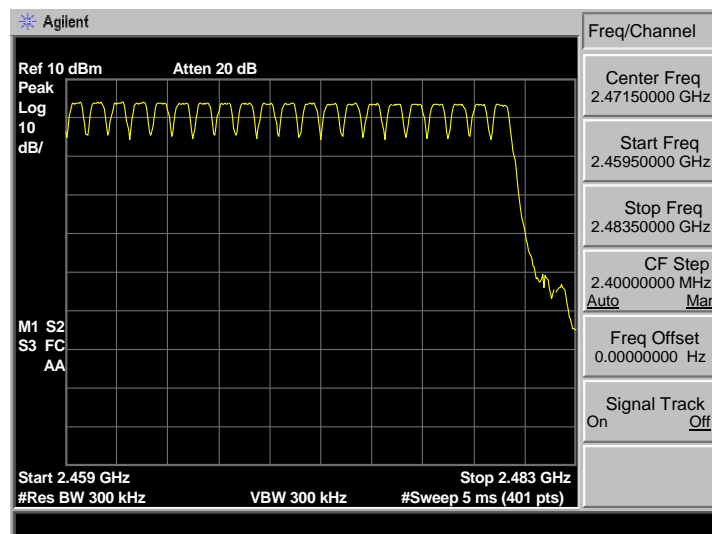
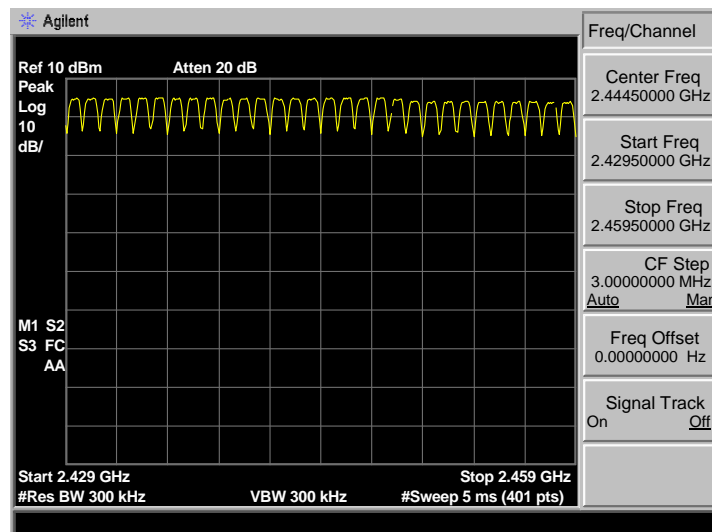
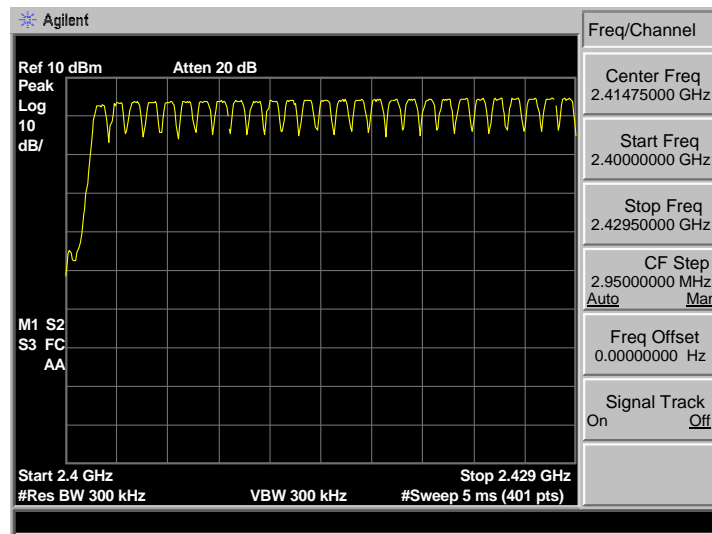


### 8-DPSK

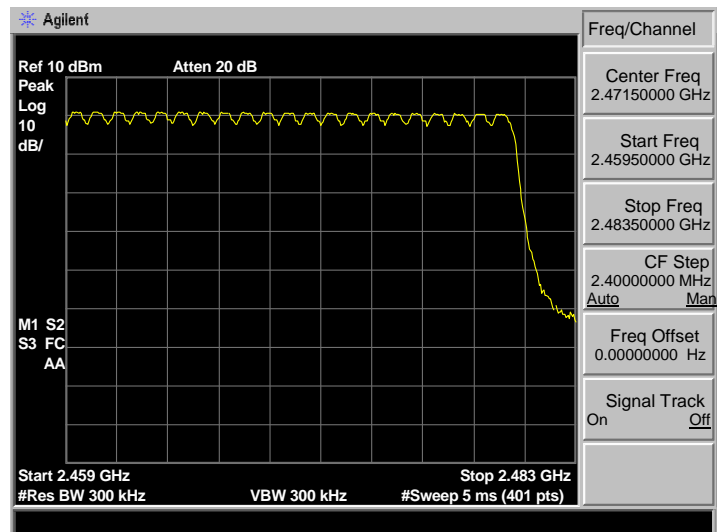
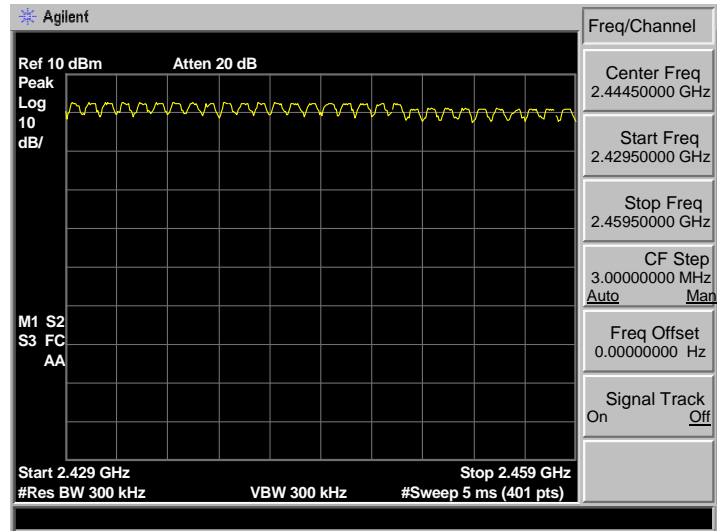
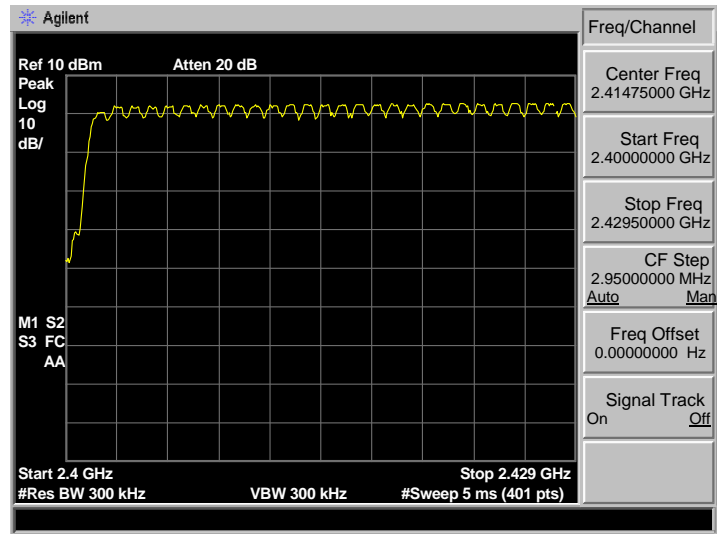




**Ant 2  
GFSK**

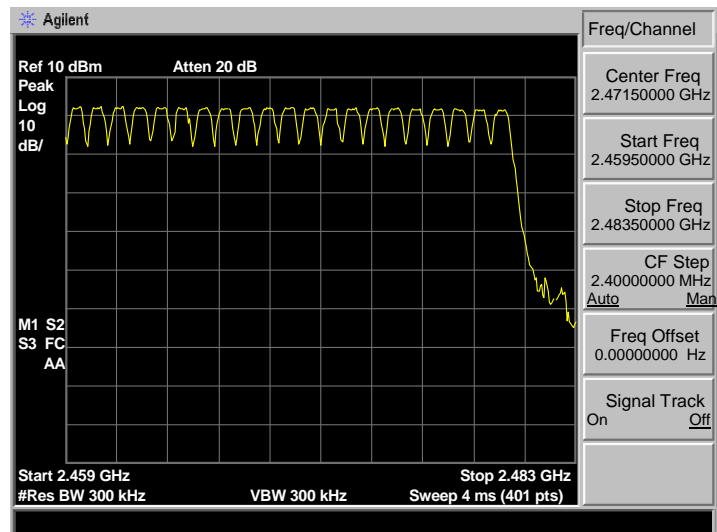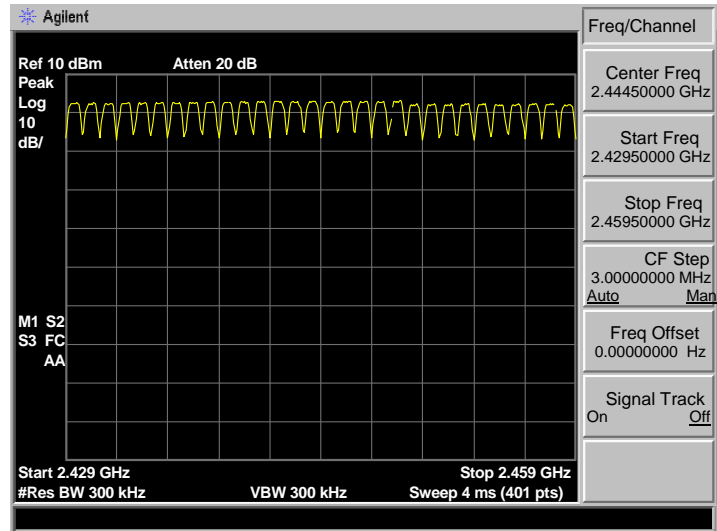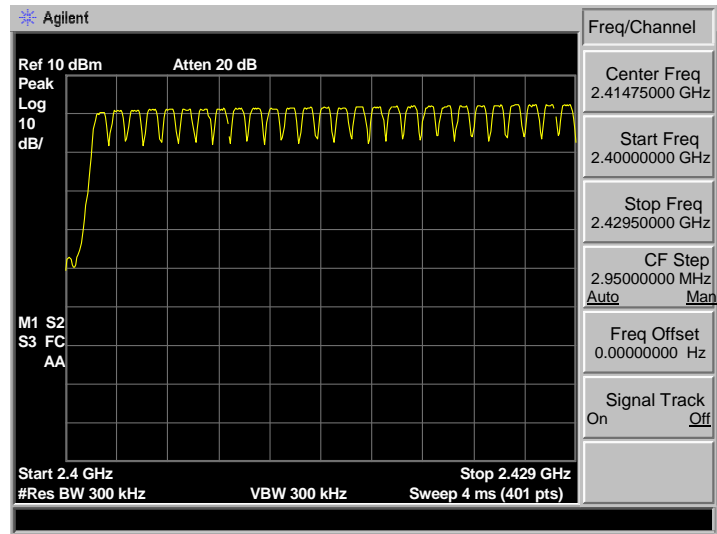

### 8-DPSK

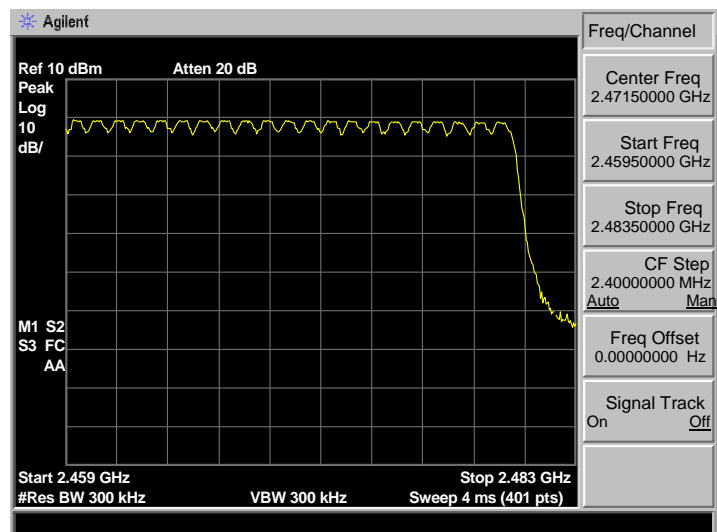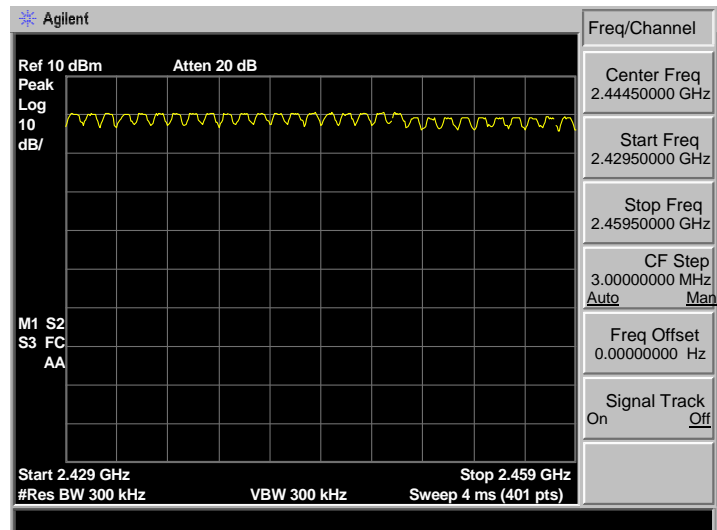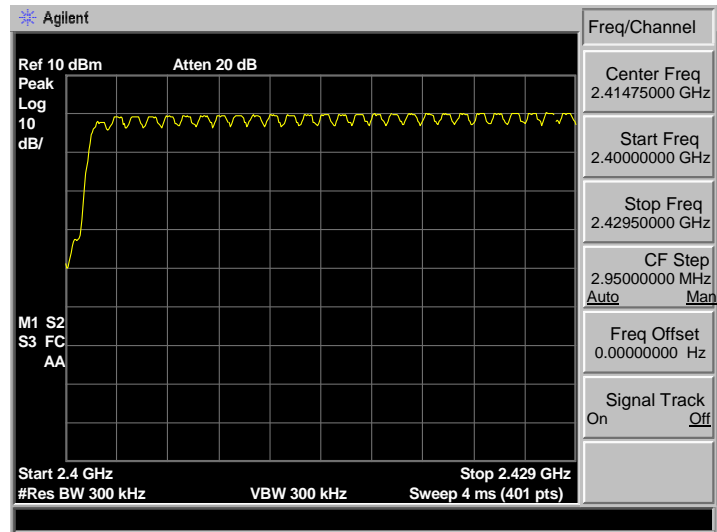

## 7. DWELL TIME

### 7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 7.2. Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW= 1MHz, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.



### 7.3. Test Result

EUT: 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER					
M/N: RSB-3					
Test date: 2017-06-25		Test site: RF site		Tested by: Tony Tang	
Mode		Dwell time (ms)		Limit	Conclusion
Ant 1	GFSK DH1	142.20		<400ms	PASS
	GFSK DH3	271.76		<400ms	PASS
	GFSK DH5	318.02		<400ms	PASS
	8-DPSK 3DH1	145.36		<400ms	PASS
	8-DPSK 3DH3	271.76		<400ms	PASS
	8-DPSK 3DH5	318.02		<400ms	PASS
Ant 2	GFSK DH1	142.20		<400ms	PASS
	GFSK DH3	271.76		<400ms	PASS
	GFSK DH5	316.95		<400ms	PASS
	8-DPSK 3DH1	145.36		<400ms	PASS
	8-DPSK 3DH3	271.76		<400ms	PASS
	8-DPSK 3DH5	320.17		<400ms	PASS



### 7.4. Test Data

#### Ant 1



**GFSK DH1 :  $50\text{hop}/5\text{s} * 0.4 * 79 * 0.45\text{ms} = 142.20$**

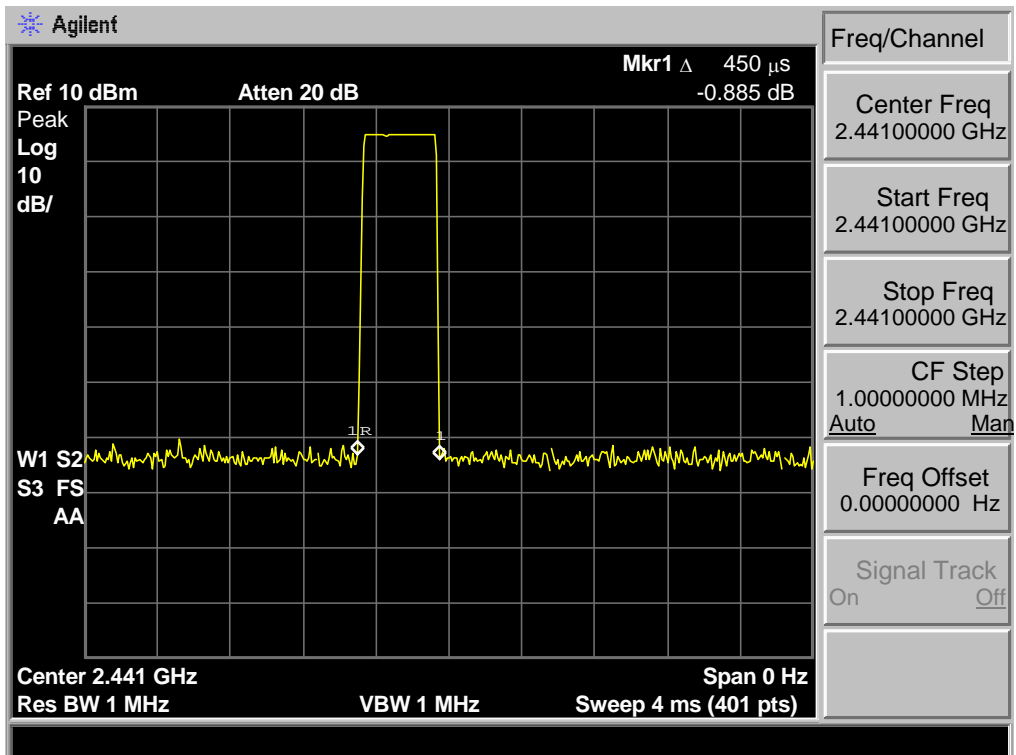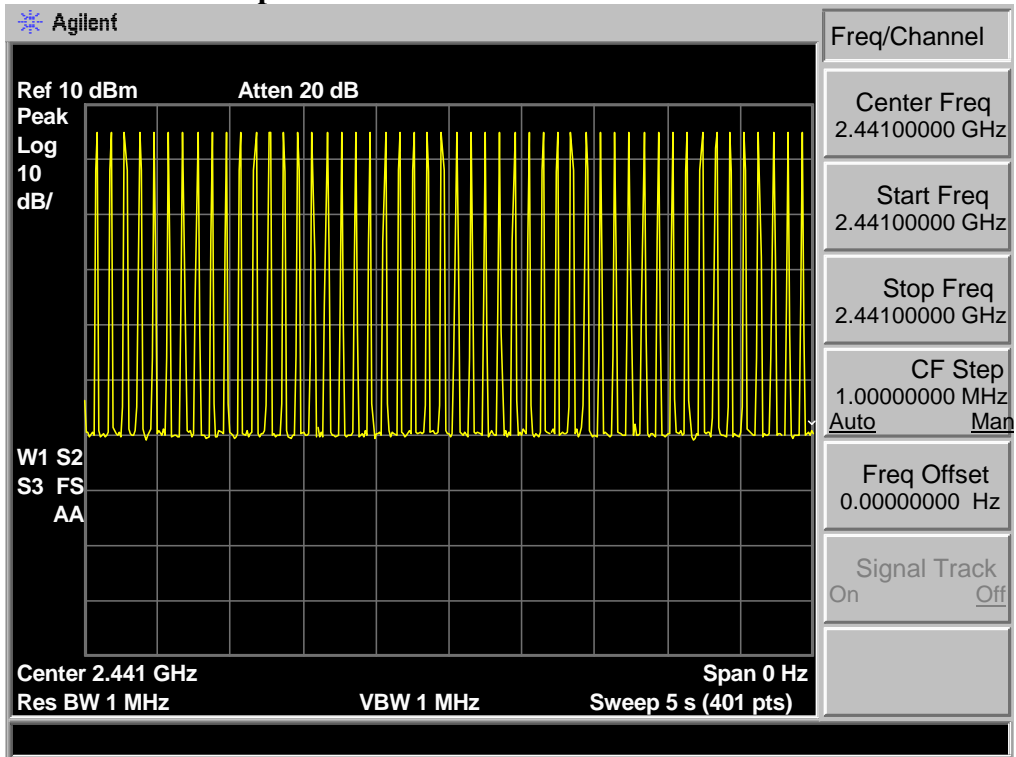



**GFSK DH3 : 25hop/5s \* 0.4 \* 79 \* 1.72ms= 271.76**

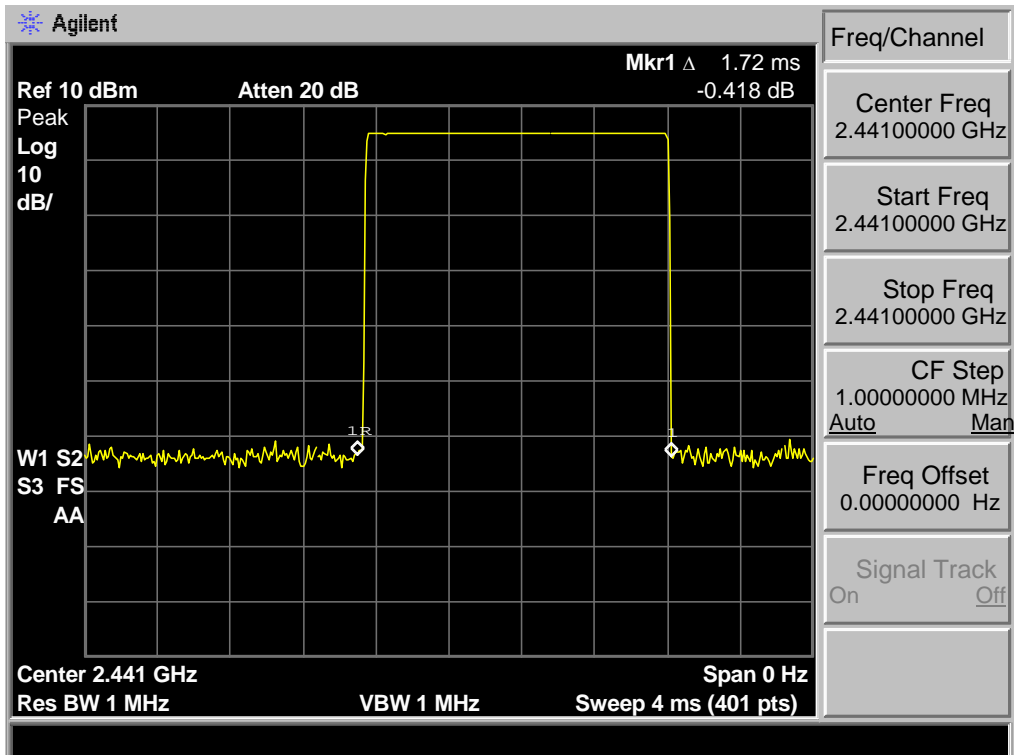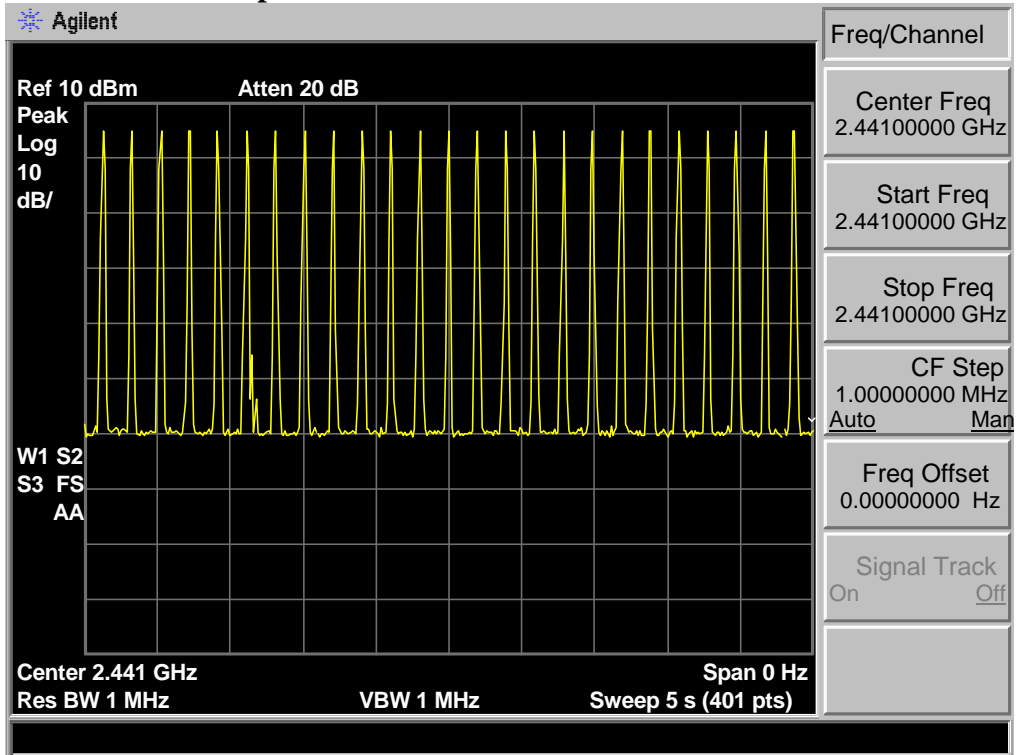



**GSFK DH5 : 17hop/5s \* 0.4 \* 79 \* 2.96ms = 318.02**

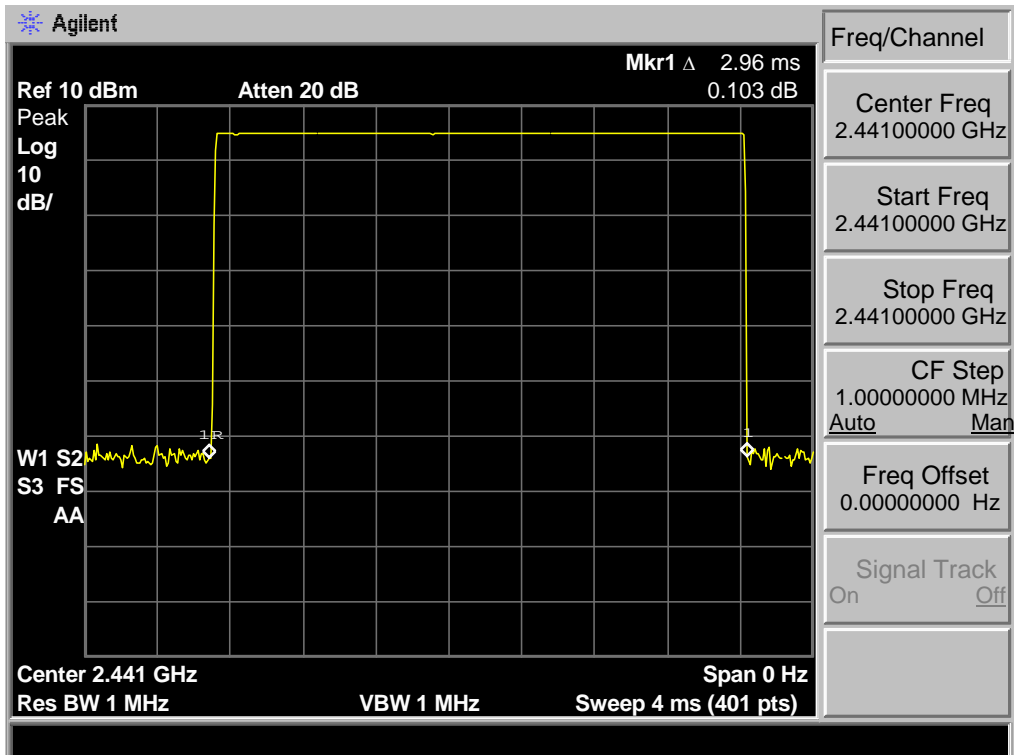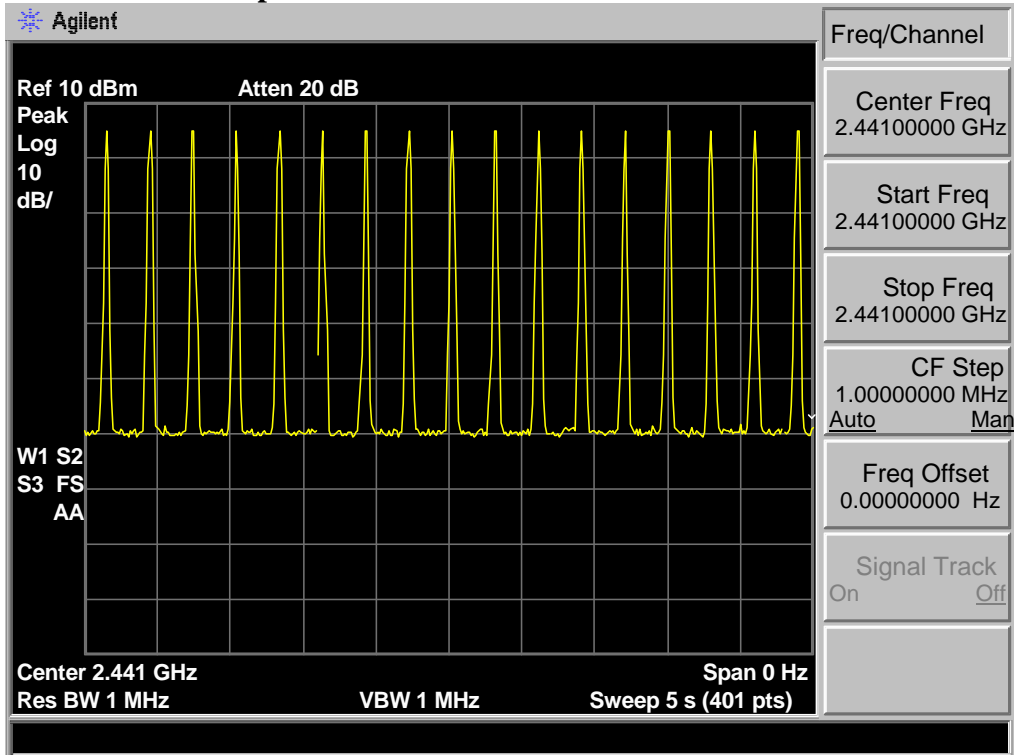

8-DPSK 3DH1 : 50hop/5s \* 0.4 \* 79 \* 0.46ms = 145.36

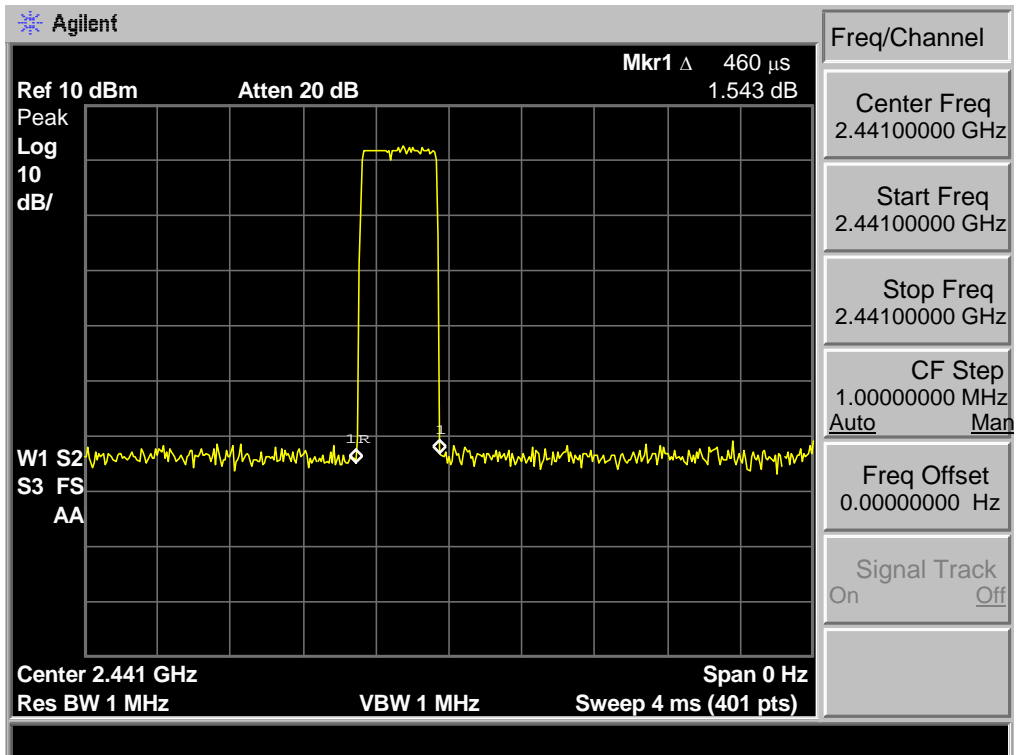
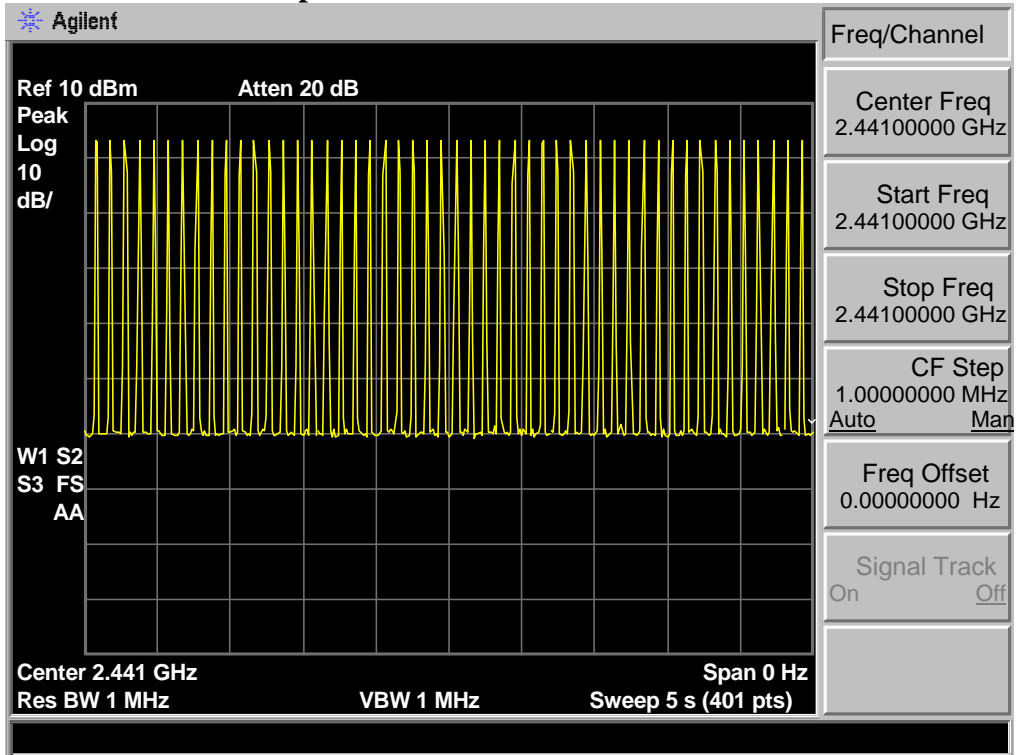


8-DPSK 3DH3 : 25hop/5s \* 0.4 \* 79 \* 1.72ms= 271.76

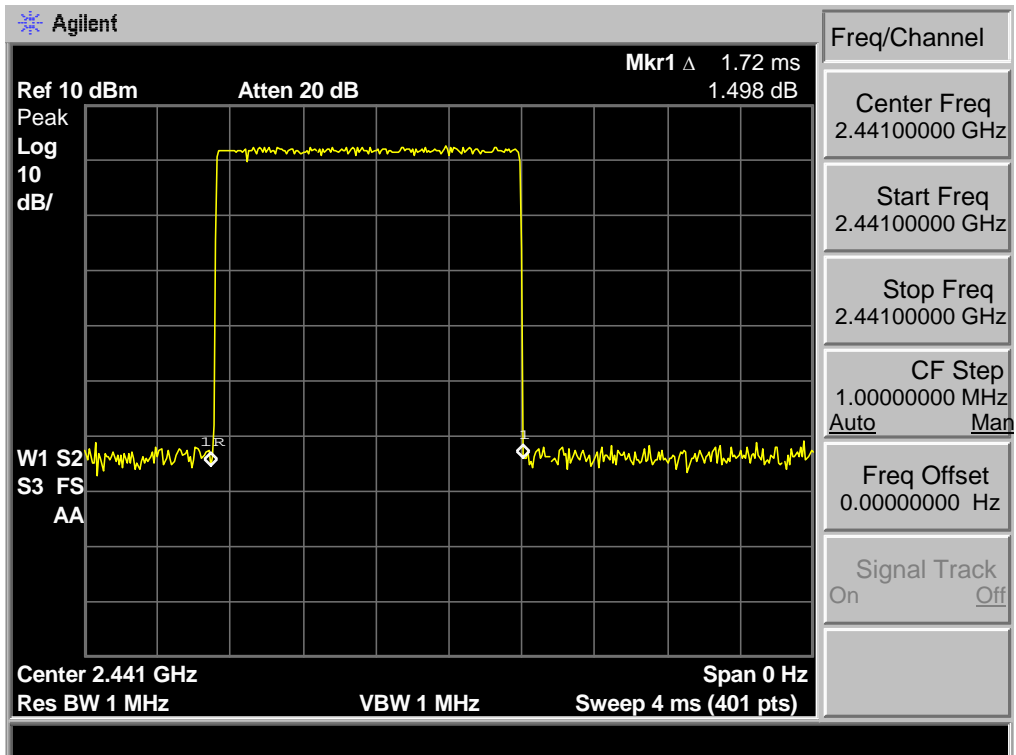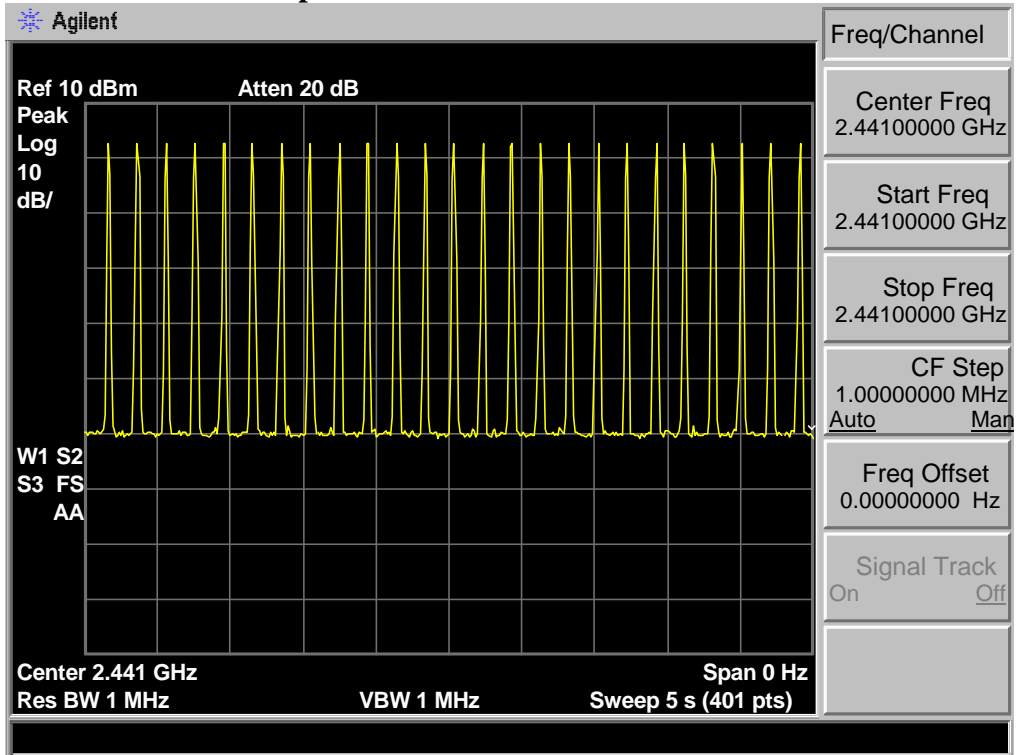





8-DPSK 3DH5 : 17hop/5s \* 0.4 \* 79 \* 2.96ms = 318.02

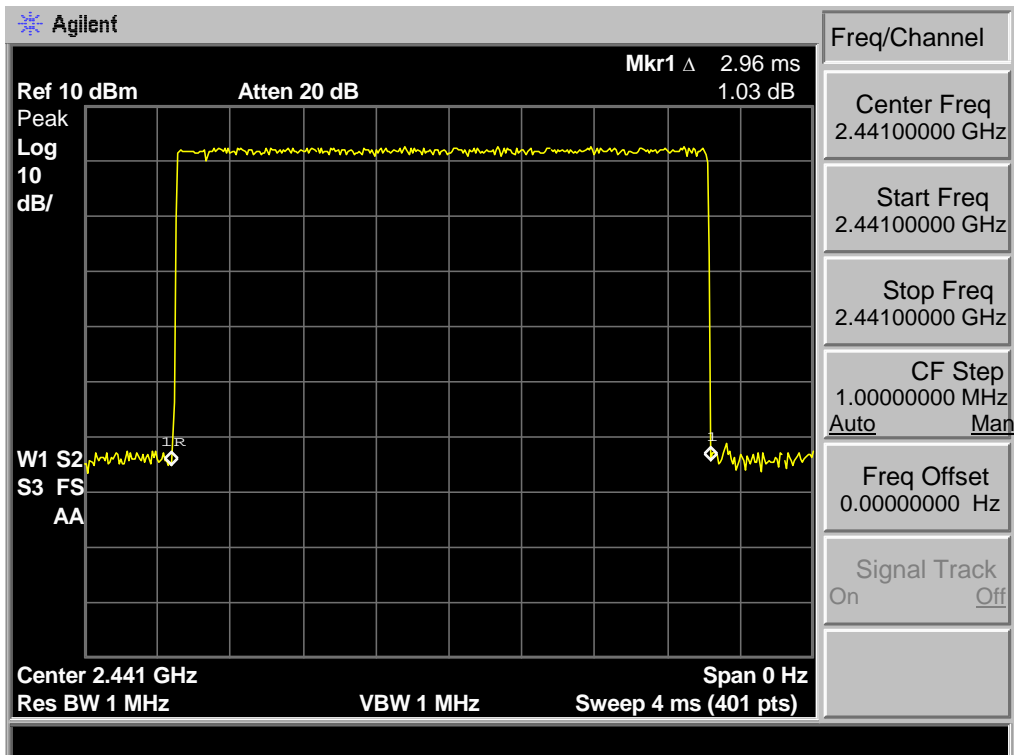
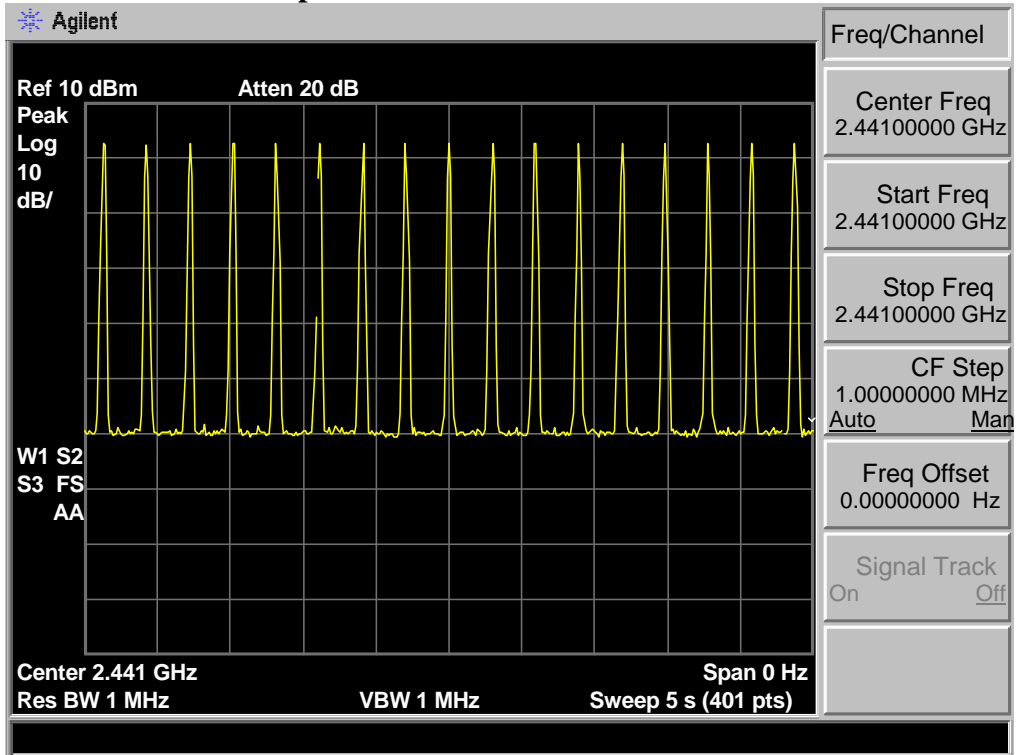


Ant 2



GFSK DH1 :  $50\text{hop}/5\text{s} * 0.4 * 79 * 0.45\text{ms} = 142.20$

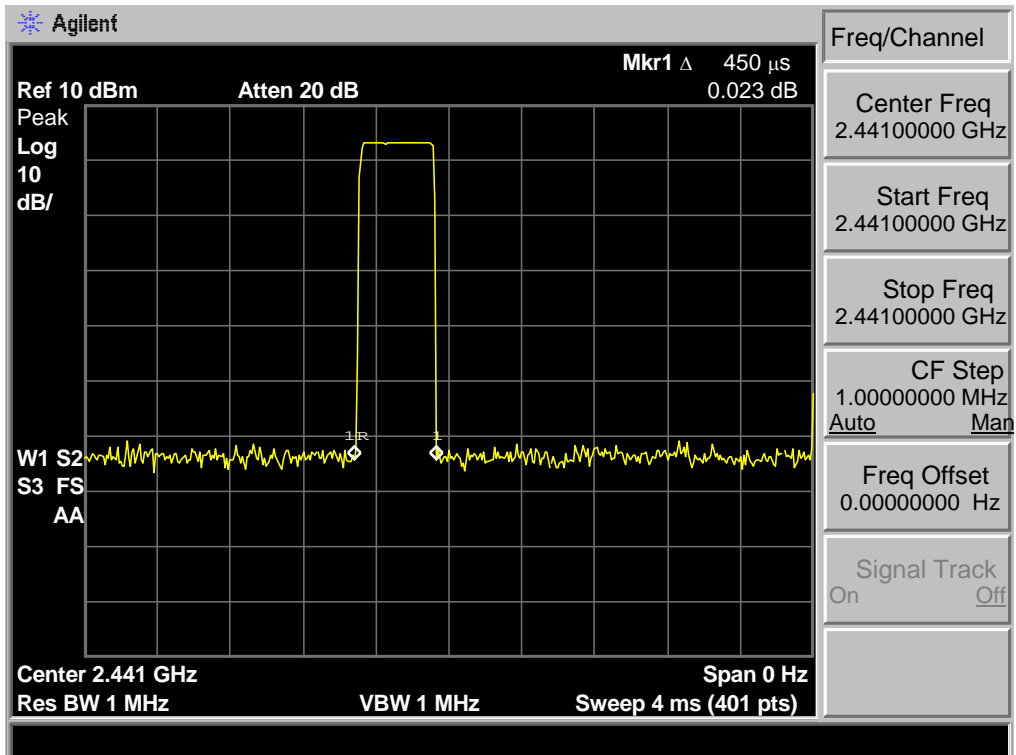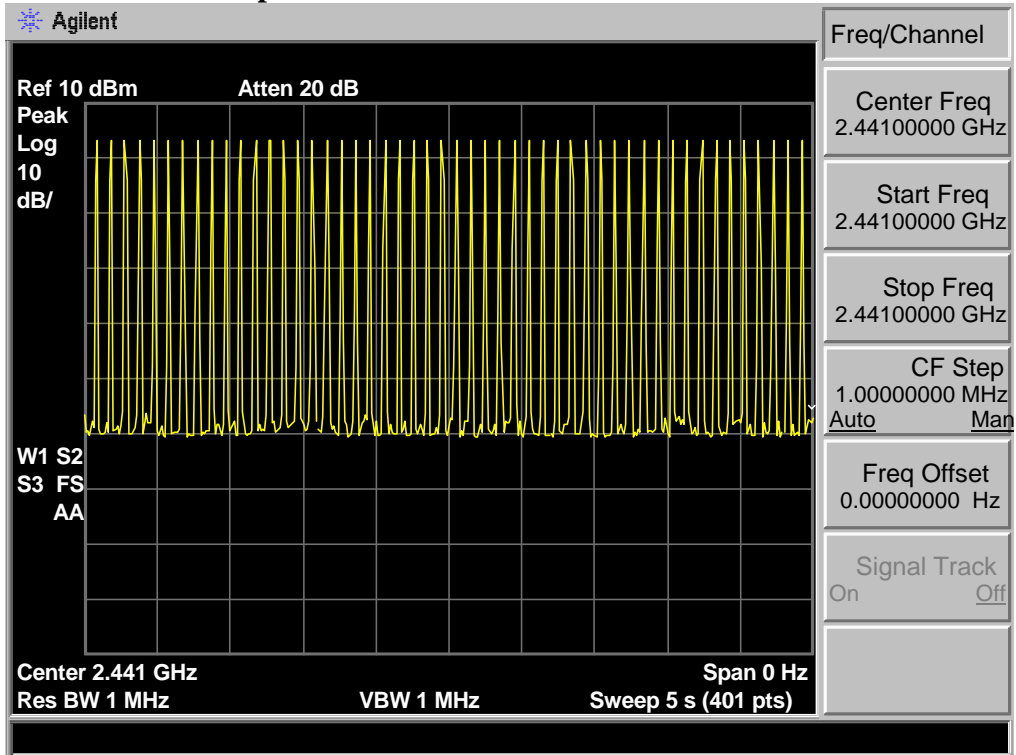



**GFSK DH3 : 25hop/5s \* 0.4 \* 79 \* 1.72ms= 271.76**

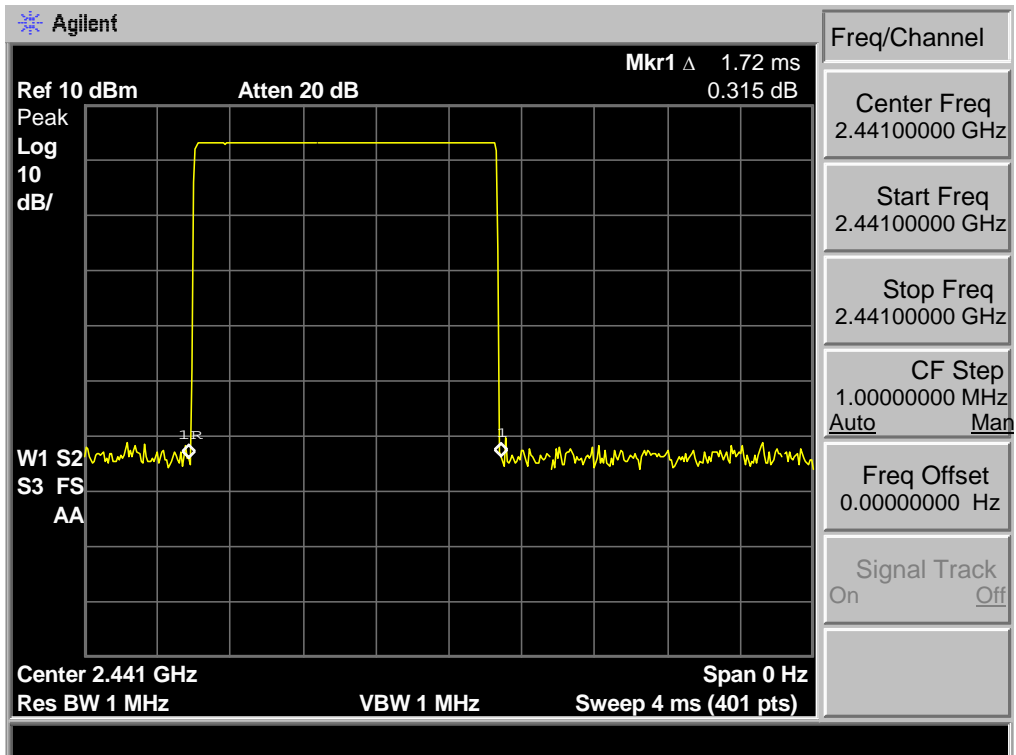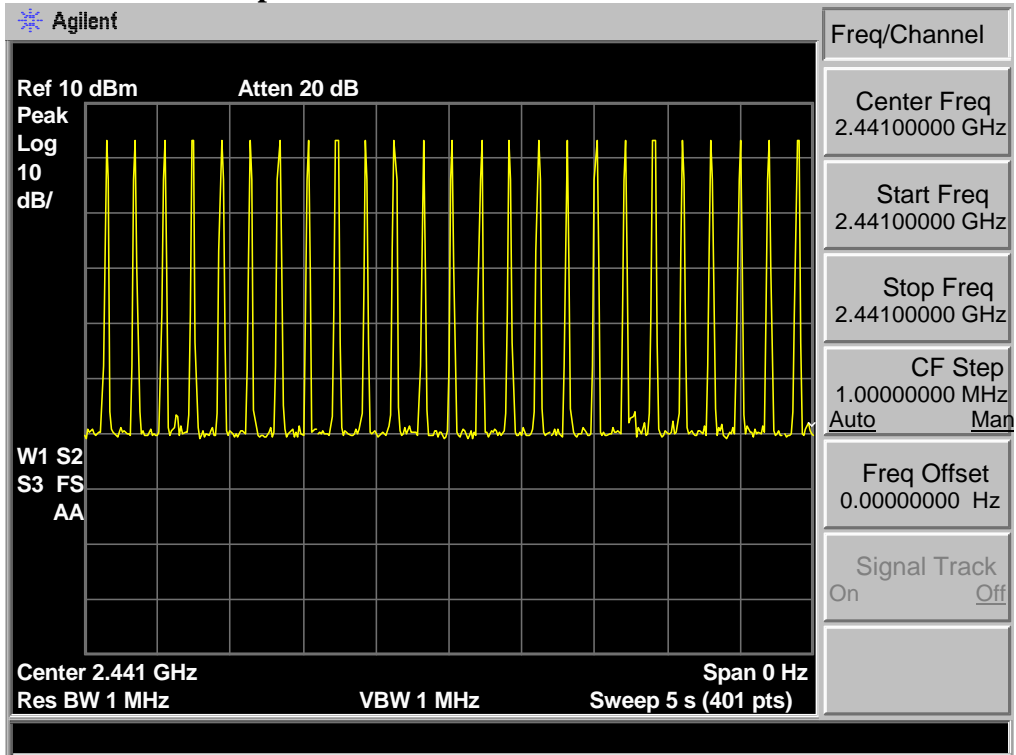



**GSFK DH5 : 17hop/5s \* 0.4 \* 79 \* 2.95ms = 316.95**

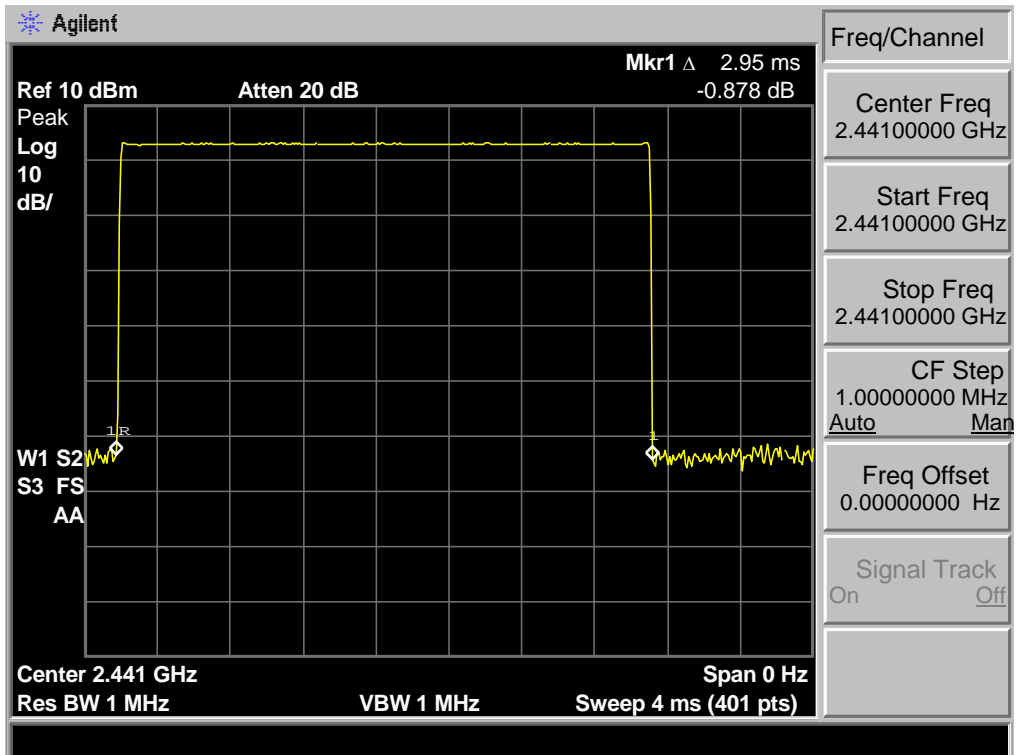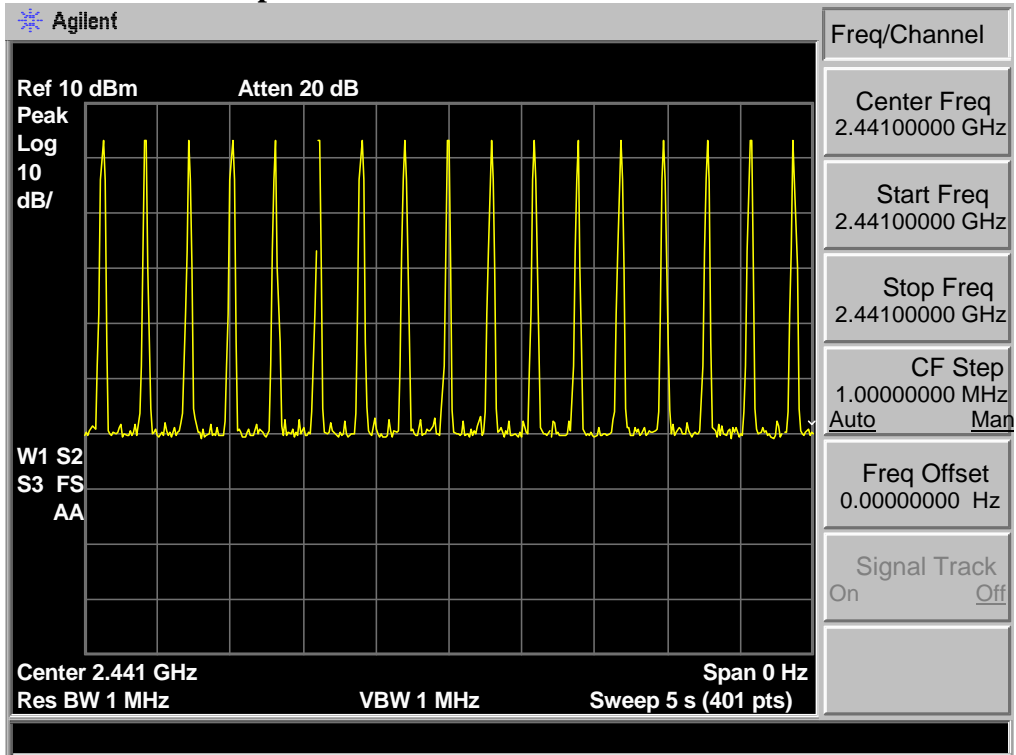



8-DPSK 3DH1 : 50hop/5s \* 0.4 \* 79 \* 0.46ms = 145.36

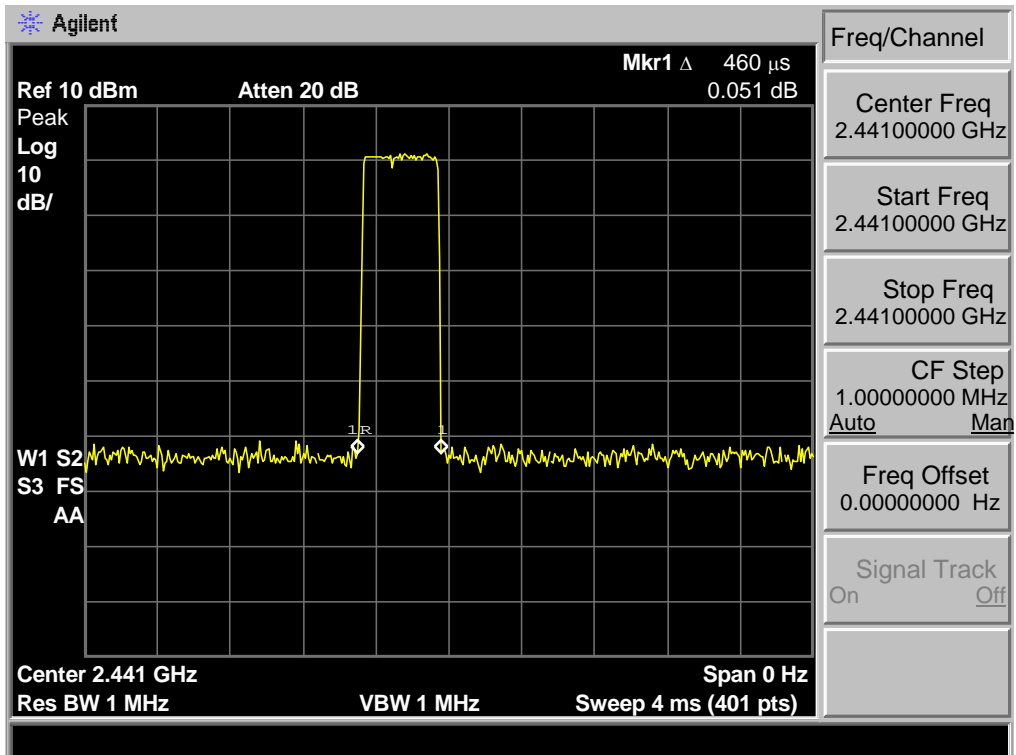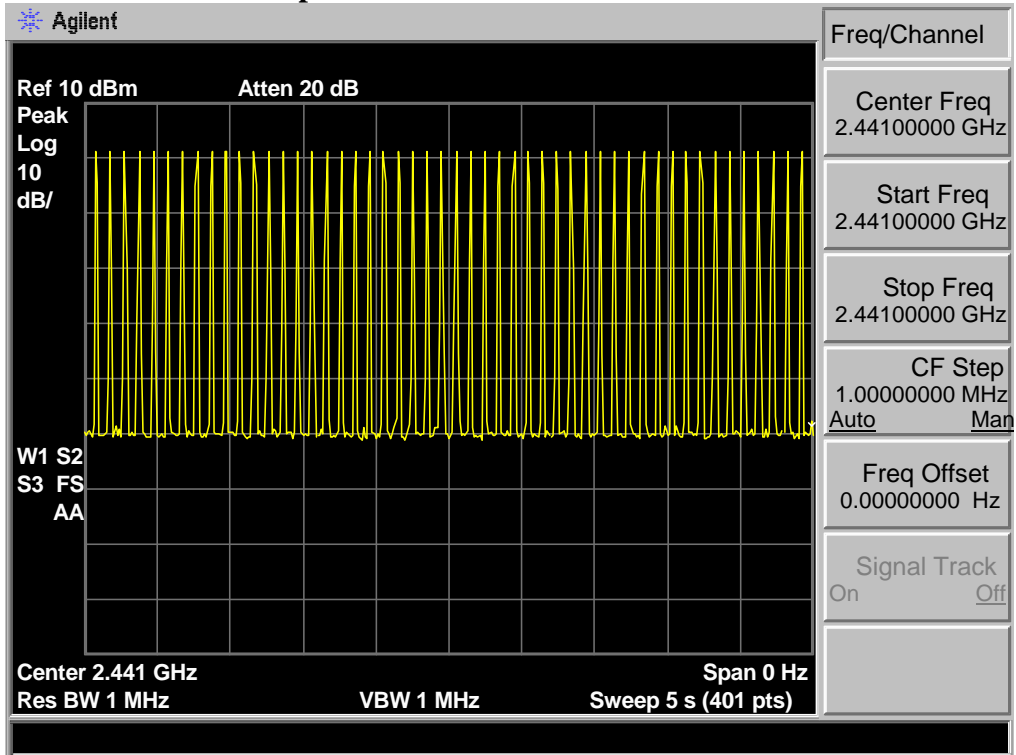

8-DPSK 3DH3 : 25hop/5s \* 0.4 \* 79 \* 1.72ms= 271.76

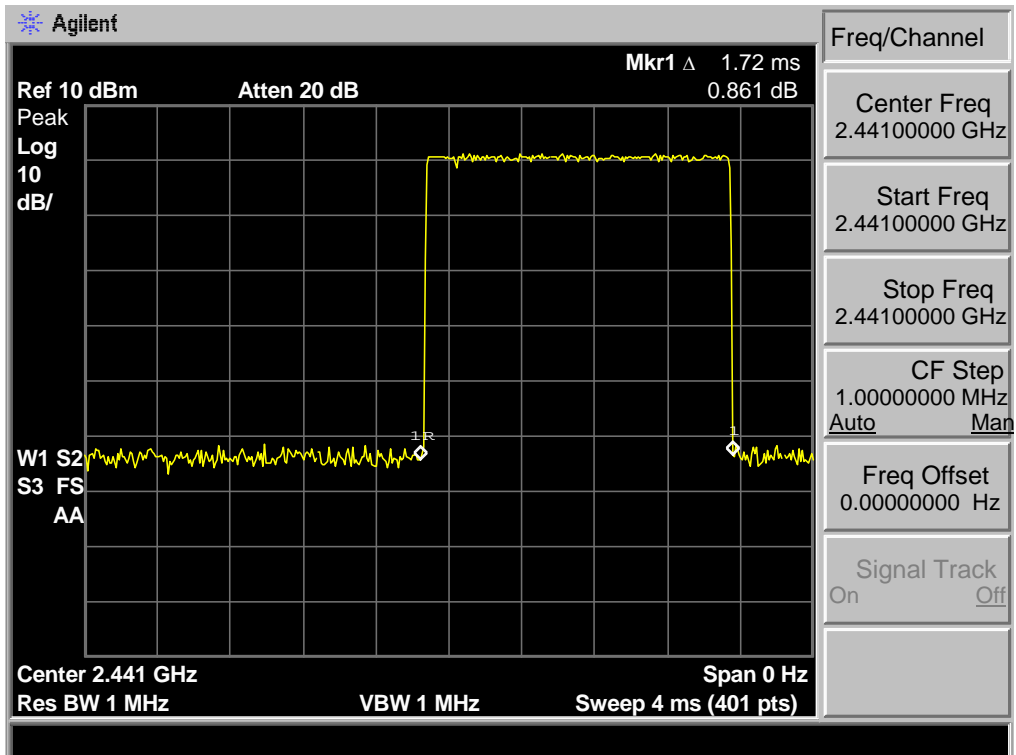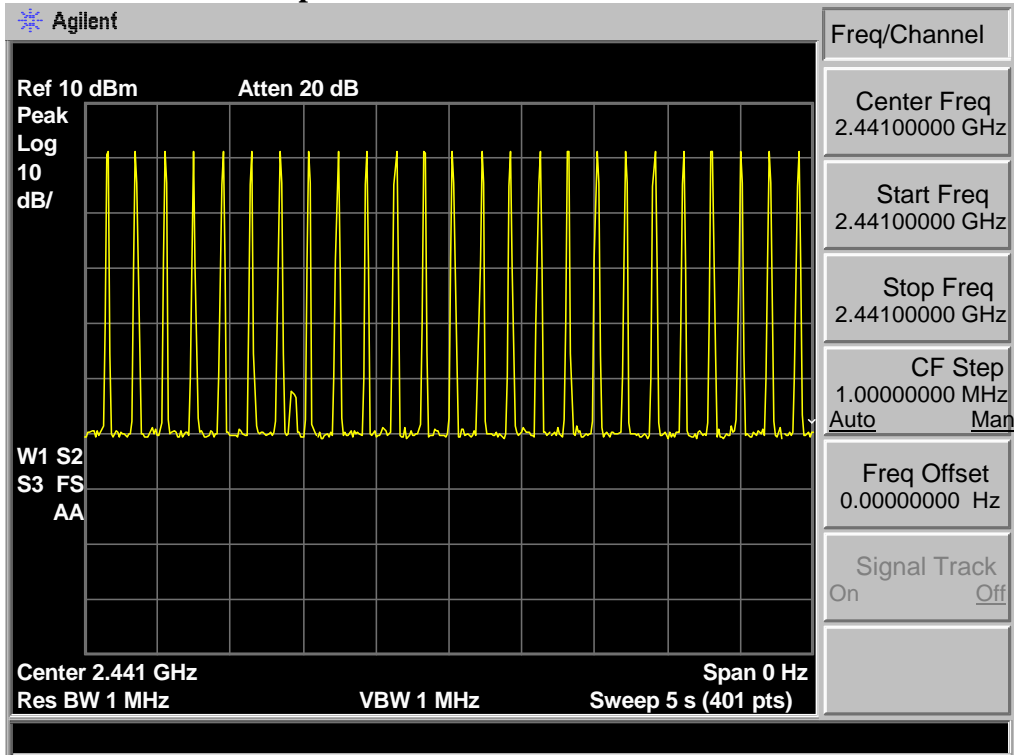

8-DPSK 3DH5 :  $17\text{hop}/5\text{s} * 0.4 * 79 * 2.98\text{ms} = 320.17$

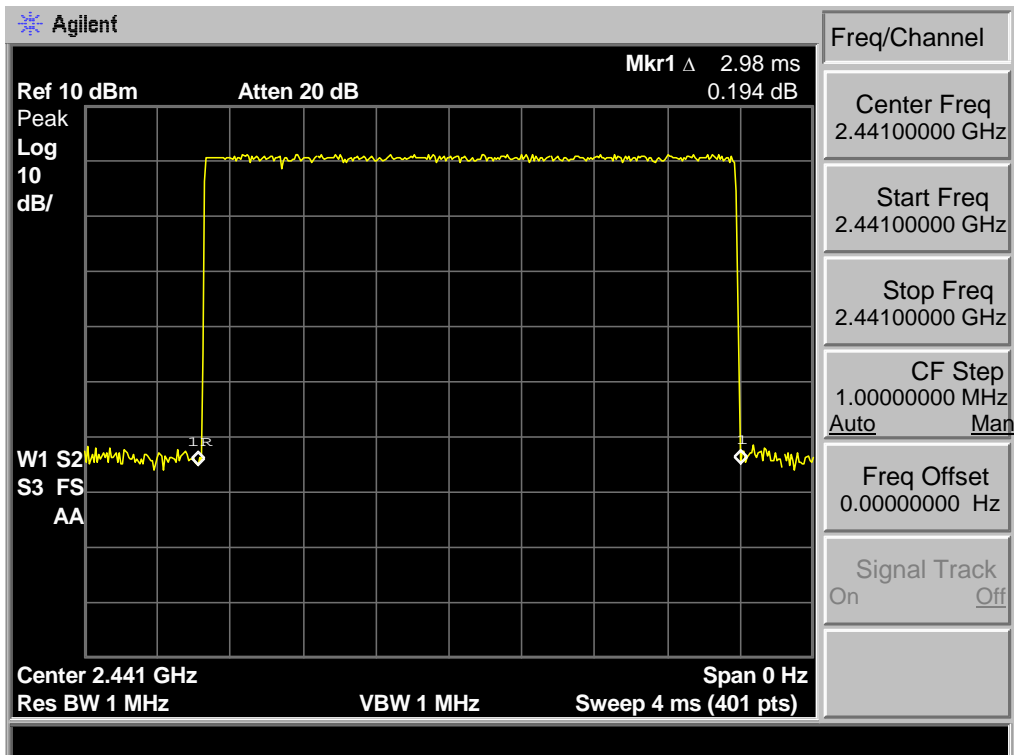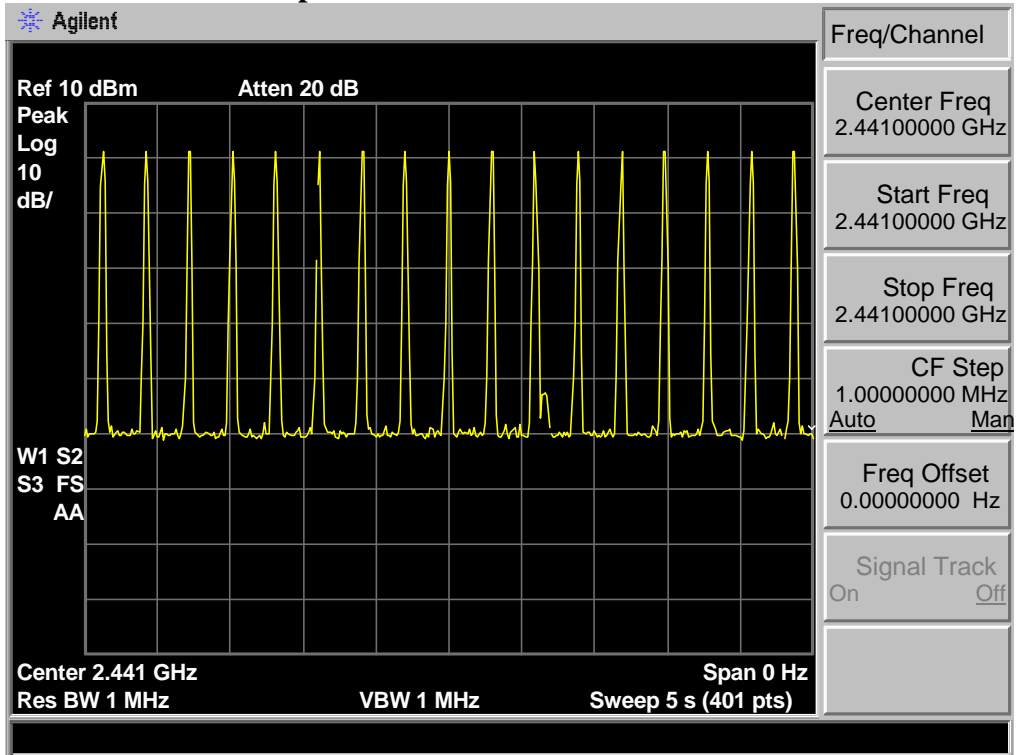

## 8. RADIATED EMISSIONS

### 8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )


#### 15.209 Limit

Frequency (MHz)	Field strength (μV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remark : (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



## 8.2. Block Diagram of Test setup

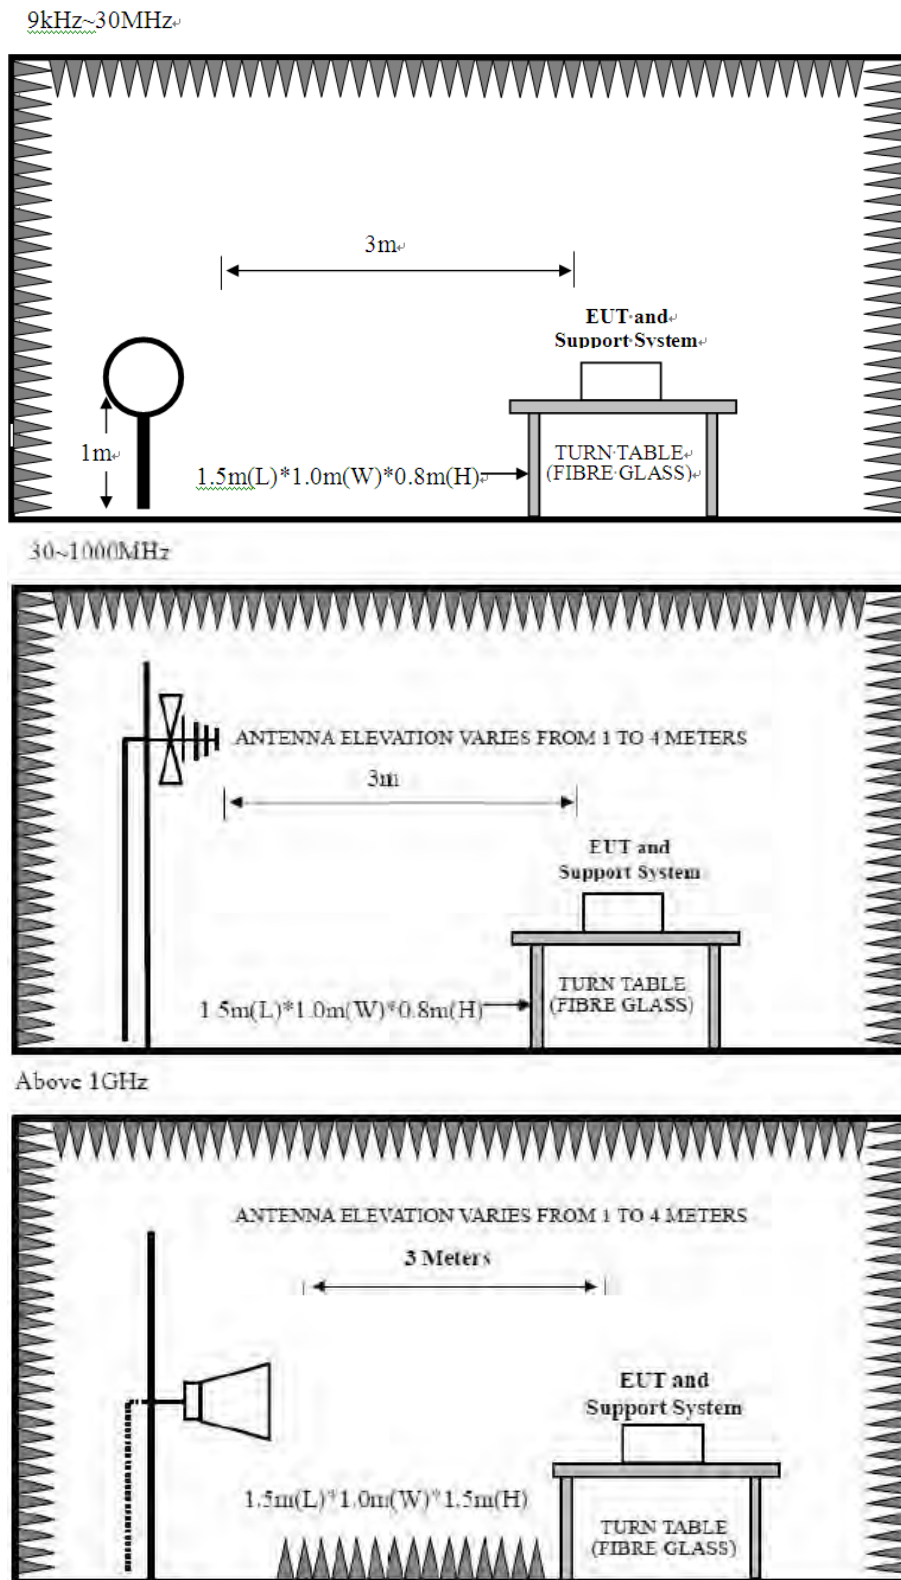

### 8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

### 8.4. Test Result

Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


## 8.5. Test Data

9 kHz – 30 MHz

Pass

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


30 MHz – 1000 MHz

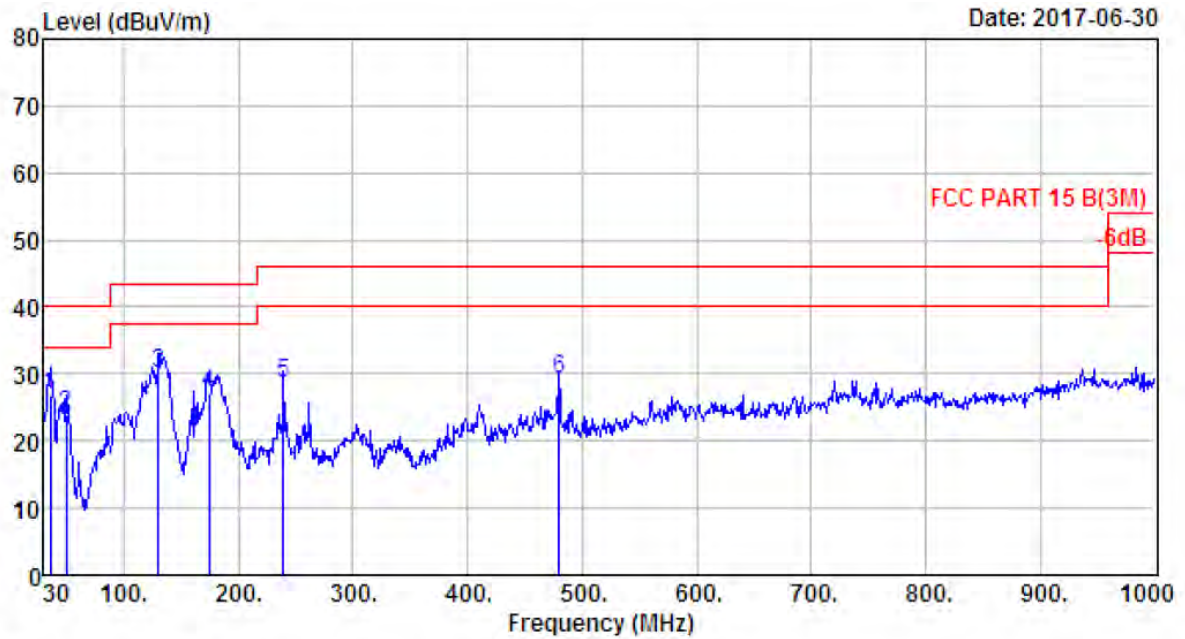

```

Site no.       : 1# 966 Chamber           Data no.  : 171
Dis. / Ant.    : 3m 27137                Ant. pol. : VERTICAL
Limit         : FCC PART 15 B(3M)
Env. / Ins.    : Temp:24.1';Humi:51%;Press:101.52kPa
Engineer      : Tony
EUT           : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER
Power         : DC 18V From Adapter Input AC 120V/60Hz
M/N           : RSB-3
Test Mode     : TX Mode
                Antenna 1
    
```


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.82	14.99	0.75	11.18	26.92	40.00	13.08	QP
2	49.40	7.90	0.95	14.92	23.77	40.00	16.23	QP
3	129.91	11.32	1.47	17.27	30.06	43.50	13.44	QP
4	174.53	8.99	1.68	16.57	27.24	43.50	16.26	QP
5	239.52	10.22	2.11	16.16	28.49	46.00	17.51	QP
6	480.08	17.45	3.10	8.65	29.20	46.00	16.80	QP

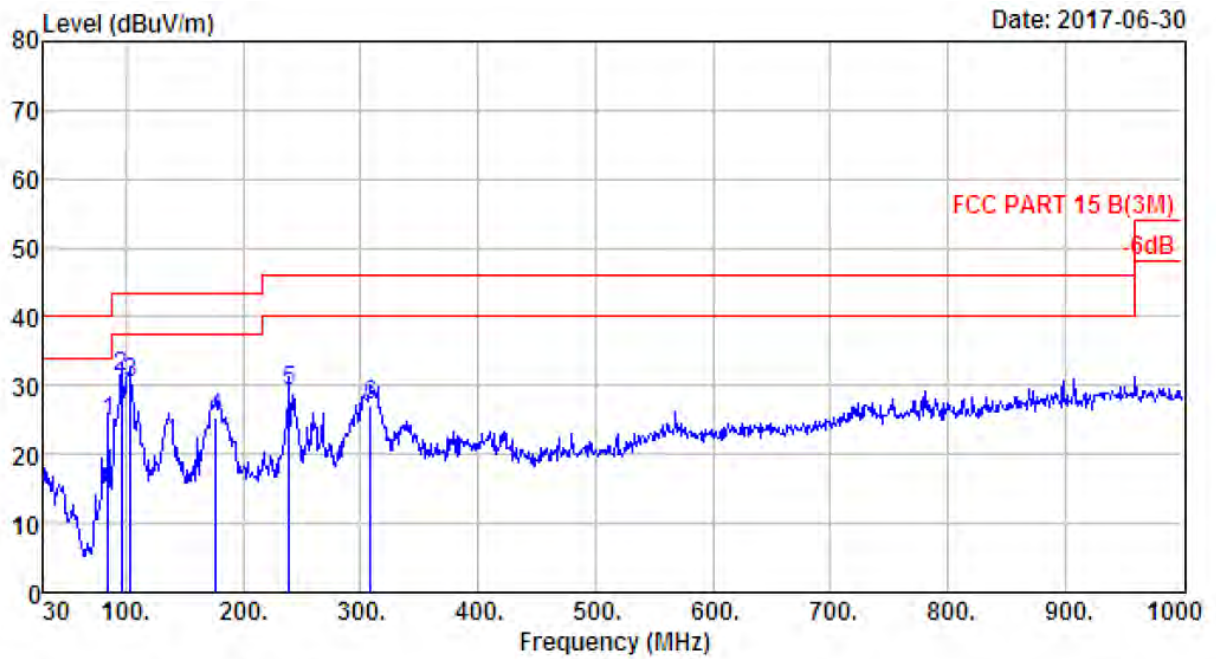

```


Site no.       : 1# 966 Chamber           Data no.  : 172
Dis. / Ant.   : 3m 27137                 Ant. pol. : HORIZONTAL
Limit        : FCC PART 15 B(3M)
Env. / Ins.   : Temp:24.1';Humi:51%;Press:101.52kPa
Engineer     : Tony
EUT          : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER
Power        : DC 18V From Adapter Input AC 120V/60Hz
M/N          : RSB-3
Test Mode    : TX Mode
                Antenna 1
    
```

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	85.29	7.72	1.18	16.02	24.92	40.00	15.08	QP
2	95.96	8.92	1.31	21.03	31.26	43.50	12.24	QP
3	103.72	9.85	1.39	19.13	30.37	43.50	13.13	QP
4	176.47	8.98	1.67	14.67	25.32	43.50	18.18	QP
5	239.52	10.22	2.11	16.92	29.25	46.00	16.75	QP
6	308.39	13.17	2.44	11.46	27.07	46.00	18.93	QP

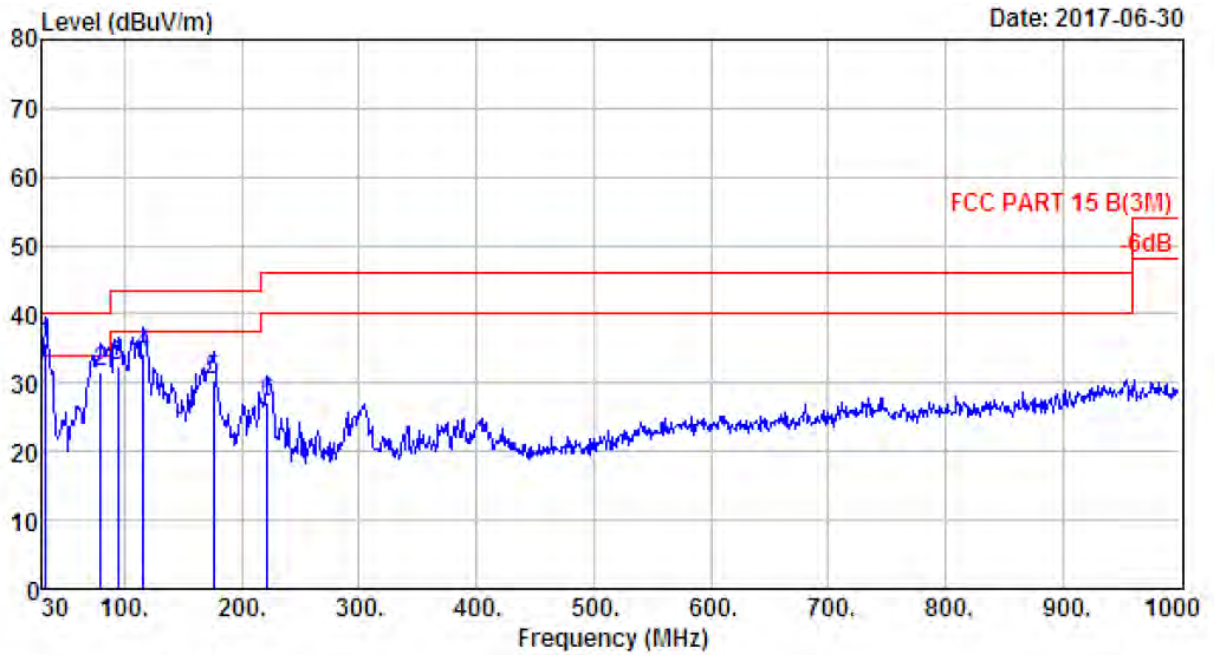


Site no. : 1# 966 Chamber Data no. : 93  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:24.1';Humi:51%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : TX Mode  
 Antenna 1

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.95	16.62	0.69	18.31	35.62	40.00	4.38	QP
2	79.47	6.98	1.24	23.49	31.71	40.00	8.29	QP
3	94.02	8.74	1.28	22.52	32.54	43.50	10.96	QP
4	116.33	10.98	1.50	21.67	34.15	43.50	9.35	QP
5	175.50	8.98	1.68	19.78	30.44	43.50	13.06	QP
6	222.06	9.31	2.01	15.81	27.13	46.00	18.87	QP

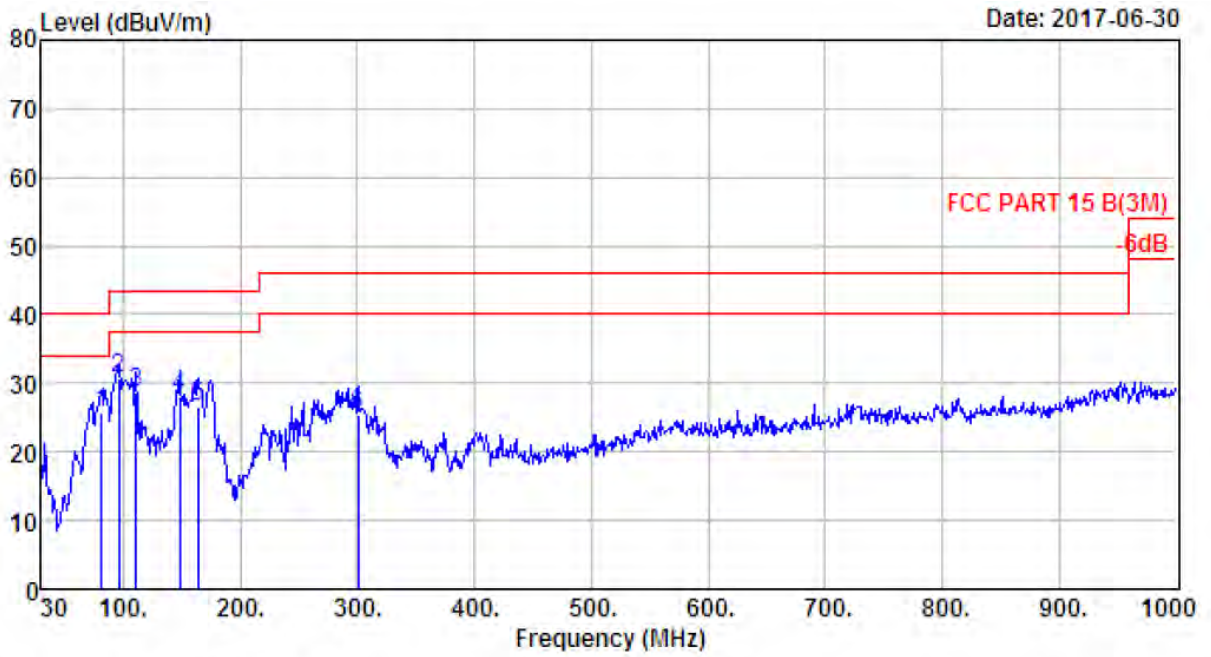

Site no. : 1# 966 Chamber                      Data no. : 94  
 Dis. / Ant. : 3m 27137                              Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:24.1';Humi:51%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : TX Mode  
                   Antenna 1


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	81.41	7.20	1.25	17.31	25.76	40.00	14.24	QP
2	95.96	8.92	1.31	20.54	30.77	43.50	12.73	QP
3	110.51	10.52	1.42	16.66	28.60	43.50	14.90	QP
4	148.34	11.00	1.69	15.32	28.01	43.50	15.49	QP
5	163.86	9.89	1.67	15.08	26.64	43.50	16.86	QP
6	300.63	13.03	2.37	10.07	25.47	46.00	20.53	QP

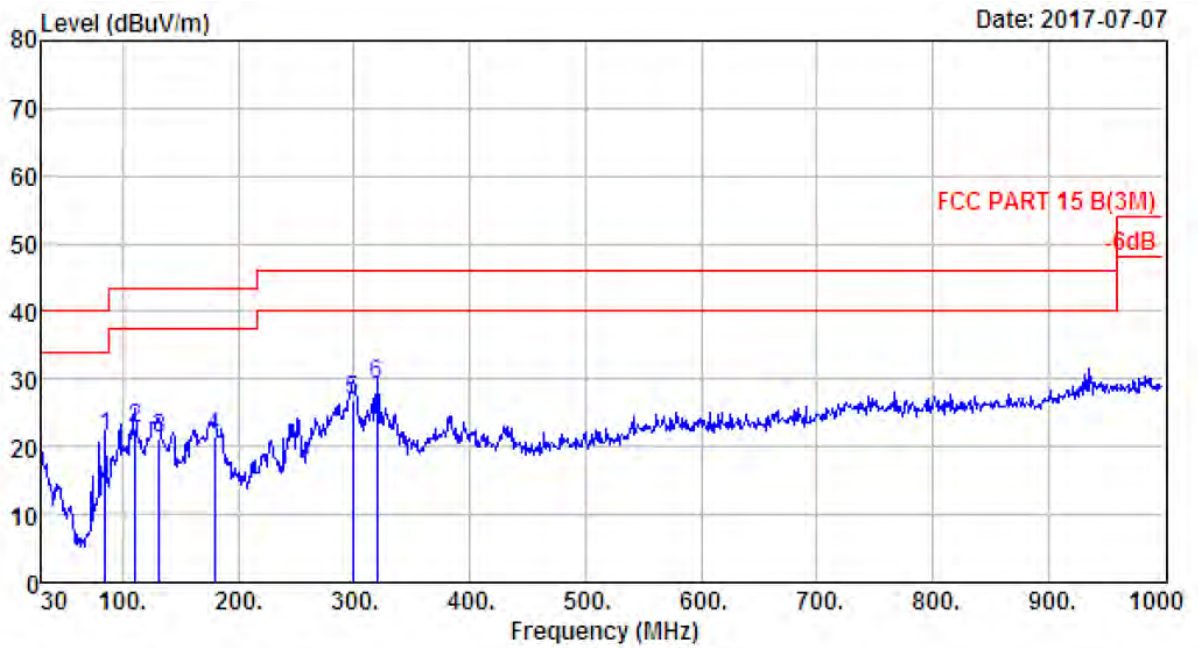

Site no. : 1# 966 Chamber Data no. : 187  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : TX Mode  
 Antenna 2


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	85.29	7.72	1.18	12.63	21.53	40.00	18.47	QP
2	110.51	10.52	1.42	10.77	22.71	43.50	20.79	QP
3	131.85	11.34	1.50	8.42	21.26	43.50	22.24	QP
4	179.38	8.96	1.72	10.86	21.54	43.50	21.96	QP
5	298.69	13.00	2.40	11.49	26.89	46.00	19.11	QP
6	320.03	13.57	2.40	13.33	29.30	46.00	16.70	QP



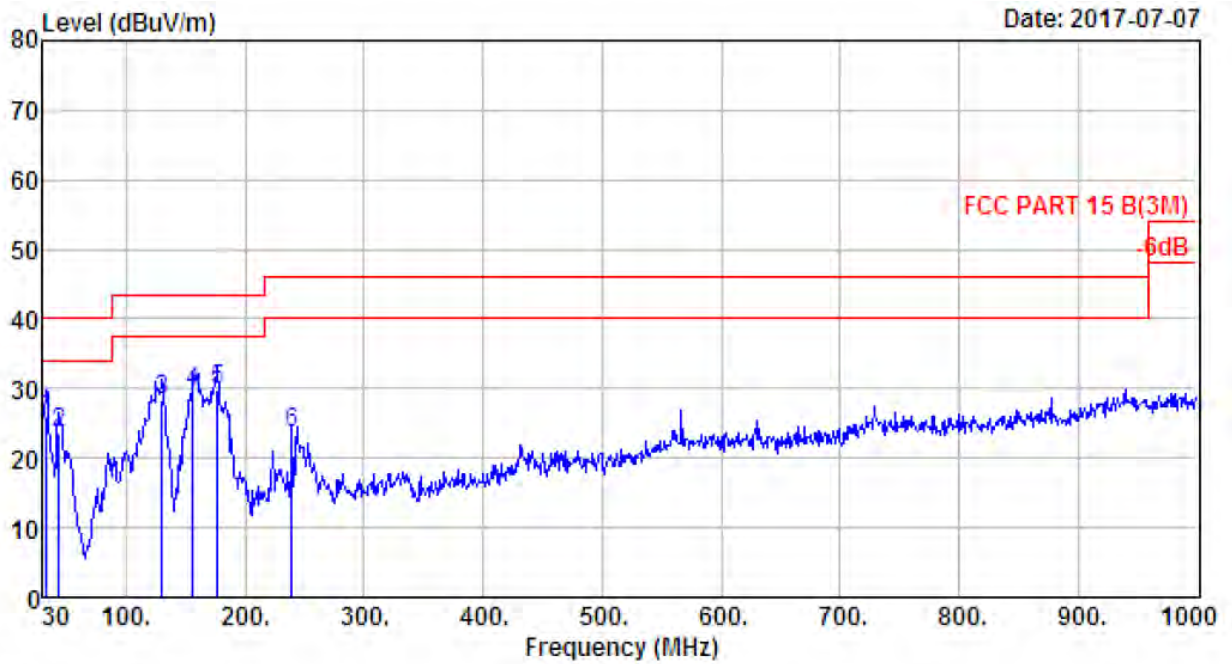


Site no. : site Data no. : 188  
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INIEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : TX Mode  
 Antenna 2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.91	16.62	0.69	8.60	25.91	40.00	14.09	QP
2	43.58	10.52	0.84	12.28	23.64	40.00	16.36	QP
3	129.91	11.32	1.47	15.47	28.26	43.50	15.24	QP
4	156.10	10.61	1.67	17.34	29.62	43.50	13.88	QP
5	176.47	8.98	1.67	19.27	29.92	43.50	13.58	QP
6	239.52	10.22	2.11	11.17	23.50	46.00	22.50	QP

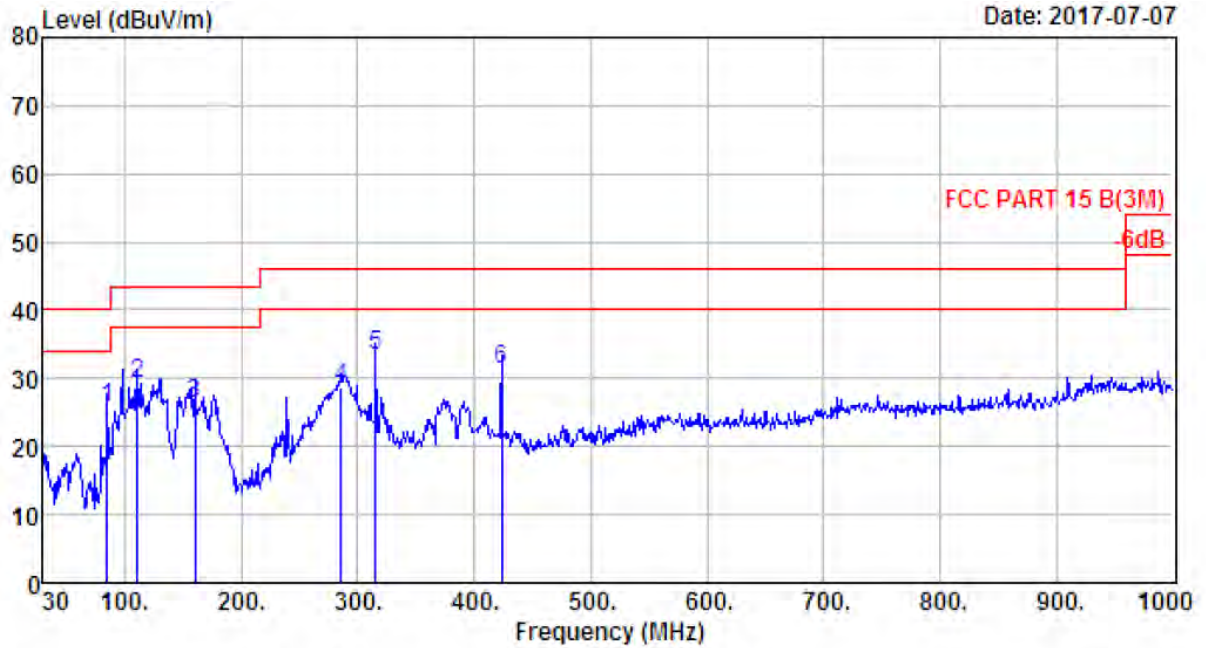

Site no. : 1# 966 Chamber Data no. : 179  
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : TX Mode  
 Antenna 2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	85.29	7.72	1.18	16.84	25.74	40.00	14.26	QP
2	110.51	10.52	1.42	17.28	29.22	43.50	14.28	QP
3	159.98	10.36	1.71	14.35	26.42	43.50	17.08	QP
4	286.08	12.59	2.32	13.72	28.63	46.00	17.37	QP
5	315.18	13.39	2.42	17.41	33.22	46.00	12.78	QP
6	423.82	16.20	2.77	12.43	31.40	46.00	14.60	QP

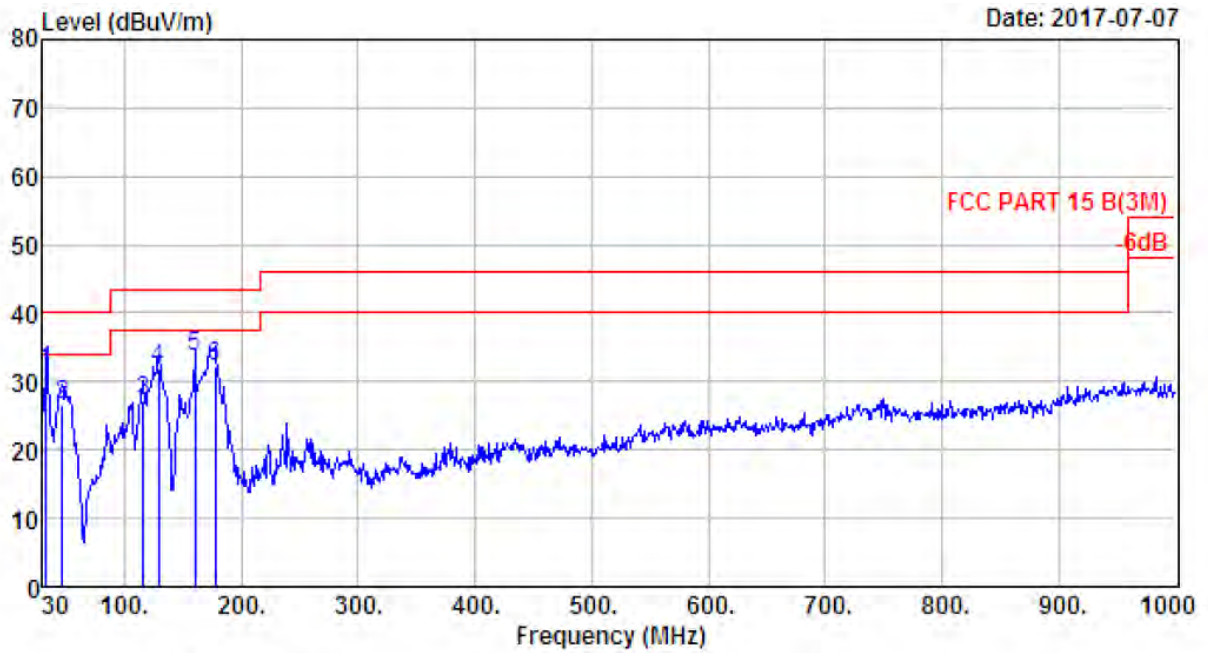

Site no. : 1# 966 Chamber                      Data no. : 180  
 Dis. / Ant. : 3m 27137                      Ant. pol. : VERTICAL  
 Limit : FCC PART 15 B(3M)  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : TX Mode  
                     Antenna 2

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.91	16.62	0.69	14.30	31.61	40.00	8.39	QP
2	46.49	9.20	0.87	16.43	26.50	40.00	13.50	QP
3	116.33	10.98	1.50	14.75	27.23	43.50	16.27	QP
4	128.94	11.33	1.47	19.02	31.82	43.50	11.68	QP
5	159.98	10.36	1.71	21.58	33.65	43.50	9.85	QP
6	177.44	8.97	1.67	21.48	32.12	43.50	11.38	QP

**Above 1000 MHz**

Site no. : 1# 966 Chamber Data no. : 9  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	101.68	101.27	74.00	-27.27	Peak
2	4804.00	31.25	11.77	35.64	39.90	47.28	74.00	26.72	Peak
3	7206.00	36.52	11.54	33.95	27.96	42.07	74.00	31.93	Peak
4	11200.00	39.39	11.14	33.24	25.77	43.06	74.00	30.94	Peak
5	14447.00	41.83	10.93	33.42	24.14	43.48	74.00	30.52	Peak
6	17847.00	44.95	11.20	30.52	21.84	47.47	74.00	26.53	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 10  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	92.95	92.54	74.00	-18.54	Peak
2	4804.00	31.25	11.77	35.64	34.80	42.18	74.00	31.82	Peak
3	7206.00	36.52	11.54	33.95	29.35	43.46	74.00	30.54	Peak
4	11268.00	39.34	11.09	33.28	27.30	44.45	74.00	29.55	Peak
5	14124.00	41.57	10.91	33.22	25.94	45.20	74.00	28.80	Peak
6	16895.00	39.44	10.89	32.42	27.02	44.93	74.00	29.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 11  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	93.96	93.38	74.00	-19.38	Peak
2	4882.00	31.37	12.07	35.76	37.77	45.45	74.00	28.55	Peak
3	7323.00	36.55	11.57	34.14	31.38	45.36	74.00	28.64	Peak
4	11217.00	39.38	11.13	33.24	29.04	46.31	74.00	27.69	Peak
5	15365.00	38.50	11.03	33.13	29.07	45.47	74.00	28.53	Peak
6	17847.00	44.95	11.20	30.52	22.70	48.33	74.00	25.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 12  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	102.69	102.11	74.00	-28.11	Peak
2	4882.00	31.37	12.07	35.76	42.64	50.32	74.00	23.68	Peak
3	7323.00	36.55	11.57	34.14	32.39	46.37	74.00	27.63	Peak
4	10180.00	38.42	11.49	34.53	31.99	47.37	74.00	26.63	Peak
5	13886.00	41.16	11.04	33.03	26.29	45.46	74.00	28.54	Peak
6	17745.00	43.95	11.08	30.80	23.37	47.60	74.00	26.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 13  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	100.02	99.20	74.00	-25.20	Peak
2	4960.00	31.49	12.44	36.01	41.42	49.34	74.00	24.66	Peak
3	7440.00	36.54	11.61	34.22	31.66	45.59	74.00	28.41	Peak
4	10316.00	38.65	11.41	34.51	31.64	47.19	74.00	26.81	Peak
5	13257.00	39.50	11.47	32.90	27.72	45.79	74.00	28.21	Peak
6	17966.00	46.12	11.34	31.76	22.06	47.76	74.00	26.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 14  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	89.96	89.14	74.00	-15.14	Peak
2	4960.00	31.49	12.44	36.01	34.71	42.63	74.00	31.37	Peak
3	7440.00	36.54	11.61	34.22	30.12	44.05	74.00	29.95	Peak
4	10214.00	38.48	11.47	34.50	30.15	45.60	74.00	28.40	Peak
5	13393.00	39.83	11.49	32.88	28.14	46.58	74.00	27.42	Peak
6	17813.00	44.62	11.16	30.47	22.49	47.80	74.00	26.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 15  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	99.50	99.09	74.00	-25.09	Peak
2	4804.00	31.25	11.77	35.64	39.63	47.01	74.00	26.99	Peak
3	7206.00	36.52	11.54	33.95	31.21	45.32	74.00	28.68	Peak
4	10945.00	39.46	11.29	34.13	29.65	46.27	74.00	27.73	Peak
5	15586.00	37.72	11.03	33.19	30.76	46.32	74.00	27.68	Peak
6	17966.00	46.12	11.34	31.76	21.53	47.23	74.00	26.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 16  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	90.05	89.64	74.00	-15.64	Peak
2	4804.00	31.25	11.77	35.64	35.17	42.55	74.00	31.45	Peak
3	7206.00	36.52	11.54	33.95	28.26	42.37	74.00	31.63	Peak
4	8684.00	37.32	11.45	33.66	27.80	42.91	74.00	31.09	Peak
5	14056.00	41.51	10.90	33.06	25.14	44.49	74.00	29.51	Peak
6	17864.00	45.12	11.22	30.66	21.08	46.76	74.00	27.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 17  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	101.95	101.37	74.00	-27.37	Peak
2	4882.00	31.37	12.07	35.76	38.58	46.26	74.00	27.74	Peak
3	7323.00	36.55	11.57	34.14	29.84	43.82	74.00	30.18	Peak
4	11064.00	39.48	11.24	33.83	26.62	43.51	74.00	30.49	Peak
5	13903.00	41.21	11.02	33.02	24.85	44.06	74.00	29.94	Peak
6	17796.00	44.45	11.14	30.45	20.71	45.85	74.00	28.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 18  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	92.05	91.47	74.00	-17.47	Peak
2	4882.00	31.37	12.07	35.76	34.22	41.90	74.00	32.10	Peak
3	7323.00	36.55	11.57	34.14	28.58	42.56	74.00	31.44	Peak
4	8735.00	37.40	11.45	33.76	26.47	41.56	74.00	32.44	Peak
5	13614.00	40.40	11.36	32.68	23.69	42.77	74.00	31.23	Peak
6	17915.00	45.62	11.28	31.26	20.14	45.78	74.00	28.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 1# 966 Chamber Data no. : 19  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	88.97	88.15	74.00	-14.15	Peak
2	4960.00	31.49	12.44	36.01	33.68	41.60	74.00	32.40	Peak
3	7440.00	36.54	11.61	34.22	29.85	43.78	74.00	30.22	Peak
4	13223.00	39.42	11.46	32.83	25.62	43.67	74.00	30.33	Peak
5	15195.00	39.30	10.95	33.83	28.37	44.79	74.00	29.21	Peak
6	17711.00	43.62	11.04	31.39	22.53	45.80	74.00	28.20	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 20  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	98.60	97.78	74.00	-23.78	Peak
2	4960.00	31.49	12.44	36.01	39.74	47.66	74.00	26.34	Peak
3	7440.00	36.54	11.61	34.22	27.31	41.24	74.00	32.76	Peak
4	8701.00	37.35	11.45	33.65	28.88	44.03	74.00	29.97	Peak
5	13444.00	39.95	11.49	32.74	26.07	44.77	74.00	29.23	Peak
6	17864.00	45.12	11.22	30.66	22.02	47.70	74.00	26.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 89  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	98.61	98.20	74.00	-24.20	Peak
2	4804.00	31.25	11.77	35.64	41.10	48.48	74.00	25.52	Peak
3	7206.00	36.52	11.54	33.95	28.95	43.06	74.00	30.94	Peak
4	11234.00	39.37	11.12	33.25	26.88	44.12	74.00	29.88	Peak
5	14515.00	41.89	10.93	33.57	25.48	44.73	74.00	29.27	Peak
6	17830.00	44.78	11.18	30.50	20.23	45.69	74.00	28.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 90  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	96.74	96.33	74.00	-22.33	Peak
2	4804.00	31.25	11.77	35.64	38.53	45.91	74.00	28.09	Peak
3	7206.00	36.52	11.54	33.95	28.40	42.51	74.00	31.49	Peak
4	10197.00	38.45	11.48	34.51	24.93	40.35	74.00	33.65	Peak
5	13954.00	41.35	10.96	32.99	21.81	41.13	74.00	32.87	Peak
6	17354.00	41.04	10.86	31.11	19.56	40.35	74.00	33.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 91  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	97.33	96.75	74.00	-22.75	Peak
2	4882.00	31.37	12.07	35.76	37.51	45.19	74.00	28.81	Peak
3	7323.00	36.55	11.57	34.14	27.16	41.14	74.00	32.86	Peak
4	10775.00	39.28	11.30	34.02	24.55	41.11	74.00	32.89	Peak
5	15416.00	38.26	11.06	32.95	23.88	40.25	74.00	33.75	Peak
6	17966.00	46.12	11.34	31.76	16.02	41.72	74.00	32.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 92  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	94.25	93.67	74.00	-19.67	Peak
2	4882.00	31.37	12.07	35.76	36.87	44.55	74.00	29.45	Peak
3	7323.00	36.55	11.57	34.14	28.35	42.33	74.00	31.67	Peak
4	11047.00	39.49	11.25	33.92	25.46	42.28	74.00	31.72	Peak
5	13954.00	41.35	10.96	32.99	25.46	44.78	74.00	29.22	Peak
6	17796.00	44.45	11.14	30.45	19.86	45.00	74.00	29.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 93  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	93.70	92.88	74.00	-18.88	Peak
2	4960.00	31.49	12.44	36.01	36.21	44.13	74.00	29.87	Peak
3	7440.00	36.54	11.61	34.22	27.96	41.89	74.00	32.11	Peak
4	11166.00	39.41	11.17	33.31	25.62	42.89	74.00	31.11	Peak
5	15076.00	39.86	10.89	33.71	26.01	43.05	74.00	30.95	Peak
6	18000.00	46.45	11.38	32.12	17.96	43.67	74.00	30.33	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 94  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	96.81	95.99	74.00	-21.99	Peak
2	4960.00	31.49	12.44	36.01	39.32	47.24	74.00	26.76	Peak
3	7440.00	36.54	11.61	34.22	30.07	44.00	74.00	30.00	Peak
4	11285.00	39.33	11.08	33.32	27.56	44.65	74.00	29.35	Peak
5	14294.00	41.71	10.92	33.42	27.24	46.45	74.00	27.55	Peak
6	17898.00	45.45	11.26	30.94	20.34	46.11	74.00	27.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 95  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	94.90	94.49	74.00	-20.49	Peak
2	4804.00	31.25	11.77	35.64	37.44	44.82	74.00	29.18	Peak
3	7206.00	36.52	11.54	33.95	30.85	44.96	74.00	29.04	Peak
4	10316.00	38.65	11.41	34.51	29.38	44.93	74.00	29.07	Peak
5	13665.00	40.55	11.30	32.75	26.39	45.49	74.00	28.51	Peak
6	17405.00	41.23	10.84	31.14	26.08	47.01	74.00	26.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 96  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	97.84	97.43	74.00	-23.43	Peak
2	4804.00	31.25	11.77	35.64	36.04	43.42	74.00	30.58	Peak
3	7206.00	36.52	11.54	33.95	25.36	39.47	74.00	34.53	Peak
4	10214.00	38.48	11.47	34.50	27.20	42.65	74.00	31.35	Peak
5	14464.00	41.85	10.93	33.45	24.14	43.47	74.00	30.53	Peak
6	17915.00	45.62	11.28	31.26	20.22	45.86	74.00	28.14	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 97  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	96.75	96.17	74.00	-22.17	Peak
2	4882.00	31.37	12.07	35.76	38.93	46.61	74.00	27.39	Peak
3	7323.00	36.55	11.57	34.14	29.48	43.46	74.00	30.54	Peak
4	11200.00	39.39	11.14	33.24	27.93	45.22	74.00	28.78	Peak
5	14090.00	41.54	10.91	33.13	26.75	46.07	74.00	27.93	Peak
6	17116.00	40.19	10.95	32.34	28.48	47.28	74.00	26.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 98  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	99.93	99.35	74.00	-25.35	Peak
2	4882.00	31.37	12.07	35.76	38.66	46.34	74.00	27.66	Peak
3	7323.00	36.55	11.57	34.14	27.58	41.56	74.00	32.44	Peak
4	11234.00	39.37	11.12	33.25	26.76	44.00	74.00	30.00	Peak
5	14124.00	41.57	10.91	33.22	24.73	43.99	74.00	30.01	Peak
6	17830.00	44.78	11.18	30.50	18.56	44.02	74.00	29.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 99  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	96.25	95.43	74.00	-21.43	Peak
2	4960.00	31.49	12.44	36.01	40.28	48.20	74.00	25.80	Peak
3	7440.00	36.54	11.61	34.22	30.08	44.01	74.00	29.99	Peak
4	11370.00	39.28	11.02	33.51	26.24	43.03	74.00	30.97	Peak
5	13444.00	39.95	11.49	32.74	26.14	44.84	74.00	29.16	Peak
6	17711.00	43.62	11.04	31.39	20.85	44.12	74.00	29.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 100  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	91.75	90.93	74.00	-16.93	Peak
2	4960.00	31.49	12.44	36.01	36.68	44.60	74.00	29.40	Peak
3	7440.00	36.54	11.61	34.22	29.75	43.68	74.00	30.32	Peak
4	11540.00	39.16	10.95	33.36	24.93	41.68	74.00	32.32	Peak
5	14090.00	41.54	10.91	33.13	25.69	45.01	74.00	28.99	Peak
6	16929.00	39.54	10.93	32.35	24.61	42.73	74.00	31.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 315  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	97.64	97.23	74.00	-23.23	Peak
2	4804.00	31.25	11.77	35.64	40.95	48.33	74.00	25.67	Peak
3	7206.00	36.52	11.54	33.95	28.41	42.52	74.00	31.48	Peak
4	9925.00	38.14	11.61	34.97	25.79	40.57	74.00	33.43	Peak
5	14124.00	41.57	10.91	33.22	22.32	41.58	74.00	32.42	Peak
6	17915.00	45.62	11.28	31.26	20.40	46.04	74.00	27.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 316  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	96.25	95.84	74.00	-21.84	Peak
2	4804.00	31.25	11.77	35.64	42.75	50.13	74.00	23.87	Peak
3	7206.00	36.52	11.54	33.95	32.37	46.48	74.00	27.52	Peak
4	11234.00	39.37	11.12	33.25	26.50	43.74	74.00	30.26	Peak
5	14090.00	41.54	10.91	33.13	25.88	45.20	74.00	28.80	Peak
6	17915.00	45.62	11.28	31.26	22.76	48.40	74.00	25.60	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 1# 966 Chamber Data no. : 317  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	98.69	98.11	74.00	-24.11	Peak
2	4882.00	31.37	12.07	35.76	42.42	50.10	74.00	23.90	Peak
3	7323.00	36.55	11.57	34.14	31.13	45.11	74.00	28.89	Peak
4	11234.00	39.37	11.12	33.25	25.73	42.97	74.00	31.03	Peak
5	15178.00	39.38	10.94	33.83	27.51	44.00	74.00	30.00	Peak
6	18000.00	46.45	11.38	32.12	20.00	45.71	74.00	28.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 318  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	99.59	99.01	74.00	-25.01	Peak
2	4882.00	31.37	12.07	35.76	41.78	49.46	74.00	24.54	Peak
3	7323.00	36.55	11.57	34.14	29.02	43.00	74.00	31.00	Peak
4	11370.00	39.28	11.02	33.51	27.38	44.17	74.00	29.83	Peak
5	14464.00	41.85	10.93	33.45	29.38	48.71	74.00	25.29	Peak
6	17898.00	45.45	11.26	30.94	23.08	48.85	74.00	25.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 319  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	96.74	95.92	74.00	-21.92	Peak
2	4960.00	31.49	12.44	36.01	40.07	47.99	74.00	26.01	Peak
3	7440.00	36.54	11.61	34.22	32.57	46.50	74.00	27.50	Peak
4	10180.00	38.42	11.49	34.53	26.58	41.96	74.00	32.04	Peak
5	13733.00	40.74	11.22	32.98	27.50	46.48	74.00	27.52	Peak
6	17830.00	44.78	11.18	30.50	21.36	46.82	74.00	27.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 320  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : GFSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	97.17	96.35	74.00	-22.35	Peak
2	4960.00	31.49	12.44	36.01	36.59	44.51	74.00	29.49	Peak
3	7440.00	36.54	11.61	34.22	27.45	41.38	74.00	32.62	Peak
4	11336.00	39.30	11.04	33.44	25.20	42.10	74.00	31.90	Peak
5	14090.00	41.54	10.91	33.13	23.10	42.42	74.00	31.58	Peak
6	17864.00	45.12	11.22	30.66	19.05	44.73	74.00	29.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 321  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	96.04	95.63	74.00	-21.63	Peak
2	4804.00	31.25	11.77	35.64	35.89	43.27	74.00	30.73	Peak
3	7206.00	36.52	11.54	33.95	27.24	41.35	74.00	32.65	Peak
4	11183.00	39.40	11.15	33.24	24.29	41.60	74.00	32.40	Peak
5	13274.00	39.54	11.47	32.92	23.97	42.06	74.00	31.94	Peak
6	17830.00	44.78	11.18	30.50	19.68	45.14	74.00	28.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 322  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	93.83	93.42	74.00	-19.42	Peak
2	4804.00	31.25	11.77	35.64	39.81	47.19	74.00	26.81	Peak
3	7206.00	36.52	11.54	33.95	28.22	42.33	74.00	31.67	Peak
4	11200.00	39.39	11.14	33.24	24.24	41.53	74.00	32.47	Peak
5	15195.00	39.30	10.95	33.83	26.84	43.26	74.00	30.74	Peak
6	17303.00	40.84	10.88	31.31	25.28	45.69	74.00	28.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 323  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	96.01	95.43	74.00	-21.43	Peak
2	4882.00	31.37	12.07	35.76	37.70	45.38	74.00	28.62	Peak
3	7323.00	36.55	11.57	34.14	30.63	44.61	74.00	29.39	Peak
4	8684.00	37.32	11.45	33.66	31.40	46.51	74.00	27.49	Peak
5	14124.00	41.57	10.91	33.22	26.47	45.73	74.00	28.27	Peak
6	17966.00	46.12	11.34	31.76	22.06	47.76	74.00	26.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 324  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	95.43	94.85	74.00	-20.85	Peak
2	4882.00	31.37	12.07	35.76	34.84	42.52	74.00	31.48	Peak
3	7323.00	36.55	11.57	34.14	28.96	42.94	74.00	31.06	Peak
4	11064.00	39.48	11.24	33.83	25.75	42.64	74.00	31.36	Peak
5	13954.00	41.35	10.96	32.99	24.06	43.38	74.00	30.62	Peak
6	17354.00	41.04	10.86	31.11	23.85	44.64	74.00	29.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 325  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	92.32	91.50	74.00	-17.50	Peak
2	4960.00	31.49	12.44	36.01	38.48	46.40	74.00	27.60	Peak
3	7440.00	36.54	11.61	34.22	28.52	42.45	74.00	31.55	Peak
4	10146.00	38.36	11.51	34.58	29.46	44.75	74.00	29.25	Peak
5	13274.00	39.54	11.47	32.92	26.26	44.35	74.00	29.65	Peak
6	17915.00	45.62	11.28	31.26	21.87	47.51	74.00	26.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 326  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : RSB-3  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	95.30	94.48	74.00	-20.48	Peak
2	4960.00	31.49	12.44	36.01	40.66	48.58	74.00	25.42	Peak
3	7440.00	36.54	11.61	34.22	31.37	45.30	74.00	28.70	Peak
4	11183.00	39.40	11.15	33.24	28.81	46.12	74.00	27.88	Peak
5	13580.00	40.31	11.40	32.64	27.62	46.69	74.00	27.31	Peak
6	17881.00	45.28	11.24	30.80	22.30	48.02	74.00	25.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 277  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	93.90	93.49	74.00	-19.49	Peak
2	4804.00	31.25	11.77	35.64	35.14	42.52	74.00	31.48	Peak
3	7206.00	36.52	11.54	33.95	31.86	45.97	74.00	28.03	Peak
4	11285.00	39.33	11.08	33.32	27.35	44.44	74.00	29.56	Peak
5	14294.00	41.71	10.92	33.42	26.00	45.21	74.00	28.79	Peak
6	17966.00	46.12	11.34	31.76	23.65	49.35	74.00	24.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 278  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	92.61	92.20	74.00	-18.20	Peak
2	4804.00	31.25	11.77	35.64	34.01	41.39	74.00	32.61	Peak
3	7206.00	36.52	11.54	33.95	31.23	45.34	74.00	28.66	Peak
4	8684.00	37.32	11.45	33.66	31.97	47.08	74.00	26.92	Peak
5	13920.00	41.26	11.00	33.00	24.98	44.24	74.00	29.76	Peak
6	17898.00	45.45	11.26	30.94	22.52	48.29	74.00	25.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 279  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	95.62	95.04	74.00	-21.04	Peak
2	4882.00	31.37	12.07	35.76	41.94	49.62	74.00	24.38	Peak
3	7323.00	36.55	11.57	34.14	33.55	47.53	74.00	26.47	Peak
4	8684.00	37.32	11.45	33.66	31.91	47.02	74.00	26.98	Peak
5	11268.00	39.34	11.09	33.28	28.00	45.15	74.00	28.85	Peak
6	17915.00	45.62	11.28	31.26	22.18	47.82	74.00	26.18	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 280  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	91.75	91.17	74.00	-17.17	Peak
2	4882.00	31.37	12.07	35.76	35.03	42.71	74.00	31.29	Peak
3	7323.00	36.55	11.57	34.14	30.46	44.44	74.00	29.56	Peak
4	8684.00	37.32	11.45	33.66	30.39	45.50	74.00	28.50	Peak
5	11625.00	39.06	11.04	33.19	26.91	43.82	74.00	30.18	Peak
6	17966.00	46.12	11.34	31.76	21.01	46.71	74.00	27.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 281  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	91.11	90.29	74.00	-16.29	Peak
2	4960.00	31.49	12.44	36.01	35.62	43.54	74.00	30.46	Peak
3	7440.00	36.54	11.61	34.22	31.05	44.98	74.00	29.02	Peak
4	8650.00	37.27	11.45	33.68	30.36	45.40	74.00	28.60	Peak
5	14260.00	41.68	10.92	33.42	26.62	45.80	74.00	28.20	Peak
6	17915.00	45.62	11.28	31.26	22.47	48.11	74.00	25.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 282  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : GFSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	93.50	92.68	74.00	-18.68	Peak
2	4960.00	31.49	12.44	36.01	36.54	44.46	74.00	29.54	Peak
3	7440.00	36.54	11.61	34.22	31.45	45.38	74.00	28.62	Peak
4	8735.00	37.40	11.45	33.76	29.38	44.47	74.00	29.53	Peak
5	15416.00	38.26	11.06	32.95	26.65	43.02	74.00	30.98	Peak
6	17830.00	44.78	11.18	30.50	21.89	47.35	74.00	26.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.



Site no. : 1# 966 Chamber Data no. : 283  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	89.00	88.59	74.00	-14.59	Peak
2	4804.00	31.25	11.77	35.64	36.62	44.00	74.00	30.00	Peak
3	7206.00	36.52	11.54	33.95	32.71	46.82	74.00	27.18	Peak
4	9126.00	37.62	11.52	34.09	31.38	46.43	74.00	27.57	Peak
5	14906.00	40.53	10.87	33.63	27.89	45.66	74.00	28.34	Peak
6	17830.00	44.78	11.18	30.50	25.27	50.73	74.00	23.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 284  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2402MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.64	91.48	91.07	74.00	-17.07	Peak
2	4804.00	31.25	11.77	35.64	37.26	44.64	74.00	29.36	Peak
3	7206.00	36.52	11.54	33.95	30.41	44.52	74.00	29.48	Peak
4	11285.00	39.33	11.08	33.32	28.82	45.91	74.00	28.09	Peak
5	15144.00	39.54	10.93	33.83	31.75	48.39	74.00	25.61	Peak
6	17966.00	46.12	11.34	31.76	24.40	50.10	74.00	23.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 285  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	93.83	93.25	74.00	-19.25	Peak
2	4882.00	31.37	12.07	35.76	37.87	45.55	74.00	28.45	Peak
3	7323.00	36.55	11.57	34.14	31.14	45.12	74.00	28.88	Peak
4	9126.00	37.62	11.52	34.09	30.76	45.81	74.00	28.19	Peak
5	13665.00	40.55	11.30	32.75	27.18	46.28	74.00	27.72	Peak
6	17898.00	45.45	11.26	30.94	25.33	51.10	74.00	22.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 286  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2441MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.85	90.06	89.48	74.00	-15.48	Peak
2	4882.00	31.37	12.07	35.76	35.27	42.95	74.00	31.05	Peak
3	7323.00	36.55	11.57	34.14	32.03	46.01	74.00	27.99	Peak
4	9160.00	37.69	11.54	34.07	29.99	45.15	74.00	28.85	Peak
5	13920.00	41.26	11.00	33.00	27.17	46.43	74.00	27.57	Peak
6	18000.00	46.45	11.38	32.12	25.33	51.04	74.00	22.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 287  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	88.12	87.30	74.00	-13.30	Peak
2	4960.00	31.49	12.44	36.01	34.30	42.22	74.00	31.78	Peak
3	7440.00	36.54	11.61	34.22	30.47	44.40	74.00	29.60	Peak
4	11200.00	39.39	11.14	33.24	26.18	43.47	74.00	30.53	Peak
5	15824.00	37.36	10.82	33.10	28.95	44.03	74.00	29.97	Peak
6	17864.00	45.12	11.22	30.66	20.86	46.54	74.00	27.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 288  
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa  
 Engineer : Tony  
 EUT : 2.0 SOUND BAR WITH INTEGRATED SUBWOOFER  
 Power : DC 18V From Adapter Input AC 120V/60Hz  
 M/N : STUDIO SB 36  
 Test Mode : 8-DPSK TX 2480MHz  
 Antenna 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	35.11	90.35	89.53	74.00	-15.53	Peak
2	4960.00	31.49	12.44	36.01	37.14	45.06	74.00	28.94	Peak
3	7440.00	36.54	11.61	34.22	29.30	43.23	74.00	30.77	Peak
4	11200.00	39.39	11.14	33.24	25.76	43.05	74.00	30.95	Peak
5	13495.00	40.07	11.50	32.65	24.29	43.21	74.00	30.79	Peak
6	17864.00	45.12	11.22	30.66	20.88	46.56	74.00	27.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

**18000MHz – 25000MHz**

Pass

Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.