


**Label**

**Label location**

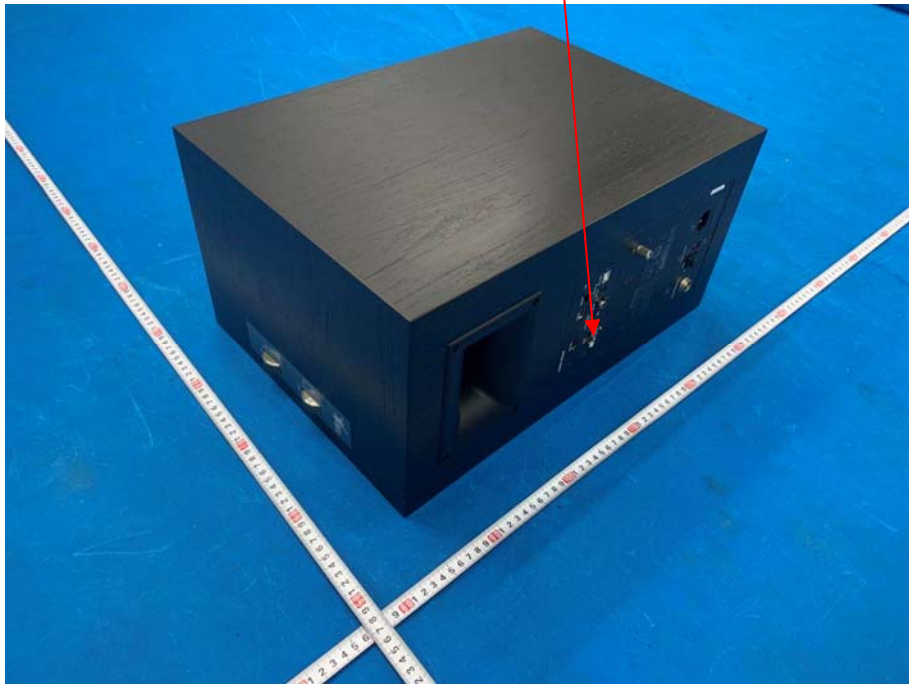

152.00 mm

PRIMARY SPEAKER

HDMI (ARC)

SERVICE

PRIMARY

PAIR

L R

ANALOG IN/OUT

DIGITAL IN

PHONO

AUX

SUB OUT

OPTICAL

USB AUDIO

LINE

PHONO

L

R

GND

**McLaren**  
FORMULA 1 TEAM

**Klipsch**<sup>®</sup>

OFFICIAL PARTNER

3502 Woodview Trace Indianapolis, IN, USA  
Klipsch Group Europe B.V., Kapteynstraat 1, 2201 BB Noordwijk, the Netherlands

CAN ICES-003(B)/NMB-003(B)  
FCC ID: STI-THENINES  
IC: 5788A-THENINES

Model: the Nines McLaren Edition  
Powered Monitor Speakers

This device complies with Part 15 of the FCC Rules, Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.



Made in China

AVIS: RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR

VOLTAGE SELECTOR

AC IN

100-120V~/220-240V~  
50/60Hz 250W

SECONDARY SPEAKER OUT

POWER

ON



OFF

AC220V-240V~

AC100V-120V~

Serial No.

FUSE T4AH 250V FOR 100-120V INPUT  
T4AH 250V FOR 220-240V INPUT



252.00 mm

152.00 mm

PRIMARY SPEAKER

HDMI (ARC)

SERVICE

PRIMARY

PAIR

L R

ANALOG IN/OUT

DIGITAL IN

PHONO

AUX

SUB OUT

OPTICAL

USB AUDIO

LINE

PHONO

L

R

GND

**Klipsch**

KLIPSCH.COM

3502 Woodview Trace Indianapolis, IN, USA  
Klipsch Group Europe B.V., Kapteynstraat 1, 2201 BB Noordwijk, the Netherlands

Model: the Nines  
Powered Monitor Speakers

This device complies with Part 15 of the FCC Rules.  
Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Made in China

CAN ICES-003(B)/NMB-003(B)  
FCC ID: STI-THENINES  
IC: 5788A-THENINES



AVIS: RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR



VOLTAGE SELECTOR

AC IN

100-120V~/220-240V~  
50/60Hz 250W

SECONDARY SPEAKER OUT

POWER

ON

OFF

AC220V-240V~

AC100V-120V~

FUSE T4AH 250V FOR 100-120V INPUT  
T4AH 250V FOR 220-240V INPUT



White

PANTONE  
10394C

252.00 mm