


RF TEST REPORT



Report No.: FCC_RF_SL16032201-SLX-008_UNII_Rev. 2.0
Supersede Report No.: FCC_RF_SL16032201-SLX-008_UNII_Rev. 1.0

Applicant	:	Hospira, Inc.
Product Name	:	SDIO Wireless Module
Model No.	:	SX-SDMAN
Test Standard	:	47 CFR 15.407
Test Method	:	ANSI C63.10: 2013 789033 D02 General UNII Test Procedures New Rules v01
FCC ID	:	STJ-SDMAN
Dates of test	:	04/07/2016 – 04/14/2016
Issue Date	:	05/10/2016
Test Result	:	☒ Pass ☐ Fail
Equipment complied with the specification ☒		
Equipment did not comply with the specification ☐		

This Test Report is Issued Under the Authority of:	
	
Rachana Khanduri	Chen Ge
Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	4
3	CUSTOMER INFORMATION	4
4	TEST SITE INFORMATION	4
5	MODIFICATION	4
6	EUT INFORMATION	5
6.1	EUT Description	5
6.2	Radio Description	5
6.3	EUT Photos	8
6.4	EUT Test Setup Photos	10
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	11
7.1	Supporting Equipment	11
7.2	Cabling Description	11
7.3	Test Software Description	11
8	TEST SUMMARY	12
9	MEASUREMENT UNCERTAINTY	13
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	14
10.1	Conducted Emissions	14
10.2	26 dB Bandwidth & 6 dB Bandwidth	17
10.3	Output Power	26
10.4	Peak Spectral Density	29
10.5	Radiated Emissions below 1GHz	44
10.6	Radiated Spurious Emissions above 1GHz	49
	ANNEX A. TEST INSTRUMENT	67
	ANNEX B. SIEMIC ACCREDITATION	68

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_RF_SL16032201-SLX-008_UNII	None	Original	04/14/2016
FCC_RF_SL16032201-SLX-008_UNII_Rev. 1.0	Rev. 1.0	Updated EUT photos	04/18/2016
FCC_RF_SL16032201-SLX-008_UNII_Rev. 2.0	Rev. 2.0	Updated EUT photos	05/10/2016

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Hospira, Inc.
Product: SDIO Wireless Module
Model: SX-SDMAN

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	Hospira, Inc.
Applicant Address	275 North Field Drive, Lake Forest, Illinois, US, 60045
Manufacturer Name	Hospira, Inc.
Manufacturer Address	275 North Field Drive, Lake Forest, Illinois, US, 60045

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	SDIO Wireless Module
Model No.	SX-SDMAN
Trade Name	Hospira
Serial No.	N/A
Input Power	AC 100-120V, 50/60Hz
Power Adapter Manu/Model	US115-05
Power Adapter SN	C01-0175140
Hardware version	N/A
Software version	N/A
Test Software version	N/A
Date of EUT received	04/01/2016
Equipment Class/ Category	UNII
Clock Frequencies	N/A
Port/Connectors	USB

6.2 Radio Description

Radio Type	802.11a	802.11n-20M	802.11n-40M
Operating Frequency	5180-5240MHz 5260-5320MHz 5500-5700MHz 5745-5825MHz	5180-5240MHz 5260-5320MHz 5500-5700MHz 5745-5825MHz	5190-5230MHz 5270-5310MHz 5510-5670MHz 5755-5795MHz
Modulation	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)	OFDM (BPSK, QPSK, 16QAM, 64QAM)
Channel Spacing	20MHz	20MHz (5GHz)	40MHz
Number of Channels	24	24 (5GHz)	11 (5GHz)
Antenna Type	Embedded PCB antenna		
Antenna Gain	4.2 dBi (2.4 GHz), 4.9 dBi (5 GHz)		
Antenna Connector Type	U.FL connector		
Remarks	2.4GHz and 5GHz Radio does not transmit simultaneously		

EUT Power Setting


5.2 GHz			
Test mode	Freq(MHz)	CH	Power settings
802.11a	5180	Low	14
	5200	Mid	14
	5240	High	14
802.11n20	5180	Low	13
	5200	Mid	14
	5240	High	14
802.11n40	5190	Low	9.5
	5230	High	14

5.3 GHz			
Test mode	Freq(MHz)	CH	Power settings
802.11a	5260	Low	14
	5280	Mid	14
	5320	High	14
802.11n20	5260	Low	14
	5280	Mid	14
	5320	High	14
802.11n40	5270	Low	14
	5310	High	11.5


5.5 GHz			
Test mode	Freq(MHz)	CH	Power settings
802.11a	5500	Low	14
	5580	Mid	14
	5700	High	14
802.11n20	5500	Low	14
	5580	Mid	14
	5700	High	14
802.11n40	5510	Low	14
	5550	Mid	14
	5670	High	14

5.8 GHz			
Test mode	Freq(MHz)	CH	Power settings
802.11a	5745	Low	13
	5785	Mid	13
	5825	High	13
802.11n20	5745	Low	13
	5785	Mid	13
	5825	High	13
802.11n40	5755	Low	13
	5795	High	13


6.3 EUT Photo

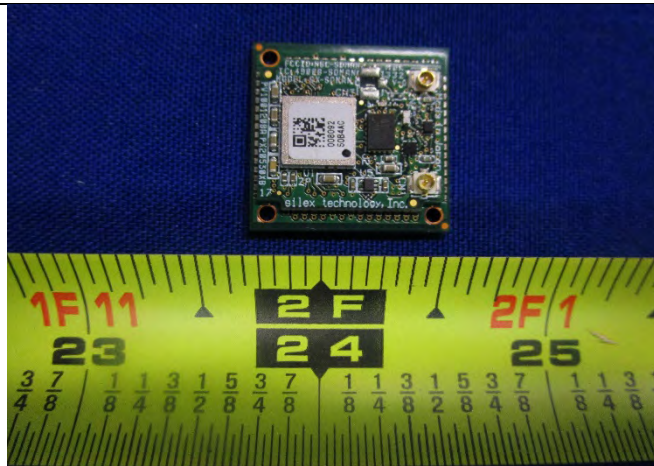


EUT – Top View

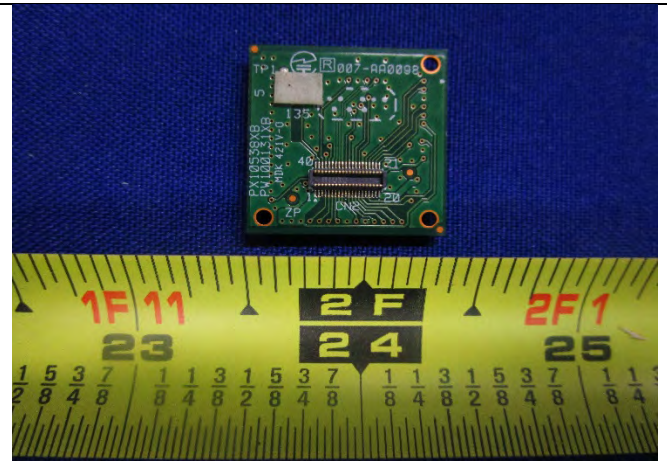

EUT – Bottom View

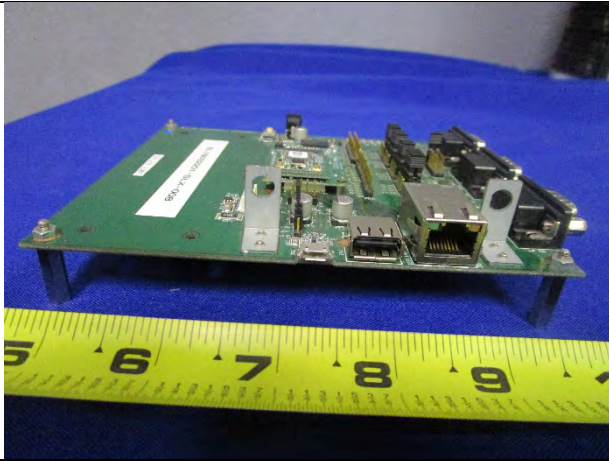


Support Equipment Board – Front View

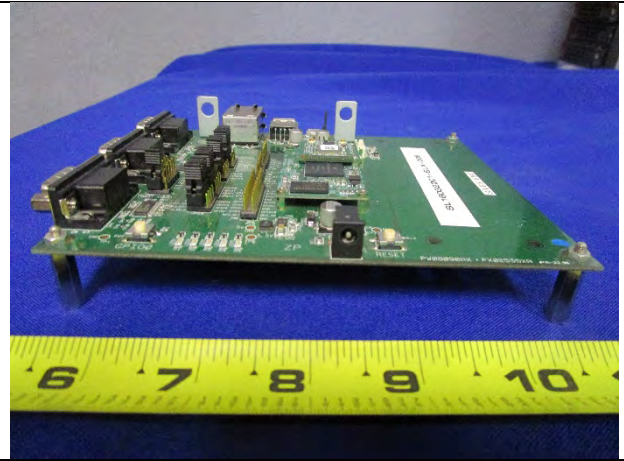

Support Equipment Board – Rear View




Support Equipment Board – Top View

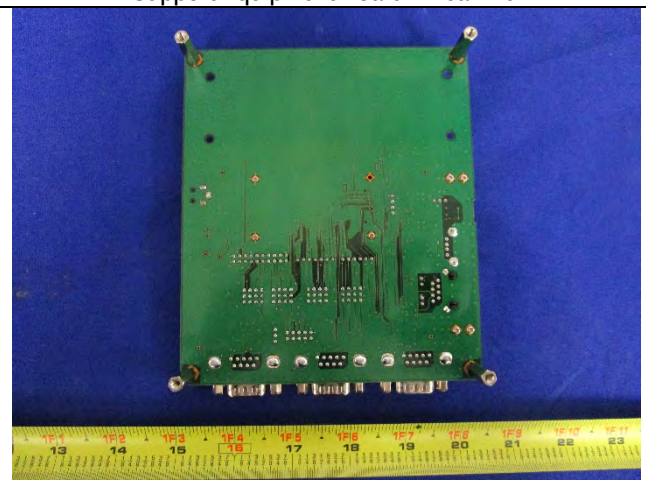


Support Equipment Board – Bottom View




Support Equipment Board – Left Side View

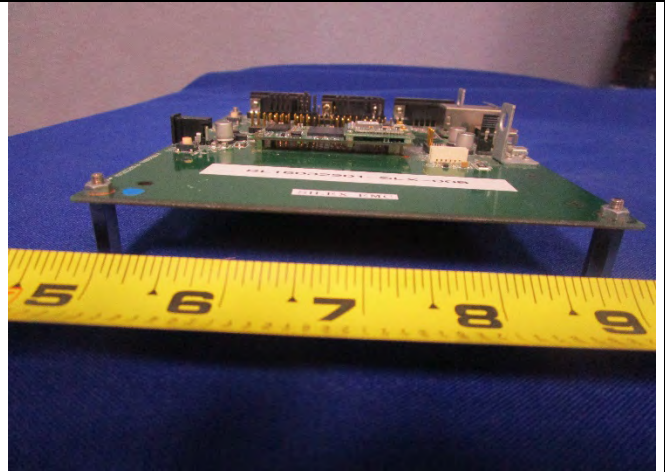

Support Equipment Board – Right Side View

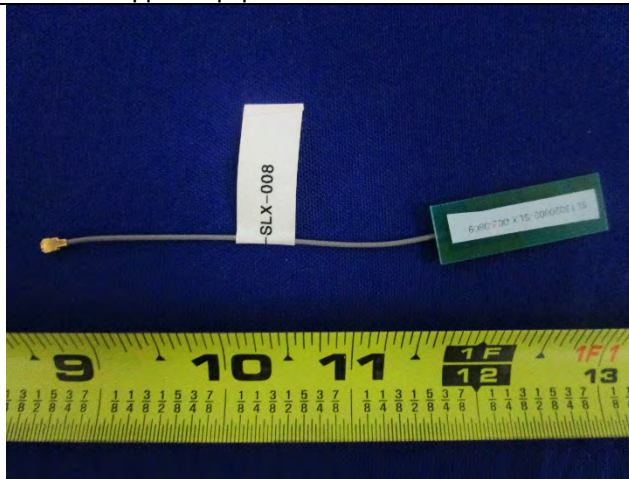

Antenna Top View

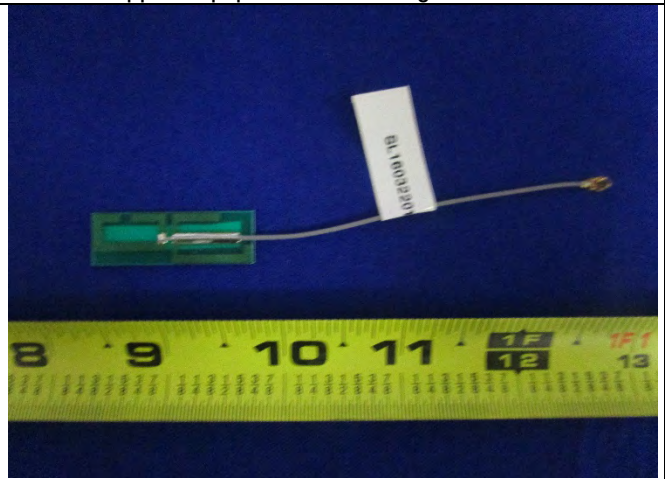

Antenna Bottom View




Support Equipment Power Supply Top View



Support Equipment Power Supply Bottom View


6.4 EUT Test Setup Photos

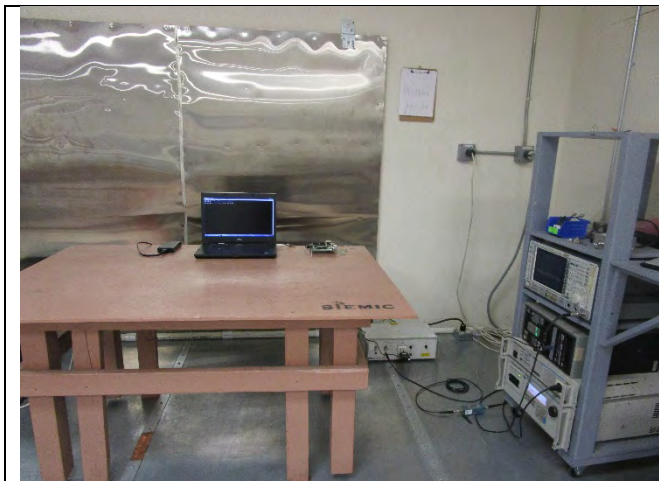


AC Line Conducted Emissions – Front View




AC Line Conducted Emissions – Rear View

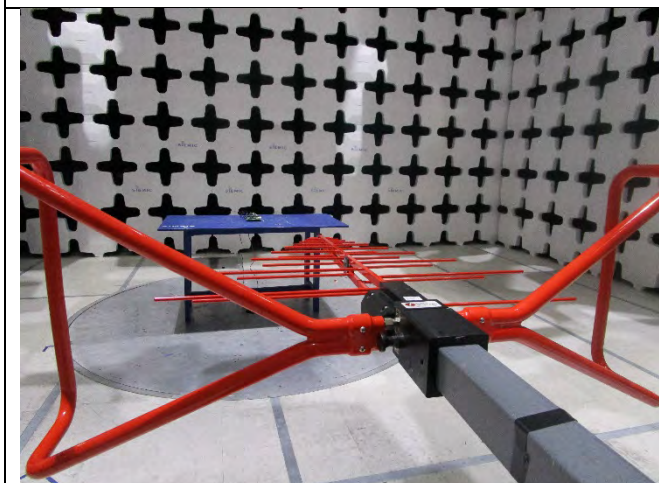

Radiated Emissions (<1GHz) – Front View

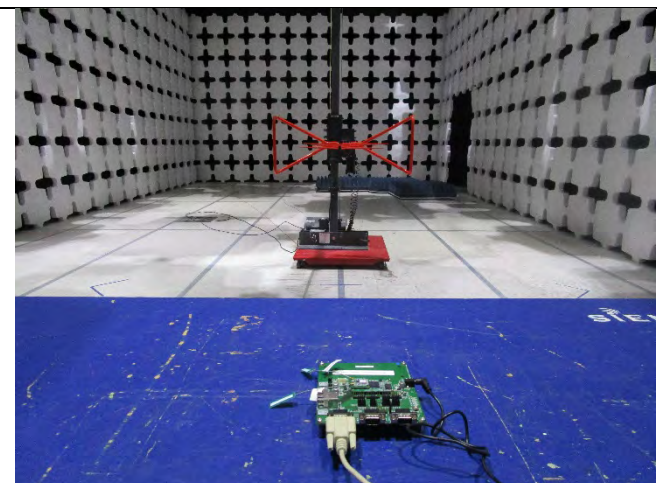

Radiated Emissions (<1GHz) – Rear View

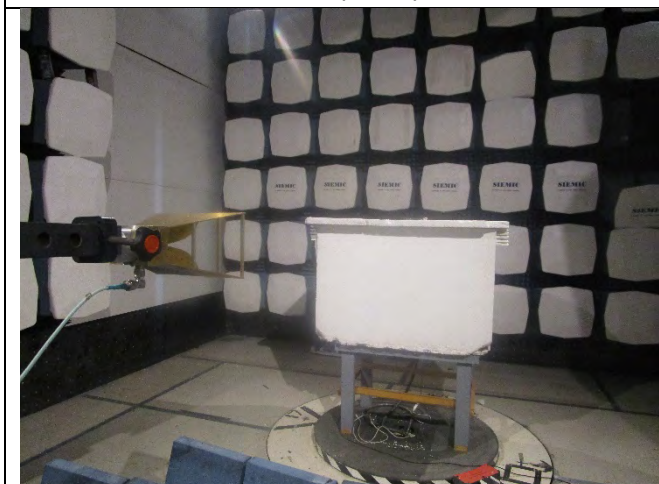

Radiated Emissions (>1GHz) – Front View



Radiated Emissions (>1GHz) – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Lattitude/E6510	N/A	Dell	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	I/O Port	Laptop	USB	2	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Tera Term Pro	Set the EUT to transmit continuously in diferent test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Restricted Band of Operation	FCC	15.205	ANSI C63.10 – 2013 789033 D02 General UNII Test Procedures New Rules v01	☒ Pass ☐ N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	ANSI C63.10 – 2013	☒ Pass ☐ N/A

Test Item	Test standard		Test Method/Procedure	Pass / Fail
26 & 6 dB Emission Bandwidth	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	☒ Pass ☐ N/A
Maximum conducted Output Power	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	☒ Pass ☐ N/A
Power reduction (Antenna Gain > 6 dBi)	FCC	15.407 (a) (2)	-	☒ Pass ☐ N/A
Band Edge and Radiated Spurious Emissions	FCC	15.407(b)(2), 15.407(b)(6)	ANSI C63.10 – 2013 789033 D02 General UNII Test Procedures New Rules v01	☒ Pass ☐ N/A
Power Spectral Density	FCC	15.407 (a) (2)	789033 D02 General UNII Test Procedures New Rules v01	☒ Pass ☐ N/A
User Manual	FCC	-	-	☒ Pass ☐ N/A
Remark	1. All measurement uncertainties are not taken into consideration for all presented test result. 2. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.			

9 Measurement Uncertainty


Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

10 Measurements, Examination and Derived Results

10.1 Conducted Emissions

Conducted Emission Limit

Frequency ranges (MHz)	Limit (dBuV)	
	QP	Average
0.15 ~ 0.5	66 – 56	56 – 46
0.5 ~ 5	56	46
5 ~ 30	60	50

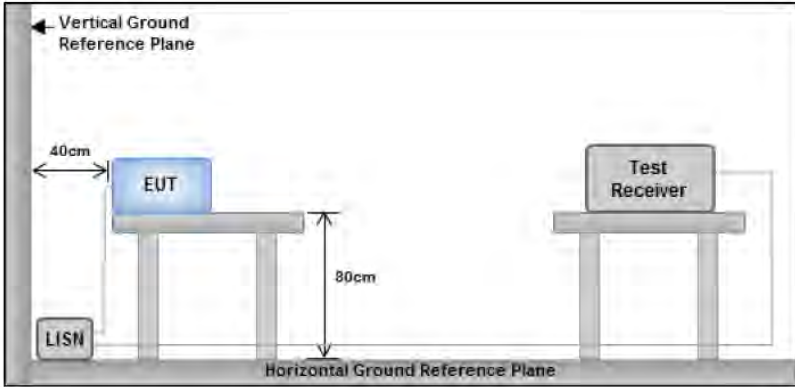Spec	Item	Requirement	Applicable
47CFR§15.207	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges.	☒
Test Setup		 Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes	
Procedure		- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply.	
Remark		EUT was tested at 120VAC, 60Hz	
Result		☒ Pass ☐ Fail	


Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by *Rachana Khanduri* at *Conducted Emission Test Site*.

Conducted Emission Test Results


Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	☒ Pass ☐ Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks	AC Line @ Neutral			

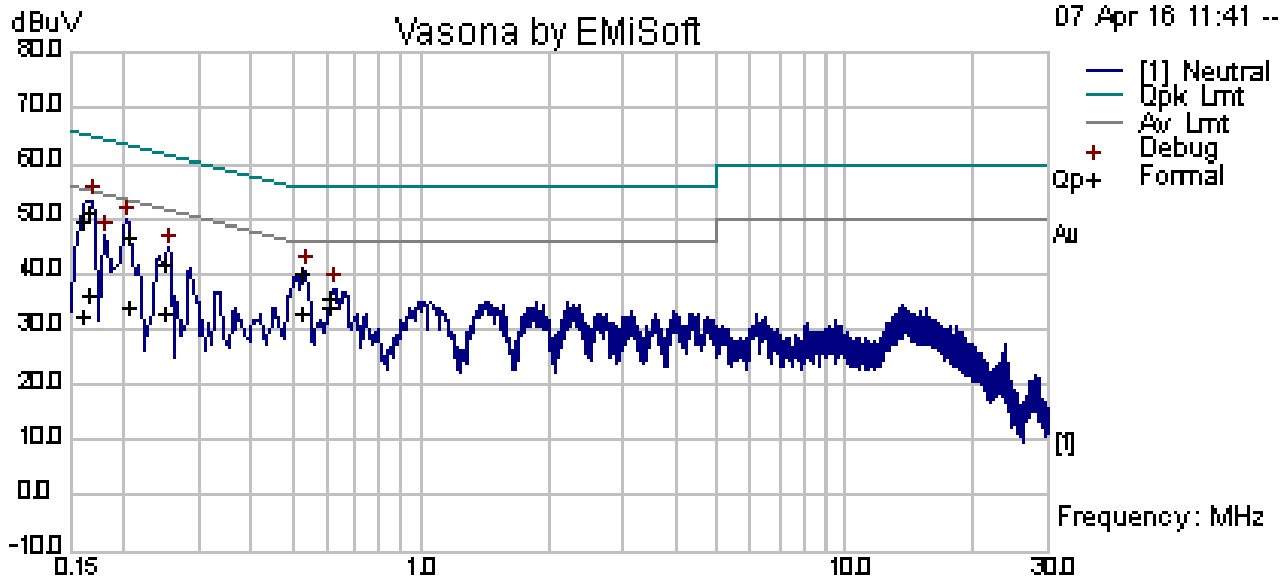

Neutral Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.16	37.97	10.00	1.68	49.66	Quasi Peak	Neutral	65.52	-15.86	Pass
0.20	35.35	10.00	1.29	46.64	Quasi Peak	Neutral	63.44	-16.80	Pass
0.52	29.29	10.01	0.67	39.97	Quasi Peak	Neutral	56.00	-16.03	Pass
0.25	31.04	10.00	1.07	42.11	Quasi Peak	Neutral	61.83	-19.71	Pass
0.17	39.51	10.00	1.61	51.12	Quasi Peak	Neutral	65.20	-14.09	Pass
0.61	25.20	10.01	0.64	35.85	Quasi Peak	Neutral	56.00	-20.15	Pass
0.16	20.55	10.00	1.68	32.24	Average	Neutral	55.52	-23.28	Pass
0.20	23.01	10.00	1.29	34.29	Average	Neutral	53.44	-19.14	Pass
0.52	22.29	10.01	0.67	32.97	Average	Neutral	46.00	-13.03	Pass
0.25	21.79	10.00	1.07	32.86	Average	Neutral	51.83	-18.97	Pass
0.17	24.79	10.00	1.61	36.40	Average	Neutral	55.20	-18.80	Pass
0.61	23.62	10.01	0.64	34.26	Average	Neutral	46.00	-11.74	Pass

Test specification:	Conducted Emissions			
Environmental Conditions:	Temp(°C):	21	Result:	☒ Pass ☐ Fail
	Humidity (%):	42		
	Atmospheric(mbar):	1021		
Mains Power:	120Vac, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks	AC Line @ Line			

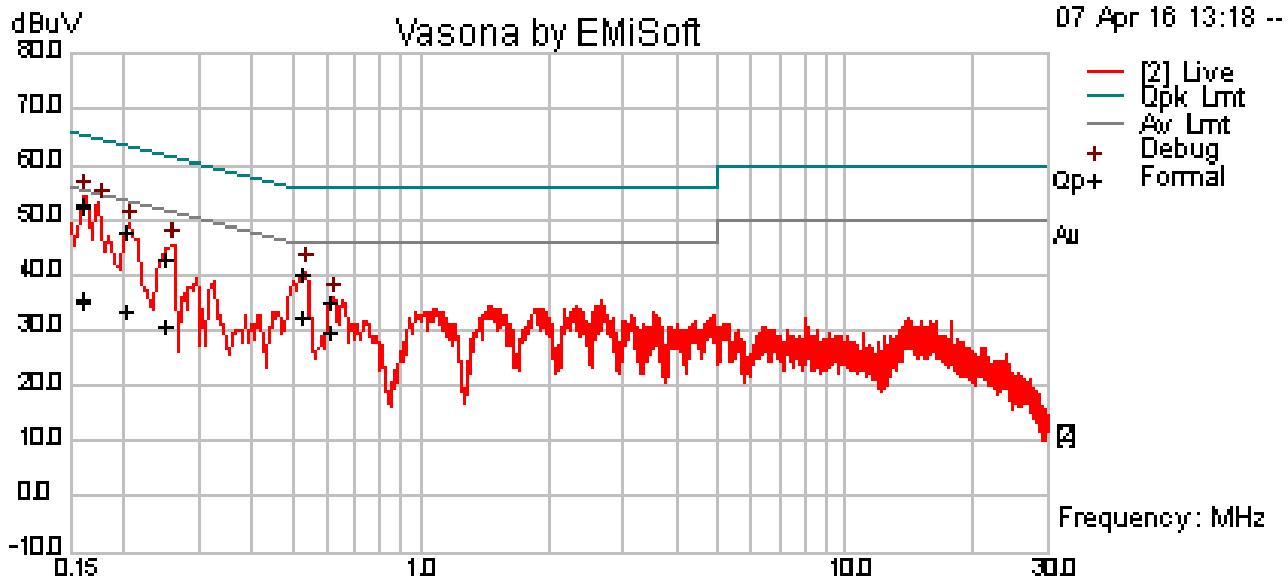

Line Plot at 120Vac, 60Hz

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	Factors (dB)	Level (dBuV)	Measurement Type	Line	Limit (dBuV)	Margin (dB)	Pass /Fail
0.16	41.28	10.00	1.66	52.94	Quasi Peak	Live	65.41	-12.47	Pass
0.20	36.45	10.00	1.30	47.75	Quasi Peak	Live	63.51	-15.75	Pass
0.52	29.68	10.01	0.67	40.35	Quasi Peak	Live	56.00	-15.65	Pass
0.25	31.79	10.00	1.06	42.85	Quasi Peak	Live	61.74	-18.90	Pass
0.61	24.44	10.01	0.64	35.09	Quasi Peak	Live	56.00	-20.91	Pass
0.16	24.03	10.00	1.66	35.69	Average	Live	55.41	-19.72	Pass
0.20	22.45	10.00	1.30	33.75	Average	Live	53.51	-19.76	Pass
0.52	21.65	10.01	0.67	32.33	Average	Live	46.00	-13.67	Pass
0.25	20.00	10.00	1.06	31.06	Average	Live	51.74	-20.68	Pass
0.61	19.34	10.01	0.64	29.99	Average	Live	46.00	-16.01	Pass

Note: The results above show only the worst case.

10.2 26 dB Bandwidth & 6 dB Bandwidth

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	-	99% BW: Report only for reference.	☒
	a) (2)	26 dB Emission BW: Report only for power limit calculation.	☒
	e)	Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.	☒
Test Setup			
Test Procedure	789033 D02 General UNII Test Procedures New Rules v01 <u>26dB Emission bandwidth measurement procedure (Other than 5.725-5.85 GHz)</u> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 26dB BW. - o Set RBW = around 1% of emission bandwidth - o Set VBW > RBW - o Detector = Peak - o Trace mode = max hold - Capture the plot. - Repeat above steps for different test channel and other modulation type. <u>6 dB Minimum emission bandwidth measurement procedure (for 5.725-5.85 GHz)</u> - Allow the trace to stabilize. - Use the spectrum analyzer built-in measurement function to determine the 6dB BW. - o Set RBW = 100 KHz - o Set VBW ≥ 3 x RBW - o Detector = Peak - o Trace mode = max hold - o Sweep = auto couple - Capture the plot. - Repeat above steps for different test channel and other modulation type.		
Test Date	04/07/2016	Environmental condition	Temperature 22°C Relative Humidity 38% Atmospheric Pressure 1020mbar
Remark	None		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A
Test Plot ☒ Yes ☐ N/A

Test was done by *Rachana Khanduri* at *RF Test Site*.

26dB Bandwidth measurement result :

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
26dB BW	802.11a	5180	Low	20.45	-	-
		5200	Mid	20.68	-	-
		5240	High	20.67	-	-
		5260	Low	20.87	-	-
		5300	Mid	21.02	-	-
		5320	High	20.46	-	-
	802.11n-20	5180	Low	21.92	-	-
		5200	Mid	21.98	-	-
		5240	High	22.96	-	-
		5260	Low	22.33	-	-
		5300	Mid	22.09	-	-
		5320	High	22.47	-	-
	802.11n-40	5190	Low	43.81	-	-
		5230	High	45.76	-	-
		5270	Low	44.70	-	-
		5310	High	43.67	-	-

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
26dB BW	802.11a	5500	Low	20.40	-	-
		5580	Mid	20.47	-	-
		5700	High	20.48	-	-
	802.11n-20	5500	Low	22.41	-	-
		5580	Mid	22.18	-	-
		5700	High	22.65	-	-
	802.11n-40	5510	Low	45.17	-	-
		5550	Mid	45.51	-	-
		5670	High	45.41	-	-

6dB Bandwidth measurement result for 5.8GHz

Type	Test mode	Freq (MHz)	CH	Result (MHz)	Limit (MHz)	Result
6dB BW	802.11a	5745	Low	16.45	≥0.5	Pass
		5785	Mid	16.44	≥0.5	Pass
		5825	High	16.43	≥0.5	Pass
	802.11n-20	5745	Low	17.03	≥0.5	Pass
		5785	Mid	16.95	≥0.5	Pass
		5825	High	16.88	≥0.5	Pass
	802.11n-40	5755	Low	35.52	≥0.5	Pass
		5795	High	35.80	≥0.5	Pass

26dB Bandwidth Test Plots



26dB BW - 802.11a 5180MHz



26dB BW - 802.11n-20M 5180MHz



26dB BW - 802.11a 5200MHz



26dB BW - 802.11n-20M 5200MHz




26dB BW - 802.11a 5240MHz



26dB BW - 802.11n-20M 5240MHz



26dB BW - 802.11n40 5190MHz

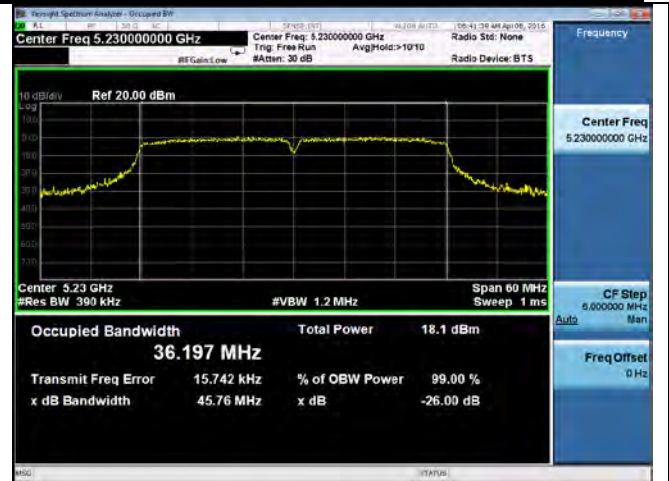


26dB BW - 802.11n-40M 5230MHz




26dB BW - 802.11a 5260MHz



26dB BW - 802.11n-20M 5260MHz

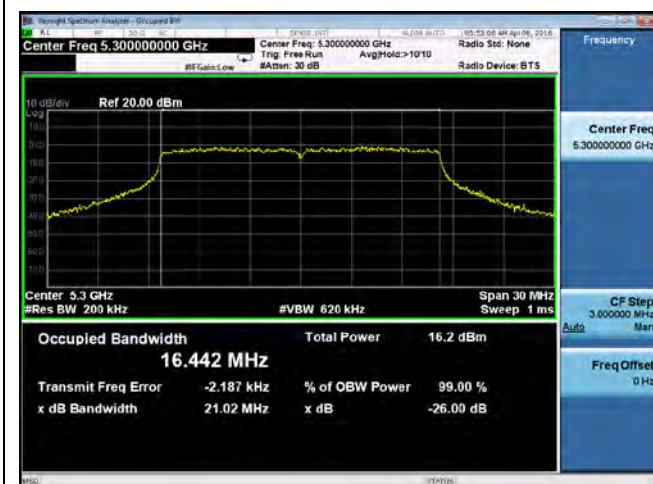


26dB BW - 802.11a 5300MHz

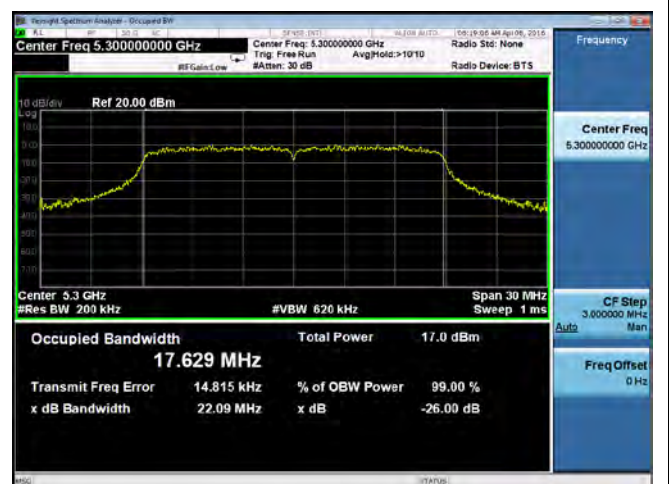

26dB BW - 802.11n-20M 5300MHz



26dB BW - 802.11a 5320MHz

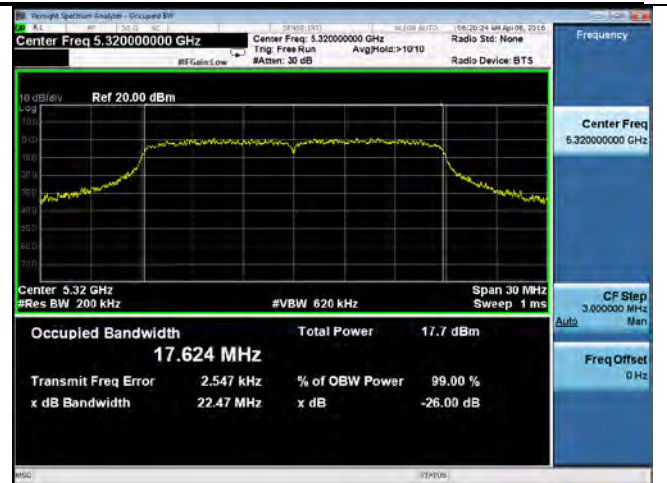


26dB BW - 802.11n-20M 5320MHz




26dB BW - 802.11n-40 5270MHz



26dB BW - 802.11n-40M 5310MHz

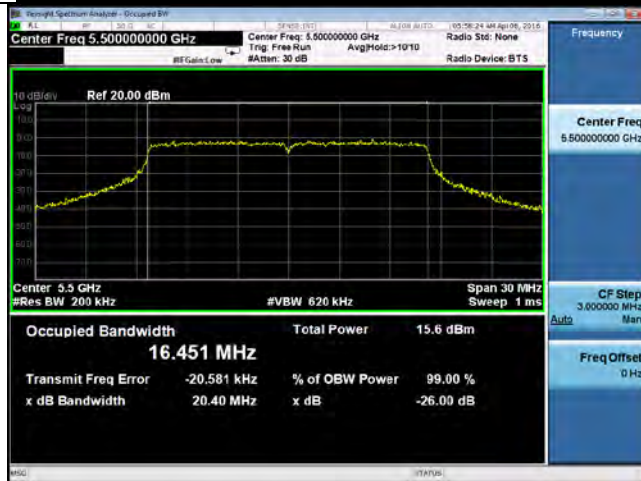

26dB BW - 802.11a 5500MHz

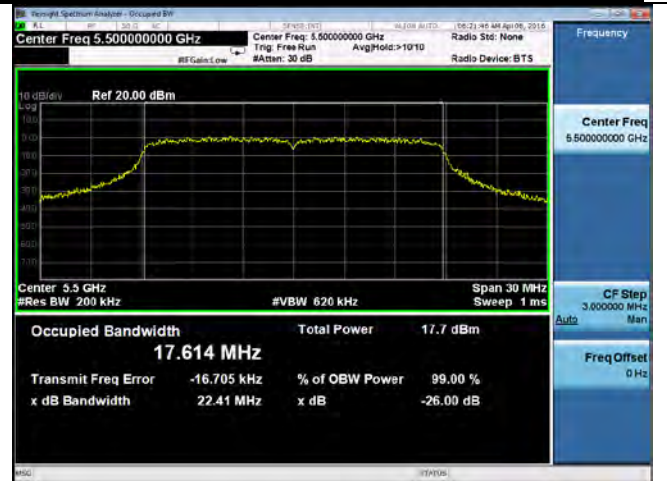

26dB BW - 802.11n-20M 5500MHz



26dB BW - 802.11a 5580MHz



26dB BW - 802.11n-20M 5580MHz




26dB BW - 802.11a 5700MHz



26dB BW - 802.11n-20M 5700MHz



26dB BW - 802.11n40 5510MHz

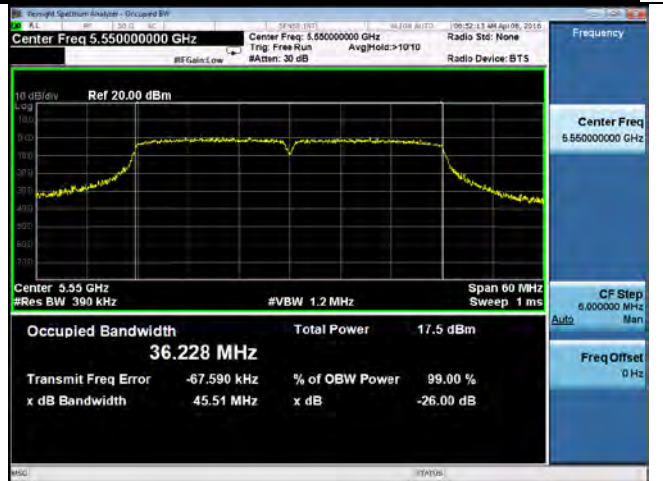

26dB BW - 802.11n40 5550MHz



26dB BW - 802.11n-40M 5670MHz

6dB Bandwidth Test Plots



6dB BW 802.11a 5745MHz



6dB BW 802.11n-20M 5745MHz



6dB BW 802.11a 5785MHz



6dB BW 802.11n-20M 5785MHz




6dB BW 802.11a 5825MHz



6dB BW 802.11n-20M 5825MHz



6dB BW 802.11n-40M 5755MHz

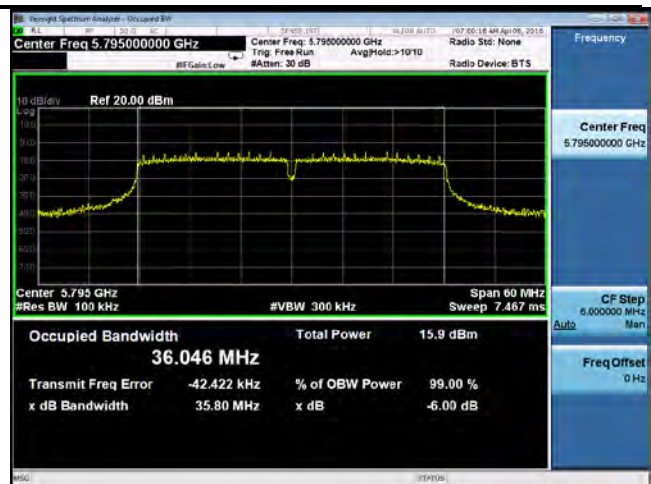

6dB BW 802.11n40 5795MHz

10.3 Output Power

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).	☐
	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.	☒
	a)(1)(iii)	For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.	☐
	a)(1)(iv)	For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.	☐
	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.	☒
	a)(3)	For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.	☒

Test Setup



Test Procedure

789033 D02 General UNII Test Procedures New Rules v01

Measurement using a Power Meter (PM)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- Connect EUT's RF output power to power meter
- Set EUT to be continuous transmission mode
- Measurement the average output power using power meter and record the result
- Repeat above steps for different test channel and other modulation type.

Test Date	04/07/2016	Environmental condition	Temperature Relative Humidity Atmospheric Pressure	21°C 40% 1019mbar
Remark	-			
Result	☒ Pass ☐ Fail			

Test Data ☒ Yes ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Test was done by *Rachana Khanduri* at *RF Test Site*.

Output Power measurement result :

5.2 GHz							
Test mode	Freq(MHz)	CH	Conducted Power (dBm)		Highest Conducted Power (dBm)	Limit (dBm)	Result
			Chain 1	Chain 2			
802.11a	5180	Low	9.87	10.40	10.40	30	pass
	5200	Mid	10.05	10.45	10.45	30	pass
	5240	High	10.25	10.79	10.79	30	pass
802.11n20	5180	Low	10.52	10.83	10.83	30	pass
	5200	Mid	10.68	10.86	10.86	30	pass
	5240	High	10.85	11.80	11.80	30	pass
802.11n40	5190	Low	7.99	7.56	7.99	30	pass
	5230	High	12.53	11.75	12.53	30	pass

5.3 GHz							
Test mode	Freq(MHz)	CH	Conducted Power (dBm)		Highest Conducted Power (dBm)	Limit (dBm)	Result
			Chain 1	Chain 2			
802.11a	5260	Low	9.80	10.59	10.59	24	pass
	5300	Mid	9.71	9.77	9.77	24	pass
	5320	High	10.08	10.15	10.15	24	pass
802.11n20	5260	Low	11.23	11.00	11.23	24	pass
	5280	Mid	10.74	10.98	10.98	24	pass
	5320	High	11.71	11.23	11.71	24	pass
802.11n40	5270	Low	11.62	10.65	11.62	24	pass
	5310	High	9.47	9.28	9.47	24	pass


5.5 GHz							
Test mode	Freq(MHz)	CH	Conducted Power (dBm)		Highest Conducted Power (dBm)	Limit (dBm)	Result
			Chain 1	Chain 2			
802.11a	5500	Low	9.14	8.69	9.14	24	pass
	5580	Mid	8.97	9.52	9.52	24	pass
	5700	High	9.37	10.64	10.64	24	pass
802.11n20	5500	Low	12.23	11.48	12.23	24	pass
	5580	Mid	11.34	11.71	11.71	24	pass
	5700	High	11.81	12.35	11.81	24	Pass
802.11n40	5510	Low	11.54	11.43	11.54	24	Pass
	5550	Mid	11.71	11.36	11.71	24	Pass
	5670	High	12.31	13.13	13.13	24	Pass

5.8 GHz							
Test mode	Freq(MHz)	CH	Conducted Power (dBm)		Highest Conducted Power (dBm)	Limit (dBm)	Result
			Chain 1	Chain 2			
802.11a	5745	Low	7.42	8.65	8.65	30	Pass
	5785	Mid	9.18	9.78	9.78	30	Pass
	5825	High	9.47	10.13	10.13	30	Pass
802.11n20	5745	Low	10.37	11.36	11.36	30	Pass
	5785	Mid	11.53	12.07	12.07	30	Pass
	5825	High	11.59	12.53	12.53	30	Pass
802.11n40	5755	Low	10.93	11.83	11.83	30	Pass
	5795	High	11.22	11.96	11.96	30	Pass

Note: Chain 1 and Chain 2 does not transmit simultaneously.

10.4 Peak Spectral Density

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.407	a)(1)(i)	For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	☐
	a)(1)(ii)	For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.	☒
	a)(2)	For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.	☒
	a)(3)	For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.	☒
Test Setup			
Test Procedure	789033 D02 General UNII Test Procedures New Rules v01, II.F. Method SA-1 <u>Maximum spectral density measurement procedure</u> - Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal. - Set RBW = 1 MHz - Set VBW ≥ 3 MHz - Detector = RMS. - Sweep time = auto couple. - Trace mode = max hold. - Trace average at least 100 traces in power averaging - Use the peak marker function to determine the maximum amplitude level within the RBW. Apply correction to the result if different RBW is used.		
Test Date	04/07/2016	Environmental condition	Temperature 22°C Relative Humidity 42% Atmospheric Pressure 1020mbar
Remark	-		
Result	☒ Pass ☐ Fail		

Test Data ☒ Yes ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by *Rachana Khanduri* at *RF Test Site*.

PSD measurement results:

5.2 GHz							
Test mode	Freq(MHz)	CH	Conducted PSD (dBm/MHz)		Highest Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Result
			Chain 1	Chain 2			
802.11a	5180	Low	6.08	5.82	6.08	17	Pass
	5200	Mid	5.31	5.38	5.38	17	Pass
	5240	High	5.99	6.22	6.22	17	Pass
802.11n20	5180	Low	5.95	5.69	5.95	17	Pass
	5200	Mid	5.72	5.15	5.72	17	Pass
	5240	High	5.83	5.79	5.83	17	Pass
802.11n40	5190	Low	-0.46	-1.06	-0.46	17	Pass
	5230	High	4.47	3.24	4.47	17	Pass

5.3 GHz							
Test mode	Freq(MHz)	CH	Conducted PSD (dBm/MHz)		Highest Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Result
			Chain 1	Chain 2			
802.11a	5260	Low	5.77	6.24	6.24	11	Pass
	5300	Mid	5.84	5.49	5.84	11	Pass
	5320	High	5.74	6.70	5.74	11	Pass
802.11n20	5260	Low	5.93	6.43	6.43	11	Pass
	5300	Mid	5.73	5.45	5.73	11	Pass
	5320	High	6.50	6.44	6.50	11	Pass
802.11n40	5270	Low	3.22	3.95	3.95	11	Pass
	5310	High	1.26	1.96	1.96	11	Pass

5.5 GHz							
Test mode	Freq(MHz)	CH	Conducted PSD (dBm/MHz)		Highest Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Result
			Chain 1	Chain 2			
802.11a	5500	Low	5.46	5.66	5.66	11	Pass
	5580	Mid	6.04	5.57	6.04	11	Pass
	5700	High	4.31	5.90	5.90	11	Pass
802.11n20	5500	Low	7.34	5.95	7.34	11	Pass
	5580	Mid	5.72	6.74	6.74	11	Pass
	5700	High	6.18	6.60	6.60	11	Pass
802.11n40	5510	Low	3.16	2.53	3.16	11	Pass
	5550	Mid	4.06	3.63	4.06	11	Pass
	5670	High	2.61	4.66	4.66	11	Pass

5.8 GHz									
Test mode	Freq(MHz)	CH	Conducted PSD (dBm/100KHz)		Highest Conducted PSD	Correction Factor	Corrected PSD (dBm/500KHz)	Limit (dBm/500KHz)	Result
			Chain 1	Chain 2					
802.11a	5745	Low	-4.46	-3.85	-3.85	6.99	3.14	30	Pass
	5785	Mid	-3.47	-3.01	-3.01	6.99	3.98	30	Pass
	5825	High	-3.07	2.52	2.52	6.99	9.51	30	Pass
802.11n20	5745	Low	-1.25	-0.60	-0.60	6.99	6.39	30	Pass
	5785	Mid	-1.33	0.21	0.21	6.99	7.20	30	Pass
	5825	High	-0.06	1.05	1.05	6.99	8.04	30	Pass
802.11n40	5755	Low	-4.09	-12.17	-4.09	6.99	2.90	30	Pass
	5795	High	-3.30	-11.59	-3.30	6.99	3.69	30	Pass
*Note	BW correction factor = 10log(500kHz/RBW)								

Note: Chain 1 and Chain 2 does not transmit simultaneously.


Test Plots



PSD-802.11a-5180M (Chain 1)



PSD-802.11a-5180M (Chain 2)

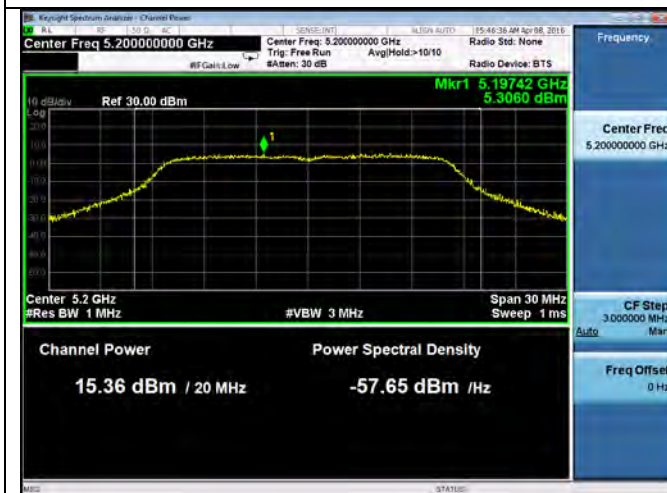


PSD-802.11a-5200M (Chain 1)



PSD-802.11a-5200M (Chain 2)



PSD-802.11a-5240M (Chain 1)

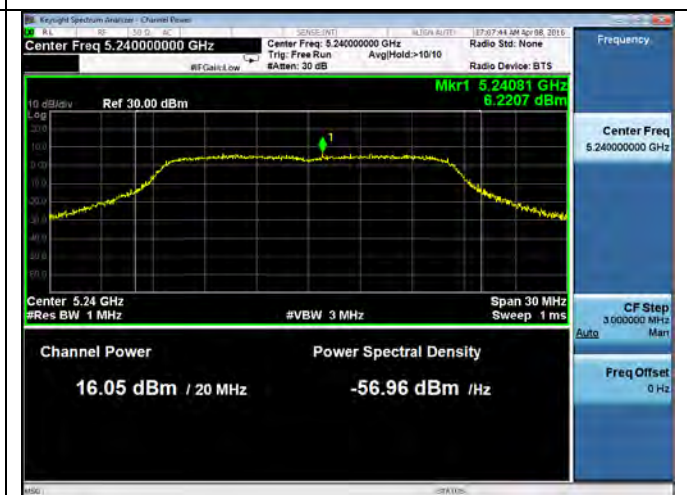


PSD-802.11a-5240M (Chain 2)



PSD-802.11a-5260M (Chain 1)



PSD-802.11a-5260M (Chain 2)

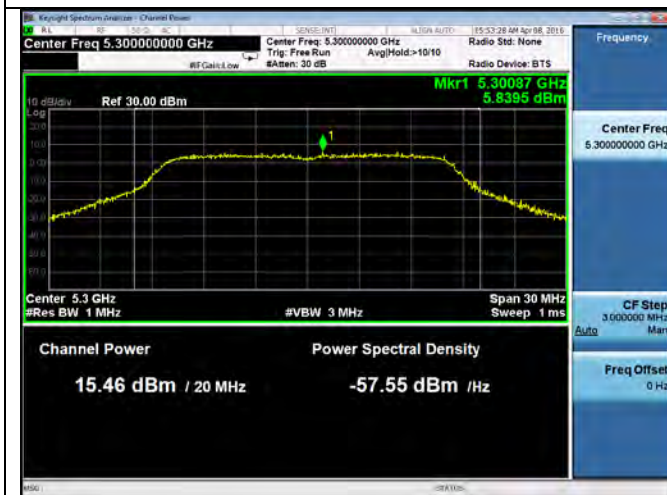

PSD-802.11a-5300M (Chain 1)



PSD-802.11a-5300M (Chain 2)




PSD-802.11a-5320M (Chain 1)




PSD-802.11a-5320M (Chain 2)



PSD-802.11n-20M-5180M (Chain 1)

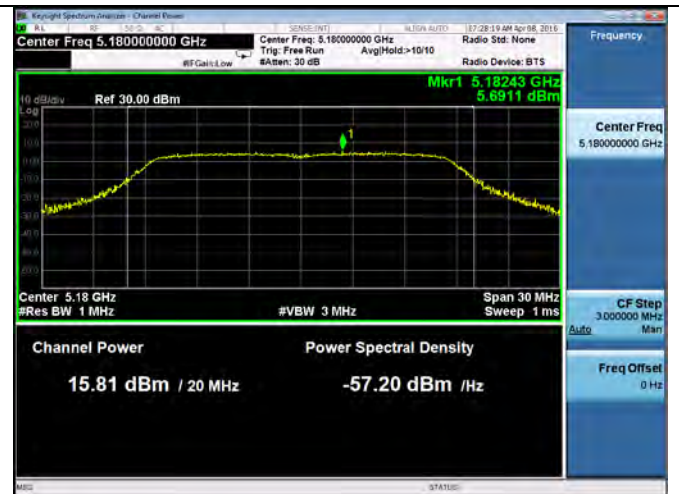


PSD-802.11n-20M-5180M (Chain 2)

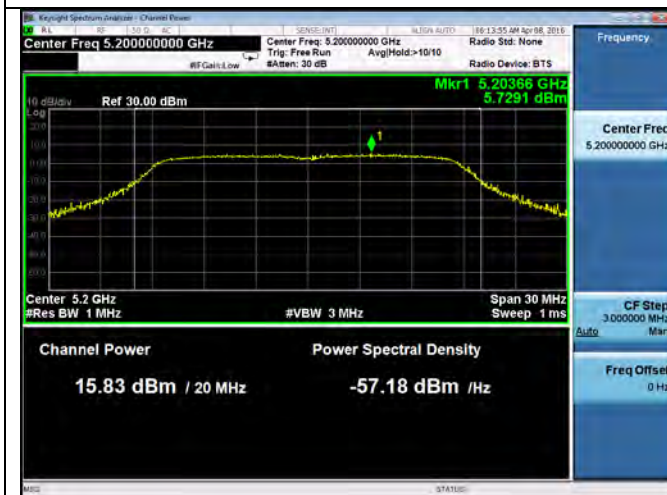

PSD-802.11n-20M-5200M (Chain 1)



PSD-802.11n-20M-5200M (Chain 2)

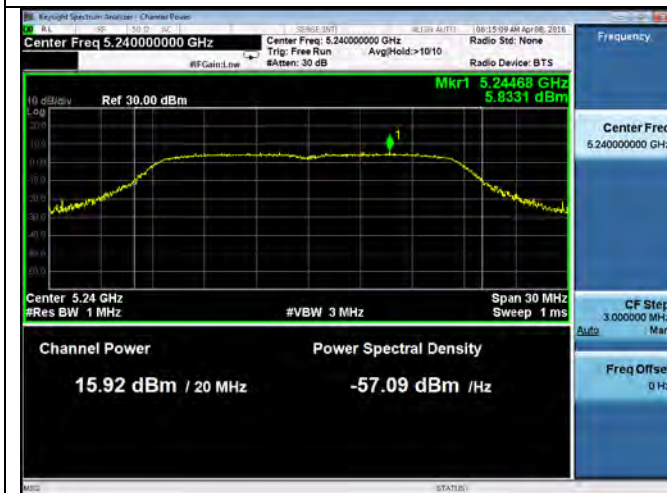

PSD-802.11n-20M-5240M (Chain 1)



PSD-802.11n-20M-5240M (Chain 2)



PSD-802.11n-20M-5260M (Chain 1)



PSD-802.11n-20M-5260M (Chain 2)



PSD-802.11n-20M-5300M (Chain 1)



PSD-802.11n-20M-5300M (Chain 2)



PSD-802.11n-20M-5320M (Chain 1)



PSD-802.11n-20M-5320M (Chain 2)



PSD-802.11n-40M-5190M (Chain 1)



PSD-802.11n-40M-5190M (Chain 2)



PSD-802.11n-40M-5230M (Chain 1)



PSD-802.11n-40M-5230M (Chain 2)



PSD-802.11n-40M-5270M (Chain 1)




PSD-802.11n-40M-5270M (Chain 2)



PSD-802.11n-40M-5310M (Chain 1)




PSD-802.11n-40M-5310M (Chain 2)

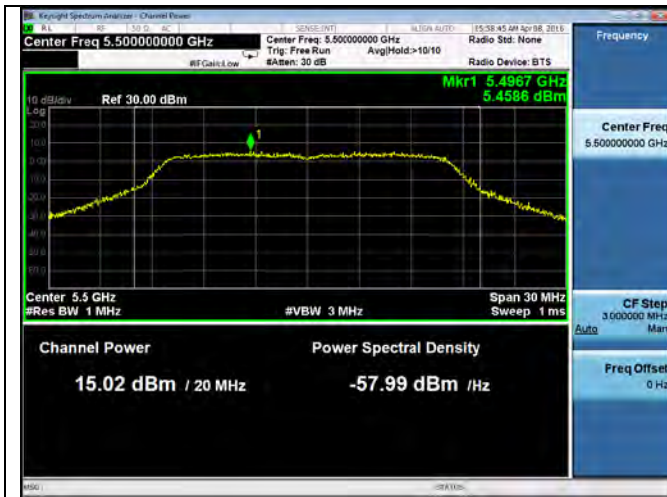

PSD-802.11a-5500M (Chain 1)




PSD-802.11a-5500M (Chain 2)

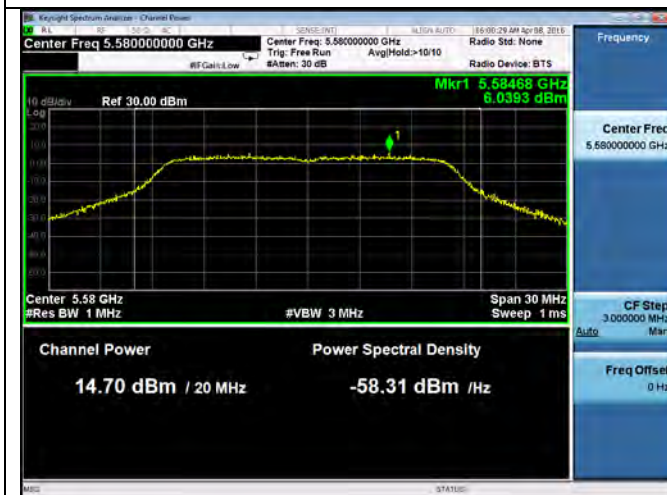

PSD-802.11a-5580M (Chain 1)




PSD-802.11a-5580M (Chain 2)

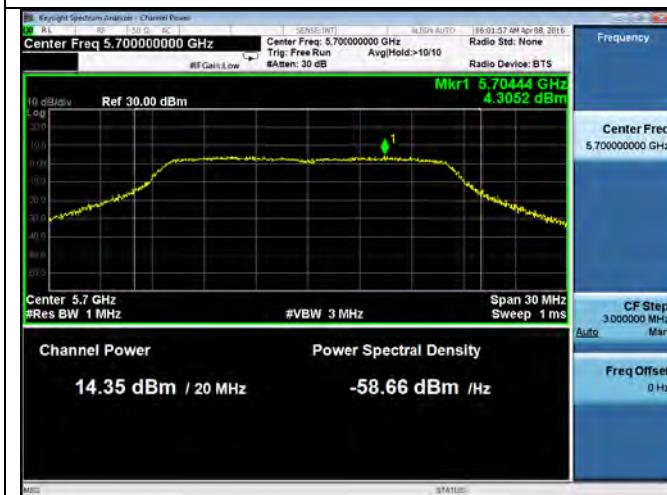


PSD-802.11a-5700M (Chain 1)



PSD-802.11a-5700M (Chain 2)

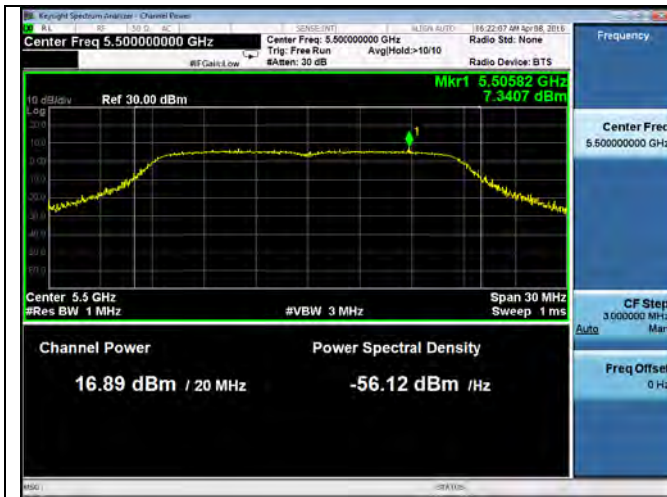

PSD-802.11n-20M-5500M (Chain 1)

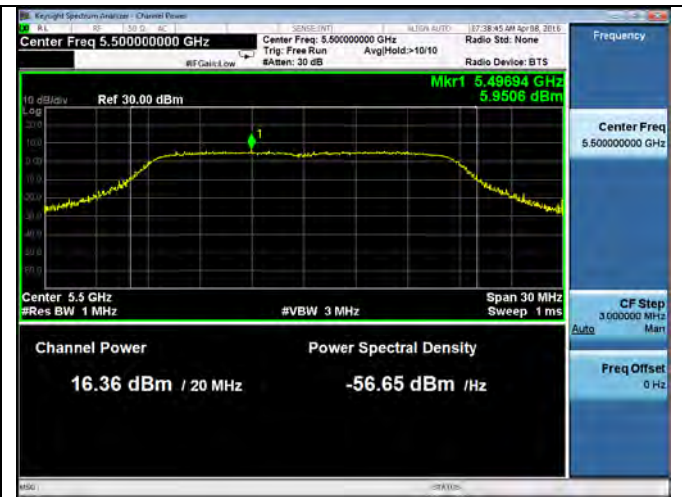


PSD-802.11n-20M-5500M (Chain 2)



PSD-802.11n-20M-5580M (Chain 1)



PSD-802.11n-20M-5580M (Chain 2)

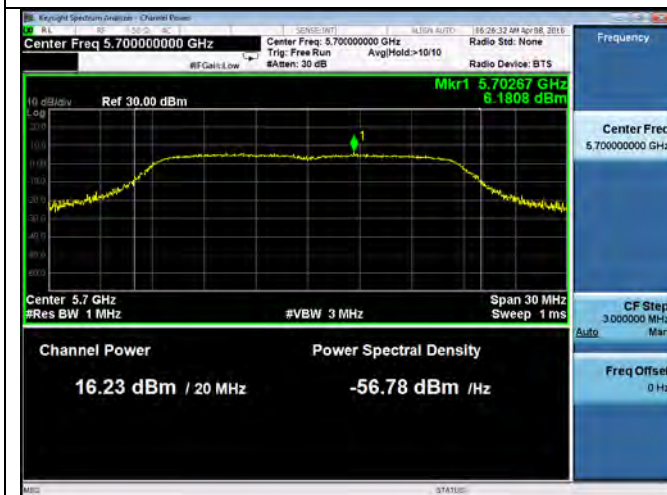

PSD-802.11n-20M-5700M (Chain 1)



PSD-802.11n-20M-5700M (Chain 2)



PSD-802.11n-40M-5510M (Chain 1)




PSD-802.11n-40M-5510M (Chain 2)



PSD-802.11n-40M-5550M (Chain 1)




PSD-802.11n-40M-5550M (Chain 2)

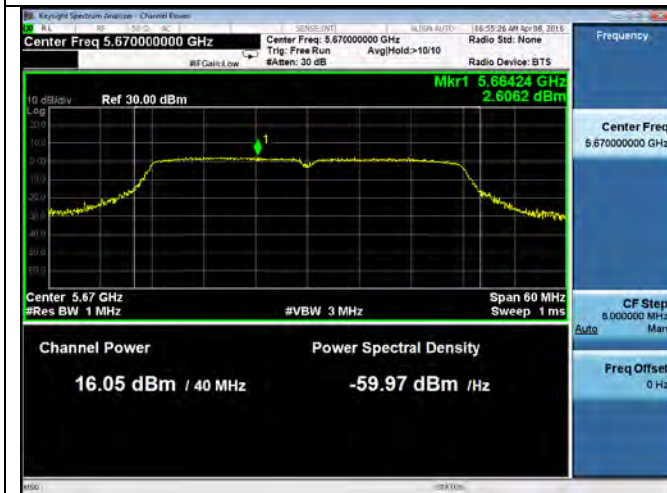


PSD-802.11n-40M-5670M (Chain 1)




PSD-802.11n-40M-5670M (Chain 2)

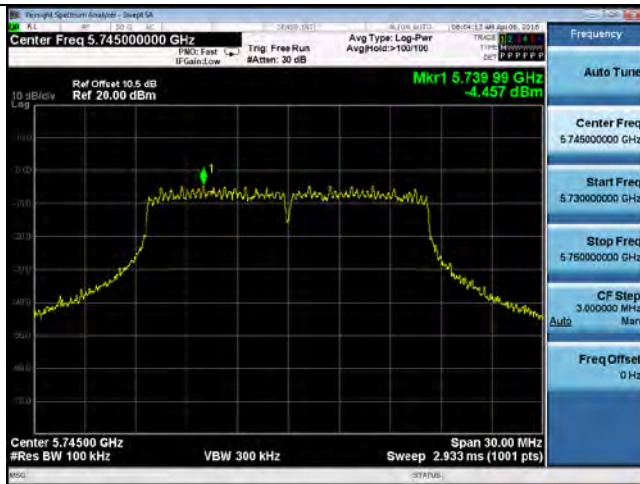


PSD-802.11a 5745MHz Chain 1

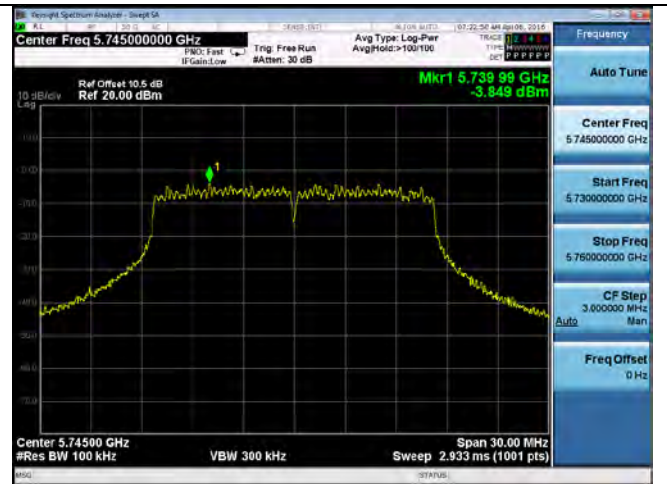


PSD-802.11a 5745MHz Chain 2

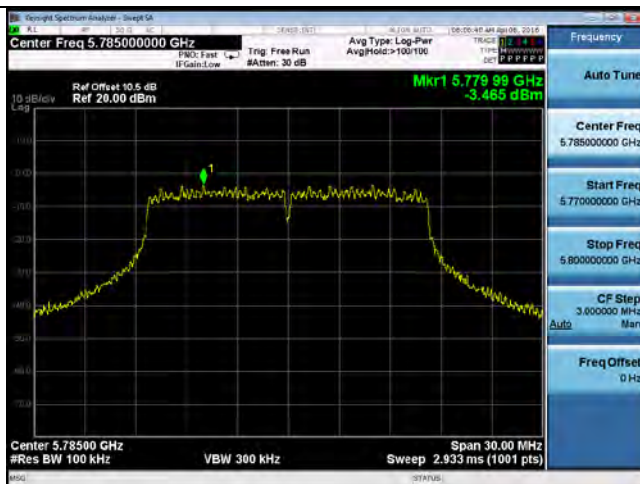


PSD-802.11a 5785MHz Chain 1

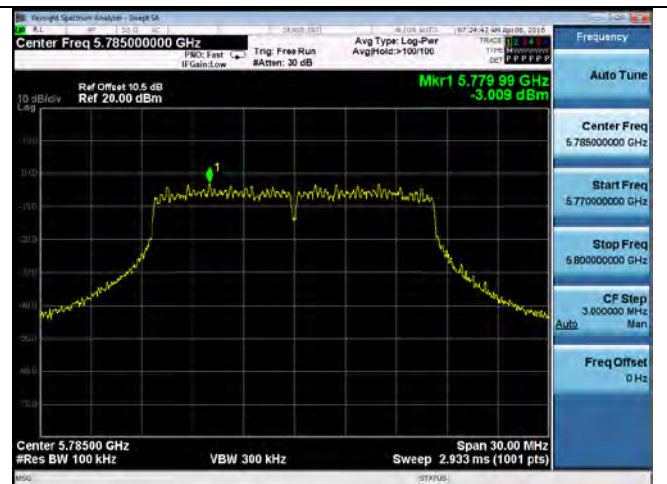


PSD-802.11a 5785MHz Chain 2

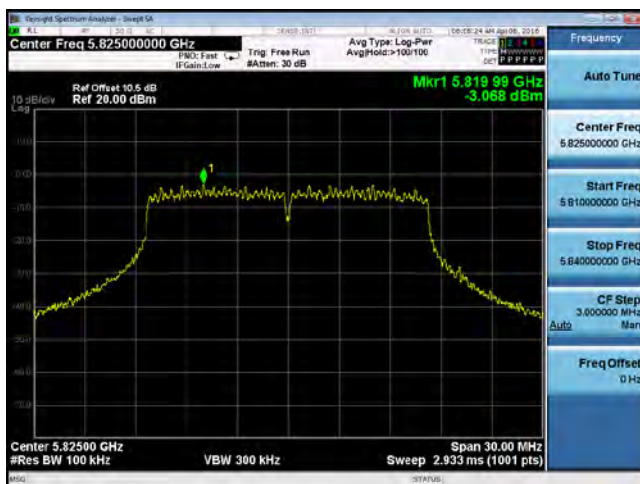


PSD-802.11a 5825MHz Chain 1

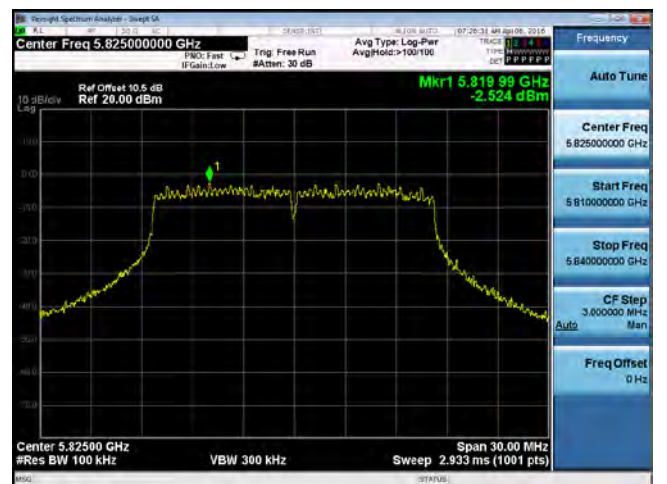


PSD-802.11a 5825MHz Chain 2

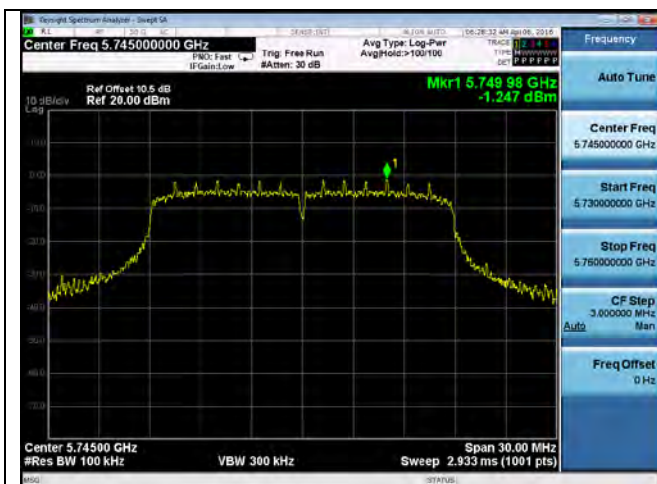


PSD-802.11n-20M 5745MHz Chain 1

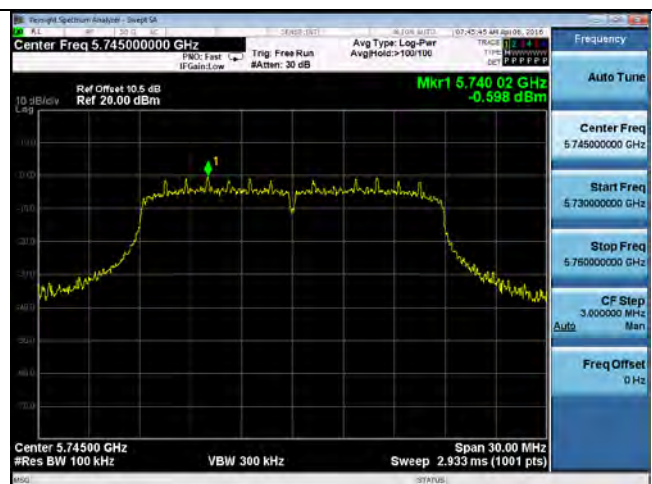


PSD-802.11n-20M 5745MHz Chain 2

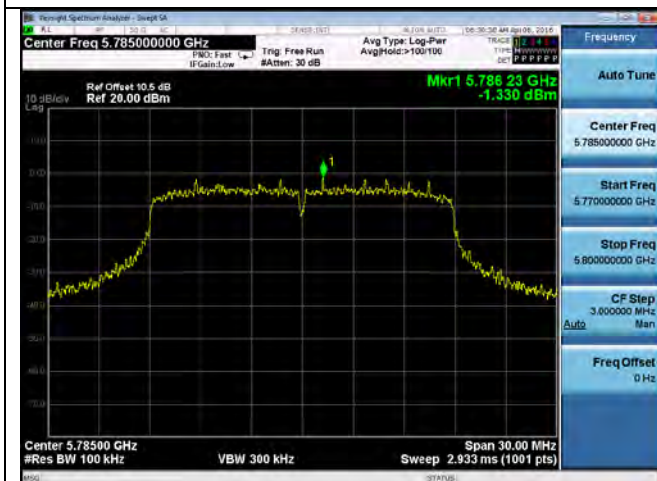


PSD-802.11n-20M 5785MHz Chain 1

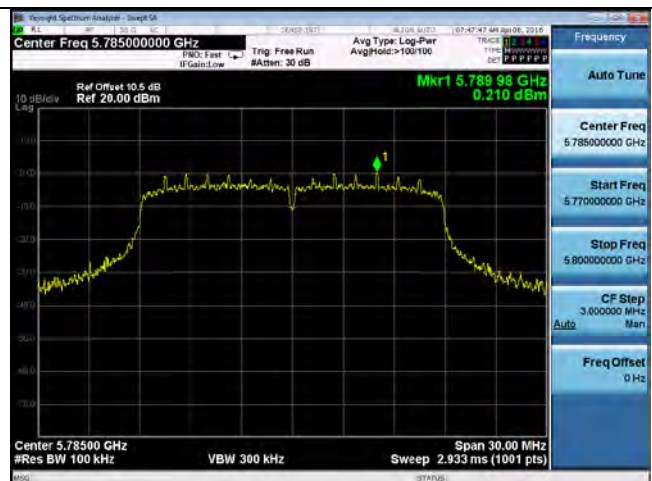


PSD-802.11n-20M 5785MHz Chain 2

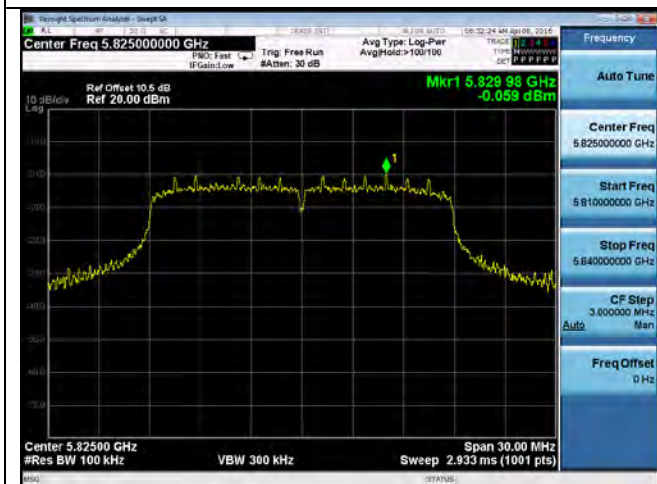


PSD-802.11n-20M 5825MHz Chain 1

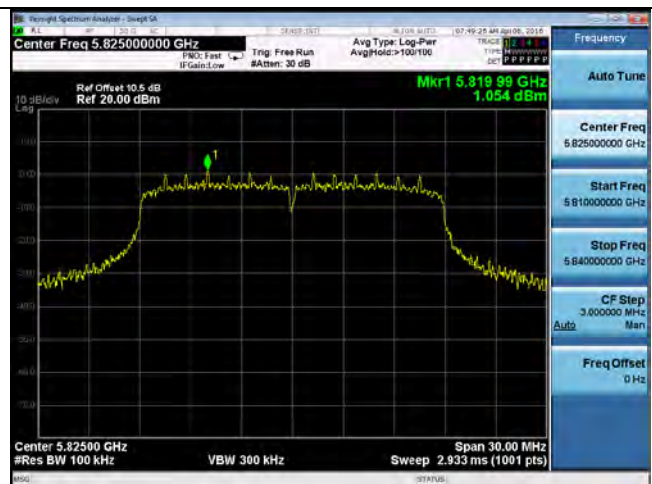


PSD-802.11n-20M 5825MHz Chain 1

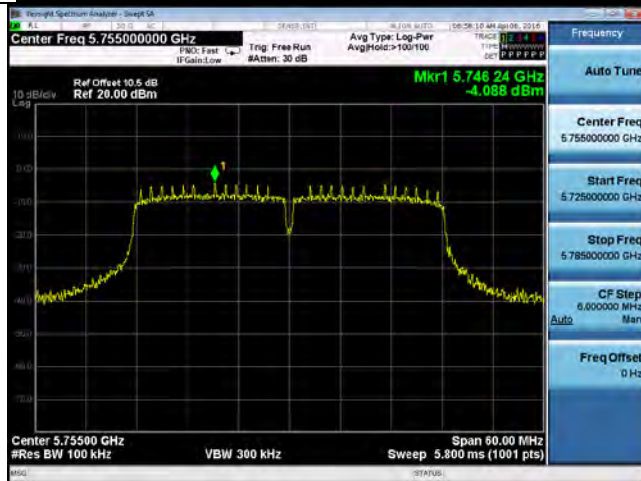


PSD-802.11n40-5755 MHz Chain 1

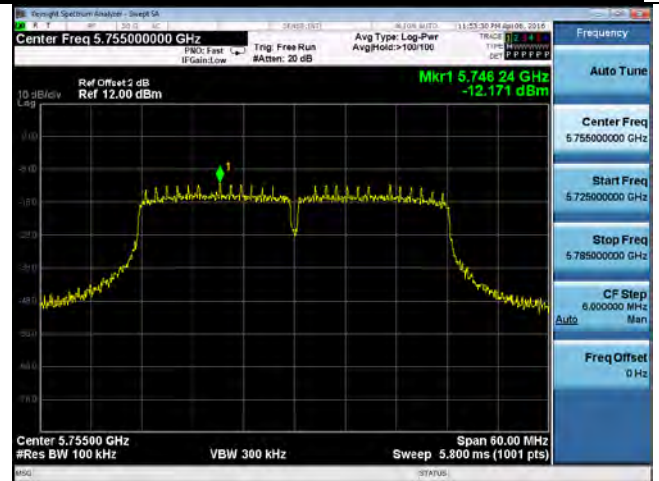

PSD-802.11n40-5755 MHz Chain 2

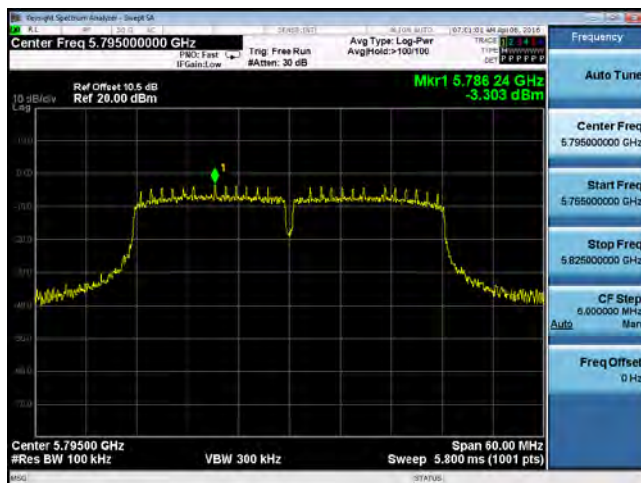


PSD-802.11n40-5795 MHz Chain 1

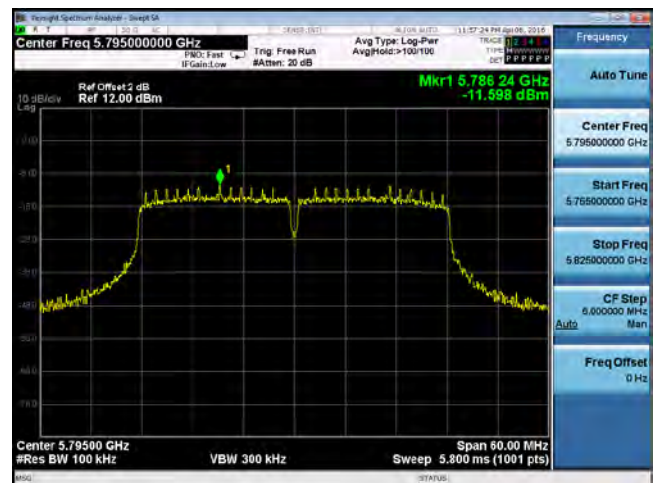

PSD-802.11n40-5795 MHz Chain 2

10.5 Radiated Emissions below 1GHz

Requirement(s):

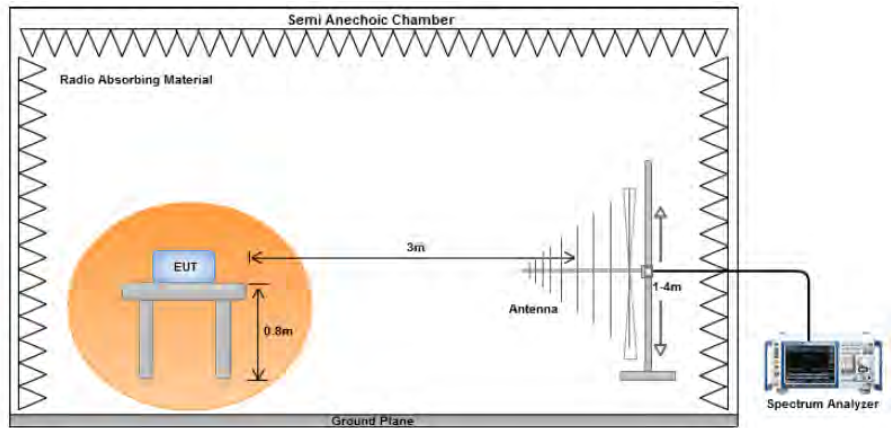Spec	Requirement	Applicable										
47CFR§ 15.407(b) 15.209 (a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges <table><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	⊗
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.											
Remark	Both horizontal and vertical polarities were investigated. The results show only the worst case.											
Result	⊗ Pass □ Fail											


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by *Rachana Khanduri* at 10m Chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	Below 1GHz			
Environmental Conditions:	Temp (°C):	25.7	Result	Pass
	Humidity (%)	29		
	Atmospheric (mPa):	1021		
Mains Power:	110VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks:	5.2GHz 11n40 5230			

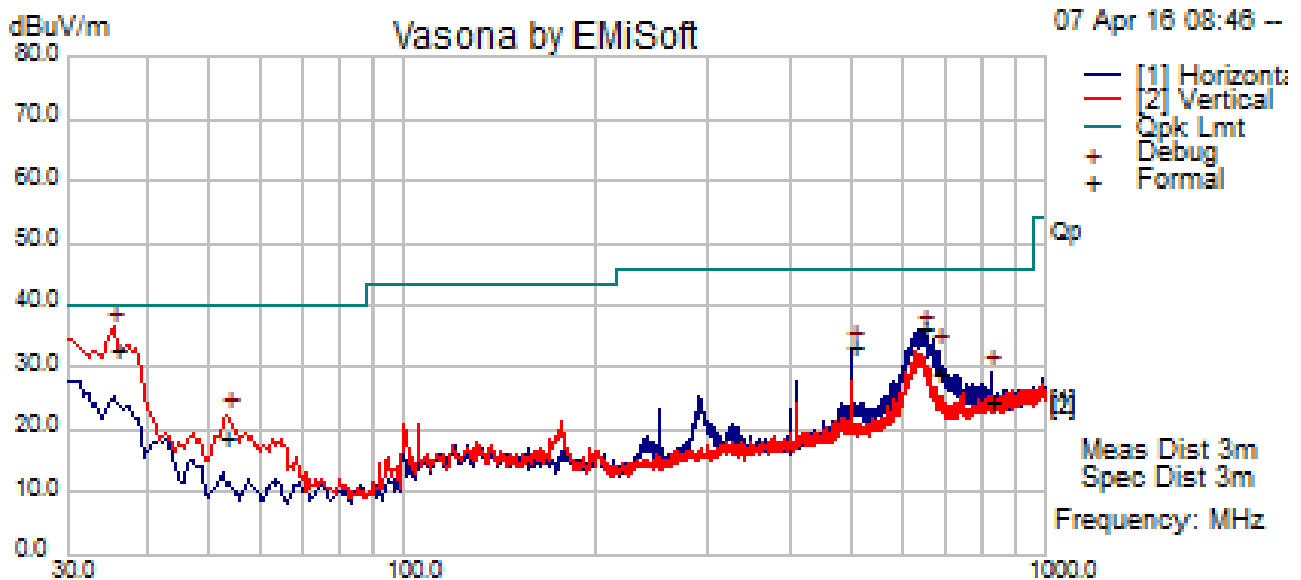


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
35.51	52.26	0.86	-20.39	32.72	Quasi Max	V	102.00	222.00	40.00	-7.28	Pass
646.45	51.59	3.99	-19.29	36.29	Quasi Max	H	123.00	183.00	46.02	-9.73	Pass
499.99	51.30	3.52	-21.59	33.23	Quasi Max	H	185.00	345.00	46.02	-12.79	Pass
679.43	43.67	4.08	-18.85	28.90	Quasi Max	H	100.00	185.00	46.02	-17.12	Pass
822.83	37.22	4.55	-17.03	24.74	Quasi Max	H	187.00	302.00	46.02	-21.28	Pass
53.13	48.06	1.13	-30.45	18.74	Quasi Max	V	114.00	249.00	40.00	-21.26	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	Below 1GHz			
Environmental Conditions:	Temp (°C):	25.7	Result	Pass
	Humidity (%)	29		
	Atmospheric (mPa):	1021		
Mains Power:	110VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks:	5.3GHz 11n-40 5310MHz			

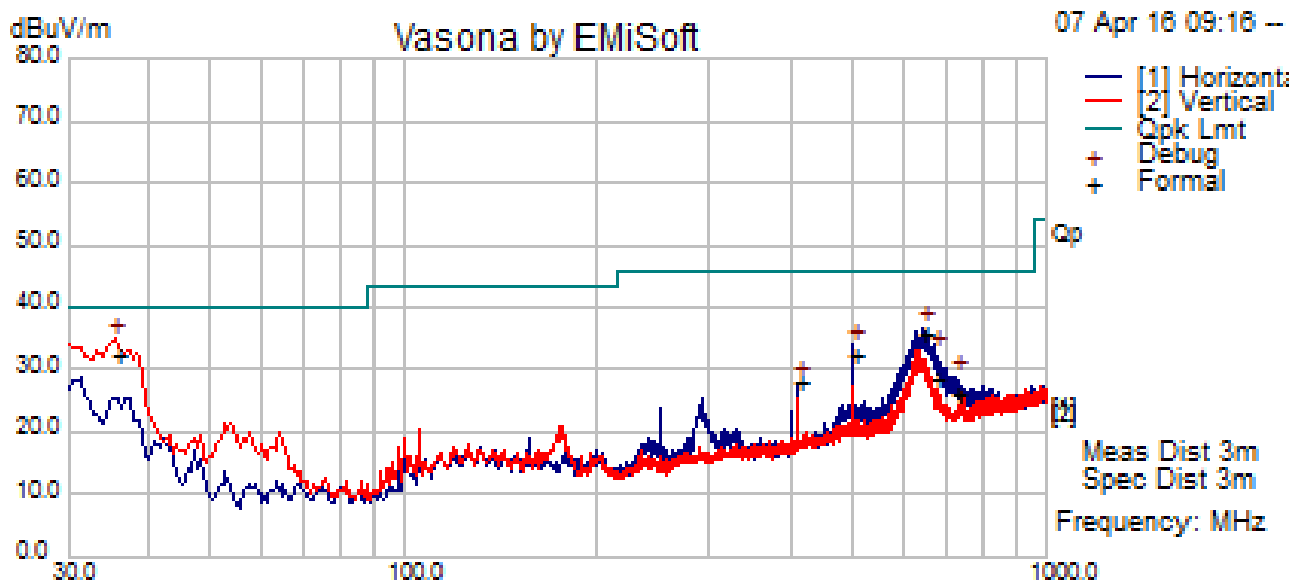


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
35.51	51.97	0.86	-20.39	32.44	Quasi Max	V	106.00	218.00	40.00	-7.56	Pass
641.89	51.05	3.97	-19.29	35.74	Quasi Max	H	144.00	192.00	46.02	-10.28	Pass
500.02	50.48	3.52	-21.59	32.41	Quasi Max	H	163.00	188.00	46.02	-13.61	Pass
672.35	43.74	4.01	-19.15	28.61	Quasi Max	H	128.00	221.00	46.02	-17.41	Pass
725.47	40.06	4.26	-18.52	25.81	Quasi Max	H	108.00	181.00	46.02	-20.21	Pass
411.42	48.34	3.16	-23.39	28.10	Quasi Max	H	101.00	169.00	46.02	-17.92	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	Below 1GHz			
Environmental Conditions:	Temp (°C):	25.7	Result	Pass
	Humidity (%)	29		
	Atmospheric (mPa):	1021		
Mains Power:	110VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks:	5.5GHz 11n-40M 5670MHz			

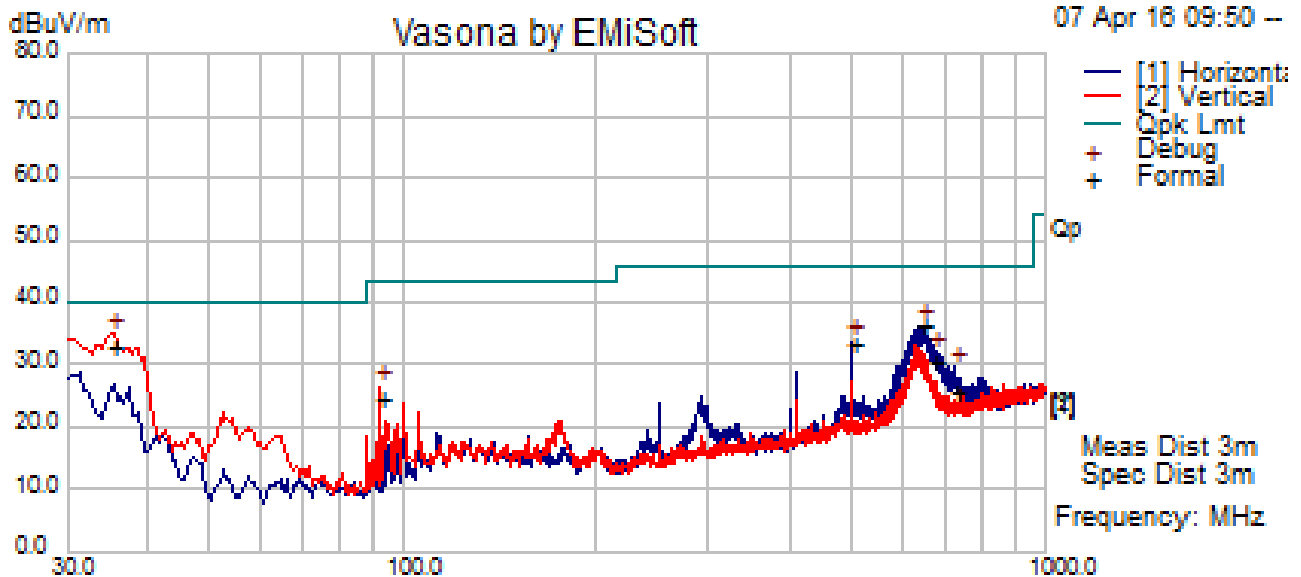


Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
35.48	52.19	0.85	-20.36	32.68	Quasi Max	V	102.00	258.00	40.00	-7.32	Pass
642.64	51.80	3.98	-19.29	36.49	Quasi Max	H	130.00	168.00	46.02	-9.53	Pass
499.99	51.46	3.52	-21.59	33.39	Quasi Max	H	161.00	184.00	46.02	-12.63	Pass
676.21	45.43	4.03	-18.99	30.48	Quasi Max	H	116.00	175.00	46.02	-15.54	Pass
725.40	39.94	4.26	-18.52	25.68	Quasi Max	H	107.00	183.00	46.02	-20.34	Pass
92.26	54.19	1.49	-31.11	24.56	Quasi Max	V	126.00	143.00	43.52	-18.96	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

Test specification	Below 1GHz			
Environmental Conditions:	Temp (°C):	25.7	Result	Pass
	Humidity (%)	29		
	Atmospheric (mPa):	1021		
Mains Power:	110VAC, 60Hz			
Tested by:	Rachana Khanduri			
Test Date:	04/07/2016			
Remarks:	5.8GHz 11n-40M 5795MHz			

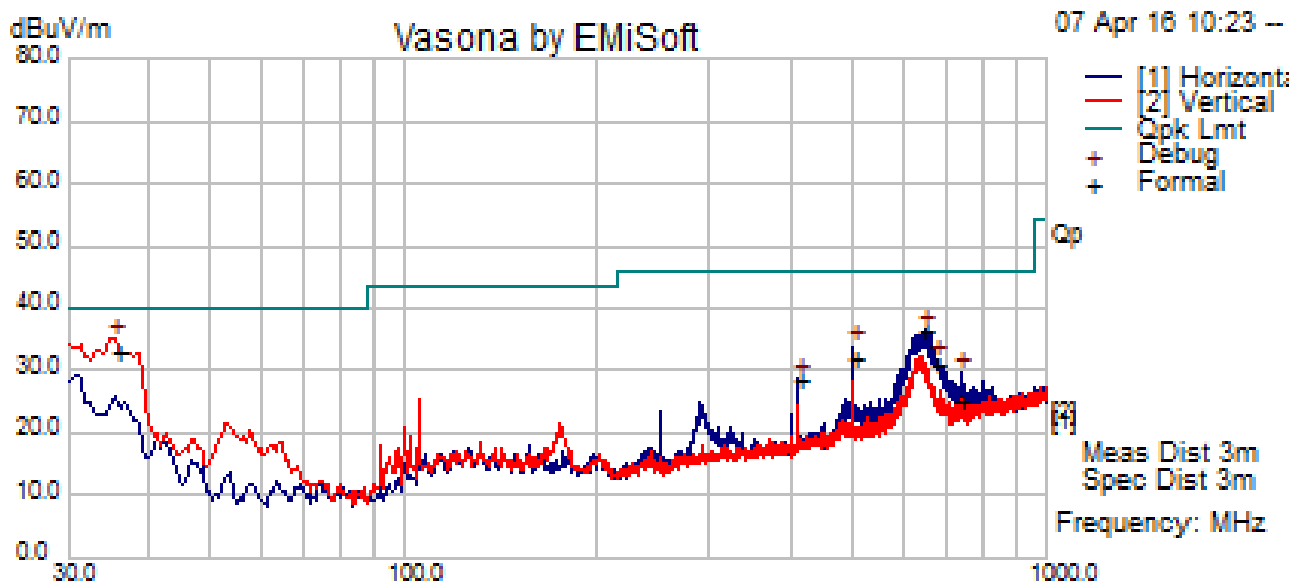

Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
35.55	52.19	0.86	-20.42	32.63	Quasi Max	V	101.00	258.00	40.00	-7.37	Pass
646.09	51.45	3.98	-19.29	36.15	Quasi Max	H	122.00	171.00	46.02	-9.87	Pass
499.99	49.96	3.52	-21.59	31.89	Quasi Max	H	144.00	170.00	46.02	-14.13	Pass
676.01	45.66	4.03	-19.00	30.70	Quasi Max	H	125.00	171.00	46.02	-15.32	Pass
737.14	39.11	4.24	-18.38	24.98	Quasi Max	H	104.00	185.00	46.02	-21.04	Pass
411.43	48.63	3.16	-23.39	28.40	Quasi Max	H	100.00	156.00	46.02	-17.62	Pass


Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.6 Radiated Spurious Emissions above 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§ 15.407(b)(2), 15.407(b)(6)	(1)	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☒
	(2)	For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.	☒
	(3)	For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.	☒
	(4)	For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz.	☒
	(5)	Restricted band, emission must also comply with the radiated emission limits specified in 15.209	☒

Test Setup

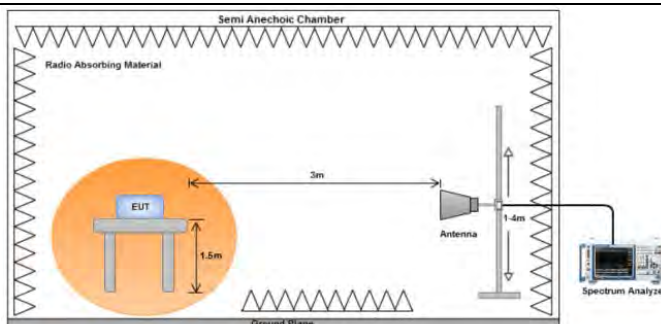

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- An average measurement was then made for that frequency point.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Remark

Both horizontal and vertical polarities were investigated. The results show only the worst case.

Result

☒ Pass ☐ Fail

Test Data ☒ Yes (See below) ☐ N/A
Test Plot ☒ Yes (See below) ☐ N/A

Test was done by *Rachana Khanduri* at *3m Chamber*.

Radiated Emission Test Results (Above 1GHz)

802.11a – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17893.65	35.10	16.11	6.54	57.76	Peak Max	V	167.00	52.00	74.00	-16.24	Pass
2134.92	46.02	4.39	-10.63	39.78	Peak Max	V	148.00	92.00	74.00	-34.23	Pass
1530.00	38.03	4.02	-13.55	28.49	Peak Max	H	207.00	360.00	74.00	-45.51	Pass
17893.65	23.24	16.11	6.54	45.90	Average Max	V	167.00	52.00	54.00	-8.10	Pass
2134.92	35.01	4.39	-10.63	28.77	Average Max	V	148.00	92.00	54.00	-25.23	Pass
1530.00	26.08	4.02	-13.55	16.54	Average Max	H	207.00	360.00	54.00	-37.46	Pass

802.11a – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17669.92	34.65	16.50	10.05	61.20	Peak Max	V	194.00	23.00	74.00	-12.80	Pass
1529.31	37.61	4.02	-10.03	31.60	Peak Max	H	194.00	179.00	74.00	-42.40	Pass
2125.64	38.81	4.39	-7.08	36.12	Peak Max	H	185.00	2.00	74.00	-37.88	Pass
17669.92	23.18	16.50	10.05	49.73	Average Max	V	194.00	23.00	54.00	-4.28	Pass
1529.31	26.19	4.02	-10.03	20.18	Average Max	H	194.00	179.00	54.00	-33.82	Pass
2125.64	26.67	4.39	-7.08	23.98	Average Max	H	185.00	2.00	54.00	-30.02	Pass

802.11a – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17382.21	35.91	16.77	5.46	58.15	Peak Max	H	208.00	298.00	74.00	-15.85	Pass
2134.89	44.61	4.39	-10.63	38.37	Peak Max	V	147.00	138.00	74.00	-35.63	Pass
1532.03	38.28	4.02	-13.55	28.75	Peak Max	H	189.00	327.00	74.00	-45.25	Pass
17382.21	23.36	16.77	5.46	45.60	Average Max	H	208.00	298.00	54.00	-8.40	Pass
2134.89	34.50	4.39	-10.63	28.26	Average Max	V	147.00	138.00	54.00	-25.74	Pass
1532.03	25.99	4.02	-13.55	16.46	Average Max	H	189.00	327.00	54.00	-37.54	Pass

802.11n20 – 5180MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17839.24	34.84	16.20	6.33	57.37	Peak Max	H	250.00	245.00	74.00	-16.63	Pass
1529.99	38.21	4.02	-13.55	28.67	Peak Max	H	242.00	231.00	74.00	-45.33	Pass
2127.67	38.13	4.39	-10.61	31.91	Peak Max	H	160.00	93.00	74.00	-42.09	Pass
17839.24	23.17	16.20	6.33	45.70	Average Max	H	250.00	245.00	54.00	-8.30	Pass
1529.99	26.55	4.02	-13.55	17.02	Average Max	H	242.00	231.00	54.00	-36.98	Pass
2127.67	26.50	4.39	-10.61	20.28	Average Max	H	160.00	93.00	54.00	-33.72	Pass

802.11n20 – 5200MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17552.79	35.88	16.70	6.11	58.70	Peak Max	V	219.00	335.00	74.00	-15.31	Pass
1529.26	38.28	4.02	-13.55	28.74	Peak Max	V	168.00	359.00	74.00	-45.26	Pass
2134.90	44.94	4.39	-10.63	38.69	Peak Max	V	192.00	203.00	74.00	-35.31	Pass
17552.79	23.37	16.70	6.11	46.18	Average Max	V	219.00	335.00	54.00	-7.82	Pass
1529.26	26.42	4.02	-13.55	16.88	Average Max	V	168.00	359.00	54.00	-37.12	Pass
2134.90	30.43	4.39	-10.63	24.19	Average Max	V	192.00	203.00	54.00	-29.82	Pass

802.11n20 – 5240MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17682.83	34.46	16.47	6.58	57.52	Peak Max	V	164.00	272.00	74.00	-16.48	Pass
1531.52	38.95	4.02	-13.55	29.42	Peak Max	V	211.00	154.00	74.00	-44.58	Pass
1735.12	39.08	4.14	-13.09	30.14	Peak Max	V	238.00	76.00	74.00	-43.87	Pass
17682.83	23.21	16.47	6.58	46.26	Average Max	V	164.00	272.00	54.00	-7.74	Pass
1531.52	27.18	4.02	-13.55	17.65	Average Max	V	211.00	154.00	54.00	-36.35	Pass
1735.12	27.18	4.14	-13.09	18.23	Average Max	V	238.00	76.00	54.00	-35.77	Pass

802.11n40 – 5190MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17660.52	35.15	16.51	6.49	58.15	Peak Max	H	207.00	178.00	74.00	-15.85	Pass
15286.26	35.03	14.55	2.94	52.51	Peak Max	V	187.00	337.00	74.00	-21.49	Pass
1532.55	38.26	4.02	-13.55	28.73	Peak Max	V	147.00	195.00	74.00	-45.27	Pass
17660.52	23.06	16.51	6.49	46.06	Average Max	H	207.00	178.00	54.00	-7.94	Pass
15286.26	23.48	14.55	2.94	40.97	Average Max	V	187.00	337.00	54.00	-13.03	Pass
1532.55	26.34	4.02	-13.55	16.81	Average Max	V	147.00	195.00	54.00	-37.19	Pass

802.11n40 – 5230MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17459.09	36.03	16.78	5.79	58.61	Peak Max	H	153.00	117.00	74.00	-15.39	Pass
1531.23	38.92	4.02	-13.55	29.39	Peak Max	H	176.00	228.00	74.00	-44.61	Pass
3071.21	43.06	5.29	-7.74	40.62	Peak Max	H	149.00	249.00	74.00	-33.38	Pass
17459.09	23.31	16.78	5.79	45.88	Average Max	H	153.00	117.00	54.00	-8.12	Pass
1531.23	27.20	4.02	-13.55	17.67	Average Max	H	176.00	228.00	54.00	-36.33	Pass
3071.21	37.37	5.29	-7.74	34.93	Average Max	H	149.00	249.00	54.00	-19.07	Pass

802.11a – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17658.80	35.88	16.51	6.48	58.88	Peak Max	V	159.00	54.00	74.00	-15.13	Pass
2125.01	38.35	4.39	-10.59	32.14	Peak Max	V	148.00	116.00	74.00	-41.86	Pass
1531.49	38.05	4.02	-13.55	28.52	Peak Max	H	149.00	302.00	74.00	-45.48	Pass
17658.80	23.13	16.51	6.48	46.13	Average Max	V	159.00	54.00	54.00	-7.87	Pass
2125.01	26.30	4.39	-10.59	20.10	Average Max	V	148.00	116.00	54.00	-33.91	Pass
1531.49	25.99	4.02	-13.55	16.46	Average Max	H	149.00	302.00	54.00	-37.54	Pass

802.11a – 5300MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17712.66	34.90	16.42	6.60	57.92	Peak Max	H	174.00	340.00	74.00	-16.08	Pass
1530.94	38.34	4.02	-13.55	28.81	Peak Max	H	186.00	48.00	74.00	-45.19	Pass
2134.89	45.99	4.39	-10.63	39.75	Peak Max	V	148.00	135.00	74.00	-34.25	Pass
17712.66	23.24	16.42	6.60	46.25	Average Max	H	174.00	340.00	54.00	-7.75	Pass
1530.94	26.00	4.02	-13.55	16.47	Average Max	H	186.00	48.00	54.00	-37.53	Pass
2134.89	33.35	4.39	-10.63	27.11	Average Max	V	148.00	135.00	54.00	-26.89	Pass

802.11a – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17701.74	34.77	16.44	6.65	57.86	Peak Max	H	150.00	291.00	74.00	-16.14	Pass
10636.87	42.28	11.81	0.18	54.27	Peak Max	V	227.00	346.00	74.00	-19.73	Pass
2134.93	45.34	4.39	-10.63	39.10	Peak Max	V	192.00	125.00	74.00	-34.91	Pass
17701.74	23.27	16.44	6.65	46.36	Average Max	H	150.00	291.00	54.00	-7.64	Pass
10636.87	29.18	11.81	0.18	41.17	Average Max	V	227.00	346.00	54.00	-12.83	Pass
2134.93	33.46	4.39	-10.63	27.22	Average Max	V	192.00	125.00	54.00	-26.79	Pass

802.11n20 – 5260MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17489.80	35.52	16.79	5.94	58.25	Peak Max	H	180.00	17.00	74.00	-15.75	Pass
1532.29	38.45	4.02	-13.55	28.92	Peak Max	H	150.00	165.00	74.00	-45.08	Pass
2134.89	43.83	4.39	-10.63	37.59	Peak Max	V	201.00	115.00	74.00	-36.41	Pass
17489.80	23.32	16.79	5.94	46.05	Average Max	H	180.00	17.00	54.00	-7.95	Pass
1532.29	26.14	4.02	-13.55	16.61	Average Max	H	150.00	165.00	54.00	-37.39	Pass
2134.89	28.05	4.39	-10.63	21.81	Average Max	V	201.00	115.00	54.00	-32.19	Pass

802.11n20 – 5300MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17522.58	34.75	16.75	6.04	57.54	Peak Max	H	241.00	156.00	74.00	-16.46	Pass
2134.898	42.06	4.39	-10.63	35.82	Peak Max	V	179.00	164.00	74.00	-38.18	Pass
1531.535	38.83	4.02	-13.55	29.30	Peak Max	H	154.00	59.00	74.00	-44.70	Pass
17522.58	23.41	16.75	6.04	46.20	Average Max	H	241.00	156.00	54.00	-7.80	Pass
2134.898	28.31	4.39	-10.63	22.07	Average Max	V	179.00	164.00	54.00	-31.93	Pass
1531.535	28.10	4.02	-13.55	18.57	Average Max	H	154.00	59.00	54.00	-35.43	Pass

802.11n20 – 5320MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17734.49	34.95	16.38	6.49	57.83	Peak Max	V	173.00	48.00	74.00	-16.17	Pass
10635.39	41.53	11.80	0.18	53.52	Peak Max	V	201.00	340.00	74.00	-20.48	Pass
1530.01	38.77	4.02	-13.55	29.24	Peak Max	H	232.00	121.00	74.00	-44.76	Pass
17734.49	23.19	16.38	6.49	46.06	Average Max	V	173.00	48.00	54.00	-7.94	Pass
10635.39	27.69	11.80	0.18	39.68	Average Max	V	201.00	340.00	54.00	-14.33	Pass
1530.01	27.90	4.02	-13.55	18.37	Average Max	H	232.00	121.00	54.00	-35.64	Pass

802.11n40 – 5270MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17490.23	35.40	16.79	5.94	58.14	Peak Max	V	219.00	111.00	74.00	-15.87	Pass
1530.66	39.36	4.02	-13.55	29.83	Peak Max	V	201.00	26.00	74.00	-44.17	Pass
2134.885	42.47	4.39	-10.63	36.23	Peak Max	V	191.00	196.00	74.00	-37.77	Pass
17490.23	23.39	16.79	5.94	46.12	Average Max	V	219.00	111.00	54.00	-7.88	Pass
1530.66	26.94	4.02	-13.55	17.41	Average Max	V	201.00	26.00	54.00	-36.59	Pass
2134.885	28.81	4.39	-10.63	22.57	Average Max	V	191.00	196.00	54.00	-31.43	Pass

802.11n40 – 5310MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17532.94	34.80	16.73	6.07	57.60	Peak Max	H	146.00	179.00	74.00	-16.40	Pass
15332.32	34.98	14.69	2.69	52.36	Peak Max	V	161.00	196.00	74.00	-21.64	Pass
2134.91	41.92	4.39	-10.63	35.67	Peak Max	V	213.00	100.00	74.00	-38.33	Pass
17532.94	23.32	16.73	6.07	46.12	Average Max	H	146.00	179.00	54.00	-7.89	Pass
15332.32	23.37	14.69	2.69	40.75	Average Max	V	161.00	196.00	54.00	-13.25	Pass
2134.91	28.81	4.39	-10.63	22.57	Average Max	V	213.00	100.00	54.00	-31.43	Pass

802.11a – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17691.43	34.86	16.46	6.62	57.94	Peak Max	H	151.00	61.00	74.00	-16.06	Pass
1530.28	38.08	4.02	-13.55	28.55	Peak Max	H	158.00	165.00	74.00	-45.45	Pass
1946.64	43.63	4.25	-12.68	35.20	Peak Max	H	150.00	46.00	74.00	-38.80	Pass
17691.43	23.21	16.46	6.62	46.29	Average Max	H	151.00	61.00	54.00	-7.71	Pass
1530.28	26.47	4.02	-13.55	16.93	Average Max	H	158.00	165.00	54.00	-37.07	Pass
1946.64	29.68	4.25	-12.68	21.25	Average Max	H	150.00	46.00	54.00	-32.75	Pass

802.11a – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17489.45	34.91	16.79	5.94	57.63	Peak Max	H	160.00	308.00	74.00	-16.37	Pass
1530.42	38.05	4.02	-13.55	28.52	Peak Max	V	192.00	212.00	74.00	-45.48	Pass
3071.48	37.56	5.29	-7.74	35.11	Peak Max	V	150.00	0.00	74.00	-38.89	Pass
17489.45	23.30	16.79	5.94	46.03	Average Max	H	160.00	308.00	54.00	-7.98	Pass
1530.42	26.09	4.02	-13.55	16.56	Average Max	V	192.00	212.00	54.00	-37.44	Pass
3071.48	27.29	5.29	-7.74	24.84	Average Max	V	150.00	0.00	54.00	-29.16	Pass

802.11a – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17987.92	34.91	15.95	6.37	57.23	Peak Max	H	194.00	215.00	74.00	-16.78	Pass
1530.26	38.71	4.02	-13.55	29.17	Peak Max	H	246.00	160.00	74.00	-44.83	Pass
2134.89	43.37	4.39	-10.63	37.13	Peak Max	V	196.00	199.00	74.00	-36.87	Pass
17987.92	23.39	15.95	6.37	45.70	Average Max	H	194.00	215.00	54.00	-8.30	Pass
1530.26	26.19	4.02	-13.55	16.66	Average Max	H	246.00	160.00	54.00	-37.34	Pass
2134.89	32.02	4.39	-10.63	25.77	Average Max	V	196.00	199.00	54.00	-28.23	Pass

802.11n20 – 5500MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17543.97	34.85	16.71	6.09	57.66	Peak Max	V	188.00	343.00	74.00	-16.35	Pass
2134.93	42.28	4.39	-10.63	36.04	Peak Max	H	193.00	17.00	74.00	-37.96	Pass
1531.905	38.22	4.02	-13.55	28.69	Peak Max	H	192.00	307.00	74.00	-45.31	Pass
17543.97	23.43	16.71	6.09	46.23	Average Max	V	188.00	343.00	54.00	-7.77	Pass
2134.93	28.80	4.39	-10.63	22.55	Average Max	H	193.00	17.00	54.00	-31.45	Pass
1531.905	27.06	4.02	-13.55	17.53	Average Max	H	192.00	307.00	54.00	-36.47	Pass

802.11n20 – 5580MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17509.36	35.54	16.77	6.01	58.33	Peak Max	V	176.00	76.00	74.00	-15.67	Pass
1732.93	38.48	4.14	-13.07	29.55	Peak Max	H	147.00	98.00	74.00	-44.45	Pass
2134.93	44.19	4.39	-10.63	37.94	Peak Max	V	199.00	65.00	74.00	-36.06	Pass
17509.36	23.30	16.77	6.01	46.08	Average Max	V	176.00	76.00	54.00	-7.92	Pass
1732.93	27.18	4.14	-13.07	18.25	Average Max	H	147.00	98.00	54.00	-35.75	Pass
2134.93	29.59	4.39	-10.63	23.35	Average Max	V	199.00	65.00	54.00	-30.65	Pass

802.11n20 – 5700MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17672.42	34.99	16.49	6.54	58.02	Peak Max	V	148.00	339.00	74.00	-15.98	Pass
1754.66	38.04	4.15	-13.29	28.90	Peak Max	H	146.00	6.00	74.00	-45.10	Pass
2134.90	43.18	4.39	-10.63	36.94	Peak Max	H	180.00	141.00	74.00	-37.07	Pass
17672.42	23.19	16.49	6.54	46.22	Average Max	V	148.00	339.00	54.00	-7.78	Pass
1754.66	26.26	4.15	-13.29	17.12	Average Max	H	146.00	6.00	54.00	-36.88	Pass
2134.90	29.01	4.39	-10.63	22.76	Average Max	H	180.00	141.00	54.00	-31.24	Pass

802.11n40 – 5510MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17520.85	35.34	16.75	6.04	58.13	Peak Max	H	157.00	113.00	74.00	-15.87	Pass
1531.69	38.63	4.02	-13.55	29.10	Peak Max	V	157.00	53.00	74.00	-44.90	Pass
2137.39	38.18	4.39	-10.65	31.93	Peak Max	V	148.00	121.00	74.00	-42.07	Pass
17520.85	23.25	16.75	6.04	46.04	Average Max	H	157.00	113.00	54.00	-7.96	Pass
1531.69	27.50	4.02	-13.55	17.97	Average Max	V	157.00	53.00	54.00	-36.03	Pass
2137.39	26.48	4.39	-10.65	20.23	Average Max	V	148.00	121.00	54.00	-33.77	Pass

802.11n40 – 5550MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17523.26	34.52	16.75	6.04	57.32	Peak Max	V	149.00	233.00	74.00	-16.68	Pass
1531.45	38.03	4.02	-13.55	28.51	Peak Max	H	192.00	62.00	74.00	-45.50	Pass
2127.03	37.72	4.39	-10.60	31.51	Peak Max	V	154.00	93.00	74.00	-42.49	Pass
17523.26	23.23	16.75	6.04	46.02	Average Max	V	149.00	233.00	54.00	-7.98	Pass
1531.45	26.67	4.02	-13.55	17.14	Average Max	H	192.00	62.00	54.00	-36.86	Pass
2127.03	26.67	4.39	-10.60	20.45	Average Max	V	154.00	93.00	54.00	-33.55	Pass

802.11n40 – 5670MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17544.43	35.18	16.71	6.09	57.99	Peak Max	V	152.00	280.00	74.00	-16.02	Pass
1531.41	38.14	4.02	-13.55	28.62	Peak Max	H	176.00	175.00	74.00	-45.39	Pass
2136.80	38.27	4.39	-10.64	32.02	Peak Max	V	198.00	292.00	74.00	-41.98	Pass
17544.43	23.25	16.71	6.09	46.06	Average Max	V	152.00	280.00	54.00	-7.94	Pass
1531.41	26.53	4.02	-13.55	17.00	Average Max	H	176.00	175.00	54.00	-37.00	Pass
2136.80	26.57	4.39	-10.64	20.32	Average Max	V	198.00	292.00	54.00	-33.68	Pass

802.11a – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17478.94	35.59	16.79	5.89	58.27	Peak Max	H	251.00	101.00	74.00	-15.73	Pass
1531.37	39.04	4.02	-13.55	29.51	Peak Max	V	170.00	308.00	74.00	-44.49	Pass
2134.89	39.99	4.39	-10.63	33.75	Peak Max	H	175.00	327.00	74.00	-40.25	Pass
17478.94	23.31	16.79	5.89	45.99	Average Max	H	251.00	101.00	54.00	-8.01	Pass
1531.37	27.85	4.02	-13.55	18.32	Average Max	V	170.00	308.00	54.00	-35.68	Pass
2134.89	27.45	4.39	-10.63	21.21	Average Max	H	175.00	327.00	54.00	-32.79	Pass

802.11a – 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17382.58	35.99	16.77	5.47	58.23	Peak Max	V	249.00	143.00	74.00	-15.77	Pass
1530.21	38.34	4.02	-13.55	28.80	Peak Max	H	230.00	252.00	74.00	-45.20	Pass
2134.88	45.21	4.39	-10.63	38.96	Peak Max	V	192.00	285.00	74.00	-35.04	Pass
17382.58	23.42	16.77	5.47	45.66	Average Max	V	249.00	143.00	54.00	-8.34	Pass
1530.21	26.35	4.02	-13.55	16.82	Average Max	H	230.00	252.00	54.00	-37.18	Pass
2134.88	33.85	4.39	-10.63	27.61	Average Max	V	192.00	285.00	54.00	-26.39	Pass

802.11a – 5825MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17542.64	35.14	16.72	6.09	57.95	Peak Max	H	171.00	91.00	74.00	-16.06	Pass
1532.80	38.50	4.02	-13.55	28.97	Peak Max	V	200.00	9.00	74.00	-45.03	Pass
4898.00	37.14	10.51	-5.55	42.11	Peak Max	V	166.00	324.00	74.00	-31.89	Pass
17542.64	23.40	16.72	6.09	46.21	Average Max	H	171.00	91.00	54.00	-7.79	Pass
1532.80	26.89	4.02	-13.55	17.37	Average Max	V	200.00	9.00	54.00	-36.63	Pass
4898.00	25.14	10.51	-5.55	30.11	Average Max	V	166.00	324.00	54.00	-23.89	Pass

802.11n20 – 5745MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17690.74	36.56	16.46	6.62	59.64	Peak Max	V	152.00	26.00	74.00	-14.36	Pass
1531.66	38.91	4.02	-13.55	29.38	Peak Max	V	168.00	160.00	74.00	-44.62	Pass
2134.90	42.45	4.39	-10.63	36.20	Peak Max	H	181.00	358.00	74.00	-37.80	Pass
17690.74	23.21	16.46	6.62	46.29	Average Max	V	152.00	26.00	54.00	-7.71	Pass
1531.66	27.72	4.02	-13.55	18.19	Average Max	V	168.00	160.00	54.00	-35.81	Pass
2134.90	30.43	4.39	-10.63	24.19	Average Max	H	181.00	358.00	54.00	-29.81	Pass

802.11n20 – 5785MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17438.18	34.47	16.78	5.69	56.94	Peak Max	H	163.00	0.00	74.00	-17.06	Pass
1530.34	39.37	4.02	-13.55	29.84	Peak Max	V	203.00	102.00	74.00	-44.16	Pass
2134.91	40.96	4.39	-10.63	34.72	Peak Max	V	219.00	6.00	74.00	-39.28	Pass
17438.18	23.29	16.78	5.69	45.77	Average Max	H	163.00	0.00	54.00	-8.24	Pass
1530.34	27.95	4.02	-13.55	18.42	Average Max	V	203.00	102.00	54.00	-35.58	Pass
2134.91	28.58	4.39	-10.63	22.33	Average Max	V	219.00	6.00	54.00	-31.67	Pass

802.11n20 – 5825MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17617.39	35.46	16.59	6.30	58.35	Peak Max	V	146.00	37.00	74.00	-15.65	Pass
1532.26	38.25	4.02	-13.55	28.72	Peak Max	H	164.00	180.00	74.00	-45.28	Pass
2134.91	41.36	4.39	-10.63	35.12	Peak Max	V	149.00	138.00	74.00	-38.88	Pass
17617.39	23.29	16.59	6.30	46.18	Average Max	V	146.00	37.00	54.00	-7.82	Pass
1532.26	26.25	4.02	-13.55	16.72	Average Max	H	164.00	180.00	54.00	-37.28	Pass
2134.91	30.00	4.39	-10.63	23.76	Average Max	V	149.00	138.00	54.00	-30.24	Pass

802.11n40 – 5755MHz


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17640.25	34.86	16.55	6.40	57.80	Peak Max	H	211.00	33.00	74.00	-16.20	Pass
1529.60	38.64	4.02	-13.55	29.11	Peak Max	H	194.00	218.00	74.00	-44.90	Pass
2135.61	38.53	4.39	-10.64	32.28	Peak Max	V	195.00	0.00	74.00	-41.72	Pass
17640.25	23.07	16.55	6.40	46.01	Average Max	H	211.00	33.00	54.00	-7.99	Pass
1529.60	26.17	4.02	-13.55	16.64	Average Max	H	194.00	218.00	54.00	-37.36	Pass
2135.61	26.56	4.39	-10.64	20.31	Average Max	V	195.00	0.00	54.00	-33.69	Pass


802.11n40 – 5795MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17456.31	34.74	16.78	5.78	57.30	Peak Max	H	148.00	64.00	74.00	-16.70	Pass
1532.79	38.79	4.02	-13.55	29.26	Peak Max	H	206.00	236.00	74.00	-44.74	Pass
2128.03	38.61	4.39	-10.61	32.39	Peak Max	V	183.00	293.00	74.00	-41.61	Pass
17456.31	23.22	16.78	5.78	45.78	Average Max	H	148.00	64.00	54.00	-8.22	Pass
1532.79	26.62	4.02	-13.55	17.09	Average Max	H	206.00	236.00	54.00	-36.91	Pass
2128.03	26.50	4.39	-10.61	20.28	Average Max	V	183.00	293.00	54.00	-33.72	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.


Restricted Band Measurement Plots:

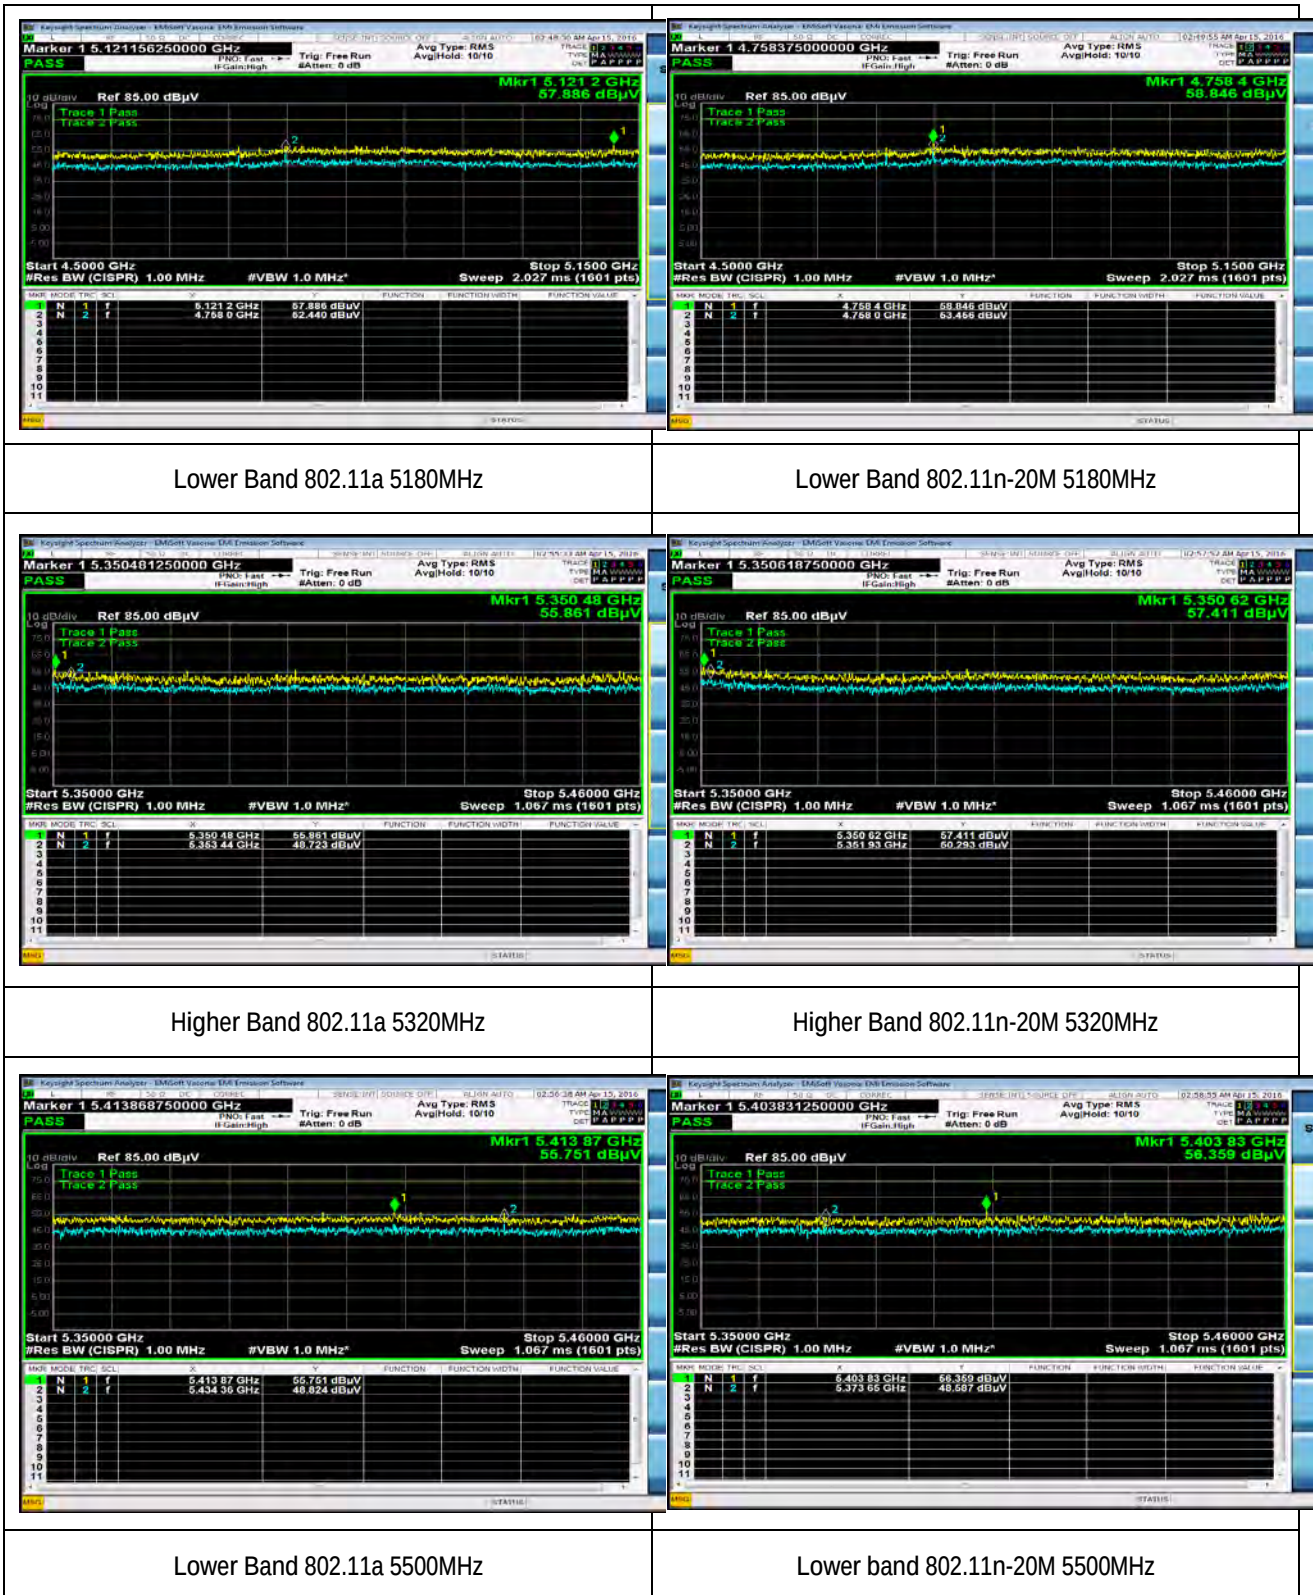

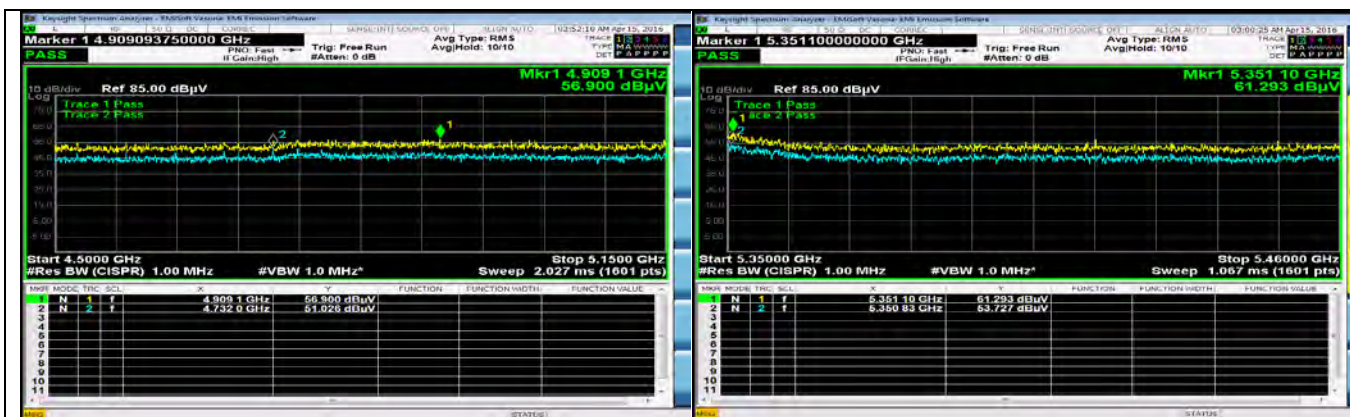


Lower Band 802.11n-40M 5190MHz

Higher Band 802.11n-40M 5310MHz

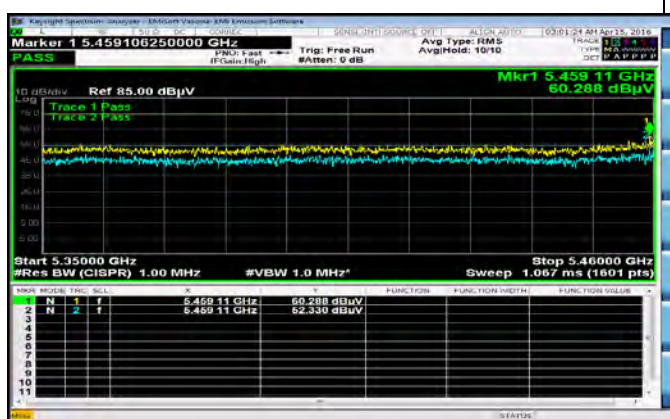


Lower Band 802.11n-40M 5510MHz


Conducted Band Edge Measurement Plots (Plot shows only worst case of both chains)

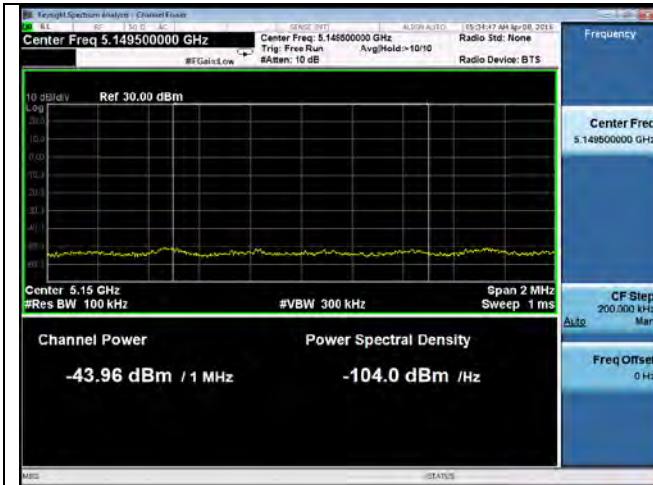


Band Edge-802.11a 5180 MHz (Limit: -27dBm/MHz eirp)

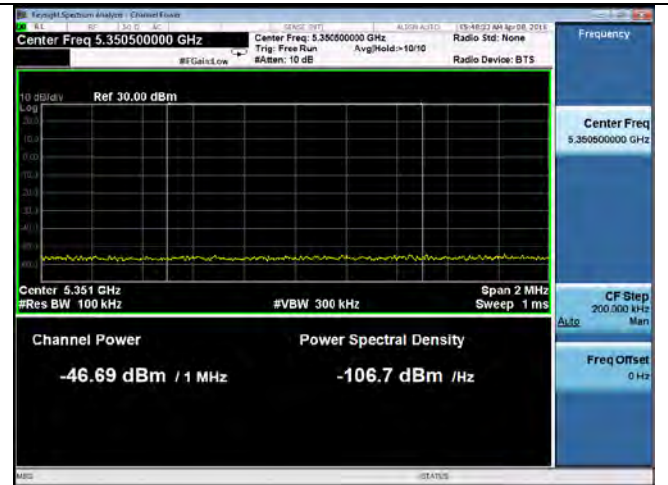


Band Edge-802.11a 5240 MHz (Limit: -27dBm/MHz eirp)

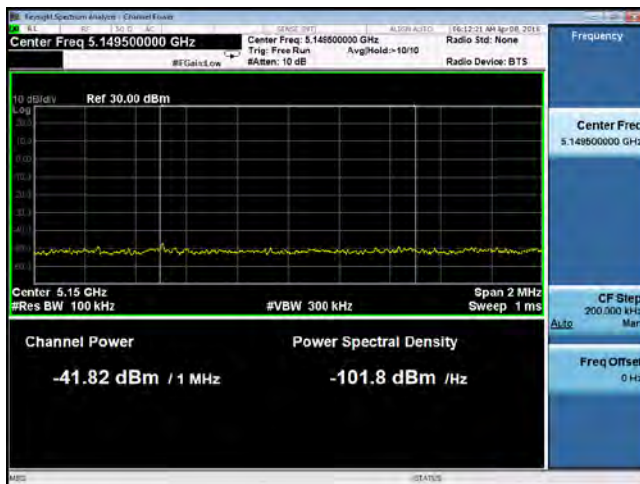


Band Edge-802.11n20 5180 MHz (Limit: -27dBm/MHz eirp)

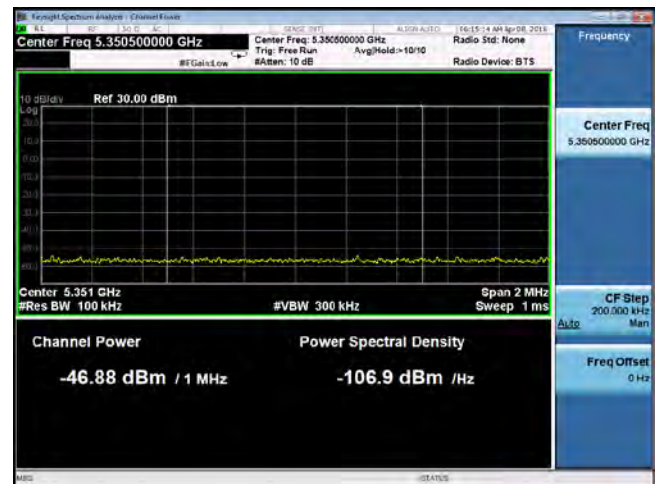


Band Edge-802.11n20 5240 MHz (Limit: -27dBm/MHz eirp)

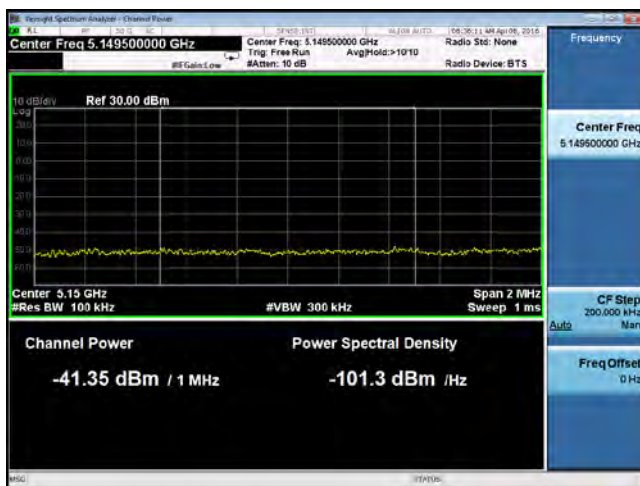


Band Edge-802.11n40 5190 MHz (Limit: -27dBm/MHz eirp)

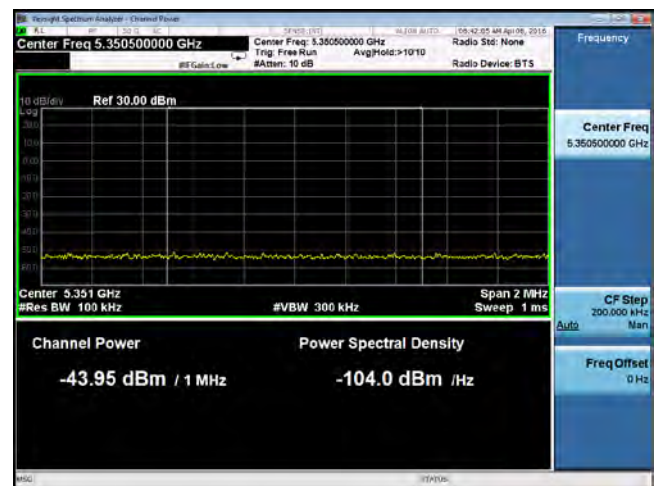


Band Edge-802.11n40 5230 MHz (Limit: -27dBm/MHz eirp)

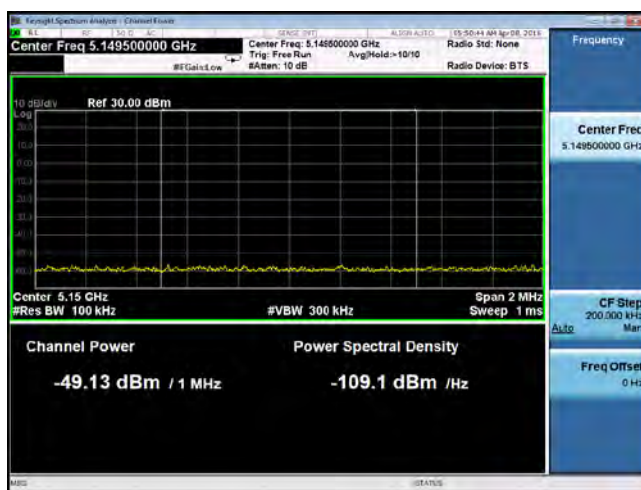


Band Edge-802.11a 5260 MHz (Limit: -27dBm/MHz eirp)

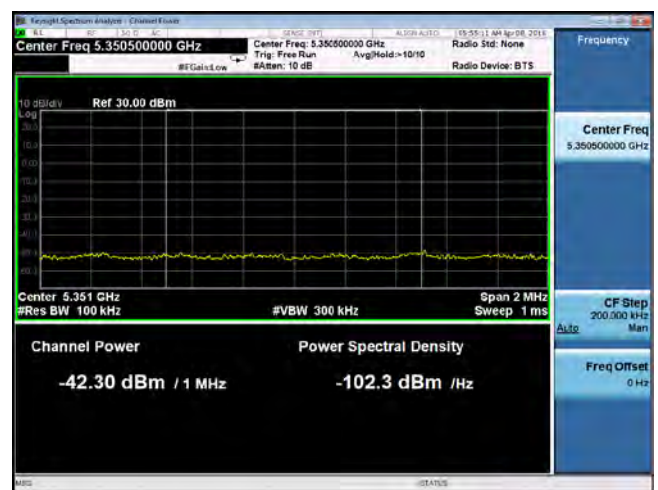


Band Edge-802.11a 5320 MHz (Limit: -27dBm/MHz eirp)

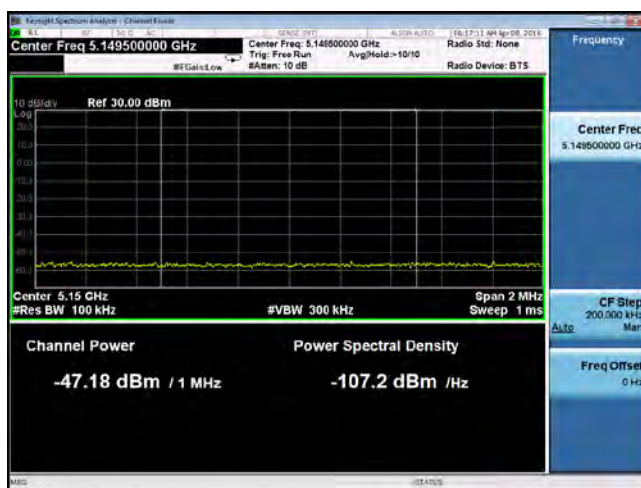


Band Edge-802.11n20 5260 MHz (Limit: -27dBm/MHz eirp)

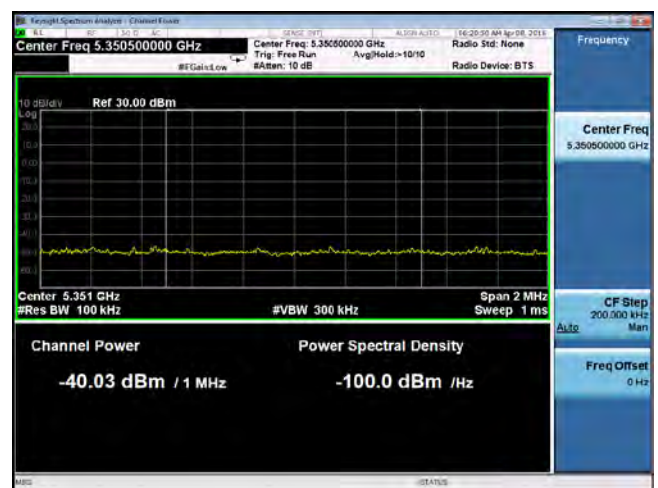


Band Edge-802.11n20 5320 MHz (Limit: -27dBm/MHz eirp)

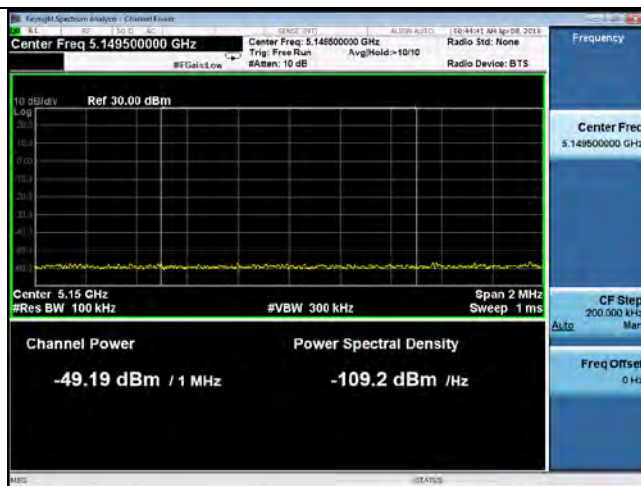


Band Edge-802.11n40 5270 MHz (Limit: -27dBm/MHz eirp)

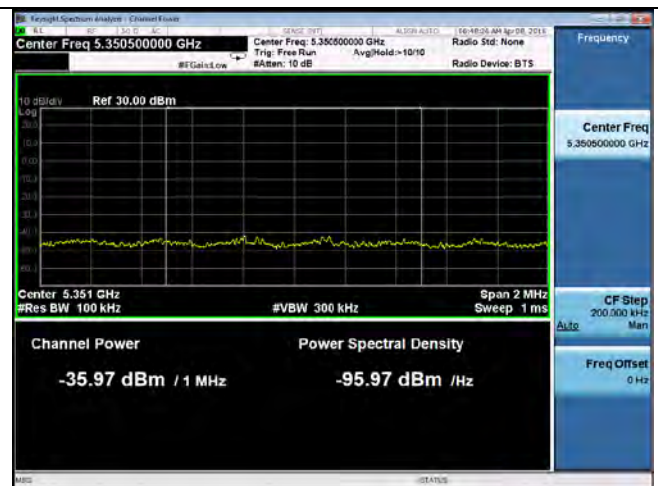


Band Edge-802.11n40 5310 MHz (Limit: -27dBm/MHz eirp)

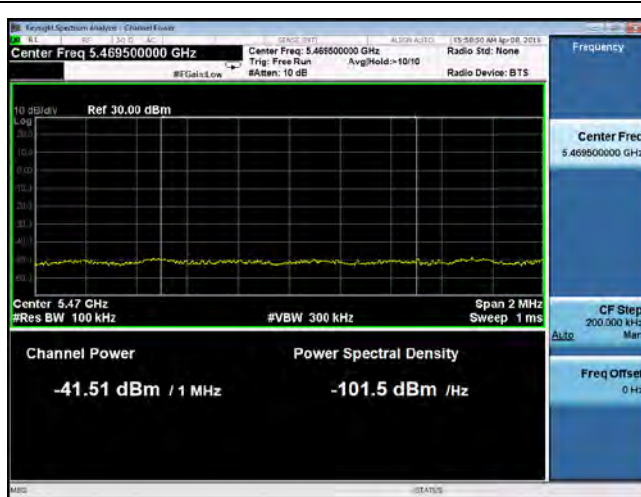


Band Edge-802.11a 5500 MHz (Limit: -27dBm/MHz eirp)

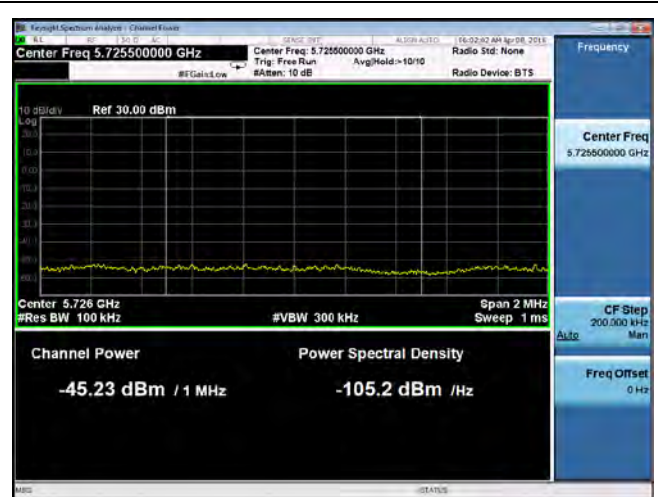


Band Edge-802.11a 5700 MHz (Limit: -27dBm/MHz eirp)

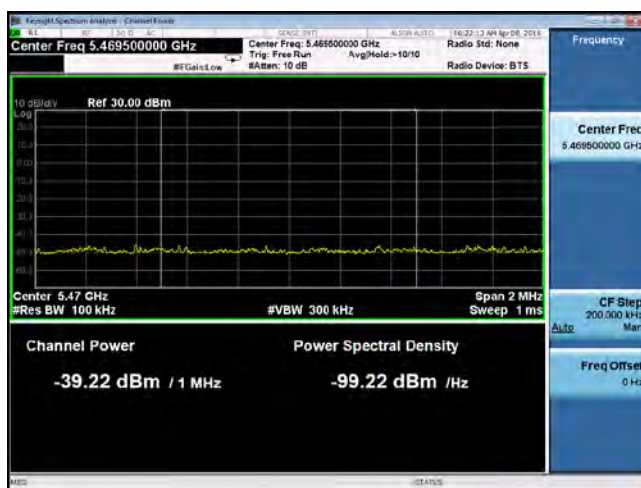


Band Edge-802.11n20 5500 MHz (Limit: -27dBm/MHz eirp)

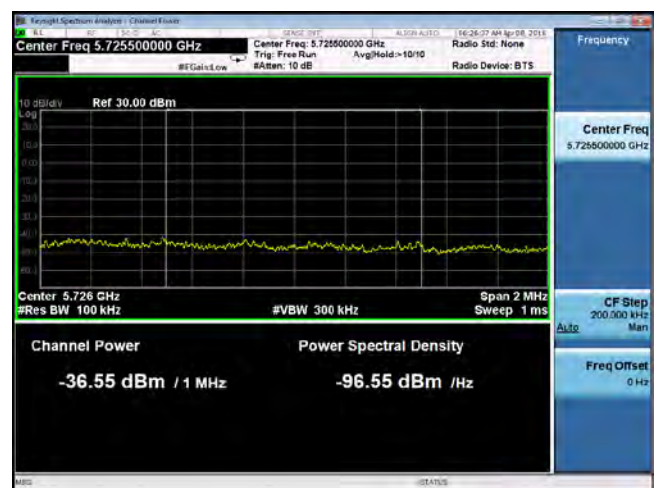


Band Edge-802.11n20 5700 MHz (Limit: -27dBm/MHz eirp)

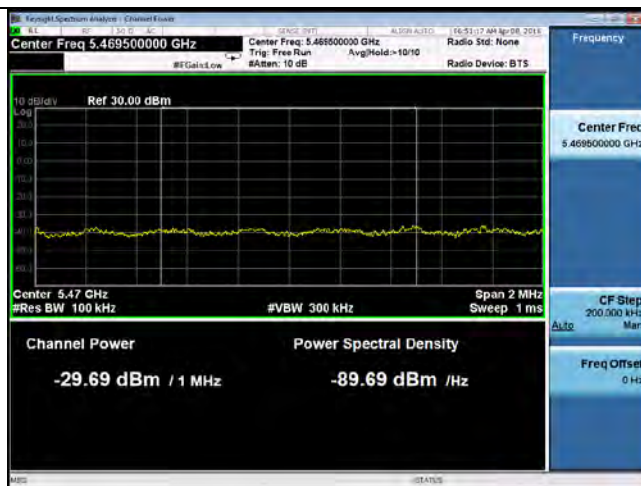


Band Edge-802.11n40 5510 MHz (Limit: -27dBm/MHz eirp)

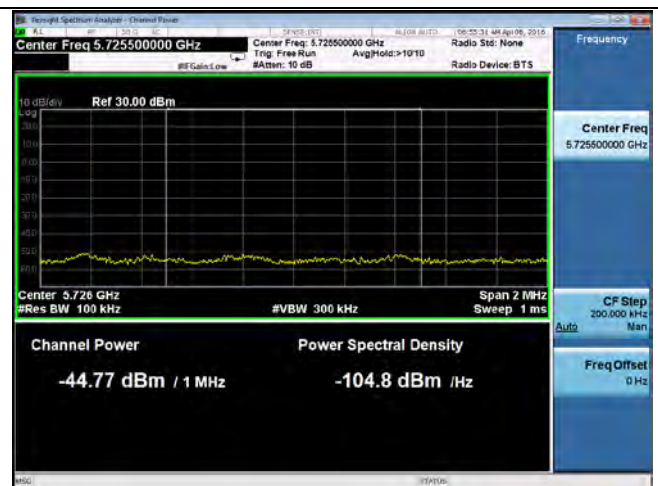


Band Edge-802.11n40 5670 MHz (Limit: -27dBm/MHz eirp)

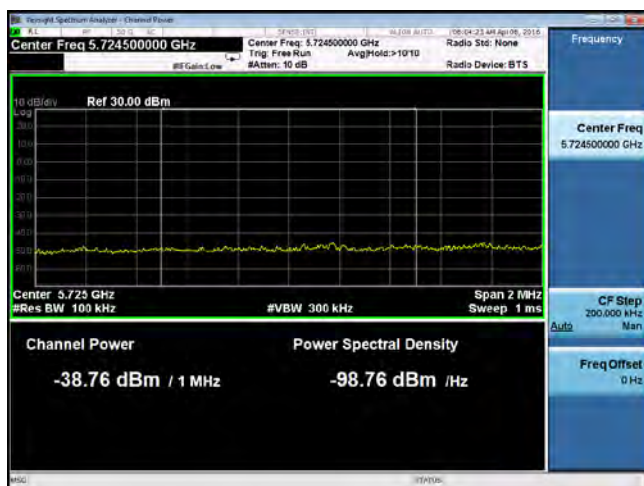


5.8GHz Band Edge-802.11a 5745 MHz (Limit: -17 eirp)

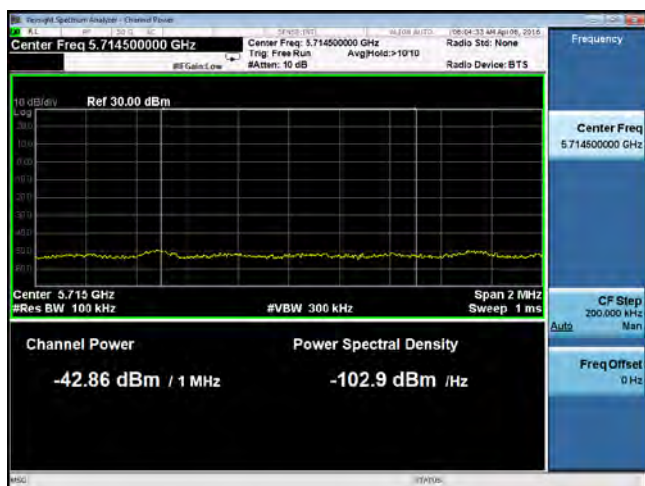


5.8GHz Band Edge-802.11a 5745 MHz (Limit: -27 eirp)

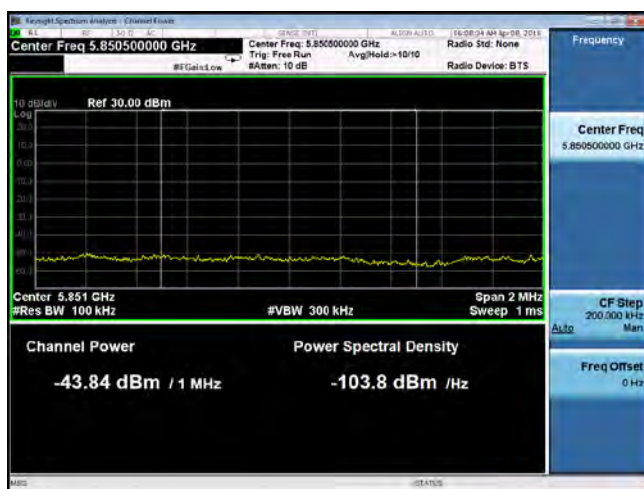


5.8GHz Band Edge-802.11a 5825 MHz (Limit: -17 eirp)

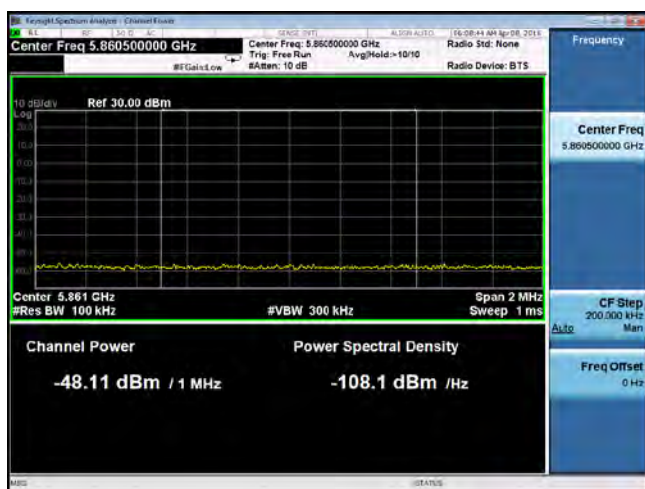


5.8GHz Band Edge-802.11a 5825 MHz (Limit: -27 eirp)

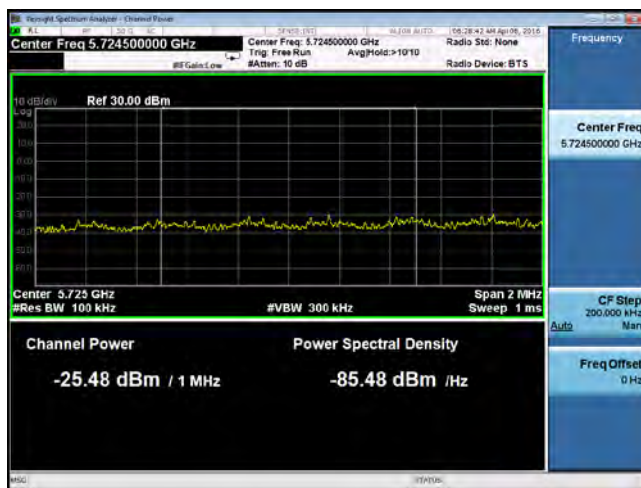


5.8GHz Band Edge-802.11n20 5745 MHz (Limit: -17 eirp)

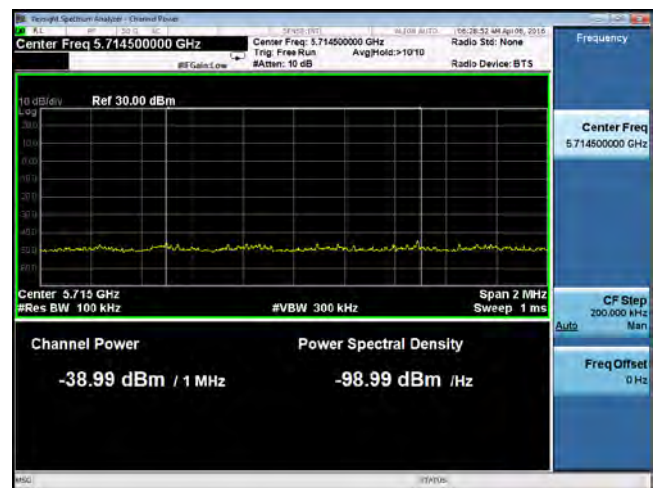


5.8GHz Band Edge-802.11n20 5745 MHz (Limit: -27 eirp)

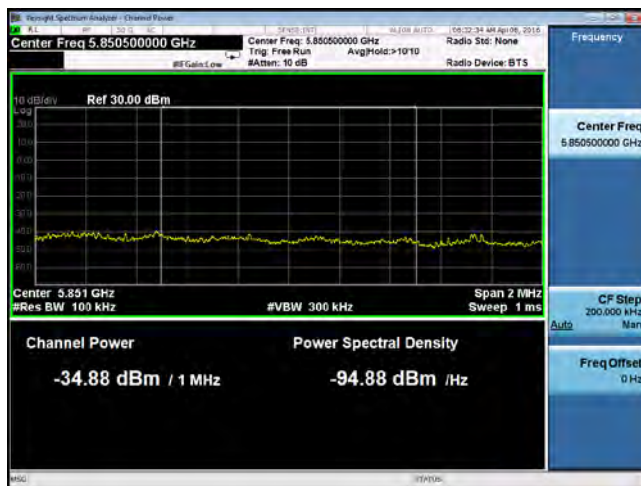


5.8GHz Band Edge-802.11n20 5825 MHz (Limit: -17 eirp)

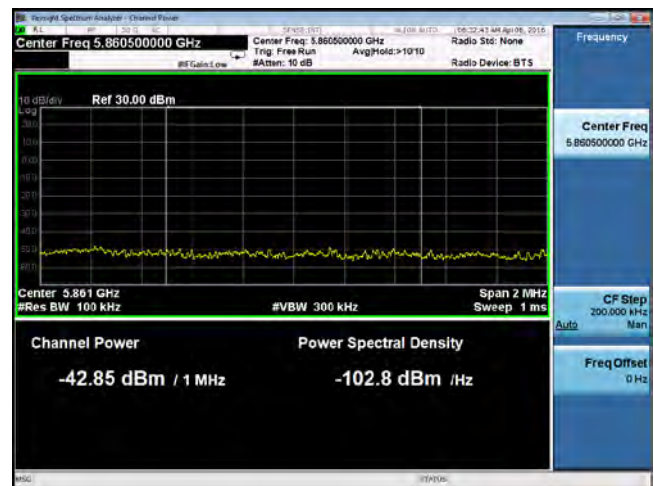


5.8GHz Band Edge-802.11n20 5825 MHz (Limit: -27 eirp)

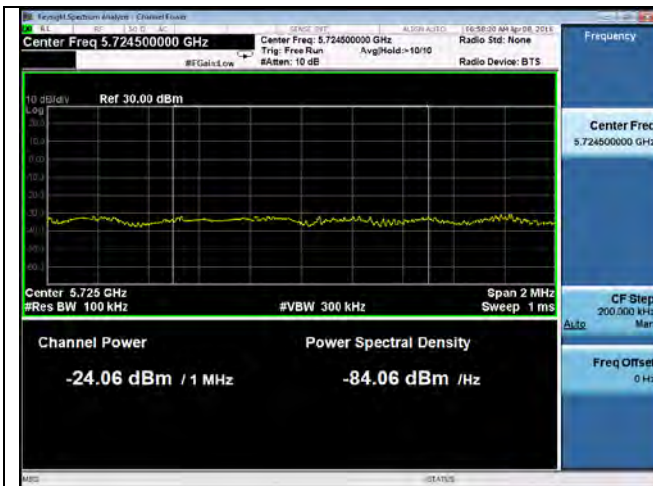


5.8GHz Band Edge-802.11n40 5755 MHz (Limit: -17 eirp)

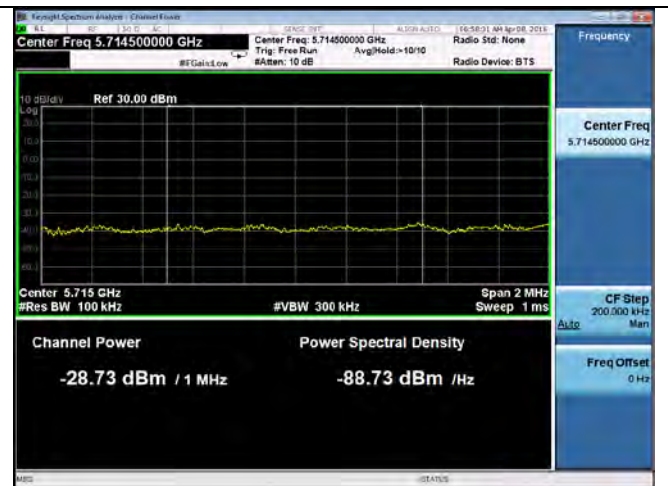

5.8GHz Band Edge-802.11n40 5755 MHz (Limit: -27 eirp)

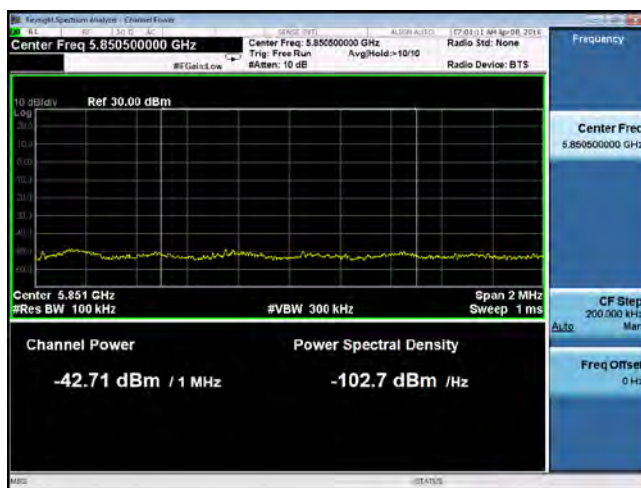

5.8GHz Band Edge-802.11n40 5795 MHz (Limit: -17 eirp)

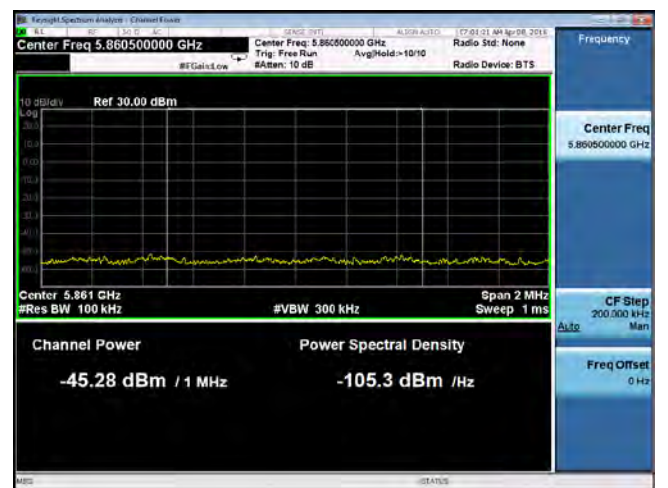

5.8GHz Band Edge-802.11n40 5795 MHz (Limit: -27 eirp)

Note: The results above show only the worst case. Antenna gain = 4.9 dBi.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/03/2015	1 Year	06/03/2016	☒
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	☒
Radiated Emissions						
R & S Receiver	ESL6	100178	05/27/2015	1 Year	05/27/2016	☒
R & S Receiver	ESIB 40	100179	06/03/2015	1 Year	06/03/2016	☒
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	03/30/2016	1 Year	03/30/2017	☒
Preamplifier (100KHz-7GHz)	LPA-6-30	11140711	02/10/2016	1 Year	02/10/2017	☒
ETS-Lingren Loop Antenna	6512	00049120	08/20/2015	1 Year	08/20/2016	☐
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/15/2015	1 Year	08/15/2016	☒
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/25/2015	1 Year	08/25/2016	☒
3 Meters SAC	3M	N/A	10/30/2015	1 Year	10/30/2016	☒
10 Meters SAC	10M	N/A	05/06/2015	1 Year	05/06/2016	☒
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY50210206	10/27/2015	1 Year	10/27/2016	☒
R & S Receiver	ESIB 40	100179	06/03/2015	1 Year	06/03/2016	☒
Test Equity Environment Chamber	1007H	61201	07/28/2015	1 Year	07/28/2016	☒
USB RF Power Sensor	7002-006	159860	09/22/2015	1 Year	09/22/2016	☒

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)		Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2