

# USER'S MANUAL

*of*

## *Model: C6003*



**Aspirit Enterprises, Inc.**

**TEL: +886-2-89535296 (Rep) FAX: +886-2-89535279**

**E-mail: [tires.monitor@msa.hinet.net](mailto:tires.monitor@msa.hinet.net)**


**<http://www.tiresmonitor.com.tw>**

## Product Specification:

<b>Frequency</b>	<b>433.92 MHz</b>	<b>Alarm Feature</b>	<b>Buzzer &amp; LED lighting flash</b>
<b>Transmission Function</b>	<b>Wireless</b>	<b>Display Mode</b>	<b>LED Display</b>
<b>Control Button</b>	<b>Power On/Off</b>	<b>Pressure Range</b>	<b>Front Tire: 30+/-2 psi</b>
	<b>Power Reset/Clear</b>		<b>Rear tire: 32+/-2 psi</b>
<b>Dimension</b>	<b>RX: 76 mm L x 42 mm W x 19.5 mm H</b> 48 g	<b>Power Supply</b>	<b>TX: 3 V Lithium Battery-CR1632</b>
	<b>TX: 31mm H x 20.8mm</b> 12.5 g		<b>RX: 1.5V Alkaline Battery-2 x 4A's</b>

Product Explanation: This security system will automatically be triggered and examine as well the tire pressure condition whenever the driver starts the engine. Even if the driver has accelerated the speed up to 150 km (93 mile), this system is still able to detect the tire pressure condition consistently. Essentially, the warning mode feature will mostly be relied upon as the Front Tire and Rear Tire pressure values have dropped down to 30+/- 2 psi and 32 +/- 2 psi, respectively. There will be two different kinds of warning indications on the display panel. One of the warning indications is the visual warning signal – a red flash light, and the other one is an audio warning to inform the driver of the tire condition relating to the tire pressure such that it is danger to continue operating the vehicle. The Transmitter will immediately send the audio signal to the Receiver Module when the system has found out the abnormal condition. At the same time, a Red Flash Light signal on the Receiver Module panel will be on to confirm the driver regarding the tire condition. The visual warning indication will be off only when the driver has taken a further action or pressed the reset button to clear the stored memory.

## Display Panel

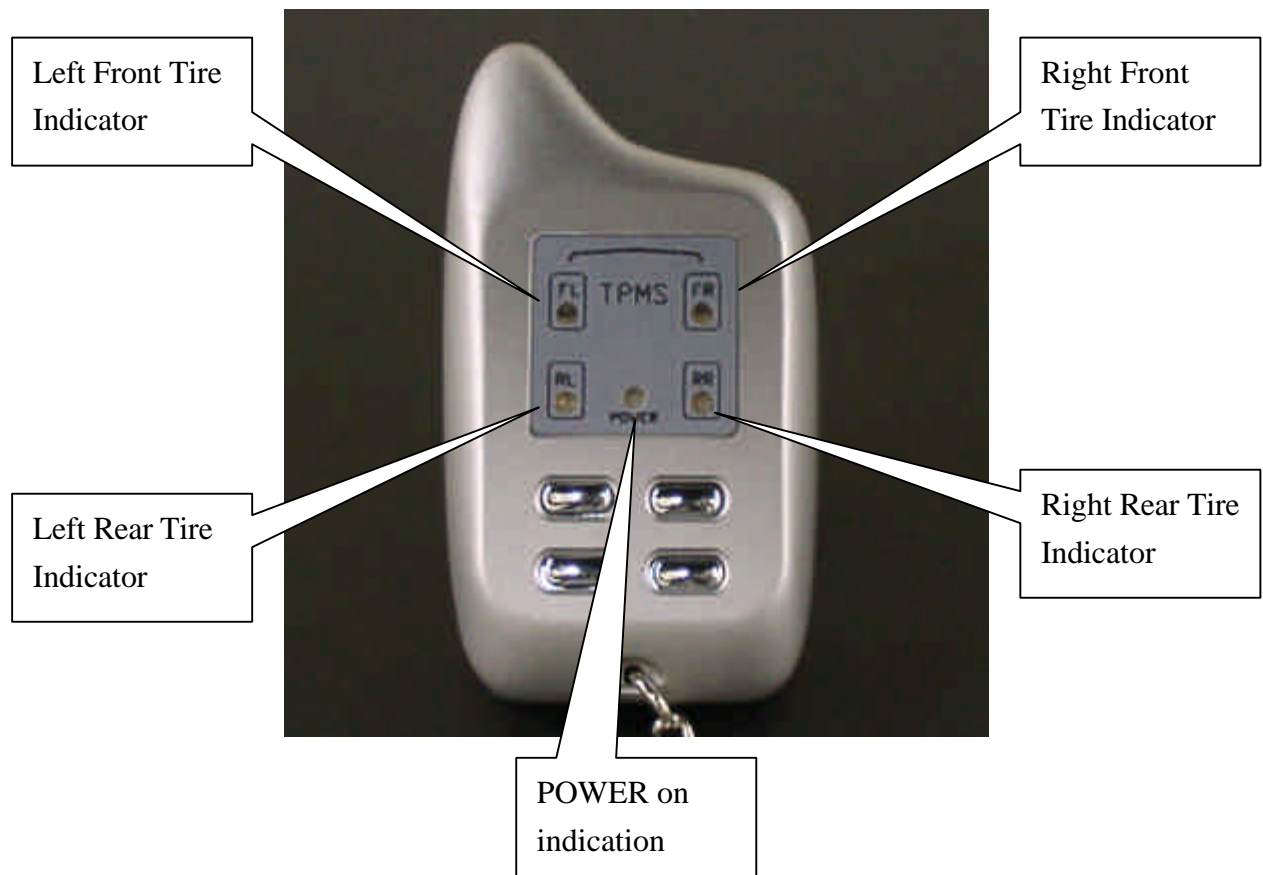

Aspirit Enterprises, Inc.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATIONS IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:

- ( 1 ) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE AND
- ( 2 ) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRIED OPERATION.

Notice : The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The term "IC:" before the radio certification number only signifies that Industry Canada Technical specifications were met.

Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.