



**A RADIO TEST REPORT
FOR
SIMOCO EMEA LTD
ON
SPD650 and SPD660
DOCUMENT NO. TRA-009125-03-47-00-A**

HULL

Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
T +44 (0)1482 801801 **F** +44 (0)1482 801806 **E** test@tracglobal.com
www.tracglobal.com

TRaC Wireless Test Report : TRA-009125-03-47-00-A

Applicant : Simoco EMEA Ltd

Apparatus : SPD650 and SPD660

Specification(s) : CFR47 Part 90 & RSS119

Purpose of Test : Certification

FCCID : STZSDP600TU

IC Unique Product number : 7068A-SDP600TU


John Charters

Authorised by : Radio Product Manager

Issue Date : 12th July 2013

Authorised Copy Number : PDF

Contents

| | | |
|-------------|---|----|
| Section 1: | Introduction | 4 |
| 1.1 | General | 4 |
| 1.2 | Tests Requested By | 5 |
| 1.3 | Manufacturer | 5 |
| 1.4 | Apparatus Assessed | 5 |
| 1.5 | Test Result Summary | 6 |
| 1.6 | Standard References | 7 |
| 1.6 | Notes Relating To Assessment | 8 |
| 1.7 | Deviations from Test Standards | 8 |
| Section 2: | Measurement Uncertainty | 9 |
| 2.1 | Measurement Uncertainty Values | 9 |
| Section 3: | Modifications | 11 |
| 3.1 | Modifications Performed During Assessment | 11 |
| Appendix A: | Formal Emission Test Results | 12 |
| A1 | RF Output Power | 13 |
| A2 | Emissions Mask | 14 |
| A3 | Occupied Bandwidth | 15 |
| A4 | Spurious Emissions at Antenna Terminals | 16 |
| A5 | Radiated Electric Field Emissions | 17 |
| A6 | Frequency Stability | 20 |
| A7 | Transient Behaviour | 22 |
| A8 | Power Line Conducted Emissions | 23 |
| A9 | Unintentional Radiated Emissions | 26 |
| A10 | Modulation Characteristics | 30 |
| Appendix B: | Supporting Graphical Data | 31 |
| Appendix C: | Additional Test and Sample Details | 72 |
| Appendix D: | Additional Information | 78 |
| Appendix F: | Photographs and Figures | 79 |

Section 1:

Introduction

1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Global []

Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Global [X]

Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: D. Winstanley

Report author: D. Winstanley

This report must not be reproduced except in full without prior written permission from TRaC Global.

1.2 Tests Requested By

This testing in this report was requested by :

Simoco EMEA Ltd
Field House
Uttoxeter Old Road
Derby
DE1 1NH
Field House

1.3 Manufacturer

As Above

1.4 Apparatus Assessed

The following apparatus was assessed between 13th February 2013 – 22nd April 2013

SPD650 and SPD660

The SDP650 and SDP660 are multi-mode PMR/ DMR Portable Handset Radios operating with 12.5 kHz channel spacing with the following emissions:

11k0F3E – Analogue speech
7k60FXE – DMR 4FSK 9600 bps TDMA digital speech and data
7k60FXD – DMR 4FSK 9600 bps TDMA digital data

The SPD650 and SPD660 are DMR Portable Handset Radios capable of operating with 12.5 kHz channel spacing in analogue mode and 12.5 kHz in Digital Mode.

The SDP660 model offers full keypad functionality for telephony, complex groups, advanced data messaging and a total of 12 programmable function keys. The SDP650 model offers seven function keys but no keypad.

1.5 Test Result Summary

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

| Test Type | FCC Part | RSS Part | Appendix in Report | Pass/ Fail |
|---|----------|----------------|--------------------|------------|
| RF Power Output | 90.205 | RSS-119 5.4 | A1 | Pass |
| Emission Mask | 90.210 | RSS-119 5.5 | A2 | Pass |
| Occupied Bandwidth | 90.210 | RSS-119 5.5 | A3 | Pass |
| Spurious Emissions at Antenna Terminals | 90.210 | RSS-119 5.8 | A4 | Pass |
| Field Strength of Spurious Emissions | 90.210 | RSS-119 5.8 | A5 | Pass |
| Frequency Stability | 90.213 | RSS-119 5.3 | A6 | Pass |
| Transient behaviour | 90.214 | RSS-119 5.9 | A7 | Pass |
| AC Powerline Conducted Emissions | 15.107 | RSS-GEN 5.5 | A8 | Pass |
| Field Strength of Un-Intentional Spurious Emissions | 15.109 | RSS-GEN 6.0 | A9 | Pass |
| Audio Frequency Response | 2.1047 | RSS-119 5.5 | A10 | Pass |
| Modulation Limiting | 2.1047 | RSS-119 5.5 | A10 | Pass |

Abbreviations used in the above table:

FCC : Federal Communications Commission
CFR : Code of Federal Regulations

RSS : Radio Standards Specification

1.6 Standard References

| | |
|-----------|---|
| 47 CFR 2 | Code of Federal Regulations, Title 47, Part 2, "Frequency allocations and Radio Telemetry Matters; General Rules and Regulations" |
| 47 CFR 90 | Code of Federal Regulations, Title 47, Part 90, "Land Mobile Radio Service" |
| 47 CFR 15 | Code of Federal Regulations, Title 47, Part 15, "Radio Frequency Devices" Subpart B, "Unintentional Radiators" |
| C63.4 | American National Standards Institute (ANSI), "Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range 9 kHz to 40 GHz" |
| RSS-GEN | Radio Standards Specification "General Requirements and Information for the Certification of Radio Apparatus" |
| RSS-119 | Radio Standards Specification "Radio transmitters and receivers operating in the land mobile and fixed services in the frequency range 27.41-960MHz" |

1.6 Notes Relating To Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

| | |
|---------------------|-----------------|
| Temperature | : 17 to 23 °C |
| Humidity | : 45 to 75 % |
| Barometric Pressure | : 86 to 106 kPa |

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of 47 CFR Part 2.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values**

For the test data recorded the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**

Uncertainty in test result (Spectrum Analyser) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Power Meter) = **0.113ppm**

Uncertainty in test result (Spectrum Analyser) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**,

Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz – 18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result – Up to 8.1GHz = **3.31dB**

Uncertainty in test result – 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result – 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result – Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**,
Uncertainty in time measurement = **0.59%**,
Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix, in addition to those listed in section 1.5

| | | | |
|------|---------------------------------|------|--------------------------------|
| Spec | : Specification | ALSR | : Absorber Lined Screened Room |
| Mod | : Modification | OATS | : Open Area Test Site |
| EUT | : Equipment Under Test | ATS | : Alternative Test Site |
| SE | : Support Equipment | Ref | : Reference |
| L | : Live Power Line | Freq | : Frequency |
| N | : Neutral Power Line | MD | : Measurement Distance |
| E | : Earth Power Line | SD | : Spec Distance |
| Pk | : Peak Detector | Pol | : Polarisation |
| QP | : Quasi-Peak Detector | H | : Horizontal Polarisation |
| Av | : Average Detector | V | : Vertical Polarisation |
| CDN | : Coupling & decoupling network | | |

A1 RF Output Power

| Test Details: | |
|------------------------|---|
| FCC Regulation | Title 47 of the CFR: Part 90.205, RSS-119 Section 5.4 |
| Measurement standard | Title 47 of the CFR: Part 2.1046, RSS-GEN Section 4.8 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| Temperature | 21 |
| Humidity | 50 |
| EUT set up | Refer to Appendix C |

| SPD650 | | | | | |
|-----------------|----------------------|-------------------|----------------|-------|---------|
| Frequency (MHz) | Measured Power (dBm) | Rated Power (dBm) | Variation (dB) | Limit | Verdict |
| 412.950 | 36.30 | 37.00 | -0.70 | ±1dB | Pass |
| 459.075 | 36.30 | 37.00 | -0.70 | ±1dB | Pass |

| SPD660 | | | | | |
|-----------------|----------------------|-------------------|----------------|-------|---------|
| Frequency (MHz) | Measured Power (dBm) | Rated Power (dBm) | Variation (dB) | Limit | Verdict |
| 412.950 | 36.80 | 37.00 | -0.20 | ±1dB | Pass |
| 459.075 | 36.80 | 37.00 | -0.30 | ±1dB | Pass |

Both variants utilise the same RF paths therefore conducted testing is performed on the highest power unit

Limit

The output power shall be within ±1dB of the manufacturers rated output power

Result

The SPD650 and SPD660 were found to comply with the limits

A2 Emissions Mask

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.210, RSS-119 Section 5.5 |
| Measurement standard | Title 47 of the CFR: Part 2.1051 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

Both variants utilise the same RF paths, testing was performed on the highest power unit, the SPD660.

Limit

Mask D – 12.5 kHz channels with audio filter

On any frequency removed from the centre of the authorised bandwidth (f_0) by the following frequency offsets

| | | | | |
|------------------|---|-----------|--------------------------|-----------------|
| ± 0 kHz | - | 5.625 kHz | 0 | dB |
| ± 5.625 kHz | - | 12.5 kHz | 7.27 ($f_d - 2.88$ kHz) | dB |
| $> \pm 12.5$ kHz | - | | 50 + 10 Log P or 70* | dB |
| $> \pm 50$ kHz | | | 43 + 10 Log P | dB [#] |

Notes:

$$(10 \log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

$$(10 \log P_{\text{watts}}) - (50 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -20 \text{ dBm}$$

* whichever is the lesser attenuation

[#] Not applicable for RSS-119

Results

The SPD660 was found to comply with the limits

See plots in Appendix B.

A3 Occupied Bandwidth

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.210, RSS-119 Section 5.5 |
| Measurement standard | Title 47 of the CFR: Part 2.1049, RSS-GEN Section 4.6 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

Both variants utilise the same RF paths, testing was performed on the highest power unit, the SPD660.

| Frequency Of Operation (MHz) | Channel Spacing | |
|------------------------------------|----------------------|---------------------|
| | 12.5 kHz Analogue | 12.5 kHz Digital |
| 412.950 | 5.1923 kHz | 7.2436 kHz |
| 459.075 | 5.1923 kHz | 6.9872 kHz |

Note 1 Measurements on 12.5 kHz channels made with 100Hz RBW
 Figures may be rounded up/down.

Limit

| Channel Spacing | Bandwidth Limitation |
|-----------------|----------------------|
| 12.5 kHz | 11.25 kHz |

Result

The SPD660 was found to comply with the limits

A4 Spurious Emissions at Antenna Terminals

| Test Details: | |
|------------------------|----------------------------------|
| Regulation | Title 47 of the CFR: Part 90.210 |
| Measurement standard | Title 47 of the CFR: Part 2.1051 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

| Operating Frequency – 412.950 MHz | | | | | |
|-----------------------------------|-------------------------|----------------------|--------------------------------|-------------------------------|-----------|
| Frequency Range (MHz) | Freq. of Emission (MHz) | Measured Level (dBm) | Attenuator & Cable Losses (dB) | Spurious Emission Level (dBm) | Limit dBm |
| 9 kHz - 16GHz | 350.703 | -67.73 | 36.45 | -31.7 | -13 |
| | 475.202 | -68.39 | 36.45 | -32.4 | -13 |
| | 825.890 | -48.16 | 10.94 | -37.6 | -13 |
| | 1238.850 | -59.20 | 19.18 | -40.5 | -13 |

| Operating Frequency – 459.075 MHz | | | | | |
|-----------------------------------|-------------------------|----------------------|--------------------------------|-------------------------------|-----------|
| Frequency Range (MHz) | Freq. of Emission (MHz) | Measured Level (dBm) | Attenuator & Cable Losses (dB) | Spurious Emission Level (dBm) | Limit dBm |
| 9 kHz - 16GHz | 442.942 | -66.90 | 36.45 | -30.90 | -13 |
| | 475.198 | -66.36 | 36.45 | -30.40 | -13 |
| | 918.147 | -54.76 | 11.93 | -43.30 | -13 |
| | 1377.225 | -54.40 | 12.43 | -42.50 | -13 |

Note Emissions checked upto 16GHz, 10 x the GPS operating frequency.

Limit

Limit is determined by the outermost step of the emissions mask and is calculated as follows:

At least $43 + 10 \log P$ dB

$$(10\log P_{\text{watts}}) - (43 + 10\log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

Limit reduces to $(10 \log P_{\text{watts}}) - (50 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -20 \text{ dBm}$ for RSS-119 Mask D

Result

The SPD660 was found to comply with the limits

A5 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious emissions.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

3m alternative test site : X

The effect of the EUT set-up on the measurements is summarised in note (c) below.

| Test Details: SPD 650 | |
|--------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.210, RSS-119 Section 5.8 |
| Measurement standard | Title 47 of the CFR: Part 2.1053, RSS-GEN Section 4.9 |
| Frequency range | 30 MHz – 16 GHz |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | S01, S08, S12, Mic/Speaker Handset |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Photographs (Appendix F) | 1 & 2 |

| Operating Frequency – 412.950MHz | | | |
|----------------------------------|--|----------------|-------------|
| FREQUENCY RANGE | FREQ. (MHz) | ERP/EIRP (dBm) | LIMIT (dBm) |
| 30 MHz – 16 GHz | No significant Emissions Within 20 dB of the limit | | -13 |

| Operating Frequency – 459.075 MHz | | | |
|-----------------------------------|--|----------------|-------------|
| FREQUENCY RANGE | FREQ. (MHz) | ERP/EIRP (dBm) | LIMIT (dBm) |
| 30 MHz – 16 GHz | No significant Emissions Within 20 dB of the limit | | -13 |

Result

The SPD650 was found to comply with the limits

| Test Details: SPD 660 | |
|------------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.210, RSS-119 Section 5.8 |
| Measurement standard | Title 47 of the CFR: Part 2.1053, RSS-GEN Section 4.9 |
| Frequency range | 30 MHz – 16 GHz |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | S01, S08, S12, Mic/Speaker Handset |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Photographs (Appendix F) | 1 & 2 |

| Operating Frequency – 412.950MHz | | | |
|---|--|----------------|-------------|
| FREQUENCY RANGE | FREQ. (MHz) | ERP/EIRP (dBm) | LIMIT (dBm) |
| 30 MHz – 16 GHz | No significant Emissions Within 20 dB of the limit | | -13 |

| Operating Frequency – 459.075 MHz | | | |
|--|--|----------------|-------------|
| FREQUENCY RANGE | FREQ. (MHz) | ERP/EIRP (dBm) | LIMIT (dBm) |
| 30 MHz – 16 GHz | No significant Emissions Within 20 dB of the limit | | -13 |

Result

The SPD660 was found to comply with the limits

Notes:

1. Emissions Checked up to a minimum of 10 times Fc, this is extended if significant emissions are detected. Emissions Checked up to 10 times the highest frequency used within the EUT, in the case of the SPD650 and SPD660 this is the GPS receiver.
2. The unit was mounted on a turntable and rotated through 360° and in 3 orthogonal planes to find the worst case emission.
3. For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak Detector RBW = 1MHz; VBW = ≥RBW

4. Limit is determined as the outermost step of the emissions mask and is calculated as follows.

At least $43 + 10 \log P$ dB

$$(10\log P_{\text{watts}}) - (43 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -13 \text{ dBm}$$

Limit reduces to $(10 \log P_{\text{watts}}) - (50 + 10 \log (P_{\text{watts}} * 1000)) = \text{LIMIT} = -20 \text{ dBm}$ for RSS-119 Mask D

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 2.1057.

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

| | See (i) | See (ii) | See (iii) | See (iv) |
|--|---------|----------|-----------|----------|
| Effect of EUT operating mode on emission levels | ✓ | | | |
| Effect of EUT internal configuration on emission levels | ✓ | | | |
| Effect of Position of EUT cables & samples on emission levels | | | ✓ | |
| (i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D | | | | |

A6 Frequency Stability

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.213, RSS-119 Section 5.3 |
| Measurement standard | Title 47 of the CFR: Part 2.1055, RSS-GEN Section 4.7 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

| Voltage Variation | | | | | |
|-----------------------|---------------|--------------------------------|---------------------------------|-------|-----------|
| Temperature °C | Vnom (Vdc) | Measured Frequency (MHz) | Frequency Difference (Hz) | ppm | Pass/Fail |
| +20 | 7.2 | 412.95020 | 0.20 | 0.48 | Pass* |
| +20 | 85% | 412.95018 | -0.02 | -0.05 | Pass |
| +20 | 115% | 412.95023 | 0.03 | 0.07 | Pass |
| Temperature Variation | | | | | |
| Temperature °C | Vnom (Vdc) | Measured Frequency (MHz) | Frequency Difference (Hz) | ppm | Pass/Fail |
| -30 | 7.2 | 412.94977 | -0.43 | -1.04 | Pass |
| -20 | 7.2 | 412.94984 | -0.36 | -0.87 | Pass |
| -10 | 7.2 | 412.94994 | -0.26 | -0.63 | Pass |
| 0 | 7.2 | 412.94997 | -0.23 | -0.56 | Pass |
| 10 | 7.2 | 412.95010 | -0.10 | -0.24 | Pass |
| 20 | 7.2 | 412.95020 | 0.20 | 0.48 | Pass* |
| 30 | 7.2 | 412.95017 | -0.03 | -0.07 | Pass |
| 40 | 7.2 | 412.94995 | -0.25 | -0.61 | Pass |
| 50 | 7.2 | 412.95005 | -0.15 | -0.36 | Pass |

* Measured f_c at Tnom Vnom used compared to declared operating frequency for drift.

* Measured f_c at Tnom Vnom used as reference frequency drift calculations of measured f_c at extreme voltage / temperature.

Limit

±1.5 ppm (tightest applicable limit)

Result

The SPD660 was found to comply with the limits

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.213, RSS-119 Section 5.3 |
| Measurement standard | Title 47 of the CFR: Part 2.1055, RSS-GEN Section 4.7 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

| Voltage Variation | | | | | |
|-----------------------|---------------|--------------------------------|---------------------------------|-------|-----------|
| Temperature °C | Vnom (Vdc) | Measured Frequency (MHz) | Frequency Difference (Hz) | ppm | Pass/Fail |
| +20 | 7.2 | 459.07521 | 0.21 | 0.46 | Pass* |
| +20 | 85% | 459.07520 | -0.01 | -0.02 | Pass |
| +20 | 115% | 459.07518 | -0.03 | -0.07 | Pass |
| Temperature Variation | | | | | |
| Temperature °C | Vnom (Vdc) | Measured Frequency (MHz) | Frequency Difference (Hz) | ppm | Pass/Fail |
| -30 | 7.2 | 459.07447 | -0.74 | -1.61 | Pass |
| -20 | 7.2 | 459.07496 | -0.25 | -0.54 | Pass |
| -10 | 7.2 | 459.07503 | -0.18 | -0.39 | Pass |
| 0 | 7.2 | 459.07508 | -0.13 | -0.28 | Pass |
| 10 | 7.2 | 459.07508 | -0.13 | -0.28 | Pass |
| 20 | 7.2 | 459.07521 | 0.21 | 0.46 | Pass* |
| 30 | 7.2 | 459.07519 | -0.02 | -0.04 | Pass |
| 40 | 7.2 | 459.07496 | -0.25 | -0.54 | Pass |
| 50 | 7.2 | 459.07504 | -0.17 | -0.37 | Pass |

* Measured f_c at Tnom Vnom used compared to declared operating frequency for drift.

* Measured f_c at Tnom Vnom used as reference frequency drift calculations of measured f_c at extreme voltage / temperature.

Limit

±1.5 ppm (tightest applicable limit)

Result

The SPD660 was found to comply with the limits

A7 Transient Behaviour

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR: Part 90.214, RSS-119 Section 5.9 |
| Measurement standard | Title 47 of the CFR: Part 2.1055, |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

| | | |
|----------|-------------|-------------|
| Channel | 412.950 MHz | 459.075 MHz |
| Time, t1 | Compliant | Compliant |
| Time, t2 | Compliant | Compliant |
| Time, t3 | Compliant | Compliant |

Limit

| Time interval | Maximum Frequency Difference | All Equipment | |
|-------------------|------------------------------|---------------|---------------|
| | | 150 – 174 MHz | 421 – 512 MHz |
| 12.5 kHz channels | | | |
| t1 | ±12.5 kHz | 5.0 ms | 10.0 ms |
| t2 | ±6.25 kHz | 20.0 ms | 25.0 ms |
| t3 | ±12.5 kHz | 5.0 ms | 10.0 ms |

Result

The SPD660 was found to comply with the limits

A8 Power Line Conducted Emissions

Previous power line conducted emission measurements were performed with a peak & average detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b). Where applicable formal measurements of the emissions were performed with an average and/or quasi peak detector.

| Test Details: | |
|--------------------------|---|
| Regulation | Title 47 of the CFR: Part 15.107, RSS-GEN Section 5.5 |
| Measurement standard | ANSI C63.10:2003 |
| Frequency range | 150kHz to 30MHz |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | S01, S08, S12, Mic/Speaker Handset |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Photographs (Appendix F) | 3 |

The EUT was operated in standby mode. The worst-case power line conducted emission measurements are listed below:

Results measured using the average detector compared to the average limit

| SPD650 | | | | | | |
|---------|------------|---------------|-----------|-------------------|-------------|----------------|
| Ref No. | Freq (MHz) | Result (dBuV) | Conductor | Spec Limit (dBuV) | Margin (dB) | Result Summary |
| 1 | 0.27 | 32.12 | Live | 51.27 | 19.15 | Pass |
| 2 | 0.40 | 29.97 | Live | 47.96 | 17.99 | Pass |
| 3 | 0.40 | 29.41 | Live | 47.85 | 18.44 | Pass |
| 4 | 0.53 | 29.78 | Live | 46.00 | 16.22 | Pass |
| 5 | 0.60 | 29.13 | Live | 46.00 | 16.87 | Pass |
| 6 | 0.66 | 26.42 | Neutral | 46.00 | 19.58 | Pass |
| 7 | 0.80 | 29.53 | Live | 46.00 | 16.47 | Pass |
| 8 | 0.86 | 27.44 | Neutral | 46.00 | 18.56 | Pass |
| 9 | 1.00 | 27.50 | Live | 46.00 | 18.50 | Pass |
| 10 | 1.06 | 26.49 | Live | 46.00 | 19.51 | Pass |
| 11 | 1.13 | 26.99 | Neutral | 46.00 | 19.01 | Pass |
| 12 | 4.44 | 27.65 | Live | 46.00 | 18.35 | Pass |
| 13 | 4.97 | 32.31 | Live | 46.00 | 13.69 | Pass |
| 14 | 5.17 | 35.40 | Live | 50.00 | 14.60 | Pass |
| 15 | 5.23 | 34.59 | Live | 50.00 | 15.41 | Pass |
| 16 | 5.63 | 32.75 | Live | 50.00 | 17.25 | Pass |
| 17 | 16.23 | 30.53 | Neutral | 50.00 | 19.47 | Pass |

Results measured using the quasi-peak detector compared to the quasi-peak limit

| SPD650 | | | | | | |
|---------------|------------|---------------|-----------|-------------------|-------------|----------------|
| Ref No. | Freq (MHz) | Result (dBuV) | Conductor | Spec Limit (dBuV) | Margin (dB) | Result Summary |
| 1 | 0.20 | 46.75 | Live | 63.61 | 16.86 | Pass |
| 2 | 4.97 | 37.19 | Neutral | 56.00 | 18.81 | Pass |
| 3 | 15.70 | 41.42 | Neutral | 60.00 | 18.58 | Pass |
| 4 | 15.96 | 41.61 | Neutral | 60.00 | 18.39 | Pass |

Results measured using the average detector compared to the average limit

| SPD660 | | | | | | |
|--|------------|---------------|-----------|-------------------|-------------|----------------|
| Ref No. | Freq (MHz) | Result (dBuV) | Conductor | Spec Limit (dBuV) | Margin (dB) | Result Summary |
| No Significant Emissions Within 20 dB of Limit | | | | | | |

Results measured using the quasi-peak detector compared to the quasi-peak limit

| SPD660 | | | | | | |
|---------------|------------|---------------|-----------|-------------------|-------------|----------------|
| Ref No. | Freq (MHz) | Result (dBuV) | Conductor | Spec Limit (dBuV) | Margin (dB) | Result Summary |
| 1 | 0.2 | 47.03 | Live | 63.61 | 16.58 | Pass |

Specification limits:

Conducted disturbance at the mains port Limits.

| Frequency range MHz | Limits dB μ V | |
|---------------------|-----------------------|-----------------------|
| | Quasi-peak | Average |
| 0.15 to 0.5 | 66 to 56 ² | 56 to 46 ² |
| 0.5 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

Notes:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes:

- (a) The levels may have been rounded for display purposes.
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels :

| | See (i) | See (ii) | See (iii) | See (iv) |
|--|---------|----------|-----------|----------|
| Effect of EUT operating mode on emission levels | ✓ | | | |
| Effect of EUT internal configuration on emission levels | ✓ | | | |
| (i) Parameter defined by standard and / or single possible, refer to Appendix C (ii) Parameter defined by client and / or single possible, refer to Appendix C (iii) Parameter had a negligible effect on emission levels, refer to Appendix C (iv) Worst case determined by initial measurement, refer to Appendix C | | | | |

A9 Unintentional Radiated Emissions

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to all spurious emissions on directly related to the transmitter. The maximum permitted field strength is listed in Section 15.109. The EUT was set to operate in a transmit standby / receive mode.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

| Test Details: | |
|------------------------|---|
| Regulation | Title 47 of the CFR, Part 15.109, RSS-GEN 6.0 |
| Measurement standard | ANSI C63.10:2003 |
| Frequency range | 30 MHz – 16.3GHz |
| EUT sample number | S02, S04 |
| Modification state | 0 |
| SE in test environment | S01, S08, S12, Mic/Speaker Handset |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |
| Photographs | See Appendix F |

The worst case radiated emission measurements for spurious emissions are listed overleaf:

| SPD650 | | | | | | | | | |
|---|-----------------------|----------------------|-----------------|------------------|--------------|----------------------------|------------------|--------------------------|--------------------|
| Ref No. | FREQ. (MHz) | MEAS Rx (dB μ V) | CABLE LOSS (dB) | ANT FACT. (dB/m) | PRE AMP (dB) | FIELD ST'GH (dB μ V/m) | EXTRAP FACT (dB) | FIELD ST'GH (μ V/m) | LIMIT (μ V/m) |
| 1 | 31.85 | 7.00 | 0.5 | 16.9 | - | 24.4 | - | 16.60 | 100 |
| 2 | 34.40 | 6.80 | 0.6 | 15.6 | - | 22.9 | - | 13.96 | 100 |
| 3 | 35.60 | 9.00 | 0.6 | 14.9 | - | 24.5 | - | 16.79 | 100 |
| 4 | 36.25 | 10.20 | 0.6 | 14.6 | - | 25.4 | - | 18.62 | 100 |
| 5 | 36.80 | 14.50 | 0.6 | 14.2 | - | 29.3 | - | 29.17 | 100 |
| 6 | 37.05 | 14.20 | 0.6 | 14.1 | - | 28.9 | - | 27.86 | 100 |
| Bottom operating channel specific emissions | | | | | | | | | |
| 7 | 367.95 | 15.40 | 2.4 | 14.7 | - | 32.50 | - | 42.17 | 200 |
| 8 | 2207.68 _{Pk} | 58.67 | 2.8 | 27.8 | 36.0 | 53.27 | -9.54 | 153.60 | 5000 |
| 9 | 2207.68 _{Av} | 55.86 | 2.8 | 27.8 | 36.0 | 50.46 | -9.54 | 111.14 | 500 |
| 10 | 2575.65 _{Pk} | 58.09 | 3.1 | 28.7 | 36.0 | 53.89 | -9.54 | 164.96 | 5000 |
| 11 | 2575.65 _{Av} | 54.89 | 3.1 | 28.7 | 36.0 | 50.69 | -9.54 | 114.12 | 500 |
| 12 | 2943.59 _{Pk} | 55.96 | 3.5 | 29.6 | 36.0 | 53.06 | -9.54 | 149.93 | 5000 |
| 13 | 2943.59 _{Av} | 52.23 | 3.5 | 29.6 | 36.0 | 49.33 | -9.54 | 97.58 | 500 |
| 14 | 3311.55 _{Pk} | 54.35 | 3.2 | 31.0 | 35.8 | 52.75 | -9.54 | 144.67 | 5000 |
| 15 | 3311.55 _{Av} | 49.78 | 3.2 | 31.0 | 35.8 | 48.18 | -9.54 | 85.48 | 500 |
| 16 | 3679.49 _{Pk} | 51.80 | 3.4 | 31.8 | 35.6 | 51.40 | -9.54 | 123.85 | 5000 |
| 17 | 3679.49 _{Av} | 46.54 | 3.4 | 31.8 | 35.6 | 46.14 | -9.54 | 67.59 | 500 |
| 18 | 4047.41 _{Pk} | 52.16 | 3.6 | 32.0 | 35.5 | 52.26 | -9.54 | 136.73 | 5000 |
| 19 | 4047.41 _{Av} | 47.23 | 3.6 | 32.0 | 35.5 | 47.33 | -9.54 | 77.51 | 500 |
| Top operating channel specific emissions | | | | | | | | | |
| 20 | 414.10 | 16.80 | 2.6 | 16.6 | - | 36.0 | - | 63.10 | 200 |
| 21 | 2484.44 _{Pk} | 54.78 | 3.1 | 28.5 | 36.0 | 50.38 | -9.54 | 110.12 | 5000 |
| 22 | 2484.44 _{Av} | 49.76 | 3.1 | 28.5 | 36.0 | 45.36 | -9.54 | 61.78 | 500 |
| 23 | 2898.48 _{Pk} | 55.77 | 3.5 | 29.4 | 36.0 | 52.67 | -9.54 | 143.34 | 5000 |
| 24 | 2898.48 _{Av} | 52.53 | 3.5 | 29.4 | 36.0 | 49.43 | -9.54 | 98.71 | 500 |
| 25 | 3312.60 _{Pk} | 55.03 | 3.2 | 31.0 | 35.8 | 53.43 | -9.54 | 156.45 | 5000 |
| 26 | 3312.60 _{Av} | 51.02 | 3.2 | 31.0 | 35.8 | 49.42 | -9.54 | 98.60 | 500 |

| SPD660 | | | | | | | | | |
|---|-----------------------|----------------------|-----------------|------------------|--------------|----------------------------|------------------|--------------------------|--------------------|
| Ref No. | FREQ. (MHz) | MEAS Rx (dB μ V) | CABLE LOSS (dB) | ANT FACT. (dB/m) | PRE AMP (dB) | FIELD ST'GH (dB μ V/m) | EXTRAP FACT (dB) | FIELD ST'GH (μ V/m) | LIMIT (μ V/m) |
| 1 | 34.40 | 12.6 | 0.6 | 17.1 | - | 30.2 | - | 32.36 | 100 |
| 2 | 34.95 | 13.9 | 0.6 | 16.7 | - | 31.2 | - | 36.31 | 100 |
| 3 | 35.35 | 14.4 | 0.6 | 16.5 | - | 31.5 | - | 37.58 | 100 |
| 4 | 37.35 | 15.3 | 0.6 | 15.4 | - | 31.3 | - | 36.73 | 100 |
| 5 | 37.45 | 15.1 | 0.6 | 15.4 | - | 31.1 | - | 35.89 | 100 |
| 6 | 37.70 | 14.9 | 0.6 | 15.3 | - | 30.7 | - | 34.28 | 100 |
| 7 | 37.85 | 14.8 | 0.6 | 15.2 | - | 30.5 | - | 33.50 | 100 |
| 8 | 39.85 | 12.3 | 0.6 | 14.1 | - | 27.0 | - | 22.39 | 100 |
| 9 | 42.60 | 12 | 0.7 | 12.6 | - | 25.3 | - | 18.41 | 100 |
| 10 | 49.85 | 6.3 | 0.8 | 8.9 | - | 16.0 | - | 6.31 | 100 |
| Bottom operating channel specific emissions | | | | | | | | | |
| 11 | 367.95 | 10.00 | 2.4 | 14.7 | - | 26.70 | - | 42.17 | 200 |
| 12 | 2575.65 _{Pk} | 53.55 | 3.1 | 28.7 | 36.0 | 49.35 | -9.54 | 97.81 | 5000 |
| 13 | 2575.65 _{Av} | 51.51 | 3.1 | 28.7 | 36.0 | 47.31 | -9.54 | 77.34 | 500 |
| 14 | 2943.59 _{Pk} | 50.3 | 3.5 | 29.6 | 36.0 | 47.40 | -9.54 | 78.14 | 5000 |
| 15 | 2943.59 _{Av} | 47.75 | 3.5 | 29.6 | 36.0 | 44.85 | -9.54 | 58.26 | 500 |
| Top operating channel specific emissions | | | | | | | | | |
| 16 | 414.10 | 9.40 | 2.6 | 16.6 | - | 28.10 | - | 63.10 | 200 |
| 17 | 2898.48 _{Pk} | 51.01 | 3.5 | 29.4 | 36.0 | 47.91 | -9.54 | 82.87 | 5000 |
| 18 | 2898.48 _{Av} | 48.38 | 3.5 | 29.4 | 36.0 | 45.28 | -9.54 | 61.22 | 500 |
| 19 | 3312.60 _{Pk} | 50.36 | 3.2 | 31.0 | 35.8 | 48.76 | -9.54 | 91.39 | 5000 |
| 20 | 3312.60 _{Av} | 46.75 | 3.2 | 31.0 | 35.8 | 45.15 | -9.54 | 60.31 | 500 |

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1. For emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW = 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

| | |
|---------|---------------|
| Peak | RBW=VBW= 1MHz |
| Average | RBW=VBW= 1MHz |

The upper and lower frequency of the measurement range was decided according to 47 CFR Part 15: Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits for all emissions:

| Frequency of emission (MHz) | Field strength $\mu\text{V/m}$ | Measurement Distance m | Field strength $\text{dB}\mu\text{V/m}$ |
|-----------------------------|--------------------------------|------------------------|---|
| 0.009-0.490 | 2400/F(kHz) | 300 | 67.6/F (kHz) |
| 0.490-1.705 | 24000/F(kHz) | 30 | 87.6/F (kHz) |
| 1.705-30 | 30 | 30 | 29.5 |
| 30-88 | 100 | 3 | 40.0 |
| 88-216 | 150 | 3 | 43.5 |
| 216-960 | 200 | 3 | 46.0 |
| Above 960 | 500 | 3 | 54.0 |

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

| | See (i) | See (ii) | See (iii) | See (iv) |
|--|---------|----------|-----------|----------|
| Effect of EUT operating mode on emission levels | ✓ | | | |
| Effect of EUT internal configuration on emission levels | ✓ | | | |
| Effect of Position of EUT cables & samples on emission levels | | | ✓ | |
| (i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D | | | | |


A10 Modulation Characteristics

| Test Details: | |
|------------------------|---|
| Measurement standard | Title 47 of the CFR: Part 2.1047, RSS-119 Section 5.5 |
| EUT sample number | S02 & S04 |
| Modification state | 0 |
| SE in test environment | Interface / Control PCB |
| SE isolated from EUT | None |
| EUT set up | Refer to Appendix C |

The transmitter was tested whilst operating under the following conditions:

- 1) A signal generator was connected into the AF input and the audio frequency was then varied between 100Hz and 5kHz.
- 2) A 1kHz audio signal was applied which was used as a 0dB response reference.

The following plot shows the audio response of the transmitter.

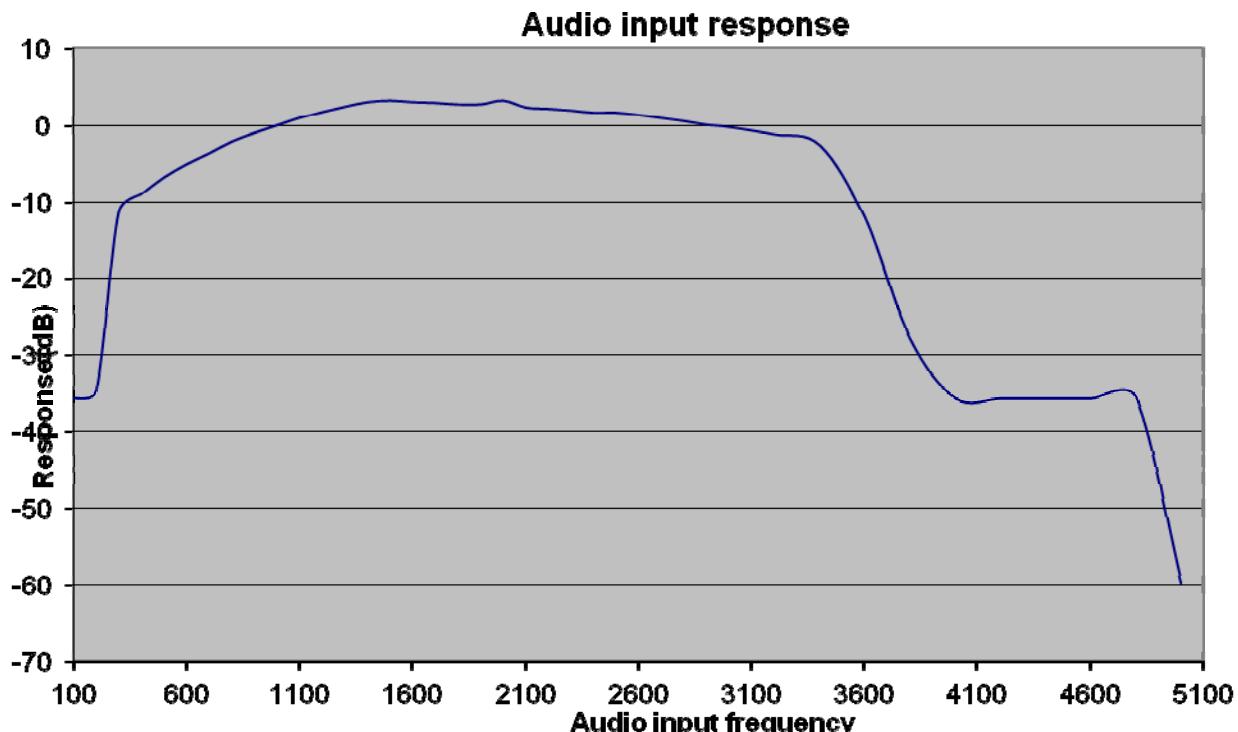


Appendix B:**Supporting Graphical Data**


This appendix contains graphical data obtained during testing.

Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

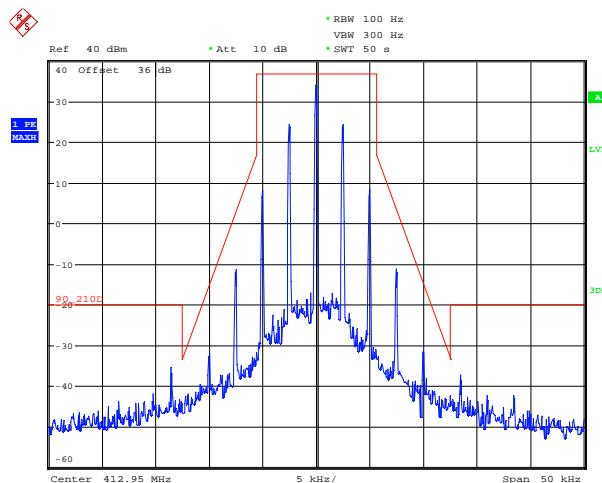


Date: 28.MAR.2013 13:05:42

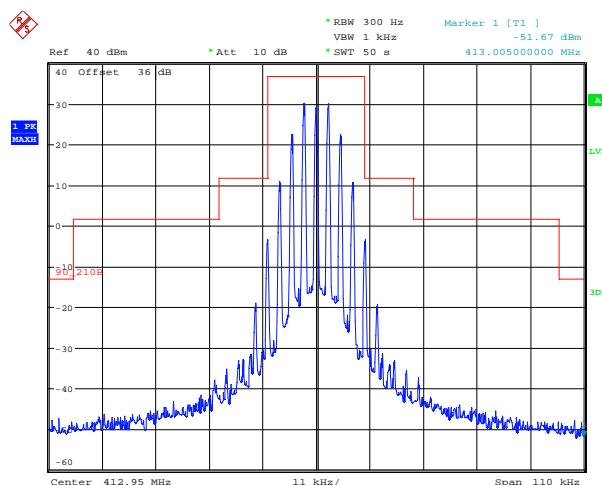
412.950 MHz Mask D – 12.5 kHz Analogue Modulation

Date: 28.MAR.2013 13:02:58


412.950 MHz Mask D – 12.5 kHz Digital Modulation

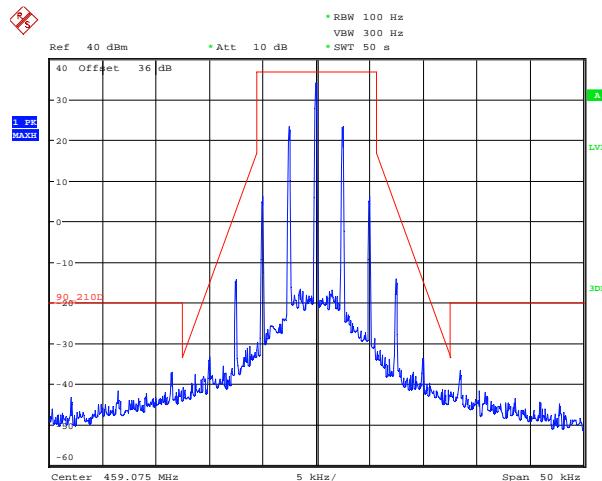

Date: 28.MAR.2013 13:08:05

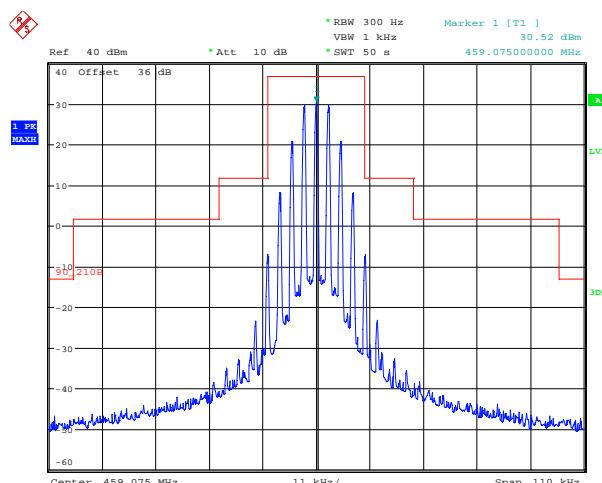
459.075 MHz Mask D – 12.5 kHz Analogue Modulation

Date: 28.MAR.2013 13:00:08

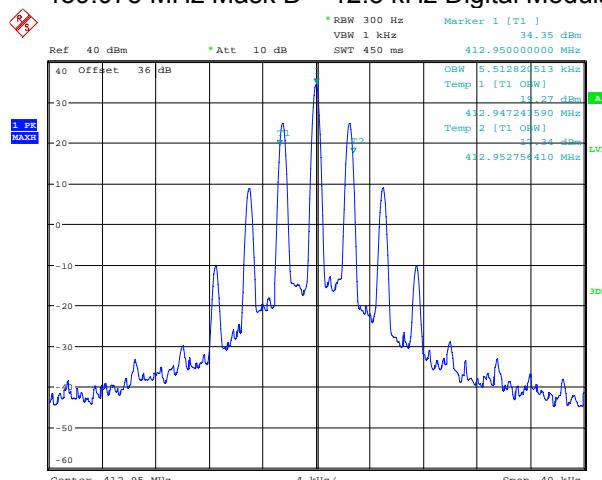459.075 MHz Mask D – 12.5 kHz Digital Modulation


Date: 28.MAR.2013 14:45:38

412.950 MHz 99% Bandwidth – 12.5 kHz Analogue Modulation

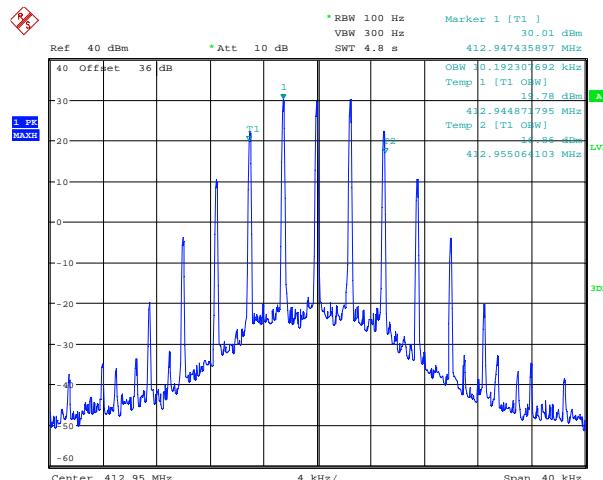


Date: 28.MAR.2013 14:54:32

412.950 MHz 99% Bandwidth – 12.5 kHz Digital Modulation

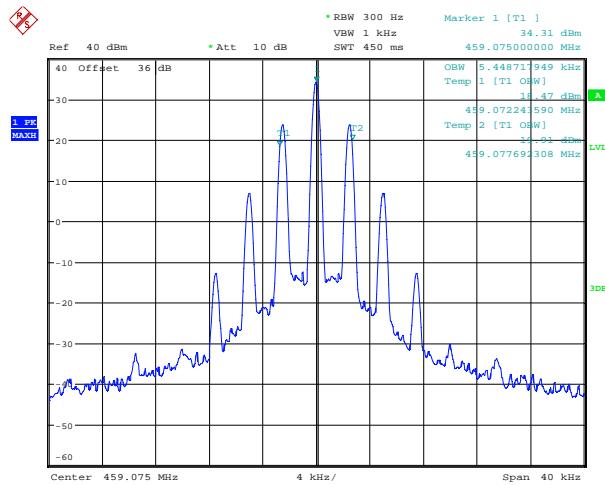

Date: 28.MAR.2013 14:46:49

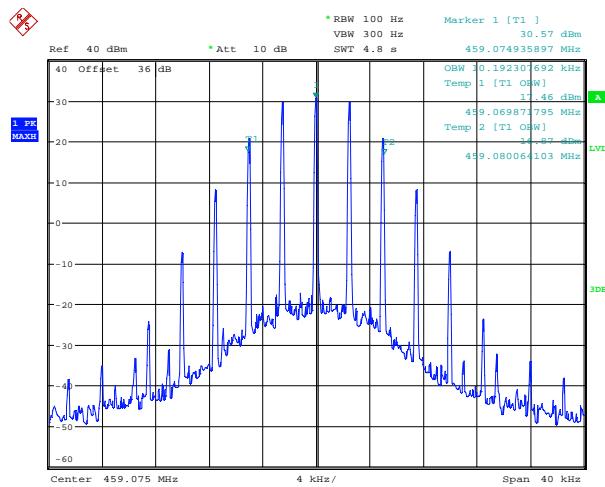
459.075 MHz 99% Bandwidth – 12.5 kHz Analogue Modulation

Date: 28.MAR.2013 14:50:25

459.075 MHz 99% Bandwidth – 12.5 kHz Digital Modulation


Spurious Emissions at antenna Terminals

412.950 MHz

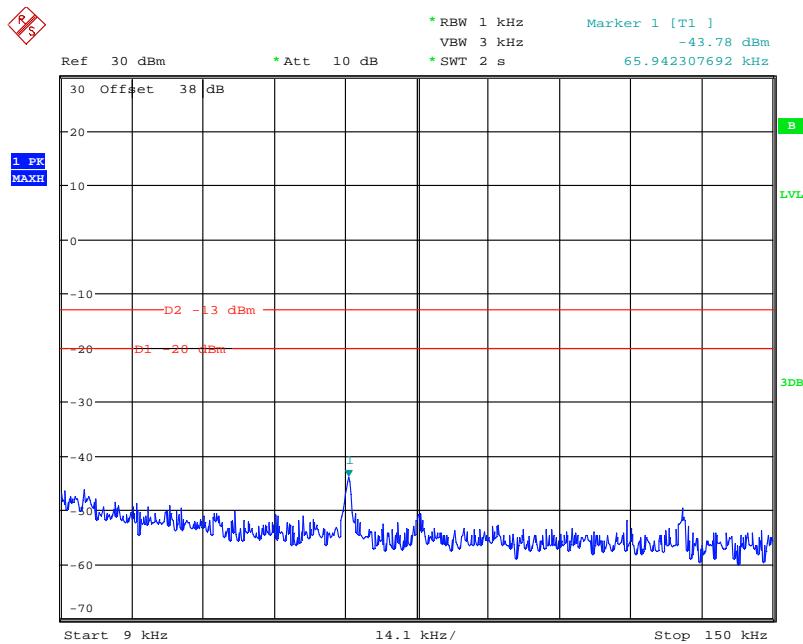

Date: 11.FEB.2013 13:23:30

9 kHz – 150 kHz

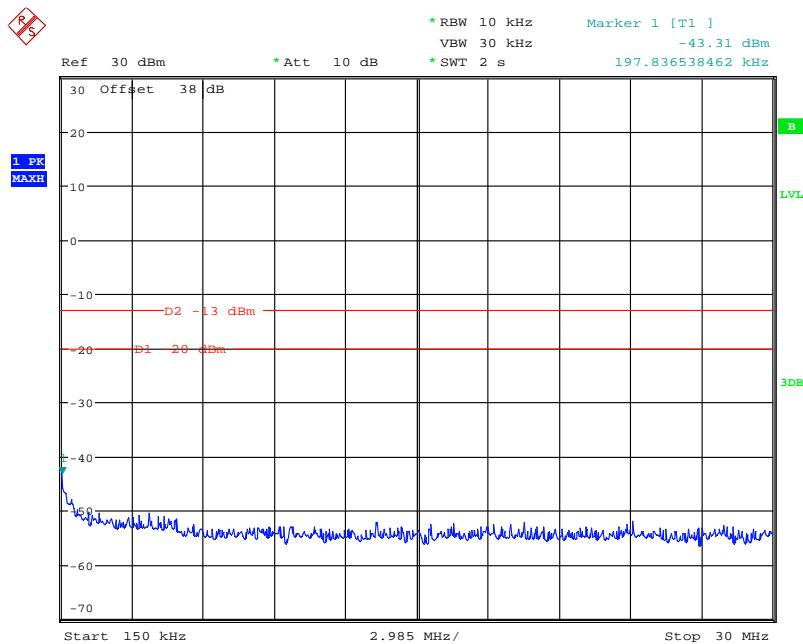


Date: 11.FEB.2013 13:24:13

150 kHz – 30 MHz


Spurious Emissions at antenna Terminals

412.950 MHz

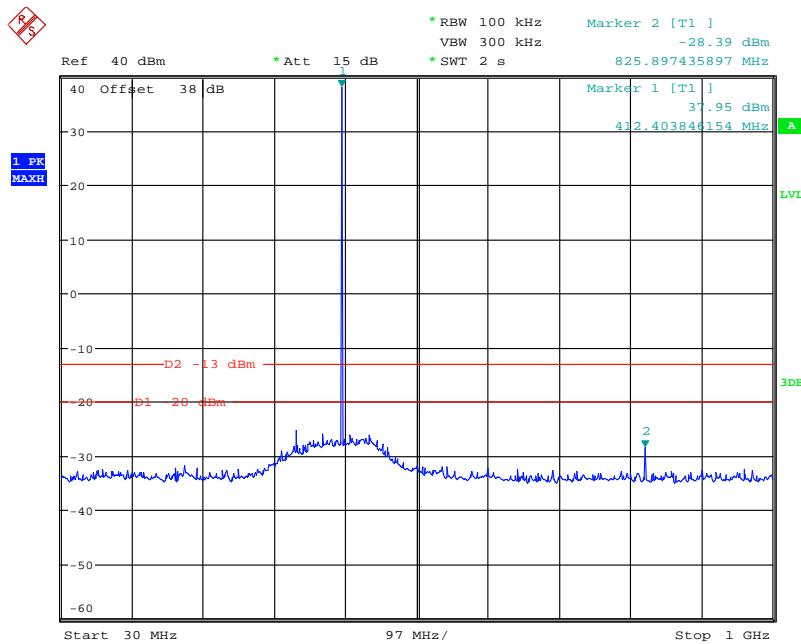

Date: 28.MAR.2013 12:34:43

30MHz – 1GHz

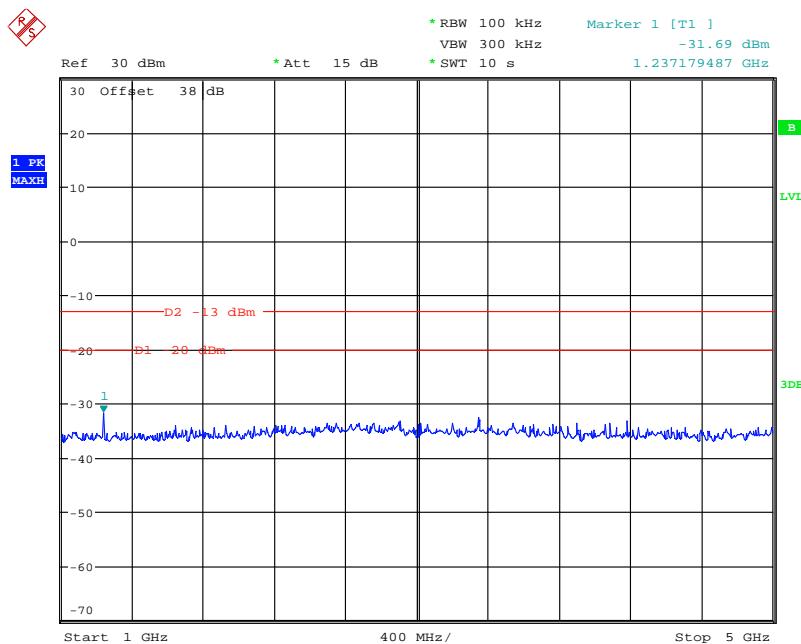


Date: 11.FEB.2013 13:20:41

1GHz – 5GHz


Spurious Emissions at antenna Terminals

412.950 MHz

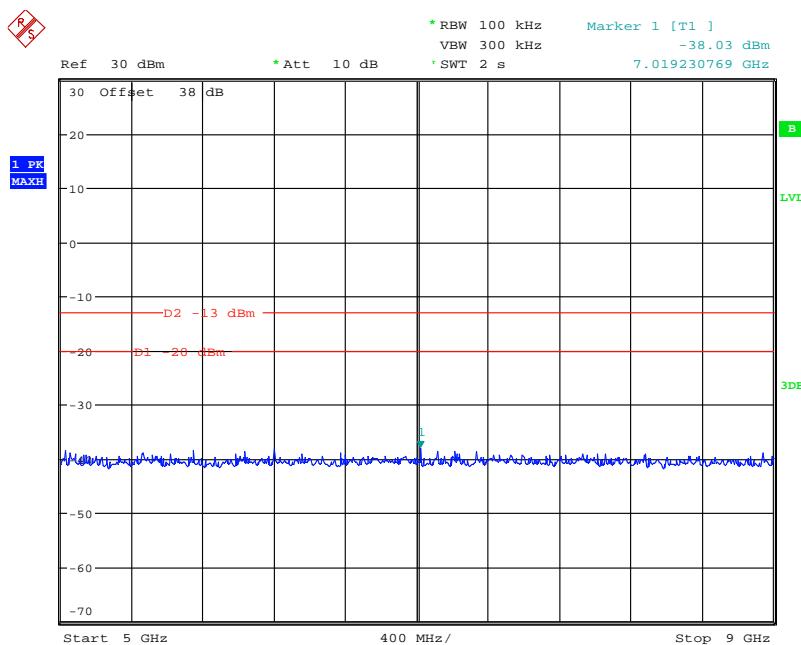

Date: 11.FEB.2013 13:22:33

5GHz – 9GHz

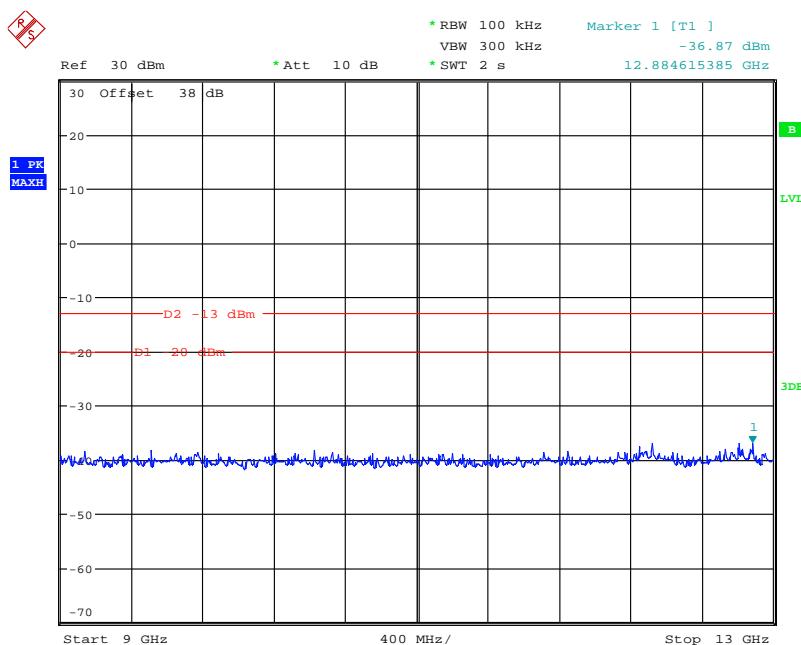


Date: 11.FEB.2013 13:22:50

9GHz – 13GHz

Spurious Emissions at antenna Terminals

412.950 MHz

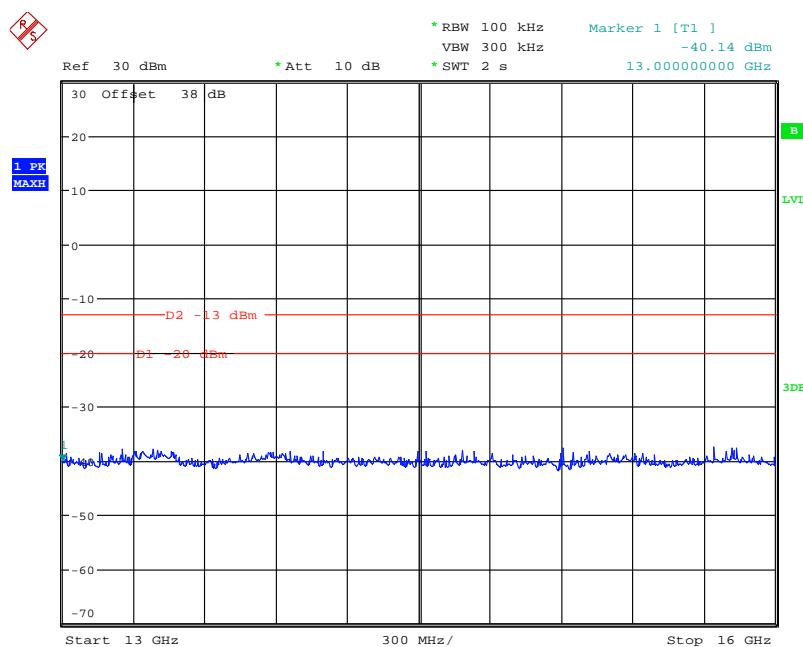


Date: 11.FEB.2013 13:23:05

13GHz – 16GHz


Spurious Emissions at antenna Terminals

459.075 MHz

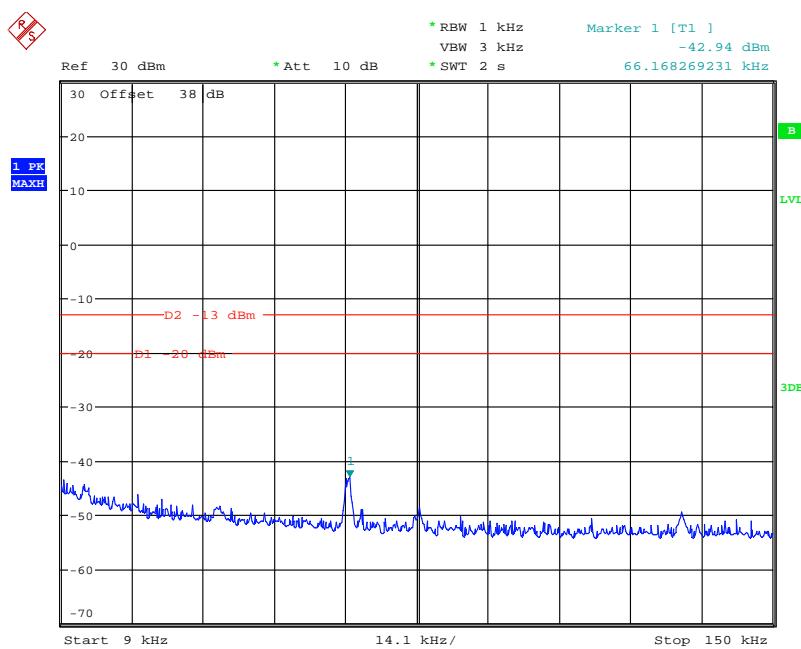

Date: 11.FEB.2013 13:30:46

9 kHz – 150 kHz

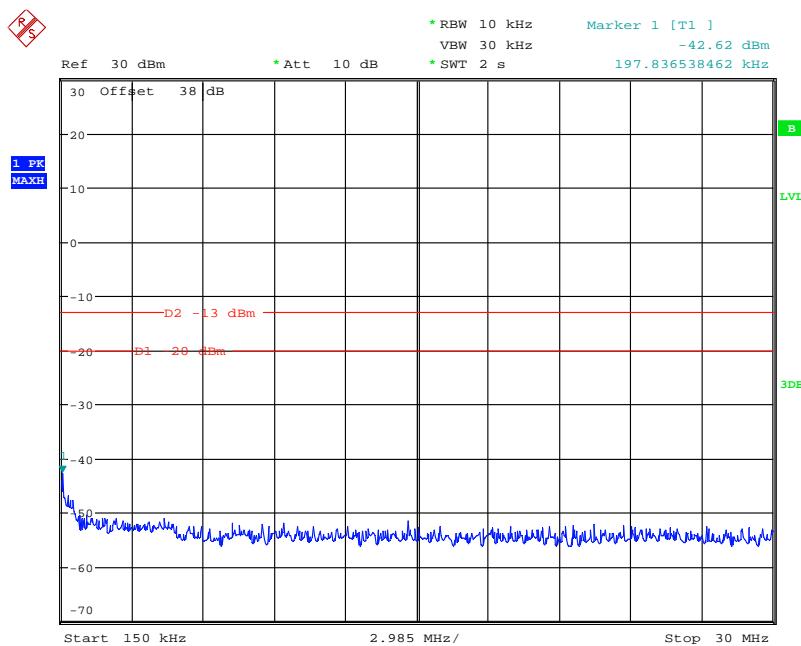


Date: 11.FEB.2013 13:24:54

150 kHz – 30 MHz


Spurious Emissions at antenna Terminals

459.075 MHz

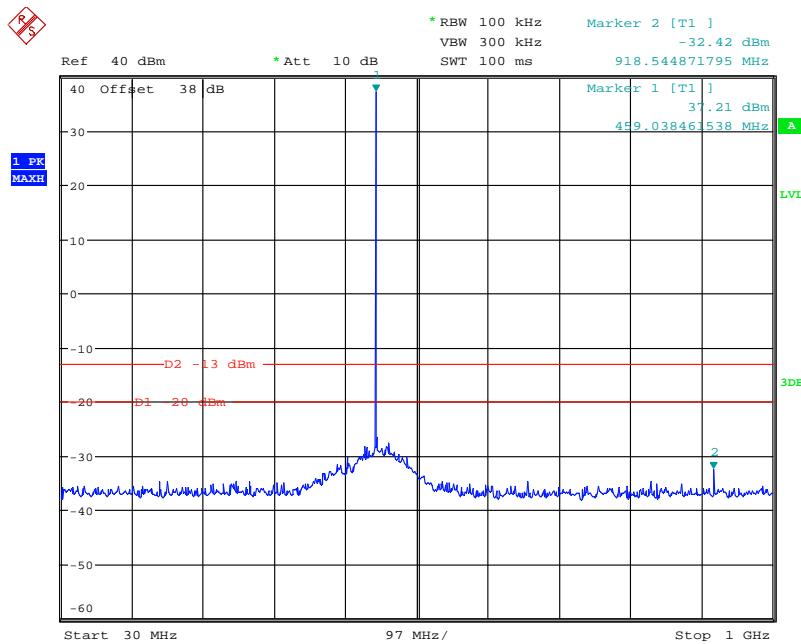

Date: 28.MAR.2013 12:41:05

30MHz – 1GHz

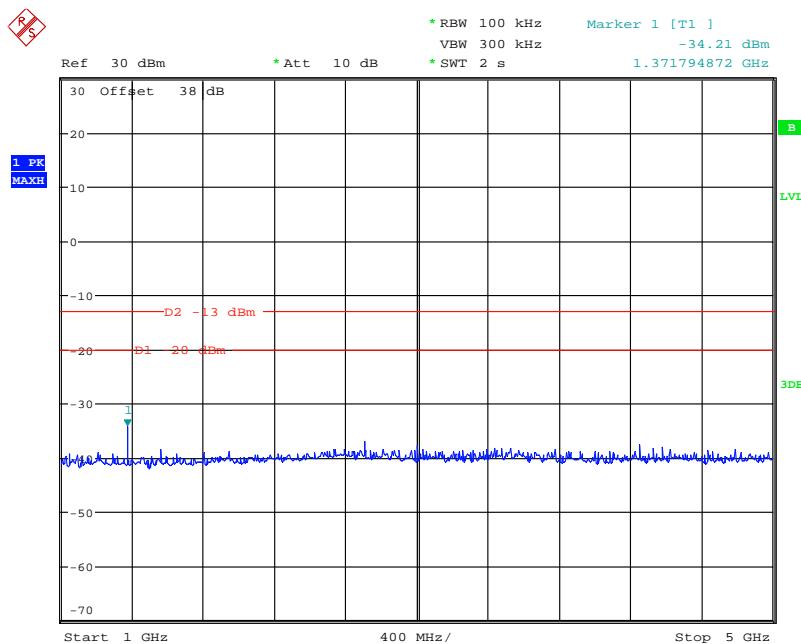


Date: 11.FEB.2013 13:31:43

1GHz – 5GHz


Spurious Emissions at antenna Terminals

459.075 MHz

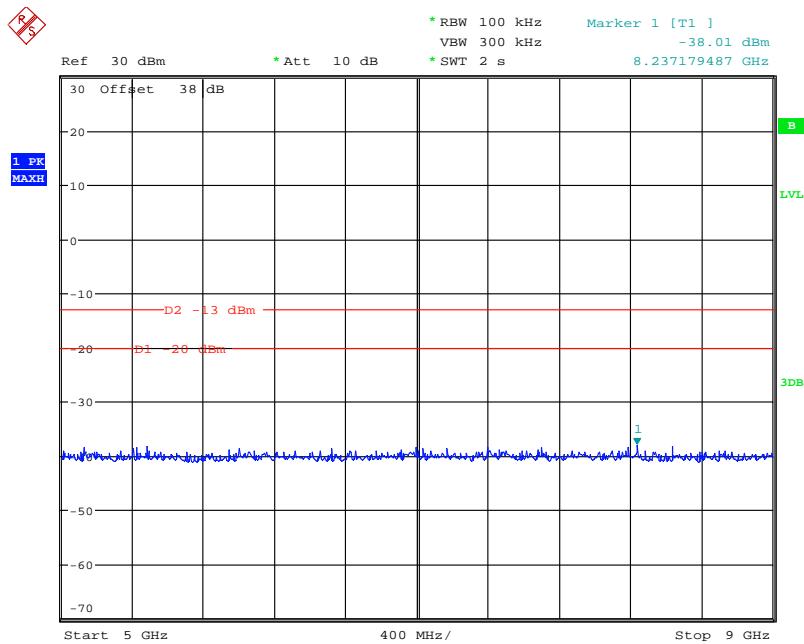

Date: 11.FEB.2013 13:32:15

5GHz – 9GHz

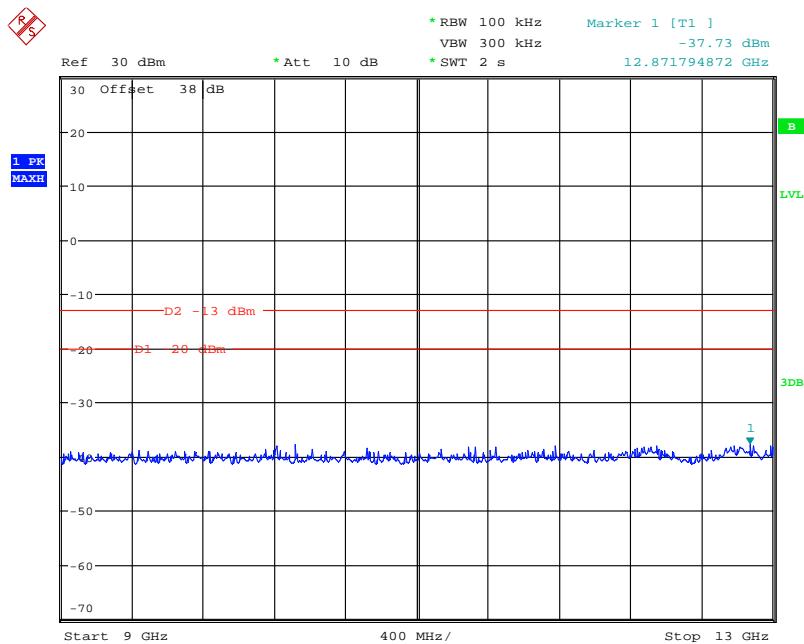


Date: 11.FEB.2013 13:32:33

9GHz – 13GHz

Spurious Emissions at antenna Terminals

459.075 MHz

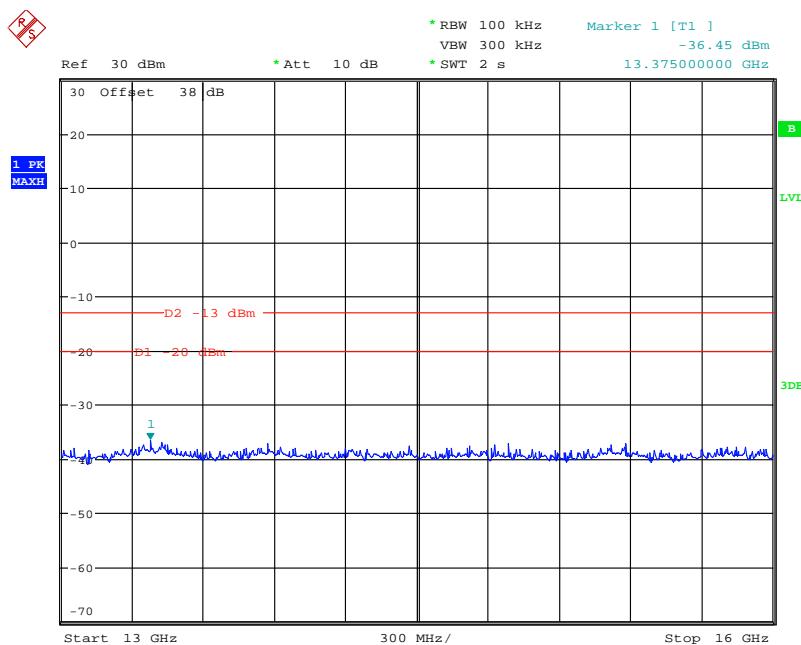


Date: 11.FEB.2013 13:33:24


13GHz – 16GHz

Field Strength of Spurious Emissions

SPD650 - 412.950 MHz

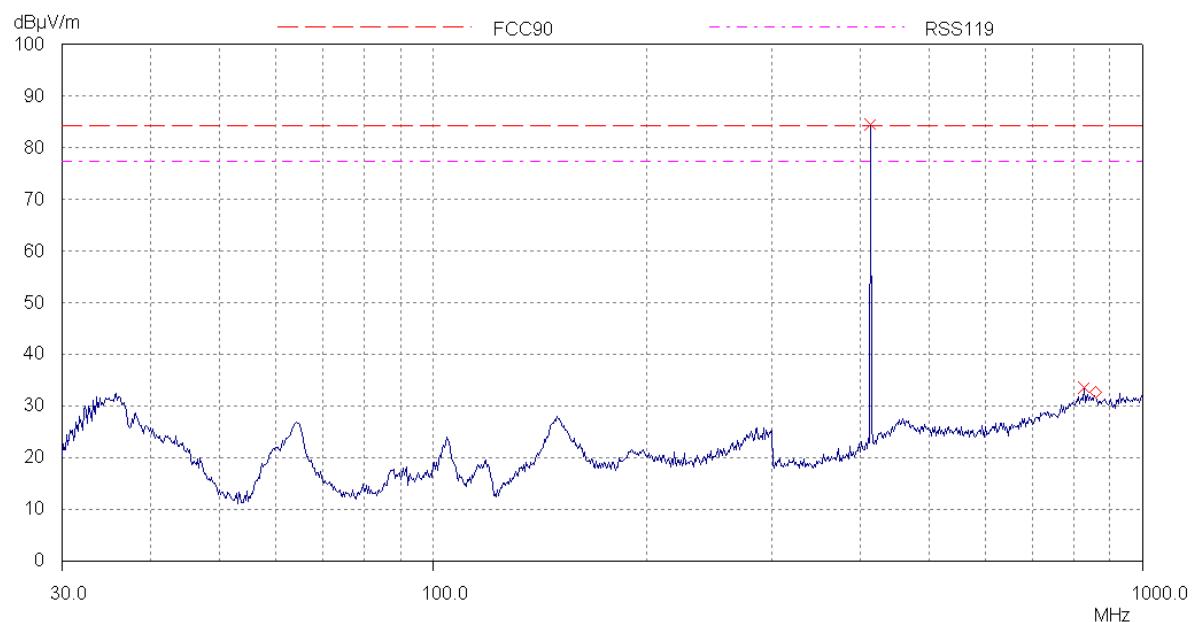

30MHz – 1 GHz

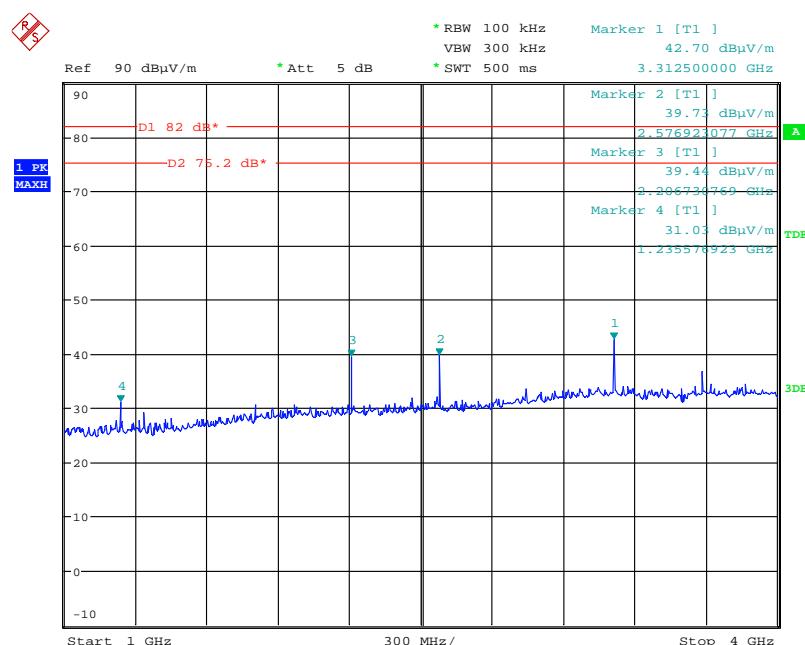


Date: 5.APR.2013 10:55:05

1 GHz – 4 GHz


Field Strength of Spurious Emissions

SPD650 - 412.950 MHz

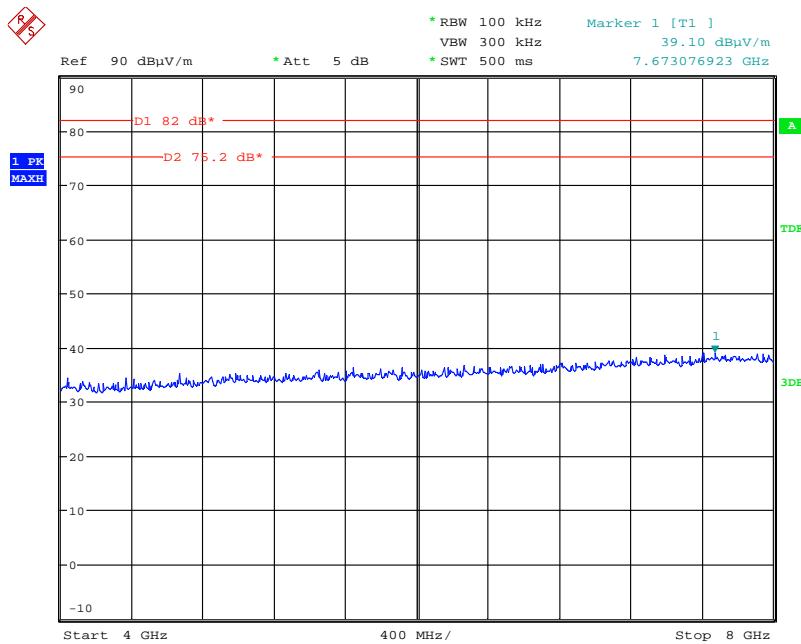

Date: 5.APR.2013 10:56:19

4 GHz – 8 GHz

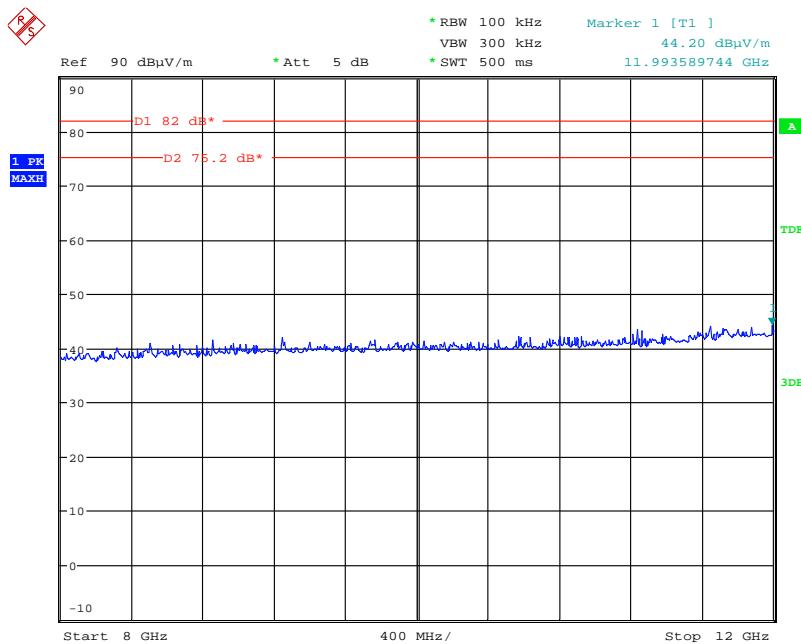


Date: 5.APR.2013 10:58:11

8 GHz – 12 GHz

Field Strength of Spurious Emissions

SPD650 - 412.950 MHz

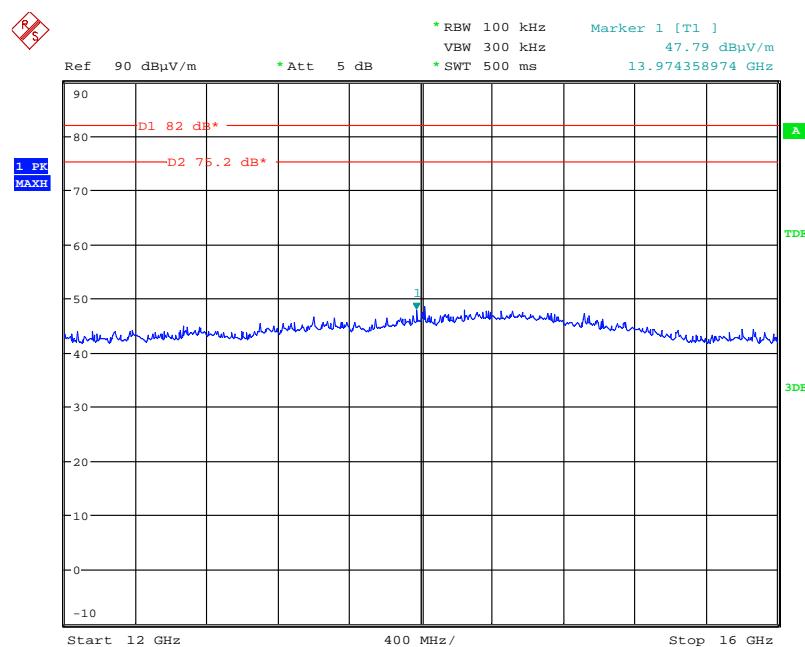


Date: 5.APR.2013 10:59:25


12 GHz – 16 GHz

Field Strength of Spurious Emissions

SPD650 – 459.075MHz

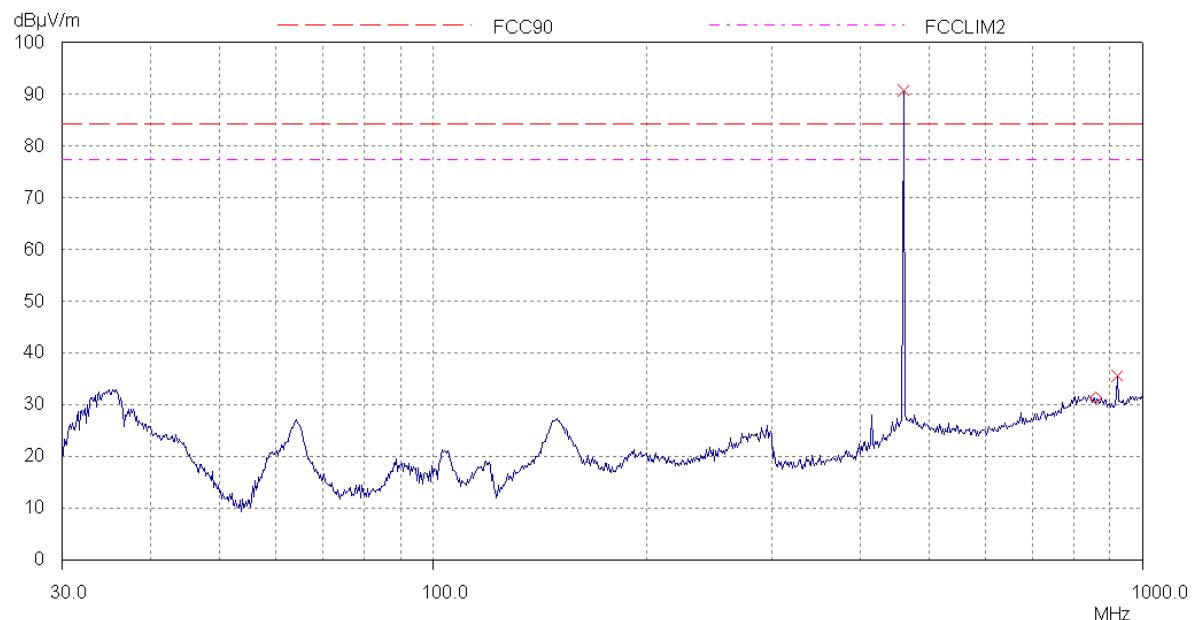

30M Hz – 1 GHz

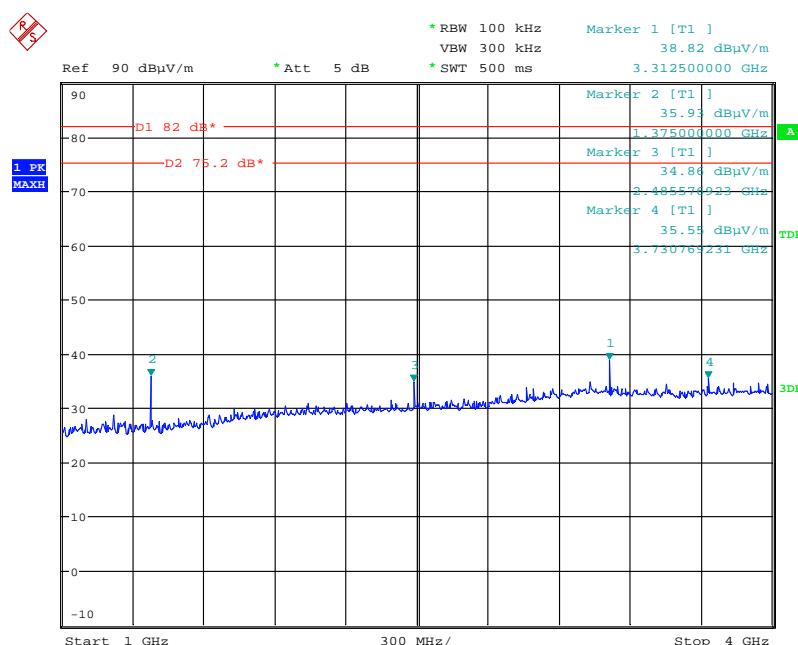


Date: 5.APR.2013 11:33:50

1 GHz – 4 GHz


Field Strength of Spurious Emissions

SPD650 – 459.075MHz

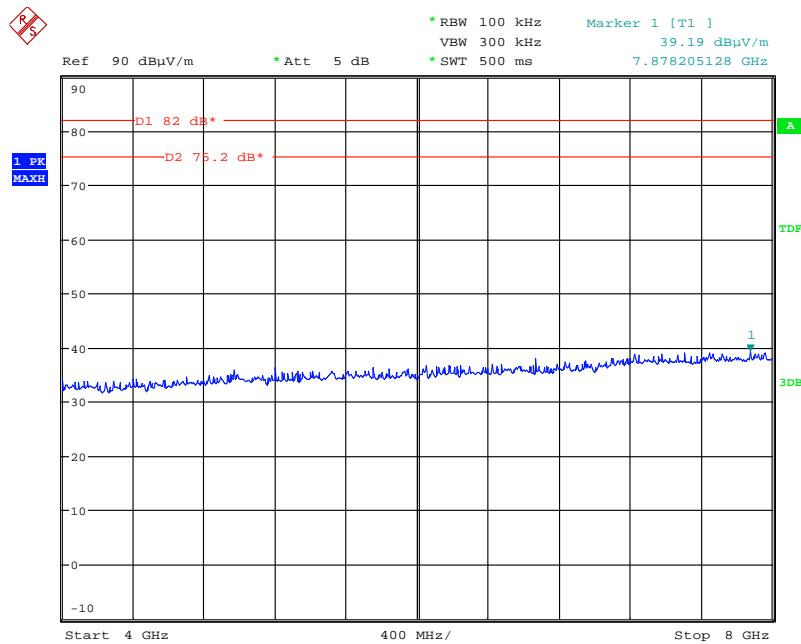

Date: 5.APR.2013 11:35:15

4 GHz – 8 GHz

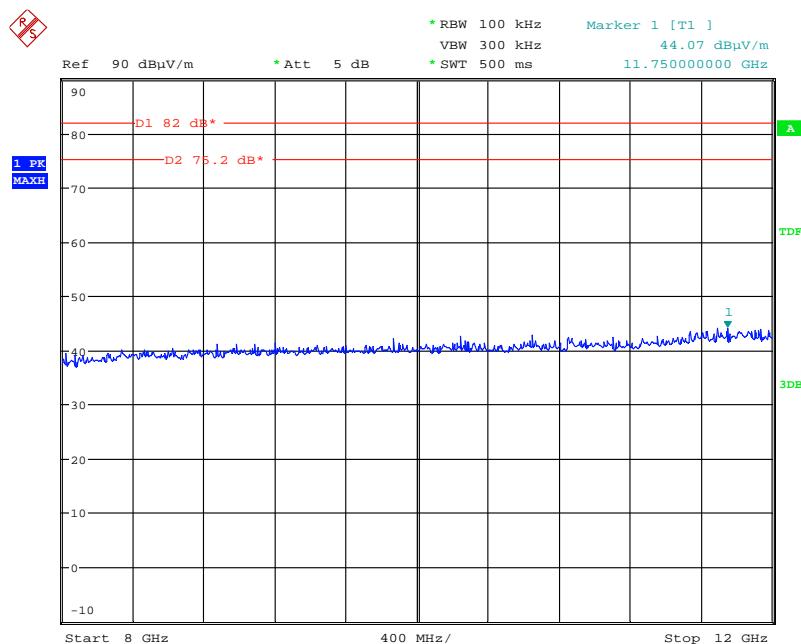


Date: 5.APR.2013 11:36:52

8 GHz – 12 GHz

Field Strength of Spurious Emissions

SPD650 – 459.075MHz

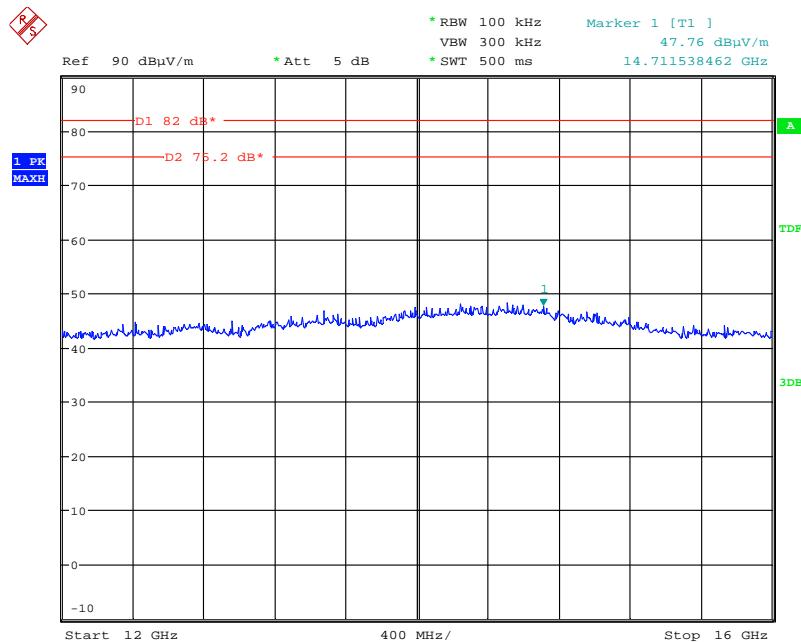


Date: 5.APR.2013 11:37:53


12 GHz – 16 GHz

Field Strength of Spurious Emissions

SPD660 - 412.950 MHz

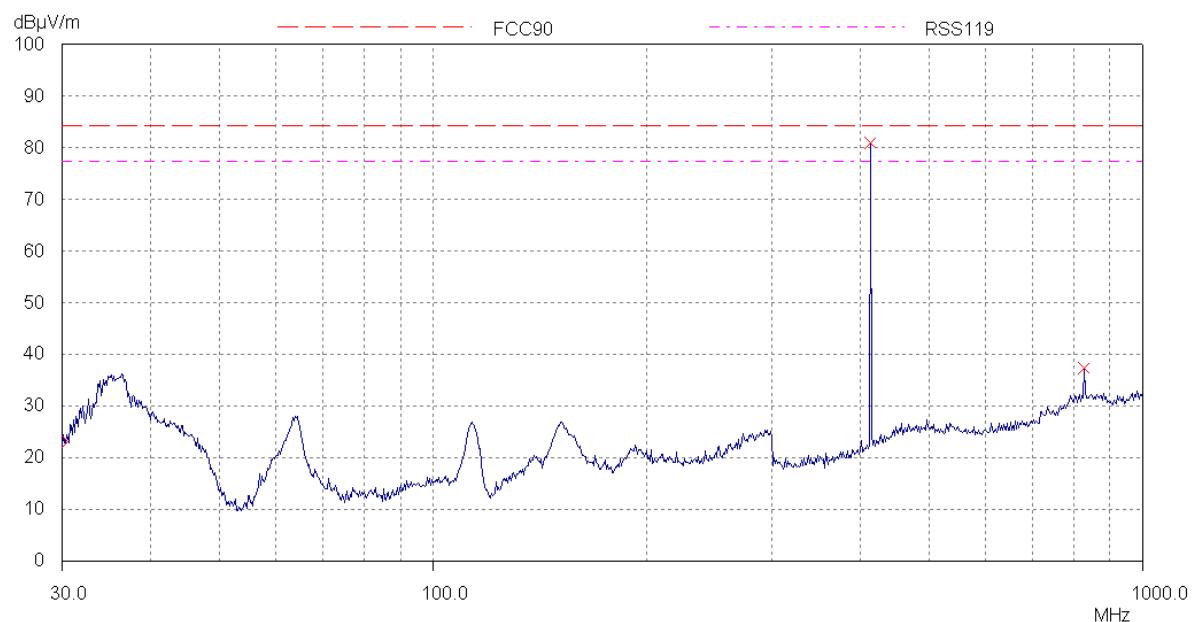

30MHz – 1 GHz

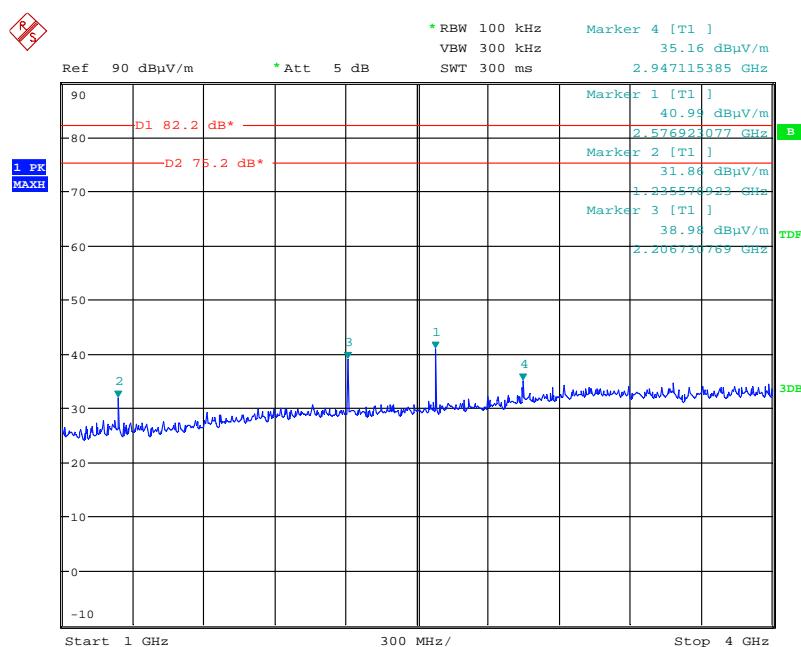


Date: 22.APR.2013 10:04:12

1 GHz – 4 GHz


Field Strength of Spurious Emissions

SPD660 - 412.950 MHz

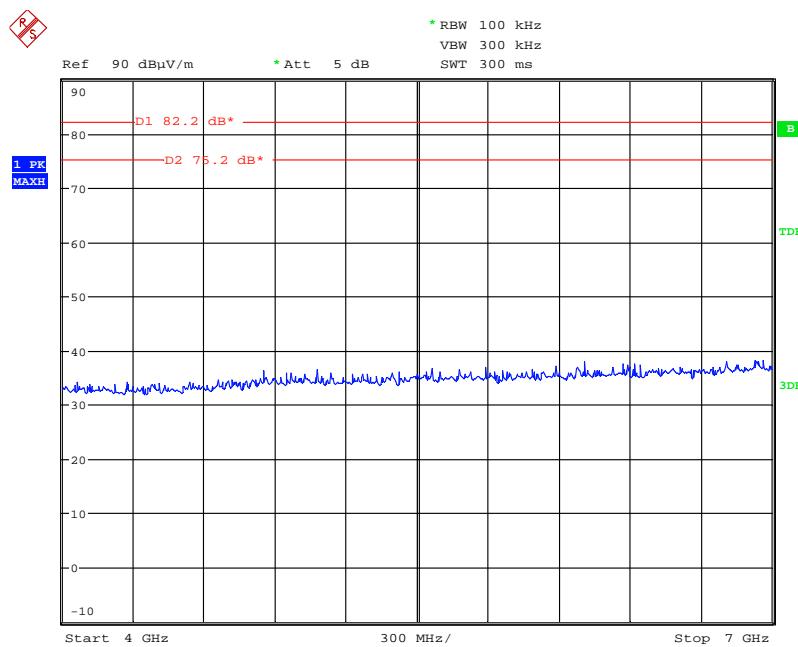

Date: 22.APR.2013 10:05:50

4 GHz – 7 GHz

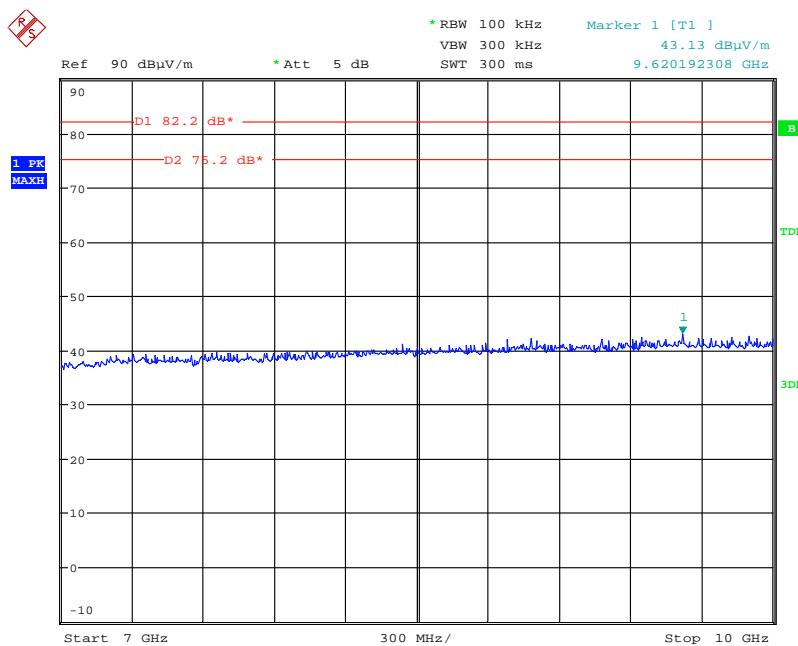


Date: 22.APR.2013 10:09:54

7 GHz – 10 GHz


Field Strength of Spurious Emissions

SPD660 - 412.950 MHz

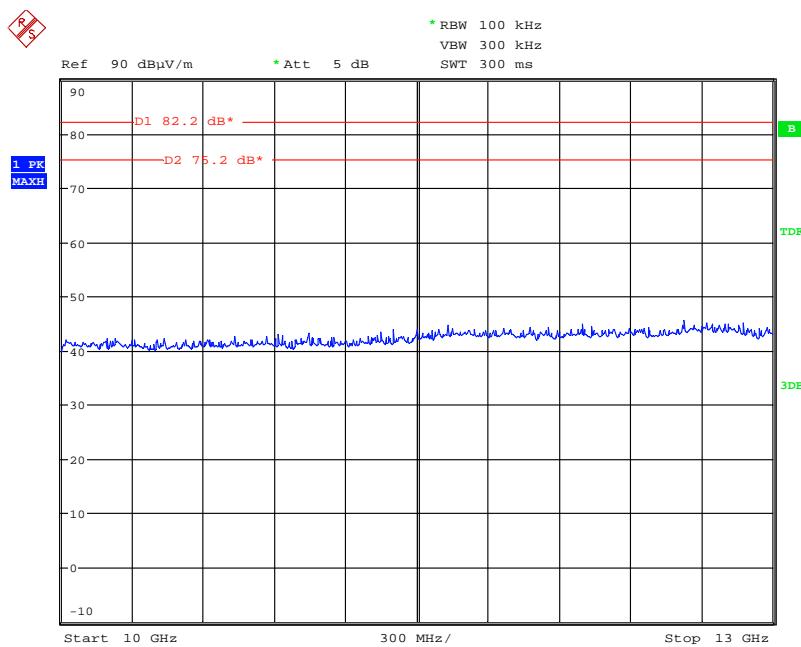

Date: 22.APR.2013 10:11:30

10 GHz – 13 GHz

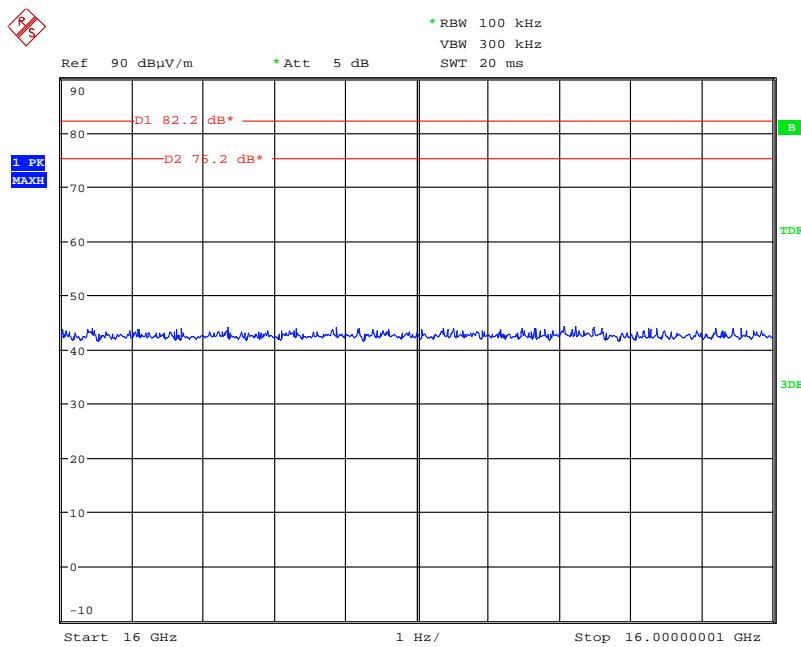


Date: 22.APR.2013 10:15:32


13 GHz – 16 GHz

Field Strength of Spurious Emissions

SPD660 – 459.075MHz

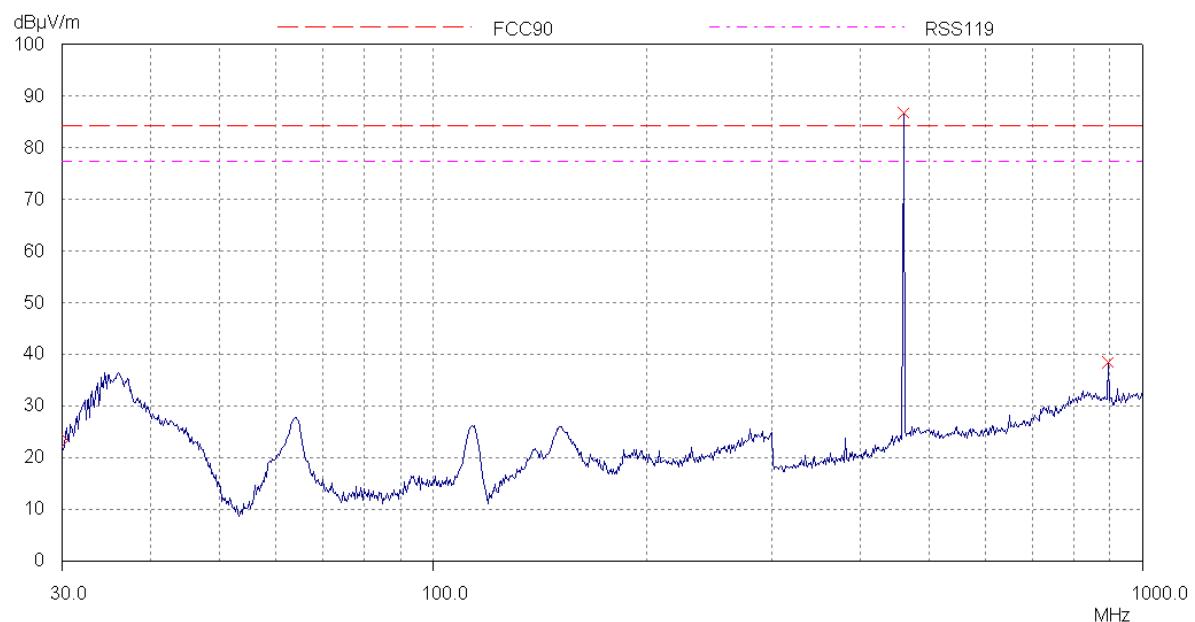

30M Hz – 1 GHz

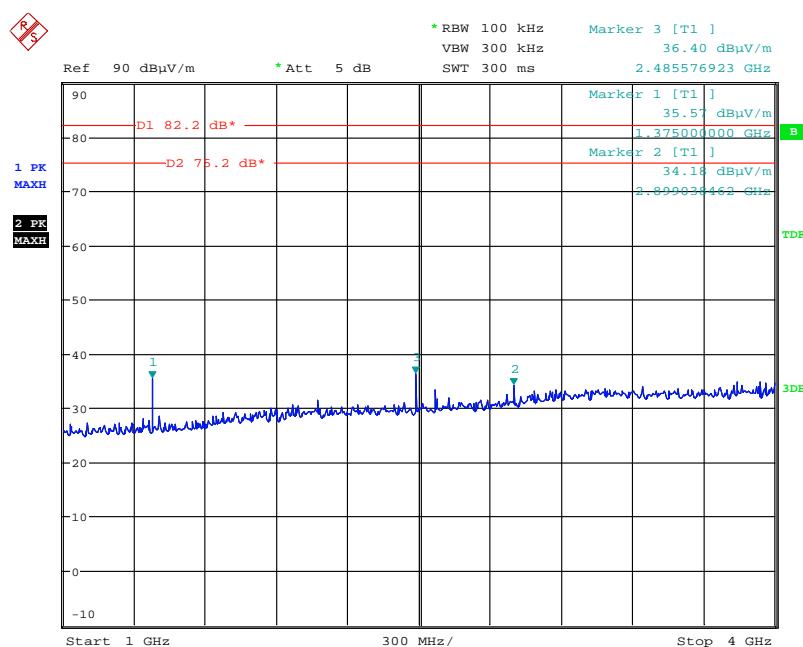


Date: 22.APR.2013 09:44:05

1 GHz – 4 GHz


Field Strength of Spurious Emissions

SPD660 – 459.075MHz

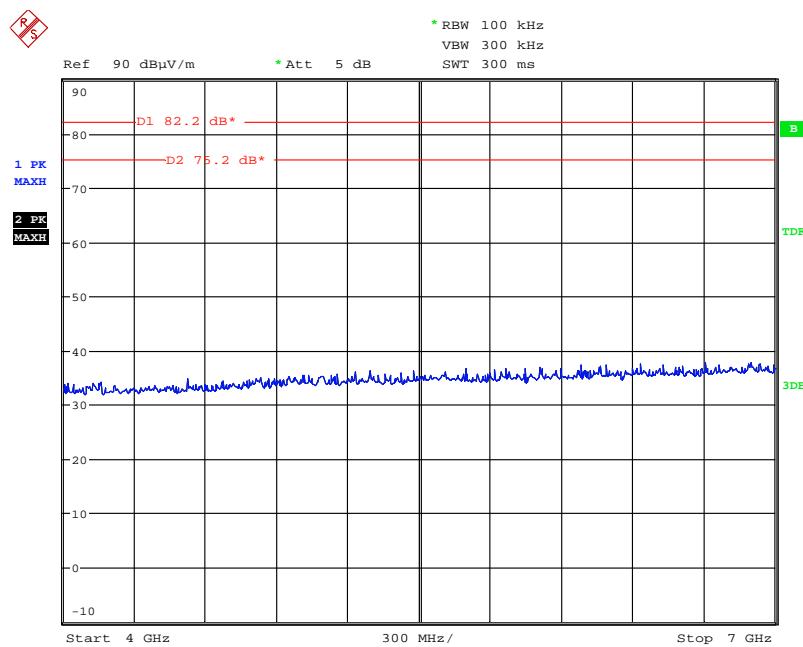

Date: 22.APR.2013 09:47:54

4 GHz – 7 GHz

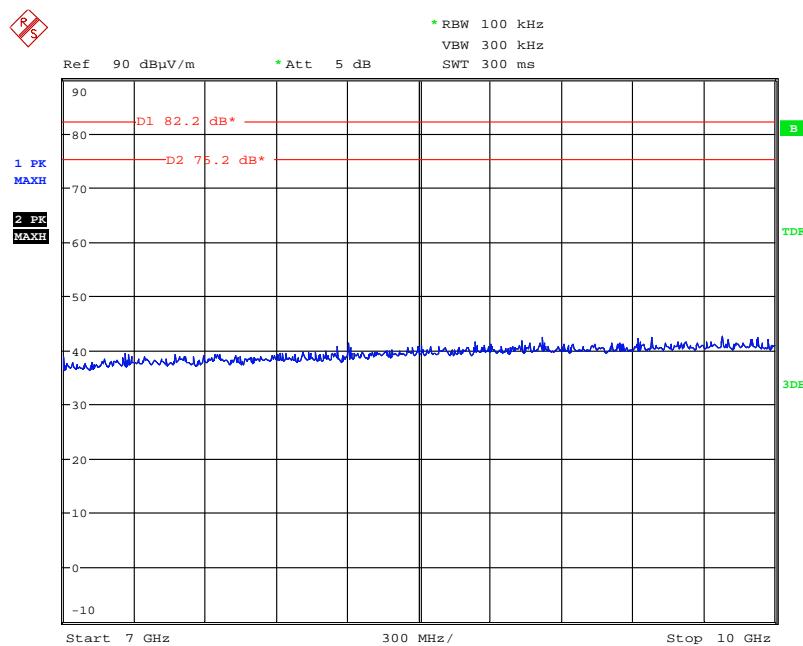


Date: 22.APR.2013 09:49:32

7 GHz – 10 GHz


Field Strength of Spurious Emissions

SPD660 – 459.075MHz

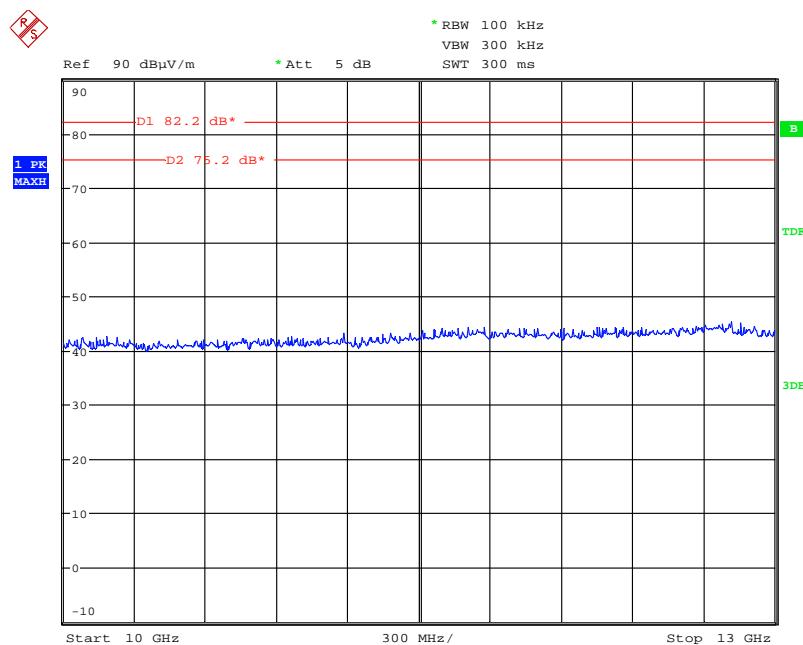

Date: 22.APR.2013 09:57:02


10 GHz – 13 GHz

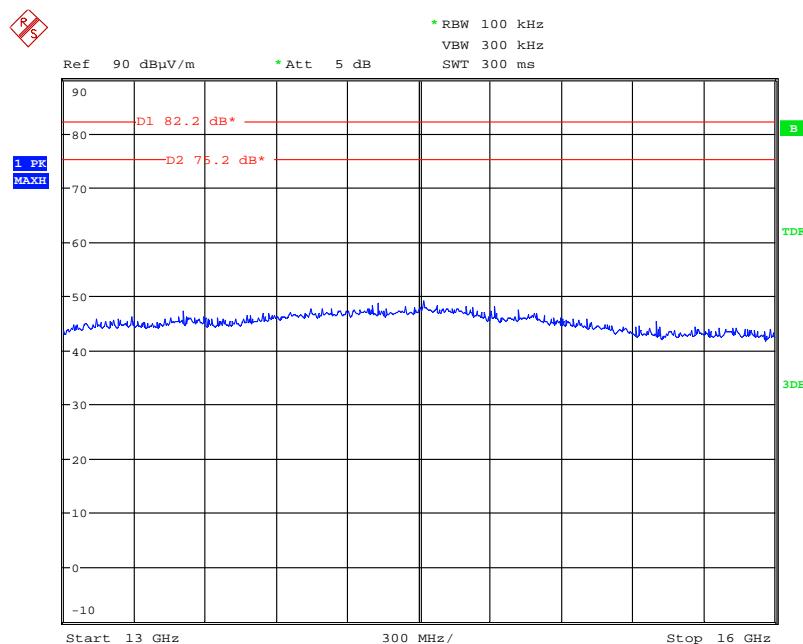


Date: 22.APR.2013 09:58:44

13 GHz – 16 GHz


412.950 MHz On Transient – 12.5 kHz

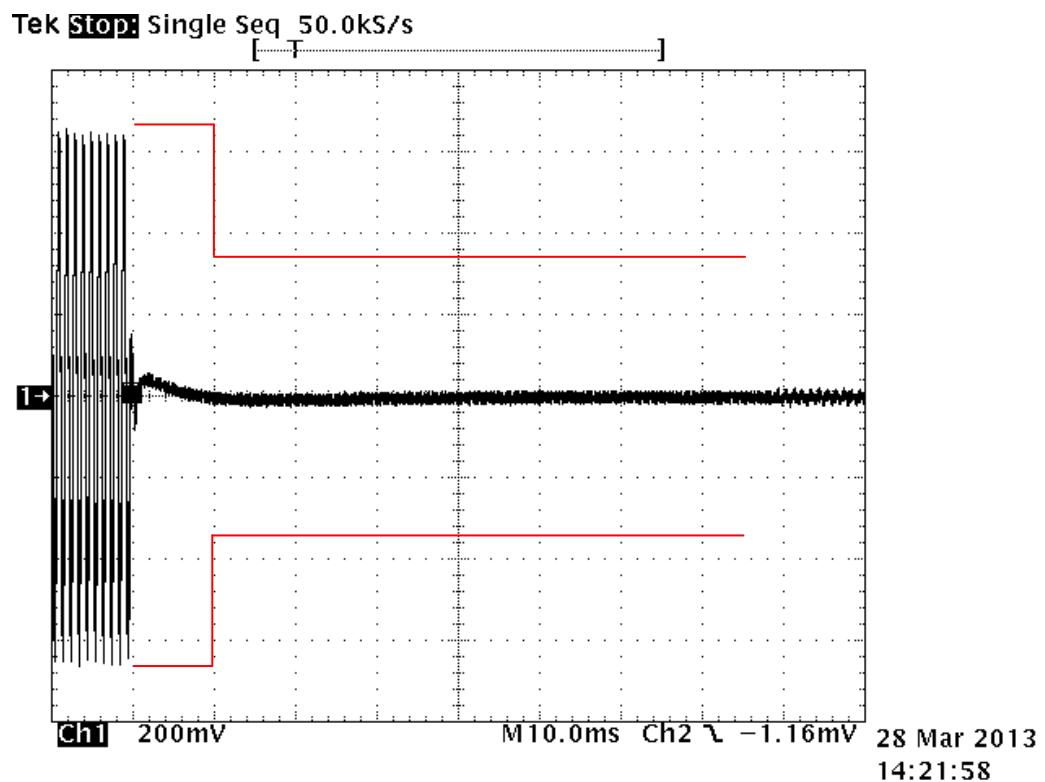


412.950 MHz Off Transient – 12.5 kHz

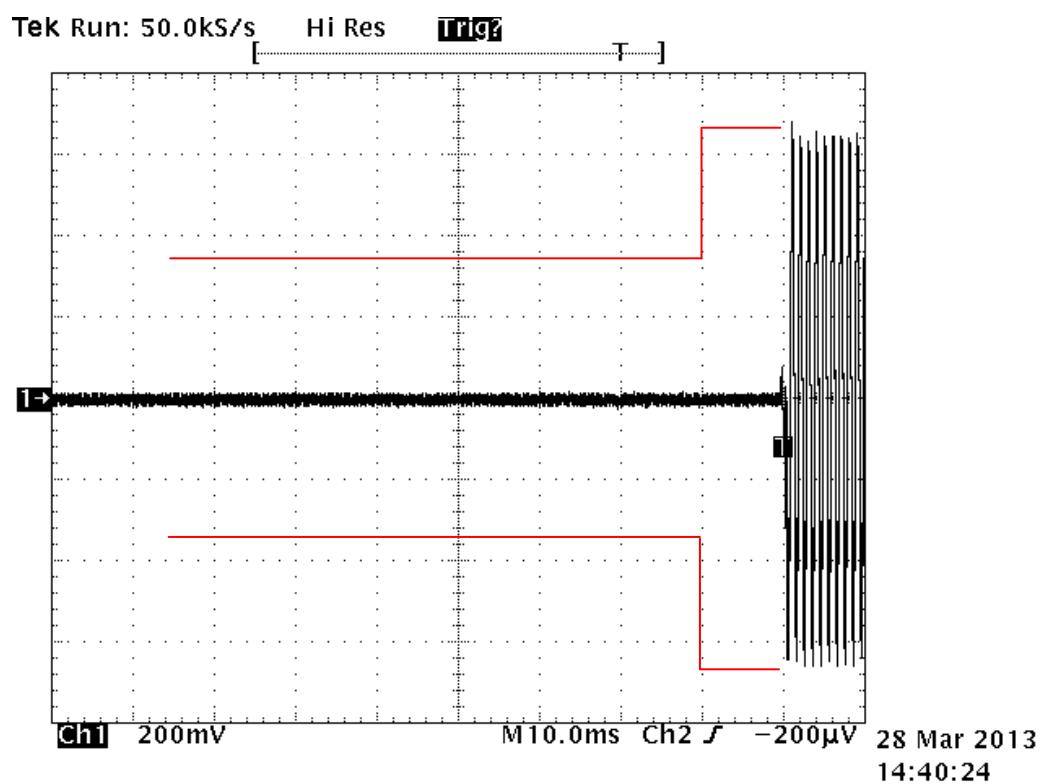


459.075 MHz On Transient – 12.5 kHz

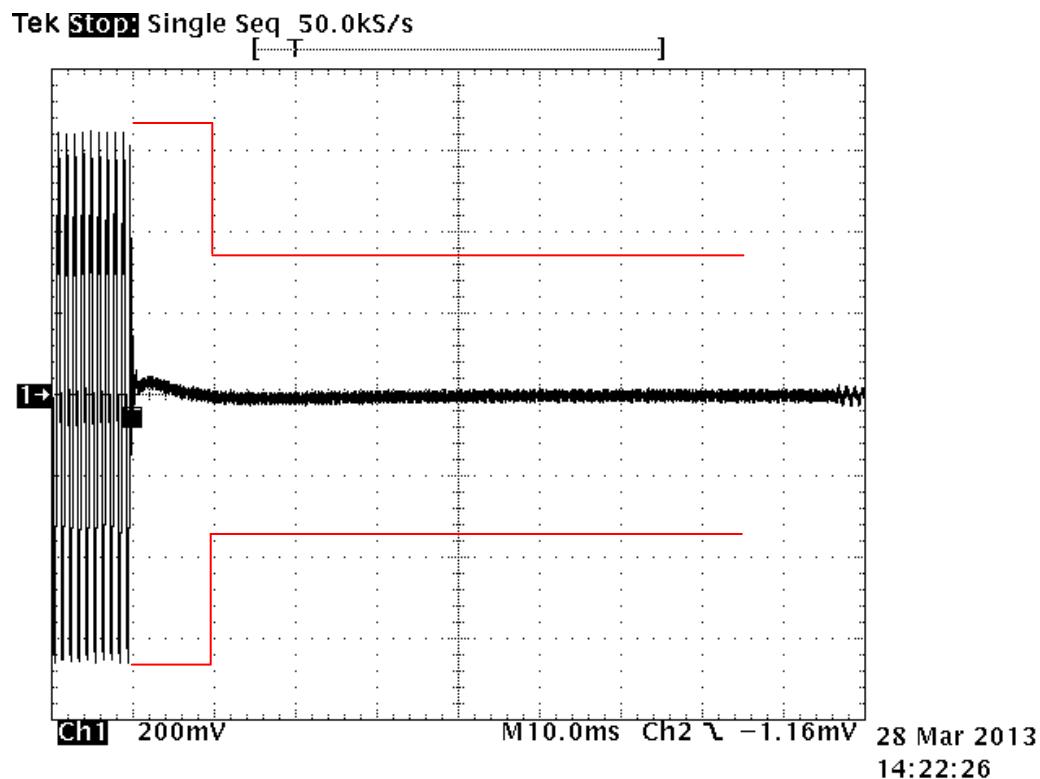


459.075 MHz Off Transient – 12.5 kHz

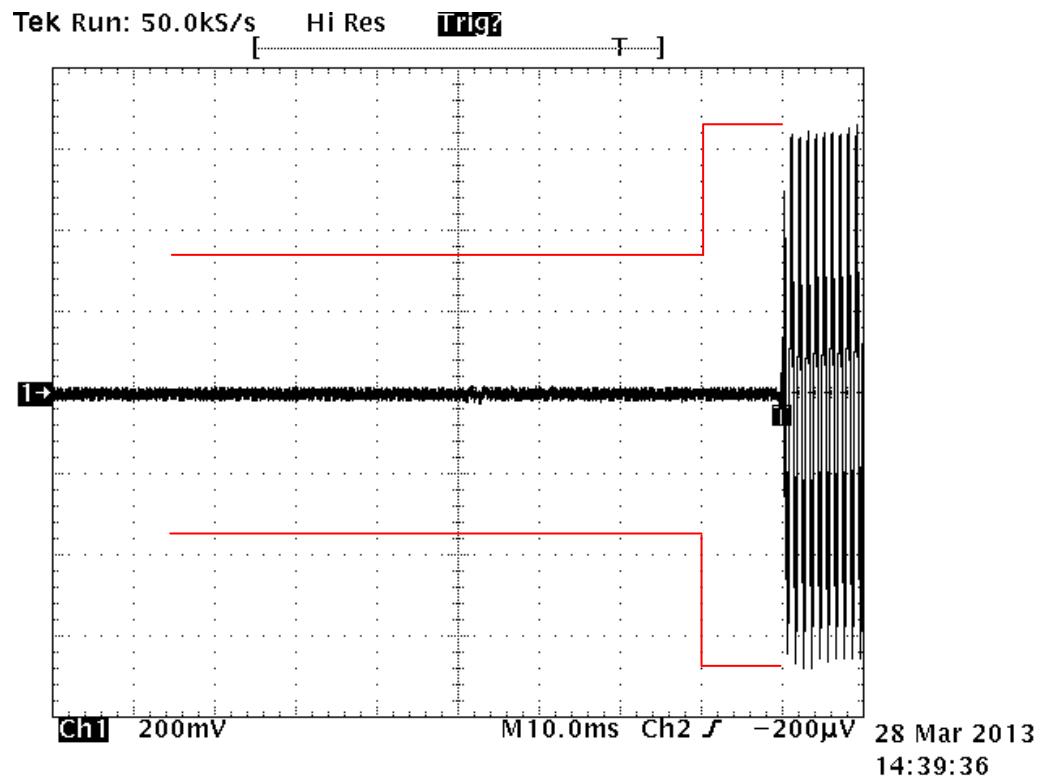


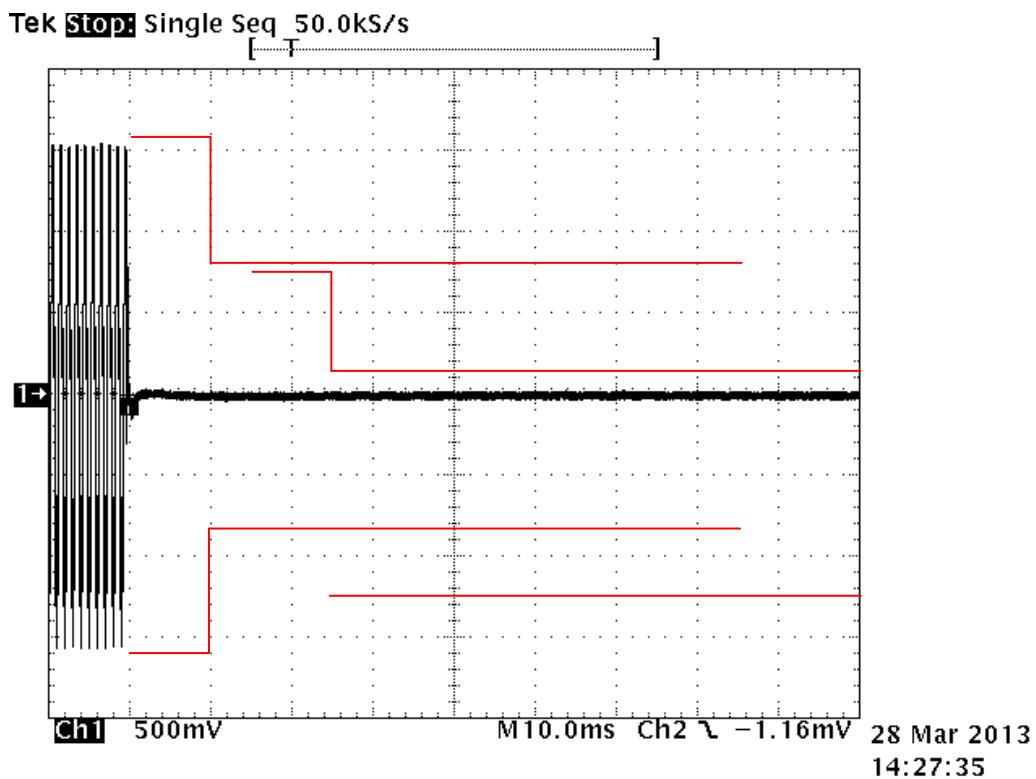

SPD 650 - AC powerline Conducted Emissions EUT in RX mode

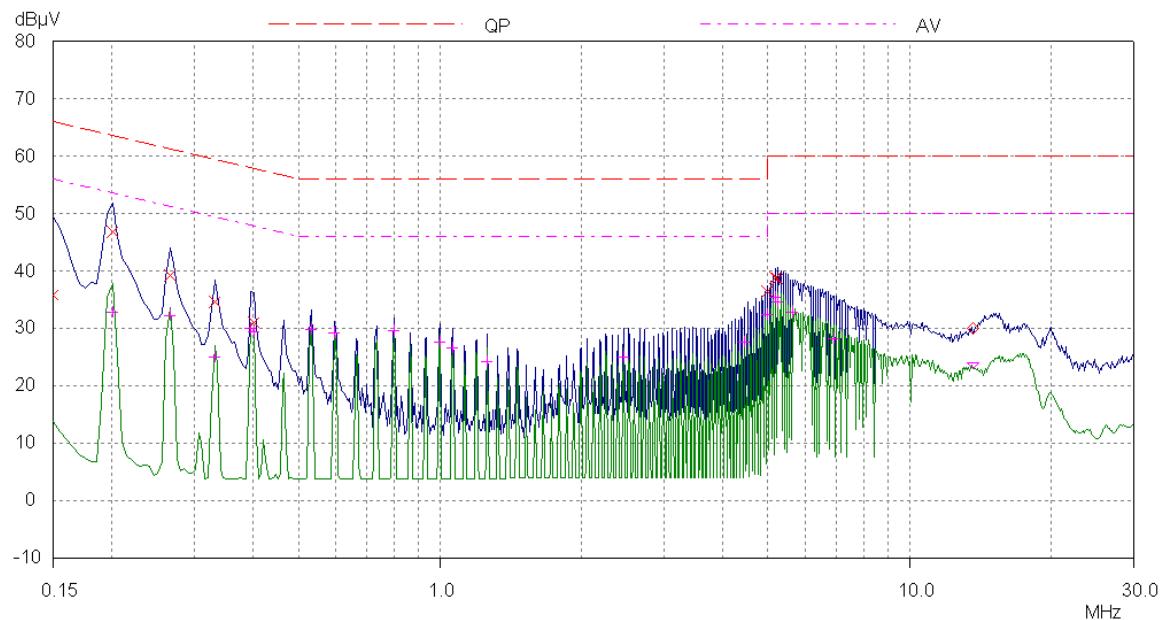


SPD 660 - AC powerline Conducted Emissions EUT in RX mode

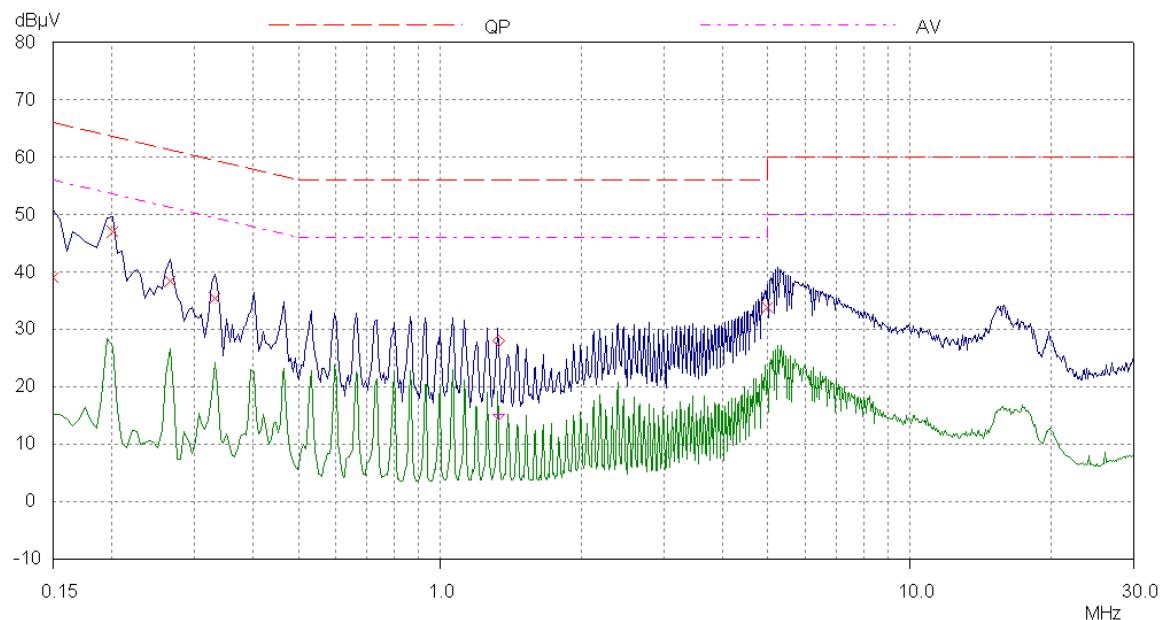


Field Strength of Un-intentional Spurious Emissions

SPD650 - 412.950 MHz

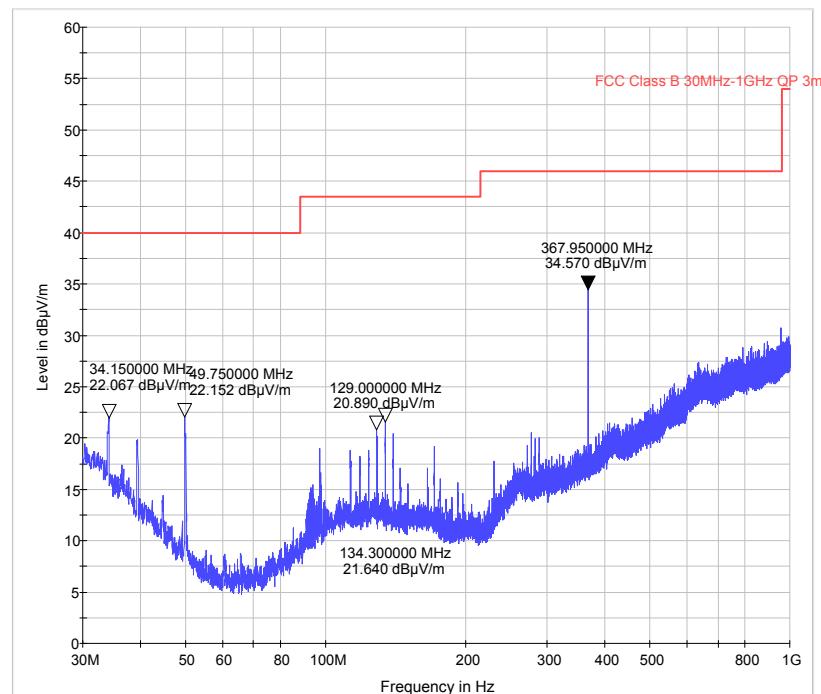

30M Hz – 1 GHz

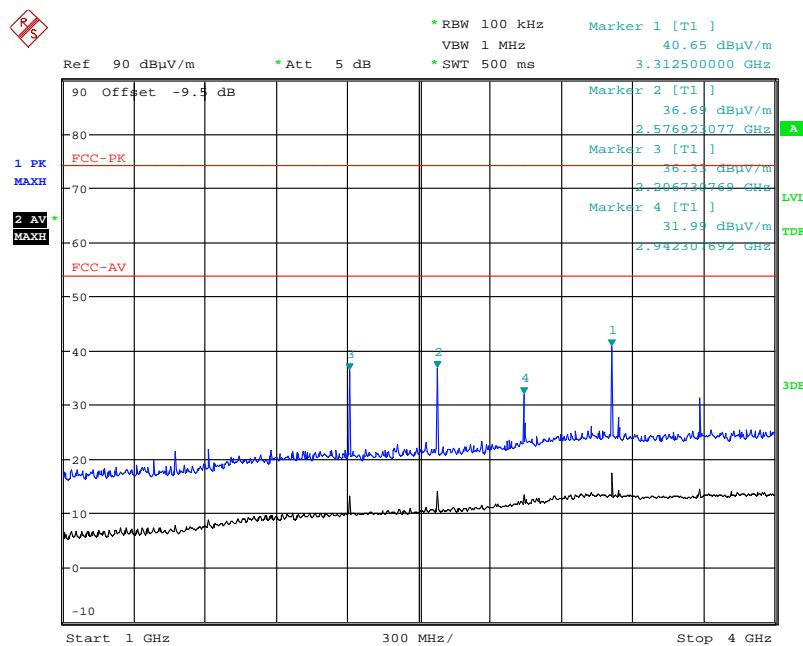


Date: 5.APR.2013 09:27:51

1 GHz – 4 GHz


Field Strength of Un-intentional Spurious Emissions

SPD650 - 412.950 MHz

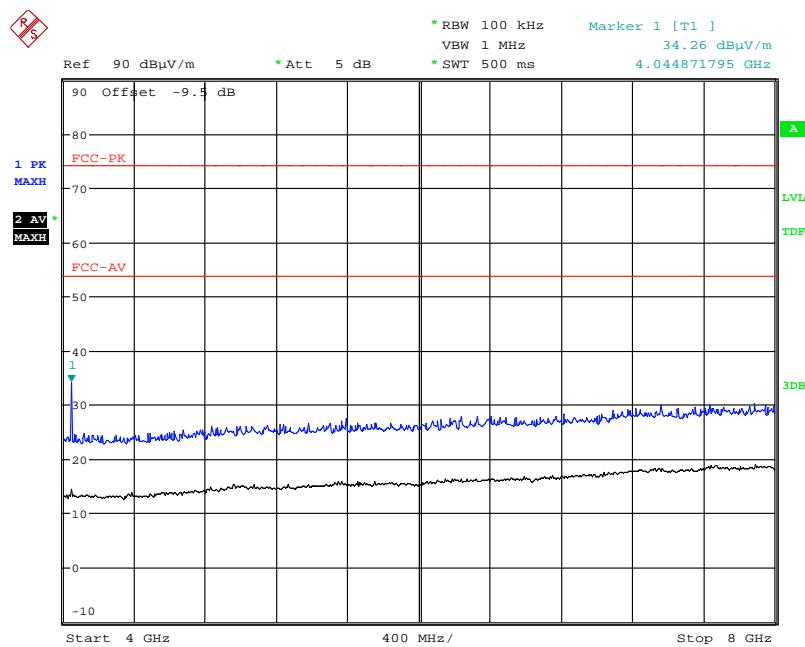

Date: 5.APR.2013 09:29:16

4GHz – 8GHz

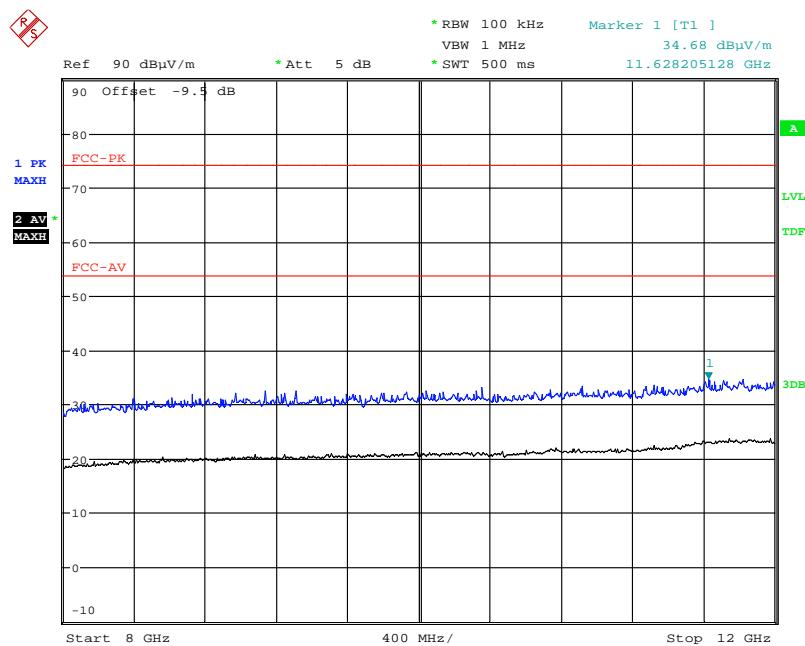


Date: 5.APR.2013 09:30:19

8GHz – 12GHz

Field Strength of Un-intentional Spurious Emissions

SPD650 - 412.950 MHz

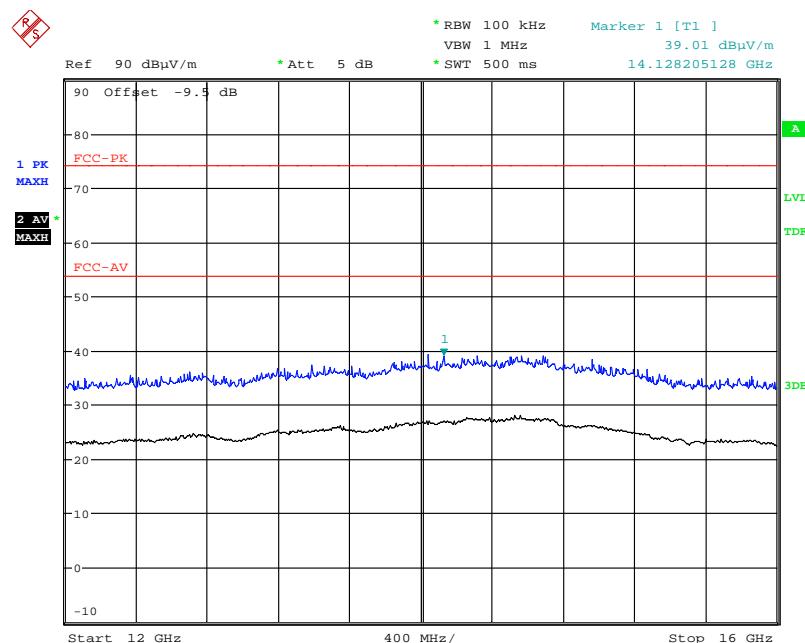


Date: 5.APR.2013 09:32:13


12GHz – 16GHz

Field Strength of Un-intentional Spurious Emissions

SPD650 - 459.075 MHz

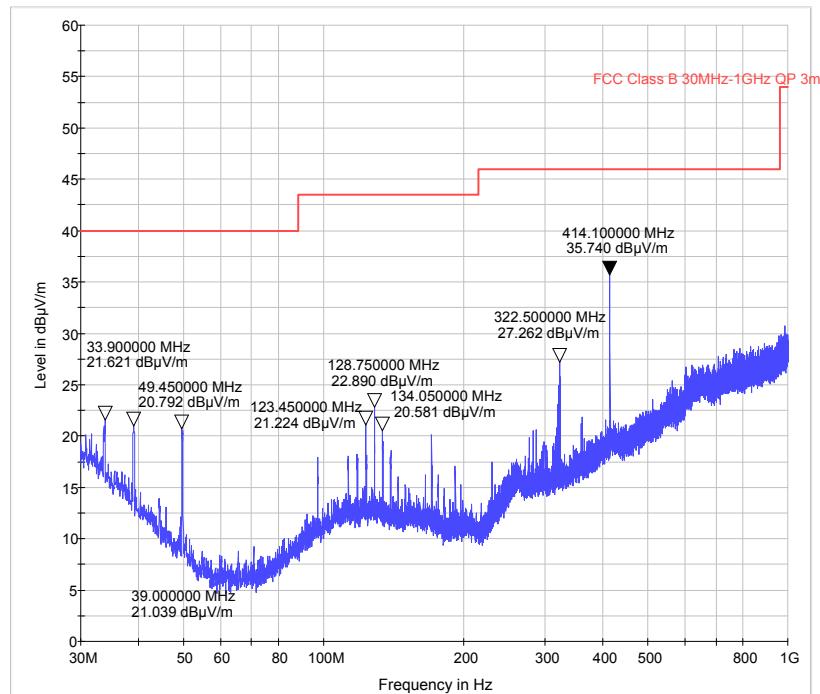

30M Hz – 1 GHz

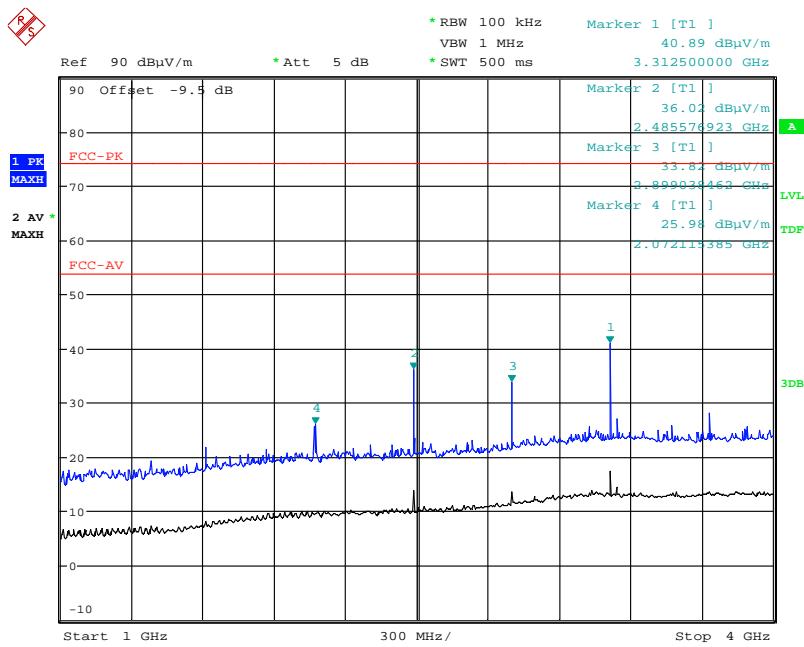


Date: 5.APR.2013 09:45:50

1 GHz – 4 GHz


Field Strength of Un-intentional Spurious Emissions

SPD650 - 459.075 MHz

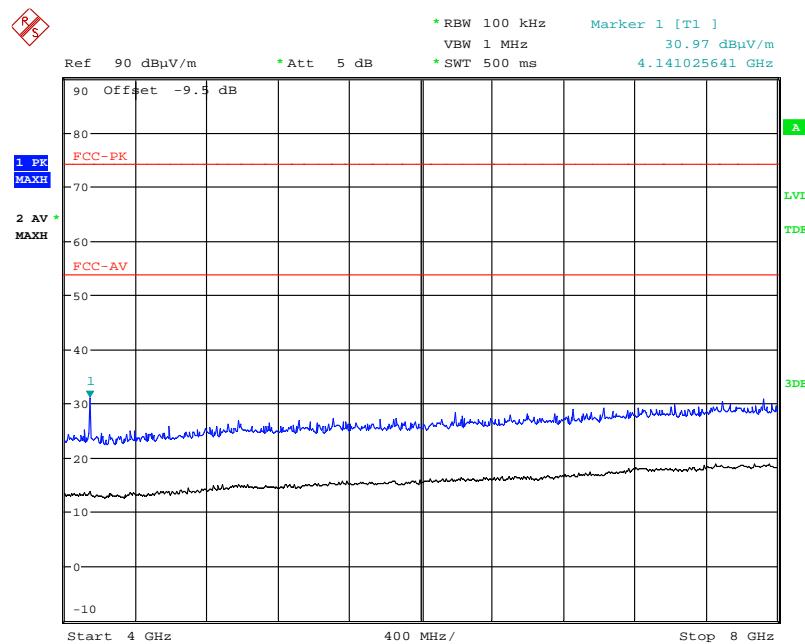

Date: 5.APR.2013 09:47:06

4GHz – 8GHz

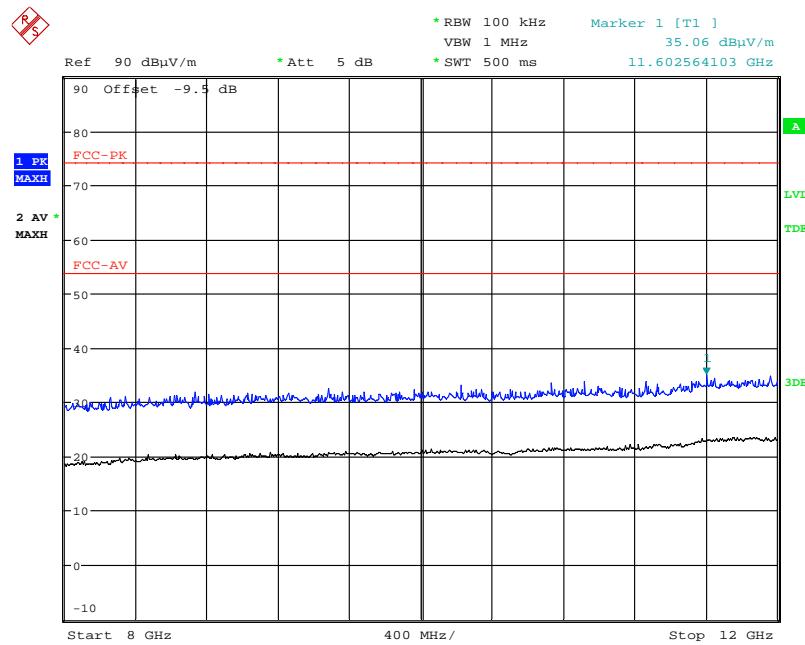


Date: 5.APR.2013 09:48:13

8GHz – 12GHz

Field Strength of Un-intentional Spurious Emissions

SPD650 - 459.075 MHz

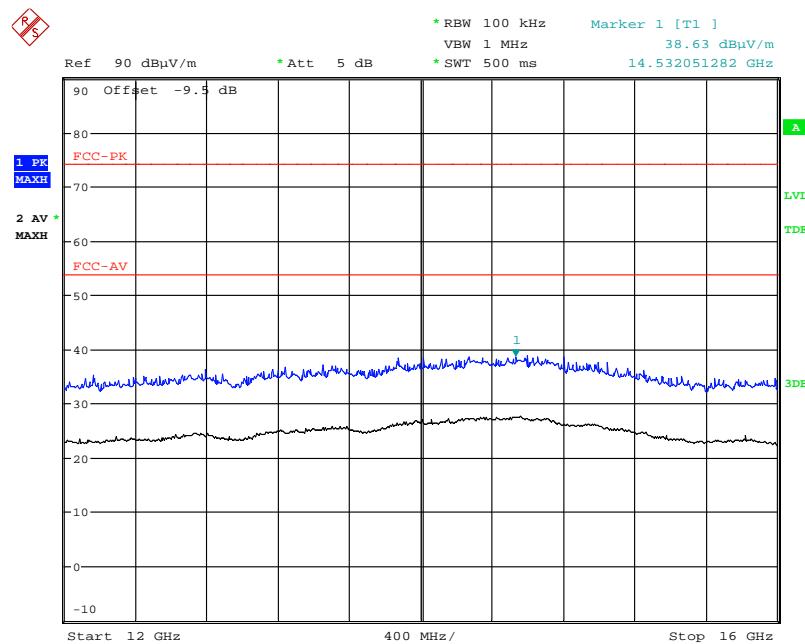


Date: 5.APR.2013 09:49:22

12GHz – 16GHz

Field Strength of Un-intentional Spurious Emissions

SPD660 - 412.950 MHz

30M Hz – 1 GHz

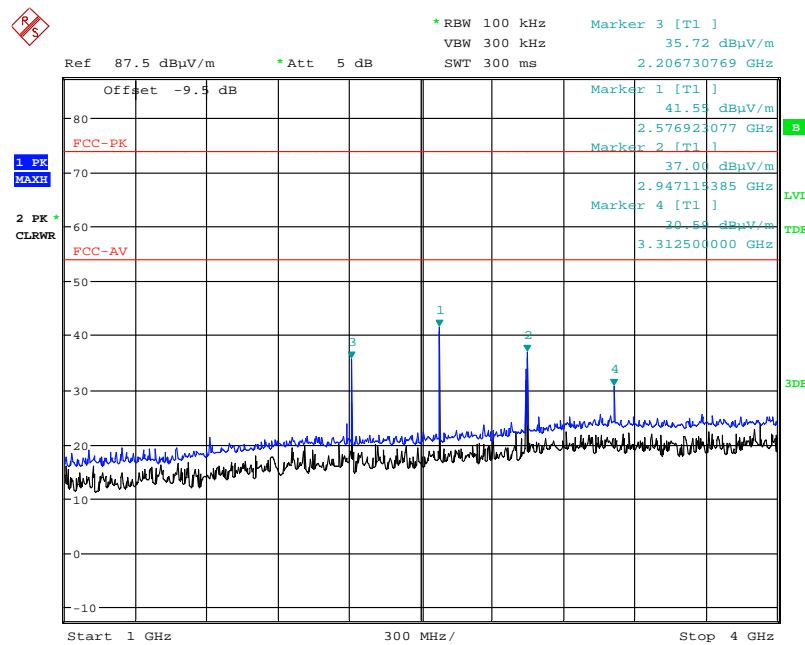


Date: 22.APR.2013 08:47:47

1 GHz – 4 GHz


Field Strength of Un-intentional Spurious Emissions

SPD660 - 412.950 MHz

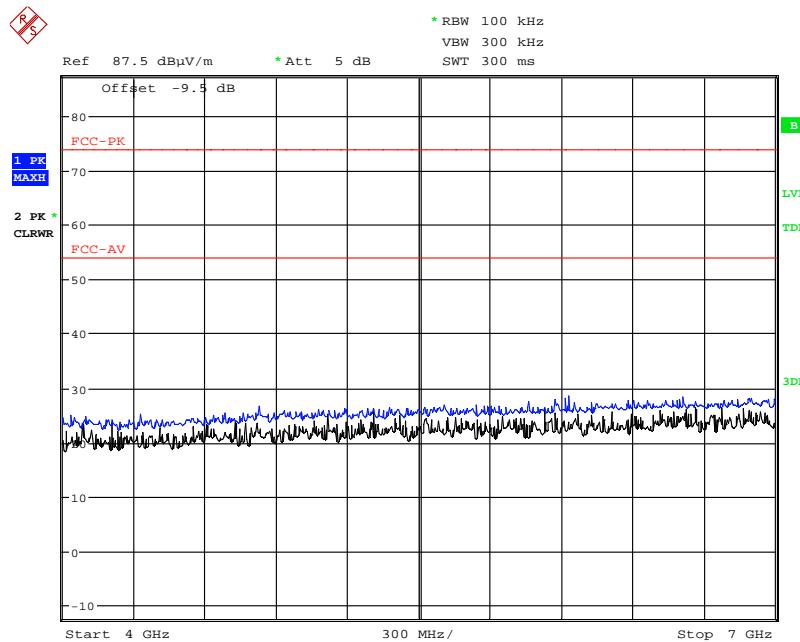

Date: 22.APR.2013 08:58:50

4GHz – 7GHz

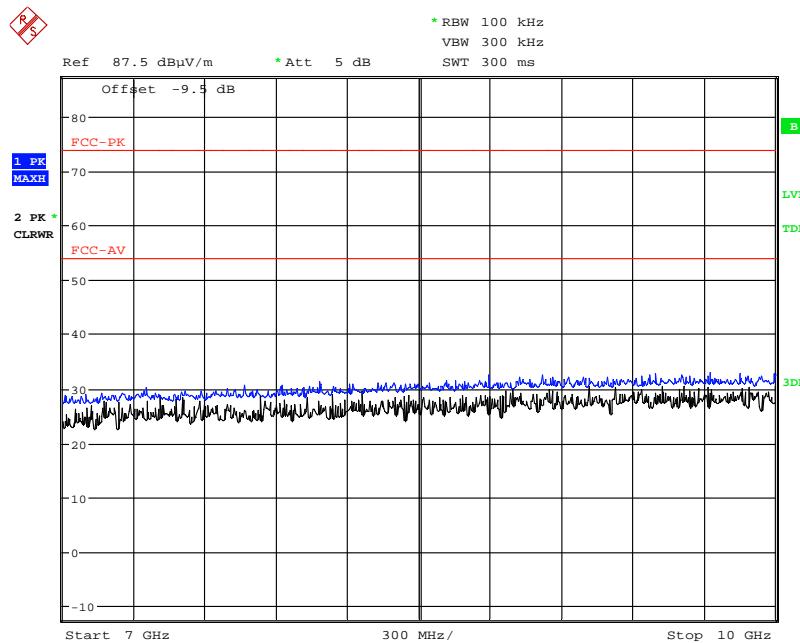


Date: 22.APR.2013 09:00:49

7GHz –10GHz


Field Strength of Un-intentional Spurious Emissions

SPD660 - 412.950 MHz

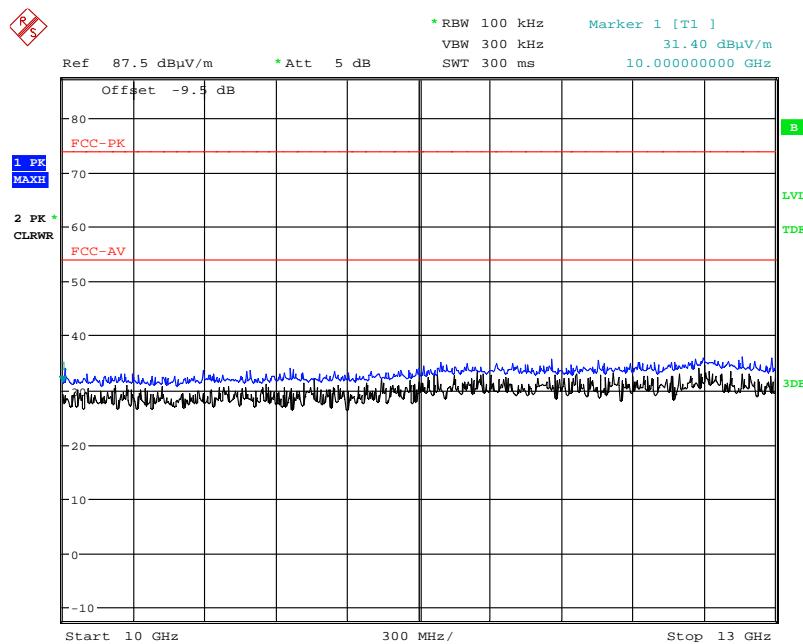

Date: 22.APR.2013 09:06:08

10GHz – 13GHz

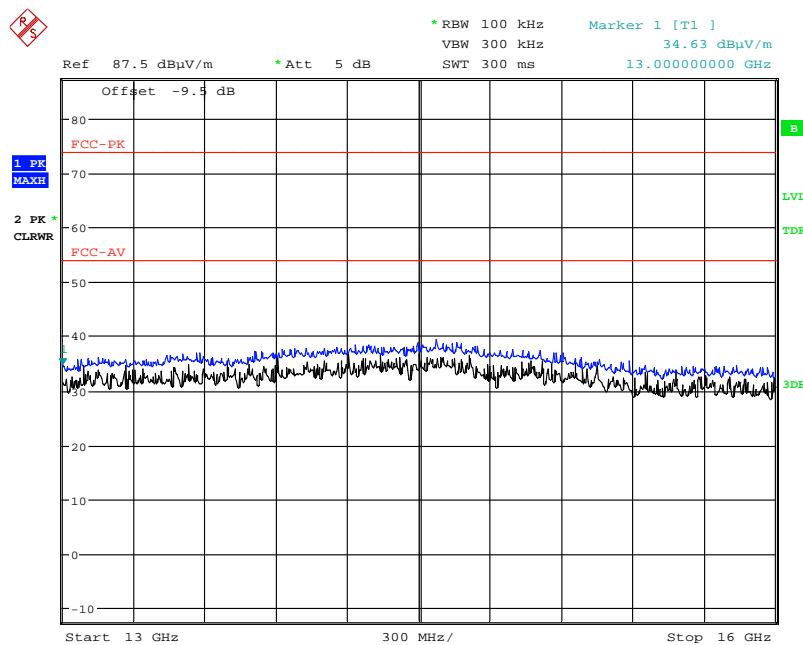


Date: 22.APR.2013 09:08:14


13GHz – 16GHz

Field Strength of Un-intentional Spurious Emissions

SPD660 - 459.075 MHz

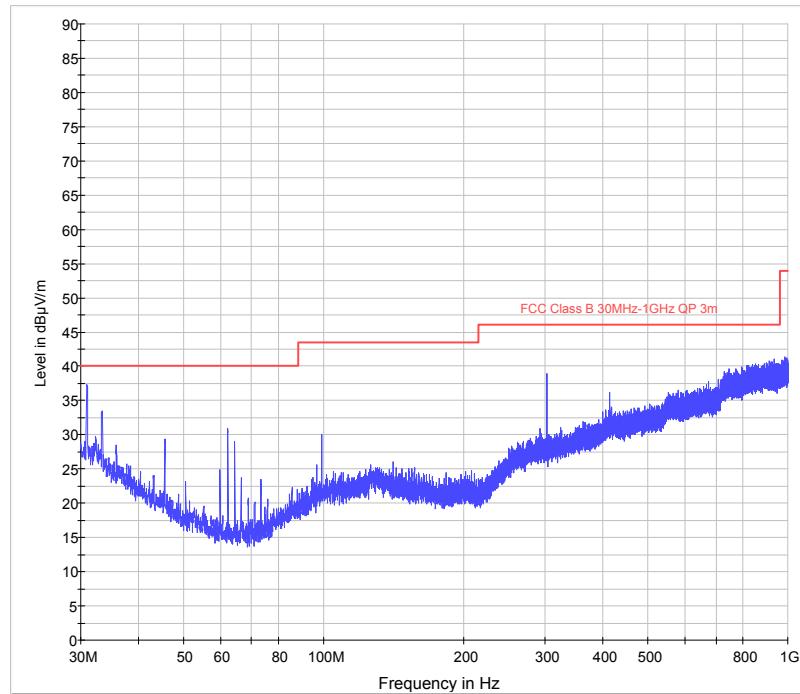

30M Hz – 1 GHz

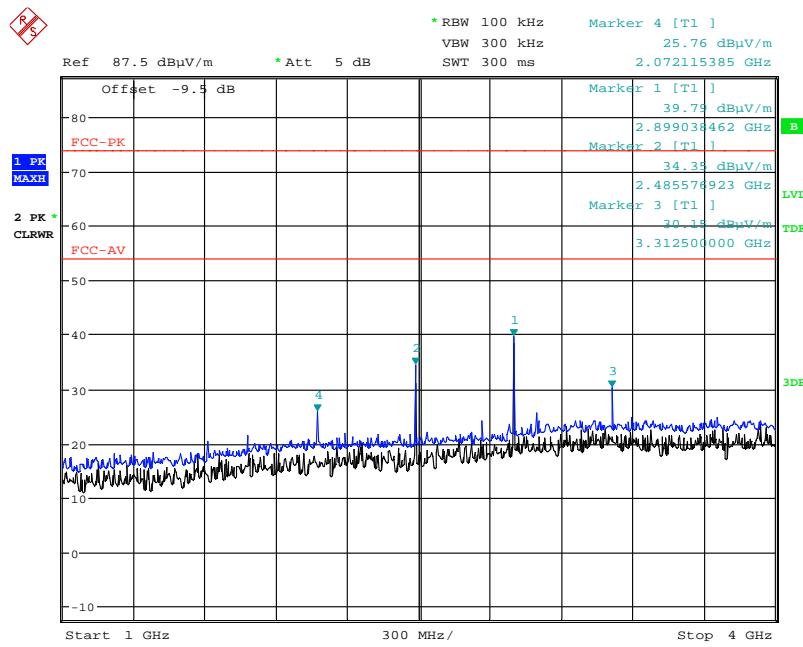


Date: 22.APR.2013 09:14:29

1 GHz – 4 GHz


Field Strength of Un-intentional Spurious Emissions

SPD660 - 459.075 MHz

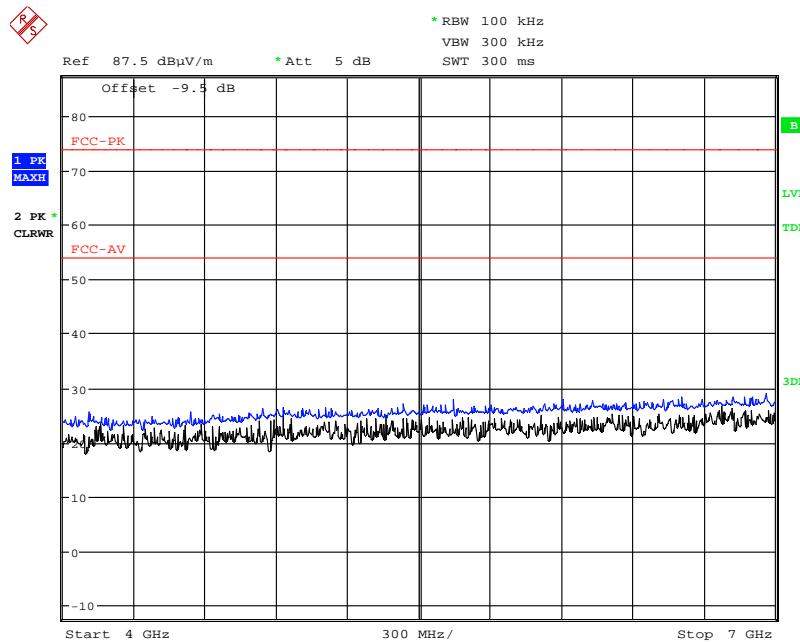

Date: 22.APR.2013 09:16:40

4GHz – 7GHz

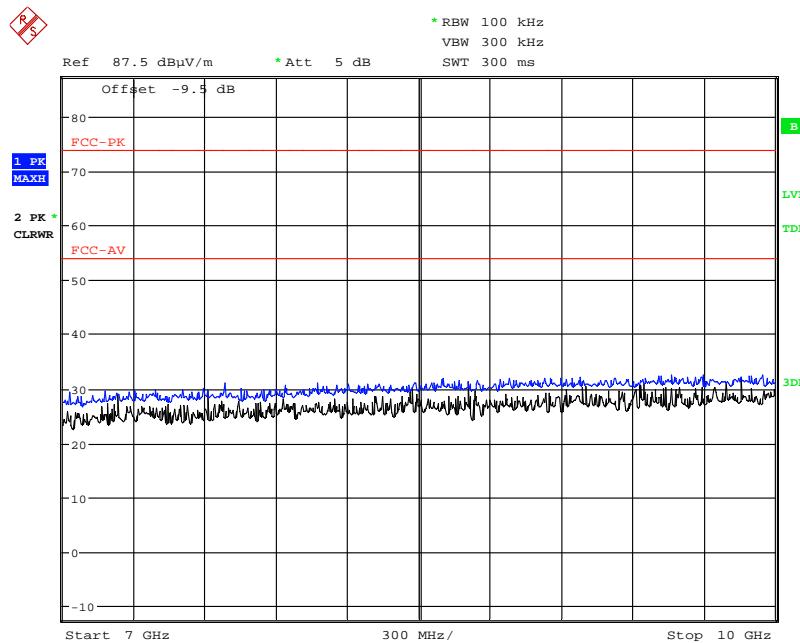


Date: 22.APR.2013 09:21:37

7GHz – 10GHz


Field Strength of Un-intentional Spurious Emissions

SPD660 - 459.075 MHz

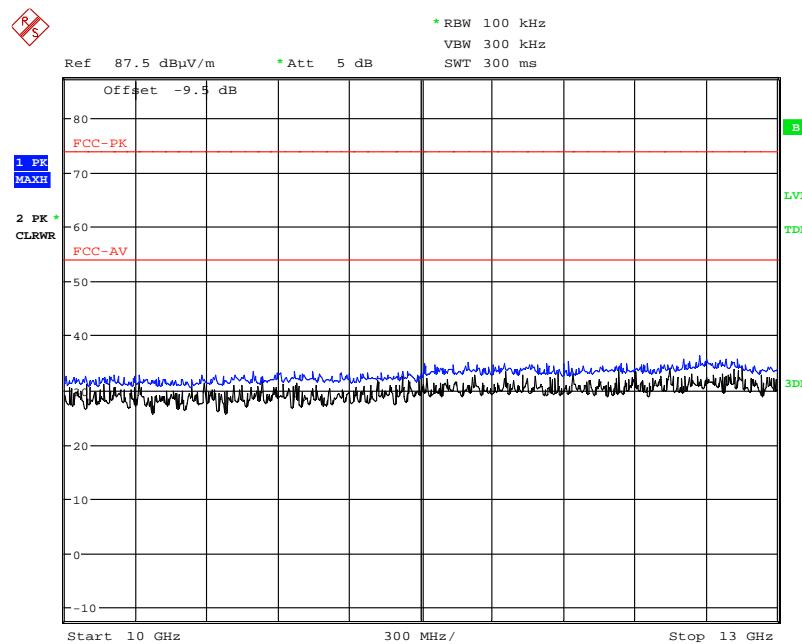

Date: 22.APR.2013 09:23:10

10GHz – 13GHz

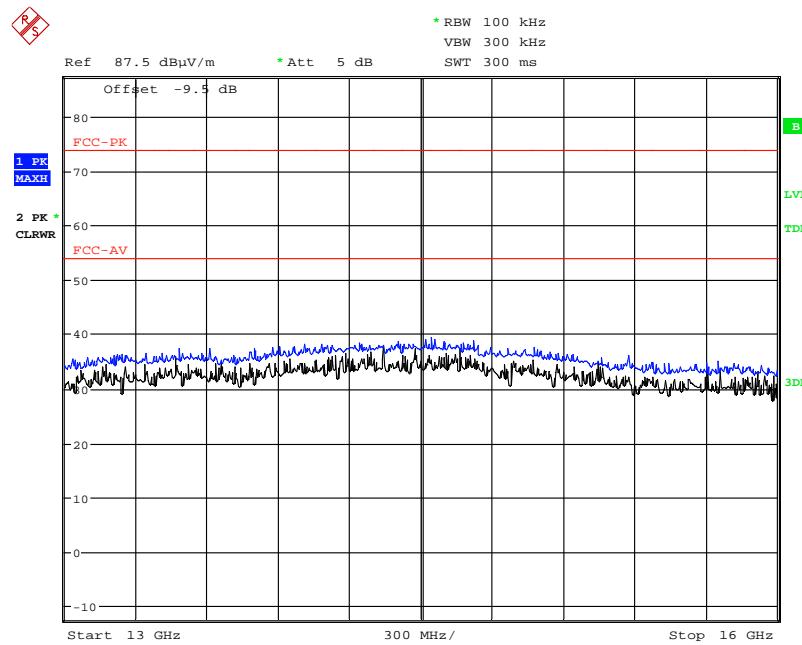

Date: 22.APR.2013 09:33:56

13GHz – 16GHz

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

| | | |
|----|-----------------------|-----------|
| xx | = sample number | eg. S01 |
| w | = modification number | eg. Mod 2 |

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Global upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing :

| Sample No. | Description | Identification |
|------------|-------------|----------------|
| S02 | SPD650 | 36NTU125100 |
| S04 | SPD660 | 36KTU125100N |
| | | |

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

| Sample No. | Description | Identification |
|------------|-------------------------|----------------|
| S01 | Charger | 36NTU125100 |
| S08 | Antenna | None |
| S12 | AC Adaptor | None |
| None | Interface / Control PCB | None |
| None | Mic / Speaker Handset | None |

The following samples of apparatus were supplied by TRaC Global as support or drive equipment (auxiliary equipment):

| Identification | Description |
|----------------|-------------|
| None | |
| | |
| | |

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

| Test | Description of Operating Mode |
|-----------------------------------|--|
| All tests detailed in this report | EUT transmitting on the required frequency with / without modulation and set to 12.5 kHz as required |

| Test | Description of Operating Mode: |
|--|----------------------------------|
| Receiver conducted and radiated (ERP) spurious emissions | EUT active but non-transmitting. |

| Test | Description of Operating Mode: |
|------|---------------------------------|
| PLCE | EUT Active but not transmitting |

C3) EUT Configuration Information.

The EUT was submitted for testing in one single possible configuration.

C4) List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S02 & S04
Tests : Conducted

| Port | Description of Cable Attached | Cable length | Equipment Connected |
|--------------|-------------------------------|--------------|-------------------------|
| Antenna Port | Coaxial cable | 1m | Measuring setup |
| Handset port | Multicore cable | 1m | Interface / Control PCB |
| | | | |
| | | | |

Sample : S02 & S04
Tests : Radiated Emissions

| Port | Description of Cable Attached | Cable length | Equipment Connected |
|---------------|-------------------------------|--------------|---------------------|
| Antenna Port | None | 0 | 50Ω Load (TX Mode) |
| Antenna Port | None | 0 | Antenna (RX Mode) |
| Charging port | None (Seated in charger) | 0 | S01 |
| | | | |
| | | | |
| | | | |

* Only connected during setup.

C5 Details of Equipment Used

| TRaC No | Equipment Type | Equipment Description | Manufacturer | Last Cal Calibration | Calibration Period | Due For Calibration |
|---------|----------------|-------------------------|--------------|----------------------|--------------------|---------------------|
| UH004 | ESVS10 | Receiver | R&S | 11/02/2013 | 12 | 11/02/2014 |
| UH028 | UHALP 9108 | Log Periodic Ant | Schwarbeck | 17/06/2011 | 24 | 17/06/2013 |
| UH029 | VHBA 9123 | Bicone Antenna | Schwarbeck | 17/06/2011 | 24 | 17/06/2013 |
| UH093 | CBL6112B | Bilog | Chase | 20/06/2011 | 24 | 20/06/2013 |
| UH096 | 6960B | Power meter | Marconi | 04/11/2012 | 12 | 04/11/2013 |
| UH122 | TDS520B | Oscilloscope | Tektronix | 11/04/2012 | 24 | 11/04/2014 |
| UH129 | 6924 | Power Sensor | Marconi | 03/12/2012 | 12 | 03/12/2013 |
| UH187 | ESH510 | Receiver | R&S | 11/02/2013 | 12 | 11/02/2014 |
| UH191 | CBL611/A | Bilog | Chase | 13/12/2012 | 24 | 13/12/2014 |
| UH195 | ESH3-Z5.831.5 | Lisn | R&S | 01/06/2012 | 12 | 01/06/2013 |
| UH228 | 6920 | Power Sensor | Marconi | 03/12/2012 | 12 | 03/12/2013 |
| UH281 | FSU46 | Spectrum Analyser | R&S | 06/03/2013 | 12 | 06/03/2014 |
| UH385 | HL 050 | Log Periodic Antenna | R&S | 16/07/2012 | 24 | 16/07/2014 |
| UH387 | ATS | Chamber 1 | Rainford EMC | 24/06/2012 | 12 | 24/06/2013 |
| UH388 | ATS | Chamber 2 | Rainford EMC | 22/06/2012 | 12 | 22/06/2013 |
| UH403 | ESCI 7 | Recevier | R&S | 27/06/2012 | 12 | 27/06/2013 |
| UH405 | FSU26 | Spectrum Analyser | R&S | 20/03/2013 | 12 | 20/03/2014 |
| UH420 | CBL6112 | Bilog | Chase | 06/07/2012 | 24 | 06/07/2014 |
| L005 | CMTA52 | Communications Analyser | R&S | 27/03/2013 | 12 | 27/03/2014 |
| L007 | hfh2 | Loop Antenna | R&S | 04/11/2011 | 24 | 04/11/2013 |
| L138 | 3115 | 1-18GHz Horn | EMCO | 08/11/2011 | 24 | 08/11/2013 |
| L139 | 3115 | 1-18GHz Horn | EMCO | 14/09/2011 | 24 | 14/09/2013 |
| L176 | 2042 | Signal Generator | Marconi | 20/11/2012 | 12 | 20/11/2013 |
| L254 | 2042 | Signal Generator | Marconi | 19/12/2012 | 12 | 19/12/2013 |
| L193 | VHA 9103 balu | Bicone Antenna | Chase | 19/06/2012 | 24 | 19/06/2014 |
| L203 | UPA6108 | Log Periodic Ant | Chase | 19/06/2012 | 24 | 19/06/2014 |
| L263/A | 20240-20 | Horn 18-26GHz | Flann | 17/11/2011 | 24 | 17/11/2013 |
| L290 | CBL611/A | Bilog | Chase | 13/12/2012 | 24 | 13/12/2014 |
| L300 | 20240-20 | Horn 18-26GHz (&UH330) | Flann | 17/11/2011 | 24 | 17/11/2013 |
| L317 | ESVS10 | Receiver | R&S | 09/01/2013 | 12 | 09/01/2014 |
| L426 | 52 Series II | Temperature Indicator | Fluke | 29/04/2013 | 12 | 29/04/2014 |
| L572 | 8449B | Pre Amp | Agilent | 12/12/2012 | 24 | 12/12/2014 |
| L654 | 8563A | Spectrum Analyser | HP | 18/10/2012 | 12 | 18/10/2013 |
| REF909 | FSU26 | Spectrum Analyser | R&S | 04/02/2013 | 12 | 04/02/2014 |
| REF916 | SMBV100A | Signal Generator | R&S | 23/07/2012 | 12 | 23/07/2013 |
| REF940 | ATS | Radio Chamber - PP | Rainford EMC | 26/06/2012 | 12 | 26/06/2013 |
| REF976 | 34405a | Multimeter | Agilent | 26/04/2013 | 12 | 26/04/2014 |
| REF977 | SH4141 | High Pass Filter | BSC | 25/02/2013 | 24 | 25/02/2015 |

Appendix D:

Additional Information

No additional information is included within this test report.

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:

1. SPD650 - Radiated electric field emissions arrangement: Overview.
2. SPD650 - AC Powerline Conducted emissions arrangement: Overview.
3. SPD660 - Radiated electric field emissions arrangement: Overview.
4. SPD660 - AC Powerline Conducted emissions arrangement: Overview.



Photograph 1



Photograph 2



Photograph 3



Photograph 4

