

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:1

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing)

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 440.1 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=440$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 55.3$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing)/Channel 1 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 8.120 W/kg

Holster (12mm Spacing)/Channel 1 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 76.639 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 7.030 W/kg; SAR(10g) = 4.780 W/kg

Maximum value of SAR (interpolated) = 11.600 W/kg

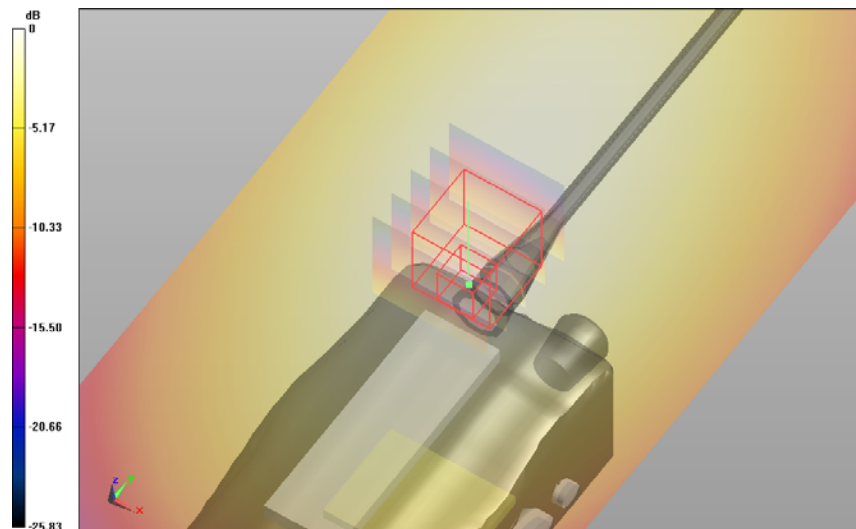


0 dB = 8.12 W/kg = 9.10 dBW/kg

SAR Measurement Plot 20



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

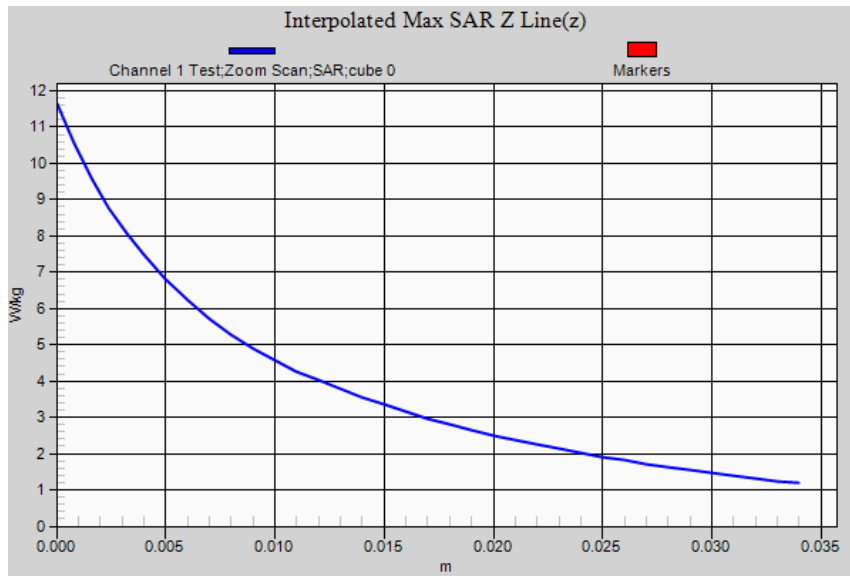

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:1

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing)

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 458.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=458$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 54.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing)/Channel 2 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 9.640 W/kg


Holster (12mm Spacing)/Channel 2 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 82.415 V/m; **Power Drift = -0.20 dB**

Averaged SAR: SAR(1g) = 8.870 W/kg; SAR(10g) = 6.070 W/kg

Maximum value of SAR (interpolated) = 14.300 W/kg

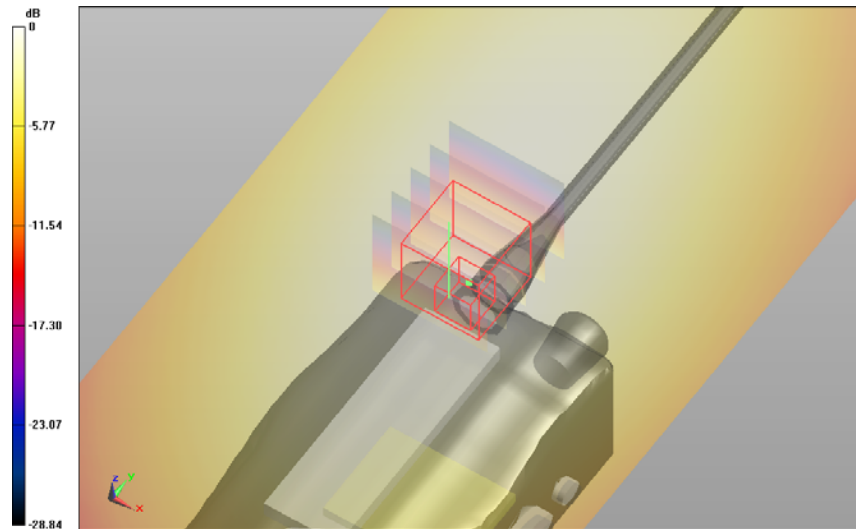

SAR Measurement Plot 21

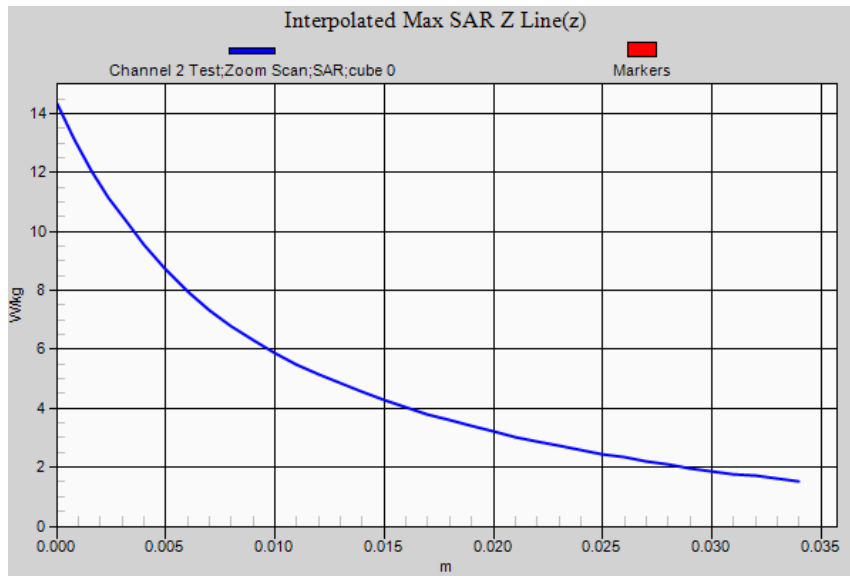

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:1

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing)

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 476.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=476$ MHz; $\sigma = 0.94$ S/m; $\epsilon_r = 54.7$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing)/Channel 3 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 7.750 W/kg

Holster (12mm Spacing)/Channel 3 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 72.217 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 7.270 W/kg; SAR(10g) = 4.890 W/kg

Maximum value of SAR (interpolated) = 11.900 W/kg

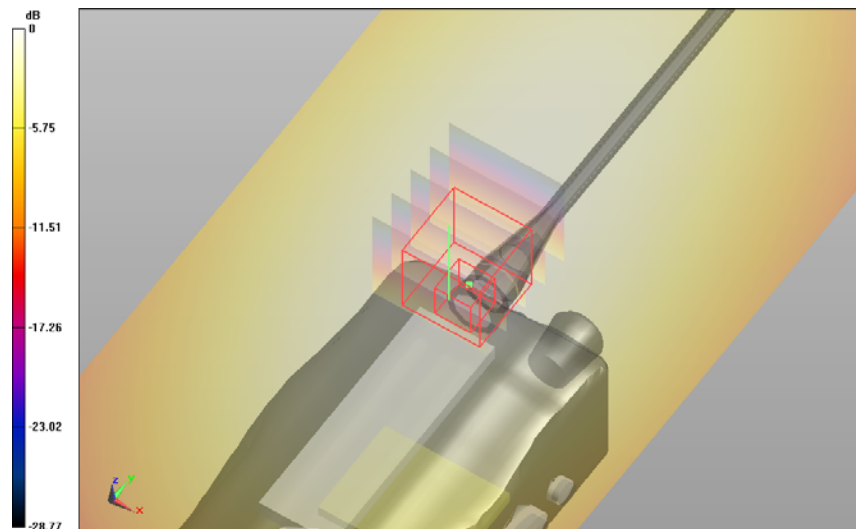


0 dB = 7.75 W/kg = 8.89 dBW/kg

SAR Measurement Plot 22



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

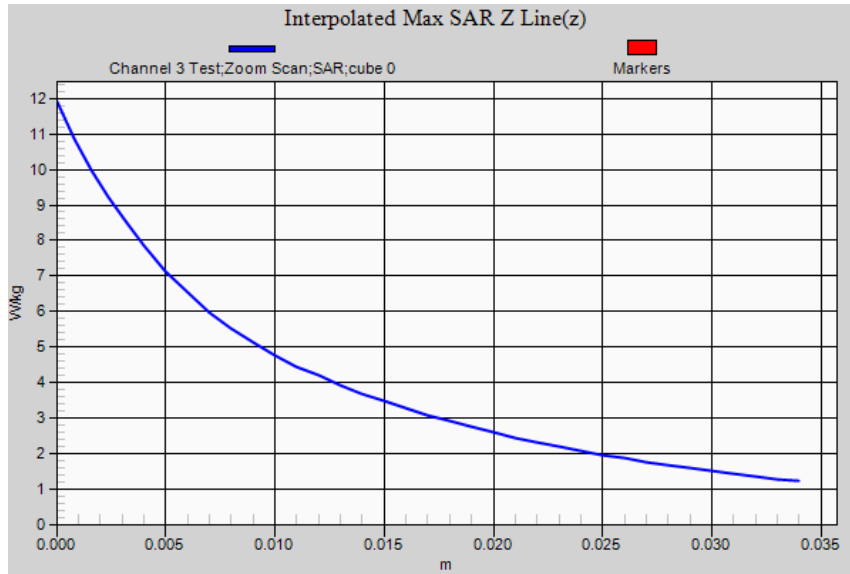

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:1

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing)

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 494.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=494$ MHz; $\sigma = 0.95$ S/m; $\epsilon_r = 54.3$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing)/Channel 4 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 7.190 W/kg

Holster (12mm Spacing)/Channel 4 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 66.096 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 7.400 W/kg; SAR(10g) = 4.790 W/kg

Maximum value of SAR (interpolated) = 12.900 W/kg

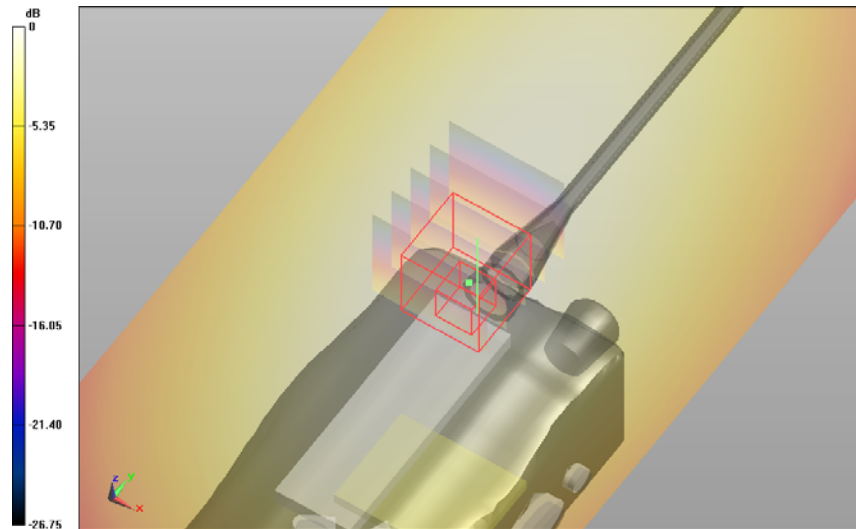


0 dB = 7.19 W/kg = 8.57 dBW/kg

SAR Measurement Plot 23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

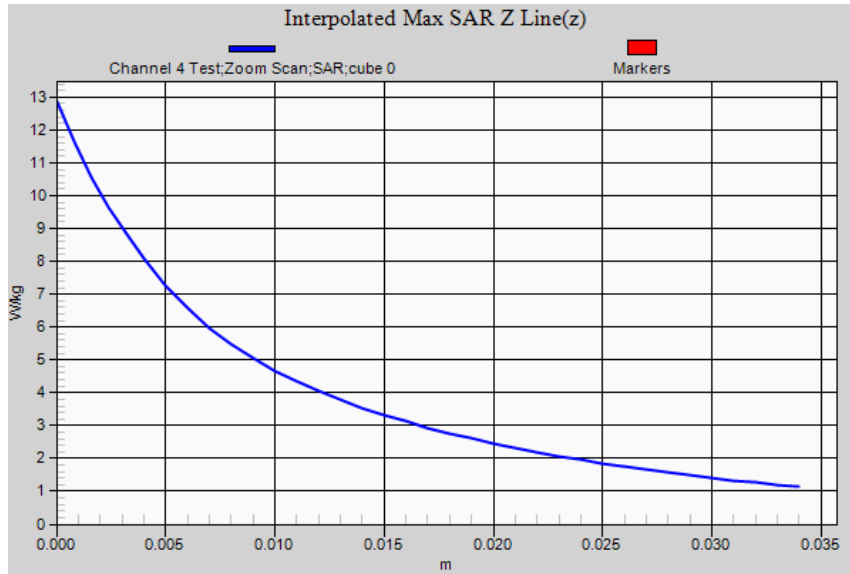

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:1

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing)

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 511.9 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=512$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 54.0$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing)/Channel 5 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 6.720 W/kg

Holster (12mm Spacing)/Channel 5 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 59.288 V/m; **Power Drift = -0.16 dB**


Averaged SAR: SAR(1g) = 6.320 W/kg; SAR(10g) = 4.050 W/kg

Maximum value of SAR (interpolated) = 11.100 W/kg

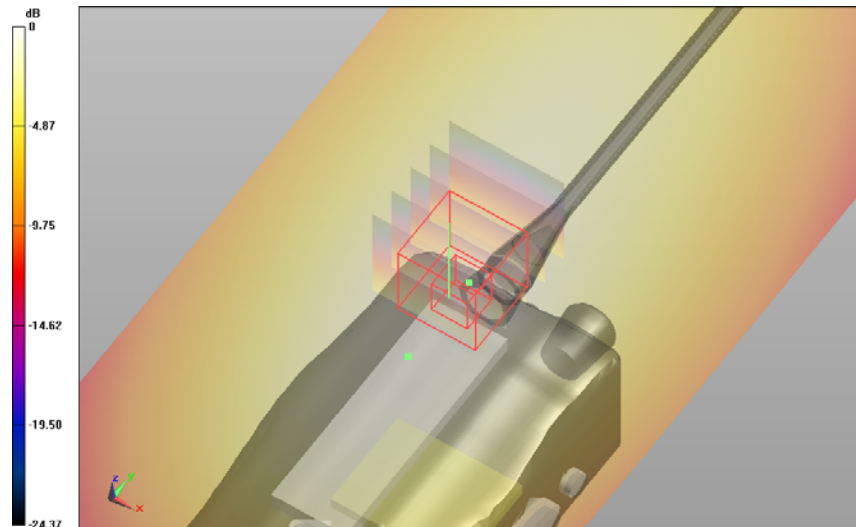

0 dB = 6.72 W/kg = 8.27 dBW/kg

SAR Measurement Plot 24

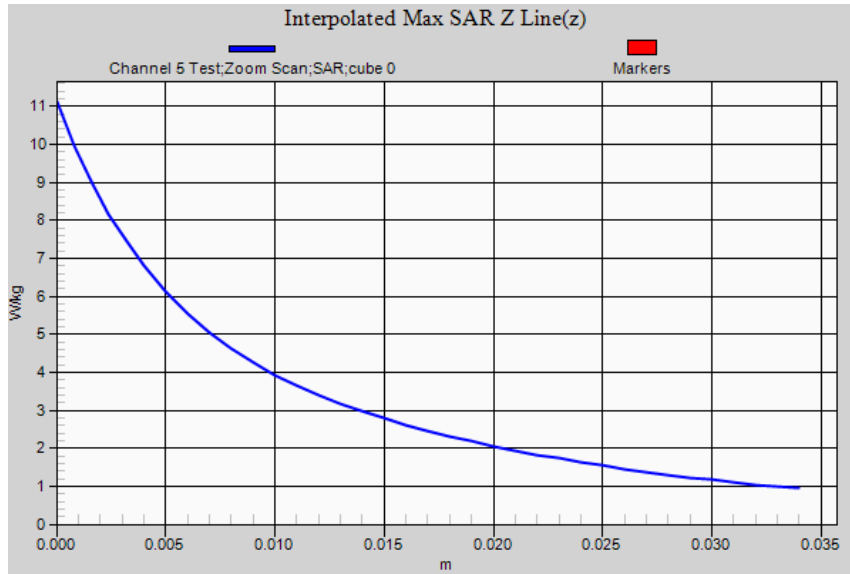

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:2

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing) Alternative Audio Accessory PAR-9180LMW1

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 458.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=458$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 54.9$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing) Alternative Audio Accessory PAR-9180LMW1/Channel 2 Test/Area Scan (221x81x1): Interpolated grid: $dx=1.5$ mm, $dy=1.5$ mm; Maximum value of SAR (interpolated) = 10.200 W/kg


Holster (12mm Spacing) Alternative Audio Accessory PAR-9180LMW1/Channel 2 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: $dx=1.6$ mm, $dy=1.6$ mm, $dz=1.0$ mm; Reference Value = 80.583 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 9.150 W/kg; SAR(10g) = 6.090 W/kg

Maximum value of SAR (interpolated) = 15.600 W/kg

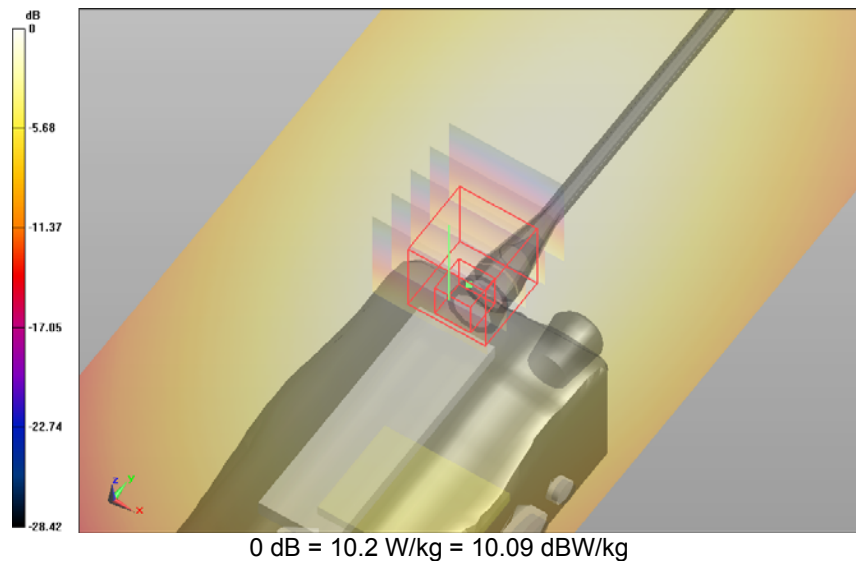

SAR Measurement Plot 25

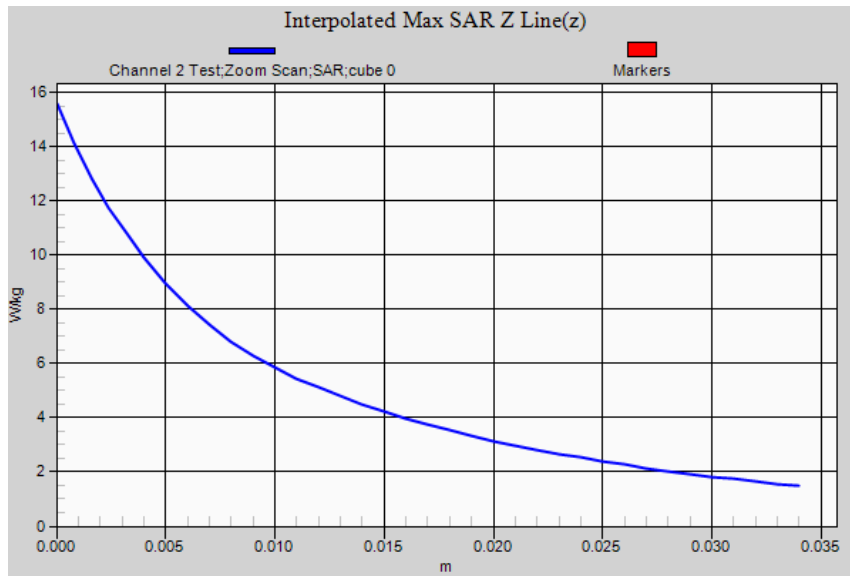

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:3

DUT Name: Simoco PTT transmitter, Type: SDP660 UW, Serial: 56KUW1415 05SL

Configuration: Holster (12mm Spacing) Alternative Audio Accessory PAR-600LMS4

Communication System: 0 - CW (0); Communication System Band: Simoco 450 MHz; Frequency: 458.0 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
 Medium Parameters used: $f=458$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 54.9$; $\rho = 1000.0$ g/cm³
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Holster (12mm Spacing) Alternative Audio Accessory PAR-600LMS4/Channel 2 Test/Area Scan (221x81x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm; Maximum value of SAR (interpolated) = 10.400 W/kg


Holster (12mm Spacing) Alternative Audio Accessory PAR-600LMS4/Channel 2 Test/Zoom Scan (21x21x36)/Cube 0: Interpolated grid: dx=1.6 mm, dy=1.6 mm, dz=1.0 mm; Reference Value = 81.254 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 9.400 W/kg; SAR(10g) = 6.290 W/kg

Maximum value of SAR (interpolated) = 15.800 W/kg

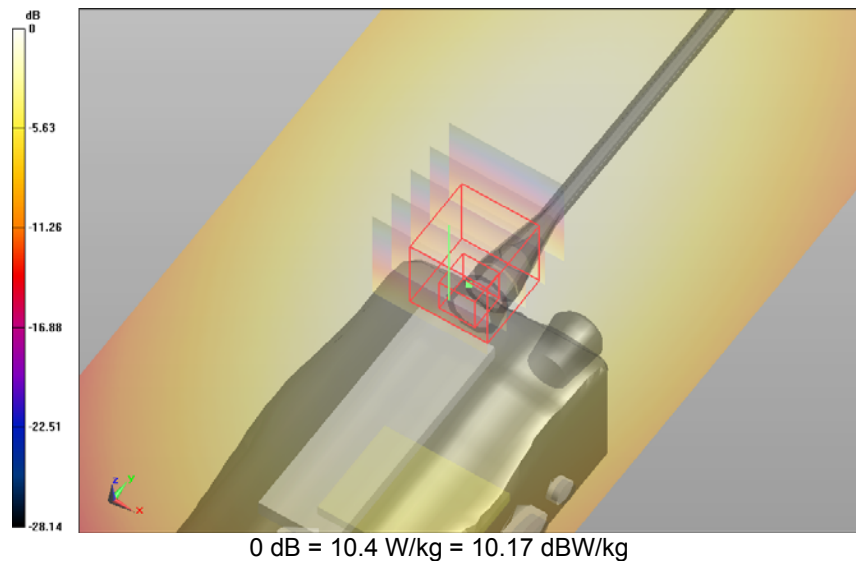

SAR Measurement Plot 26

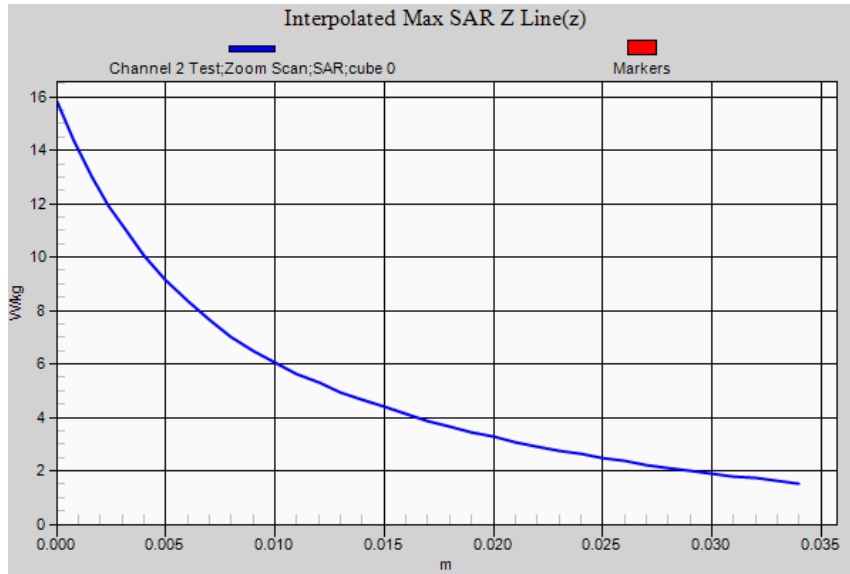

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech Test File: M140624 PTT 450 MHz Body Worn FCC 01-07-14.da52:4

DUT Name: Dipole 450 MHz, Type: D450V3, Serial: 1074

Configuration: System Check

Communication System: 0 - CW 450 MHz; Communication System Band: **450 MHz**; Frequency: 450.0 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
 Medium Parameters used: f=450 MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 55.1$; $\rho = 1000.0\text{g/cm}^3$
 Phantom section: Flat Section

DASY Configuration:


Probe: ET3DV6 - SN1380; ConvF: (7.49,7.49,7.49); Calibrated: 13/12/2013;
 Sensor-Surface: 4 mm (Mechanical Surface Detection)
 Electronics: DAE3 Sn442; Calibrated: 10/12/2013
 Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101
 DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Check/Channel 1Test/Area Scan (51x121x1): Interpolated grid: dx=1.5 mm, dy=1.5 mm;
 Maximum value of SAR (interpolated) = 1.970 W/kg


System Check/Channel 1Test/Zoom Scan (31x31x36)/Cube 0: Interpolated grid: dx=1.0 mm, dy=1.0 mm, dz=1.0 mm; Reference Value = 48.215 V/m; **Power Drift = -0.02 dB**

Averaged SAR: SAR(1g) = 1.890 W/kg; SAR(10g) = 1.190 W/kg

Maximum value of SAR (interpolated) = 3.240 W/kg

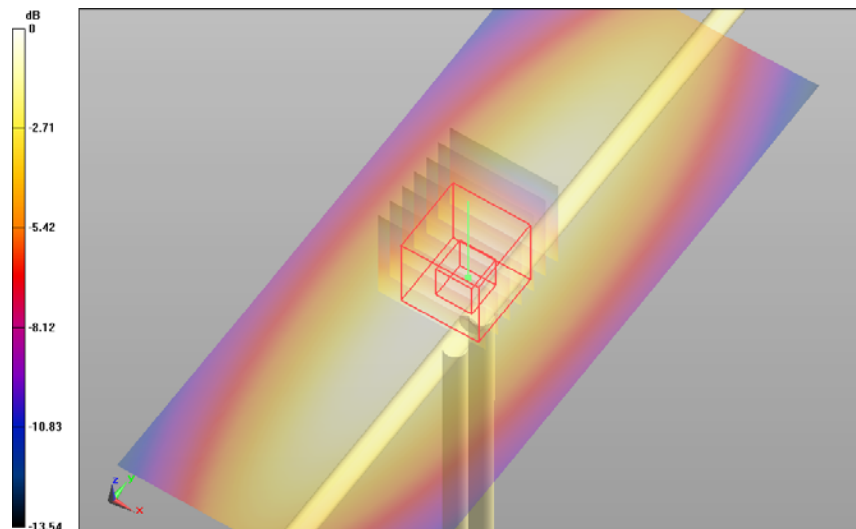

SAR Measurement Plot 27

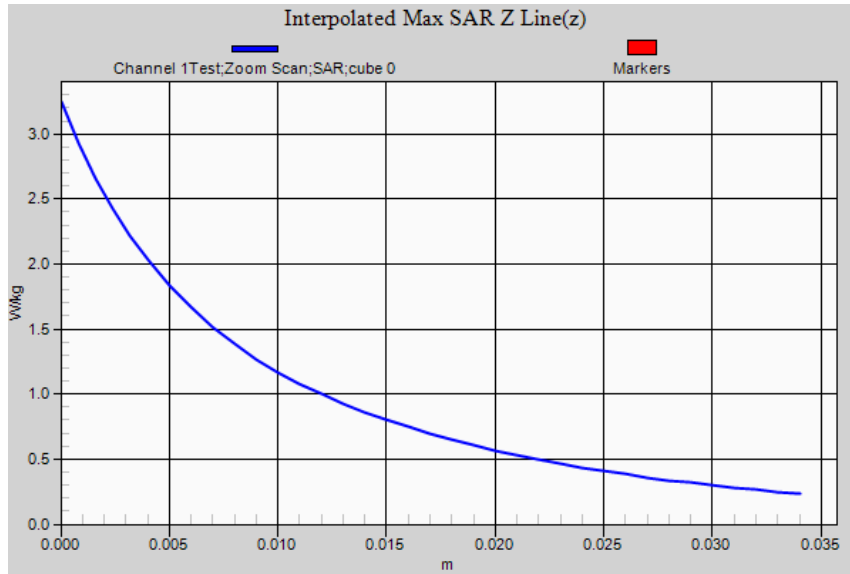

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.