

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

TEST REPORT

SIMOCO SRP9130AC / MACOM P3300 VHF Portable Transceiver

tested to the

Code of Federal Regulations (CFR) 47


Part 90 –Private Land Mobile Services

Part 22 – Public Mobile Services

Part 15 – Radio Frequency Device

for

TMC Radio Pty Ltd

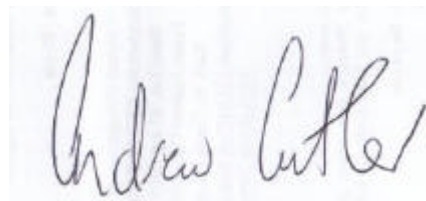

This Test Report is issued with the authority of:

Andrew Cutler - General Manager



All tests reported
herein have been
performed in accordance
with the laboratory's
scope of accreditation

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No **70520.2**

Report date: 30th May 2007

Table of Contents

1. CLIENT INFORMATION	3
2. DESCRIPTION OF TEST SAMPLE	3
3. COMPLIANCE STATEMENT AND RESULT SUMMARY	4
4. TEST SAMPLE DESCRIPTION	5
5. TEST CONDITIONS	6
6. ATTESTATION	7
7. TEST RESULTS	8
8. TEST EQUIPMENT USED	35
9. ACCREDITATIONS	35
10. PHOTOGRAPH (S)	36

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No **70520.2**

Report date: 30th May 2007

1. CLIENT INFORMATION

Company Name TMC Radio Pty Ltd
Address 1270 Ferntree Gully Road
Scoresby
City Victoria, 3179
Country Australia
Contact Mr Robert Stowell

2. DESCRIPTION OF TEST SAMPLE

Brand Name SIMOCO / MACOM
Model Number SRP9130AC / P3300
Product VHF Portable Transceiver
Manufacturer TMC Radio Pty Ltd
Designed in Australia
Manufactured in Taiwan
Serial Number ES3AX070557PC
FCC ID STZSRP9100AC

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

3. COMPLIANCE STATEMENT AND RESULT SUMMARY

The **SIMOCO SRP9130AC/ MACOM P3300 VHF Portable Transceiver** complies with the limits defined in 47CFR 15, 47CFR22, 47 CFR Part 90 and 47 CFR Part 2 when tested in-accordance with the test methods described in 47 CFR Part 2.

<u>CLAUSE</u>	<u>TEST PERFORMED</u>	<u>RESULT</u>
90.203	Certification required	Complies
2.1046	RF power output	Noted
90.205	Power and antenna height limits	Complies
2.1047	Modulation Characteristics	
2.1047(a)	Low pass filter response	Complies
2.1047(b)	Modulation limiting characteristics	Complies
90.211(a)	Modulation characteristics	Complies
2.1049	Occupied bandwidth	Noted
2.202	Bandwidths	Noted
22.357	Emission types	Complies
22.359(a)	Emission masks	Complies
90.207	Types of emissions	Complies
90.209	Bandwidth limitations	Complies
90.210	Emission masks	Complies
2.1051	Spurious emissions at antenna terminals	Complies
2.1053	Field strength of spurious radiation	Complies
2.1055	Frequency stability	Noted
22.355	Frequency tolerance	Complies
90.213	Frequency stability	Complies
90.214	Transient frequency behaviour	Complies
15.109	Radiated emission limits	Complies
15.111	Antenna conducted power measurement	Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

4. TEST SAMPLE DESCRIPTION

The sample tested has the following specifications:

Rated Transmitter Output Power

5.0 Watts (36.9 dBm)

Transmitter frequency range

150-174 MHz

Test frequencies

Chl	Frequency MHz	Power Watts	Spacing kHz
1	150.075	5.0	12.5
2	162.075	5.0	12.5
3	173.975	5.0	12.5
4	150.075	5.0	25.0
5	162.075	5.0	25.0
6	173.975	5.0	25.0

FCC Bands

Part 90: 150-174 MHz

Part 22: 150-174 MHz

Emission Designators / Modes of operation

11k2F3E – Analogue speech

11k2F1D – 1200 baud FFSK

8k10F1E – C4FM digital speech

16k0F3E – Analogue speech

16k0F1D – 1200 baud FFSK

Power Supply

Battery DC voltage supply. Typically 7.2 Vdc

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

5. TEST CONDITIONS

Standard Temperature and Humidity

Temperature: Range +15°C- 30°C
Relative Humidity: Range 20% -75%

Standard Test Power Source

Standard Test Voltage: 7.2 Vdc.

Extreme Temperature

High Temperature: + 50°C maintained.
Low Temperature: - 30 °C maintained.

Extreme Test Voltages

Low Voltage: 6.4 Vdc

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

6. ATTESTATION

The **SIMOCO SRP9130AC/ MACOM P3300 VHF Mobile Transceiver** complies with the Code of Federal Regulations (CFR) 47 Part 90 –Private Land Mobile Services , Part 22 – Public Land Mobile Services and 47 Part 15 – Radio Frequency Devices.

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:

The client selected the test sample.

The report relates only to the sample tested.


This report does not contain corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations.

To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards.

I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.

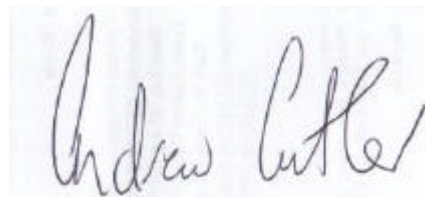

Andrew Cutler
General Manager
EMC Technologies NZ Ltd

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

7. TEST RESULTS

Certification required

Certification of this device is sought for analogue speech, digital speech and data transmissions using 12.5 kHz and 25.0 kHz channel spacing.

25 kHz and 12.5 kHz channel bandwidth certification is sought for this transmitter under section 90.203(j)(3) as:

- certification has been sought after February 14, 1997 and before January 1, 2011.
- the equipment meets the spectrum efficiency standard of one voice channel per 12.5 kHz of channel bandwidth
- the equipment can operate with a data rate greater than 4.8 kbps per 6.25 kHz

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

RF power output

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50 Ω dummy load.

Measurements were carried out when the transmitter was not being modulated.

Measurements were made with the input voltage set to 7.2 Vdc and decreased by 10%.

Testing was carried out at maximum power output.

Frequency	Voltage (Vdc)	Rated (dBm)	Measured (dBm)
150.075	7.2	36.9	36.7
162.075	7.2	36.9	36.8
173.975	7.2	36.9	36.7

Frequency	Voltage (Vdc)	Rated (dBm)	Measured (dBm)
162.075	7.2	36.9	36.8
162.075	6.4	36.9	36.3

Limits:

Clause 90.205(d) of Part 90 specifies that in the band 150 – 174 MHz the maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and the required service area.

Part 22 does not specify the transmitter output power.

Result: Complies

Measurement Uncertainty: ± 0.5 dB

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Modulation Characteristics


This transmitter is capable of producing analogue speech and digital speech modulations.

(a) Frequency response of the audio frequency low pass filter between 100 Hz and 15 kHz.

This measurement was carried out using an audio signal generator and an audio modulation analyser.

At 1 kHz an audio signal was applied which was used as a 0 dB response reference.

The frequency of the input signal was then varied and the output response noted. This measurement was carried out from 100 Hz to 5000 Hz as required by Part 2 with further measurements carried out in order to show the full range of this filter.

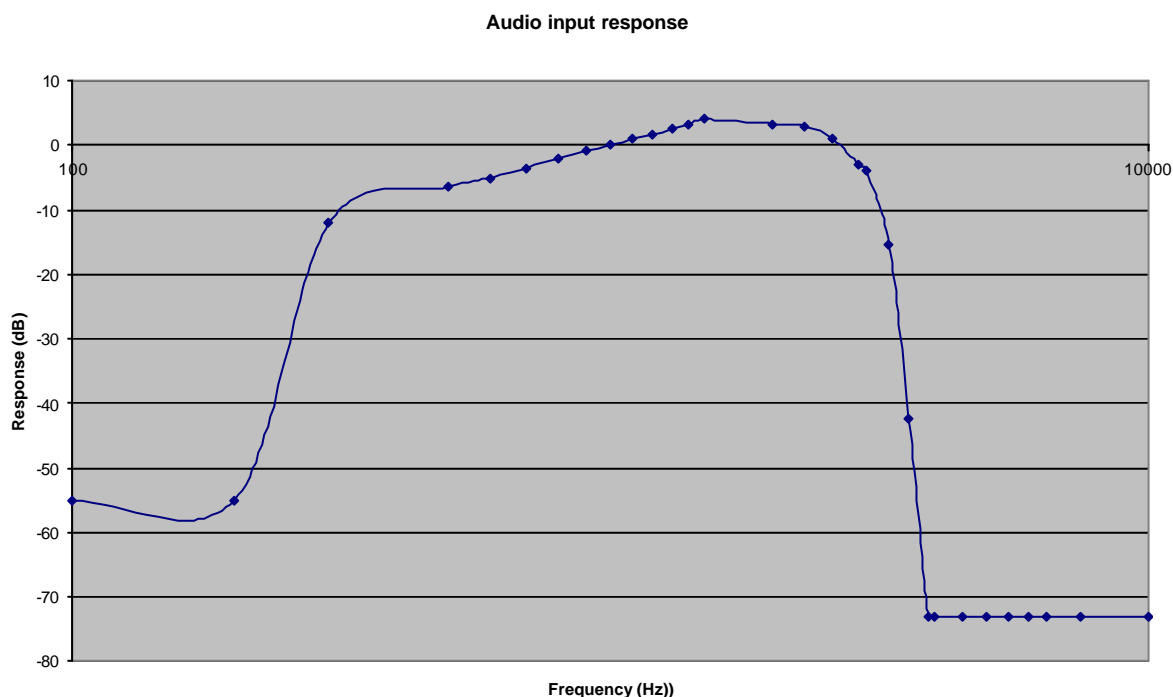

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2


Report date: 30th May 2007

(b) A family of curves showing the percentage of modulation versus the modulation input voltage.

Measurements were made between 100 Hz to 4 kHz.

At each frequency the input voltage was slowly increased with the resulting frequency deviation of the transmitter being recorded.

This deviation was then converted to a modulation percentage where 5 kHz deviation is 100% for 25 kHz channels and 2.5 kHz deviation is 100% for 12.5 kHz channels.

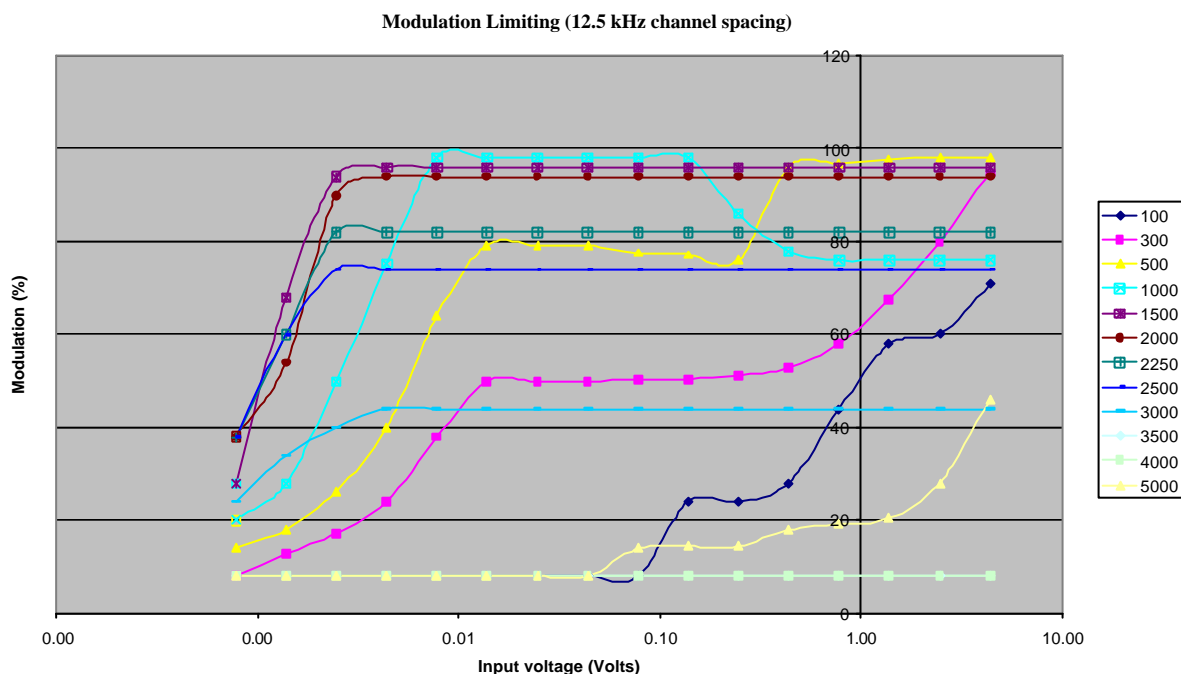

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Modulation limiting (25 kHz channel spacing transmitter)

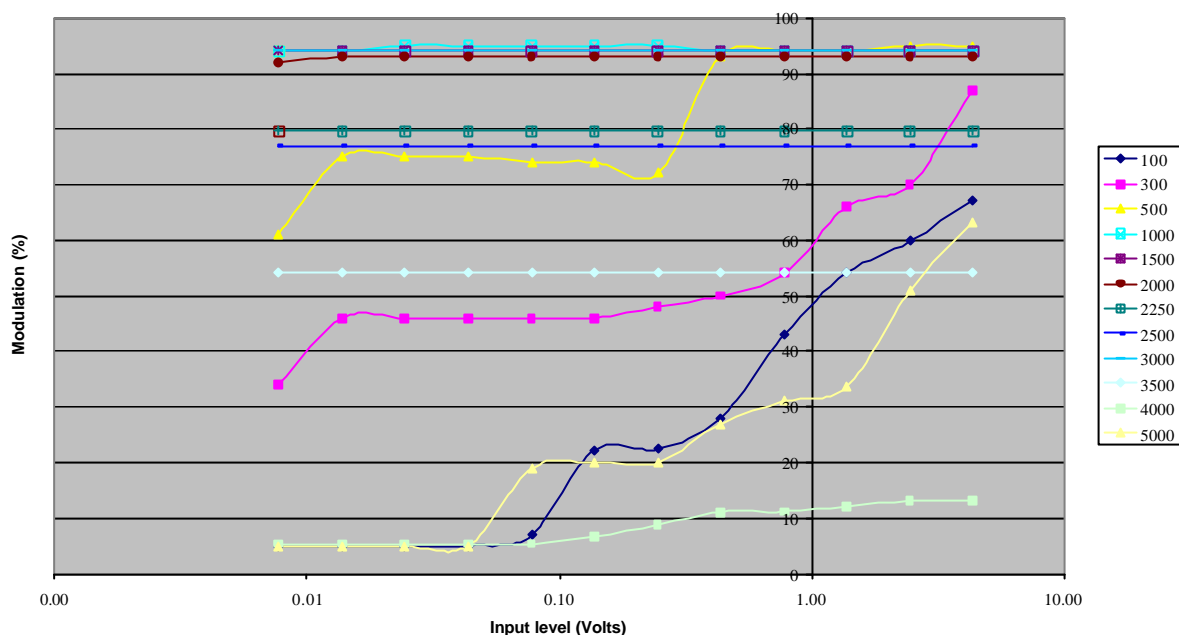

(d) A curve or equivalent data that shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

Digital modulation as detailed below is also used with this transmitter.

The types of modulation used are:

C4FM digital modulation is used for digital telephony (F1E).

1200 baud FFSK data is used for data transmissions (F1D).

Limit:

Part 90.211 – Modulation requirements states the transmitter must meet the emission requirements of 90.210. Refer to the Occupied Bandwidth measurements in this report.

Result: Complies

Measurement Uncertainty: $\pm 1\%$.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Part 90.207 – Emission types:

The following emission types are used:

- F3E: Frequency modulation with analogue speech.
- F1E: Digital telephony using C4FM.
- F1D: Data transmission using 1200 baud FFSK data.

Part 90.209 – Bandwidth limitations:

The authorised bandwidth is taken to be the necessary bandwidth.

Using the formulas contained in Part 2.202 the necessary bandwidth calculation for the 25 kHz channel step emission is:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 5.0 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = \underline{16 \text{ kHz}}$$

This is confirmed in the emission designation, 16k0F3E, declared by the client.

Using the formulas contained in Part 2.202 the necessary bandwidth calculation for the 12.5 kHz channel step emission is:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 2.5 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = \underline{11 \text{ kHz}}$$

This is confirmed in the emission designation, 11k0F3E, declared by the client.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Part 22.359 – Bandwidth limitations:

Part 22.359(a) – Analog modulation. No authorised bandwidth is defined.

The necessary bandwidth is taken to be the authorised bandwidth.

Using the formulas contained in Part 2.202:

$$B_n = 2 \times D + 2 \times M$$

Where D = maximum deviation: 2.5 kHz or 5.0 kHz

Where M = maximum modulation frequency: 3 kHz

$$B_n = \underline{11.0 \text{ kHz or } 16 \text{ kHz}}$$

This is confirmed in the emission designations, 11k0F3E and 16k0F3E as declared by the client.

This transmitter can also transmit digital telephony and data using F1E and F1D.

Using the tables in Part 2.202 – Bandwidth, bandwidths for the F1D and F1E emissions could not be determined easily.

Therefore the occupied bandwidth has been measured and compared against the occupied bandwidth declared by the client.

Measurements have been made of each modulation type using a spectrum analyser operating in peak hold mode and a 30 dB attenuator.

Initially power measurements are made using a resolution bandwidth of 120 kHz which is used as a reference level on the spectrum analyser.

The resolution bandwidth is then changed to 100 Hz and the reference level minus 23 dB (99%) absolute bandwidth points determined

However in keeping with the method used previously the F1D bandwidths have been measured relative to the 100 Hz bandwidth maximum.

The F1E bandwidth has been measured using the above described method.

Emission	Channel	Measured	Designation
F1D	12.5 kHz	7.3 kHz	11k0F1D
F1E	12.5 kHz	8.2 kHz	8k10F1E
F1D	25.0 kHz	11.3 kHz	16k0F1D

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd


Test Report No 70520.2

Report date: 30th May 2007

F1D – 12.5 kHz channel spacing

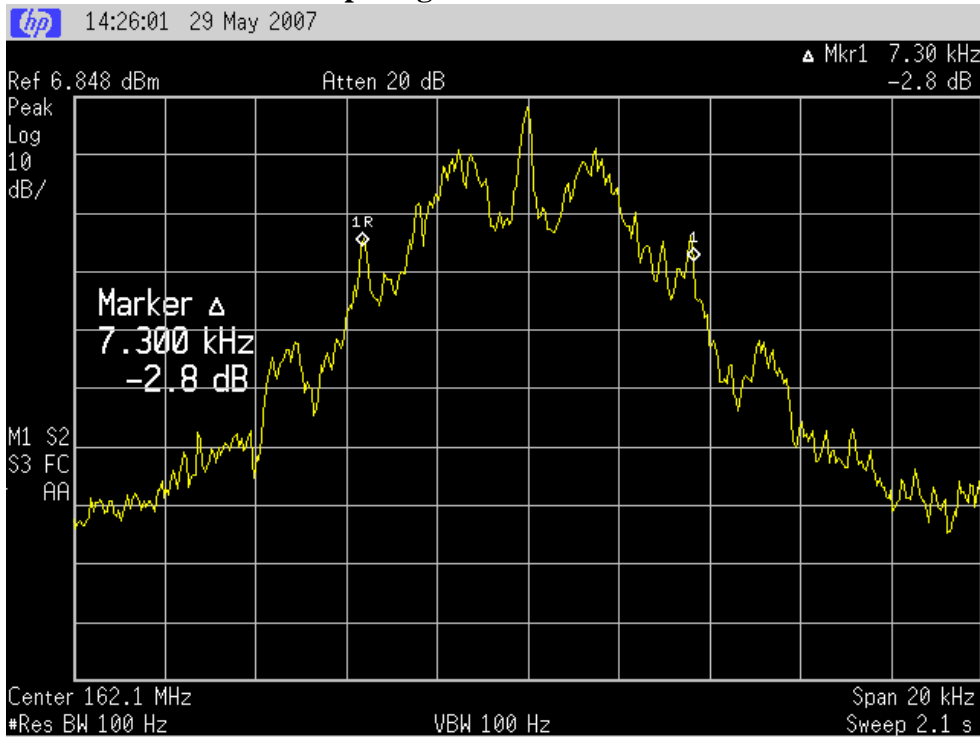

F1E – 12.5 KHz spacing

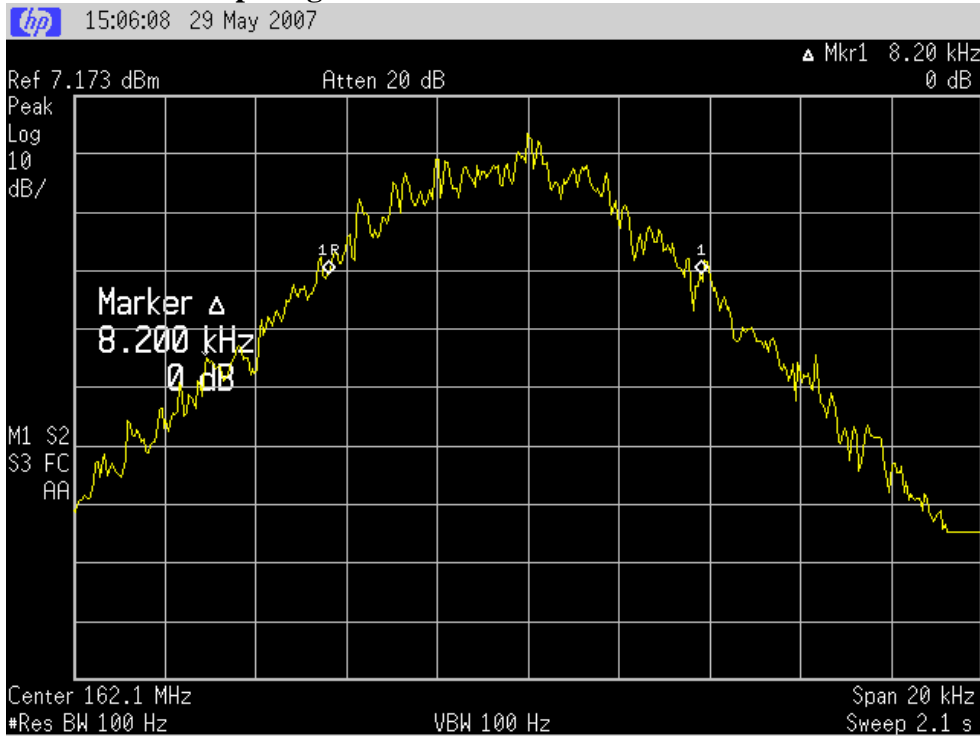

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

F1D – 25.0 kHz channel spacing

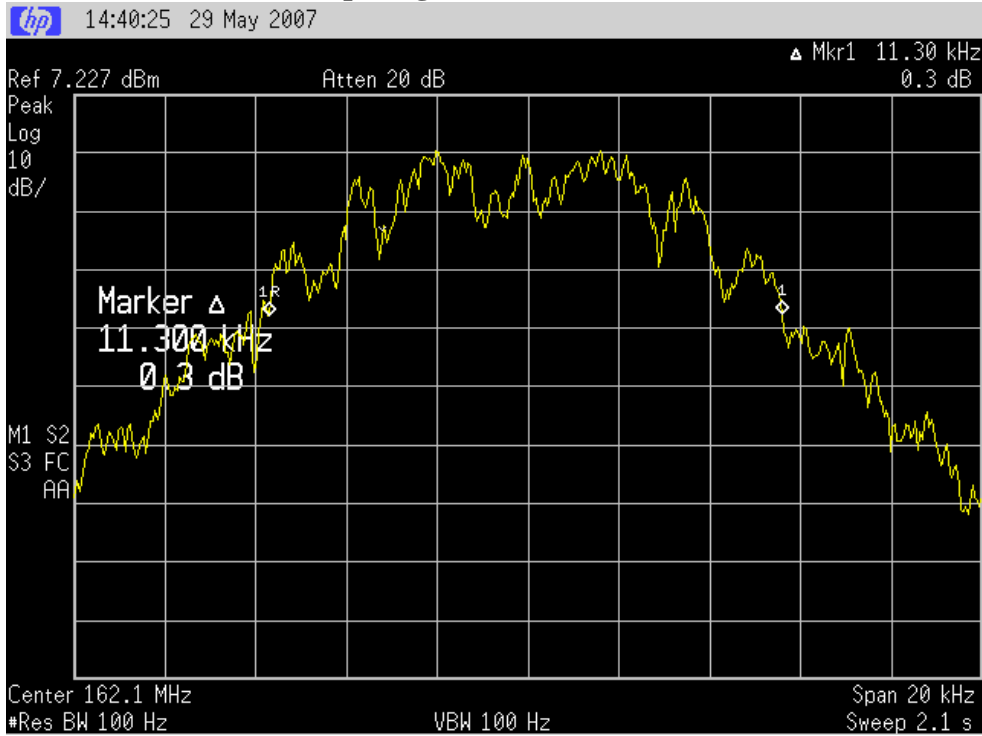

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Occupied Bandwidth

The spectrum masks are defined in:

Section 90.210(d) – Masks B and D have been applied as the transmitter can operate in the band 150 – 174 MHz using an authorised bandwidth of 20.0 kHz and 11.25 kHz as per Section 90.209(b)(5).

The reference level for the following emission mask measurements has been determined using a resolution bandwidth of 120 kHz with the transmitter modulated.

All measurements have been made with a 30 dB attenuator being placed between the transmitter and the spectrum analyser.

Measurements were made in peak hold with the transmitter operating on 162.075 MHz.

When operating in F3E mode a 2500 Hz tone, which was found to be the frequency of maximum response, that was applied at a level 16 dB higher than that required to achieve 50% modulation.

For the F1E and F1D modes the transmitter was modulated uses modulation sources internal to the transmitter as supplied by the client.

Section 22.359(a) has been applied when analogue speech is utilised. The authorised bandwidth is taken as the necessary bandwidth which has been determined by calculation.

The 12.5 kHz transmitter has an authorised bandwidth (necessary bandwidth calculated) of 11 kHz applied and the 25 kHz transmitter has an authorised bandwidth of 16 kHz applied

Section 22.359(b) (1) has been applied when F1D and F1E are utilised. Authorised bandwidths of 7.1, 7.8 and 11.15 kHz (based upon the measured occupied bandwidths) have been applied.

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd


Test Report No 70520.2

Report date: 30th May 2007

Part 90: F3E 12.5 kHz

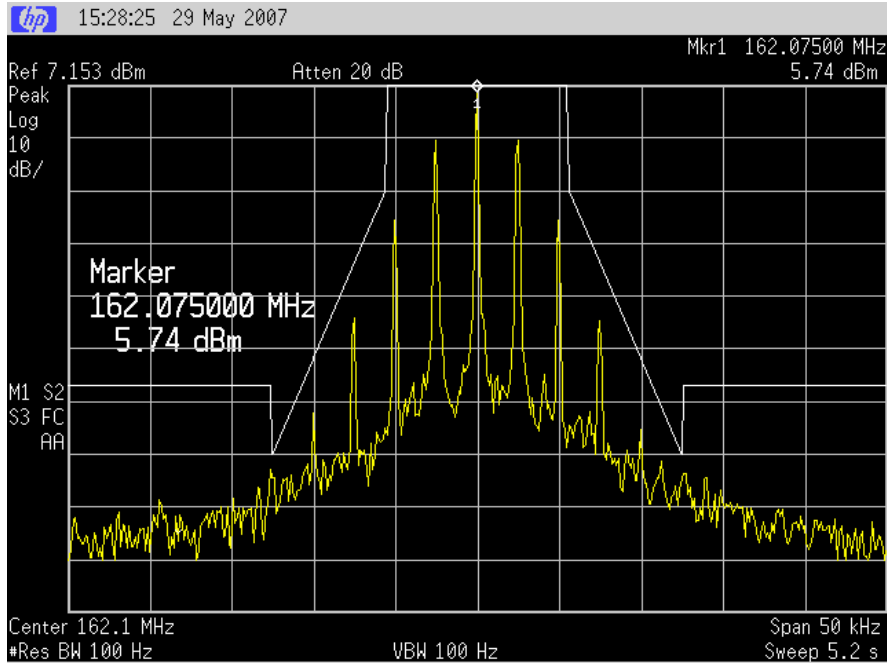

Part 90: F1D 12.5 kHz

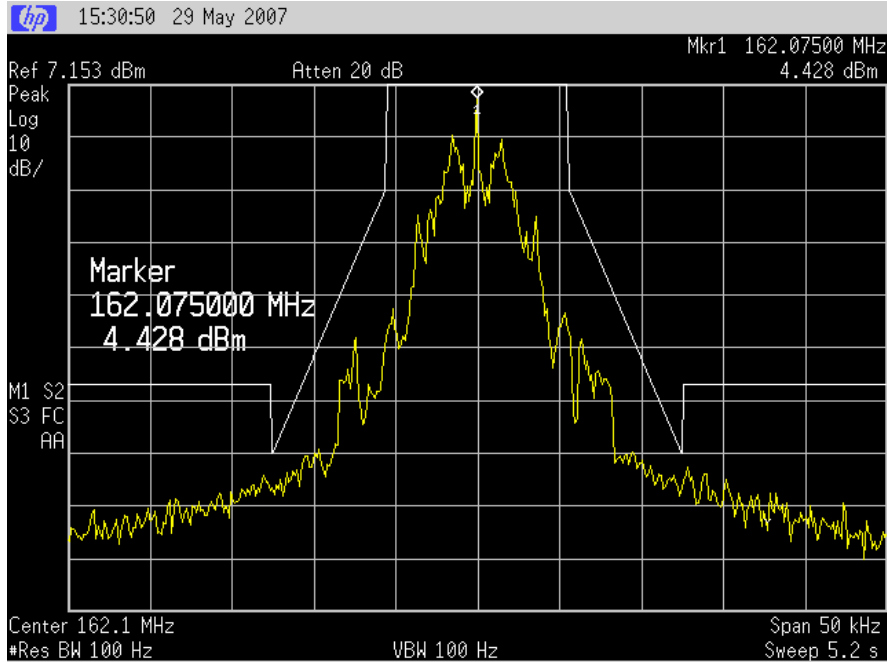

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd


Test Report No 70520.2

Report date: 30th May 2007

Part 90: F1E 12.5 kHz

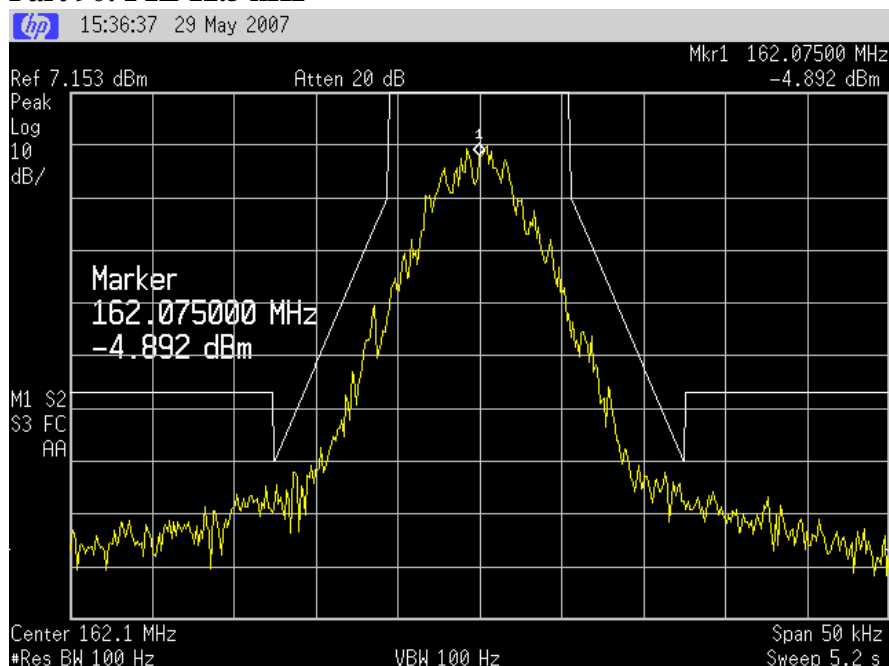

Part 90: F3E 25 kHz

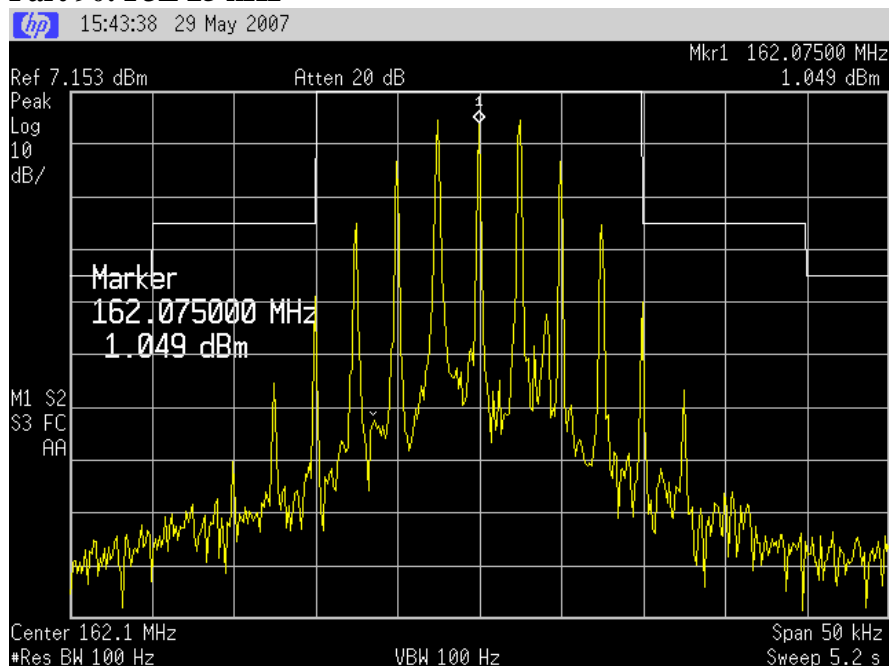

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Part 90: F1D 25kHz

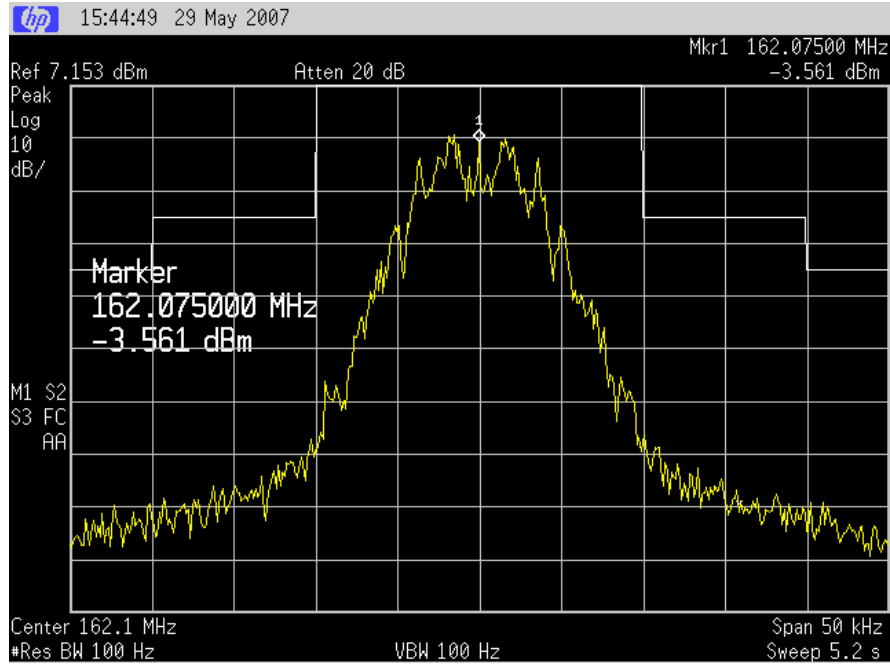

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd


Test Report No 70520.2

Report date: 30th May 2007

Part 22: F3E – 12.5 kHz (Authorised bandwidth = 11.0 kHz)

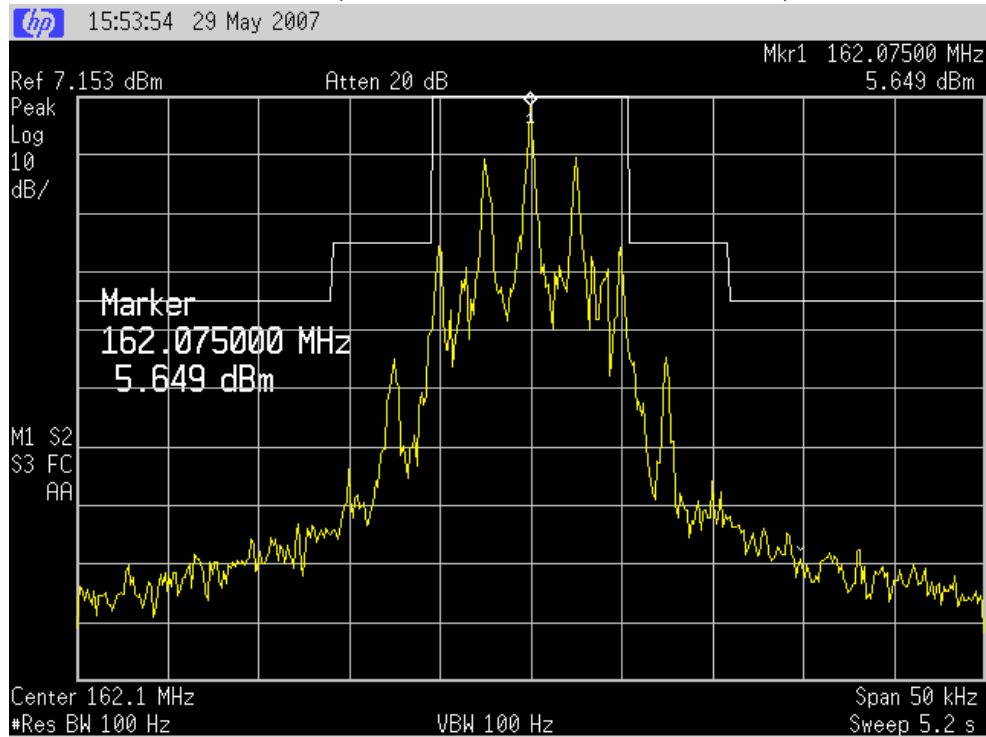

Part 22: F3E – 25 kHz (Authorised bandwidth = 16.0 kHz)

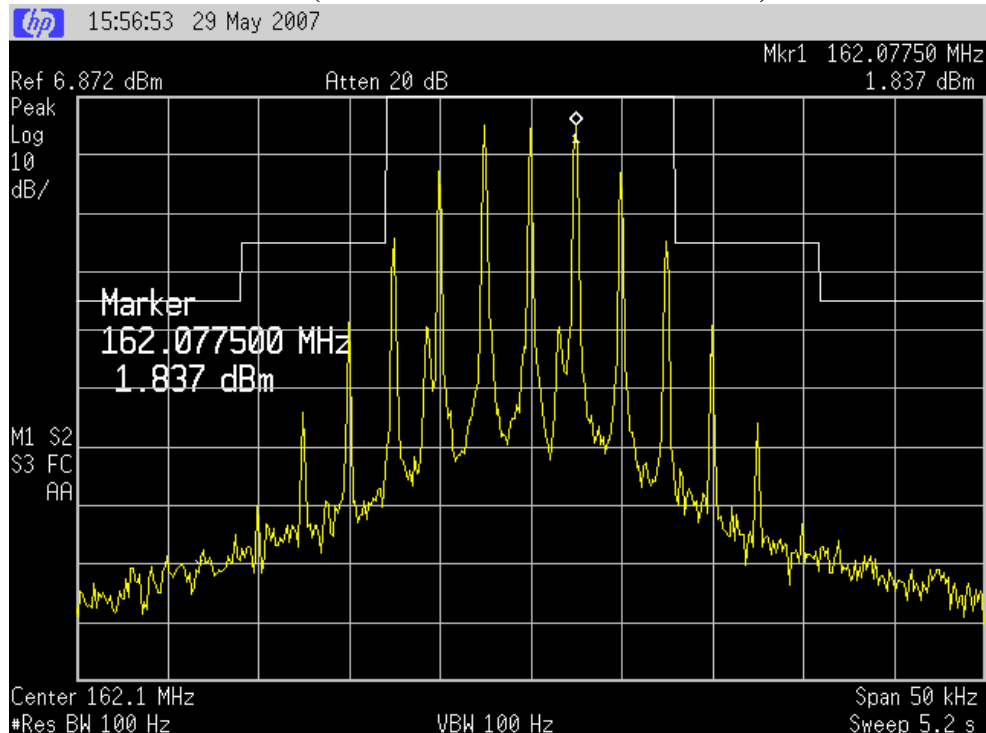

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd


Test Report No 70520.2

Report date: 30th May 2007

Part 22: F1E – 12.5 kHz (Authorised bandwidth = kHz)

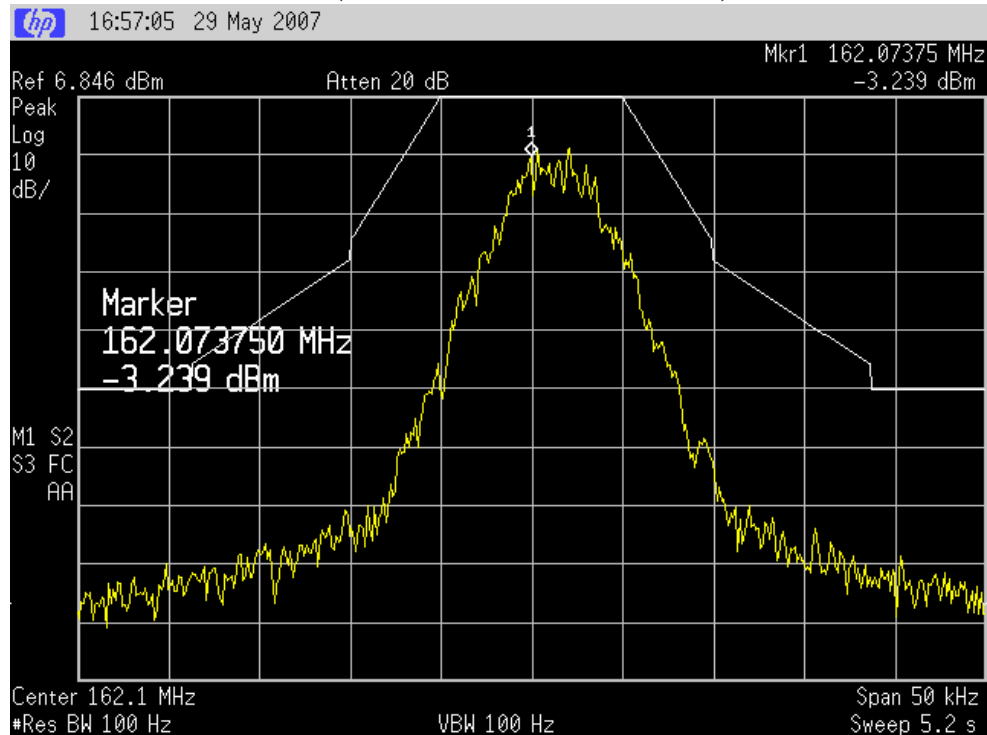

Part 22: F1D – 12.5 kHz (Authorised bandwidth = kHz)

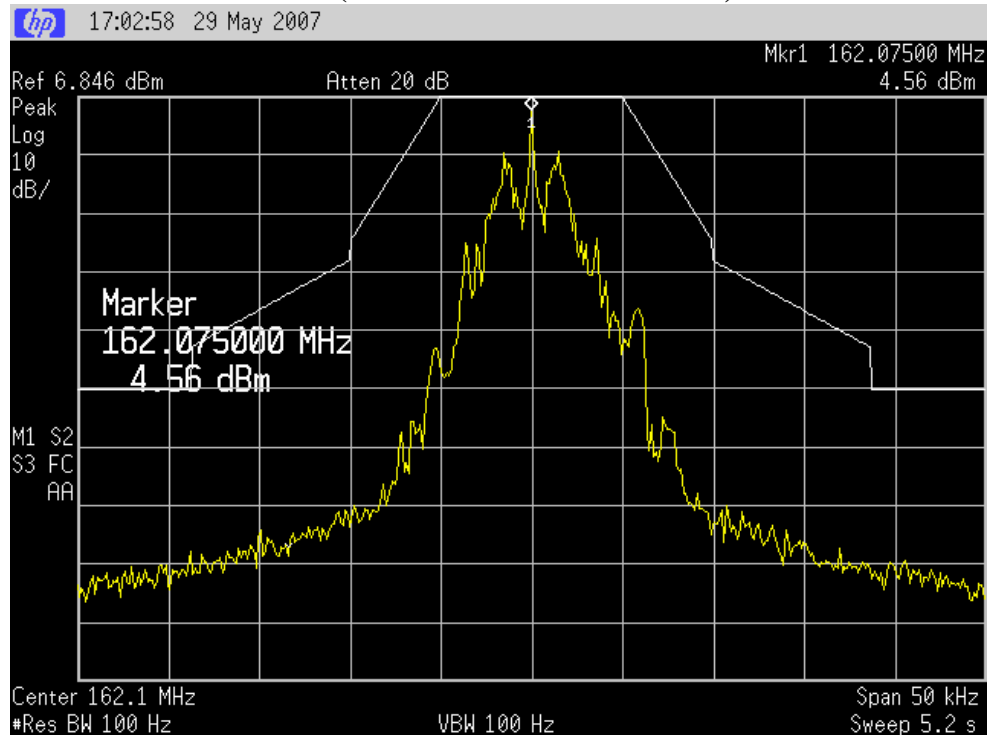

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand


Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Part 22: F1D – 25 kHz (Authorised bandwidth = 11.15 kHz)

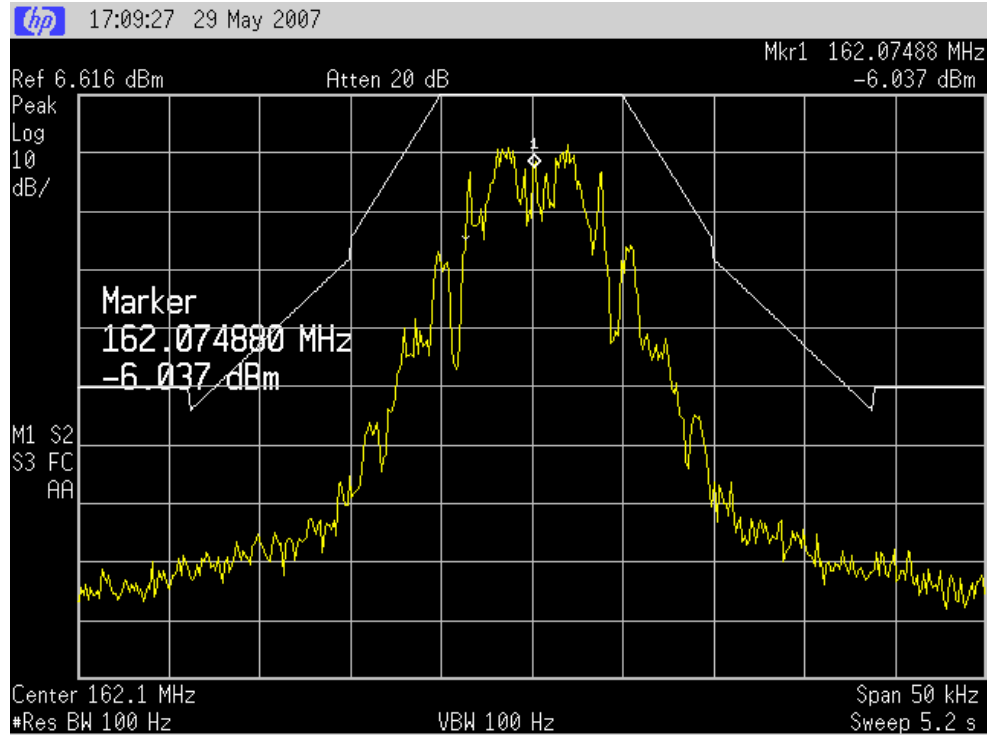

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Transmitter spurious emissions at the antenna terminals

Frequency: 162.075 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
324.150	-36.2	-20.0
486.225	-41.3	-20.0
648.300	-41.6	-20.0
810.375	-40.3	-20.0
972.455	-42.2	-20.0
1296.600	-57.1	-20.0

No other emissions observed above -60.0dBm.

Limit:

Part 90.210(d) Mask D, (3) on any frequency removed from the centre of the authorised bandwidth by a displacement frequency of more than 12.5 kHz shall be attenuated by at least $50 + 10 \log (P)$ or 70 dB whichever is the lesser attenuation.

The spurious emission limit defined by Mask D has been applied as this transmitter can operate using channel spacings of 12.5 kHz.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified.

Part 2.1057 states that the spectrum should be investigated up to the 10th harmonic if the transmitter operates below 10 GHz.

A rated power of 5.0 watts gives a limit of -20 dBm.

Some emissions less than -40 dBm have been reported for completeness.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Receiver spurious emissions at antenna terminals

Receive frequency: 150.0750 MHz

Intermediate frequency: 45.000 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
195.075	-102.0	-57.0

Receive frequency: 162.0750 MHz

Intermediate frequency: 45.000 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
207.075	-116.0	-57.0

Receive frequency: 173.9750 MHz

Intermediate frequency: 45.000 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
218.975	106.0	-57.0

No other emissions within 20 dB of the limit.

Limit:

In accordance with CFR 47 Part 15, section 15.111 the power of any emission at the antenna terminal should not exceed 2 nW (-57.0 dBm).

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Field strength of the transmitter spurious emissions

Frequency: 162.075 MHz

Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Polarity	Margin (dB)
324.1500	46.8	-50.6	-20.0	Vertical	30.6
324.1500	49.9	-45.3	-20.0	Horizontal	25.3
486.2250	42.0	-53.2	-20.0	Vertical	33.2
486.2250	42.0	-53.2	-20.0	Horizontal	33.2
648.3000	37.5	-57.7	-20.0	Vertical	37.7
648.3000	31.5	-63.7	-20.0	Horizontal	43.7
810.3750	31.8	-63.4	-20.0	Vertical	43.4
810.3750	33.3	-61.9	-20.0	Horizontal	41.9
972.4500	45.0	-50.2	-20.0	Vertical	30.2
972.4500	41.4	-53.8	-20.0	Horizontal	33.8
1134.5250	36.5	-58.7	-20.0	Vertical	38.7
1134.5250	39.1	-56.1	-20.0	Horizontal	36.1
1296.6000	37.9	-57.3	-20.0	Vertical	37.3
1296.6000	32.3	-62.9	-20.0	Horizontal	42.9
1458.6750	38.1	-57.1	-20.0	Vertical	37.1
1458.6750	33.0	-62.2	-20.0	Horizontal	42.2
1620.7500	43.2	-52.0	-20.0	Vertical	32.0
1620.7500	41.5	-53.7	-20.0	Horizontal	33.7

Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Polarity	Margin (dB)
230.4850	21.0	-74.2	-20.0	Horizontal	54.2
261.2100	23.7	-71.5	-20.0	Horizontal	51.5
276.5725	22.0	-73.2	-20.0	Vertical	53.2
230.4850	21.0	-74.2	-20.0	Horizontal	54.2
261.2100	23.7	-71.5	-20.0	Horizontal	51.5
276.5725	22.0	-73.2	-20.0	Vertical	53.2
230.4850	21.0	-74.2	-20.0	Horizontal	54.2
261.2100	23.7	-71.5	-20.0	Horizontal	51.5

When operating in transmit mode no significant emissions were detected between the harmonic emissions that were detected.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Device was tested on an open area test site at a distance of 3 metres.

The transmitter was tested while transmitting continuously while attached to a dummy load.

Limit:

All spurious emissions are to be attenuated by at least $50 + 10 \log (P)$.

The rated power of 25 watts gives a limit of -20 dBm.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Field strength of the receiver spurious emissions

150.075 MHz

Frequency (MHz)	Vert dBuV/m	Hort dBuV/m	Limit dBuV/m	Polarity	Margin (dB)
975.3750	25.1	25.4	54.0	Horizontal	28.6
1170.4500	28.2	29.1	54.0	Horizontal	24.9

162.075 MHz

Frequency (MHz)	Vert dBuV/m	Hort dBuV/m	Limit dBuV/m	Polarity	Margin (dB)
207.0750	-	15.2	43.5	Horizontal	28.3
414.1500	17.5	18.5	46.0	Horizontal	27.5
1035.3750	28.4	29.5	54.0	Horizontal	24.5
1242.4500	34.1	33.0	54.0	Vertical	19.9

173.975 MHz

Frequency (MHz)	Vert dBuV/m	Hort dBuV/m	Limit dBuV/m	Polarity	Margin (dB)
218.9750	15.0	17.6	43.5	Horizontal	25.9
437.9500	17.8	18.3	46.0	Horizontal	27.7
1094.8750	31.3	30.1	54.0	Vertical	22.7
1313.8500	35.0	32.7	54.0	Vertical	19.0
1532.8250	33.0	31.6	54.0	Vertical	21.0

Device was tested on an open area test site at a distance of 3 metres.

Below 1000 MHz a quasi peak detector was used with a bandwidth of 120 kHz.

Above 1000 MHz an average detector was used with a bandwidth of 1 MHz.

The receiver was tested receiving while attached to a dummy load.

Limit:

The field strength limits as per CFR 47 Part 15, section 15.109 have been applied.

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Frequency Stability

Frequency stability measurements were between - 30 °C and + 50°C in 10°C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made at the nominal supply voltage of 7.2 Vdc and 6.4 Vdc which is the battery end voltage as advised by the client.

Nominal Frequency: 162.075 MHz

Voltage Temp.	6.4 Vdc	7.2 Vdc
+50° C	-217.0	-215.0
+40° C	-204.0	-205.0
+30° C	-230.0	-237.0
+20° C	-93.0	-80.0
+10° C	-48.0	-47.0
0° C	-58.0	-57.0
-10° C	-88.0	-70.0
-20° C	-86.0	86.0
-30° C	-133.0	-107.0

Limit:

Part 22.355 and Part 90.213 state that mobile station transmitters operating between 50-450 Mhz and 150-174 MHz are required to have a frequency tolerance of 5 ppm.

This transmitter operates on 164.0750 MHz. 5 ppm = 5 x 164.075 = 820 Hz.

Result: Complies

Measurement Uncertainty: ±30 Hz

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Transient frequency behaviour

Transient frequency behaviour measurements are applicable to wide band and narrow band transmitters operating in the frequency band 150-174 MHz. Measurements were carried out at 162.075 MHz using the method described in TIA-603 and EN 300-086. In summary this method calls for the use of an external signal generator tuned to 162.075 MHz with a output level 0.1 % (-30 dB) of the level from the transmitter with a 1 kHz tone with a frequency deviation of 12.5 kHz being applied to the input of a modulation analyser along with the output from the transmitter.

The modulation analyser produces an amplitude difference signal and a frequency difference signal, which are applied to the input of a storage oscilloscope.

The unmodulated transmitter is then keyed which produces a trigger pulse that is AC coupled to the oscilloscope that produces a display on the screen.

The result of the change in the ratio of power between the test signal from the signal generator and the transmitter output will produce 2 separate sides on the oscilloscope picture. One will show the 1000 Hz test modulation and the other will be the frequency difference of the transmitter versus time.

Measured Transient Deviation		
Period t_1 (ms)	period t_2 (ms)	period t_3 (ms)
5.0	20.0	5.0
Frequency Difference from the Nominal Frequency (kHz)		
Nil	Nil	Nil
Nil	Nil	Nil

Limits:

Channel Spacing (kHz)	Transmitter Period t_1 (kHz)	Transmitter Period t_2 (kHz)	Transmitter Period t_3 (kHz)
12.5	± 12.5	± 6.25	± 12.5
25.0	± 25.0	± 12.5	± 25.0

Result: Complies

Measurement Uncertainty: Frequency difference ± 1.6 kHz
Time period ± 1 ms

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

12.5 kHz transmitter turn on

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz and any transient.

Green trace has been maximised to give full screen indication of ± 12.5 kHz.

Therefore each Y axis division = 3.125 kHz per division.

The X axis has been set to a sweep rate of 10 mS/division.


Triggering has been set to occur 2 divisions from the left hand edge (20 mS).

This is position t_{on} .

t_1 occurs between 2.0 and 2.5 divisions from the left-hand edge.

t_2 occurs between 2.5 and 4.5 divisions from the left-hand edge.

No transient can be observed just after t_{on} .

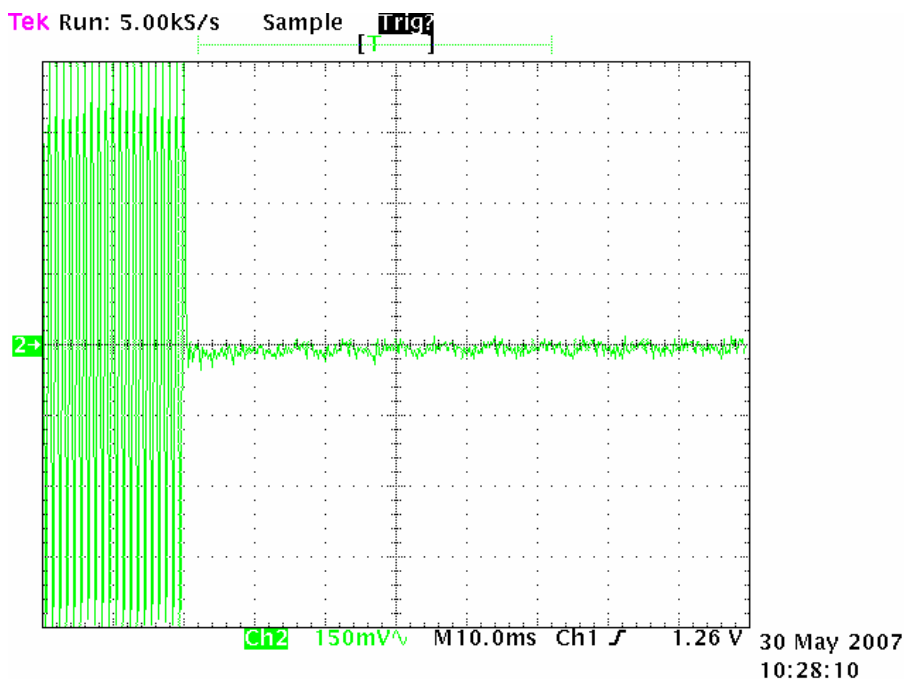

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

12.5 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz and any transient.

Green trace has been maximised to give full screen indication of ± 12.5 kHz.

Therefore each Y axis division = 3.125 kHz per division.


The X axis has been set to a sweep rate of 10 mS/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 mS).

This is position *toff*.

t_3 occurs between 4.5 and 5.0 divisions from the left hand edge.

No transient response can be observed just before *toff*.

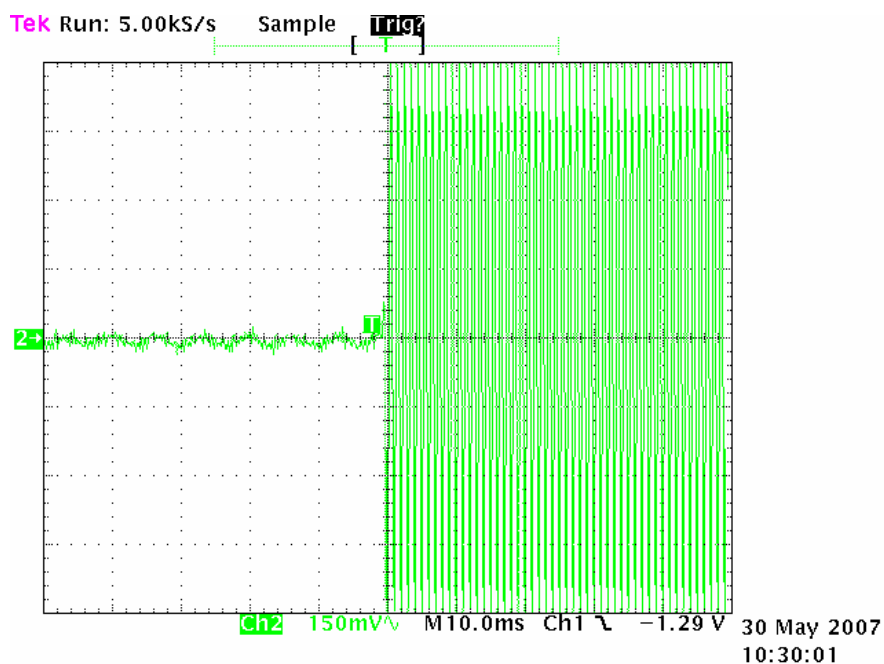

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

25 kHz transmitter turn on

Green Trace = 1 kHz tone with FM deviation of 25 kHz and any transient.

Green trace has been maximised to give full screen indication of ± 25 kHz.

Therefore each Y axis division = 6.25 kHz per division.

The X axis has been set to a sweep rate of 10 mS/division.


Triggering has been set to occur 2 divisions from the left hand edge (20 mS).

This is position t_{on} .

t_1 occurs between 2.0 and 2.5 divisions from the left-hand edge.

t_2 occurs between 2.5 and 4.5 divisions from the left-hand edge.

No transients can be observed just after t_{on} .

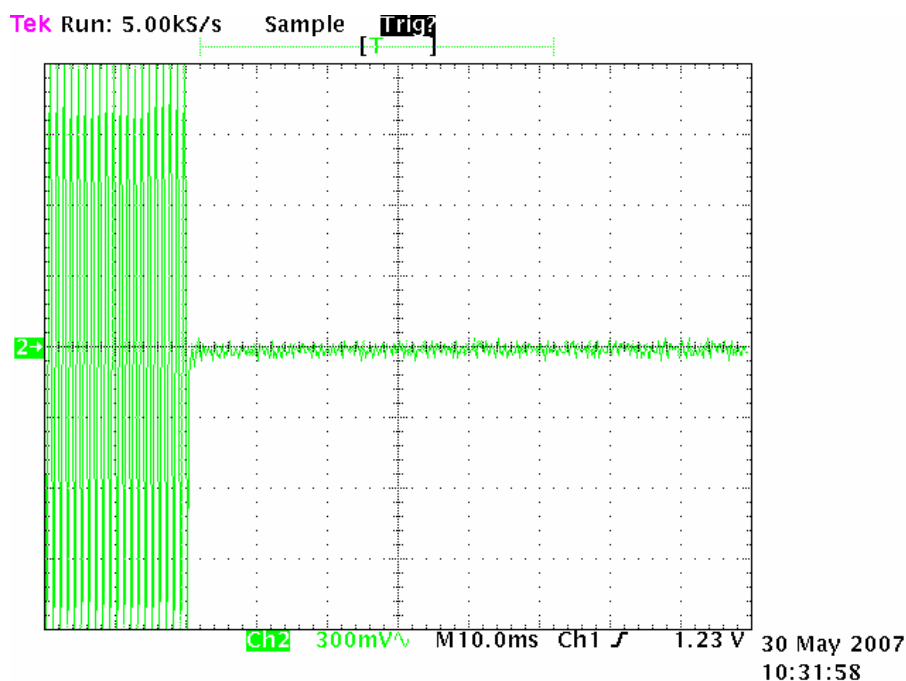

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

25 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 25 kHz and any transient.

Green trace has been maximised to give full screen indication of ± 25 kHz.

Therefore each Y axis division = 6.25 kHz per division.


The X axis has been set to a sweep rate of 10 mS/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 mS).

This is position *toff*.

t3 occurs between 4.5 and 5.0 divisions from the left hand edge.

No transient can be observed just before *toff*.

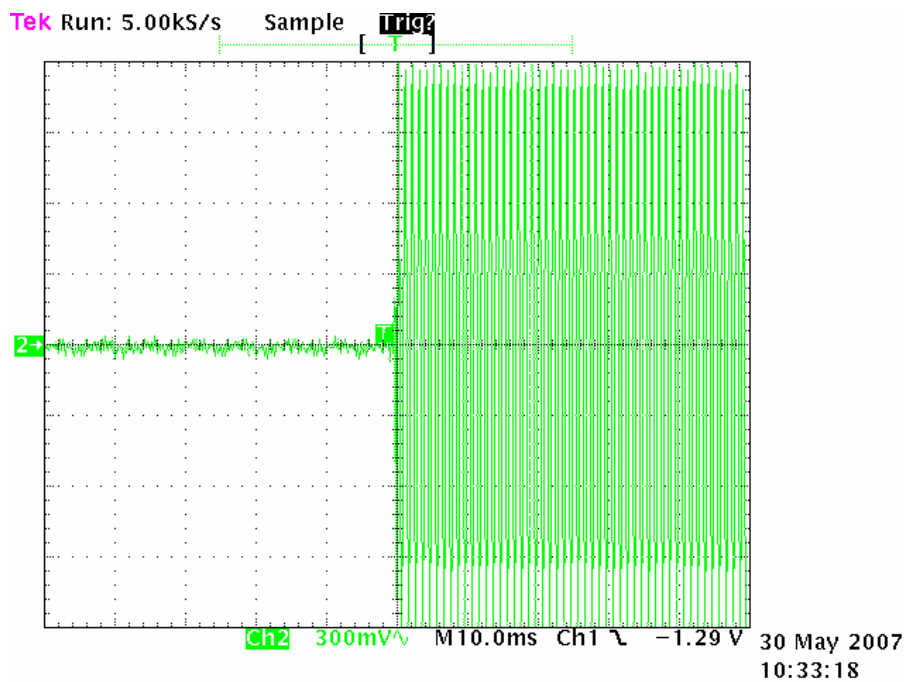

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Attenuator 10 dB	Hewlett Packard	HP8491A	24838	E1329
Attenuator 20 dB	Weinschel	49-20-43	GC-104	E1308
Audio Analyzer	Hewlett Packard	8903A	2216A01713	E1146
Biconical Antenna	Schwarzbeck	BBA 9106		RFS 3612
Frequency Counter	Hewlett Packard	HP 5342A	1916A01713	E1224
Level generator	Anritsu	MG443B	M61689	E1143
Log Periodic Antenna	Schwarzbeck	VUSLP9111	9111-228	3785
Measurement Receiver	Rohde & Schwarz	ESCS 30	847124/020	E1595
Modulation Analyzer	Rohde & Schwarz	FMA	837807/020	E1552
Modulation Analyzer	Hewlett Packard	8901B	2608A00782	E1090
Oscilloscope	Tektronics	745A	B010643	1569
Power Attenuator	Weinschel	49-20-43	GC104	E1308
Power Supply	Hewlett Packard	6032A	2743A-02859	E1069
RF Power Meter	Hewlett Packard	HP 436A	2512A22439	E1198
Rubidium Oscillator	Ball Efratom	FRS - C	4287	E1053
Selective Level Meter	Anritsu	ML422C	M35386	E1140
Signal Generator	Rohde & Schwarz	SMHU.58	838923/028	E1493
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Thermal chamber	Contherm	M180F	86025	E1129
Thermometer	DSIR	RT200	035	E1049
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709
Horn antenna	Electrometrics	RGA-60	6234	E1494
Microwave Pre Amplifier	Hewlett Packard	8349B	2644A01659	-

9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was last updated on January 18th, 2007.

All testing has been carried out in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

10. PHOTOGRAPH (S)

Sample product label



External views –



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand



Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Internal views

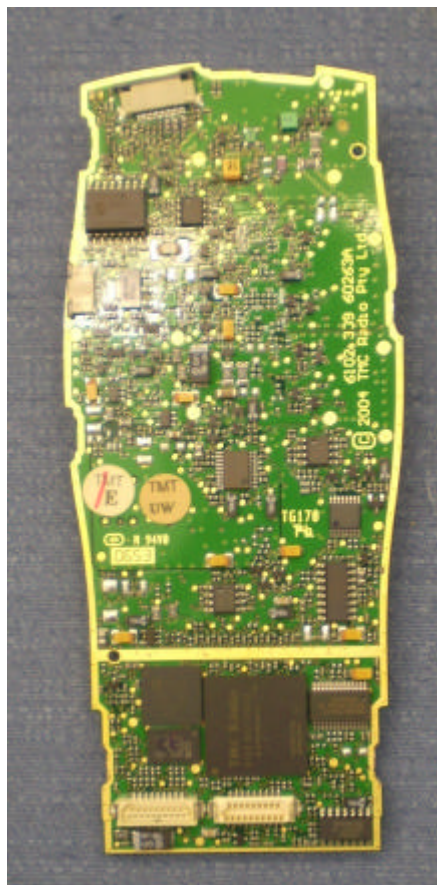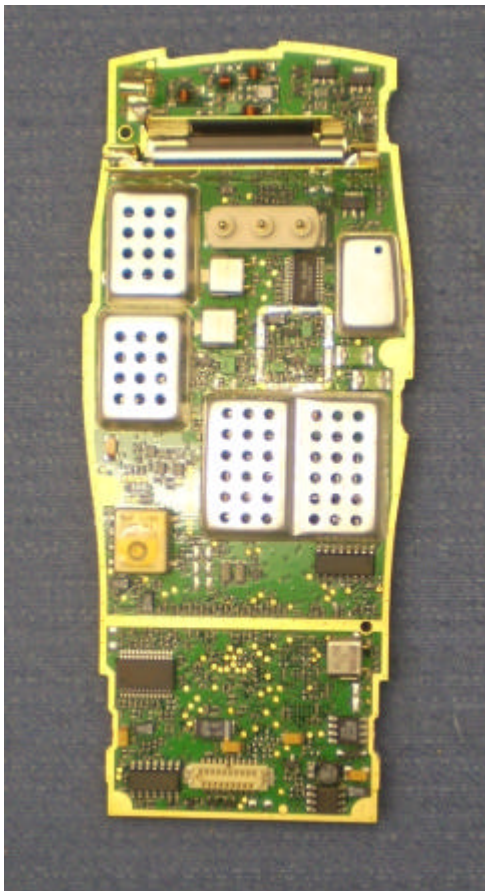

EMC Technologies (NZ) Ltd



STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

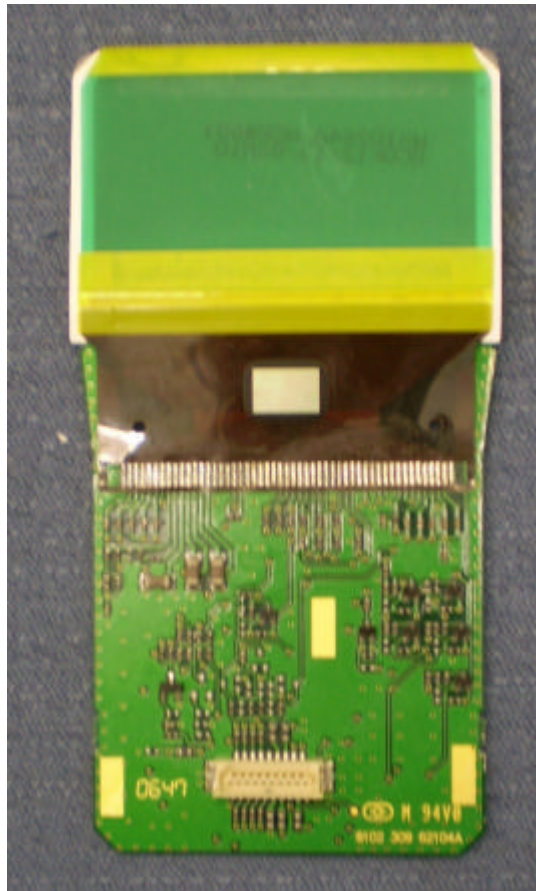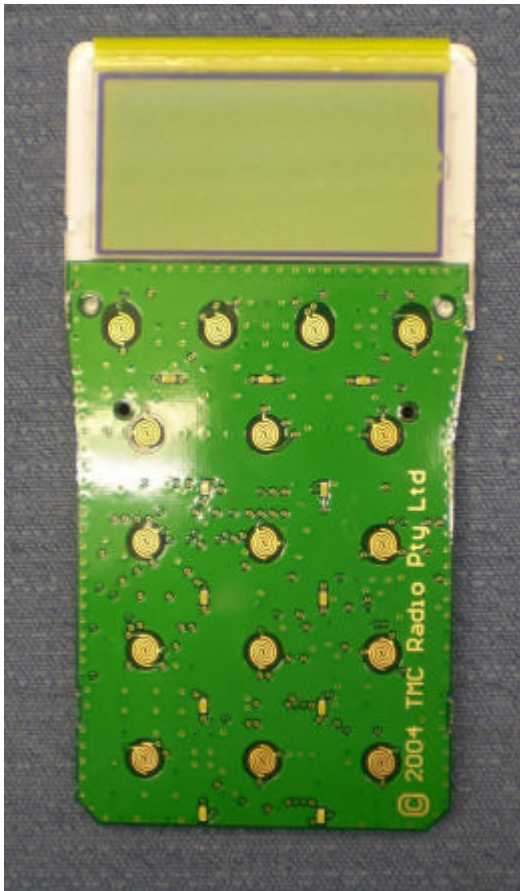

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd

Test Report No 70520.2

Report date: 30th May 2007

Radiated emissions test set up



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, NZ
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

Phone: +64 9 360 0862 Fax: +64 9 360 0861
E-mail: aucklab@ihug.co.nz