



Label Layout in a Roll
State of supply



Scale 1:1

<p>With IR sensor installed:</p> <p>I M1 Ex ia op is I Ma II 1G Ex ia op is IIC T4 Ga Ex ia op is I Ma Ex ia op is IIC T4 Ga</p>	<p>Without IR sensor installed:</p> <p>I M1 Ex ia I Ma II 1G Ex ia IIC T4 Ga Ex ia I Ma Ex ia IIC T4 Ga</p>
<p>Class 1, Division 1, Group A,B,C,D, T4; INT. SAFE: Class 1, Zone0, AEx ia op is IIC, T4;</p>	<p>Class 1, Division 1, Group A,B,C,D, T4; INT. SAFE: Class 1, Zone0, AEx ia IIC, T4;</p>

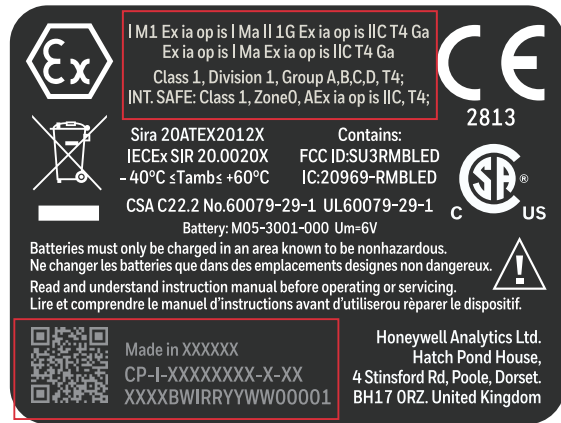

Print Areas

Scale 2:1

Required Information:			
Plant Code	SN Format Table	(1)	4 Characters
Product Code / REV#	SN Format Table	(4)	5 Characters alpha-numeric
Year	SN Format Table	(6)	2 Characters numeric
Week	SN Format Table	(5)	2 Characters numeric
Num sequence	SN Format Table	(9)	5 Characters numeric

9256 BWSXX XX XX XXXXX (18 characters)

Notes:

Text Color: Pantone Cool Grey 1C

Label Color: Honeywell Grey 85/R48 G48 B48/#303030/NCS S 8500N, cover with YD25

Surface: Anti-static film on top

Material Manufacturer: FLEXCON
Product: Thermal Film Select 21830
CSA File # 99214
UL File# MH16635CN

Label Manufacturer: Brady
Product: B-423
CSA File # 41833
UL File# MH10939

Tolerance: 0.1mm
Adhesive: Permanent

SPS EXPERIENCE DESIGN

Experience Graphics

Revisions:	Date:	Change:
A	23.06.2020	Drawing release
B	05.08.2020	CSA + text added

Project Name/Brand	HONEYWELL_HGAS
Drawing Title:	BW Icon Certification Label
Scale:	100%
Date:	22.06.2020
Drawn By:	L.TurnbulLUK01
Part Number:	M05-4003-000



Label Location

