



Neutron Engineering Inc.

Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	12
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	13
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
3.5 DESCRIPTION OF SUPPORT UNITS	15
4 CONDUCTED EMISSION	16
4.1 LIMIT	16
4.2 MEASUREMENT INSTRUMENTS LIST	16
4.3 TEST PROCEDURES	17
4.4 TEST SETUP LAYOUT	17
4.5 DEVIATION FROM TEST STANDARD	17
4.6 EUT OPERATING CONDITIONS	18
4.7 TEST RESULTS	19
5 ANTENNA CONDUCTED SPURIOUS EMISSION	21
5.1 LIMIT	21
5.2 MEASUREMENT INSTRUMENTS LIST	21
5.3 TEST PROCEDURES	21
5.4 TEST SETUP LAYOUT	21
5.5 DEVIATION FROM TEST STANDARD	21
5.6 EUT OPERATING CONDITIONS	21
5.7 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND	22
5.8 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	45
6 26 DB BANDWIDTH	65
6.1 LIMIT	65
6.2 MEASUREMENT INSTRUMENTS LIST	65
6.3 MEASURING INSTRUMENTS SETTING	65
6.4 TEST PROCEDURES	65
6.5 TEST SETUP LAYOUT	65
6.6 DEVIATION FROM TEST STANDARD	65
6.7 EUT OPERATING CONDITIONS	65
6.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	66
6.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	76
6.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	86



Table of Contents

7	MAXIMUM PEAK CONDUCTED OUTPUT POWER	96
7.1	LIMIT	96
7.2	MEASUREMENT INSTRUMENTS LIST	96
7.3	MEASURING INSTRUMENTS SETTING	96
7.4	TEST PROCEDURES	96
7.5	TEST SETUP LAYOUT	96
7.6	DEVIATION FROM TEST STANDARD	96
7.7	EUT OPERATING CONDITIONS	97
7.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	98
7.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	110
7.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	122
8	RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	134
8.1	LIMIT	134
8.2	MEASUREMENT INSTRUMENTS LIST	135
8.3	MEASURING INSTRUMENTS SETTING	135
8.4	TEST PROCEDURES	136
8.5	DEVIATION FROM TEST STANDARD	136
8.6	TEST SETUP LAYOUT	136
8.7	EUT OPERATING CONDITIONS	137
8.8	TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND	138
8.9	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	140
9	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	142
9.1	LIMIT	142
9.2	MEASUREMENT INSTRUMENTS LIST	143
9.3	MEASURING INSTRUMENTS SETTING	143
9.4	TEST PROCEDURES	144
9.5	DEVIATION FROM TEST STANDARD	144
9.6	TEST SETUP LAYOUT	144
9.7	EUT OPERATING CONDITIONS	145
9.8	TEST RESULTS - 5180 MHZ TO 5350 MHZ BAND	146
9.9	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	182
9.10	TEST RESULTS (RESTRICTED BANDS) - 4500 MHZ TO 5150 MHZ	218
9.11	TEST RESULTS (RESTRICTED BANDS) - 5350 MHZ TO 5460 MHZ BAND	224
10	POWER SPECTRAL DENSITY	236
10.1	LIMIT	236
10.2	MEASUREMENT INSTRUMENTS LIST	236
10.3	MEASURING INSTRUMENTS SETTING	236
10.4	TEST PROCEDURES	236
10.5	TEST SETUP LAYOUT	236

**Table of Contents**

10.6	DEVIATION FROM TEST STANDARD	236
10.7	EUT OPERATING CONDITIONS	237
10.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	238
10.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	250
10.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	262
11	PEAK EXCURSION	274
11.1	LIMIT	274
11.2	MEASUREMENT INSTRUMENTS LIST	274
11.3	MEASURING INSTRUMENTS SETTING	274
11.4	TEST PROCEDURES	274
11.5	TEST SETUP LAYOUT	274
11.6	DEVIATION FROM TEST STANDARD	275
11.7	EUT OPERATING CONDITIONS	275
11.8	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	276
11.9	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	286
11.10	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	296
12	FREQUENCY STABILITY	306
12.1	LIMIT	306
12.2	MEASUREMENT INSTRUMENTS LIST	306
12.3	MEASURING INSTRUMENTS SETTING	306
12.4	TEST PROCEDURES	306
12.5	TEST SETUP LAYOUT	306
12.6	DEVIATION FROM TEST STANDARD	306
12.7	EUT OPERATING CONDITIONS	307
12.8	TEST RESULTS	308
13	RF EXPOSURE COMPLIANCE	309
13.1	LIMIT	309
13.2	MEASUREMENT INSTRUMENTS LIST	309
13.3	MPE CALCULATION METHOD	309
13.4	TEST SETUP LAYOUT	310
13.5	DEVIATION FROM TEST STANDARD	310
13.6	EUT OPERATING CONDITIONS	310
13.7	TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND	311
13.8	TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND	318
13.9	TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND	325
14	EUT TEST PHOTO	332



Neutron Engineering Inc.

REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Nov. 06, 2013



1 CERTIFICATION

Equipment : IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client
Brand Name : Teraoka
Model Name : AP-3001g
Applicant : Teraoka Weigh-System Pte Ltd.
Date of Test : May 17, 2013 ~ Sep. 28, 2013
Standards : RSS-210, Issue 8, 2010
FCC Part 15, Subpart E: 2010
ANSI C63.4: 2009
FCC KDB 789033 D01 General UNII Test Procedures v01r03

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.
The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-2-1305157) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



2. SUMMARY OF TEST RESULTS

RSS-210, Issue 8, 2010; FCC Part 15, Subpart C: 2010			
Standard Clause		Test Item	Result
RSS-210	FCC Part 15, Subpart C		
NOTE (2)	15.207	Conducted Emission	PASS
A9.2	15.407 (a)	Antenna conducted Spurious Emission	PASS
---	15.407 (a)	26 dB Bandwidth	PASS
A9.2	15.407 (a)	Maximum Peak Conducted Output Power	PASS
NOTE (3)	15.407 (a)	Radiated Spurious Emission	PASS
A9.4	15.407 (a)	Power Spectral Density	PASS
---	15.407 (a)	Peak Excursion	PASS
A9.2	15.407 (b)	Band Edge Emissions	PASS
NOTE (6)	15.407 (b)	Frequency Stability	PASS
NOTE (4)	15.205	Restricted Bands	PASS
NOTE (5)	15.203	Antenna Requirement	PASS
NOTE (7)	1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	PASS

NOTE:

- (1) N/A: denotes test is not applicable in this Test Report
- (2) Reference standerads is RSS-GEN 7.2.4
- (3) Reference standerads is RSS-GEN 7.2.5
- (4) Reference standerads is RSS-GEN 7.2.2
- (5) Reference standerads is RSS-GEN 7.1.2
- (6) Reference standerads is RSS-GEN 7.2.6
- (7) Reference standerads is RSS-202
- (8) This test report only covers radio operating bands: 5150-5250 MHz, 5250-5350 MHz and 5470-5725 MHz (IEEE 802.11a/n).
The test for radio operating bands: 2400-2483.5 MHz (IEEE 802.11b/g/n) and 5725-5825 MHz (IEEE 802.11a/n) is covered in another test report: NEI-FCCP-1-1305157.



2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Conducted emission Test:

C01: (VCCI RN: C-2918; FCC RN: 95335; FCC DN: TW1010)
No.132-1, Ln. 329, Sec. 2, Balian Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

Radiated emission Test (Below 1 GHz):

CB08: (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

Radiated emission Test (Above 1 GHz):

CB08: (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty is not specified by FCC rules and for reference only.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted emission test:

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C01	150 kHz ~ 30 MHz	1.94	

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE	
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB	
			200 - 1000MHz	3.11 dB	
			1 - 18GHz	3.97 dB	
			18 - 40GHz	4.01 dB	
		Vertical Polarization	30 - 200MHz	3.22 dB	
			200 - 1000MHz	3.24 dB	
			1 - 18GHz	4.05 dB	
			18 - 40GHz	4.04 dB	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above.

These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	
Brand Name	Teraoka	
Model Name	AP-3001g	
OEM Brand/Model Name	N/A	
Model Difference	N/A	
Product Description	The EUT is an IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client.	
	Operation Frequency	5180 MHz to 5240 MHz, 5260 MHz to 5320 MHz, 5500 MHz to 5700 MHz
	Modulation Type	DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM, MIMO IEEE 802.11a: OFDM IEEE 802.11n: BPSK (2 TX & 2 RX)
	Bit Rate of Transmitter	IEEE 802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps IEEE 802.11n: HT20: 130 Mbps (max.) IEEE 802.11n: HT40: 300 Mbps (max.)
	Number Of Channel	Please refer to the Note 2.
	Antenna Designation	Please refer to the Note 3.
	Antenna Gain(Peak)	Please refer to the Note 3.
	Maximum Peak Conducted Output Power:	5180 MHz to 5240 MHz Band: IEEE 802.11a: 12.20 dBm IEEE 802.11n(20 MHz): 15.51 dBm 5190 MHz to 5230 MHz Band: IEEE 802.11n(40 MHz): 12.63 dBm 5260 MHz to 5320 MHz Band: IEEE 802.11a: 12.02 dBm IEEE 802.11n(20 MHz): 15.09 dBm 5270 MHz to 5310 MHz Band: IEEE 802.11n(40 MHz): 12.63 dBm 5500 MHz to 5700 MHz Band: IEEE 802.11a: 11.59 dBm IEEE 802.11n(20 MHz): 14.66 dBm 5510 MHz to 5670 MHz Band: IEEE 802.11n(40 MHz): 11.96 dBm
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
	Power Source	Supplied from System USB port.
Power Rating	I/P: DC 5V	
Connecting I/O Port(s)	Please refer to the User's Manual	
Products Covered	N/A	
EUT Modification(s)	N/A	



NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

5180 MHz to 5240 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220		
40	5200	48	5240		

5190 MHz to 5230 MHz Band (IEEE 802.11n (40MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230		

5260 MHz to 5320 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300		
56	5280	64	5320		

5270 MHz to 5310 MHz Band (IEEE 802.11n (40MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
54	5270	62	5310		

5500 MHz to 5700 MHz Band (IEEE 802.11a/n (20MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	112	5560	140	5700
104	5520	116	5580		
108	5540	136	5680		

5510 MHz to 5670 MHz Band (IEEE 802.11n (40MHz))					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
102	5510	110	5550	134	5670

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
0	N/A	N/A	Printed	N/A	4.29
1	N/A	N/A	Printed	N/A	4.95

4. The EUT incorporates MIMO function. Physically, the EUT provides two completed transmitters and two receivers (2T2R).

Modulated type	TX Function
IEEE 802.11a	1 TX
IEEE 802.11n (20MHz)	2 TX
IEEE 802.11n (40MHz)	2 TX



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	IEEE	Mode	Data Rate	Channel	Note
Conducted Emission	802.11a	OFDM	6 Mbps	---	
Antenna conducted Spurious Emission	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
26 dB Bandwidth	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
Maximum Peak Conducted Output Power	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
Radiated Spurious Emission (30 MHz to 1 GHz)	802.11a	OFDM	6 Mbps	40	
	802.11n (20 MHz)	BPSK	MCS8	60/116	
Radiated Spurious Emission (above 1 GHz)	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
Restricted Bands	802.11a	OFDM	6 Mbps	36/48/52/64/100/140	
	802.11n (20 MHz)	BPSK	MCS8	36/48/52/64/100/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/134	
Power Spectral Density	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
Peak Excursion	802.11a	OFDM	6 Mbps	36/40/48/52/60/64/100/116/140	
	802.11n (20 MHz)	BPSK	MCS8	36/40/48/52/60/64/100/116/140	
	802.11n (40 MHz)	BPSK	MCS8	38/46/54/62/102/110/134	
Band Edge Emissions	802.11a	OFDM	6 Mbps	36/64/100	
	802.11n (20 MHz)	BPSK	MCS8	36/64/100	
	802.11n (40 MHz)	BPSK	MCS8	38/62/102	
Frequency Stability	802.11a	OFDM	6 Mbps	40	
Antenna Requirement	---	---	---	---	
RF Exposure Compliance	---	---	---	---	

NOTE: The measurements are performed at the highest, middle, lowest available channels.



3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

5180 MHz to 5240 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	ART			DRTU		
Frequency	5180 MHz	5200 MHz	5240 MHz	5180 MHz	5200 MHz	5240 MHz
Parameter	12	12	12	12	12	12

5190 MHz to 5230 MHz Band						
IEEE	802.11n (40 MHz)					
Test software Version	ART					
Frequency	5190 MHz	5230 MHz				
Parameter	9	9				

5260 MHz to 5320 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	ART			ART		
Frequency	5260 MHz	5300 MHz	5320 MHz	5260 MHz	5300 MHz	5320 MHz
Parameter	12	12	12	12	12	12


5270 MHz to 5310 MHz Band						
IEEE	802.11n (40 MHz)					
Test software Version	ART					
Frequency	5270 MHz	5310 MHz				
Parameter	9	9				

5500 MHz to 5700 MHz Band						
IEEE	802.11a			802.11n (20 MHz)		
Test software Version	ART			ART		
Frequency	5500 MHz	5580 MHz	5700 MHz	5500 MHz	5580 MHz	5700 MHz
Parameter	12	12	12	12	12	12

5510 MHz to 5670 MHz Band						
IEEE	802.11n (40 MHz)					
Test software Version	ART					
Frequency	5510 MHz	5550 MHz	5670 MHz			
Parameter	9	9	9			



3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

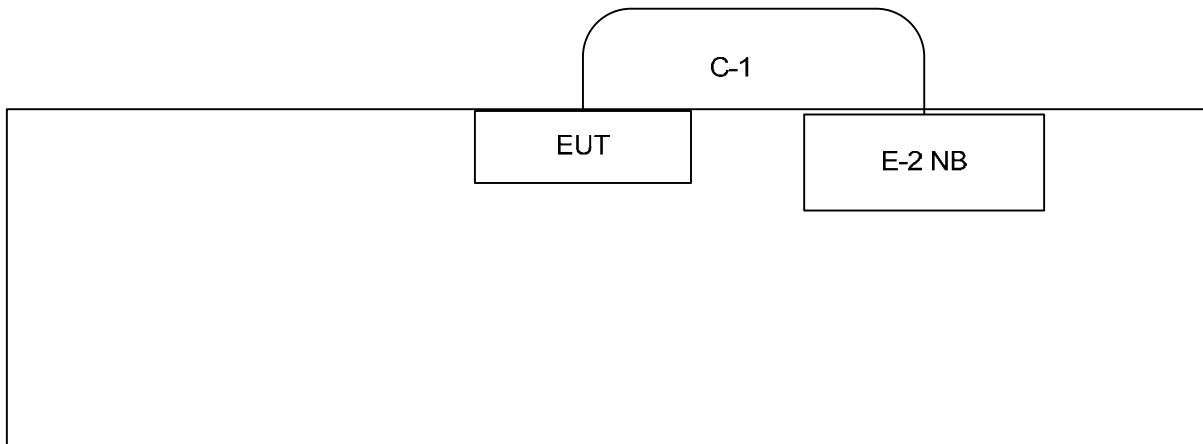



3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Teraoka	AP-3001g	SUFAP3001G	N/A	EUT
E-2	Notebook PC	DELL	PP18L	DOC	PF329 A01	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	2.0M	USB

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



4 CONDUCTED EMISSION

4.1 LIMIT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 - 5.0	73.00	60.00	56.00	46.00
5.0 - 30.0	73.00	60.00	60.00	50.00

NOTE:

1. The tighter limit applies at the band edges.
2. The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
3. The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value – Limit Value

4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Apr. 22, 2014
2	Test Cable	TIMES	CFD300-NL	C01	Jun. 16, 2014
3	EMI Test Receiver	R&S	ESCI	100082	Mar. 21, 2014
4	Measurement Software	EZ	EZ_EMG (Version NB-02A)	N/A	N/A

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.


4.3 TEST PROCEDURES

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

NOTE:

- a. Reading in which marked as Peak, QP or AVG means measurements by using are Quasi-Peak or Average Mode with Detector BW=9 kHz (6 dB Bandwidth).
- b. All readings are Peak Mode value unless otherwise stated QP or AVG in column of Note. If the Peak or QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only Peak or QP Mode was measured, but AVG Mode didn't perform.

4.4 TEST SETUP LAYOUT

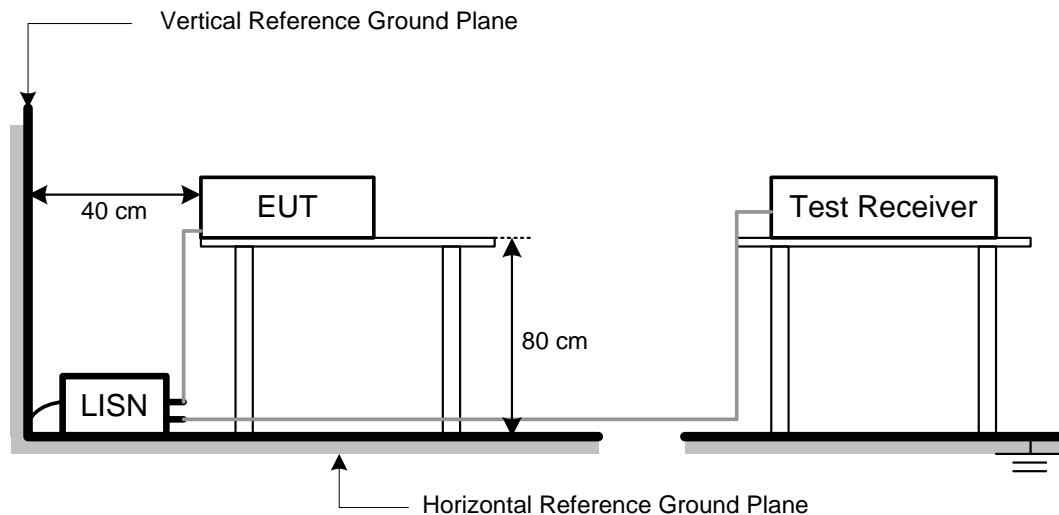

4.5 DEVIATION FROM TEST STANDARD

No deviation



Neutron Engineering Inc.

4.6 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.7 TEST RESULTS

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	5320 MHz		

Phase: Line

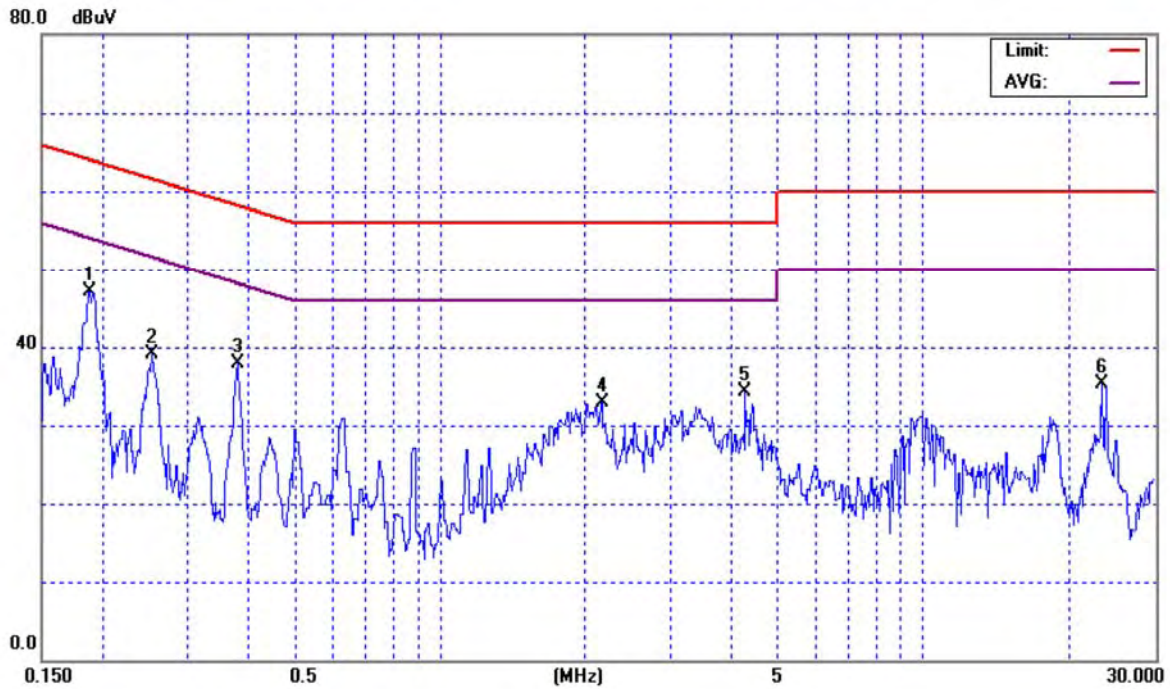


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1878	37.57	9.59	47.16	64.13	-16.97	peak	
2		0.2529	29.58	9.60	39.18	61.66	-22.48	peak	
3		0.3810	28.18	9.66	37.84	58.26	-20.42	peak	
4		2.1560	23.26	9.65	32.91	56.00	-23.09	peak	
5		4.2890	24.48	9.73	34.21	56.00	-21.79	peak	
6		23.5000	25.23	10.00	35.23	60.00	-24.77	peak	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	24°C	Relative Humidity	48%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	5320 MHz		

Phase: Neutral

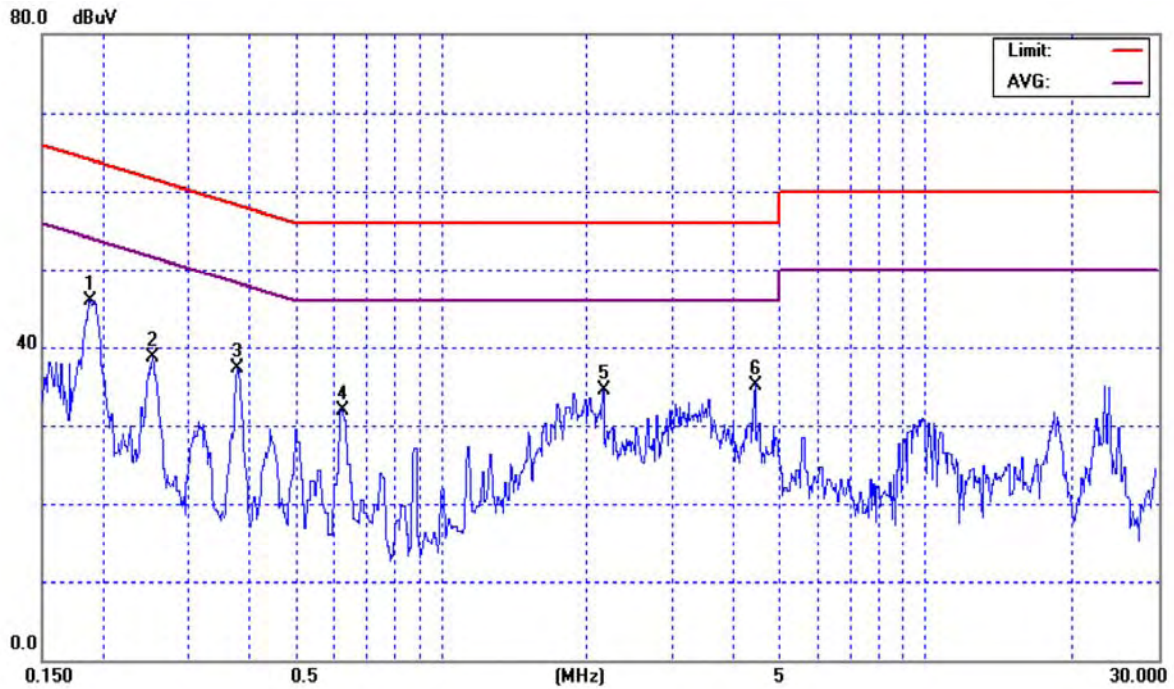

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1878	36.42	9.57	45.99	64.13	-18.14	peak	
2		0.2529	29.22	9.58	38.80	61.66	-22.86	peak	
3		0.3789	27.60	9.64	37.24	58.30	-21.06	peak	
4		0.6260	22.30	9.64	31.94	56.00	-24.06	peak	
5		2.1560	24.84	9.63	34.47	56.00	-21.53	peak	
6		4.4420	25.48	9.72	35.20	56.00	-20.80	peak	



5 ANTENNA CONDUCTED SPURIOUS EMISSION

5.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-40000	20 dB less than the peak value of fundamental frequency

5.2 MEASUREMENT INSTRUMENTS LIST


Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: N/A: denotes No Model Name, No Serial No. or No Calibration specified.

5.3 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW = 1000 kHz, VBW = 1000 kHz, Sweep time = Auto.

5.4 TEST SETUP LAYOUT

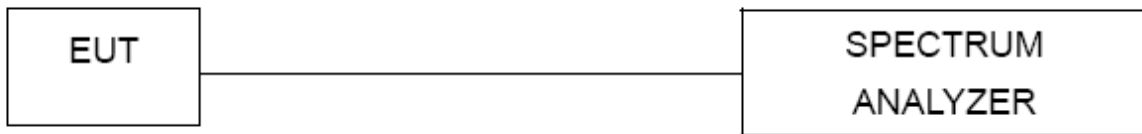

5.5 DEVIATION FROM TEST STANDARD

No deviation

5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest and highest channel frequencies individually.



5.7 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.00	-27.06	5351.20	-32.81
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11a/The max. radio frequency power in any 100kHz bandwidth outside the frequency band




*RBW 1 MHz Marker 3 [T1]
*VBW 1 MHz -27.06 dBm
SWT 20 ms 5.149000000 GHz

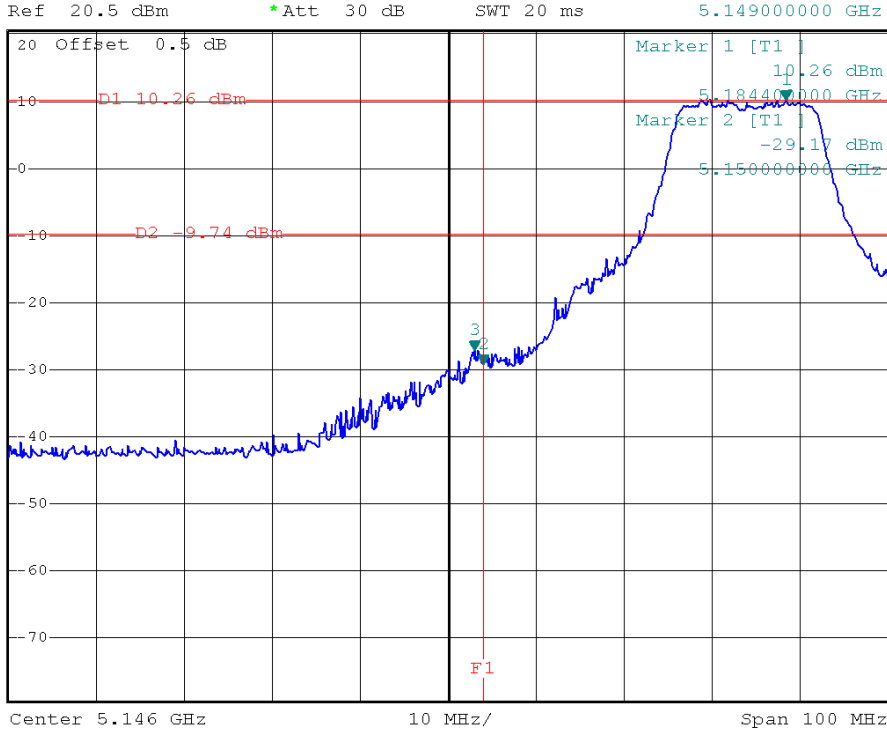

IEEE 802.11a/The max. radio frequency power in any 100 kHz bandwidth within the frequency band



*RBW 1 MHz Marker 3 [T1]
*VBW 1 MHz -32.81 dBm
SWT 20 ms 5.351200000 GHz

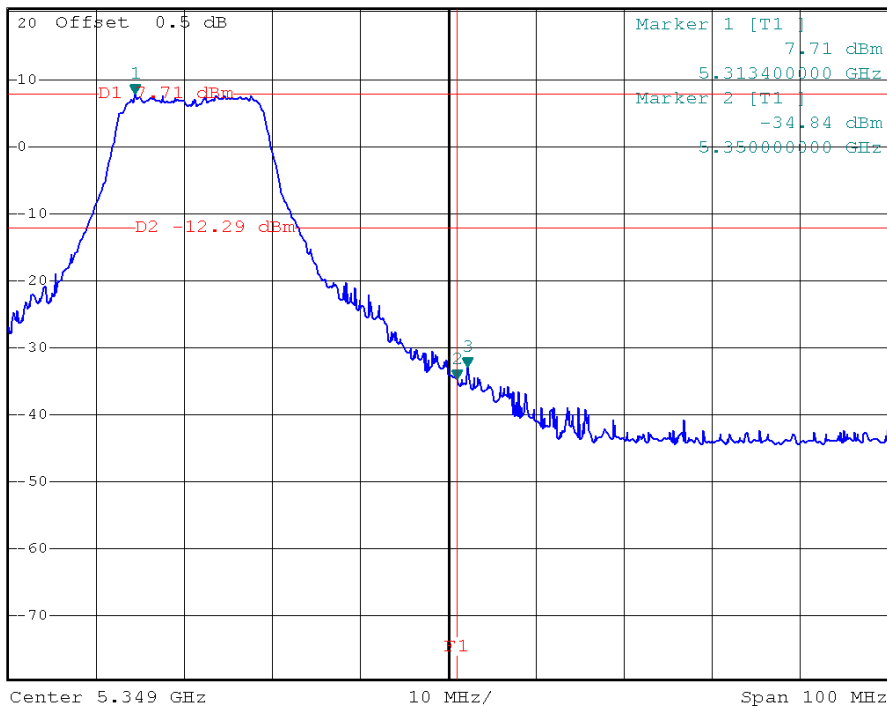




IEEE 802.11a/5180 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.32 dBm
SWT 800 ms 36.962280000 GHz

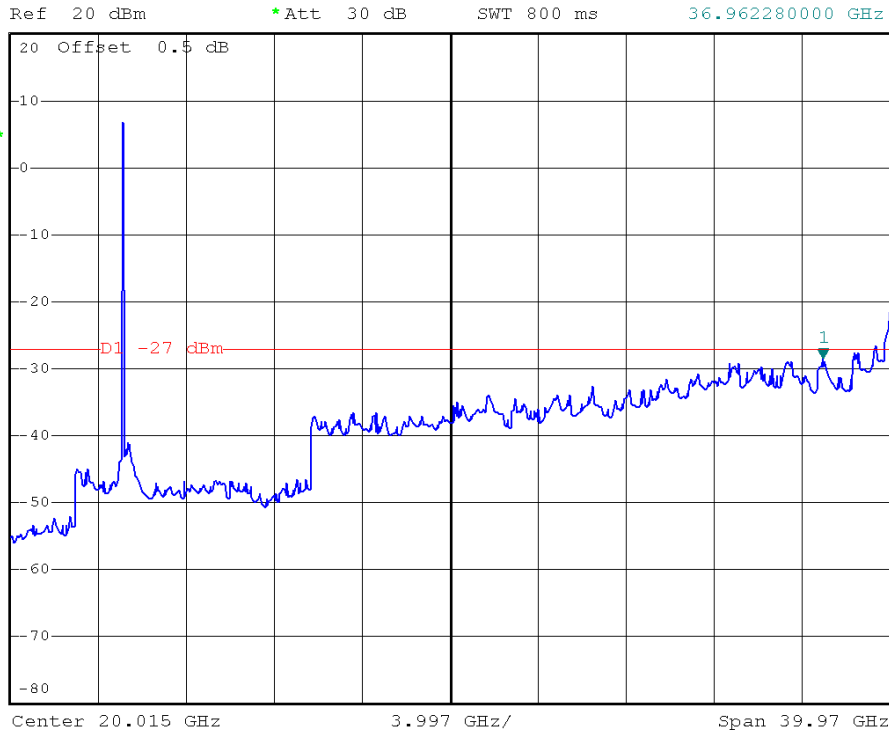

IEEE 802.11a/5200 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.52 dBm
SWT 800 ms 36.882340000 GHz

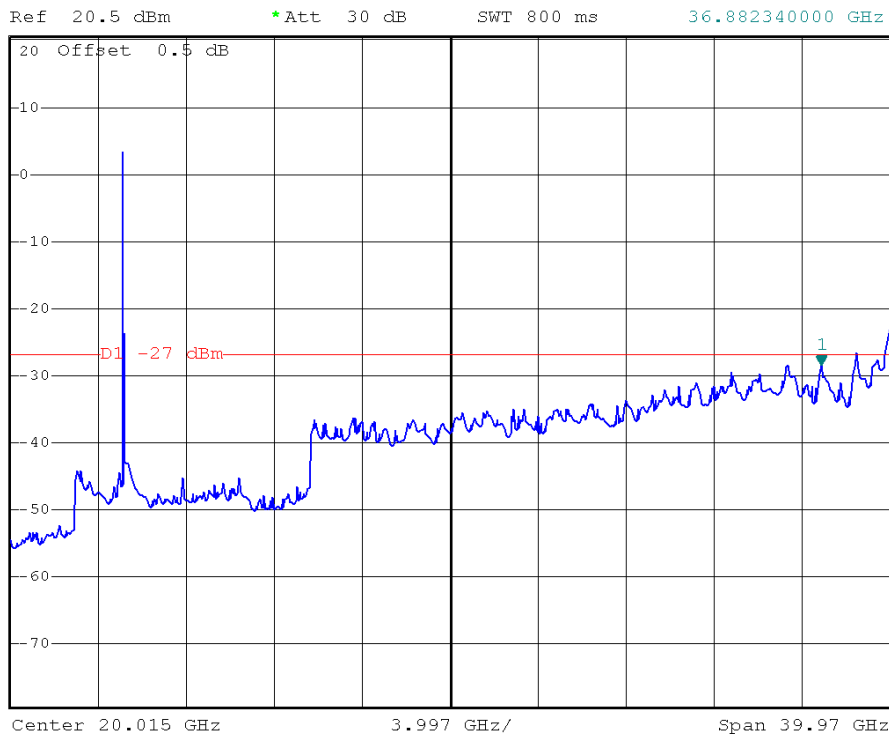




IEEE 802.11a/5240 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.41 dBm
SWT 800 ms 35.443420000 GHz

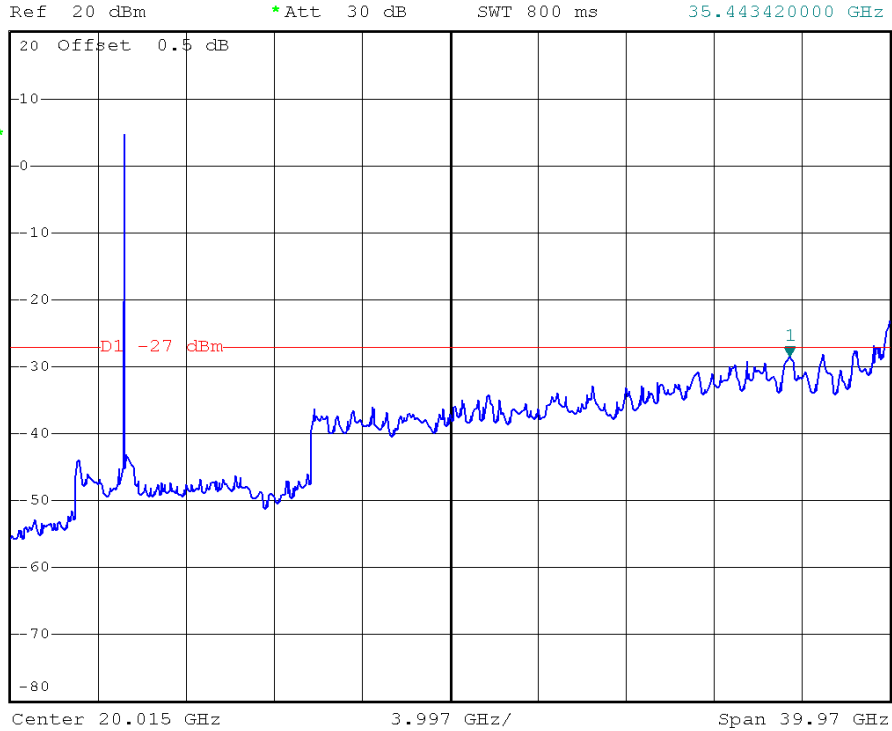

IEEE 802.11a/5260 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -29.07 dBm
SWT 800 ms 37.122160000 GHz

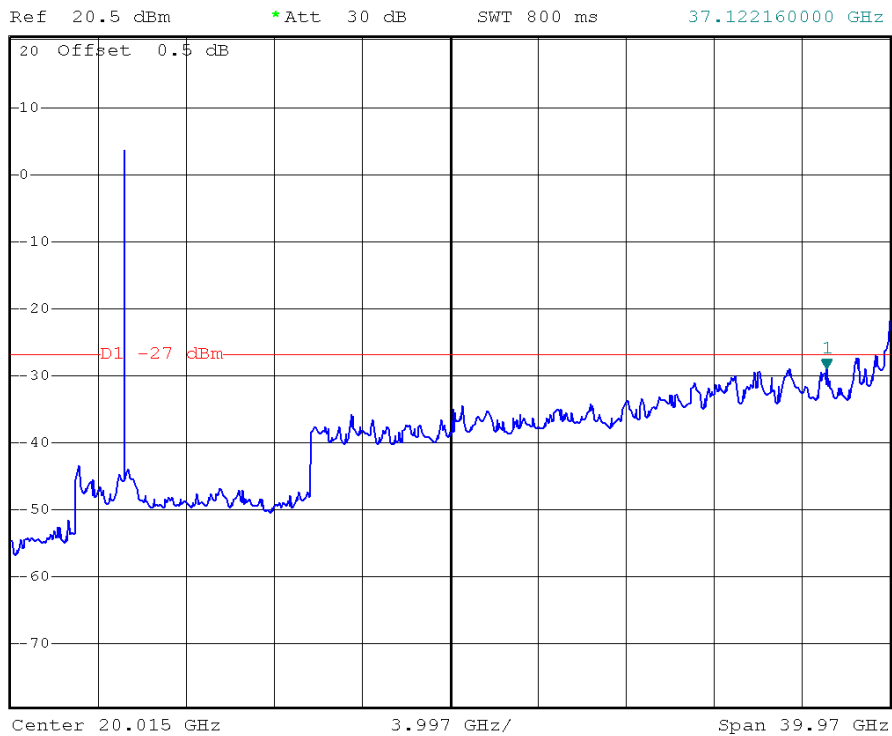




IEEE 802.11a/5300 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.53 dBm
SWT 800 ms 36.802400000 GHz

Ref 20.5 dBm *Att 30 dB

1 PK
VIEW

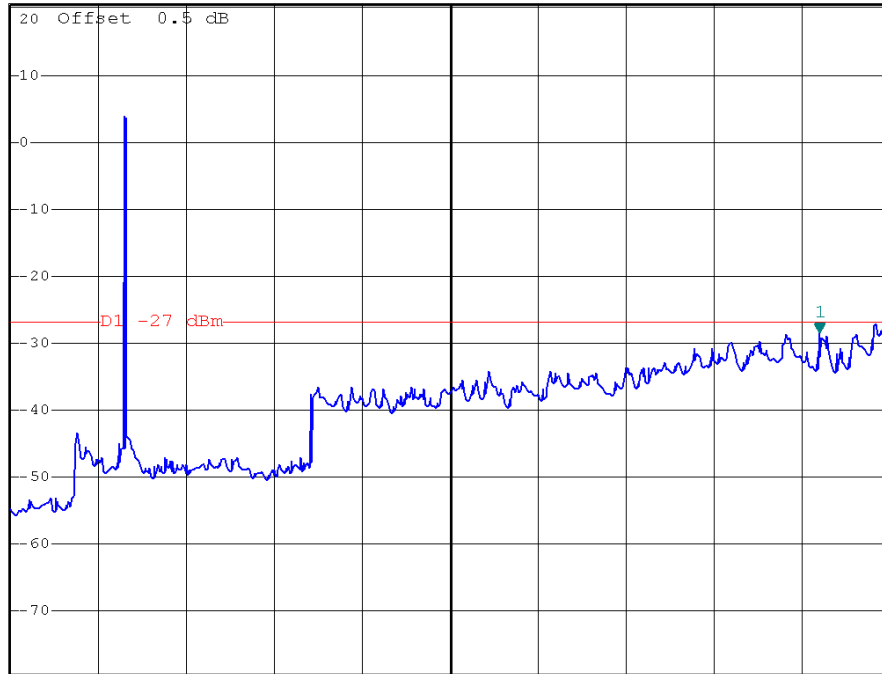

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz


IEEE 802.11a/5320 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.46 dBm
SWT 800 ms 36.882340000 GHz

Ref 20 dBm *Att 30 dB

1 PK*
VIEW

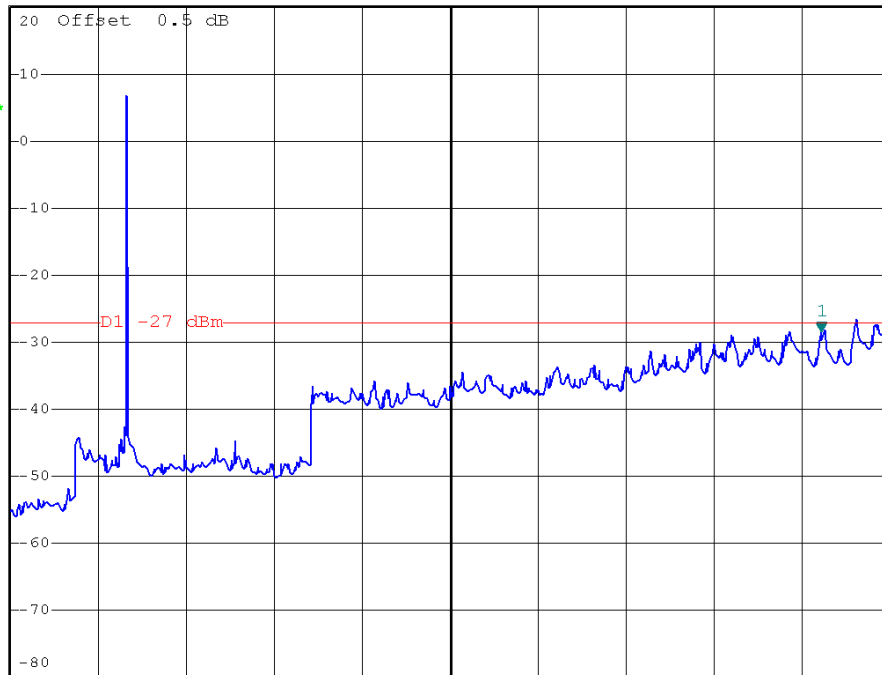

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.80	-34.71	5351.20	-43.22
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (20 MHz)/ANT.0/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

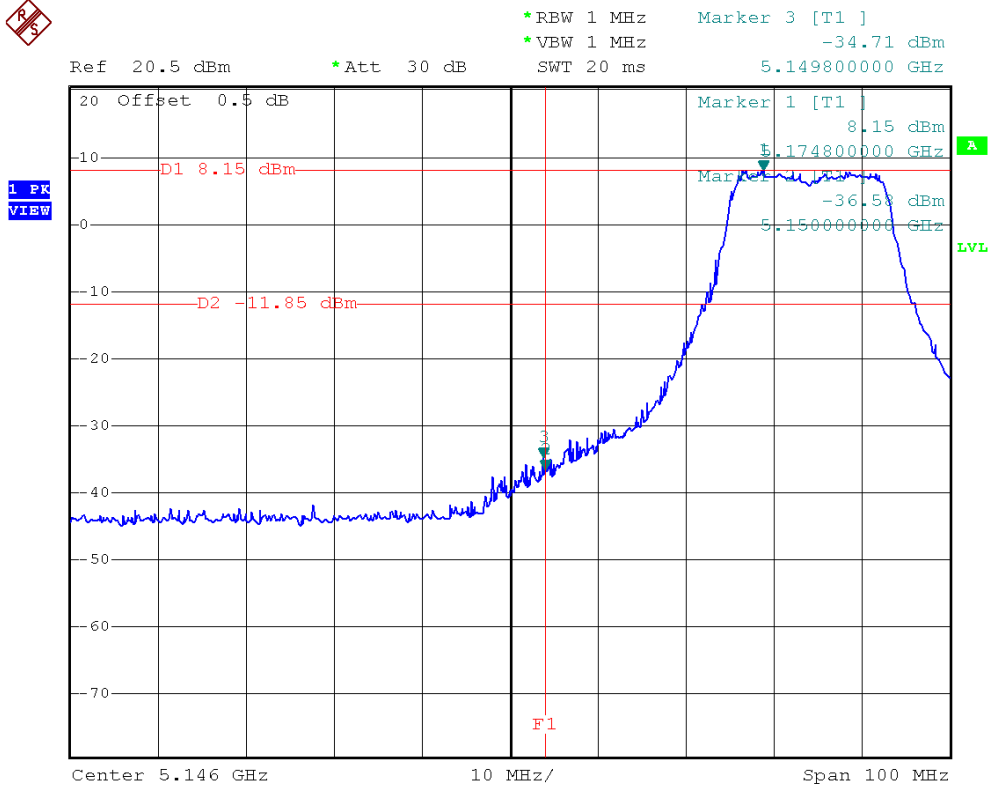

IEEE 802.11n (20 MHz)/ANT.0/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

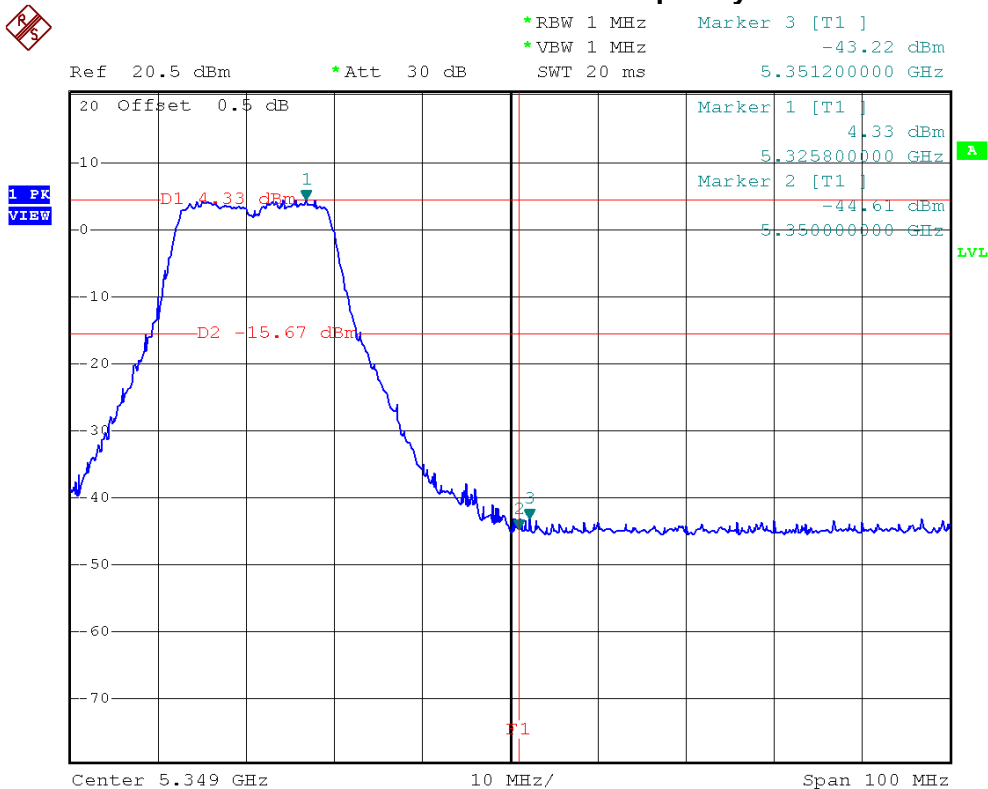




IEEE 802.11n (20 MHz)/ANT.0/5180 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.37 dBm
SWT 800 ms 35.443420000 GHz

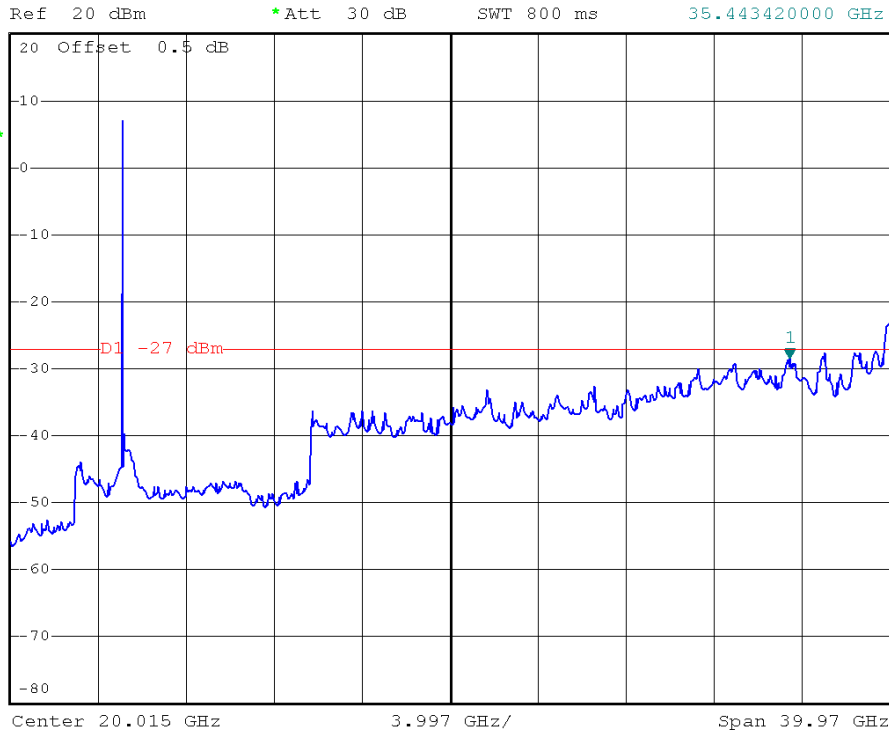

IEEE 802.11n (20 MHz)/ANT.0/5200 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.78 dBm
SWT 800 ms 37.042220000 GHz

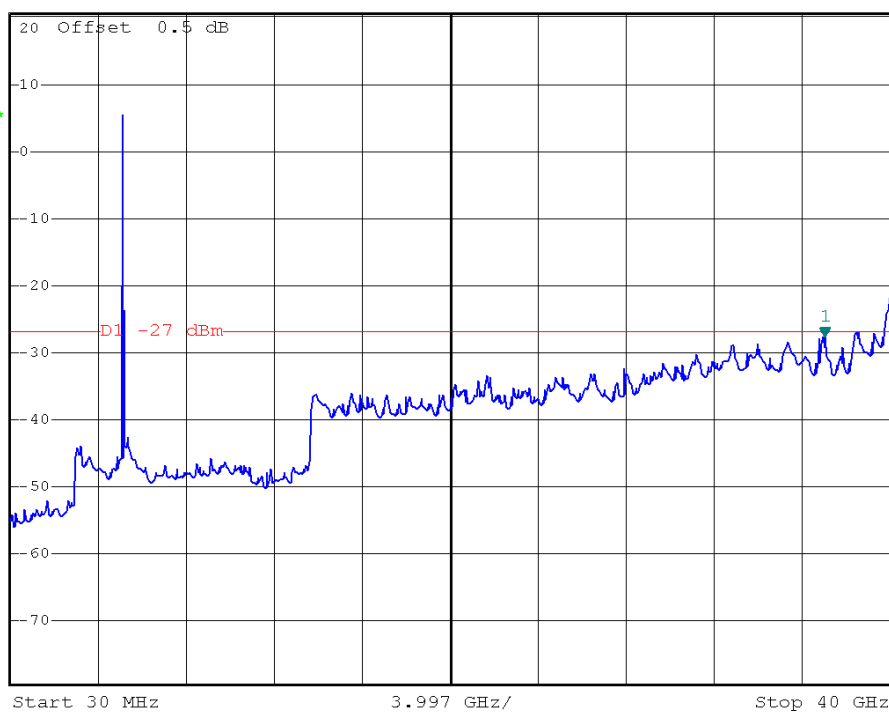




IEEE 802.11n (20 MHz)/ANT.0/5240 MHz/10 Harmonic of the frequency

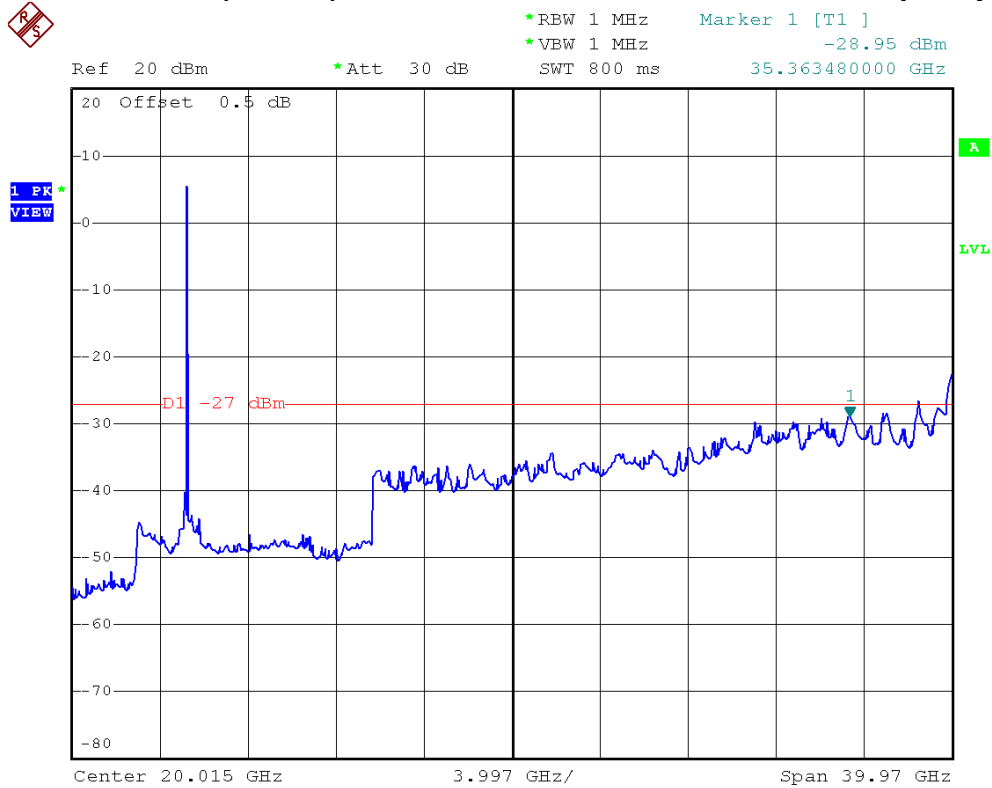

IEEE 802.11n (20 MHz)/ANT.0/5260 MHz/10 Harmonic of the frequency

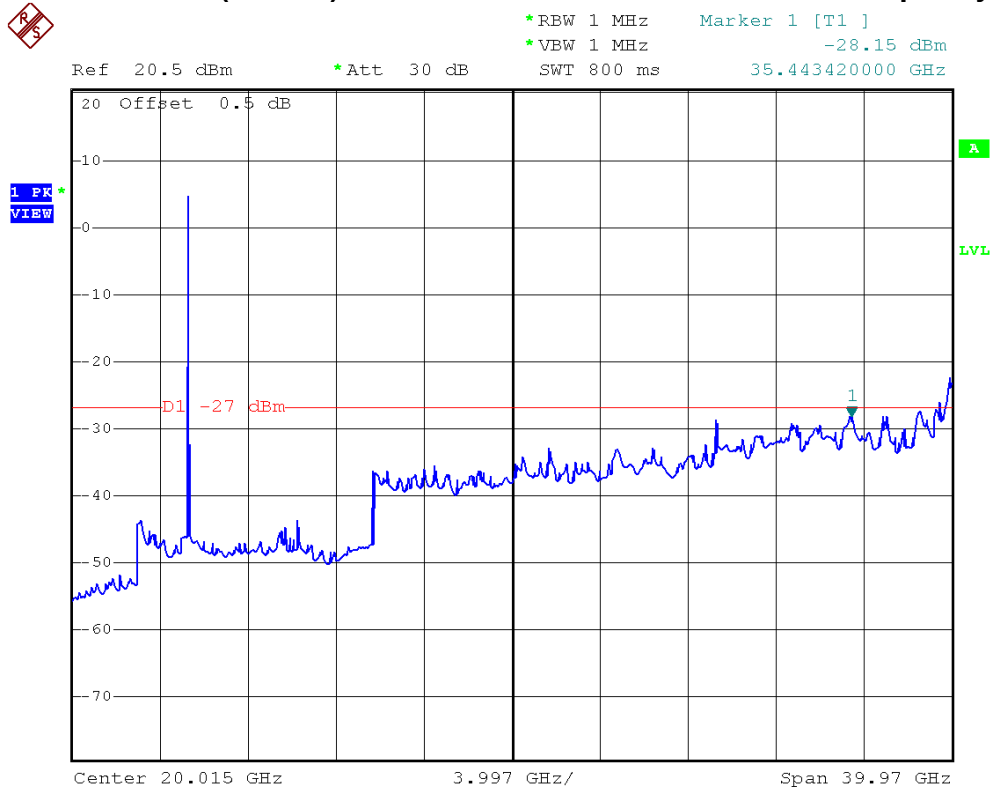




IEEE 802.11n (20 MHz)/ANT.0/5300 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.78 dBm
SWT 800 ms 36.962280000 GHz

Ref 20.5 dBm *Att 30 dB

1 PK*
VIEW

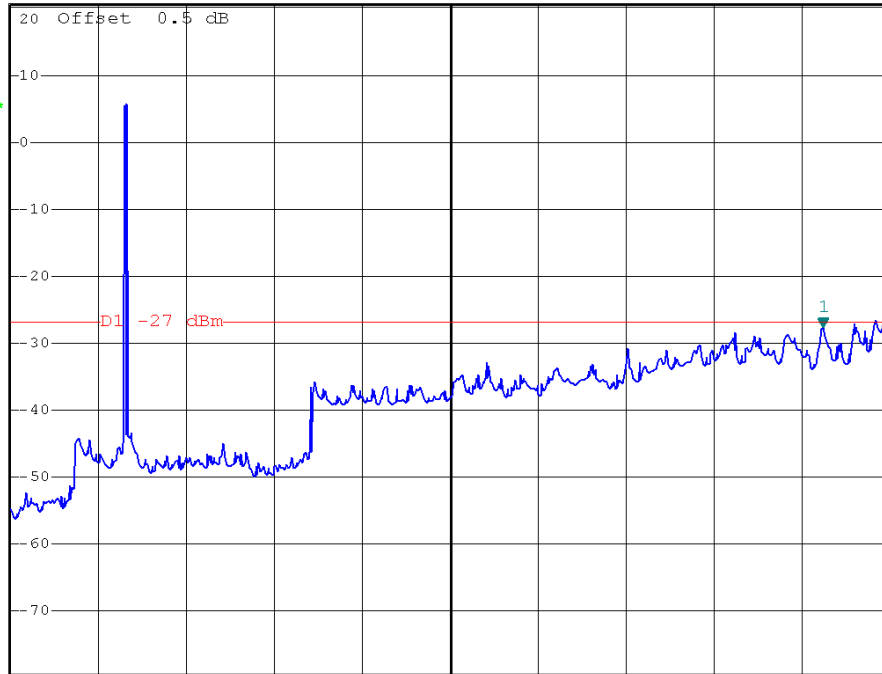

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz


IEEE 802.11n (20 MHz)/ANT.0/5320 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.24 dBm
SWT 800 ms 36.962280000 GHz

Ref 20 dBm *Att 30 dB

1 PK*
VIEW

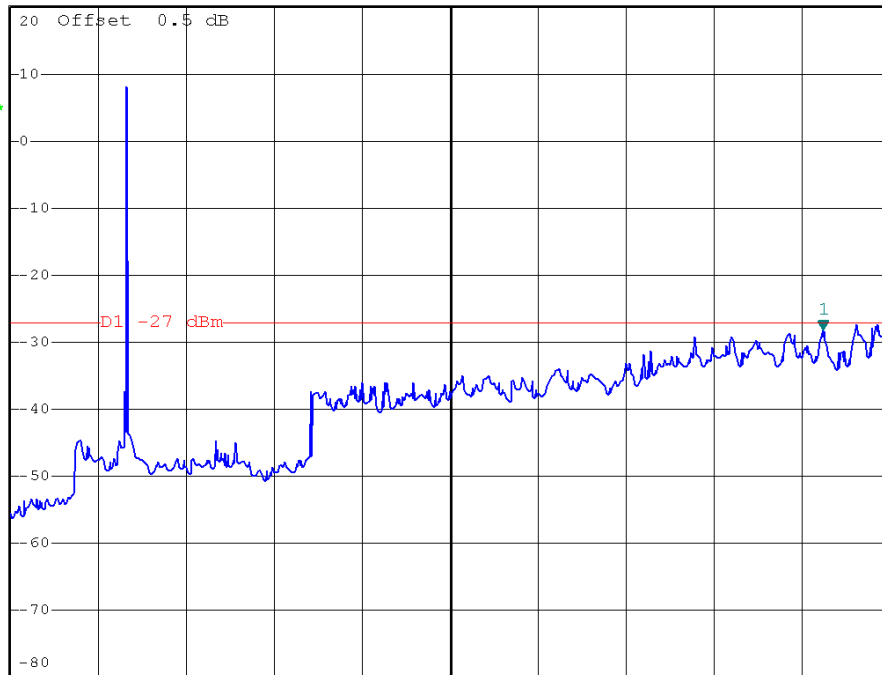

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5149.80	-37.01	5350.80	-41.97
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (20 MHz)/ANT.1/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

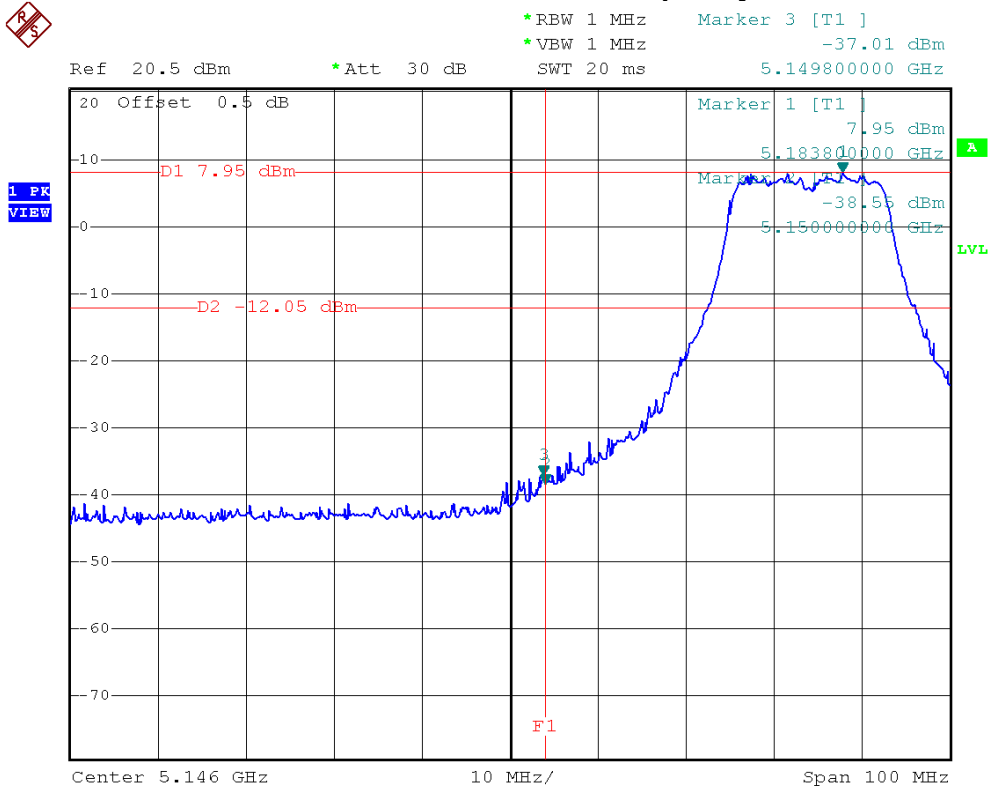

IEEE 802.11n (20 MHz)/ANT.1/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

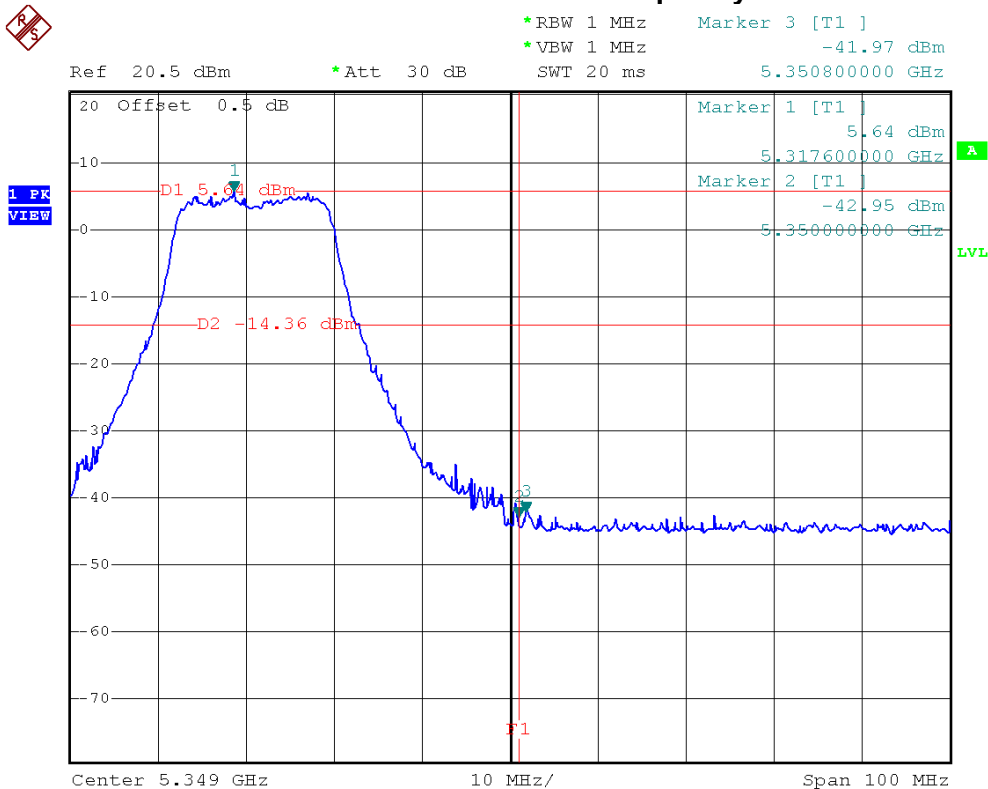




IEEE 802.11n (20 MHz)/ANT.1/5240 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.90 dBm
SWT 800 ms 35.283540000 GHz

Ref 20 dBm *Att 30 dB

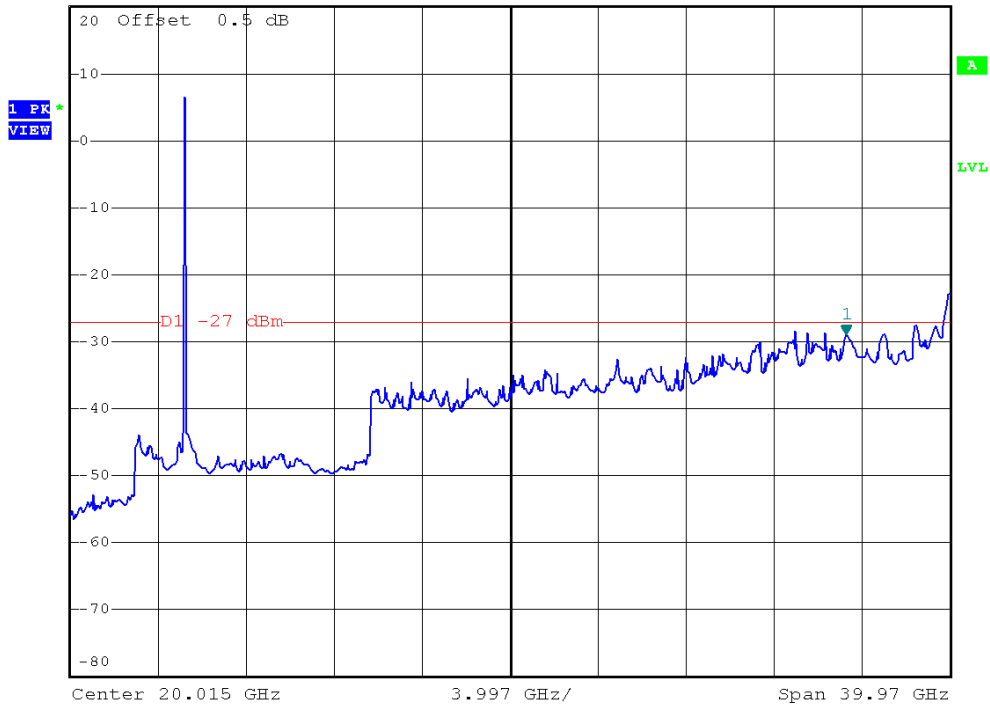


IEEE 802.11n (20 MHz)/ANT.1/5260 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.51 dBm
SWT 800 ms 35.443420000 GHz

Ref 20.5 dBm *Att 30 dB

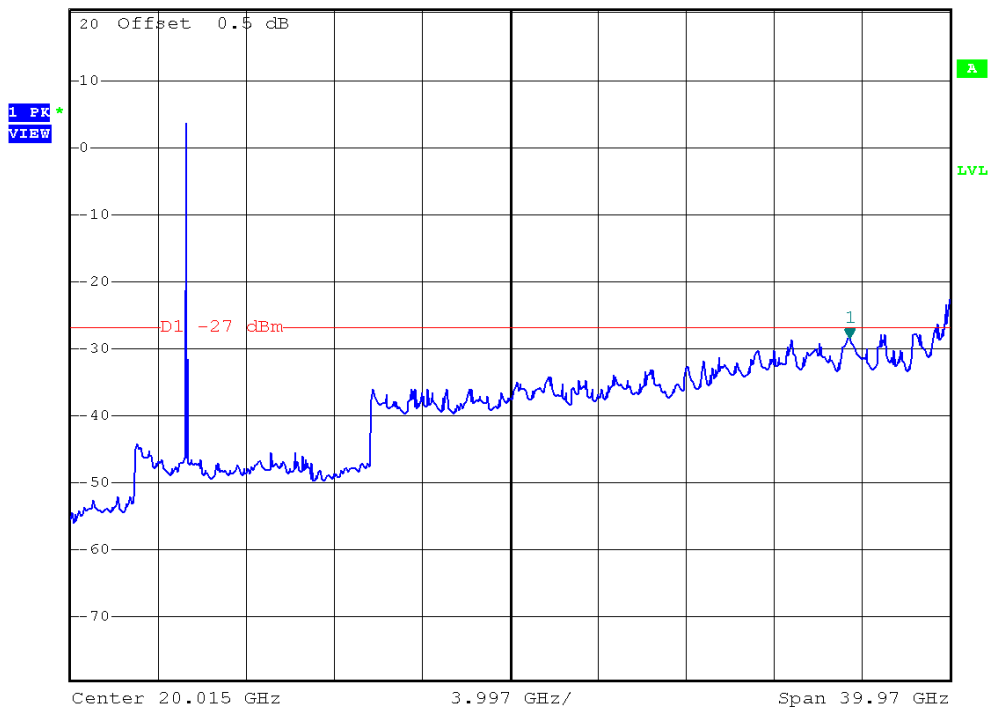




IEEE 802.11n (20 MHz)/ANT.1/5300 MHz/10 Harmonic of the frequency

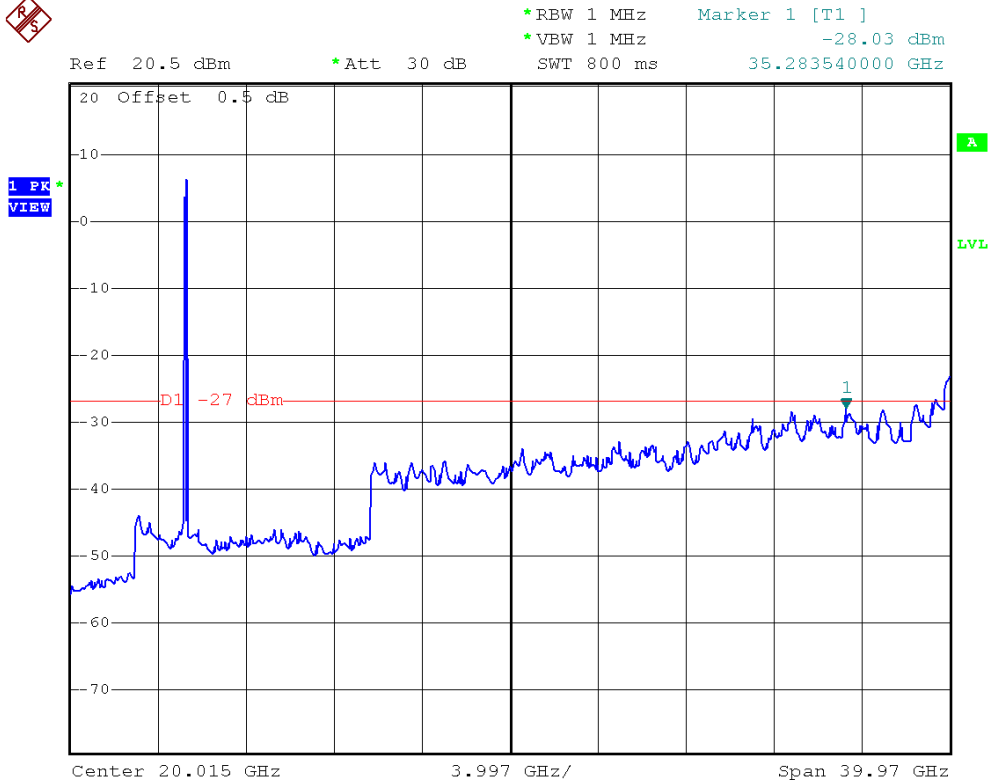

IEEE 802.11n (20 MHz)/ANT.1/5320 MHz/10 Harmonic of the frequency

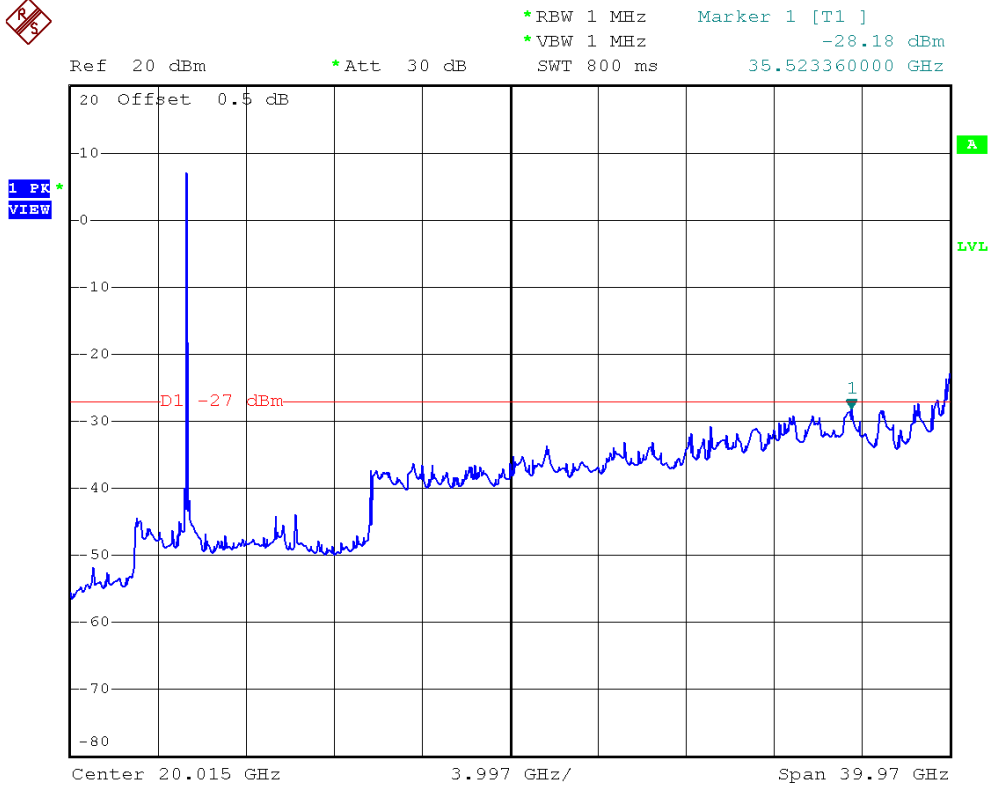




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5150.00	-38.11	5350.00	-44.64
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (40 MHz)/ANT.0/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

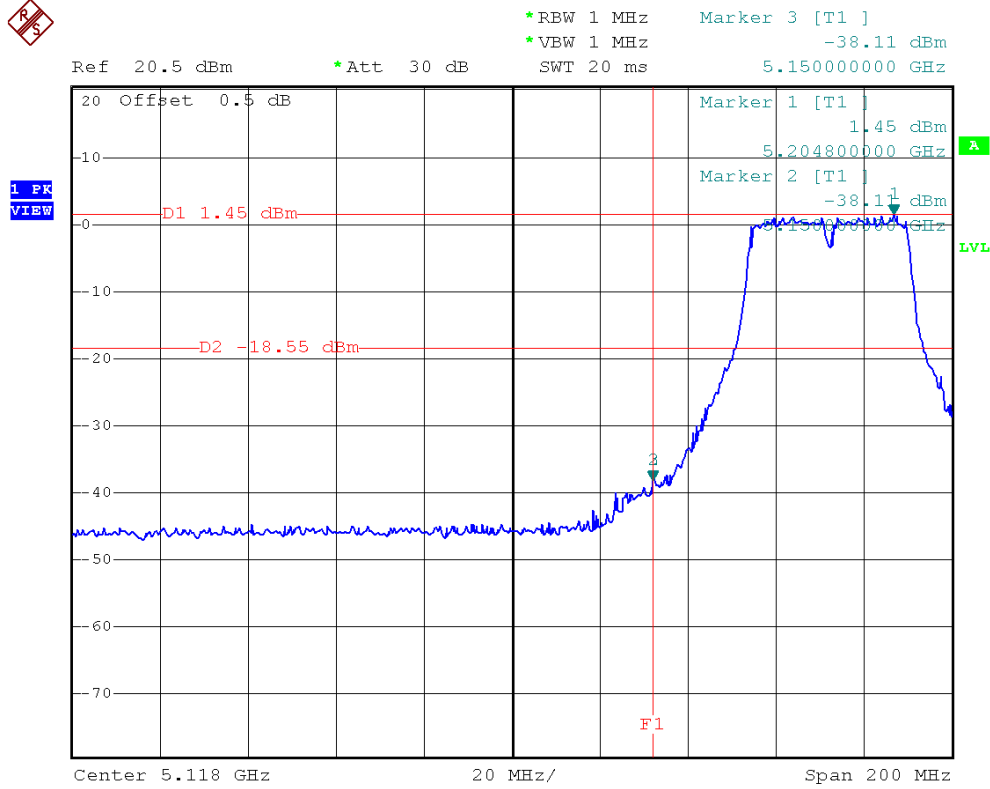

IEEE 802.11n (40 MHz)/ANT.0/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

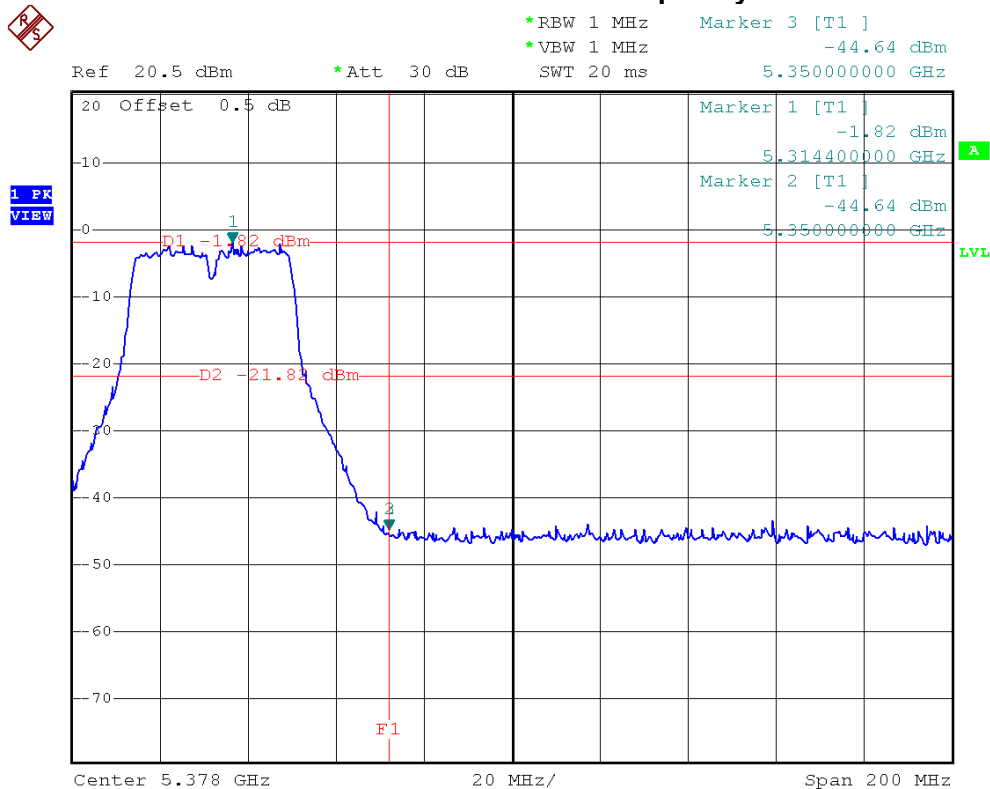




IEEE 802.11n (40 MHz)/ANT.0/5190 MHz/10 Harmonic of the frequency




IEEE 802.11n (40 MHz)/ANT.0/5230 MHz/10 Harmonic of the frequency

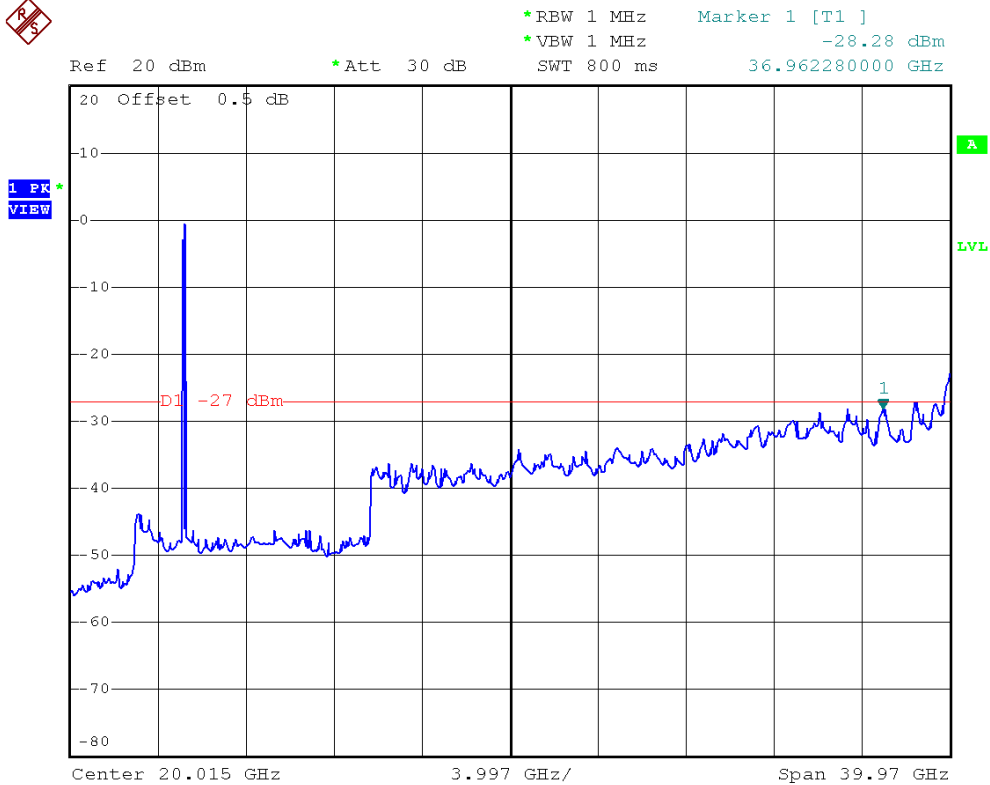




IEEE 802.11n (40 MHz)/ANT.0/5270 MHz/10 Harmonic of the frequency

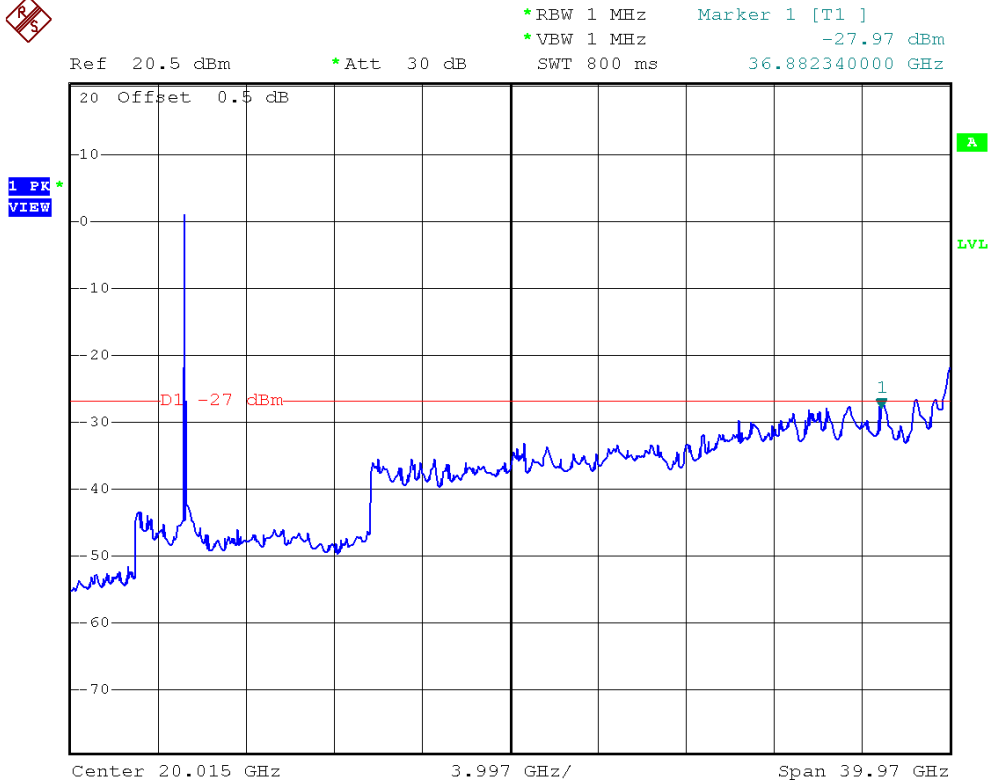

IEEE 802.11n (40 MHz)/ANT.0/5310 MHz/10 Harmonic of the frequency

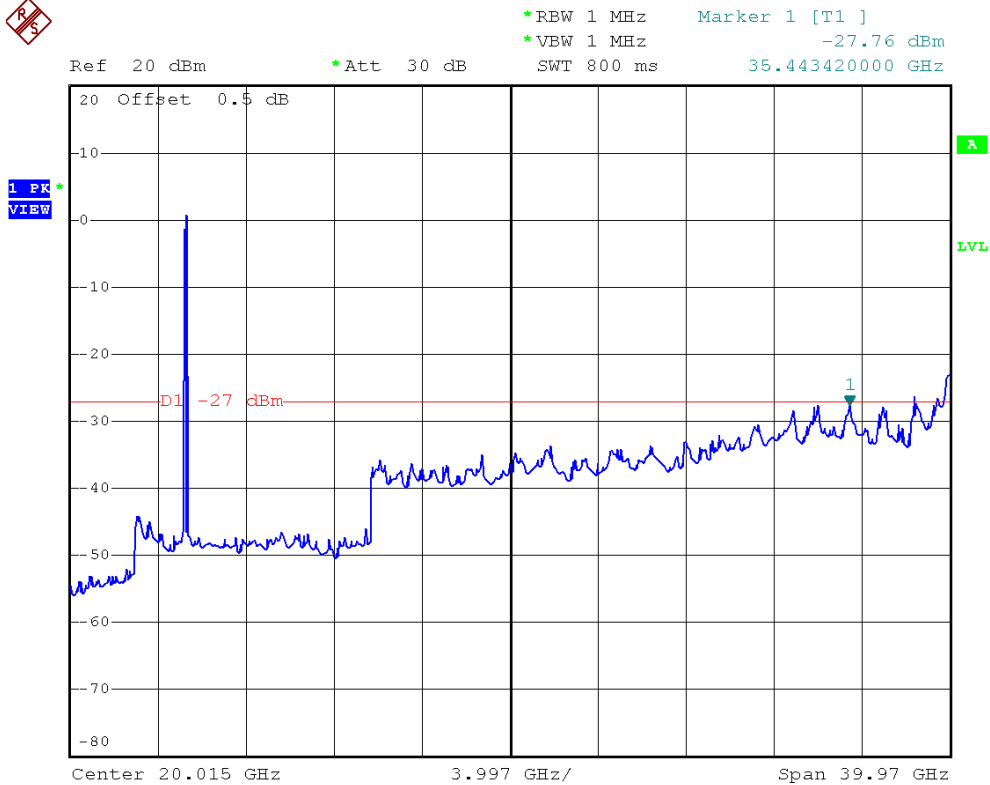




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5147.20	-39.63	5350.00	-44.44
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (40 MHz)/ANT.1/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

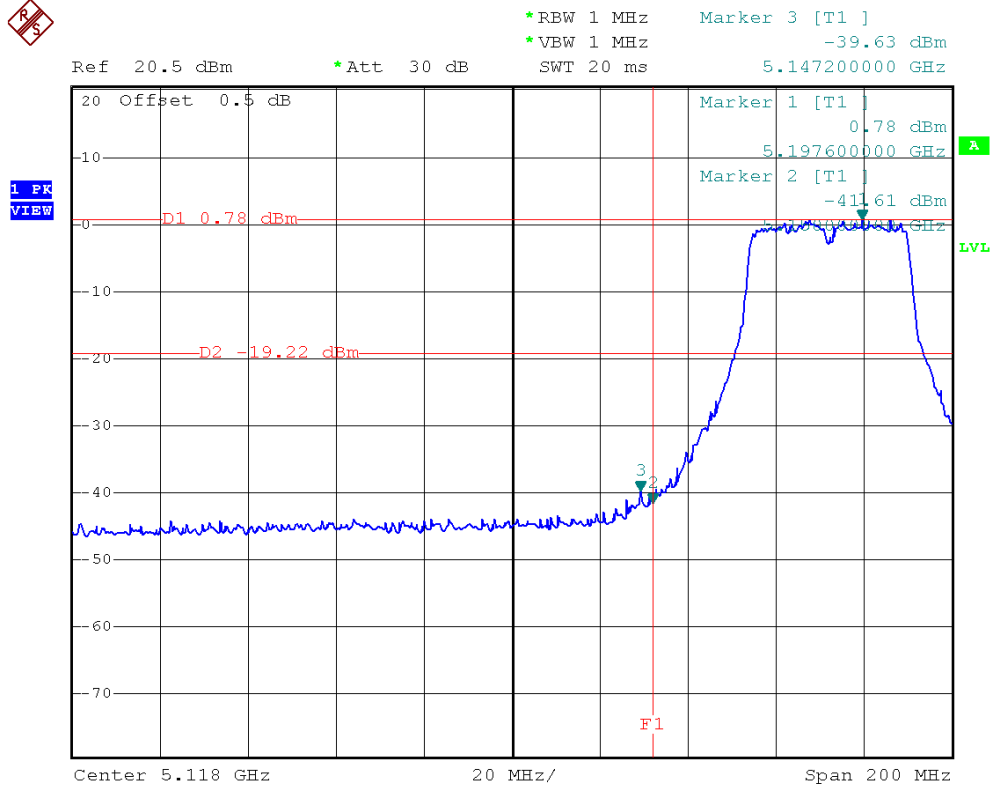


IEEE 802.11n (40 MHz)/ANT.1/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

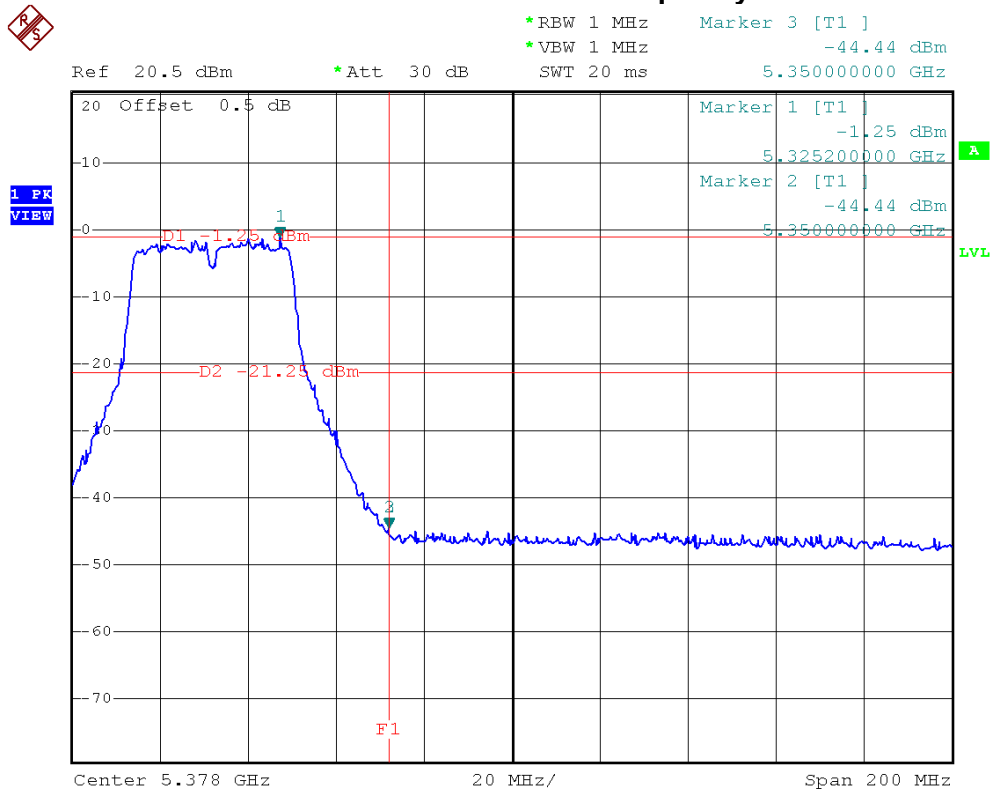




IEEE 802.11n (40 MHz)/ANT.1/5190 MHz/10 Harmonic of the frequency

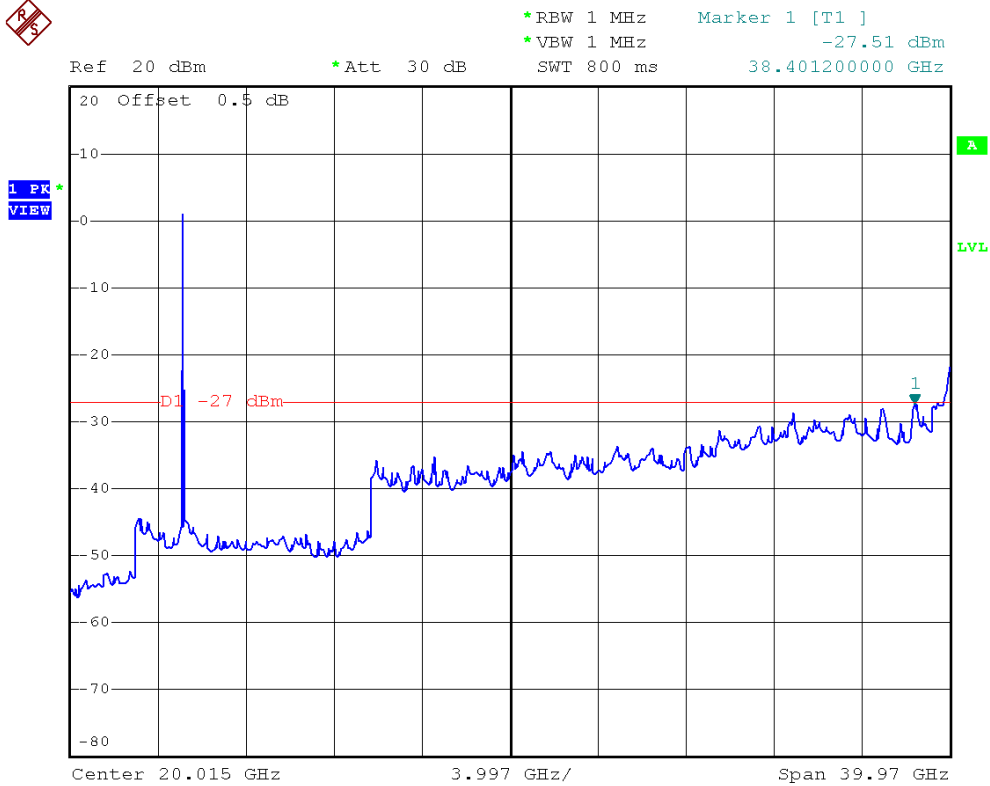

IEEE 802.11n (40 MHz)/ANT.1/5230 MHz/10 Harmonic of the frequency

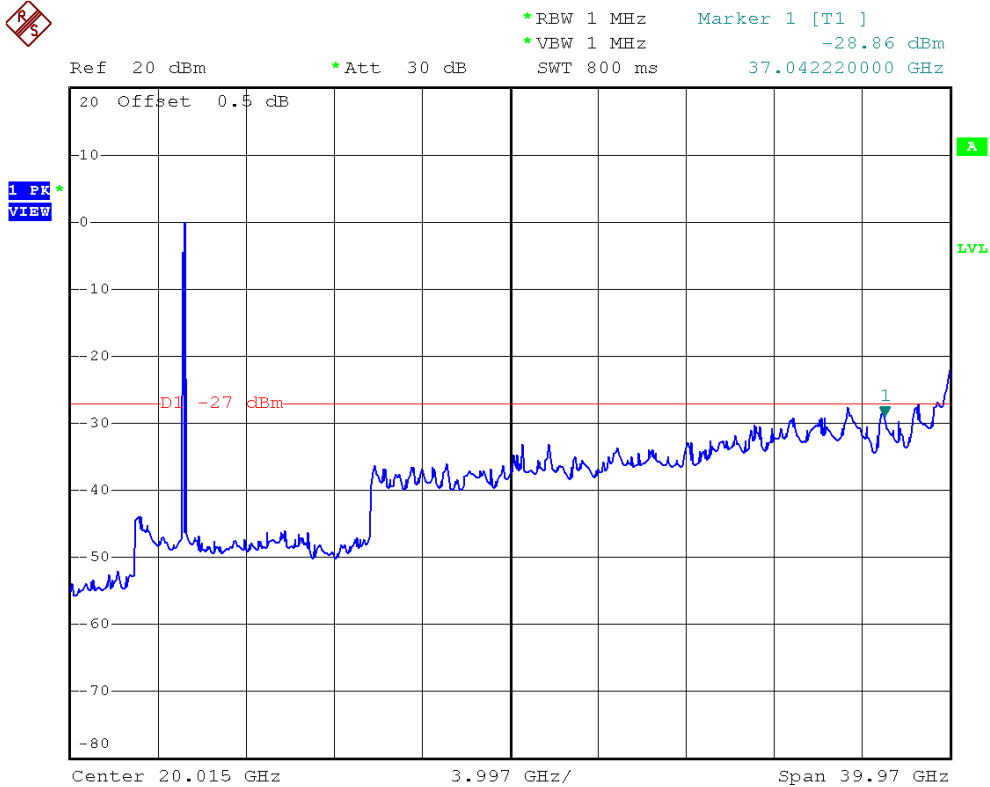




IEEE 802.11n (40 MHz)/ANT.1/5270 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.79 dBm
SWT 800 ms 35.443420000 GHz

Ref 20.5 dBm *Att 30 dB

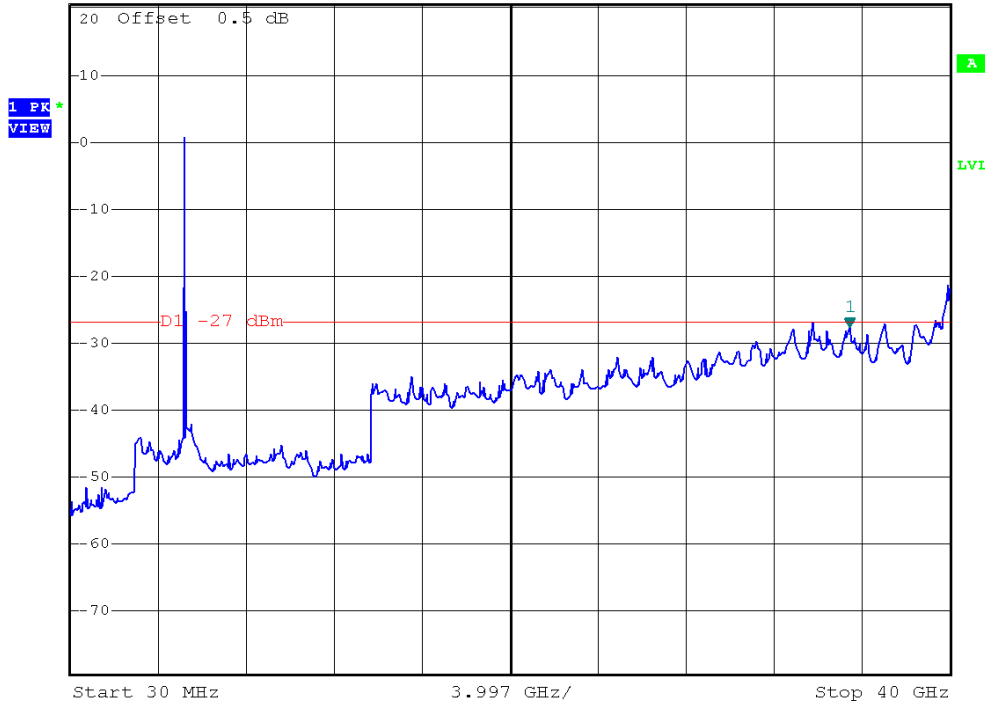


IEEE 802.11n (40 MHz)/ANT.1/5310 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.27 dBm
SWT 800 ms 36.802400000 GHz

Ref 20 dBm *Att 30 dB

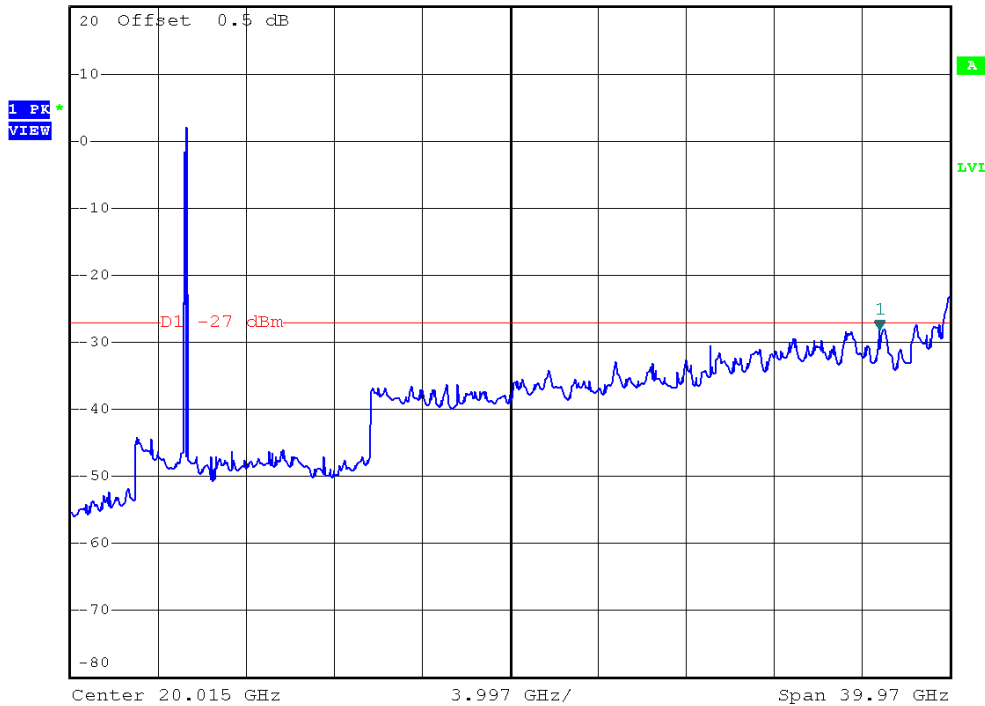



Neutron Engineering Inc.

5.8 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5468.60	-32.64	5725.00	-28.05
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11a/The max. radio frequency power in any 100kHz bandwidth outside the frequency band




*RBW 1 MHz Marker 3 [T1]
*VBW 1 MHz -32.64 dBm
SWT 20 ms 5.468600000 GHz

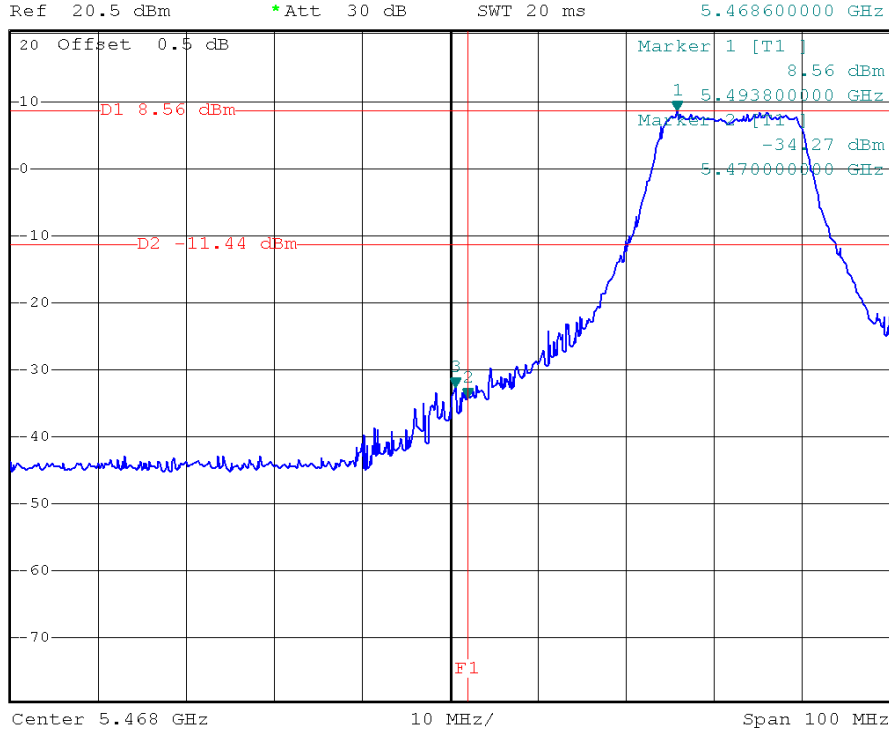

IEEE 802.11a/The max. radio frequency power in any 100 kHz bandwidth within the frequency band



*RBW 1 MHz Marker 3 [T1]
*VBW 1 MHz -28.05 dBm
SWT 20 ms 5.725000000 GHz

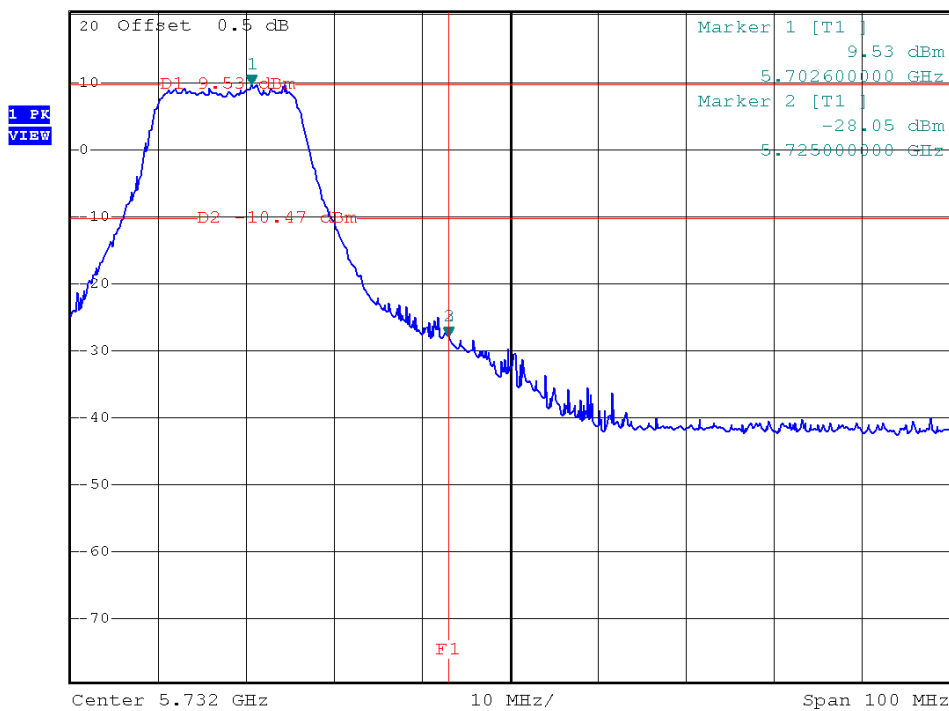




IEEE 802.11a/5500 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.26 dBm
SWT 800 ms 36.962280000 GHz

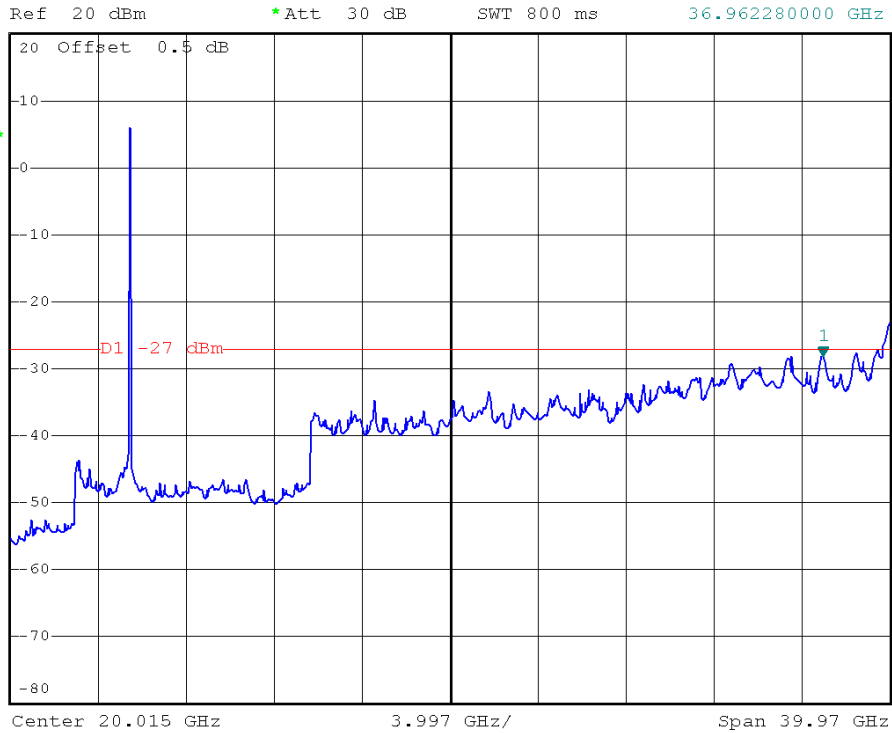

IEEE 802.11a/5580 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -29.22 dBm
SWT 800 ms 36.882340000 GHz

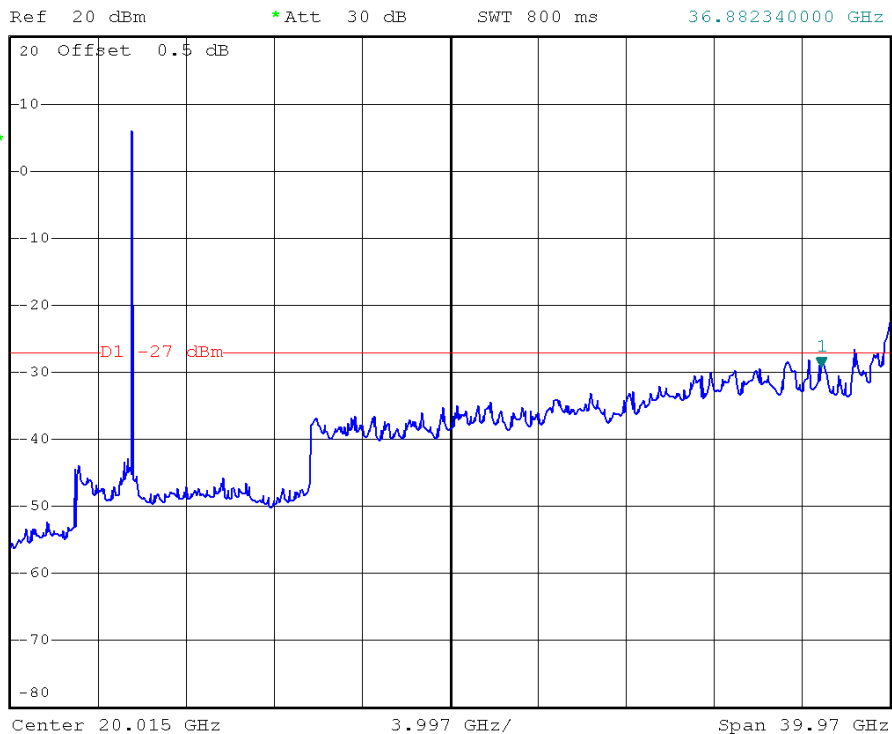



IEEE 802.11a/5700 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.25 dBm
SWT 800 ms 36.882340000 GHz

Ref 20 dBm

*Att 30 dB

1 PK
VIEW

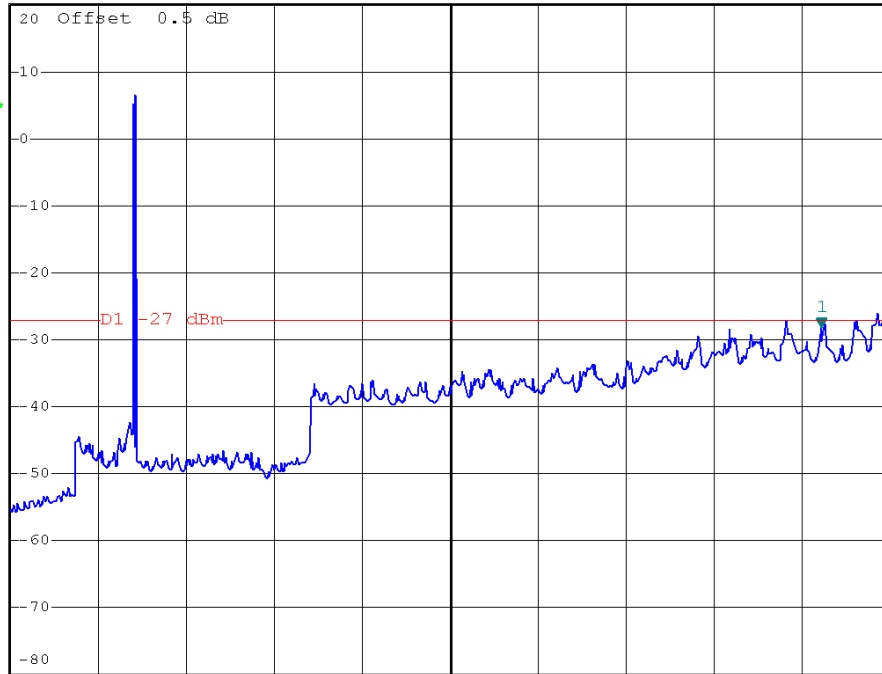

Center 20.015 GHz

3.997 GHz/

Span 39.97 GHz




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5466.80	-42.37	5725.40	-34.82
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (20 MHz)/ANT.0/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

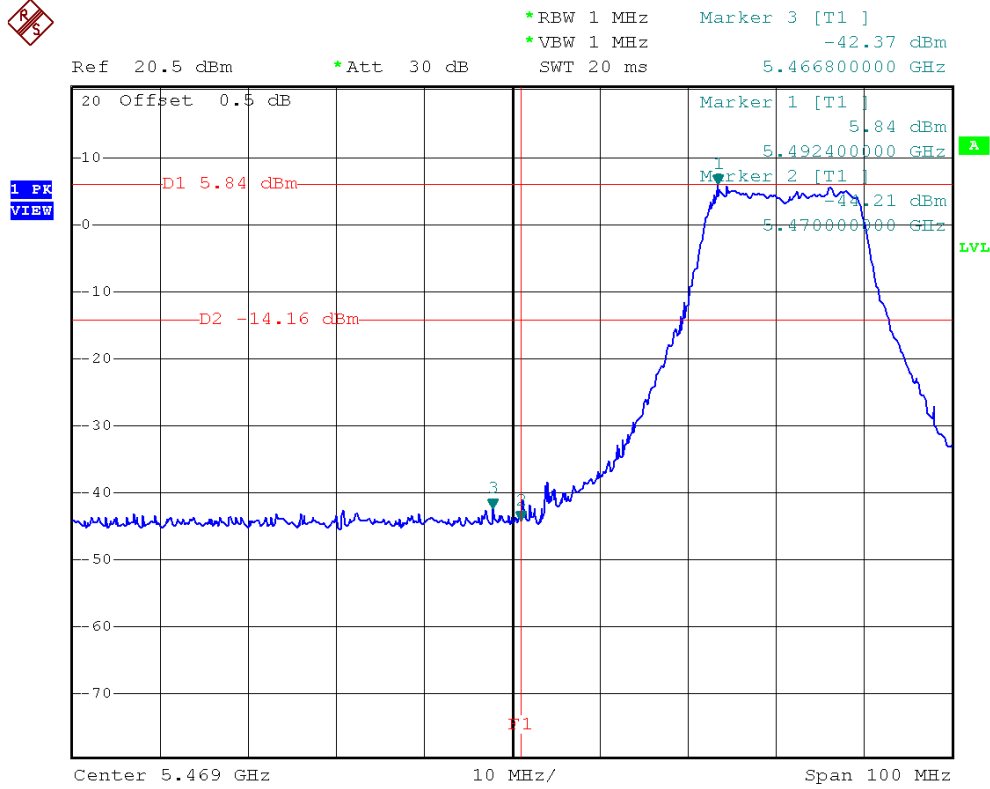


IEEE 802.11n (20 MHz)/ANT.0/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

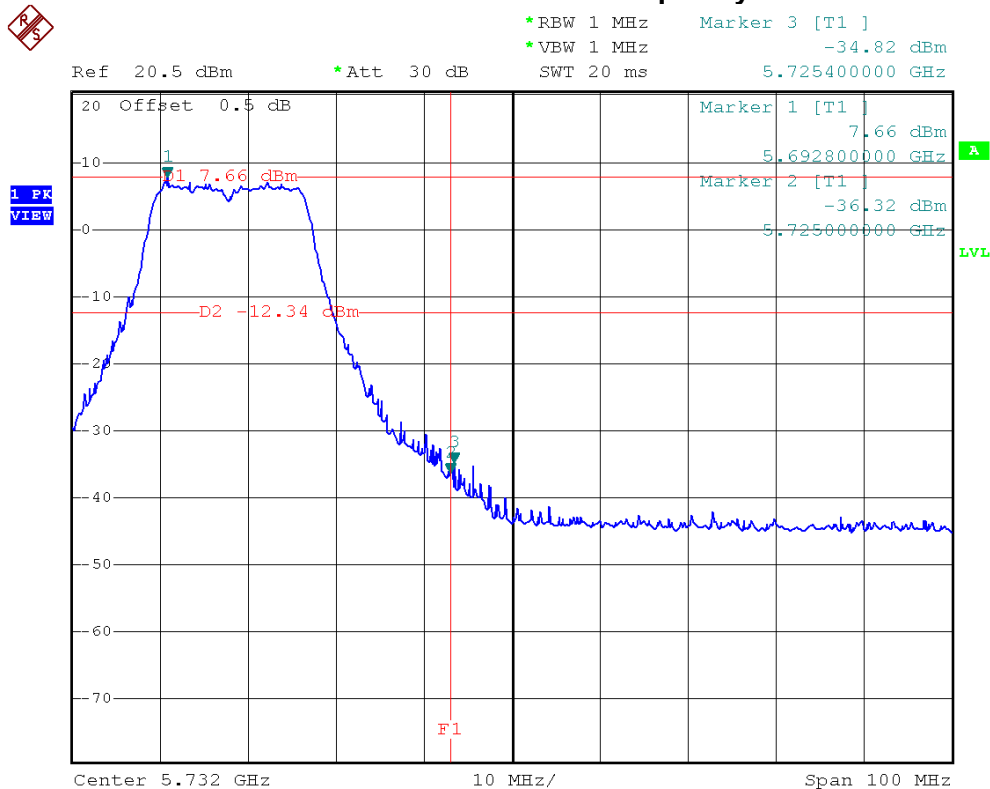




IEEE 802.11n (20 MHz)/ANT.0/5500 MHz/10 Harmonic of the frequency

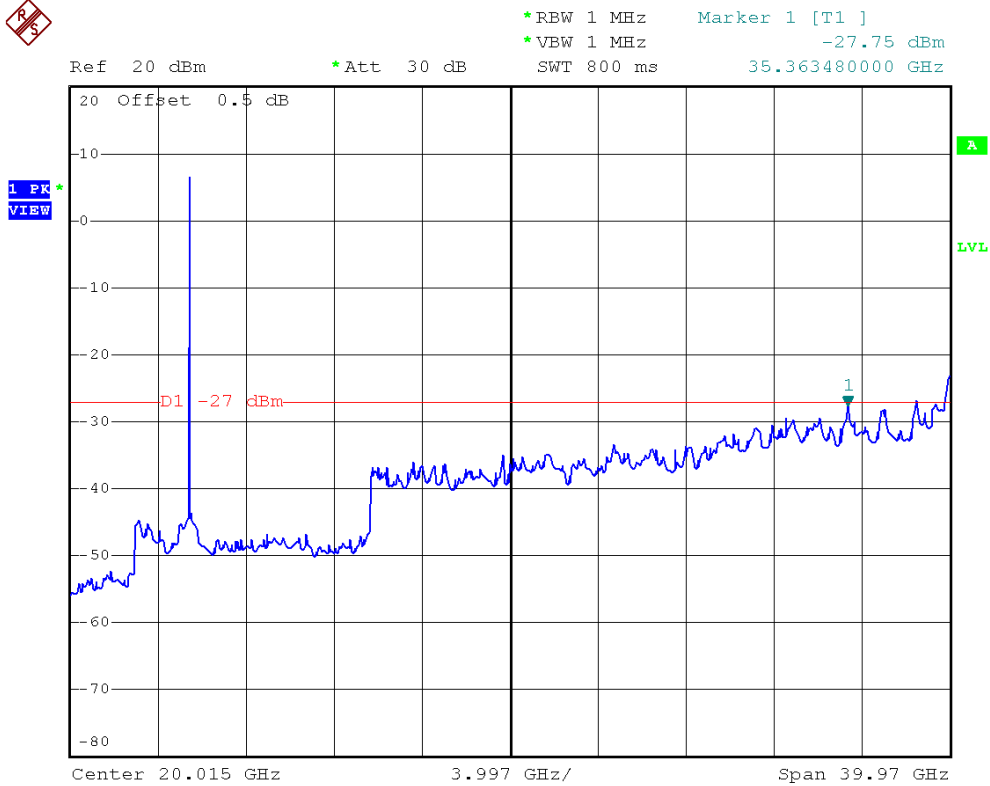

IEEE 802.11n (20 MHz)/ANT.0/5580 MHz/10 Harmonic of the frequency

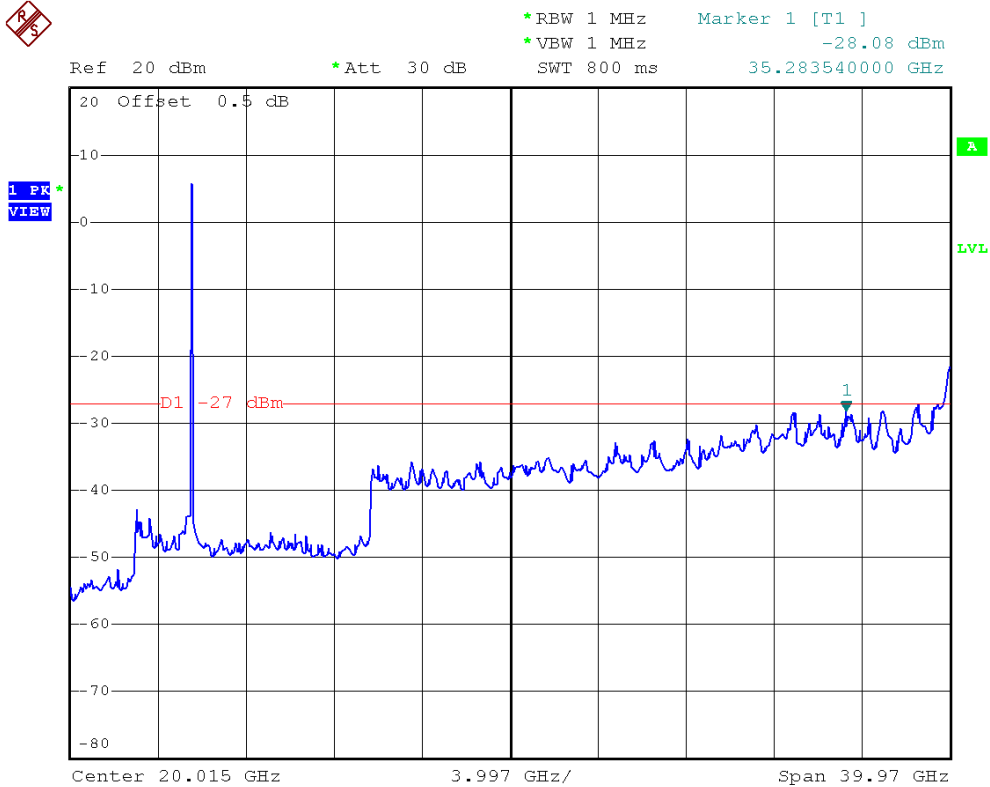



IEEE 802.11n (20 MHz)/ANT.0/5700 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.04 dBm
SWT 800 ms 37.042220000 GHz

Ref 20 dBm

*Att 30 dB

1 PK
VIEW

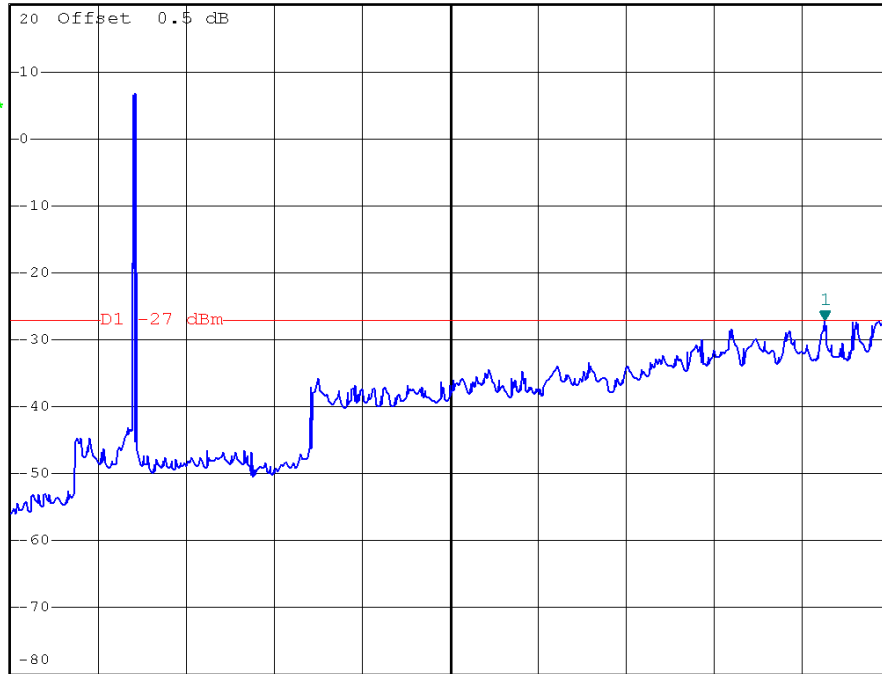

Start 30 MHz

3.997 GHz/

Stop 40 GHz

A

LVL




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5469.40	-41.61	5725.20	-32.54
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (20 MHz)/ANT.1/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

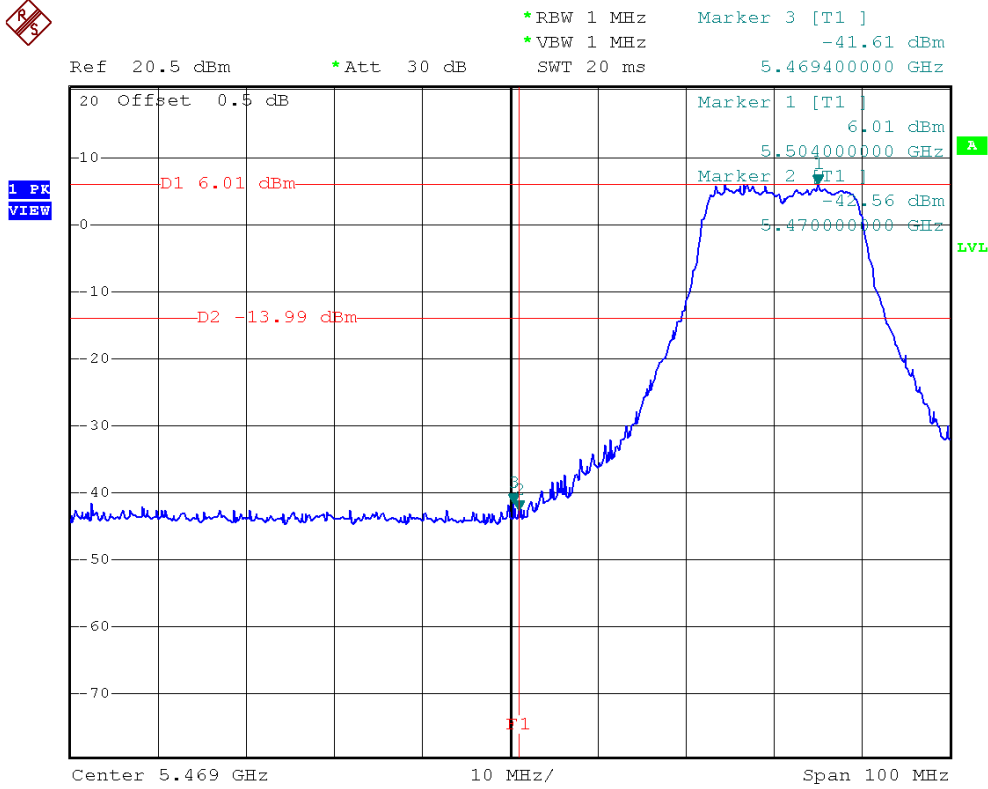


IEEE 802.11n (20 MHz)/ANT.1/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

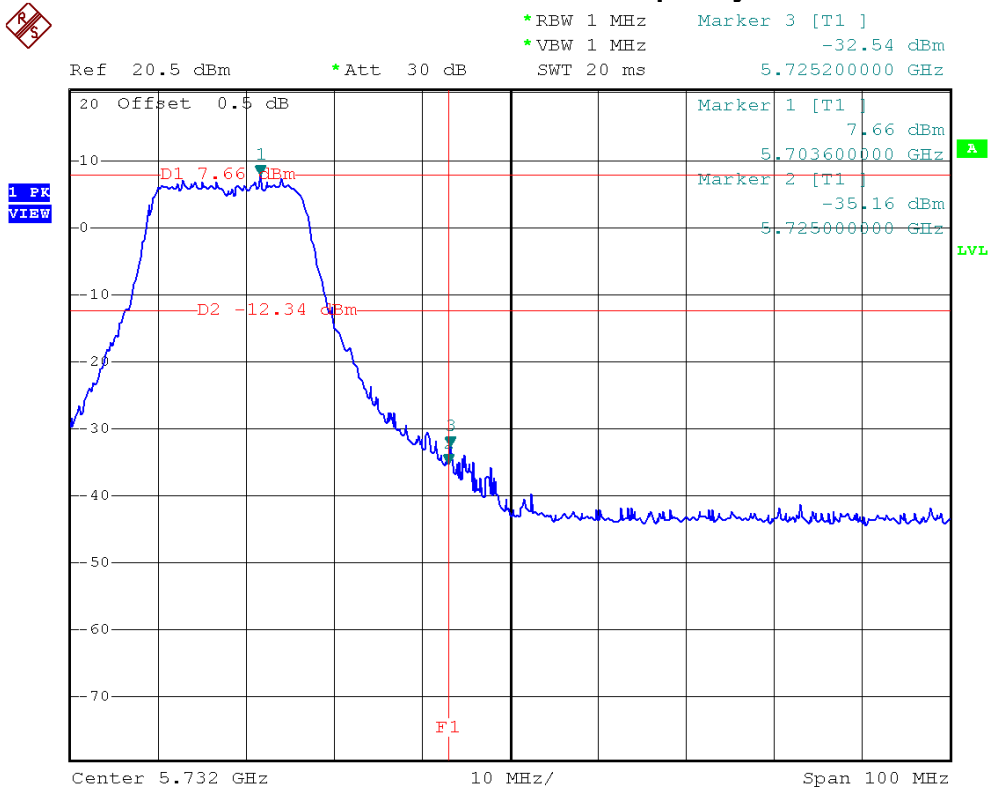




IEEE 802.11n (20 MHz)/ANT.1/5500 MHz/10 Harmonic of the frequency

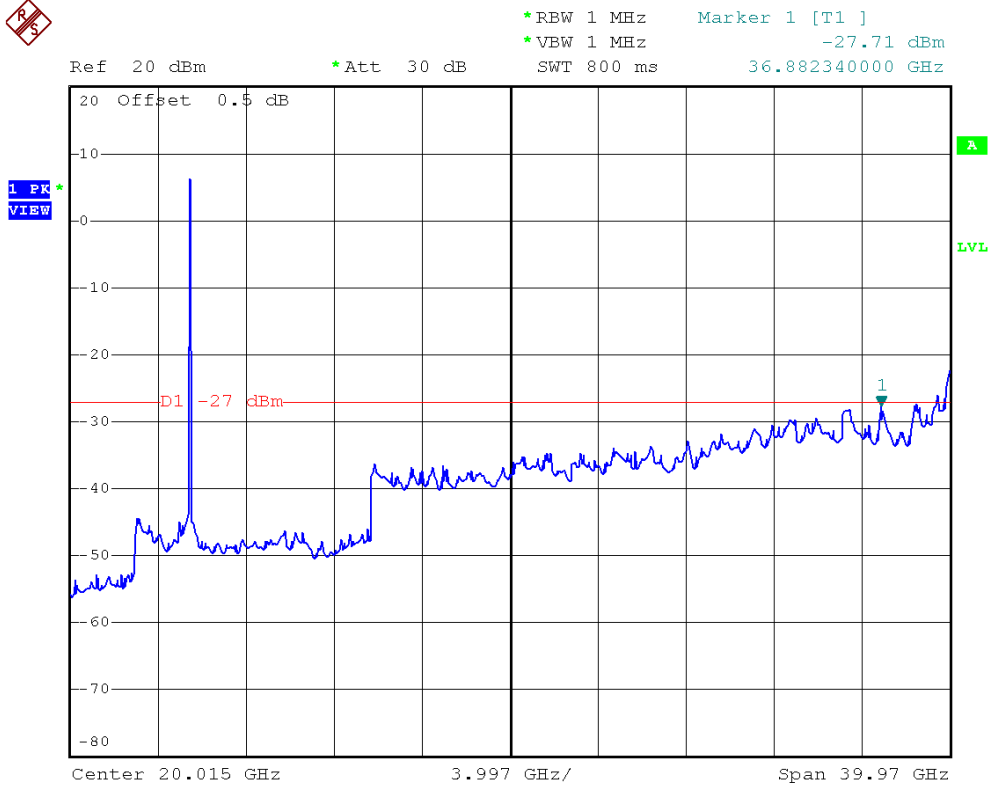

IEEE 802.11n (20 MHz)/ANT.1/5580 MHz/10 Harmonic of the frequency

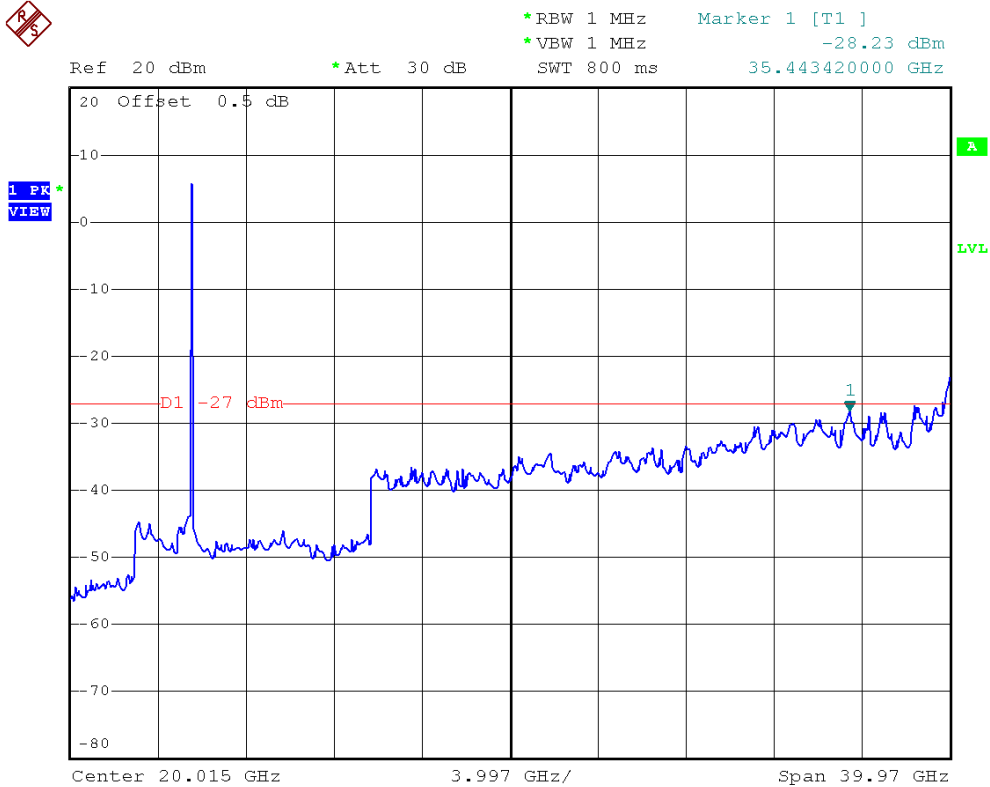



IEEE 802.11n (20 MHz)/ANT.1/5700 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.20 dBm
SWT 800 ms 37.042220000 GHz

Ref 20 dBm

*Att 30 dB

37.042220000 GHz

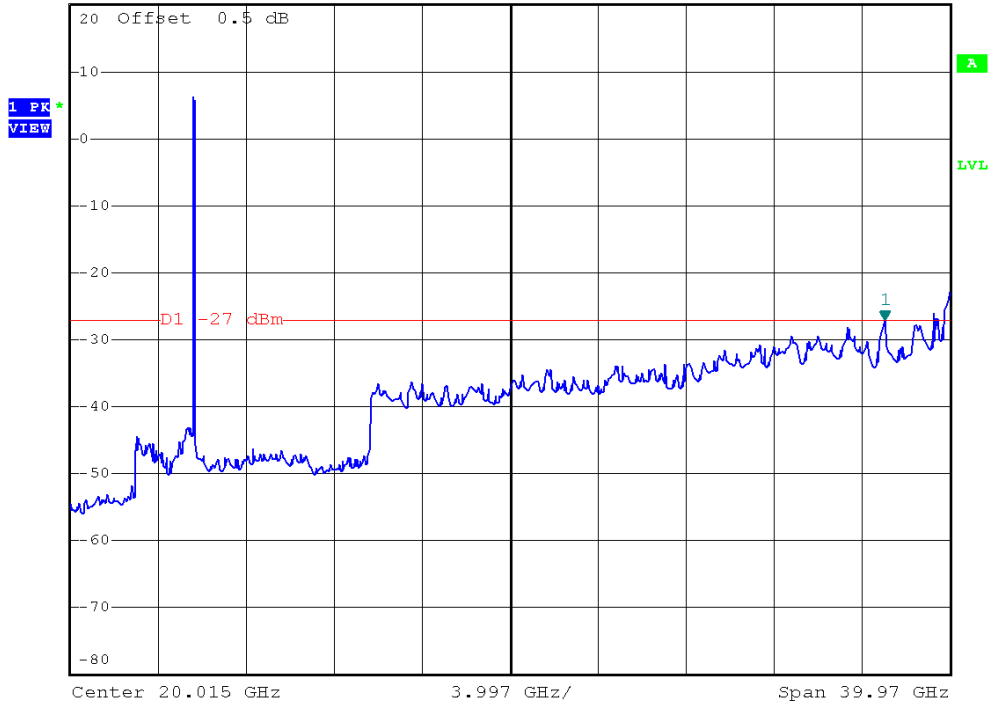




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5468.80	-44.09	5725.00	-44.47
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (40 MHz)/ANT.0/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

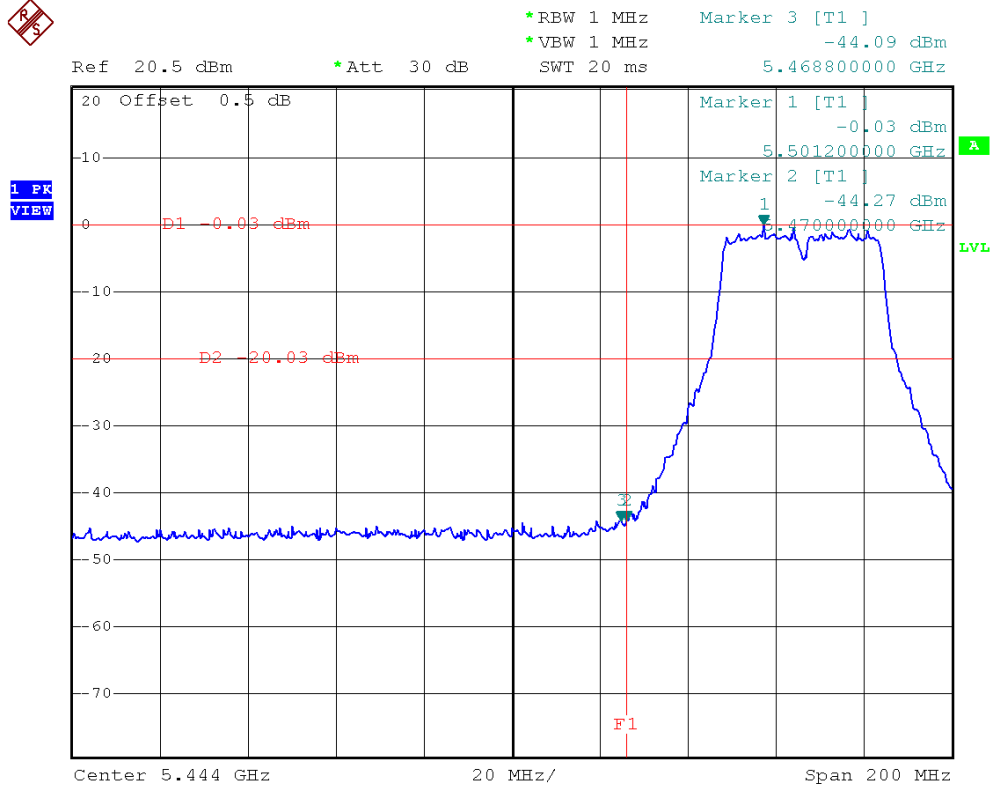

IEEE 802.11n (40 MHz)/ANT.0/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

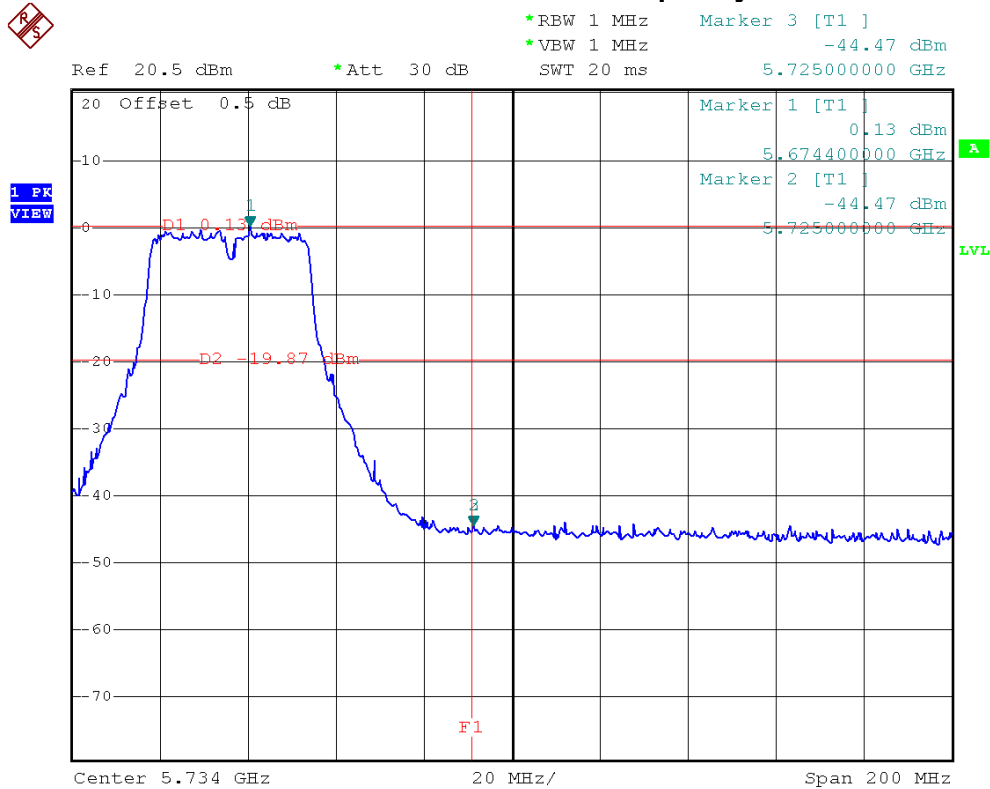




IEEE 802.11n (40 MHz)/ANT.0/5510 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.62 dBm
SWT 800 ms 35.443420000 GHz

Ref 20 dBm *Att 30 dB

1 PK VIEW

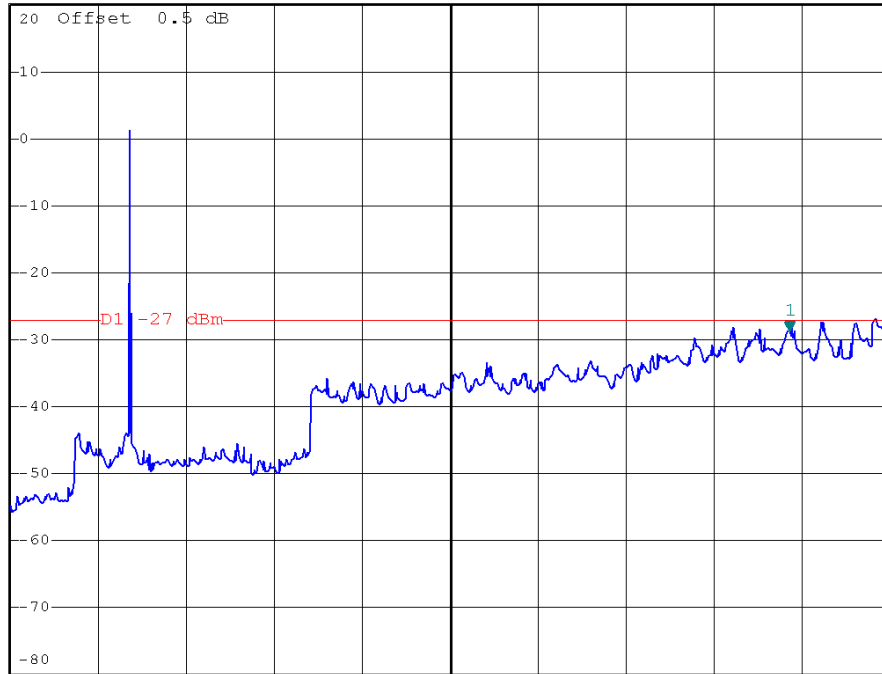

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz


IEEE 802.11n (40 MHz)/ANT.0/5550 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.81 dBm
SWT 800 ms 35.203600000 GHz

Ref 20 dBm *Att 30 dB

1 PK VIEW

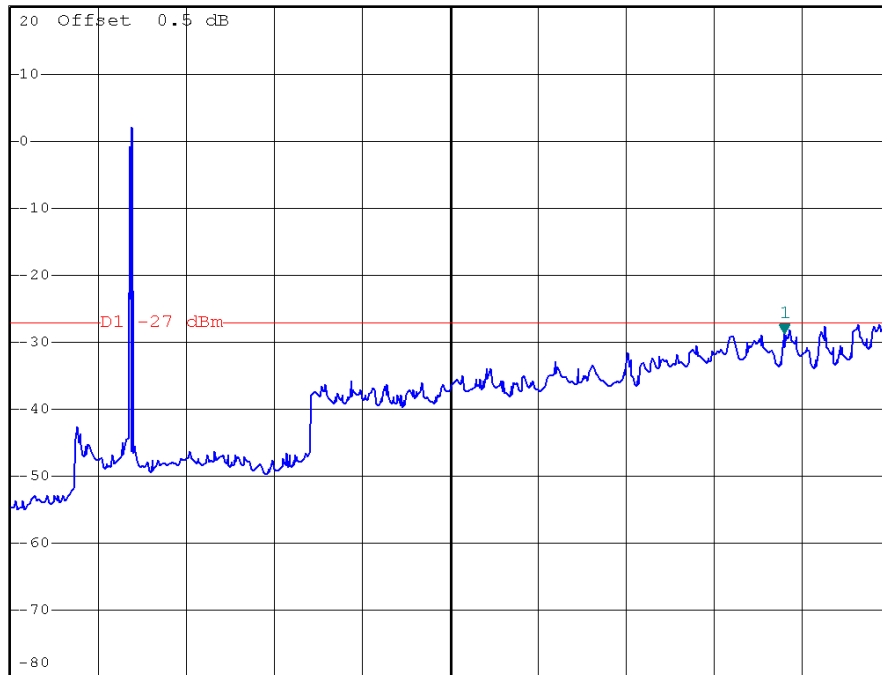

Center 20.015 GHz 3.997 GHz/ Span 39.97 GHz



IEEE 802.11n (40 MHz)/ANT.0/5670 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -29.49 dBm
SWT 800 ms 35.443420000 GHz

Ref 20 dBm

*Att 30 dB

35.443420000 GHz

1 PK
VIEW

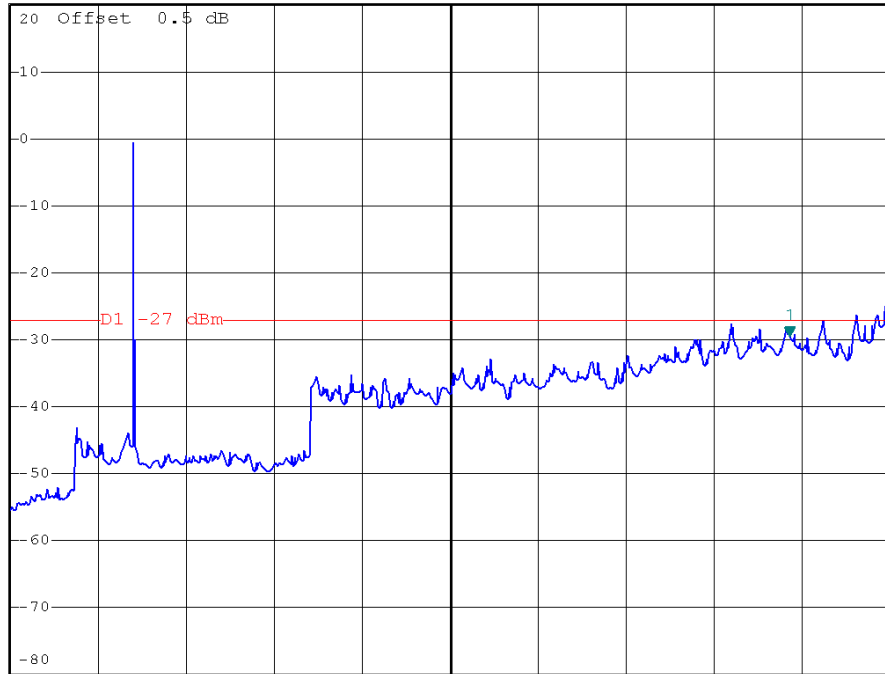

Center 20.015 GHz

3.997 GHz/

Span 39.97 GHz




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1		


Channel of Worst Data			
The max. radio frequency power in any 100 kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
5468.40	-42.48	5725.00	-44.58
Result			
In any 100 kHz bandwidth outside the frequency band, the radio frequency power is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.			



IEEE 802.11n (40 MHz)/ANT.1/The max. radio frequency power in any 100kHz bandwidth outside the frequency band

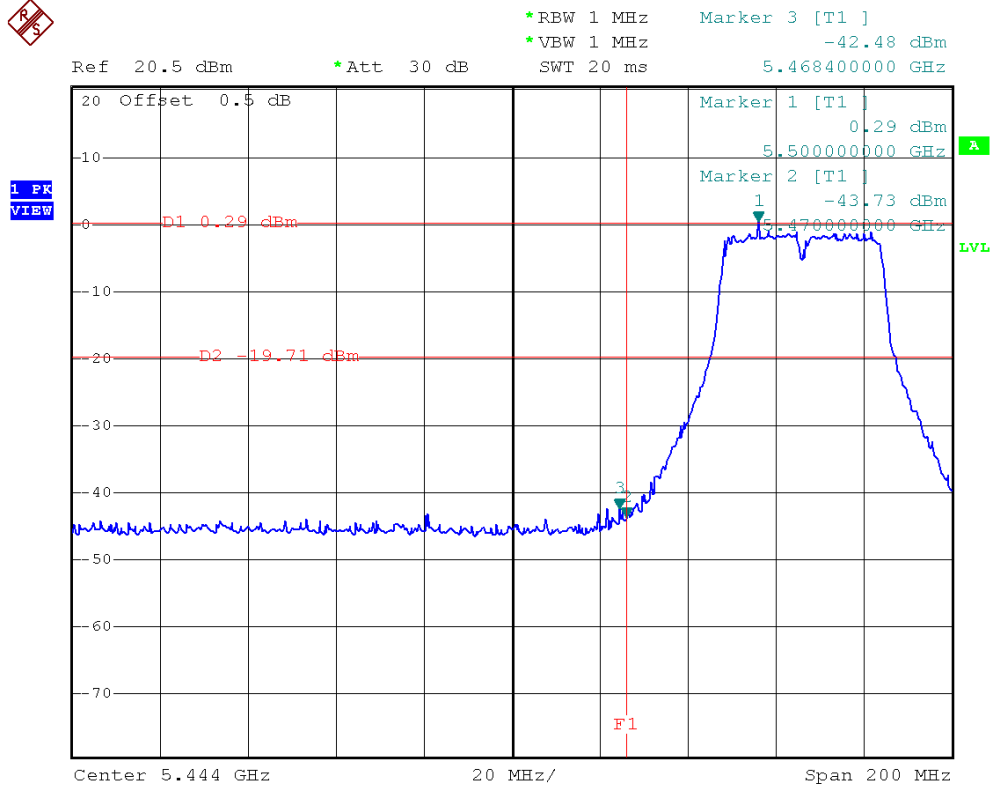

IEEE 802.11n (40 MHz)/ANT.1/The max. radio frequency power in any 100 kHz bandwidth within the frequency band

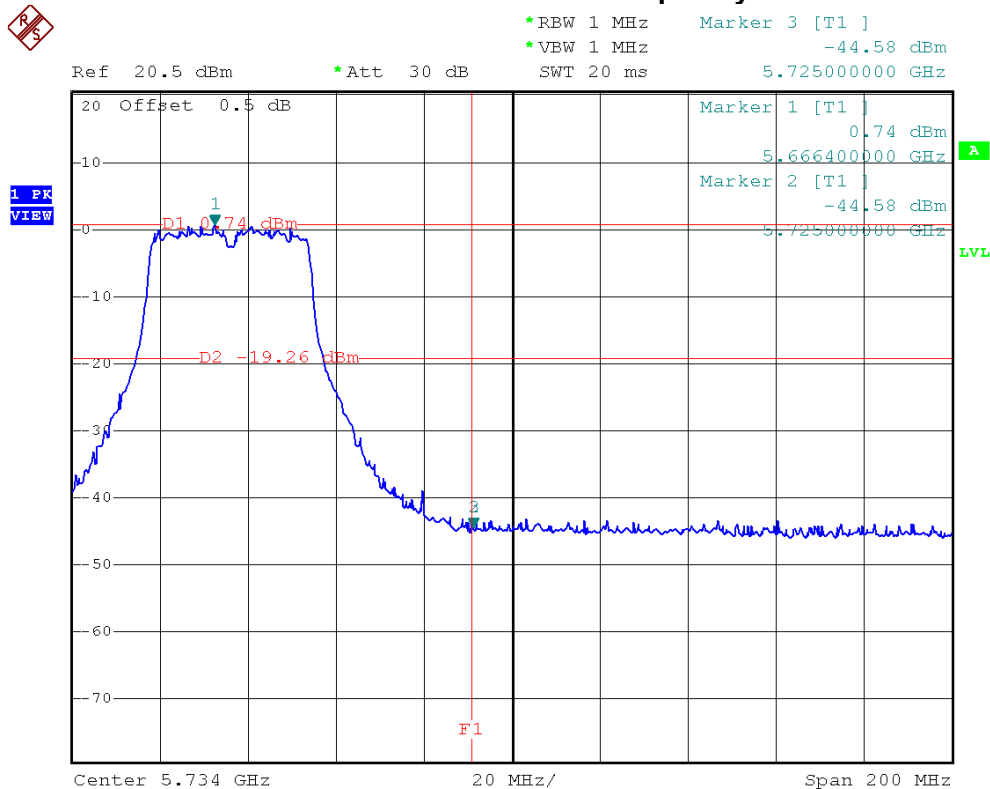




IEEE 802.11n (40 MHz)/ANT.1/5510 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -27.58 dBm
SWT 800 ms 36.962280000 GHz

Ref 20 dBm *Att 30 dB

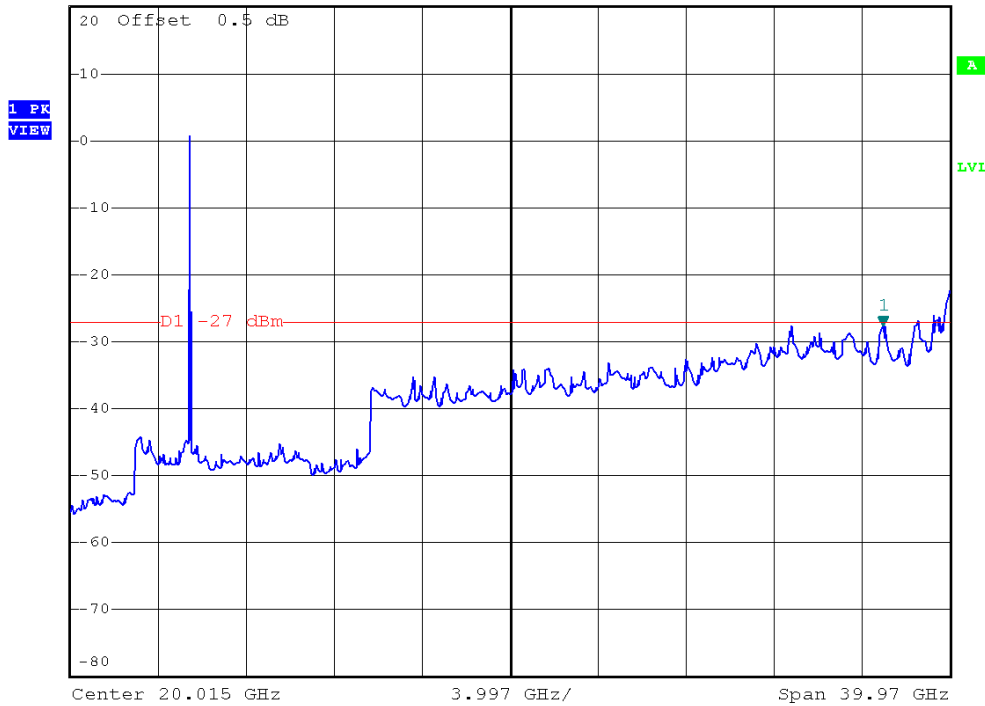


IEEE 802.11n (40 MHz)/ANT.1/5550 MHz/10 Harmonic of the frequency



*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.39 dBm
SWT 800 ms 35.443420000 GHz

Ref 20 dBm *Att 30 dB

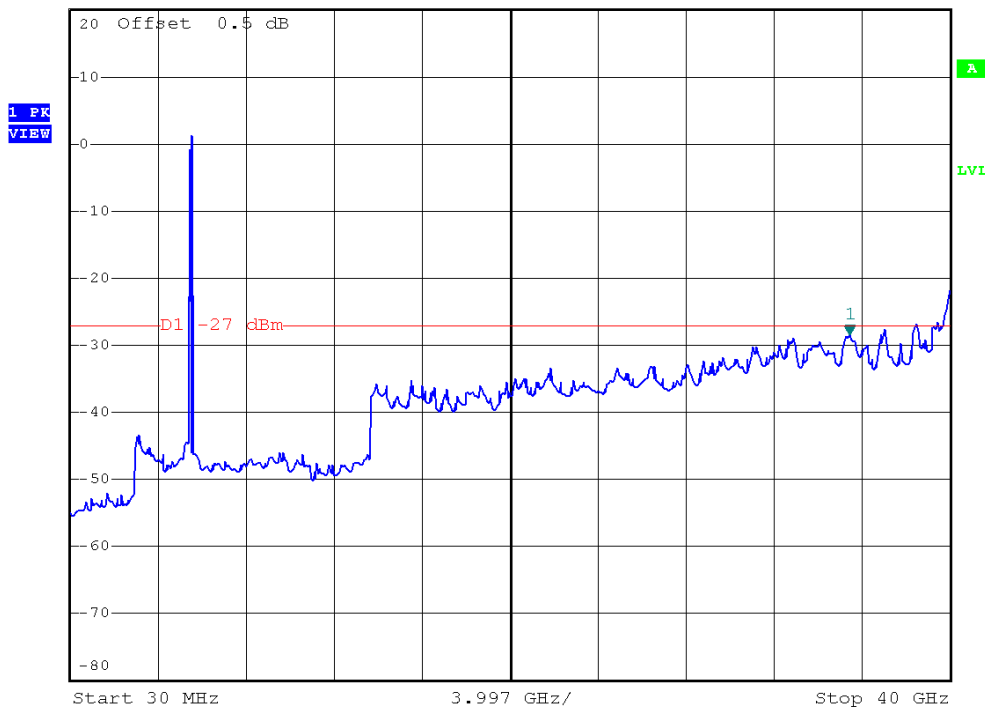



IEEE 802.11n (40 MHz)/ANT.1/5670 MHz/10 Harmonic of the frequency




*RBW 1 MHz Marker 1 [T1]
*VBW 1 MHz -28.55 dBm
SWT 800 ms 35.523360000 GHz

Ref 20 dBm

*Att 30 dB

35.523360000 GHz

1 PK
VIEW

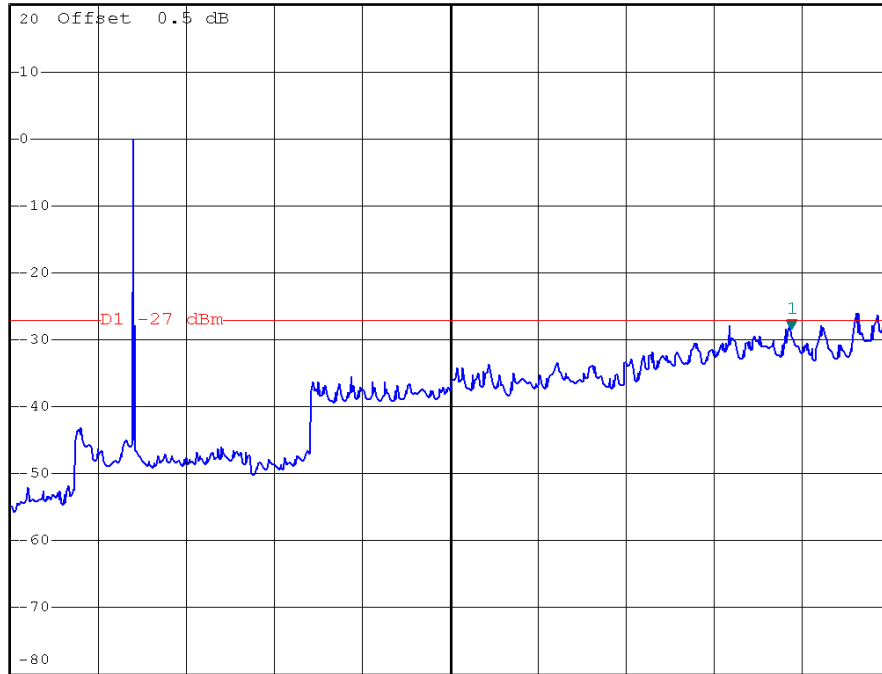

Center 20.015 GHz

3.997 GHz/

Span 39.97 GHz



6 26 DB BANDWIDTH

6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
26 dB Bandwidth	5150 - 5250	---
	5250 - 5350	
	5470 - 5725	
	5725 - 5825	

6.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

6.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.4 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Measured the spectrum width with power higher than 26 dB below carrier.

6.5 TEST SETUP LAYOUT



6.6 DEVIATION FROM TEST STANDARD

No deviation

6.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.




6.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180 MHz	27.20	18.00
5200 MHz	26.32	17.76
5240 MHz	25.60	17.76

IEEE 802.11a/5180 MHz/26 dB and 99% Occupied Bandwidth

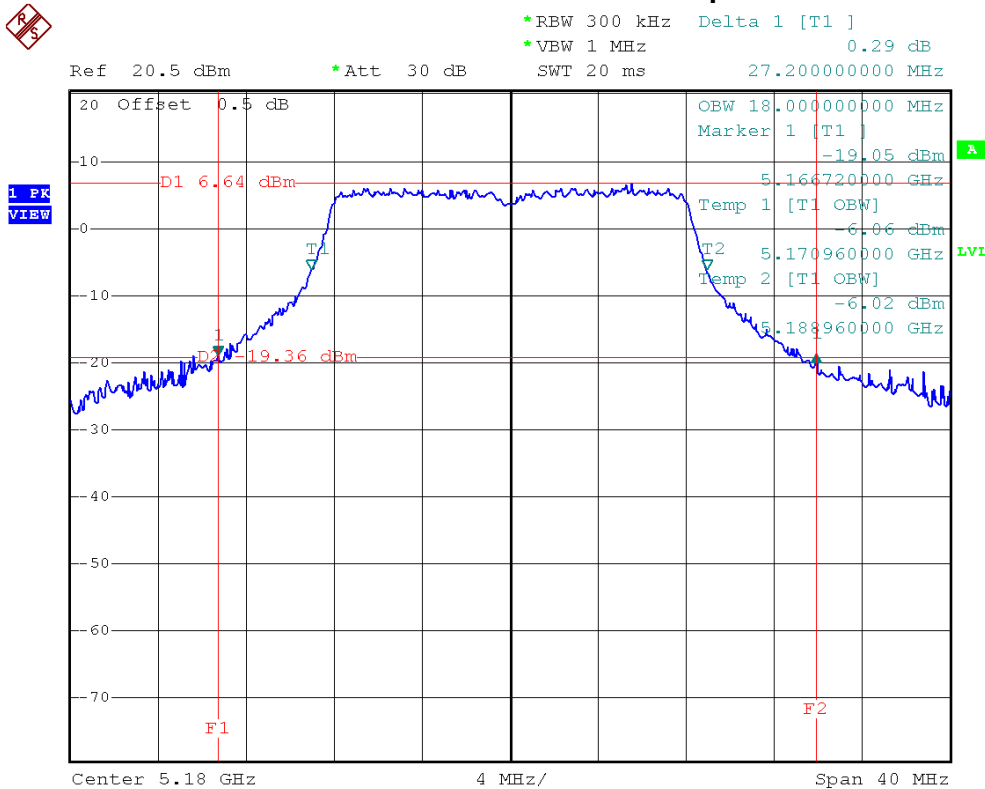




IEEE 802.11a/5200 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 1.35 dB
SWT 20 ms 26.320000000 MHz

Ref 20.5 dBm *Att 30 dB

1 PK VIEW

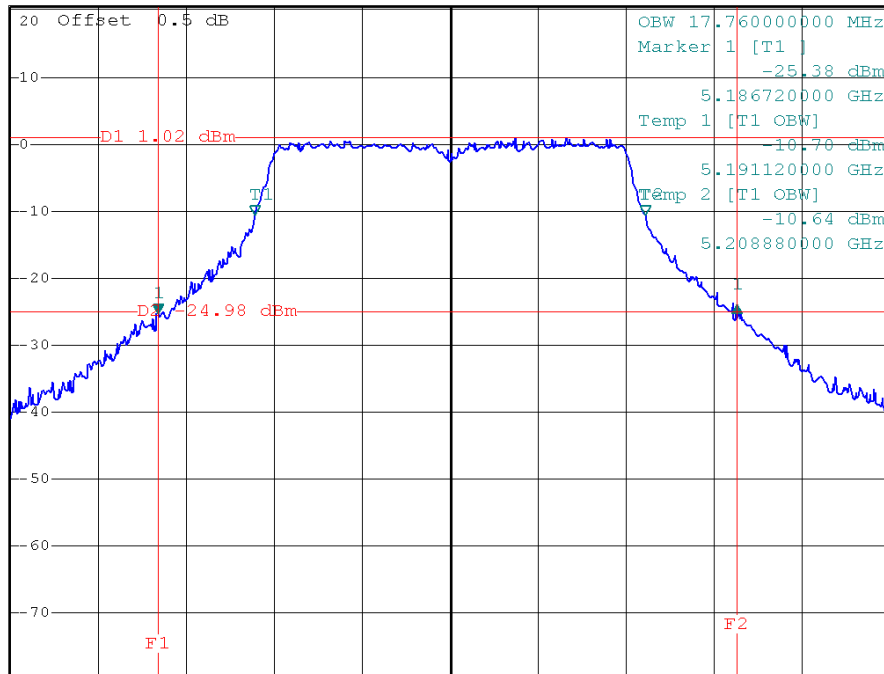

Center 5.2 GHz 4 MHz/ Span 40 MHz


IEEE 802.11a/5240 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -0.16 dB
SWT 20 ms 25.600000000 MHz

Ref 20.5 dBm *Att 30 dB

1 PK VIEW

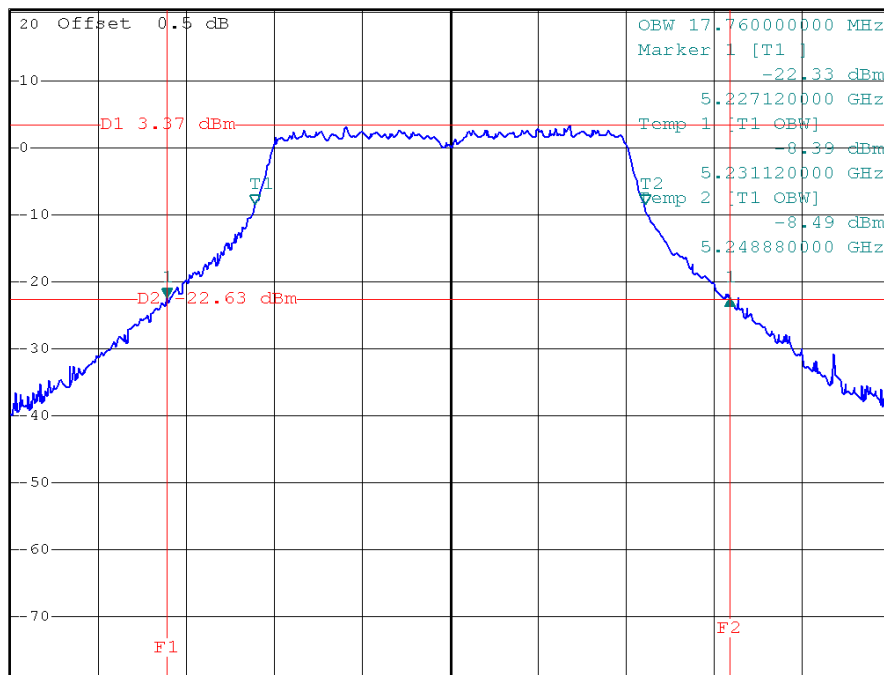


Center 5.24 GHz 4 MHz/ Span 40 MHz



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180 MHz	25.36	18.40
5200 MHz	25.04	18.40
5240 MHz	24.72	18.48

IEEE 802.11n (20 MHz)/ANT.0/5180 MHz/26 dB and 99% Occupied Bandwidth

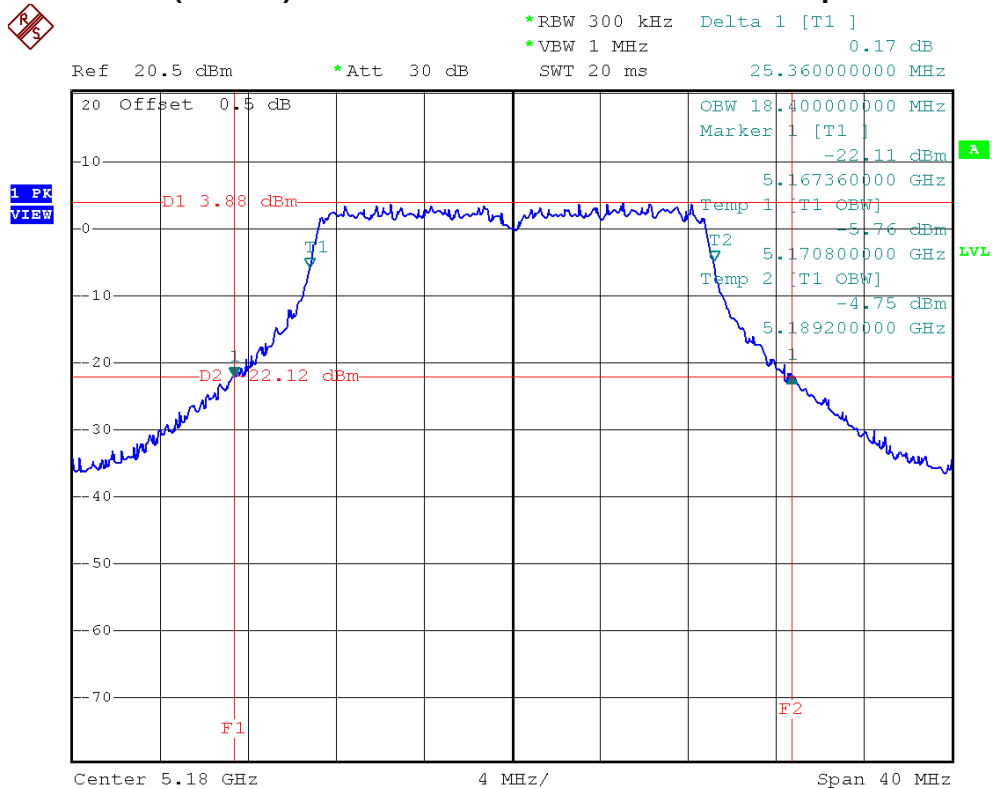




IEEE 802.11n (20 MHz)/ANT.0/5200 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz -0.04 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 25.040000000 MHz

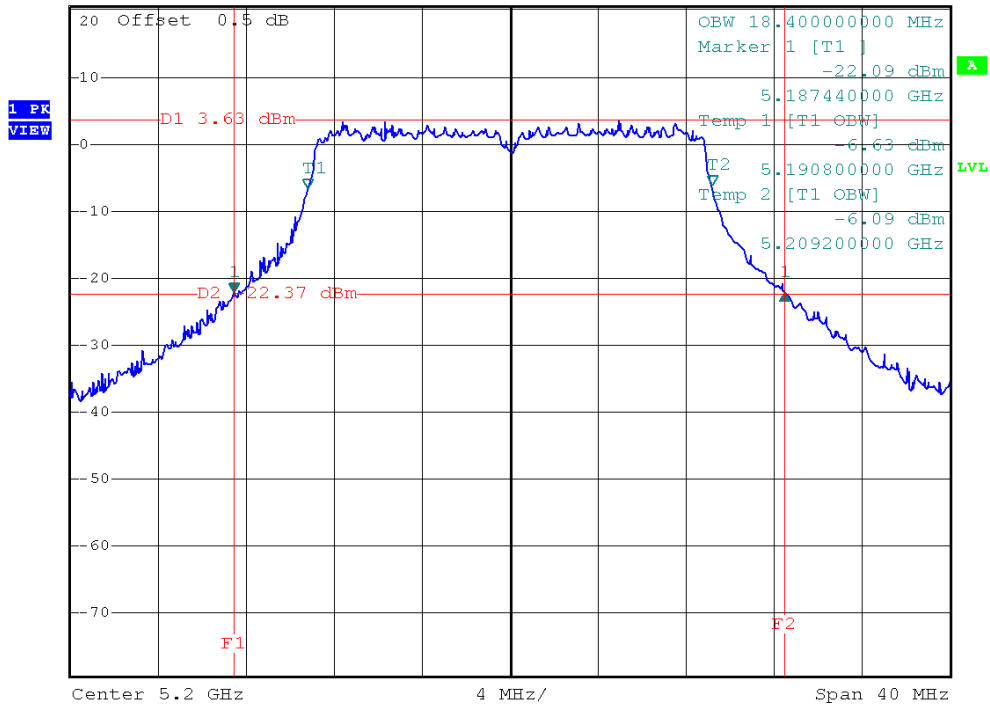

IEEE 802.11n (20 MHz)/ANT.0/5240 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz -0.87 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 24.720000000 MHz

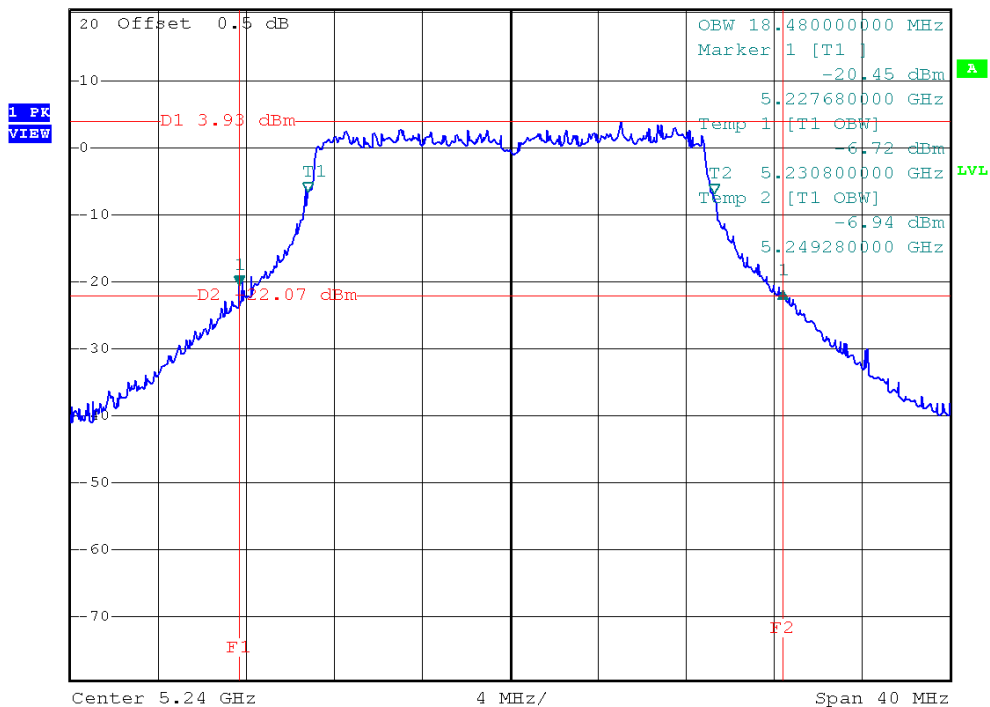




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180 MHz	24.72	18.32
5200 MHz	25.20	18.40
5240 MHz	24.80	18.40

IEEE 802.11n (20 MHz)/ANT.1/5180 MHz/26 dB and 99% Occupied Bandwidth

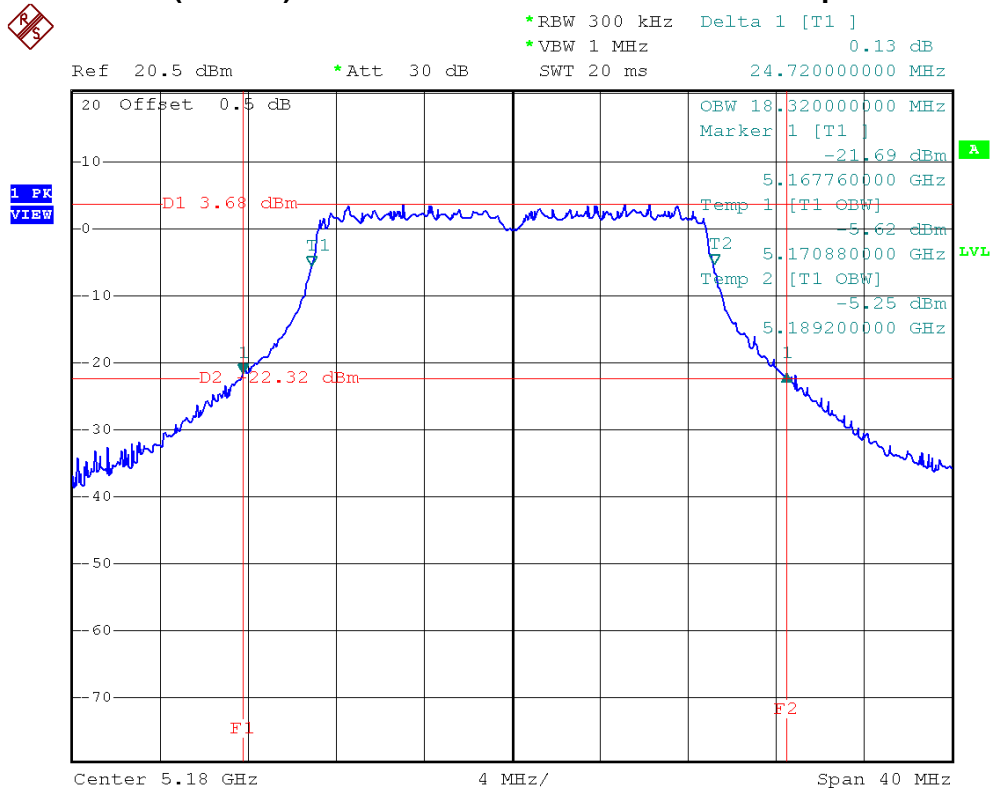




IEEE 802.11n (20 MHz)/ANT.1/5200 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.90 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 25.200000000 MHz

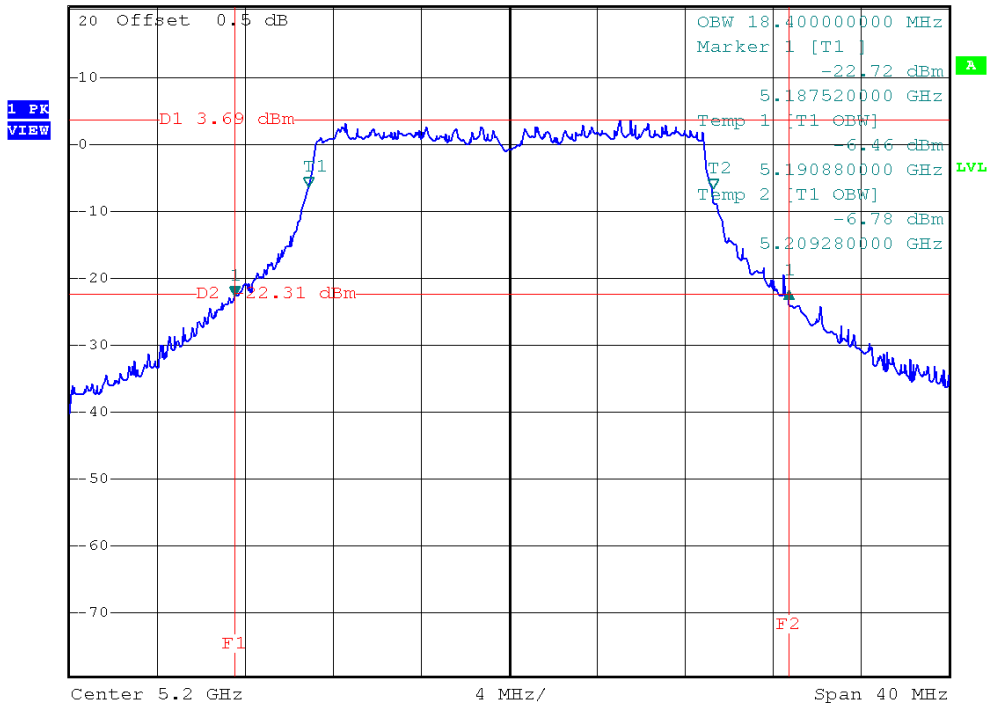

IEEE 802.11n (20 MHz)/ANT.1/5240 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 1.86 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 24.800000000 MHz

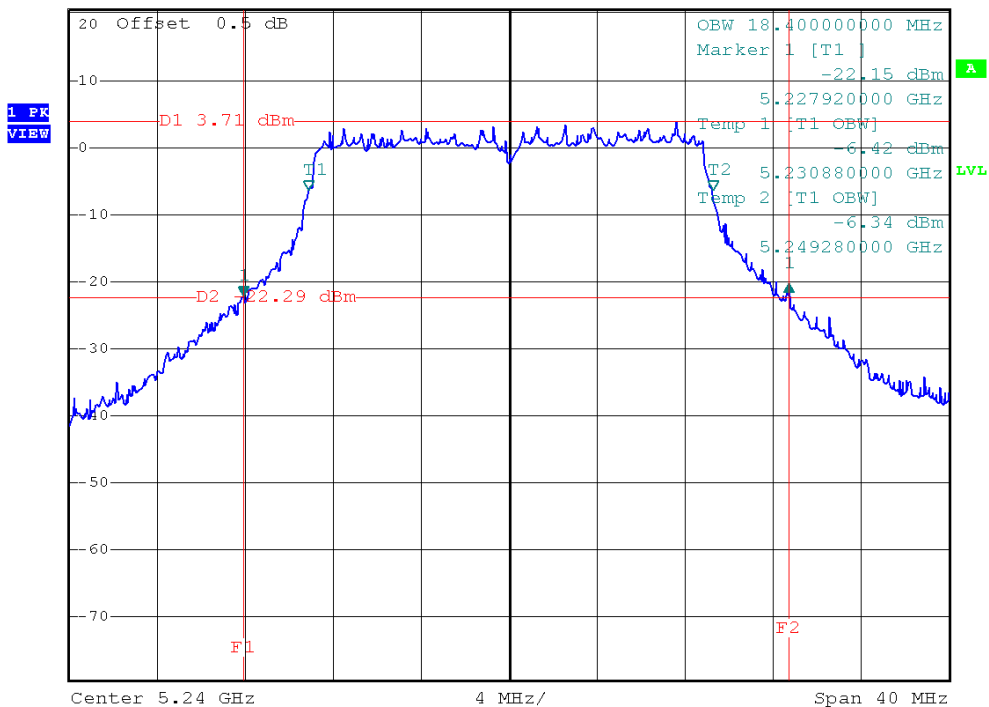



Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5190 MHz, 5230 MHz		


Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5190 MHz	46.20	36.40
5230 MHz	45.50	36.40



IEEE 802.11n (40 MHz)/ANT.0/5190 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 1.26 dB
SWT 20 ms 46.200000000 MHz

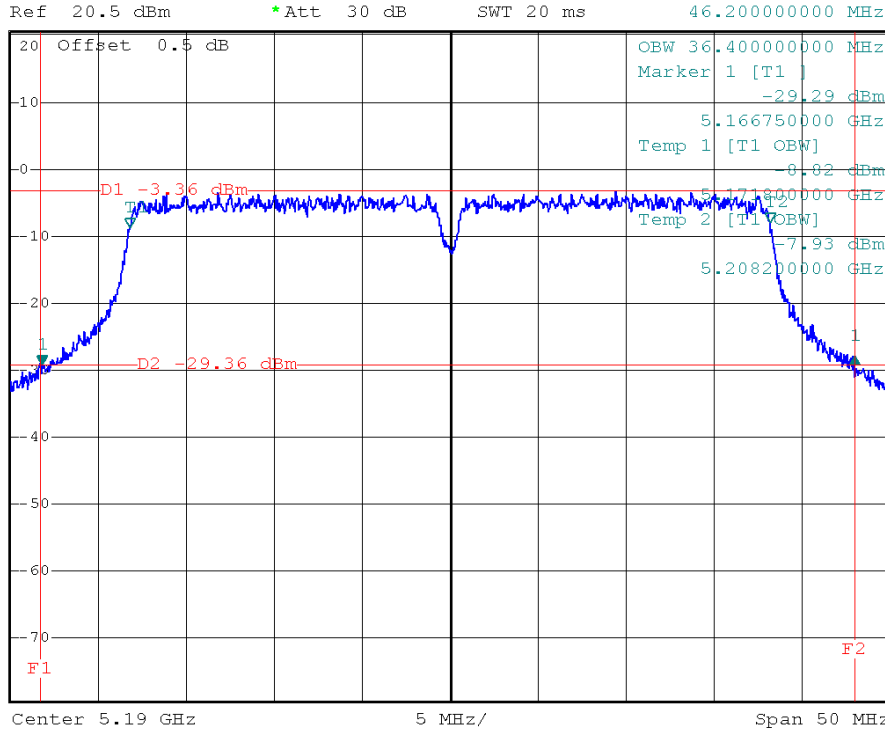

IEEE 802.11n (40 MHz)/ANT.0/5230 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.33 dB
SWT 20 ms 45.500000000 MHz

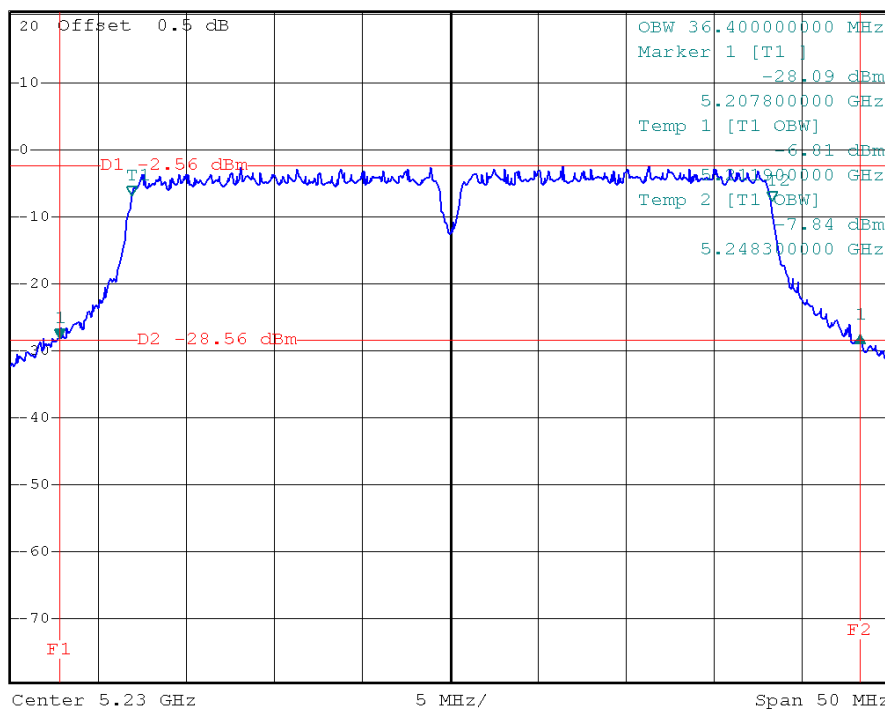


**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5190 MHz, 5230 MHz		


Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5190 MHz	44.80	36.35
5230 MHz	45.50	36.40



IEEE 802.11n (40 MHz)/ANT.1/5190 MHz/26 dB and 99% Occupied Bandwidth

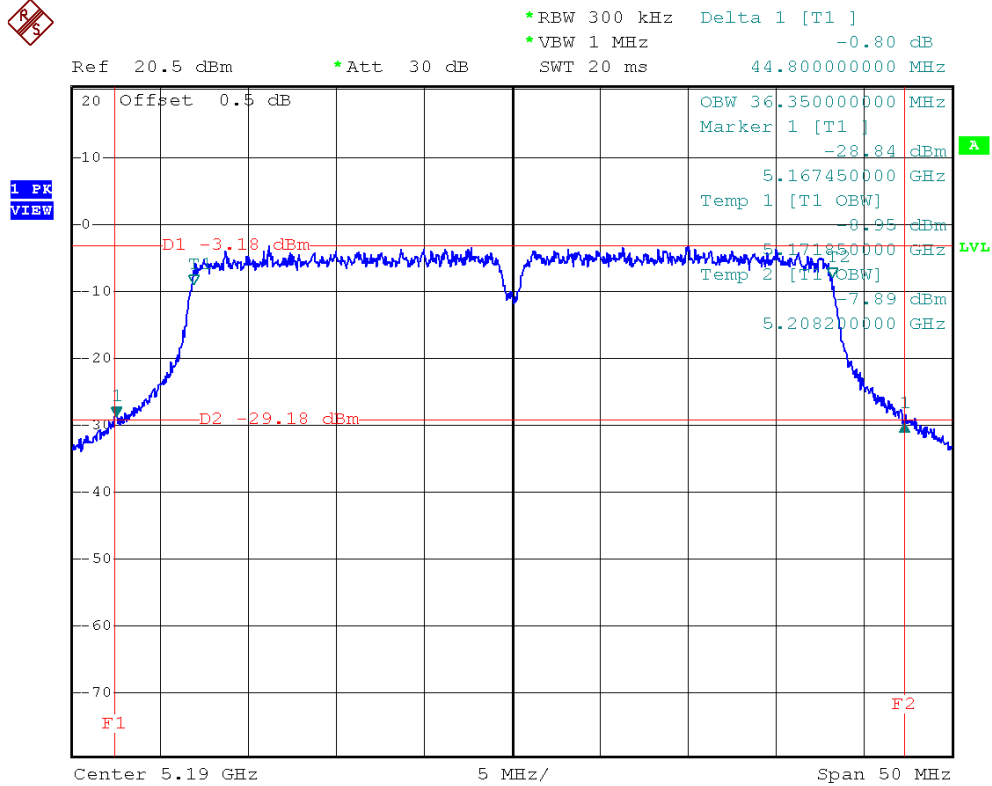

IEEE 802.11n (40 MHz)/ANT.1/5230 MHz/26 dB and 99% Occupied Bandwidth

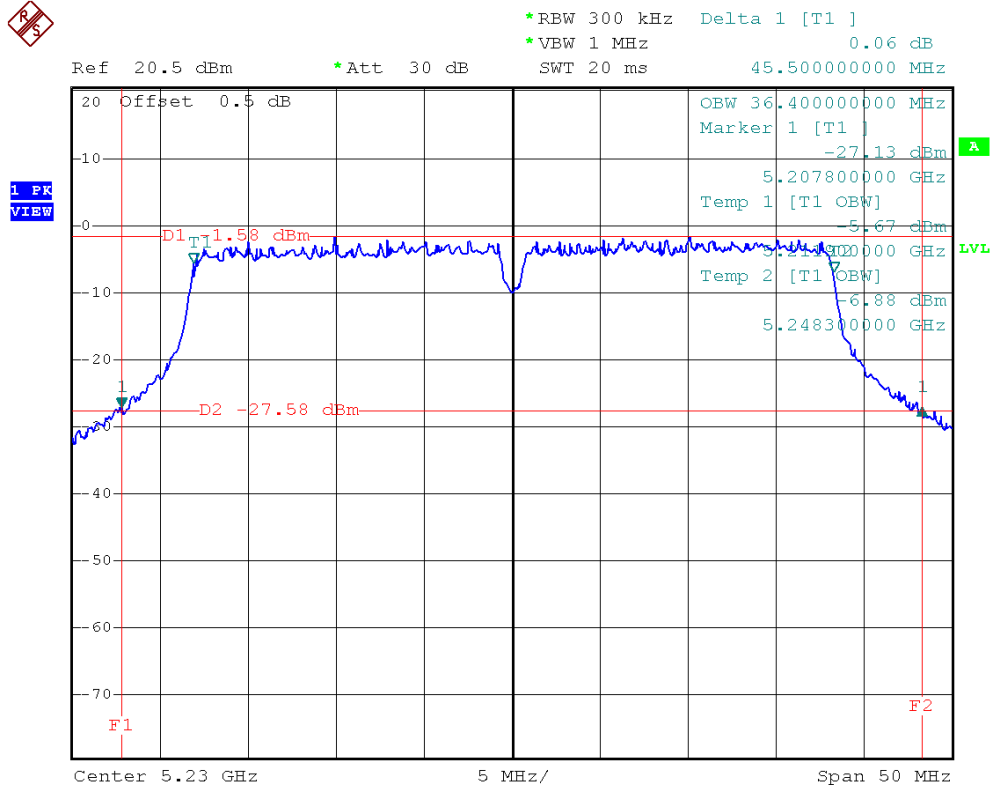




6.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260 MHz	26.08	17.68
5300 MHz	25.20	17.60
5320 MHz	26.00	17.60

IEEE 802.11a/5260 MHz/26 dB and 99% Occupied Bandwidth

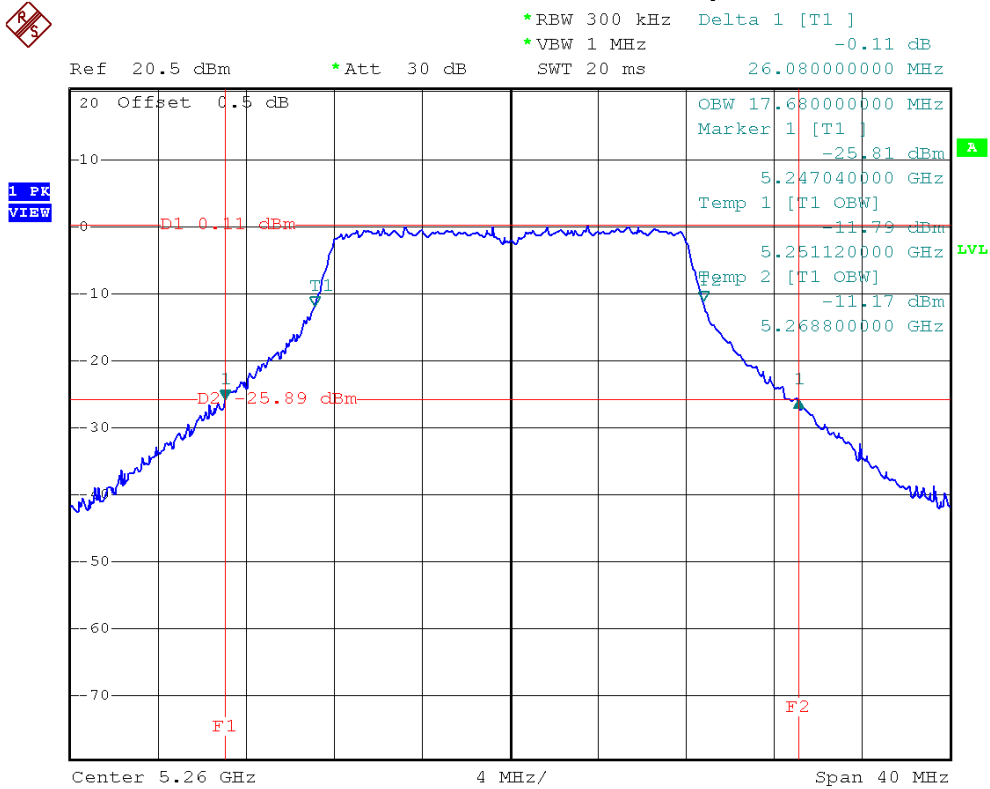




IEEE 802.11a/5300 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz -1.96 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 25.200000000 MHz

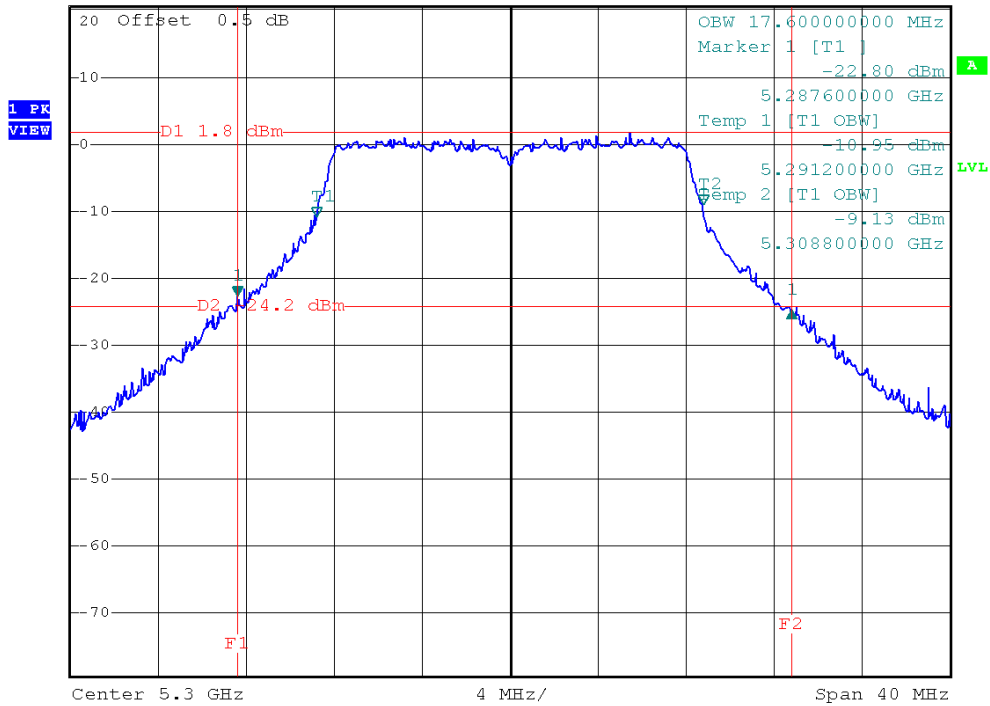

IEEE 802.11a/5320 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.69 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 26.000000000 MHz

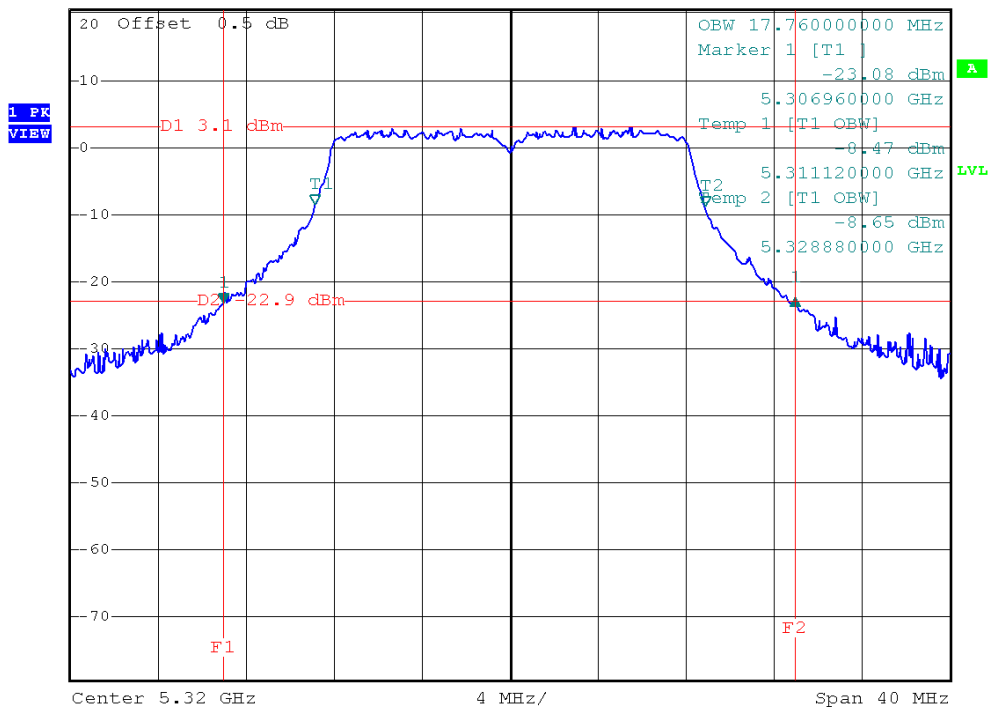




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260 MHz	25.28	18.40
5300 MHz	24.80	18.40
5320 MHz	24.96	18.40

IEEE 802.11n (20 MHz)/ANT.0/5260 MHz/26 dB and 99% Occupied Bandwidth

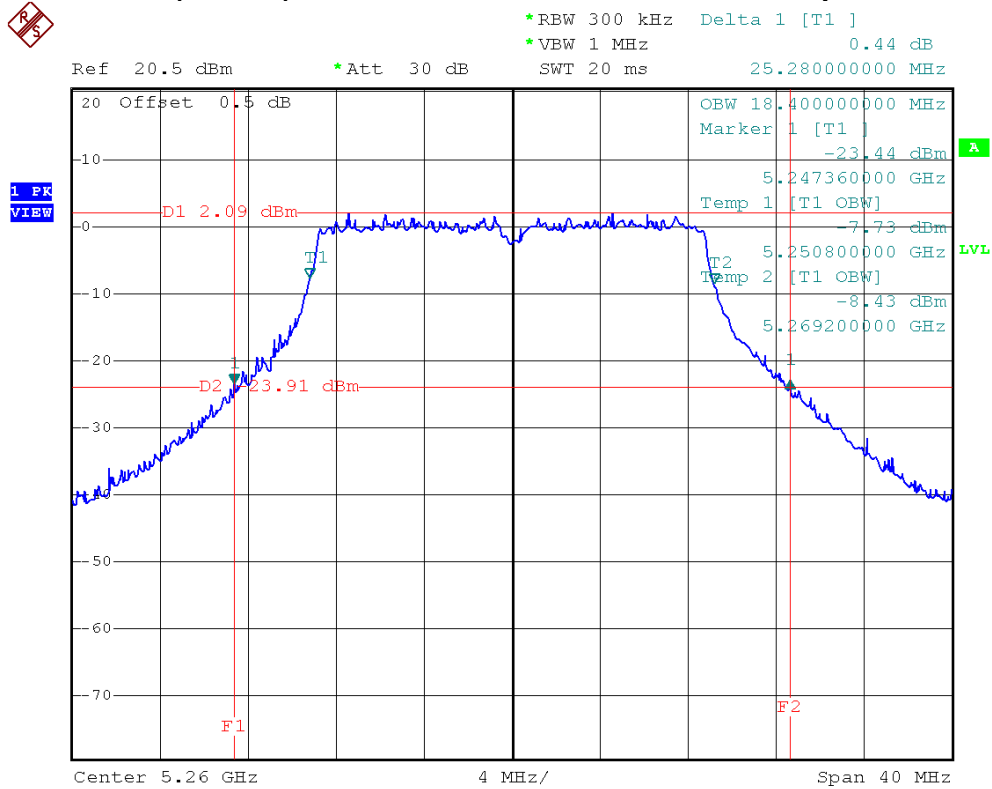




IEEE 802.11n (20 MHz)/ANT.0/5300 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.46 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 24.800000000 MHz

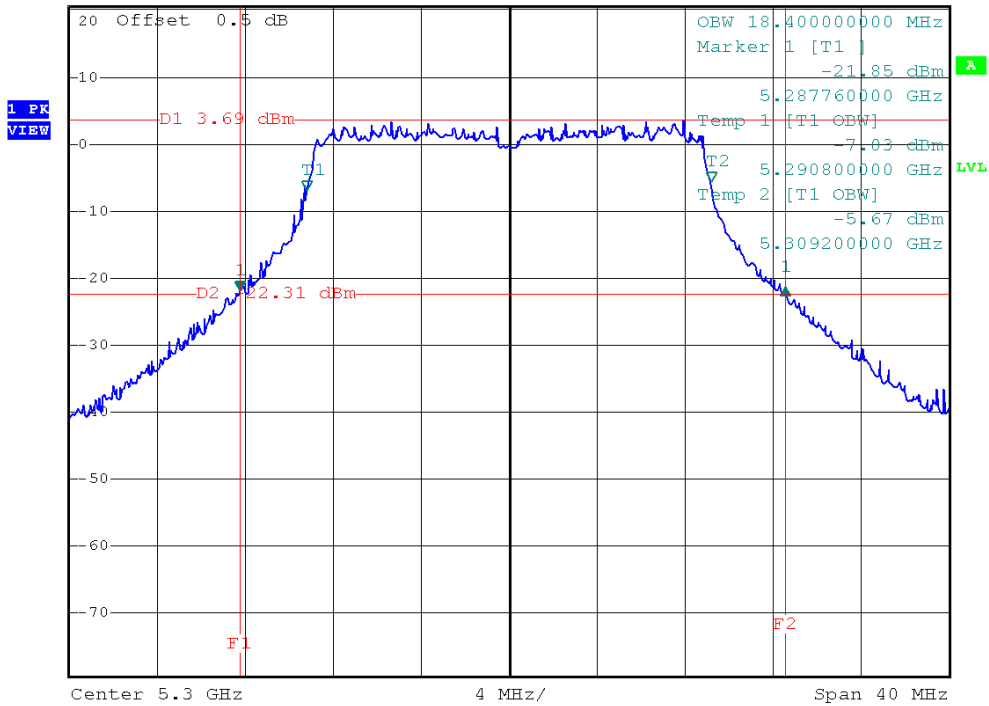

IEEE 802.11n (20 MHz)/ANT.0/5320 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.68 dB
 Ref 20.5 dBm *Att 30 dB
 SWT 20 ms 24.960000000 MHz

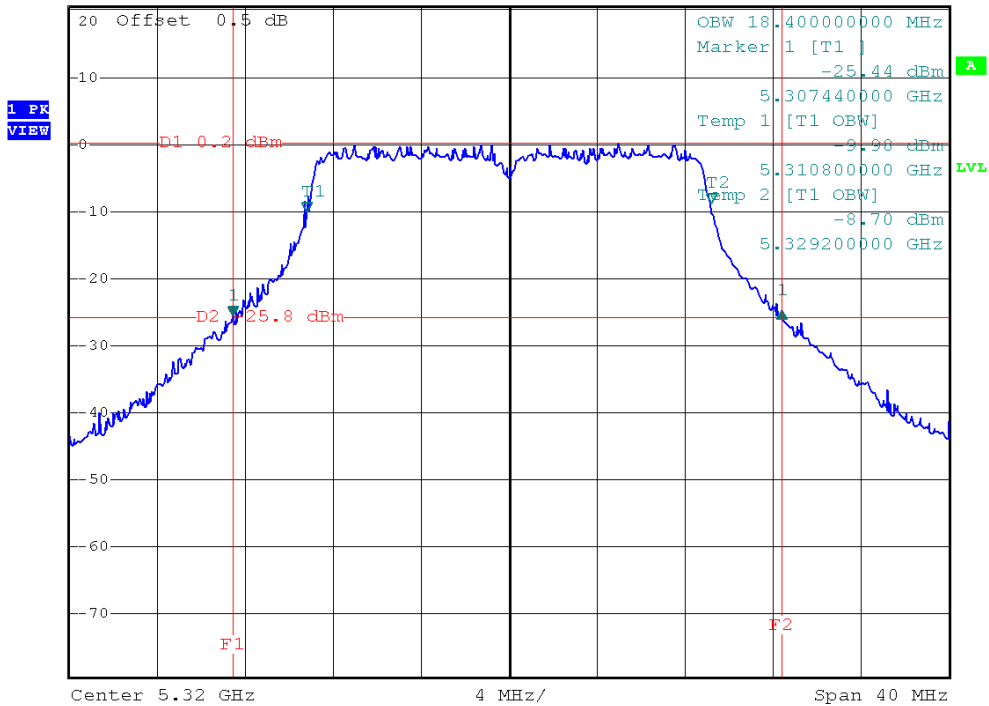




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5260 MHz, 5300 MHz, 5320 MHz		


Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5260 MHz	24.88	18.40
5300 MHz	24.80	18.40
5320 MHz	24.56	18.40

IEEE 802.11n (20 MHz)/ANT.1/5260 MHz/26 dB and 99% Occupied Bandwidth

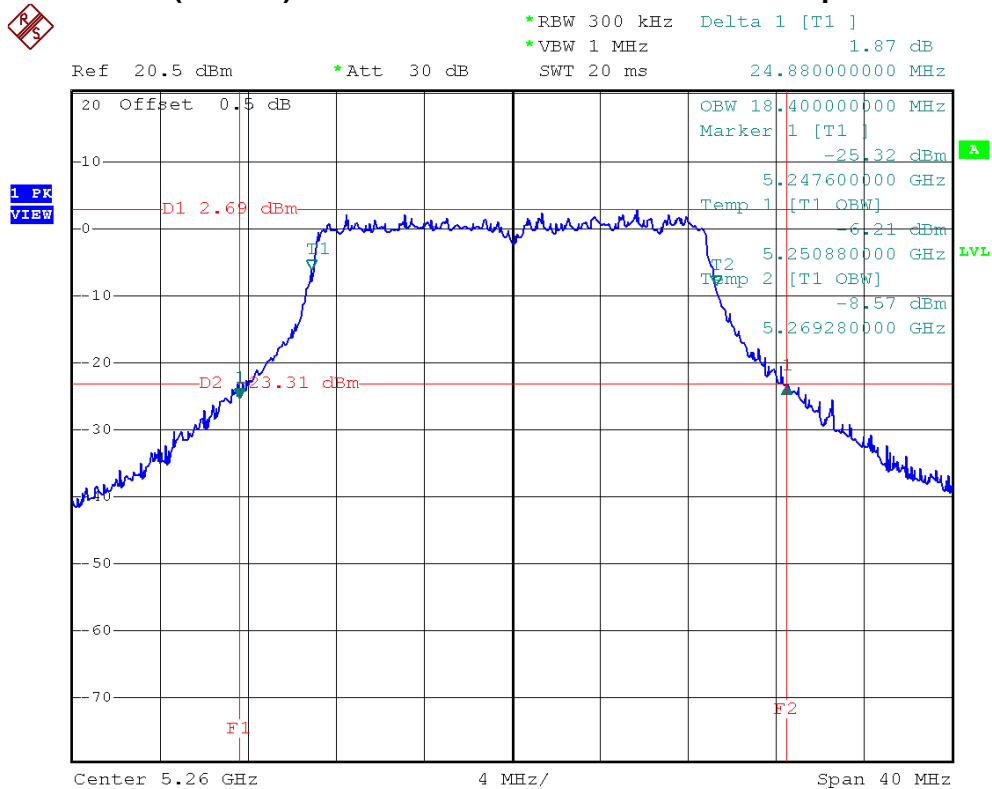




IEEE 802.11n (20 MHz)/ANT.1/5300 MHz/26 dB and 99% Occupied Bandwidth

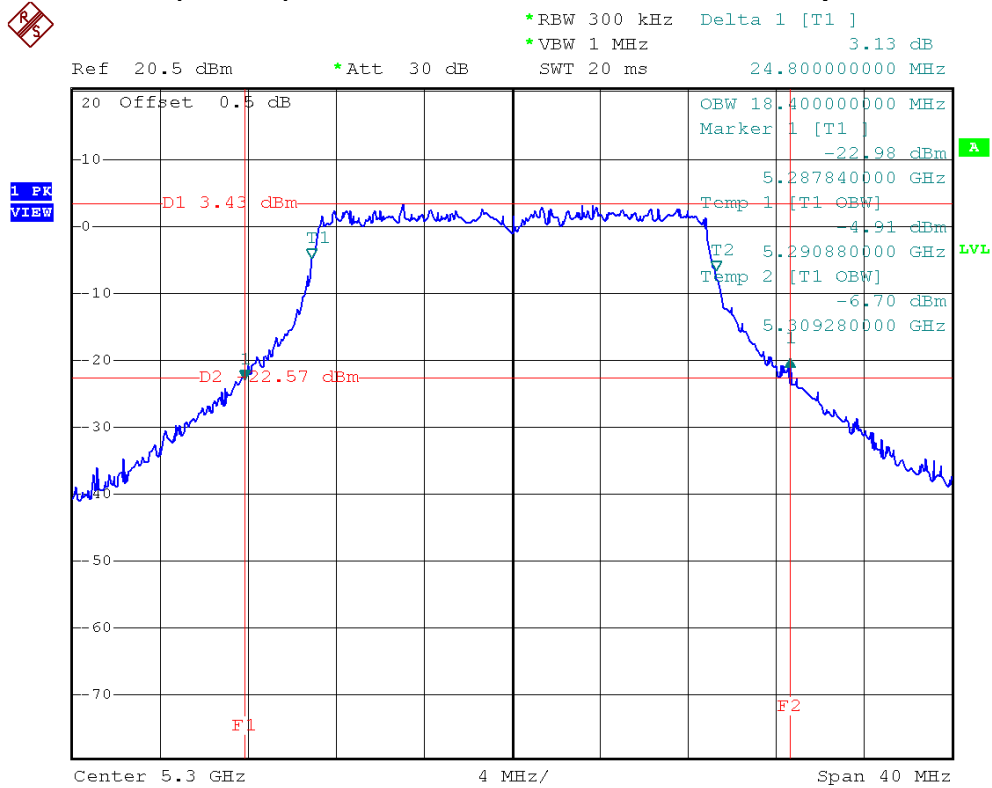

IEEE 802.11n (20 MHz)/ANT.1/5320 MHz/26 dB and 99% Occupied Bandwidth

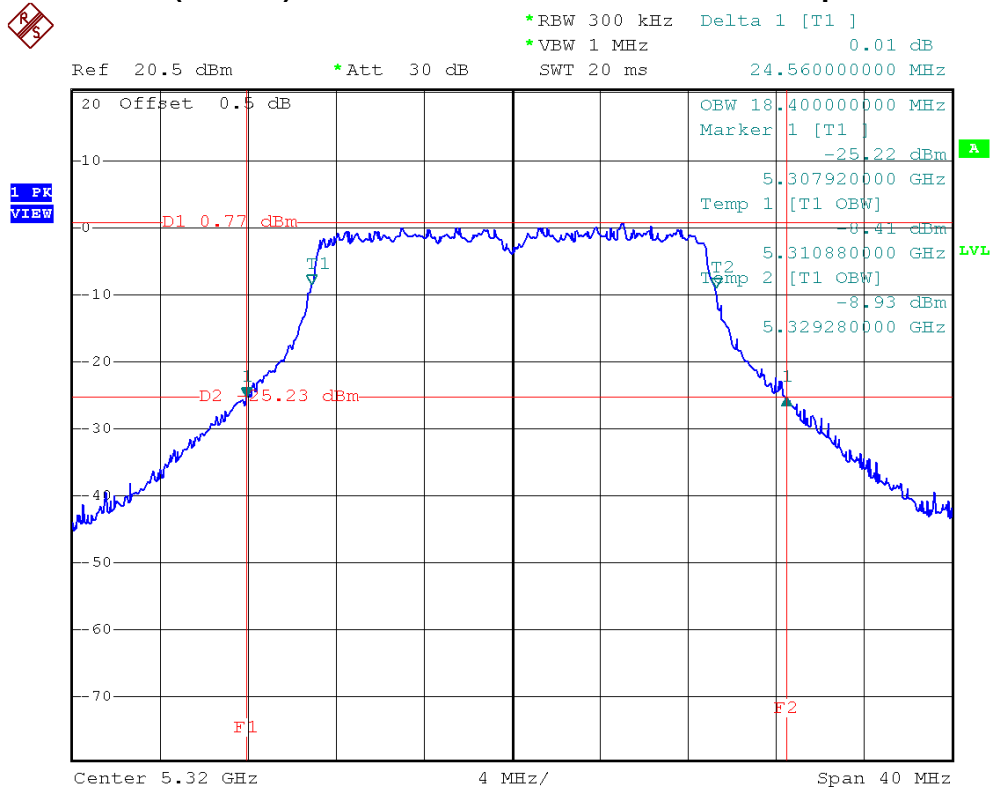

**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5270 MHz, 5310 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5270 MHz	45.60	36.40
5310 MHz	45.65	36.40




IEEE 802.11n (40 MHz)/ANT.0/5270 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -0.86 dB
SWT 20 ms 45.600000000 MHz

Ref 20.5 dBm *Att 30 dB

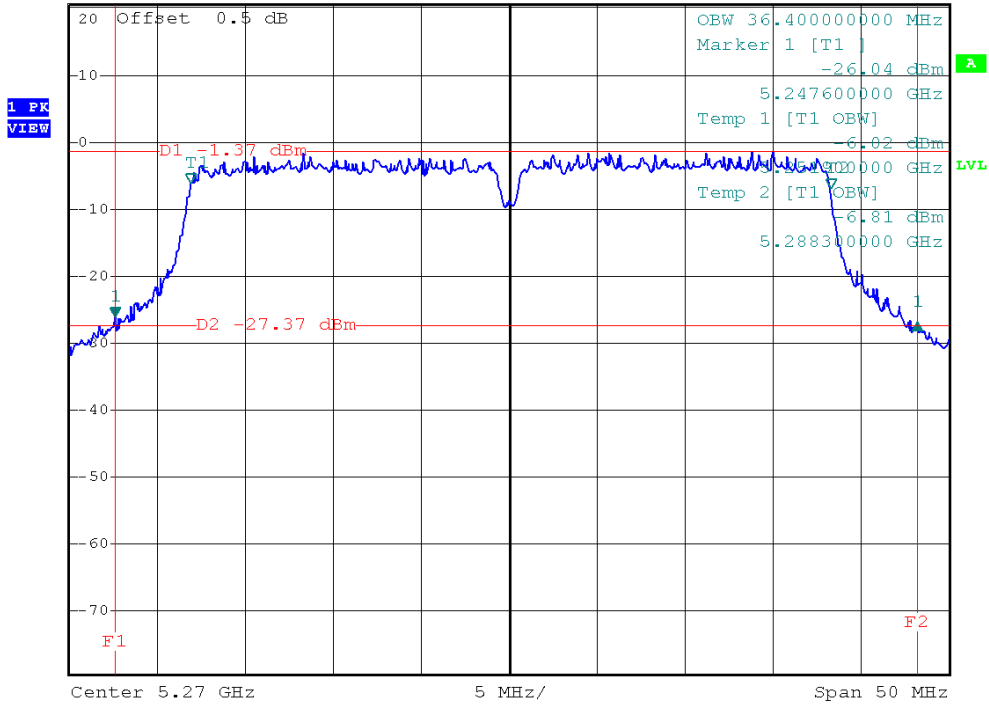


IEEE 802.11n (40 MHz)/ANT.0/5310 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.11 dB
SWT 20 ms 45.650000000 MHz

Ref 20.5 dBm *Att 30 dB

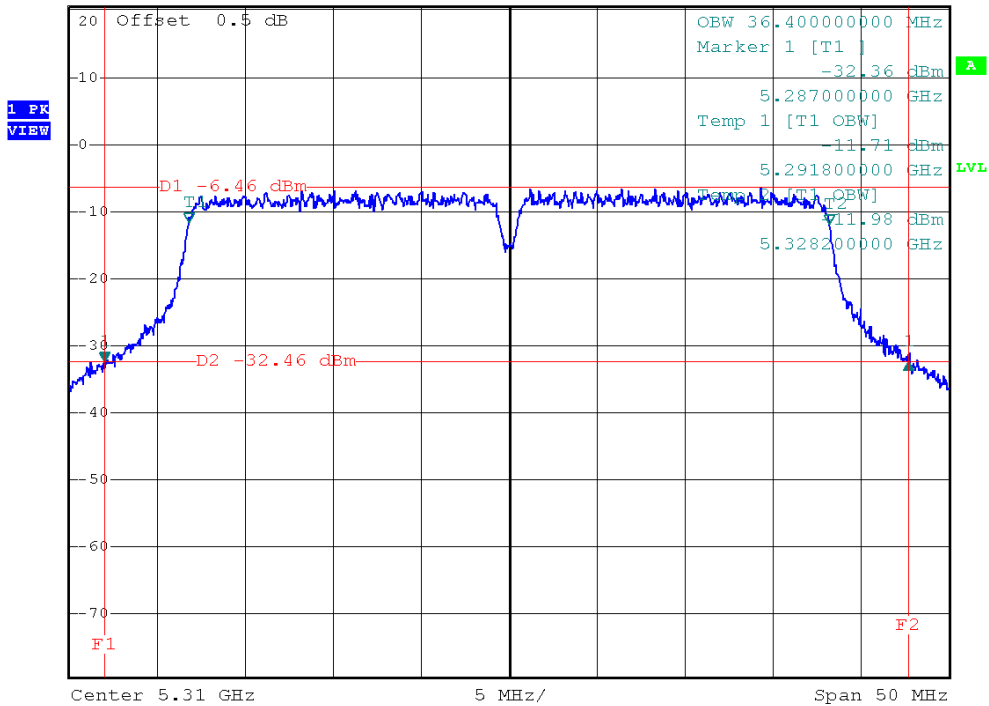

**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5270 MHz, 5310 MHz		


Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5270 MHz	45.40	36.40
5310 MHz	45.20	36.35



IEEE 802.11n (40 MHz)/ANT.1/5270 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.81 dB
SWT 20 ms 45.400000000 MHz

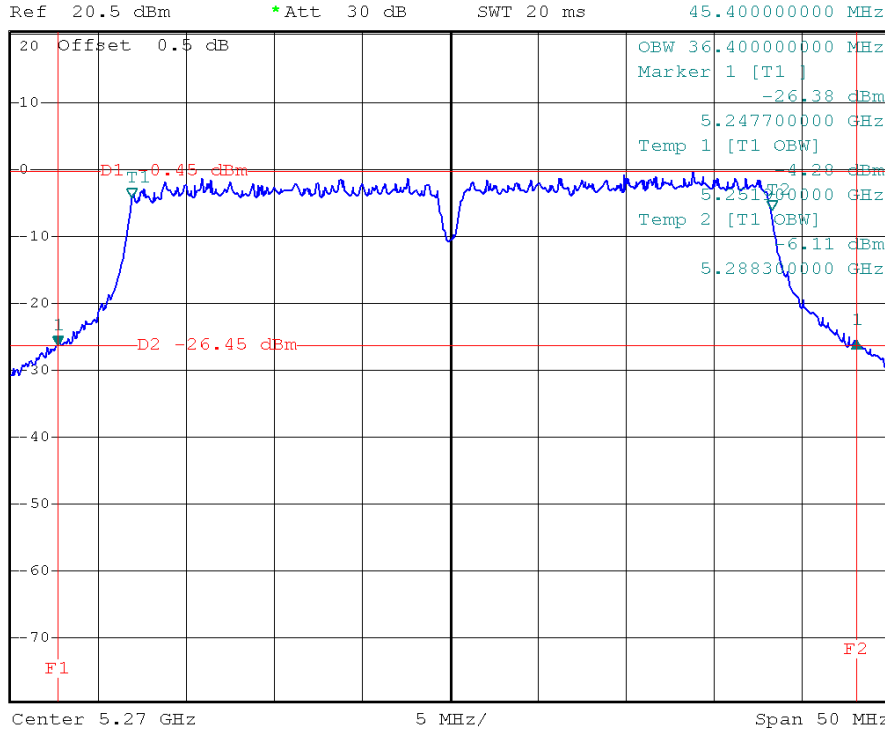

IEEE 802.11n (40 MHz)/ANT.1/5310 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.42 dB
SWT 20 ms 45.200000000 MHz

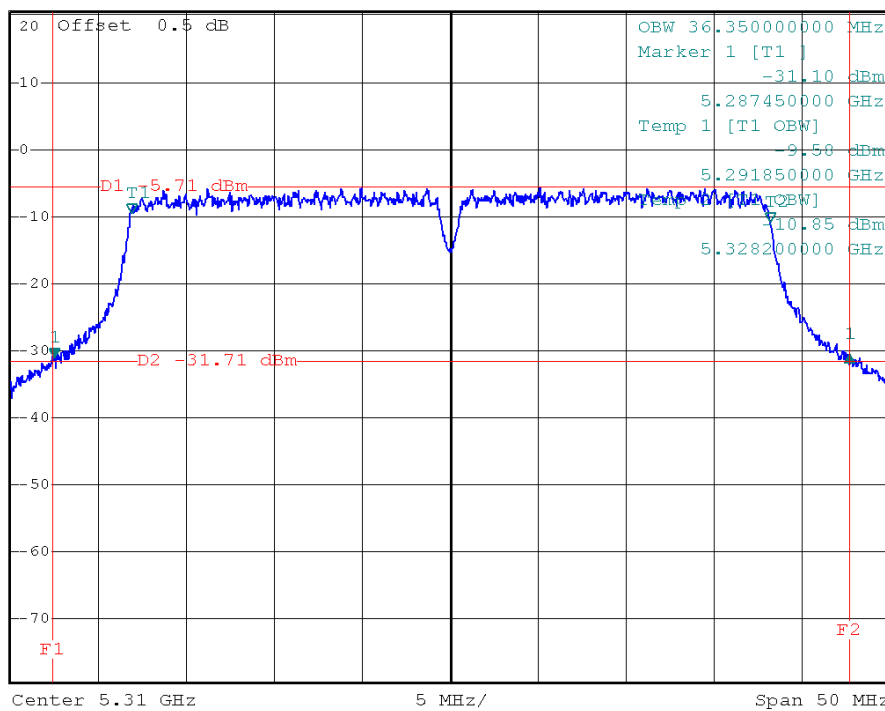




6.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500 MHz	24.80	17.76
5580 MHz	25.44	17.68
5700 MHz	26.00	17.76

IEEE 802.11a/5500 MHz/26 dB and 99% Occupied Bandwidth

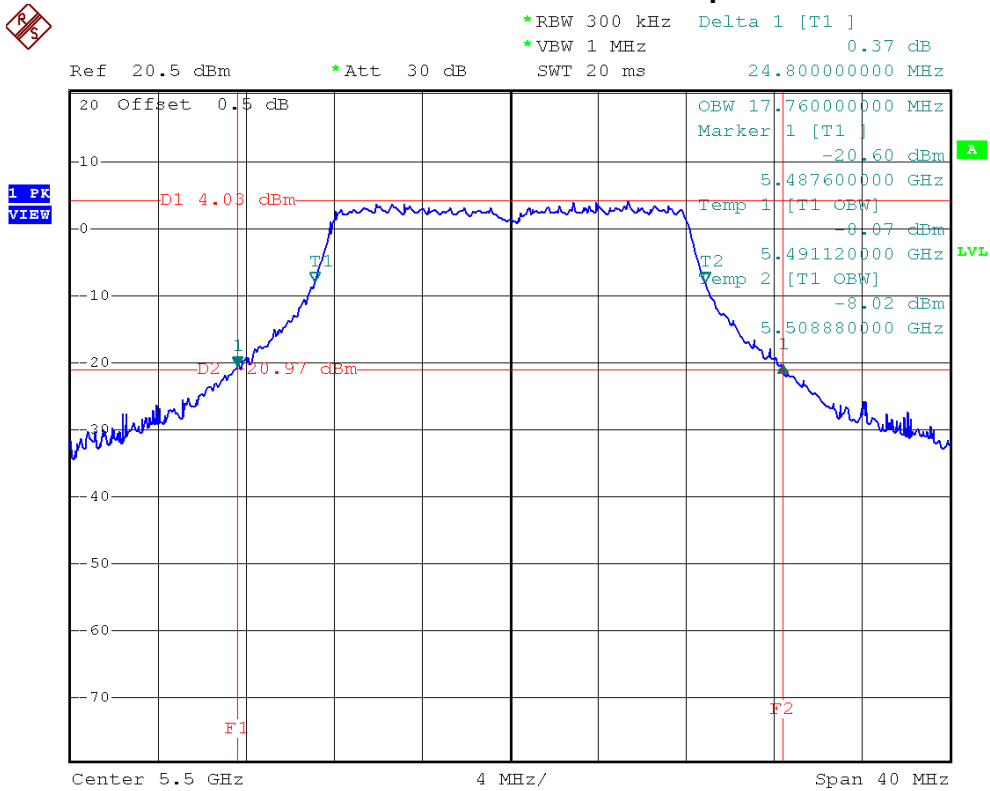




IEEE 802.11a/5580 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -1.56 dB
SWT 20 ms 25.440000000 MHz

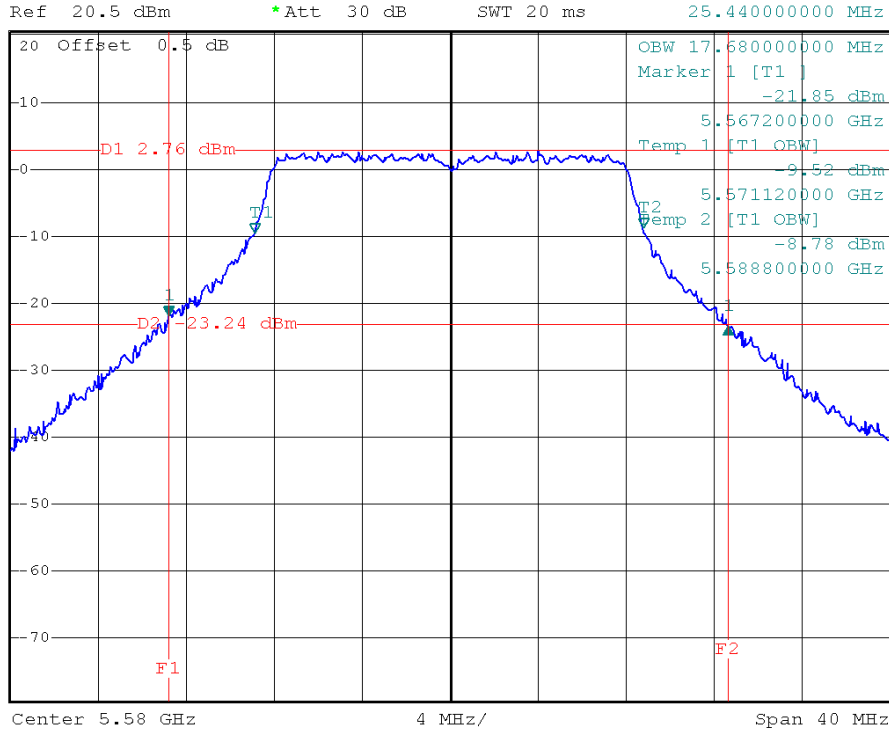

IEEE 802.11a/5700 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.14 dB
SWT 20 ms 26.000000000 MHz

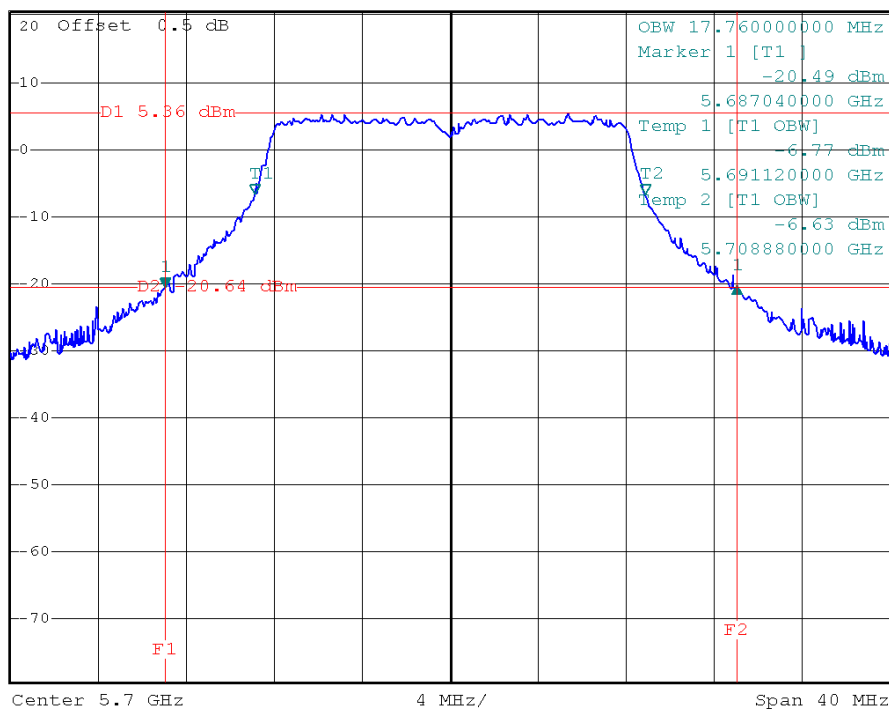




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500 MHz	24.96	18.32
5580 MHz	25.20	18.40
5700 MHz	24.72	18.40

IEEE 802.11n (20 MHz)/ANT.0/5500 MHz/26 dB and 99% Occupied Bandwidth

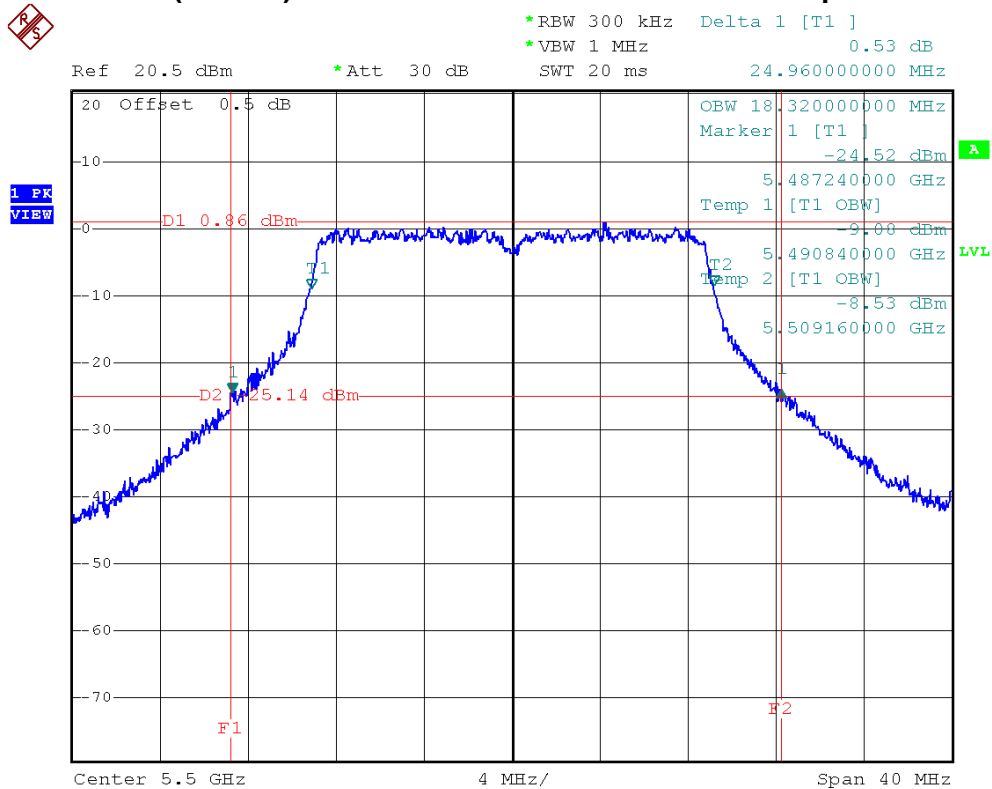




IEEE 802.11n (20 MHz)/ANT.0/5580 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz -0.01 dB
 SWT 20 ms 25.200000000 MHz

Ref 20.5 dBm *Att 30 dB

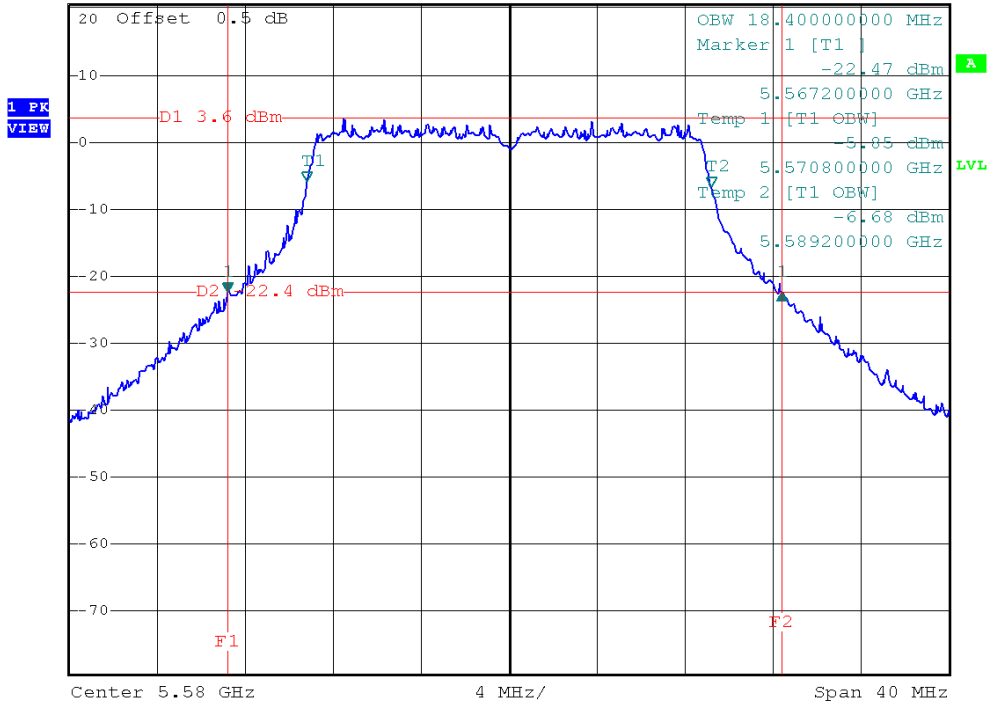


IEEE 802.11n (20 MHz)/ANT.0/5700 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.16 dB
 SWT 20 ms 24.720000000 MHz

Ref 20.5 dBm *Att 30 dB

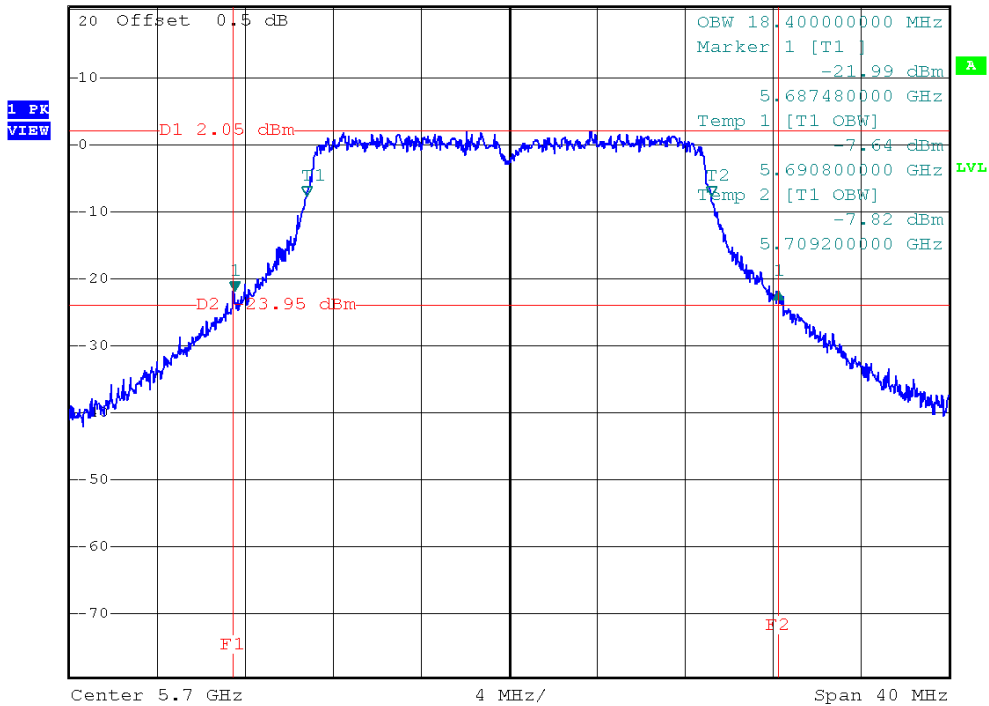




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5500 MHz	24.32	18.32
5580 MHz	25.36	18.40
5700 MHz	25.12	18.32

IEEE 802.11n (20 MHz)/ANT.1/5500 MHz/26 dB and 99% Occupied Bandwidth

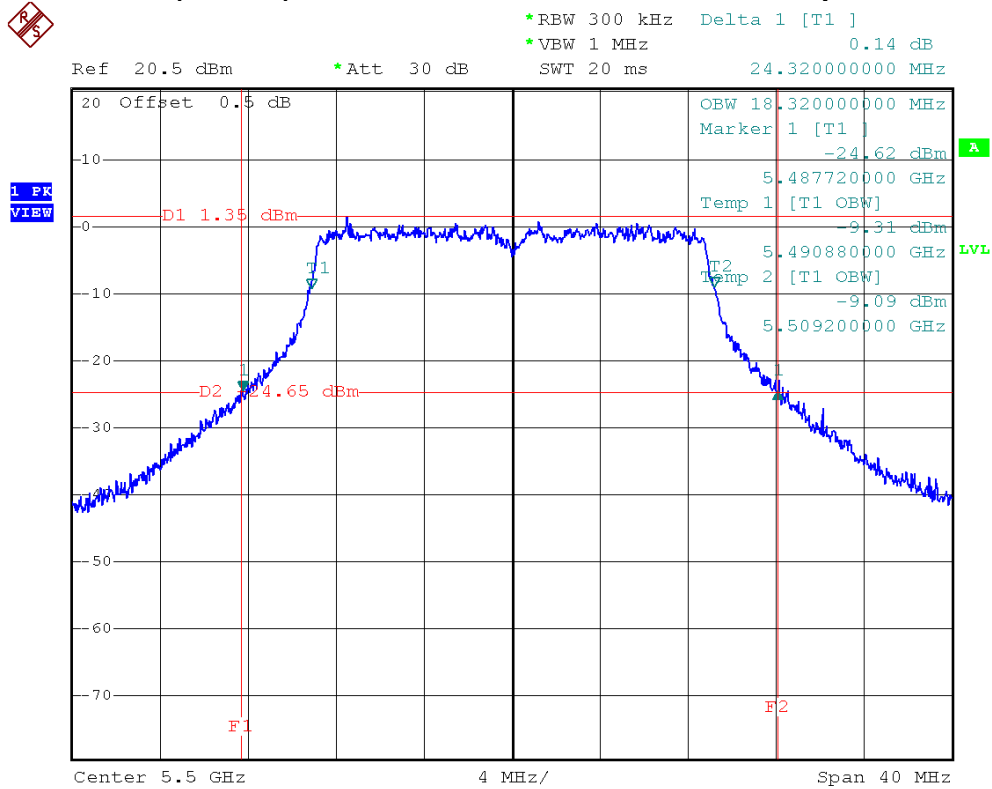




IEEE 802.11n (20 MHz)/ANT.1/5580 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 1.22 dB
 Ref 20.5 dBm *Att 30 dB SWT 20 ms 25.360000000 MHz

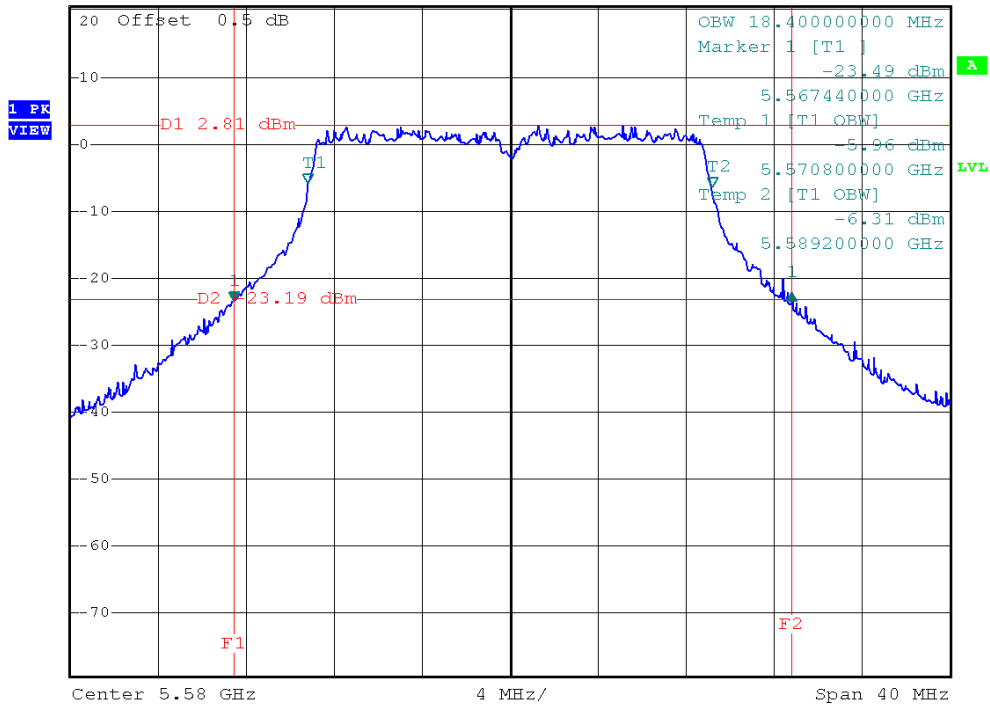

IEEE 802.11n (20 MHz)/ANT.1/5700 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
 *VBW 1 MHz 0.02 dB
 Ref 20.5 dBm *Att 30 dB SWT 20 ms 25.120000000 MHz

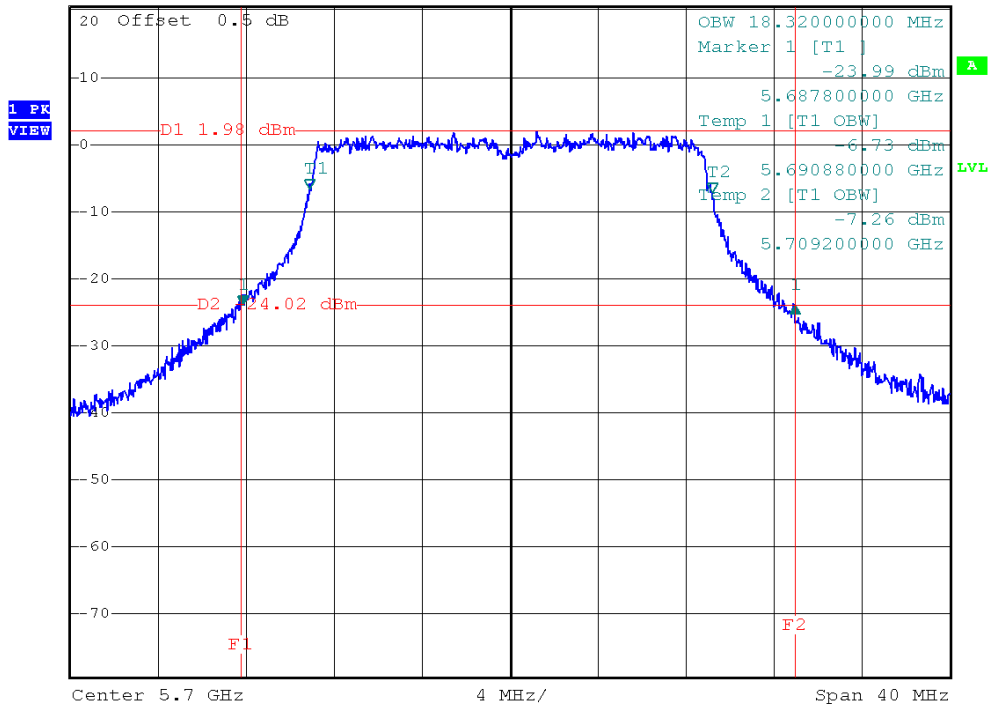




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5510 MHz, 5550 MHz, 5670 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5510 MHz	45.10	36.35
5550 MHz	45.51	36.40
5670 MHz	45.85	36.40

IEEE 802.11n (40 MHz)/ANT.0/5510 MHz/26 dB and 99% Occupied Bandwidth

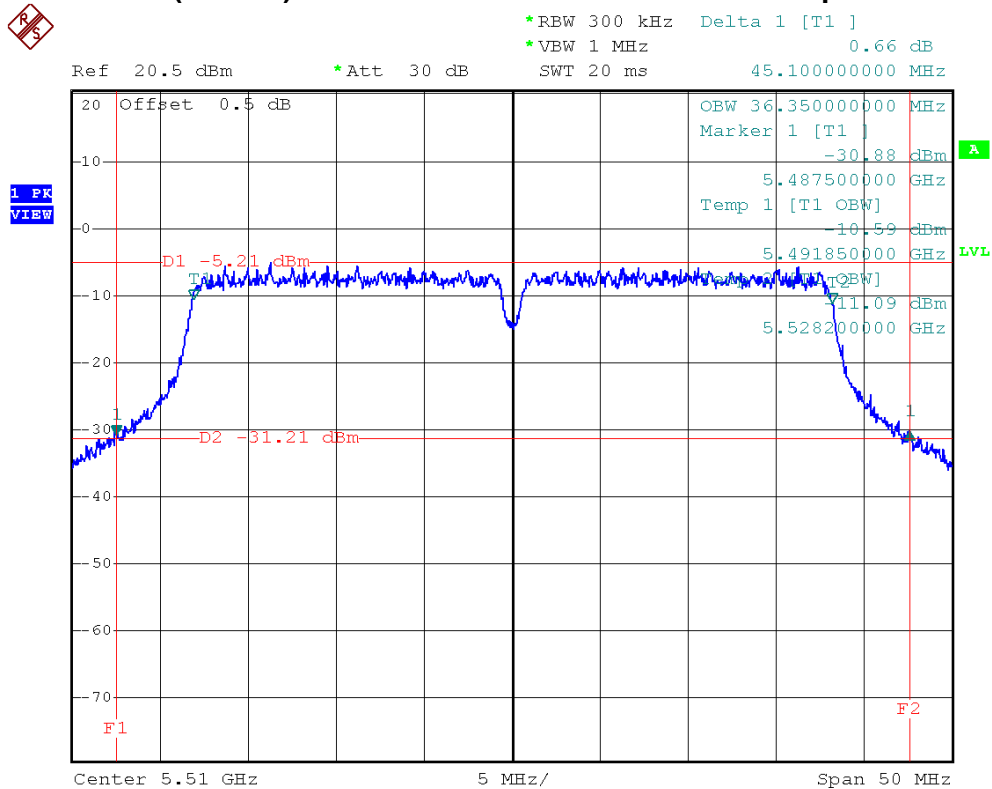




IEEE 802.11n (40 MHz)/ANT.0/5550 MHz/26 dB and 99% Occupied Bandwidth




*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -0.37 dB
SWT 20 ms 45.508982036 MHz

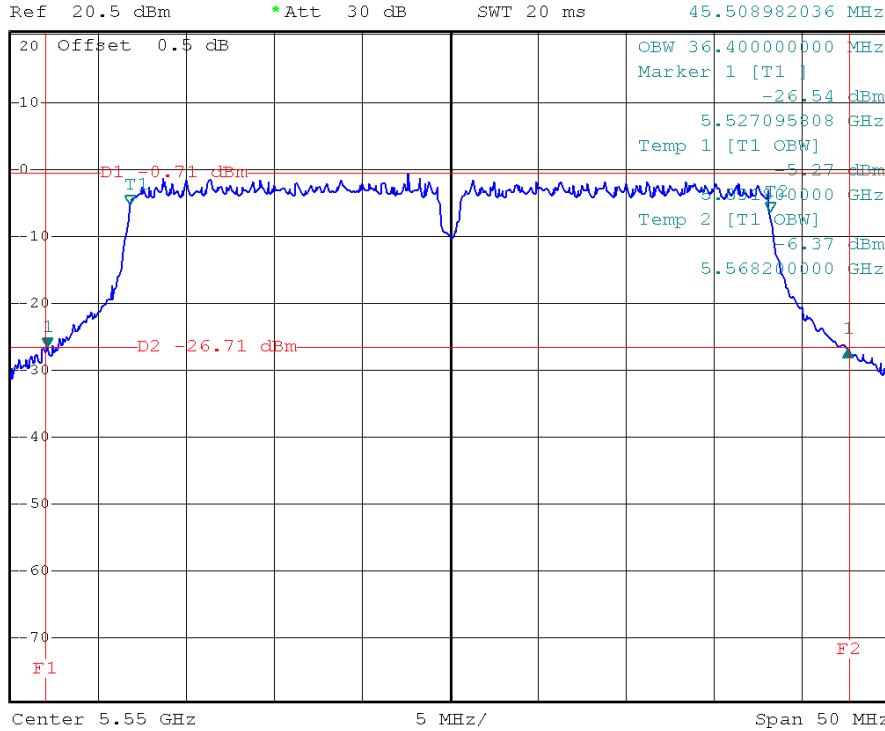

IEEE 802.11n (40 MHz)/ANT.0/5670 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 0.36 dB
SWT 20 ms 45.850000000 MHz

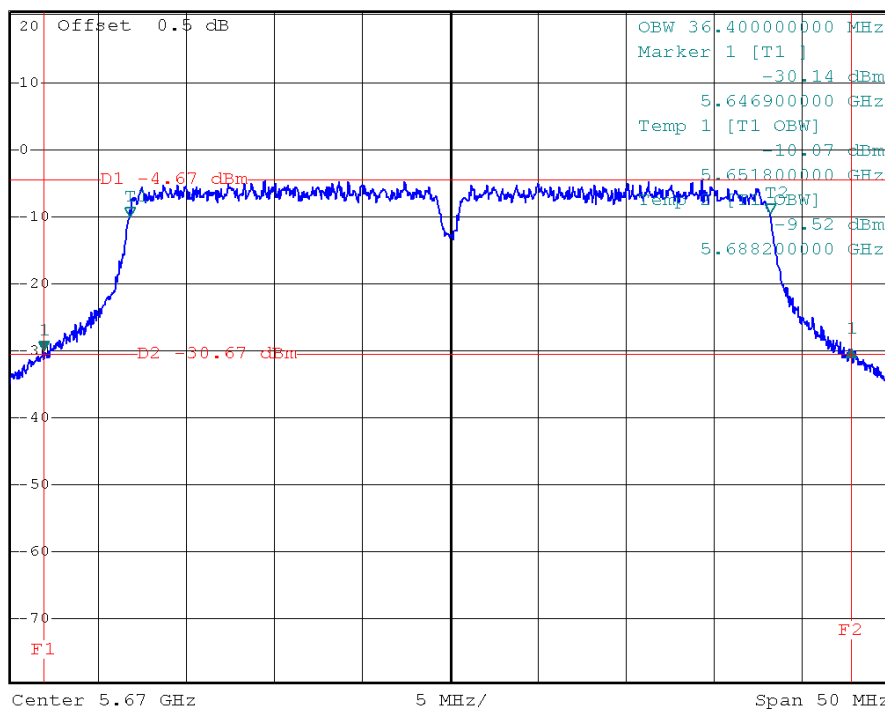




E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5510 MHz, 5550 MHz, 5670 MHz		

Frequency	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5510 MHz	44.55	36.35
5550 MHz	46.21	36.40
5670 MHz	45.15	36.35

IEEE 802.11n (40 MHz)/ANT.1/5510 MHz/26 dB and 99% Occupied Bandwidth

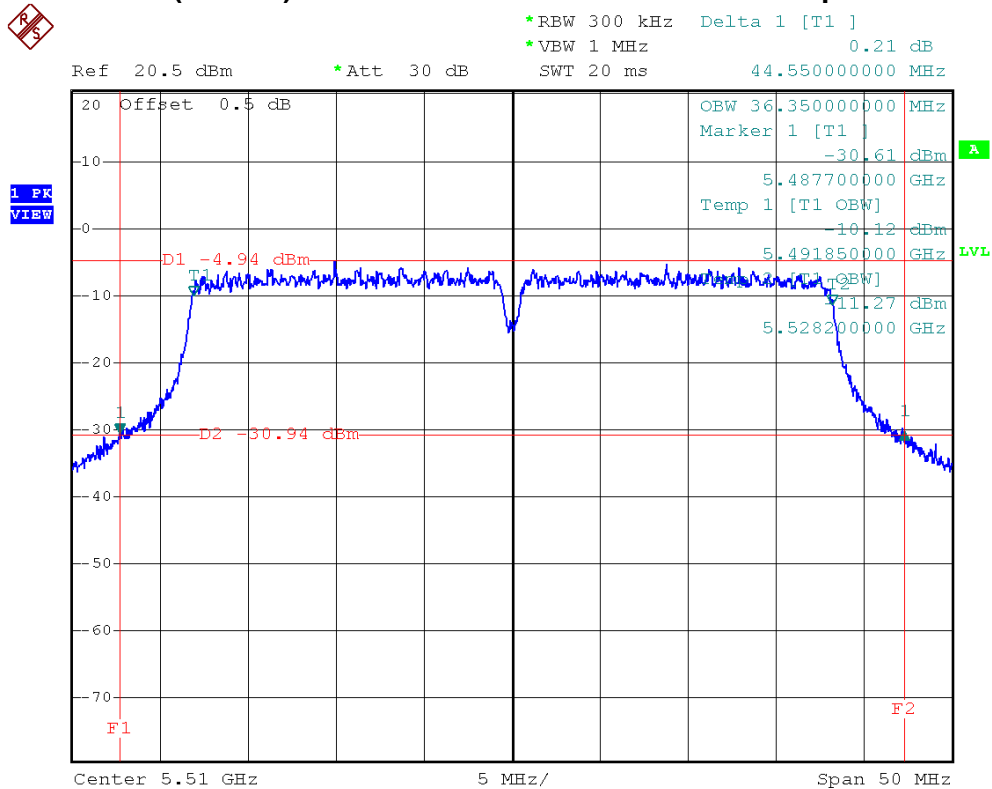




IEEE 802.11n (40 MHz)/ANT.1/5550 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz -0.31 dB
SWT 20 ms 46.207584830 MHz

Ref 20.5 dBm *Att 30 dB

1 PK VIEW

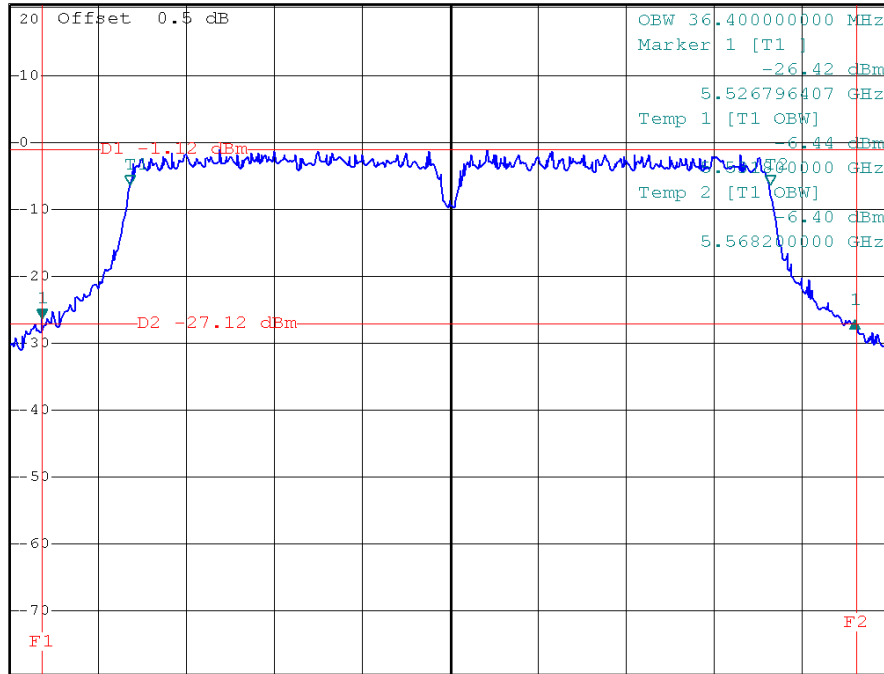

Center 5.55 GHz 5 MHz/ Span 50 MHz


IEEE 802.11n (40 MHz)/ANT.1/5670 MHz/26 dB and 99% Occupied Bandwidth



*RBW 300 kHz Delta 1 [T1]
*VBW 1 MHz 1.09 dB
SWT 20 ms 45.150000000 MHz

Ref 20.5 dBm *Att 30 dB

1 PK VIEW

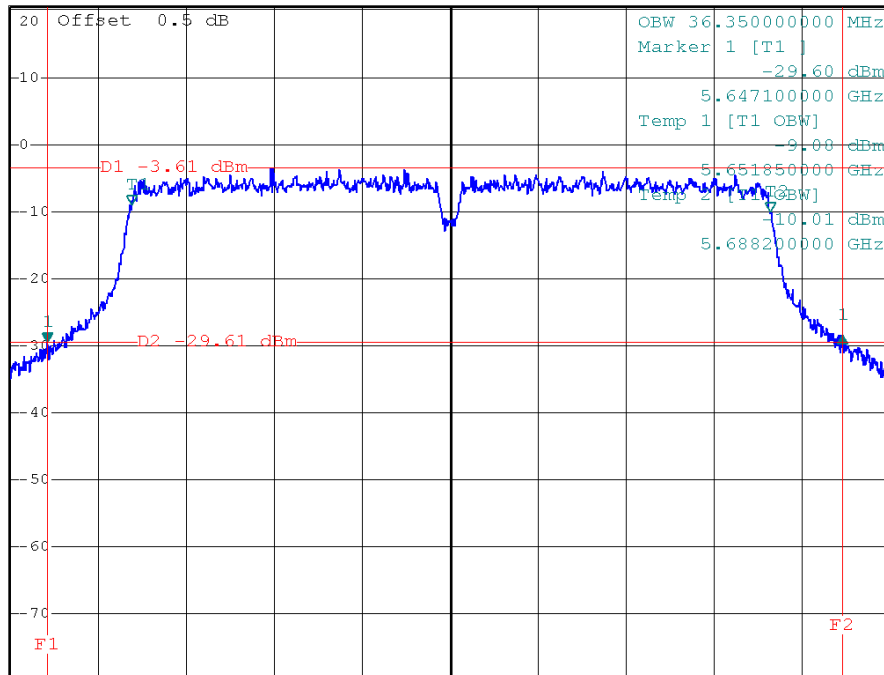

Center 5.67 GHz 5 MHz/ Span 50 MHz



7 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	5150 - 5250	not exceed the lesser of 50 mW (17 dBm) or 4 dBm + 10log B
	5250 - 5350	not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10log B
	5470 - 5725	not exceed the lesser of 250 mW (24 dBm) or 11 dBm + 10log B
	5725 - 5825	not exceed the lesser of 1 W (30 dBm) or 17 dBm + 10log B.

7.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

7.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	RMS
Trace	Max Hold
Sweep Time	AUTO

7.4 TEST PROCEDURES

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Test was performed in accordance with Method SA-1 of FCC KDB 789033 D01 General UNII Test Procedures v01r03.

7.5 TEST SETUP LAYOUT



7.6 DEVIATION FROM TEST STANDARD

No deviation



Neutron Engineering Inc.

7.7 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.


**Neutron Engineering Inc.****7.8 TEST RESULTS - 5180 MHZ TO 5240 MHZ BAND**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz, 5200 MHz, 5240 MHz		


Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
5180 MHz	12.20	17.00	PASS
5200 MHz	11.31	17.00	PASS
5240 MHz	10.27	17.00	PASS




IEEE 802.11a/5180 MHz/Maximum Peak Conducted Output Power

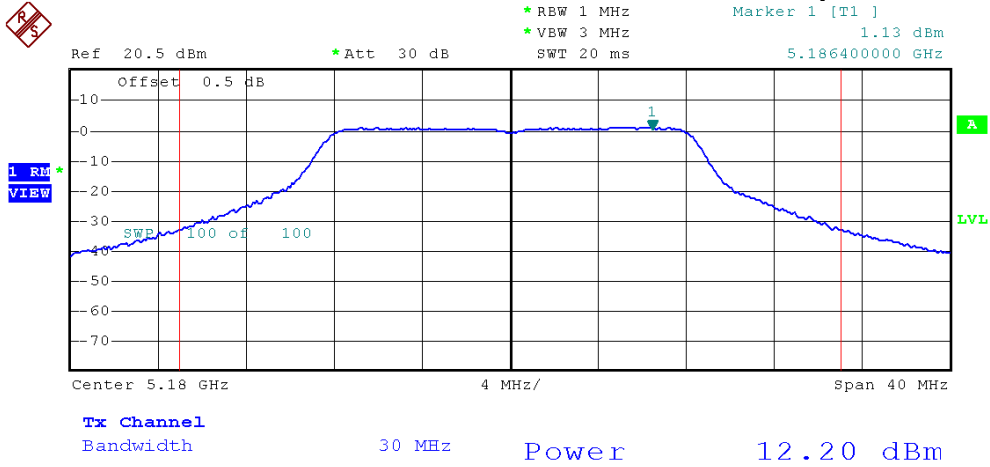

IEEE 802.11a/5200 MHz/Maximum Peak Conducted Output Power

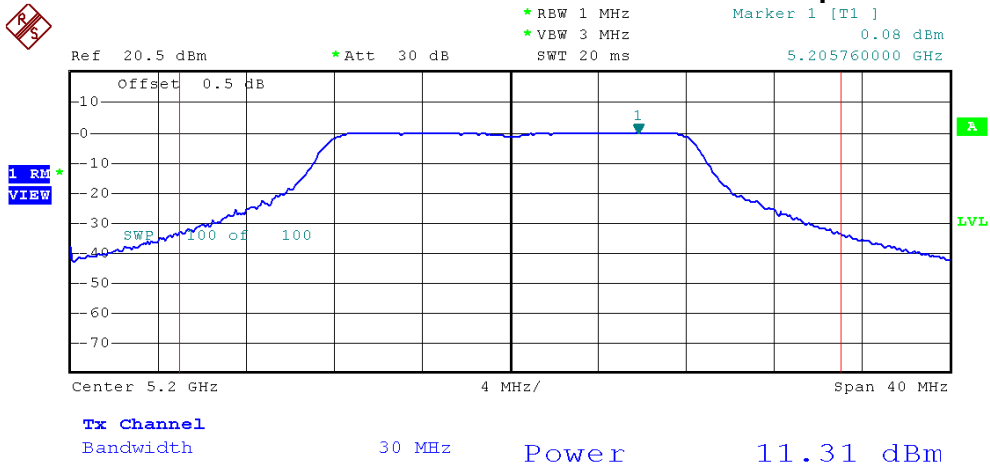

IEEE 802.11a/5240 MHz/Maximum Peak Conducted Output Power

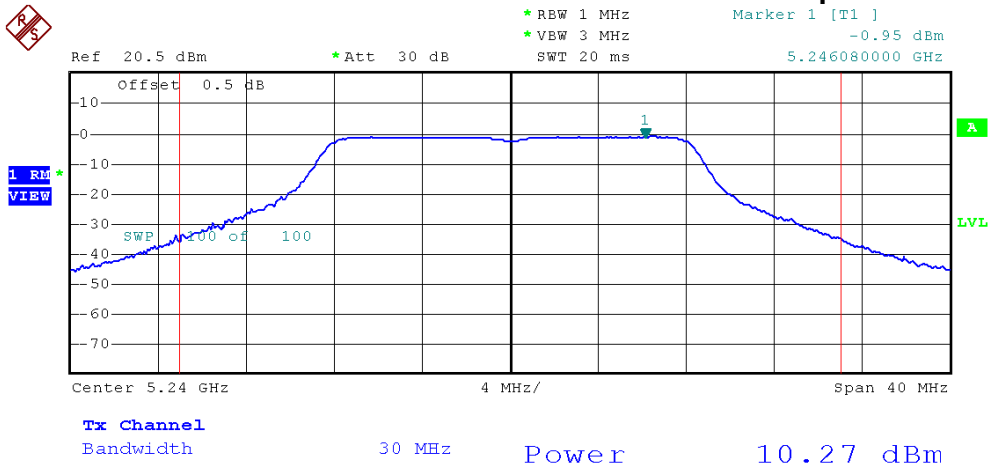




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5180 MHz	12.44	0.0175	17.00	0.0501	PASS
5200 MHz	12.08	0.0161	17.00	0.0501	PASS
5240 MHz	10.72	0.0118	17.00	0.0501	PASS




IEEE 802.11n (20 MHz)/ANT.0/5180 MHz/Maximum Peak Conducted Output Power

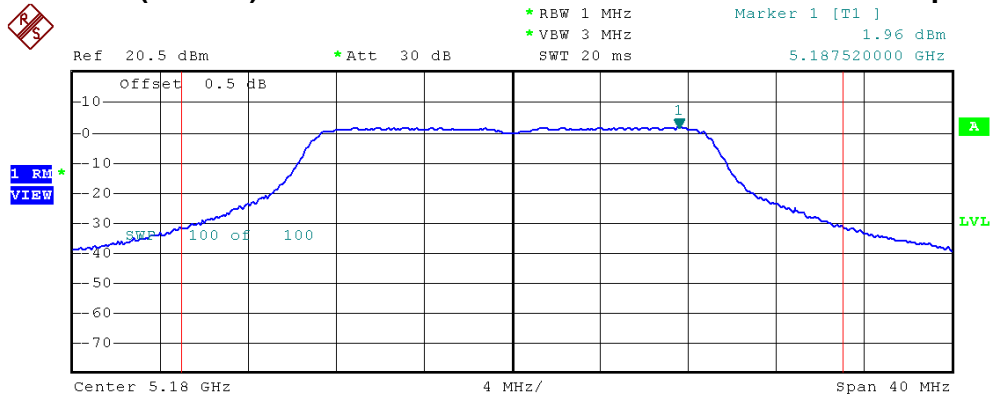


Tx Channel
 Bandwidth 30 MHz Power 12.44 dBm

IEEE 802.11n (20 MHz)/ANT.0/5200 MHz/Maximum Peak Conducted Output Power

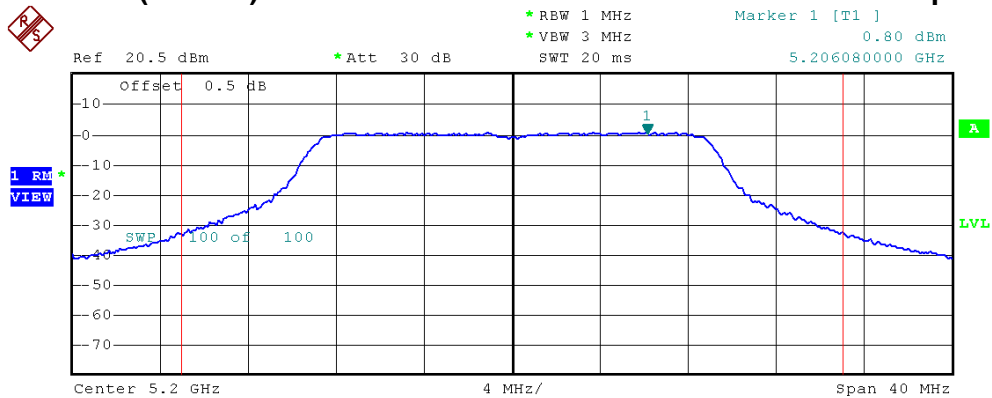

Tx Channel
 Bandwidth 30 MHz Power 12.08 dBm

IEEE 802.11n (20 MHz)/ANT.0/5240 MHz/Maximum Peak Conducted Output Power

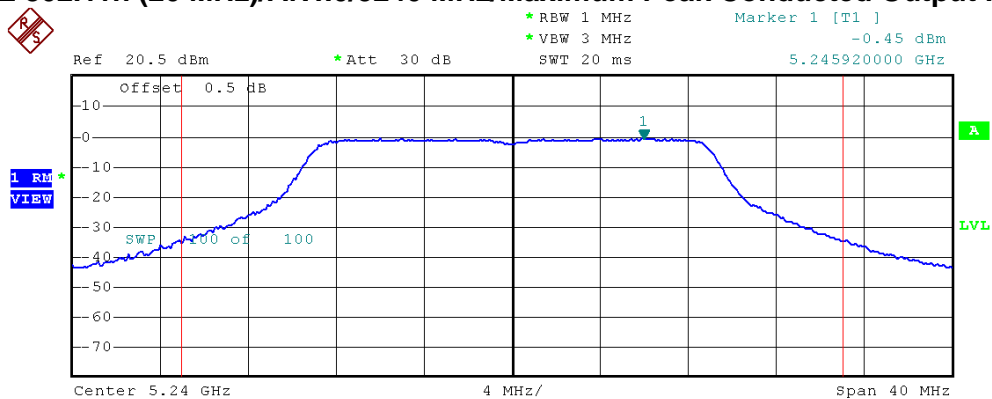

Tx Channel
 Bandwidth 30 MHz Power 10.72 dBm




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5180 MHz	12.55	0.0180	17.00	0.0501	PASS
5200 MHz	11.99	0.0158	17.00	0.0501	PASS
5240 MHz	11.17	0.0131	17.00	0.0501	PASS




IEEE 802.11n (20 MHz)/ANT.1/5180 MHz/Maximum Peak Conducted Output Power

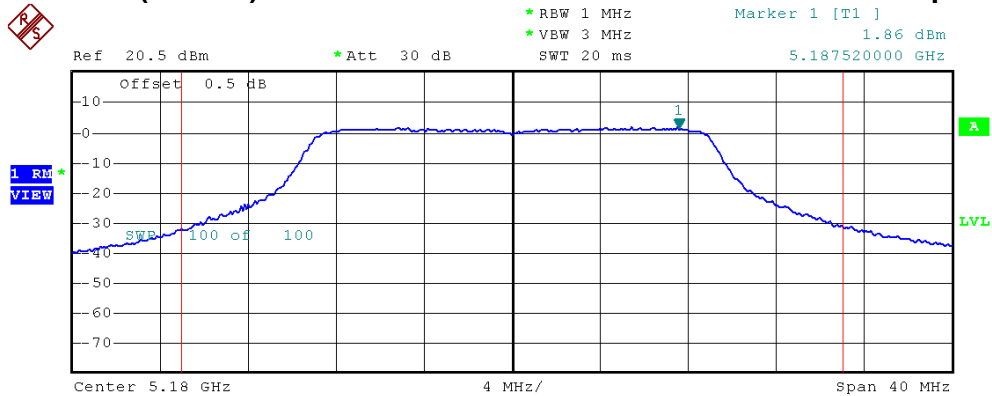


Tx Channel
 Bandwidth 30 MHz Power 12.55 dBm

IEEE 802.11n (20 MHz)/ANT.1/5200 MHz/Maximum Peak Conducted Output Power

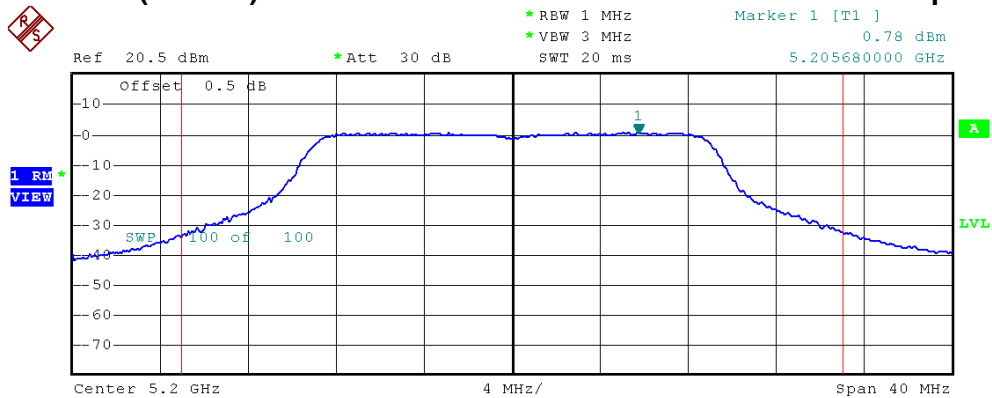

Tx Channel
 Bandwidth 30 MHz Power 11.99 dBm

IEEE 802.11n (20 MHz)/ANT.1/5240 MHz/Maximum Peak Conducted Output Power

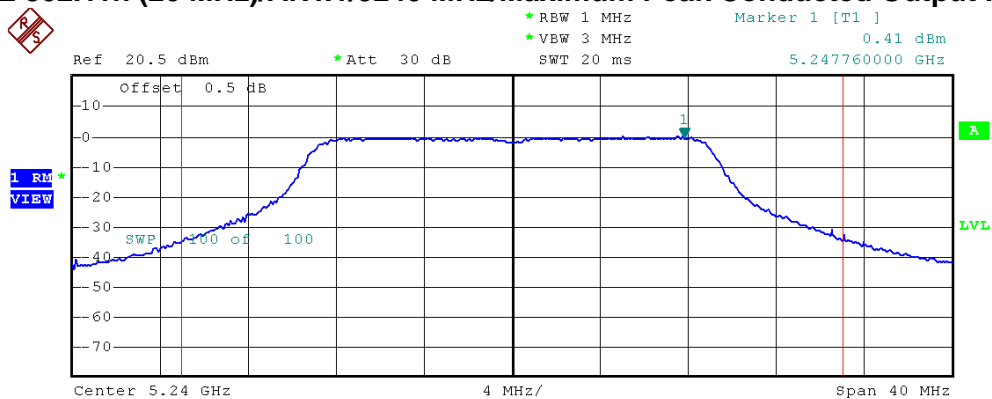

Tx Channel
 Bandwidth 30 MHz Power 11.17 dBm



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.Total/5180 MHz, 5200 MHz, 5240 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5180 MHz	15.51	0.0355	17.00	0.0501	PASS
5200 MHz	15.05	0.0320	17.00	0.0501	PASS
5240 MHz	13.96	0.0249	17.00	0.0501	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
 And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
 Antenna 1 Gain=5.16 dBi.




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5190 MHz, 5230 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5190 MHz	9.64	0.0092	17.00	0.0501	PASS
5230 MHz	8.30	0.0068	17.00	0.0501	PASS



IEEE 802.11n (40 MHz)/ANT.0/5190 MHz/Maximum Peak Conducted Output Power

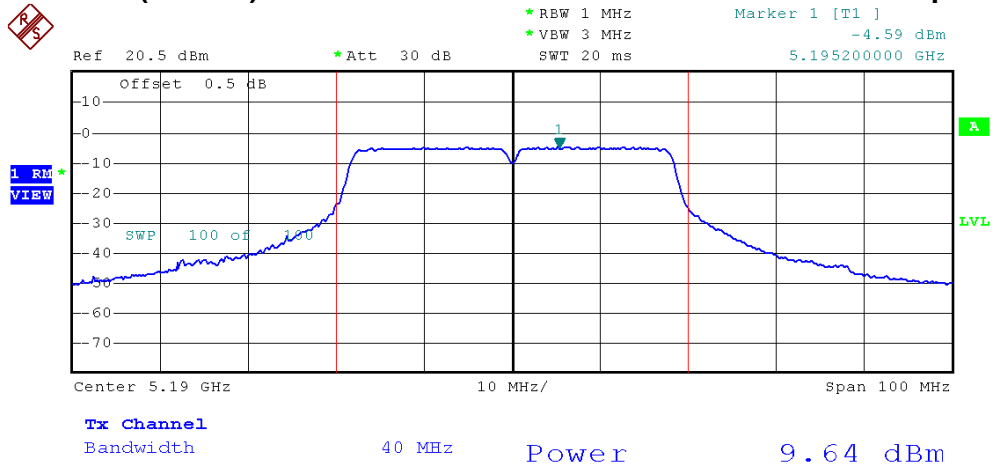

IEEE 802.11n (40 MHz)/ANT.0/5230 MHz/Maximum Peak Conducted Output Power

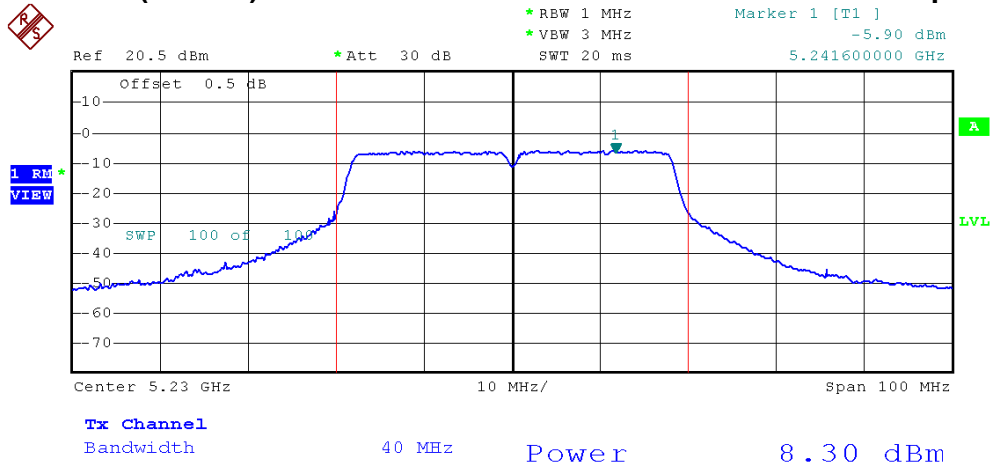



Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5190 MHz, 5230 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5190 MHz	9.60	0.0091	17.00	0.0501	PASS
5230 MHz	8.64	0.0073	17.00	0.0501	PASS



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.Total/5190 MHz, 5230 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5190 MHz	12.63	0.0183	17.00	0.0501	PASS
5230 MHz	11.48	0.0141	17.00	0.0501	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
Antenna 1 Gain=5.16 dBi.



Neutron Engineering Inc.

7.9 TEST RESULTS - 5260 MHZ TO 5320 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
5260 MHz	10.82	24.00	PASS
5300 MHz	12.02	24.00	PASS
5320 MHz	12.00	24.00	PASS




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5260 MHz	11.40	0.0138	24.00	0.2512	PASS
5300 MHz	11.74	0.0149	24.00	0.2512	PASS
5320 MHz	11.95	0.0157	24.00	0.2512	PASS




IEEE 802.11n (20 MHz)/ANT.0/5260 MHz/Maximum Peak Conducted Output Power

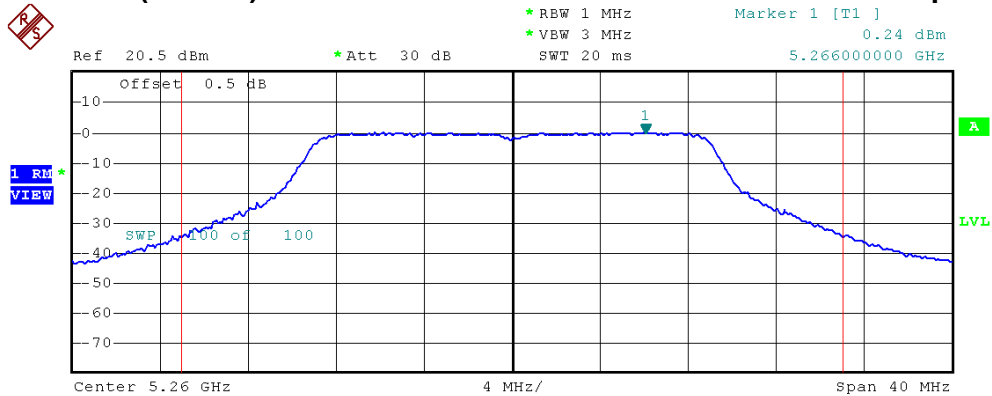


Tx Channel
 Bandwidth 30 MHz Power 11.40 dBm

IEEE 802.11n (20 MHz)/ANT.0/5300 MHz/Maximum Peak Conducted Output Power

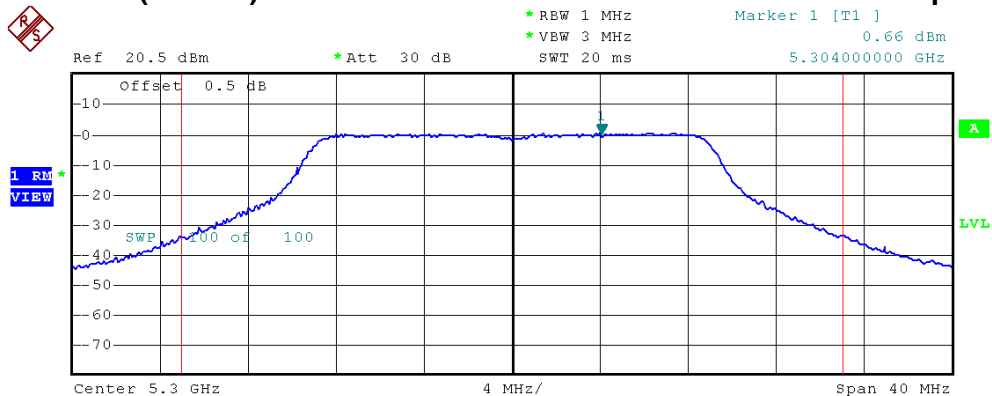

Tx Channel
 Bandwidth 30 MHz Power 11.74 dBm

IEEE 802.11n (20 MHz)/ANT.0/5320 MHz/Maximum Peak Conducted Output Power

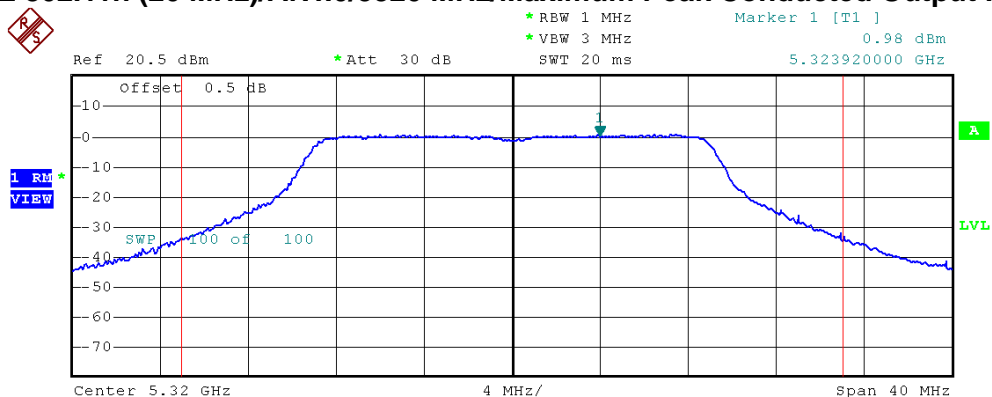

Tx Channel
 Bandwidth 30 MHz Power 11.95 dBm




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5260 MHz, 5300 MHz, 5320 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5260 MHz	11.61	0.0145	24.00	0.2512	PASS
5300 MHz	11.58	0.0144	24.00	0.2512	PASS
5320 MHz	12.21	0.0166	24.00	0.2512	PASS




IEEE 802.11n (20 MHz)/ANT.1/5260 MHz/Maximum Peak Conducted Output Power

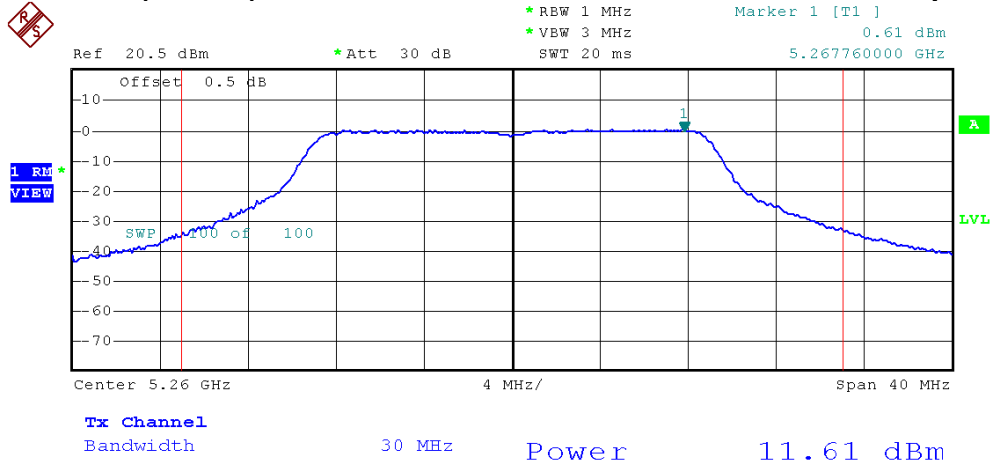

IEEE 802.11n (20 MHz)/ANT.1/5300 MHz/Maximum Peak Conducted Output Power

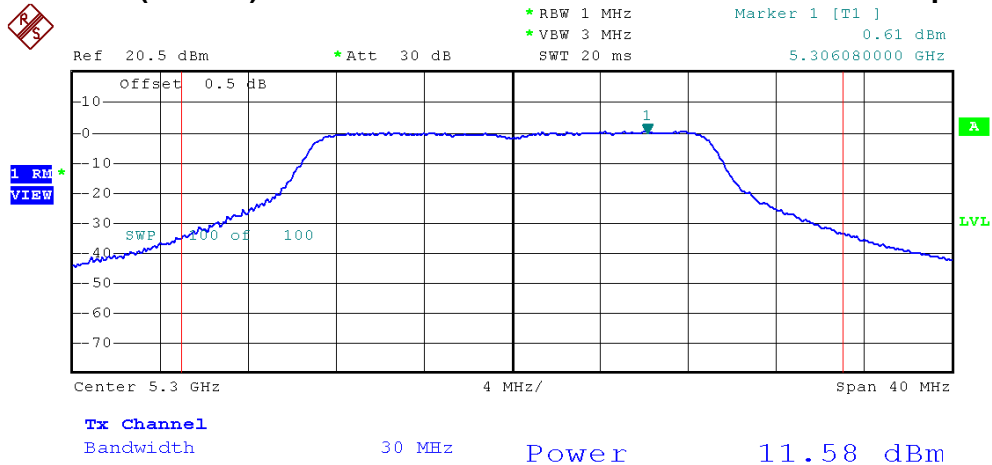

IEEE 802.11n (20 MHz)/ANT.1/5320 MHz/Maximum Peak Conducted Output Power

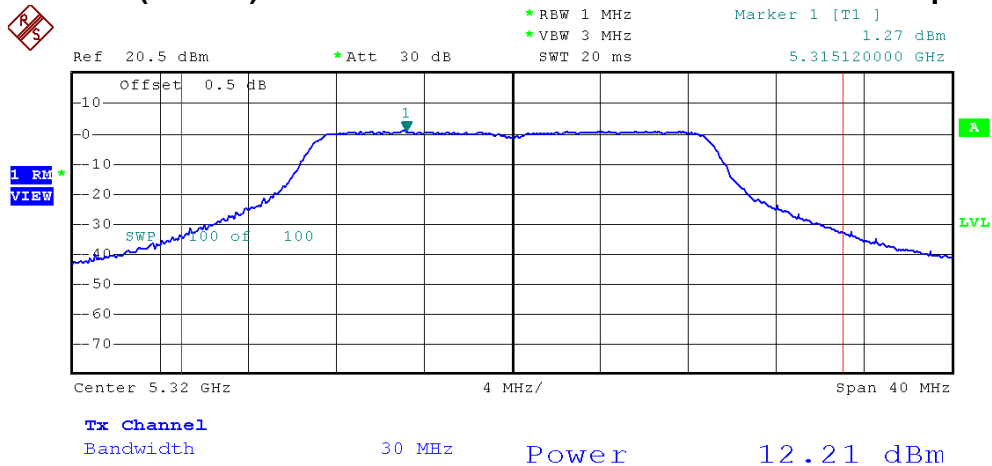



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.Total/5260 MHz, 5300 MHz, 5320 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5260 MHz	14.52	0.0283	24.00	0.2512	PASS
5300 MHz	14.67	0.0293	24.00	0.2512	PASS
5320 MHz	15.09	0.0323	24.00	0.2512	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
 And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
 Antenna 1 Gain=5.16 dBi.




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5270 MHz, 5310 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5270 MHz	9.22	0.0084	24.00	0.2512	PASS
5310 MHz	9.63	0.0092	24.00	0.2512	PASS



IEEE 802.11n (40 MHz)/ANT.0/5270 MHz/Maximum Peak Conducted Output Power

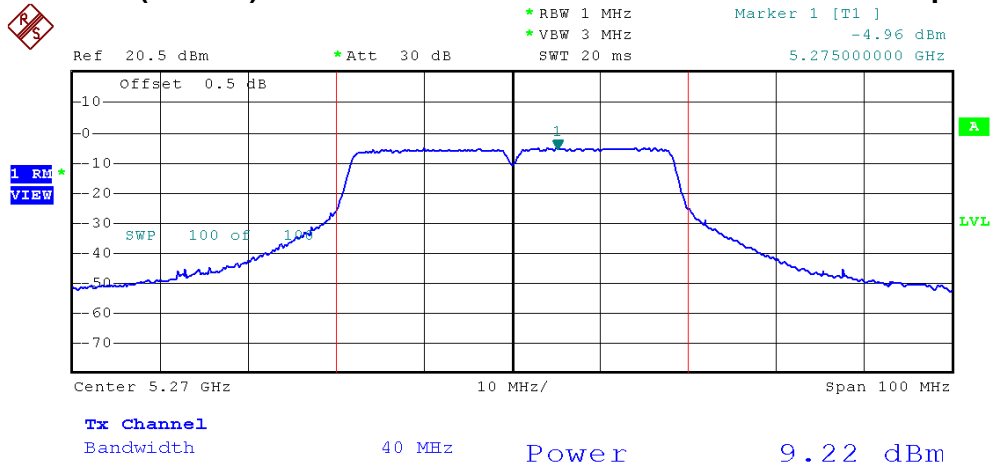

IEEE 802.11n (40 MHz)/ANT.0/5310 MHz/Maximum Peak Conducted Output Power

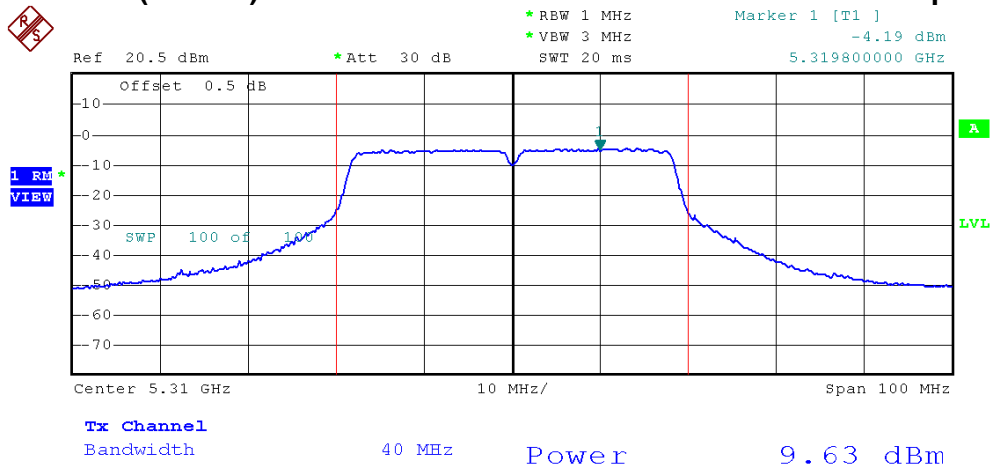




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5270 MHz, 5310 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5270 MHz	9.71	0.0094	24.00	0.2512	PASS
5310 MHz	9.61	0.0091	24.00	0.2512	PASS



IEEE 802.11n (40 MHz)/ANT.1/5270 MHz/Maximum Peak Conducted Output Power

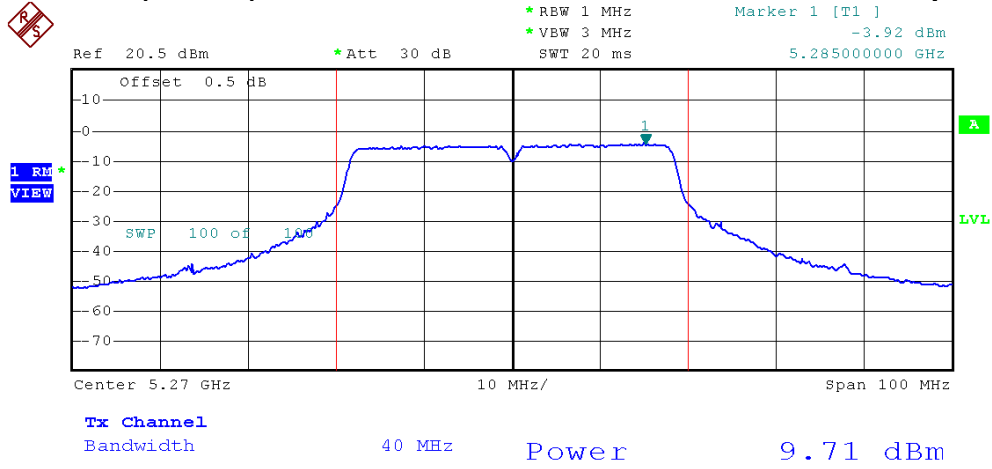

IEEE 802.11n (40 MHz)/ANT.1/5310 MHz/Maximum Peak Conducted Output Power

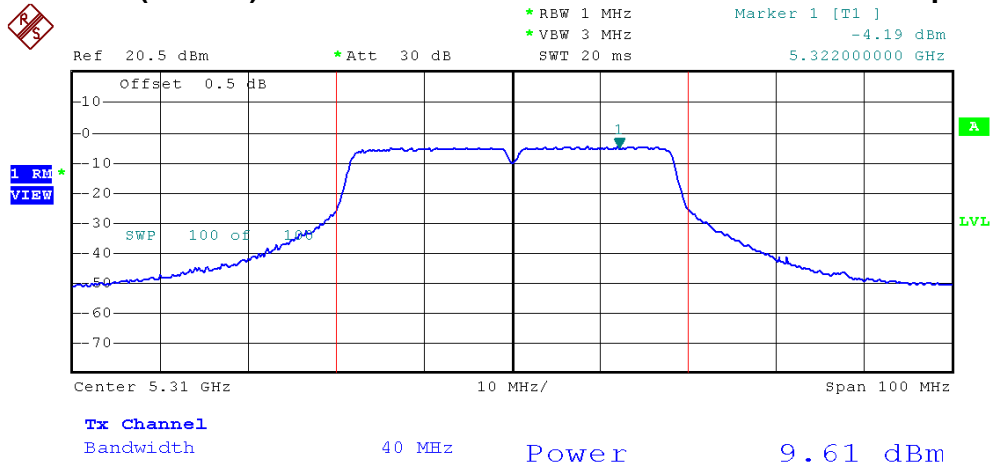



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.Total/5270 MHz, 5310 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5270 MHz	12.48	0.0177	24.00	0.2512	PASS
5310 MHz	12.63	0.0183	24.00	0.2512	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
Antenna 1 Gain=5.16 dBi.


**Neutron Engineering Inc.****7.10 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5500 MHz, 5580 MHz, 5700 MHz		


Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
5500 MHz	11.11	24.00	PASS
5580 MHz	11.09	24.00	PASS
5700 MHz	11.59	24.00	PASS




IEEE 802.11a/5500 MHz/Maximum Peak Conducted Output Power

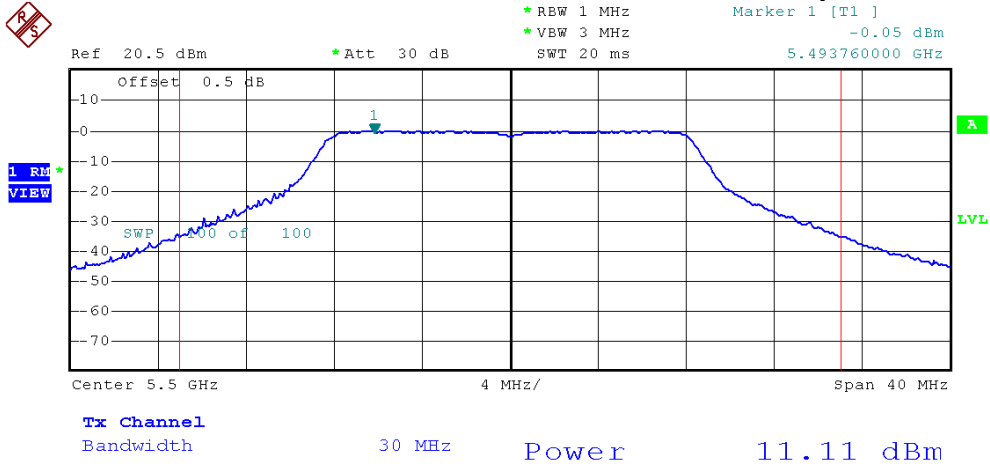

IEEE 802.11a/5580 MHz/Maximum Peak Conducted Output Power

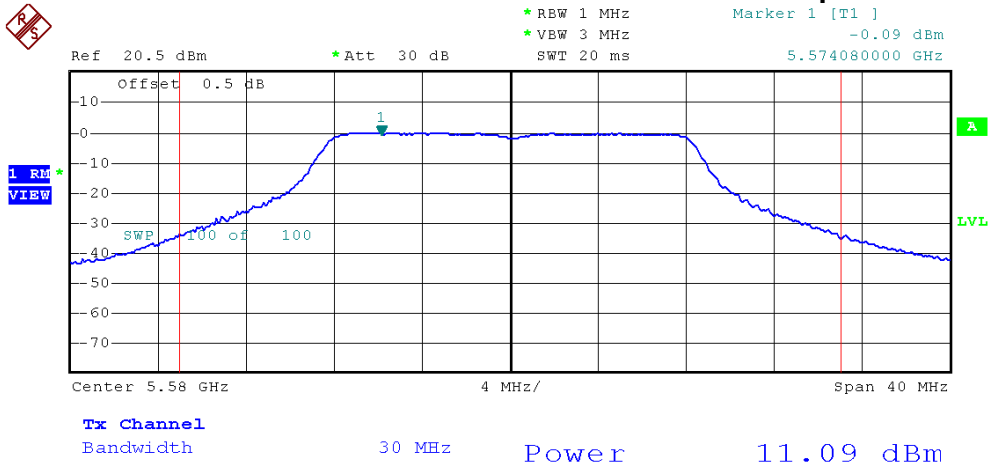

IEEE 802.11a/5700 MHz/Maximum Peak Conducted Output Power

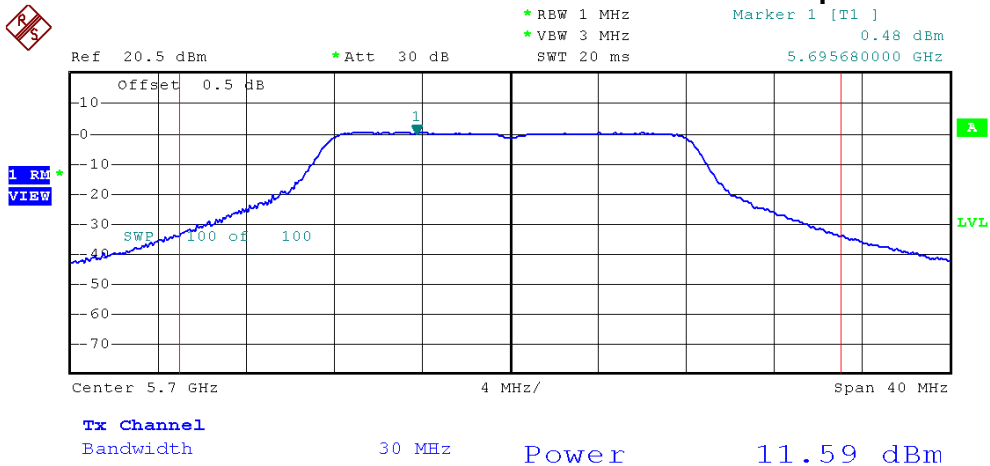


**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.0/5500 MHz, 5580 MHz, 5700 MHz		


Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5500 MHz	11.12	0.0129	30.00	1.0000	PASS
5580 MHz	10.79	0.0120	30.00	1.0000	PASS
5700 MHz	11.79	0.0151	30.00	1.0000	PASS




IEEE 802.11n (20 MHz)/ANT.0/5500 MHz/Maximum Peak Conducted Output Power

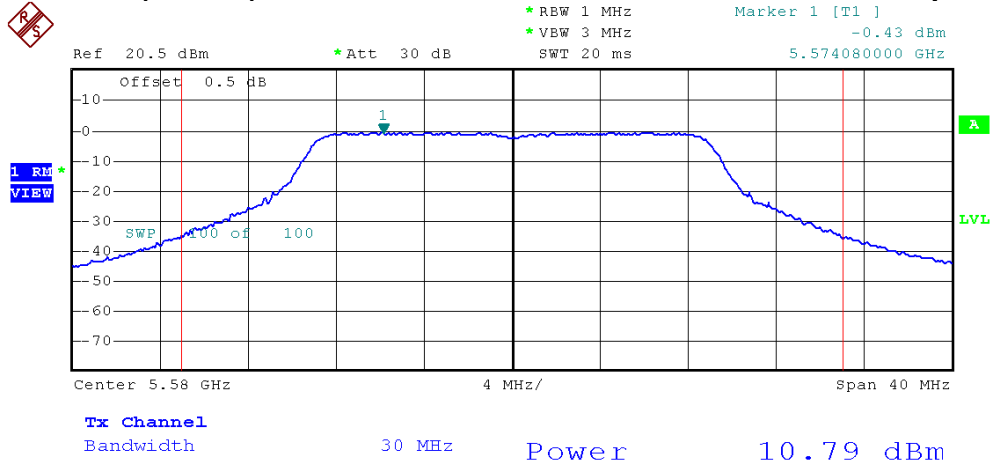

IEEE 802.11n (20 MHz)/ANT.0/5580 MHz/Maximum Peak Conducted Output Power

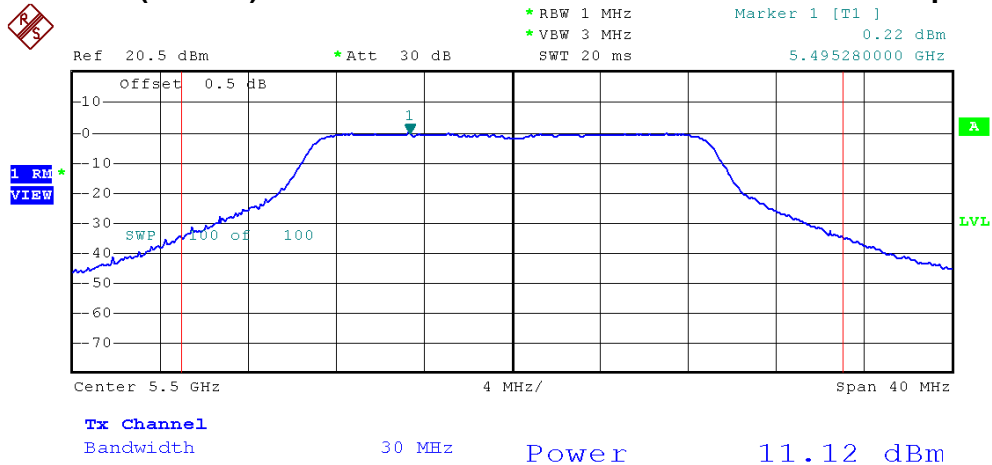

IEEE 802.11n (20 MHz)/ANT.0/5700 MHz/Maximum Peak Conducted Output Power

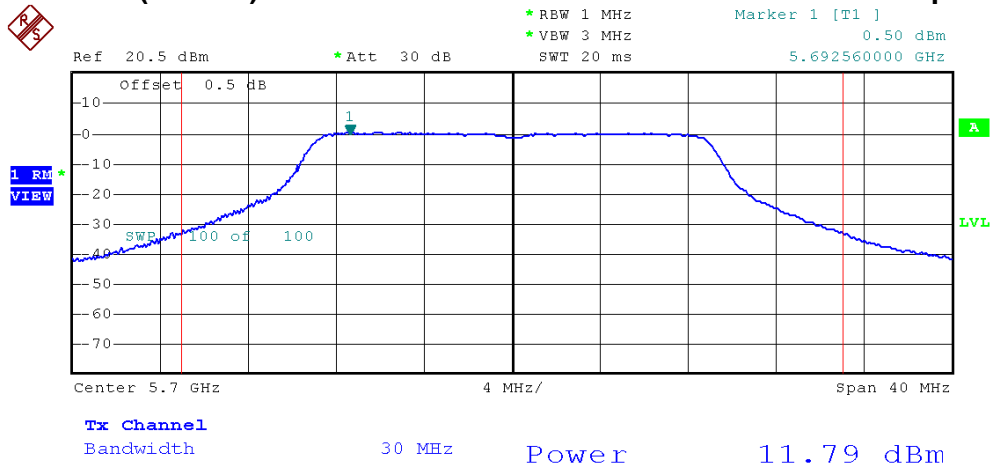




Neutron Engineering Inc.

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.1/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5500 MHz	11.45	0.0140	30.00	1.0000	PASS
5580 MHz	10.81	0.0121	30.00	1.0000	PASS
5700 MHz	11.50	0.0141	30.00	1.0000	PASS




IEEE 802.11n (20 MHz)/ANT.1/5500 MHz/Maximum Peak Conducted Output Power

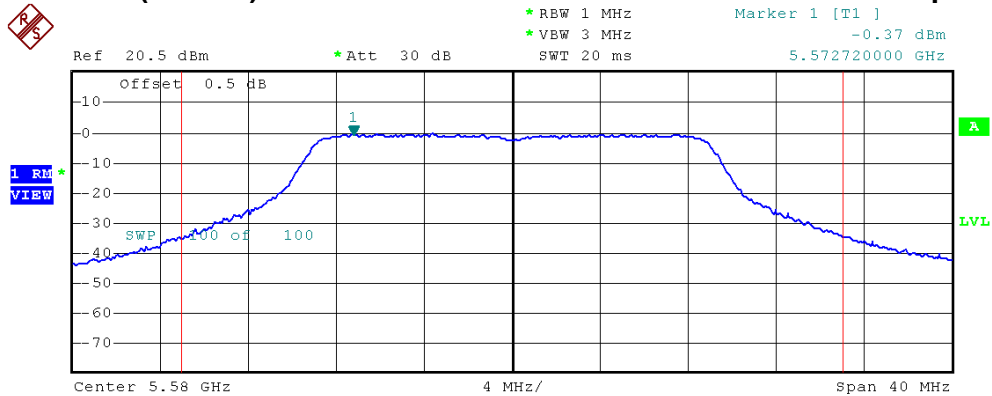


Tx Channel
Bandwidth 30 MHz Power 10.81 dBm

IEEE 802.11n (20 MHz)/ANT.1/5580 MHz/Maximum Peak Conducted Output Power

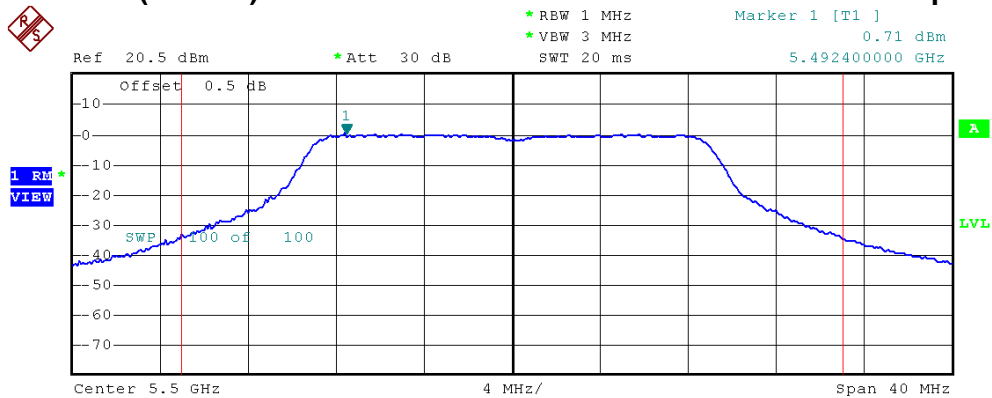

Tx Channel
Bandwidth 30 MHz Power 11.45 dBm

IEEE 802.11n (20 MHz)/ANT.1/5700 MHz/Maximum Peak Conducted Output Power

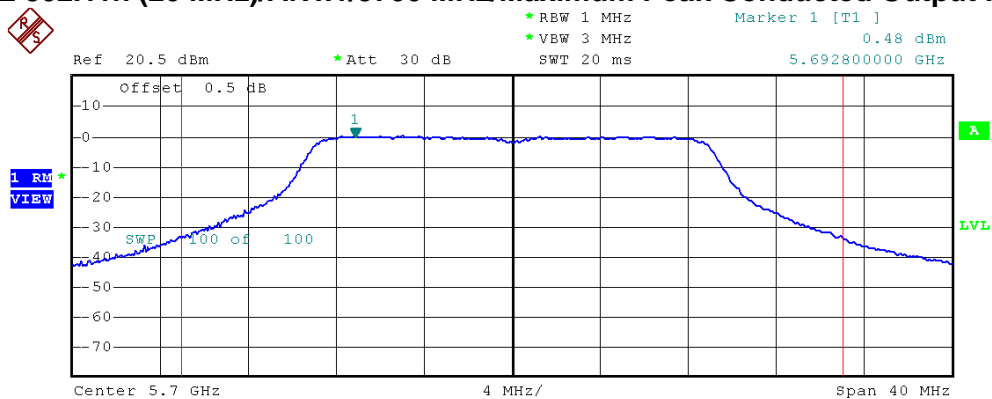

Tx Channel
Bandwidth 30 MHz Power 11.50 dBm



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (20 MHz)/ANT.Total/5500 MHz, 5580 MHz, 5700 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5500 MHz	14.30	0.0269	30.00	1.0000	PASS
5580 MHz	13.81	0.0240	30.00	1.0000	PASS
5700 MHz	14.66	0.0292	30.00	1.0000	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
Antenna 1 Gain=5.16 dBi.


**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.0/5510 MHz, 5550 MHz, 5670 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5510 MHz	8.91	0.0078	30.00	1.0000	PASS
5550 MHz	8.96	0.0079	30.00	1.0000	PASS
5670 MHz	8.17	0.0066	30.00	1.0000	PASS




IEEE 802.11n (40 MHz)/ANT.0/5510 MHz/Maximum Peak Conducted Output Power

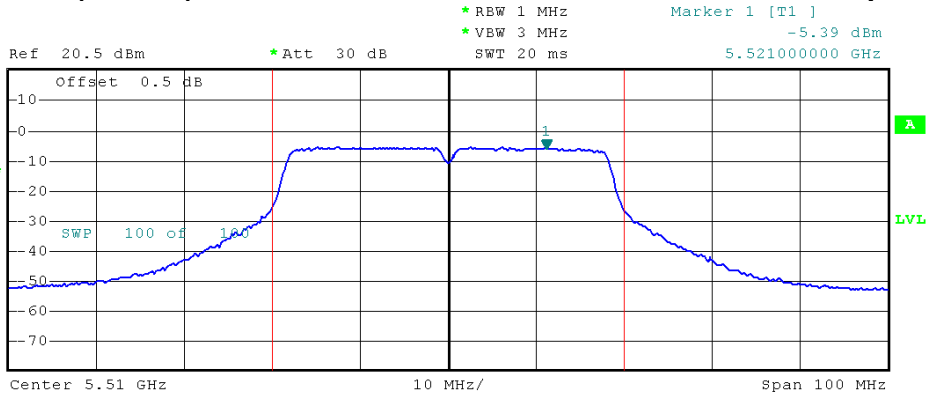


Tx Channel
Bandwidth 40 MHz Power 8.91 dBm

IEEE 802.11n (40 MHz)/ANT.0/5550 MHz/Maximum Peak Conducted Output Power

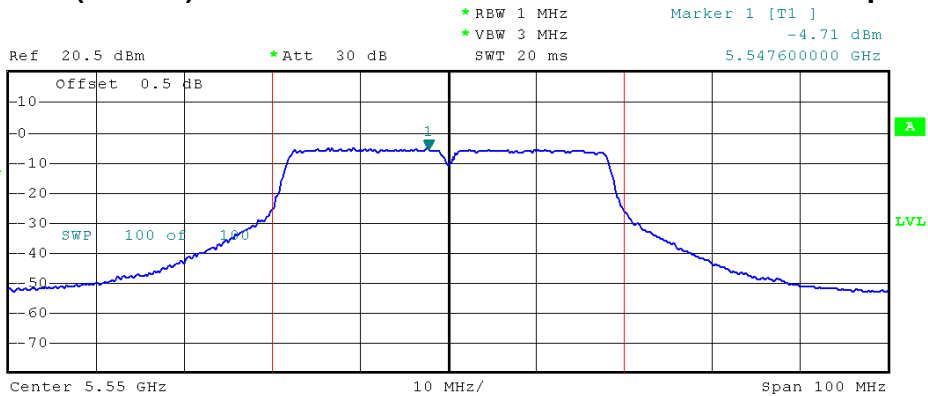

Tx Channel
Bandwidth 40 MHz Power 8.96 dBm

IEEE 802.11n (40 MHz)/ANT.0/5670 MHz/Maximum Peak Conducted Output Power

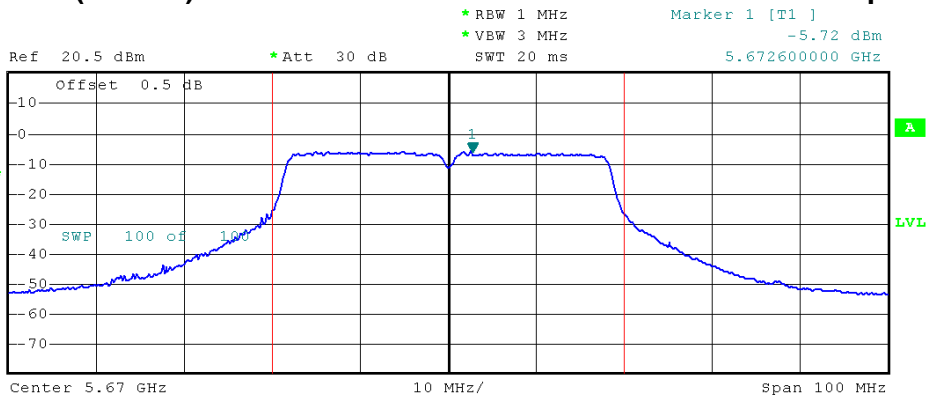

Tx Channel
Bandwidth 40 MHz Power 8.17 dBm

**Neutron Engineering Inc.**

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.1/5510 MHz, 5550 MHz, 5670 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5510 MHz	8.64	0.0073	30.00	1.0000	PASS
5550 MHz	8.94	0.0078	30.00	1.0000	PASS
5670 MHz	8.18	0.0066	30.00	1.0000	PASS



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	46%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11n (40 MHz)/ANT.Total/5510 MHz, 5550 MHz, 5670 MHz		

Frequency	Peak Output Power		LIMIT (dBm)	LIMIT (W)	Result
	(dBm)	(W)			
5510 MHz	11.79	0.0151	30.00	1.0000	PASS
5550 MHz	11.96	0.0157	30.00	1.0000	PASS
5670 MHz	11.19	0.0131	30.00	1.0000	PASS

NOTE:

- The MIMO test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
And after obtain each individual transmitter chain power, then sum the output power by using the following formula:

$$((\text{dBm}/\text{Chain 1})/10^{\wedge}\text{Log}) + ((\text{dBm}/\text{Chain 2})/10^{\wedge}\text{log}) + ((\text{dBm}/\text{ChainN})/10^{\wedge}\text{log}) = \text{Combined peak output power in mW.}$$
- Antenna 0 Gain=4.85 dBi.
Antenna 1 Gain=5.16 dBi.



8 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)

8.1 LIMIT

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



Neutron Engineering Inc.

8.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 18, 2014
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

8.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz ~ 150 kHz / RB 200 Hz for QP
Start ~ Stop Frequency	150 kHz ~ 30 MHz / RB 9 kHz for QP
Start ~ Stop Frequency	30 MHz ~ 1000 MHz / RB 120 kHz for QP

8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

8.5 DEVIATION FROM TEST STANDARD

No deviation

8.6 TEST SETUP LAYOUT

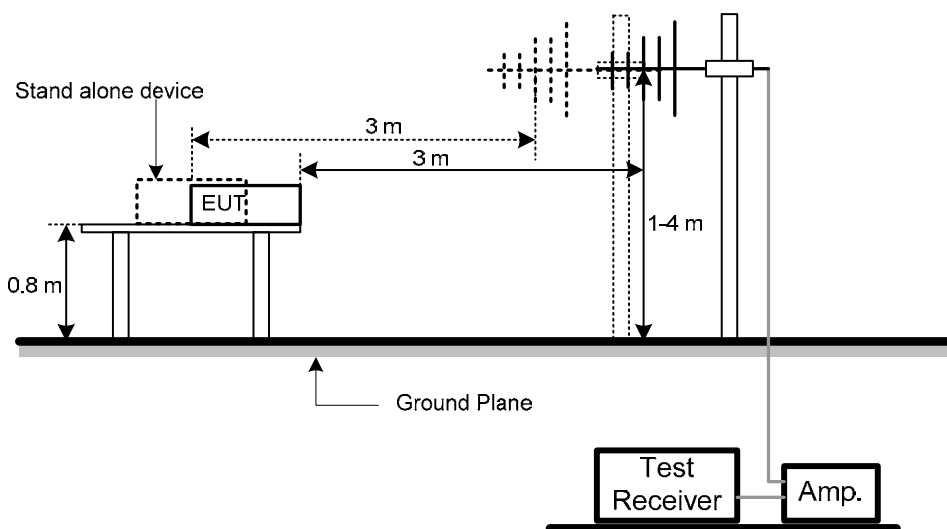



Neutron Engineering Inc.

8.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



8.8 TEST RESULTS - 5180 MHZ TO 5320 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

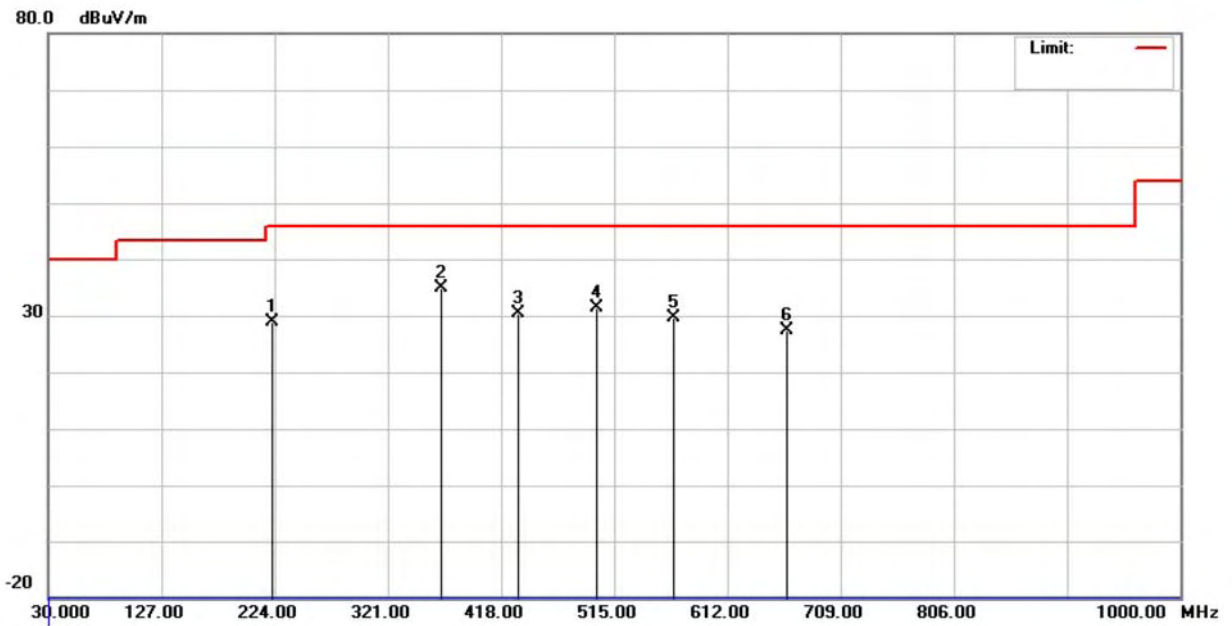


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	221.5749	50.70	-21.75	28.95	46.00	-17.05	peak	
2 *	367.0750	51.51	-16.68	34.83	46.00	-11.17	peak	
3	432.5499	45.30	-15.00	30.30	46.00	-15.70	peak	
4	500.4500	45.37	-13.95	31.42	46.00	-14.58	peak	
5	565.9249	41.68	-11.93	29.75	46.00	-16.25	peak	
6	662.9249	37.72	-10.39	27.33	46.00	-18.67	peak	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

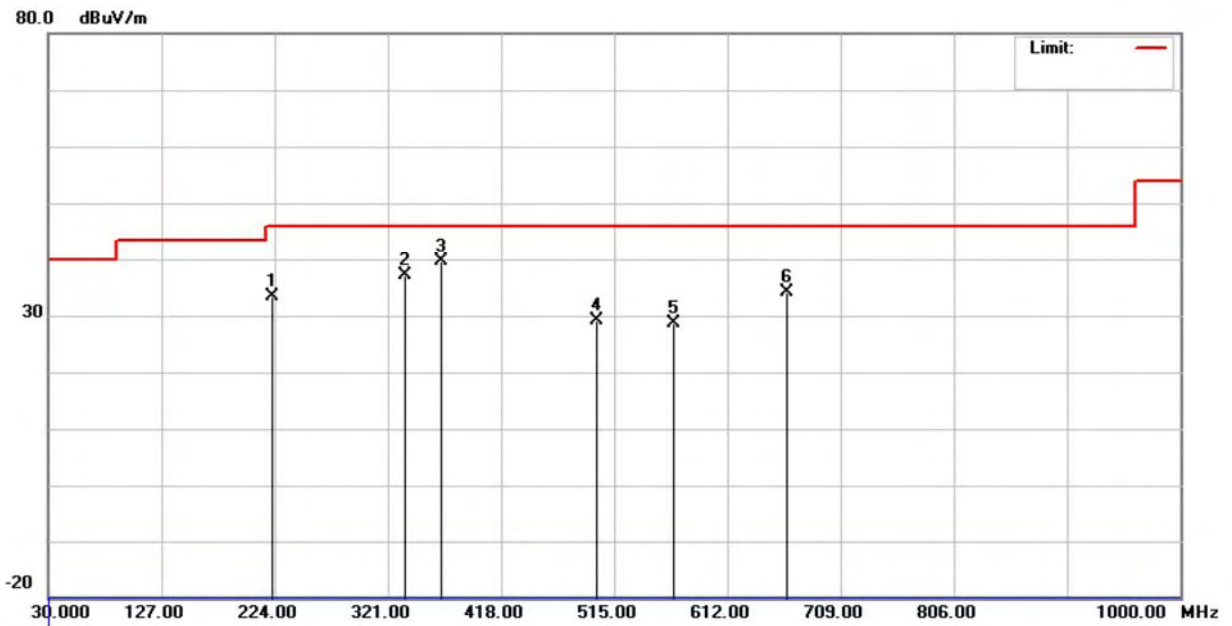


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		221.5749	55.25	-21.75	33.50	46.00	-12.50	peak	
2		335.5499	54.68	-17.45	37.23	46.00	-8.77	peak	
3	*	367.0750	56.20	-16.68	39.52	46.00	-6.48	peak	
4		500.4500	43.08	-13.95	29.13	46.00	-16.87	peak	
5		565.9249	40.66	-11.93	28.73	46.00	-17.27	peak	
6		662.9249	44.41	-10.39	34.02	46.00	-11.98	peak	



8.9 TEST RESULTS - 5500 MHZ TO 5700 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5580 MHz		

Polarization: Vertical

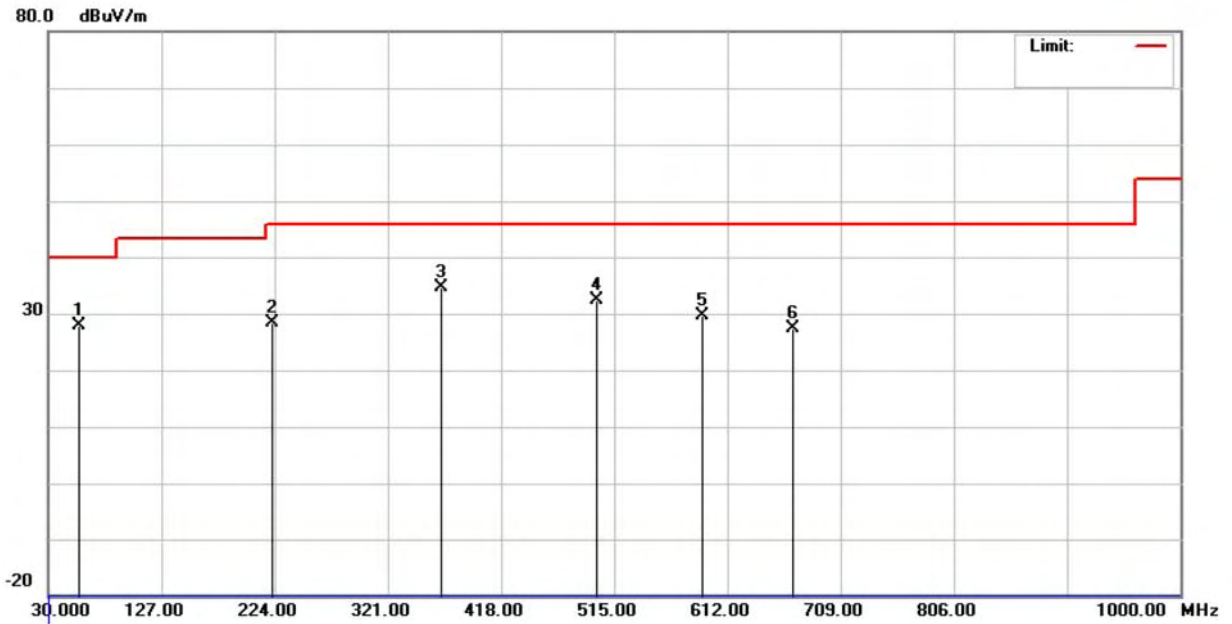


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	56.6749	47.09	-19.27	27.82	40.00	-12.18	peak	
2	221.5749	50.01	-21.75	28.26	46.00	-17.74	peak	
3 *	367.0750	51.21	-16.68	34.53	46.00	-11.47	peak	
4	500.4500	46.26	-13.95	32.31	46.00	-13.69	peak	
5	590.1749	41.10	-11.50	29.60	46.00	-16.40	peak	
6	667.7750	37.73	-10.38	27.35	46.00	-18.65	peak	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/580 MHz		

Polarization: Horizontal

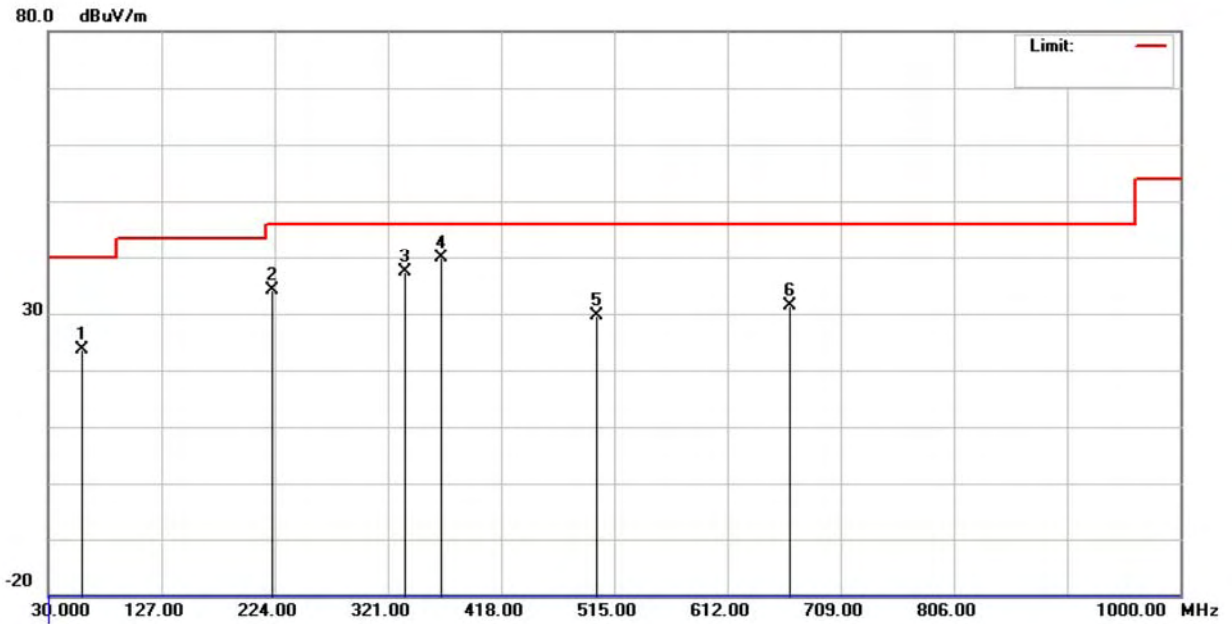

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	59.0999	43.19	-19.45	23.74	40.00	-16.26	peak	
2	221.5749	55.77	-21.75	34.02	46.00	-11.98	peak	
3	335.5499	54.95	-17.45	37.50	46.00	-8.50	peak	
4 *	367.0750	56.56	-16.68	39.88	46.00	-6.12	peak	
5	500.4500	43.59	-13.95	29.64	46.00	-16.36	peak	
6	665.3499	41.87	-10.38	31.49	46.00	-14.51	peak	



9 RADIATED SPURIOUS EMISSION (ABOVE 1 GHz)

9.1 LIMIT

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micровolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)
 Margin Level = Measurement Value – Limit Value



Neutron Engineering Inc.

9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 15, 2014
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 16, 2014
4	Microflex Cable	Harbour industries	27478LL142	1m	May. 13, 2014
5	Microflex Cable	EMC	S104-SMA	8m	May. 13, 2014
6	Microflex Cable	Harbour industries	27478LL142	3m	May. 13, 2014
7	Test Cable	LMR	LMR-400	12m	May. 14, 2014
8	Test Cable	LMR	LMR-400	3m	May. 14, 2014
9	Pre-Amplifier	Anritsu	MH648A	M92649	Jun. 18, 2014
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 11, 2014
11	Preamplifier With Adaptor	EMC	EMC2654045	980030	Feb. 18, 2014
12	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 24, 2013

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10 Hz for Average
RB / VB (other emission)	1 MHz / 1 MHz for Peak, 1 MHz / 10 Hz for Average

9.4 TEST PROCEDURES

- a. The measuring distance of at 1 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC KDB 789033 D01 General UNII Test Procedures v01r03 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.


NOTE:

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

9.5 DEVIATION FROM TEST STANDARD

No deviation

9.6 TEST SETUP LAYOUT

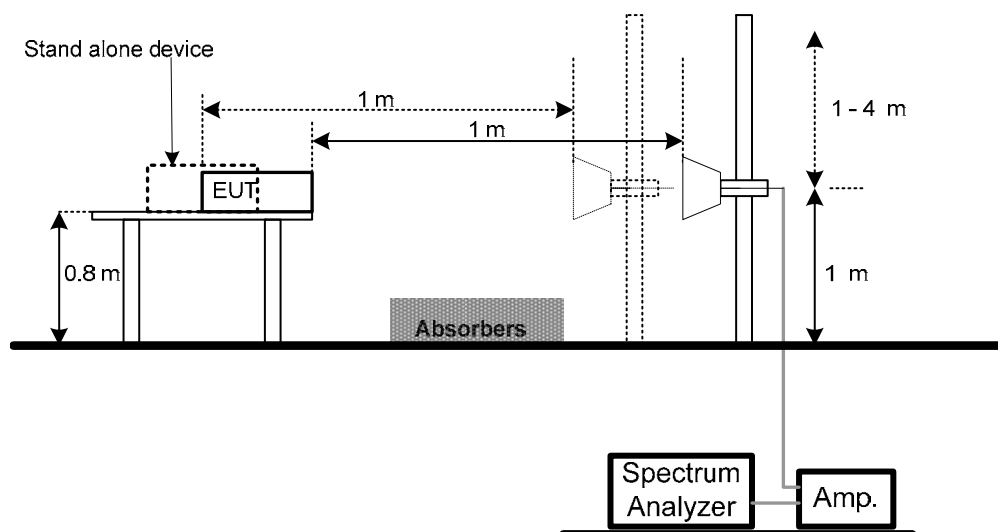



Neutron Engineering Inc.

9.7 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 5.6 Unless otherwise a special operating condition is specified in the follows during the testing.



9.8 TEST RESULTS - 5180 MHZ TO 5350 MHZ BAND

E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Vertical

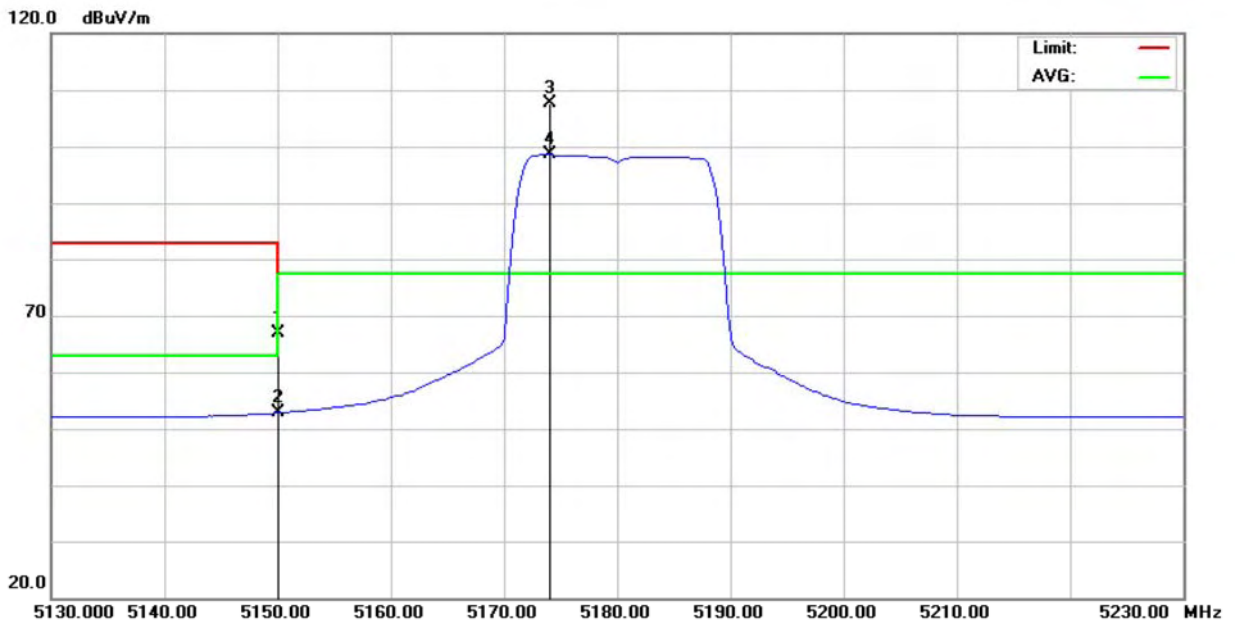


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	27.62	39.23	66.85	77.30	-10.45	peak	
2		5150.000	13.57	39.23	52.80	63.00	-10.20	AVG	
3	*	5174.000	68.43	39.22	107.65	77.30	30.35	peak	
4	X	5174.000	59.34	39.22	98.56	77.30	21.26	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Vertical

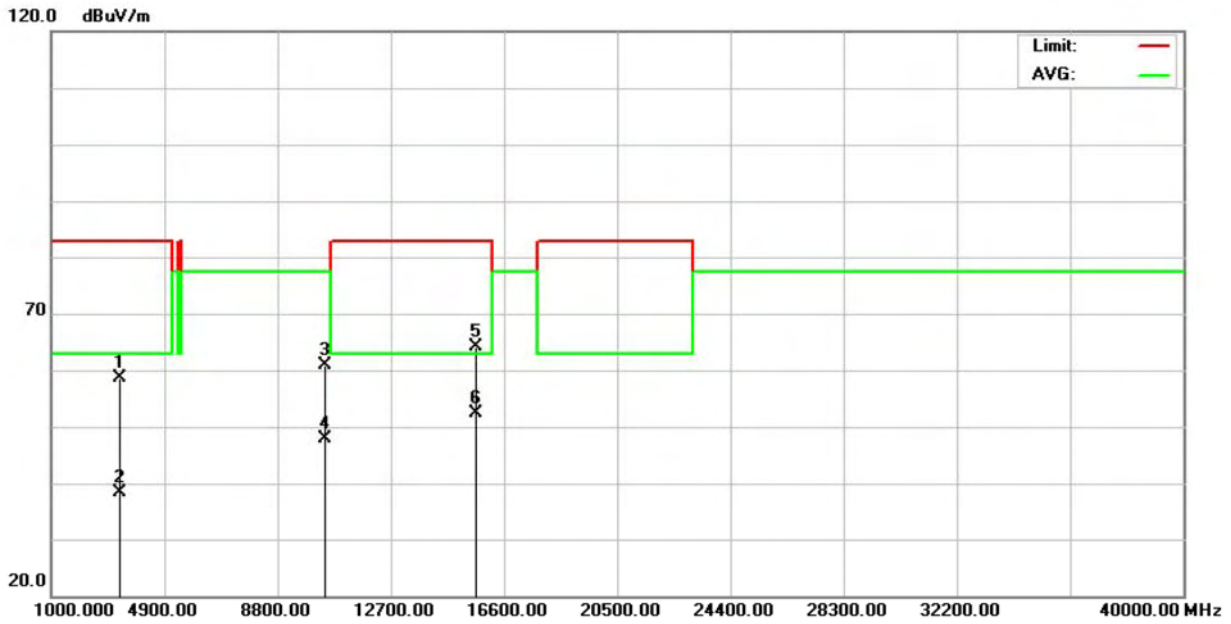


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3328.250	56.39	2.28	58.67	83.00	-24.33	peak	
2		3328.250	36.20	2.28	38.48	63.00	-24.52	AVG	
3		10360.65	44.10	16.75	60.85	77.30	-16.45	peak	
4		10360.65	31.21	16.75	47.96	77.30	-29.34	AVG	
5		15539.77	43.85	20.35	64.20	83.00	-18.80	peak	
6	*	15539.77	31.93	20.35	52.28	63.00	-10.72	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Horizontal

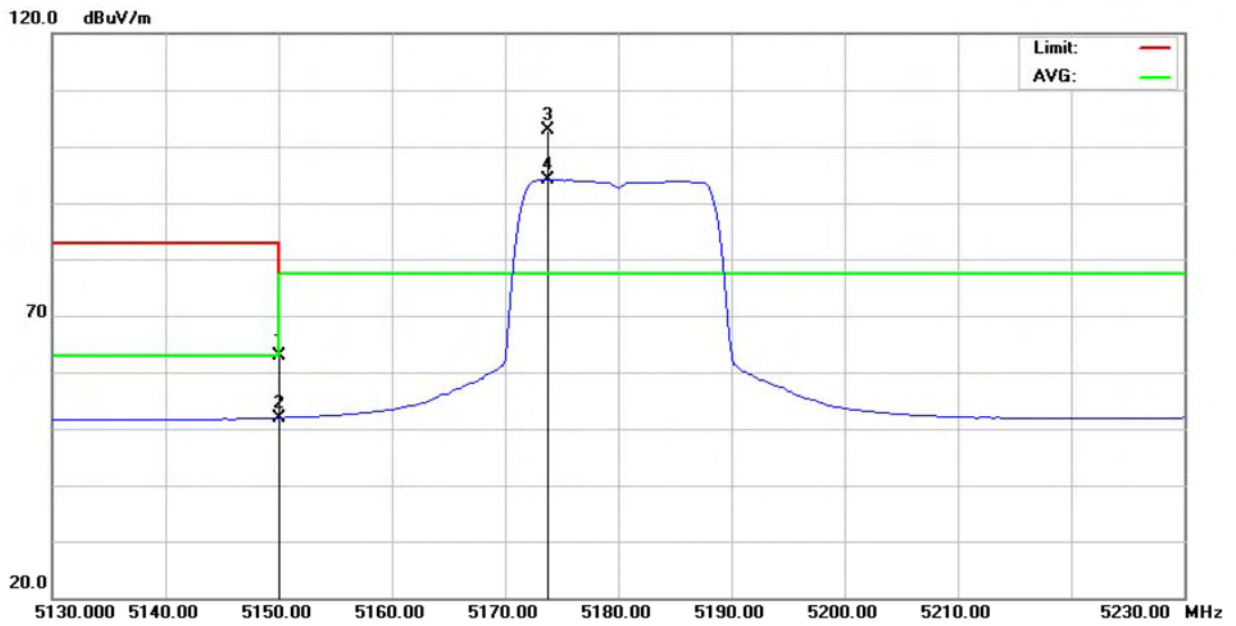


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		5150.000	23.62	39.23	62.85	77.30	-14.45	peak	
2		5150.000	12.69	39.23	51.92	63.00	-11.08	AVG	
3	*	5173.750	63.67	39.22	102.89	77.30	25.59	peak	
4	X	5173.750	54.89	39.22	94.11	77.30	16.81	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5180 MHz		

Polarization: Horizontal

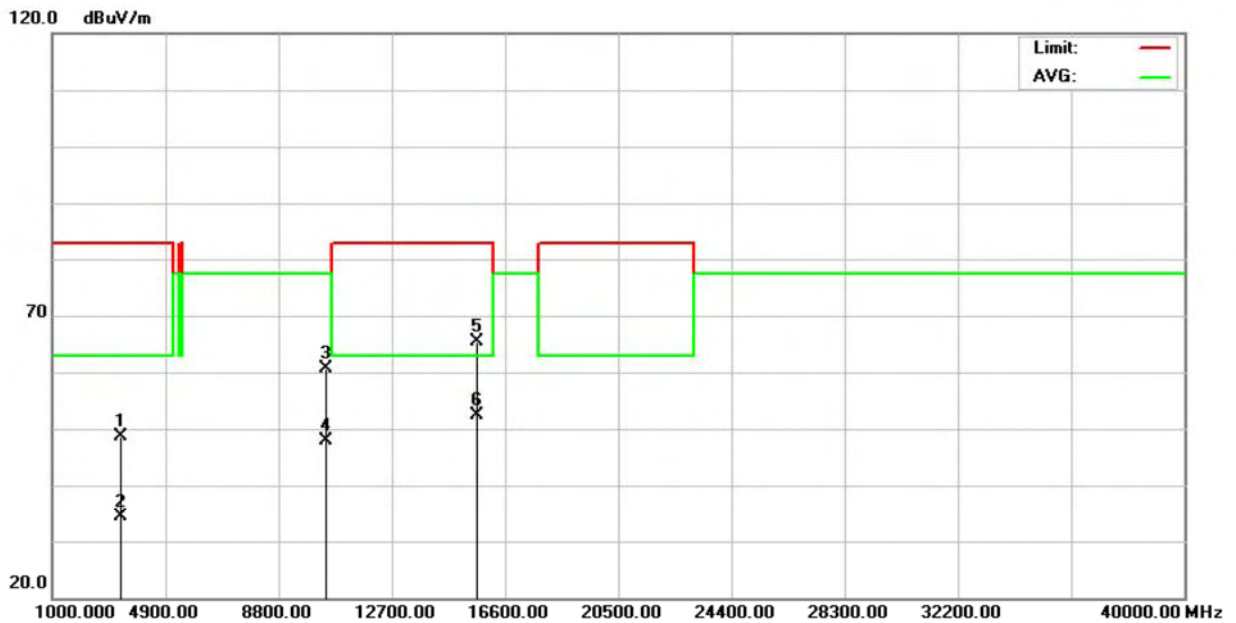


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3330.550	46.37	2.28	48.65	83.00	-34.35	peak	
2		3330.550	32.15	2.28	34.43	63.00	-28.57	AVG	
3		10360.30	43.83	16.75	60.58	77.30	-16.72	peak	
4		10360.30	31.22	16.75	47.97	77.30	-29.33	AVG	
5		15539.92	44.97	20.35	65.32	83.00	-17.68	peak	
6	*	15539.92	31.97	20.35	52.32	63.00	-10.68	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

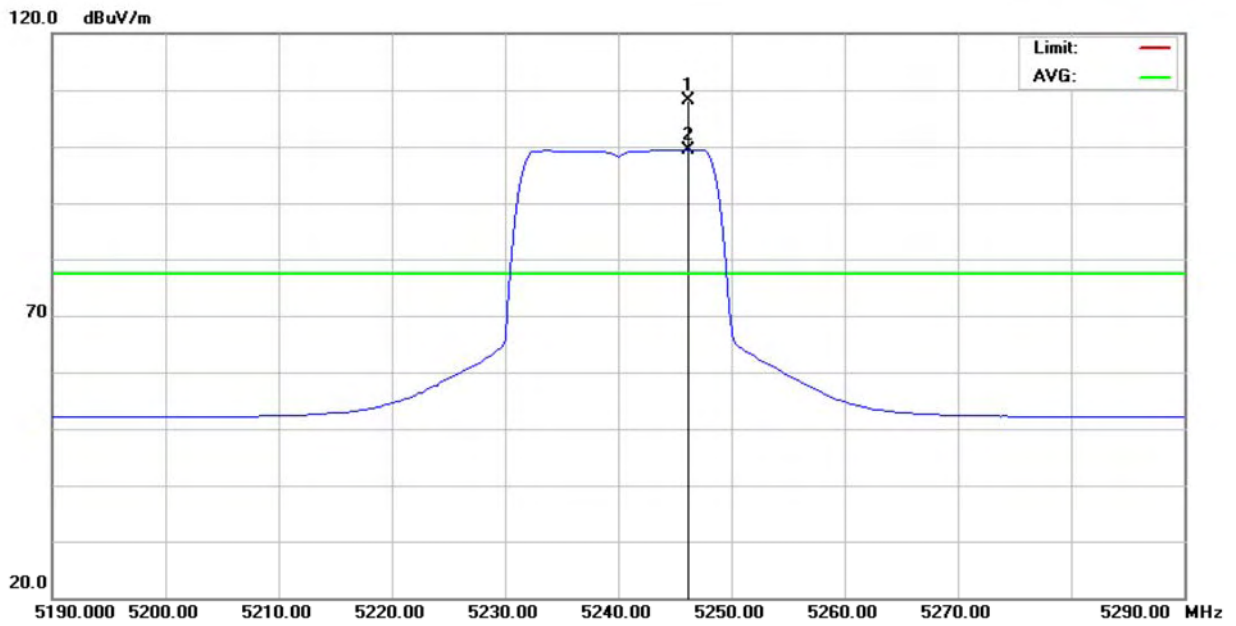


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5246.250	69.02	39.20	108.22	77.30	30.92	peak	
2	X	5246.250	60.20	39.20	99.40	77.30	22.10	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Vertical

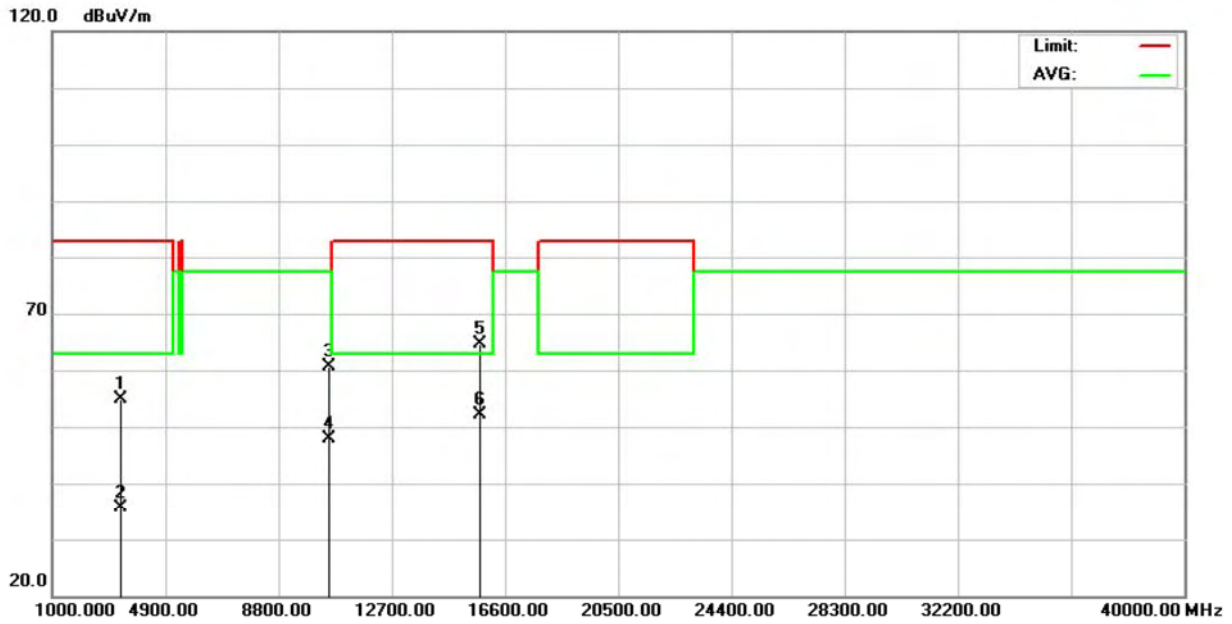


No.	Mk.	Freq. (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Over (dB)	Detector	Comment
1		3327.500	52.66	2.27	54.93	83.00	-28.07	peak	
2		3327.500	33.27	2.27	35.54	63.00	-27.46	AVG	
3		10479.87	43.70	16.89	60.59	77.30	-16.71	peak	
4		10479.87	31.11	16.89	48.00	77.30	-29.30	AVG	
5		15719.60	44.26	20.31	64.57	83.00	-18.43	peak	
6	*	15719.60	31.94	20.31	52.25	63.00	-10.75	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

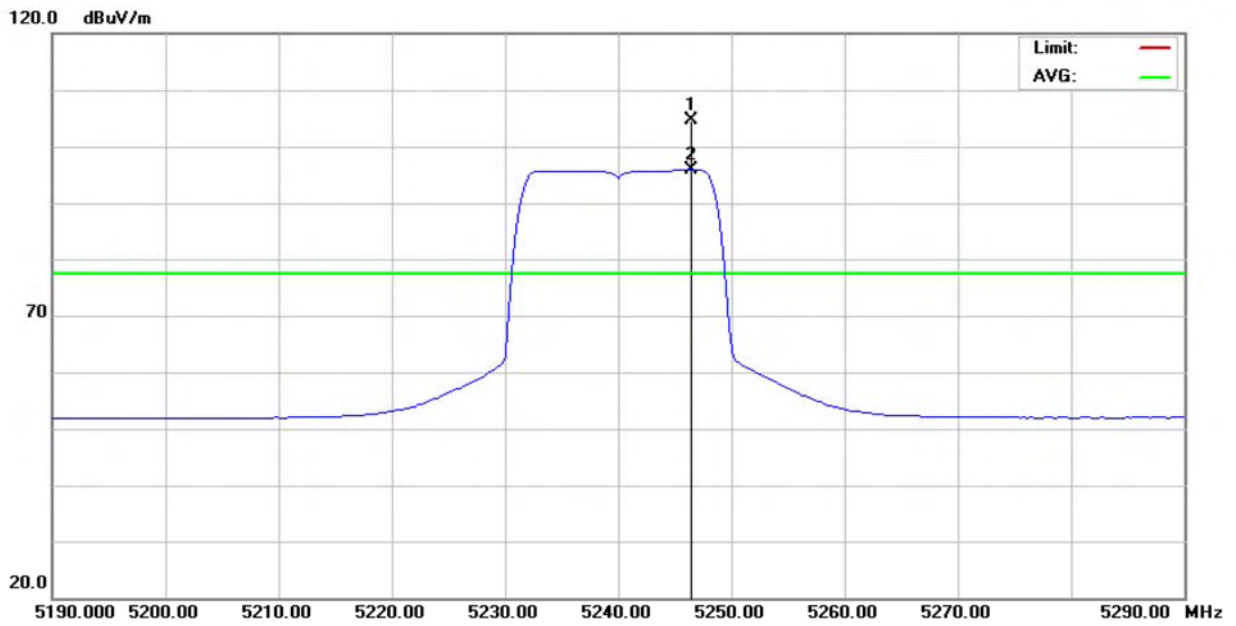


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5246.500	65.48	39.20	104.68	77.30	27.38	peak	
2	X	5246.500	56.60	39.20	95.80	77.30	18.50	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5240 MHz		

Polarization: Horizontal

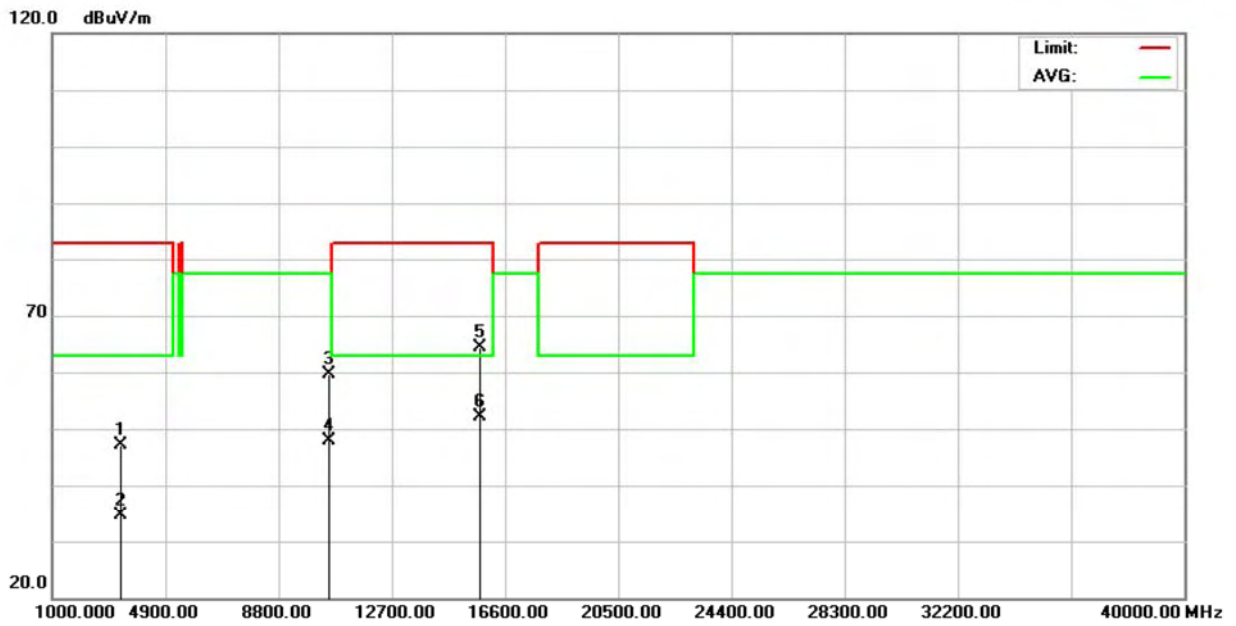


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3312.875	45.00	2.23	47.23	83.00	-35.77	peak	
2		3327.875	32.47	2.28	34.75	63.00	-28.25	AVG	
3		10480.00	42.68	16.89	59.57	77.30	-17.73	peak	
4		10480.00	30.98	16.89	47.87	77.30	-29.43	AVG	
5		15720.52	44.01	20.31	64.32	83.00	-18.68	peak	
6	*	15720.52	31.93	20.31	52.24	63.00	-10.76	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

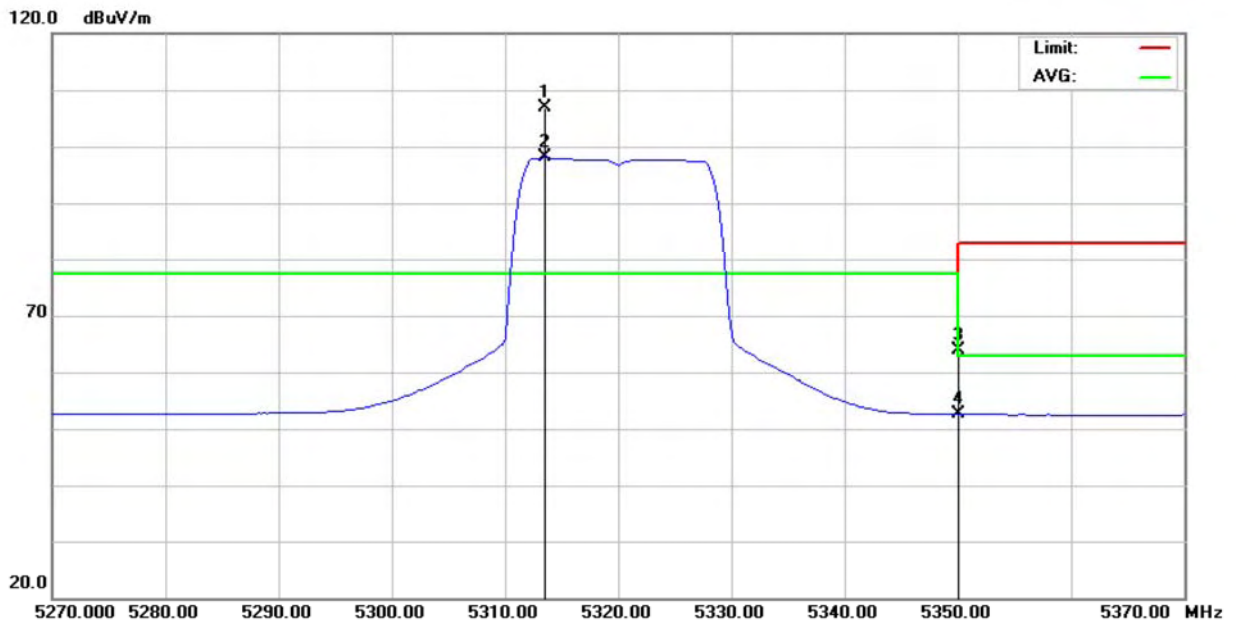


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5313.500	67.72	39.17	106.89	77.30	29.59	peak	
2	X	5313.500	58.85	39.17	98.02	77.30	20.72	AVG	
3		5350.000	24.81	39.16	63.97	77.30	-13.33	peak	
4		5350.000	13.41	39.16	52.57	63.00	-10.43	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Vertical

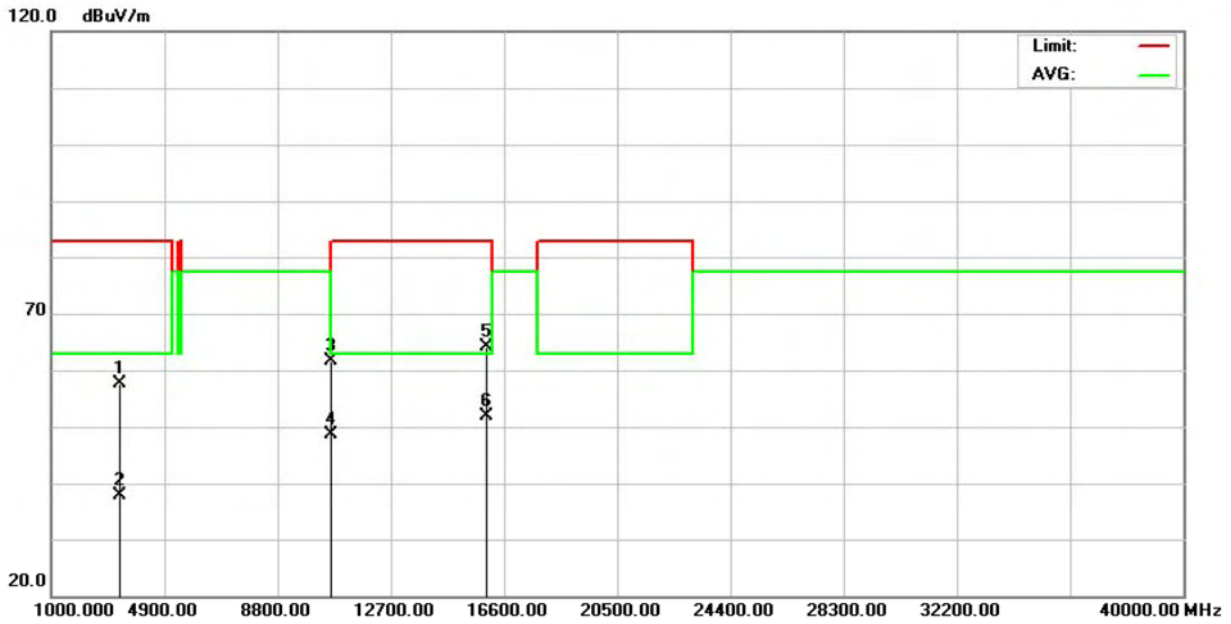


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3329.350	55.29	2.28	57.57	83.00	-25.43	peak	
2		3329.350	35.55	2.28	37.83	63.00	-25.17	AVG	
3		10640.80	44.09	17.47	61.56	83.00	-21.44	peak	
4		10640.80	31.08	17.47	48.55	63.00	-14.45	AVG	
5		15959.25	43.81	20.25	64.06	83.00	-18.94	peak	
6	*	15959.25	31.61	20.25	51.86	63.00	-11.14	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

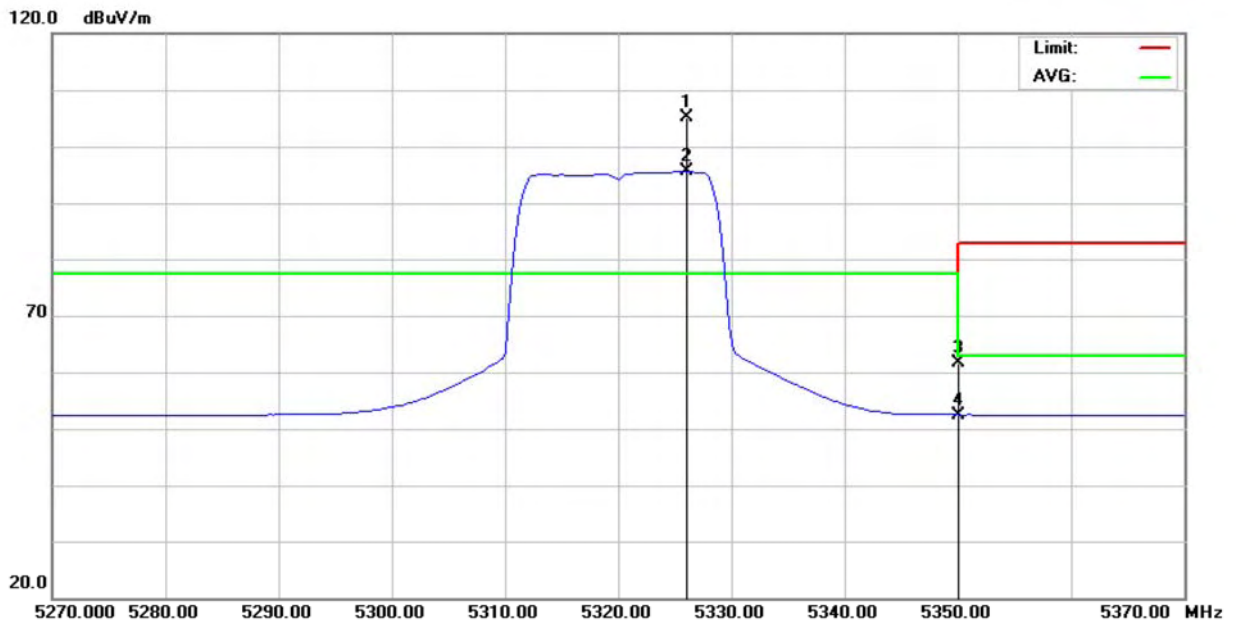


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	5326.000	65.90	39.17	105.07	77.30	27.77	peak	
2	X	5326.000	56.39	39.17	95.56	77.30	18.26	AVG	
3		5350.000	22.35	39.16	61.51	77.30	-15.79	peak	
4		5350.000	13.33	39.16	52.49	63.00	-10.51	AVG	



E.U.T	IEEE 802.11a/b/g/n 2x2 Wireless LAN USB Client	Model Name	AP-3001g
Temperature	26°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz (System)		
Test Mode	IEEE 802.11a/5320 MHz		

Polarization: Horizontal

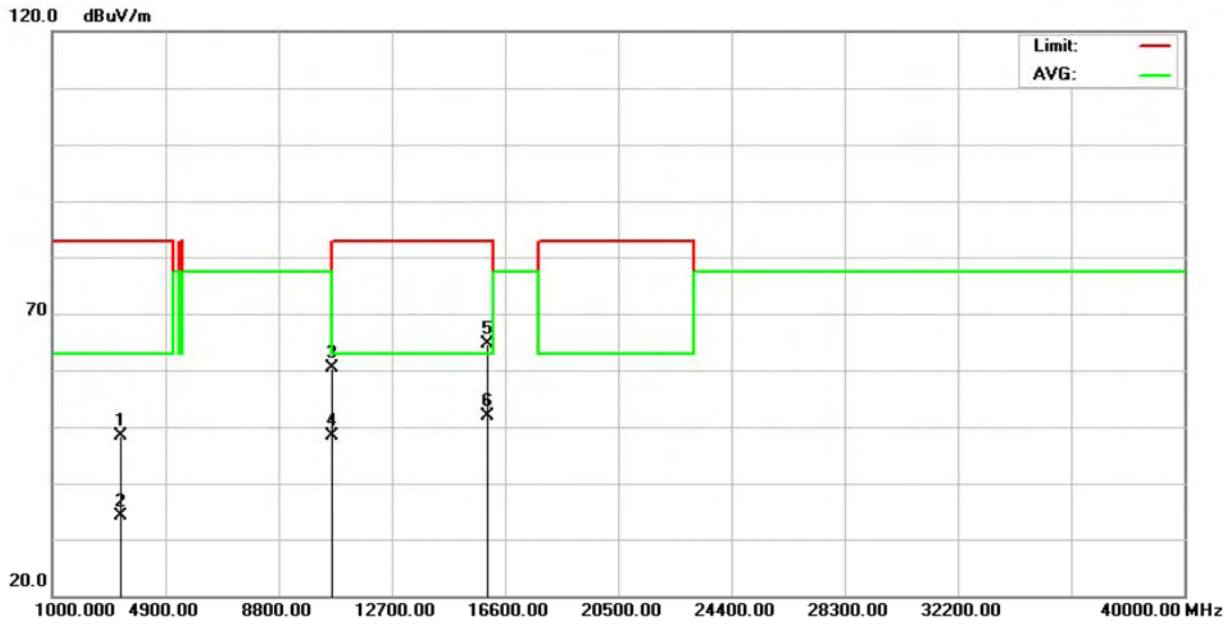

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3327.600	46.10	2.27	48.37	83.00	-34.63	peak	
2		3327.600	31.88	2.27	34.15	63.00	-28.85	AVG	
3		10639.15	42.87	17.46	60.33	83.00	-22.67	peak	
4		10639.15	30.89	17.46	48.35	63.00	-14.65	AVG	
5		15961.05	44.37	20.25	64.62	83.00	-18.38	peak	
6	*	15961.05	31.58	20.25	51.83	63.00	-11.17	AVG	