

FCC Test Report

Equipment : RF BS COMBO
Brand Name : DIGI
Model No. : IB-3500
FCC ID : SUFIB3500
Standard : 47 CFR FCC Part 15.247
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DTS
Applicant : Teraoka Weigh System Pte Ltd
Manufacturer : 4 Leng Kee Rd, #05-03/04/05&11, SIS Building,
Singapore 159088

The product sample received on Oct. 16, 2013 and completely tested on Dec. 31, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



James Fan / Assistant Manager

Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT.....	9
2.1	The Worst Case Modulation Configuration	9
2.2	Test Channel Frequencies Configuration.....	9
2.3	The Worst Case Power Setting Parameter	9
2.4	The Worst Case Measurement Configuration.....	10
2.5	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	12
3.1	AC Power-line Conducted Emissions	12
3.2	6dB Bandwidth	17
3.3	RF Output Power.....	20
3.4	Power Spectral Density	23
3.5	Emissions in non-restricted frequency bands	25
3.6	Transmitter Radiated Unwanted Emissions	30
4	TEST EQUIPMENT AND CALIBRATION DATA	49
	APPENDIX A. TEST PHOTOS	A1

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:0.3149460MHz 27.84 (Margin 22.00dB) - AV 33.90 (Margin 25.94dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	GFSK:1265.22 kHz MSK:565.22 kHz	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] GFSK:16.35 MSK: 8.58	Power [dBm] 30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/3kHz] GFSK: 0.70 MSK: -2.01	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Emissions in non-restricted frequency bands	Out-of -band emissions are 20dB below the highest power	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:2370.00MHz 52.89 (Margin 1.11dB) –AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

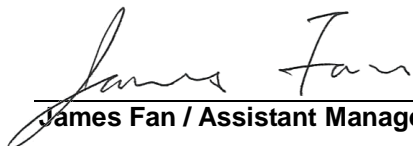

SPORTON INTERNATIONAL INC.
TEL : 886-3-3273456
FAX : 886-3-3270973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)	Co-location
2400-2483.5	GFSK	2402-2475	0-73	16.35	N/A
2400-2483.5	MSK	2402-2475	0-73	8.58	N/A

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
<input checked="" type="checkbox"/>	External antenna (dedicated antennas)
<input type="checkbox"/>	RF connector provided
<input checked="" type="checkbox"/>	Unique antenna connector. (e.g., MMCX, U.FL, IPX, and RP-SMA, RP-N type...)
<input type="checkbox"/>	Standard antenna connector. (e.g., SMA, N, BNC, and TNC type...)

Antenna General Information						
No.	Ant. Cat.	Ant. Type	Brand	Model	Gain (dBi)	Connector
1	External	Reserved SMA Dipole	BORNTEK	B5F-2435-G2	3.5	Ipex

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated normally mode for worst duty cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 100% - GFSK	0.00
<input checked="" type="checkbox"/> 100% - MSK	0.00

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC (48Vdc)	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> External DC adapter	<input checked="" type="checkbox"/> From POE

1.2 Accessories and Support Equipment

Accessories				
No.	Equipment	Brand Name	Model Name	Spec.
1	---	---	---	---

Support Equipment				
No.	Equipment	Brand Name	Model Name	Spec.
1	Adapter for POE	NETGEAR	NU60-F480125-I1NN	I/P: 100-240Vac, 1.4A, 50/60Hz O/P: 48Vdc, 1.25A 1.8m non-shielded cable with one core
2	POE	NETGEAR	GS108P	I/P: 48Vdc, 1.25A

Note: No.1 ~ 2 were provided by client.

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 558074 v03r01

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-318-0055		
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Aaron Liang	23°C / 61%
AC Conduction		CO04-HY	Skys Huang	18°C / 58%
Radiated Emission		03CH07-HY	Mark Liao	22°C / 65%
Test site registered number [636805] with FCC				
Test site registered number [4086B-2] with IC				

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth		±1.42 %	N/A
RF output power, conducted		±0.63 dB	N/A
Power density, conducted		±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing			
Modulation Mode	Transmit Chains (N _{TX})	Data Rate	RF Output Power (dBm)
GFSK, 2Mbps	1	2 Mbps	16.35
MSK, 500Kbps	1	500 kbps	8.58

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
GFSK / MSK	2402-(F1), 2439-(F2), 2475-(F3)




2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	SmartRF Studio 7, Version 1.10.3		
Modulation Mode	2402 MHz	2439 MHz	2475 MHz
GFSK, 2Mbps	C1	D1	D1
MSK, 500Kbps	-16	-14	-12



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Tx1 Mode (GFSK)
2	Tx2 Mode (MSK)

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth
Test Condition	Conducted measurement at transmit chains
Modulation Mode	GFSK-2Mbps / MSK-500Kbps

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position.		
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X.		
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes. The worst plane is Z.		
Operating Mode	<input checked="" type="checkbox"/> 1. Transmit / Receive		
Modulation Mode	GFSK, MSK		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

2.5 Test Setup Diagram

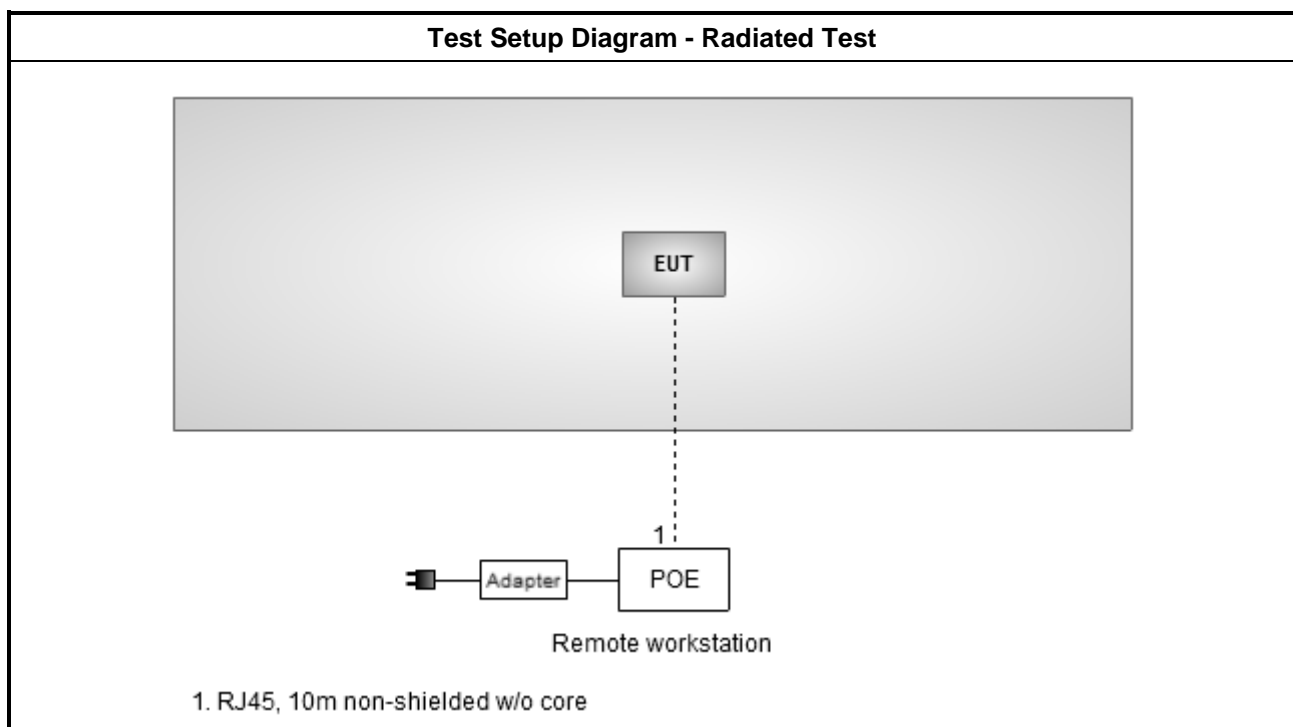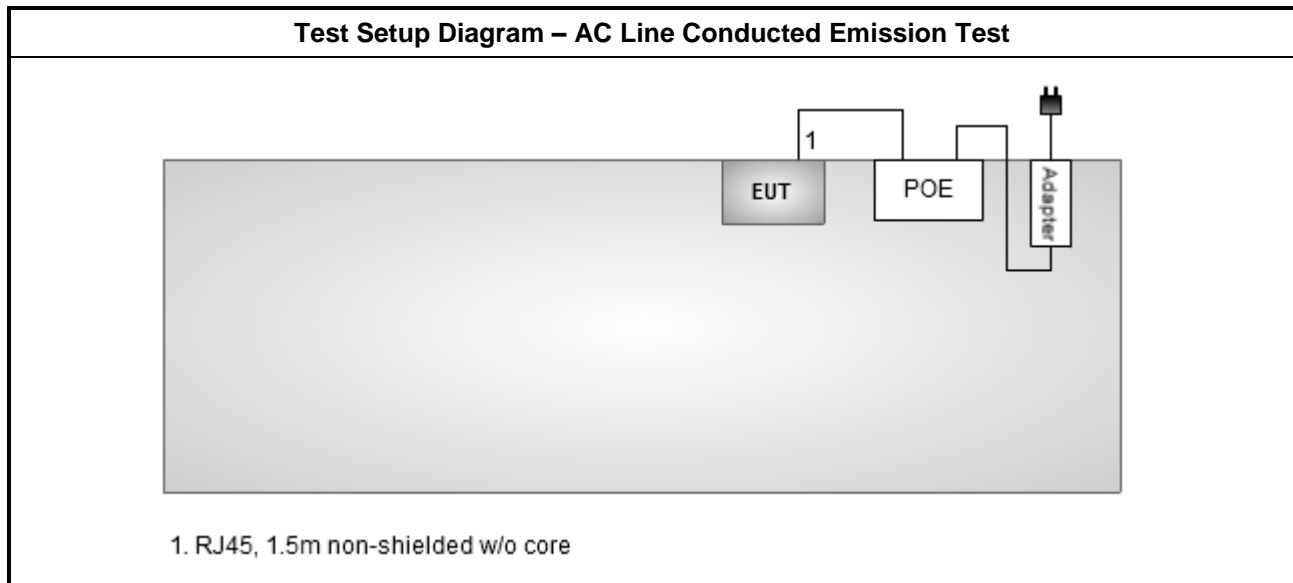

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

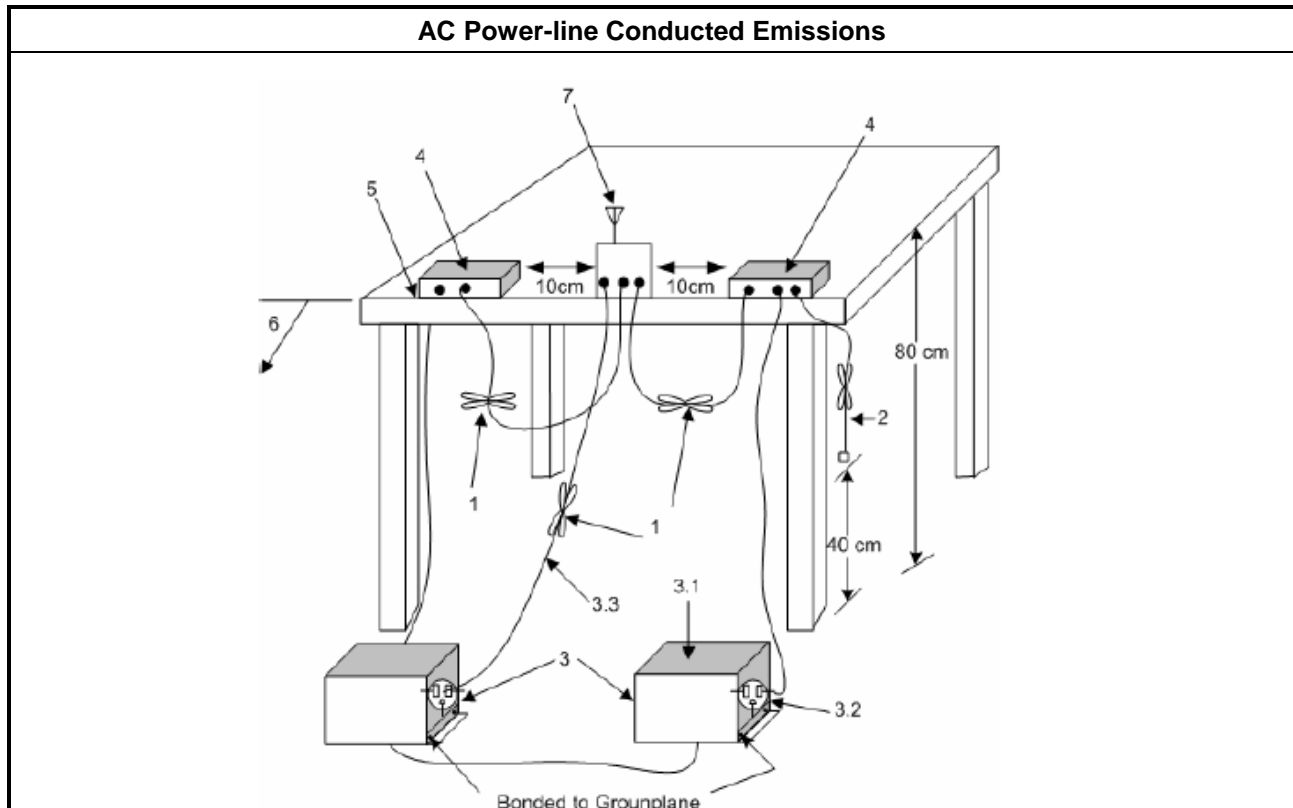


3.1.5 Test Result of AC Power-line Conducted Emissions

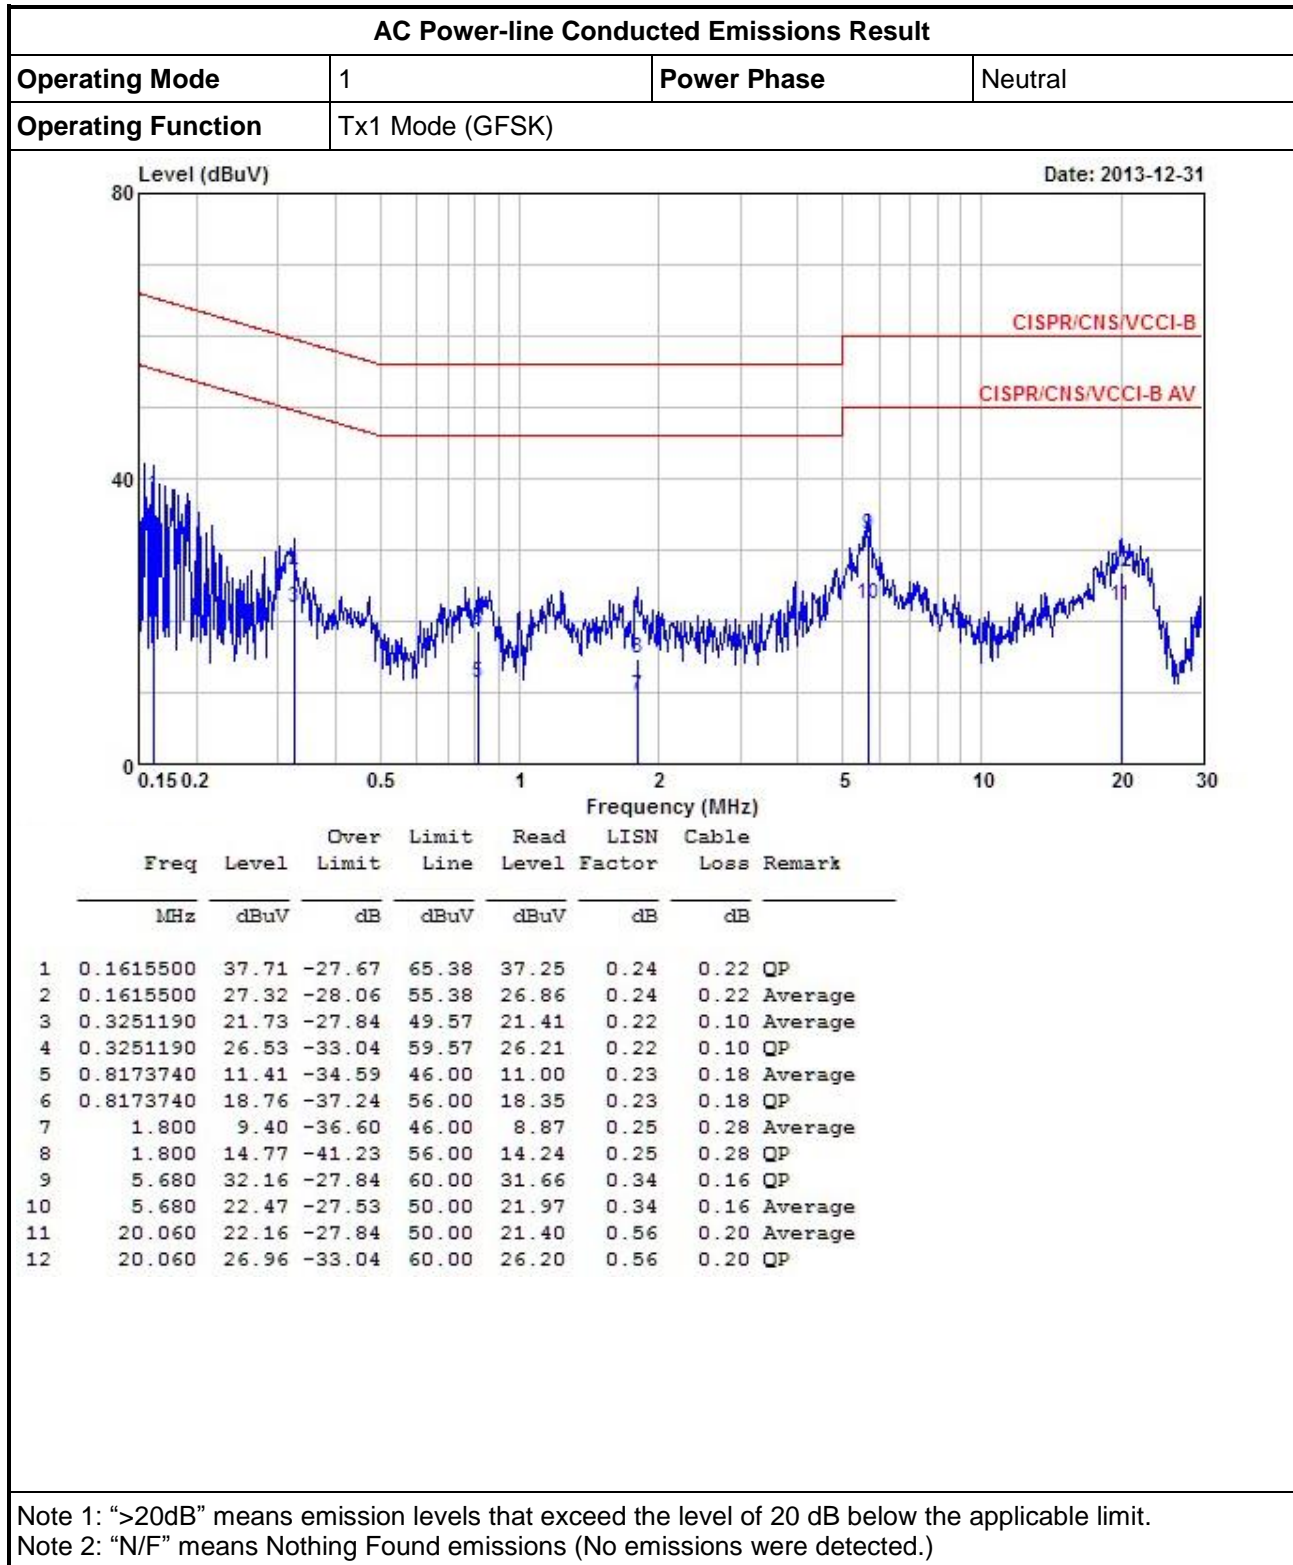

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Tx1 Mode (GFSK)		

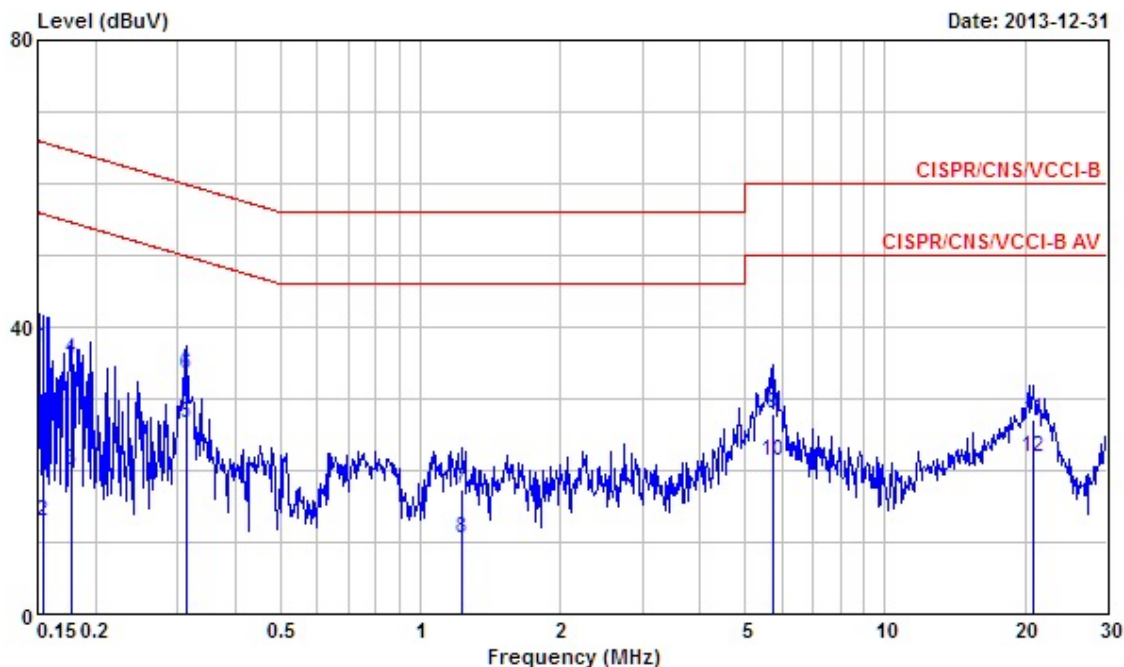


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1548450	37.10	-28.64	65.74	36.74	0.11	0.25	QP
2	0.1548450	12.81	-42.93	55.74	12.45	0.11	0.25	Average
3	0.1767760	20.09	-34.55	54.64	19.81	0.11	0.17	Average
4	0.1767760	35.55	-29.09	64.64	35.27	0.11	0.17	QP
5	0.3149460	26.65	-23.19	49.84	26.45	0.10	0.10	Average
6	0.3149460	33.46	-26.38	59.84	33.26	0.10	0.10	QP
7	1.230	17.34	-38.66	56.00	16.99	0.12	0.23	QP
8	1.230	10.46	-35.54	46.00	10.11	0.12	0.23	Average
9	5.740	27.98	-32.02	60.00	27.63	0.19	0.16	QP
10	5.740	21.26	-28.74	50.00	20.91	0.19	0.16	Average
11	20.920	27.08	-32.92	60.00	26.60	0.32	0.16	QP
12	20.920	21.72	-28.28	50.00	21.24	0.32	0.16	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Neutral
Operating Function	Tx2 Mode (MSK)		

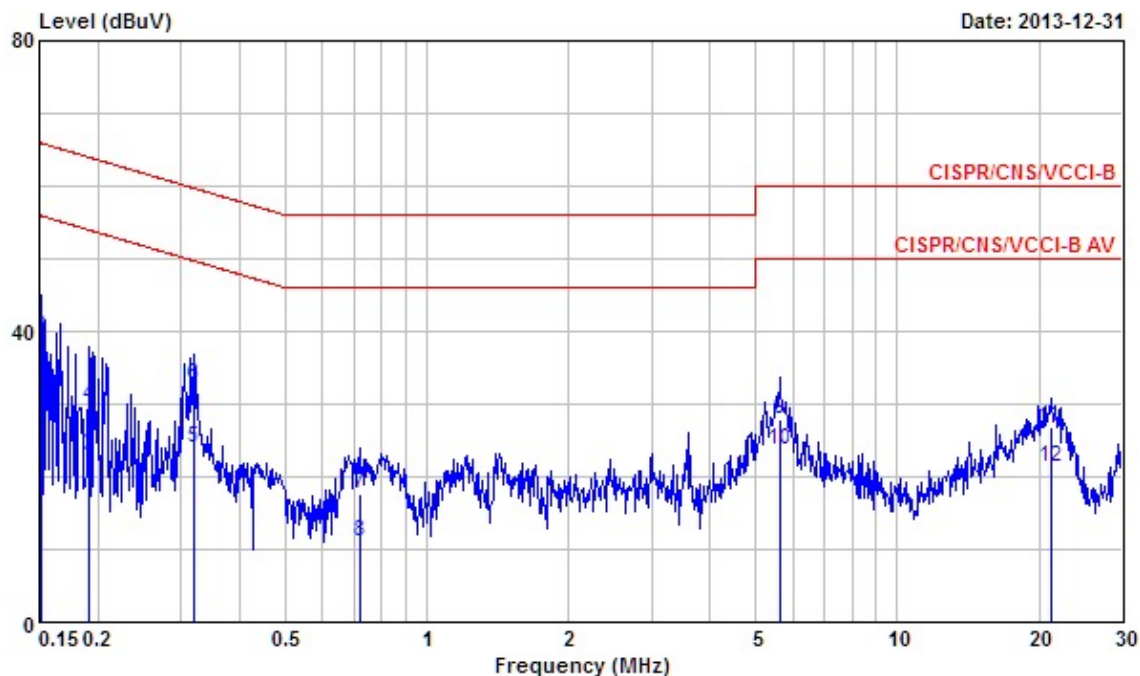


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1515980	29.30	-26.61	55.91	28.80	0.24	0.26	Average
2	0.1515980	39.13	-26.78	65.91	38.63	0.24	0.26	QP
3	0.1903870	23.02	-31.00	54.02	22.66	0.23	0.13	Average
4	0.1903870	29.76	-34.26	64.02	29.40	0.23	0.13	QP
5	0.3183010	23.89	-25.86	49.75	23.57	0.22	0.10	Average
6	0.3183010	32.57	-27.18	59.75	32.25	0.22	0.10	QP
7	0.7197740	17.76	-38.24	56.00	17.37	0.23	0.16	QP
8	0.7197740	11.03	-34.97	46.00	10.64	0.23	0.16	Average
9	5.620	27.86	-32.14	60.00	27.36	0.34	0.16	QP
10	5.620	23.76	-26.24	50.00	23.26	0.34	0.16	Average
11	21.150	26.83	-33.17	60.00	26.10	0.58	0.15	QP
12	21.150	21.35	-28.65	50.00	20.62	0.58	0.15	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	Tx2 Mode (MSK)		

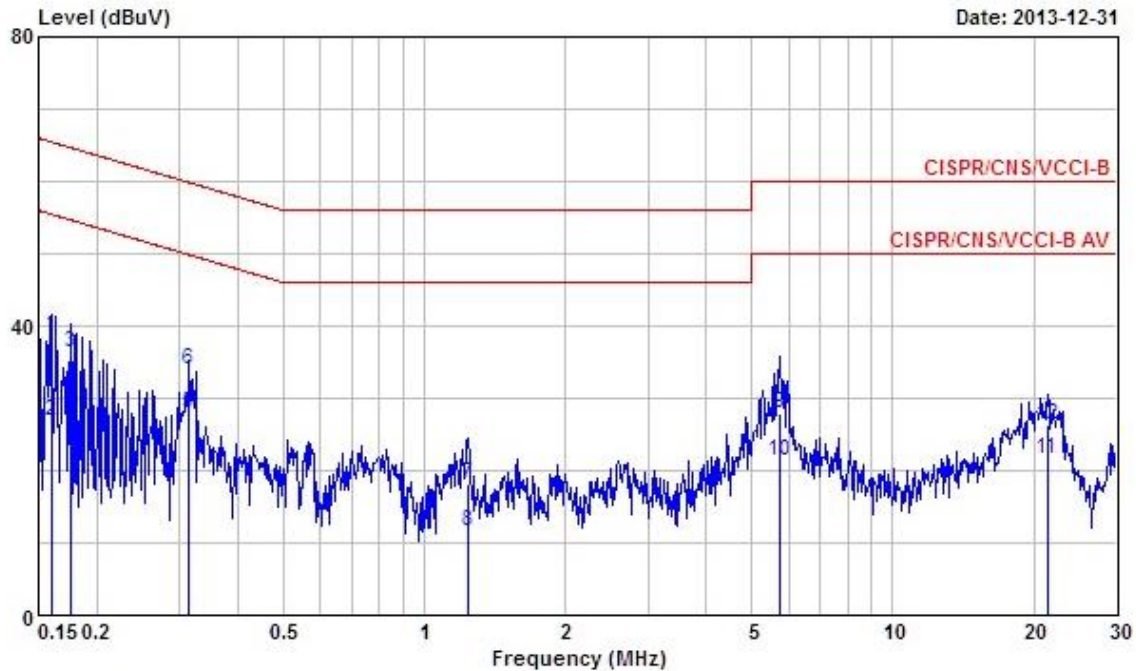

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1598470	38.76	-26.71	65.47	38.42	0.11	0.23	QP
2	0.1598470	26.73	-28.74	55.47	26.39	0.11	0.23	Average
3	0.1758420	36.45	-28.23	64.68	36.16	0.11	0.18	QP
4	0.1758420	28.09	-26.59	54.68	27.80	0.11	0.18	Average
5	0.3149460	27.84	-22.00	49.84	27.64	0.10	0.10	Average
6	0.3149460	33.90	-25.94	59.84	33.70	0.10	0.10	QP
7	1.240	18.16	-37.84	56.00	17.81	0.12	0.23	QP
8	1.240	11.63	-34.37	46.00	11.28	0.12	0.23	Average
9	5.740	27.90	-32.10	60.00	27.55	0.19	0.16	QP
10	5.740	21.26	-28.74	50.00	20.91	0.19	0.16	Average
11	21.370	21.50	-28.50	50.00	21.04	0.32	0.14	Average
12	21.370	26.44	-33.56	60.00	25.98	0.32	0.14	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
<input checked="" type="checkbox"/>	6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 8.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 8.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.4 Test Setup

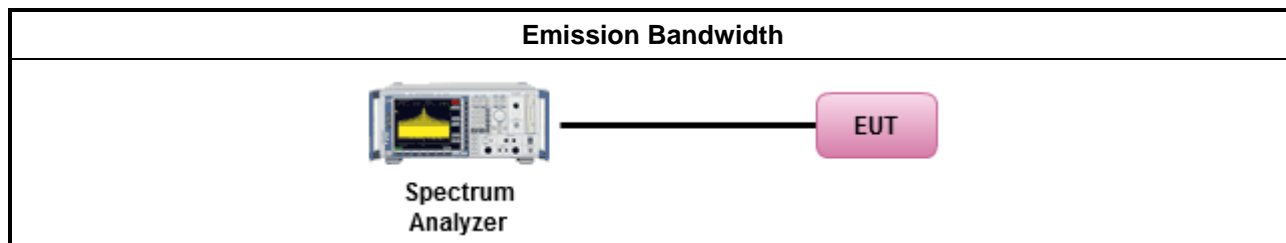


3.2.5 Test Result of Emission Bandwidth


Emission Bandwidth Result			
Modulation Mode	Freq. (MHz)	99% Bandwidth (kHz)	6dB Bandwidth (kHz)
GFSK-2Mbps	2402	2083.94	1286.96
GFSK-2Mbps	2439	2079.59	1265.22
GFSK-2Mbps	2475	2070.91	1365.22
MSK-500kbps	2402	1046.31	569.57
MSK-500kbps	2439	1085.38	569.57
MSK-500kbps	2475	1111.43	565.22
Limit		N/A	≥500 kHz
Result		Complied	

Worst 6dB Bandwidth Plots

GFSK-2Mbps

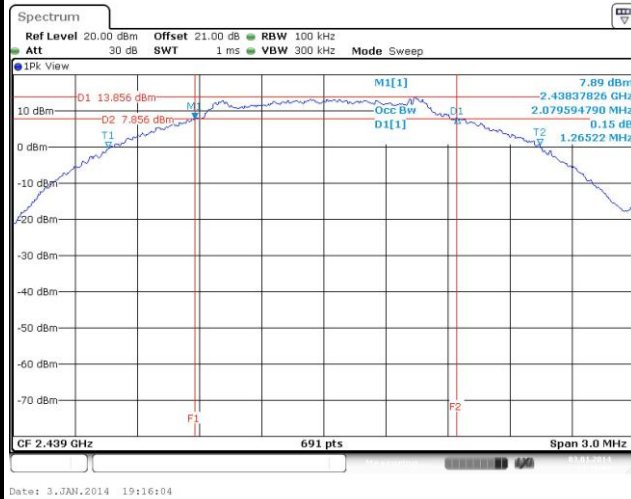


MSK-500kbps

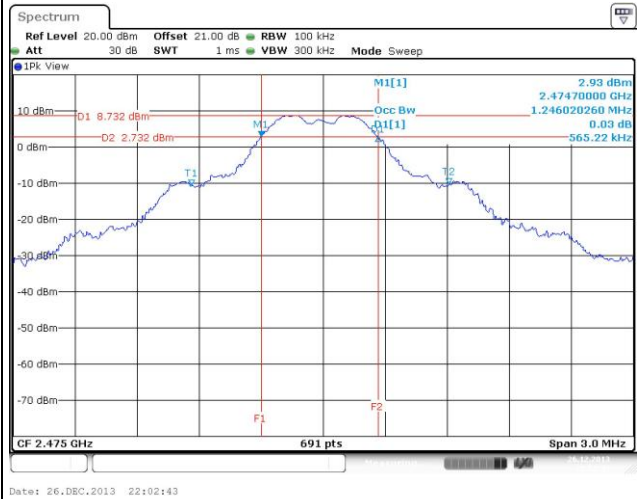


Worst 99% Bandwidth Plots

GFSK-2Mbps

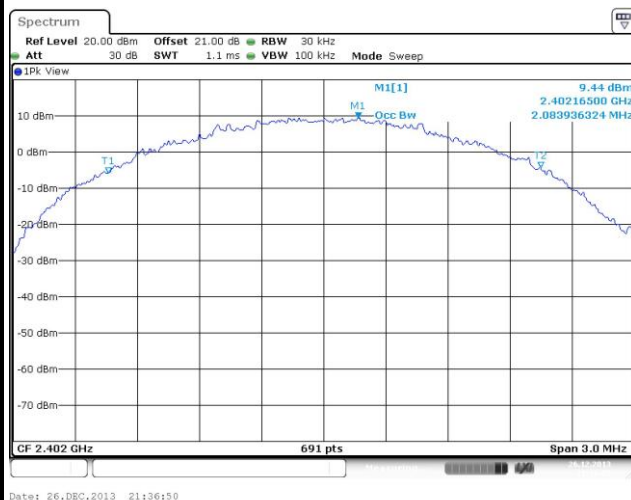

MSK-500kbps

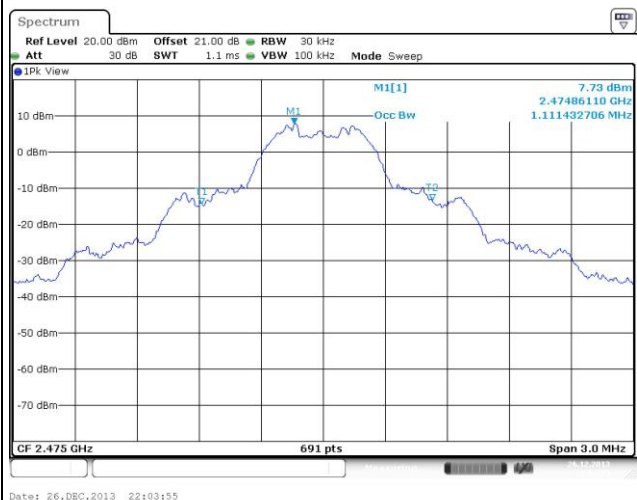

3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit for Digital Modulation Systems	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band:
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/>	2400-2483.5 MHz Band
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Maximum Peak Conducted Output Power
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.1 Option 1 (RBW ≥ EBW method).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.2 Option 2 (integrated band power method).
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.1.3 Option 2 (peak power meter for VBW ≥ DTS BW)
<input checked="" type="checkbox"/>	Maximum Conducted Output Power (For reference only)
	[duty cycle ≥ 98% or external video / power trigger]
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.2.2 Method AVGSA-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.2.3 Method AVGSA-1 Alt. (slow sweep speed)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.2.4 Method AVGSA-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.2.5 Method AVGSA-2 Alt. (slow sweep speed)
	RF power meter and average over on/off periods with duty factor or gated trigger
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 9.2.3 Method AVGPM (using an RF average power meter).
<input checked="" type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input type="checkbox"/>	The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
<input checked="" type="checkbox"/>	If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

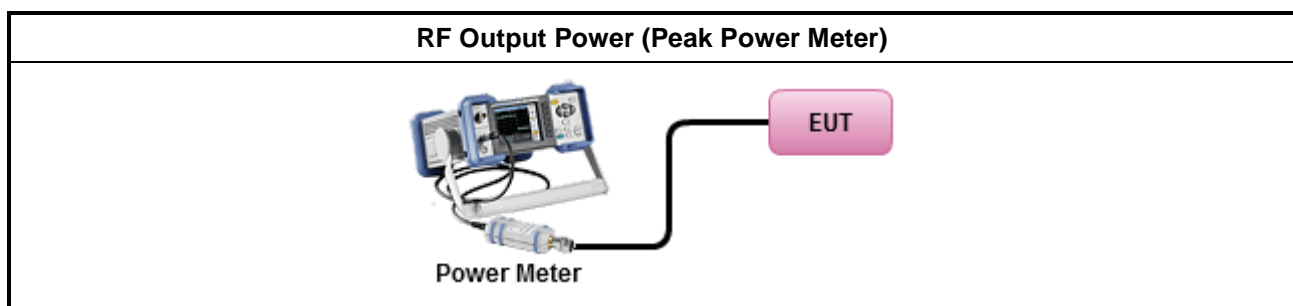

3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
GFSK-2Mbps	2402	15.54	30	3.5	19.04	36
GFSK-2Mbps	2439	16.35	30	3.5	19.85	36
GFSK-2Mbps	2475	15.45	30	3.5	18.95	36
MSK-500kbps	2402	6.46	30	3.5	9.96	36
MSK-500kbps	2439	8.12	30	3.5	11.62	36
MSK-500kbps	2475	8.58	30	3.5	12.08	36
Result		Complied				

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
GFSK-2Mbps	2402	14.74	30	3.5	18.24	36
GFSK-2Mbps	2439	15.46	30	3.5	18.96	36
GFSK-2Mbps	2475	14.59	30	3.5	18.09	36
MSK-500kbps	2402	6.35	30	3.5	9.85	36
MSK-500kbps	2439	7.88	30	3.5	11.38	36
MSK-500kbps	2475	8.35	30	3.5	11.85	36
Result		Complied				

Note: Average power is for reference only.

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
<input checked="" type="checkbox"/>	Power Spectral Density (PSD) \leq 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 10.2 Method PKPSD (RBW=3kHz;detector=peak).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 10.3 Method AVGPSD-1 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 10.4 Method AVGPSD-1 Alt. (slow sweep speed)
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 10.5 Method AVGPSD-2 (spectral trace averaging).
<input type="checkbox"/>	Refer as FCC KDB 558074 v03r01, clause 10.6 Method AVGPSD-2 Alt. (slow sweep speed)
<input checked="" type="checkbox"/>	Conducted measurement.
<input checked="" type="checkbox"/>	The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/>	The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.4.4 Test Setup

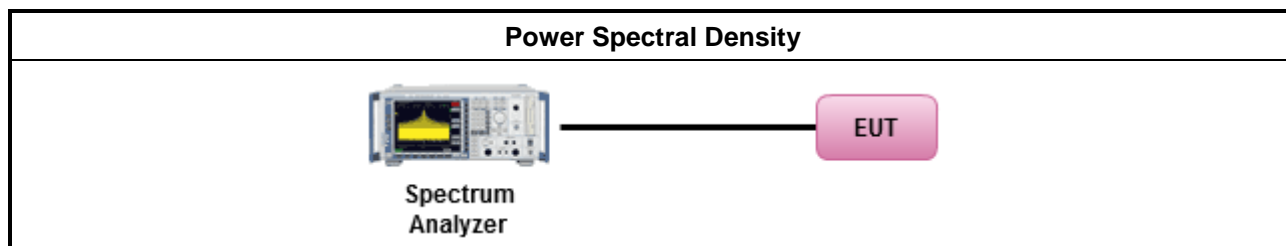

3.4.5 Test Result of Power Spectral Density

Power Spectral Density Result (dBm/3kHz)			
Modulation Mode	Freq. (MHz)	PSD	PSD Limit
GFSK-2Mbps	2402	-0.03	8
GFSK-2Mbps	2439	0.30	8
GFSK-2Mbps	2475	0.70	8
MSK-500kbps	2402	-5.53	8
MSK-500kbps	2439	-3.97	8
MSK-500kbps	2475	-2.01	8
Result		Complied	

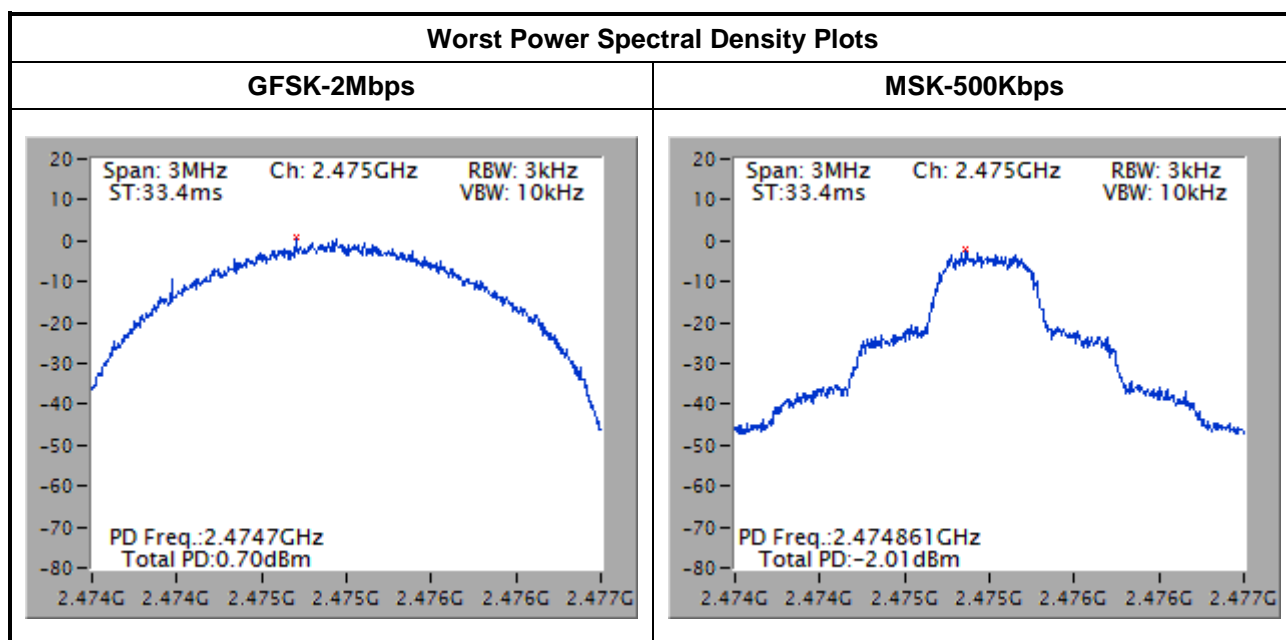

3.5 Emissions in non-restricted frequency bands

3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.5.4 Test Setup


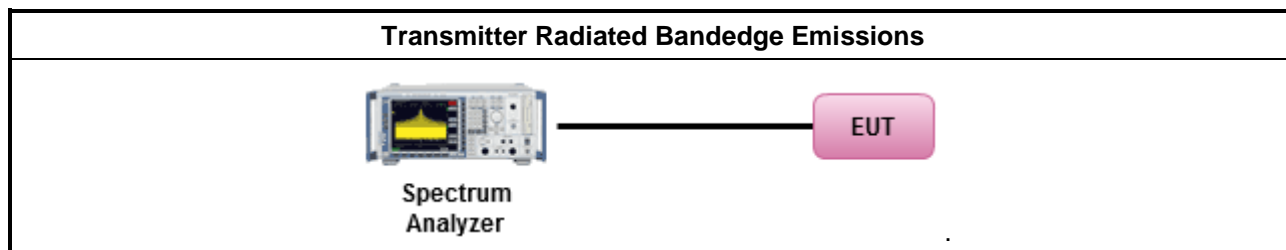


3.5.5 Test Result of Emissions in non-restricted frequency bands


GFSK

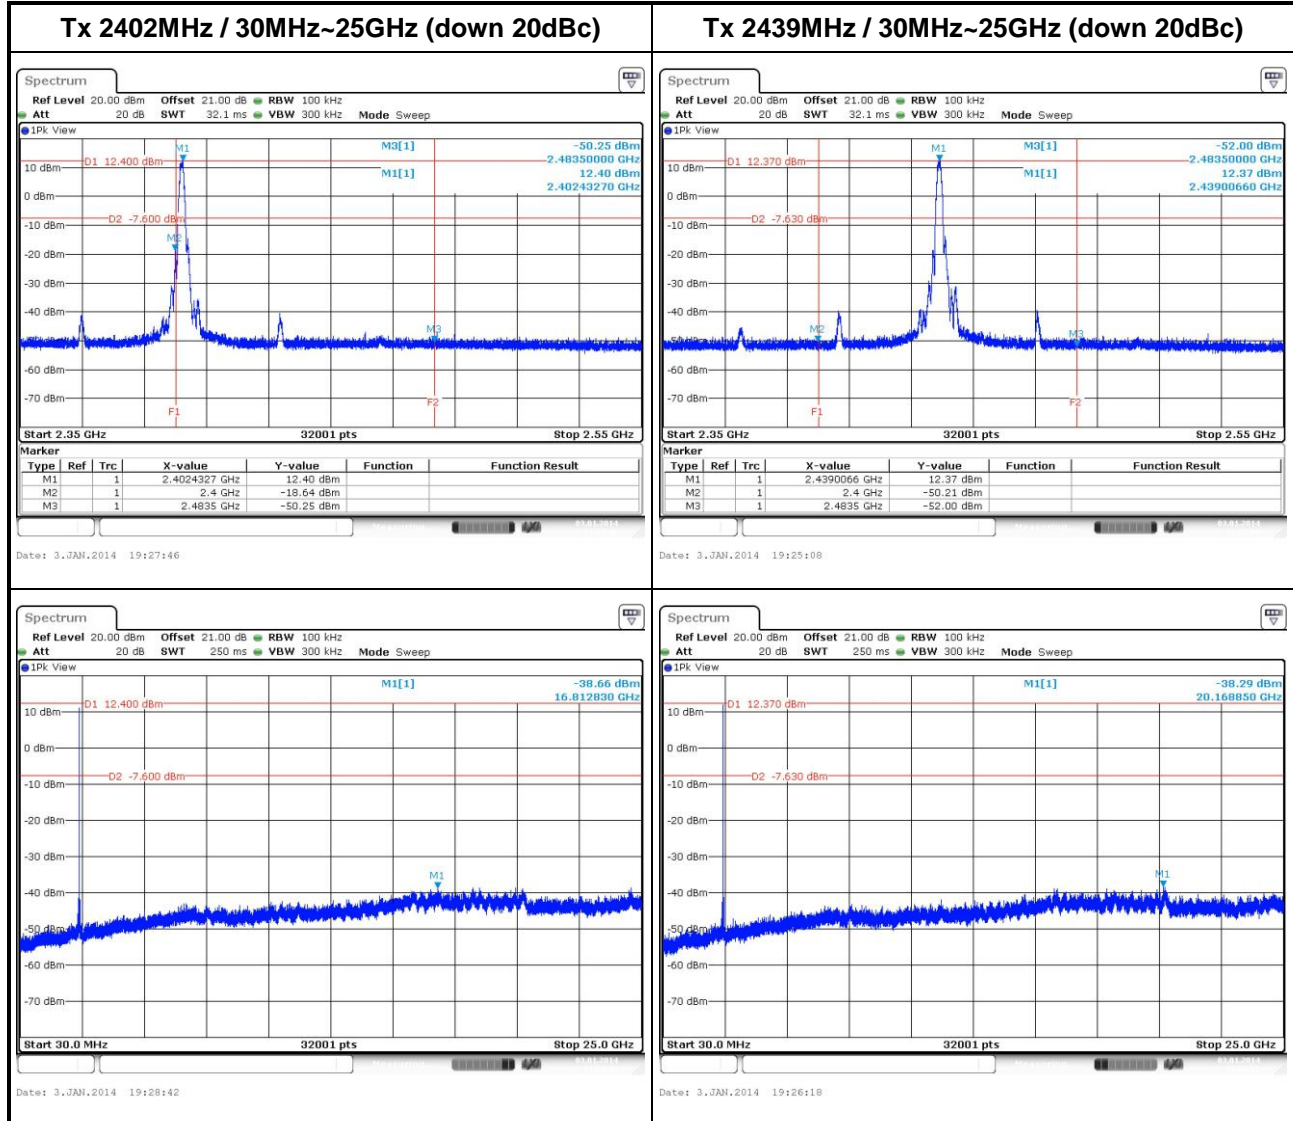



Tx 2475MHz / 30MHz~25GHz (down 20dBc)

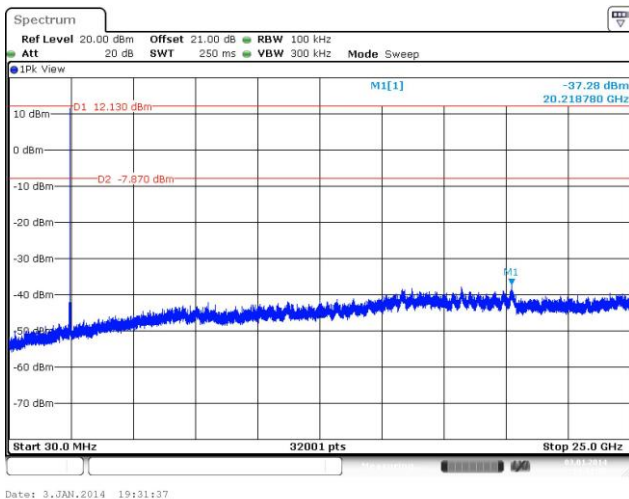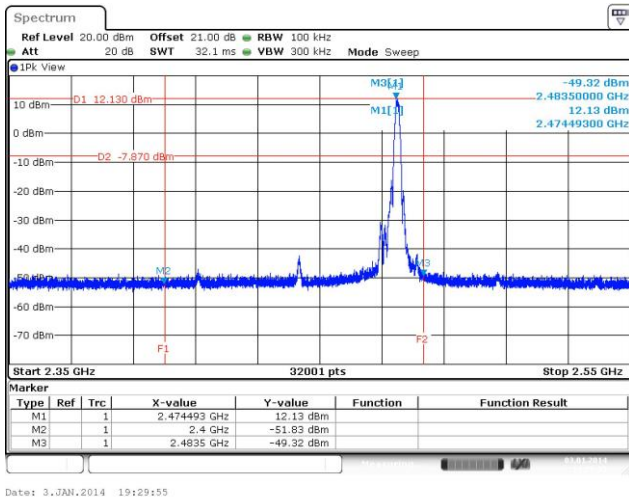

MSK

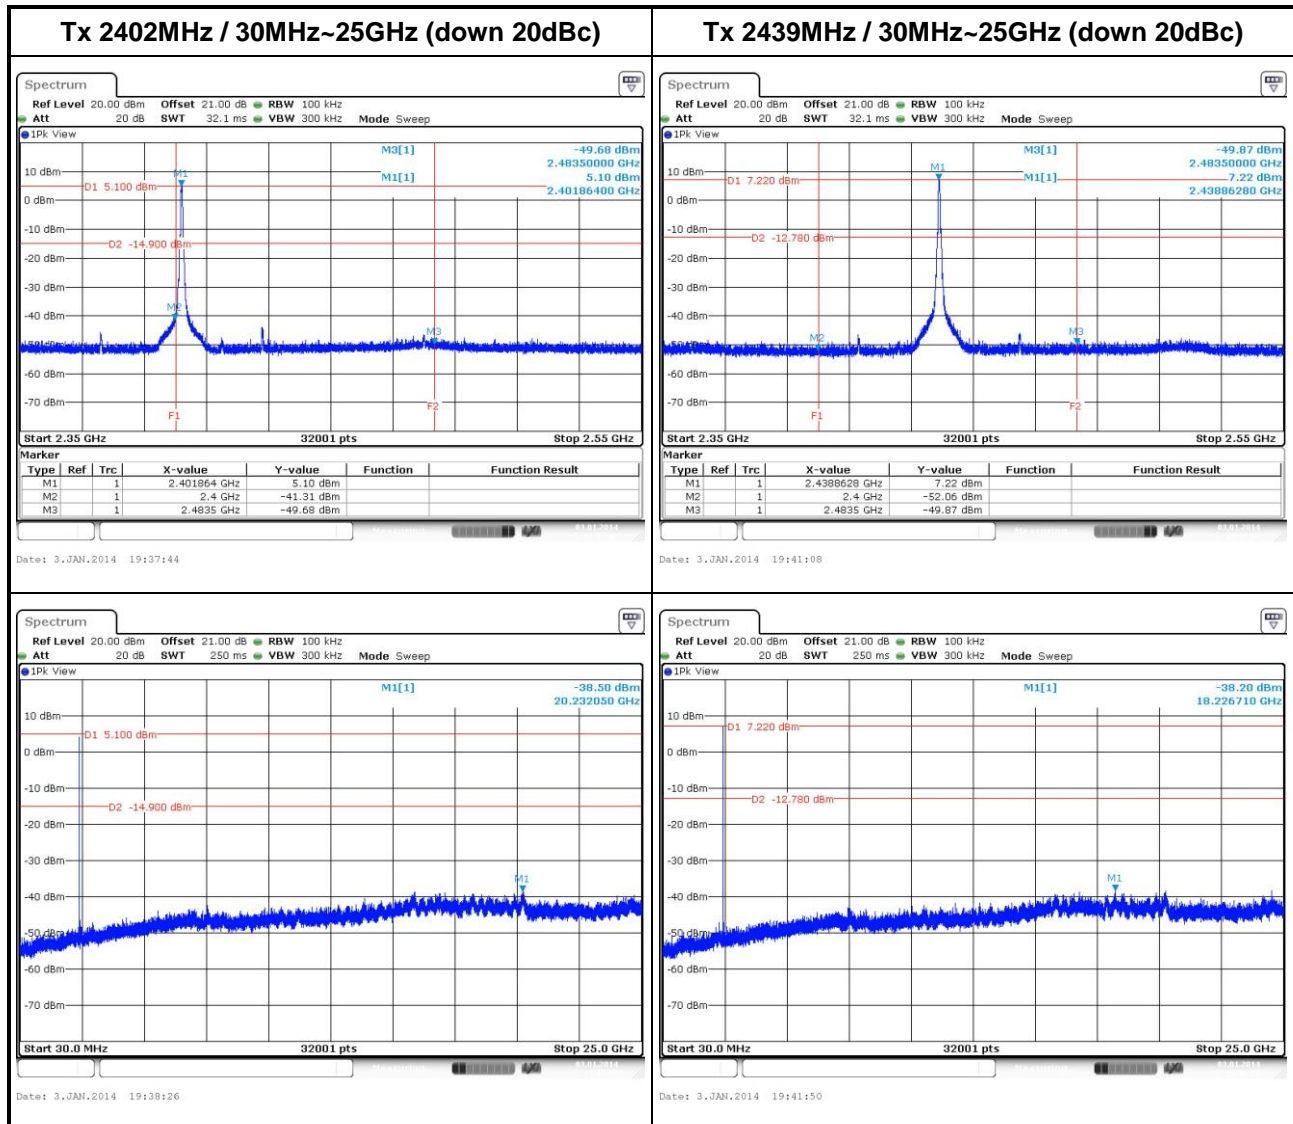

Tx 2475MHz / 30MHz~25GHz (down 20dBc)

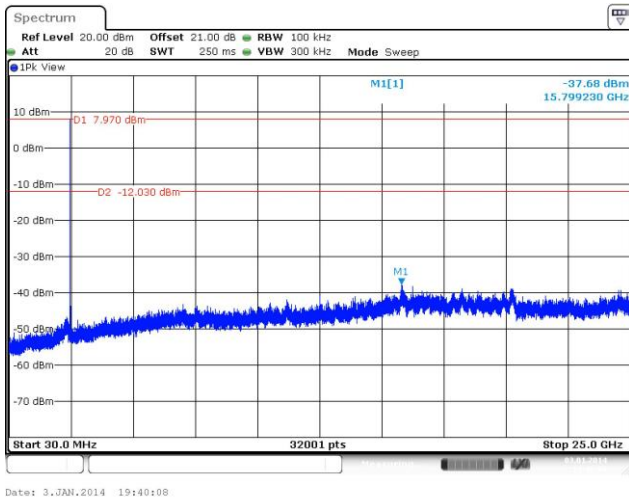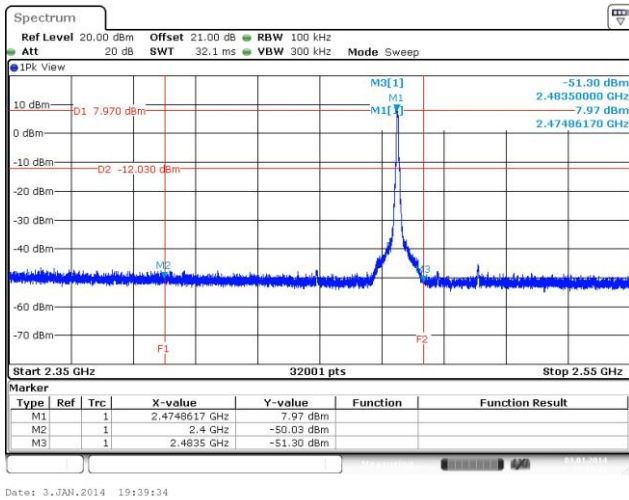

3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$, where T is pulse time.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.


3.6.4 Test Setup

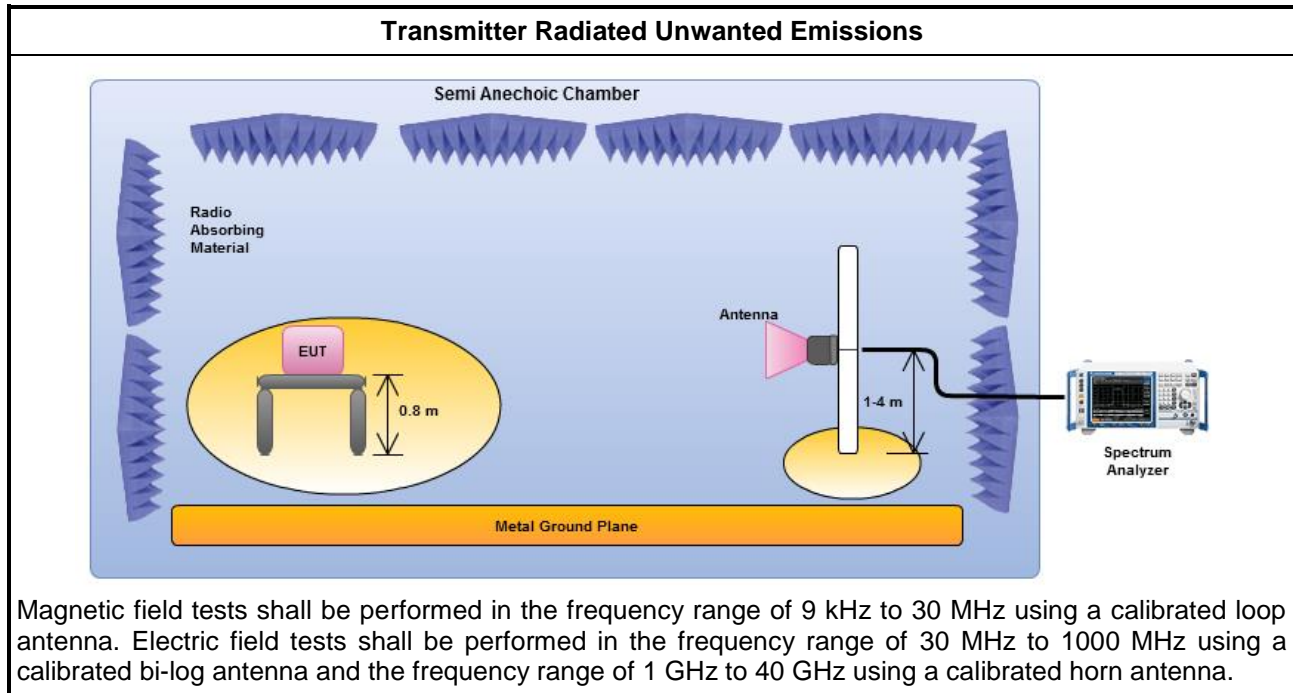

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.6.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

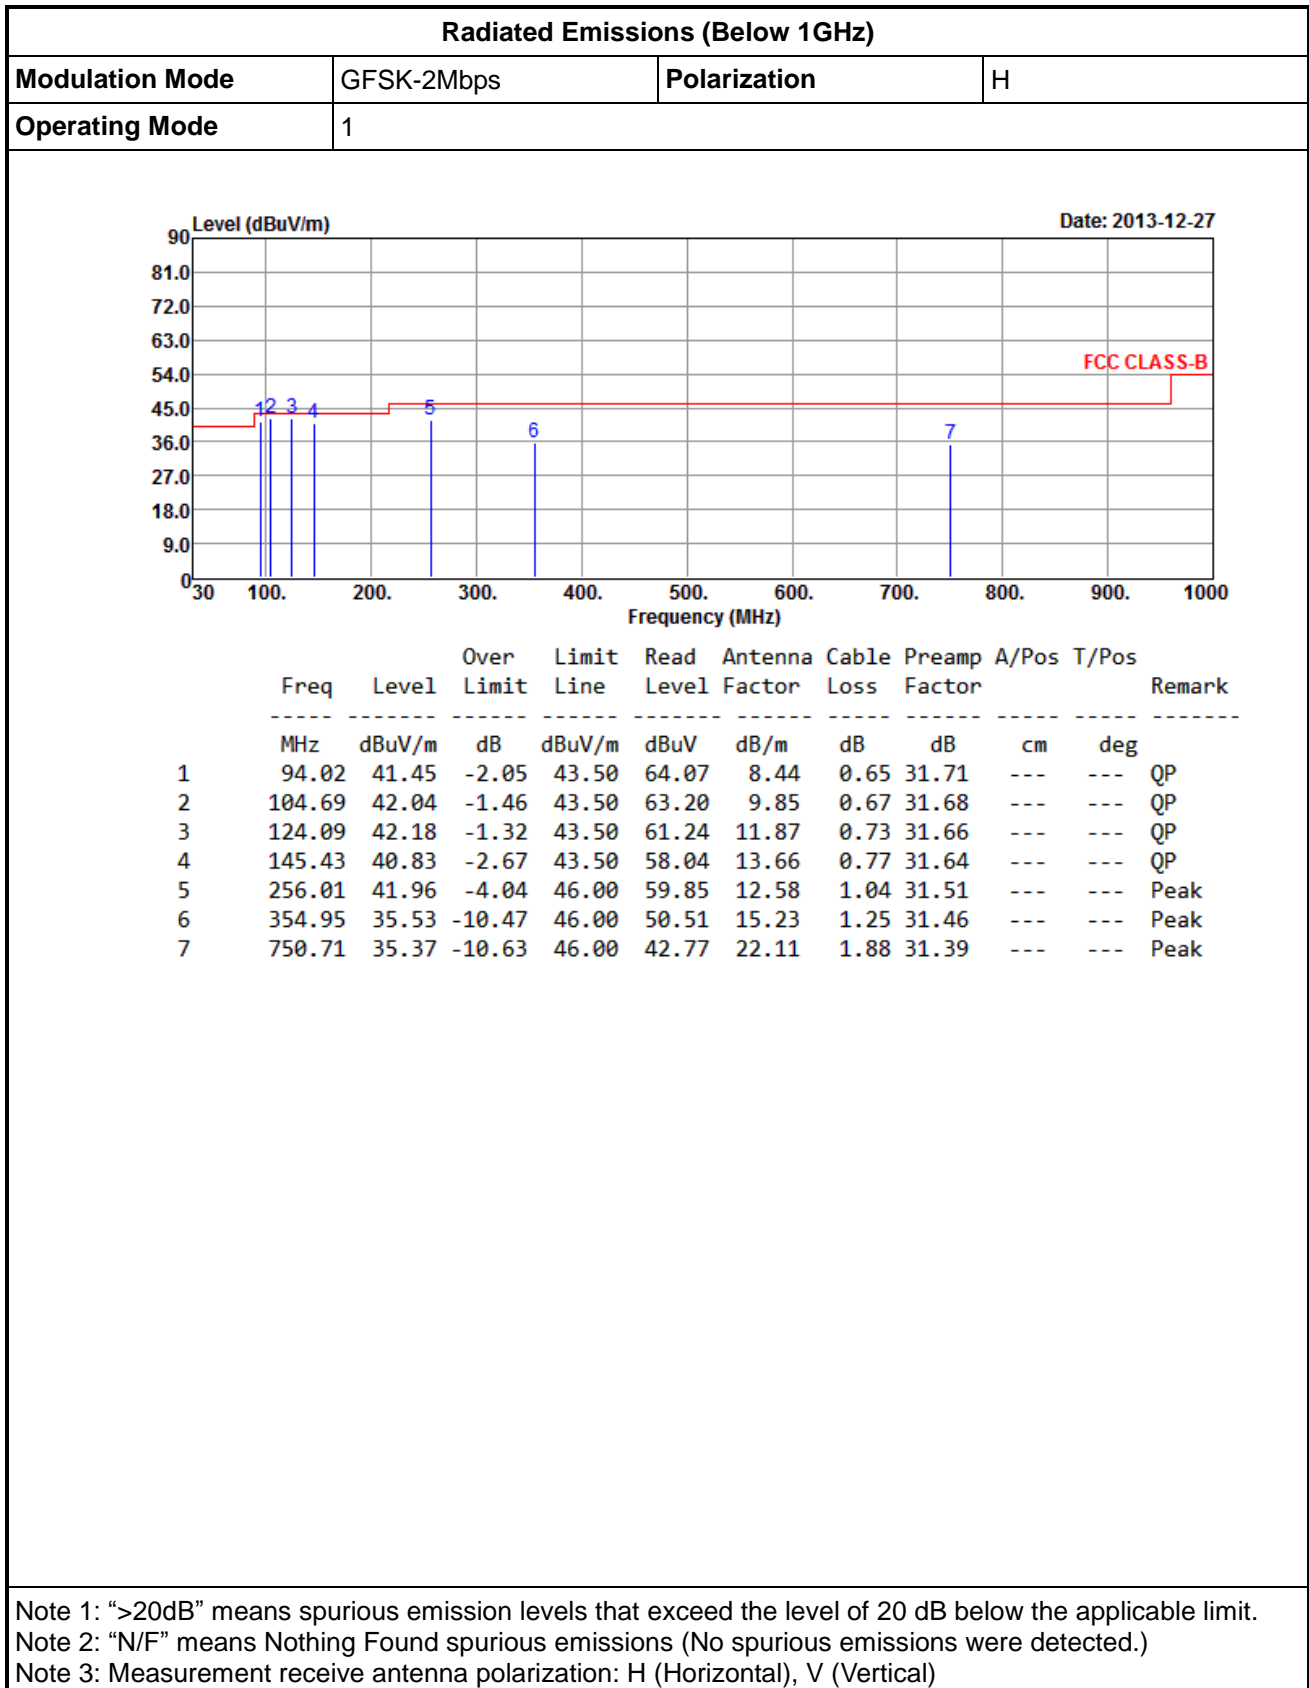

Radiated Emissions (Below 1GHz)

Modulation Mode	GFSK-2Mbps	Polarization	V
Operating Mode	1		

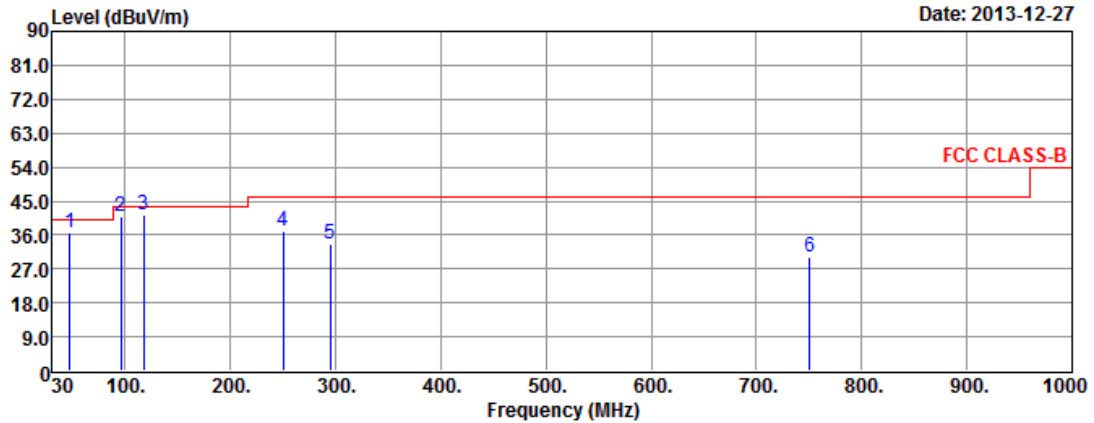


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	47.46	36.43	-3.57	40.00	53.18	14.55	0.49	31.79	---	---	Peak
2	95.96	40.74	-2.76	43.50	63.13	8.66	0.65	31.70	---	---	Peak
3	117.30	41.33	-2.17	43.50	61.01	11.28	0.71	31.67	---	---	QP
4	250.19	36.83	-9.17	46.00	54.90	12.41	1.03	31.51	---	---	Peak
5	294.81	33.68	-12.32	46.00	50.12	13.90	1.12	31.46	---	---	Peak
6	750.71	30.34	-15.66	46.00	37.74	22.11	1.88	31.39	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Radiated Emissions (Below 1GHz)

Modulation Mode	MSK-500kbps	Polarization	H
Operating Mode	2		

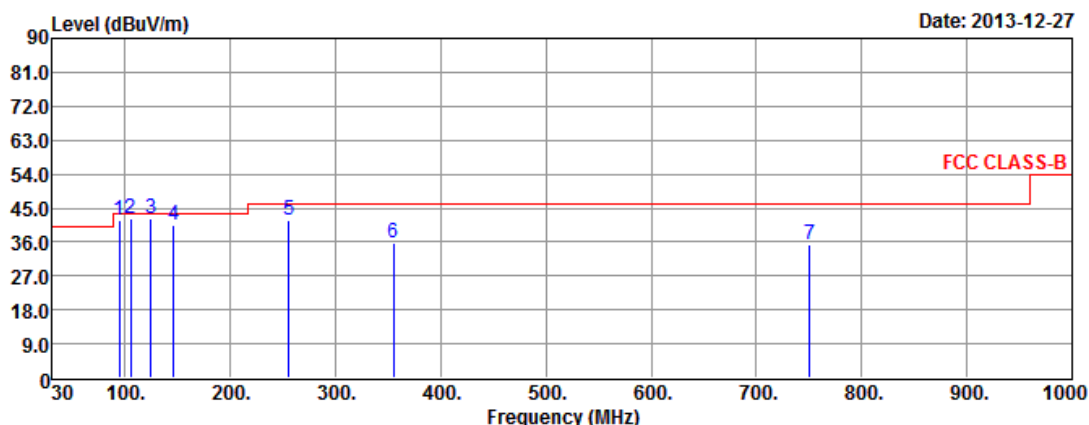


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	94.25	41.58	-1.92	43.50	64.17	8.47	0.65	31.71	---	---	QP
2	105.11	42.36	-1.14	43.50	63.45	9.92	0.67	31.68	---	---	QP
3	124.55	42.31	-1.19	43.50	61.33	11.91	0.73	31.66	---	---	QP
4	145.98	40.65	-2.85	43.50	57.84	13.68	0.77	31.64	---	---	QP
5	255.81	41.67	-4.33	46.00	59.57	12.57	1.04	31.51	---	---	Peak
6	355.21	35.66	-10.34	46.00	50.63	15.24	1.25	31.46	---	---	Peak
7	750.29	35.48	-10.52	46.00	42.89	22.10	1.88	31.39	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Radiated Emissions (Below 1GHz)


Modulation Mode	MSK-500kbps	Polarization	V
Operating Mode	2		

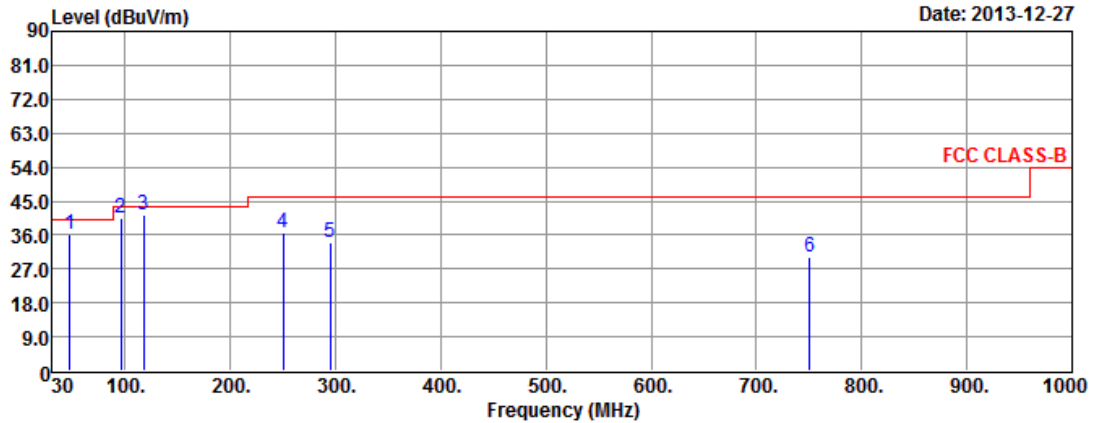

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	47.23	36.21	-3.79	40.00	52.97	14.54	0.49	31.79	---	---	Peak
2	95.84	40.66	-2.84	43.50	63.08	8.64	0.65	31.71	---	---	Peak
3	117.25	41.18	-2.32	43.50	60.86	11.28	0.71	31.67	---	---	QP
4	250.06	36.75	-9.25	46.00	54.83	12.40	1.03	31.51	---	---	Peak
5	294.72	33.81	-12.19	46.00	50.26	13.89	1.12	31.46	---	---	Peak
6	750.44	30.15	-15.85	46.00	37.56	22.10	1.88	31.39	---	---	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

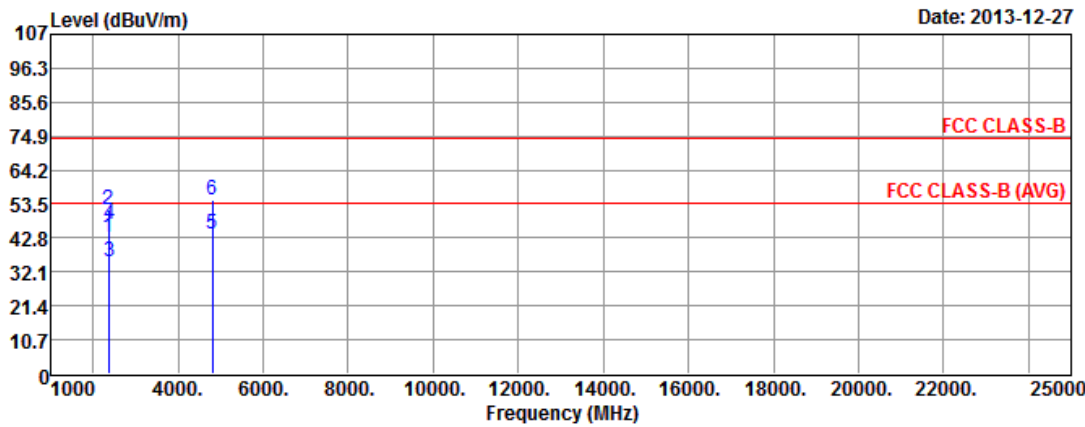Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																										
Modulation Mode	GFSK-2Mbps				Test Freq. (FX)			F1																																																																																																		
Operating Mode	1				Polarization			H																																																																																																		
<div><div><div>Level (dBUV/m)</div><div></div><div>Date: 2013-12-27</div></div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>Read Level</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preampl Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dB</th><th>dBUV/m</th><th>dBUV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2370.00</td><td>43.13</td><td>-10.87</td><td>54.00</td><td>46.33</td><td>26.86</td><td>4.58</td><td>34.64</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>2</td><td>2370.00</td><td>51.68</td><td>-22.32</td><td>74.00</td><td>54.88</td><td>26.86</td><td>4.58</td><td>34.64</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>2390.00</td><td>35.46</td><td>-18.54</td><td>54.00</td><td>38.58</td><td>26.91</td><td>4.60</td><td>34.63</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>4</td><td>2390.00</td><td>47.24</td><td>-26.76</td><td>74.00</td><td>50.36</td><td>26.91</td><td>4.60</td><td>34.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>4804.00</td><td>44.21</td><td>-9.79</td><td>54.00</td><td>39.59</td><td>31.06</td><td>6.74</td><td>33.18</td><td>---</td><td>---</td><td>Average</td></tr><tr><td>6</td><td>4804.00</td><td>54.90</td><td>-19.10</td><td>74.00</td><td>50.28</td><td>31.06</td><td>6.74</td><td>33.18</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table></div>												Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark		MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg		1	2370.00	43.13	-10.87	54.00	46.33	26.86	4.58	34.64	---	---	Average	2	2370.00	51.68	-22.32	74.00	54.88	26.86	4.58	34.64	---	---	Peak	3	2390.00	35.46	-18.54	54.00	38.58	26.91	4.60	34.63	---	---	Average	4	2390.00	47.24	-26.76	74.00	50.36	26.91	4.60	34.63	---	---	Peak	5	4804.00	44.21	-9.79	54.00	39.59	31.06	6.74	33.18	---	---	Average	6	4804.00	54.90	-19.10	74.00	50.28	31.06	6.74	33.18	---	---	Peak
	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	A/Pos	T/Pos	Remark																																																																																															
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg																																																																																																
1	2370.00	43.13	-10.87	54.00	46.33	26.86	4.58	34.64	---	---	Average																																																																																															
2	2370.00	51.68	-22.32	74.00	54.88	26.86	4.58	34.64	---	---	Peak																																																																																															
3	2390.00	35.46	-18.54	54.00	38.58	26.91	4.60	34.63	---	---	Average																																																																																															
4	2390.00	47.24	-26.76	74.00	50.36	26.91	4.60	34.63	---	---	Peak																																																																																															
5	4804.00	44.21	-9.79	54.00	39.59	31.06	6.74	33.18	---	---	Average																																																																																															
6	4804.00	54.90	-19.10	74.00	50.28	31.06	6.74	33.18	---	---	Peak																																																																																															
<div>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div> <div>Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div> <div>Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div> <div>Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.</div> <div>Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.</div>																																																																																																										

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-2Mbps	Test Freq. (FX)	F1
Operating Mode	1	Polarization	V

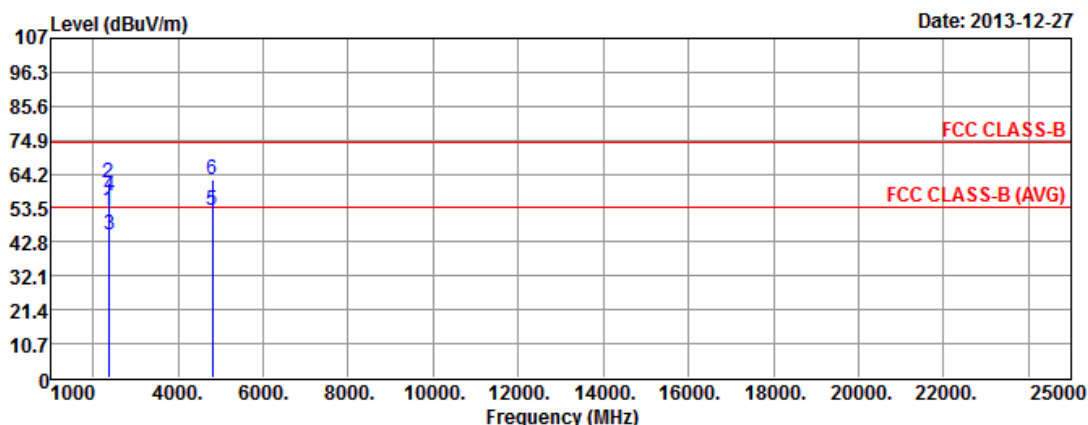

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2370.00	52.89	-1.11	54.00	56.09	26.86	4.58	34.64	---	---	Average
2	2370.00	61.43	-12.57	74.00	64.63	26.86	4.58	34.64	---	---	Peak
3	2390.00	45.15	-8.85	54.00	48.27	26.91	4.60	34.63	---	---	Average
4	2390.00	57.23	-16.77	74.00	60.35	26.91	4.60	34.63	---	---	Peak
5	4804.00	52.67	-1.33	54.00	48.05	31.06	6.74	33.18	---	---	Average
6	4804.00	62.47	-11.53	74.00	57.85	31.06	6.74	33.18	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-2Mbps	Test Freq. (FX)	F2
Operating Mode	1	Polarization	H

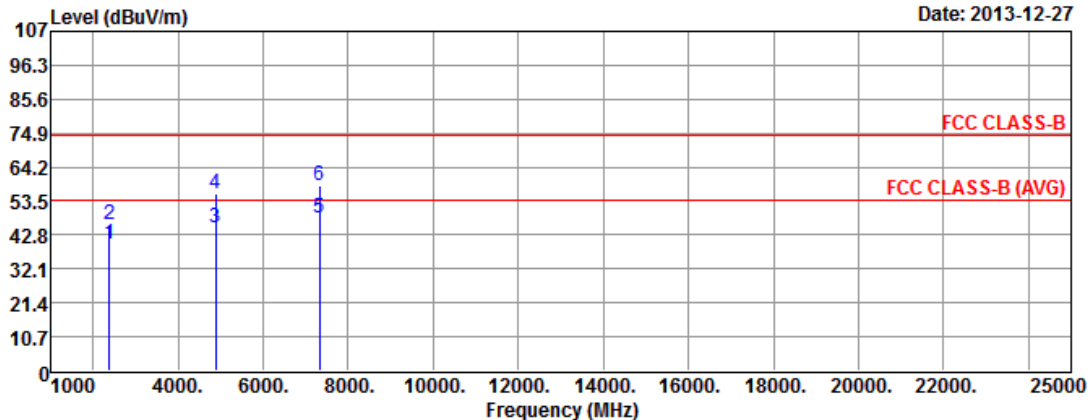

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	39.81	-14.19	54.00	42.97	26.88	4.59	34.63	---	---	Average
2	2376.00	46.25	-27.75	74.00	49.41	26.88	4.59	34.63	---	---	Peak
3	4878.00	45.01	-8.99	54.00	40.28	31.15	6.73	33.15	---	---	Average
4	4878.00	55.61	-18.39	74.00	50.88	31.15	6.73	33.15	---	---	Peak
5	7317.00	48.02	-5.98	54.00	37.91	35.66	8.98	34.53	---	---	Average
6	7317.00	58.20	-15.80	74.00	48.09	35.66	8.98	34.53	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-2Mbps	Test Freq. (FX)	F2
Operating Mode	1	Polarization	V

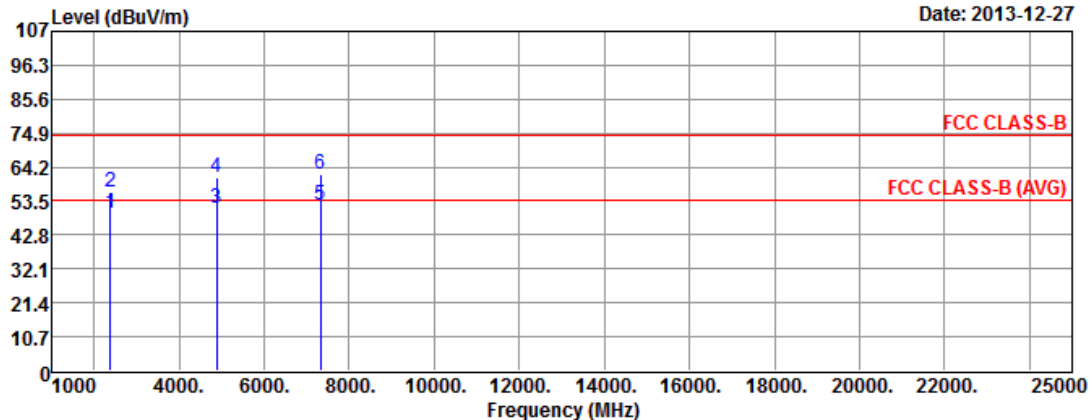

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	49.56	-4.44	54.00	52.72	26.88	4.59	34.63	---	---	Average
2	2376.00	56.07	-17.93	74.00	59.23	26.88	4.59	34.63	---	---	Peak
3	4878.00	51.00	-3.00	54.00	46.27	31.15	6.73	33.15	---	---	Average
4	4878.00	61.08	-12.92	74.00	56.35	31.15	6.73	33.15	---	---	Peak
5	7317.00	52.16	-1.84	54.00	42.05	35.66	8.98	34.53	---	---	Average
6	7317.00	62.00	-12.00	74.00	51.89	35.66	8.98	34.53	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-2Mbps	Test Freq. (FX)	F3
Operating Mode	1	Polarization	H

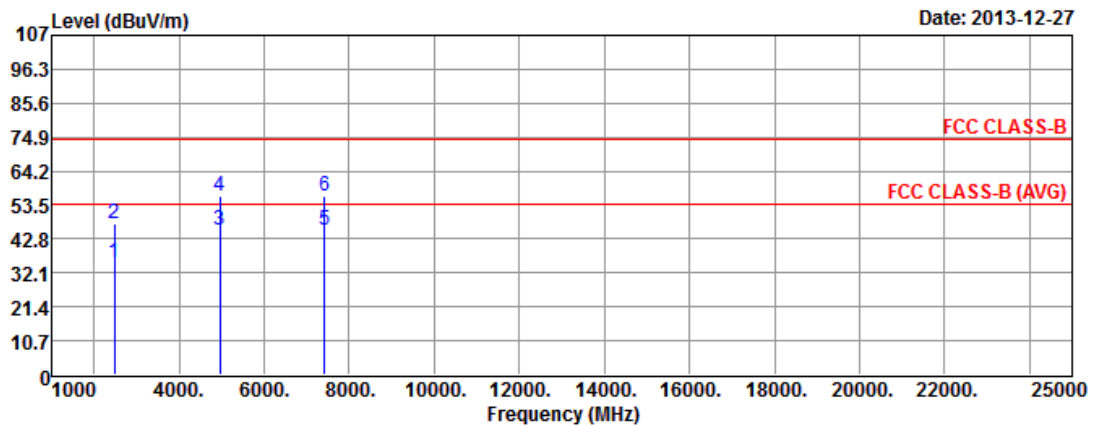

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	35.24	-18.76	54.00	37.93	27.16	4.74	34.59	---	---	Average
2	2483.50	47.71	-26.29	74.00	50.40	27.16	4.74	34.59	---	---	Peak
3	4950.00	45.45	-8.55	54.00	40.61	31.24	6.72	33.12	---	---	Average
4	4950.00	56.08	-17.92	74.00	51.24	31.24	6.72	33.12	---	---	Peak
5	7425.00	45.66	-8.34	54.00	35.37	35.92	9.05	34.68	---	---	Average
6	7425.00	56.40	-17.60	74.00	46.11	35.92	9.05	34.68	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-2Mbps	Test Freq. (FX)	F3
Operating Mode	1	Polarization	V

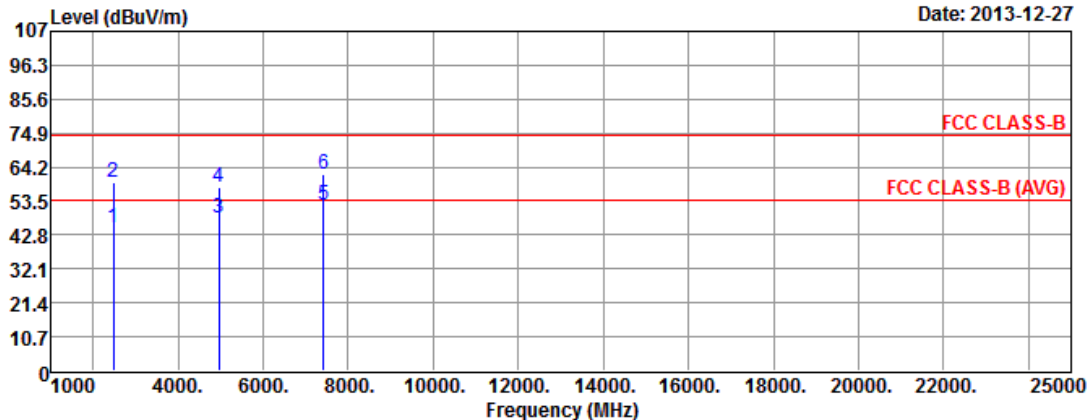

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	45.13	-8.87	54.00	47.82	27.16	4.74	34.59	---	---	Average
2	2483.50	59.35	-14.65	74.00	62.04	27.16	4.74	34.59	---	---	Peak
3	4950.00	47.89	-6.11	54.00	43.05	31.24	6.72	33.12	---	---	Average
4	4950.00	58.09	-15.91	74.00	53.25	31.24	6.72	33.12	---	---	Peak
5	7425.00	52.24	-1.76	54.00	41.95	35.92	9.05	34.68	---	---	Average
6	7425.00	61.82	-12.18	74.00	51.53	35.92	9.05	34.68	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F1
Operating Mode	2	Polarization	H

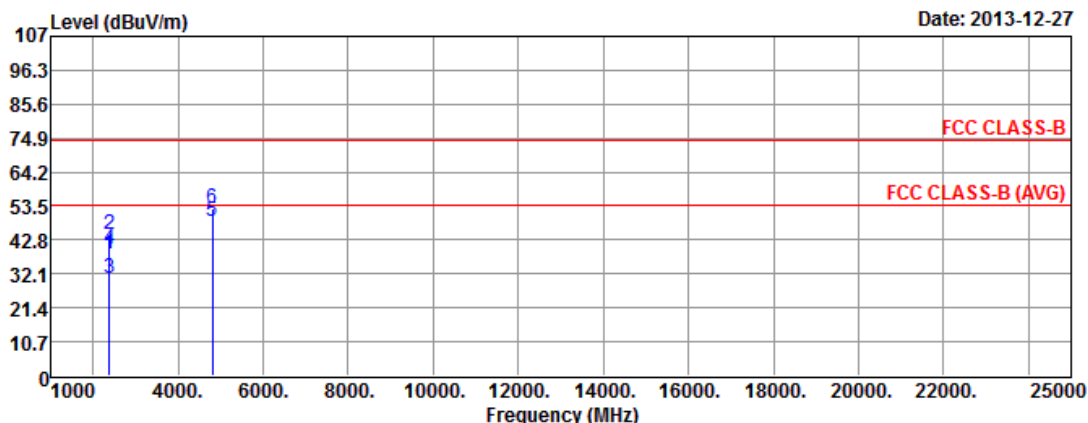

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	38.65	-15.35	54.00	41.81	26.88	4.59	34.63	---	---	Average
2	2376.00	44.37	-29.63	74.00	47.53	26.88	4.59	34.63	---	---	Peak
3	2388.00	30.68	-23.32	54.00	33.80	26.91	4.60	34.63	---	---	Average
4	2388.00	39.88	-34.12	74.00	43.00	26.91	4.60	34.63	---	---	Peak
5	4804.00	48.62	-5.38	54.00	44.00	31.06	6.74	33.18	---	---	Average
6	4804.00	52.81	-21.19	74.00	48.19	31.06	6.74	33.18	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F1
Operating Mode	2	Polarization	V

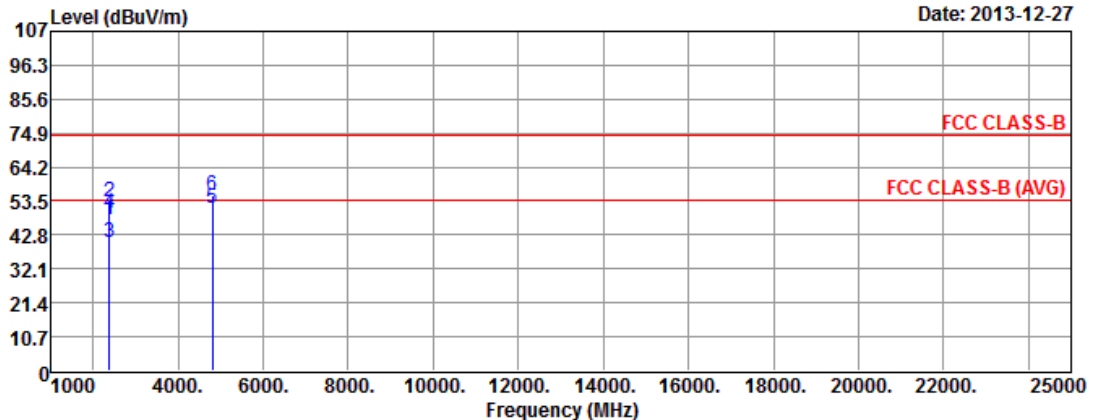

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2376.00	47.79	-6.21	54.00	50.95	26.88	4.59	34.63	---	---	Average
2	2376.00	53.26	-20.74	74.00	56.42	26.88	4.59	34.63	---	---	Peak
3	2388.00	40.52	-13.48	54.00	43.64	26.91	4.60	34.63	---	---	Average
4	2388.00	49.66	-24.34	74.00	52.78	26.91	4.60	34.63	---	---	Peak
5	4804.00	51.15	-2.85	54.00	46.53	31.06	6.74	33.18	---	---	Average
6	4804.00	55.26	-18.74	74.00	50.64	31.06	6.74	33.18	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F2
Operating Mode	2	Polarization	H

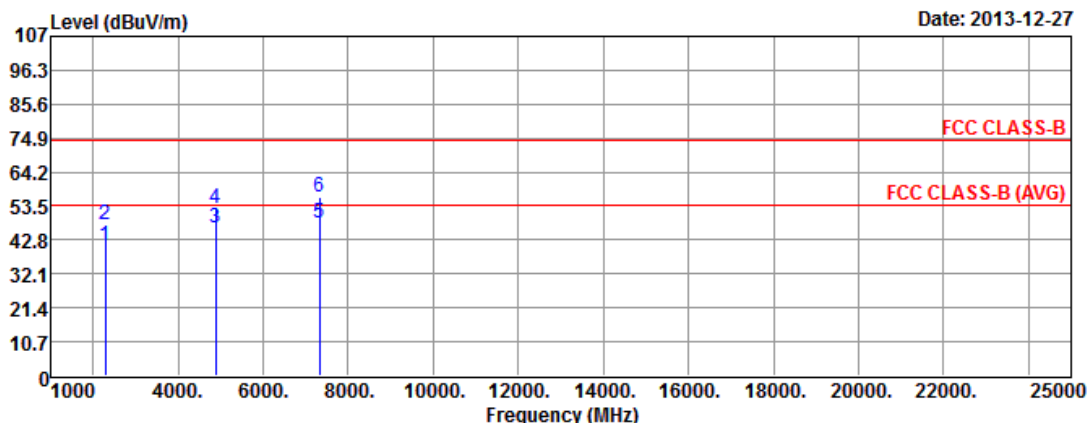

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2284.00	40.88	-13.12	54.00	44.42	26.64	4.50	34.68	---	---	Average
2	2284.00	47.54	-26.46	74.00	51.08	26.64	4.50	34.68	---	---	Peak
3	4878.00	46.49	-7.51	54.00	41.76	31.15	6.73	33.15	---	---	Average
4	4878.00	52.52	-21.48	74.00	47.79	31.15	6.73	33.15	---	---	Peak
5	7317.00	48.02	-5.98	54.00	37.91	35.66	8.98	34.53	---	---	Average
6	7317.00	56.10	-17.90	74.00	45.99	35.66	8.98	34.53	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F2
Operating Mode	2	Polarization	V

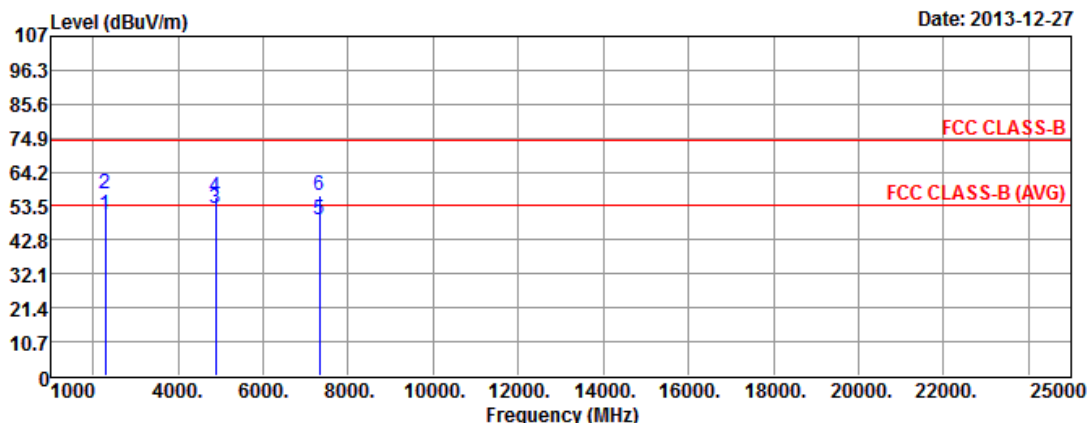

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2284.00	50.69	-3.31	54.00	54.23	26.64	4.50	34.68	---	---	Average
2	2284.00	57.32	-16.68	74.00	60.86	26.64	4.50	34.68	---	---	Peak
3	4878.00	52.48	-1.52	54.00	47.75	31.15	6.73	33.15	---	---	Average
4	4878.00	56.45	-17.55	74.00	51.72	31.15	6.73	33.15	---	---	Peak
5	7317.00	49.34	-4.66	54.00	39.23	35.66	8.98	34.53	---	---	Average
6	7317.00	56.85	-17.15	74.00	46.74	35.66	8.98	34.53	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F3
Operating Mode	2	Polarization	H

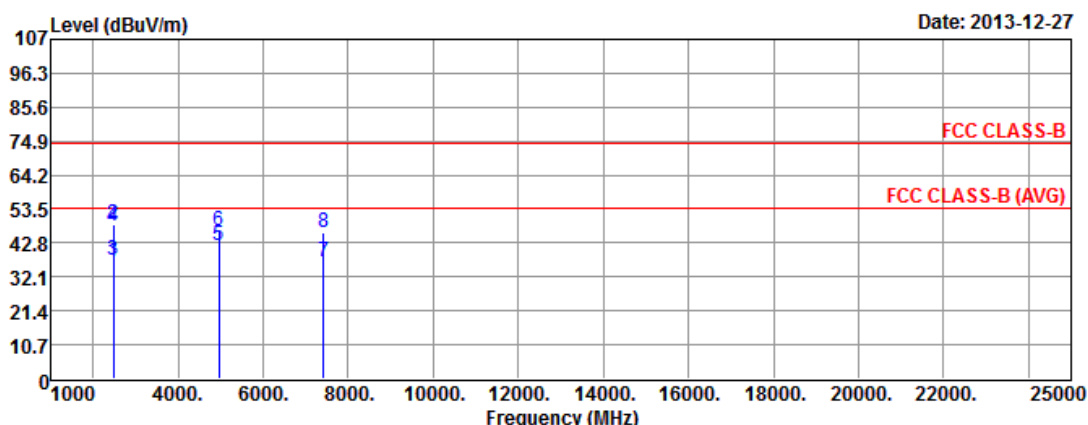

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	36.78	-17.22	54.00	39.47	27.16	4.74	34.59	---	---	Average
2	2483.50	48.39	-25.61	74.00	51.08	27.16	4.74	34.59	---	---	Peak
3	2488.00	37.15	-16.85	54.00	39.82	27.17	4.75	34.59	---	---	Average
4	2488.00	47.96	-26.04	74.00	50.63	27.17	4.75	34.59	---	---	Peak
5	4950.00	42.23	-11.77	54.00	37.39	31.24	6.72	33.12	---	---	Average
6	4950.00	46.49	-27.51	74.00	41.65	31.24	6.72	33.12	---	---	Peak
7	7425.00	36.95	-17.05	54.00	26.66	35.92	9.05	34.68	---	---	Average
8	7425.00	45.86	-28.14	74.00	35.57	35.92	9.05	34.68	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	MSK-500kbps	Test Freq. (FX)	F3
Operating Mode	2	Polarization	V

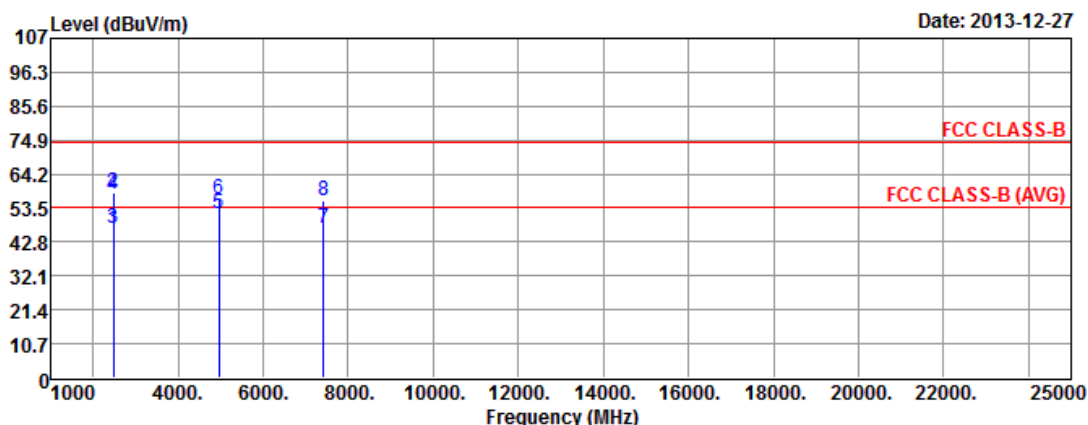

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2483.50	46.54	-7.46	54.00	49.23	27.16	4.74	34.59	---	---	Average
2	2483.50	58.17	-15.83	74.00	60.86	27.16	4.74	34.59	---	---	Peak
3	2488.00	46.90	-7.10	54.00	49.57	27.17	4.75	34.59	---	---	Average
4	2488.00	57.74	-16.26	74.00	60.41	27.17	4.75	34.59	---	---	Peak
5	4950.00	51.90	-2.10	54.00	47.06	31.24	6.72	33.12	---	---	Average
6	4950.00	56.34	-17.66	74.00	51.50	31.24	6.72	33.12	---	---	Peak
7	7425.00	46.88	-7.12	54.00	36.59	35.92	9.05	34.68	---	---	Average
8	7425.00	55.70	-18.30	74.00	45.41	35.92	9.05	34.68	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

Note 5: Average emission setting: RBW=1MHz; VBW $\geq 1/T$, where T is "Pulse On Time", e.g., LE VBW $\geq 1/625\mu s$, VBW=3kHz.

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 18, 2013	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	7.61183201e+012	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
ISN	TESEQ	ISN T800	30330	9kHz ~ 30MHz	Mar. 15, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
CDN	TESEQ	M016	25100	150kHz ~ 26MHz	Mar. 11, 2013	Conduction (CO04-HY)
CDN	TESEQ	M016	25103	150kHz ~ 26MHz	Mar. 11, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	TM012	N/A	Feb. 26, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-02	N/A	Feb. 26, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-01	N/A	Apr. 22, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-04-03	N/A	Feb. 26, 2013	Conduction (CO04-HY)
50 ohm terminal	N/A	N/A	CON-01-04	N/A	Feb. 26, 2013	Conduction (CO04-HY)
ISN	TESEQ	ISN T400	21653	N/A	Jun. 25, 2013	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2013	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345675/4	30MHz ~ 26.5GHz	Dec. 02, 2013	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345669/4	30MHz ~ 26.5GHz	Dec. 02, 2013	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV40	101498	9Kz ~ 40GHz	Jan. 24, 2013	Radiation (03CH07-HY)
Receiver	R&S	ESR3	101658	9KHz ~ 3GHz	Jan. 28, 2013	Radiation (03CH07-HY)
Amplifier	COM-POWER	PA-103	161241	10MHz ~ 1000MHz	Feb. 26, 2013	Radiation (03CH07-HY)
Amplifier	Agilent	8449B	3008A02362	1GHz ~ 26.5 GHz	Nov. 29, 2013	Radiation (03CH07-HY)
Horn Antenna	ETS-LINDGREN	3117	00075962	1GHz~18GHz	Aug. 22, 2013	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170251	15GHz~40GHz	Oct. 3, 2013	Radiation (03CH07-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30 MHz - 1 GHz	Oct. 10, 2013	Radiation (03CH07-HY)

Note: Calibration Interval of instruments listed above is one year.

Amplifier	MITEQ	AMF-7D-00101800-30-10P	9121372	26.5GHz ~ 40GHz	Feb. 27, 2013	Radiation (03CH07-HY)
Loop Antenna (note 1)	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH07-HY)

Note: Calibration Interval of instruments listed above is two year.


Appendix A. TEST PHOTOS

1 Photographs of Conducted Emissions Test Configuration

FRONT VIEW



REAR VIEW

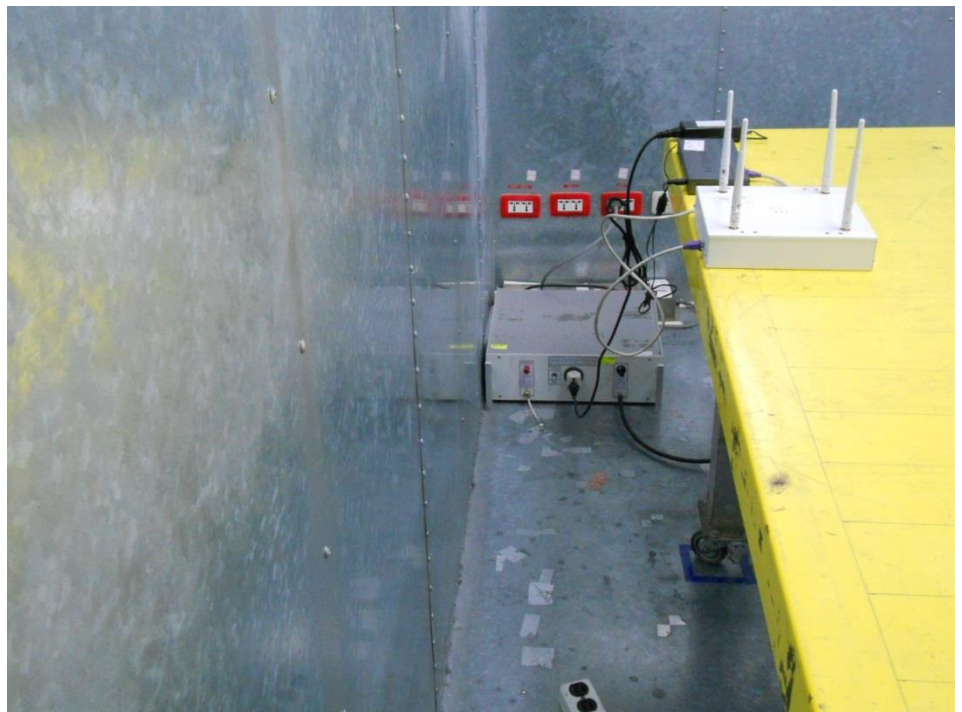

SIDE VIEW



2 Photographs of Radiated Emissions Test Configuration For radiated emission

FRONT VIEW



REAR VIEW

