

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Dong guan Synst Electronics.Co.,Ltd

Bluetooth speaker

Model Number: NYNE Bass

FCC ID: SV9-NYNEBASS

Prepared for : Dong guan Synst Electronics.Co.,Ltd
The Science&Technology Industrial Park Houjie Town,
Dongguan,Guangdong. china

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808


Report Number: ESTE-R1310001
Date of Test : September 09~ November 29, 2013
Date of Report : December 03, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram	8
2.5. Test mode	9
2.6. Channel List for Bluetooth.....	9
2.7. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Result.....	11
3.4. Test Data	13
4. 20 DB BANDWIDTH.....	19
4.1. Limit	19
4.2. Test Procedure	19
4.3. Test Result.....	19
4.4. Test Data	20
5. CARRIER FREQUENCY SEPARATION	26
5.1. Limit	26
5.2. Test Procedure	26
5.3. Test Result.....	26
5.4. Test Data	27
6. NUMBER OF HOPPING CHANNEL	33
6.1. Limit	33
6.2. Test Procedure	33
6.3. Test Result.....	33
6.4. Test Data	34
7. DWELL TIME	38
7.1. Limit	38
7.2. Test Result.....	38
7.3. Test Data	39
8. RADIATED EMISSIONS.....	51
8.1. Limit	51
8.2. Block Diagram of Test setup.....	52
8.3. Test Procedure	52
8.4. Test Result.....	52
8.5. Test Data	53

9.	BAND EDGE COMPLIANCE	125
9.1.	Limit	125
9.2.	Block Diagram of Test setup	125
9.3.	Test Procedure	125
9.4.	Test Result	125
9.5.	Test Data	126
10.	POWER LINE CONDUCTED EMISSIONS	158
10.1.	Limit	158
10.2.	Test Procedure	158
11.	ANTENNA REQUIREMENTS	163
11.1.	Limit	163
11.2.	Result	163
12.	TEST SETUP PHOTO	164
13.	PHOTOS OF EUT	167

Test Report Verification

Applicant:	Dong guan Synst Electronics.Co.,Ltd		
Address:	The Science&Technology Industrial Park Houjie Town,Dongguan, Guangdong. china		
Manufacturer Address:	Dong guan Synst Electronics.Co.,Ltd The Science&Technology Industrial Park Houjie Town,Dongguan, Guangdong. china		
E.U.T:	Bluetooth speaker		
Model Number:	NYNE Bass		
Additional Model:	NB400 Note: The products are difference in model number only.		
Power Supply:	DC 12V From Adapter Input AC 100-240V~50/60Hz DC 7.4V From Internal Battery		
Test Voltage:	DC 12V From Adapter Input AC 120V/60Hz		
Trade Name:	NYNE	Serial No.:	-----
Date of Receipt:	September 09, 2013	Date of Test:	September 09~ November 29, 2013
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2013 ANSI C63.4:2009		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: December 03, 2013		
Prepared by:	Tested by:	Approved by:	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: Bluetooth speaker
Model Number	: NYNE Bass
FCC ID	: SV9-NYNEBASS
Operation frequency	: 2402MHz~2480MHz
Number of channel	: 79
Antenna	: Internal antenna, 0 dBi gain
Modulation	: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Sample Type	: Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: October 28, 2011 Certificated by FCC, USA Registration No.: 989591 Date of registration: December 07, 2010 Certificated by Industry Canada Registration No.: 46405-9405 Date of registration: December 16, 2010 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Assistant equipment used for test

2.3.1. Adapter

Adapter 1


M/N	:	GQ30-120250-A U	
Input	:	AC 100-240V~50/60Hz	1.0A Max
Output	:	DC 12V/2.5A	

Adapter 2

M/N	:	ASSA32-120250	
Input	:	AC 100-240V~50/60Hz	1.0A Max
Output	:	DC 12V/2.5A	

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by software before test.



(EUT: Bluetooth speaker)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	May,30,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	May,30,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	July.25,13	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	May,30,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	May,30,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	25872	Nov,08,12	1.5 Year
Signal Amplifier	Agilent	310N	187037	July.25,13	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature controller	Terchy	MHQ	120	May.08,13	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	May.08,13	1 Year
Vector Signal Generator	R&S	SMBV100A	1407.6004K02	May.08,13	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Jan.16.13	2 Year
Double Ridged Horn Antenna	R&S	HF907	100268	Jan.16.13	2 Year
Log-periodic Dipole Antenna	R&S	HL223	100435	Jan.16.13	2 Year
Biconical Antenna	R&S	HK116	100431	Jan.16.13	2 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-462	Jan.16.13	2 Year
Pre-amplifier	AH	PAM-0118	10008	May.08,13	1 Year
Pre-amplifier	R&S	SCU-01	10049	May.08,13	1 Year
High Pass filter	Micro	HPM50111	324455	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534096	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534123	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	523455	May.08,13	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result

Adapter 1


EUT: Bluetooth speaker					
M/N: NYNE Bass					
Test date: 2013-09-28		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	2.788	30.00	1	27.212
	2441	4.547	30.00	1	25.453
	2480	5.634	30.00	1	24.366
8-DPSK	2402	1.862	21.00	0.125	19.138
	2441	3.720	21.00	0.125	17.280
	2480	4.531	21.00	0.125	16.469
Conclusion: PASS					

Adapter 2


EUT: Bluetooth speaker					
M/N: NYNE Bass					
Test date: 2013-11-20		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	2.201	30.00	1	27.212
	2441	4.103	30.00	1	25.453
	2480	4.628	30.00	1	24.366
8-DPSK	2402	0.587	21.00	0.125	19.138
	2441	3.152	21.00	0.125	17.280
	2480	3.882	21.00	0.125	16.469
Conclusion: PASS					

3.4. Test Data


Adapter 1
GFSK 2402 MHz

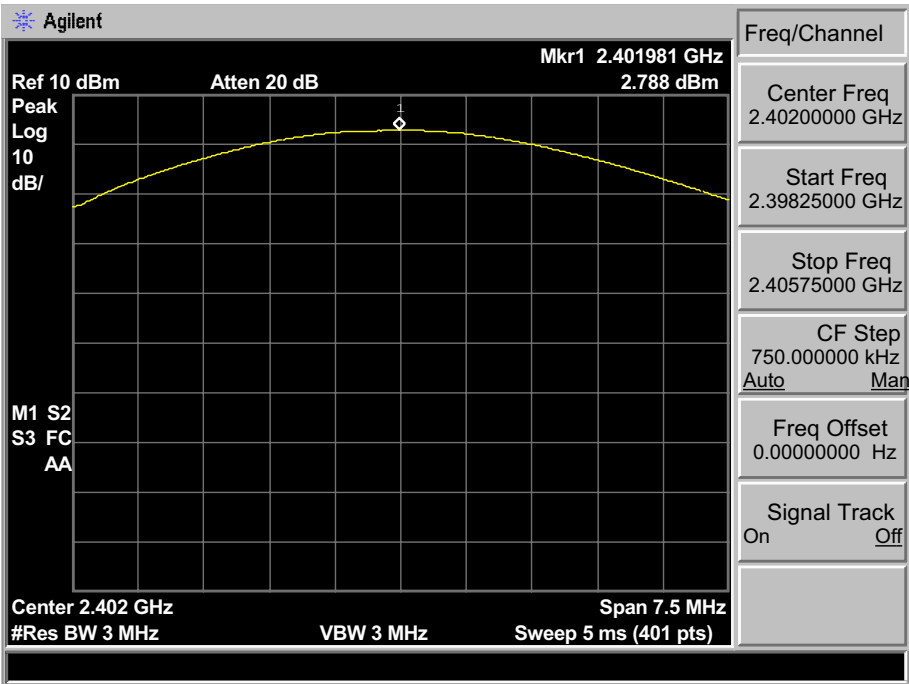


GFSK 2441 MHz

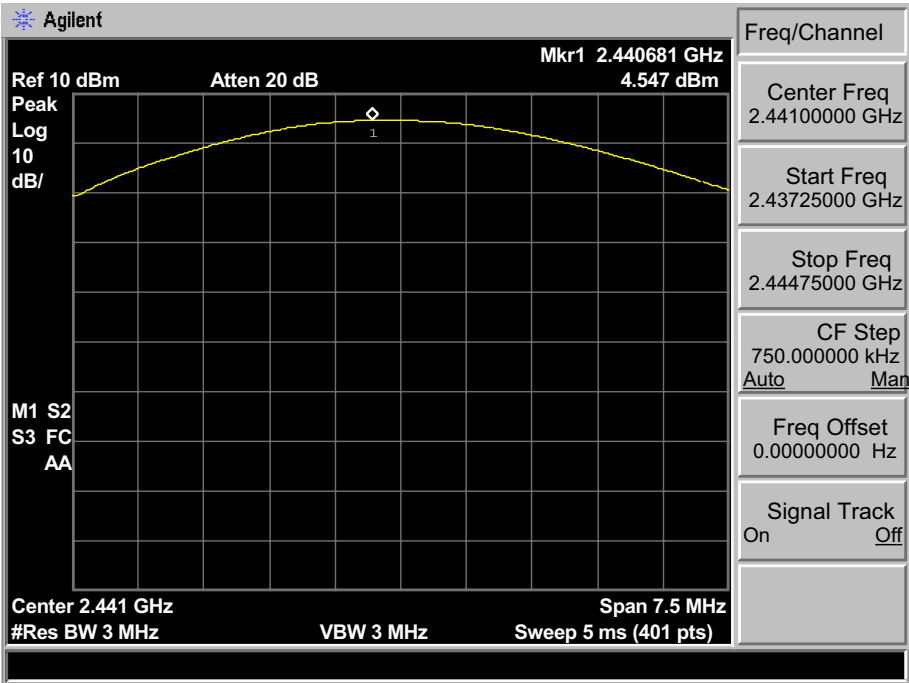


GFSK 2480 MHz

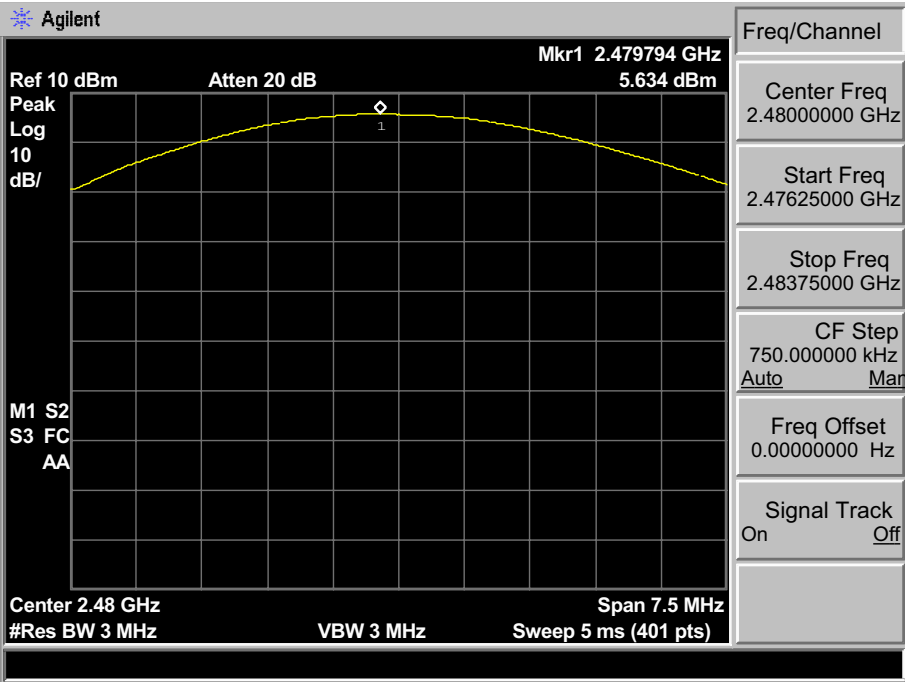


Adapter 2
GFSK 2402 MHz

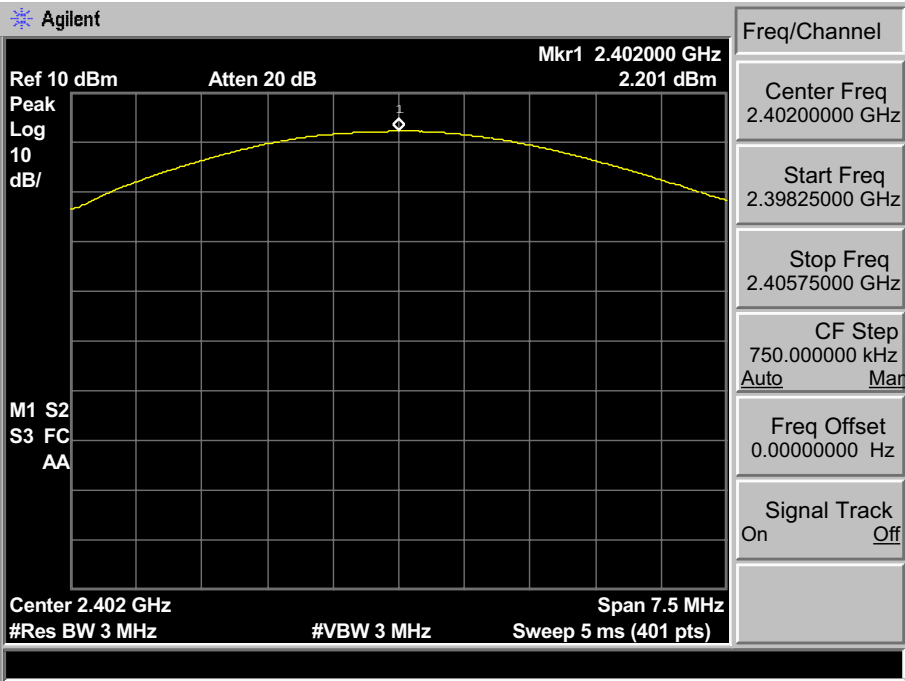


GFSK 2441MHz

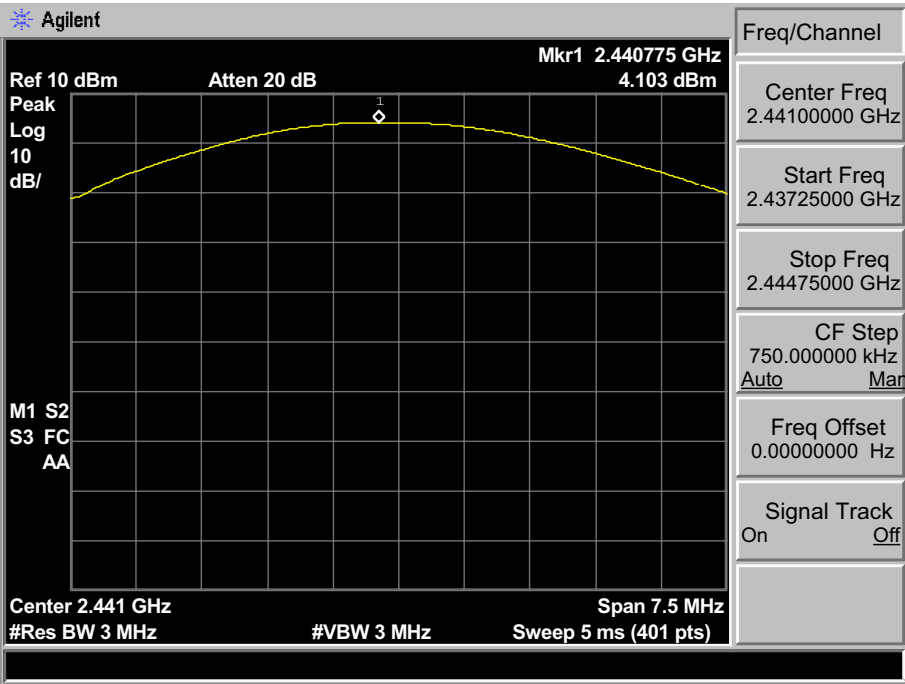


GFSK 2480MHz

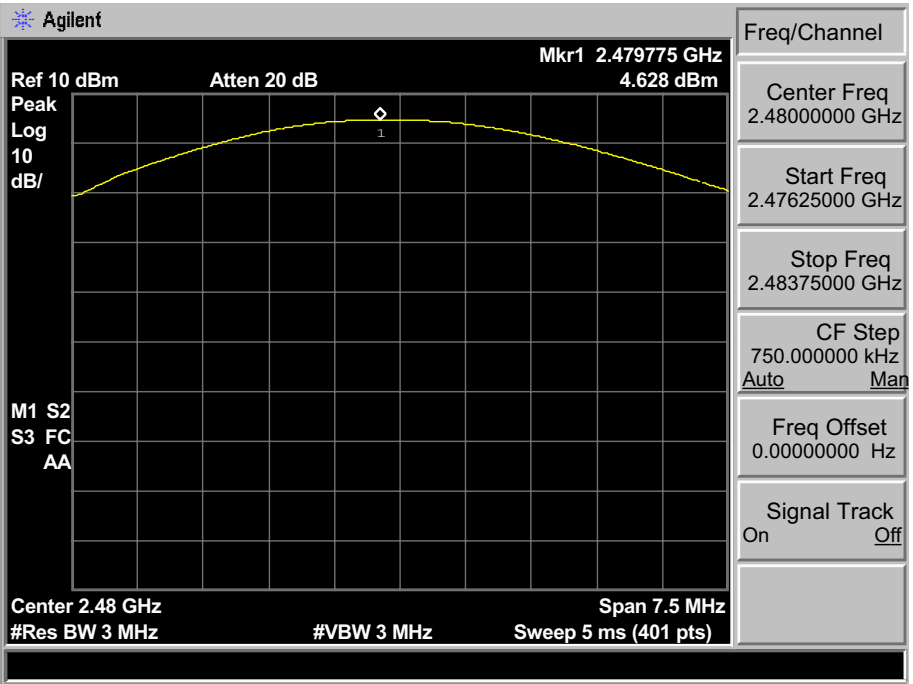


Adapter 1
8-DPSK 2402 MHz

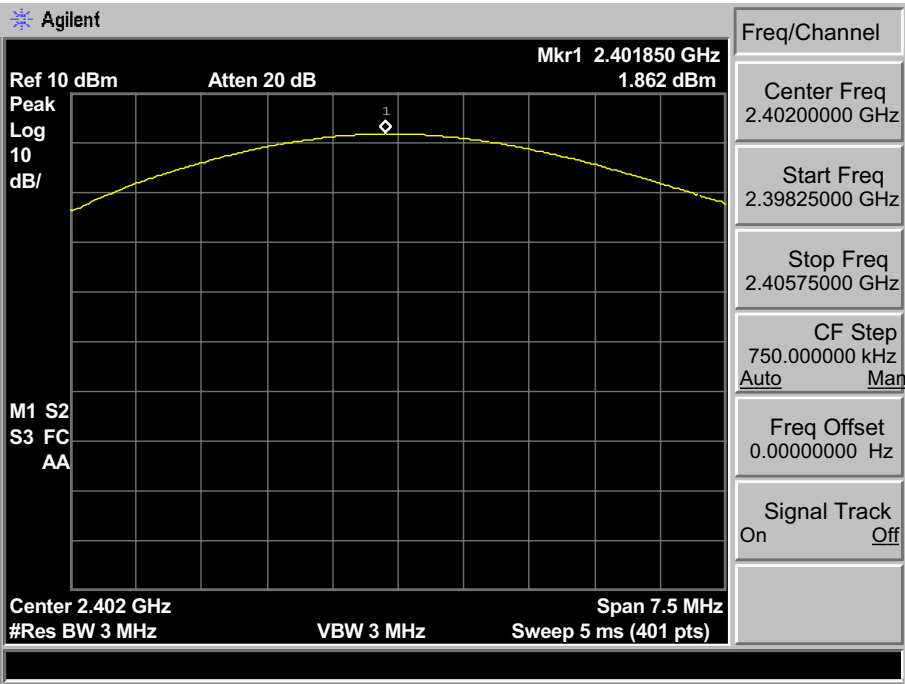


8-DPSK 2441 MHz

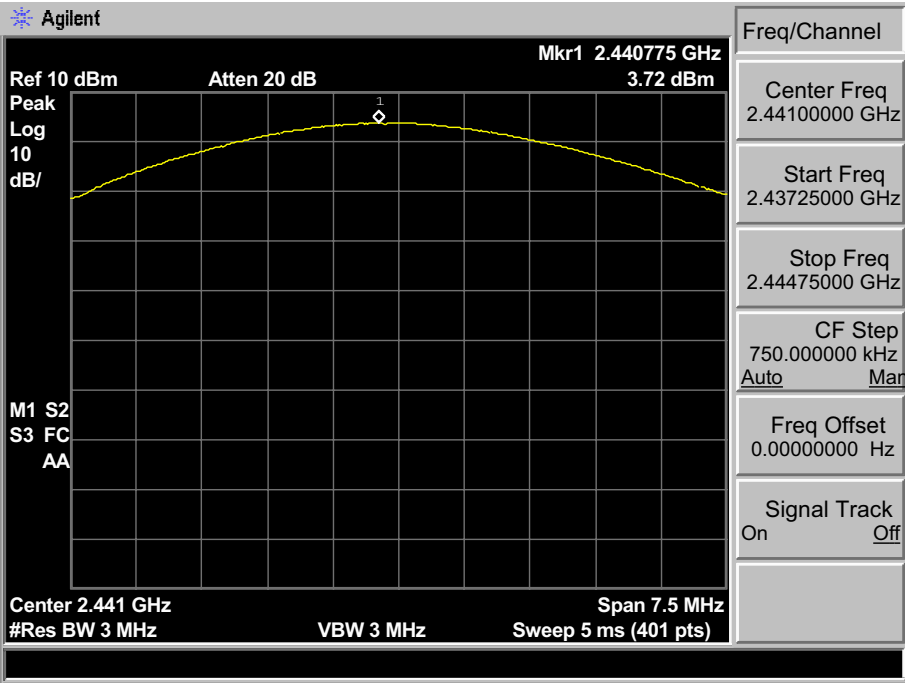


8-DPSK 2480 MHz

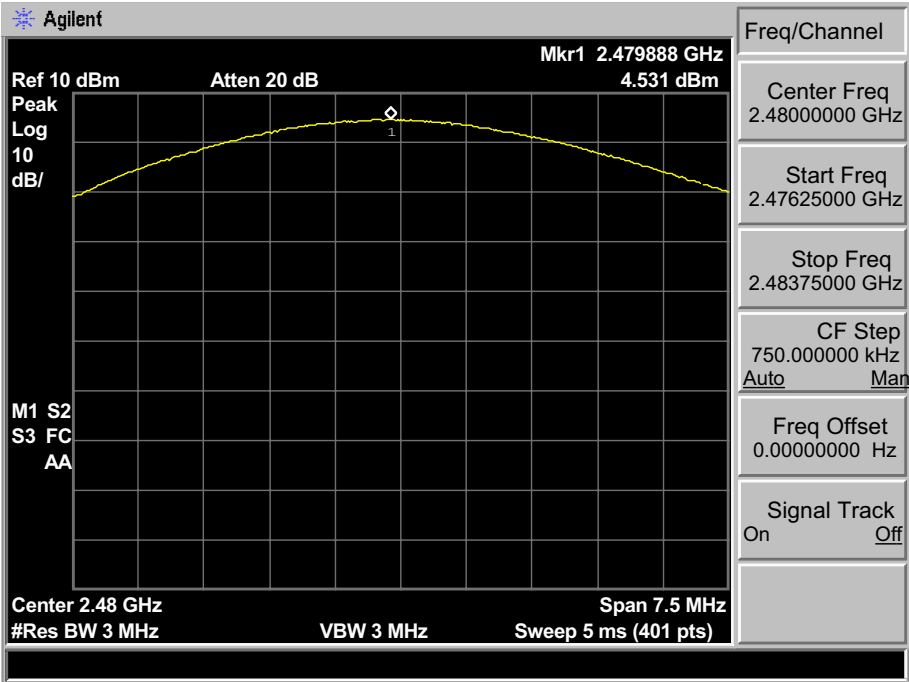


Adapter 2
8-DPSK 2402 MHz

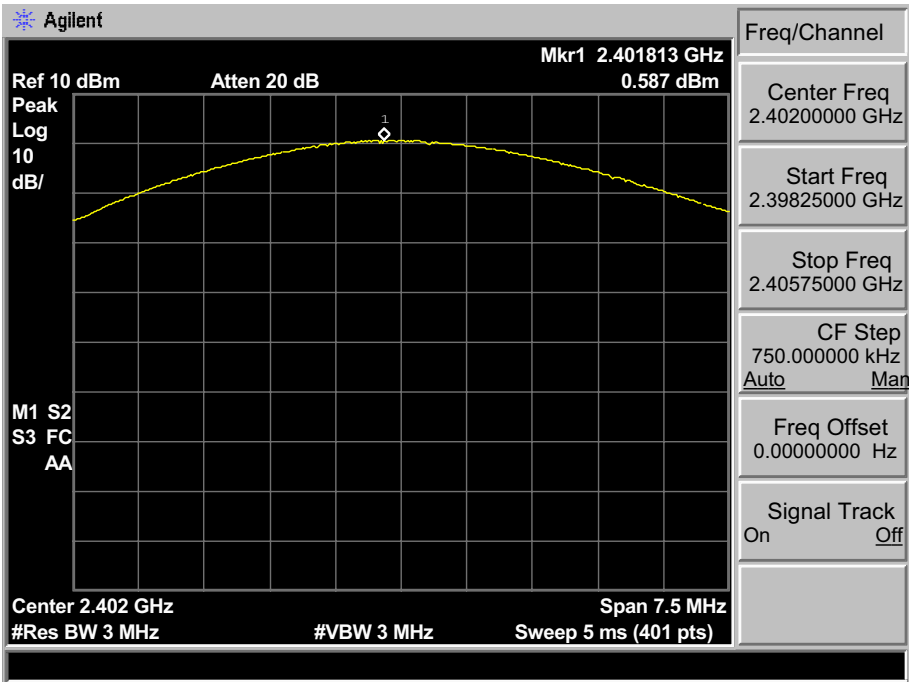

8-DPSK 2441 MHz

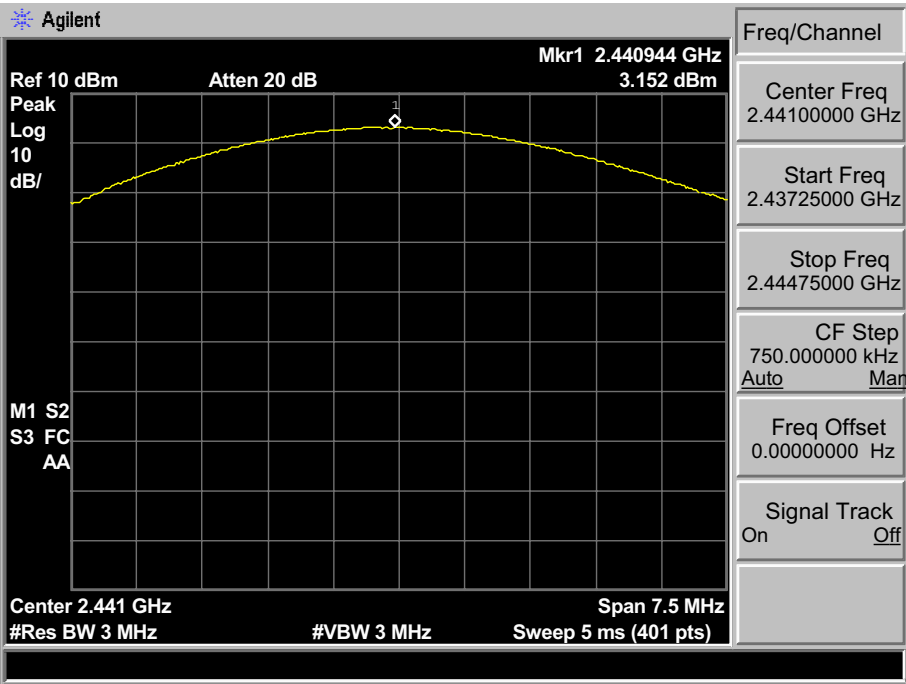

8-DPSK 2480 MHz

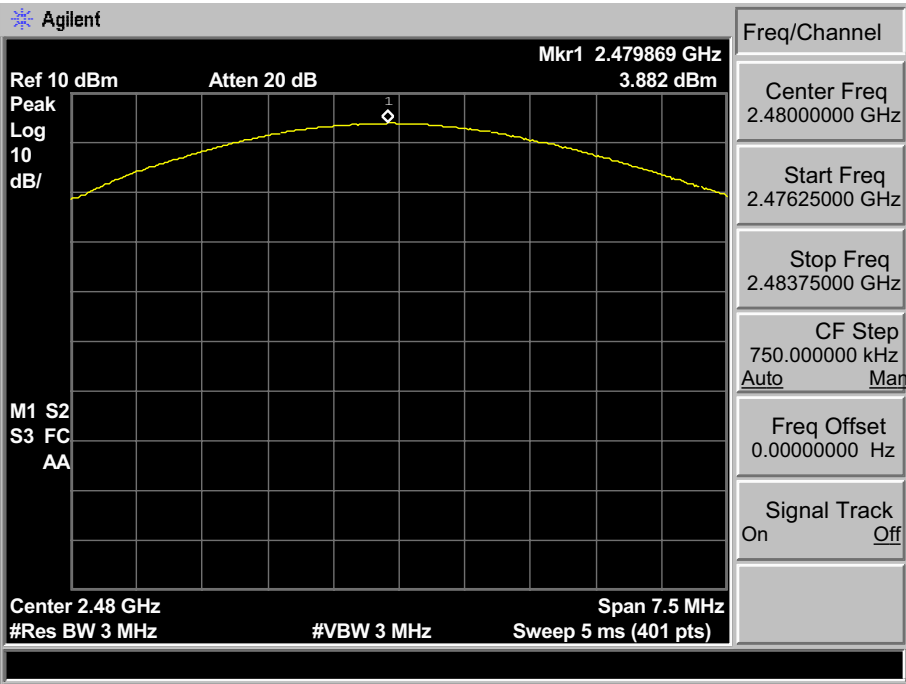

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result

Adapter 1

EUT: Bluetooth speaker				
M/N: NYNE Bass				
Test date: 2013-09-28		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.887	/	PASS
	2441	0.886	/	PASS
	2480	0.870	/	PASS
8-DPSK	2402	1.215	/	PASS
	2441	1.222	/	PASS
	2480	1.218	/	PASS


Adapter 2

EUT: Bluetooth speaker				
M/N: NYNE Bass				
Test date: 2013-11-23		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.878	/	PASS
	2441	0.870	/	PASS
	2480	0.865	/	PASS
8-DPSK	2402	1.217	/	PASS
	2441	1.226	/	PASS
	2480	1.223	/	PASS


4.4. Test Data



Adapter 1

GFSK 2402MHz

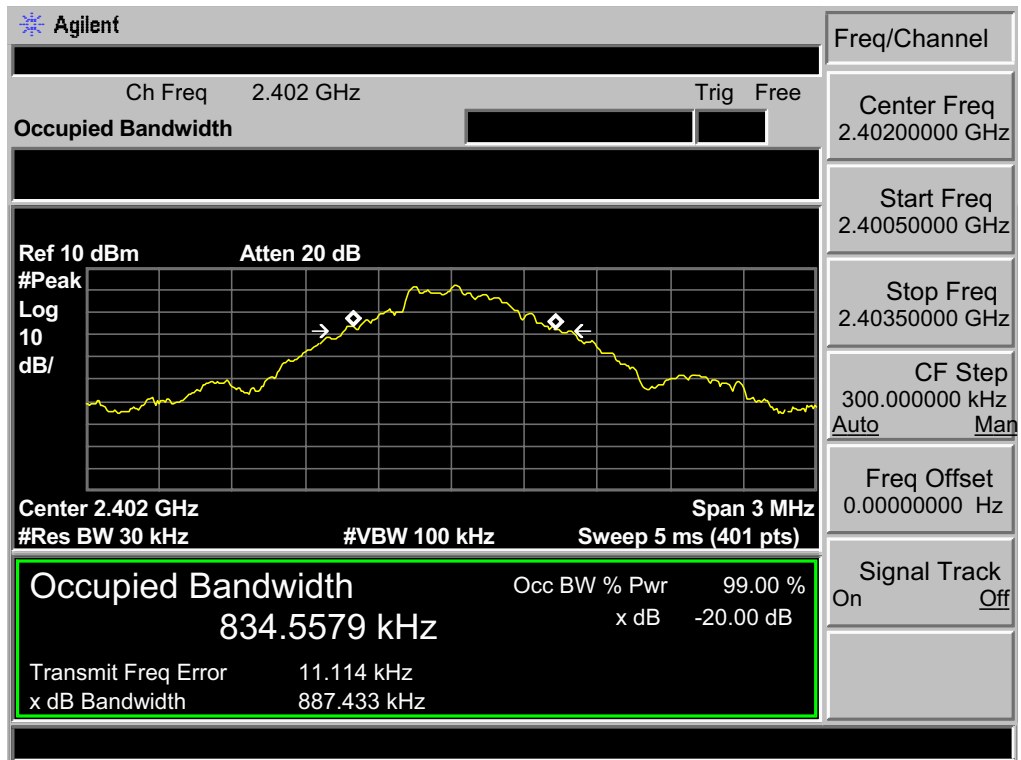


GFSK 2441MHz

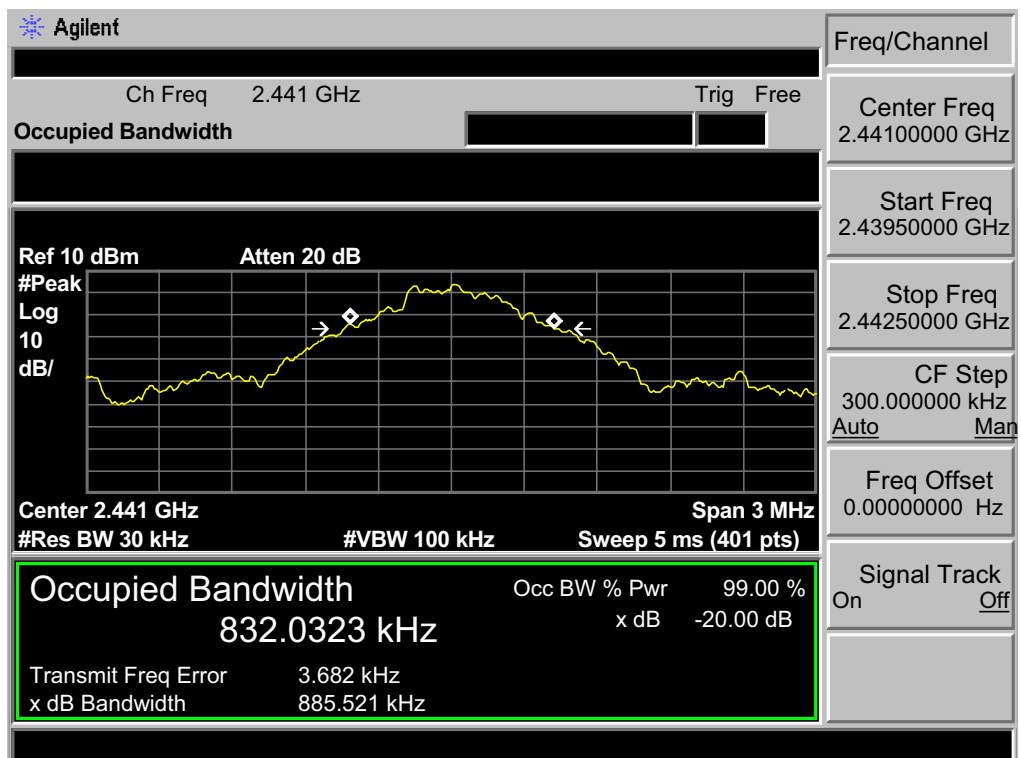


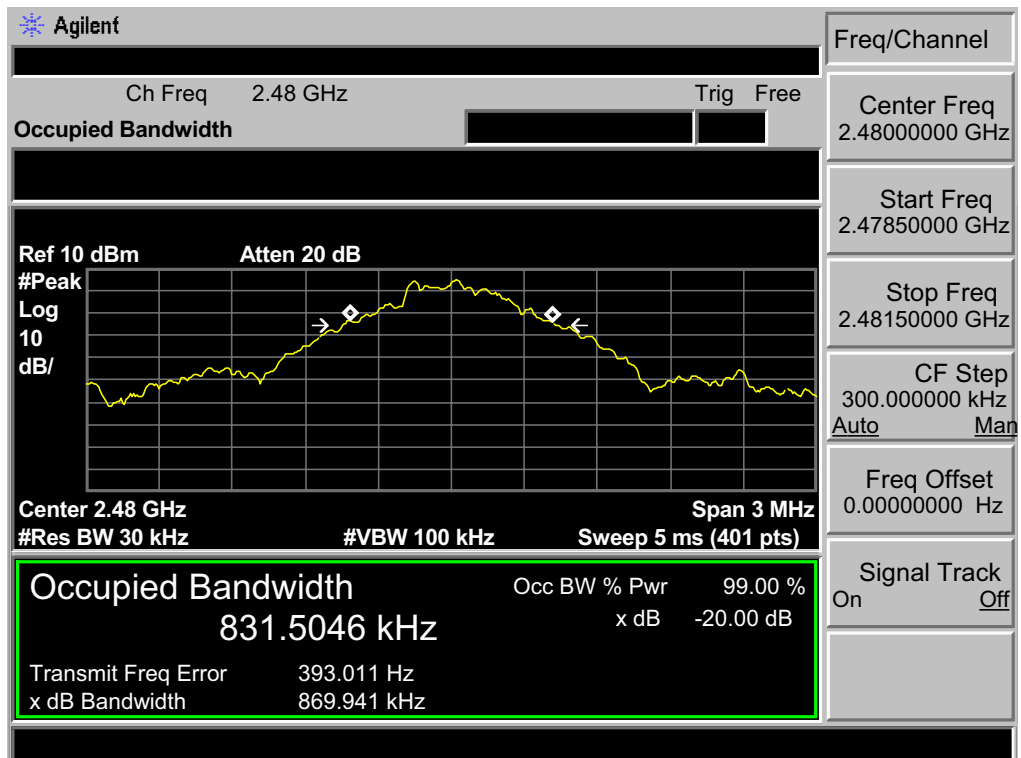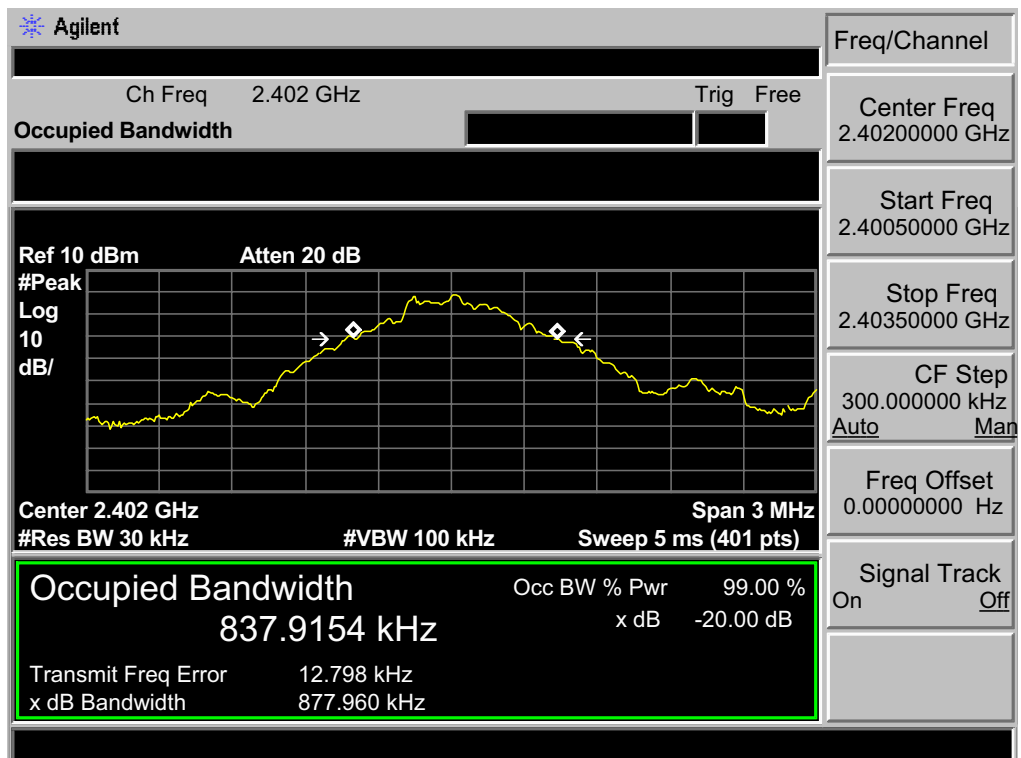GFSK 2480MHz**Adapter 2
GFSK 2402MHz**


GFSK 2441MHz

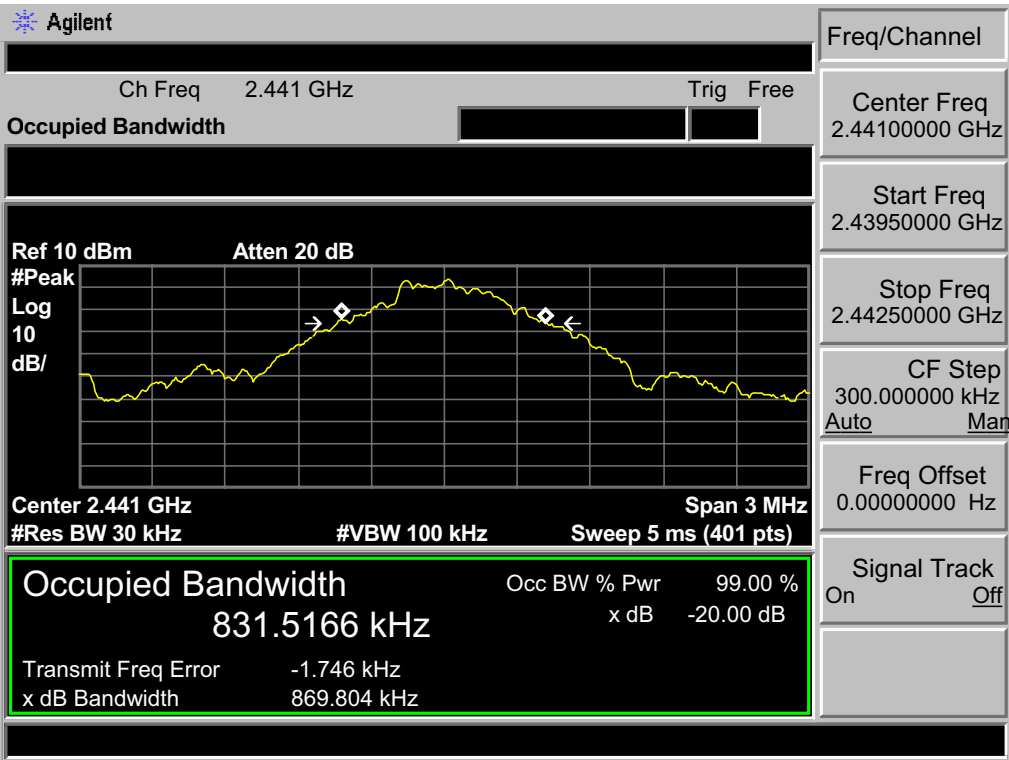


GFSK 2480MHz

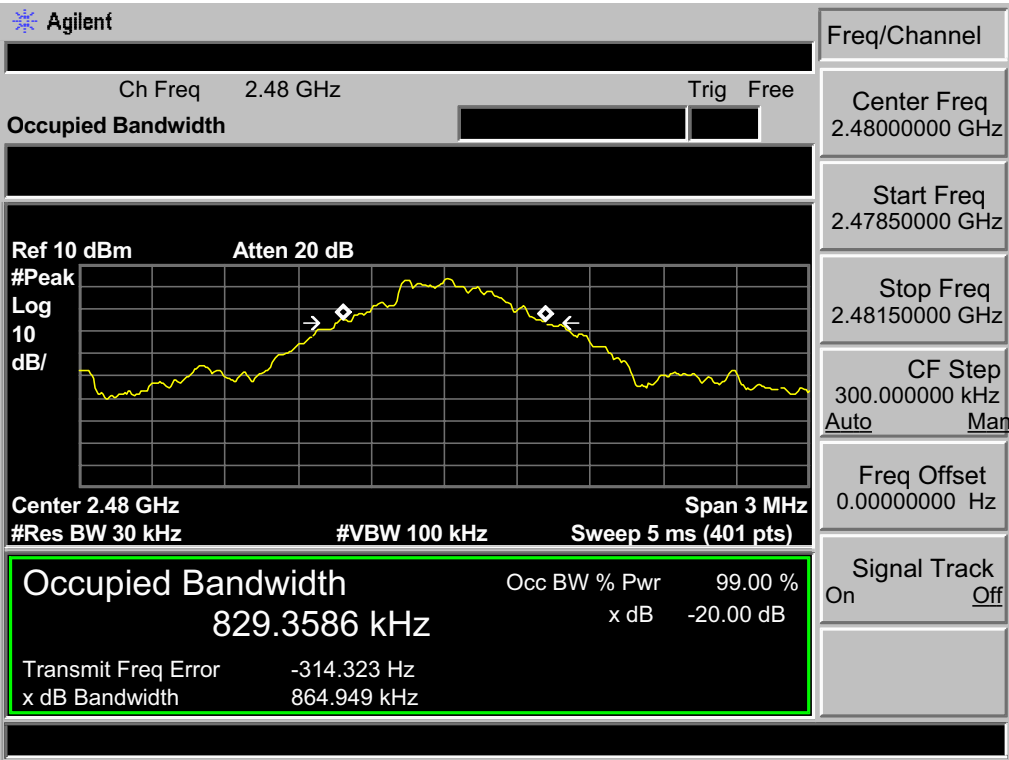


Adapter 1
8-DPSK 2402MHz

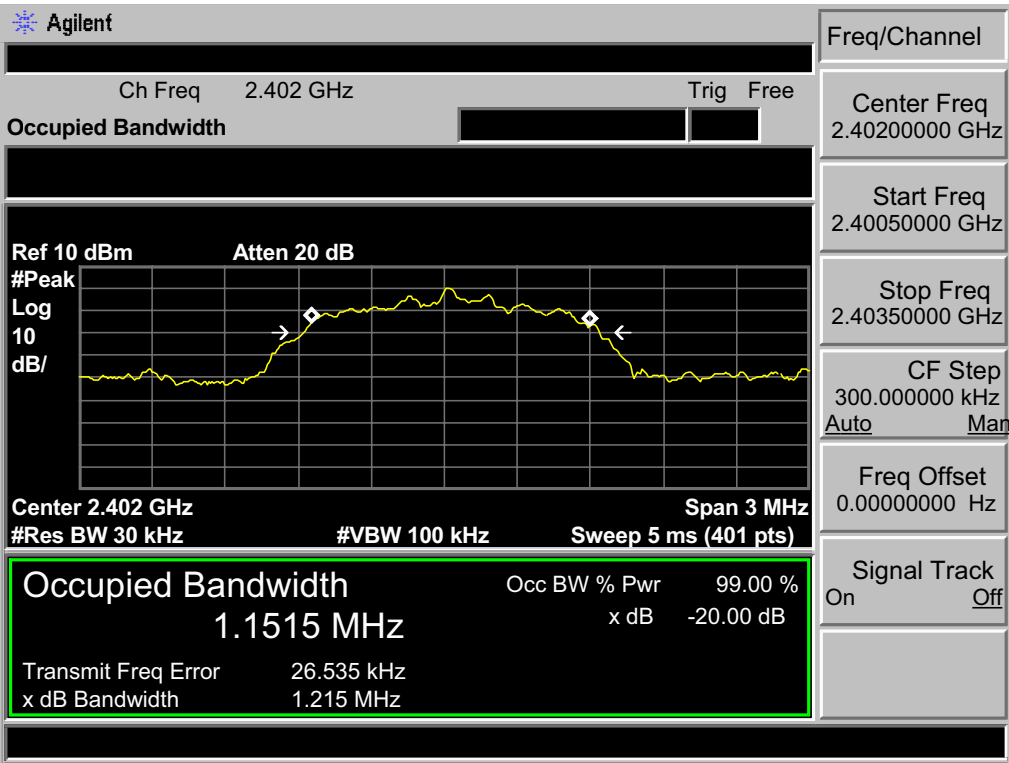


8-DPSK 2441MHz

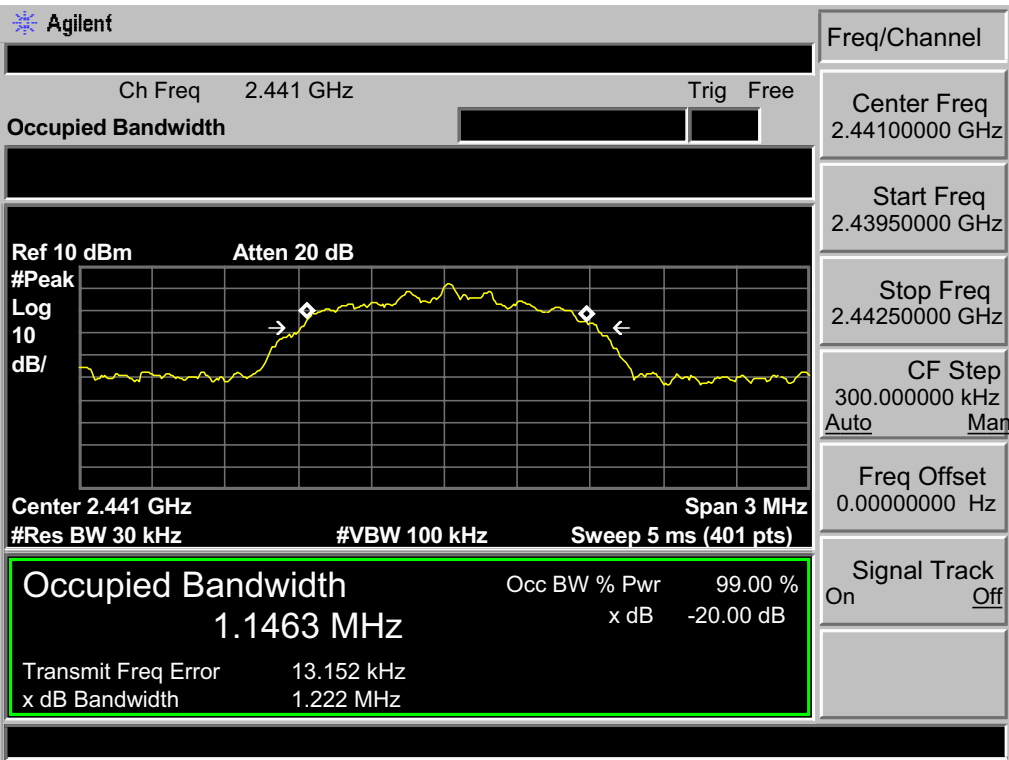


8-DPSK 2480MHz

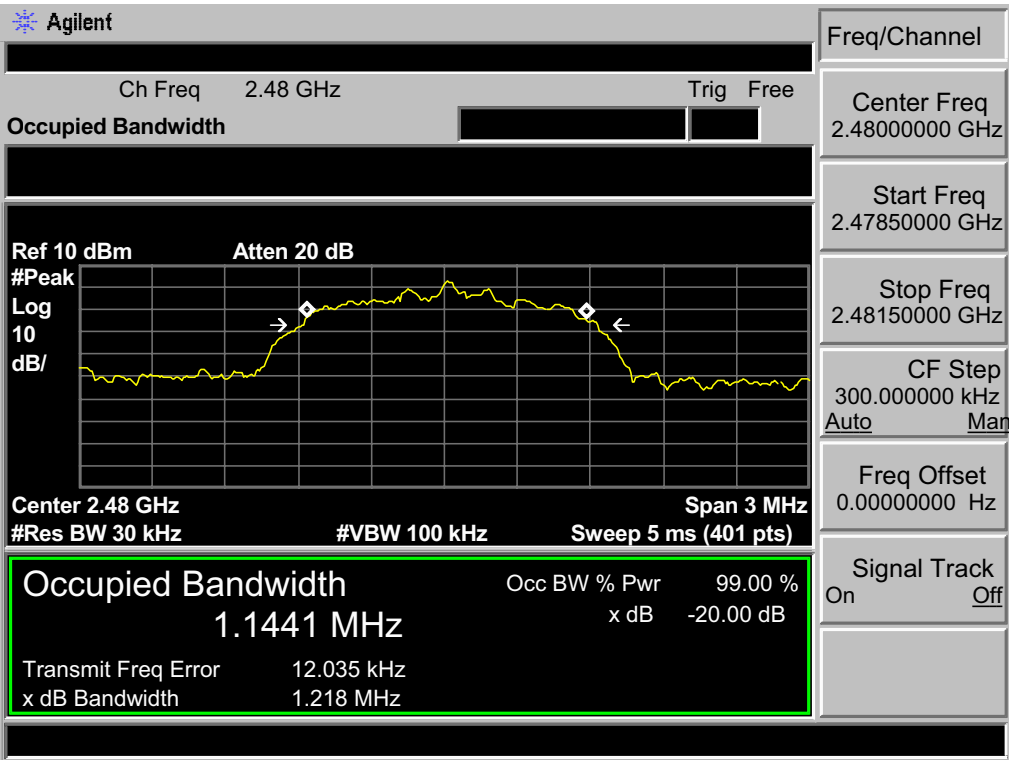


Adapter 2
8-DPSK 2402MHz

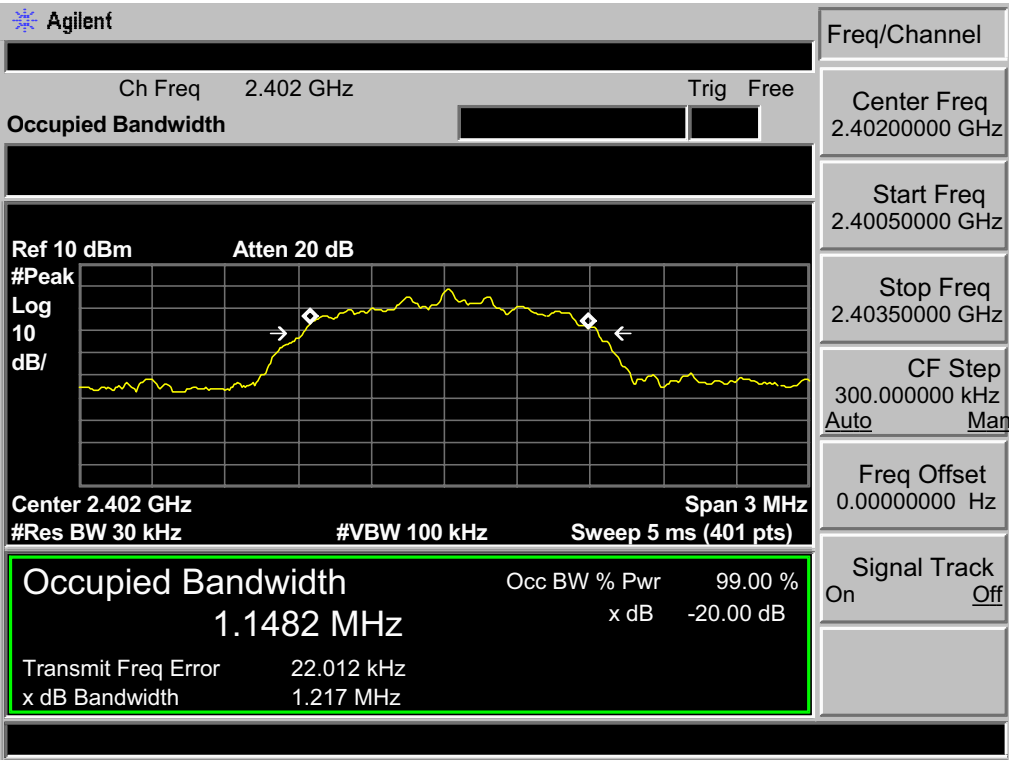

8-DPSK 2441MHz

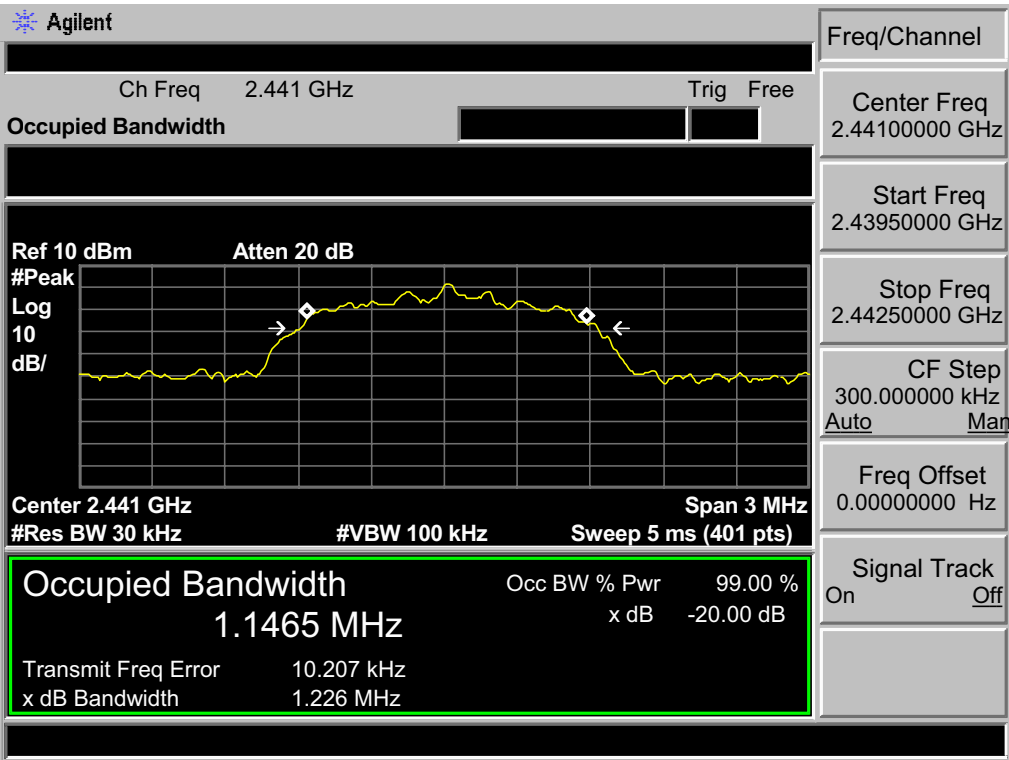

8-DPSK 2480MHz

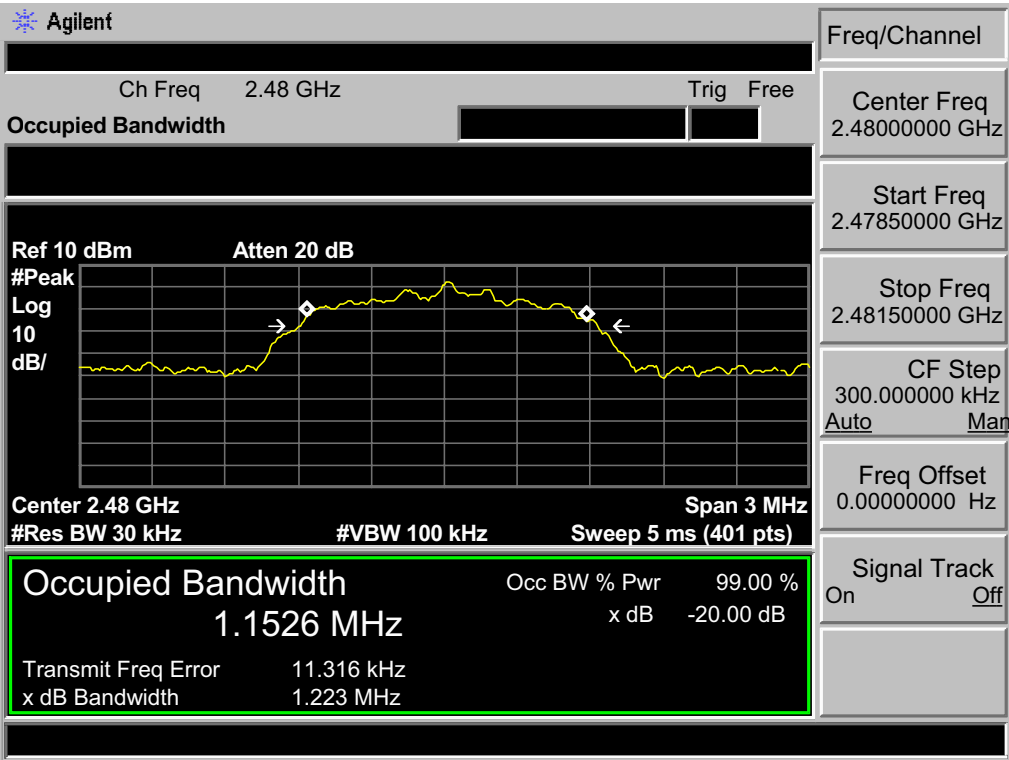

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.

5.3. Test Result


Adapter 1

EUT: Bluetooth speaker M/N: NYNE Bass				
Test date: 2013-09-28		Test site: RF site		Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.025	0.887 MHz	PASS
	Mid CH	1.006	0.886MHz	PASS
	High CH	1.000	0.870MHz	PASS
8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.006		PASS
	High CH	1.000		PASS


Adapter 2

EUT: Bluetooth speaker M/N: NYNE Bass				
Test date: 2013-11-23		Test site: RF site		Tested by: Tony Tang
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.878 MHz	PASS
	Mid CH	1.000	0.870MHz	PASS
	High CH	1.013	0.865MHz	PASS
8-DPSK	Low CH	1.000	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.000		PASS



5.4. Test Data

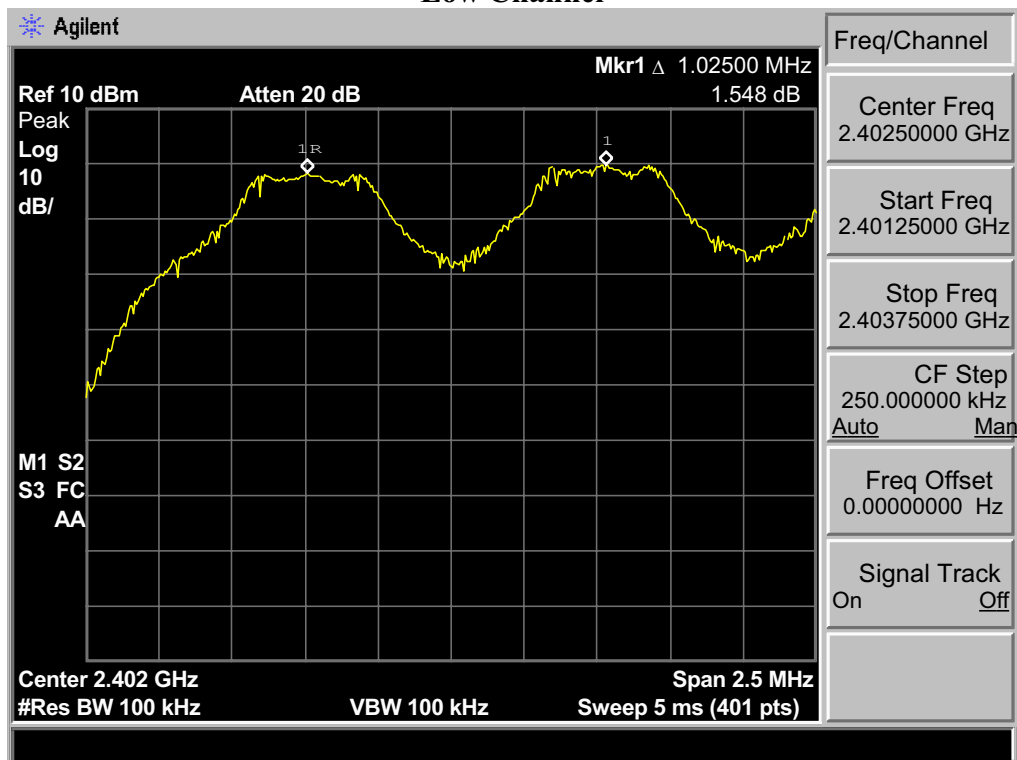Adapter 1
GFSK
Low Channel


Mid Channel

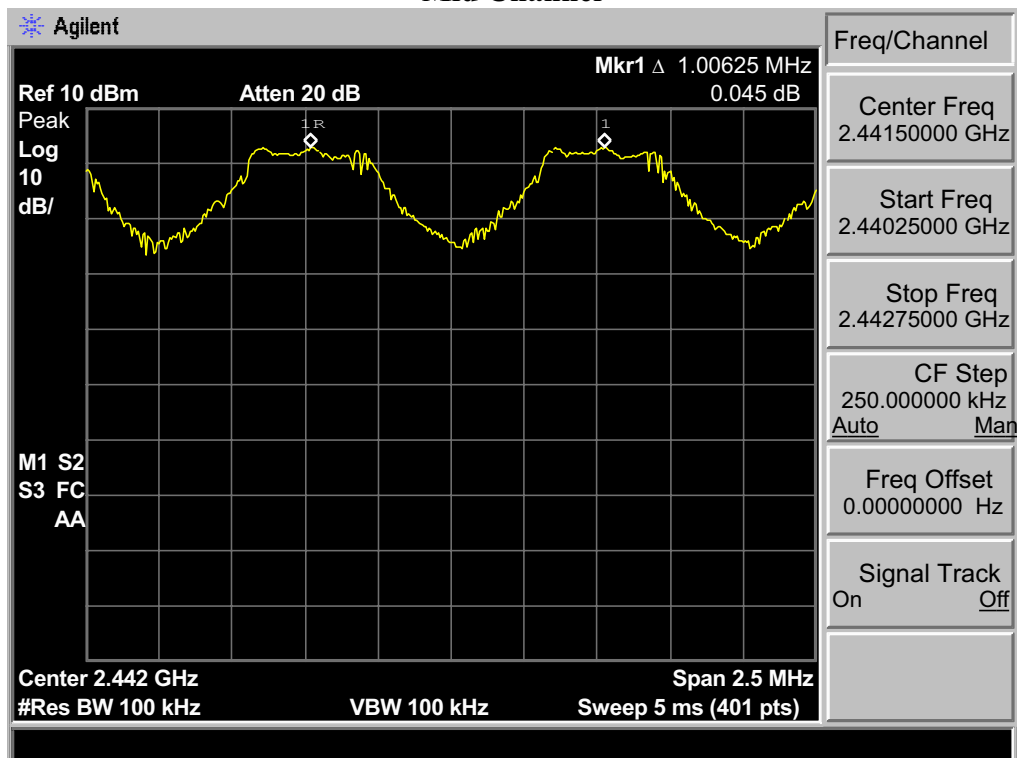


High Channel

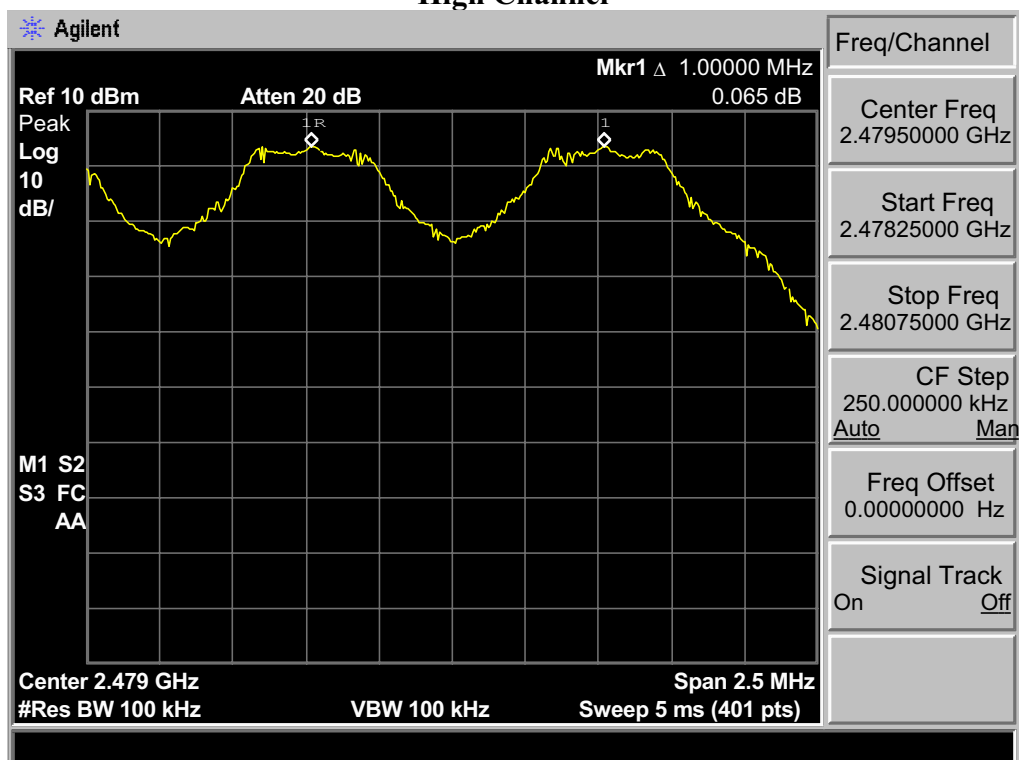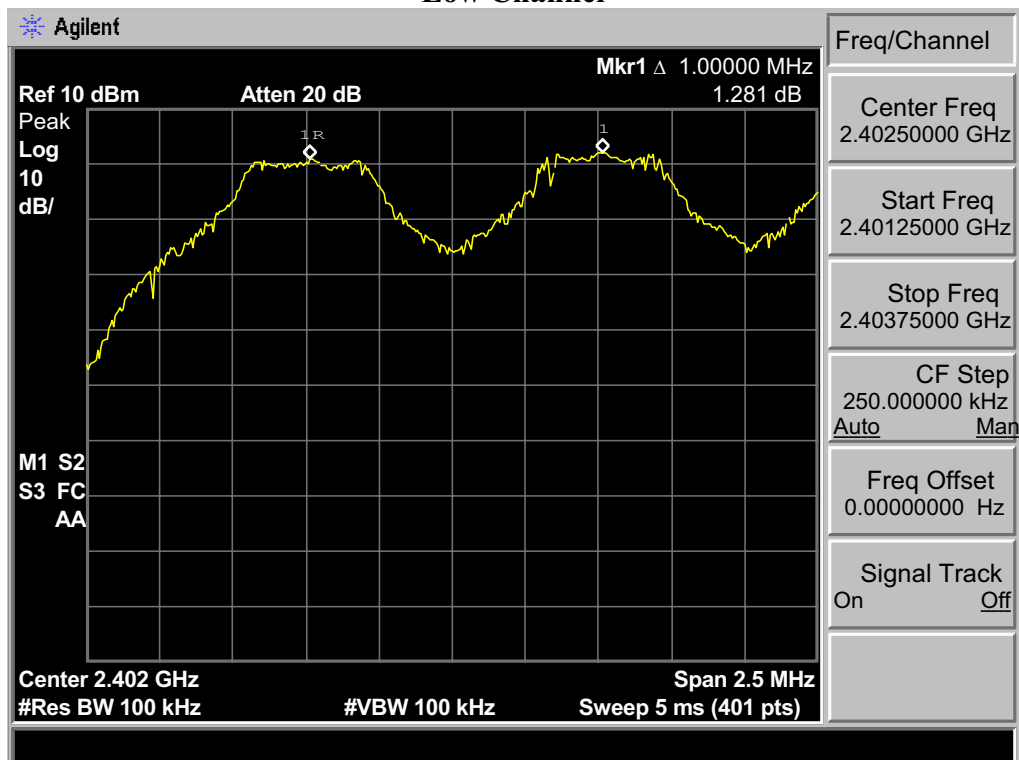Adapter 2
GFSK
Low Channel


Mid Channel

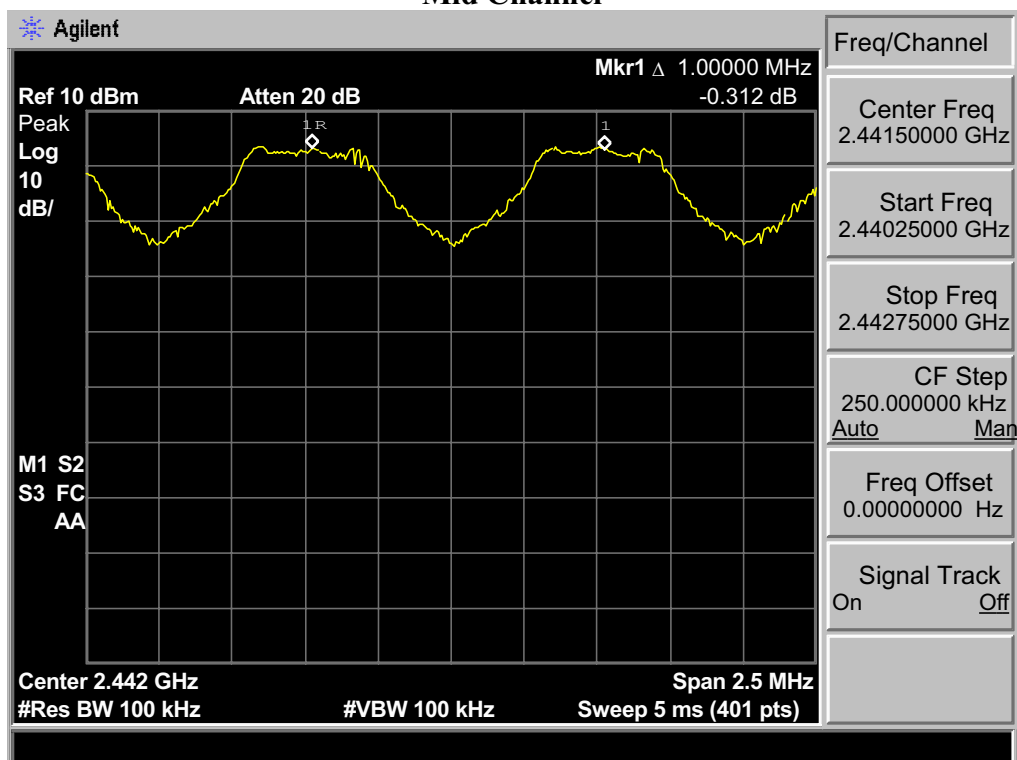


High Channel

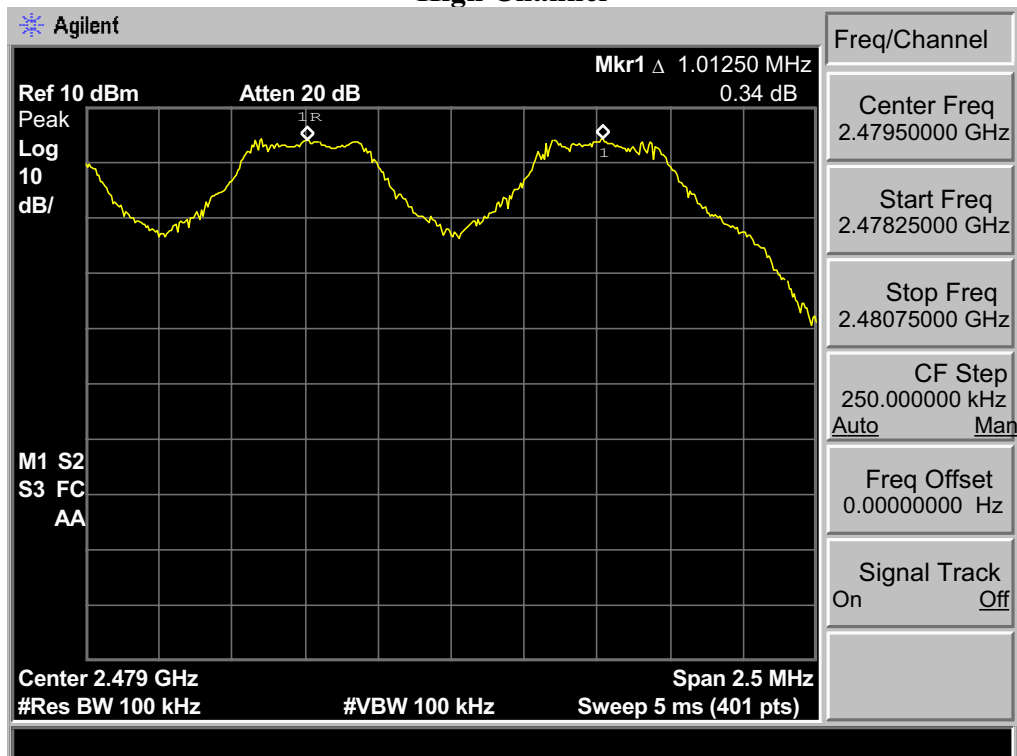



Adapter 1 8-DPSK Low Channel

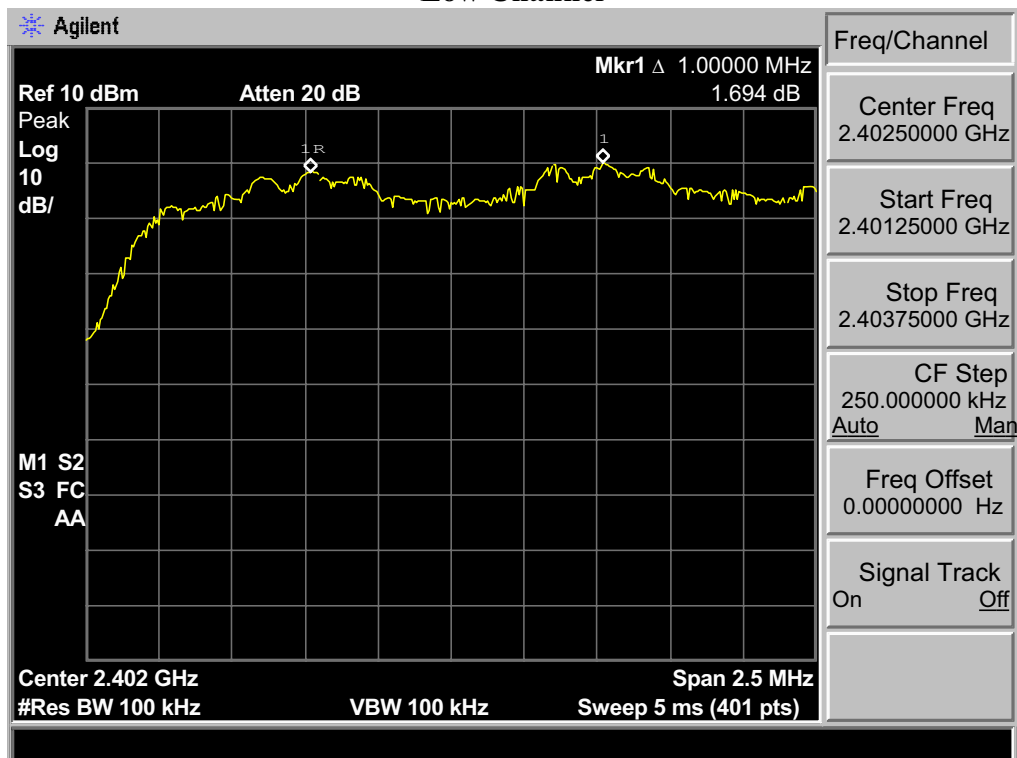


Mid Channel

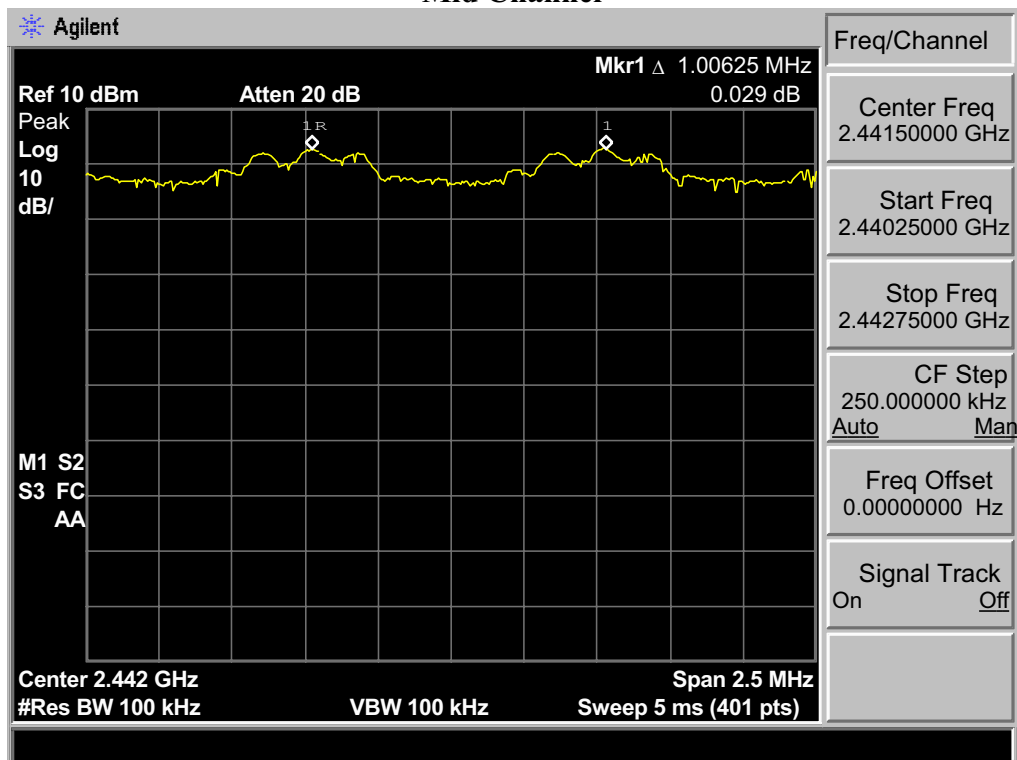


High Channel

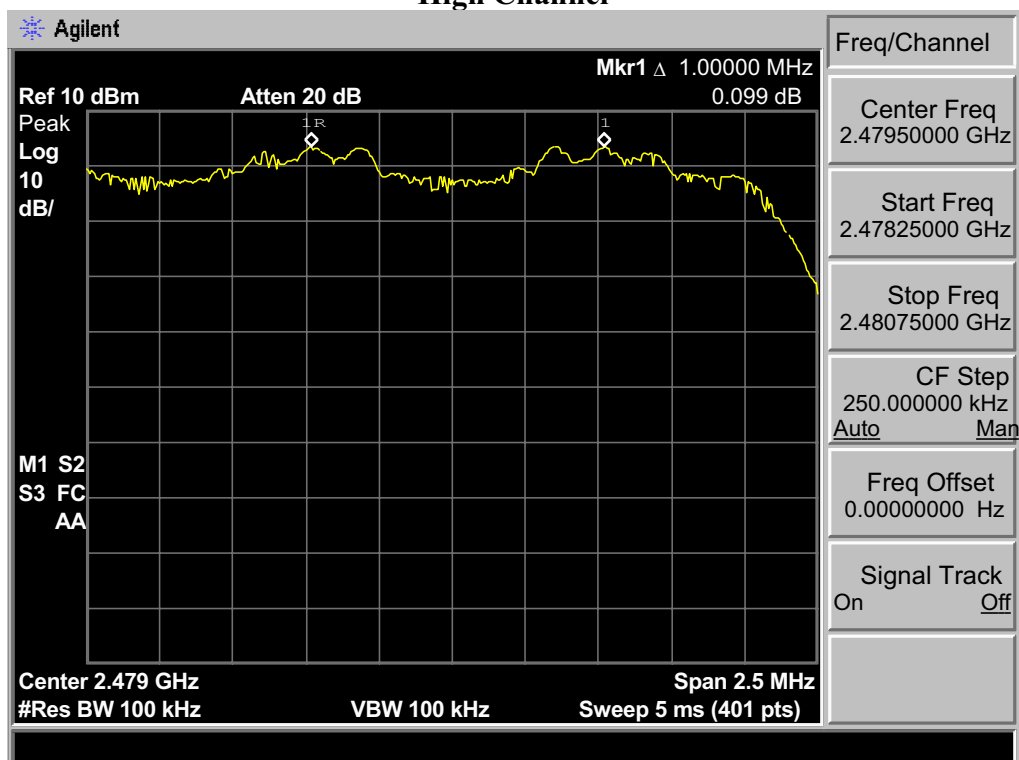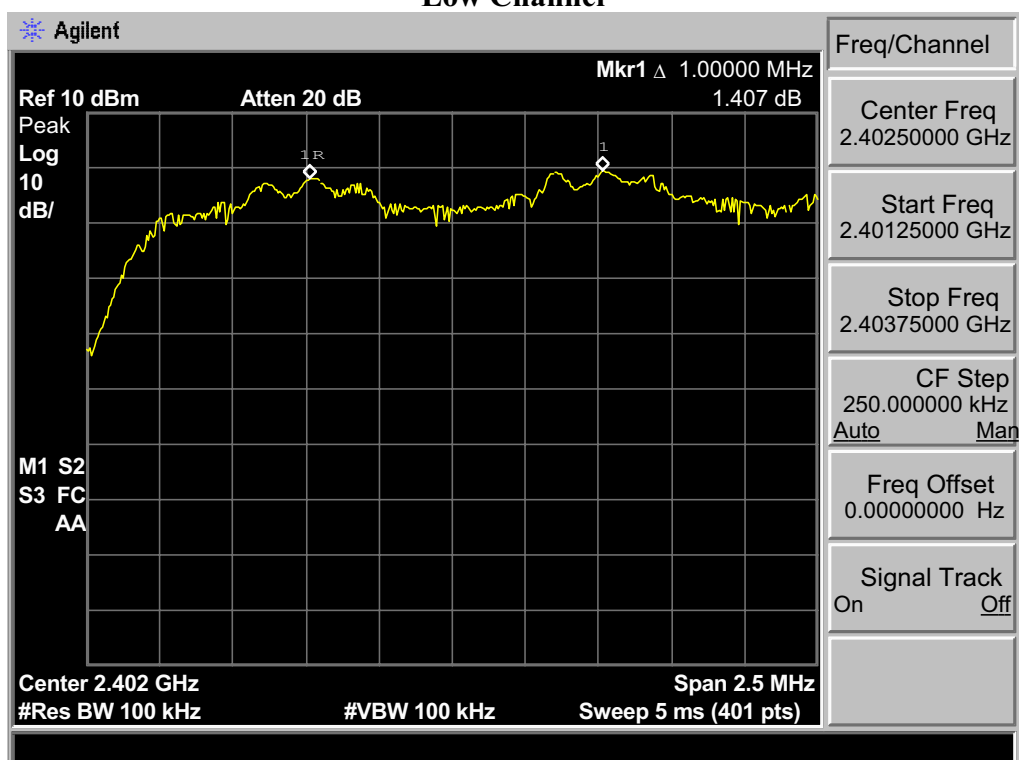Adapter 2
8-DPSK
Low Channel

Mid Channel

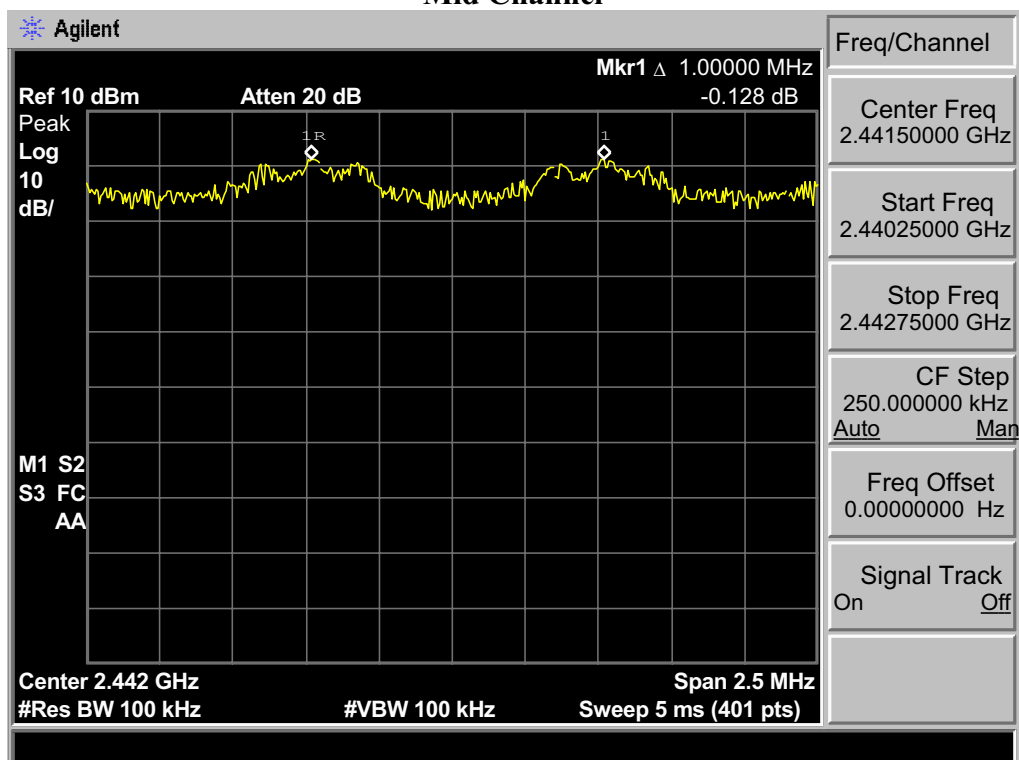

High Channel

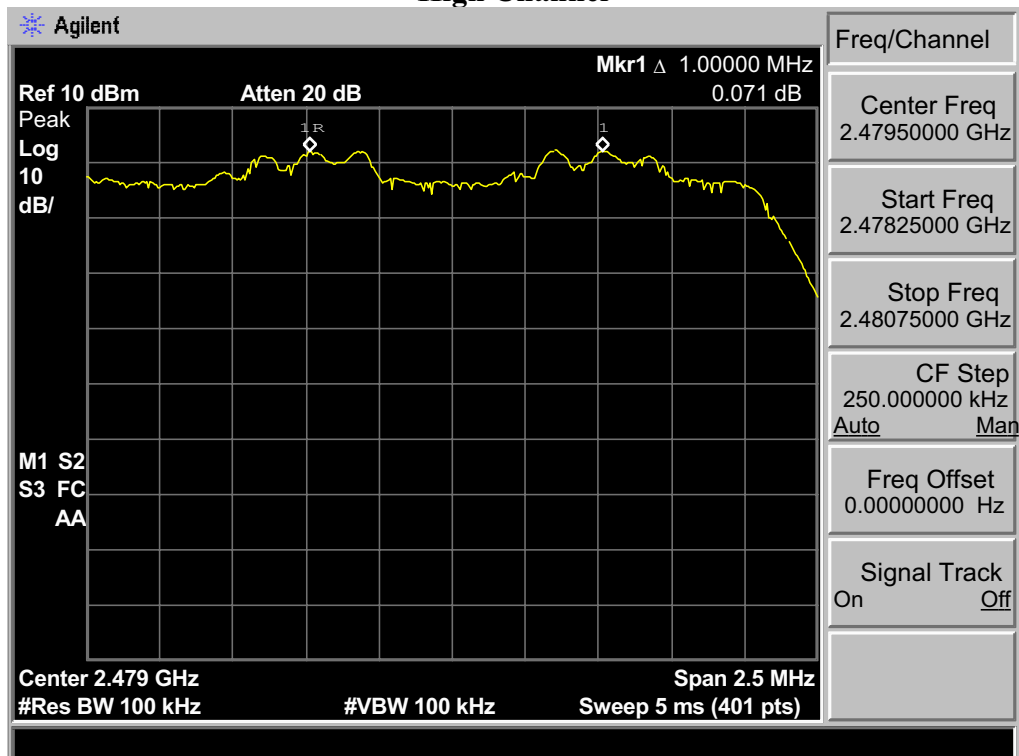

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




Adapter 1

EUT: Bluetooth speaker M/N: NYNE Bass			
Test date: 2013-09-28		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS




Adapter 2

EUT: Bluetooth speaker M/N: NYNE Bass			
Test date: 2013-11-23		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS




6.4. Test Data

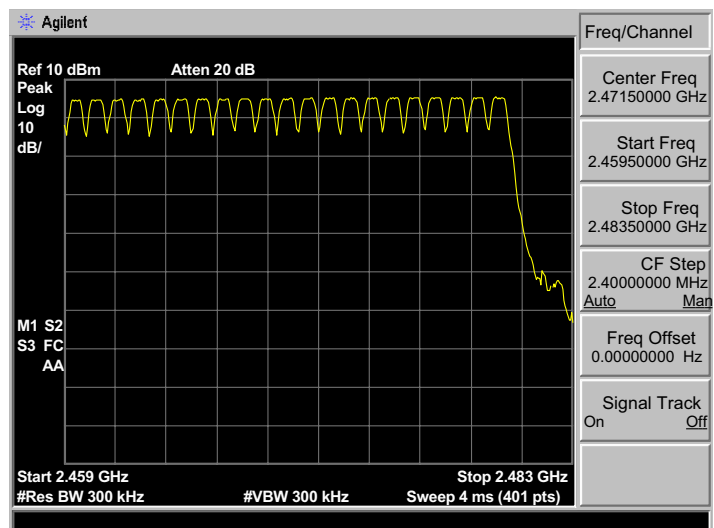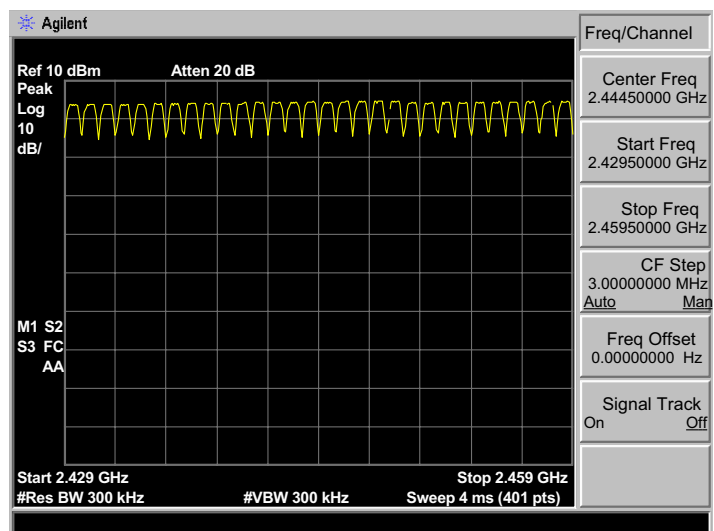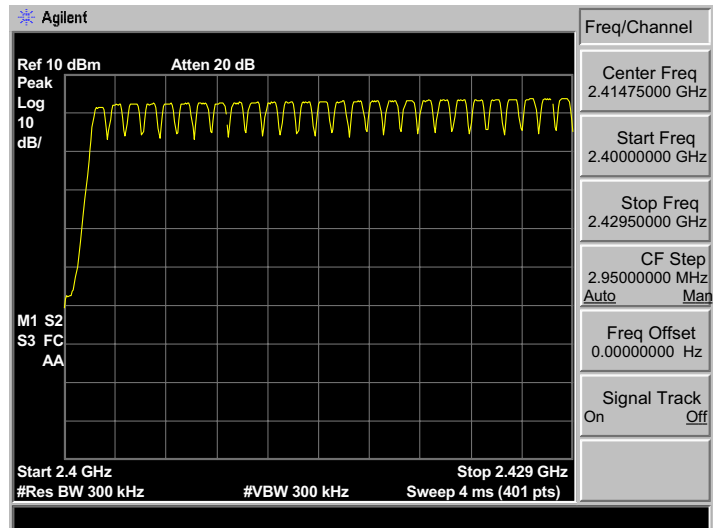Adapter 1
GFSK




Adapter 2 GFSK

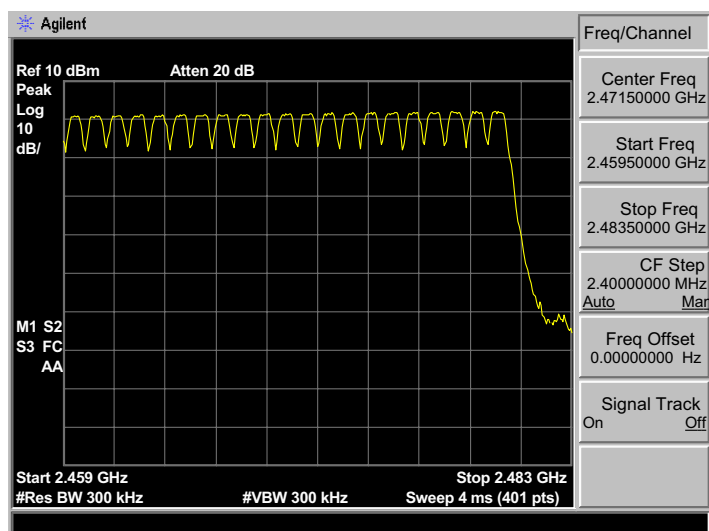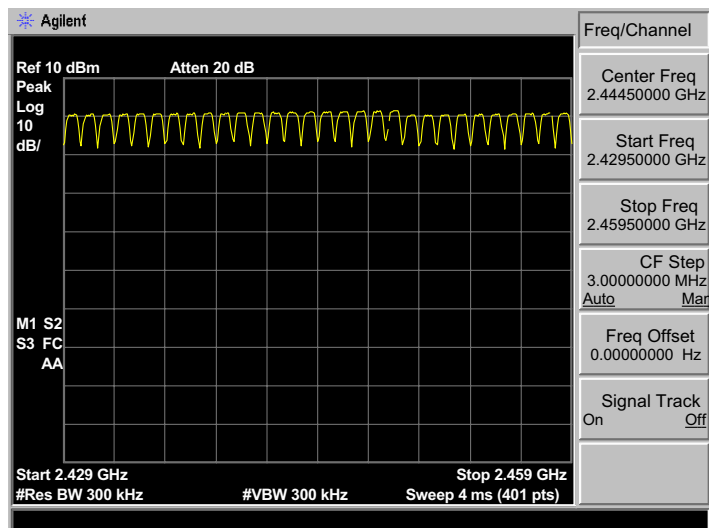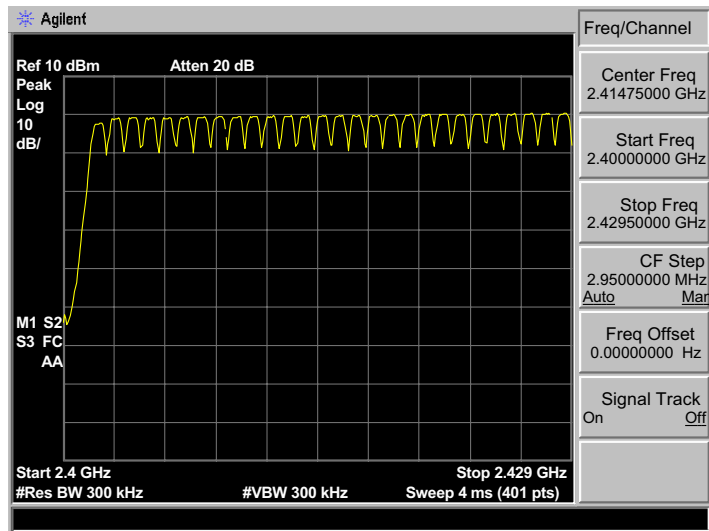

Adapter 1 8-DPSK

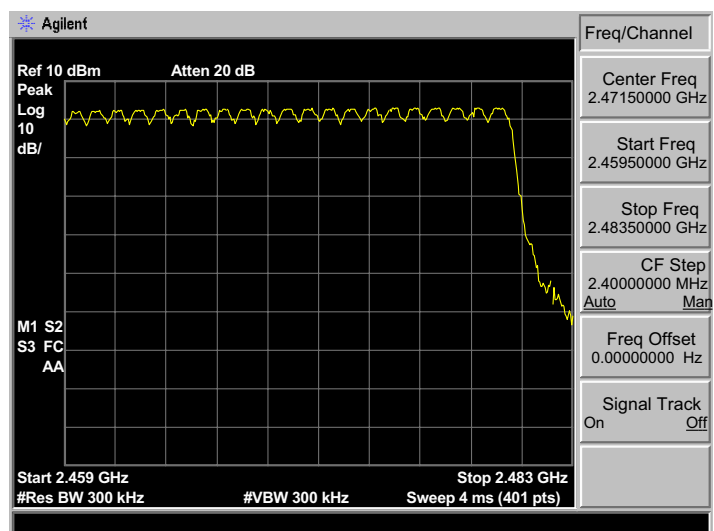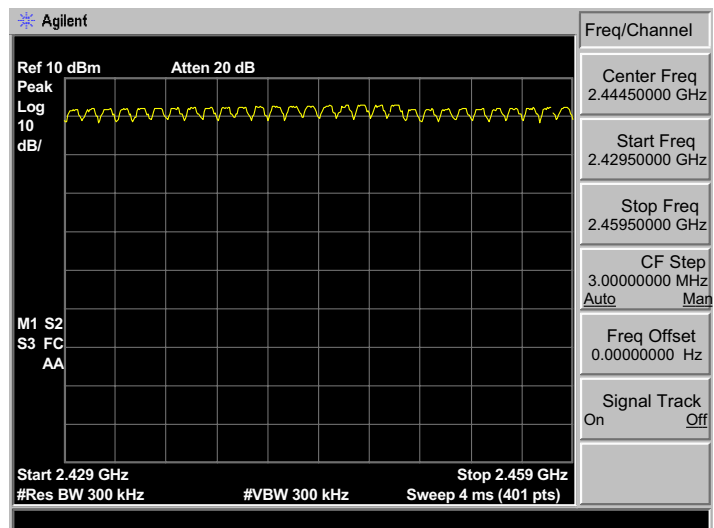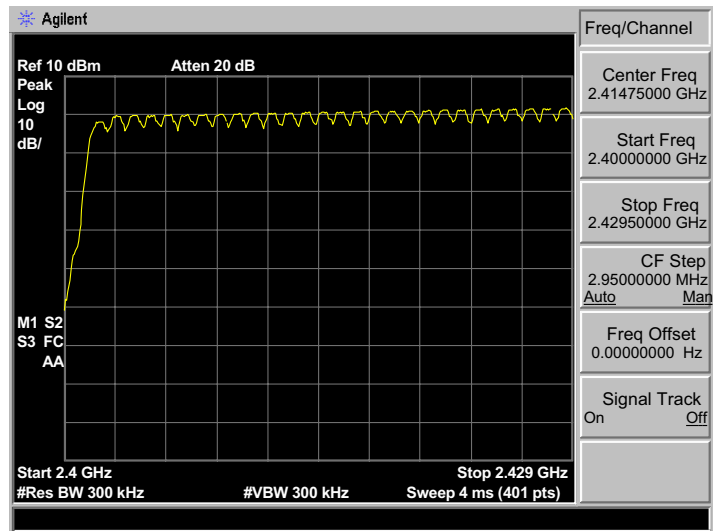

Adapter 2 8-DPSK

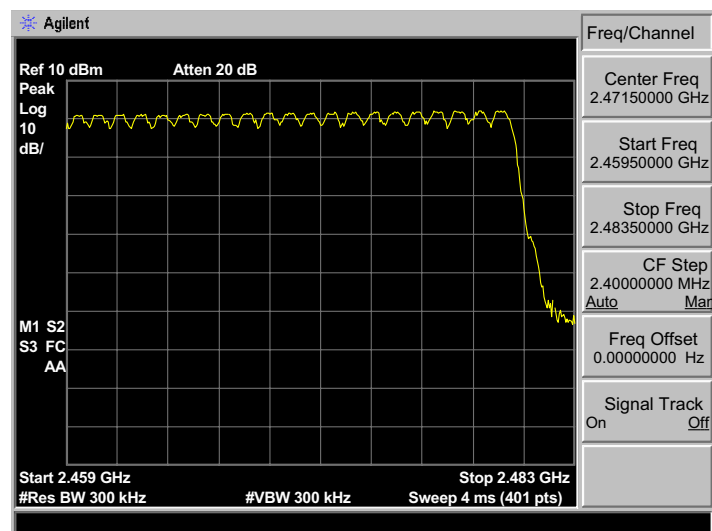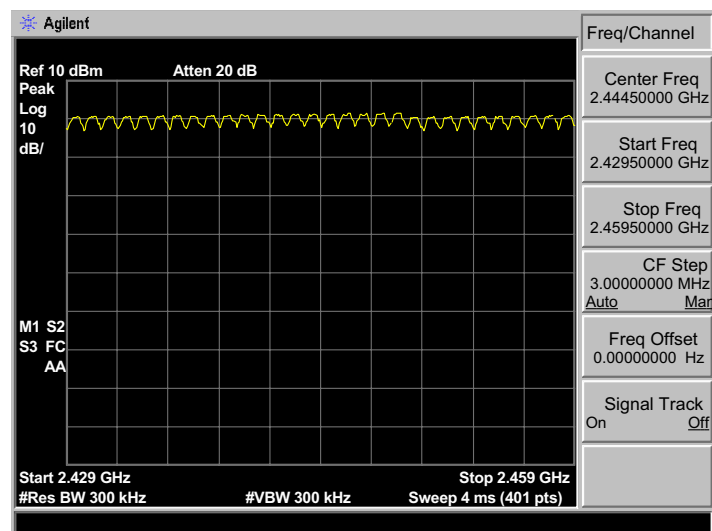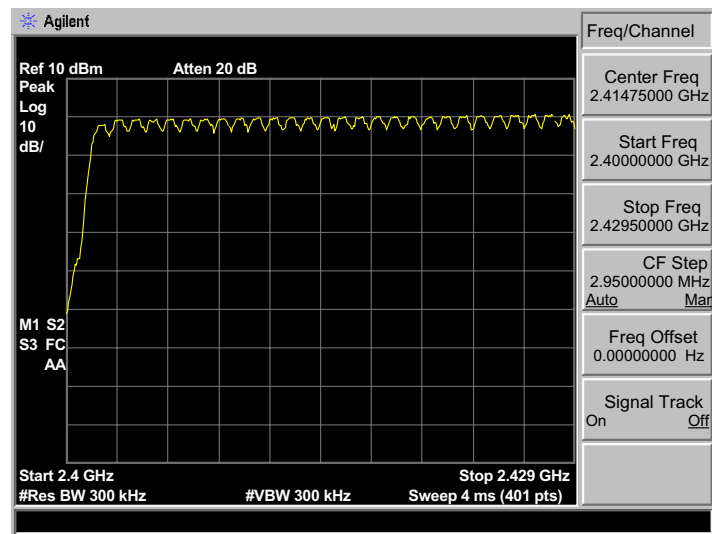

7. DWELL TIME

7.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Result

Adapter 1

EUT: Bluetooth speaker			
M/N: NYNE Bass			
Test date: 2013-09-28		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time (ms)	Limit	Conclusion
GFSK DH1	148.52	<400ms	PASS
GFSK DH3	287.56	<400ms	PASS
GFSK DH5	322.32	<400ms	PASS
8-DPSK DH1	170.64	<400ms	PASS
8-DPSK DH3	285.98	<400ms	PASS
8-DPSK DH5	328.77	<400ms	PASS



Adapter 2

EUT: Bluetooth speaker			
M/N: NYNE Bass			
Test date: 2013-11-23		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time (ms)	Limit	Conclusion
GFSK DH1	151.68	<400ms	PASS
GFSK DH3	274.92	<400ms	PASS
GFSK DH5	321.25	<400ms	PASS
8-DPSK DH1	158.00	<400ms	PASS
8-DPSK DH3	271.76	<400ms	PASS
8-DPSK DH5	318.02	<400ms	PASS



7.3. Test Data

Adapter 1



$$\text{GFSK DH1 : } 50\text{hop}/5\text{s} * 0.4 * 79 * 0.47\text{ms} = 148.52$$

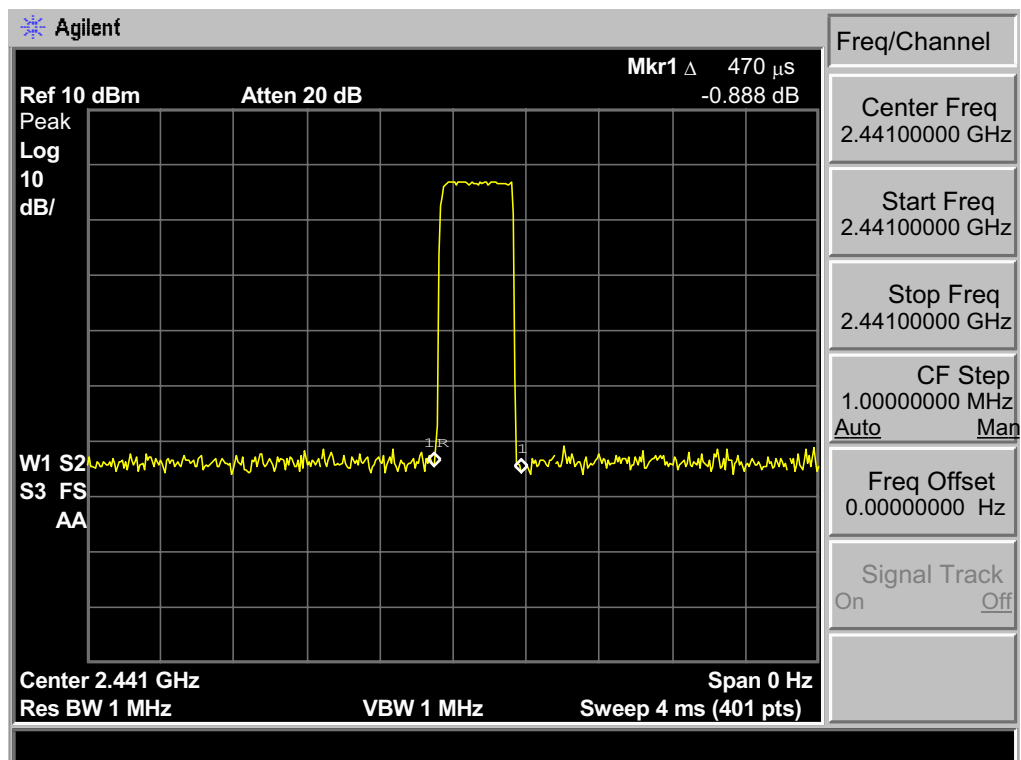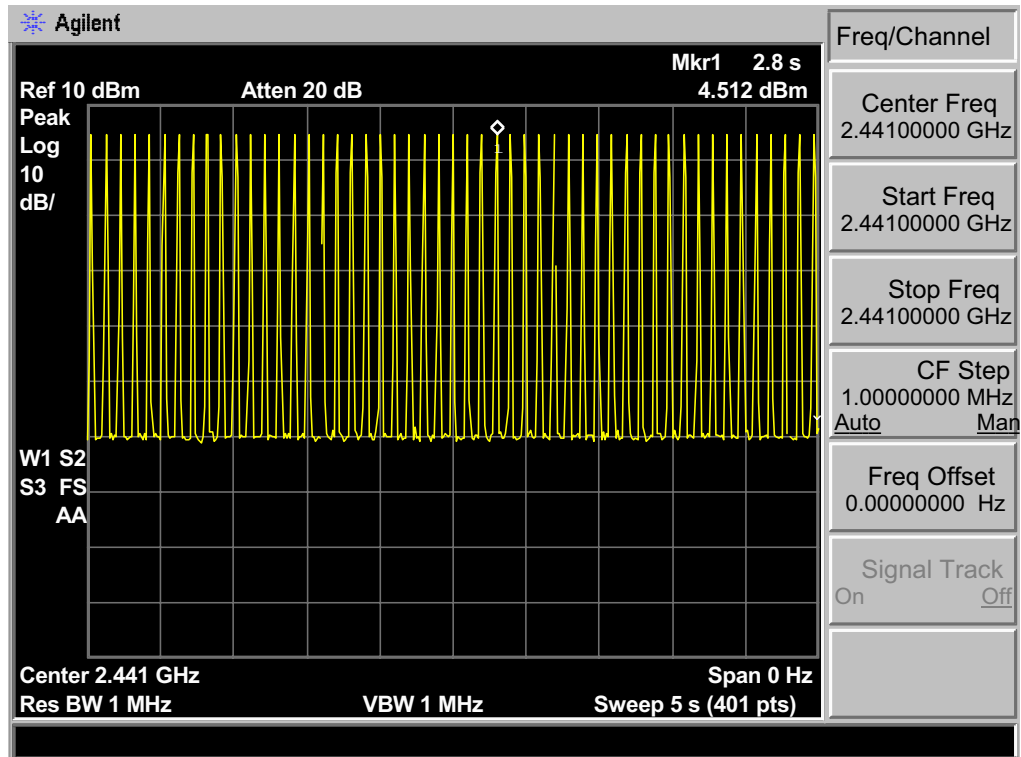

GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.82\text{ms} = 287.56$

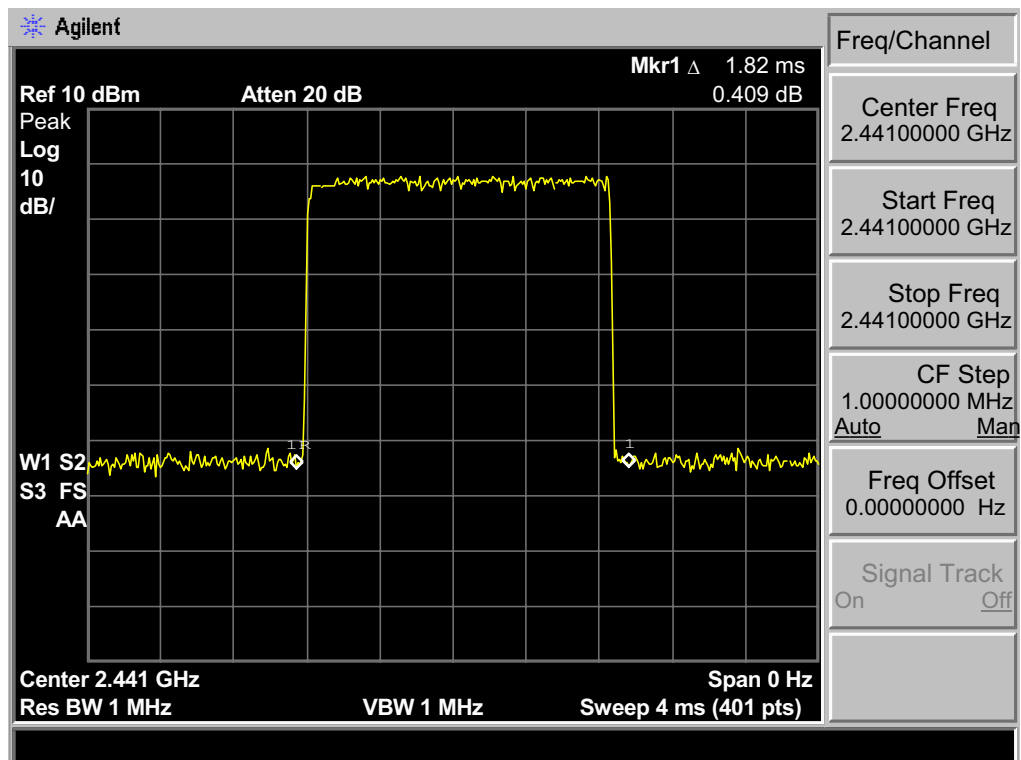
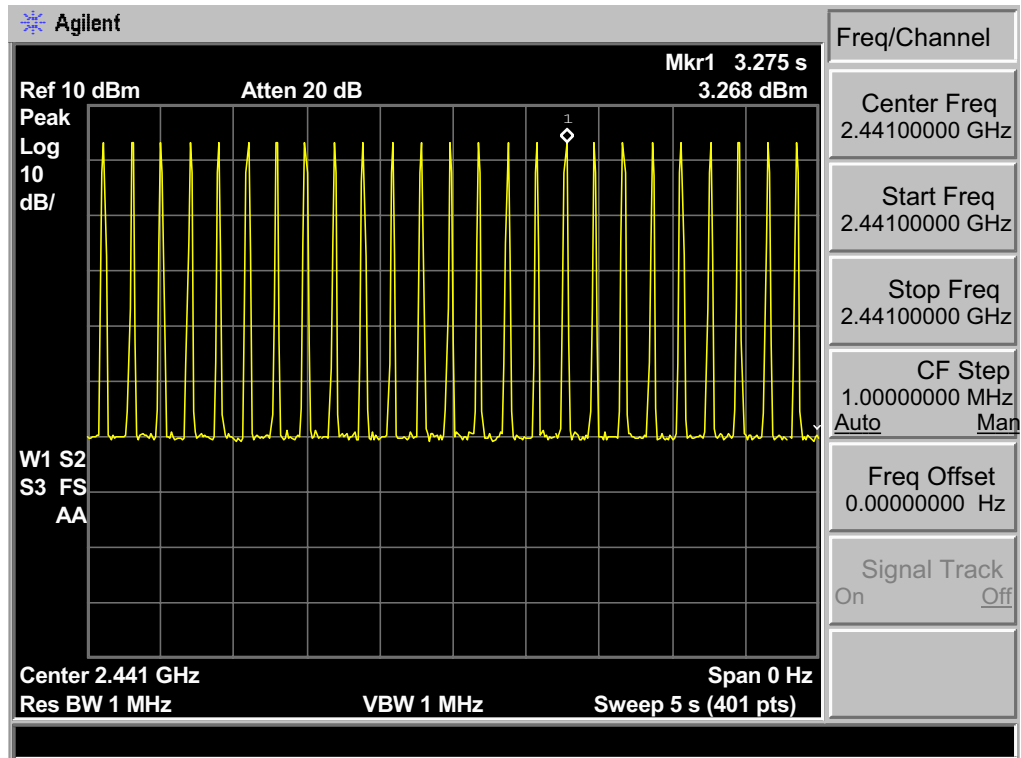


GSFK DH5 : 17hop/5s * 0.4 * 79 * 3.00ms = 322.32

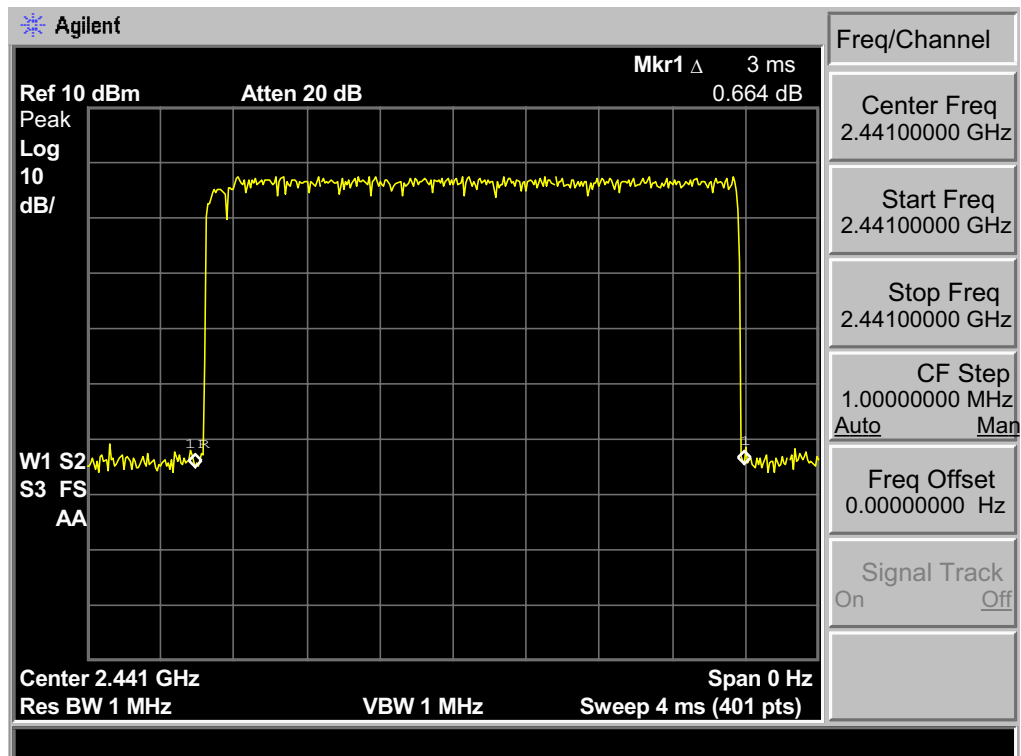
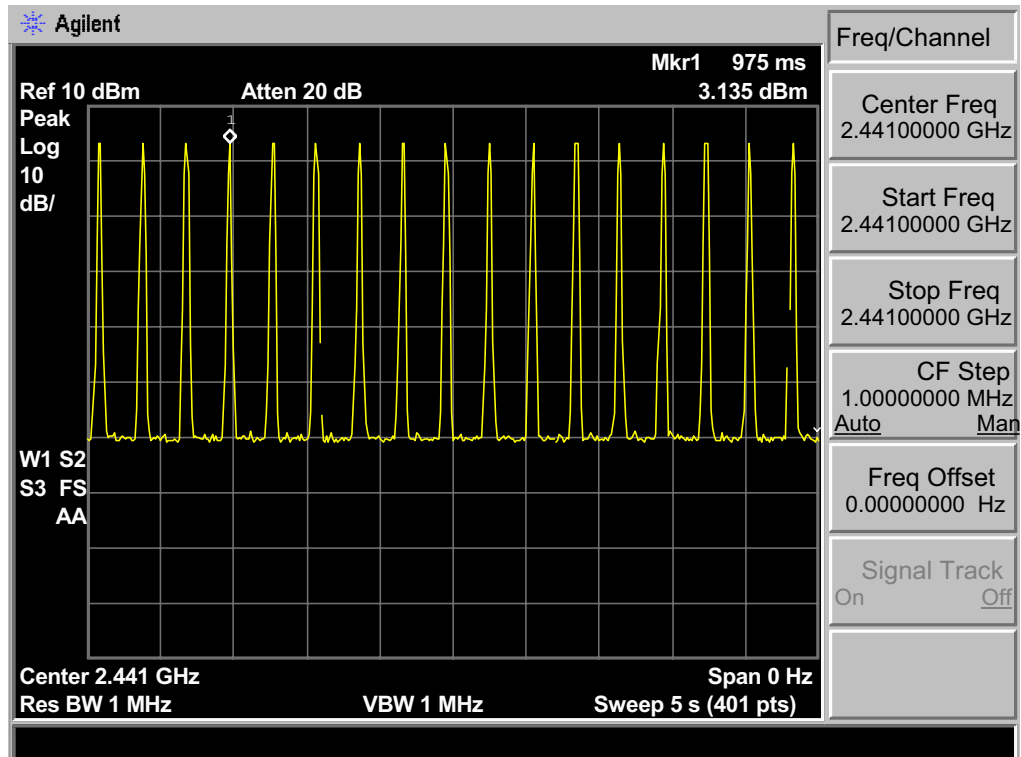


Adapter 2



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.48\text{ms} = 151.68$

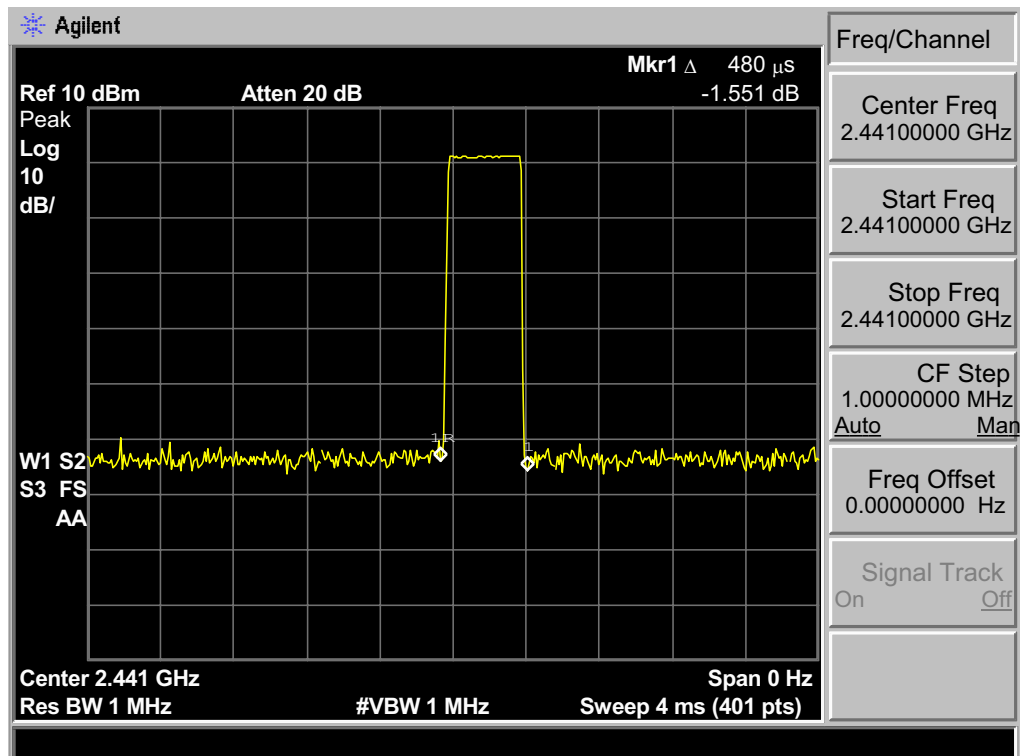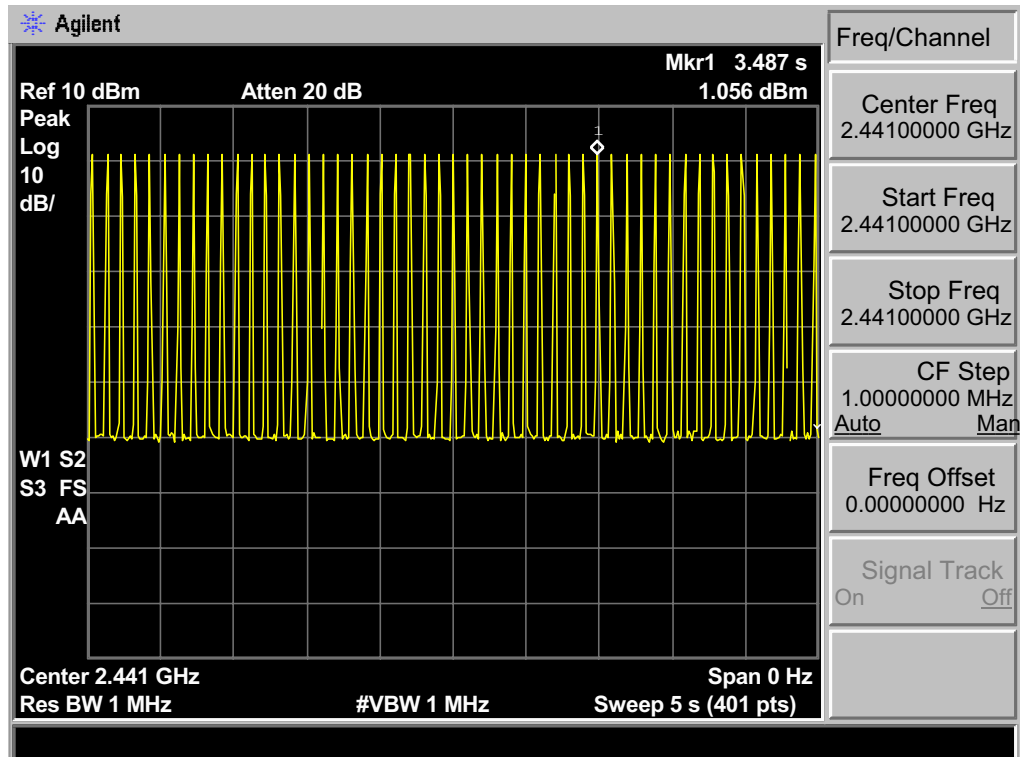

GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.74\text{ms} = 274.92$

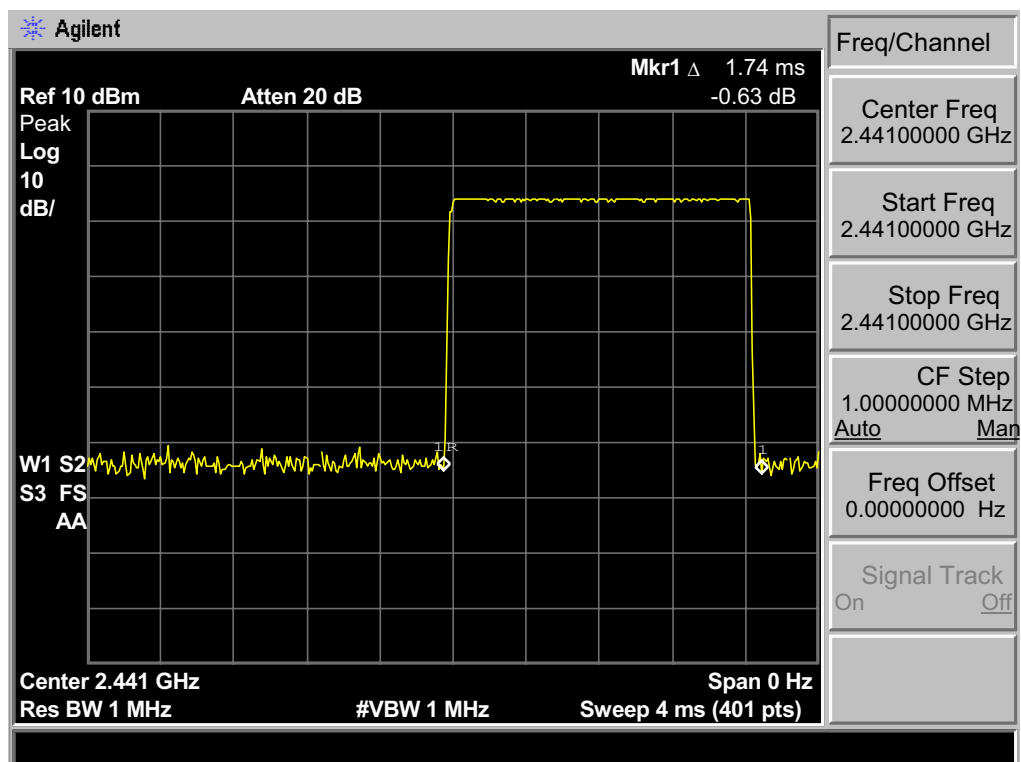
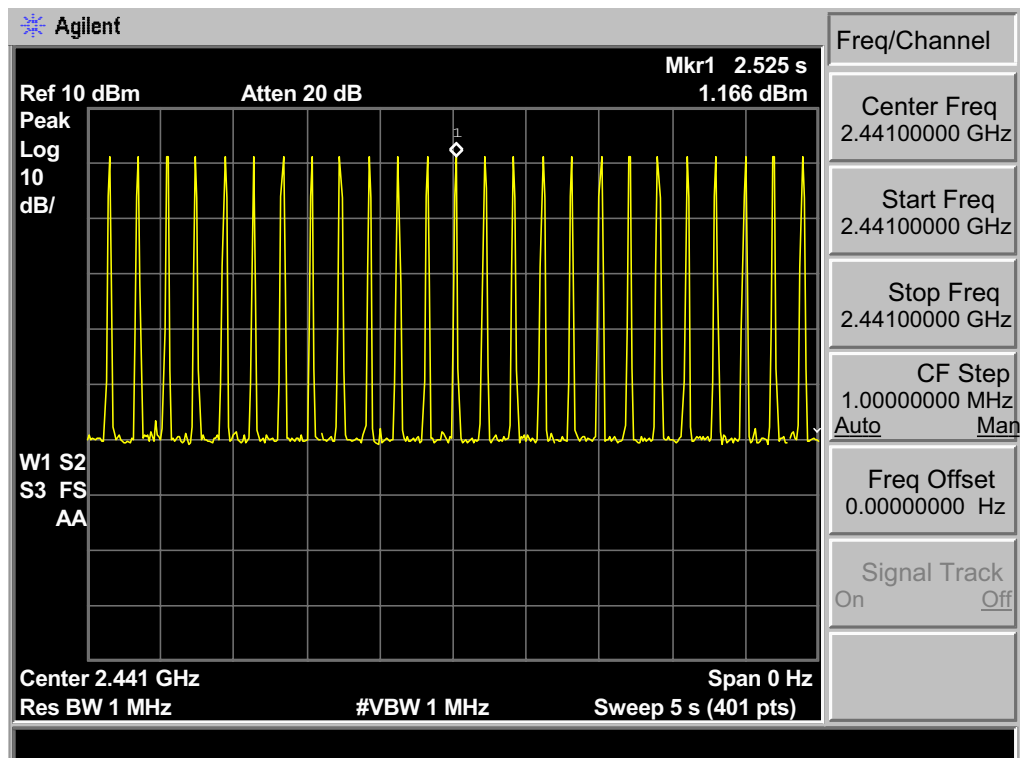


GSFK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 2.99\text{ms} = 321.25$

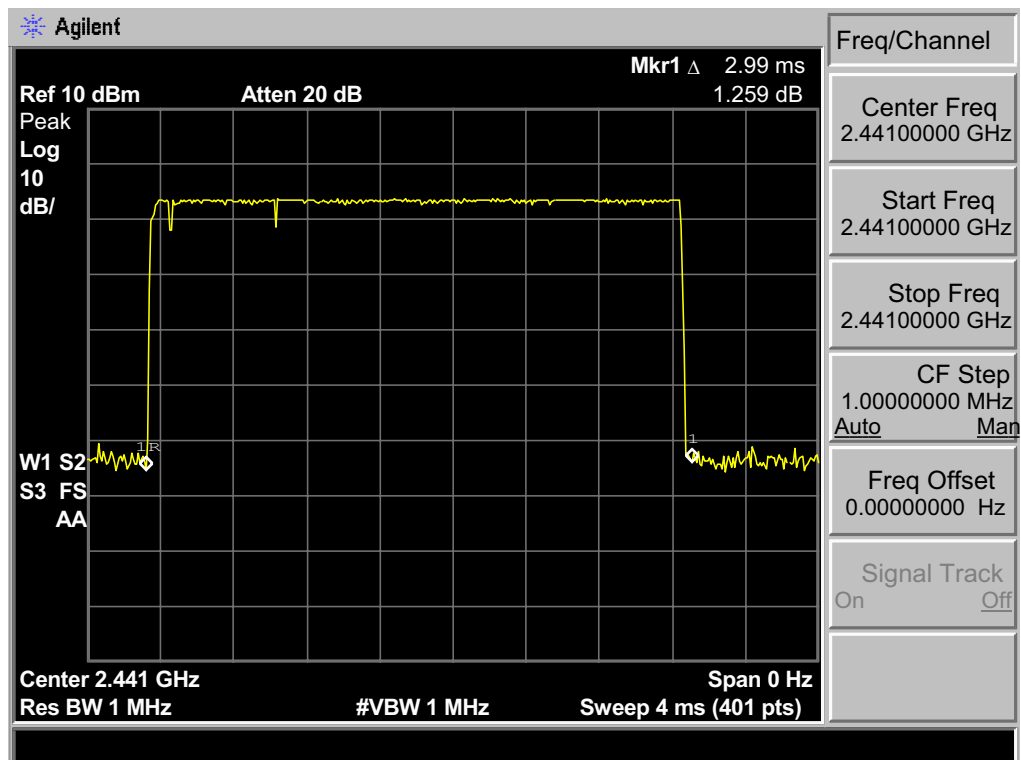
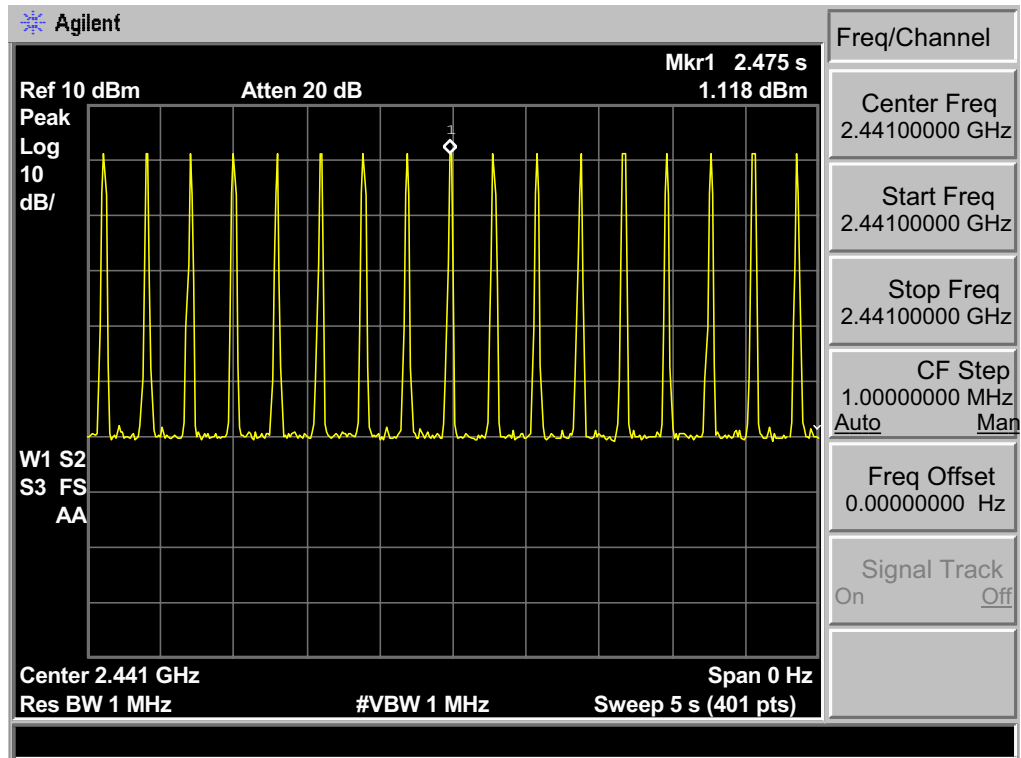


Adapter 1



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.54\text{ms} = 170.64$

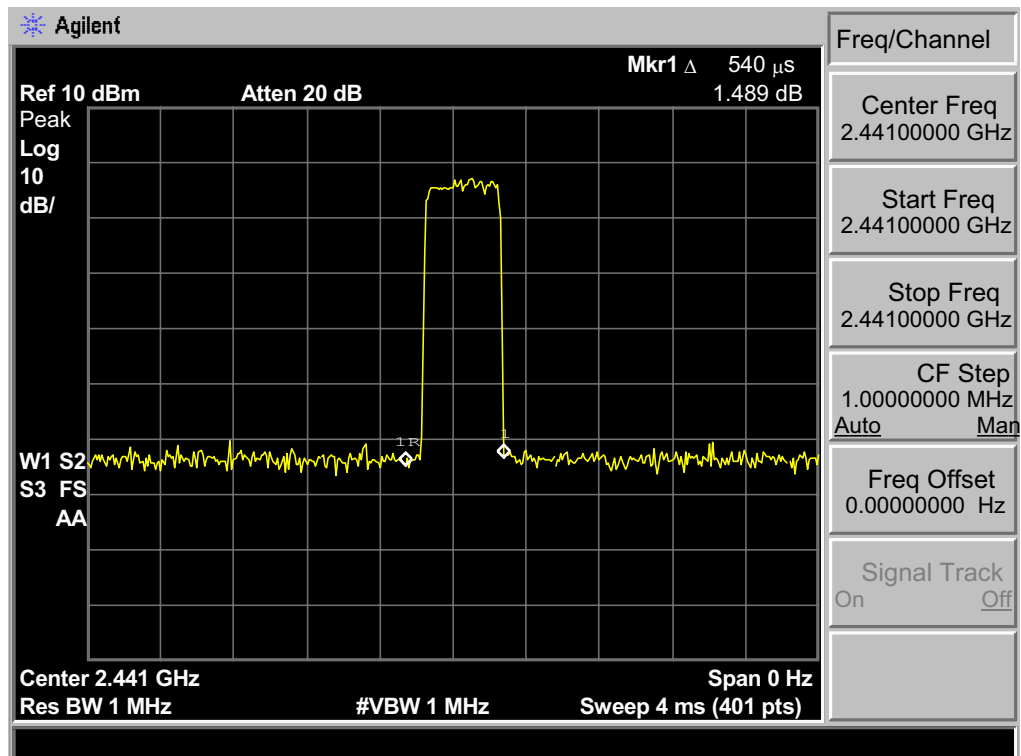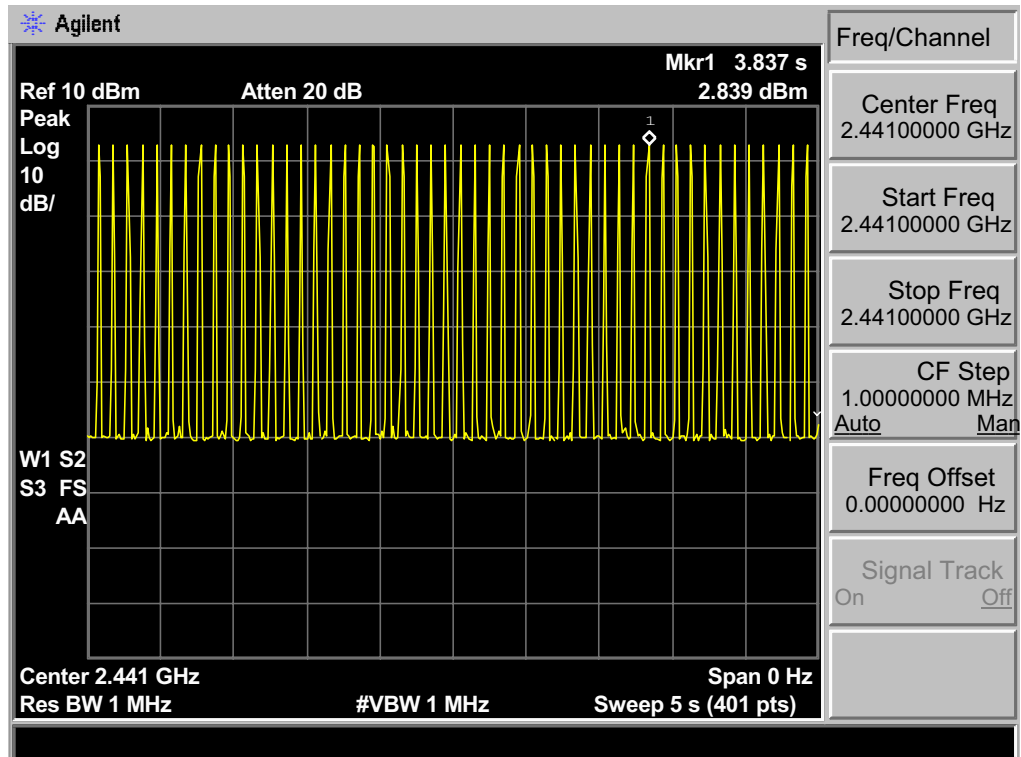

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.81\text{ms} = 285.98$

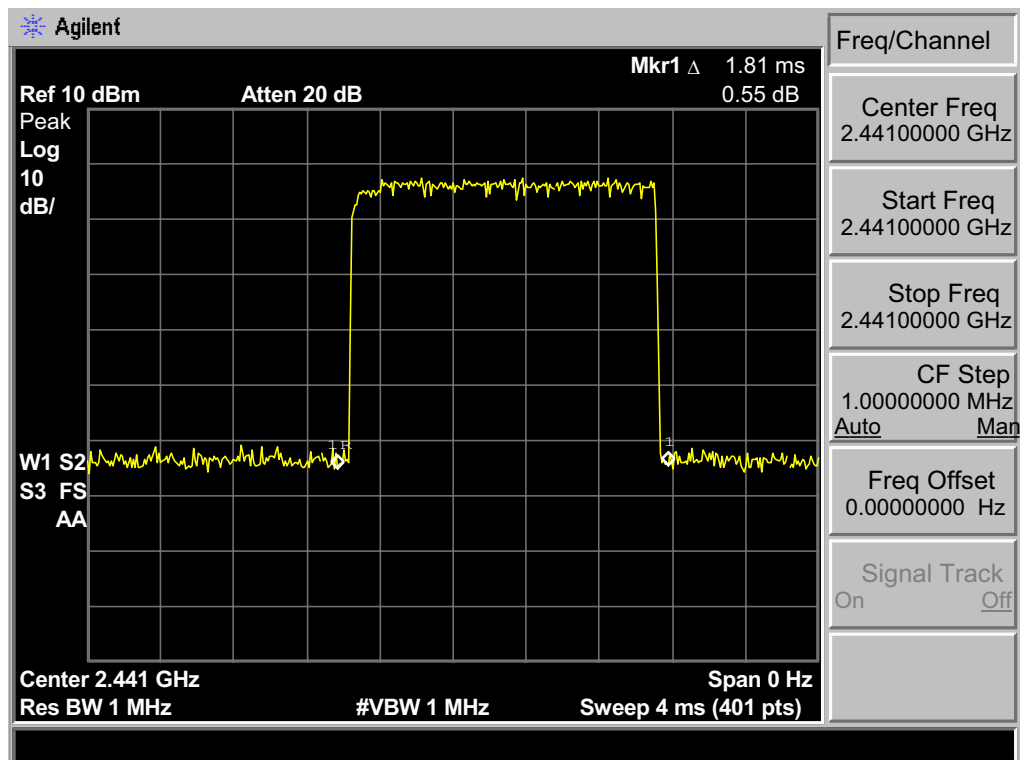
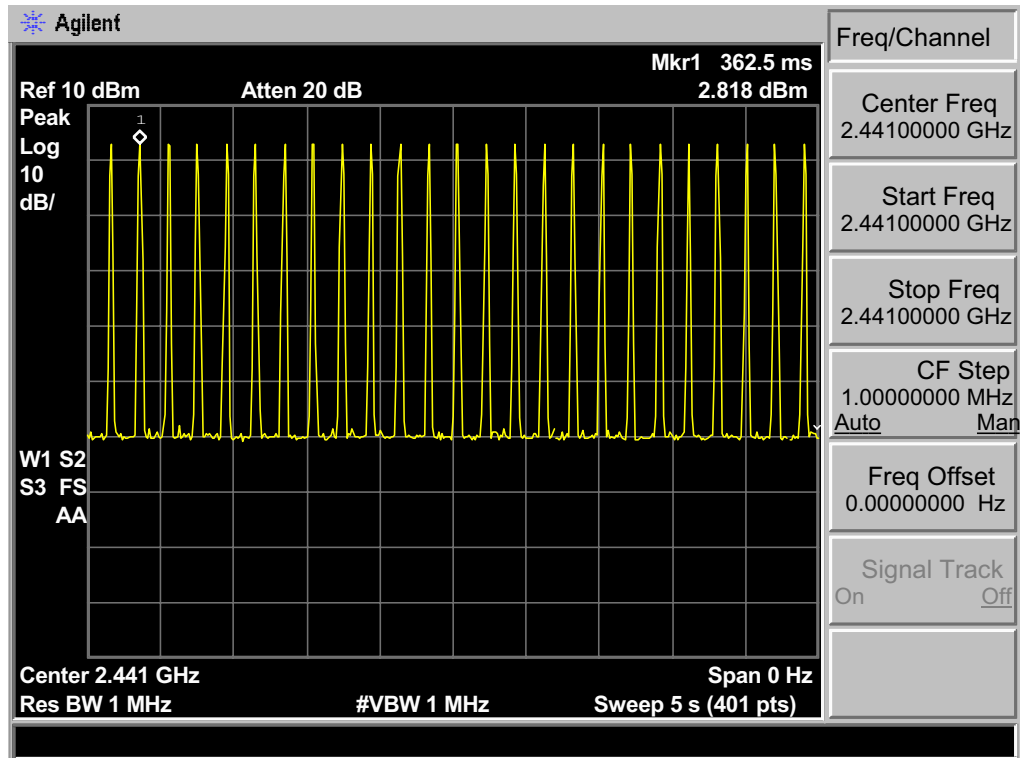


8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 3.06\text{ms} = 328.77$

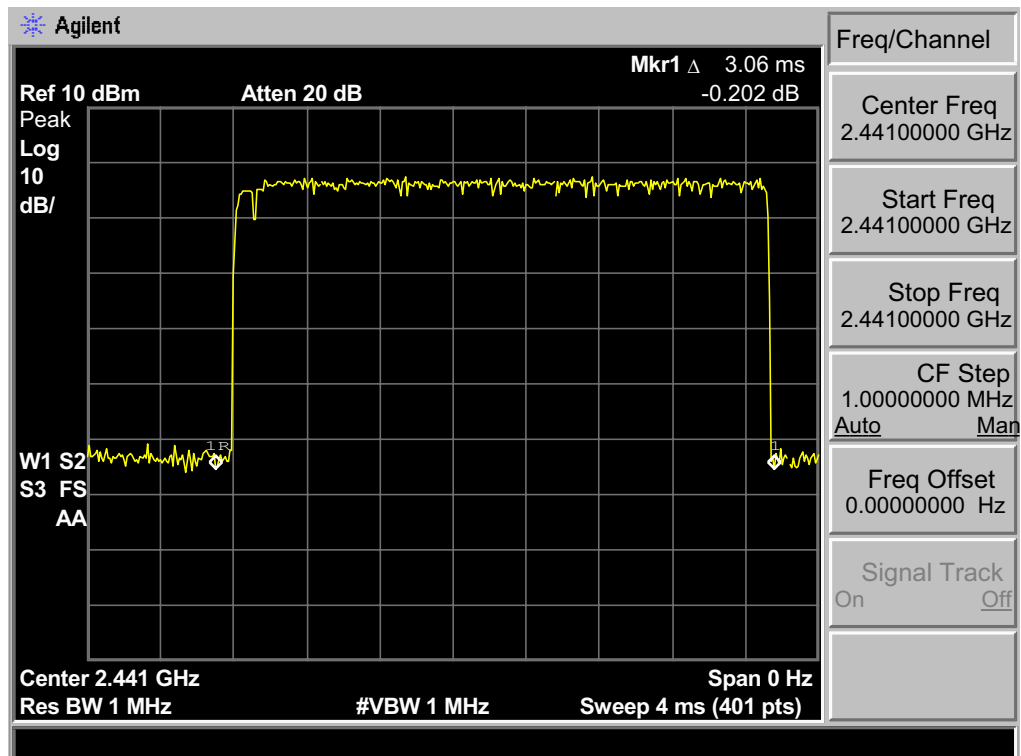
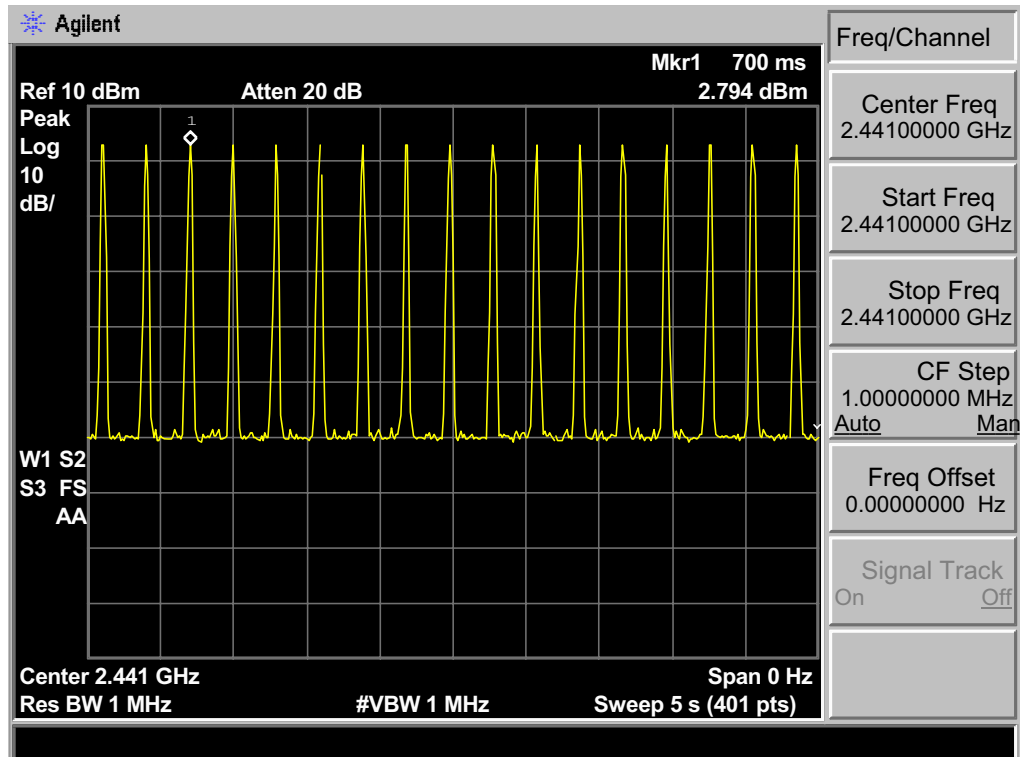


Adapter 2



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.50\text{ms} = 158.00$

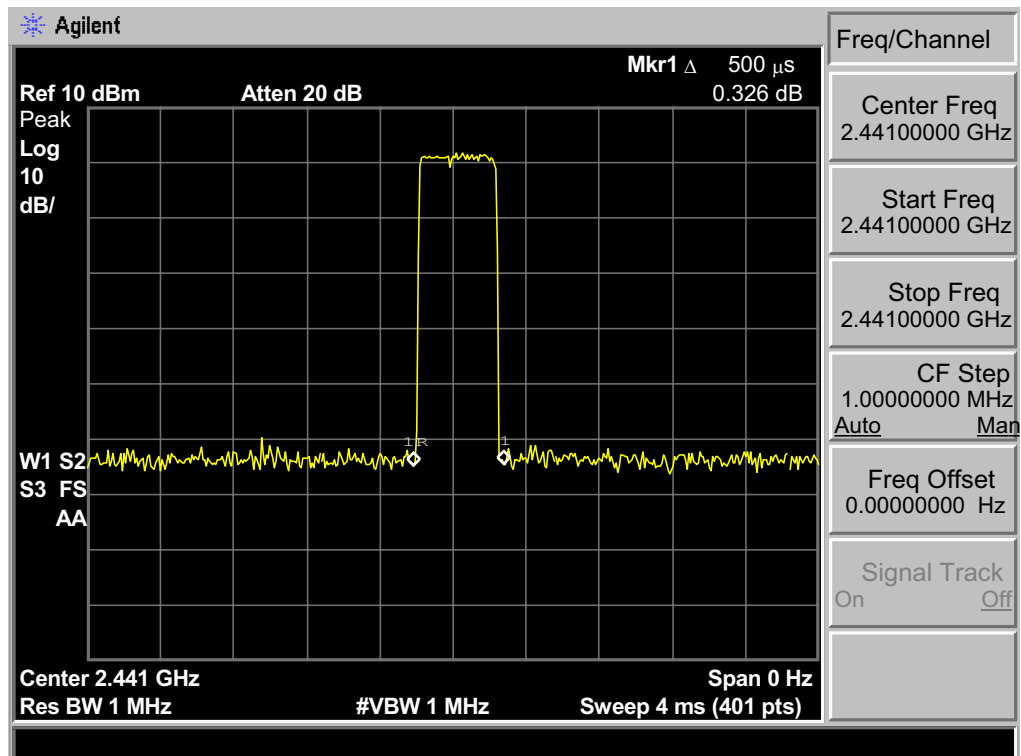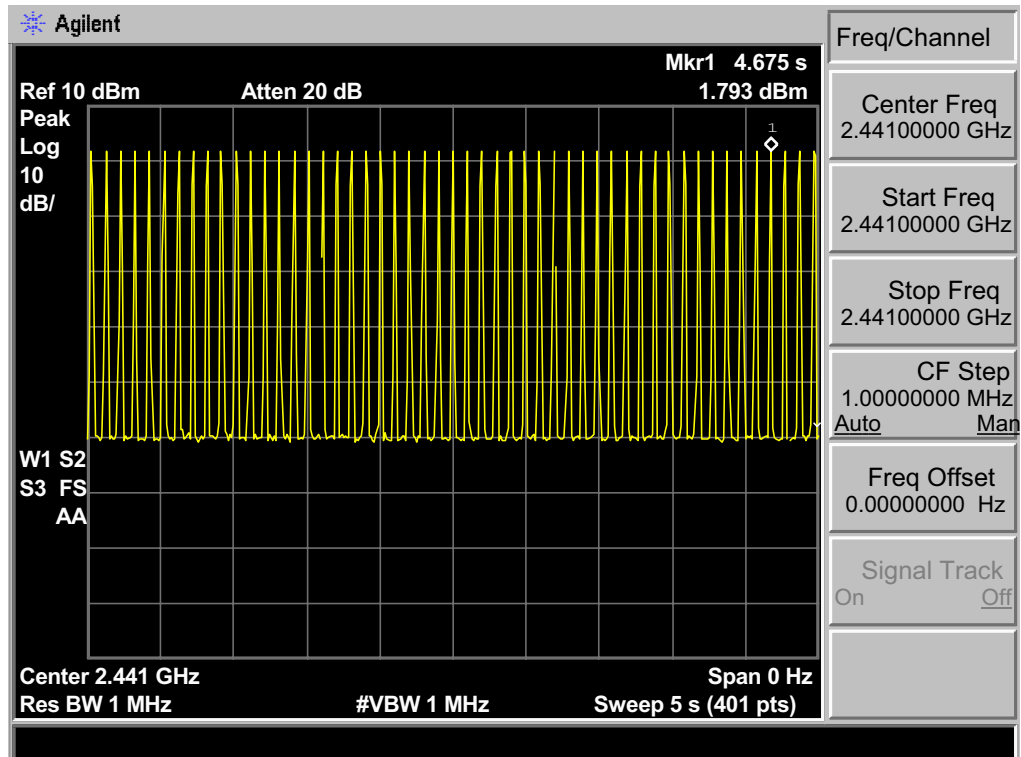

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.72\text{ms} = 271.76$

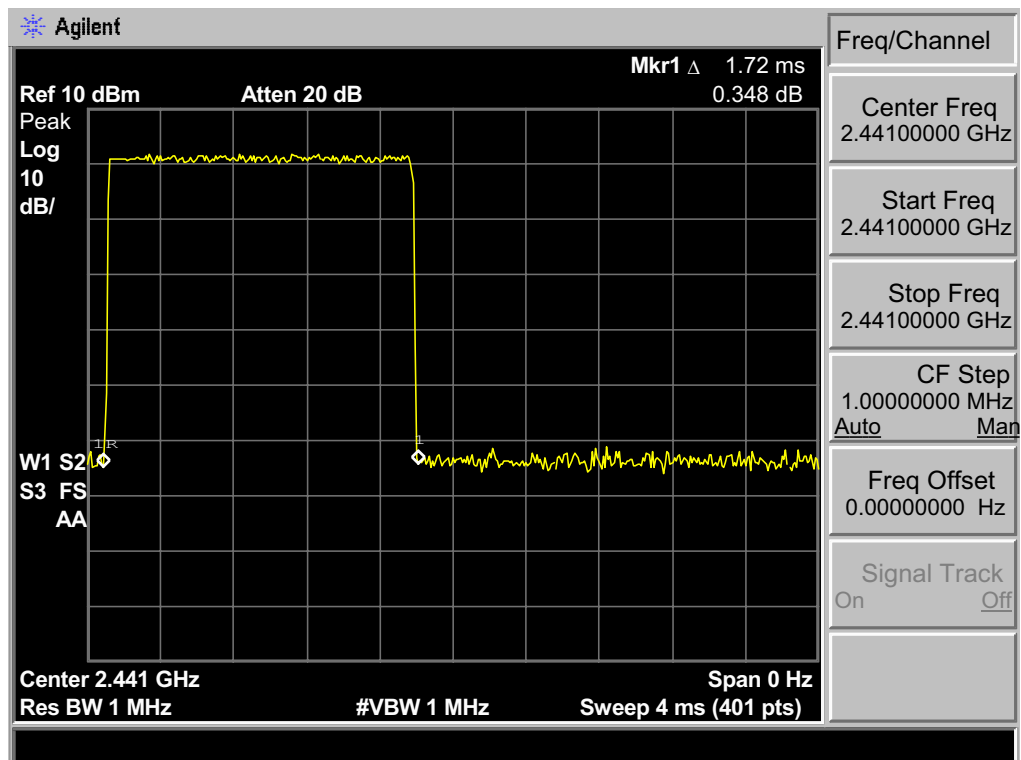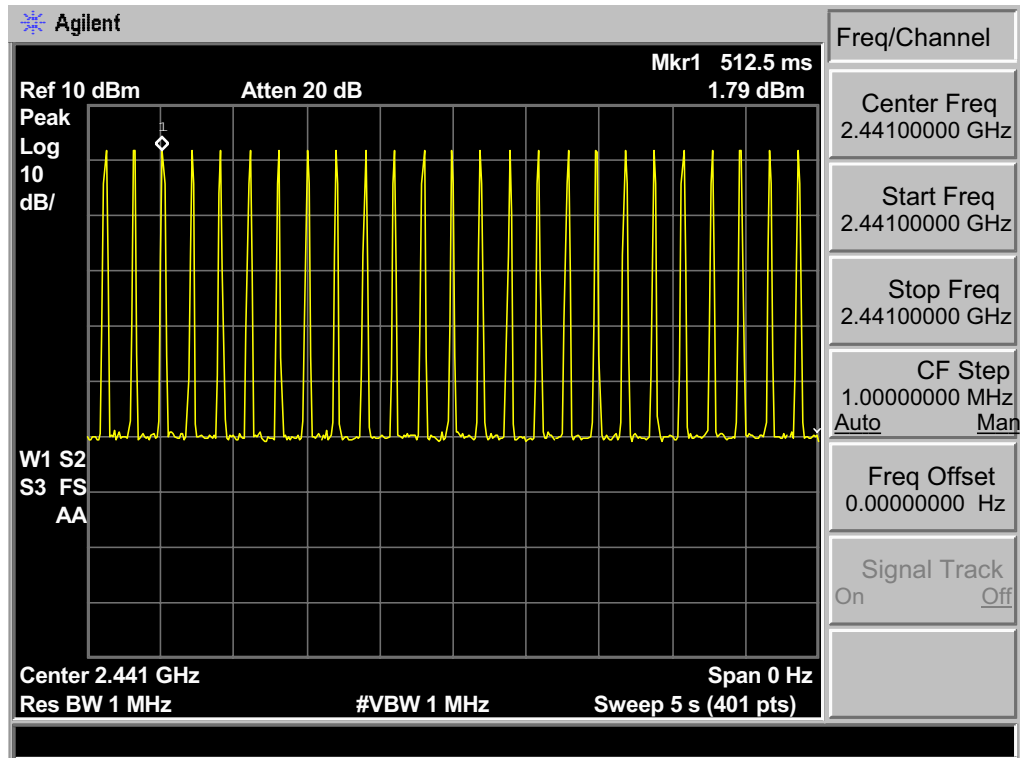

8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 2.96\text{ms} = 318.02$

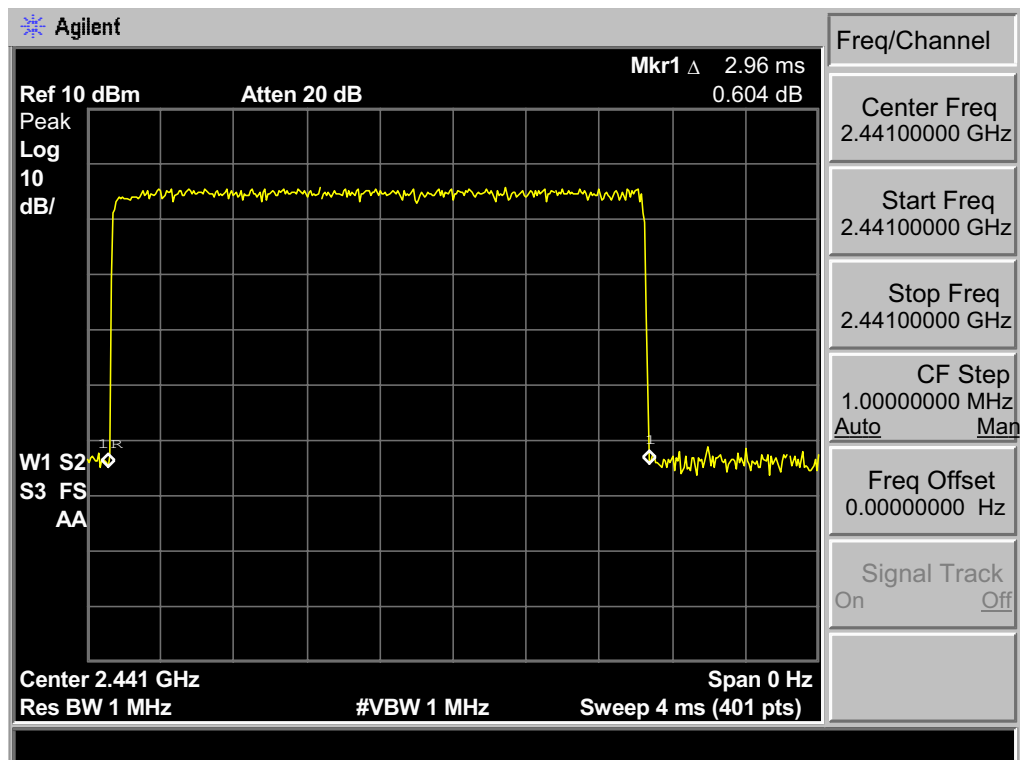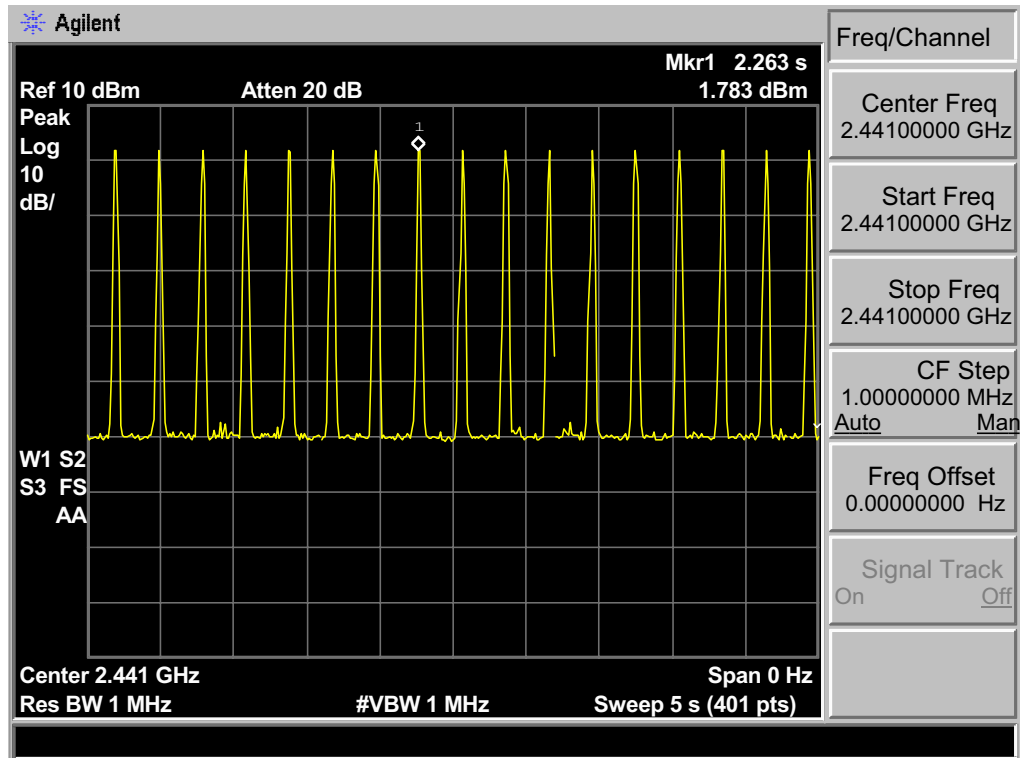

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

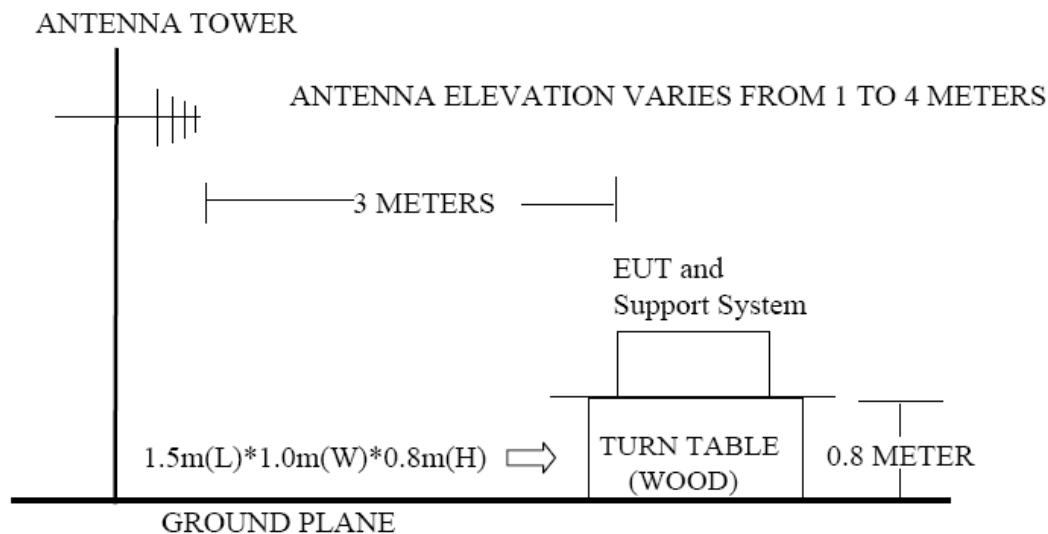

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emission Test result		
EUT: Bluetooth speaker		
M/N: NYNE Bass		
Power: DC 12V From Adapter Input AC 120V/60Hz		
Test date: 2013-09-26~2013-11-29	Test site: 3m Chamber	Tested by: Tony Tang
Test mode: Tx Mode		
Pass		

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

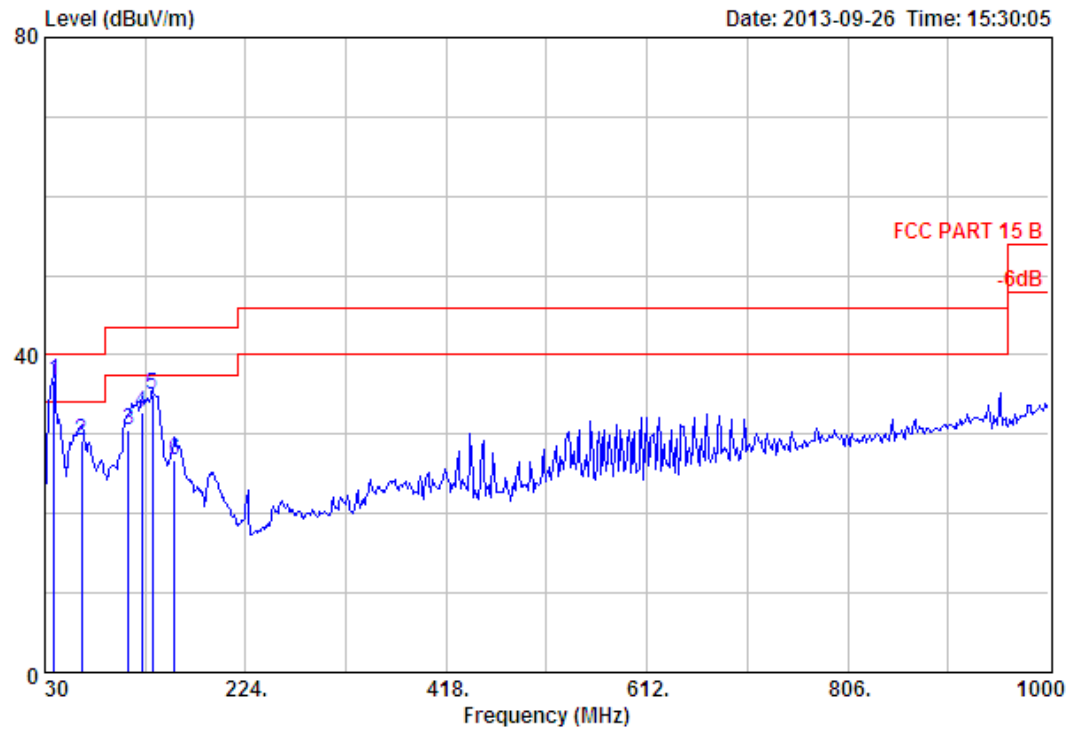


Site no. : 3m Chamber Data no. : 118
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.73	13.48	2.10	21.18	36.76	40.00	3.24	QP
2	65.89	5.17	2.64	21.32	29.13	40.00	10.87	QP
3	110.51	10.52	3.20	16.72	30.44	43.50	13.06	QP
4	124.09	11.31	3.42	17.94	32.67	43.50	10.83	QP
5	133.79	11.36	3.58	19.95	34.89	43.50	8.61	QP
6	155.13	10.67	3.82	12.16	26.65	43.50	16.85	QP

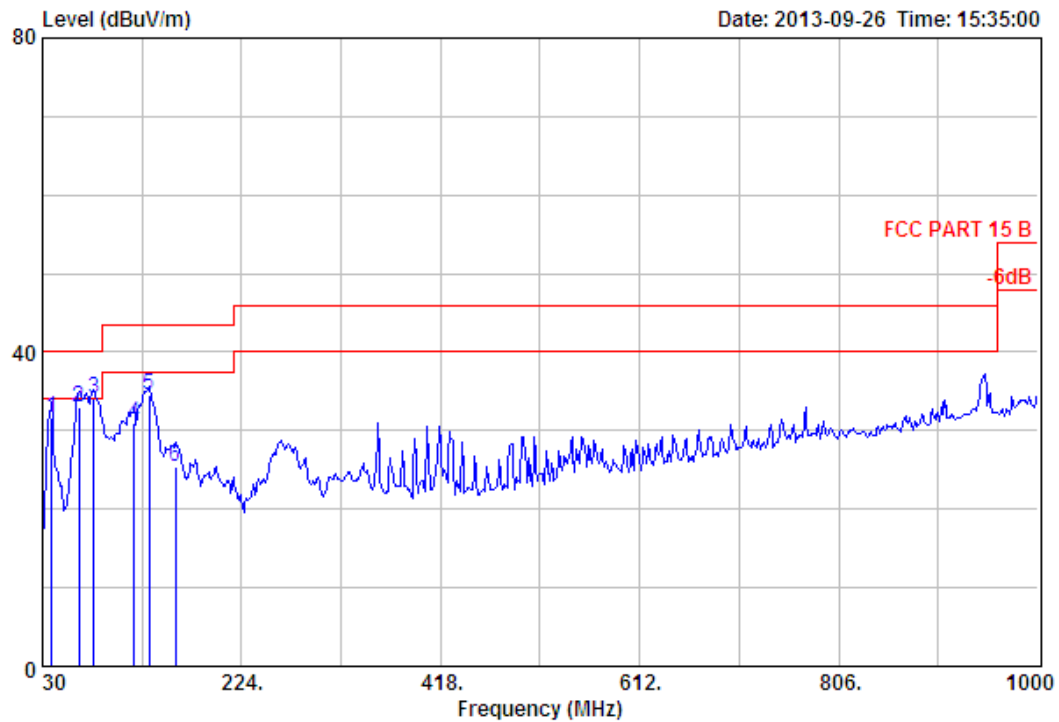


Site no. : 3m Chamber Data no. : 119
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.73	13.48	2.10	16.16	31.74	40.00	8.26	QP
2	65.89	5.17	2.64	25.23	33.04	40.00	6.96	QP
3	80.44	7.07	2.84	24.21	34.12	40.00	5.88	QP
4	119.24	11.11	3.34	16.51	30.96	43.50	12.54	QP
5	133.79	11.36	3.58	19.63	34.57	43.50	8.93	QP
6	159.98	10.36	3.89	11.20	25.45	43.50	18.05	QP

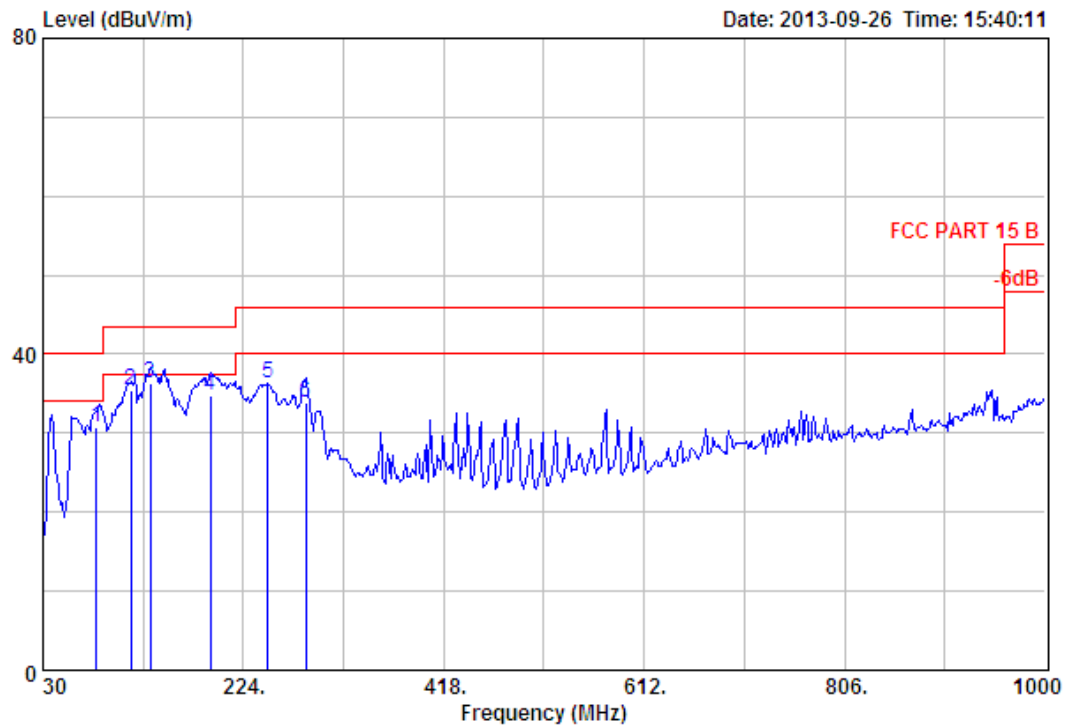


Site no. : 3m Chamber Data no. : 120
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission				
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark	
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	81.41	7.20	2.86	20.65	30.71	40.00	9.29	QP	
2	115.36	10.93	3.27	21.26	35.46	43.50	8.04	QP	
3	133.79	11.36	3.58	21.36	36.30	43.50	7.20	QP	
4	191.99	7.85	4.22	22.64	34.71	43.50	8.79	QP	
5	247.28	11.36	4.78	20.08	36.22	46.00	9.78	QP	
6	284.14	12.52	5.12	16.31	33.95	46.00	12.05	QP	

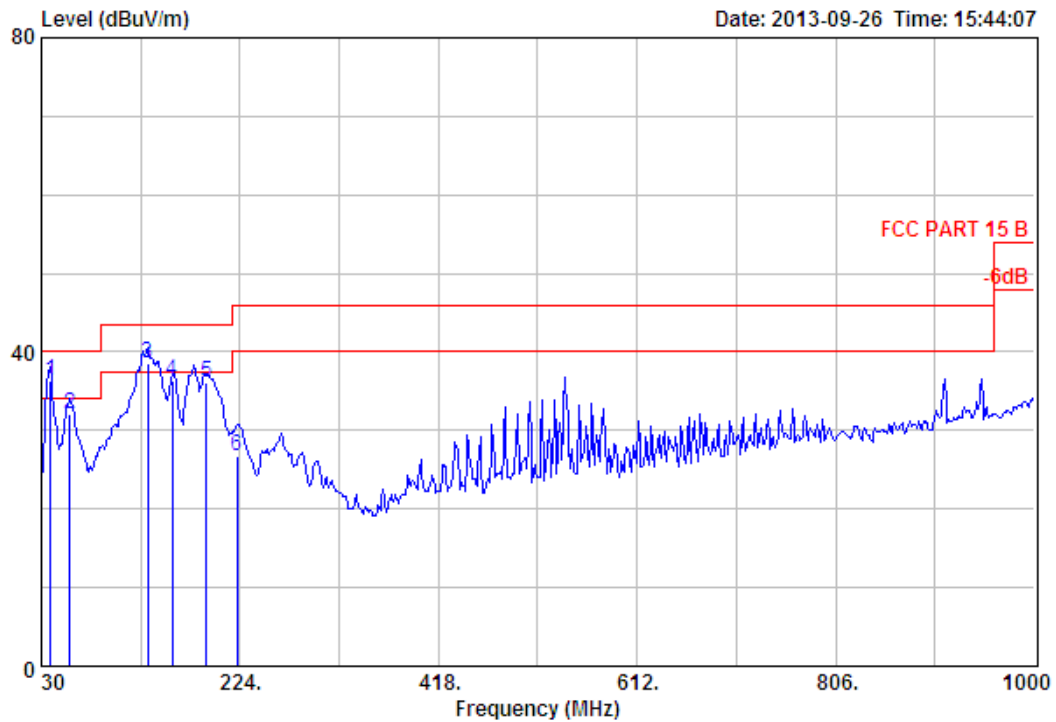


Site no. : 3m Chamber Data no. : 121
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	38.73	13.48	2.10	20.63	36.21	40.00	3.79	QP
2	58.13	4.91	2.54	24.65	32.10	40.00	7.90	QP
3	133.79	11.36	3.58	23.71	38.65	43.50	4.85	QP
4	158.04	10.48	3.87	21.90	36.25	43.50	7.25	QP
5	191.02	7.90	4.22	24.03	36.15	43.50	7.35	QP
6	221.09	9.26	4.45	13.04	26.75	46.00	19.25	QP

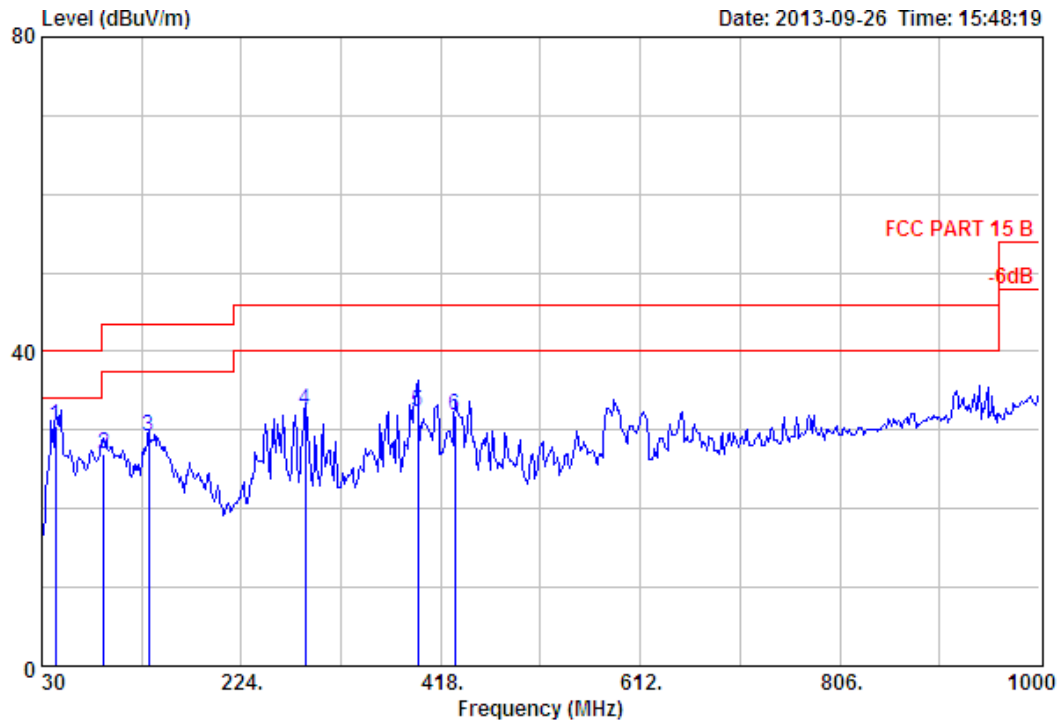


Site no. : 3m Chamber Data no. : 122
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	43.58	10.52	2.21	17.79	30.52	40.00	9.48	QP
2	90.14	8.38	2.91	15.73	27.02	43.50	16.48	QP
3	133.79	11.36	3.58	14.24	29.18	43.50	14.32	QP
4	286.08	12.59	5.14	14.71	32.44	46.00	13.56	QP
5	395.69	15.87	5.93	10.51	32.31	46.00	13.69	QP
6	431.58	16.09	6.26	9.43	31.78	46.00	14.22	QP

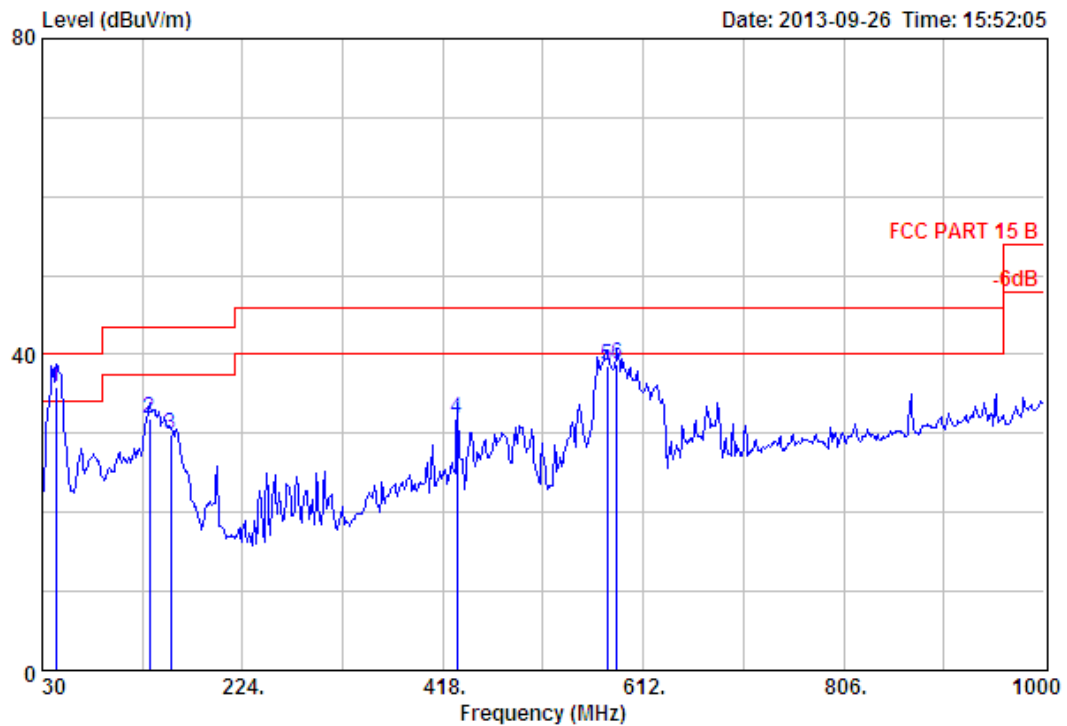


Site no. : 3m Chamber Data no. : 123
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	43.58	10.52	2.21	23.13	35.86	40.00	4.14	QP
2	133.79	11.36	3.58	16.89	31.83	43.50	11.67	QP
3	154.16	10.71	3.82	15.30	29.83	43.50	13.67	QP
4	431.58	16.09	6.26	9.53	31.88	46.00	14.12	QP
5	577.08	19.53	7.22	11.77	38.52	46.00	7.48	QP
6	586.78	19.45	7.30	12.03	38.78	46.00	7.22	QP

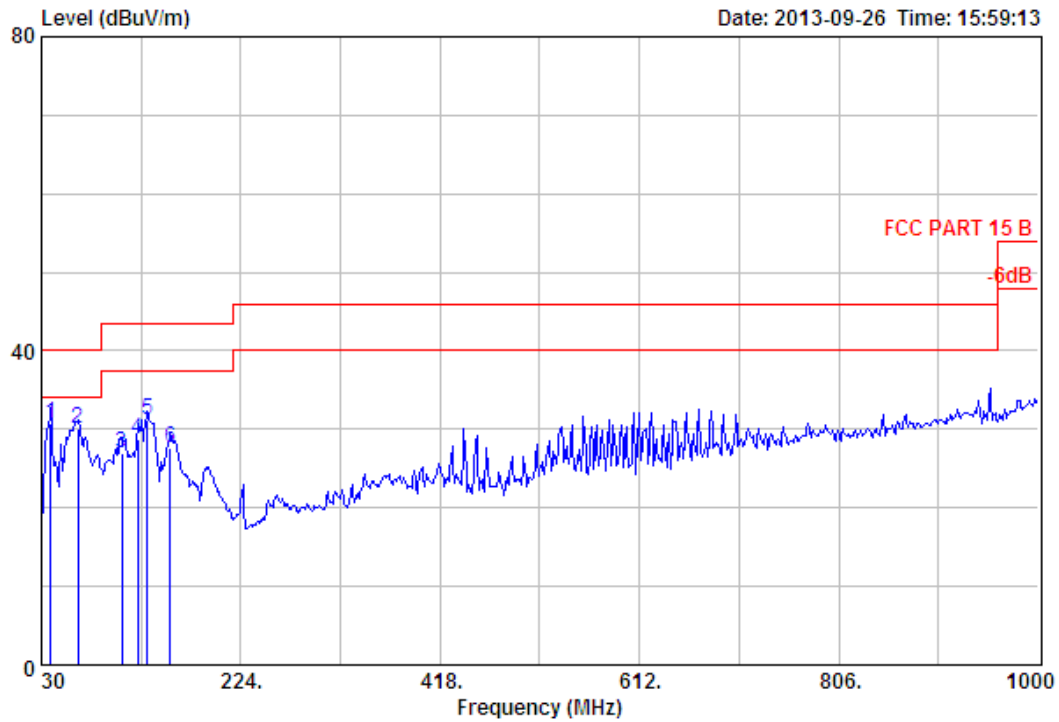


Site no. : 3m Chamber Data no. : 124
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant.	Cable	Emission				Remark
		Factor (dB/m)	Loss (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	38.73	13.48	2.10	15.18	30.76	40.00	9.24	QP
2	65.89	5.17	2.64	22.32	30.13	40.00	9.87	QP
3	108.57	10.34	3.20	13.48	27.02	43.50	16.48	QP
4	124.09	11.31	3.42	13.94	28.67	43.50	14.83	QP
5	132.82	11.35	3.57	16.34	31.26	43.50	12.24	QP
6	155.13	10.67	3.82	13.16	27.65	43.50	15.85	QP

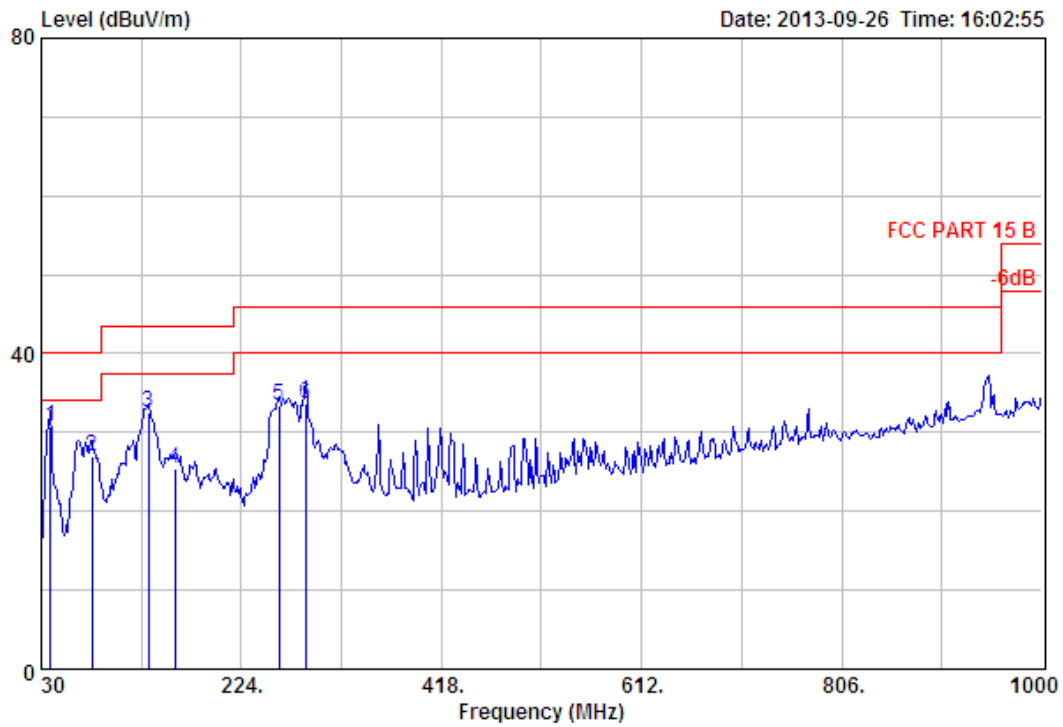


Site no. : 3m Chamber Data no. : 125
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	38.73	13.48	2.10	15.16	30.74	40.00	9.26	QP
2	79.47	6.98	2.84	17.21	27.03	40.00	12.97	QP
3	133.79	11.36	3.58	17.63	32.57	43.50	10.93	QP
4	159.98	10.36	3.89	11.20	25.45	43.50	18.05	QP
5	260.86	12.96	4.94	15.58	33.48	46.00	12.52	QP
6	286.08	12.59	5.14	15.84	33.57	46.00	12.43	QP

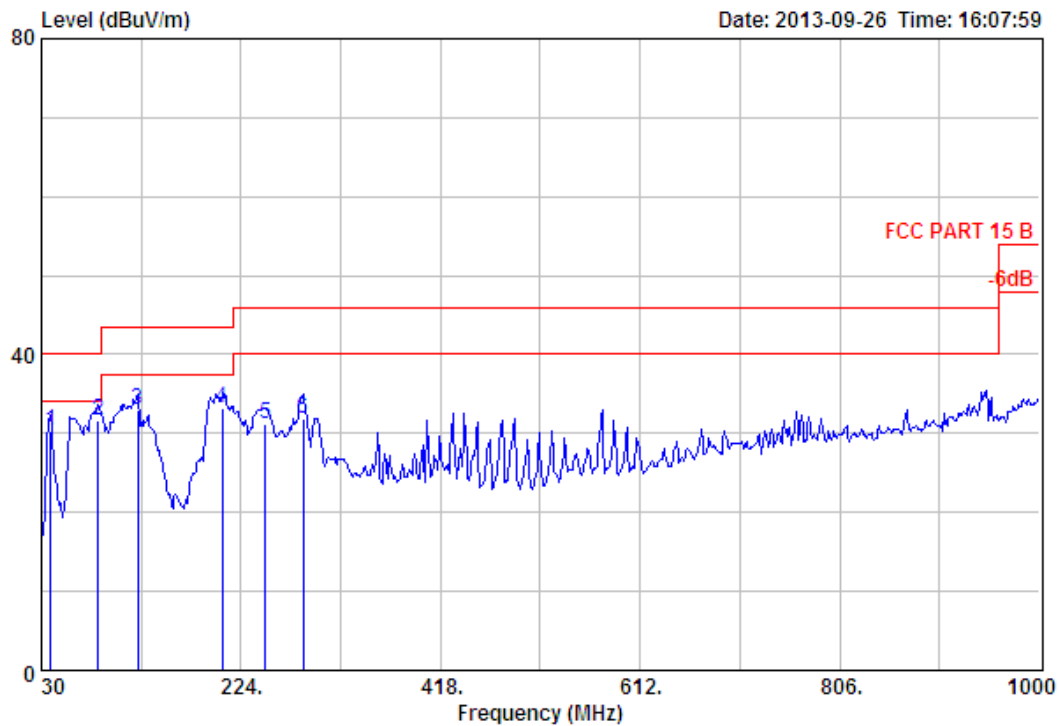


Site no. : 3m Chamber Data no. : 126
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	38.73	13.48	2.10	14.83	30.41	40.00	9.59	QP
2	85.29	7.72	2.87	20.99	31.58	40.00	8.42	QP
3	124.09	11.31	3.42	18.21	32.94	43.50	10.56	QP
4	205.57	8.00	4.32	20.85	33.17	43.50	10.33	QP
5	247.28	11.36	4.78	15.08	31.22	46.00	14.78	QP
6	284.14	12.52	5.12	14.31	31.95	46.00	14.05	QP

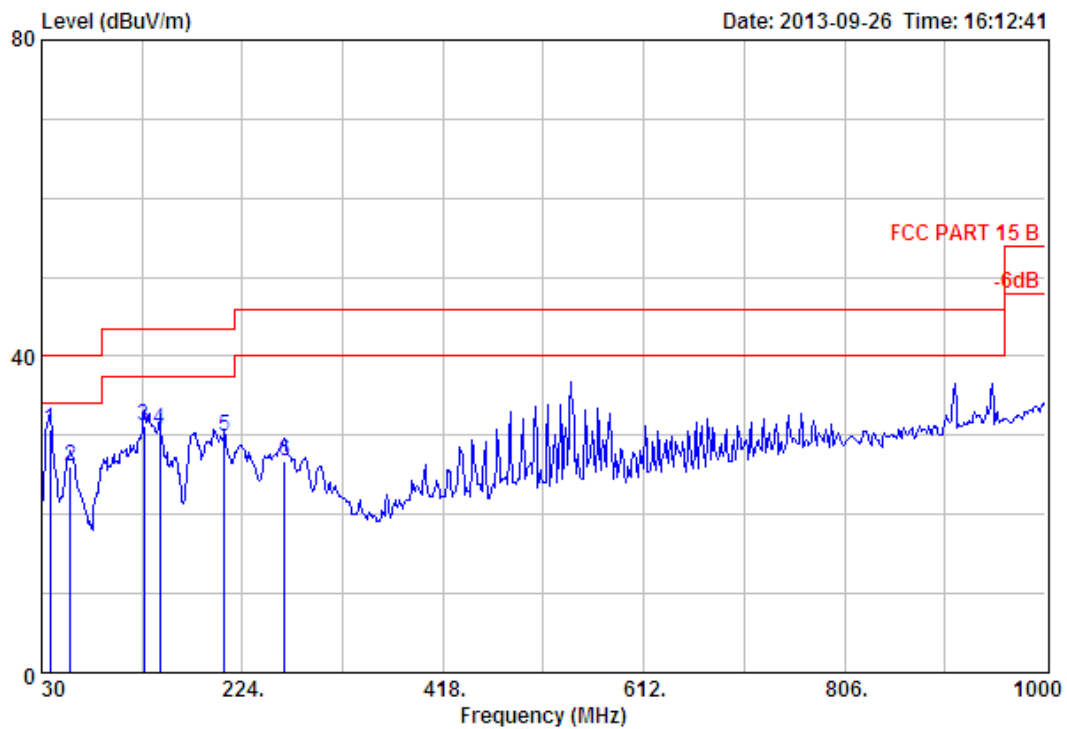


Site no. : 3m Chamber Data no. : 127
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	37.76	14.05	2.08	14.72	30.85	40.00	9.15	QP
2	58.13	4.91	2.54	18.65	26.10	40.00	13.90	QP
3	128.94	11.33	3.48	16.35	31.16	43.50	12.34	QP
4	144.46	11.26	3.73	15.69	30.68	43.50	12.82	QP
5	206.54	8.09	4.32	17.42	29.83	43.50	13.67	QP
6	264.74	12.94	4.97	8.80	26.71	46.00	19.29	QP

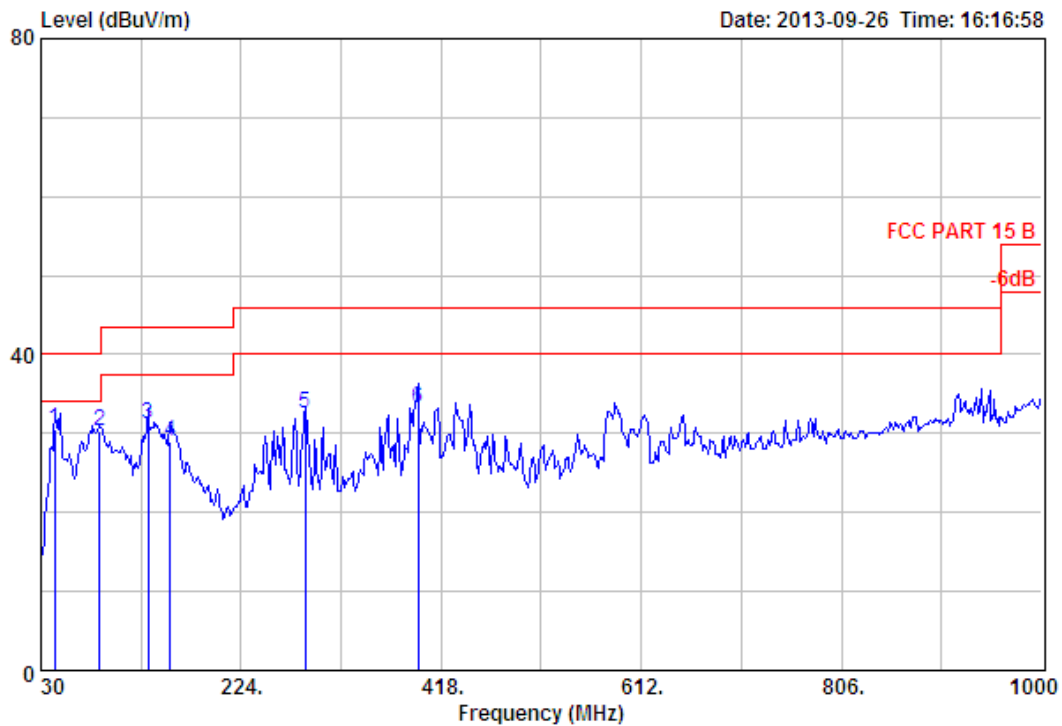


Site no. : 3m Chamber Data no. : 128
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	43.58	10.52	2.21	17.79	30.52	40.00	9.48	QP
2	87.23	7.97	2.96	19.33	30.26	40.00	9.74	QP
3	133.79	11.36	3.58	16.24	31.18	43.50	12.32	QP
4	155.13	10.67	3.82	14.55	29.04	43.50	14.46	QP
5	286.08	12.59	5.14	14.71	32.44	46.00	13.56	QP
6	395.69	15.87	5.93	11.51	33.31	46.00	12.69	QP

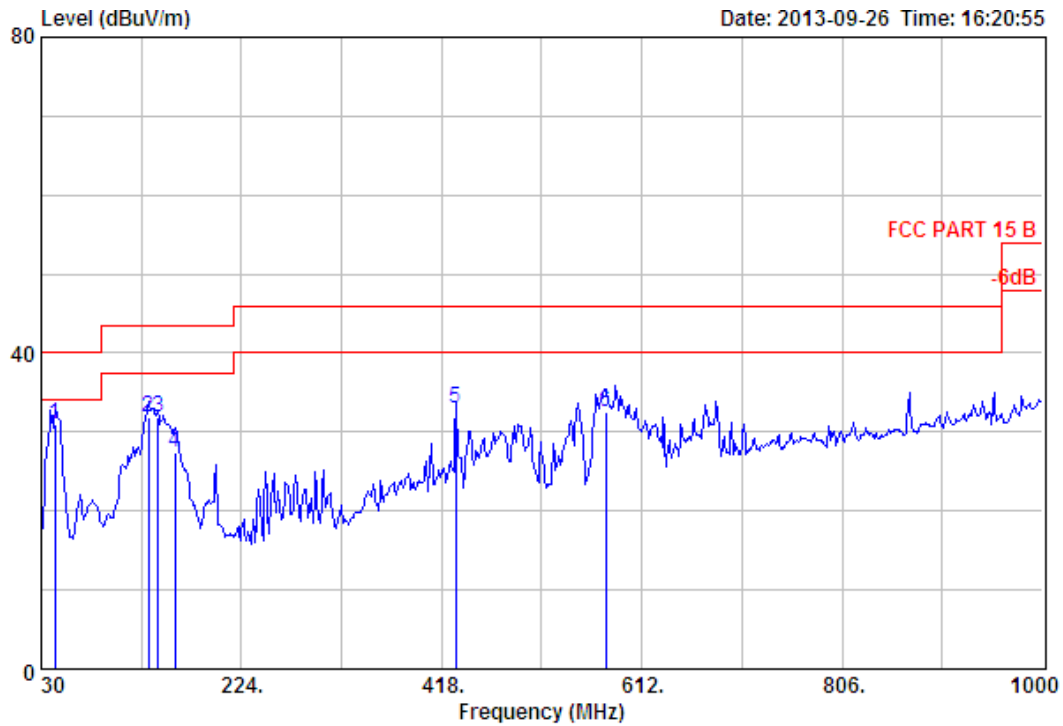


Site no. : 3m Chamber Data no. : 129
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	43.58	10.52	2.21	18.13	30.86	40.00	9.14	QP
2	133.79	11.36	3.58	16.89	31.83	43.50	11.67	QP
3	143.49	11.29	3.71	16.76	31.76	43.50	11.74	QP
4	159.98	10.36	3.89	13.26	27.51	43.50	15.99	QP
5	431.58	16.09	6.26	10.53	32.88	46.00	13.12	QP
6	577.08	19.53	7.22	5.77	32.52	46.00	13.48	QP

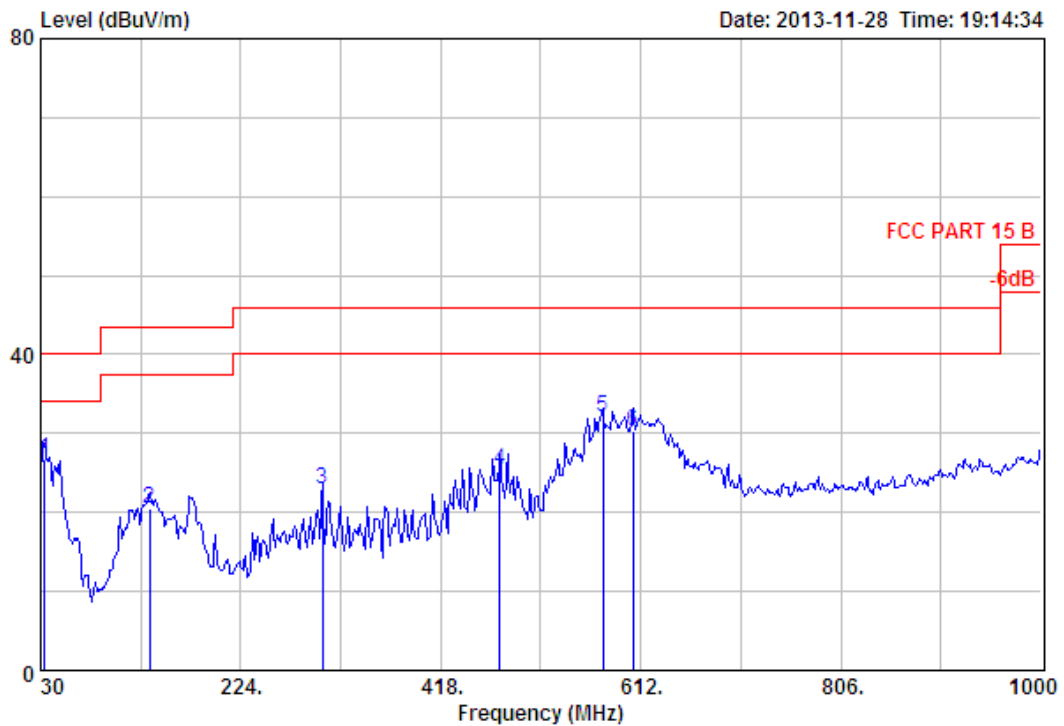


Site no. : 3m Chamber Data no. : 290
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.88	16.11	0.70	10.04	26.85	40.00	13.15	QP
2	135.73	11.38	1.59	7.54	20.51	43.50	22.99	QP
3	303.54	13.08	2.43	7.41	22.92	46.00	23.08	QP
4	475.23	17.33	2.98	5.12	25.43	46.00	20.57	QP
5	575.14	19.55	3.40	9.21	32.16	46.00	13.84	QP
6	604.24	19.71	3.41	7.10	30.22	46.00	15.78	QP

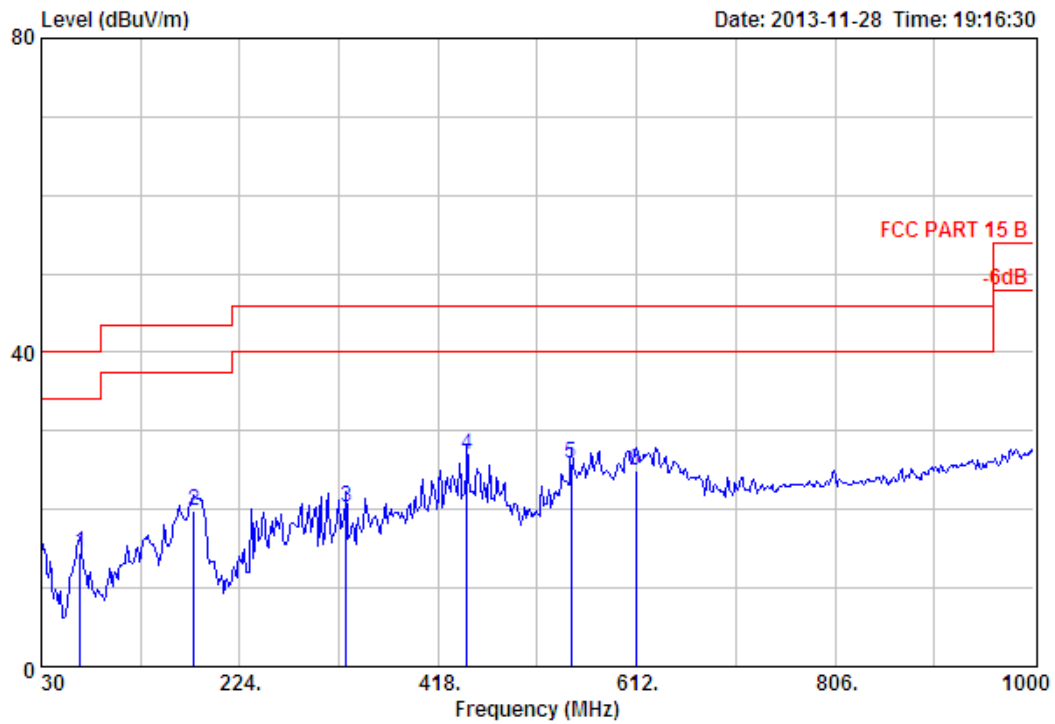


Site no. : 3m Chamber Data no. : 291
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	67.83	5.39	1.13	8.05	14.57	40.00	25.43	QP
2	179.38	8.96	1.72	9.09	19.77	43.50	23.73	QP
3	327.79	13.79	2.46	4.04	20.29	46.00	25.71	QP
4	446.13	16.38	3.00	7.60	26.98	46.00	19.02	QP
5	547.98	19.45	3.23	3.09	25.77	46.00	20.23	QP
6	611.03	19.89	3.30	1.77	24.96	46.00	21.04	QP

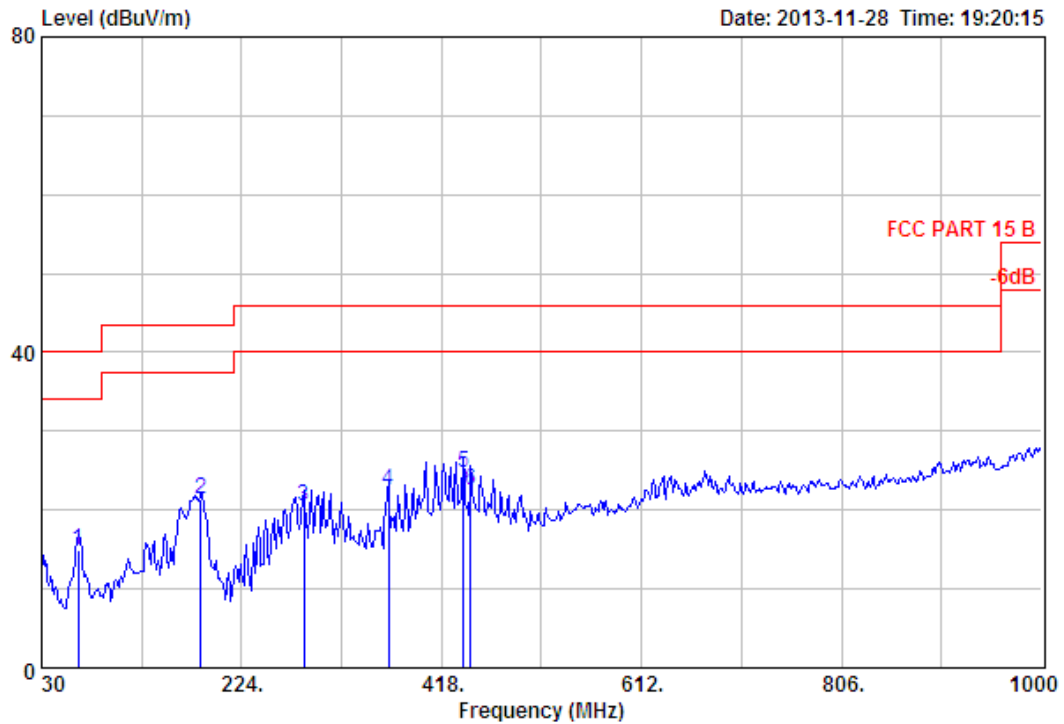


Site no. : 3m Chamber Data no. : 292
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	65.89	5.17	1.00	8.68	14.85	40.00	25.15	QP
2	184.23	8.57	1.71	11.05	21.33	43.50	22.17	QP
3	284.14	12.52	2.36	5.66	20.54	46.00	25.46	QP
4	366.59	14.72	2.71	5.18	22.61	46.00	23.39	QP
5	439.34	16.23	2.89	5.70	24.82	46.00	21.18	QP
6	446.13	16.38	3.00	3.15	22.53	46.00	23.47	QP

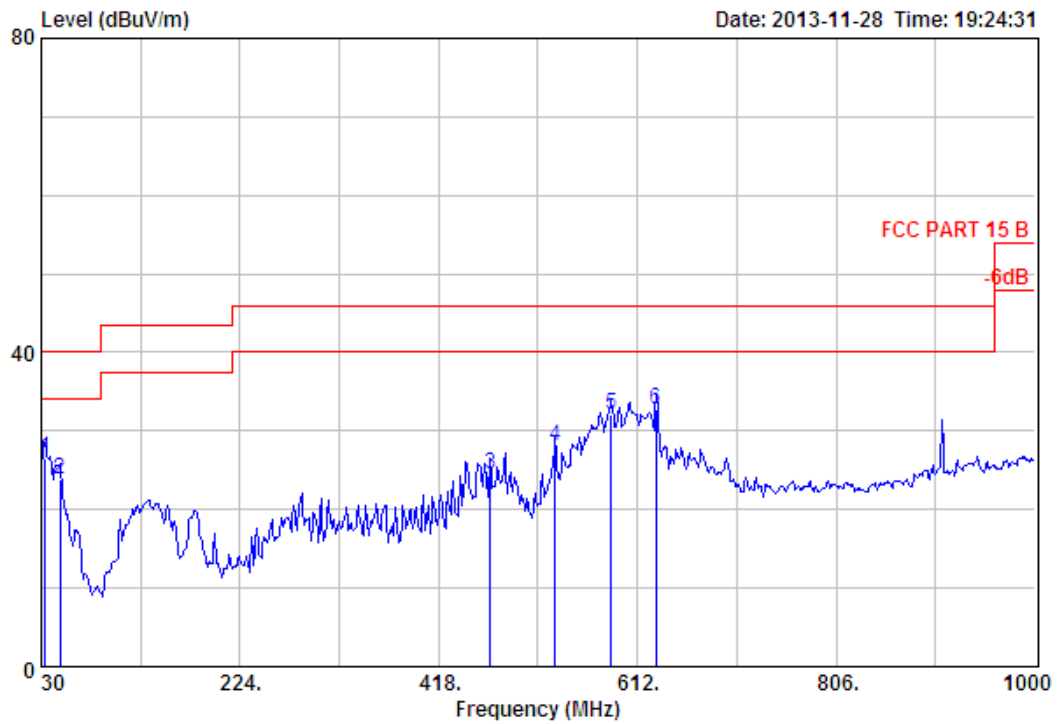


Site no. : 3m Chamber Data no. : 293
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission			Remark
					Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	33.88	16.11	0.70	9.66	26.47	40.00	13.53	QP
2	48.43	8.37	0.98	14.42	23.77	40.00	16.23	QP
3	468.44	17.14	3.09	4.35	24.58	46.00	21.42	QP
4	531.49	18.45	3.21	6.49	28.15	46.00	17.85	QP
5	586.78	19.45	3.41	9.19	32.05	46.00	13.95	QP
6	630.43	20.17	3.48	9.12	32.77	46.00	13.23	QP

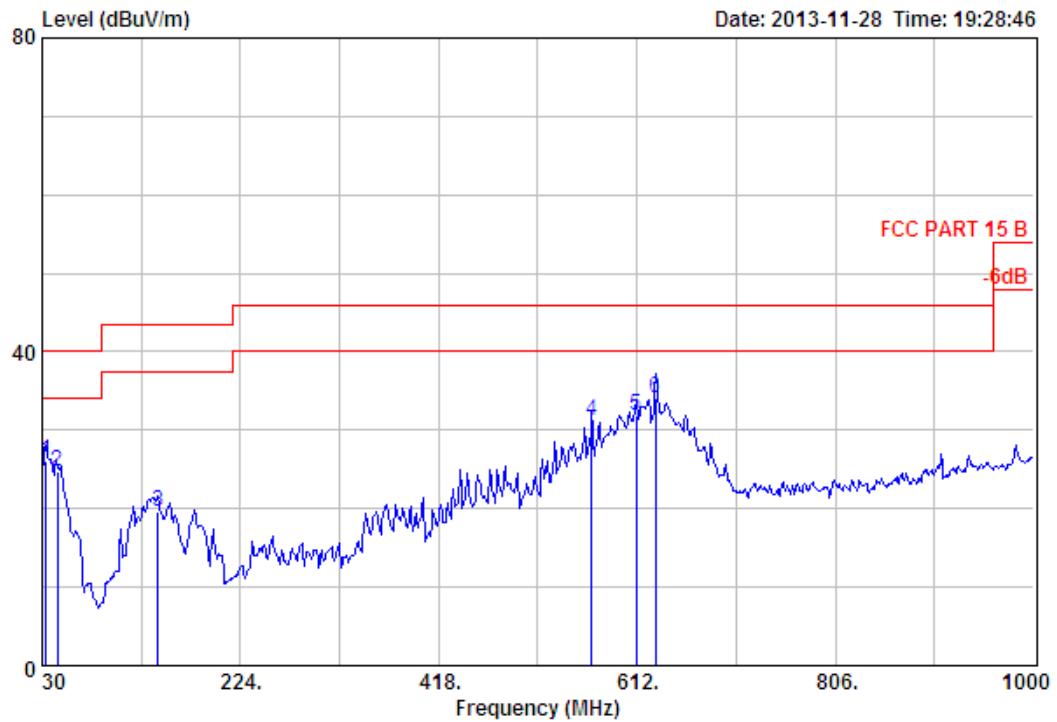


Site no. : 3m Chamber Data no. : 294
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	33.88	16.11	0.70	9.33	26.14	40.00	13.86	QP
2	44.55	10.07	0.85	13.73	24.65	40.00	15.35	QP
3	143.49	11.29	1.55	6.88	19.72	43.50	23.78	QP
4	567.38	19.63	3.18	8.41	31.22	46.00	14.78	QP
5	611.03	19.89	3.30	8.67	31.86	46.00	14.14	QP
6	630.43	20.17	3.48	10.47	34.12	46.00	11.88	QP

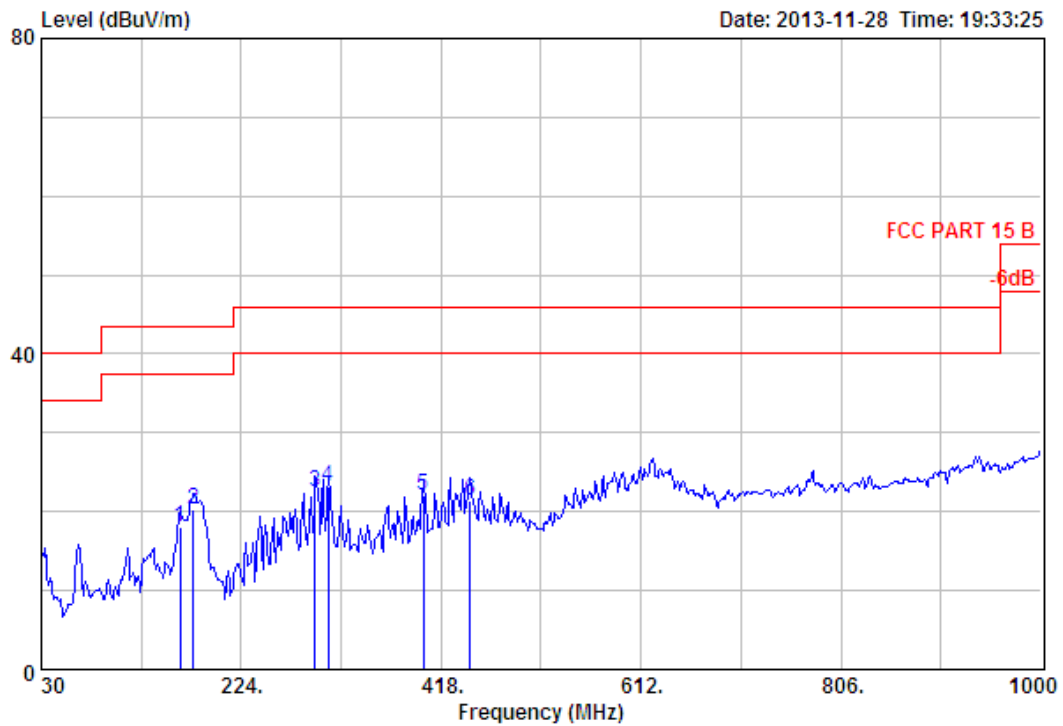


Site no. : 3m Chamber Data no. : 295
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	164.83	9.77	1.66	6.71	18.14	43.50	25.36	QP
2	177.44	8.97	1.67	9.56	20.20	43.50	23.30	QP
3	295.78	12.98	2.28	7.16	22.42	46.00	23.58	QP
4	308.39	13.17	2.44	7.60	23.21	46.00	22.79	QP
5	400.54	16.07	2.66	3.35	22.08	46.00	23.92	QP
6	446.13	16.38	3.00	1.94	21.32	46.00	24.68	QP

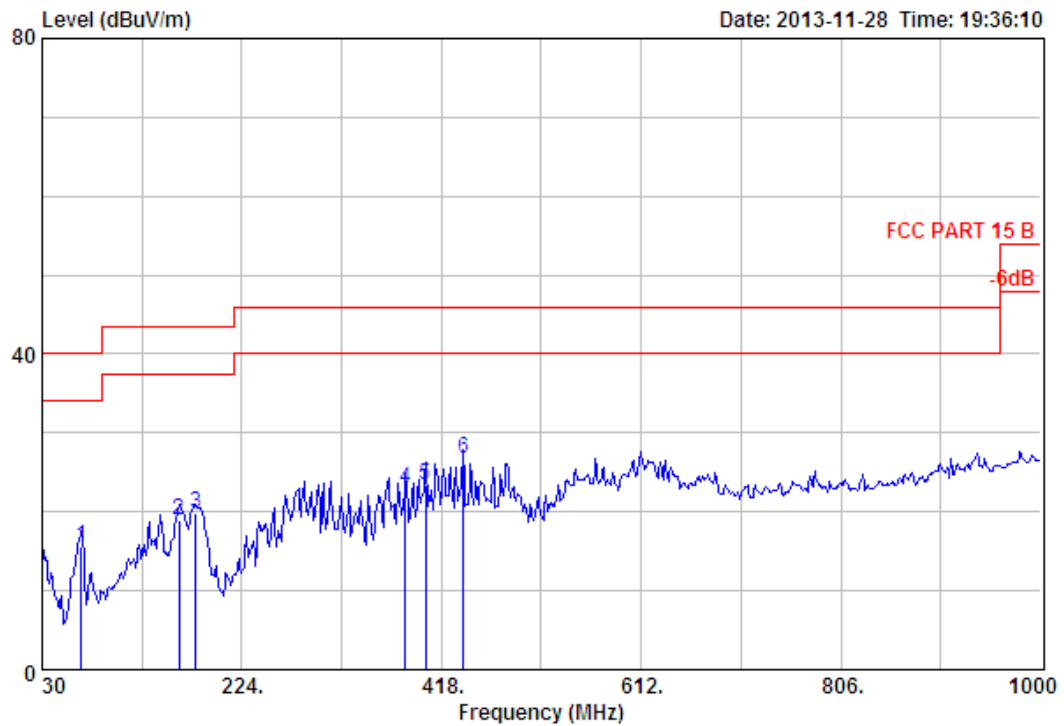


Site no. : 3m Chamber Data no. : 296
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	67.83	5.39	1.13	9.11	15.63	40.00	24.37	QP
2	162.89	10.01	1.67	7.25	18.93	43.50	24.57	QP
3	179.38	8.96	1.72	9.25	19.93	43.50	23.57	QP
4	383.08	15.18	2.63	5.22	23.03	46.00	22.97	QP
5	402.48	16.12	2.74	4.54	23.40	46.00	22.60	QP
6	439.34	16.23	2.89	7.72	26.84	46.00	19.16	QP

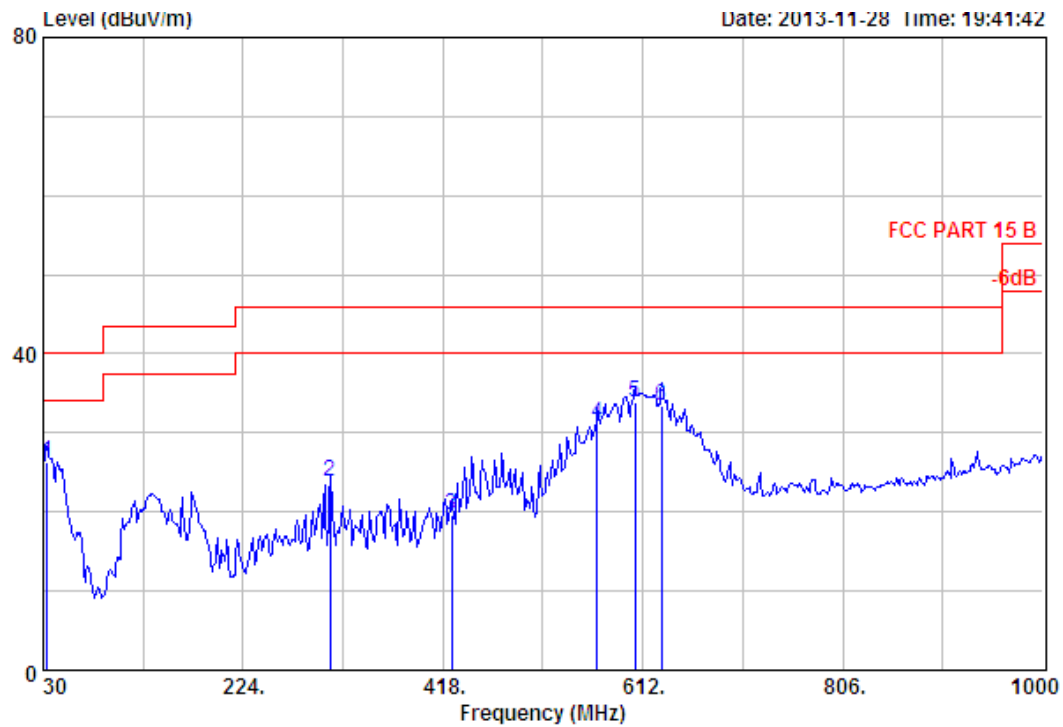


Site no. : 3m Chamber Data no. : 297
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.88	16.11	0.70	9.50	26.31	40.00	13.69	QP
2	308.39	13.17	2.44	8.14	23.75	46.00	22.25	QP
3	426.73	16.13	2.85	0.66	19.64	46.00	26.36	QP
4	567.38	19.63	3.18	8.33	31.14	46.00	14.86	QP
5	604.24	19.71	3.41	10.67	33.79	46.00	12.21	QP
6	630.43	20.17	3.48	9.69	33.34	46.00	12.66	QP

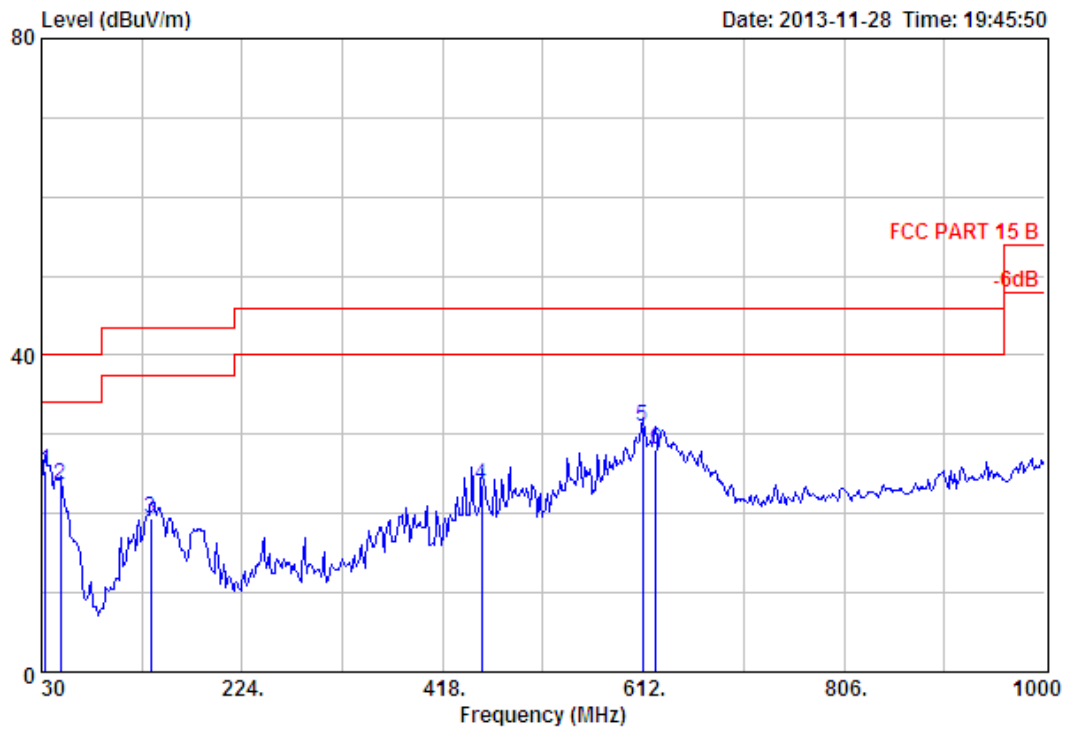


Site no. : 3m Chamber Data no. : 298
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	33.88	16.11	0.70	8.50	25.31	40.00	14.69	QP
2	48.43	8.37	0.98	14.31	23.66	40.00	16.34	QP
3	135.73	11.38	1.59	6.49	19.46	43.50	24.04	QP
4	455.83	16.69	2.89	4.01	23.59	46.00	22.41	QP
5	611.03	19.89	3.30	7.88	31.07	46.00	14.93	QP
6	623.64	20.08	3.37	4.58	28.03	46.00	17.97	QP

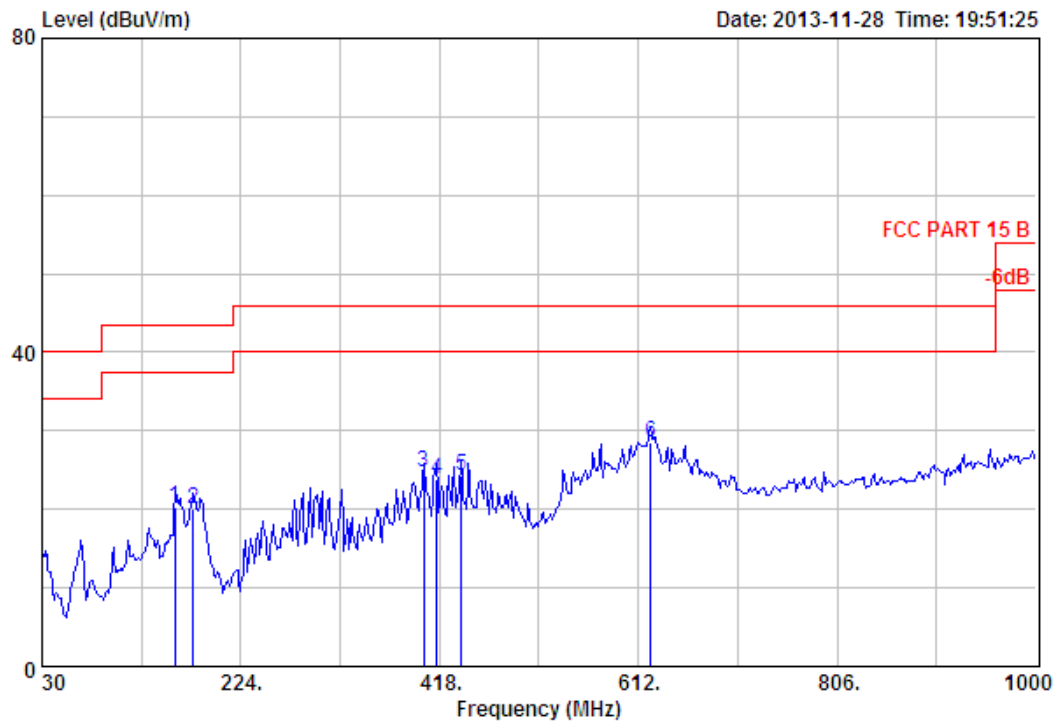


Site no. : 3m Chamber Data no. : 299
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	159.98	10.36	1.71	8.11	20.18	43.50	23.32	QP
2	177.44	8.97	1.67	9.34	19.98	43.50	23.52	QP
3	402.48	16.12	2.74	5.93	24.79	46.00	21.21	QP
4	415.09	16.30	2.74	4.82	23.86	46.00	22.14	QP
5	439.34	16.23	2.89	5.24	24.36	46.00	21.64	QP
6	623.64	20.08	3.37	5.04	28.49	46.00	17.51	QP

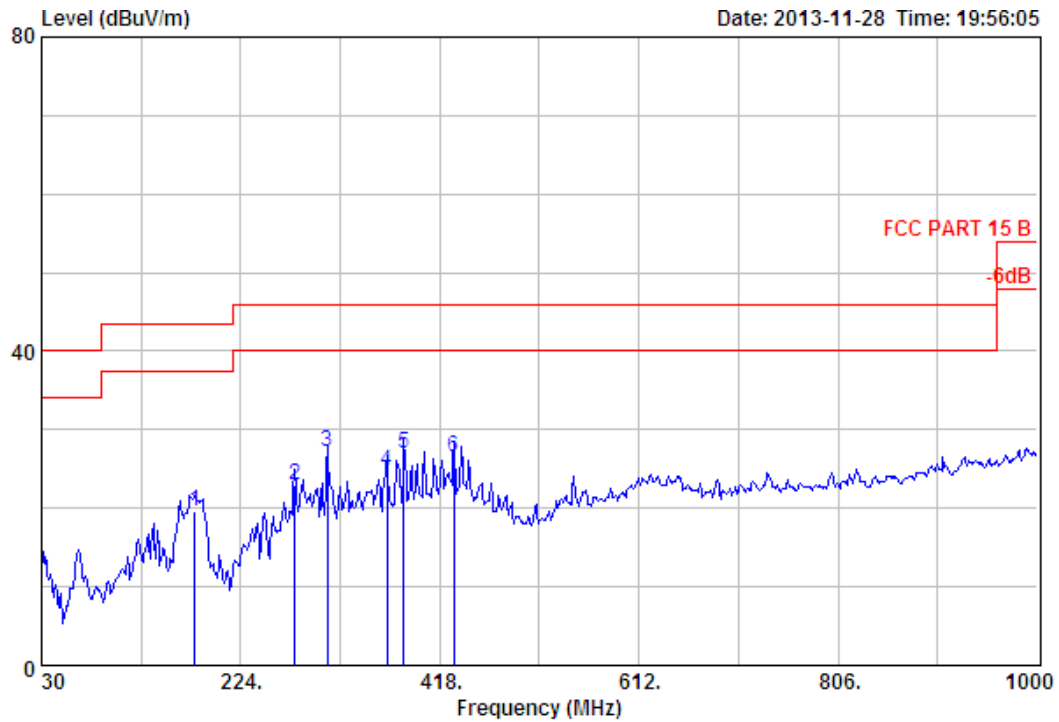

Site no. : 3m Chamber Data no. : 300
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	179.38	8.96	1.72	9.01	19.69	43.50	23.81	QP
2	276.38	12.36	2.26	8.23	22.85	46.00	23.15	QP
3	308.39	13.17	2.44	11.53	27.14	46.00	18.86	QP
4	366.59	14.72	2.71	7.27	24.70	46.00	21.30	QP
5	383.08	15.18	2.63	9.17	26.98	46.00	19.02	QP
6	431.58	16.09	2.77	7.68	26.54	46.00	19.46	QP

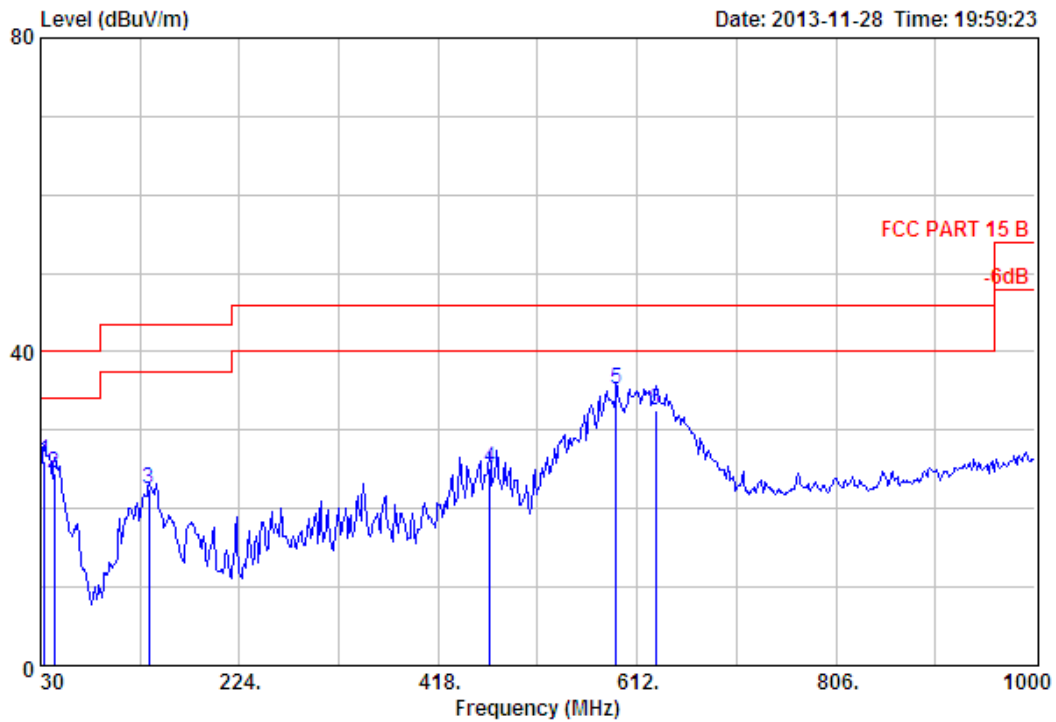

Site no. : 3m Chamber Data no. : 301
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	33.88	16.11	0.70	9.25	26.06	40.00	13.94	QP
2	43.58	10.52	0.84	13.23	24.59	40.00	15.41	QP
3	135.73	11.38	1.59	9.43	22.40	43.50	21.10	QP
4	468.44	17.14	3.09	5.04	25.27	46.00	20.73	QP
5	591.63	19.46	3.37	12.30	35.13	46.00	10.87	QP
6	630.43	20.17	3.48	8.99	32.64	46.00	13.36	QP


1000 MHz – 18000MHz

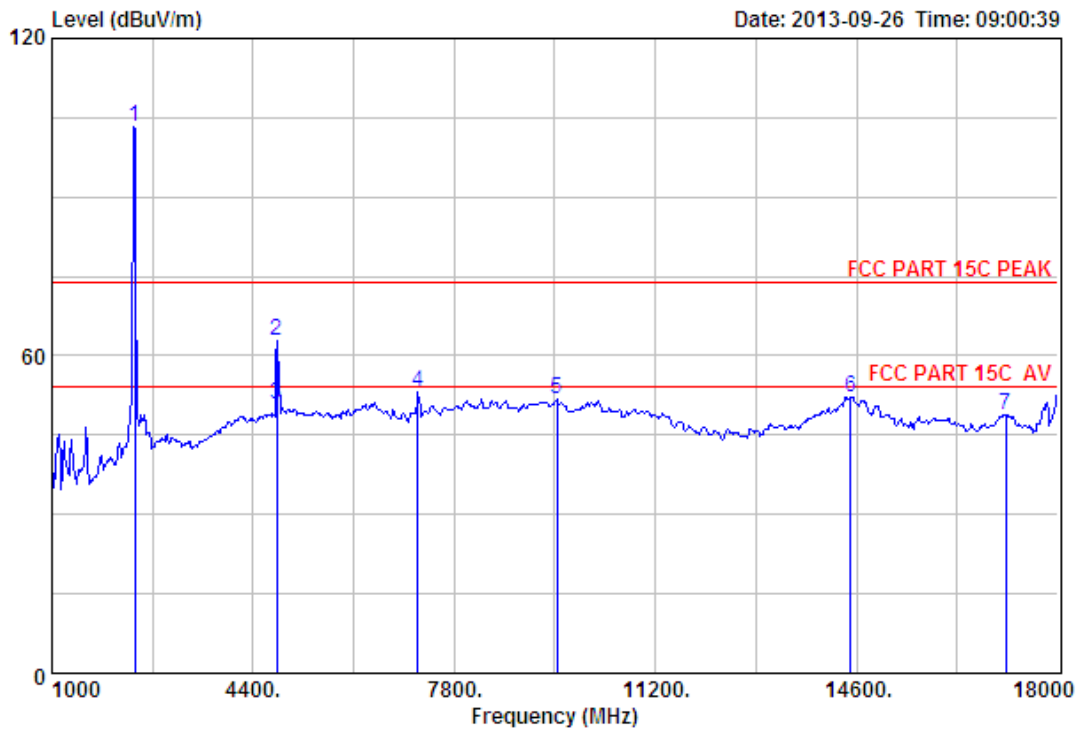

Site no. : 3m Chamber Data no. : 1
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	103.37	103.42	74.00	-29.42	Peak
2	4804.00	31.25	11.77	31.81	51.68	62.89	74.00	11.11	Peak
3	4804.00	31.25	11.77	31.81	39.69	50.90	54.00	3.10	Average
4	7188.00	36.43	11.53	32.14	37.35	53.17	74.00	20.83	Peak
5	9534.00	37.97	11.70	31.92	33.92	51.67	74.00	22.33	Peak
6	14498.00	41.88	10.93	33.08	32.42	52.15	74.00	21.85	Peak
7	17116.00	40.19	10.95	32.92	30.57	48.79	74.00	25.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

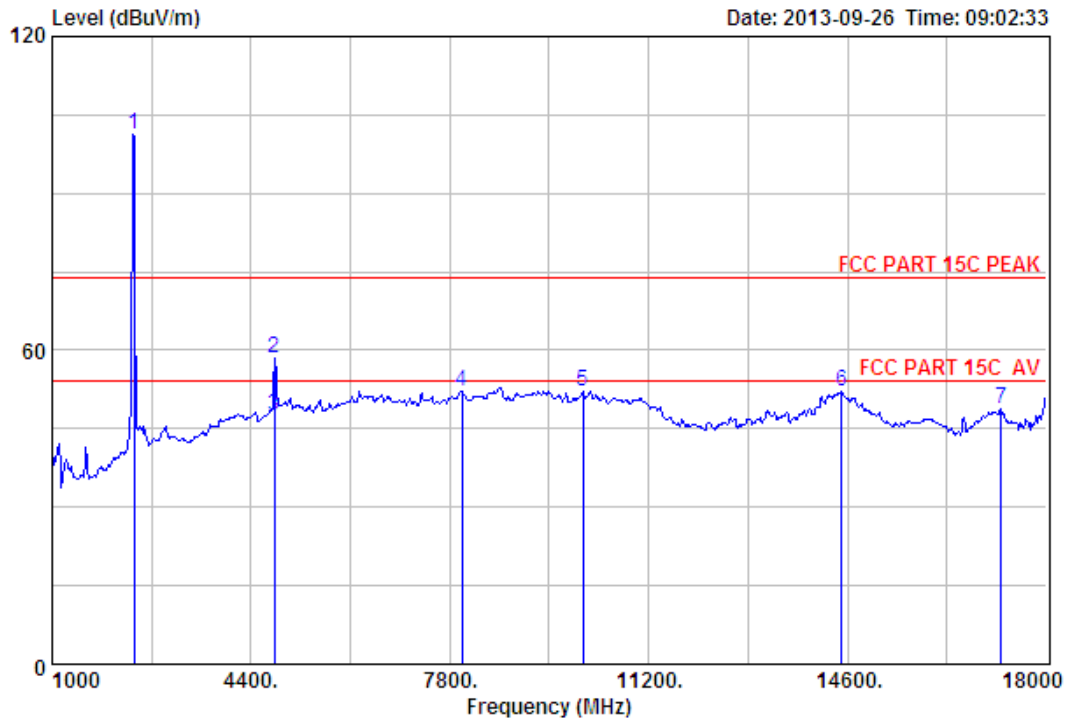

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	101.31	101.36	74.00	-27.36	Peak
2	4804.00	31.25	11.77	31.81	47.25	58.46	74.00	15.54	Peak
3	4804.00	31.25	11.77	31.81	36.09	47.30	54.00	6.70	Average
4	8004.00	37.01	11.40	31.22	35.12	52.31	74.00	21.69	Peak
5	10078.00	38.24	11.54	31.92	34.27	52.13	74.00	21.87	Peak
6	14498.00	41.88	10.93	33.08	32.42	52.15	74.00	21.85	Peak
7	17235.00	40.65	10.90	33.66	30.85	48.74	74.00	25.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

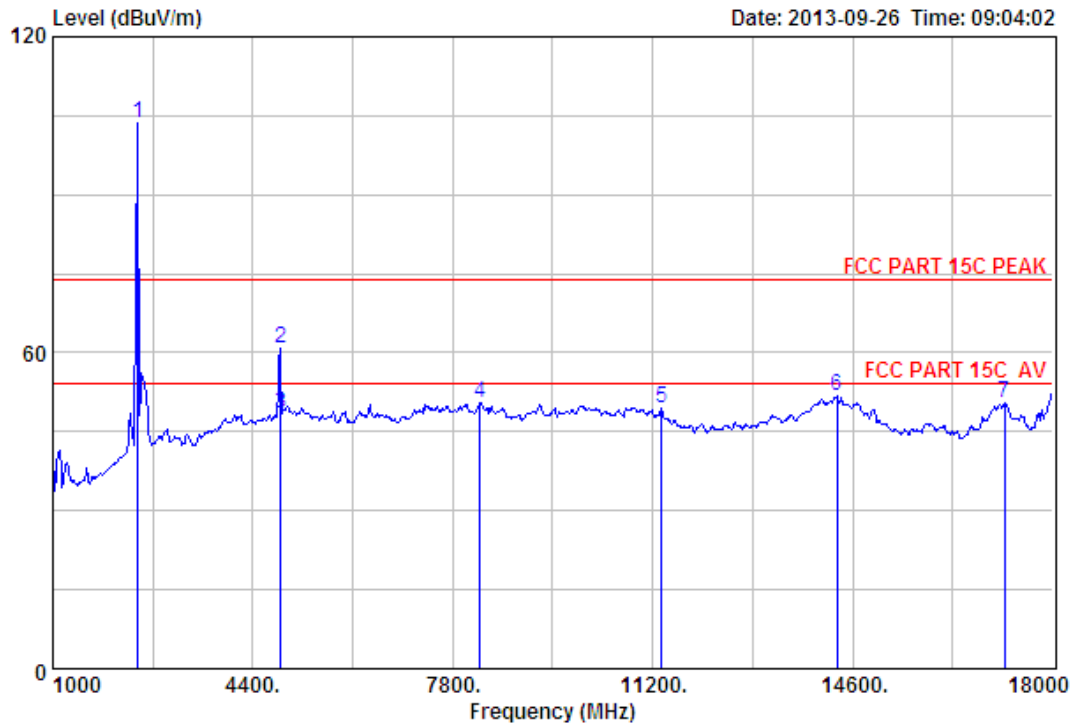

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	103.58	103.73	74.00	-29.73	Peak
2	4882.00	31.37	12.07	31.90	49.33	60.87	74.00	13.13	Peak
3	4882.00	31.37	12.07	31.90	37.06	48.60	54.00	5.40	Average
4	8259.00	36.67	11.43	31.53	33.91	50.48	74.00	23.52	Peak
5	11353.00	39.29	11.03	34.32	33.57	49.57	74.00	24.43	Peak
6	14328.00	41.74	10.92	32.98	32.09	51.77	74.00	22.23	Peak
7	17184.00	40.45	10.92	33.34	32.50	50.53	74.00	23.47	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

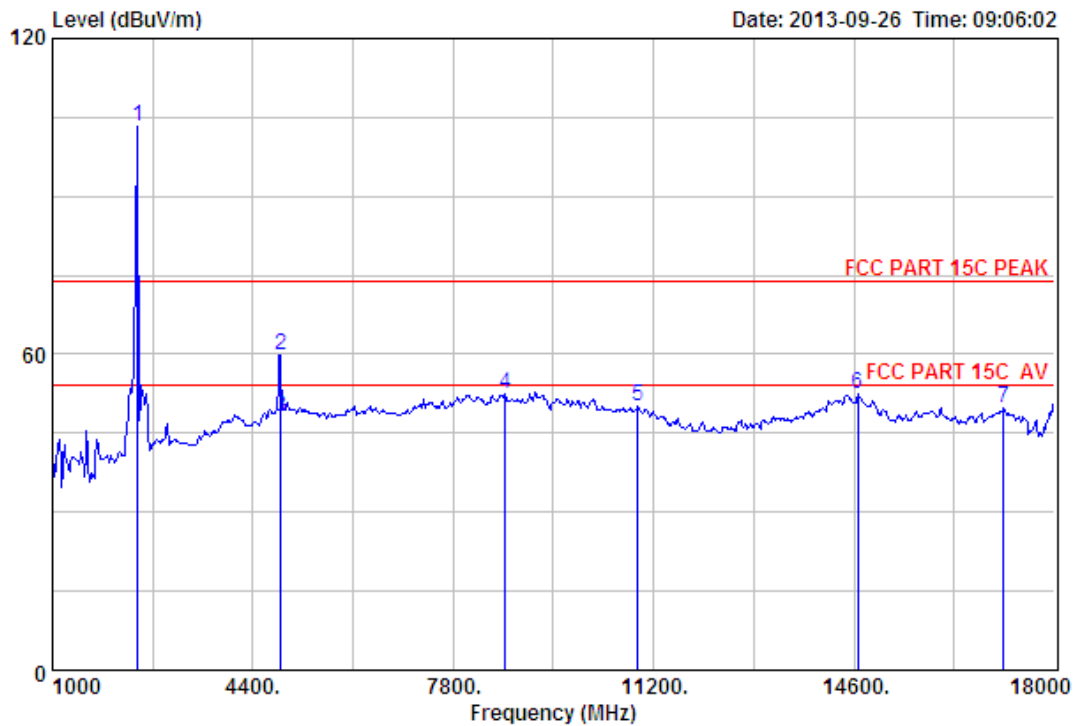

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	103.25	103.40	74.00	-29.40	Peak
2	4882.00	31.37	12.07	31.90	48.29	59.83	74.00	14.17	Peak
3	4882.00	31.37	12.07	31.90	36.56	48.10	54.00	5.90	Average
4	8684.00	37.32	11.45	32.43	36.06	52.40	74.00	21.60	Peak
5	10928.00	39.45	11.29	33.52	32.99	50.21	74.00	23.79	Peak
6	14668.00	41.36	10.91	33.68	33.75	52.34	74.00	21.66	Peak
7	17133.00	40.26	10.94	33.03	31.51	49.68	74.00	24.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

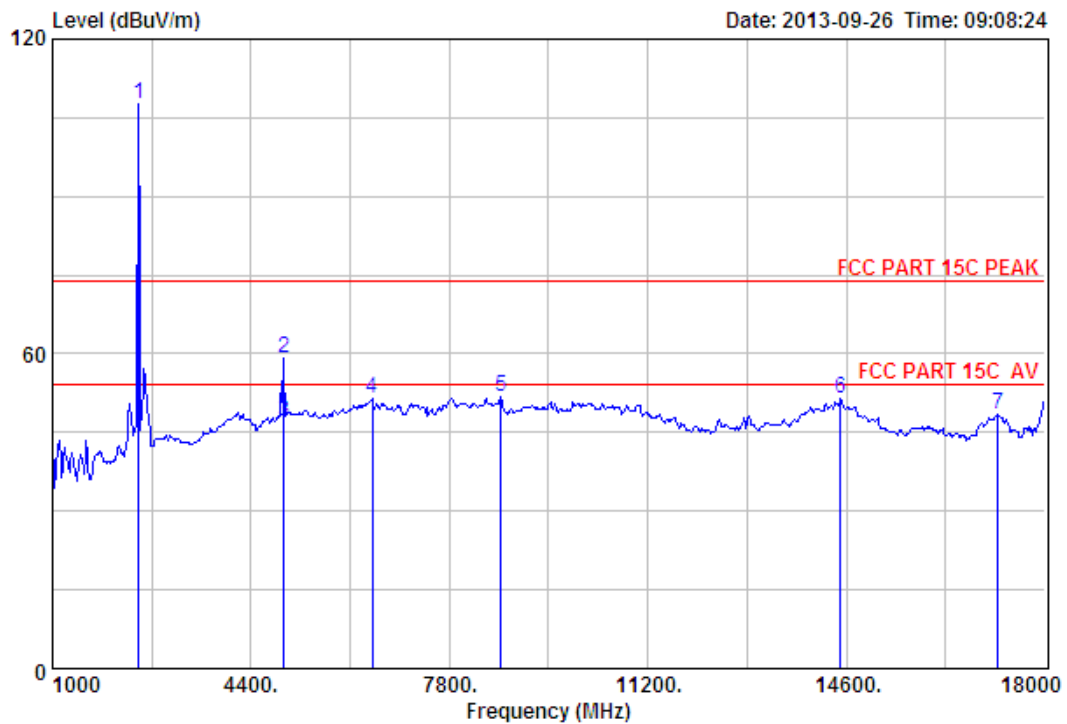

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	107.51	107.77	74.00	-33.77	Peak
2	4960.00	31.49	12.44	31.97	47.15	59.11	74.00	14.89	Peak
3	4960.00	31.49	12.44	31.97	35.14	47.10	54.00	6.90	Average
4	6474.00	34.16	12.22	31.98	37.00	51.40	74.00	22.60	Peak
5	8684.00	37.32	11.45	32.43	35.51	51.85	74.00	22.15	Peak
6	14498.00	41.88	10.93	33.08	31.70	51.43	74.00	22.57	Peak
7	17201.00	40.52	10.91	33.45	30.63	48.61	74.00	25.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

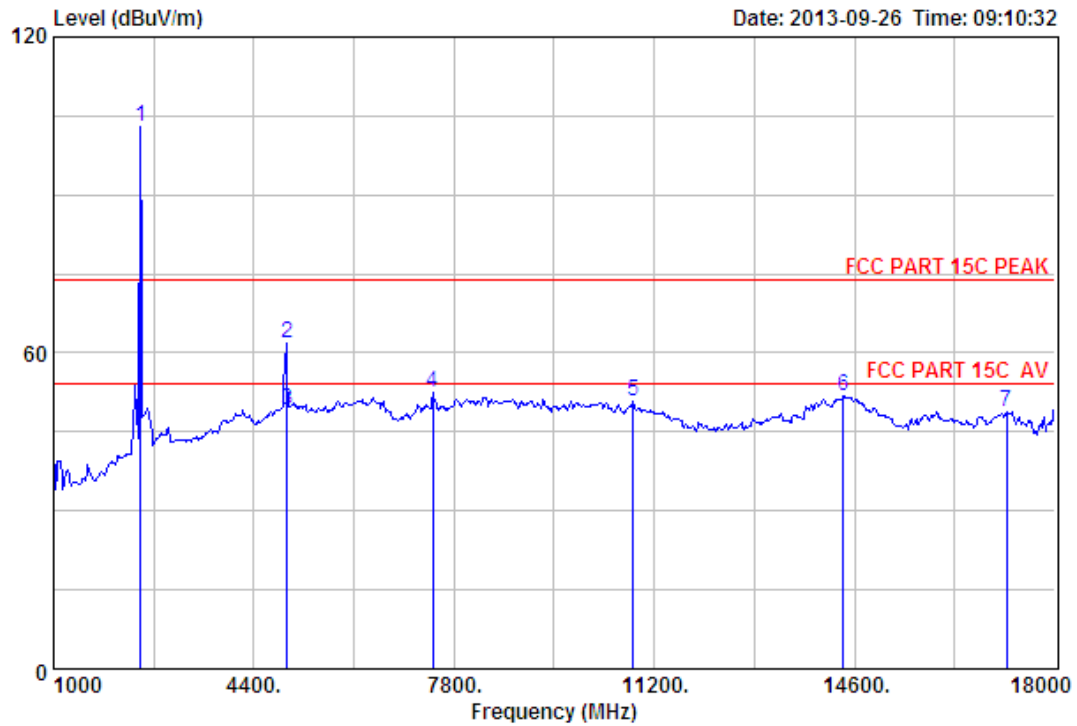

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)			
1	2480.00	27.58	6.71	34.03	102.72	102.98	74.00	-28.98	Peak
2	4960.00	31.49	12.44	31.97	49.75	61.71	74.00	12.29	Peak
3	4960.00	31.49	12.44	31.97	37.05	49.01	54.00	4.99	Average
4	7443.00	36.54	11.61	31.93	36.09	52.31	74.00	21.69	Peak
5	10843.00	39.35	11.30	33.36	33.39	50.68	74.00	23.32	Peak
6	14413.00	41.80	10.92	32.78	31.81	51.75	74.00	22.25	Peak
7	17184.00	40.45	10.92	33.34	30.65	48.68	74.00	25.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

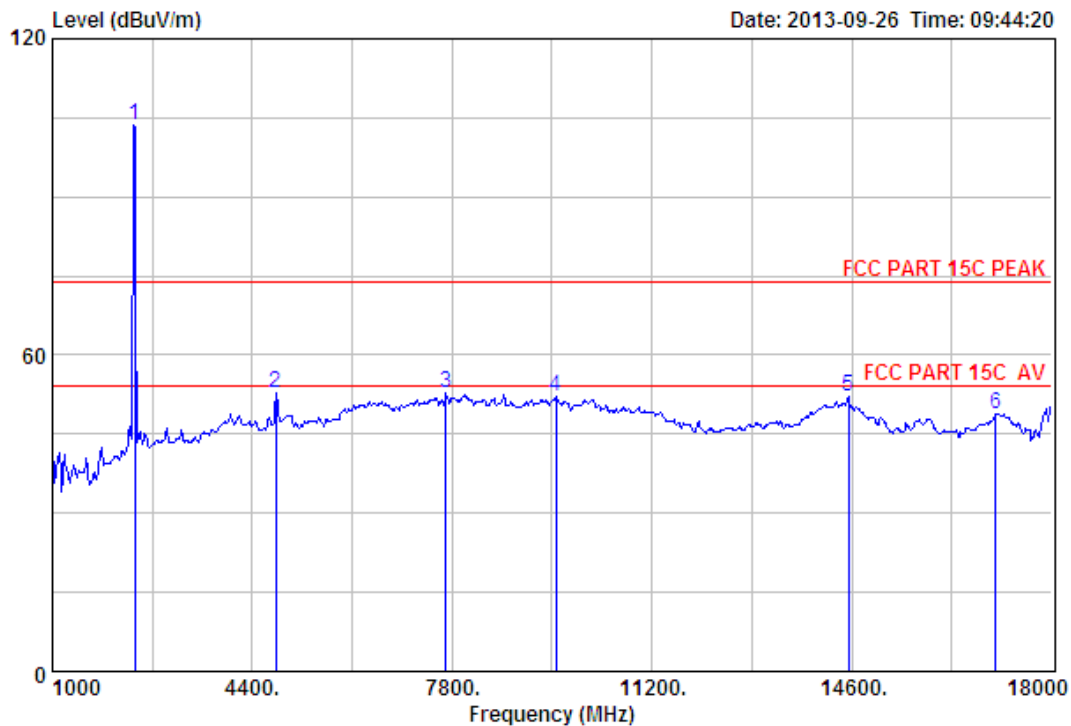

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	103.42	103.47	74.00	-29.47	Peak
2	4804.00	31.25	11.77	31.81	41.48	52.69	74.00	21.31	Peak
3	7698.00	36.49	11.53	31.53	36.25	52.74	74.00	21.26	Peak
4	9568.00	37.94	11.69	31.93	34.59	52.29	74.00	21.71	Peak
5	14549.00	41.77	10.92	33.26	32.70	52.13	74.00	21.87	Peak
6	17048.00	39.93	10.97	33.09	30.99	48.80	74.00	25.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

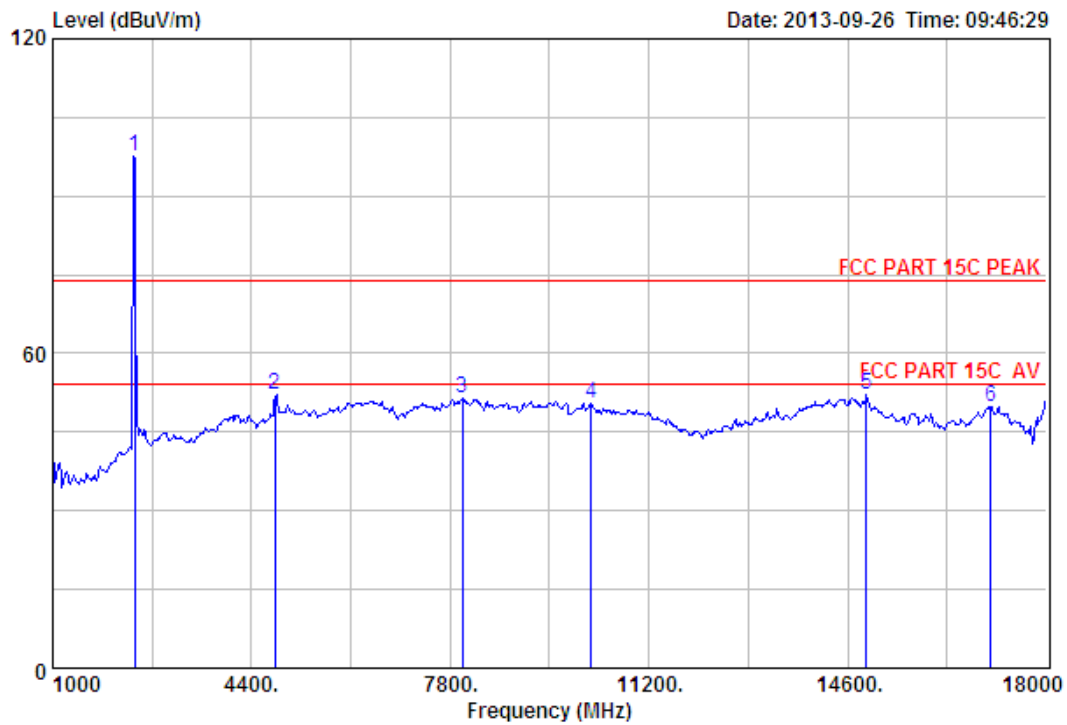

Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	97.52	97.57	74.00	-23.57	Peak
2	4804.00	31.25	11.77	31.81	41.02	52.23	74.00	21.77	Peak
3	8004.00	37.01	11.40	31.22	34.34	51.53	74.00	22.47	Peak
4	10214.00	38.48	11.47	32.17	32.77	50.55	74.00	23.45	Peak
5	14923.00	40.47	10.87	34.57	35.24	52.01	74.00	21.99	Peak
6	17048.00	39.93	10.97	33.09	31.93	49.74	74.00	24.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

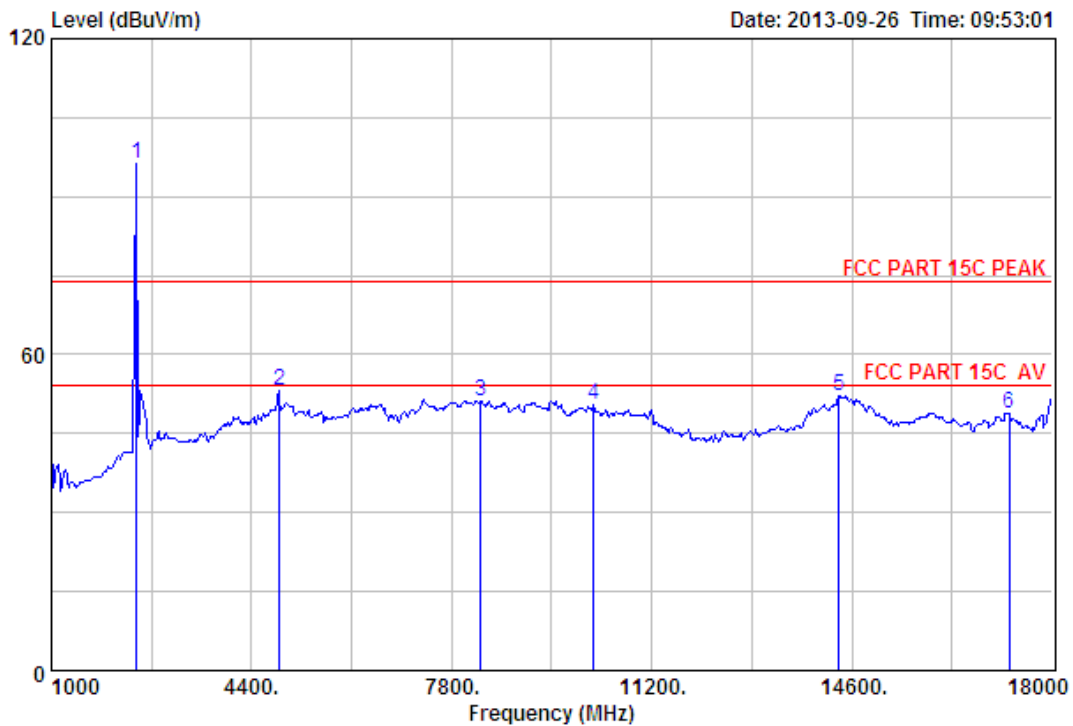

Site no. : 3m Chamber Data no. : 25
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2441.00	27.60	6.67	34.12	95.97	96.12	74.00	-22.12	Peak
2	4882.00	31.37	12.07	31.90	41.68	53.22	74.00	20.78	Peak
3	8293.00	36.67	11.43	31.57	34.70	51.23	74.00	22.77	Peak
4	10214.00	38.48	11.47	32.17	32.81	50.59	74.00	23.41	Peak
5	14379.00	41.77	10.92	32.88	32.47	52.28	74.00	21.72	Peak
6	17269.00	40.78	10.89	33.87	31.14	48.94	74.00	25.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

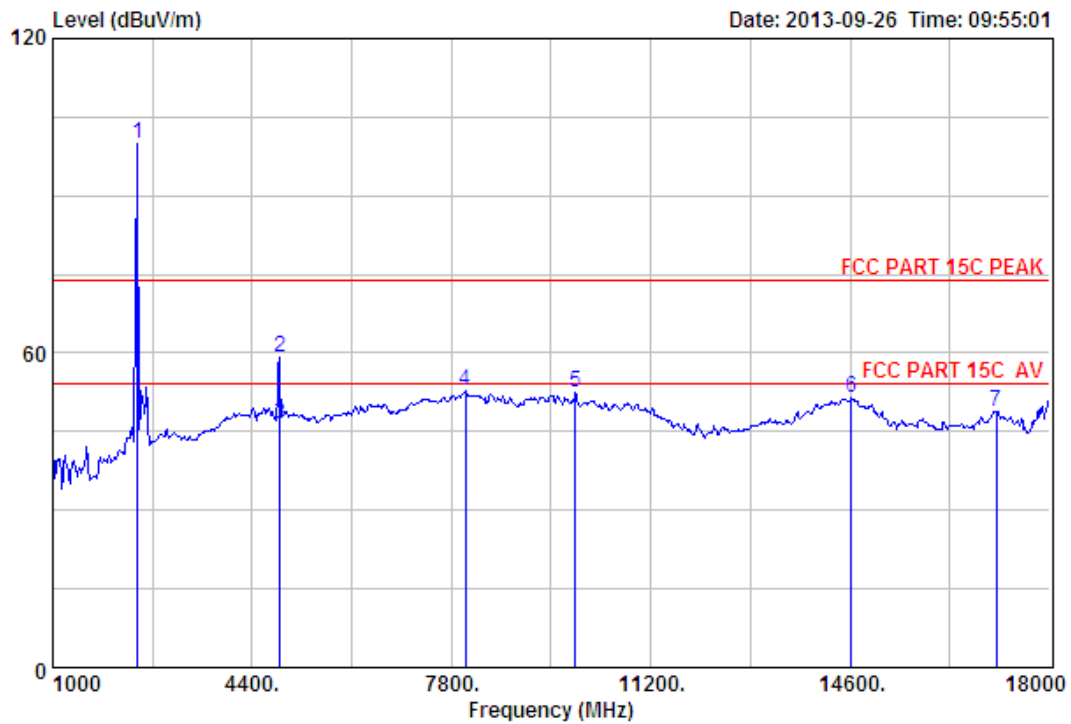

Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading	Level			
					(dBuV)	(dBuV/m)			
1	2441.00	27.60	6.67	34.12	99.88	100.03	74.00	-26.03	Peak
2	4882.00	31.37	12.07	31.90	47.66	59.20	74.00	14.80	Peak
3	4882.00	31.37	12.07	31.90	34.76	46.30	54.00	7.70	Average
4	8038.00	36.95	11.40	31.28	35.63	52.70	74.00	21.30	Peak
5	9908.00	38.14	11.61	31.76	34.36	52.35	74.00	21.65	Peak
6	14617.00	41.54	10.91	33.50	32.40	51.35	74.00	22.65	Peak
7	17099.00	40.13	10.95	32.96	30.67	48.79	74.00	25.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

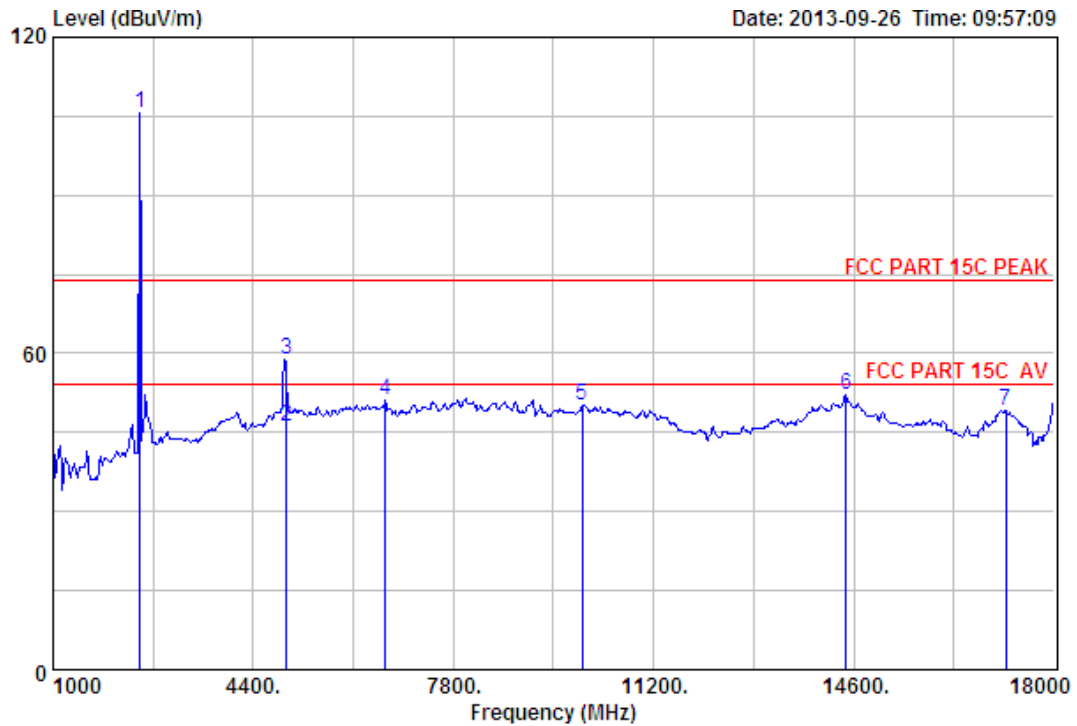

Site no. : 3m Chamber Data no. : 27
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	105.40	105.66	74.00	-31.66	Peak
2	4960.00	31.49	12.44	31.97	34.14	46.10	54.00	7.90	Average
3	4960.00	31.49	12.44	31.97	47.01	58.97	74.00	15.03	Peak
4	6644.00	34.48	12.02	32.20	36.69	50.99	74.00	23.01	Peak
5	9993.00	38.12	11.59	31.78	32.25	50.18	74.00	23.82	Peak
6	14464.00	41.85	10.93	32.96	32.37	52.19	74.00	21.81	Peak
7	17184.00	40.45	10.92	33.34	31.18	49.21	74.00	24.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

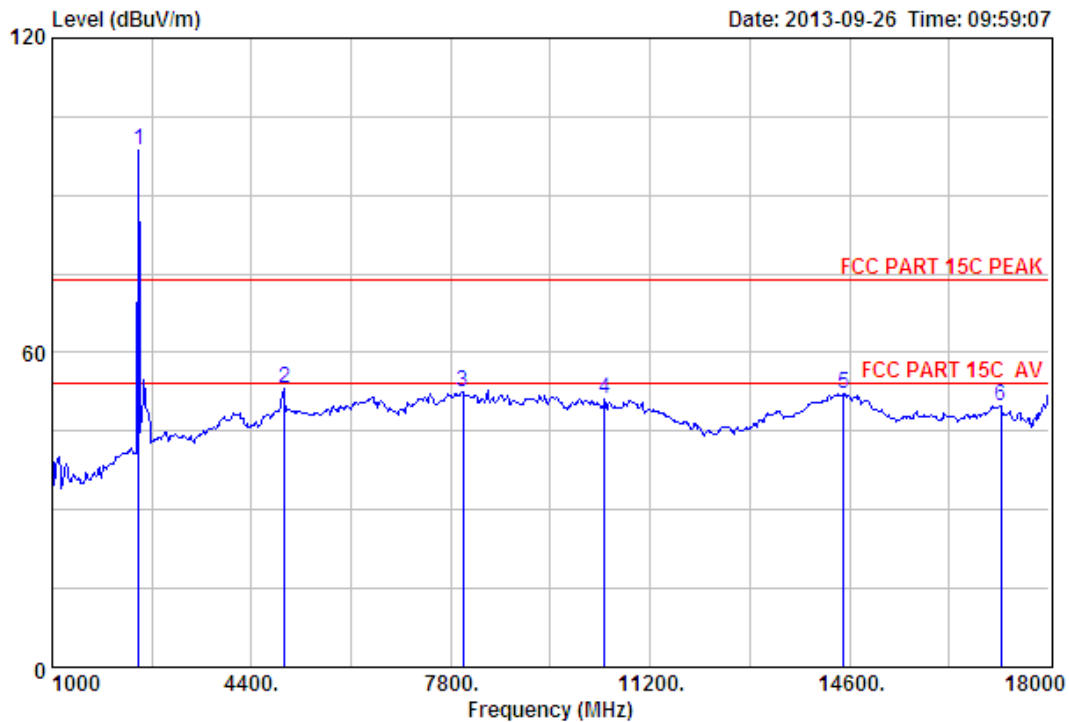

Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	98.22	98.48	74.00	-24.48	Peak
2	4960.00	31.49	12.44	31.97	41.16	53.12	74.00	20.88	Peak
3	8004.00	37.01	11.40	31.22	35.45	52.64	74.00	21.36	Peak
4	10418.00	38.83	11.36	32.56	33.62	51.25	74.00	22.75	Peak
5	14498.00	41.88	10.93	33.08	32.36	52.09	74.00	21.91	Peak
6	17184.00	40.45	10.92	33.34	31.77	49.80	74.00	24.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

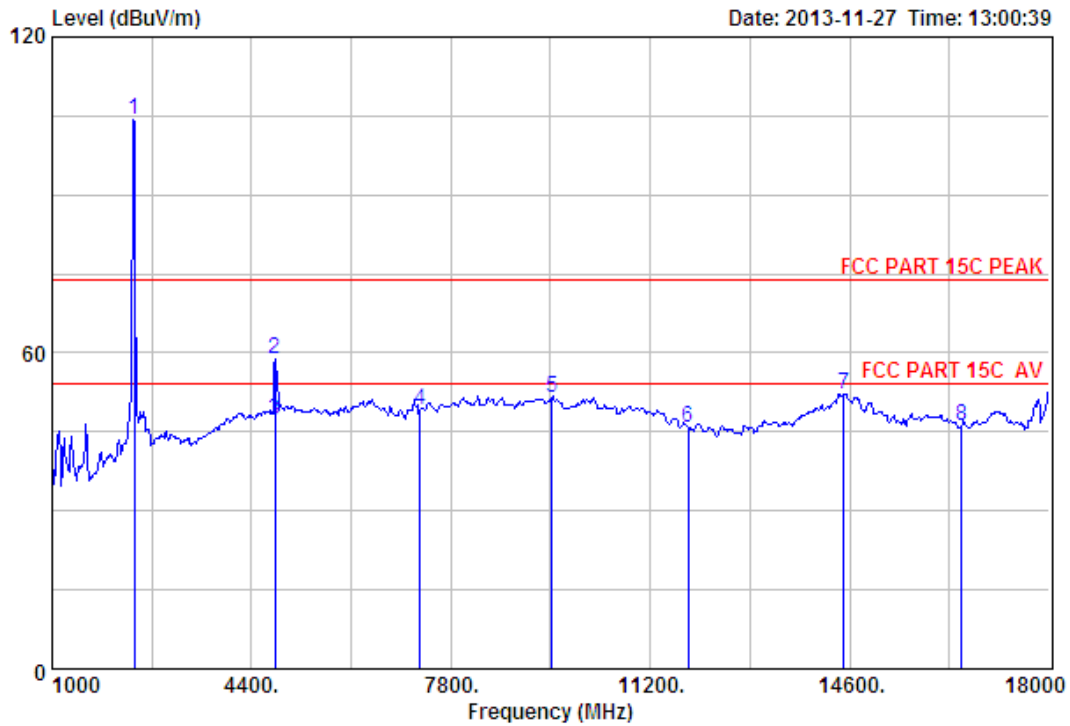

Site no. : 3m Chamber Data no. : 322
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	104.37	104.42	74.00	-30.42	Peak
2	4804.00	31.25	11.77	31.81	47.68	58.89	74.00	15.11	Peak
3	4804.00	31.25	11.77	31.81	35.90	47.11	54.00	6.89	Average
4	7273.00	36.54	11.56	32.04	33.10	49.16	74.00	24.84	Peak
5	9517.00	37.98	11.71	31.92	33.57	51.34	74.00	22.66	Peak
6	11846.00	38.80	11.26	35.22	31.07	45.91	74.00	28.09	Peak
7	14498.00	41.88	10.93	33.08	32.42	52.15	74.00	21.85	Peak
8	16504.00	38.28	10.52	34.70	32.00	46.10	74.00	27.90	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

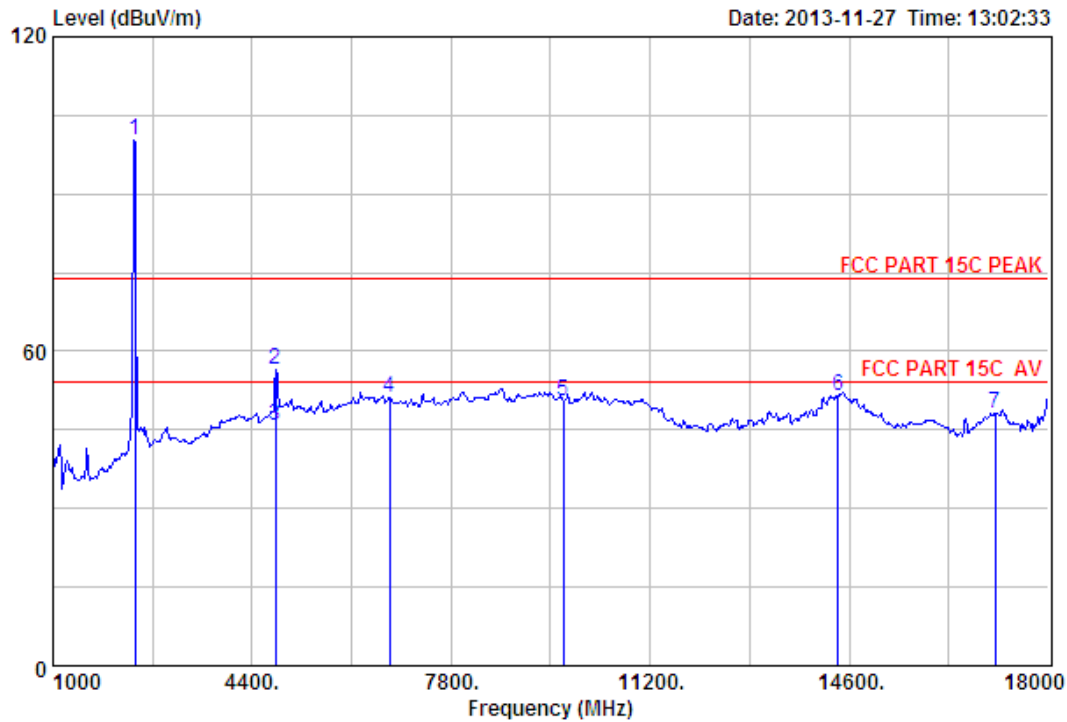

Site no. : 3m Chamber Data no. : 323
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	100.31	100.36	74.00	-26.36	Peak
2	4804.00	31.25	11.77	31.81	45.25	56.46	74.00	17.54	Peak
3	4804.00	31.25	11.77	31.81	34.69	45.90	54.00	8.10	Average
4	6746.00	34.51	11.87	32.28	36.97	51.07	74.00	22.93	Peak
5	9721.00	38.08	11.66	31.87	32.70	50.57	74.00	23.43	Peak
6	14413.00	41.80	10.92	32.78	31.49	51.43	74.00	22.57	Peak
7	17099.00	40.13	10.95	32.96	30.09	48.21	74.00	25.79	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

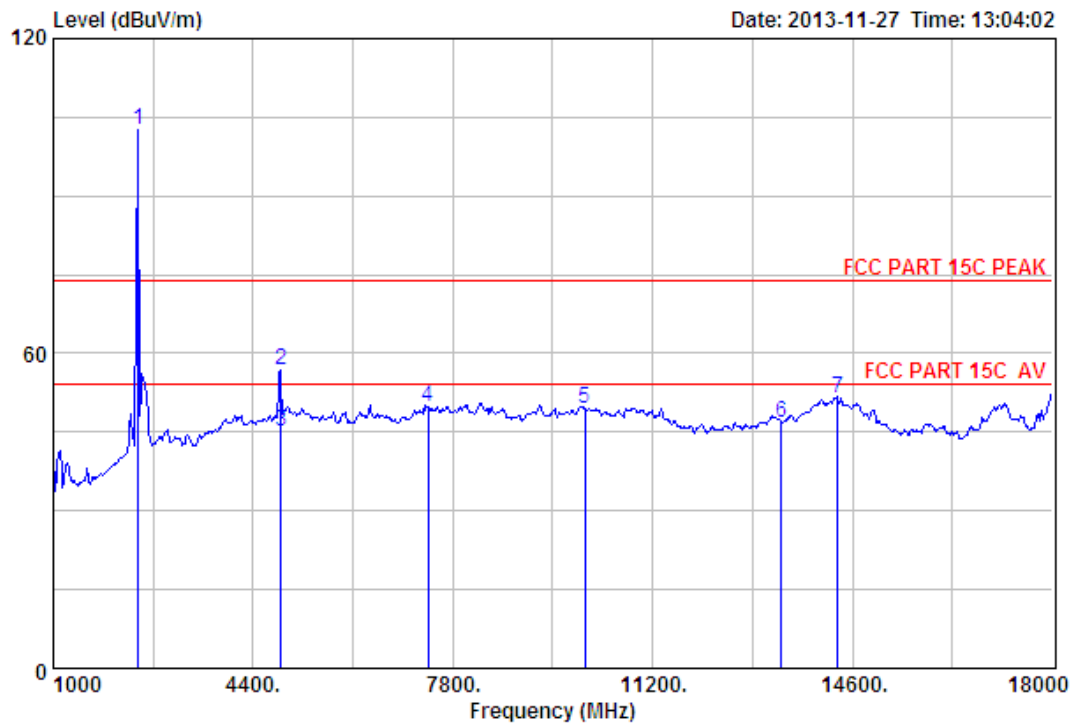

Site no. : 3m Chamber Data no. : 324
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	102.58	102.73	74.00	-28.73	Peak
2	4882.00	31.37	12.07	31.90	45.33	56.87	74.00	17.13	Peak
3	4882.00	31.37	12.07	31.90	33.44	44.98	54.00	9.02	Average
4	7375.00	36.57	11.59	31.98	33.55	49.73	74.00	24.27	Peak
5	10044.00	38.18	11.56	31.85	31.57	49.46	74.00	24.54	Peak
6	13393.00	39.83	11.49	35.03	30.53	46.82	74.00	27.18	Peak
7	14345.00	41.76	10.92	32.93	31.56	51.31	74.00	22.69	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

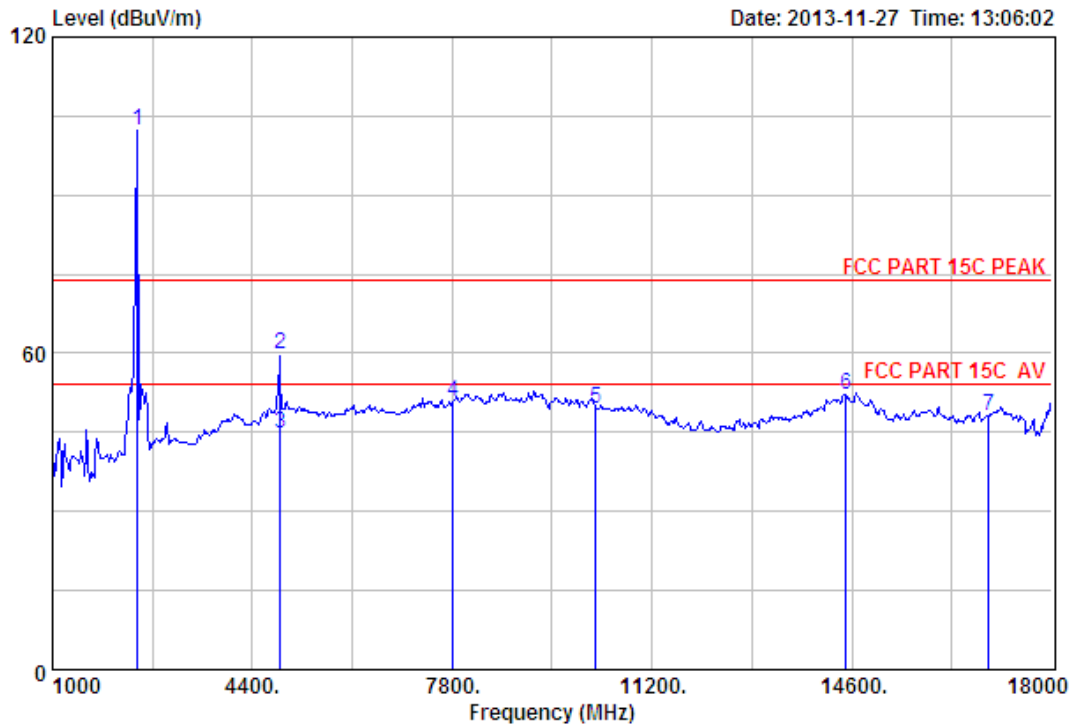

Site no. : 3m Chamber Data no. : 325
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	102.25	102.40	74.00	-28.40	Peak
2	4882.00	31.37	12.07	31.90	48.15	59.69	74.00	14.31	Peak
3	4882.00	31.37	12.07	31.90	33.35	44.89	54.00	9.11	Average
4	7817.00	36.64	11.48	31.42	34.18	50.88	74.00	23.12	Peak
5	10248.00	38.53	11.45	32.24	31.83	49.57	74.00	24.43	Peak
6	14498.00	41.88	10.93	33.08	32.35	52.08	74.00	21.92	Peak
7	16929.00	39.54	10.93	33.64	31.30	48.13	74.00	25.87	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

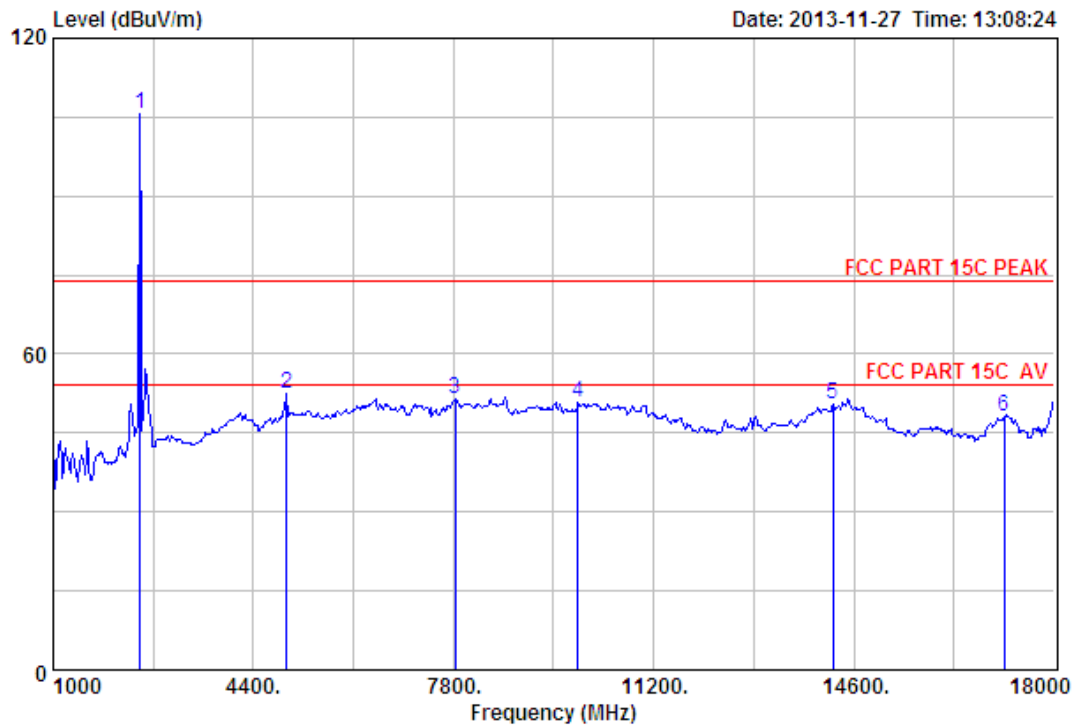

Site no. : 3m Chamber Data no. : 326
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	105.51	105.77	74.00	-31.77	Peak
2	4960.00	31.49	12.44	31.97	40.67	52.63	74.00	21.37	Peak
3	7834.00	36.68	11.47	31.40	34.71	51.46	74.00	22.54	Peak
4	9908.00	38.14	11.61	31.76	32.74	50.73	74.00	23.27	Peak
5	14243.00	41.67	10.91	33.24	31.28	50.62	74.00	23.38	Peak
6	17150.00	40.32	10.93	33.13	30.17	48.29	74.00	25.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

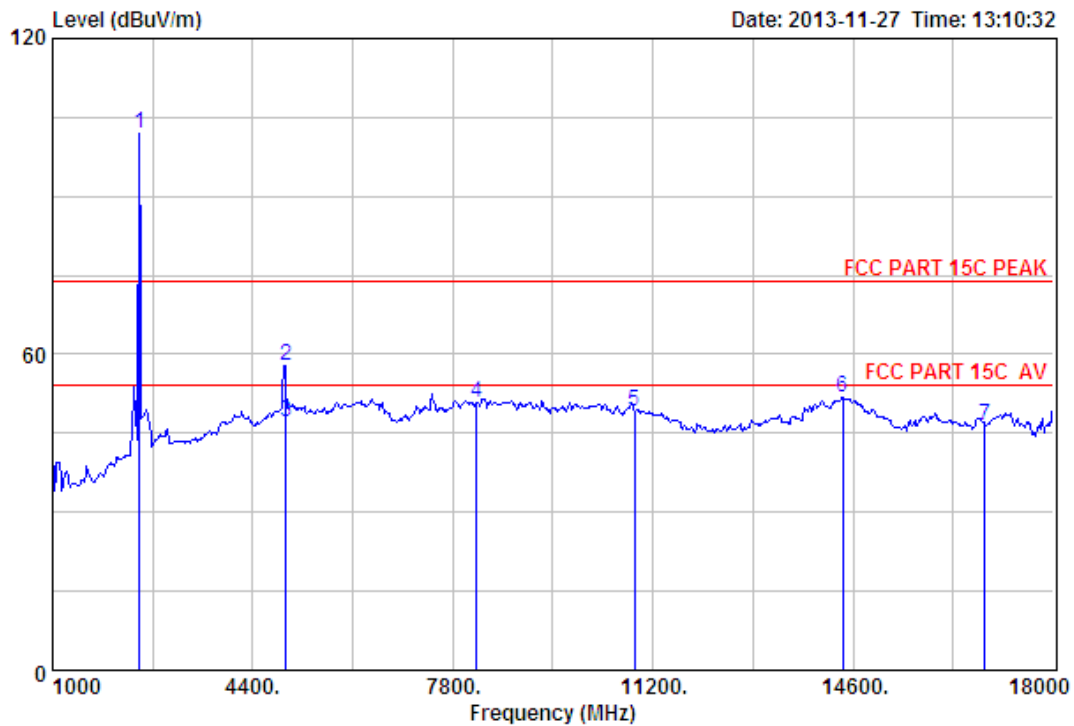

Site no. : 3m Chamber Data no. : 327
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	101.72	101.98	74.00	-27.98	Peak
2	4960.00	31.49	12.44	31.97	45.80	57.76	74.00	16.24	Peak
3	4960.00	31.49	12.44	31.97	35.04	47.00	54.00	7.00	Average
4	8208.00	36.66	11.42	31.46	34.33	50.95	74.00	23.05	Peak
5	10894.00	39.41	11.29	33.46	31.95	49.19	74.00	24.81	Peak
6	14430.00	41.82	10.93	32.84	31.74	51.65	74.00	22.35	Peak
7	16844.00	39.29	10.84	34.17	30.41	46.37	74.00	27.63	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

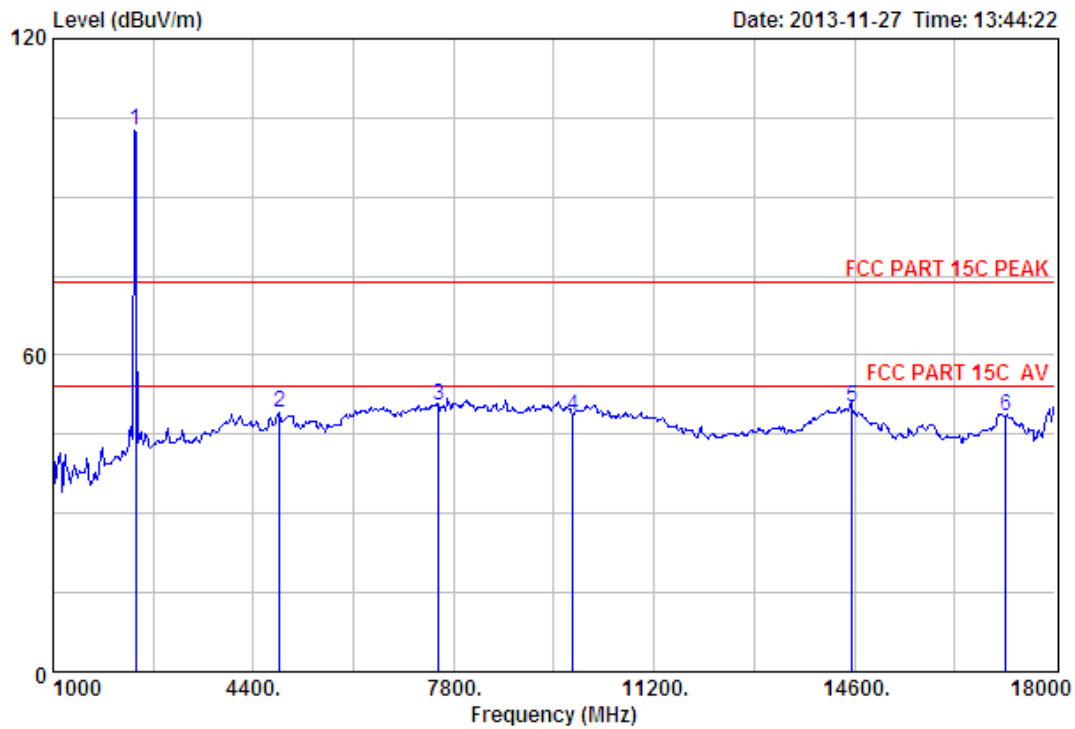

Site no. : 3m Chamber Data no. : 342
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	102.42	102.47	74.00	-28.47	Peak
2	4842.00	31.31	11.92	31.85	37.79	49.17	74.00	24.83	Peak
3	7545.00	36.43	11.60	31.81	34.30	50.52	74.00	23.48	Peak
4	9823.00	38.17	11.63	31.82	30.43	48.41	74.00	25.59	Peak
5	14566.00	41.71	10.92	33.32	30.88	50.19	74.00	23.81	Peak
6	17167.00	40.39	10.93	33.24	30.30	48.38	74.00	25.62	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

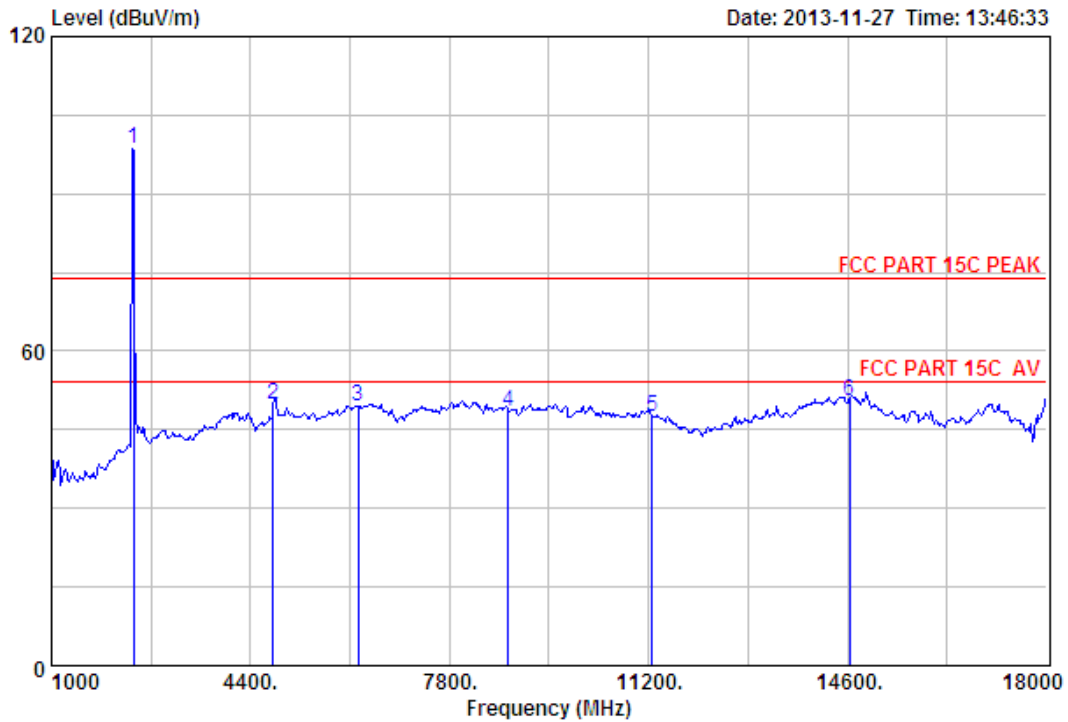

Site no. : 3m Chamber Data no. : 343
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.61	6.62	34.18	98.52	98.57	74.00	-24.57	Peak
2	4791.00	31.22	11.69	31.80	38.84	49.95	74.00	24.05	Peak
3	6236.00	33.36	12.17	31.97	36.01	49.57	74.00	24.43	Peak
4	8803.00	37.51	11.46	32.68	32.21	48.50	74.00	25.50	Peak
5	11268.00	39.34	11.09	34.16	31.20	47.47	74.00	26.53	Peak
6	14634.00	41.48	10.91	33.56	31.81	50.64	74.00	23.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

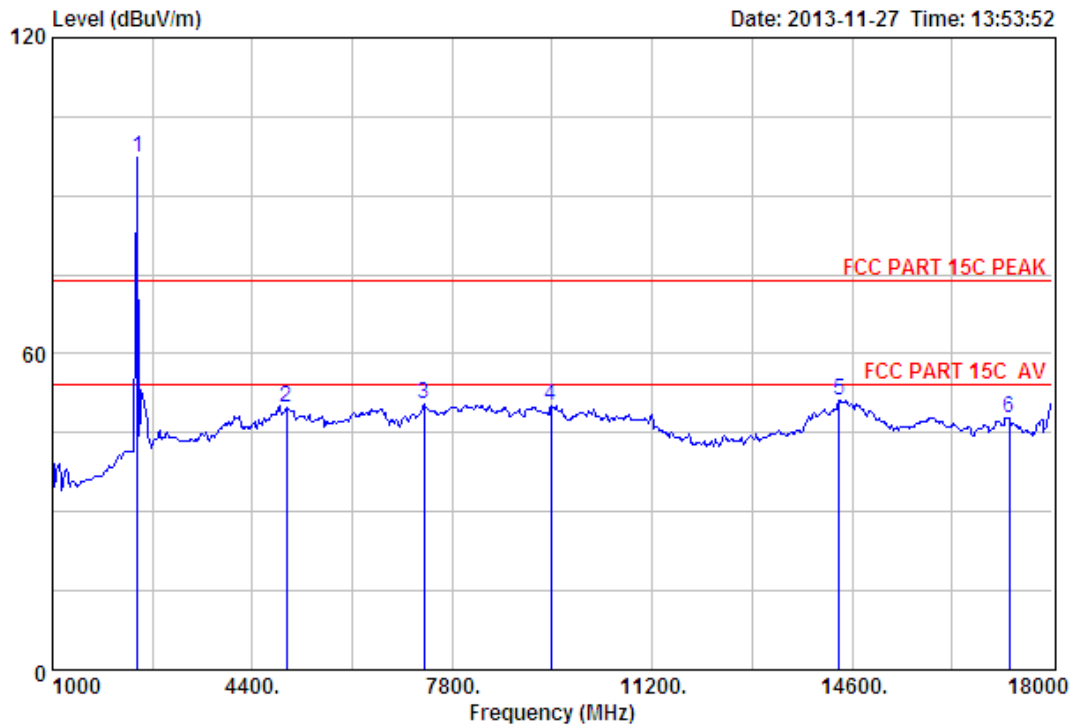

Site no. : 3m Chamber Data no. : 346
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	27.60	6.67	34.12	96.97	97.12	74.00	-23.12	Peak
2	4978.00	31.52	12.52	31.99	37.65	49.70	74.00	24.30	Peak
3	7324.00	36.55	11.57	31.99	34.35	50.48	74.00	23.52	Peak
4	9483.00	38.01	11.70	31.93	32.45	50.23	74.00	23.77	Peak
5	14379.00	41.77	10.92	32.88	31.47	51.28	74.00	22.72	Peak
6	17269.00	40.78	10.89	33.87	30.14	47.94	74.00	26.06	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

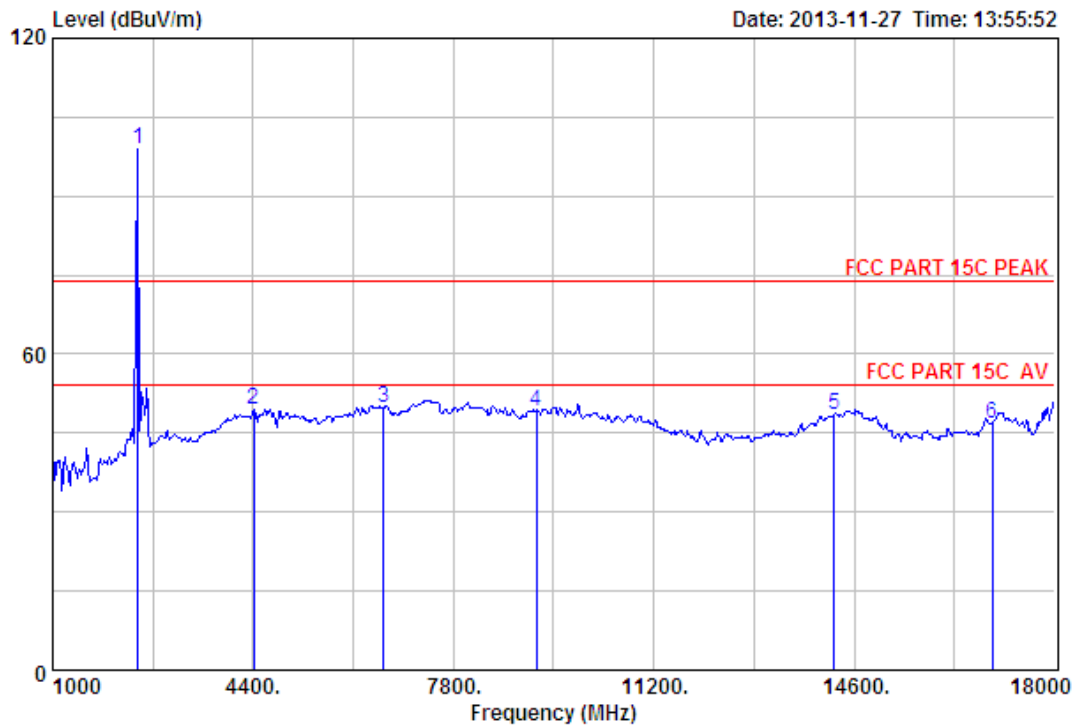

Site no. : 3m Chamber Data no. : 347
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	98.88	99.03	74.00	-25.03	Peak
2	4417.00	30.41	10.50	31.86	40.36	49.41	74.00	24.59	Peak
3	6610.00	34.47	12.07	32.18	35.32	49.68	74.00	24.32	Peak
4	9211.00	37.78	11.56	32.32	32.17	49.19	74.00	24.81	Peak
5	14260.00	41.68	10.92	33.19	29.06	48.47	74.00	25.53	Peak
6	16946.00	39.59	10.94	33.53	29.87	46.87	74.00	27.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

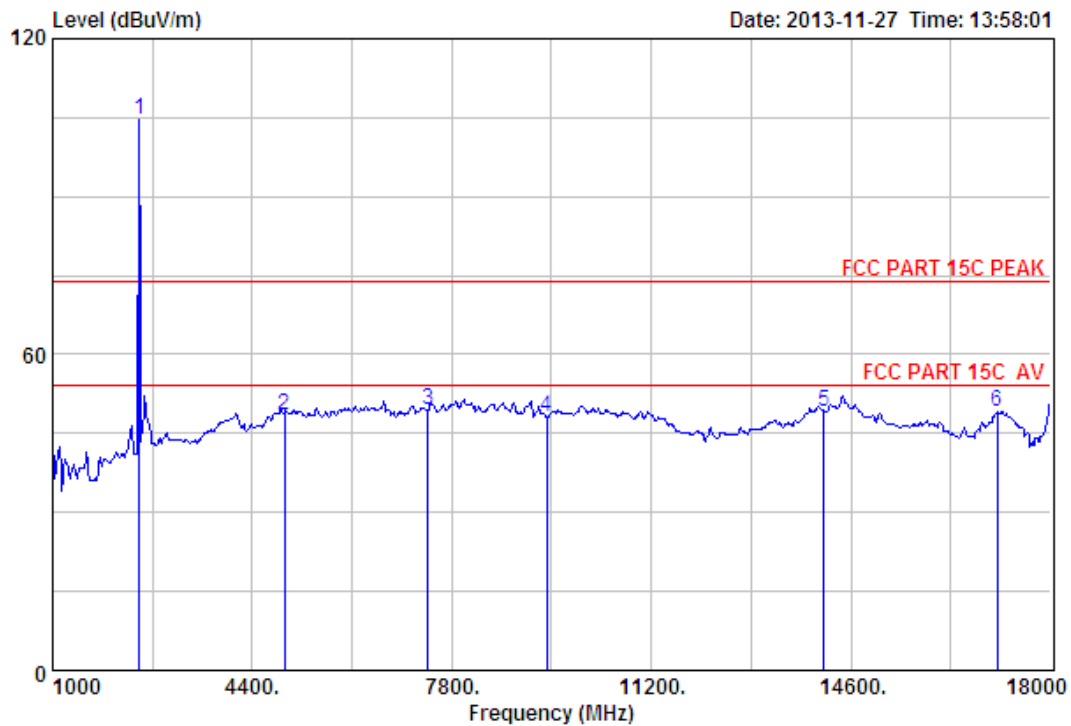

Site no. : 3m Chamber Data no. : 348
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	104.40	104.66	74.00	-30.66	Peak
2	4944.00	31.47	12.37	31.96	36.75	48.63	74.00	25.37	Peak
3	7392.00	36.57	11.59	31.97	33.40	49.59	74.00	24.41	Peak
4	9415.00	38.07	11.67	31.99	30.51	48.26	74.00	25.74	Peak
5	14141.00	41.58	10.91	33.54	30.26	49.21	74.00	24.79	Peak
6	17099.00	40.13	10.95	32.96	30.90	49.02	74.00	24.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

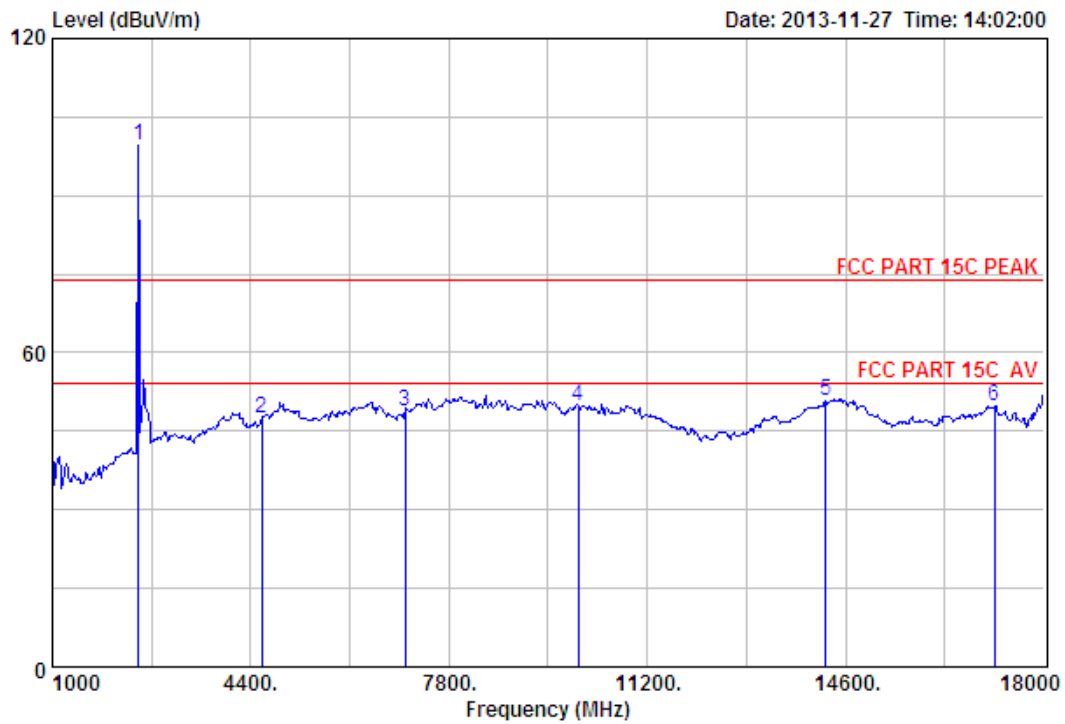


Site no. : 3m Chamber Data no. : 349
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.00	27.58	6.71	34.03	99.22	99.48	74.00	-25.48	Peak
2	4587.00	30.77	10.79	31.68	37.55	47.43	74.00	26.57	Peak
3	7052.00	35.72	11.49	32.39	33.86	48.68	74.00	25.32	Peak
4	10010.00	38.12	11.58	31.79	31.96	49.87	74.00	24.13	Peak
5	14260.00	41.68	10.92	33.19	31.29	50.70	74.00	23.30	Peak
6	17150.00	40.32	10.93	33.13	31.56	49.68	74.00	24.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.


18000MHz – 25000MHz

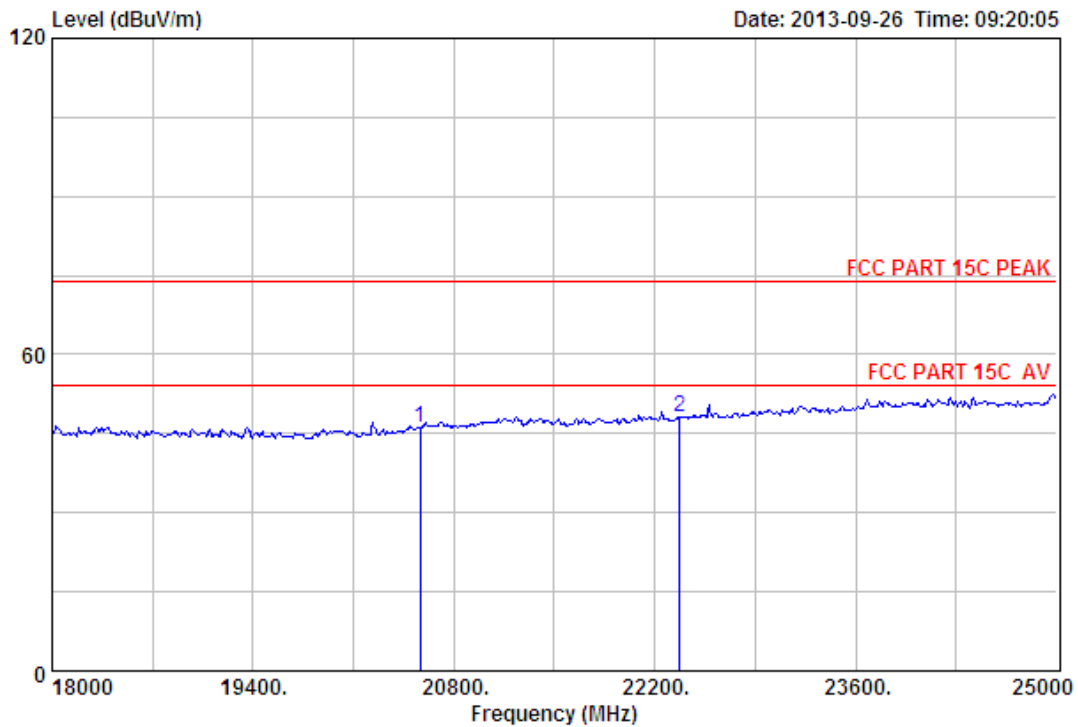

Site no. : 3m Chamber Data no. : 11
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20562.00	46.03	19.94	36.21	16.36	46.12	74.00	27.88	Peak
2	22375.00	45.77	20.78	34.51	16.10	48.14	74.00	25.86	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

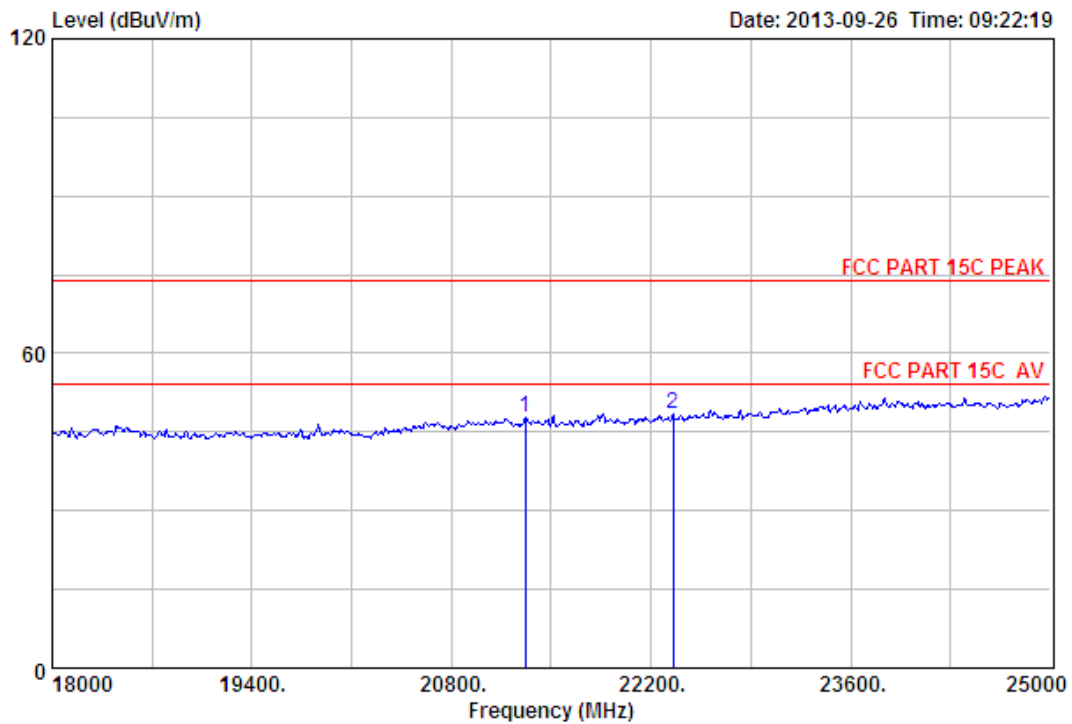

Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	21318.00	46.10	20.27	35.51	16.99	47.85	74.00	26.15	Peak
2	22354.00	45.77	20.77	34.53	16.40	48.41	74.00	25.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

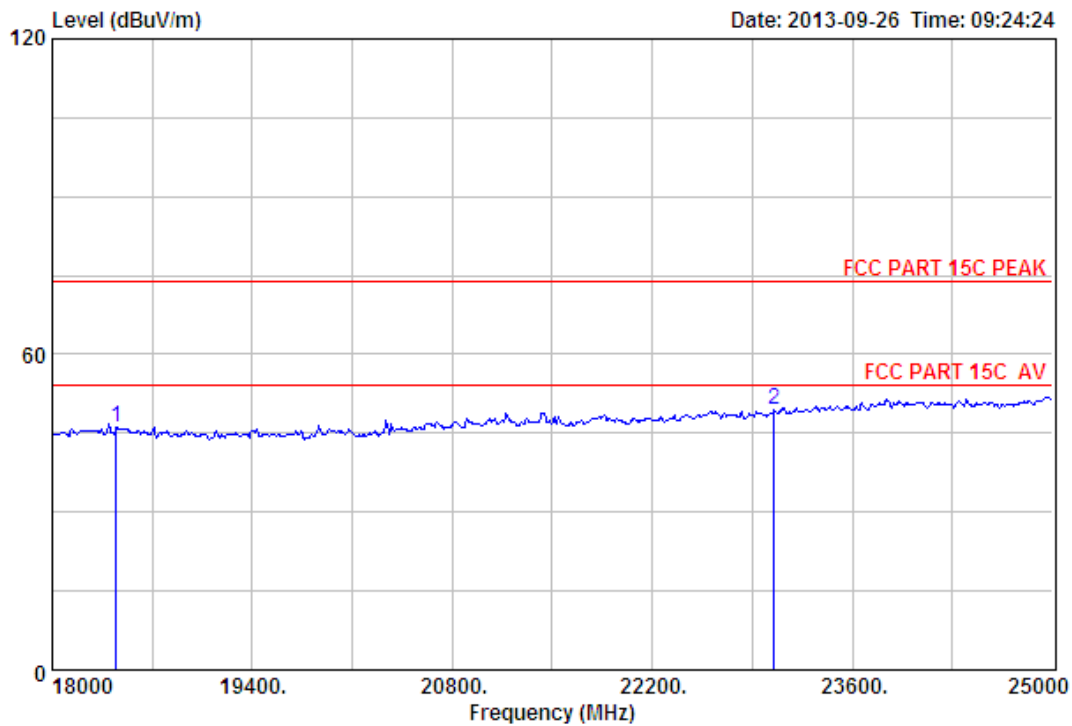

Site no. : 3m Chamber Data no. : 13
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 18448.00	44.81	17.87	35.38	18.93	46.23		74.00	27.77	Peak
2 23054.00	45.61	21.20	33.80	16.45	49.46		74.00	24.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

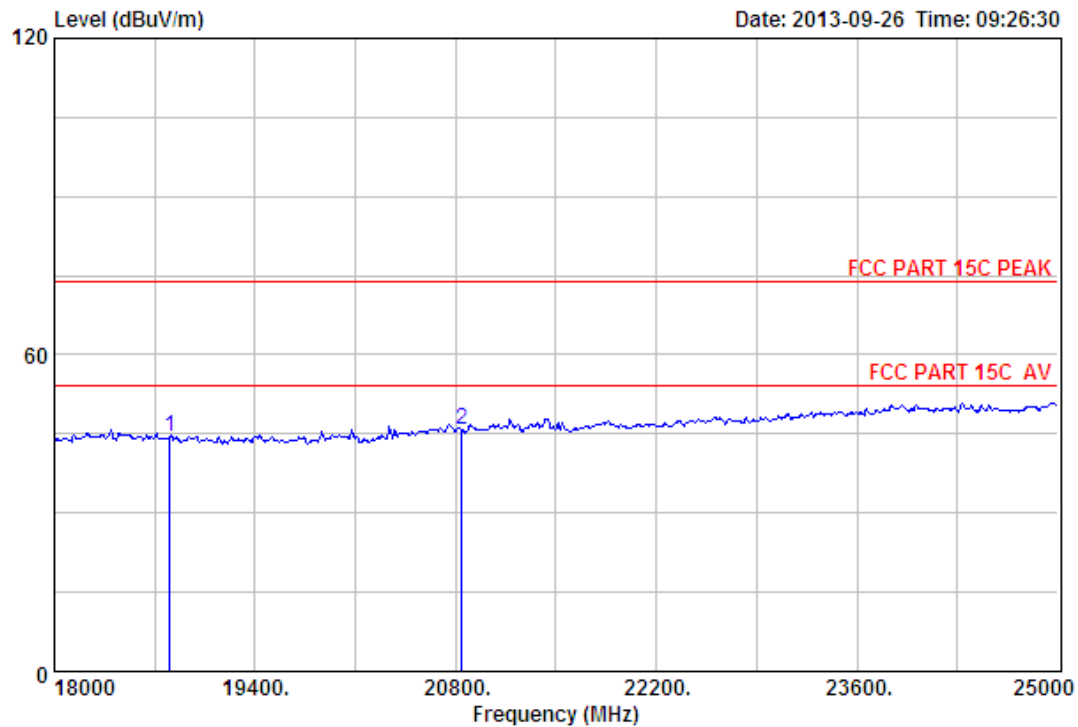

Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 18805.00	45.22	18.30	35.68	16.62	44.46	74.00	29.54	Peak	
2 20842.00	46.20	20.06	35.94	15.53	45.85	74.00	28.15	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

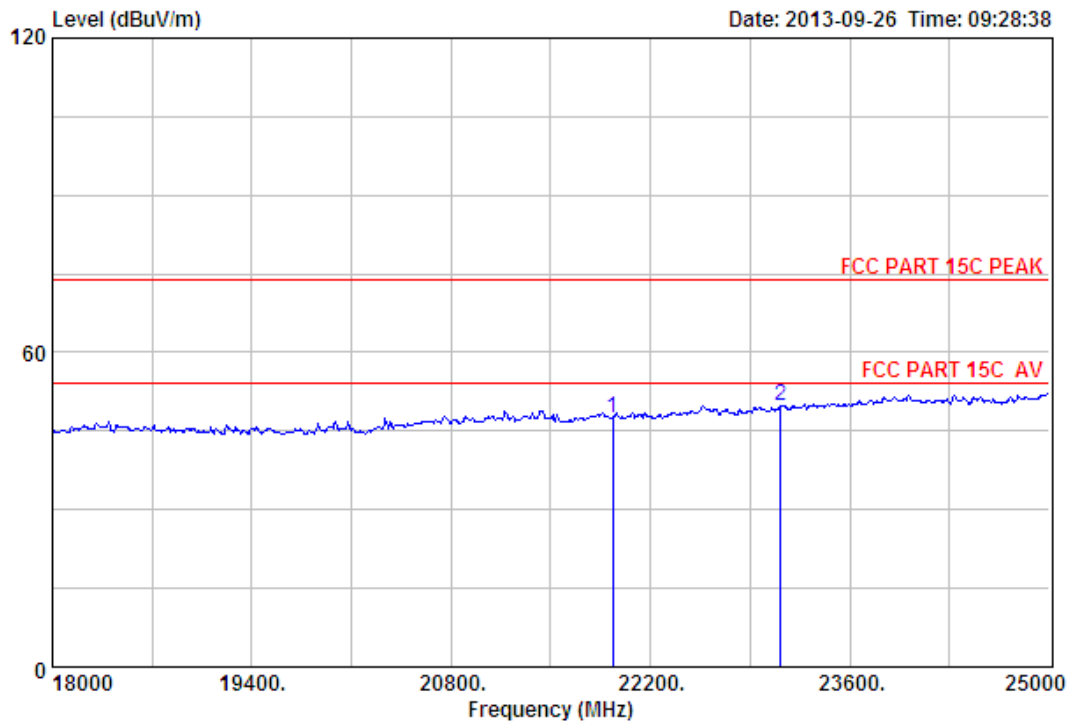

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 21934.00	45.74	20.53	34.97	16.25	47.55		74.00	26.45	Peak
2 23117.00	45.63	21.26	33.72	16.56	49.73		74.00	24.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

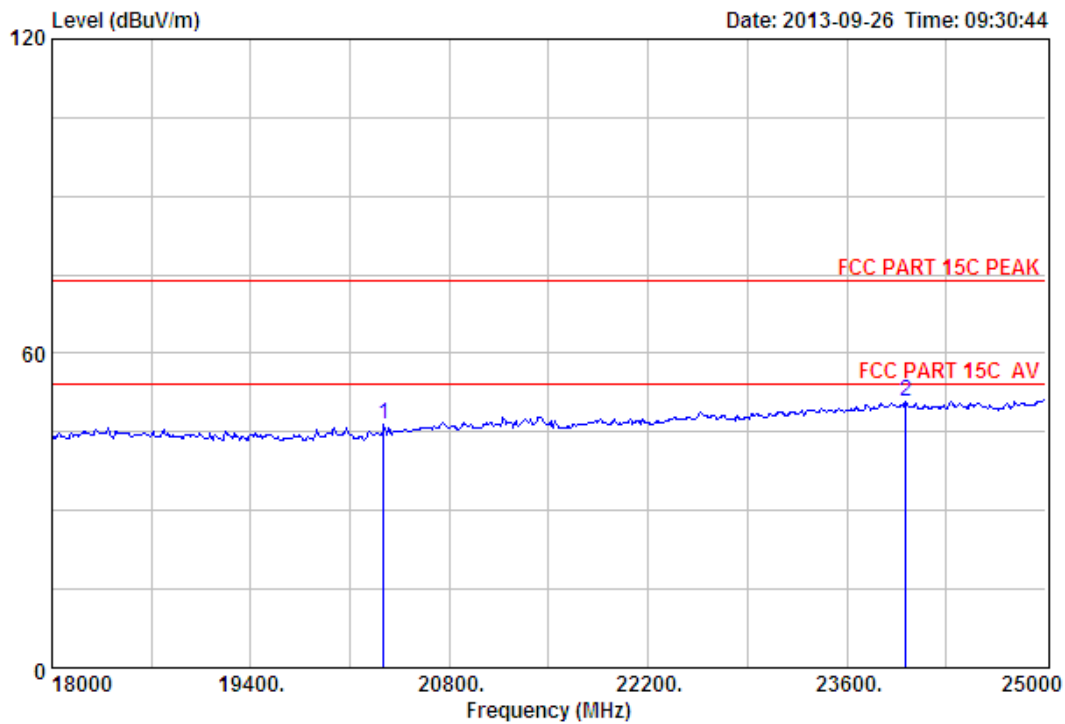

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading	Level			
					(dBuV)	(dBuV/m)	(dBuV/m)		
1	20338.00	46.03	19.83	36.39	16.96	46.43	74.00	27.57	Peak
2	24013.00	45.60	22.05	32.84	16.04	50.85	74.00	23.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official
 limit are not reported.

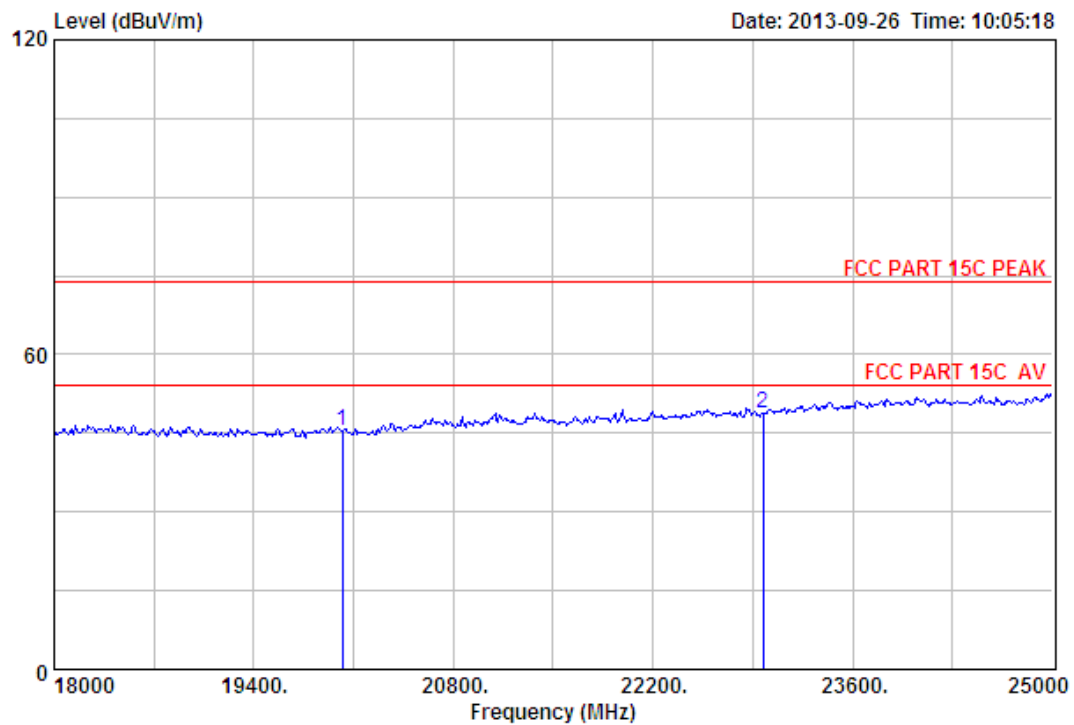

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 20023.00	46.10	19.69	36.68	16.31	45.42	74.00	28.58	Peak
2 22970.00	45.61	21.13	33.88	16.06	48.92	74.00	25.08	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

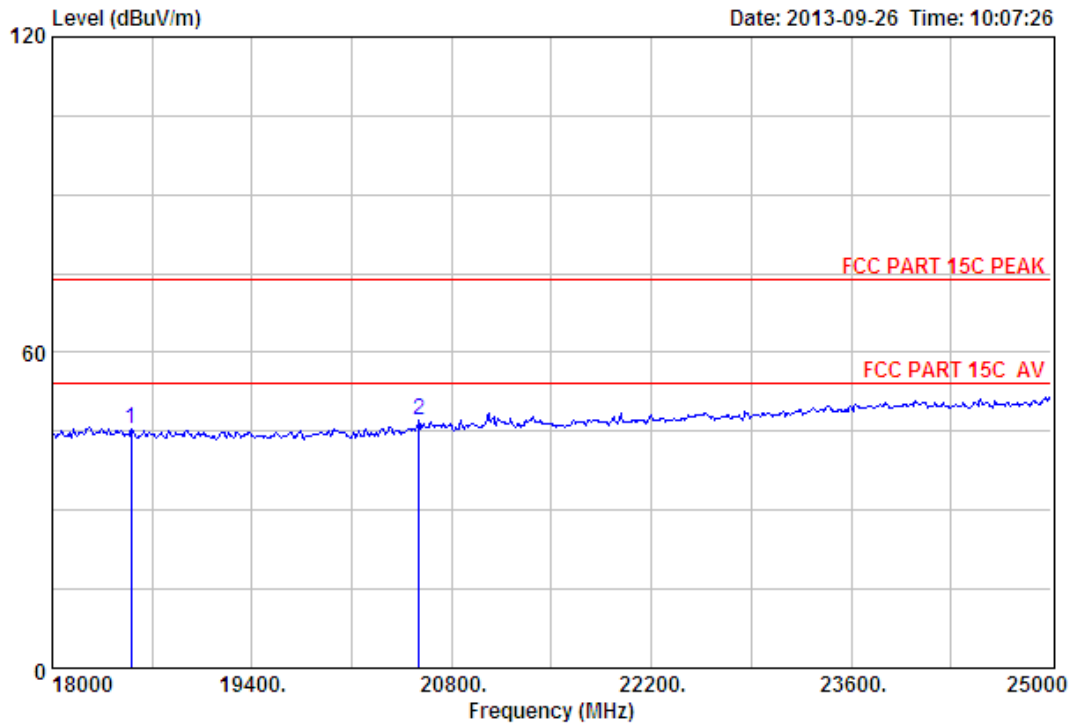

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	18553.00	44.95	17.99	35.47	18.06	45.53	74.00	28.47	Peak
2	20569.00	46.04	19.94	36.18	17.32	47.12	74.00	26.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

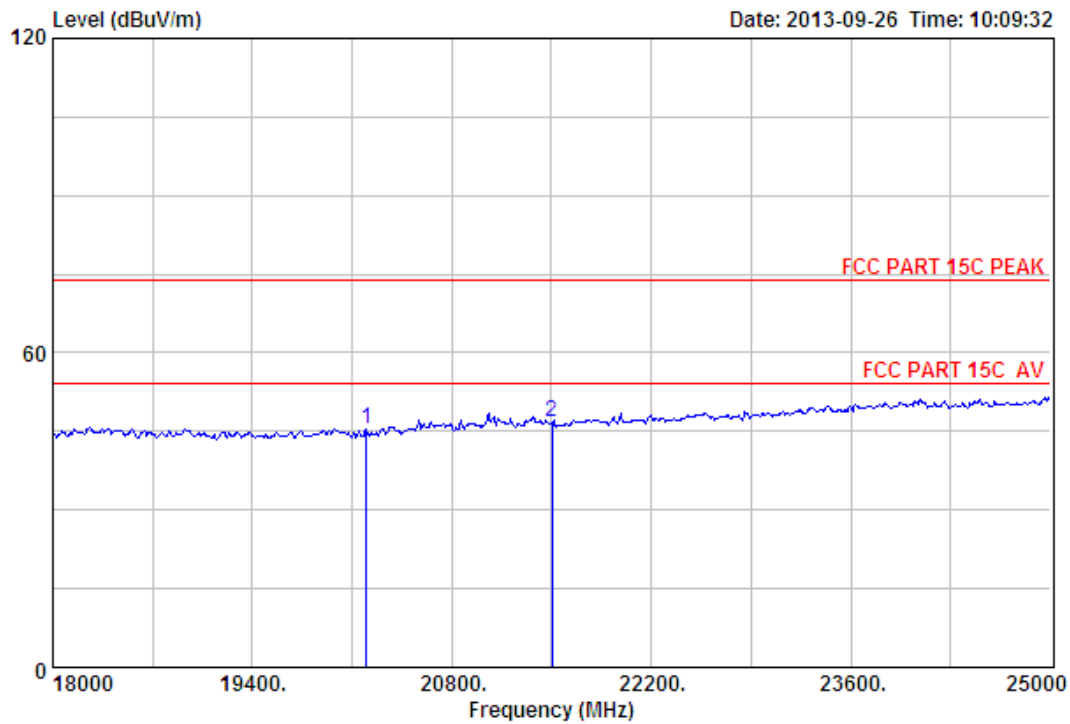

Site no. : 3m Chamber Data no. : 33
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	20198.00	46.06	19.77	36.52	16.00	45.31	74.00	28.69	Peak
2	21500.00	46.00	20.35	35.35	15.67	46.67	74.00	27.33	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

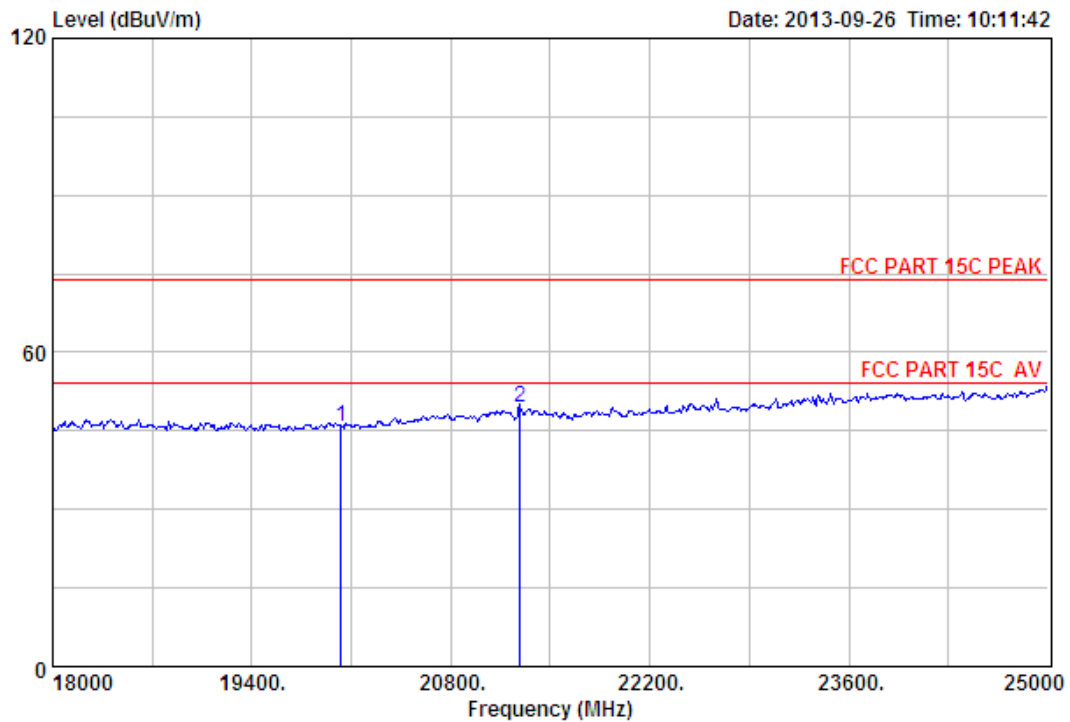

Site no. : 3m Chamber Data no. : 34
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 20030.00	46.10	19.70	36.68	16.80	45.92	74.00	28.08	Peak
2 21290.00	46.12	20.26	35.53	18.71	49.56	74.00	24.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

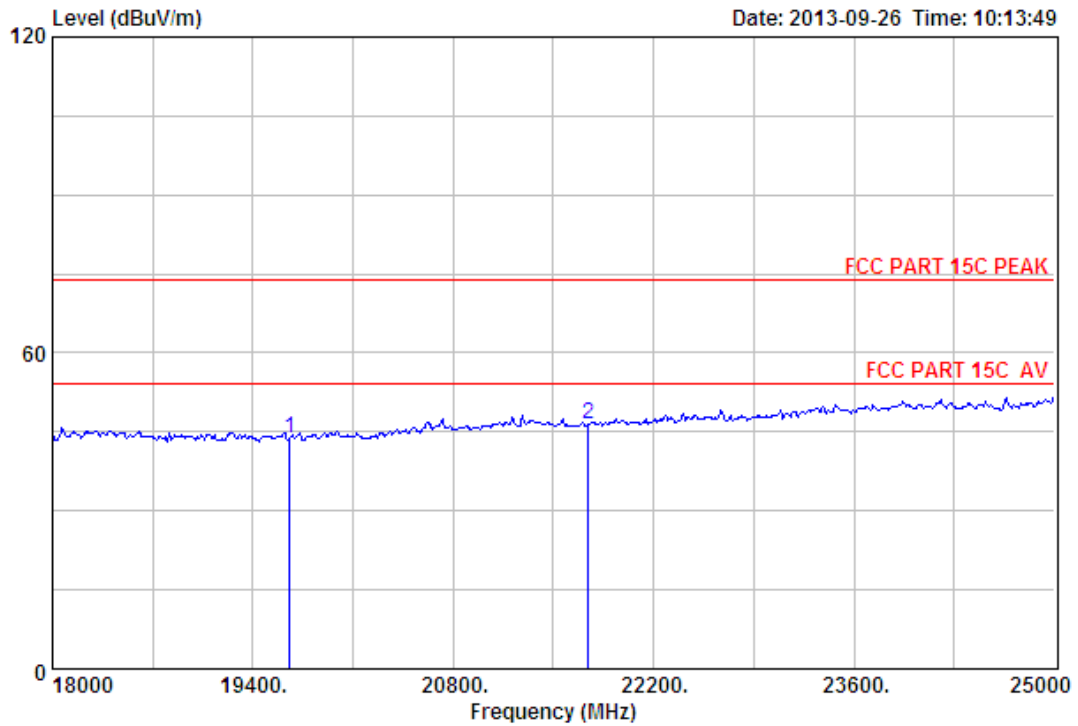

Site no. : 3m Chamber Data no. : 35
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19659.00	45.96	19.29	36.40	15.09	43.94	74.00	30.06	Peak
2	21745.00	45.86	20.45	35.12	15.32	46.51	74.00	27.49	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

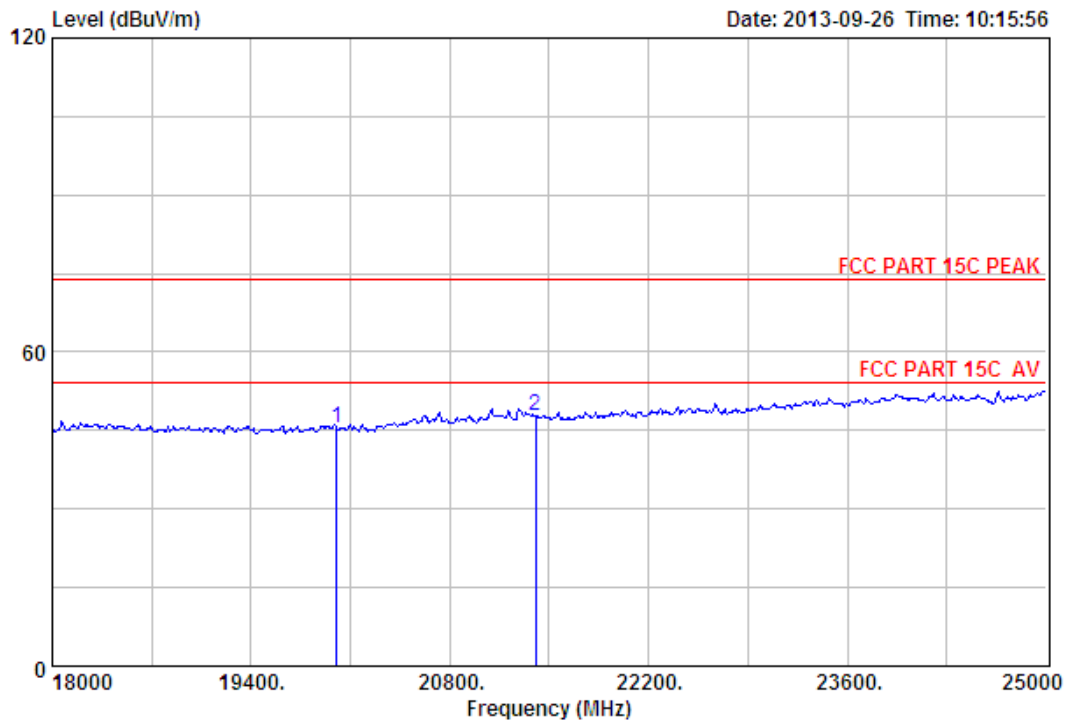

Site no. : 3m Chamber Data no. : 36
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20002.00	46.10	19.68	36.70	16.49	45.57	74.00	28.43	Peak
2	21402.00	46.05	20.30	35.44	16.90	47.81	74.00	26.19	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

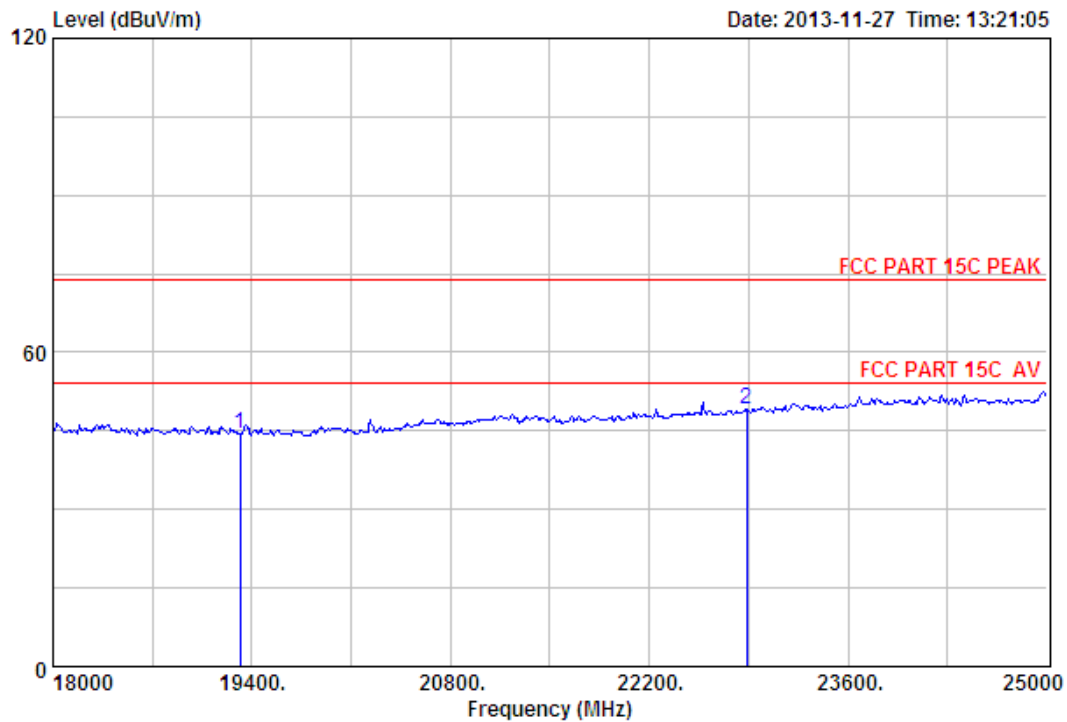

Site no. : 3m Chamber Data no. : 332
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading	Level			
1 19316.00	45.73	18.90	36.13	15.88	44.38	74.00	29.62	Peak
2 22886.00	45.65	21.08	33.98	16.31	49.06	74.00	24.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

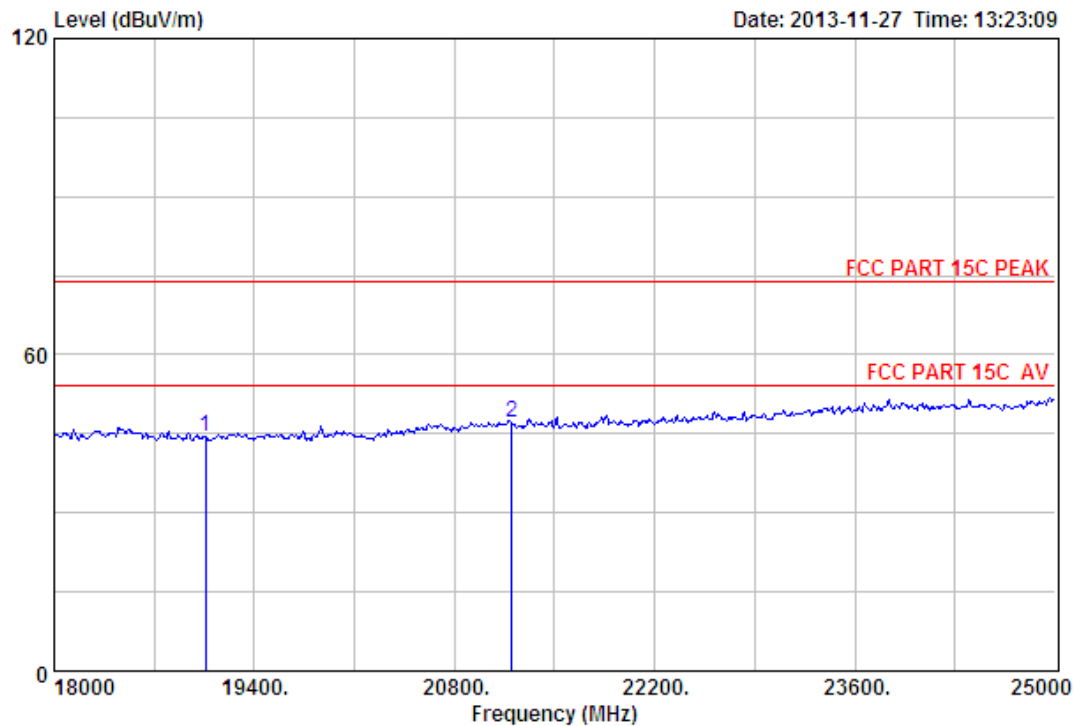

Site no. : 3m Chamber Data no. : 333
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)			
1	19057.00	45.47	18.60	35.89	16.15	44.33	74.00	29.67	Peak
2	21199.00	46.18	20.22	35.62	16.24	47.02	74.00	26.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

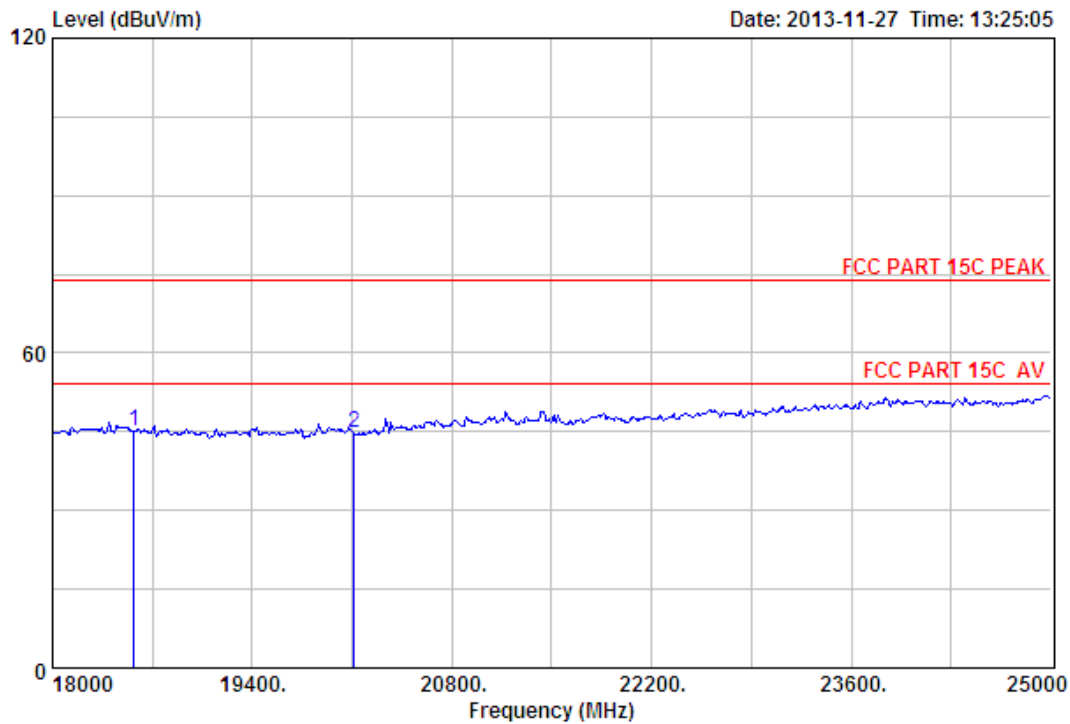

Site no. : 3m Chamber Data no. : 334
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 18574.00	44.97	18.02	35.49	17.72	45.22	74.00	28.78	Peak	
2 20114.00	46.08	19.73	36.59	15.42	44.64	74.00	29.36	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

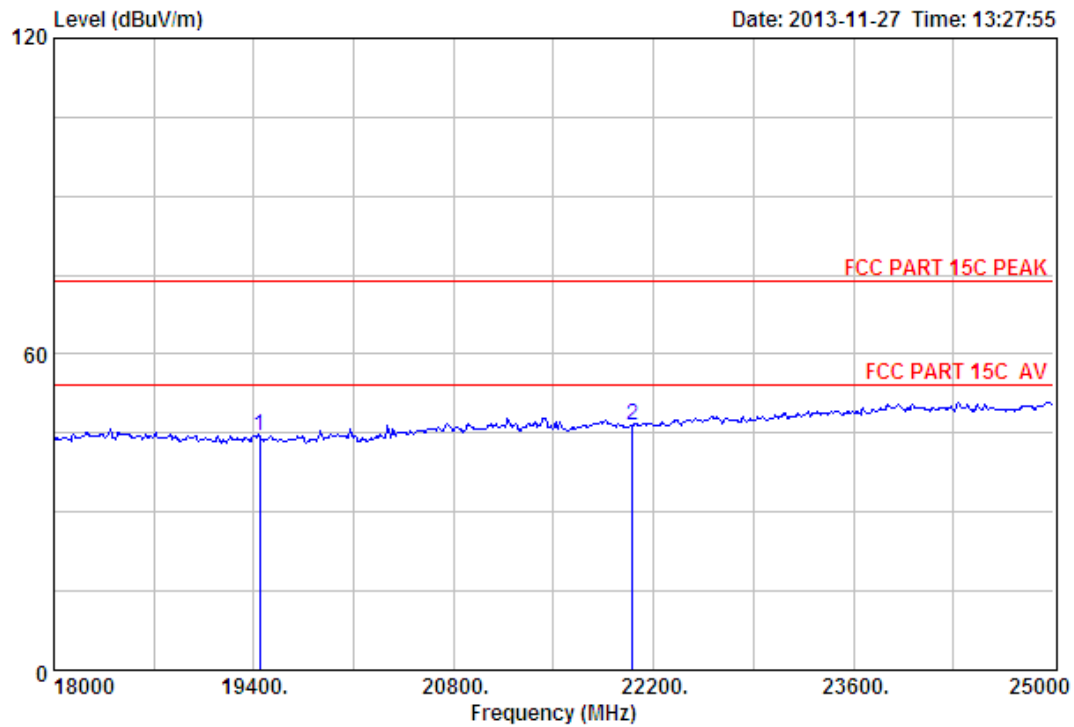

Site no. : 3m Chamber Data no. : 335
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	19442.00	45.86	19.04	36.23	15.65	44.32	74.00	29.68	Peak
2	22053.00	45.71	20.59	34.85	15.10	46.55	74.00	27.45	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

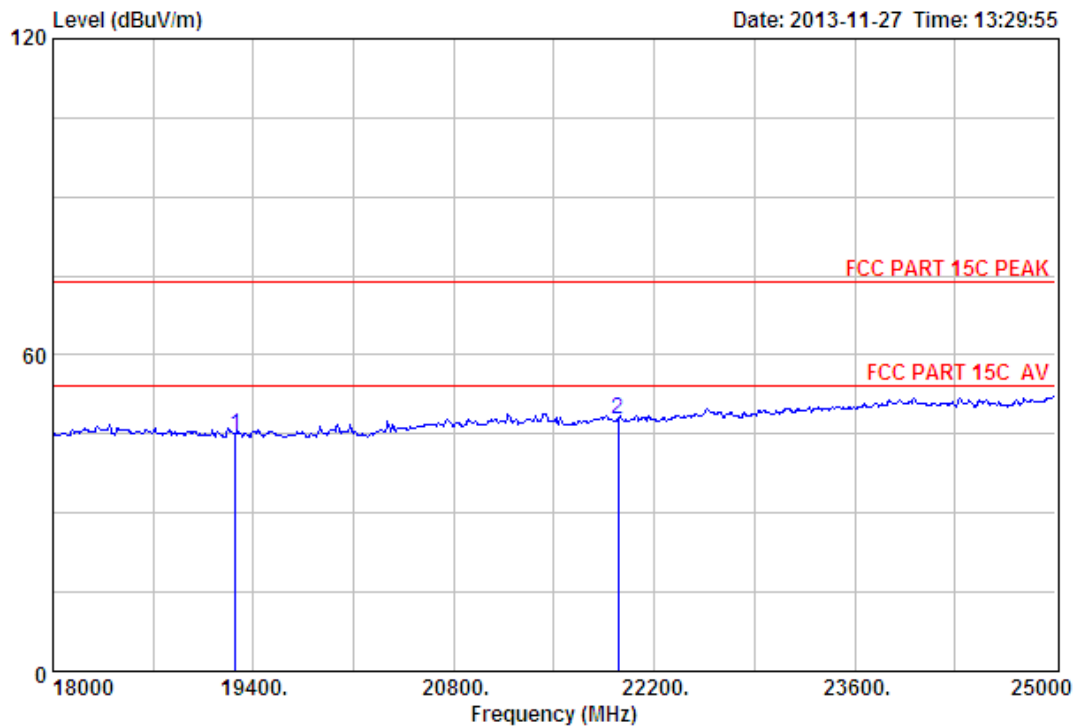

Site no. : 3m Chamber Data no. : 336
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19274.00	45.68	18.86	36.08	16.34	44.80	74.00	29.20	Peak
2	21948.00	45.74	20.54	34.94	16.40	47.74	74.00	26.26	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

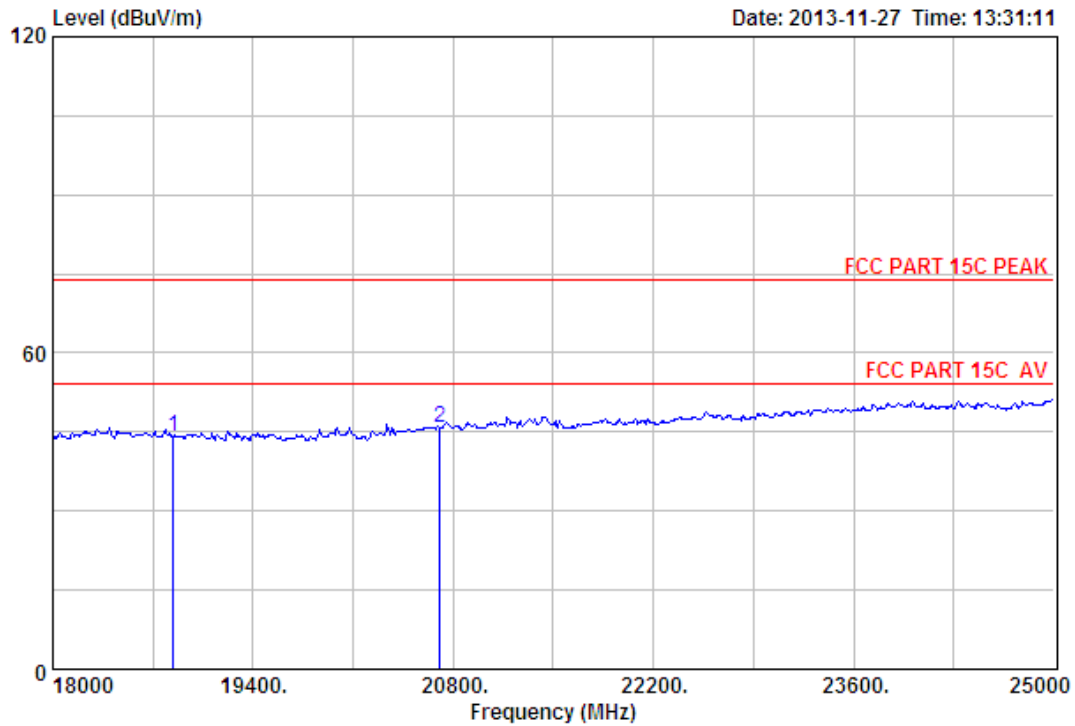

Site no. : 3m Chamber Data no. : 337
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	18840.00	45.24	18.34	35.72	16.29	44.15	74.00	29.85	Peak
2	20709.00	46.12	20.00	36.07	15.74	45.79	74.00	28.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

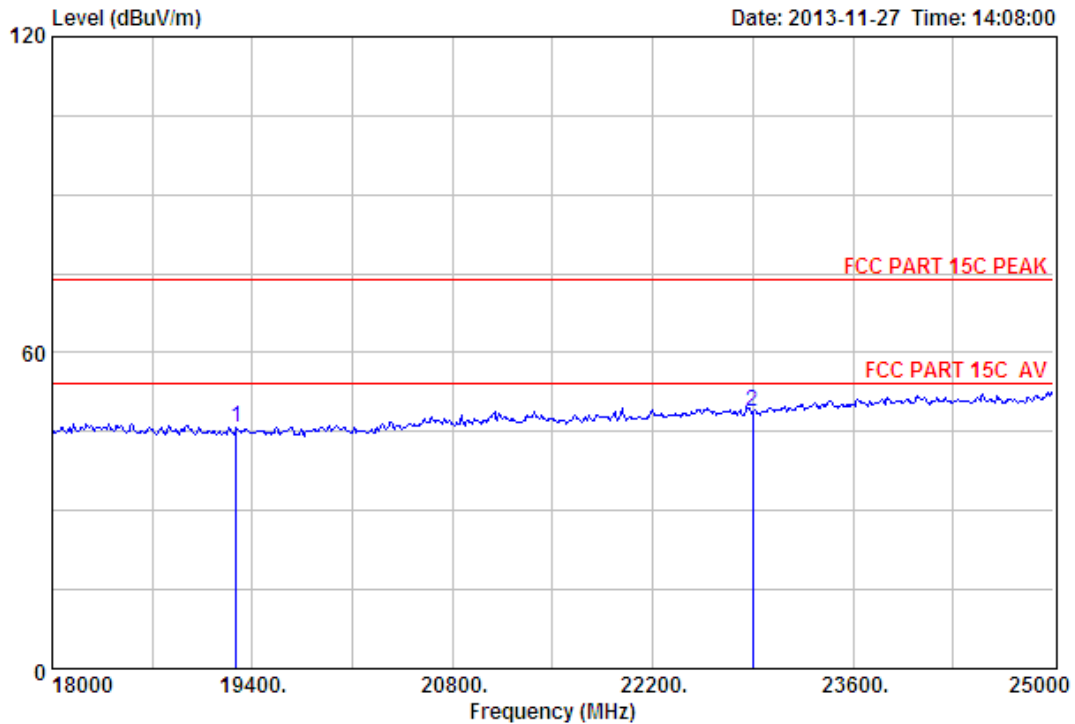

Site no. : 3m Chamber Data no. : 352
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	19288.00	45.70	18.87	36.10	17.25	45.72	74.00	28.28	Peak
2	22900.00	45.64	21.09	33.96	15.87	48.64	74.00	25.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

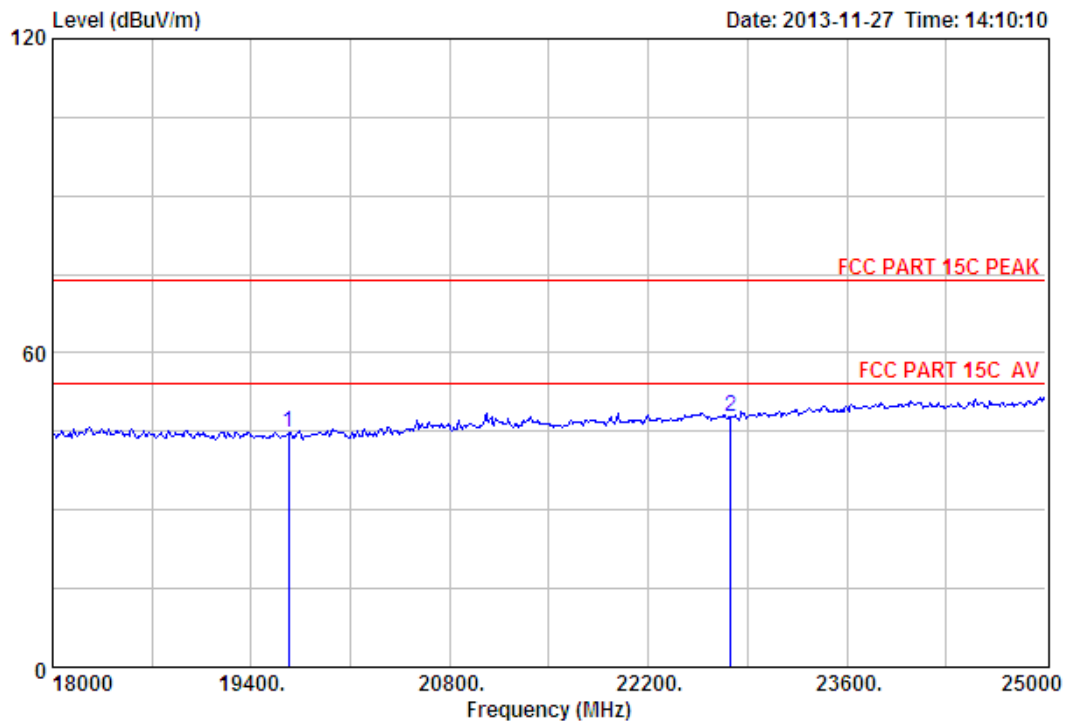

Site no. : 3m Chamber Data no. : 353
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 19666.00	45.97	19.30	36.42	15.83	44.68	74.00	29.32	Peak
2 22781.00	45.69	21.02	34.09	15.15	47.77	74.00	26.23	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

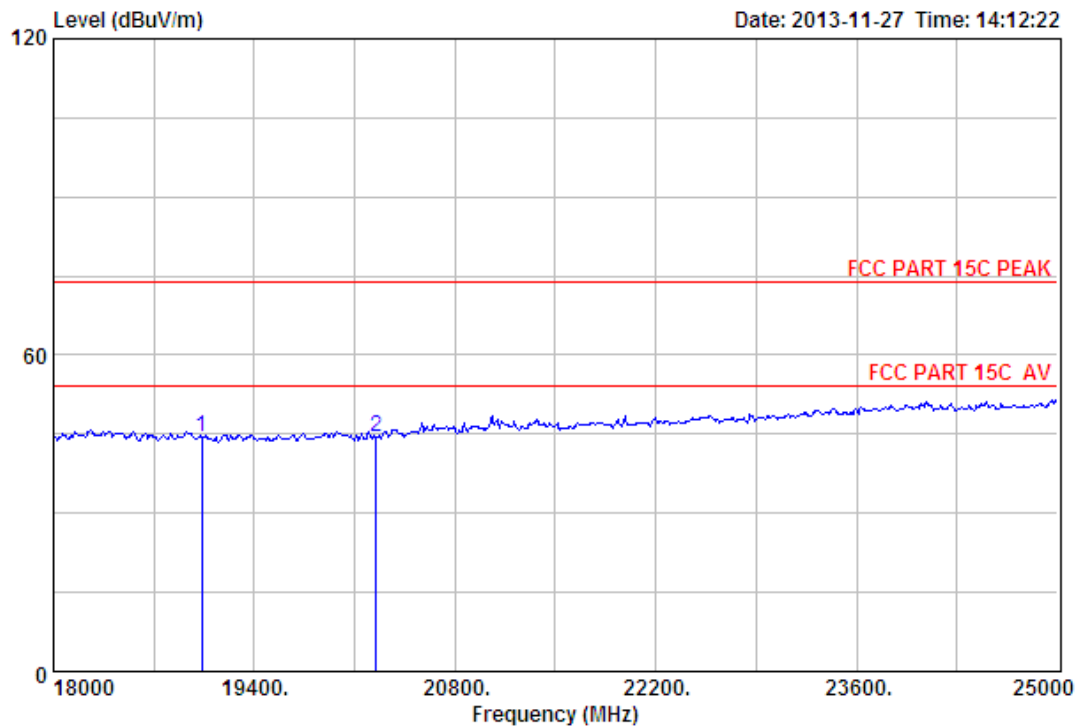

Site no. : 3m Chamber Data no. : 354
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	19036.00	45.44	18.58	35.87	16.31	44.46	74.00	29.54	Peak
2	20247.00	46.05	19.79	36.48	15.10	44.46	74.00	29.54	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

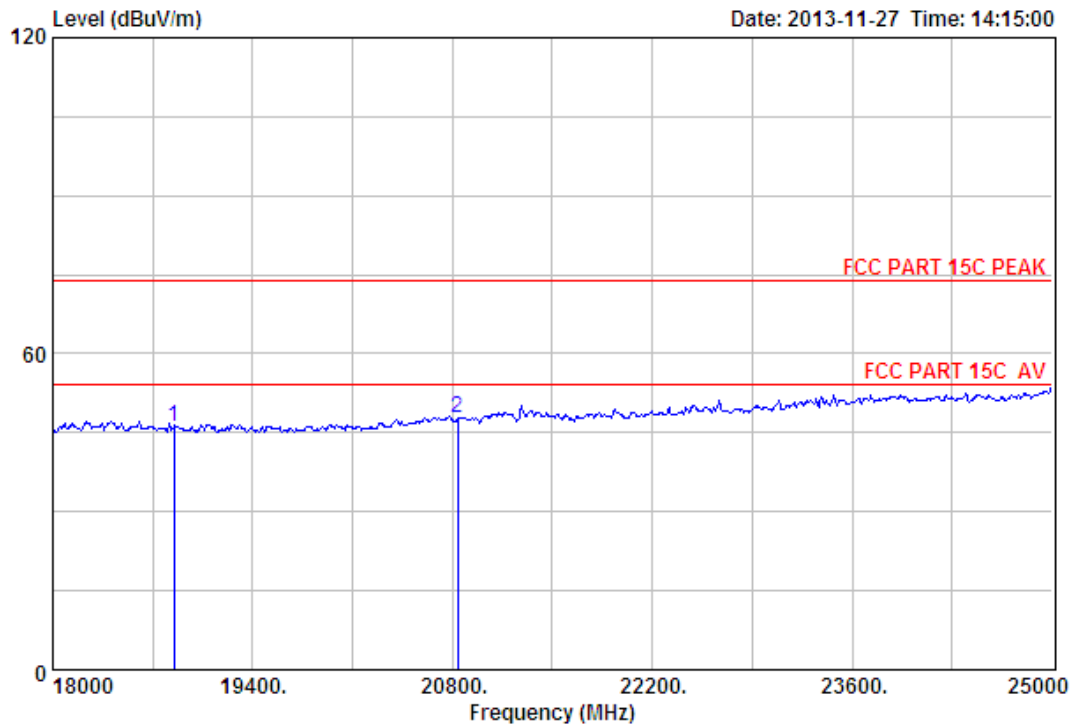

Site no. : 3m Chamber Data no. : 355
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2441MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 18847.00	45.24	18.35	35.72	18.22	46.09		74.00	27.91	Peak
2 20835.00	46.20	20.06	35.96	17.36	47.66		74.00	26.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

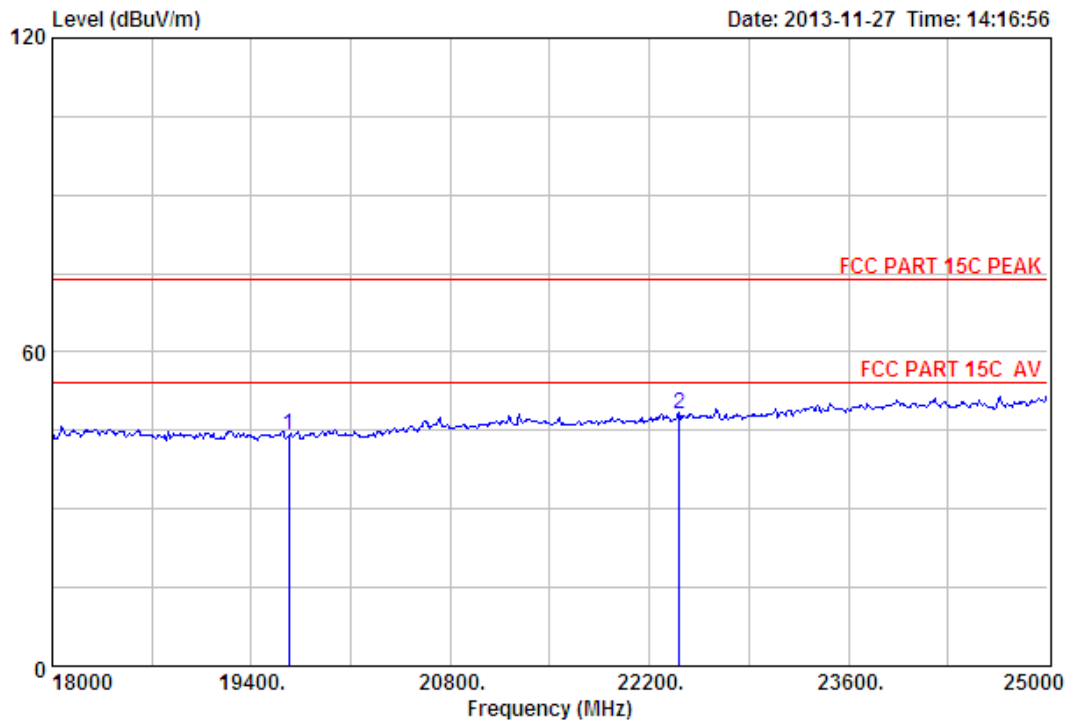

Site no. : 3m Chamber Data no. : 356
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 19666.00	45.97	19.30	36.42	15.30	44.15		74.00	29.85	Peak
2 22410.00	45.78	20.80	34.48	16.02	48.12		74.00	25.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

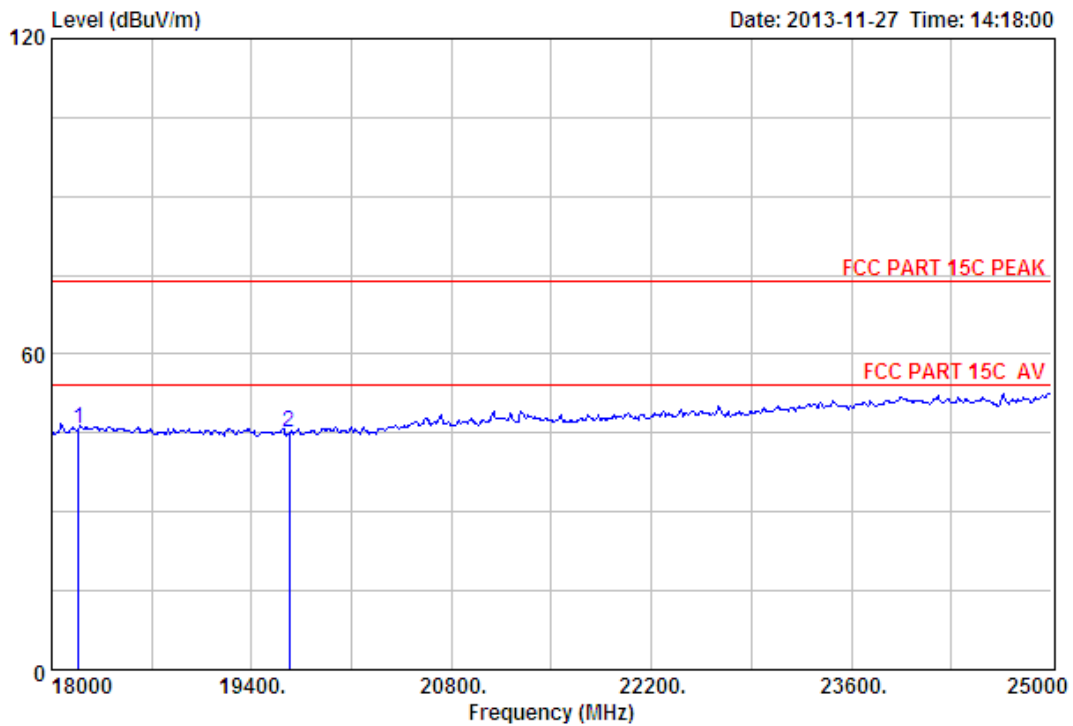

Site no. : 3m Chamber Data no. : 357
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 18189.00	44.47	17.55	35.17	18.93	45.78	74.00	28.22	Peak
2 19666.00	45.97	19.30	36.42	16.30	45.15	74.00	28.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

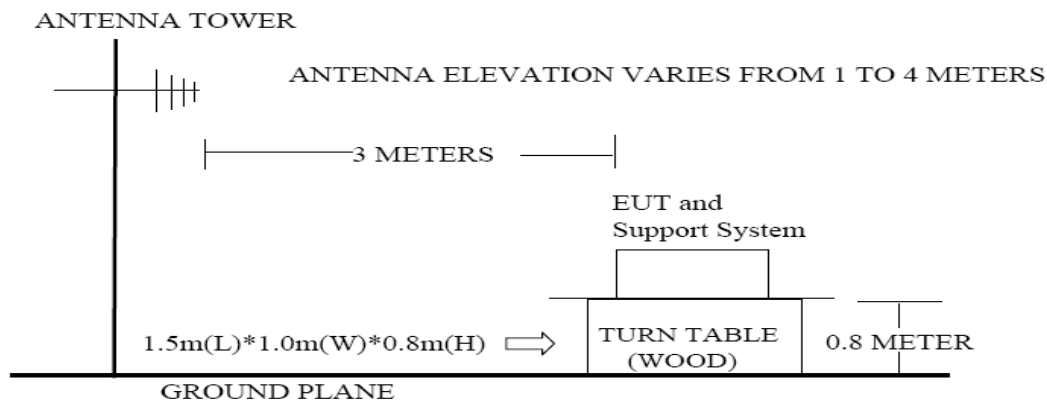

9.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


9.4. Test Result

EUT: Bluetooth speaker
M/N: NYNE BASS
Power: DC 12V From Adapter Input AC 120V/60Hz
Test date: 2013-09-26~2013-11-29 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


9.5. Test Data

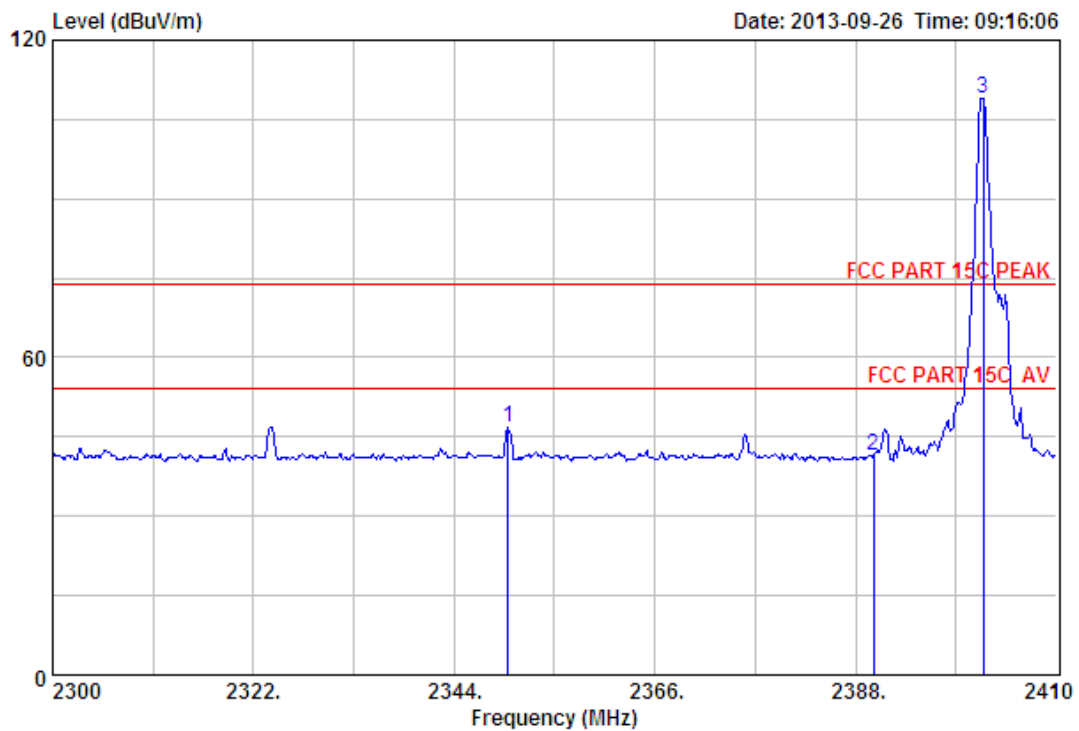

Site no. : 3m Chamber Data no. : 9
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz (No Hopping)
 Adapter 1

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2349.94	27.70	6.56	34.22	46.66	46.70	74.00	27.30	Peak
2	2390.00	27.64	6.62	34.19	41.46	41.53	74.00	32.47	Peak
3	2401.97	27.61	6.62	34.18	108.86	108.91	74.00	-34.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

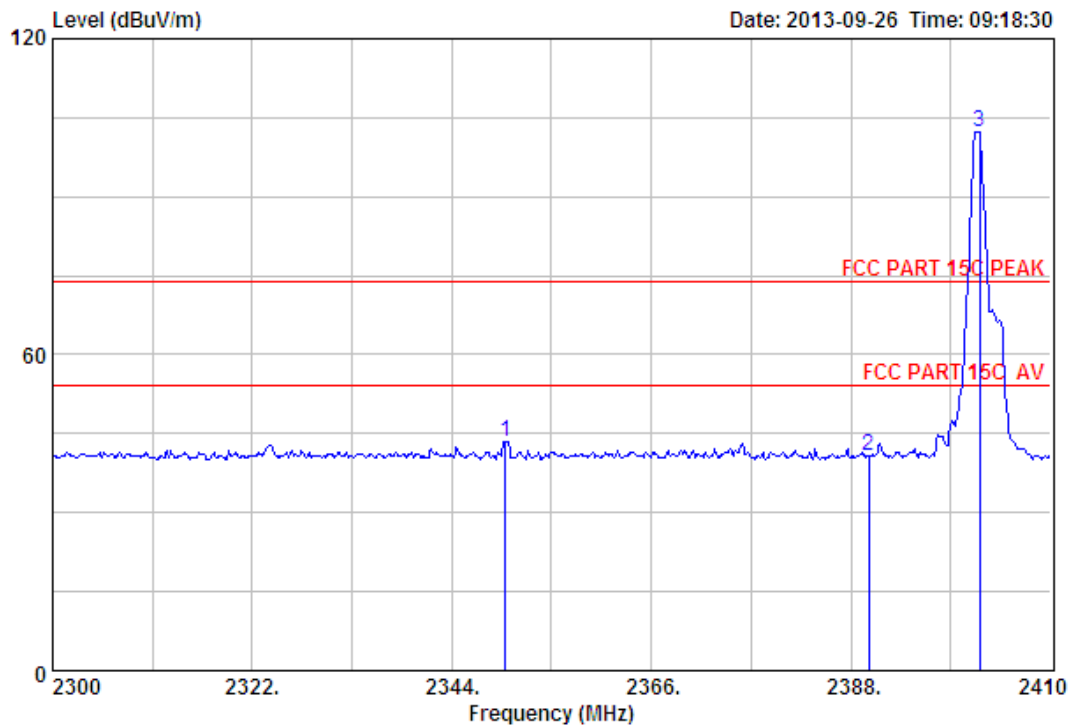

Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2349.94	27.70	6.56	34.22	43.56	43.60	74.00	30.40	Peak
2	2390.00	27.64	6.62	34.19	40.55	40.62	74.00	33.38	Peak
3	2402.19	27.61	6.62	34.18	102.39	102.44	74.00	-28.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

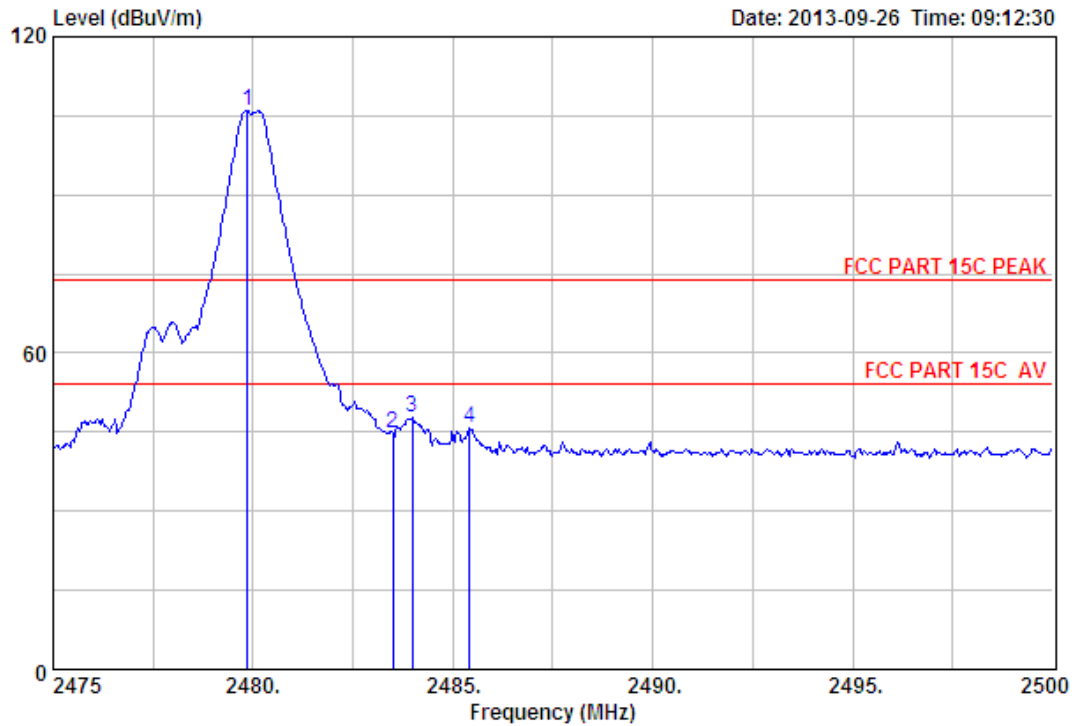

Site no. : 3m Chamber Data no. : 7
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.58	6.71	34.03	105.74	106.00	74.00	-32.00	Peak
2	2483.50	27.58	6.71	34.03	44.51	44.77	74.00	29.23	Peak
3	2483.98	27.58	6.71	34.03	47.41	47.67	74.00	26.33	Peak
4	2485.43	27.58	6.71	34.03	45.53	45.79	74.00	28.21	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

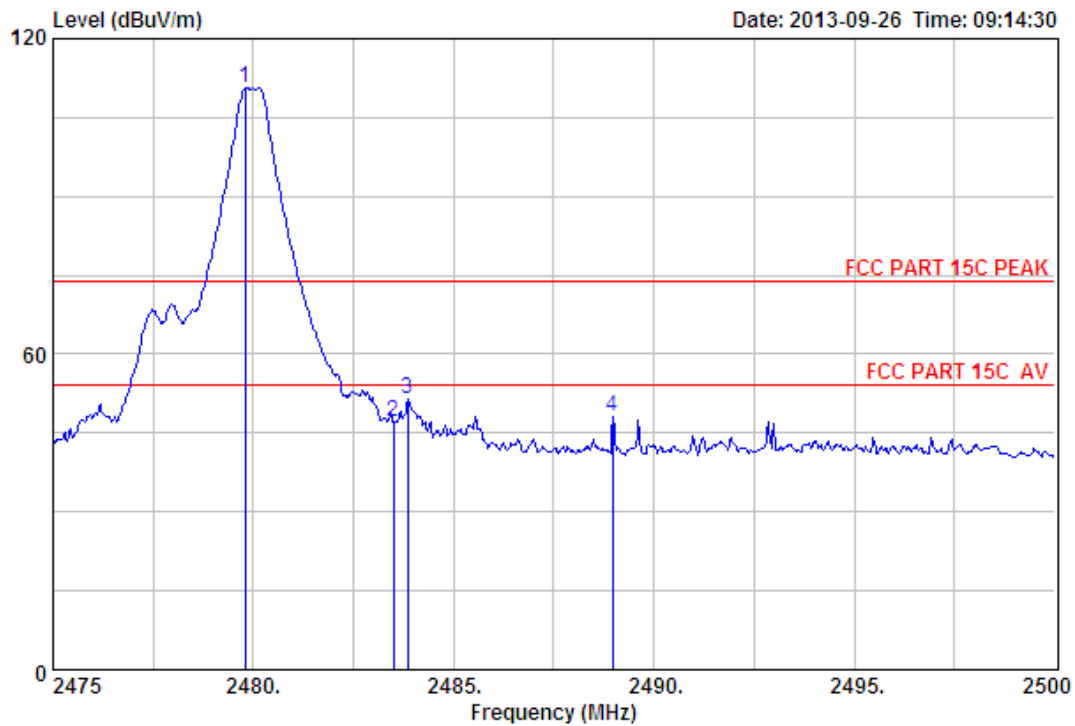

Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.80	27.58	6.71	34.03	110.35	110.61	74.00	-36.61	Peak
2	2483.50	27.58	6.71	34.03	46.92	47.18	74.00	26.82	Peak
3	2483.85	27.58	6.71	34.03	51.18	51.44	74.00	22.56	Peak
4	2488.98	27.58	6.73	34.03	47.84	48.12	74.00	25.88	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

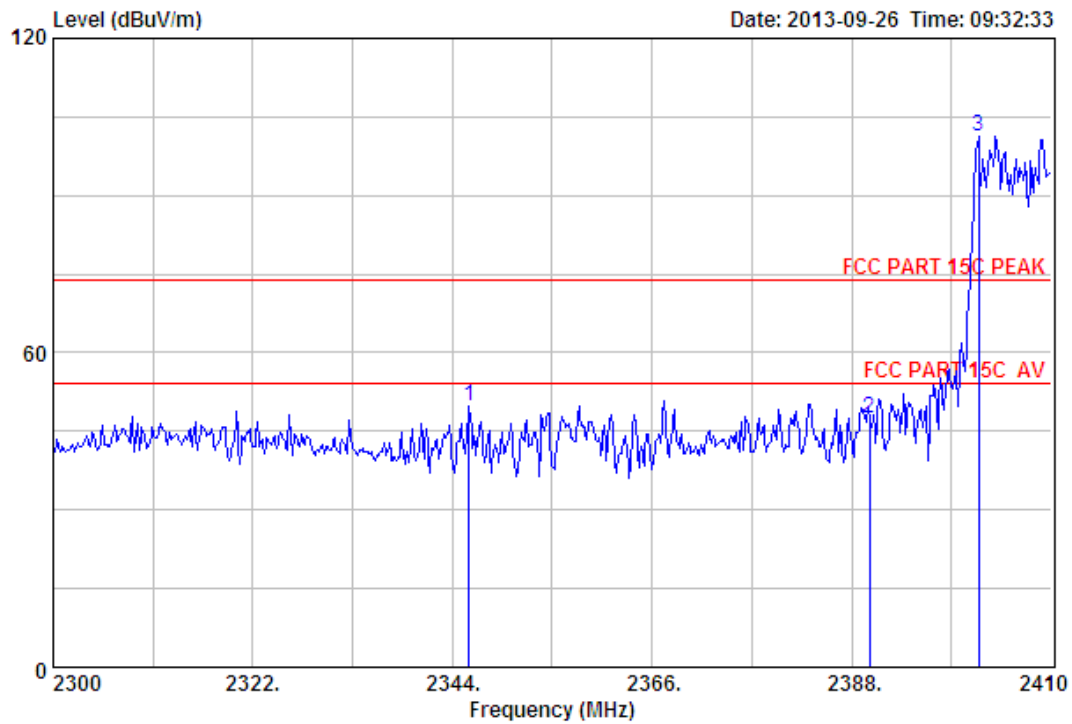

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Adapter 1

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2345.87	27.70	6.56	34.22	49.88	49.92	74.00	24.08	Peak
2	2390.00	27.64	6.62	34.19	47.32	47.39	74.00	26.61	Peak
3	2401.97	27.61	6.62	34.18	101.09	101.14	74.00	-27.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

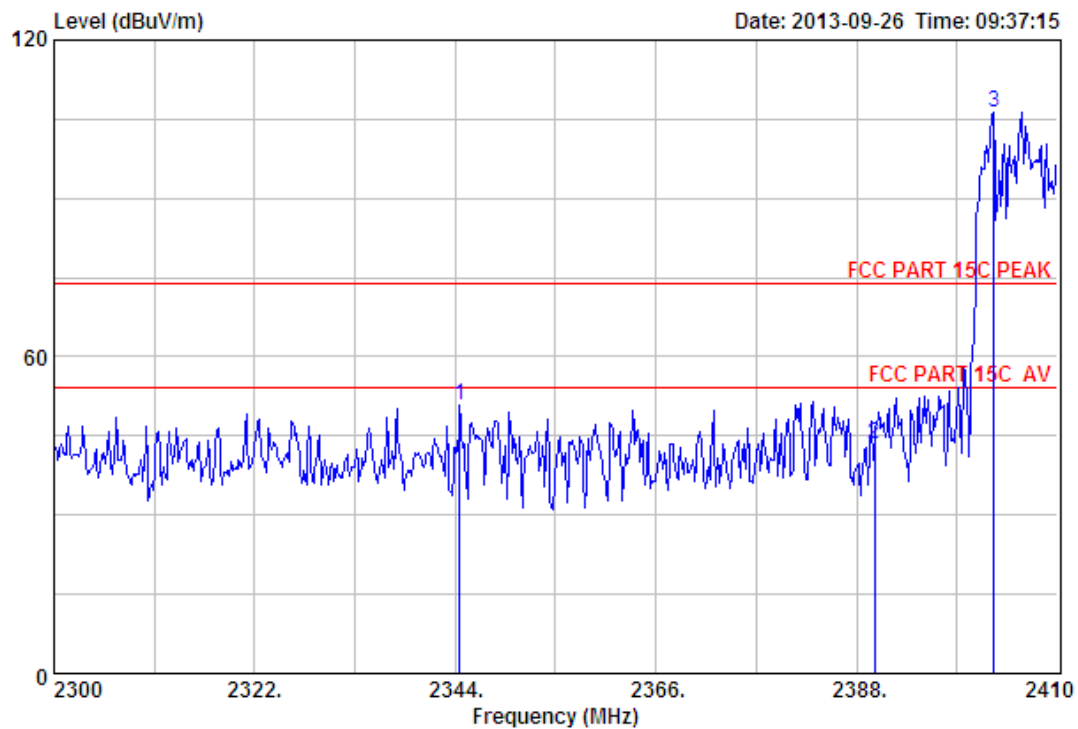

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz(Hopping On)
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading	Level			
					(dBuV)	(dBuV/m)	(dBuV/m)		
1	2344.44	27.70	6.56	34.22	50.66	50.70	74.00	23.30	Peak
2	2390.00	27.64	6.62	34.19	43.31	43.38	74.00	30.62	Peak
3	2403.07	27.61	6.64	34.18	106.13	106.20	74.00	-32.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

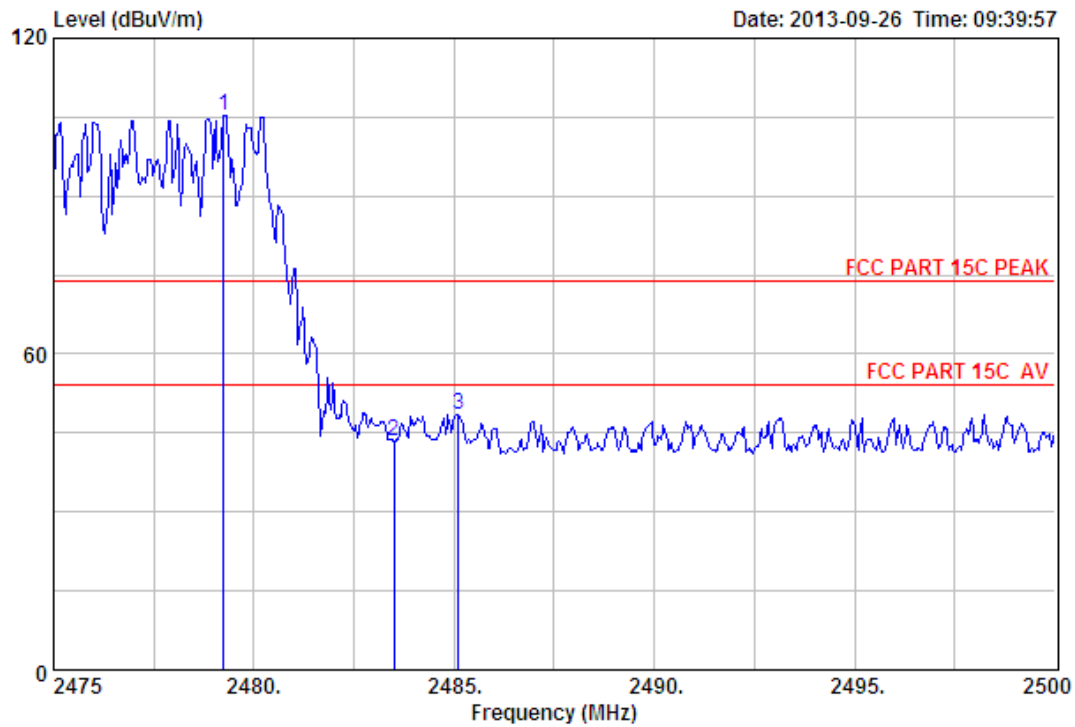

Site no. : 3m Chamber Data no. : 19
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz(Hopping On)
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2479.25	27.58	6.71	34.03	104.97	105.23	74.00	-31.23	Peak
2	2483.50	27.58	6.71	34.03	43.29	43.55	74.00	30.45	Peak
3	2485.10	27.58	6.71	34.03	48.34	48.60	74.00	25.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

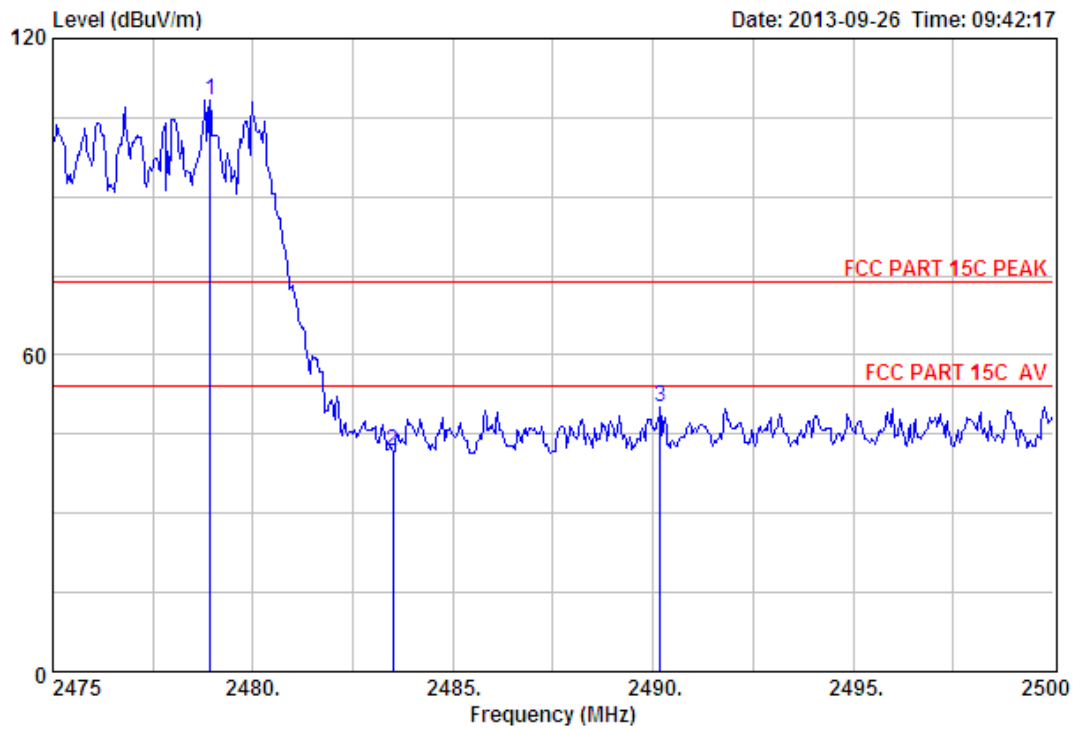

Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz (Hopping On)
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.93	27.58	6.71	34.03	107.95	108.21	74.00	-34.21	Peak
2	2483.50	27.58	6.71	34.03	41.68	41.94	74.00	32.06	Peak
3	2490.18	27.58	6.73	34.03	49.73	50.01	74.00	23.99	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

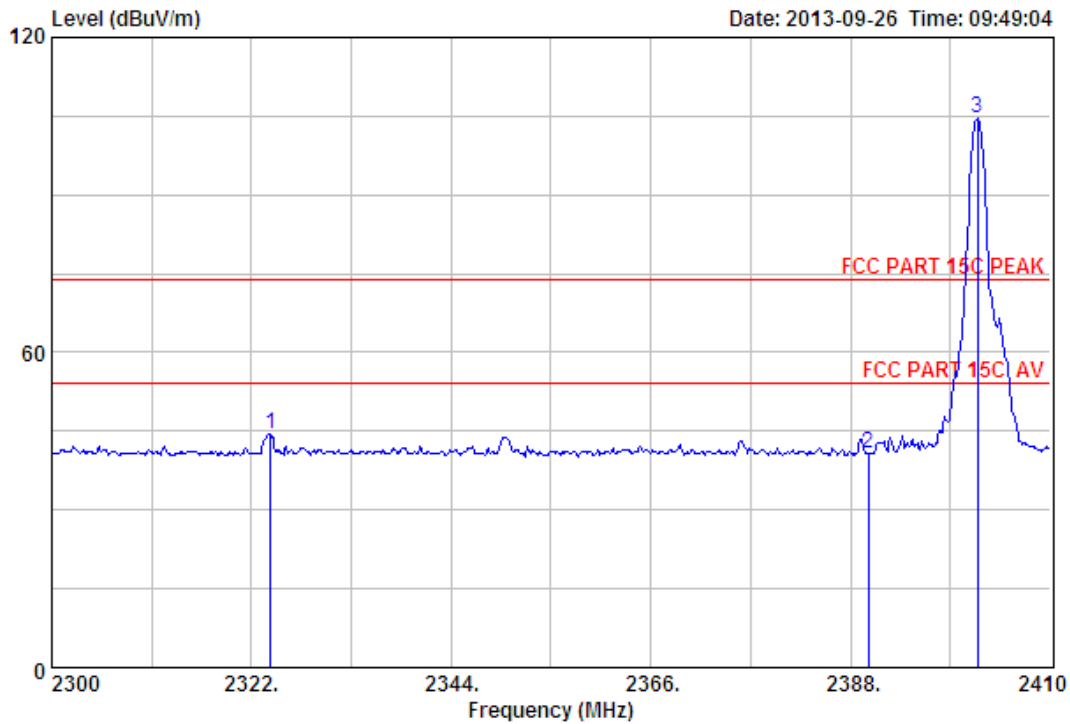

Site no. : 3m Chamber Data no. : 23
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2324.09	27.73	6.54	34.23	44.30	44.34	74.00	29.66	Peak
2	2390.00	27.64	6.62	34.19	40.81	40.88	74.00	33.12	Peak
3	2401.97	27.61	6.62	34.18	104.72	104.77	74.00	-30.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

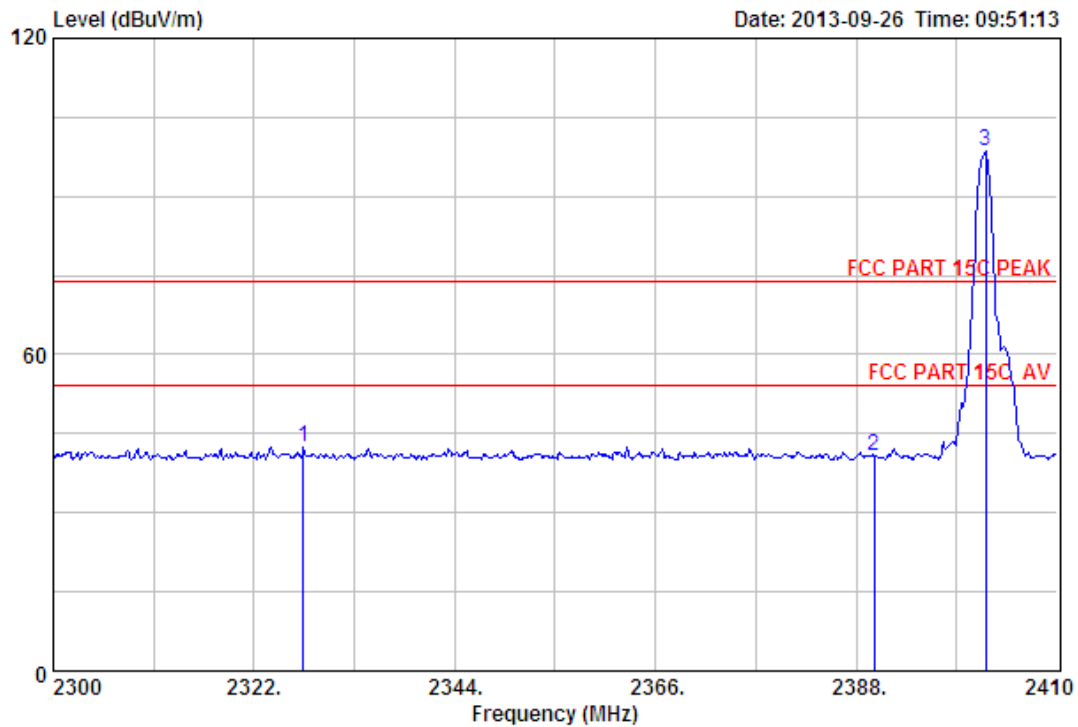

Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2327.39	27.73	6.54	34.23	42.49	42.53	74.00	31.47	Peak
2	2390.00	27.64	6.62	34.19	40.87	40.94	74.00	33.06	Peak
3	2402.19	27.61	6.62	34.18	98.41	98.46	74.00	-24.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

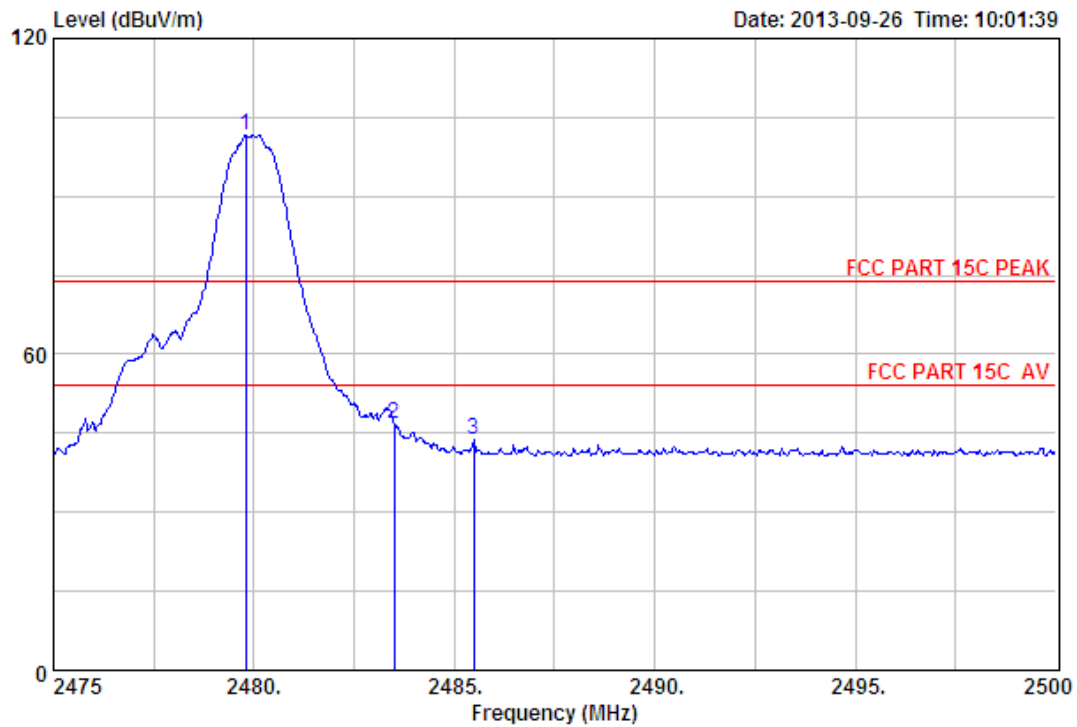

Site no. : 3m Chamber Data no. : 29
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 1

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.80	27.58	6.71	34.03	101.47	101.73	74.00	-27.73	Peak
2	2483.50	27.58	6.71	34.03	46.69	46.95	74.00	27.05	Peak
3	2485.48	27.58	6.71	34.03	43.67	43.93	74.00	30.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

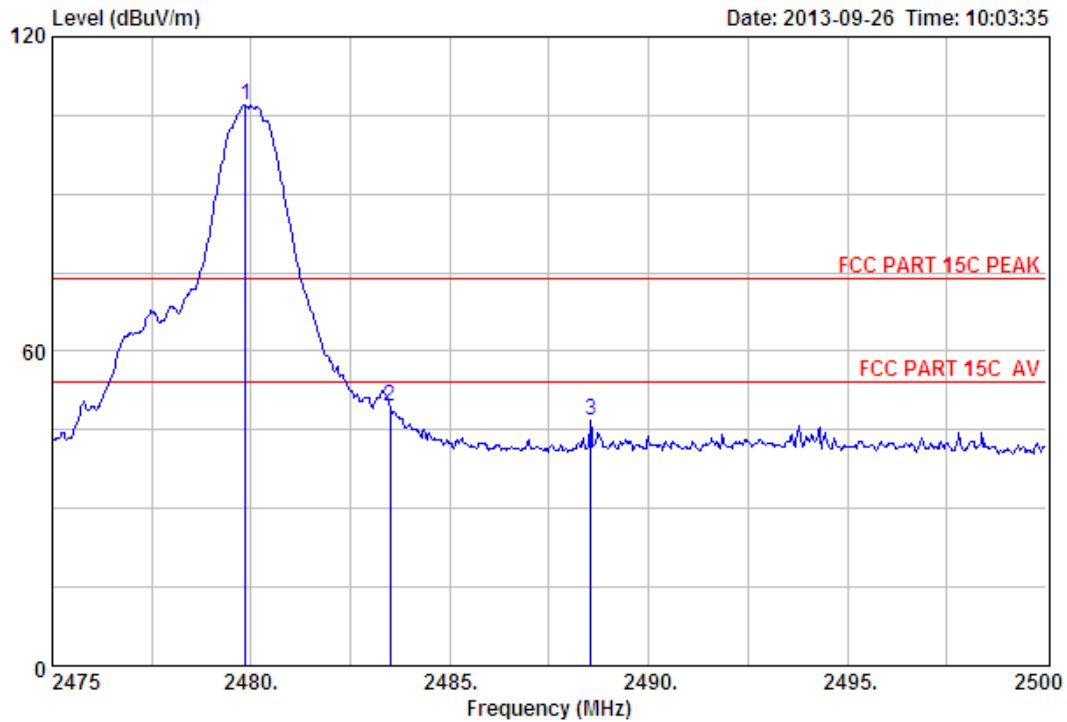

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.58	6.71	34.03	106.65	106.91	74.00	-32.91	Peak
2	2483.50	27.58	6.71	34.03	49.16	49.42	74.00	24.58	Peak
3	2488.55	27.58	6.73	34.03	46.59	46.87	74.00	27.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

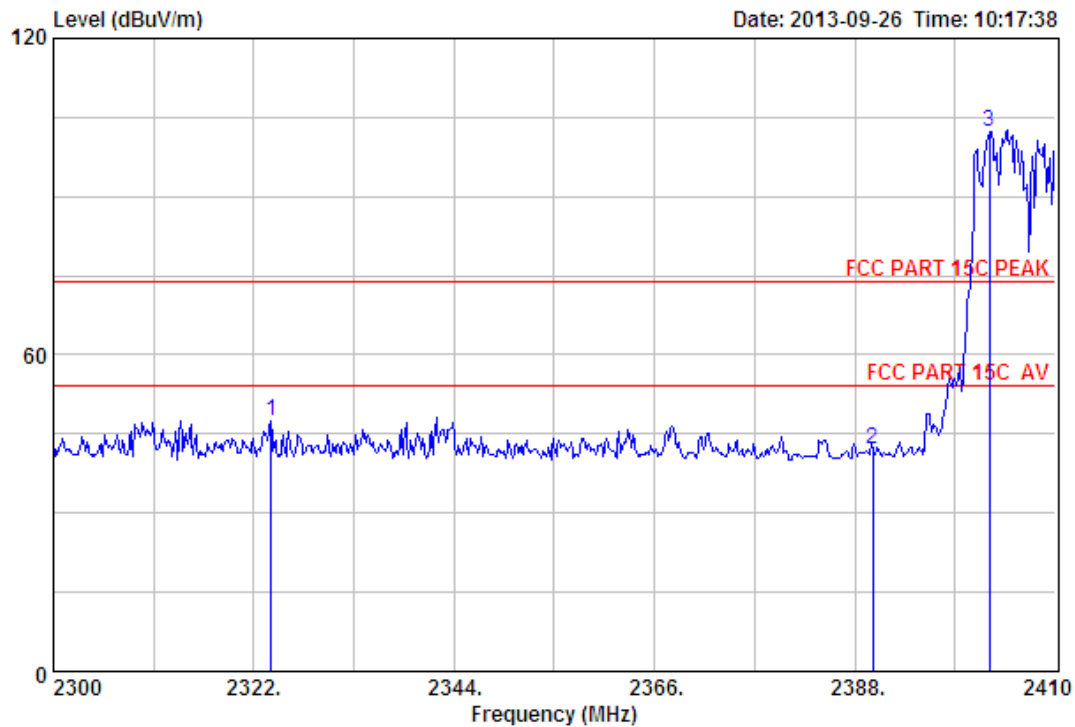

Site no. : 3m Chamber Data no. : 37
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2323.87	27.73	6.54	34.23	47.51	47.55	74.00	26.45	Peak
2	2390.00	27.64	6.62	34.19	42.01	42.08	74.00	31.92	Peak
3	2402.74	27.61	6.64	34.18	102.37	102.44	74.00	-28.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

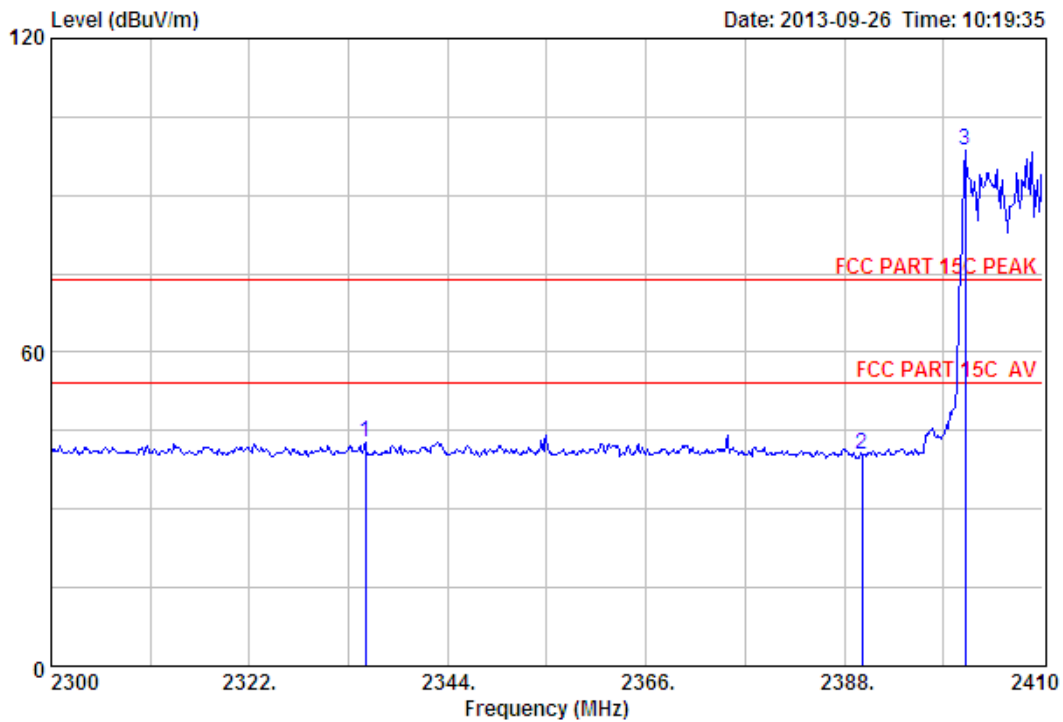

Site no. : 3m Chamber Data no. : 38
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2334.87	27.73	6.56	34.23	42.57	42.63	74.00	31.37	Peak
2	2390.00	27.64	6.62	34.19	40.46	40.53	74.00	33.47	Peak
3	2401.42	27.61	6.62	34.18	98.41	98.46	74.00	-24.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

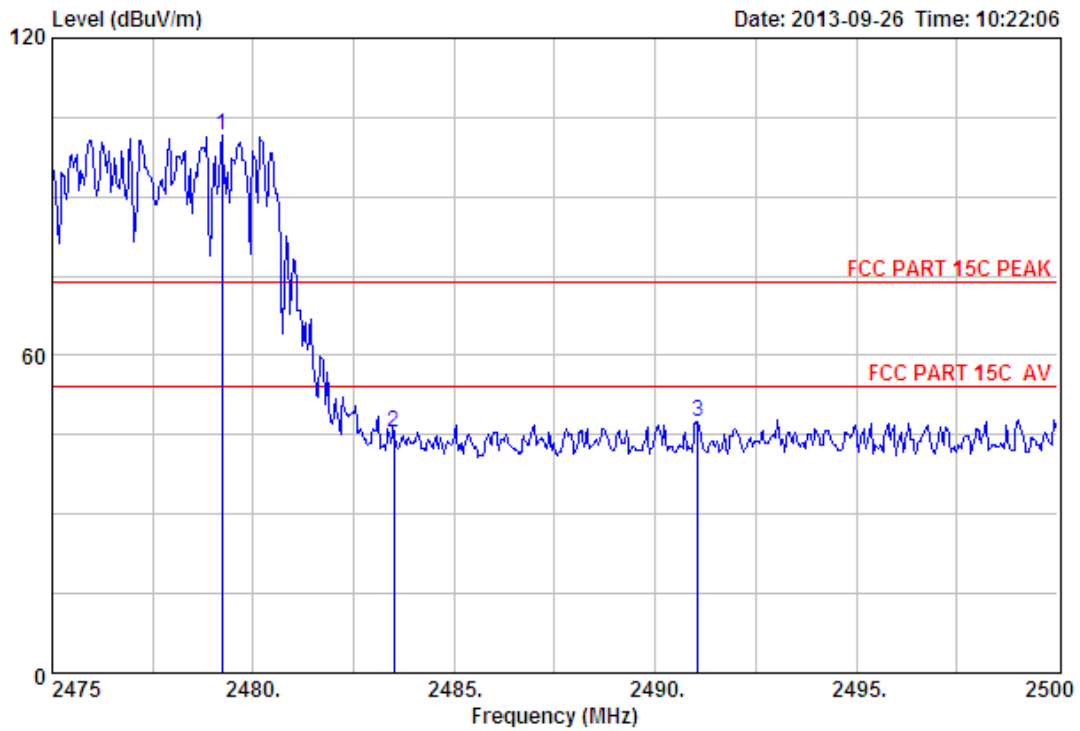

Site no. : 3m Chamber Data no. : 39
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)
 Adapter 1

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.23	27.58	6.71	34.03	101.24	101.50	74.00	-27.50	Peak
2	2483.50	27.58	6.71	34.03	45.22	45.48	74.00	28.52	Peak
3	2491.05	27.58	6.73	34.03	47.04	47.32	74.00	26.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

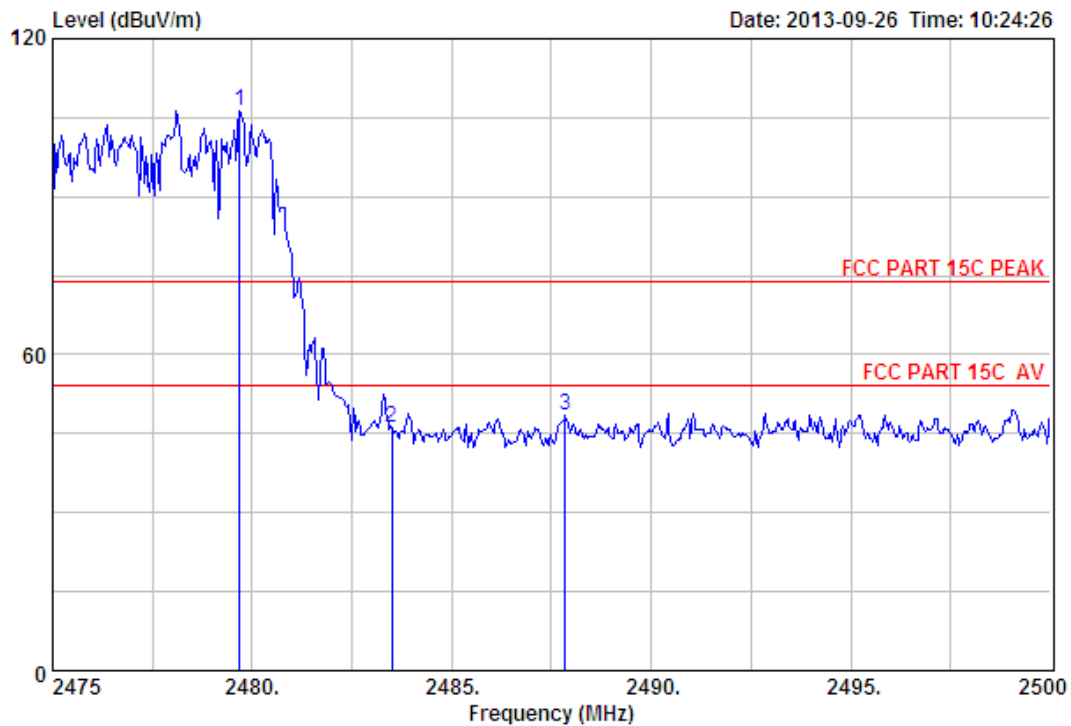

Site no. : 3m Chamber Data no. : 40
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)
 Adapter 1

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2479.68	27.58	6.71	34.03	106.13	106.39	74.00	-32.39	Peak
2	2483.50	27.58	6.71	34.03	45.80	46.06	74.00	27.94	Peak
3	2487.85	27.58	6.73	34.03	48.13	48.41	74.00	25.59	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

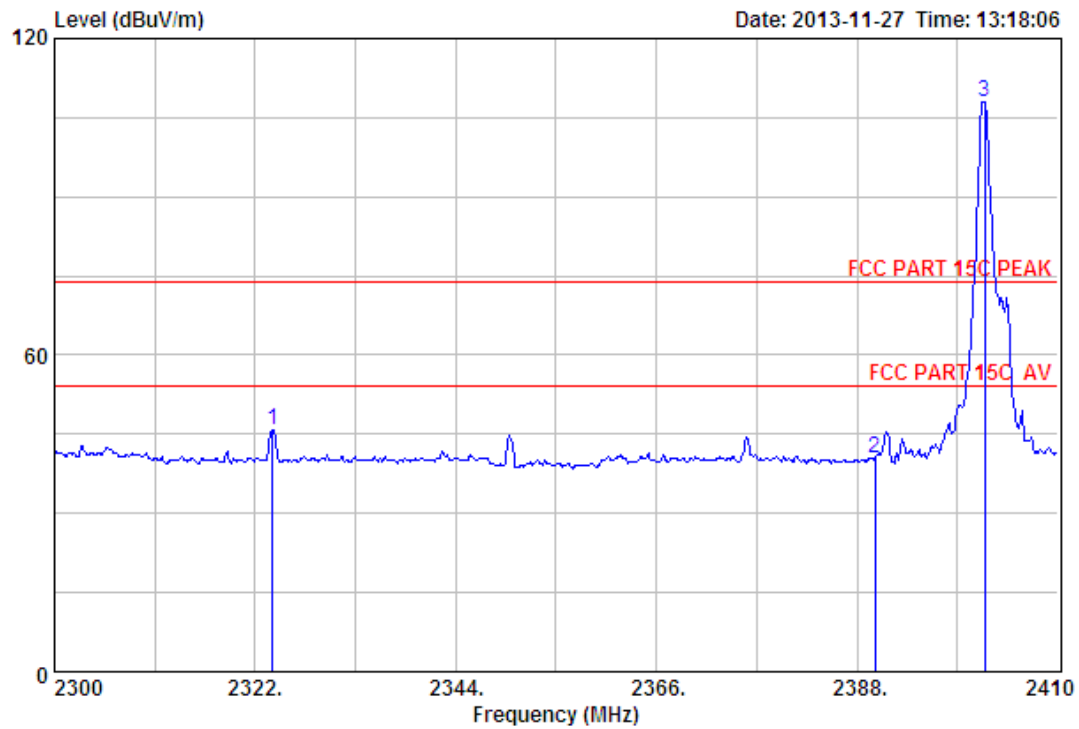

Site no. : 3m Chamber Data no. : 330
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz(No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)		
1	2323.87	27.73	6.54	34.23	45.76	45.80	74.00	28.20	Peak
2	2390.00	27.64	6.62	34.19	40.46	40.53	74.00	33.47	Peak
3	2401.97	27.61	6.62	34.18	107.86	107.91	74.00	-33.91	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

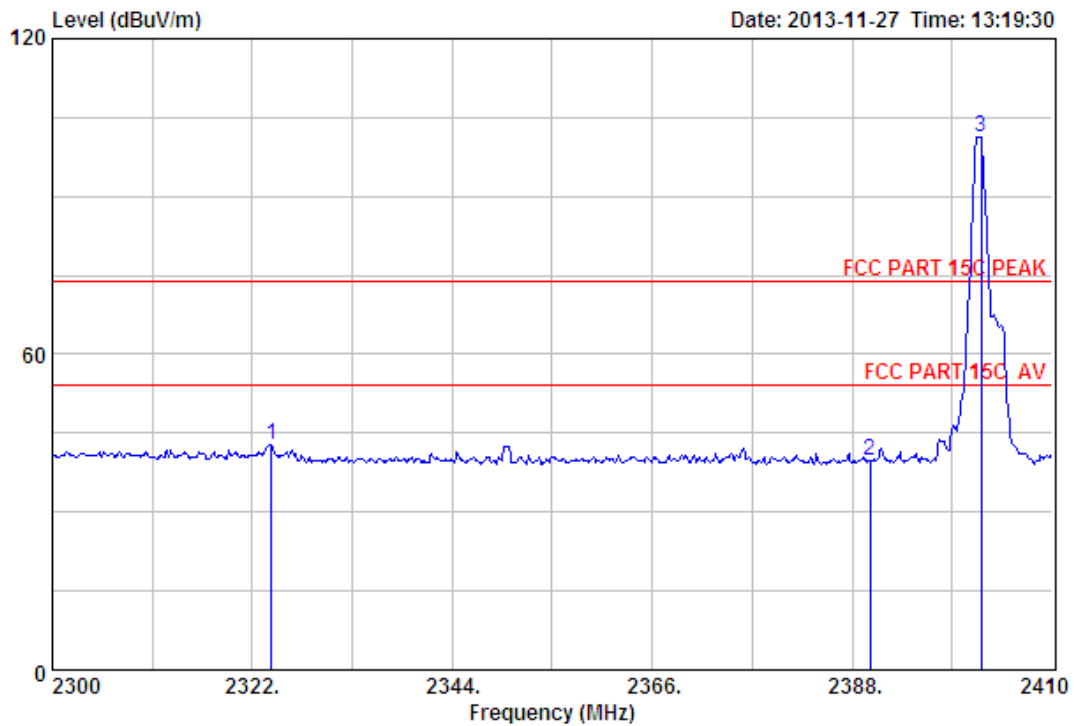

Site no. : 3m Chamber Data no. : 331
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz (No Hopping)
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2324.09	27.73	6.54	34.23	42.70	42.74	74.00	31.26	Peak
2	2390.00	27.64	6.62	34.19	39.55	39.62	74.00	34.38	Peak
3	2402.19	27.61	6.62	34.18	101.39	101.44	74.00	-27.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

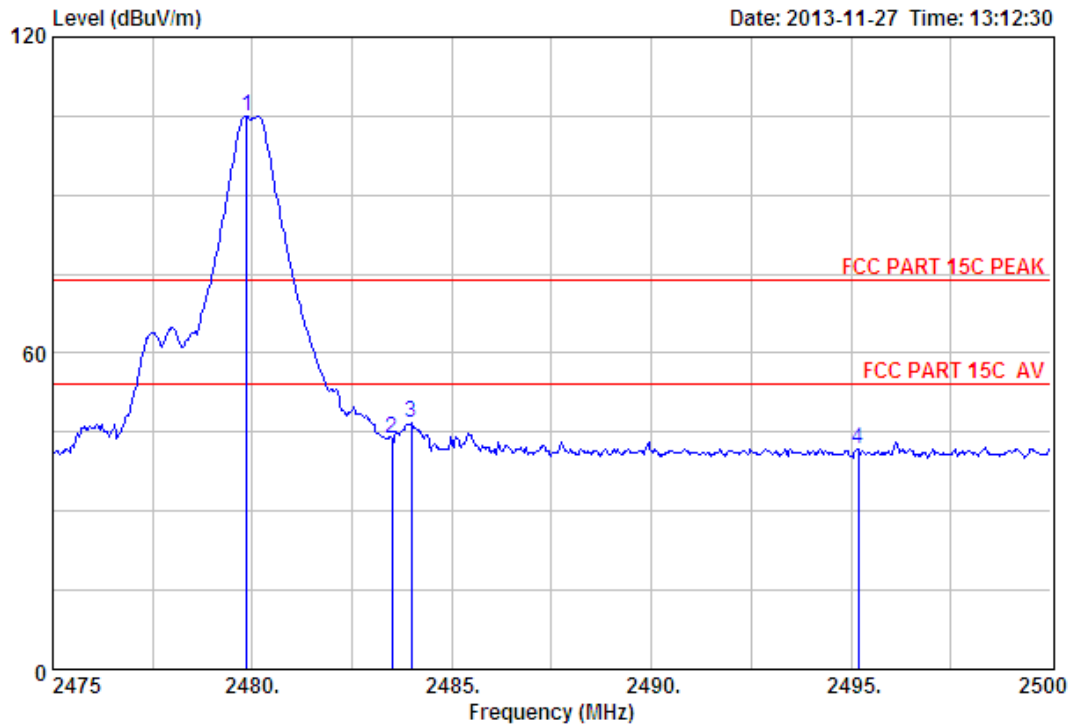

Site no. : 3m Chamber Data no. : 328
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz (No Hopping)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.85	27.58	6.71	34.03	104.74	105.00	74.00	-31.00	Peak
2	2483.50	27.58	6.71	34.03	43.51	43.77	74.00	30.23	Peak
3	2483.98	27.58	6.71	34.03	46.41	46.67	74.00	27.33	Peak
4	2495.18	27.57	6.73	34.00	41.57	41.87	74.00	32.13	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

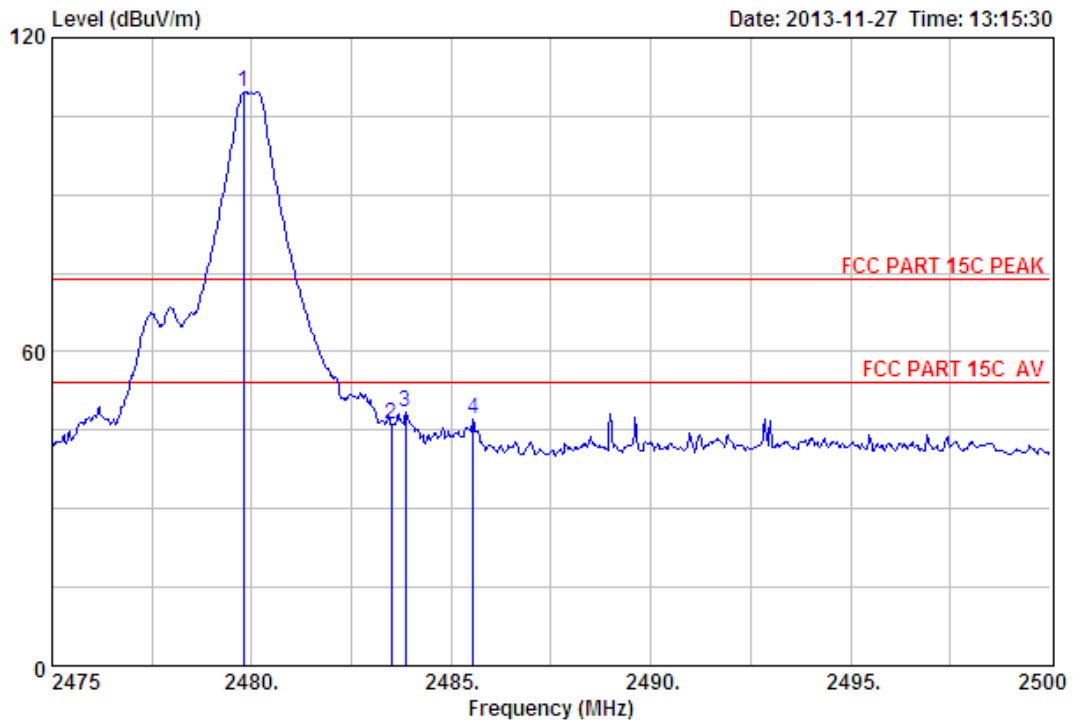

Site no. : 3m Chamber Data no. : 329
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz(No Hopping)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.80	27.58	6.71	34.03	109.35	109.61	74.00	-35.61	Peak
2	2483.50	27.58	6.71	34.03	45.92	46.18	74.00	27.82	Peak
3	2483.85	27.58	6.71	34.03	48.18	48.44	74.00	25.56	Peak
4	2485.55	27.58	6.71	34.03	47.02	47.28	74.00	26.72	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

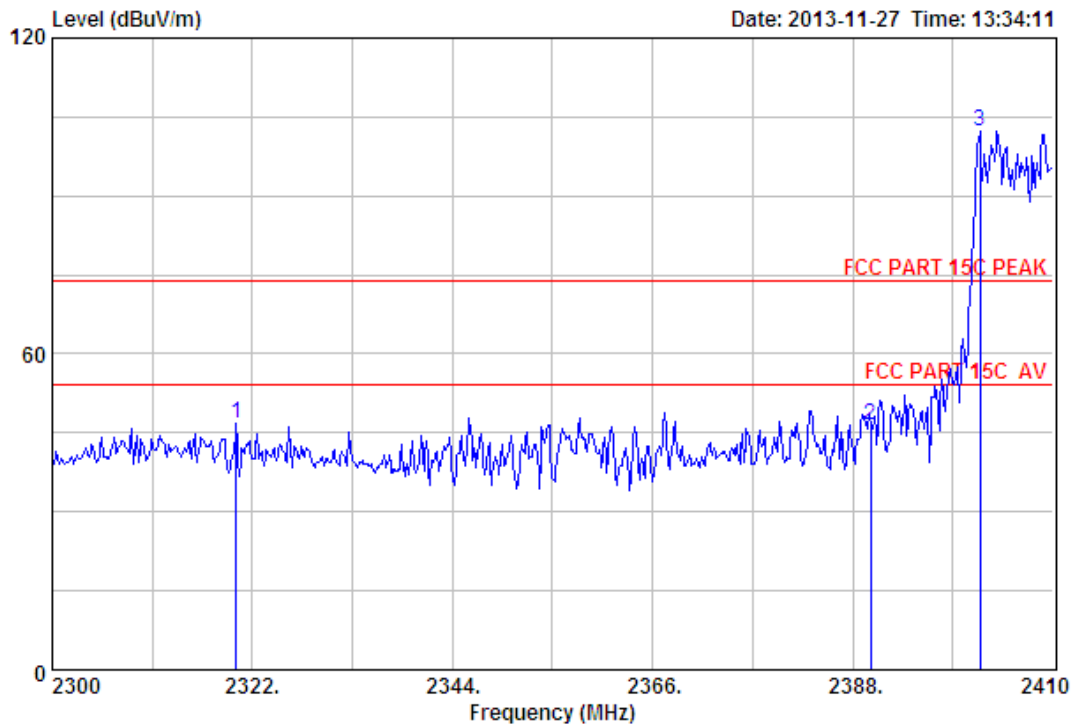

Site no. : 3m Chamber Data no. : 338
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Adapter 2

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2320.24	27.76	6.54	34.24	46.70	46.76	74.00	27.24	Peak
2	2390.00	27.64	6.62	34.19	46.32	46.39	74.00	27.61	Peak
3	2401.97	27.61	6.62	34.18	102.09	102.14	74.00	-28.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

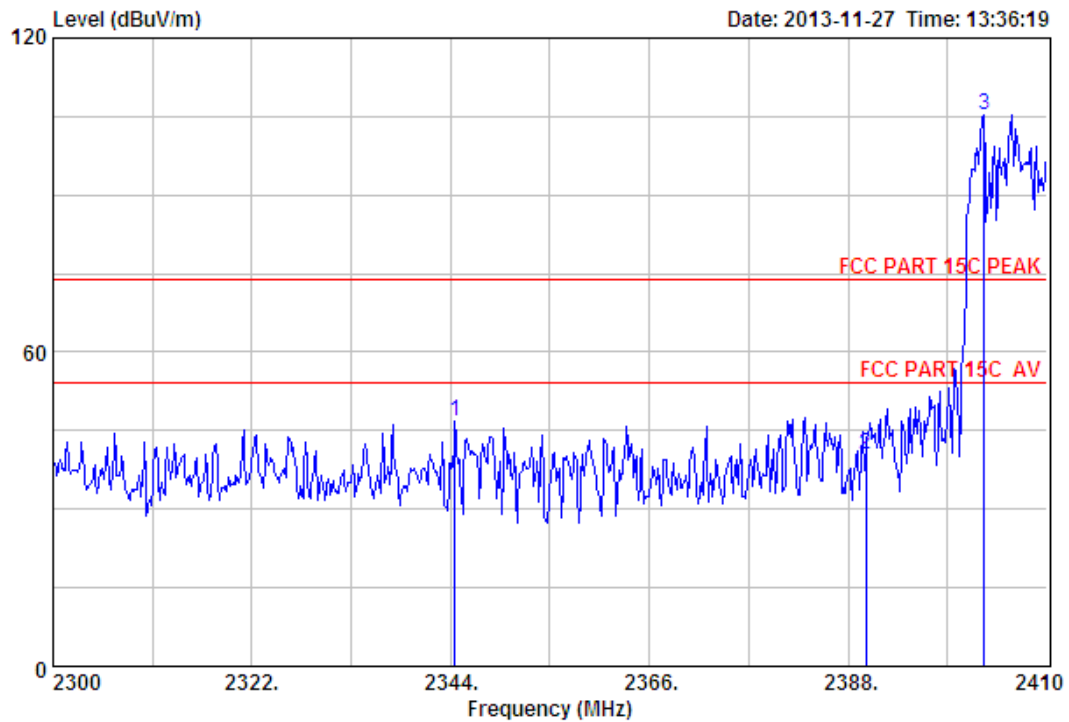

Site no. : 3m Chamber Data no. : 339
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2402MHz (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2344.44	27.70	6.56	34.22	46.66	46.70	74.00	27.30	Peak
2	2390.00	27.64	6.62	34.19	40.31	40.38	74.00	33.62	Peak
3	2403.07	27.61	6.64	34.18	105.13	105.20	74.00	-31.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

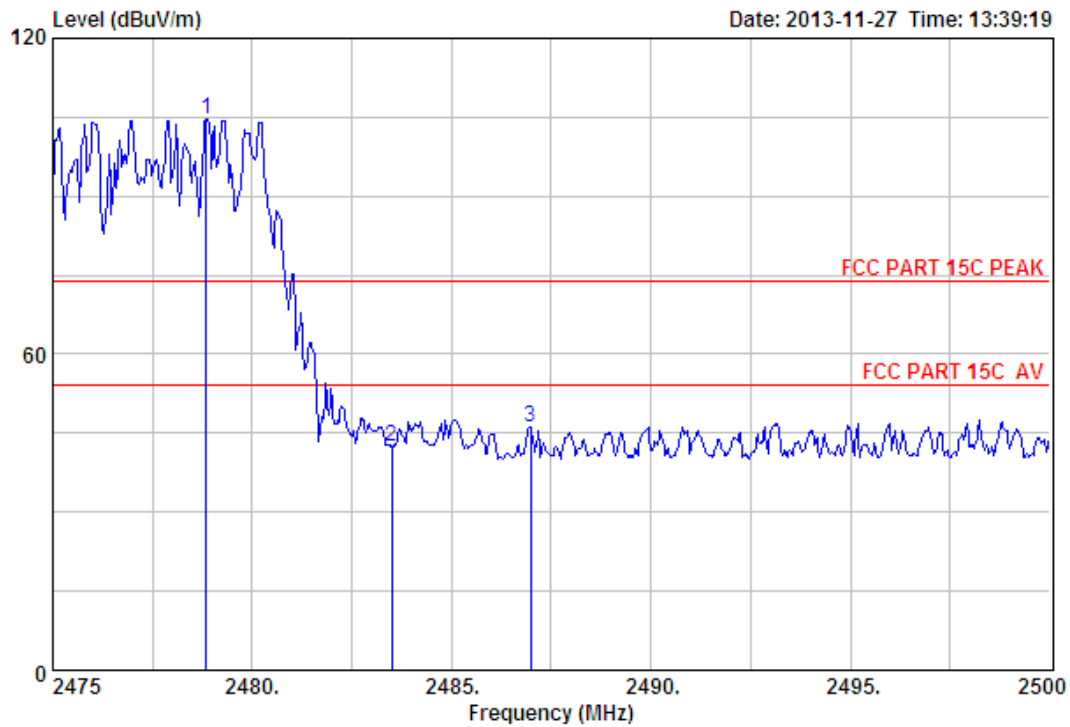

Site no. : 3m Chamber Data no. : 340
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz (Hopping On)
 Adapter 2

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2478.85	27.58	6.71	34.03	104.48	104.74	74.00	-30.74	Peak
2	2483.50	27.58	6.71	34.03	42.29	42.55	74.00	31.45	Peak
3	2486.98	27.58	6.71	34.03	45.94	46.20	74.00	27.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

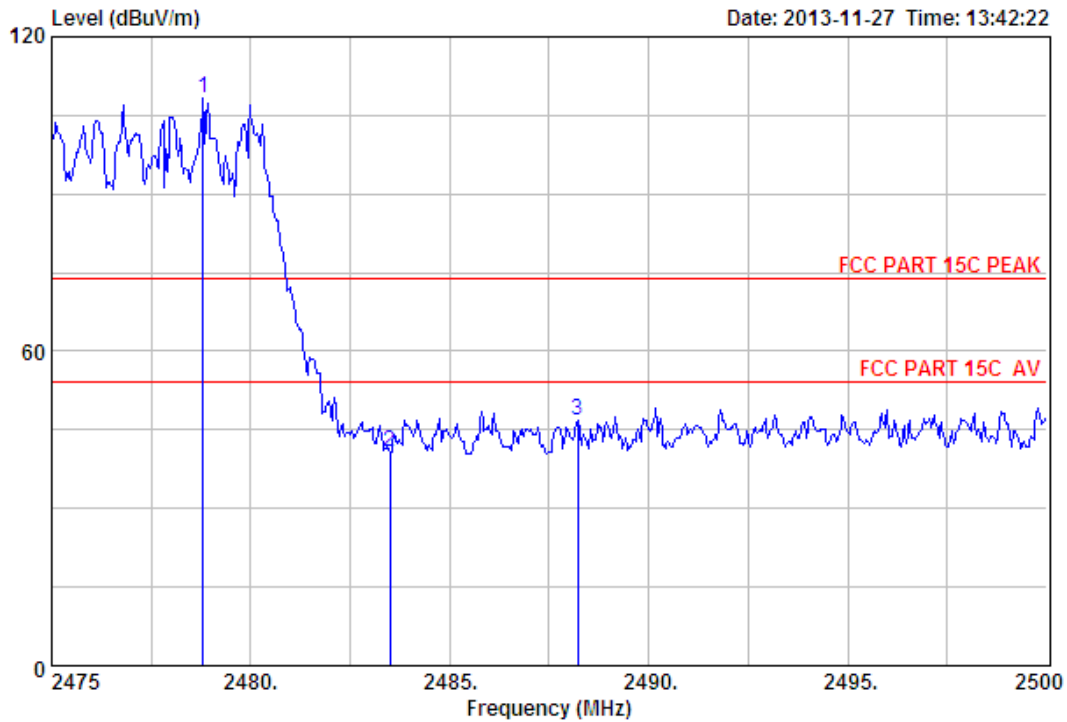

Site no. : 3m Chamber Data no. : 341
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : GFSK TX 2480MHz(Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.80	27.58	6.71	34.03	107.88	108.14	74.00	-34.14	Peak
2	2483.50	27.58	6.71	34.03	40.68	40.94	74.00	33.06	Peak
3	2488.23	27.58	6.73	34.03	46.41	46.69	74.00	27.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

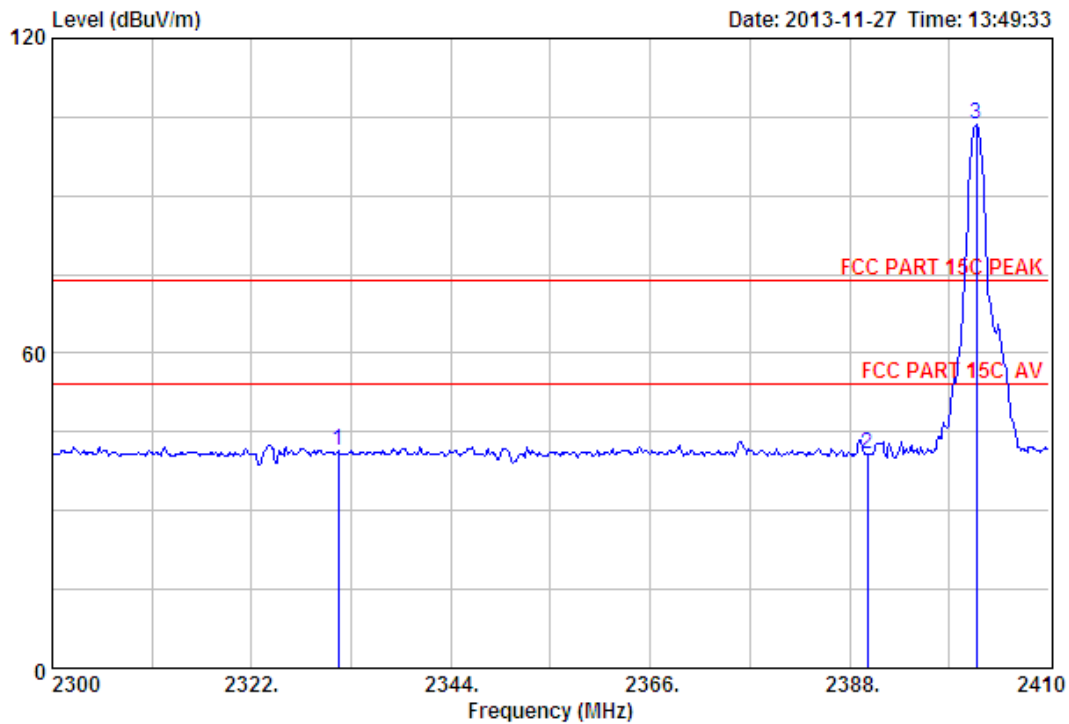

Site no. : 3m Chamber Data no. : 344
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz(No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2331.57	27.73	6.54	34.23	41.46	41.50	74.00	32.50	Peak
2	2390.00	27.64	6.62	34.19	40.81	40.88	74.00	33.12	Peak
3	2401.97	27.61	6.62	34.18	103.72	103.77	74.00	-29.77	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

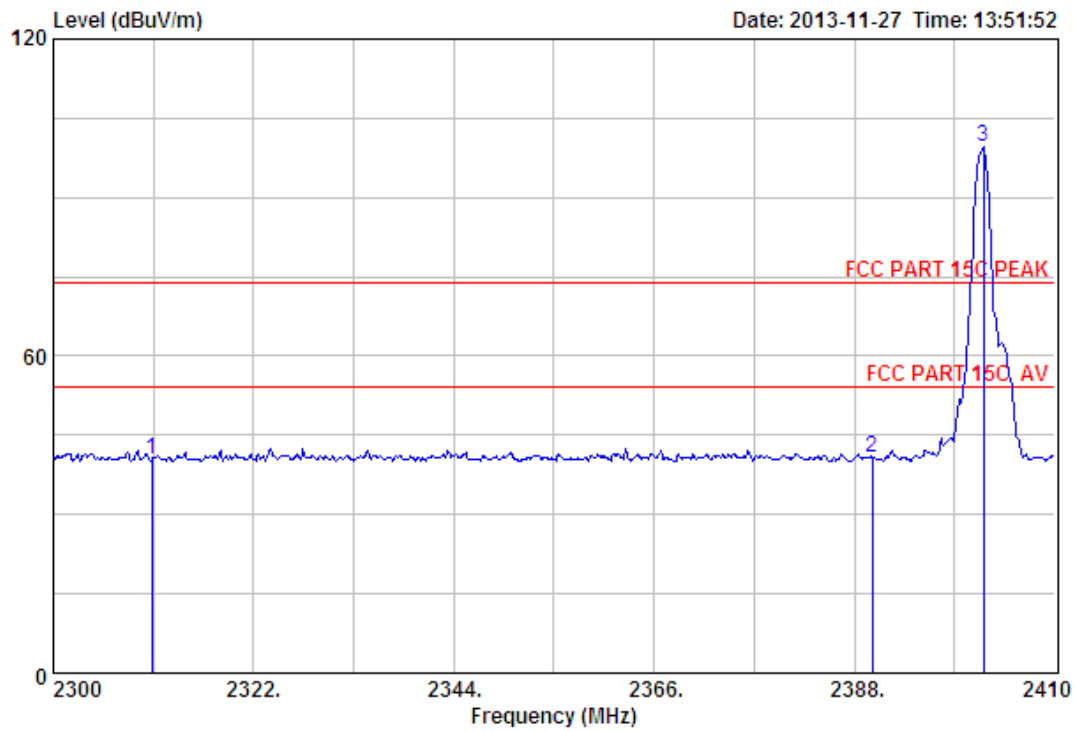

Site no. : 3m Chamber Data no. : 345
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)
 Adapter 2

		Ant.	Cable	Amp	Emission				
	Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2310.78	27.76	6.53	34.24	40.50	40.55	74.00	33.45	Peak
2	2390.00	27.64	6.62	34.19	40.87	40.94	74.00	33.06	Peak
3	2402.19	27.61	6.62	34.18	99.41	99.46	74.00	-25.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

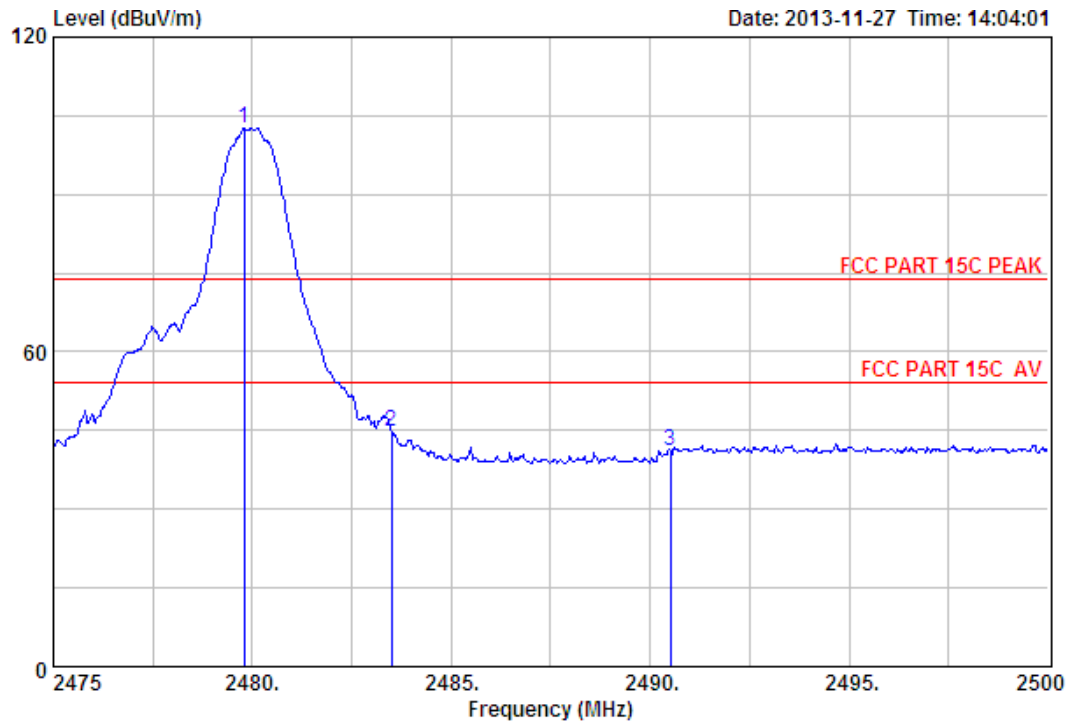

Site no. : 3m Chamber Data no. : 350
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.80	27.58	6.71	34.03	102.47	102.73	74.00	-28.73	Peak
2	2483.50	27.58	6.71	34.03	44.69	44.95	74.00	29.05	Peak
3	2490.50	27.58	6.73	34.03	40.87	41.15	74.00	32.85	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

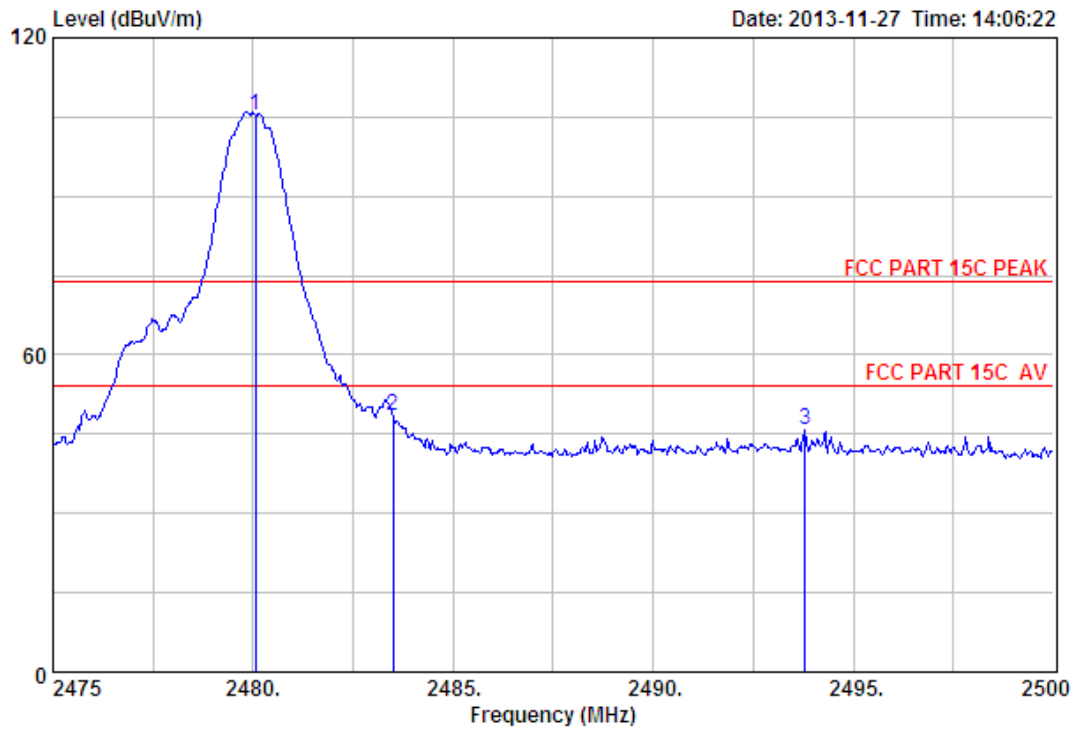

Site no. : 3m Chamber Data no. : 351
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.05	27.58	6.71	34.03	105.20	105.46	74.00	-31.46	Peak
2	2483.50	27.58	6.71	34.03	48.16	48.42	74.00	25.58	Peak
3	2493.80	27.58	6.73	34.03	45.47	45.75	74.00	28.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

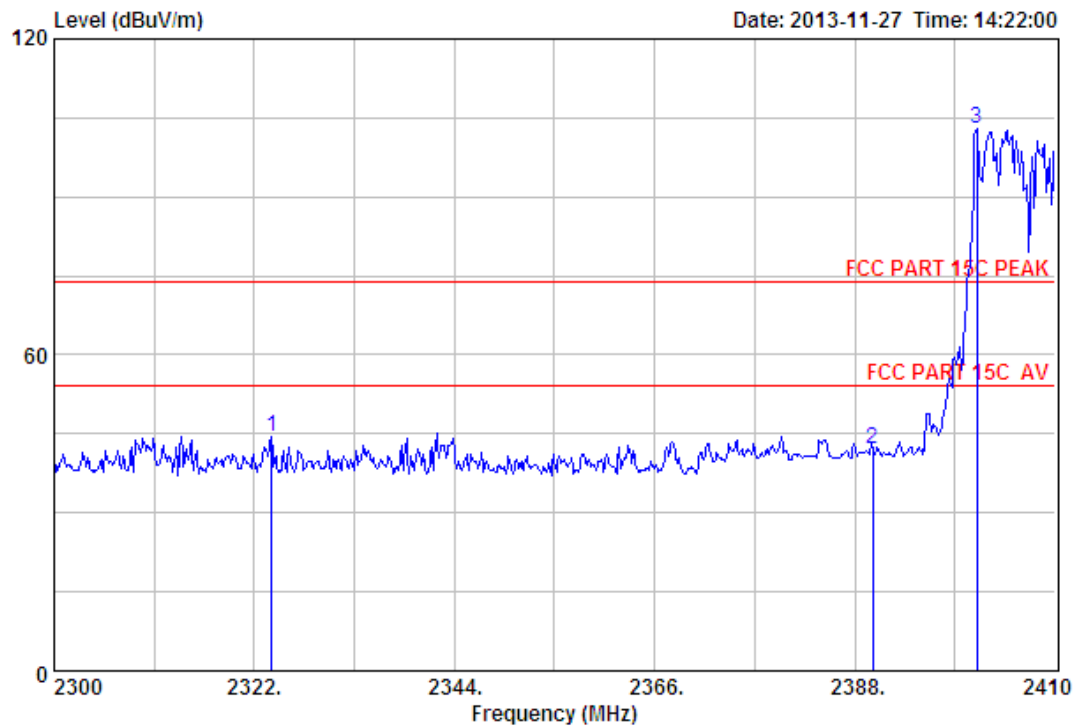

Site no. : 3m Chamber Data no. : 358
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz(Hopping On)
 Adapter 2

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2323.87	27.73	6.54	34.23	44.51	44.55	74.00	29.45	Peak
2	2390.00	27.64	6.62	34.19	42.01	42.08	74.00	31.92	Peak
3	2401.42	27.61	6.62	34.18	102.79	102.84	74.00	-28.84	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

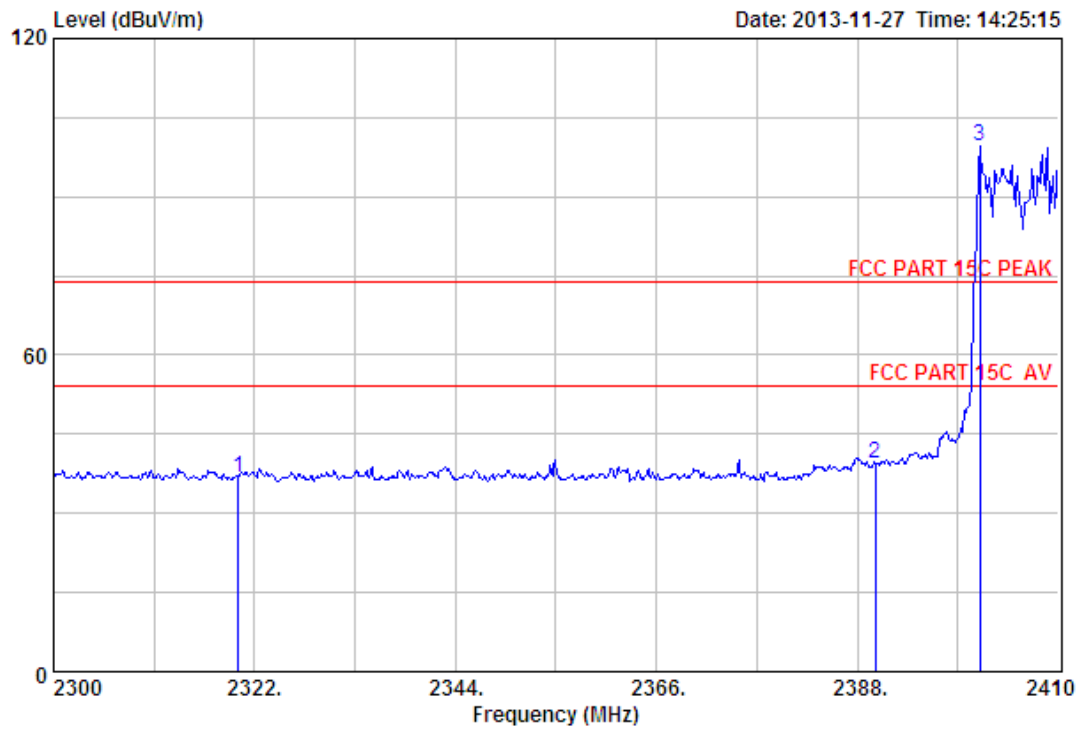

Site no. : 3m Chamber Data no. : 359
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2320.24	27.76	6.54	34.24	36.66	36.72	74.00	37.28	Peak
2	2390.00	27.64	6.62	34.19	39.46	39.53	74.00	34.47	Peak
3	2401.42	27.61	6.62	34.18	99.41	99.46	74.00	-25.46	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

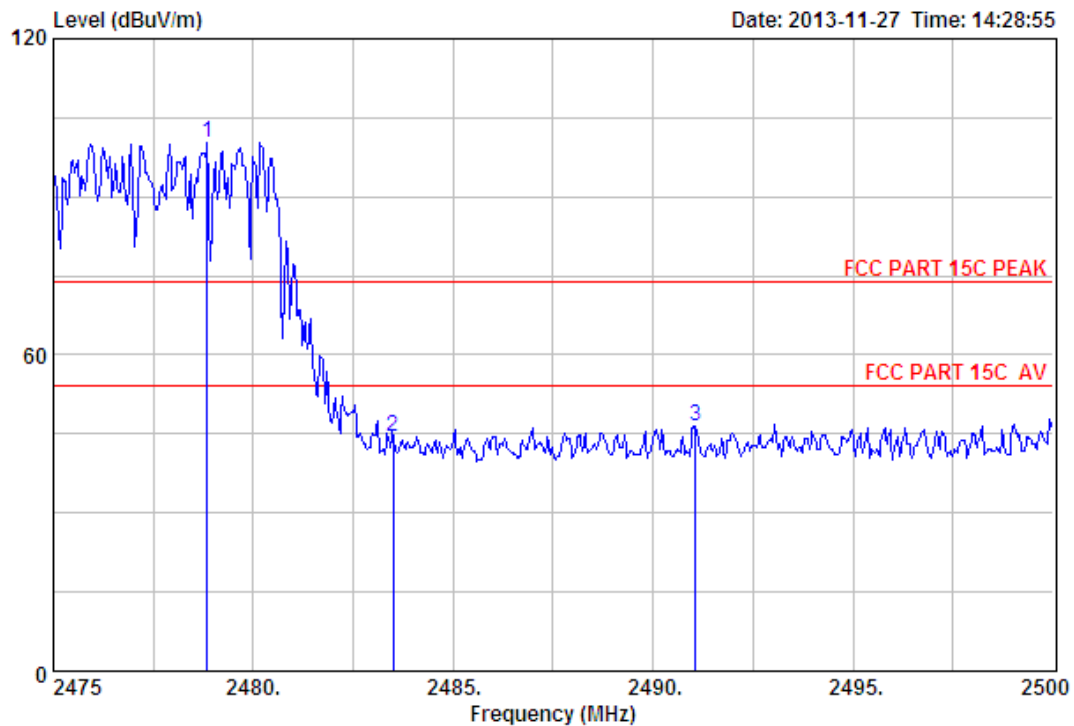

Site no. : 3m Chamber Data no. : 360
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.85	27.58	6.71	34.03	100.15	100.41	74.00	-26.41	Peak
2	2483.50	27.58	6.71	34.03	44.22	44.48	74.00	29.52	Peak
3	2491.05	27.58	6.73	34.03	46.04	46.32	74.00	27.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

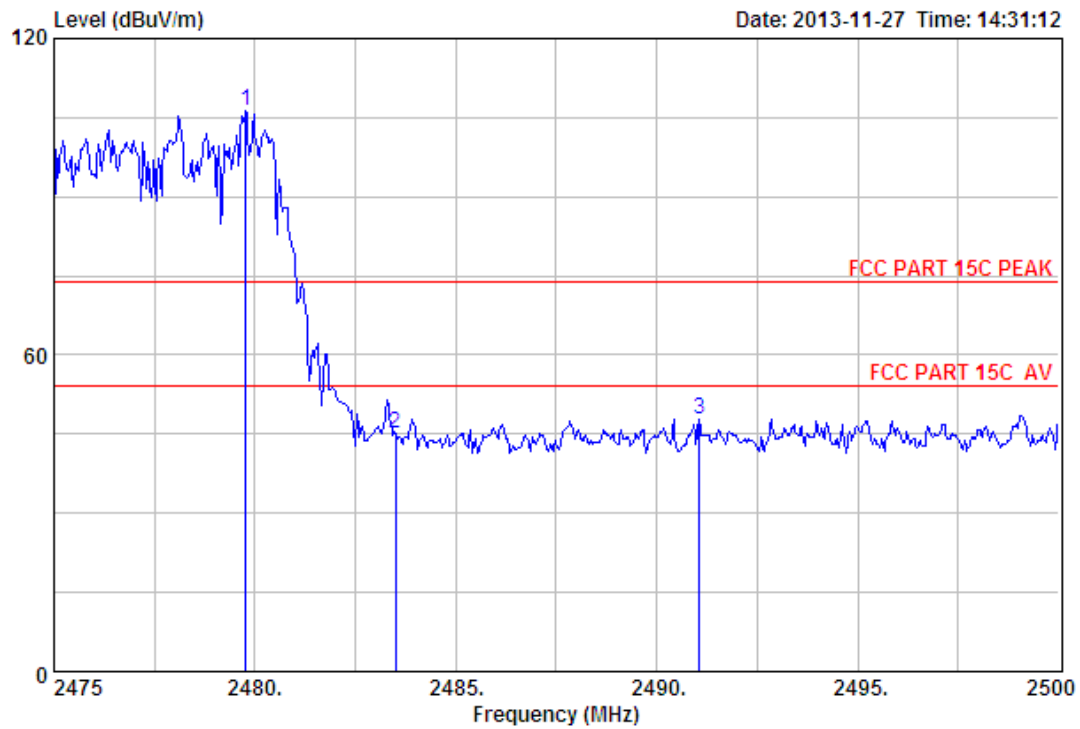

Site no. : 3m Chamber Data no. : 361
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)
 Adapter 2

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2479.78	27.58	6.71	34.03	106.12	106.38	74.00	-32.38	Peak
2	2483.50	27.58	6.71	34.03	44.80	45.06	74.00	28.94	Peak
3	2491.05	27.58	6.73	34.03	47.41	47.69	74.00	26.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. POWER LINE CONDUCTED EMISSIONS

10.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT was charged from PC's USB port which connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#).. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

10.3. Test Result


0.15MHz—30MHz Conducted emissison Test result		
EUT: Bluetooth speaker	M/N: NYNE Bass	
Power: DC 12V From Adapter Input AC 120V/60Hz		
Test date: 2013-11-23~2013-11-26	Test site: 3m Chamber	Tested by: Tony.Tang
Test mode: Tx Mode		
Pass		

10.4. Test data

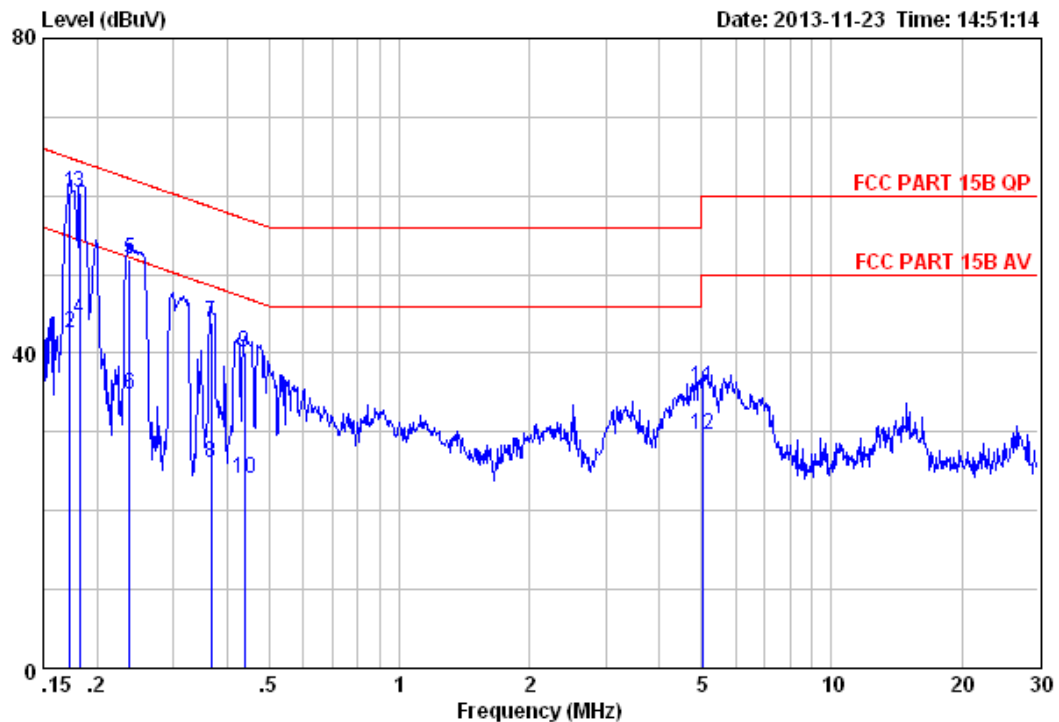


Site no. : EST Conduction Shielded Room Data no. : 113
 Limit : FCC PART 15B QP LINE Phase : LINE
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : TX Mode
 Adapter 1

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.17	9.61	9.81	41.05	60.47	64.81	4.34	QP
2	0.17	9.61	9.81	23.05	42.47	54.81	12.34	Average
3	0.18	9.61	9.80	41.00	60.41	64.37	3.96	QP
4	0.18	9.61	9.80	25.00	44.41	54.37	9.96	Average
5	0.24	9.61	9.82	32.41	51.84	62.17	10.33	QP
6	0.24	9.61	9.82	15.41	34.84	52.17	17.33	Average
7	0.37	9.61	9.82	24.58	44.01	58.56	14.55	QP
8	0.37	9.61	9.82	6.58	26.01	48.56	22.55	Average
9	0.44	9.61	9.81	20.66	40.08	57.11	17.03	QP
10	0.44	9.61	9.81	4.66	24.08	47.11	23.03	Average
11	5.03	9.65	9.83	16.15	35.63	60.00	24.37	QP
12	5.03	9.65	9.83	10.15	29.63	50.00	20.37	Average

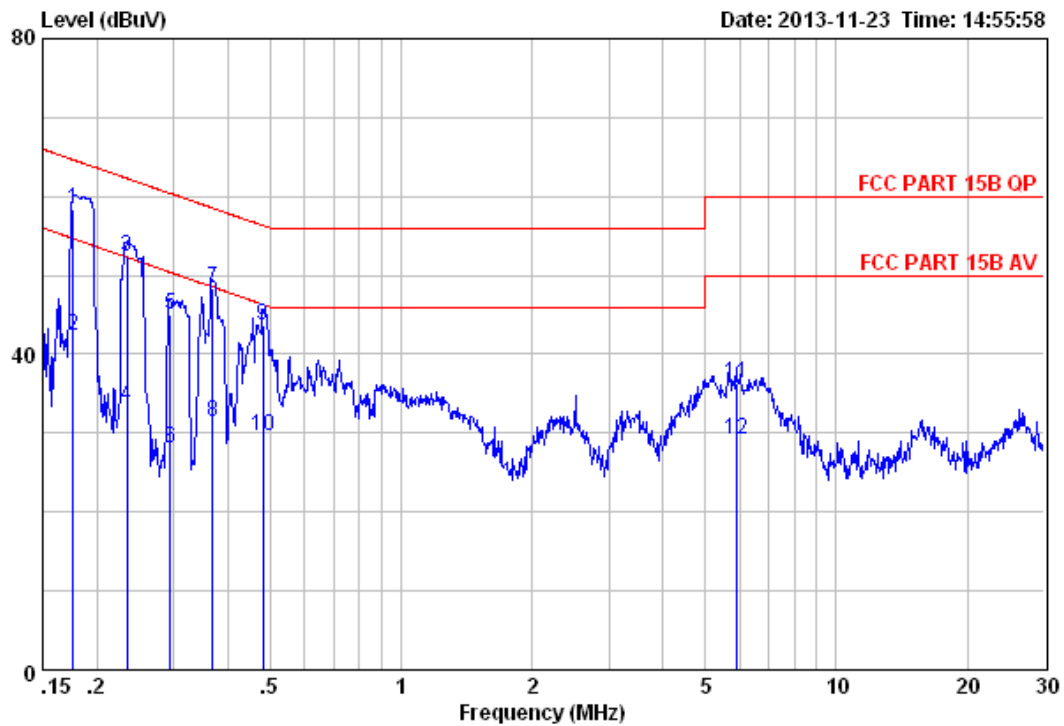


Site no. : EST Conduction Shielded RoomData no. : 115
 Limit : FCC PART 15B QP LINE Phase : NEUTRAL
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : TX Mode
 Adapter 1

		LISN	Cable		Emission			
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.18	9.54	9.80	38.94	58.28	64.68	6.40	QP
2	0.18	9.54	9.80	22.94	42.28	54.68	12.40	Average
3	0.23	9.60	9.82	32.90	52.32	62.30	9.98	QP
4	0.23	9.60	9.82	13.90	33.32	52.30	18.98	Average
5	0.29	9.60	9.83	25.57	45.00	60.41	15.41	QP
6	0.29	9.60	9.83	8.57	28.00	50.41	22.41	Average
7	0.37	9.59	9.82	29.00	48.41	58.52	10.11	QP
8	0.37	9.59	9.82	12.00	31.41	48.52	17.11	Average
9	0.48	9.59	9.81	24.28	43.68	56.32	12.64	QP
10	0.48	9.59	9.81	10.28	29.68	46.32	16.64	Average
11	5.90	9.65	9.86	16.72	36.23	60.00	23.77	QP
12	5.90	9.65	9.86	9.72	29.23	50.00	20.77	Average

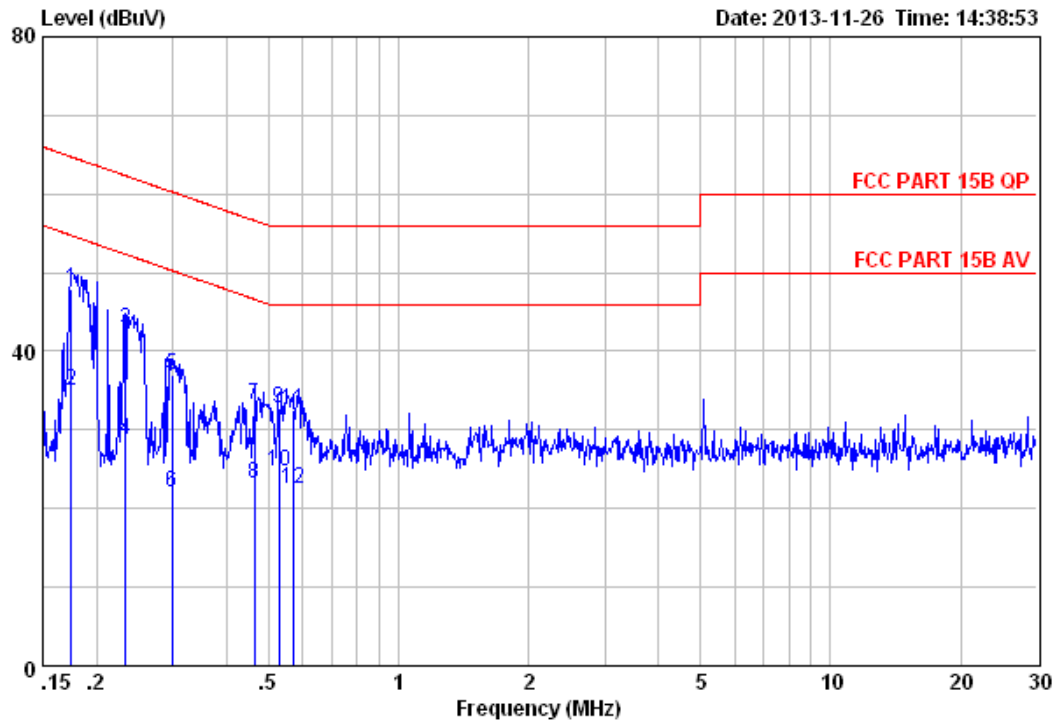

Site no. : EST Conduction Shielded Room Data no. : 145
 Limit : FCC PART 15B QP LINE Phase : LINE
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : TX Mode
 Adapter 2

		LISN	Cable	Emission				
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.17	9.61	9.80	28.56	47.97	64.72	16.75	QP
2	0.17	9.61	9.80	15.56	34.97	54.72	19.75	Average
3	0.23	9.61	9.80	23.28	42.69	62.35	19.66	QP
4	0.23	9.61	9.80	9.28	28.69	52.35	23.66	Average
5	0.30	9.61	9.83	17.58	37.02	60.28	23.26	QP
6	0.30	9.61	9.83	2.58	22.02	50.28	28.26	Average
7	0.46	9.61	9.81	13.69	33.11	56.63	23.52	QP
8	0.46	9.61	9.81	3.69	23.11	46.63	23.52	Average
9	0.53	9.61	9.81	13.41	32.83	56.00	23.17	QP
10	0.53	9.61	9.81	5.41	24.83	46.00	21.17	Average
11	0.57	9.60	9.82	13.03	32.45	56.00	23.55	QP
12	0.57	9.60	9.82	3.03	22.45	46.00	23.55	Average

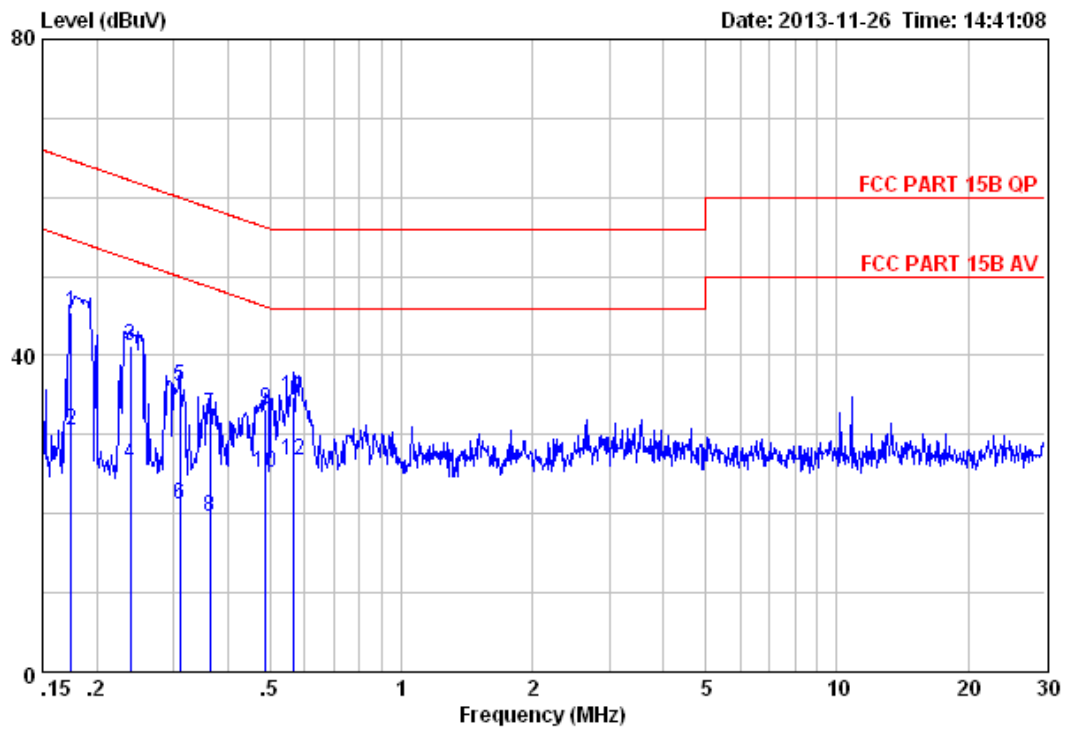

Site no. : EST Conduction Shielded Room Data no. : 147
 Limit : FCC PART 15B QP LINE Phase : NEUTRAL
 Env. / Ins. : Temp:25.3'C Humi:58% Press:101.50kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 12V From Adapter Input AC 120V/60Hz
 M/N : NYNE Bass
 Test Mode : TX Mode
 Adapter 2

		LISN	Cable	Emission				
	Freq.	Factor	Loss	Reading	Level	Limits	Margin	Remark
	(MHz)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	0.17	9.54	9.80	26.23	45.57	64.72	19.15	QP
2	0.17	9.54	9.80	11.23	30.57	54.72	24.15	Average
3	0.24	9.60	9.82	21.78	41.20	62.13	20.93	QP
4	0.24	9.60	9.82	6.78	26.20	52.13	25.93	Average
5	0.31	9.60	9.83	16.69	36.12	59.97	23.85	QP
6	0.31	9.60	9.83	1.69	21.12	49.97	28.85	Average
7	0.36	9.59	9.82	13.18	32.59	58.65	26.06	QP
8	0.36	9.59	9.82	0.18	19.59	48.65	29.06	Average
9	0.49	9.59	9.81	13.73	33.13	56.19	23.06	QP
10	0.49	9.59	9.81	5.73	25.13	46.19	21.06	Average
11	0.56	9.60	9.82	15.43	34.85	56.00	21.15	QP
12	0.56	9.60	9.82	7.43	26.85	46.00	19.15	Average

11. ANTENNA REQUIREMENTS

11.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result



The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

12. TEST SETUP PHOTO


Conducted Test

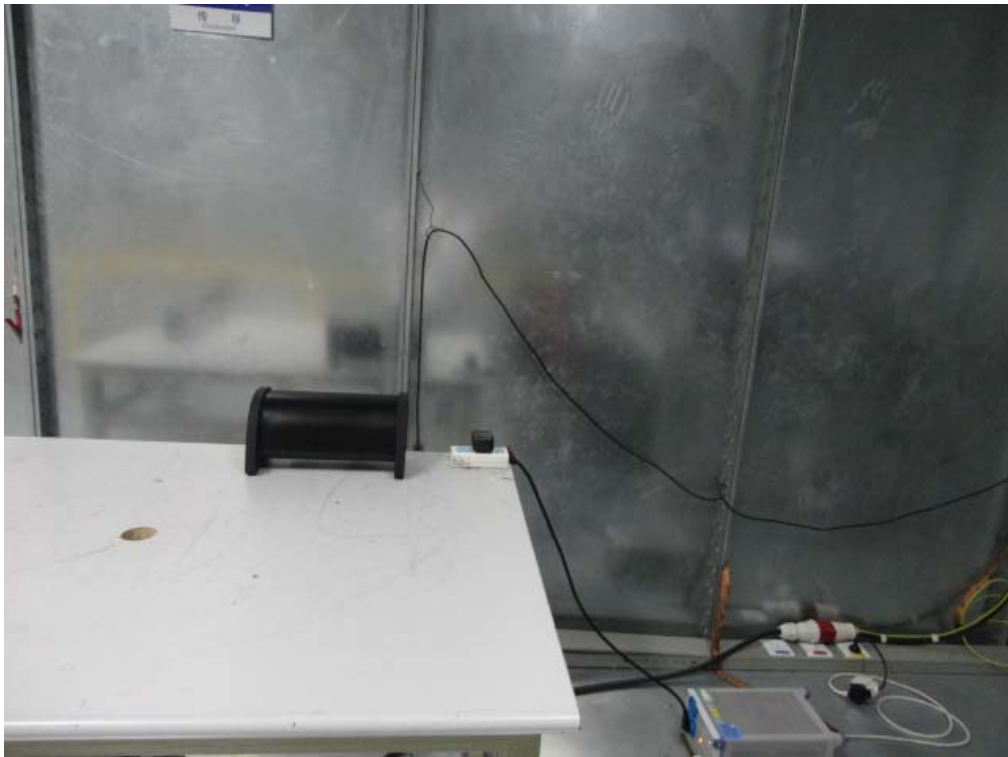

Radiated Test (30-1000 MHz)

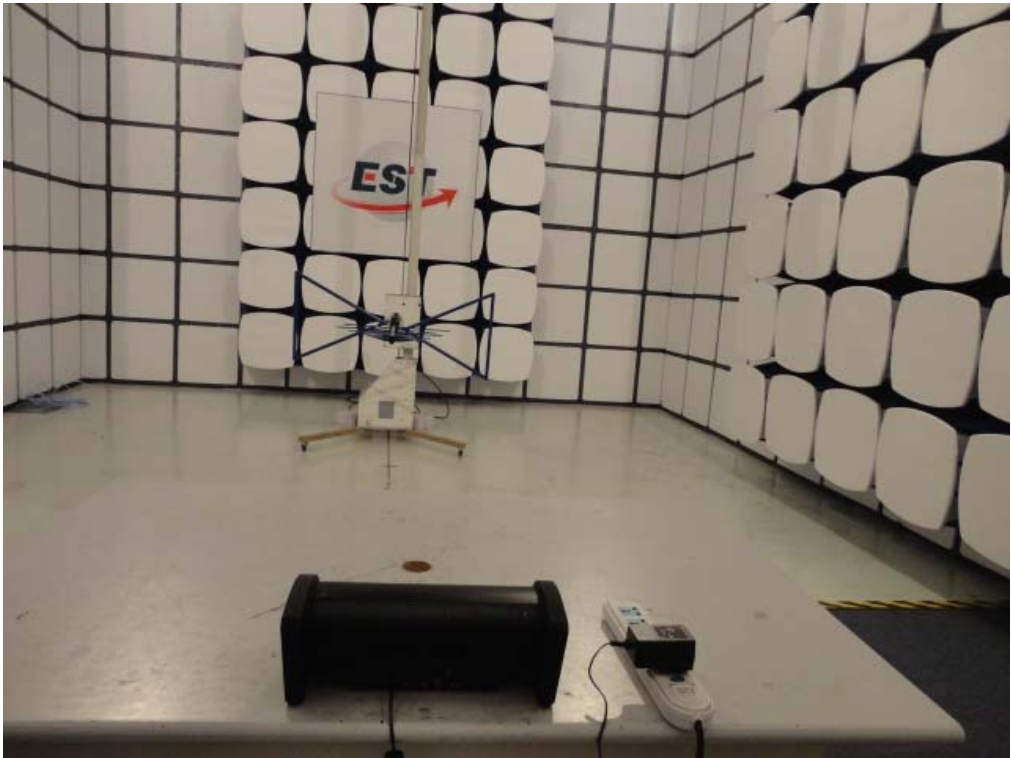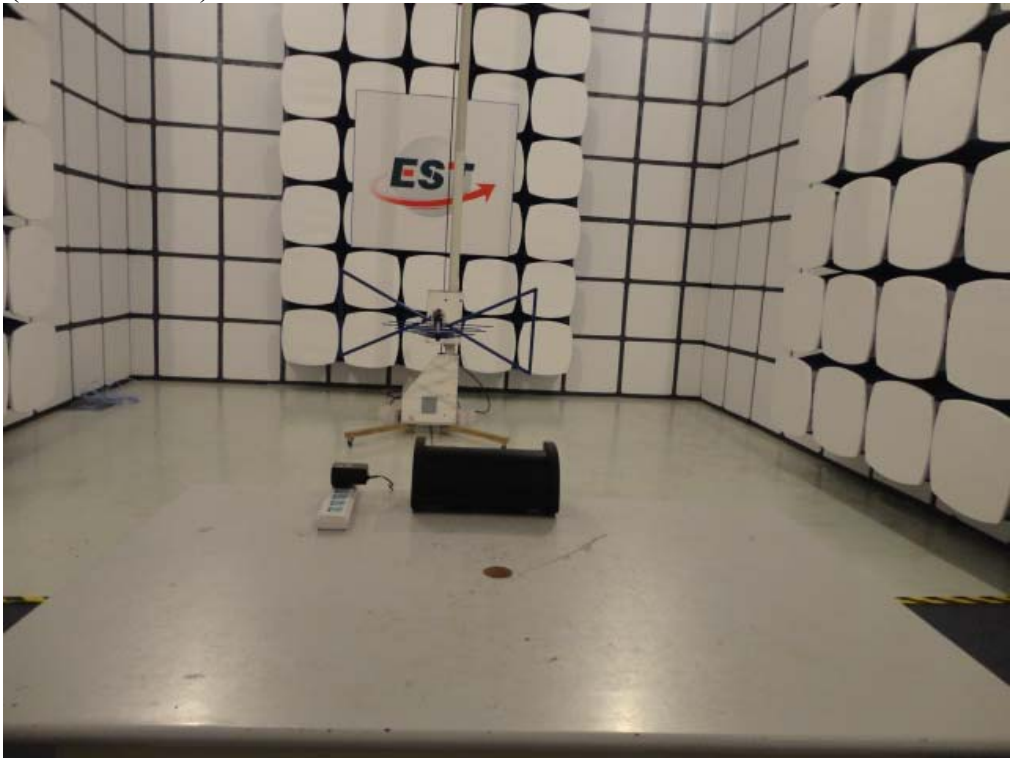

Radiated Test (1000-25000 MHz)

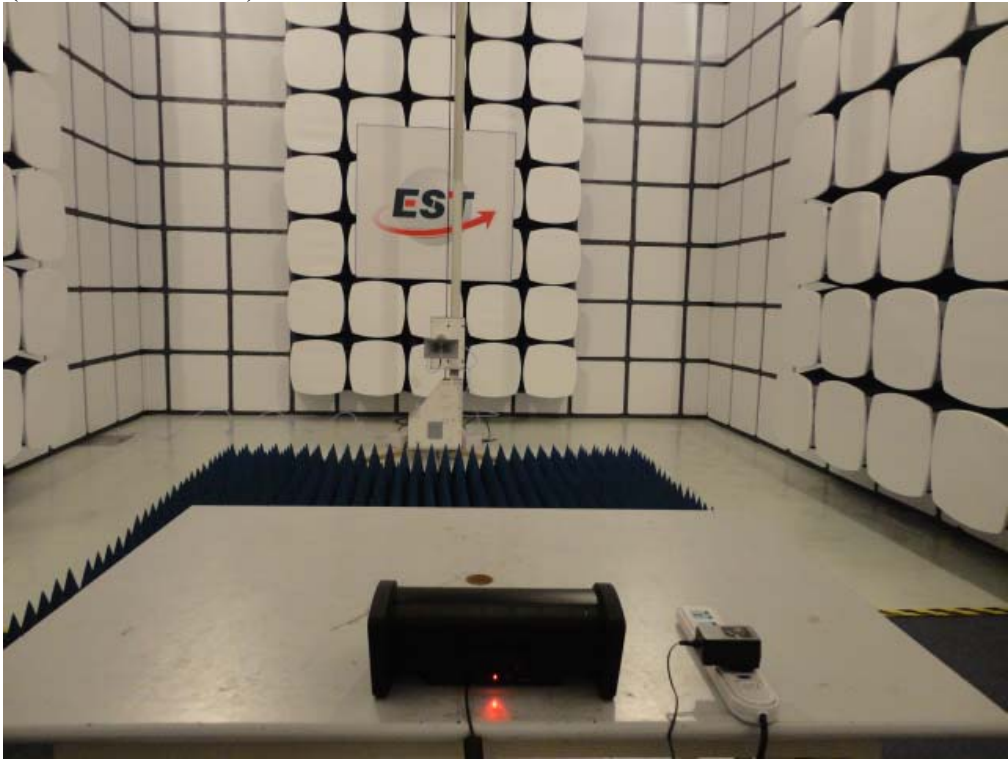

13. PHOTOS OF EUT

External Photos
M/N: NYNE Bass



External Photos
M/N: NYNE Bass





External Photos
M/N: NYNE Bass



Internal Photos
M/N: NYNE Bass



Internal Photos
M/N: NYNE Bass

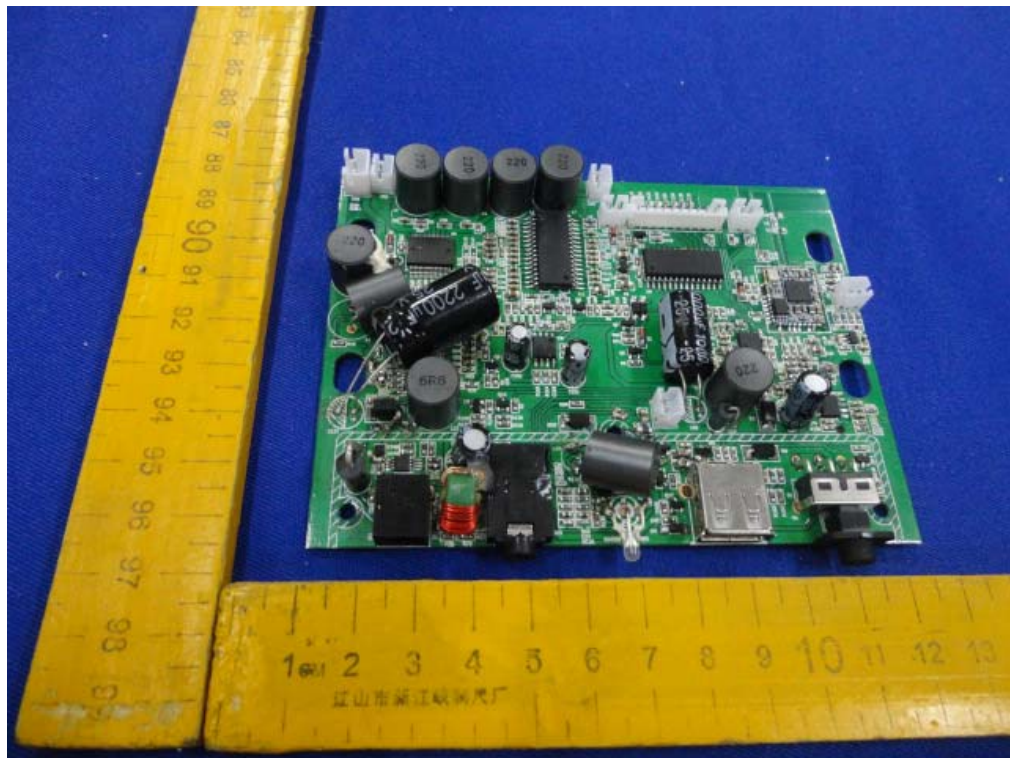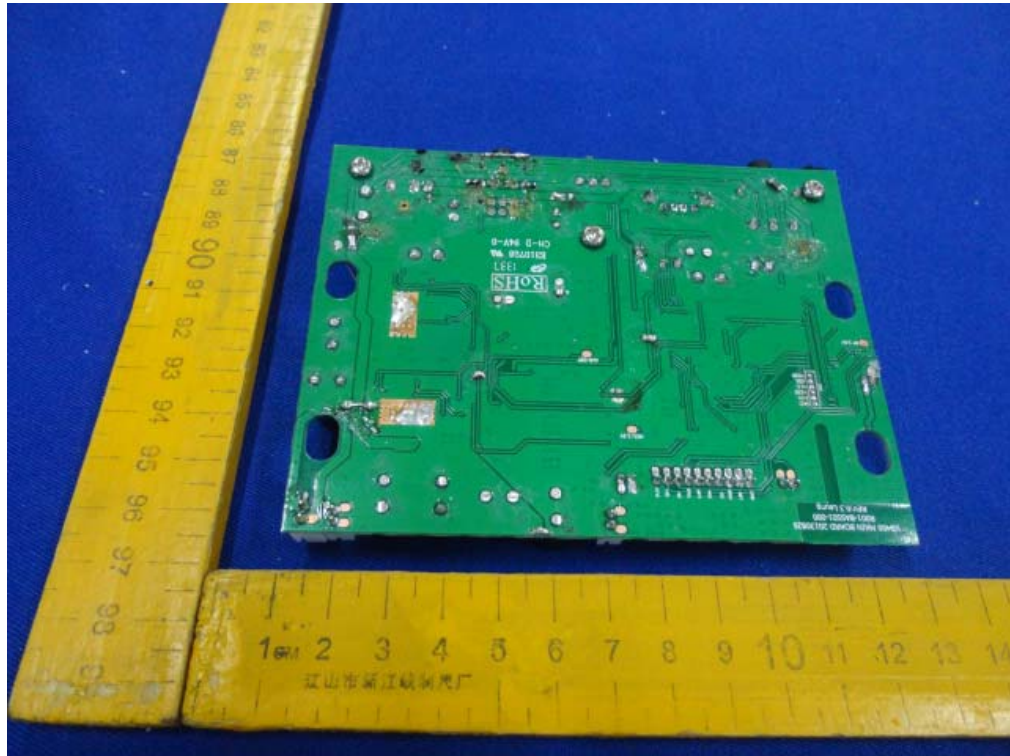



Internal Photos
M/N: NYNE Bass




Bluetooth
Antenna



Internal Photos
M/N: NYNE Bass

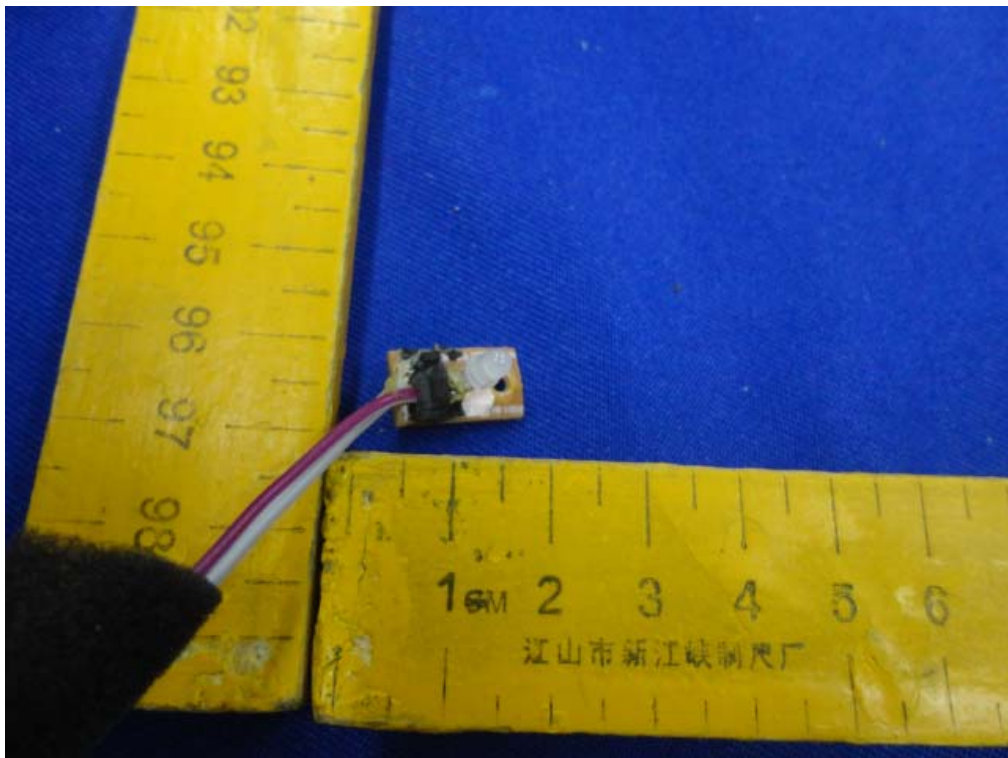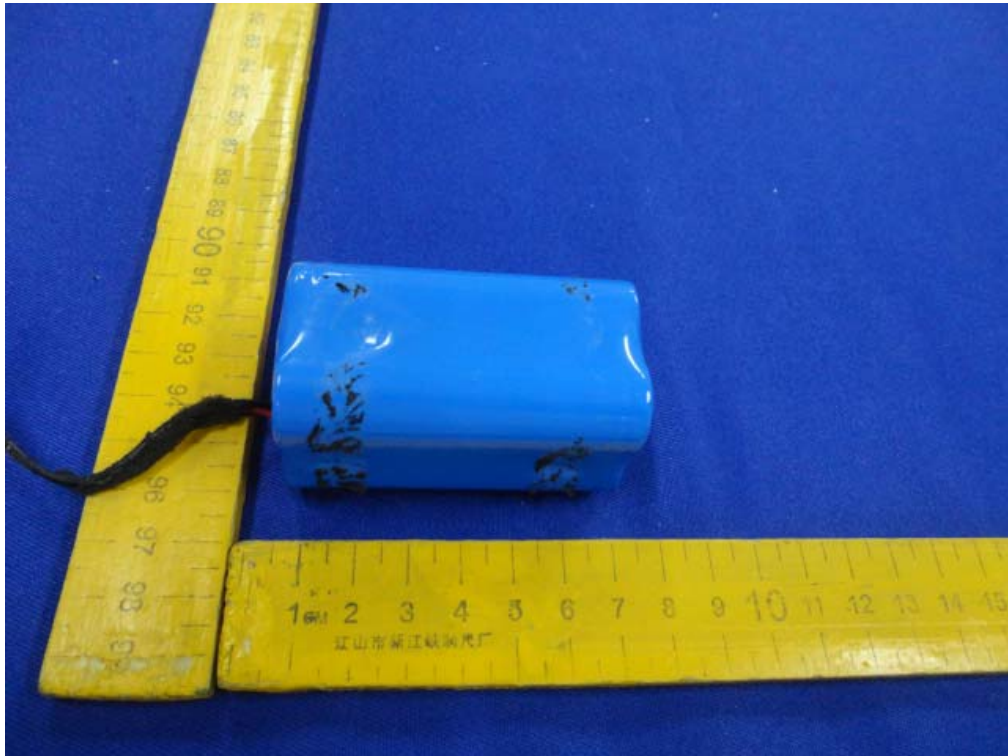

Internal Photos
M/N: NYNE Bass

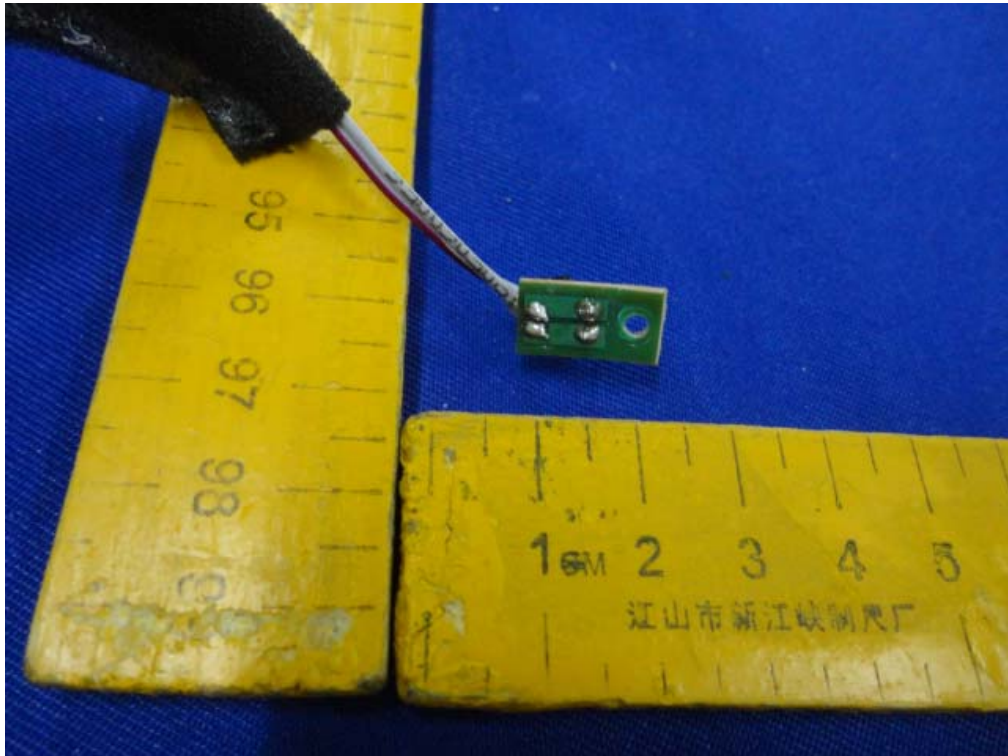

Internal Photos
M/N: NYNE Bass



Internal Photos
M/N: NYNE Bass



Adapter 1 Photos



Adapter 1 Photos



Adapter 2 Photos



Adapter 2 Photos

