


Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz	

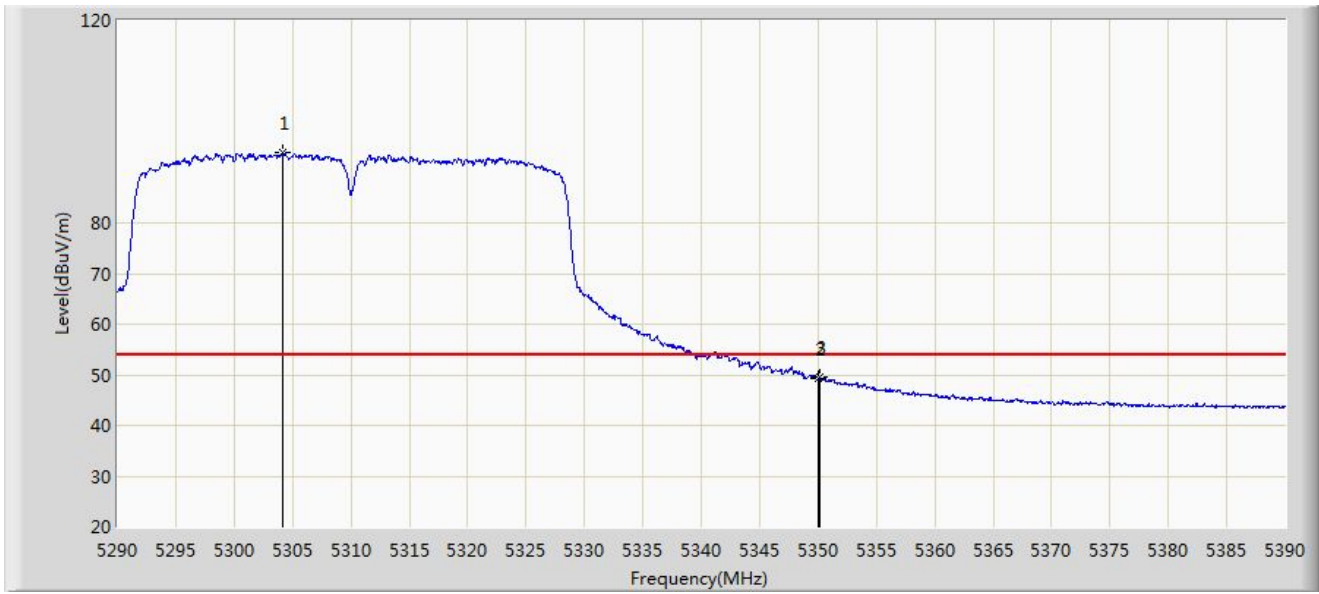


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5304.150	93.913	90.273	N/A	N/A	3.640	AV
2		5350.000	49.287	45.404	-4.713	54.000	3.884	AV
3	*	5350.150	49.517	45.631	-4.483	54.000	3.887	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

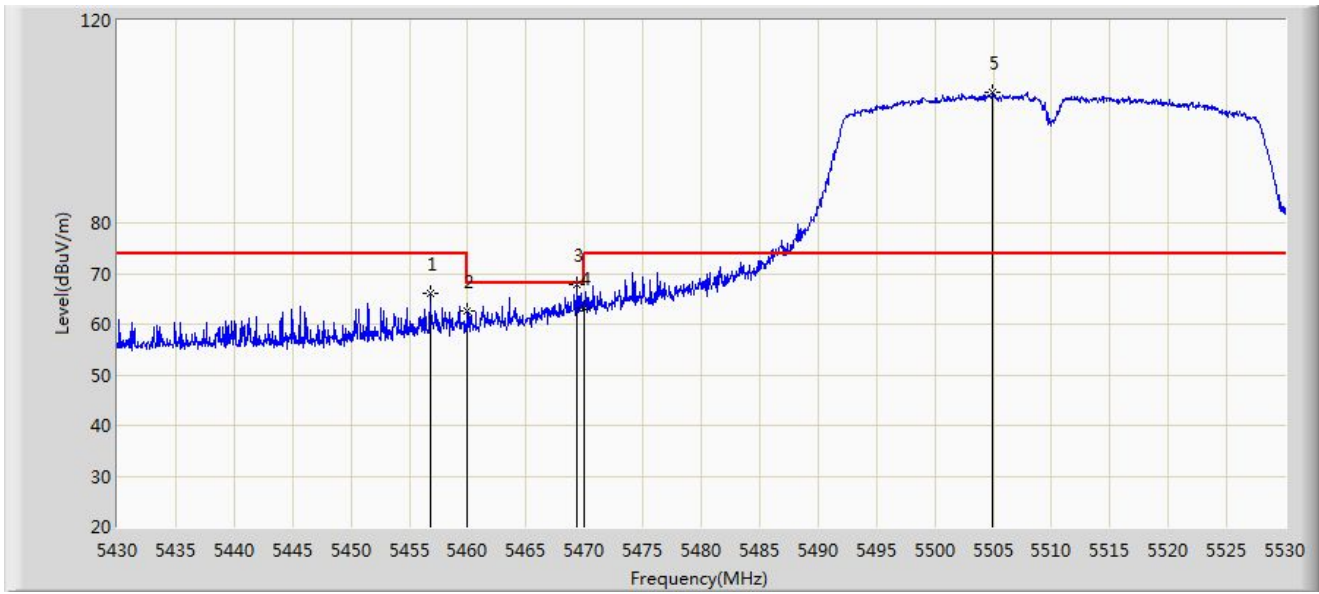


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5456.800	66.102	62.182	-7.898	74.000	3.920	PK
2		5460.000	62.722	58.818	-11.278	74.000	3.904	PK
3	*	5469.400	67.689	63.830	-0.511	68.200	3.859	PK
4		5470.000	63.321	59.465	-4.879	68.200	3.856	PK
5		5504.950	105.742	101.527	N/A	N/A	4.215	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

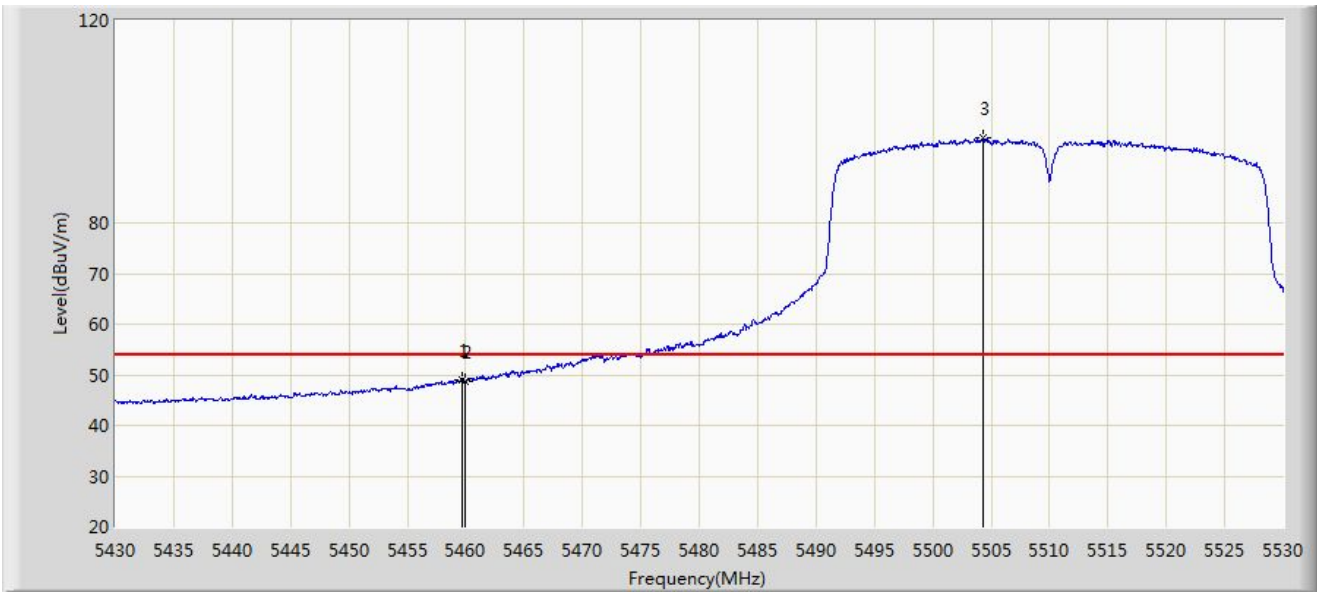


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5459.750	49.014	45.109	-4.986	54.000	3.904	AV
2		5460.000	48.747	44.843	-5.253	54.000	3.904	AV
3		5504.300	96.711	92.508	N/A	N/A	4.203	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

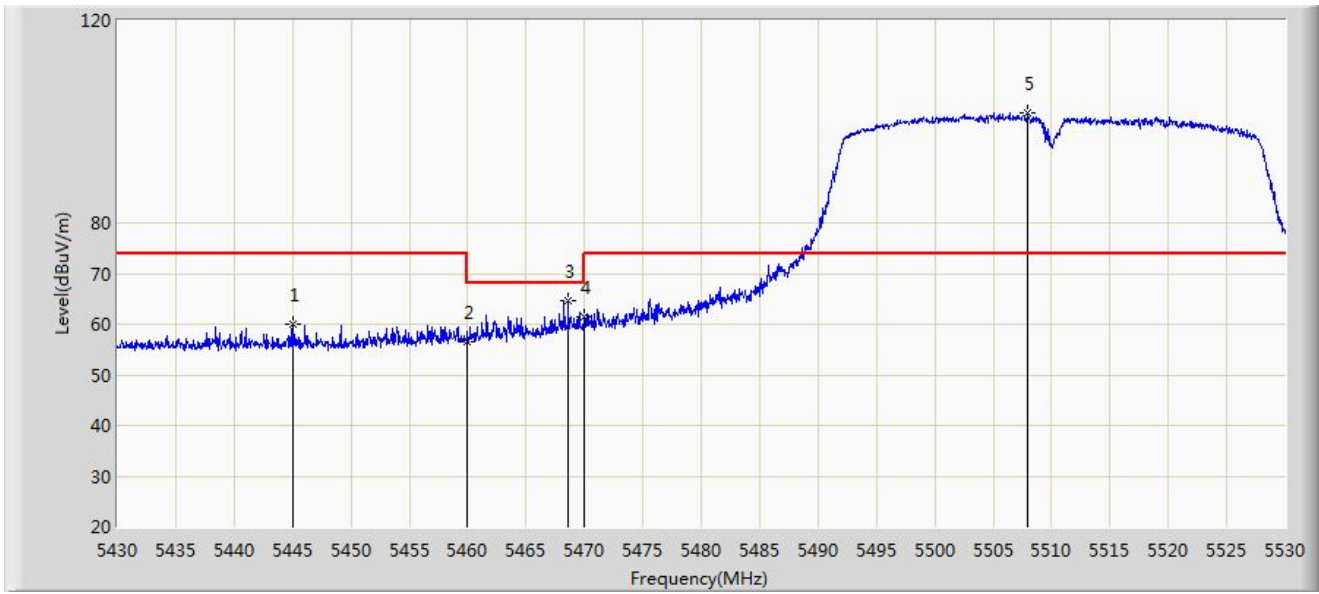


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5445.100	60.016	55.858	-13.984	74.000	4.158	PK
2		5460.000	56.485	52.581	-17.515	74.000	3.904	PK
3	*	5468.600	64.733	60.870	-3.467	68.200	3.862	PK
4		5470.000	61.526	57.670	-6.674	68.200	3.856	PK
5		5507.950	101.815	97.626	N/A	N/A	4.190	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz	

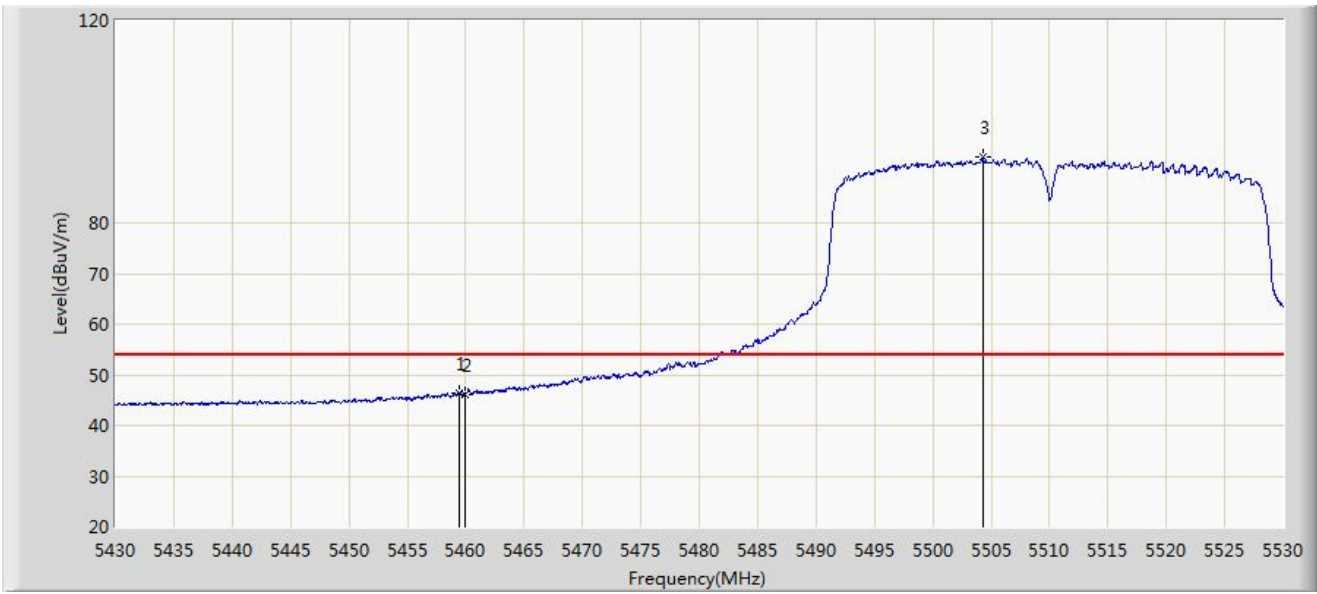


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5459.500	46.492	42.586	-7.508	54.000	3.907	AV
2		5460.000	46.204	42.300	-7.796	54.000	3.904	AV
3		5504.300	92.966	88.763	N/A	N/A	4.203	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

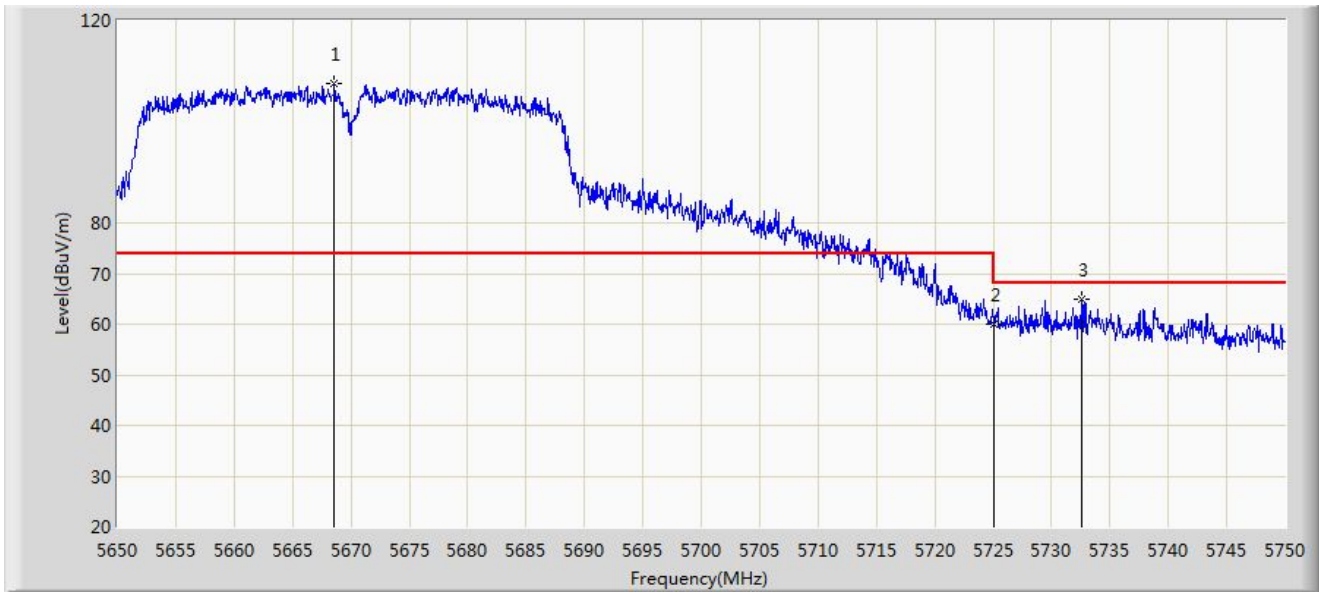


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5668.550	107.393	102.132	N/A	N/A	5.261	PK
2		5725.000	59.981	54.460	-8.219	68.200	5.521	PK
3	*	5732.600	64.843	59.266	-3.357	68.200	5.578	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

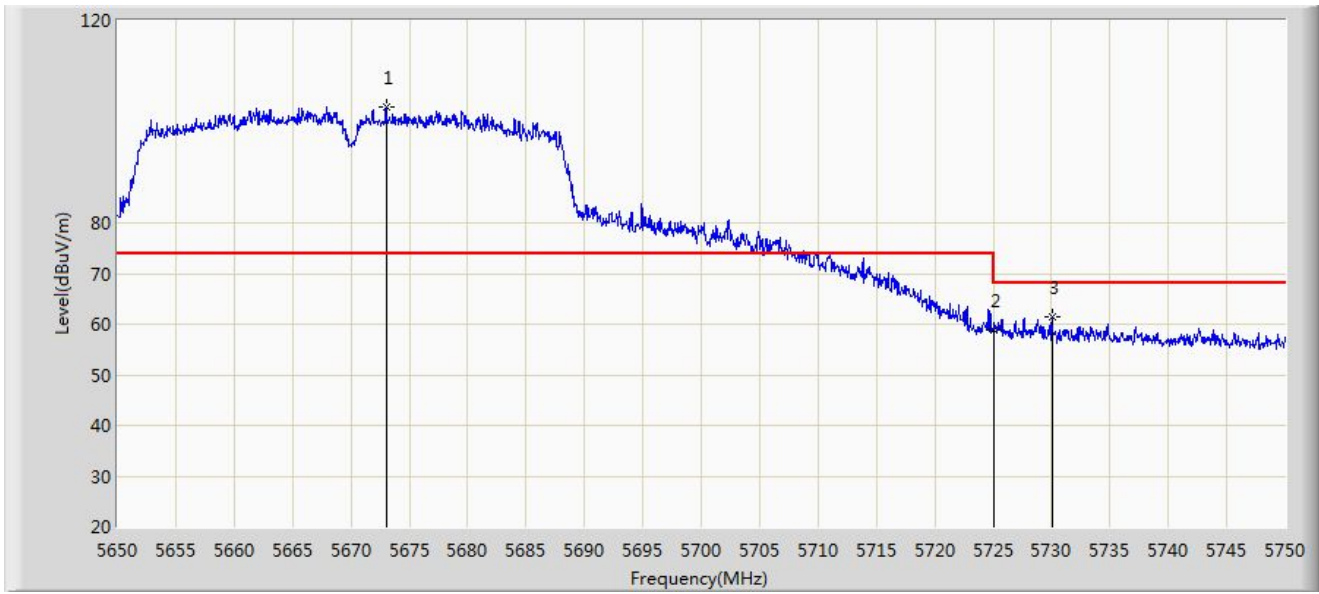


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5673.000	103.015	97.786	N/A	N/A	5.229	PK
2		5725.000	58.967	53.446	-9.233	68.200	5.521	PK
3	*	5730.050	61.508	55.947	-6.692	68.200	5.562	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

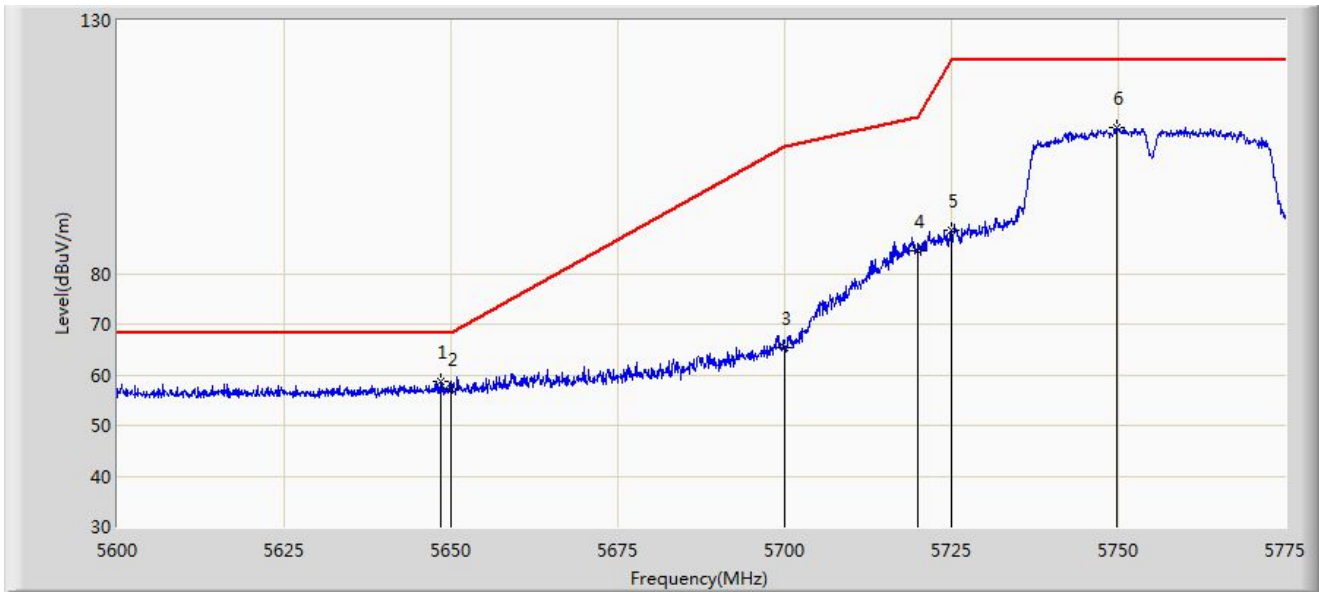


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.388	58.820	53.616	-9.380	68.200	5.203	PK
2		5650.000	57.332	52.110	-10.868	68.200	5.222	PK
3		5700.000	65.340	60.159	-39.860	105.200	5.181	PK
4		5720.000	84.592	79.153	-26.208	110.800	5.439	PK
5		5725.000	88.638	83.117	-33.562	122.200	5.521	PK
6		5749.800	108.722	103.173	N/A	N/A	5.548	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

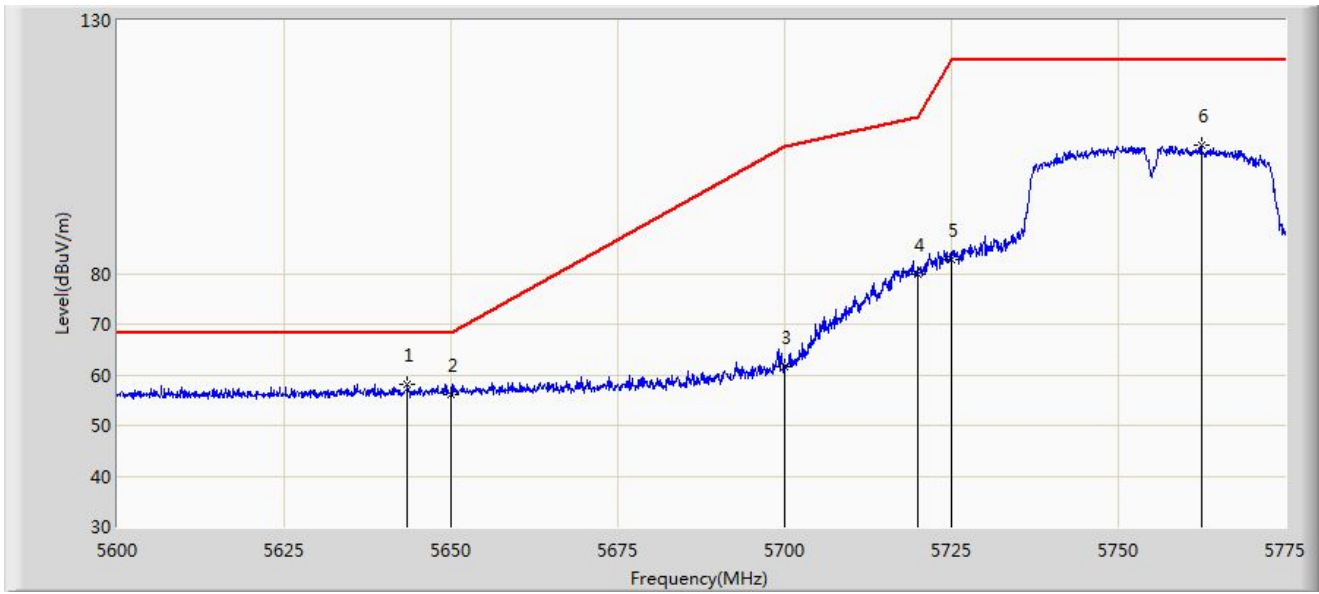


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5643.487	58.142	52.994	-10.058	68.200	5.147	PK
2		5650.000	56.213	50.991	-11.987	68.200	5.222	PK
3		5700.000	61.623	56.442	-43.577	105.200	5.181	PK
4		5720.000	79.987	74.548	-30.813	110.800	5.439	PK
5		5725.000	82.690	77.169	-39.510	122.200	5.521	PK
6		5762.400	105.261	99.864	N/A	N/A	5.397	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

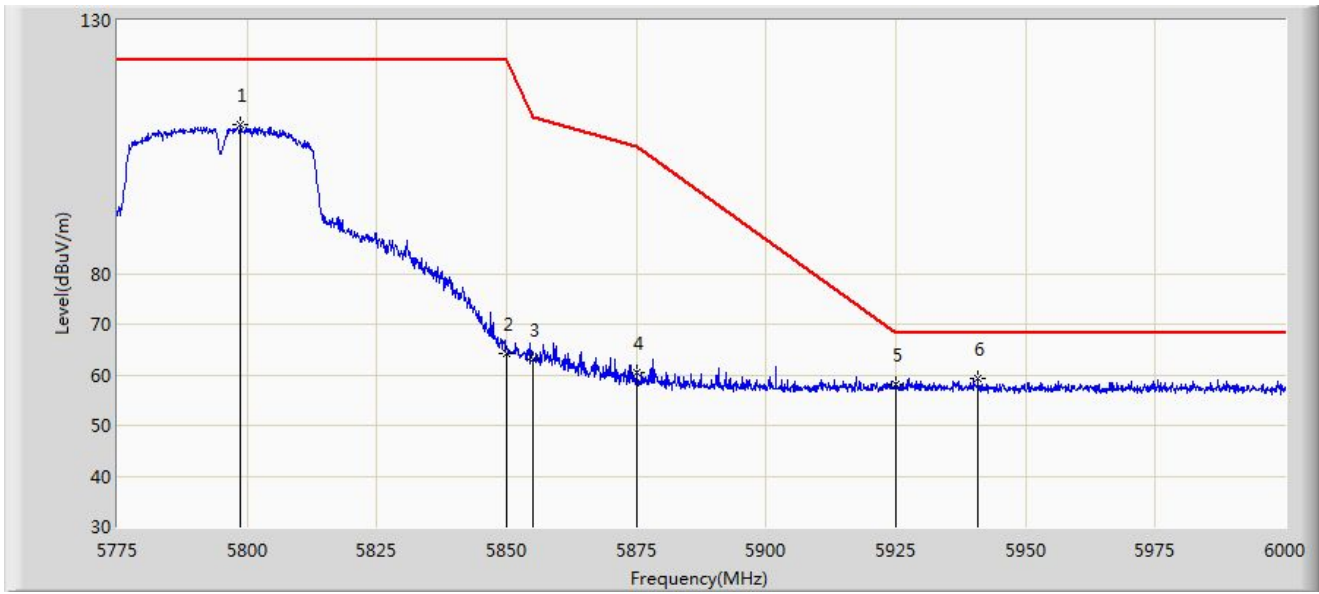


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5798.737	109.344	103.452	N/A	N/A	5.892	PK
2		5850.000	64.132	58.412	-58.068	122.200	5.720	PK
3		5855.000	62.984	57.182	-47.816	110.800	5.802	PK
4		5875.000	60.337	54.388	-44.863	105.200	5.949	PK
5		5925.000	58.235	52.175	-9.965	68.200	6.060	PK
6	*	5940.825	59.304	53.246	-8.896	68.200	6.058	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

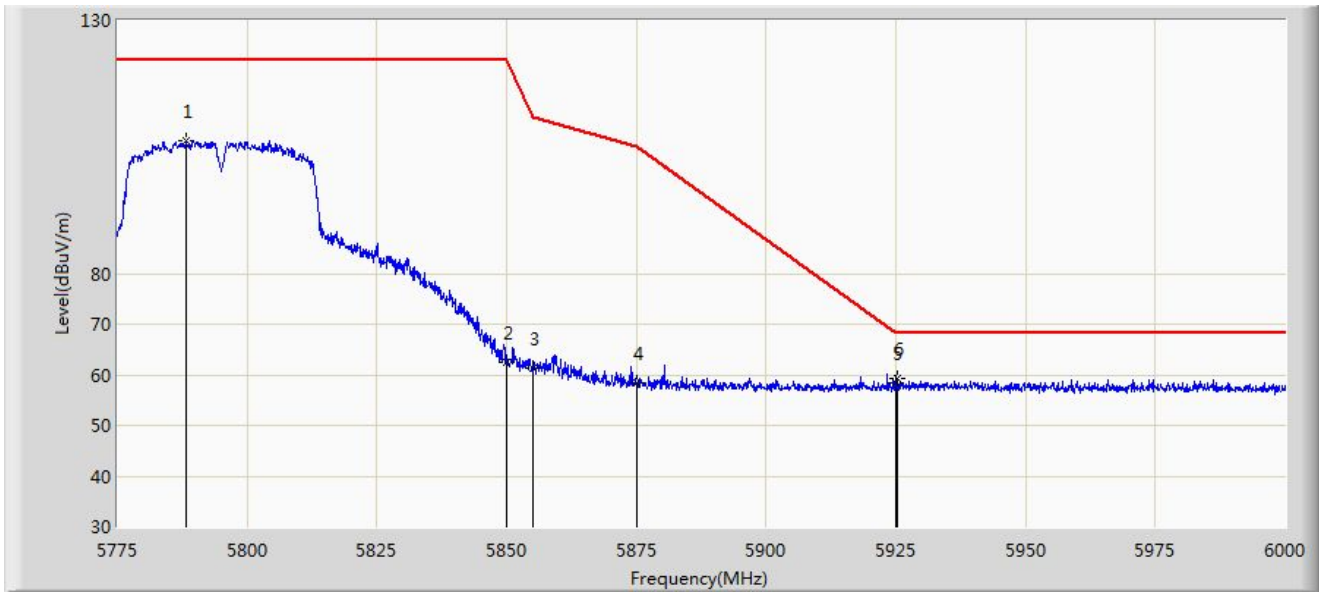


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5788.275	106.354	100.565	N/A	N/A	5.789	PK
2		5850.000	62.541	56.821	-59.659	122.200	5.720	PK
3		5855.000	61.376	55.574	-49.424	110.800	5.802	PK
4		5875.000	58.312	52.363	-46.888	105.200	5.949	PK
5		5925.000	58.443	52.383	-9.757	68.200	6.060	PK
6	*	5925.187	59.293	53.229	-8.907	68.200	6.064	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

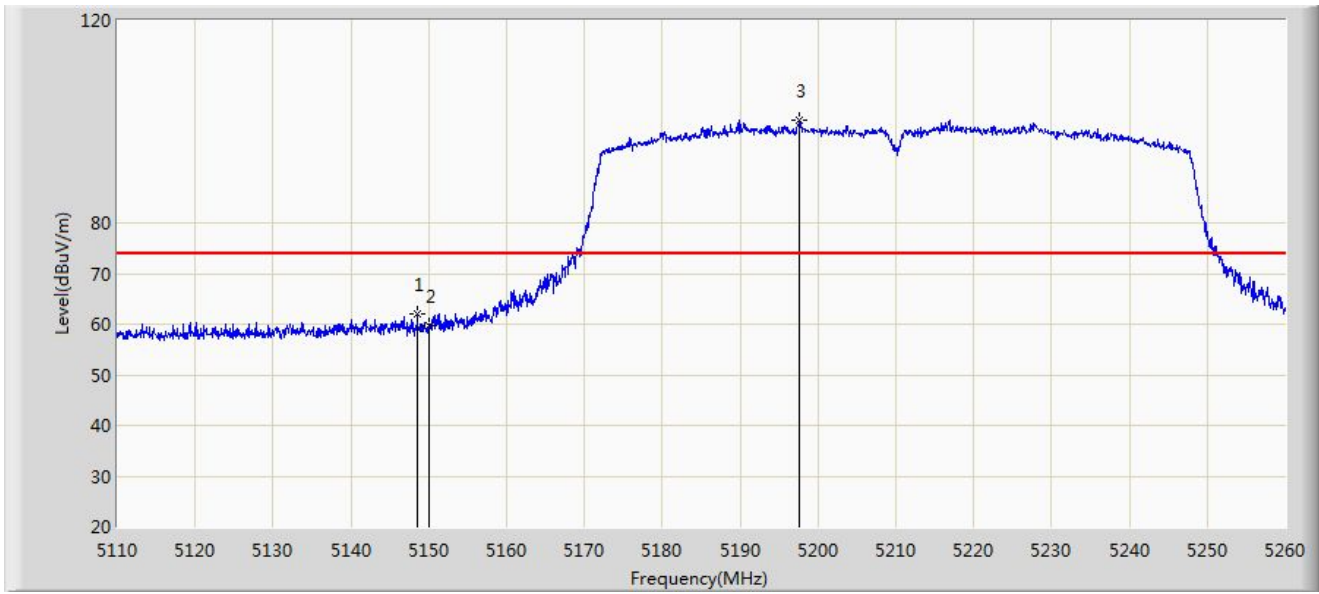


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5148.550	62.120	57.963	-11.880	74.000	4.157	PK
2		5150.000	59.678	55.560	-14.322	74.000	4.118	PK
3		5197.675	100.290	96.431	N/A	N/A	3.859	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

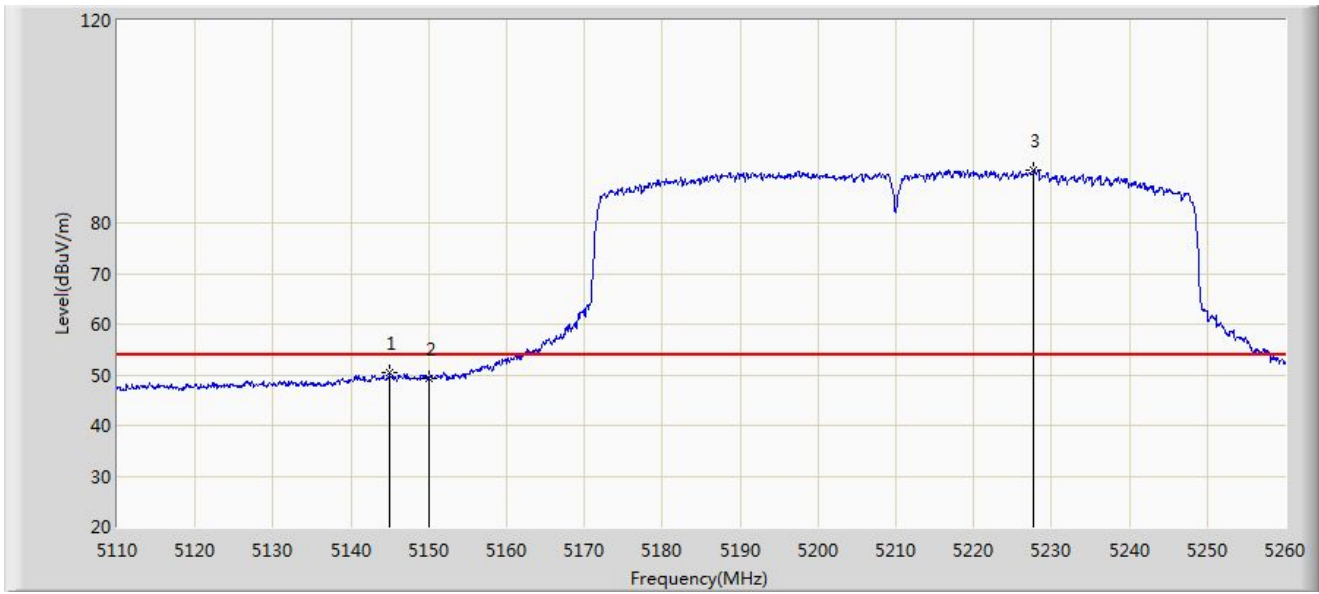


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5144.950	50.378	46.207	-3.622	54.000	4.171	AV
2		5150.000	49.418	45.300	-4.582	54.000	4.118	AV
3		5227.750	90.494	86.743	N/A	N/A	3.751	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

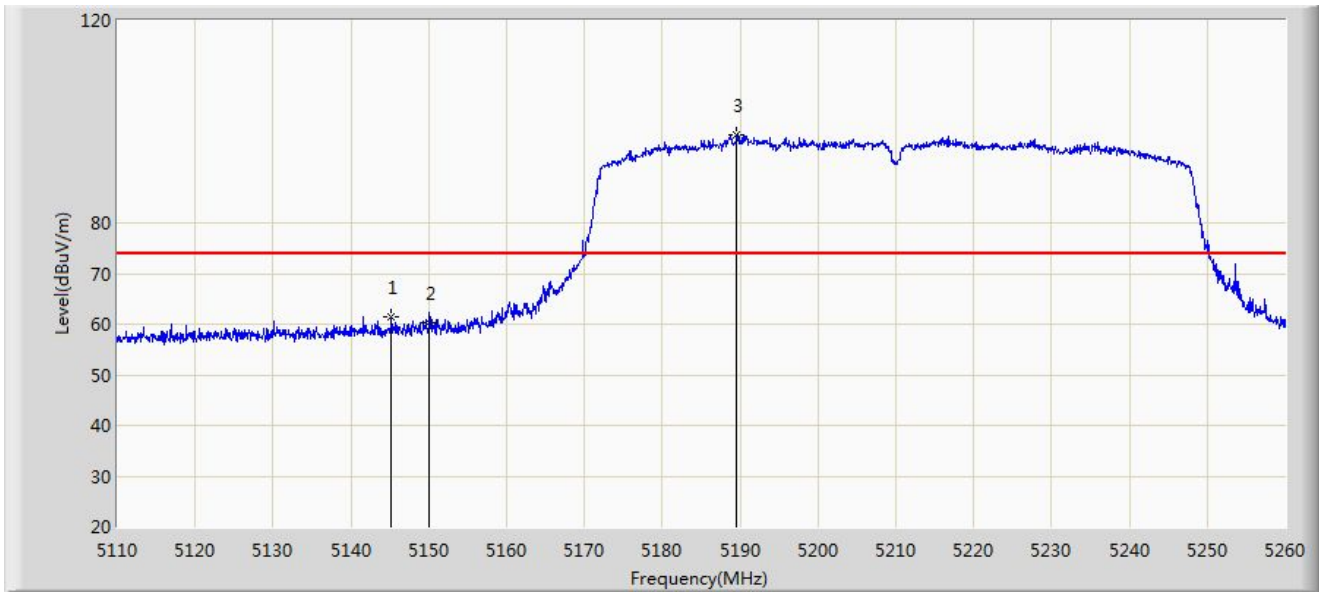


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5145.175	61.497	57.326	-12.503	74.000	4.171	PK
2		5150.000	60.180	56.062	-13.820	74.000	4.118	PK
3		5189.575	97.331	93.484	N/A	N/A	3.846	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

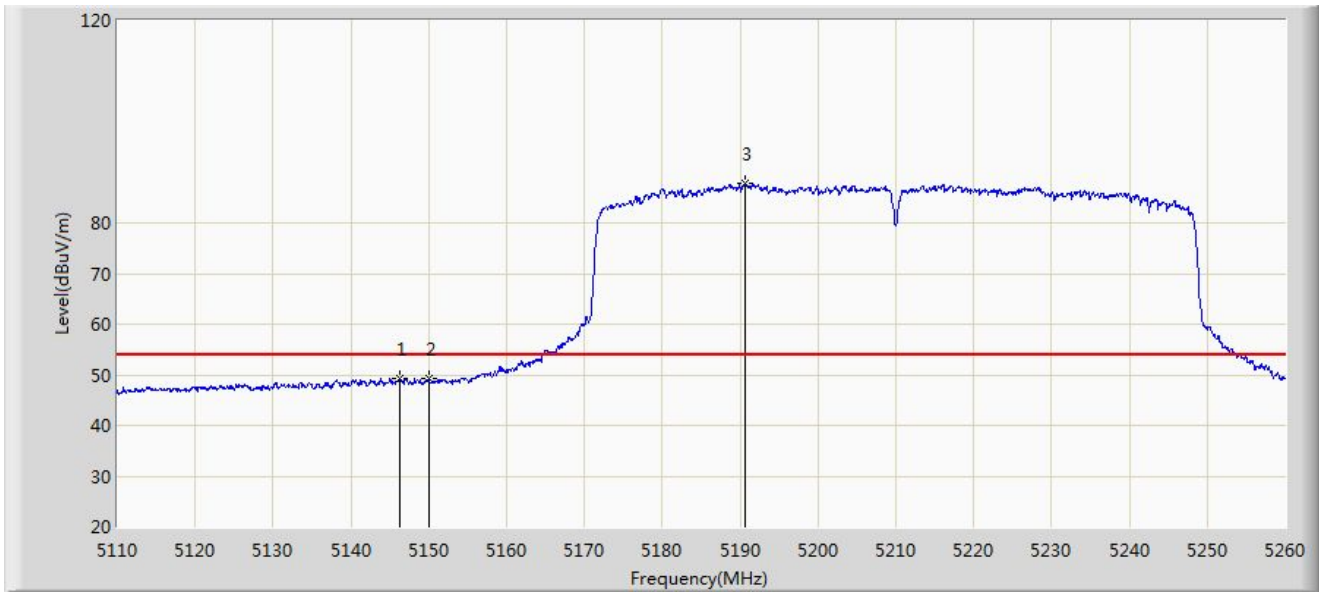


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5146.300	49.394	45.223	-4.606	54.000	4.171	AV
2		5150.000	49.200	45.082	-4.800	54.000	4.118	AV
3		5190.625	87.707	83.859	N/A	N/A	3.849	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

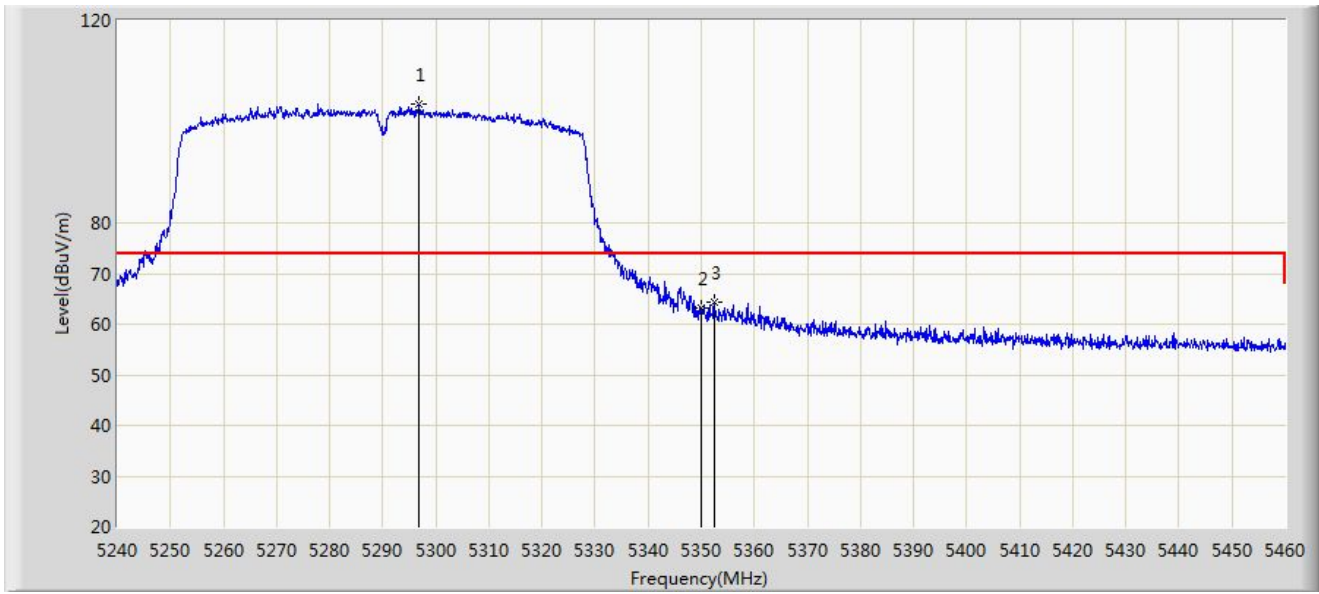


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5296.870	103.437	99.765	N/A	N/A	3.672	PK
2		5350.000	63.203	59.320	-10.797	74.000	3.884	PK
3	*	5352.530	64.289	60.369	-9.711	74.000	3.921	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

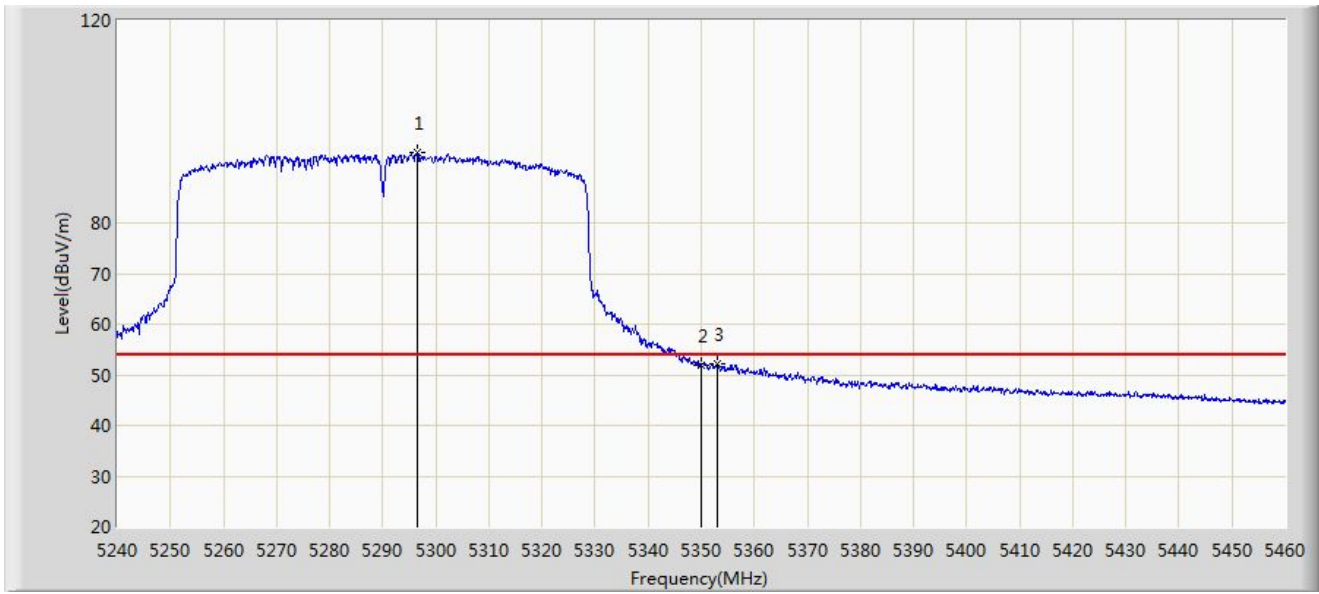


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5296.650	93.819	90.146	N/A	N/A	3.674	AV
2		5350.000	51.987	48.104	-2.013	54.000	3.884	AV
3	*	5353.080	52.292	48.370	-1.708	54.000	3.922	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

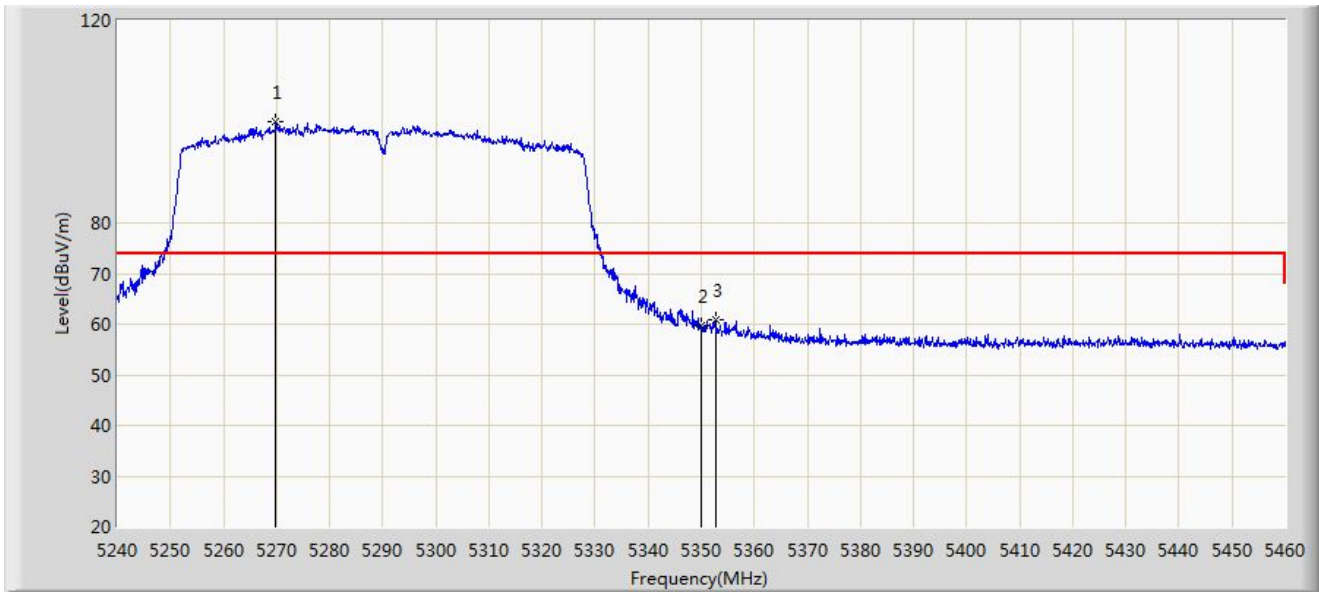


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5269.810	100.062	96.482	N/A	N/A	3.580	PK
2		5350.000	59.596	55.713	-14.404	74.000	3.884	PK
3	*	5352.640	60.943	57.023	-13.057	74.000	3.921	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

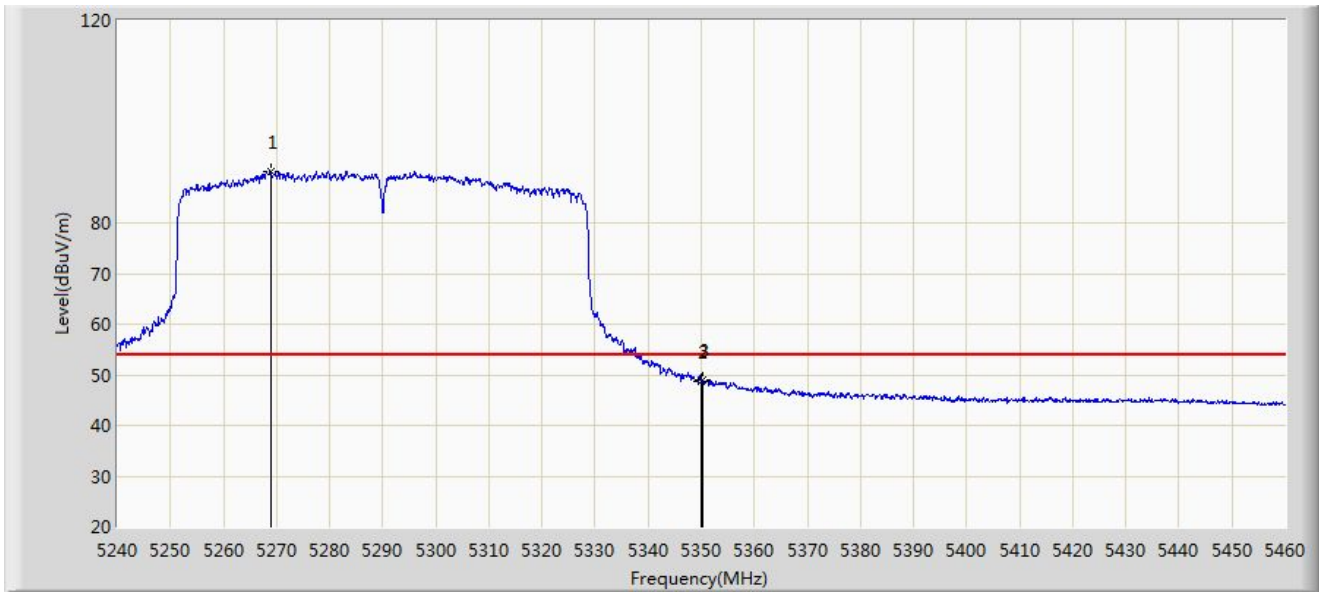


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5268.820	90.218	86.652	N/A	N/A	3.567	AV
2		5350.000	48.609	44.726	-5.391	54.000	3.884	AV
3	*	5350.330	48.902	45.013	-5.098	54.000	3.889	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

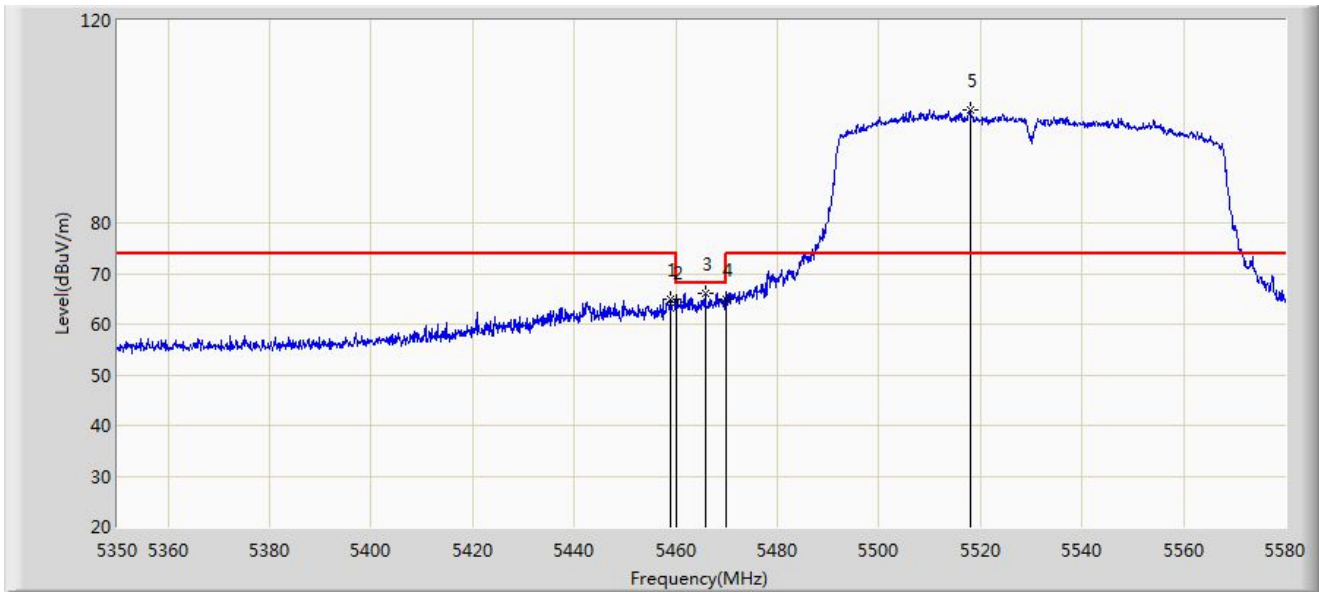


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5459.020	64.968	61.060	-9.032	74.000	3.908	PK
2		5460.000	64.435	60.531	-9.565	74.000	3.904	PK
3	*	5465.805	66.079	62.203	-2.121	68.200	3.876	PK
4		5470.000	64.836	60.980	-3.364	68.200	3.856	PK
5		5517.900	102.411	98.315	N/A	N/A	4.095	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

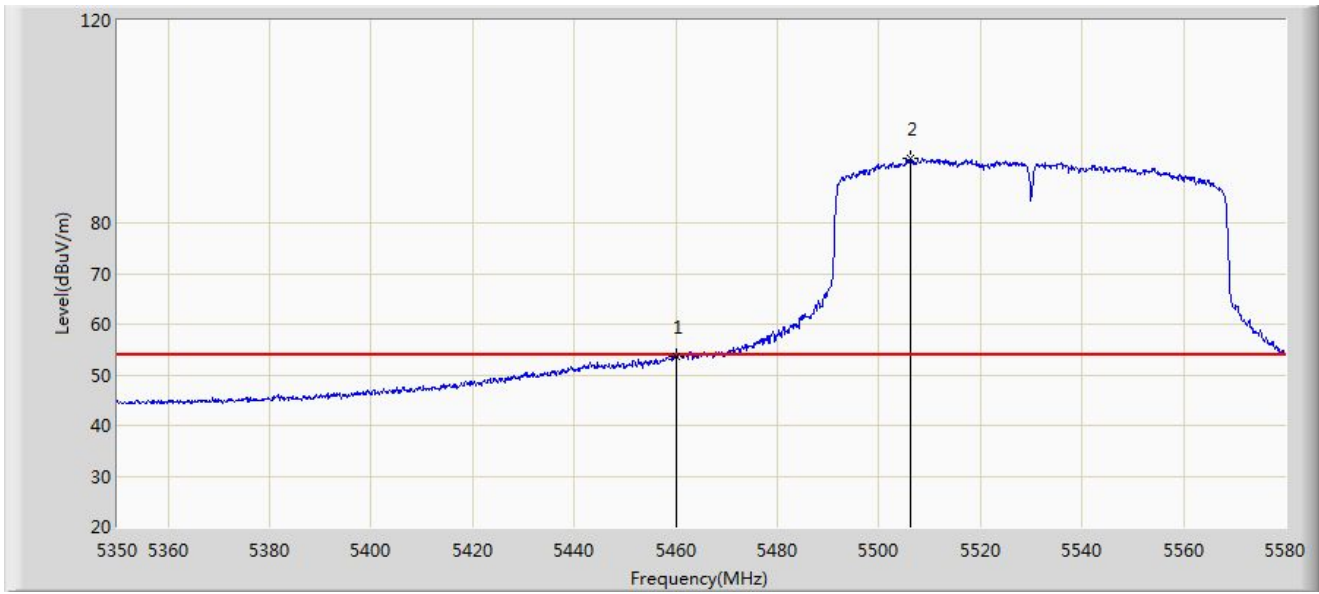


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5460.000	53.669	49.765	-0.331	54.000	3.904	AV
2		5506.170	92.695	88.490	N/A	N/A	4.205	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

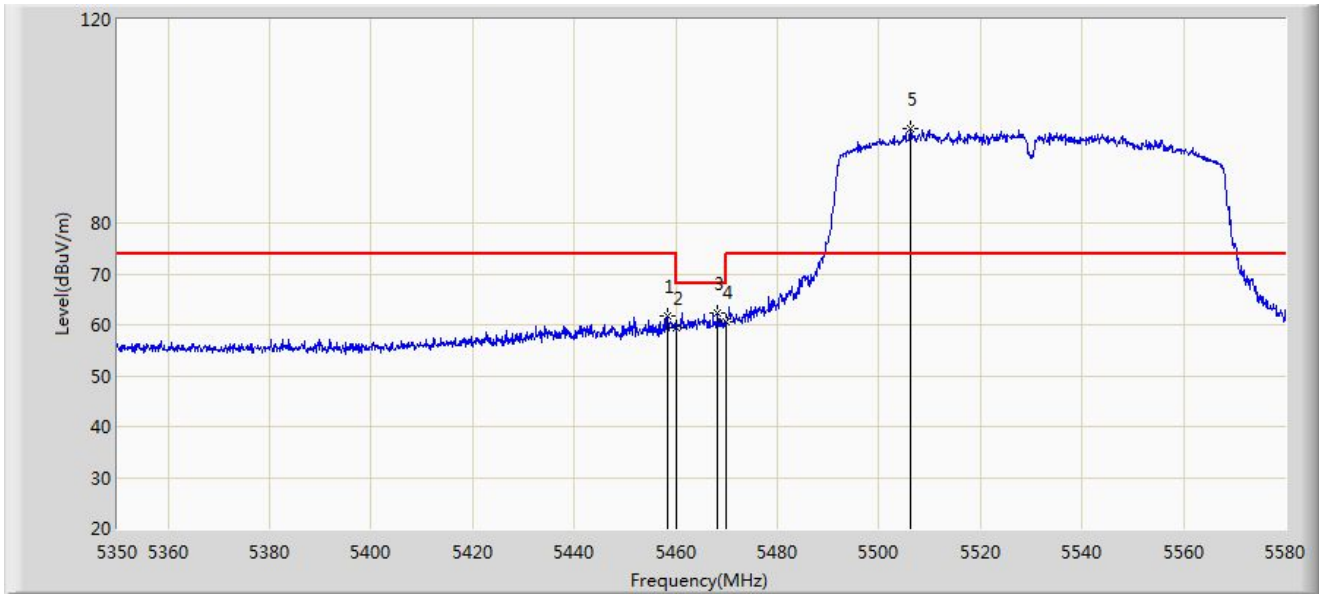


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.330	61.795	57.883	-12.205	74.000	3.912	PK
2		5460.000	59.405	55.501	-14.595	74.000	3.904	PK
3	*	5468.220	62.384	58.520	-5.816	68.200	3.864	PK
4		5470.000	60.696	56.840	-7.504	68.200	3.856	PK
5		5506.170	98.532	94.327	N/A	N/A	4.205	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

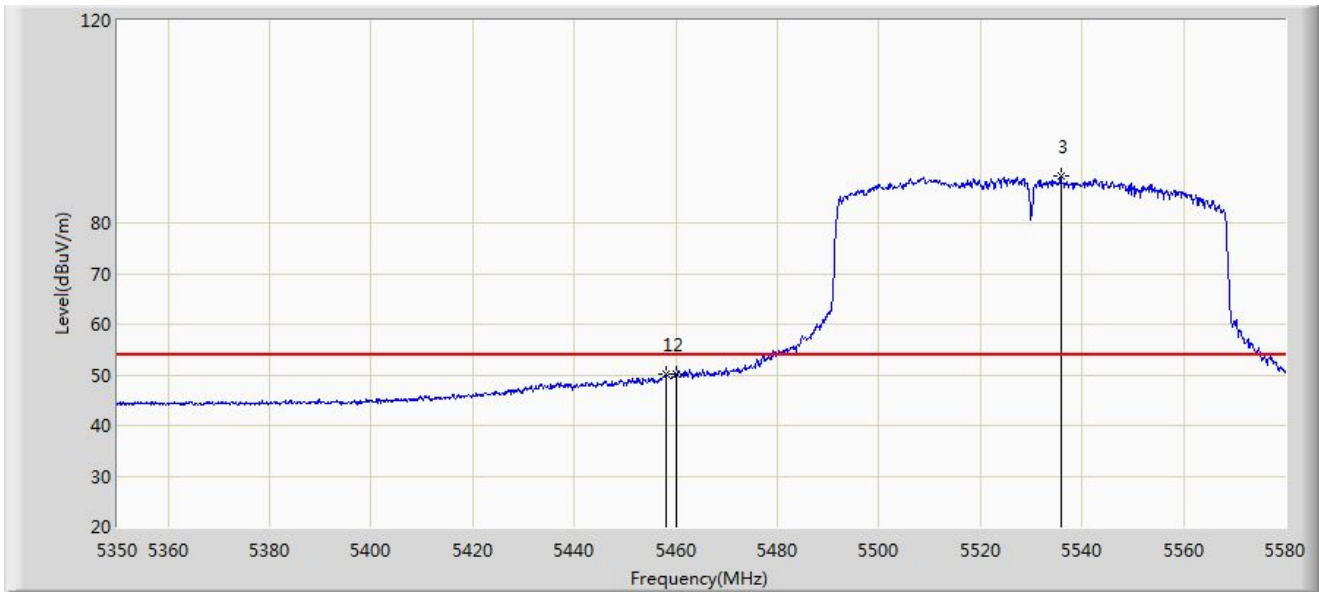


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5458.100	50.077	46.164	-3.923	54.000	3.913	AV
2		5460.000	50.008	46.104	-3.992	54.000	3.904	AV
3		5535.840	89.273	85.335	N/A	N/A	3.938	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

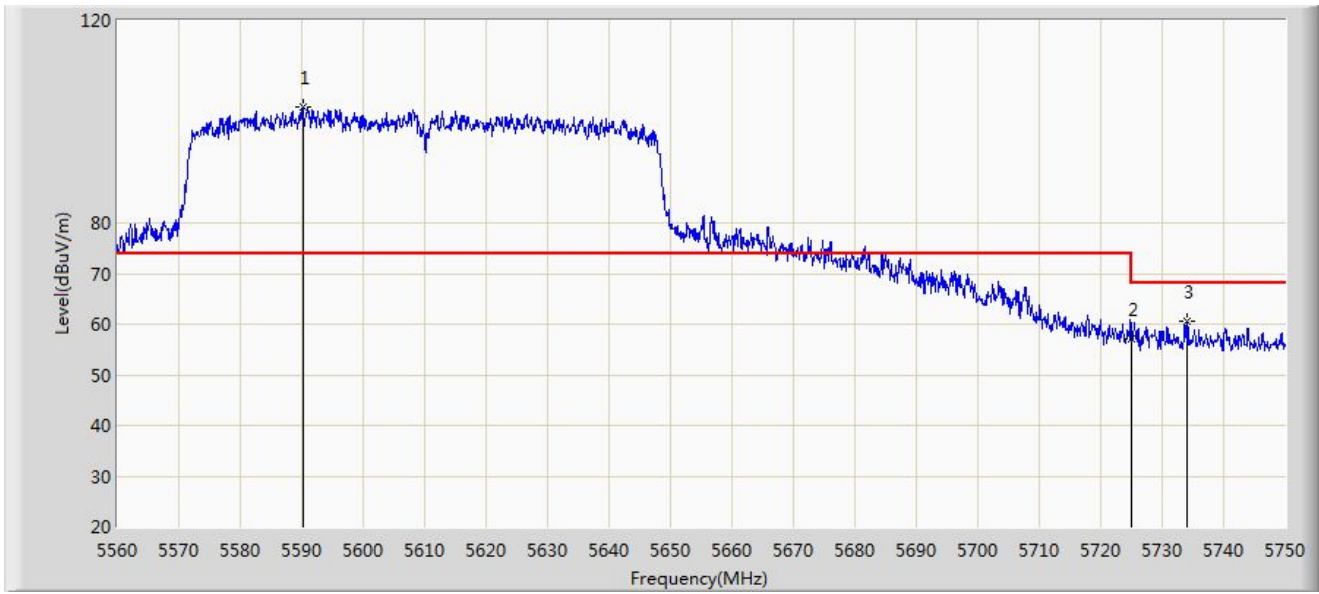


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5590.210	103.018	98.281	N/A	N/A	4.737	PK
2		5725.000	57.192	51.671	-11.008	68.200	5.521	PK
3	*	5734.135	60.638	55.051	-7.562	68.200	5.586	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.209_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

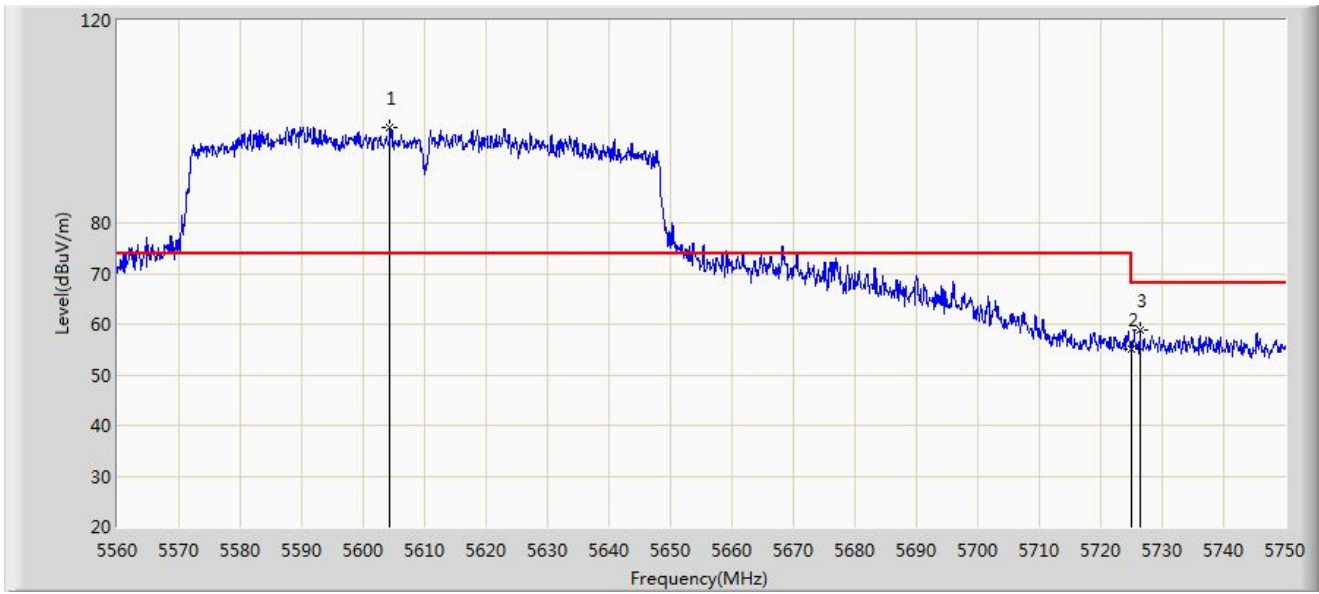


No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1		5604.365	98.848	94.279	N/A	N/A	4.569	PK
2		5725.000	55.066	49.545	-13.134	68.200	5.521	PK
3	*	5726.440	58.909	53.370	-9.291	68.200	5.540	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

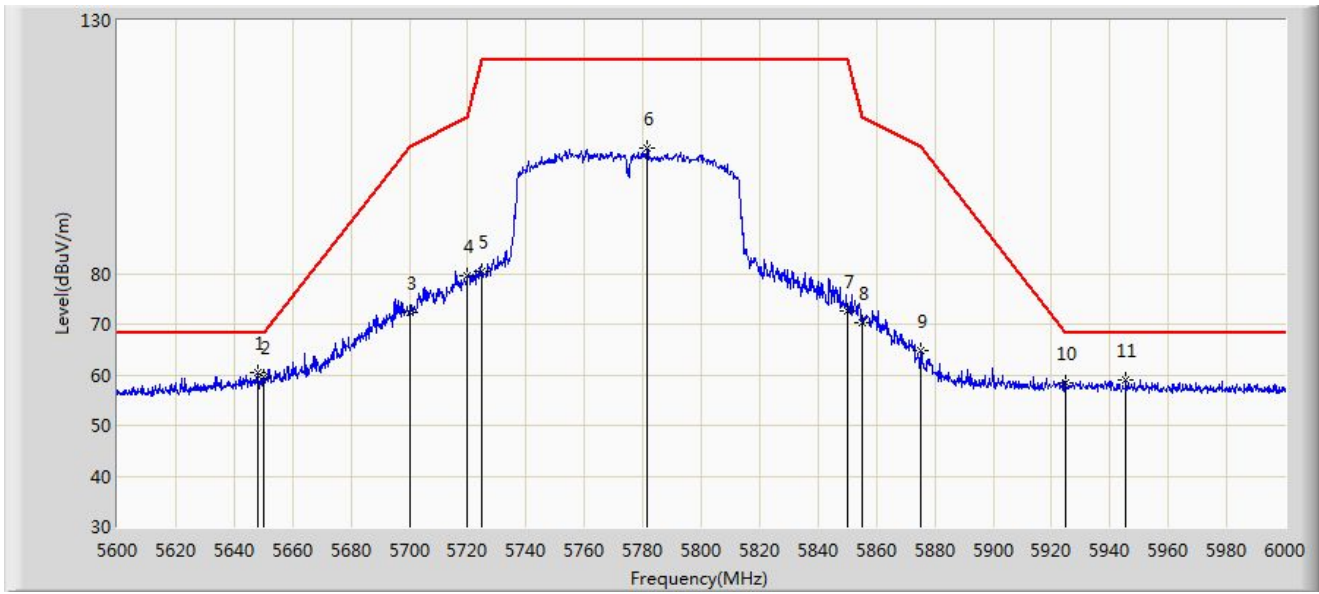


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5648.000	60.353	55.154	-7.847	68.200	5.199	PK
2		5650.000	59.684	54.462	-8.516	68.200	5.222	PK
3		5700.000	72.458	67.277	-32.742	105.200	5.181	PK
4		5720.000	79.508	74.069	-31.292	110.800	5.439	PK
5		5725.000	80.508	74.987	-41.692	122.200	5.521	PK
6		5781.600	104.764	99.116	N/A	N/A	5.648	PK
7		5850.000	72.510	66.790	-49.690	122.200	5.720	PK
8		5855.000	70.273	64.471	-40.527	110.800	5.802	PK
9		5875.000	64.797	58.848	-40.403	105.200	5.949	PK
10		5925.000	58.322	52.262	-9.878	68.200	6.060	PK
11		5945.400	59.062	53.066	-9.138	68.200	5.996	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

Site: WZ-AC2	Test Date: 2022-08-30
Limit: FCC_Part15.407_RE(3m)	Engineer: Lucas Wang
Probe: BBHA9120D_1457_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

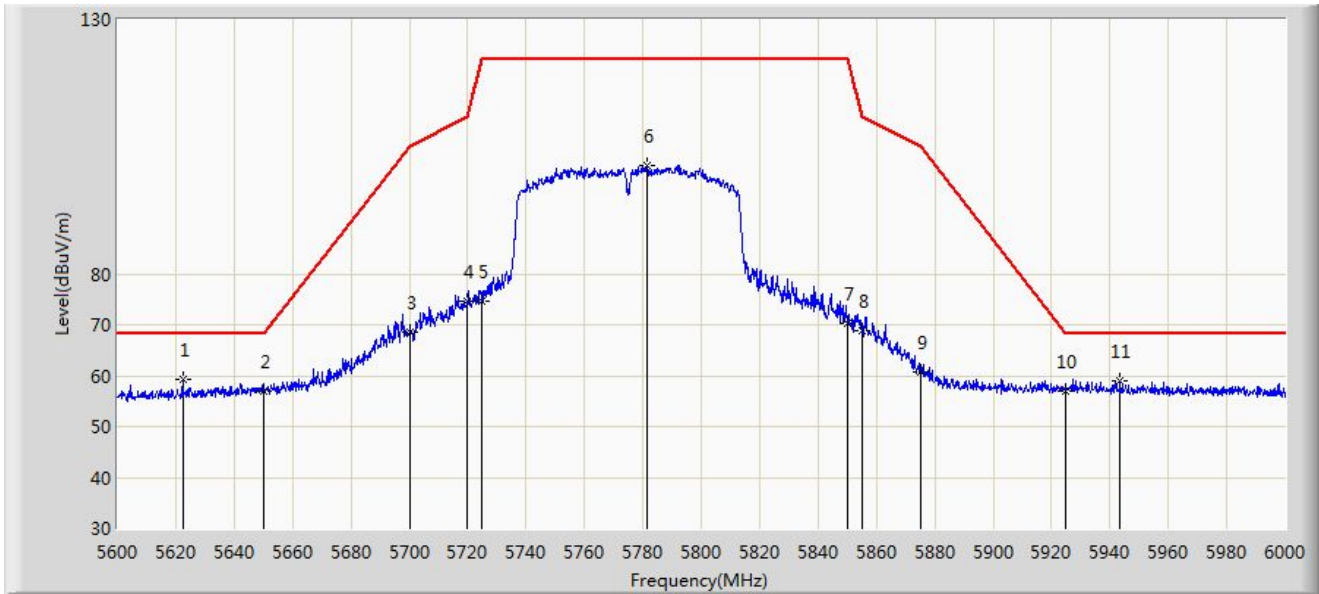

No	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1	*	5622.400	59.281	54.582	-8.919	68.200	4.699	PK
2		5650.000	57.074	51.852	-11.126	68.200	5.222	PK
3		5700.000	68.586	63.405	-36.614	105.200	5.181	PK
4		5720.000	74.662	69.223	-36.138	110.800	5.439	PK
5		5725.000	74.709	69.188	-47.491	122.200	5.521	PK
6		5781.600	101.421	95.773	N/A	N/A	5.648	PK
7		5850.000	70.310	64.590	-51.890	122.200	5.720	PK
8		5855.000	68.847	63.045	-41.953	110.800	5.802	PK
9		5875.000	60.653	54.704	-44.547	105.200	5.949	PK
10		5925.000	56.961	50.901	-11.239	68.200	6.060	PK
11		5943.600	59.049	53.025	-9.151	68.200	6.024	PK


Note 1: "*" , means this data is the worst emission level.

Note 2: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB).

A.9 AC Conducted Emissions Test Result

Site: WZ-SR2	Date: 2022-09-09
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off	Polarity: Line
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

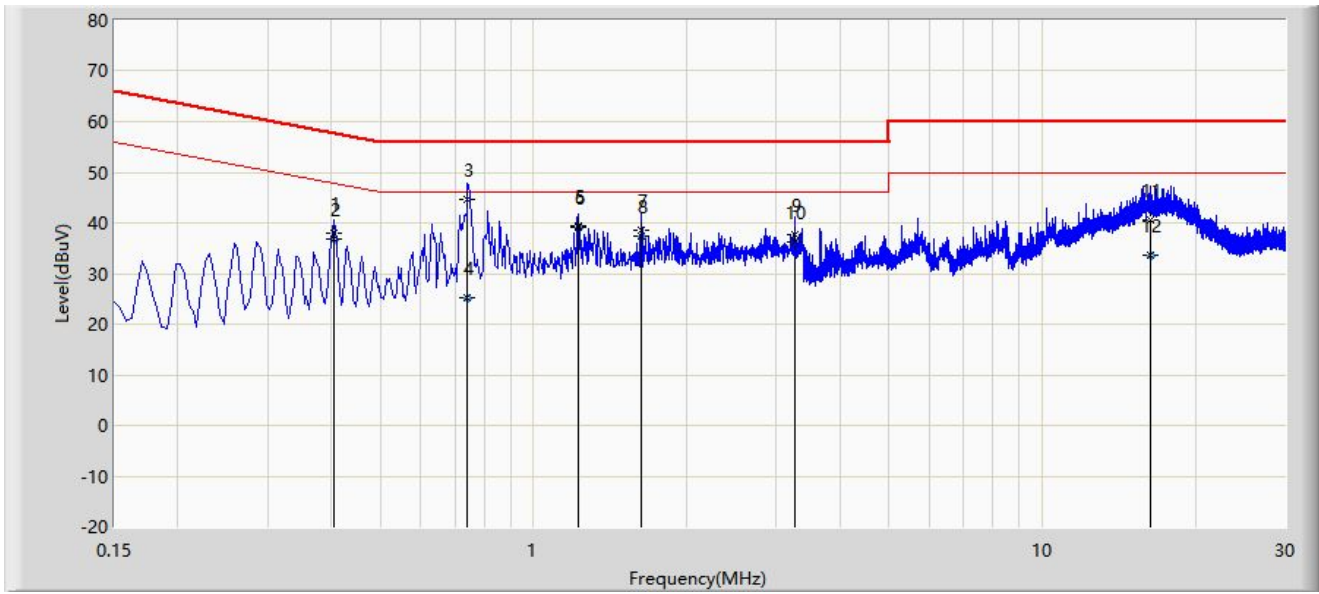


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.406	38.011	28.204	-19.719	57.730	9.806	QP
2		0.406	36.871	27.064	-10.859	47.730	9.806	AV
3		0.742	44.678	34.839	-11.322	56.000	9.839	QP
4		0.742	25.254	15.414	-20.746	46.000	9.839	AV
5		1.222	39.544	29.694	-16.456	56.000	9.850	QP
6	*	1.222	38.993	29.143	-7.007	46.000	9.850	AV
7		1.630	38.542	28.692	-17.458	56.000	9.850	QP
8		1.630	37.404	27.554	-8.596	46.000	9.850	AV
9		3.258	37.769	27.697	-18.231	56.000	10.072	QP
10		3.258	36.294	26.222	-9.706	46.000	10.072	AV
11		16.258	40.588	29.905	-19.412	60.000	10.684	QP
12		16.258	33.621	22.938	-16.379	50.000	10.684	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: WZ-SR2	Date: 2022-09-09
Limit: FCC_Part15.207_CE_AC Power	Engineer: Alin Zhou
Probe: ENV216_101683_Filter Off	Polarity: Neutral
EUT: Wireless Streaming Speaker	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

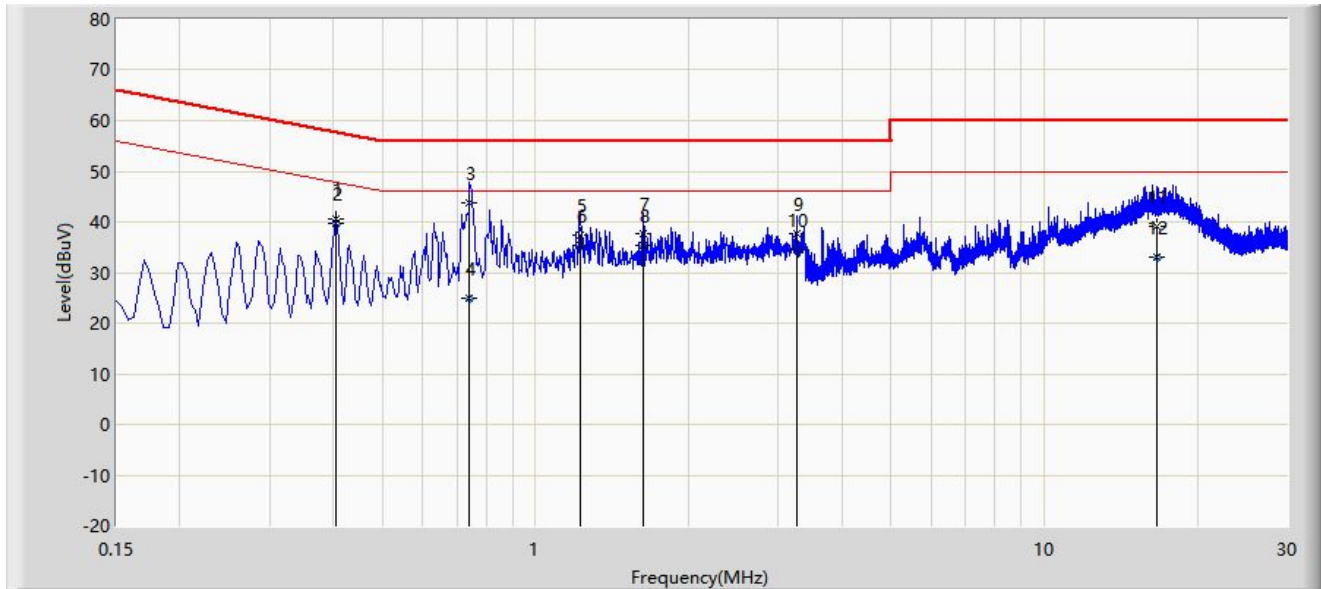

No	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1		0.406	40.438	30.634	-17.291	57.730	9.804	QP
2	*	0.406	39.692	29.888	-8.038	47.730	9.804	AV
3		0.742	43.854	34.022	-12.146	56.000	9.832	QP
4		0.742	24.878	15.046	-21.122	46.000	9.832	AV
5		1.222	37.325	27.467	-18.675	56.000	9.858	QP
6		1.222	35.243	25.385	-10.757	46.000	9.858	AV
7		1.630	37.731	27.877	-18.269	56.000	9.854	QP
8		1.630	35.358	25.504	-10.642	46.000	9.854	AV
9		3.258	37.579	27.511	-18.421	56.000	10.068	QP
10		3.258	34.462	24.394	-11.538	46.000	10.068	AV
11		16.690	39.000	28.322	-21.000	60.000	10.677	QP
12		16.690	33.155	22.478	-16.845	50.000	10.677	AV

Note 1: "*" , means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Appendix B – Test Setup Photograph

Refer to “2206RSU013-UT” file.

Appendix C – EUT Photograph

Refer to “2206RSU013-UE” file.

_____ The End _____