


Site: WZ-AC2	Time: 2022/01/29 - 00:20
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

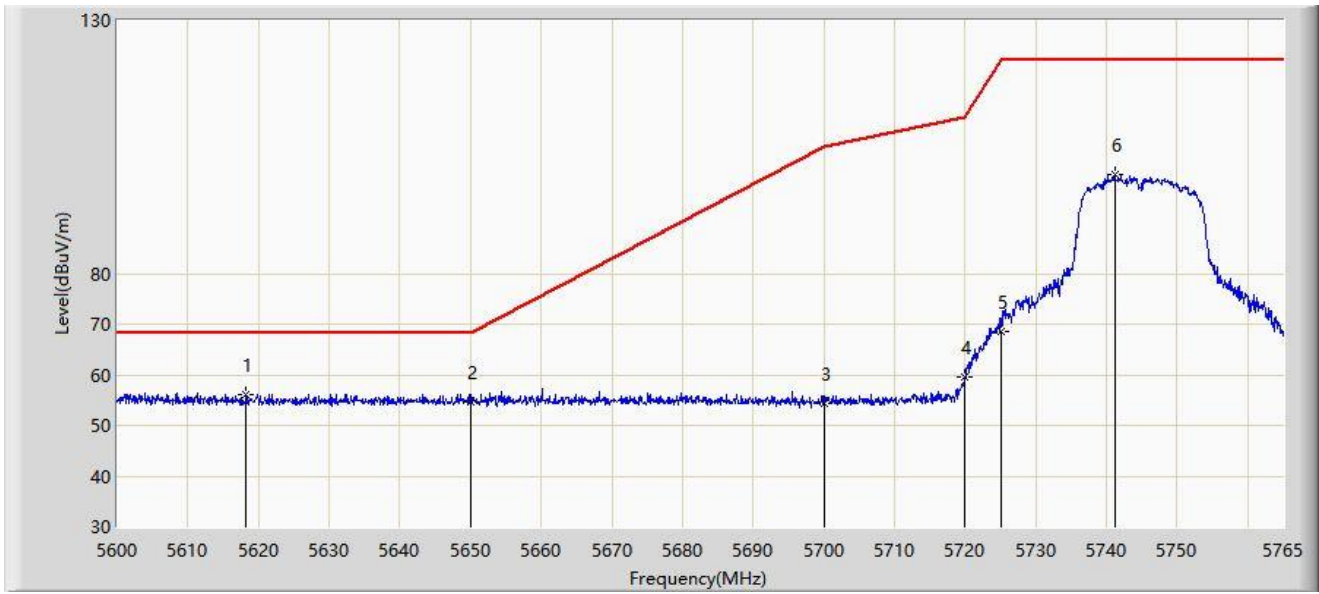


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5618.232	56.072	51.523	-12.128	68.200	4.549	PK
2			5650.000	54.597	49.786	-13.603	68.200	4.810	PK
3			5700.000	54.330	49.336	-50.870	105.200	4.993	PK
4			5720.000	59.708	54.456	-51.092	110.800	5.252	PK
5			5725.000	68.634	63.268	-53.566	122.200	5.366	PK
6			5741.240	99.678	94.184	N/A	N/A	5.494	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:23
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

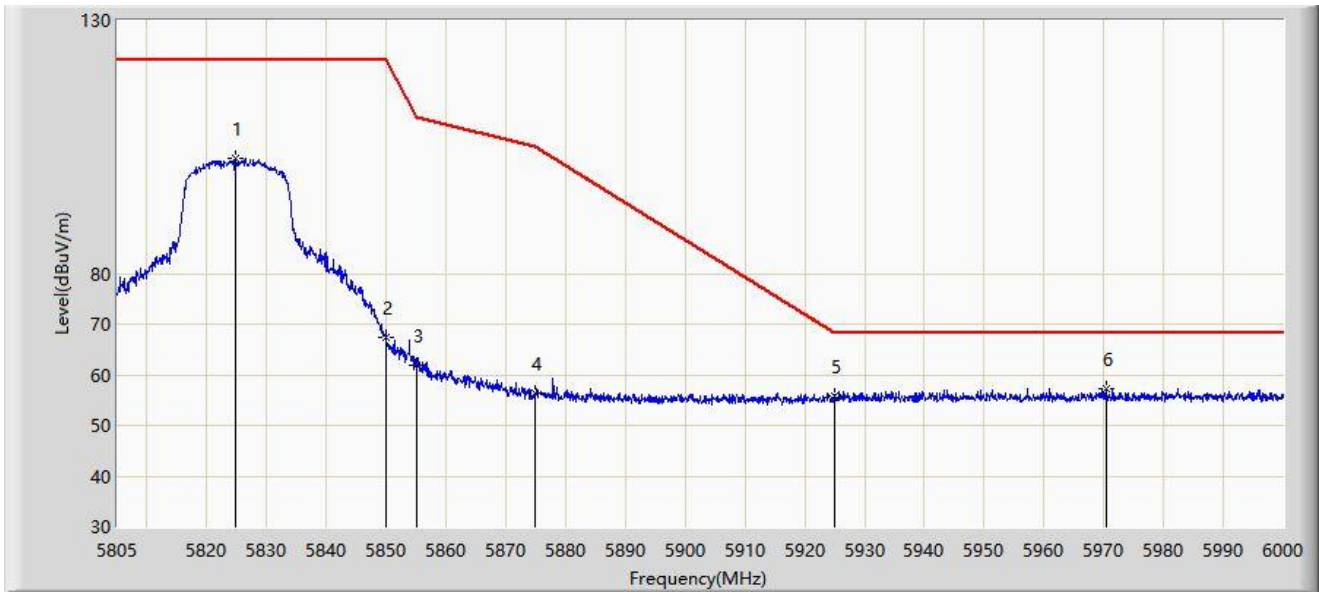


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5824.792	102.702	96.995	N/A	N/A	5.706	PK
2			5850.000	67.381	61.623	-54.819	122.200	5.758	PK
3			5855.000	61.905	56.119	-48.895	110.800	5.787	PK
4			5875.000	56.471	50.567	-48.729	105.200	5.904	PK
5			5925.000	55.880	49.860	-12.320	68.200	6.020	PK
6		*	5970.360	57.343	51.131	-10.857	68.200	6.212	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:24
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

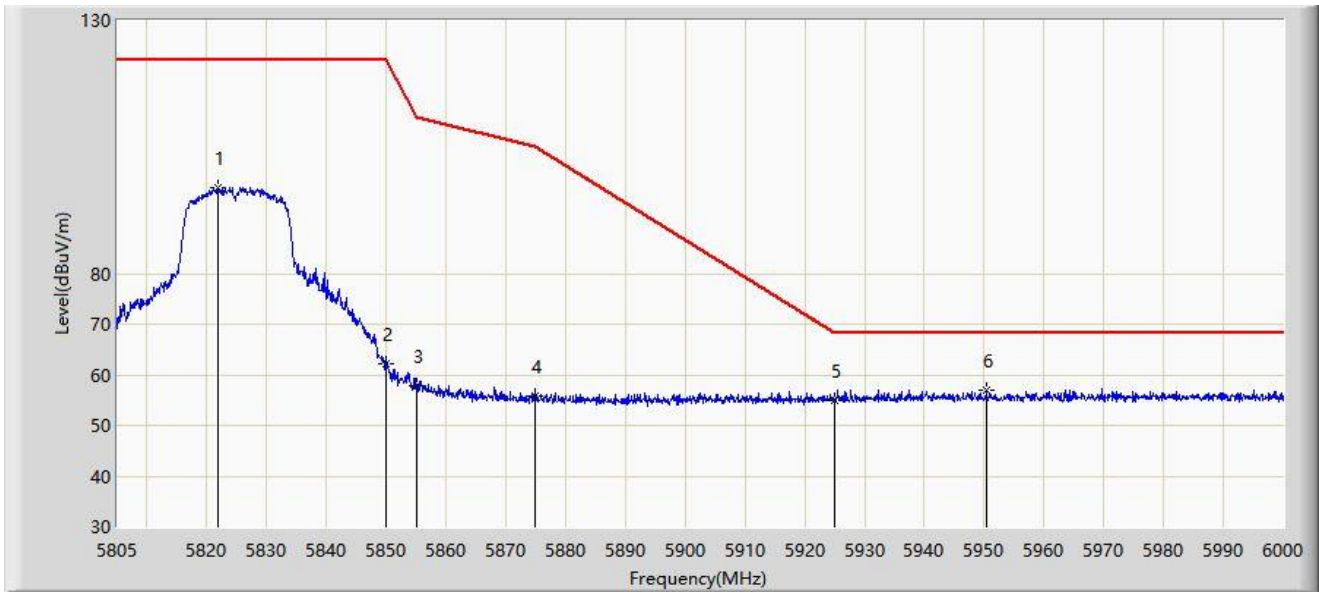


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5821.868	97.090	91.379	N/A	N/A	5.711	PK
2			5850.000	62.212	56.454	-59.988	122.200	5.758	PK
3			5855.000	57.717	51.931	-53.083	110.800	5.787	PK
4			5875.000	55.851	49.947	-49.349	105.200	5.904	PK
5			5925.000	55.050	49.030	-13.150	68.200	6.020	PK
6		*	5950.373	56.877	50.573	-11.323	68.200	6.304	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

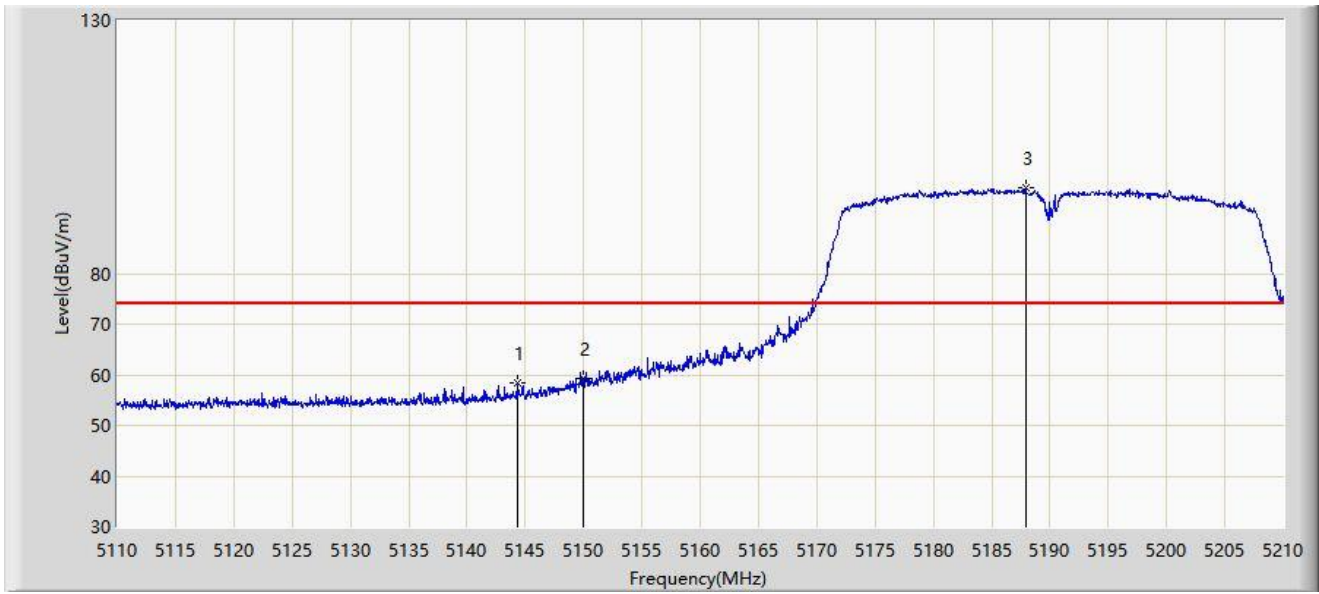


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5144.300	58.380	54.194	-15.620	74.000	4.186	PK
2			5150.000	59.212	55.040	-14.788	74.000	4.173	PK
3		*	5187.950	97.013	93.391	N/A	N/A	3.623	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

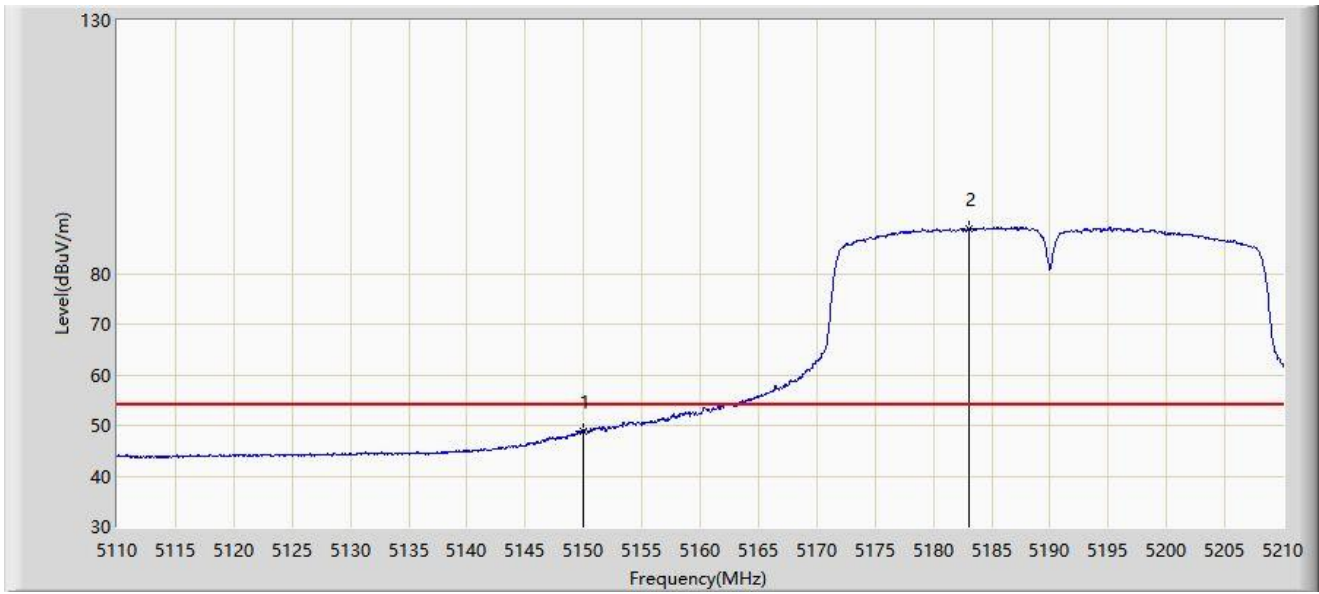


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5150.000	48.955	44.783	-5.045	54.000	4.173	AV
2		*	5183.000	88.889	85.264	N/A	N/A	3.624	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

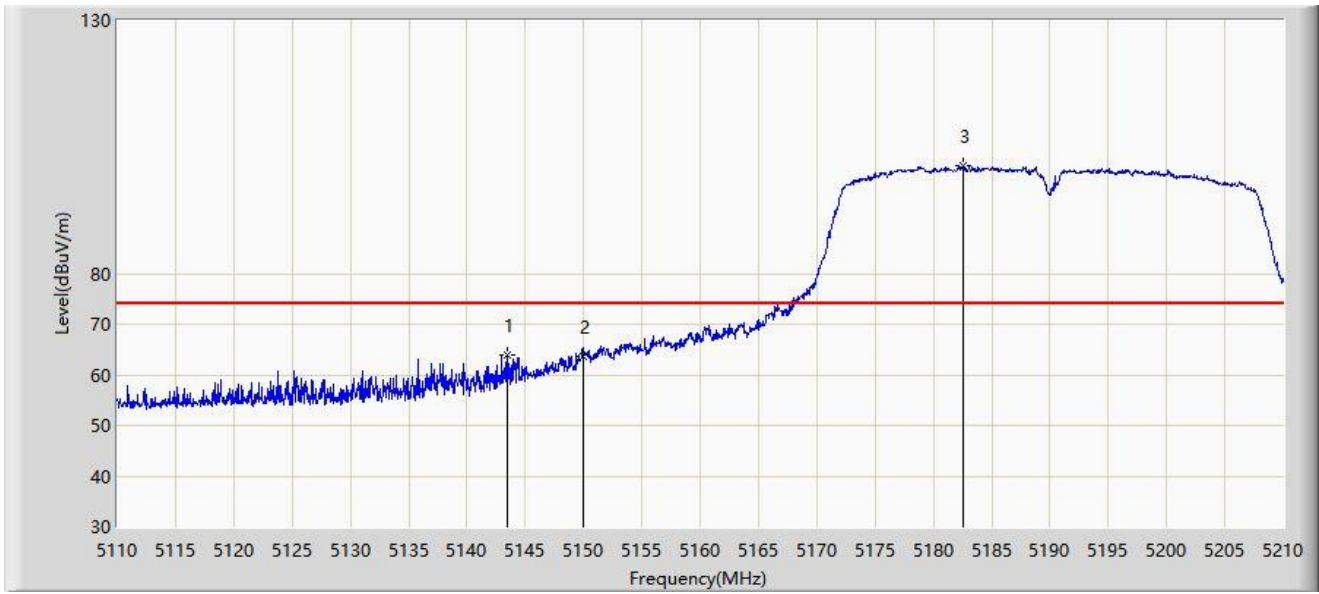


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5143.400	63.826	59.646	-10.174	74.000	4.180	PK
2			5150.000	63.567	59.395	-10.433	74.000	4.173	PK
3		*	5182.500	101.380	97.755	N/A	N/A	3.625	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

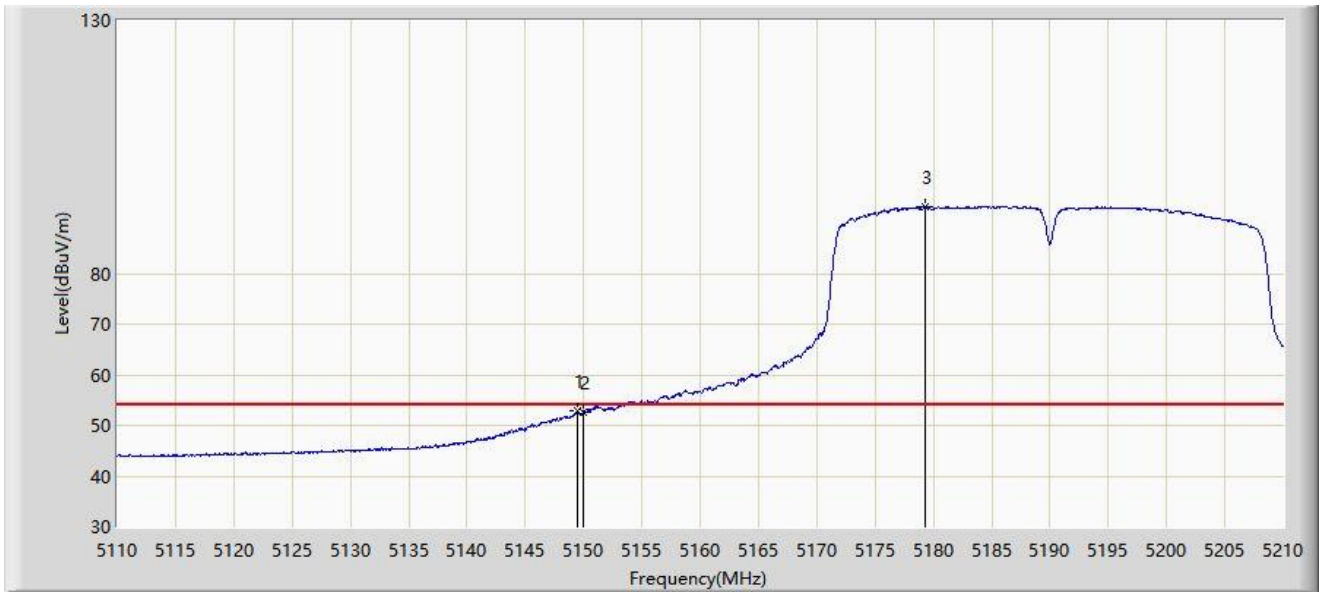


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5149.500	52.823	48.642	-1.177	54.000	4.181	AV
2			5150.000	52.604	48.432	-1.396	54.000	4.173	AV
3		*	5179.350	93.244	89.557	N/A	N/A	3.686	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:46
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

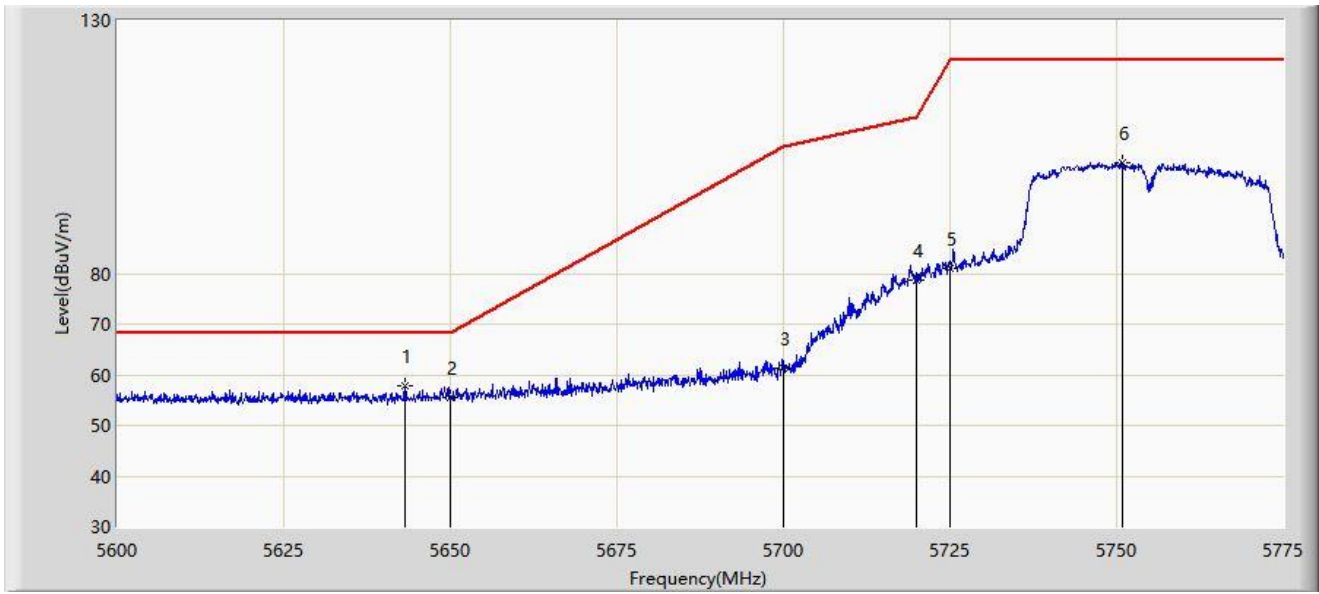


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5643.138	57.726	53.004	-10.474	68.200	4.722	PK
2			5650.000	55.473	50.662	-12.727	68.200	4.810	PK
3			5700.000	61.286	56.292	-43.914	105.200	4.993	PK
4			5720.000	78.715	73.463	-32.085	110.800	5.252	PK
5			5725.000	80.901	75.535	-41.299	122.200	5.366	PK
6			5750.937	101.934	96.512	N/A	N/A	5.423	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:47
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

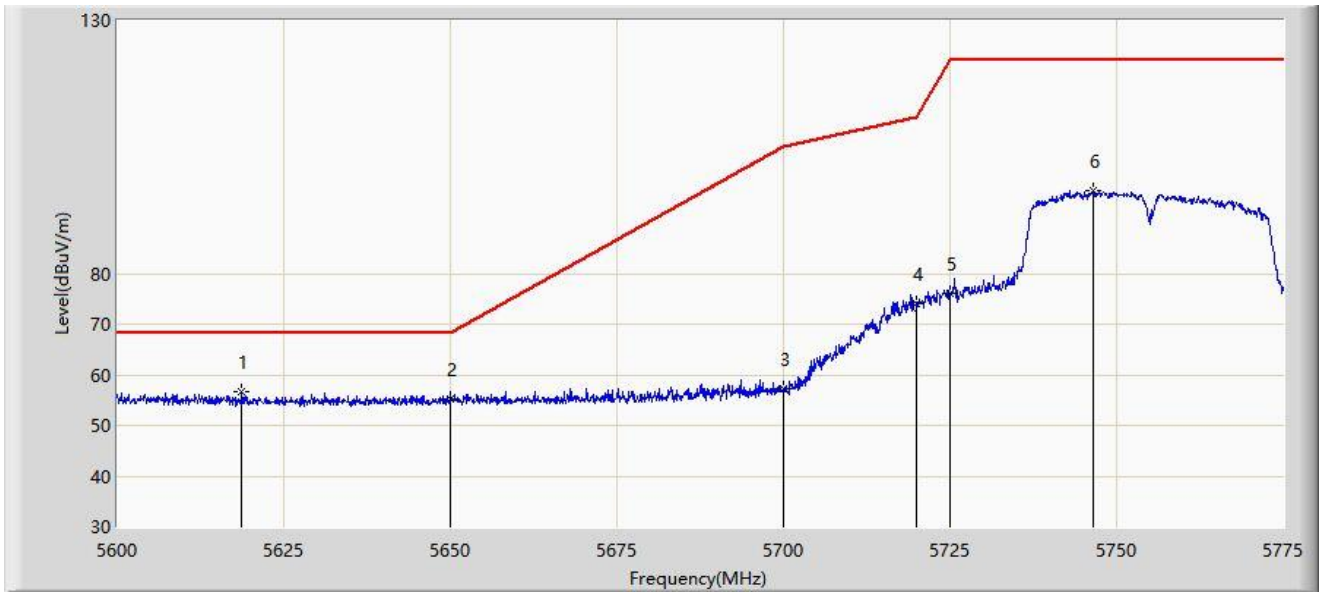


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5618.725	56.726	52.181	-11.474	68.200	4.545	PK
2			5650.000	55.277	50.466	-12.923	68.200	4.810	PK
3			5700.000	57.277	52.283	-47.923	105.200	4.993	PK
4			5720.000	74.103	68.851	-36.697	110.800	5.252	PK
5			5725.000	76.003	70.637	-46.197	122.200	5.366	PK
6			5746.388	96.396	90.919	N/A	N/A	5.478	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:50
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

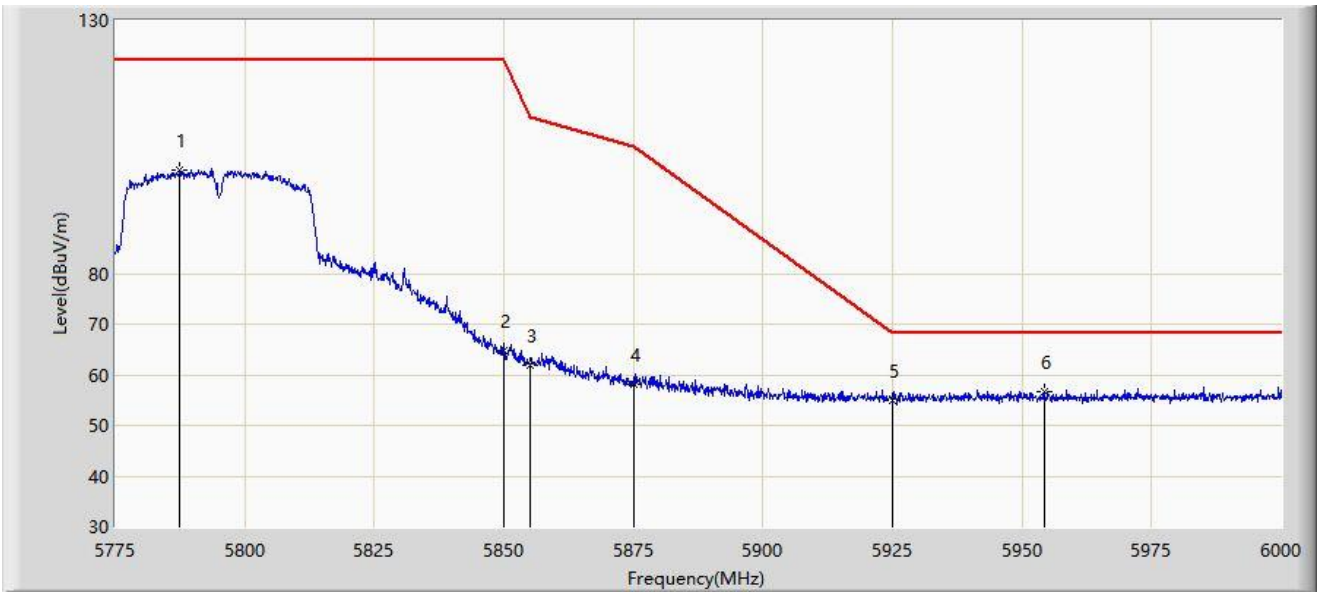


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5787.487	100.361	94.911	N/A	N/A	5.451	PK
2			5850.000	64.849	59.091	-57.351	122.200	5.758	PK
3			5855.000	61.972	56.186	-48.828	110.800	5.787	PK
4			5875.000	58.095	52.191	-47.105	105.200	5.904	PK
5			5925.000	55.037	49.017	-13.163	68.200	6.020	PK
6		*	5954.437	56.747	50.471	-11.453	68.200	6.276	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:51
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

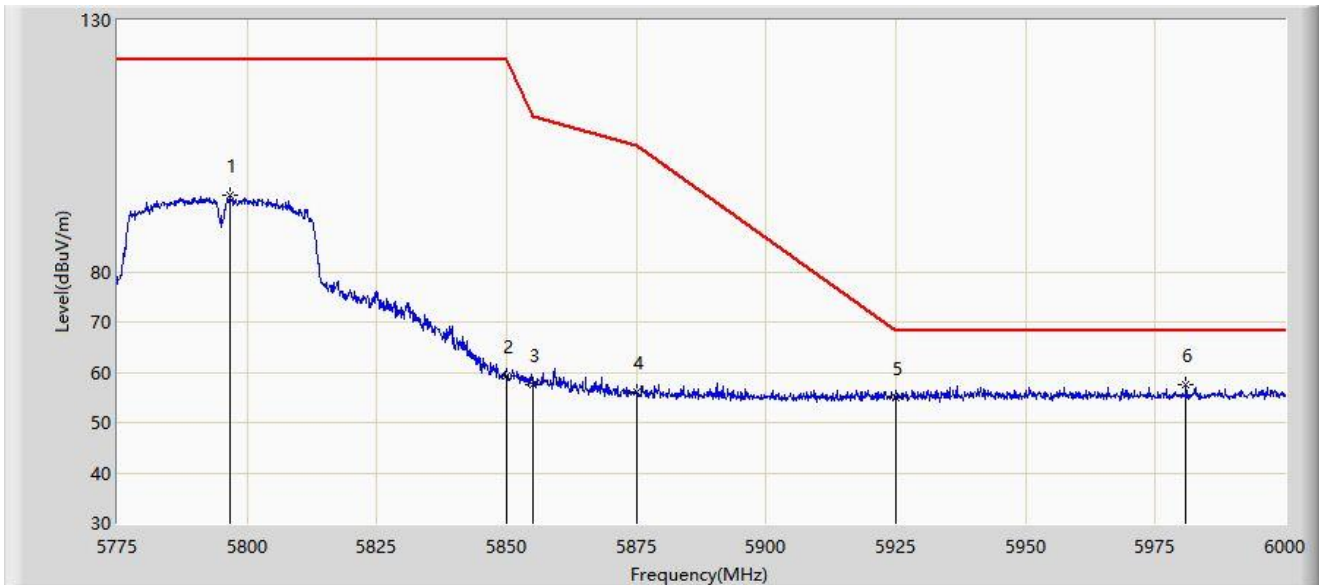


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5796.600	95.252	89.652	N/A	N/A	5.600	PK
2			5850.000	59.327	53.569	-62.873	122.200	5.758	PK
3			5855.000	57.606	51.820	-53.194	110.800	5.787	PK
4			5875.000	56.079	50.175	-49.121	105.200	5.904	PK
5			5925.000	54.980	48.960	-13.220	68.200	6.020	PK
6		*	5980.875	57.554	51.383	-10.646	68.200	6.171	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

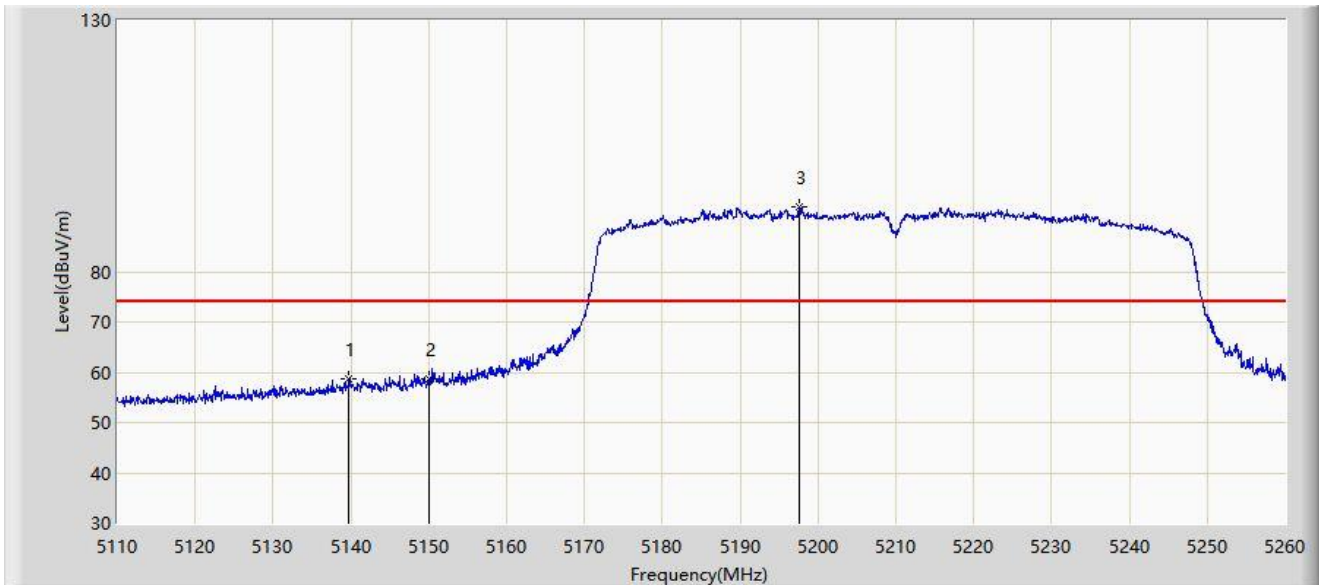


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5139.775	58.806	54.648	-15.194	74.000	4.158	PK
2			5150.000	58.782	54.610	-15.218	74.000	4.173	PK
3		*	5197.600	92.942	89.296	N/A	N/A	3.646	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

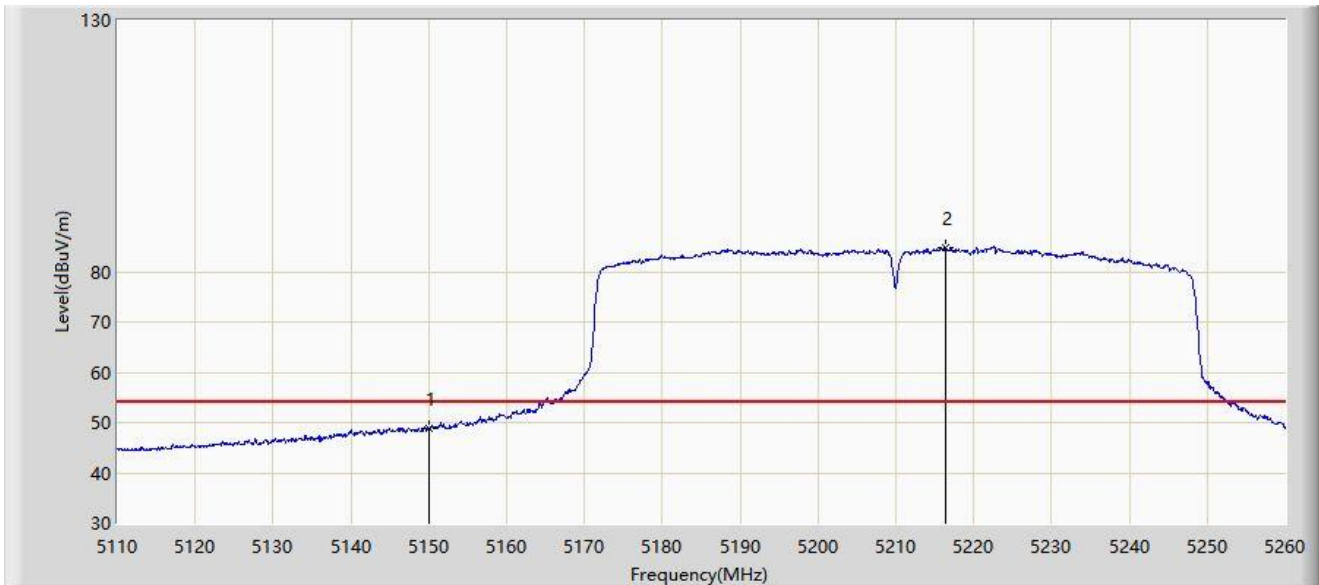


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5150.000	48.714	44.542	-5.286	54.000	4.173	AV
2		*	5216.350	84.833	80.955	N/A	N/A	3.878	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

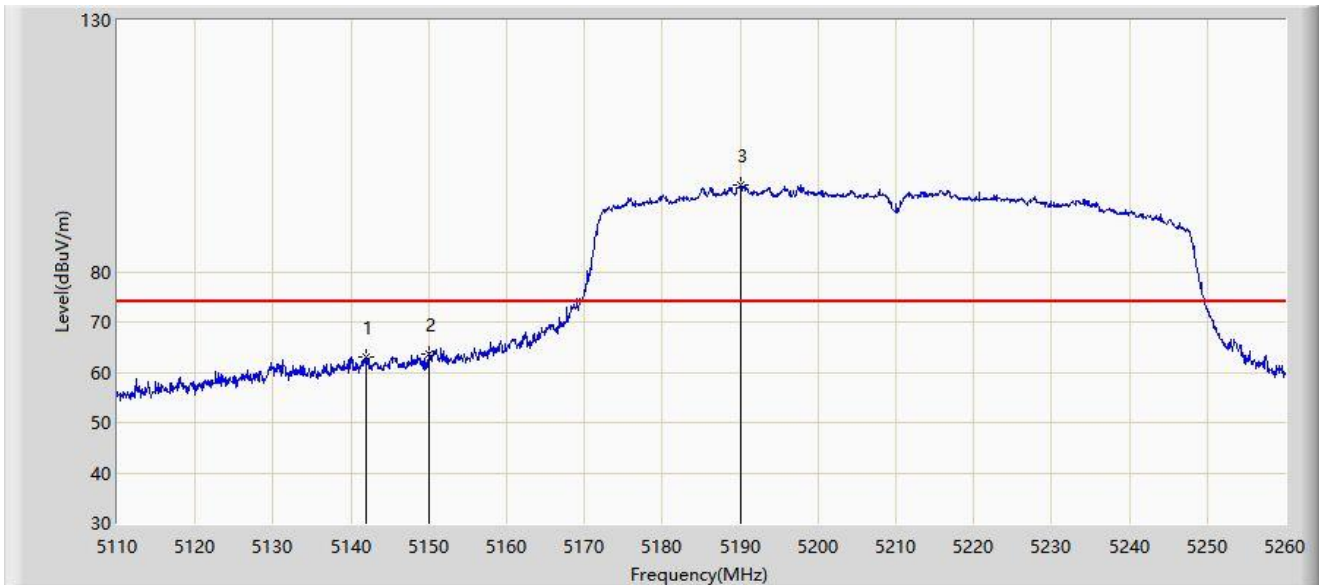


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5141.950	63.005	58.834	-10.995	74.000	4.171	PK
2			5150.000	63.610	59.438	-10.390	74.000	4.173	PK
3		*	5190.100	97.359	93.731	N/A	N/A	3.628	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 00:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

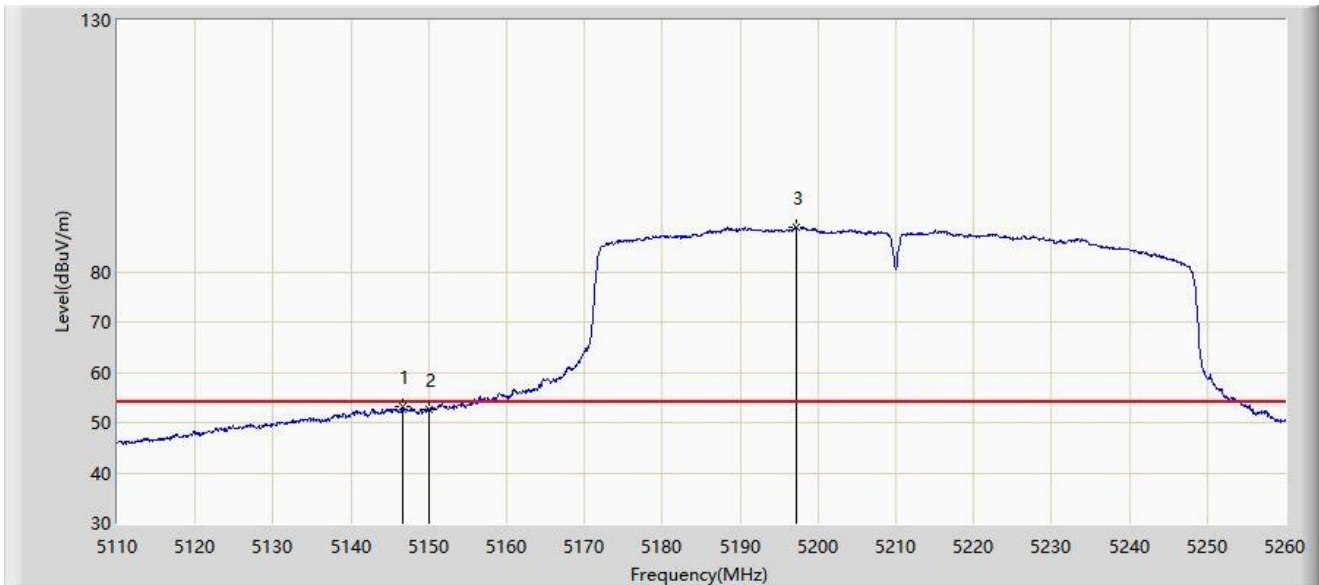


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V/m)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V/m)	Factor (dB/m)	Type
1			5146.675	53.062	48.861	-0.938	54.000	4.201	AV
2			5150.000	52.718	48.546	-1.282	54.000	4.173	AV
3		*	5197.150	88.862	85.217	N/A	N/A	3.645	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:02
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

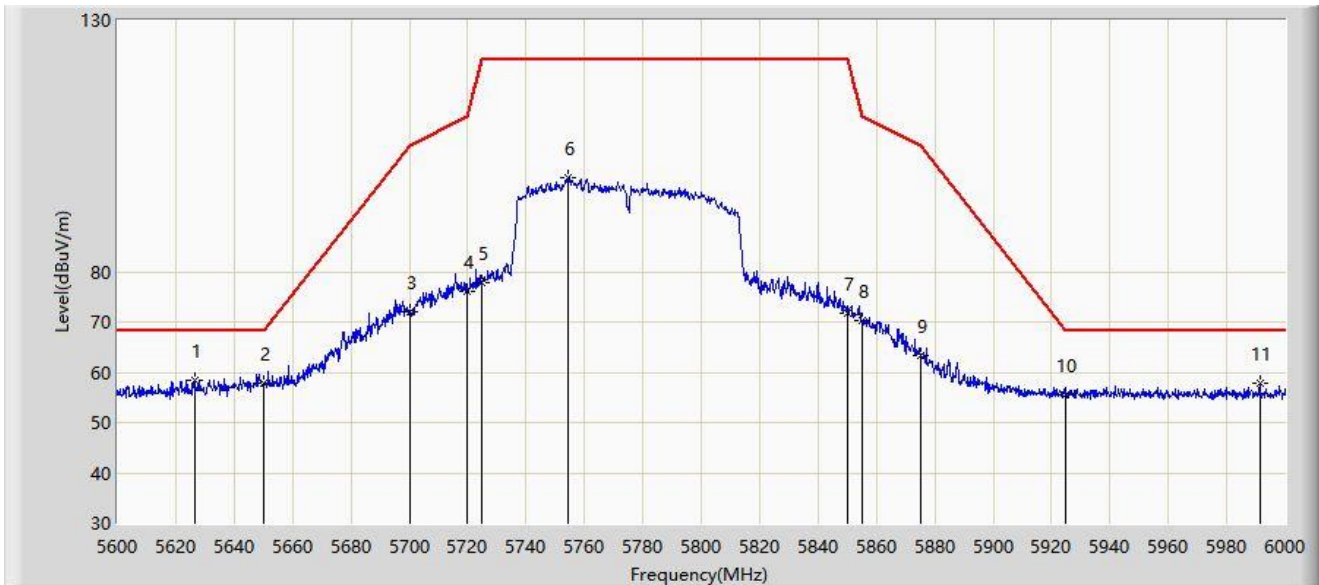


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5626.400	58.457	53.929	-9.743	68.200	4.528	PK
2			5650.000	57.922	53.111	-10.278	68.200	4.810	PK
3			5700.000	71.893	66.899	-33.307	105.200	4.993	PK
4			5720.000	76.053	70.801	-34.747	110.800	5.252	PK
5			5725.000	77.856	72.490	-44.344	122.200	5.366	PK
6			5754.600	98.837	93.458	N/A	N/A	5.379	PK
7			5850.000	71.704	65.946	-50.496	122.200	5.758	PK
8			5855.000	70.320	64.534	-40.480	110.800	5.787	PK
9			5875.000	63.281	57.377	-41.919	105.200	5.904	PK
10			5925.000	55.553	49.533	-12.647	68.200	6.020	PK
11			5991.400	57.849	51.627	-10.351	68.200	6.222	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/01/29 - 01:04
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

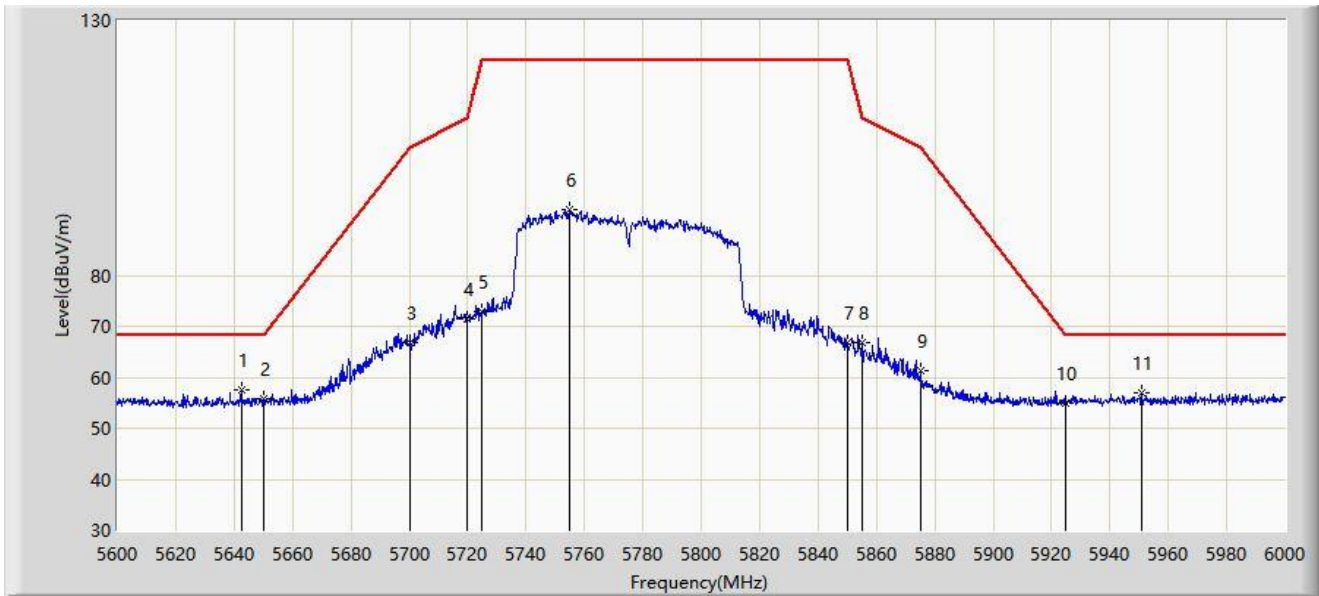


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5642.400	57.502	52.790	-10.698	68.200	4.712	PK
2			5650.000	55.826	51.015	-12.374	68.200	4.810	PK
3			5700.000	66.697	61.703	-38.503	105.200	4.993	PK
4			5720.000	71.511	66.259	-39.289	110.800	5.252	PK
5			5725.000	72.760	67.394	-49.440	122.200	5.366	PK
6			5755.000	93.028	87.654	N/A	N/A	5.373	PK
7			5850.000	66.866	61.108	-55.334	122.200	5.758	PK
8			5855.000	66.747	60.961	-44.053	110.800	5.787	PK
9			5875.000	61.281	55.377	-43.919	105.200	5.904	PK
10			5925.000	55.045	49.025	-13.155	68.200	6.020	PK
11			5950.800	56.961	50.660	-11.239	68.200	6.302	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: WZ-AC2	Time: 2022/03/11 - 19:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Hyde Yu
Probe: WZ-AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

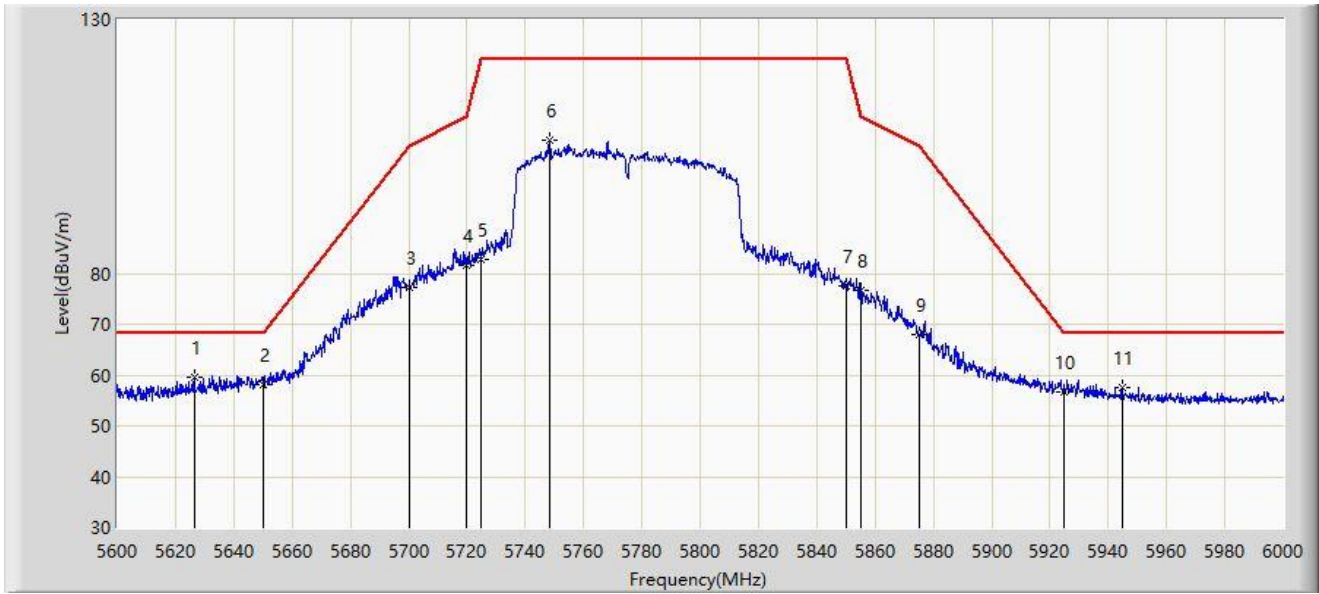

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5626.400	59.685	55.157	-8.515	68.200	4.528	PK
2			5650.000	58.258	53.447	-9.942	68.200	4.810	PK
3			5700.000	77.257	72.263	-27.943	105.200	4.993	PK
4			5720.000	81.451	76.199	-29.349	110.800	5.252	PK
5			5725.000	82.823	77.457	-39.377	122.200	5.366	PK
6			5748.400	106.231	100.778	N/A	N/A	5.453	PK
7			5850.000	77.577	71.819	-44.623	122.200	5.758	PK
8			5855.000	76.732	70.946	-34.068	110.800	5.787	PK
9			5875.000	68.061	62.157	-37.139	105.200	5.904	PK
10			5925.000	56.809	50.789	-11.391	68.200	6.020	PK
11			5944.800	57.591	51.277	-10.609	68.200	6.314	PK


Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

A.9 AC Conducted Emissions Test Result

Radio 2 Test Data - Retest Data

Site: WZ-SR2	Time: 2022/03/11 - 10:07
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5580MHz	

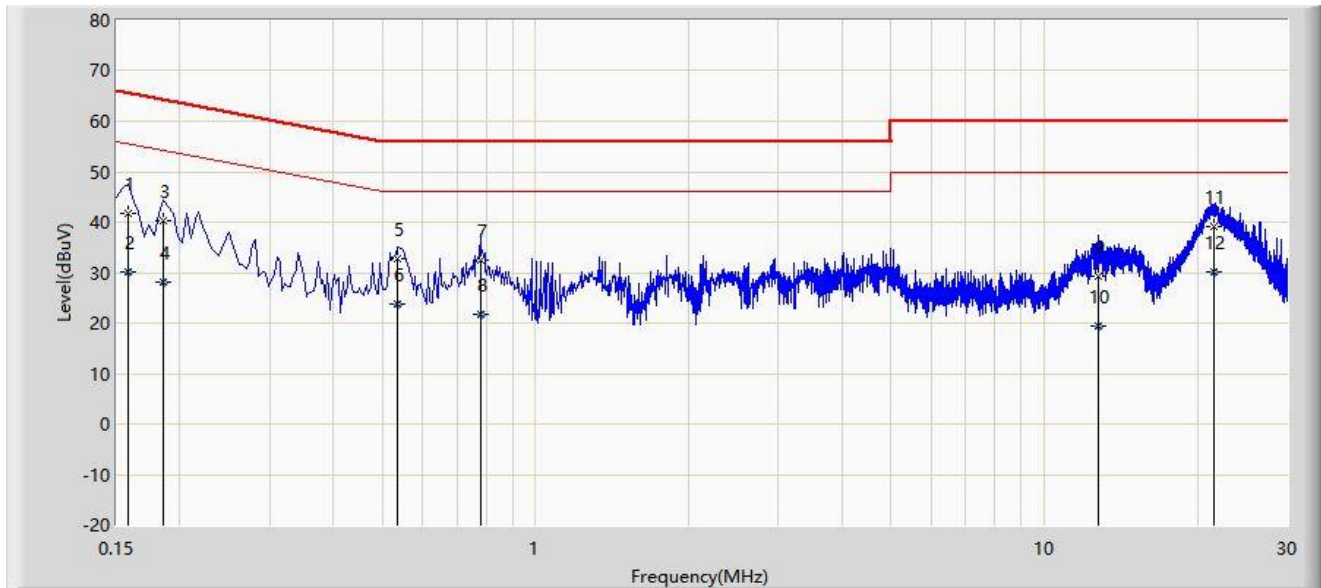


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.158	41.868	31.820	-23.700	65.568	10.048	QP
2			0.158	30.100	20.052	-25.468	55.568	10.048	AV
3			0.186	40.376	30.333	-23.837	64.213	10.043	QP
4			0.186	28.095	18.053	-26.118	54.213	10.043	AV
5			0.534	32.809	22.680	-23.191	56.000	10.129	QP
6			0.534	23.716	13.588	-22.284	46.000	10.129	AV
7			0.778	32.345	22.163	-23.655	56.000	10.182	QP
8			0.778	21.848	11.666	-24.152	46.000	10.182	AV
9			12.742	29.134	18.270	-30.866	60.000	10.863	QP
10			12.742	19.453	8.590	-30.547	50.000	10.863	AV
11			21.510	39.039	27.793	-20.961	60.000	11.246	QP
12		*	21.510	30.207	18.961	-19.793	50.000	11.246	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/03/11 - 10:16
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at channel 5580MHz	

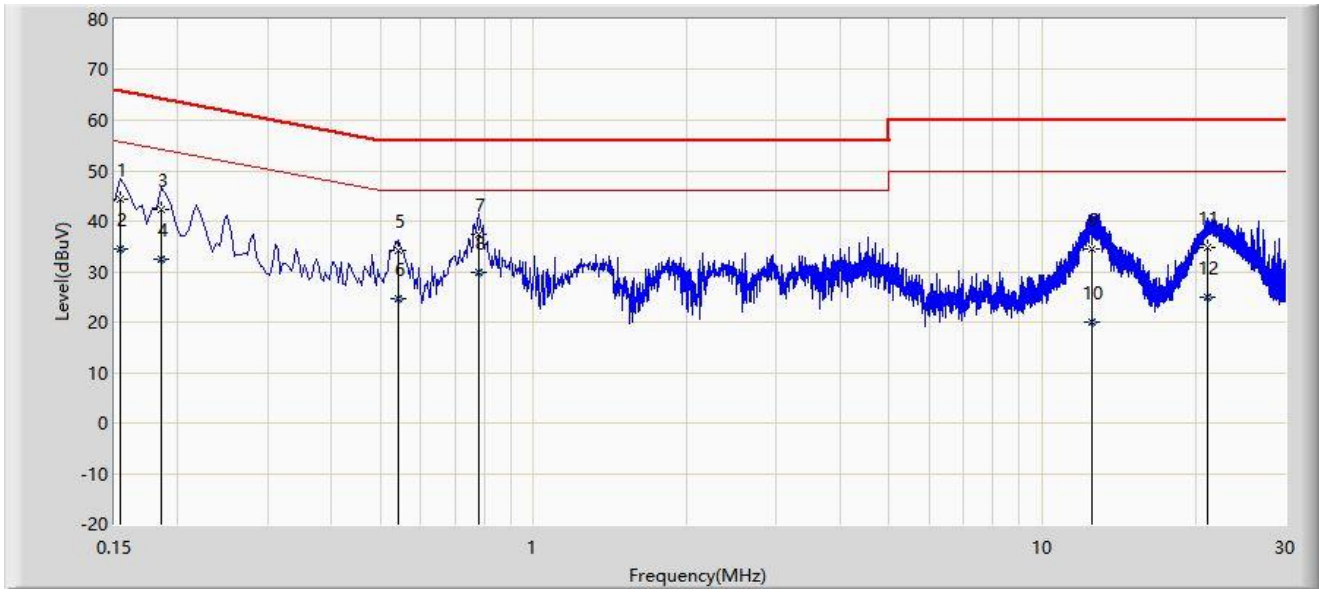


No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.154	44.408	34.038	-21.373	65.781	10.370	QP
2			0.154	34.598	24.228	-21.183	55.781	10.370	AV
3			0.186	42.462	32.121	-21.751	64.213	10.341	QP
4			0.186	32.578	22.237	-21.635	54.213	10.341	AV
5			0.542	34.132	23.744	-21.868	56.000	10.388	QP
6			0.542	24.620	14.232	-21.380	46.000	10.388	AV
7			0.782	37.251	26.818	-18.749	56.000	10.433	QP
8		*	0.782	29.893	19.460	-16.107	46.000	10.433	AV
9			12.506	34.536	23.406	-25.464	60.000	11.130	QP
10			12.506	20.128	8.998	-29.872	50.000	11.130	AV
11			21.182	34.903	23.494	-25.097	60.000	11.409	QP
12			21.182	25.067	13.658	-24.933	50.000	11.409	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Radio 3 Test Data - Original Data

Site: WZ-SR2	Time: 2022/03/11 - 10:48
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Line
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

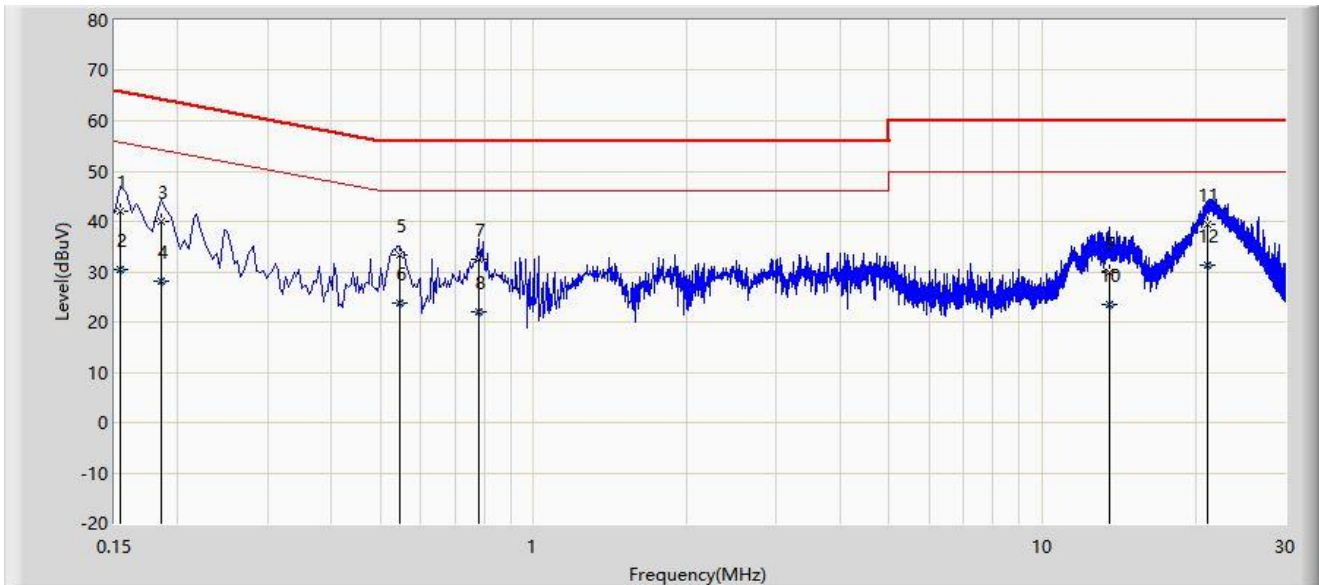


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1			0.154	41.979	31.930	-23.802	65.781	10.049	QP
2			0.154	30.455	20.406	-25.326	55.781	10.049	AV
3			0.186	39.979	29.936	-24.235	64.213	10.043	QP
4			0.186	28.156	18.113	-26.057	54.213	10.043	AV
5			0.546	33.258	23.126	-22.742	56.000	10.131	QP
6			0.546	23.768	13.637	-22.232	46.000	10.131	AV
7			0.778	32.466	22.284	-23.534	56.000	10.182	QP
8			0.778	22.038	11.856	-23.962	46.000	10.182	AV
9			13.594	29.821	18.962	-30.179	60.000	10.859	QP
10			13.594	23.406	12.547	-26.594	50.000	10.859	AV
11			21.174	39.380	28.142	-20.620	60.000	11.238	QP
12		*	21.174	31.321	20.083	-18.679	50.000	11.238	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: WZ-SR2	Time: 2022/03/11 - 10:53
Limit: FCC_Part15.207_CE_AC Power	Engineer: Helen Han
Probe: ENV216_101683_Filter Off_C	Polarity: Neutral
EUT: Wireless Streaming Sound System	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 5230MHz	

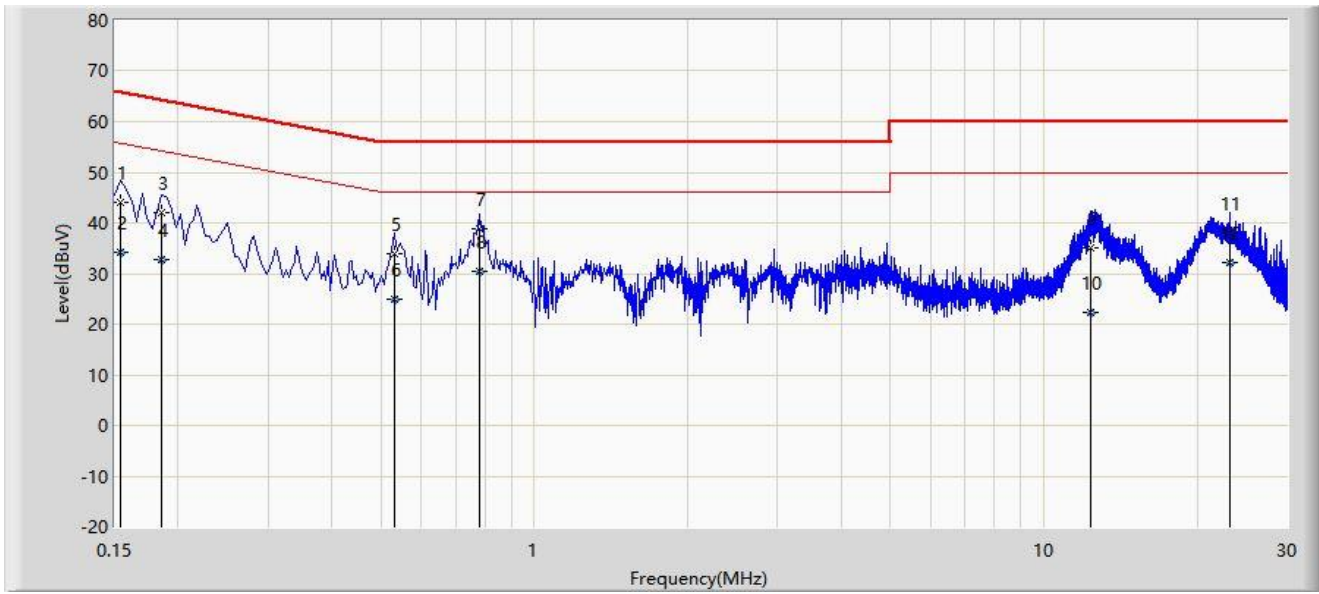

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.154	44.119	33.749	-21.662	65.781	10.370	QP
2			0.154	34.191	23.821	-21.590	55.781	10.370	AV
3			0.186	42.074	31.732	-22.140	64.213	10.341	QP
4			0.186	32.623	22.282	-21.590	54.213	10.341	AV
5			0.530	33.820	23.434	-22.180	56.000	10.385	QP
6			0.530	24.881	14.495	-21.119	46.000	10.385	AV
7			0.778	38.732	28.300	-17.268	56.000	10.432	QP
8		*	0.778	30.397	19.966	-15.603	46.000	10.432	AV
9			12.386	35.024	23.894	-24.976	60.000	11.130	QP
10			12.386	22.343	11.213	-27.657	50.000	11.130	AV
11			23.126	37.831	26.325	-22.169	60.000	11.506	QP
12			23.126	32.270	20.764	-17.730	50.000	11.506	AV

Note: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2105RSU032-UT” file.

Appendix C – EUT Photograph

Refer to “2105RSU032-UE” file.

————— The End —————