


Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5670MHz	

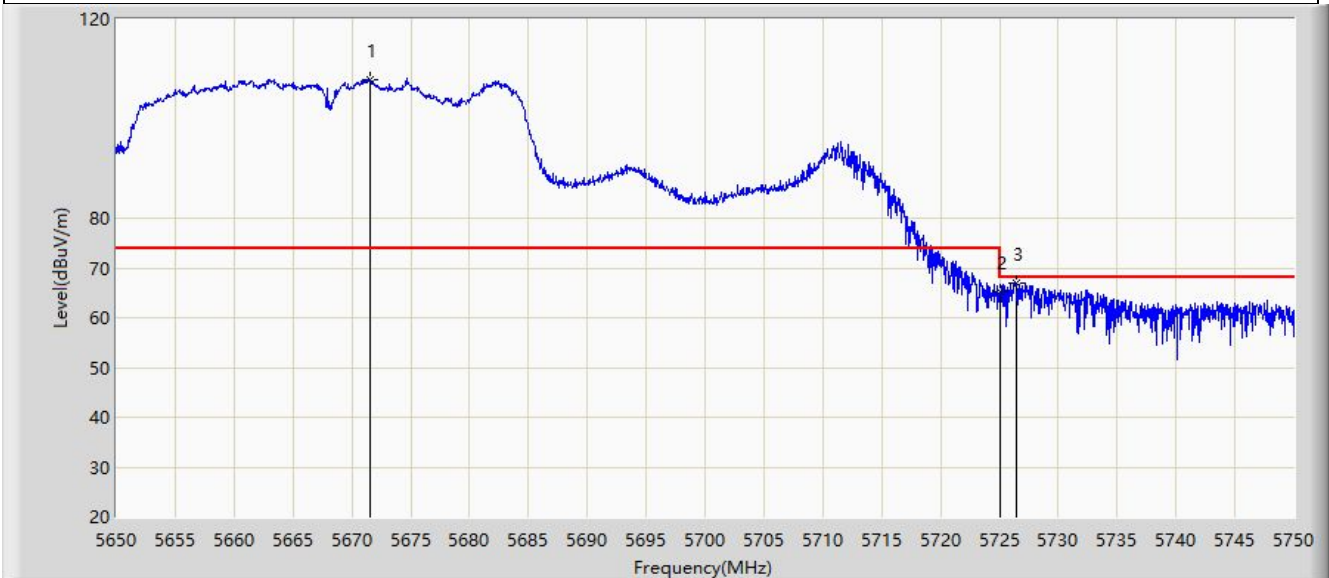


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5671.550	107.784	69.331	N/A	N/A	38.454	PK
2		5725.000	65.262	66.857	-2.938	68.200	-1.596	PK
3	*	5726.400	67.043	69.325	-1.157	68.200	-2.282	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

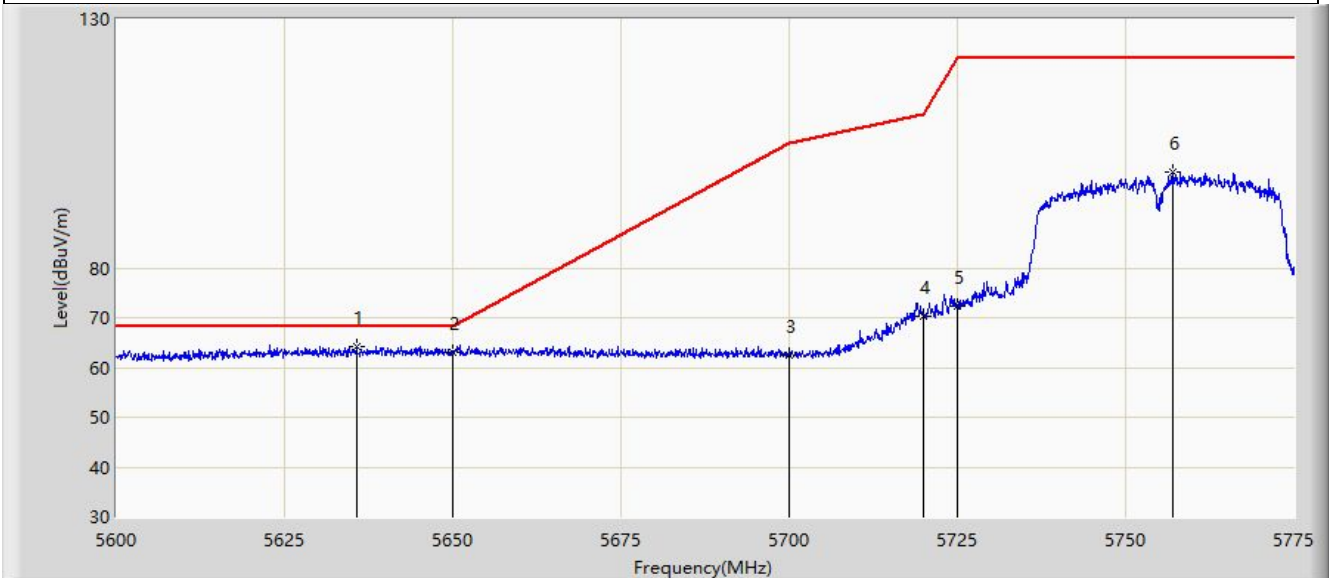


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5635.700	64.340	72.004	-3.860	68.200	-7.664	PK
2		5650.000	63.086	70.694	-5.114	68.200	-7.607	PK
3		5700.000	62.515	70.767	-42.685	105.200	-8.252	PK
4		5720.000	70.356	78.385	-40.444	110.800	-8.029	PK
5		5725.000	72.285	80.165	-49.915	122.200	-7.881	PK
6		5756.975	99.191	106.747	N/A	N/A	-7.556	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5755MHz	

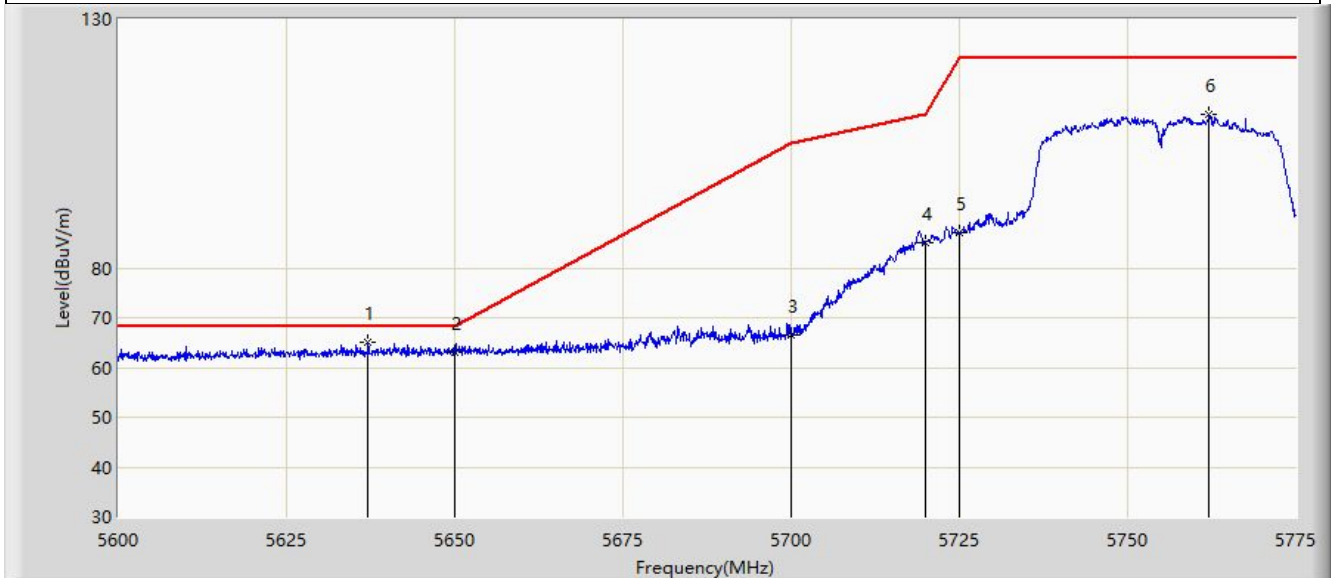


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5637.100	65.140	72.785	-3.060	68.200	-7.644	PK
2		5650.000	63.018	70.626	-5.182	68.200	-7.607	PK
3		5700.000	66.574	74.826	-38.626	105.200	-8.252	PK
4		5720.000	85.027	93.056	-25.773	110.800	-8.029	PK
5		5725.000	86.987	94.867	-35.213	122.200	-7.881	PK
6		5762.050	110.772	118.308	N/A	N/A	-7.536	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

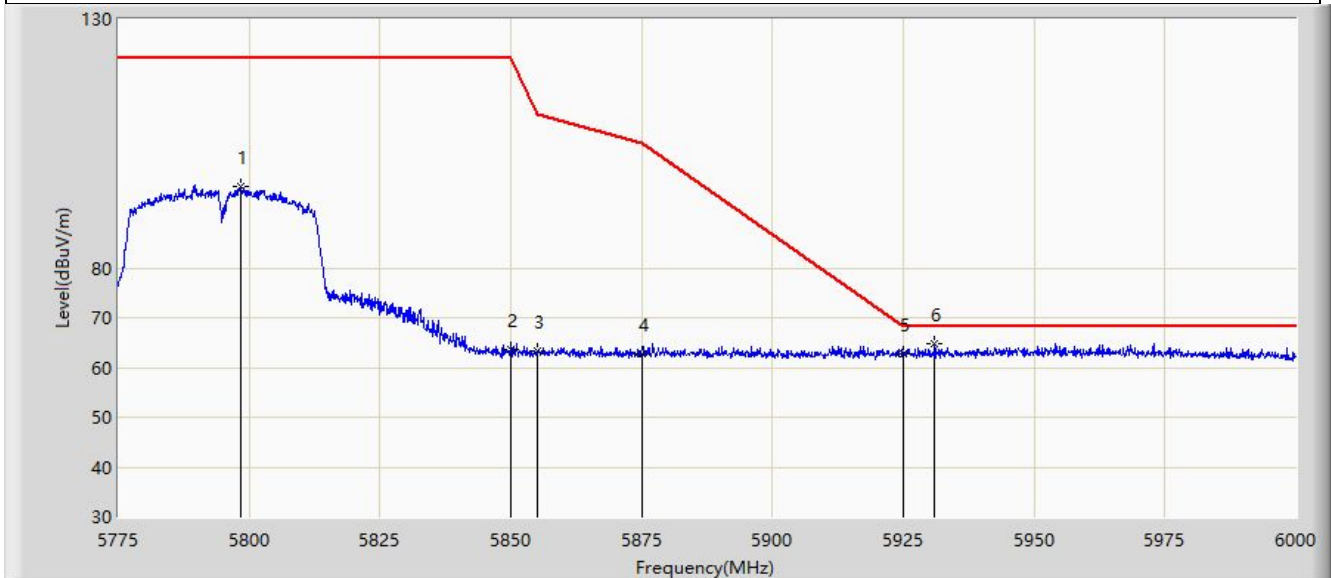


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5798.288	96.437	104.589	N/A	N/A	-8.152	PK
2		5850.000	63.485	71.189	-58.715	122.200	-7.704	PK
3		5855.000	63.315	71.075	-47.485	110.800	-7.760	PK
4		5875.000	62.641	70.569	-42.559	105.200	-7.929	PK
5		5925.000	62.770	70.828	-5.430	68.200	-8.058	PK
6	*	5931.038	64.663	72.707	-3.537	68.200	-8.044	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at 5795MHz	

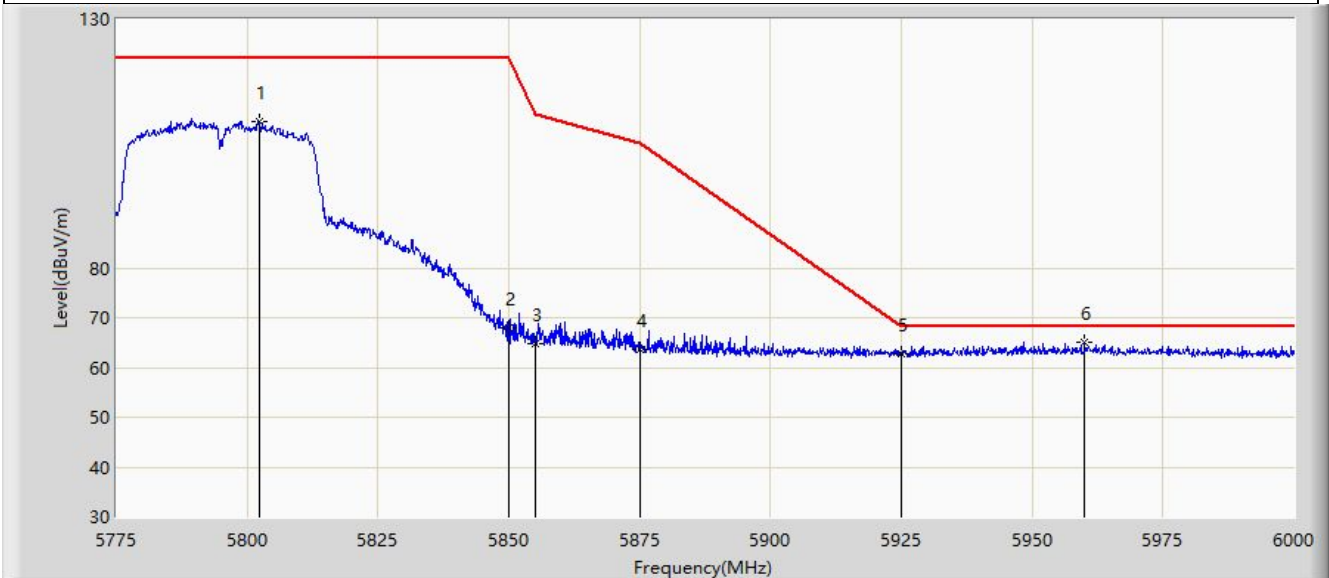


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5802.225	109.465	117.705	N/A	N/A	-8.241	PK
2		5850.000	67.973	75.677	-54.227	122.200	-7.704	PK
3		5855.000	64.835	72.595	-45.965	110.800	-7.760	PK
4		5875.000	63.677	71.605	-41.523	105.200	-7.929	PK
5		5925.000	62.735	70.793	-5.465	68.200	-8.058	PK
6	*	5959.950	65.121	72.715	-3.079	68.200	-7.594	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-04-20
Limit: FCC_5G_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: STEREPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

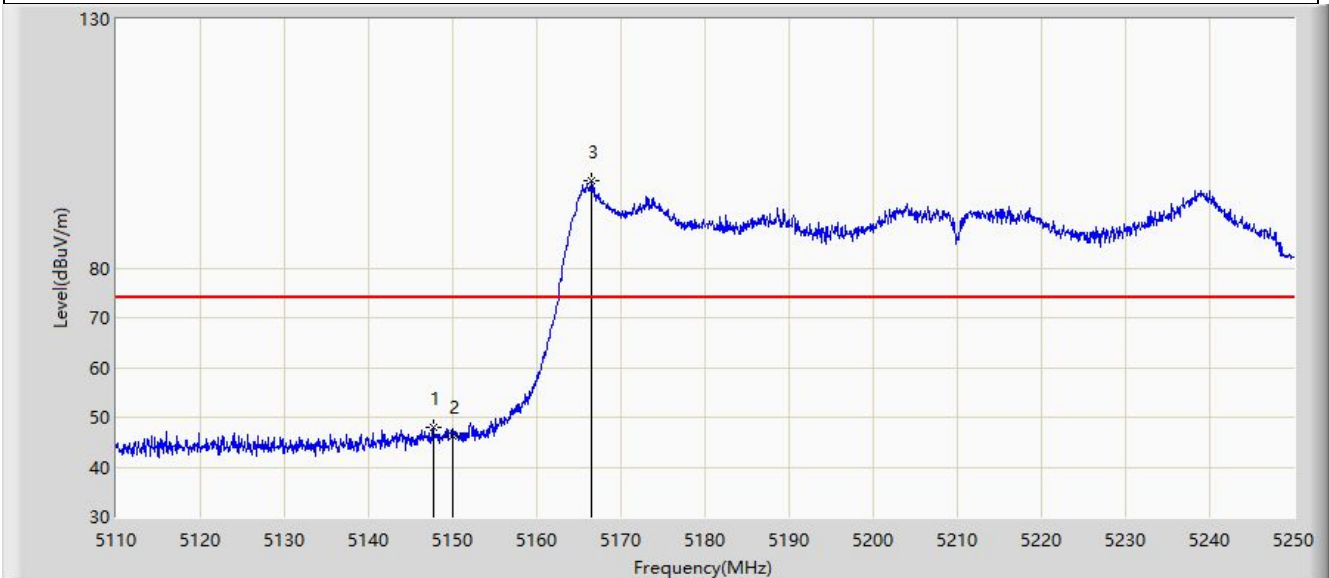


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5147.660	47.857	48.330	-26.143	74.000	-0.474	PK
2		5150.000	46.368	46.430	-27.632	74.000	-0.062	PK
3		5166.420	97.625	45.545	N/A	N/A	52.081	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-04-20
Limit: FCC_5G_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

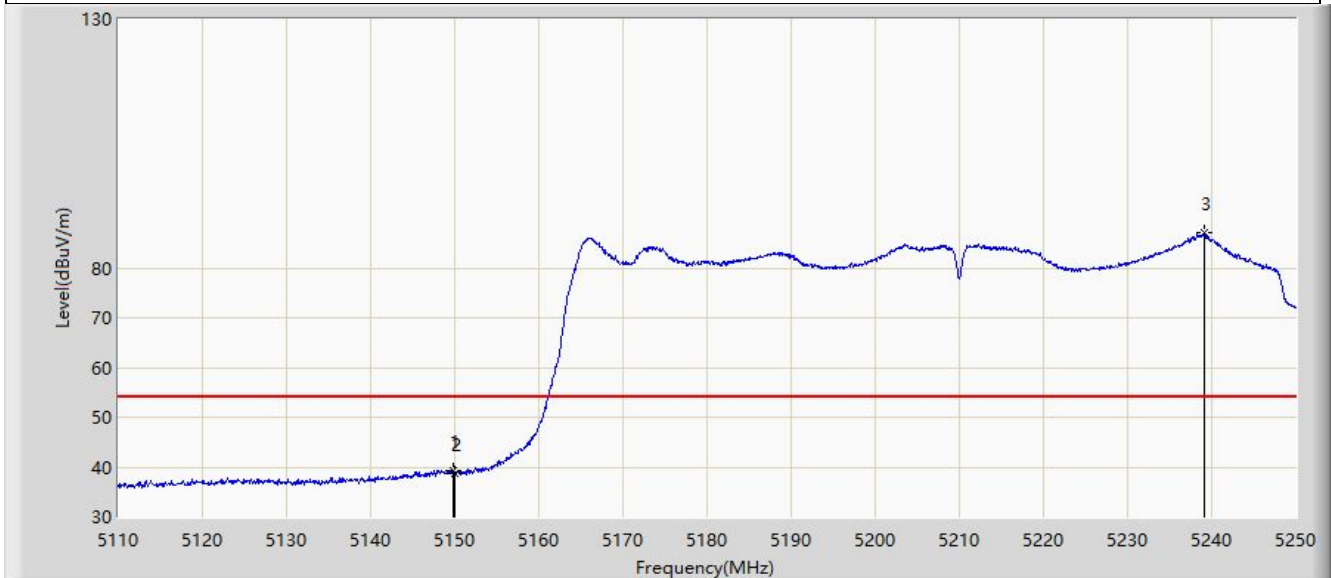


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5149.830	39.419	39.508	-14.581	54.000	-0.089	AV
2		5150.000	38.798	38.860	-15.202	54.000	-0.062	AV
3		5239.150	87.011	36.295	N/A	N/A	50.717	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC2	Test Date: 2023-04-20
Limit: FCC_5G_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

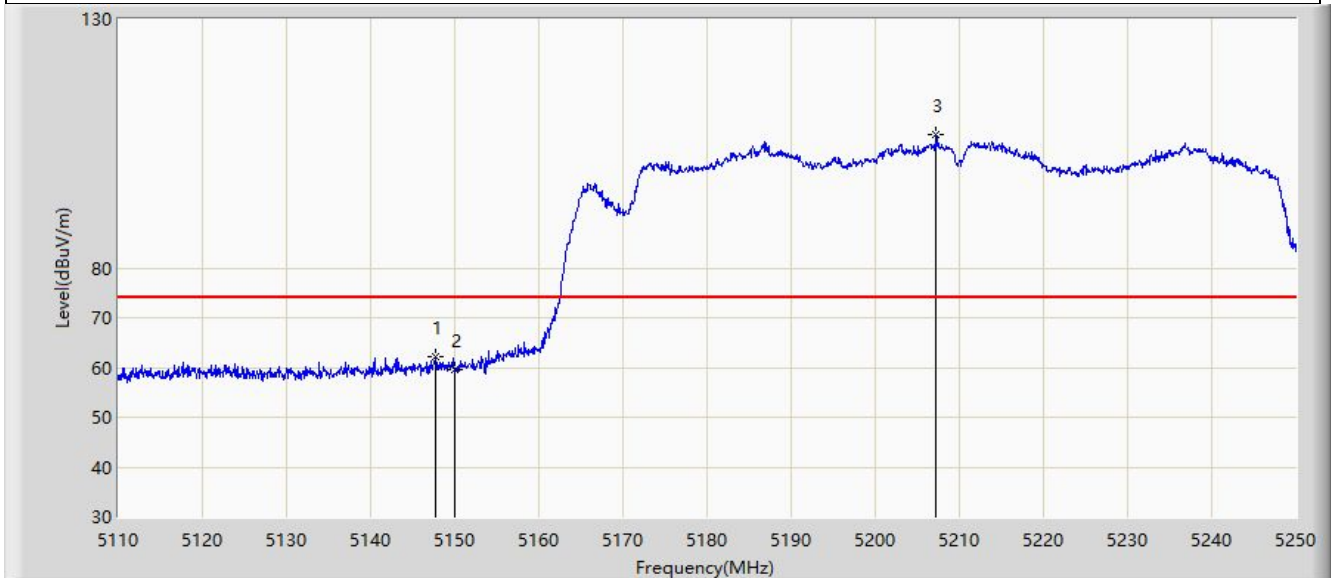

No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5147.800	62.230	62.687	-11.770	74.000	-0.457	PK
2		5150.000	59.477	59.539	-14.523	74.000	-0.062	PK
3		5207.230	106.696	64.877	N/A	N/A	41.819	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC2	Test Date: 2023-04-20
Limit: FCC_5G_RE(3m)	Engineer: Barry Wu
Probe: BBHA 9120D_02042_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5210MHz	

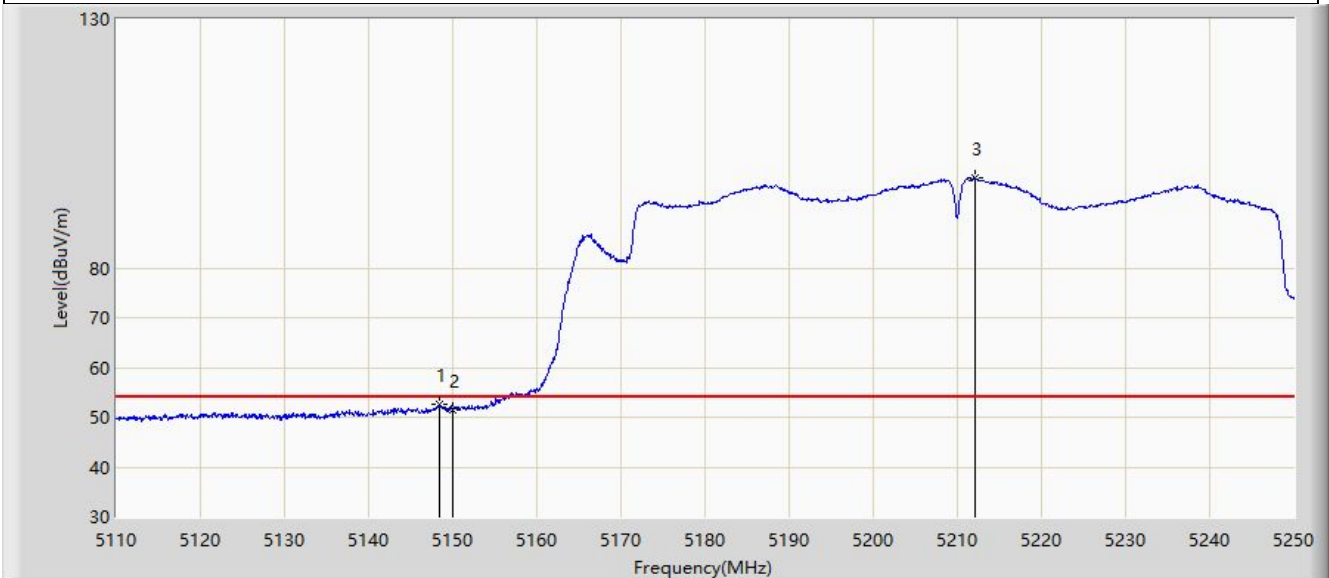


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5148.360	52.592	52.965	-1.408	54.000	-0.373	AV
2		5150.000	51.462	51.524	-2.538	54.000	-0.062	AV
3		5212.060	97.975	58.378	N/A	N/A	39.596	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

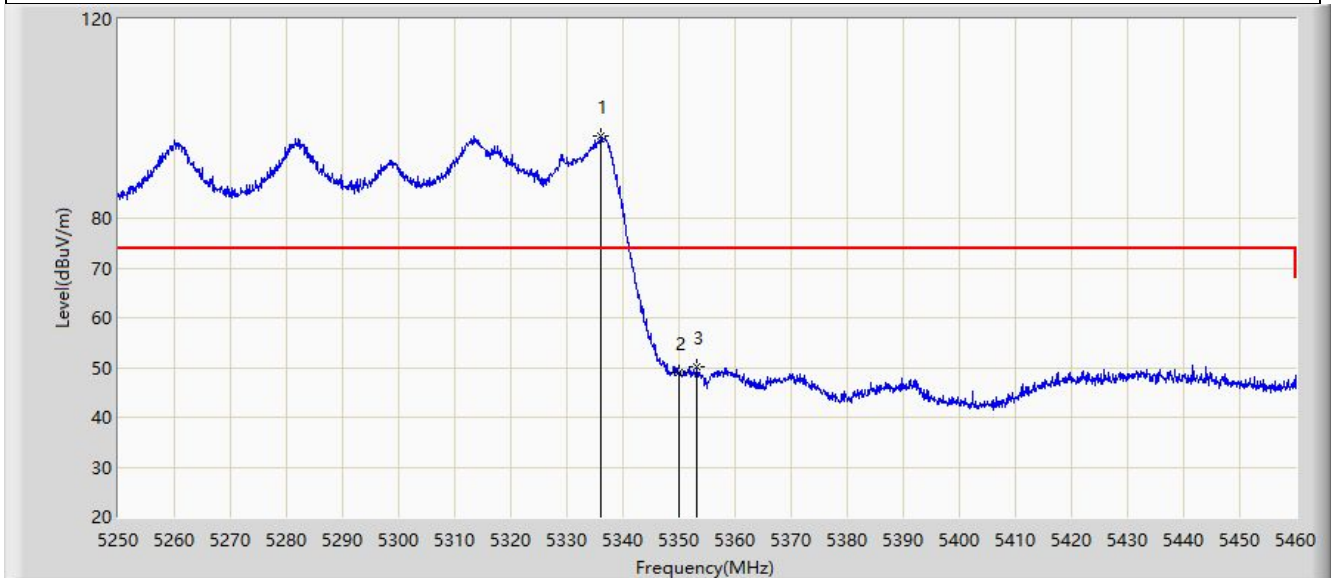


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5335.995	96.648	55.036	N/A	N/A	41.613	PK
2		5350.000	48.930	50.380	-25.070	74.000	-1.451	PK
3	*	5353.215	50.113	52.876	-23.887	74.000	-2.762	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

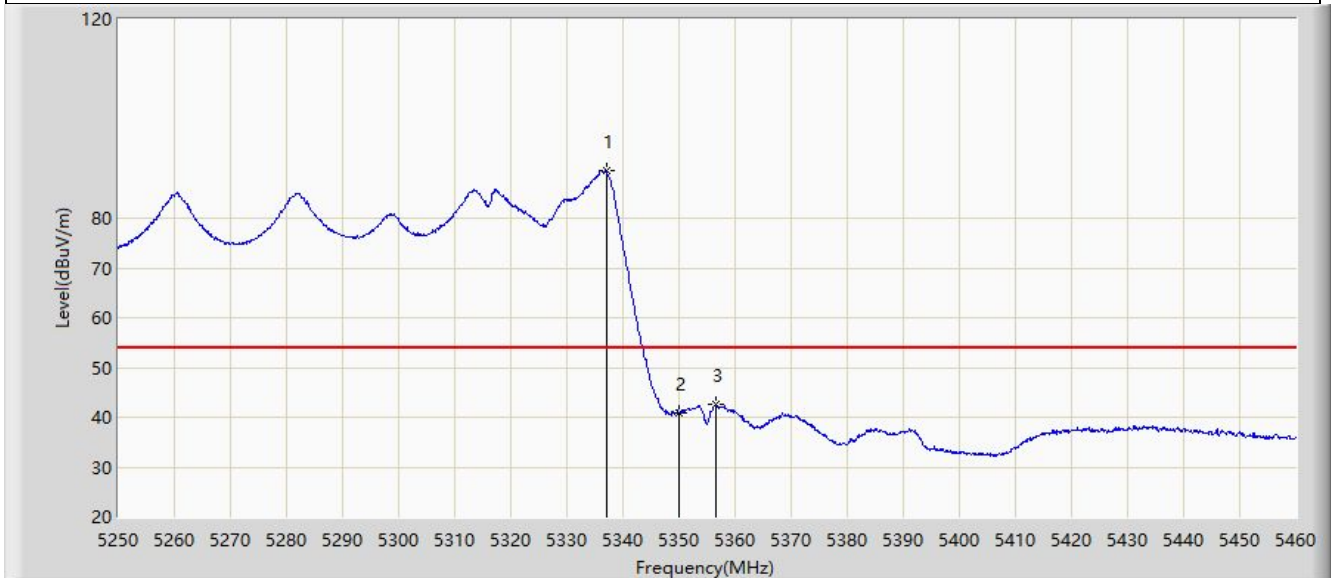


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5337.045	89.570	47.788	N/A	N/A	41.782	AV
2		5350.000	40.925	42.375	-13.075	54.000	-1.451	AV
3	*	5356.680	42.723	46.358	-11.277	54.000	-3.634	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

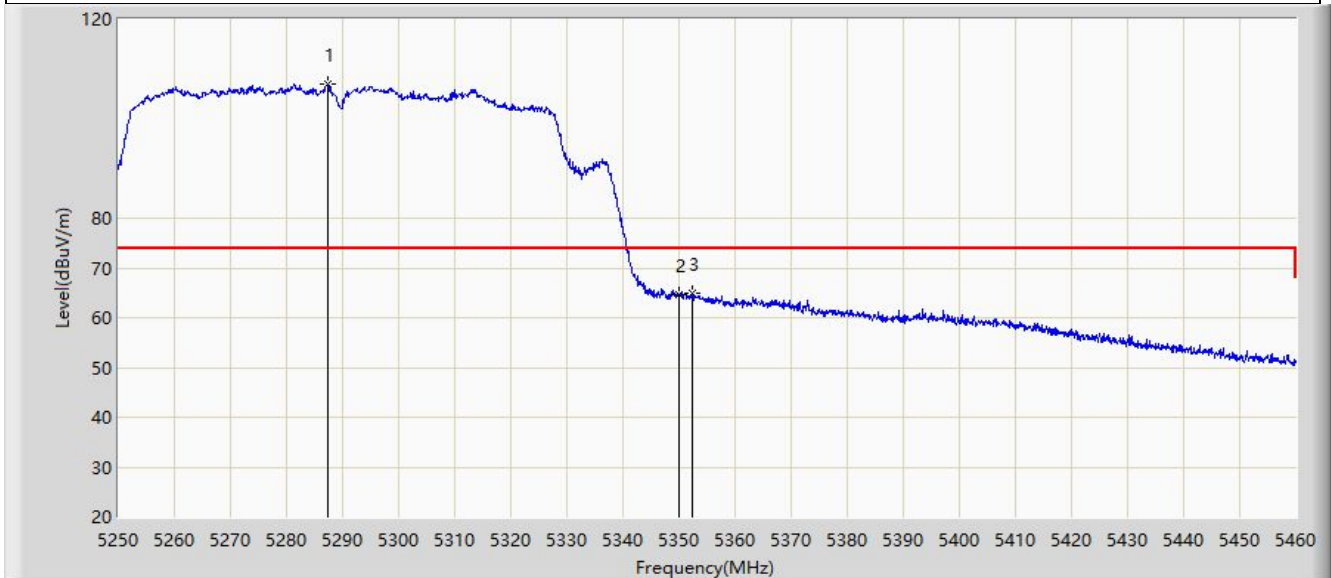


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5287.275	106.942	66.659	N/A	N/A	40.283	PK
2		5350.000	64.687	66.137	-9.313	74.000	-1.451	PK
3	*	5352.270	64.998	67.417	-9.002	74.000	-2.420	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5290MHz	

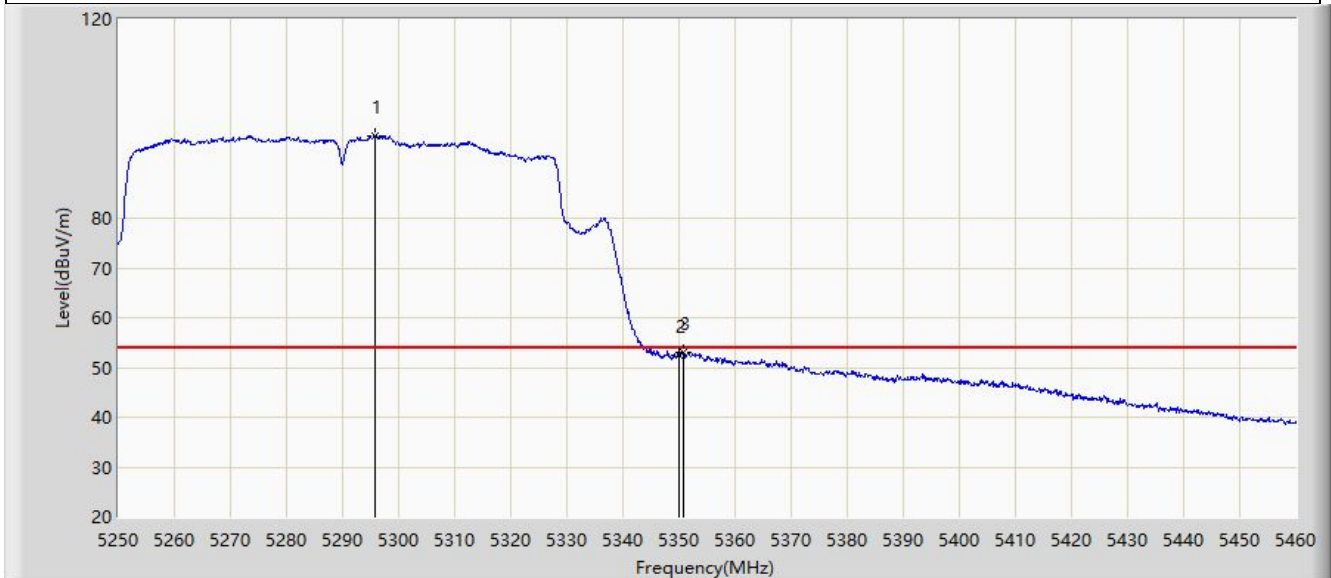


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1		5295.675	96.590	56.323	N/A	N/A	40.268	AV
2		5350.000	52.605	54.055	-1.395	54.000	-1.451	AV
3	*	5350.695	53.186	54.998	-0.814	54.000	-1.812	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

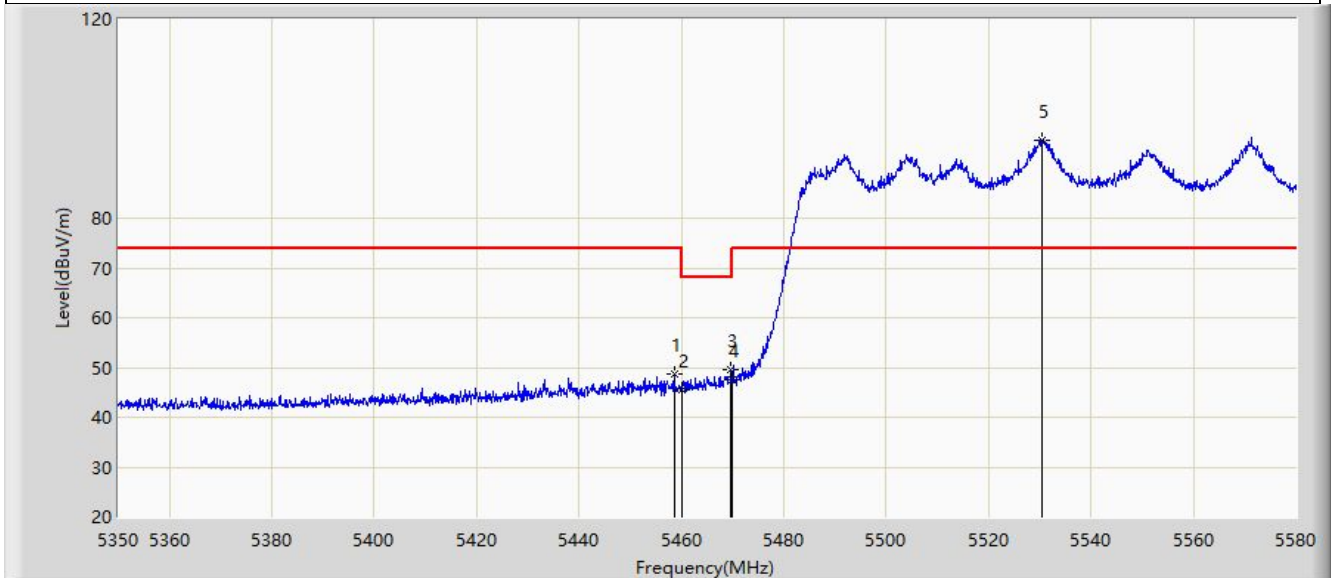


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5458.560	48.724	52.513	-25.276	74.000	-3.789	PK
2		5460.000	45.478	49.153	-22.722	68.200	-3.675	PK
3	*	5469.715	49.431	51.461	-18.769	68.200	-2.031	PK
4		5470.000	47.508	49.440	-20.692	68.200	-1.932	PK
5		5530.550	95.664	47.300	N/A	N/A	48.364	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

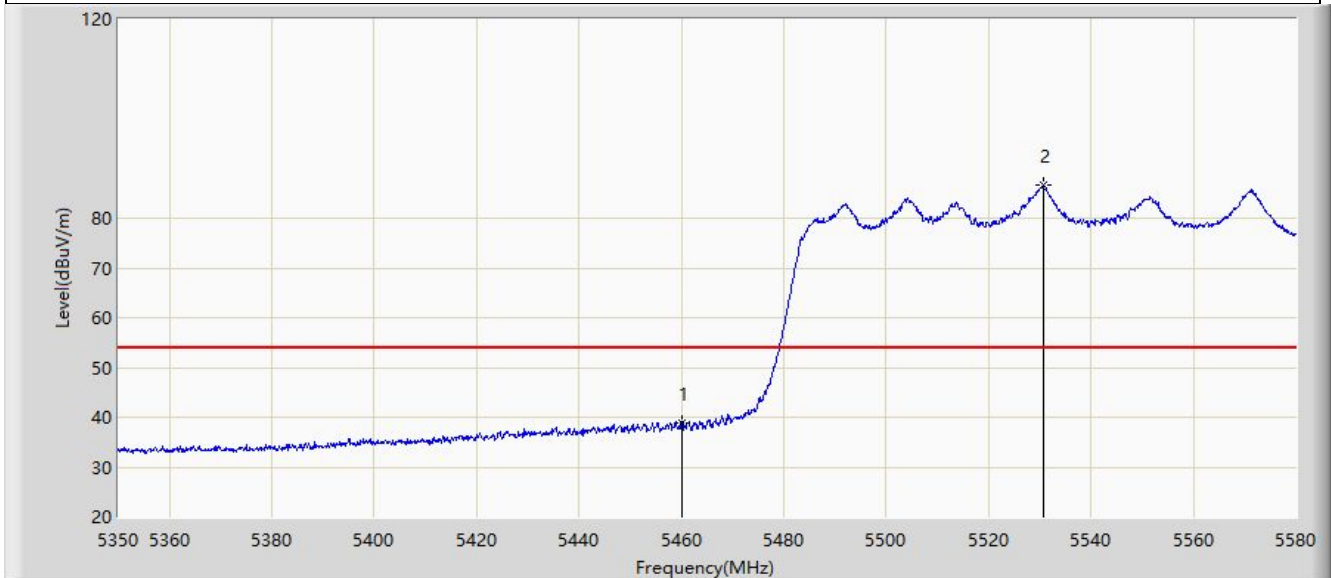


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5460.000	38.951	42.626	-15.049	54.000	-3.675	AV
2		5530.665	86.687	38.329	N/A	N/A	48.358	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

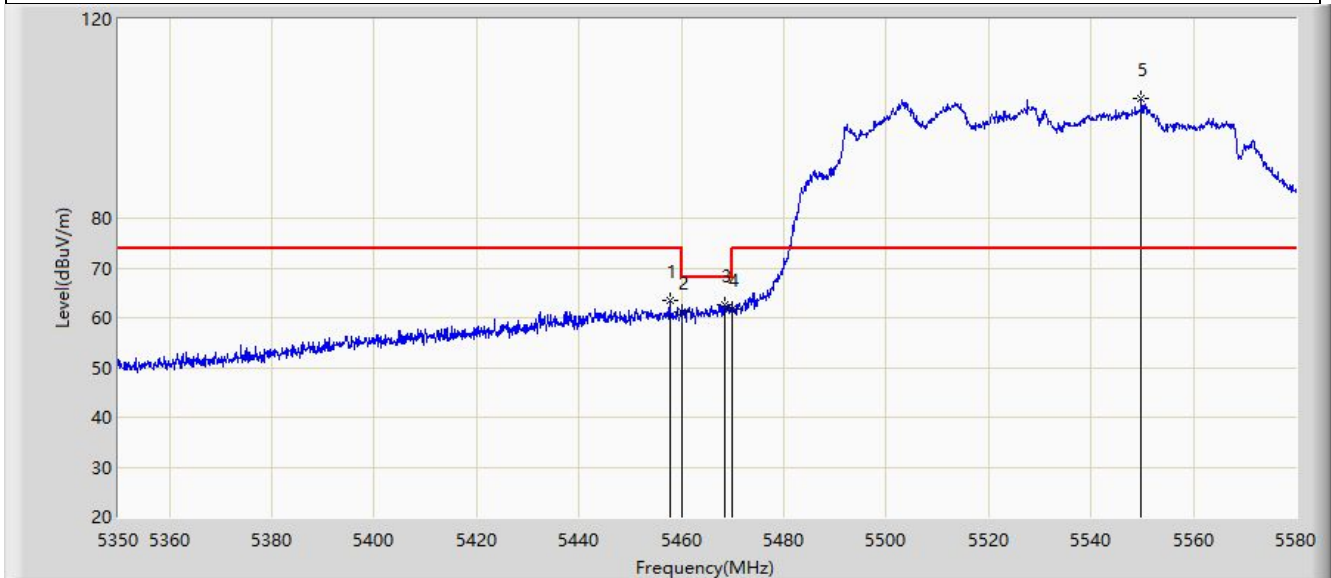

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5457.755	63.605	67.488	-10.395	74.000	-3.883	PK
2		5460.000	61.269	64.944	-6.931	68.200	-3.675	PK
3	*	5468.450	62.597	65.024	-5.603	68.200	-2.427	PK
4		5470.000	61.754	63.686	-6.446	68.200	-1.932	PK
5		5549.870	103.958	59.536	N/A	N/A	44.421	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).



Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5530MHz	

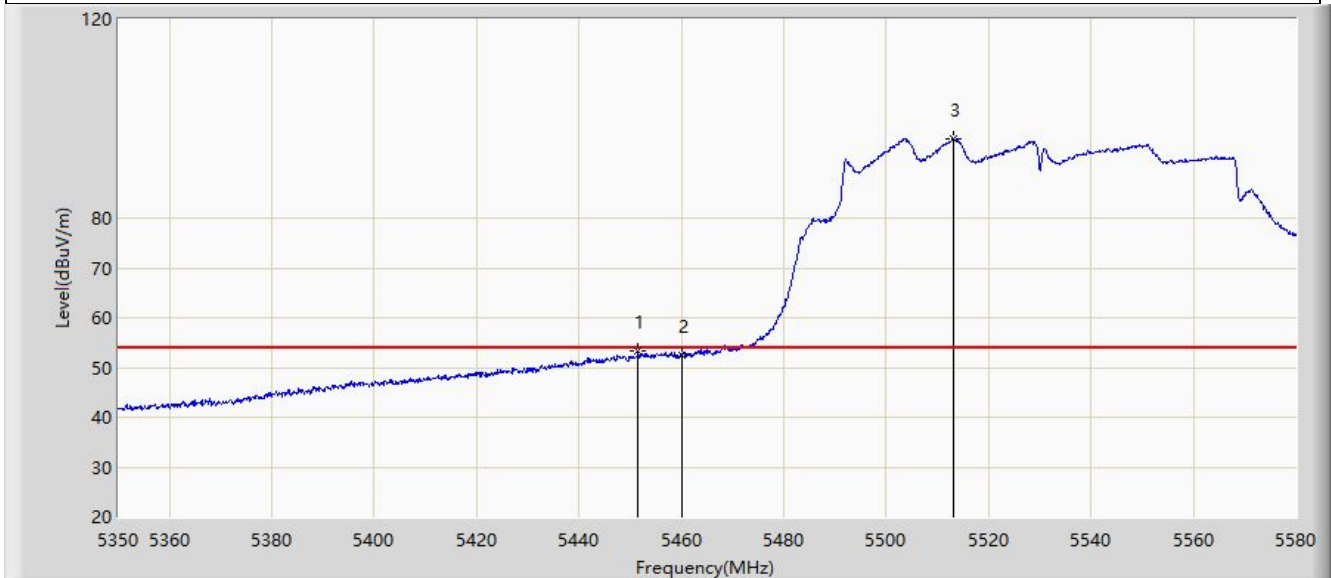


No	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V/m)	Reading Level (dB $\mu$ V)	Margin (dB)	Limit (dB $\mu$ V/m)	Factor (dB/m)	Type
1	*	5451.430	53.272	57.484	-0.728	54.000	-4.212	AV
2		5460.000	52.434	56.109	-1.566	54.000	-3.675	AV
3		5513.185	95.997	54.601	N/A	N/A	41.396	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dB $\mu$ V/m) = Reading Level (dB $\mu$ V) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

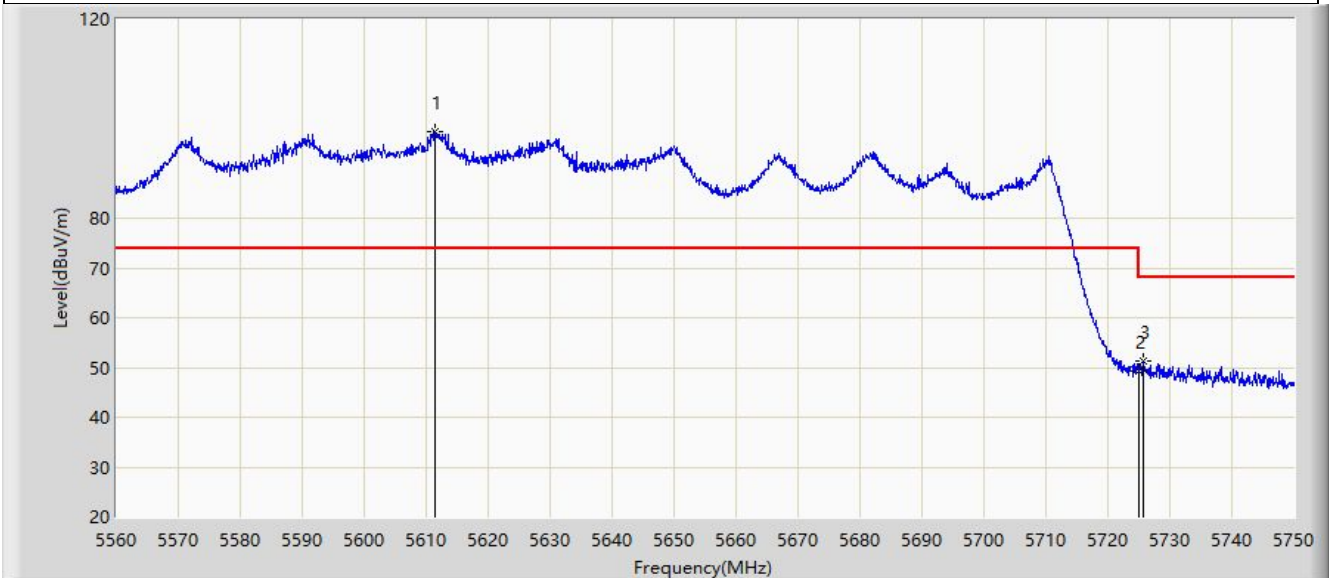


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5611.395	97.381	49.378	N/A	N/A	48.003	PK
2		5725.000	49.179	50.774	-19.021	68.200	-1.596	PK
3	*	5725.680	51.411	53.378	-16.789	68.200	-1.966	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5610MHz	

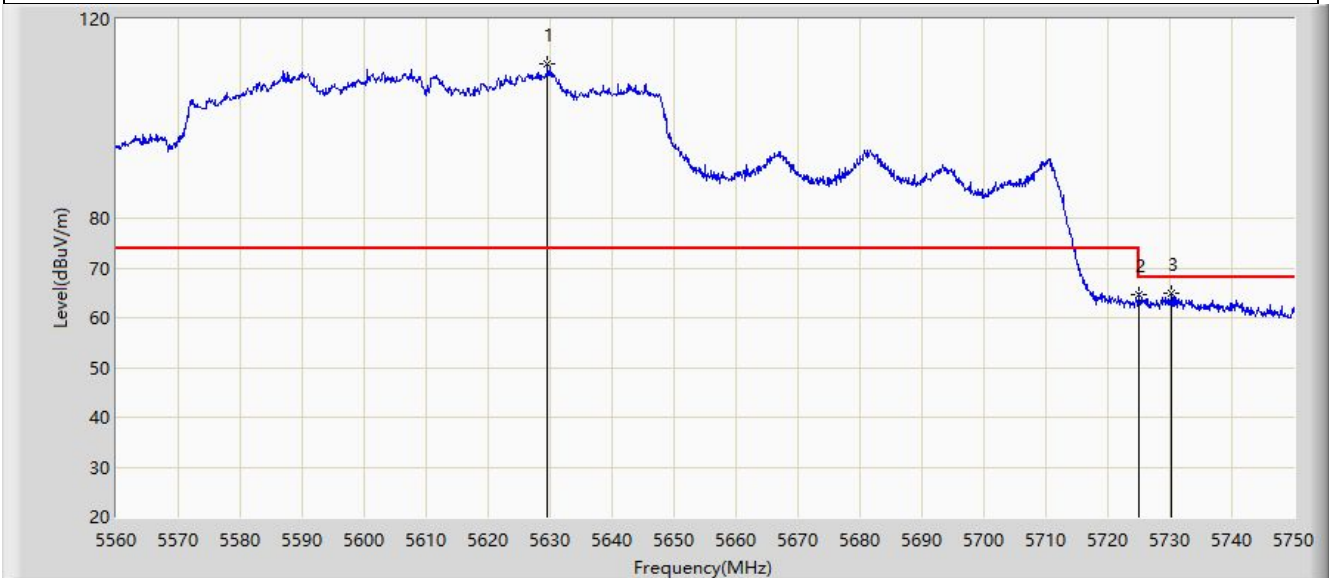


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5629.635	110.976	67.247	N/A	N/A	43.729	PK
2		5725.000	64.652	66.247	-3.548	68.200	-1.596	PK
3	*	5730.335	65.061	68.477	-3.139	68.200	-3.416	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Horizontal
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

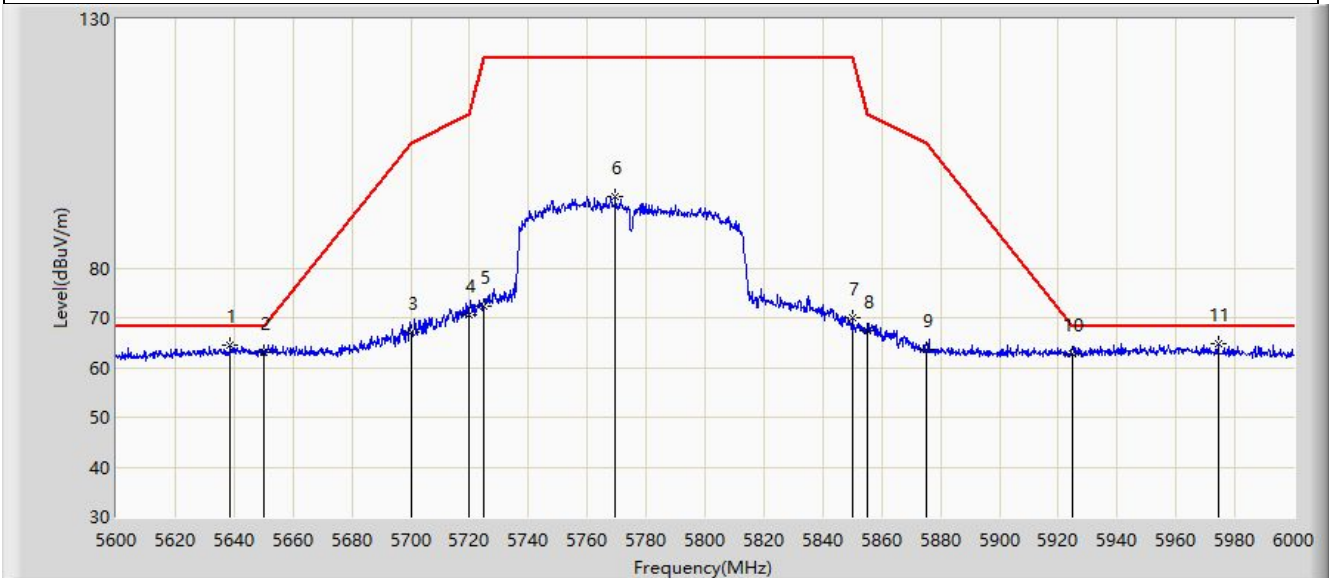


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		5638.600	64.574	72.198	-3.626	68.200	-7.624	PK
2		5650.000	63.178	70.786	-5.022	68.200	-7.607	PK
3		5700.000	67.081	75.333	-38.119	105.200	-8.252	PK
4		5720.000	70.530	78.559	-40.270	110.800	-8.029	PK
5		5725.000	72.336	80.216	-49.864	122.200	-7.881	PK
6		5769.600	94.316	101.963	N/A	N/A	-7.647	PK
7		5850.000	70.058	77.762	-52.142	122.200	-7.704	PK
8		5855.000	67.389	75.149	-43.411	110.800	-7.760	PK
9		5875.000	63.702	71.630	-41.498	105.200	-7.929	PK
10		5925.000	62.758	70.816	-5.442	68.200	-8.058	PK
11	*	5974.200	64.859	72.608	-3.341	68.200	-7.749	PK

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

Site: SIP-AC3	Test Date: 2023-04-21
Limit: FCC_5.8G_RE(3m)	Engineer: Alan Yu
Probe: HF907_102861_1-18GHz	Polarity: Vertical
EUT: STEREPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at 5775MHz	

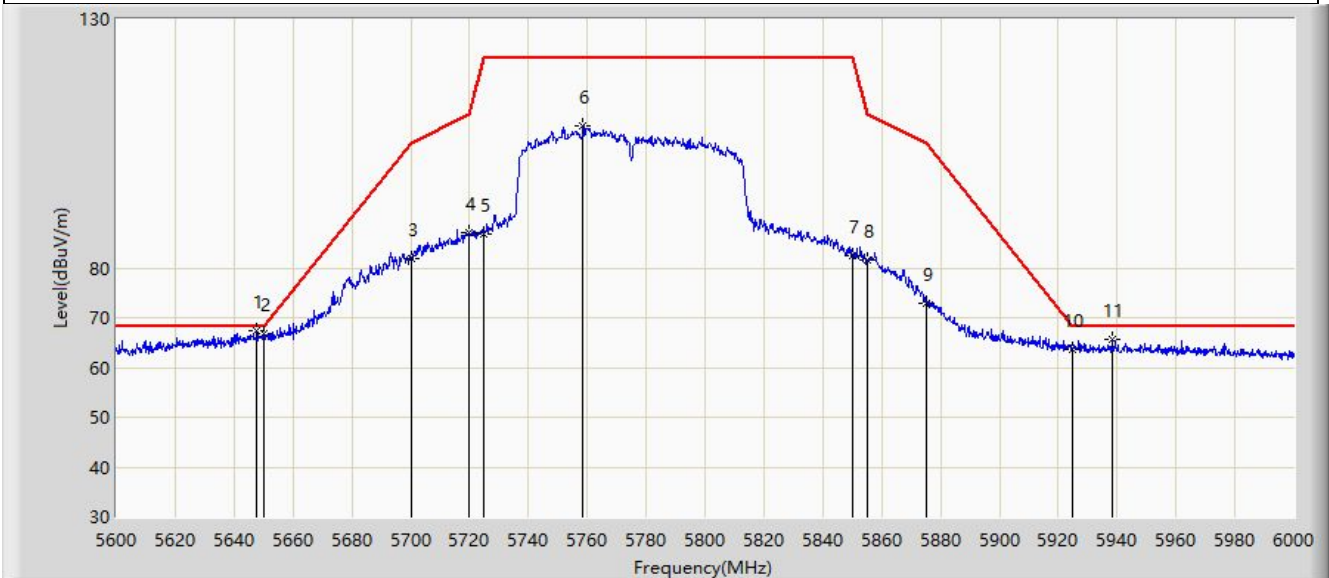

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	5647.800	67.293	74.896	-0.907	68.200	-7.603	PK
2		5650.000	66.770	74.378	-1.430	68.200	-7.607	PK
3		5700.000	82.025	90.277	-23.175	105.200	-8.252	PK
4		5720.000	87.068	95.097	-23.732	110.800	-8.029	PK
5		5725.000	86.924	94.804	-35.276	122.200	-7.881	PK
6		5758.600	108.595	116.124	N/A	N/A	-7.529	PK
7		5850.000	82.374	90.078	-39.826	122.200	-7.704	PK
8		5855.000	81.643	89.403	-29.157	110.800	-7.760	PK
9		5875.000	72.846	80.774	-32.354	105.200	-7.929	PK
10		5925.000	63.607	71.665	-4.593	68.200	-8.058	PK
11		5938.200	65.511	73.376	-2.689	68.200	-7.864	PK


Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB).

**A.9 AC Conducted Emissions Test Result**

Site: SIP-SR2	Test Date: 2023-05-09
Temperature: 22.1°C	Humidity: 48.2%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Probe: SIP-SR2-ENV216_101684_Fitter off	Polarity: Line
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

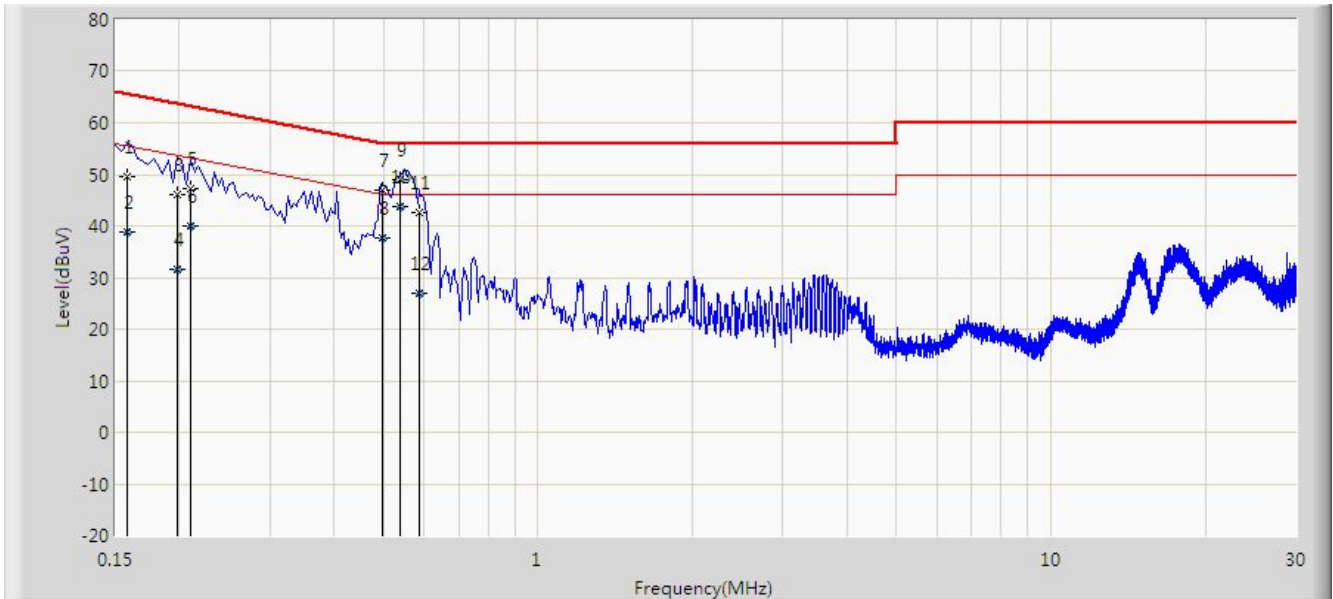


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.158	49.591	39.970	-15.978	65.568	9.620	QP
2		0.158	38.843	29.223	-16.725	55.568	9.620	AV
3		0.198	46.215	36.571	-17.479	63.694	9.644	QP
4		0.198	31.453	21.809	-22.241	53.694	9.644	AV
5		0.210	47.137	37.477	-16.068	63.205	9.660	QP
6		0.210	39.880	30.220	-13.326	53.205	9.660	AV
7		0.498	46.948	37.248	-9.085	56.033	9.700	QP
8		0.498	37.659	27.959	-8.374	46.033	9.700	AV
9		0.539	49.100	39.400	-6.900	56.000	9.700	QP
10	*	0.539	43.900	34.200	-2.100	46.000	9.700	AV
11		0.586	42.638	32.938	-13.362	56.000	9.700	QP
12		0.586	26.824	17.124	-19.176	46.000	9.700	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SIP-SR2	Test Date: 2023-05-09
Temperature: 22.1°C	Humidity: 48.2%
Limit: FCC_Part15.207_CE_AC Power	Engineer: Violet Tao
Probe: SIP-SR2-ENV216_101684_Fitter off	Polarity: Neutral
EUT: STEREOPHONIC AMPLIFIER	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at 5180MHz	

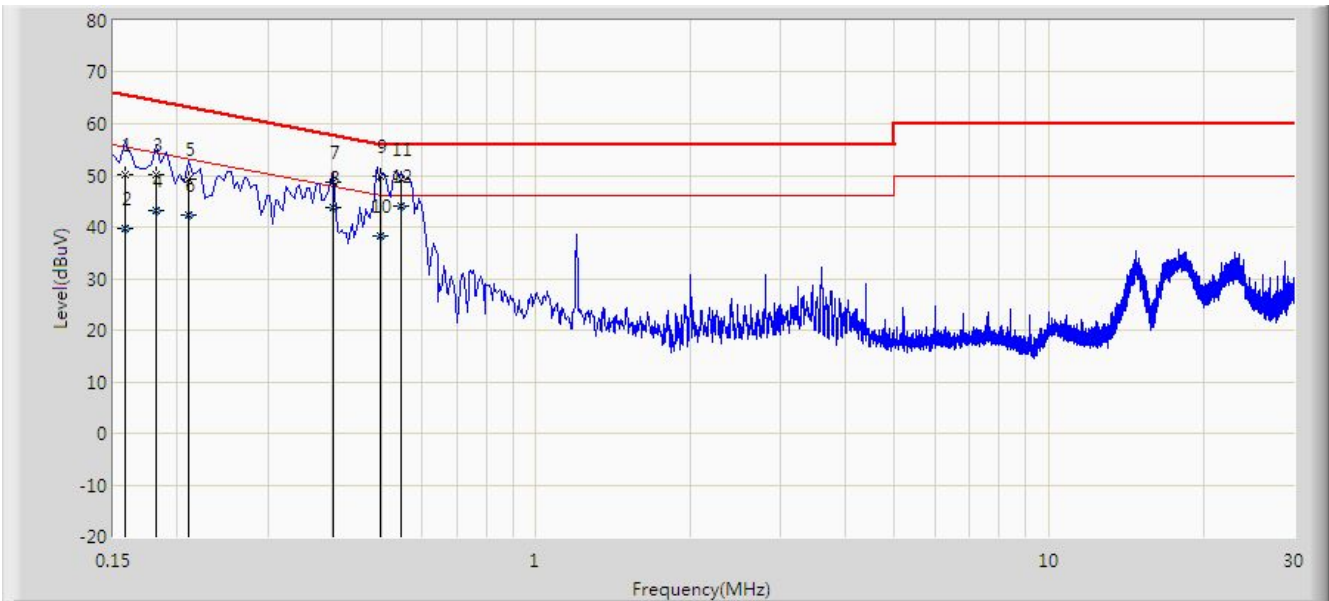

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.158	50.199	40.569	-15.369	65.568	9.630	QP
2		0.158	39.791	30.160	-15.778	55.568	9.630	AV
3		0.182	50.185	40.552	-14.209	64.394	9.633	QP
4		0.182	43.300	33.667	-11.094	54.394	9.633	AV
5		0.210	49.407	39.737	-13.799	63.205	9.669	QP
6		0.210	42.292	32.623	-10.913	53.205	9.669	AV
7		0.402	48.564	38.861	-9.248	57.812	9.703	QP
8		0.402	43.641	33.938	-4.171	47.812	9.703	AV
9		0.498	49.864	40.164	-6.169	56.033	9.700	QP
10		0.498	38.170	28.470	-7.864	46.033	9.700	AV
11		0.545	49.200	39.500	-6.800	56.000	9.700	QP
12	*	0.545	44.000	34.300	-2.000	46.000	9.700	AV

Note 1: " \* ", means this data is the worst emission level.

Note 2: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB).

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## Appendix B – Test Setup Photograph

Refer to “2302RSU056-UT” file.



## Appendix C – EUT Photograph

Refer to “2302RSU056-UE” file.

————— The End —————