

FCC REPORT

Applicant: Lenbrook Industries Limited.

Address of Applicant: 633 Granite Court, Pickering, Ontario, L1W 3K1 Canada

Equipment Under Test (EUT)

Product Name: BLOUS STREAMING DAC AMPLIFIER

Model No.: M33

Trade mark: NAD

FCC ID: SVC-M33

Applicable standards: FCC CFR Title 47 Part 15 Subpart B

Date of sample receipt: 30 Mar., 2020

Date of Test: 31 Mar., to 10 Jun., 2020

Date of report issued: 26 Nov., 2020

Test Result: PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	10 Jun., 2020	Original
01	26 Nov., 2020	Update Applicant Address and Manufacturer Address.

Tested by: Yao Wu **Date:** 26 Nov., 2020
Test Engineer

Reviewed by: Winner Zhang **Date:** 26 Nov., 2020
Project Engineer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODE AND TEST SAMPLES PLANS	5
5.4 MEASUREMENT UNCERTAINTY.....	5
5.5 DESCRIPTION OF SUPPORT UNITS	6
5.6 RELATED SUBMITTAL(S) / GRANT (S).....	6
5.7 DESCRIPTION OF CABLE USED	6
5.8 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	6
5.9 LABORATORY FACILITY	6
5.10 LABORATORY LOCATION.....	6
5.11 TEST INSTRUMENTS LIST	7
6 TEST RESULTS AND MEASUREMENT DATA	8
6.1 CONDUCTED EMISSION.....	8
6.2 RADIATED EMISSION	11
7 TEST SETUP PHOTO	17
8 EUT CONSTRUCTIONAL DETAILS	19

4 Test Summary

Test Item	Section in CFR 47	Result
Conducted Emission	Part 15.107	Pass
Radiated Emission	Part 15.109	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: The EUT not applicable of the test item.		
Test Method:	ANSI C63.4:2014	

5 General Information

5.1 Client Information

Applicant:	Lenbrook Industries Limited.
Address:	633 Granite Court, Pickering, Ontario, L1W 3K1 Canada
Manufacturer:	Lenbrook Industries Limited.
Address:	633 Granite Court, Pickering, Ontario, L1W 3K1 Canada
Factory:	Hansong (Nanjing) Technology Ltd.
Address:	8th Kangping Road, Jiangning Economy and Technology Development Zone, Nanjing, 211106, China

5.2 General Description of E.U.T.

Product Name:	BLOUS STREAMING DAC AMPLIFIER
Model No.:	M33
Power supply:	AC 100V~240V, 50/60Hz
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

5.3 Test Mode and test samples plans

Operating mode	Detail description
Phono Input mode	Keep the EUT in Phono Input + Speaker(Worst case)
BluOS Input mode	Keep the EUT in BluOS Input + Speaker
HDMI ARC Input mode	Keep the EUT in HDMI ARC Input + Speaker mode
Optical Input mode	Keep the EUT in Optical Input + Speaker mode
Coax Input mode	Keep the EUT in Coax Input + Speaker mode
AES/EBU Input mode	Keep the EUT in AES/EBU Input + Speaker mode
Line In Input mode	Keep the EUT in Line In Input + Speaker mode
Balanced In Input mode	Keep the EUT in Balanced In Input + Speaker mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

5.4 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
HUAWEI	Smart Phone	P10	/	DoC
NANTAI	Sound	P400A	/	/
Takstar	Wired Microphone	DM-2300	/	/
UGREER	3.5mm to RCA	AV132	/	/
LENOVO	Laptop	SL510	2847A65	DoC

5.6 Related Submittal(s) / Grant (s)

This is an original grant, no related submittals and grants.

5.7 Description of Cable Used

Cable Type	Description	Length	From	To
N/A	N/A	N/A	N/A	N/A

5.8 Additions to, deviations, or exclusions from the method

No

5.9 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**
JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- **ISED – CAB identifier.: CN0021**
The 3m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- **A2LA - Registration No.: 4346.01**
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.10 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.11 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-07-2020	03-06-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-05-2020	03-04-2021
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-05-2020	03-04-2021
LISN	CHASE	MN2050D	1447	03-05-2020	03-04-2021
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2017	07-20-2020
Cable	HP	10503A	N/A	03-05-2020	03-04-2021
EMI Test Software	AUDIX	E3	Version: 6.110919b		


6 Test results and Measurement Data

6.1 Conducted Emission

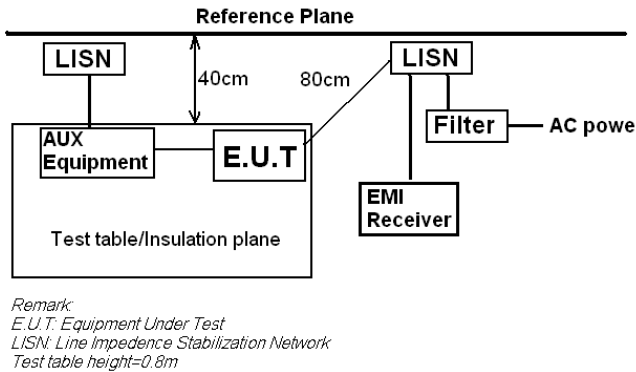Test Requirement:	FCC Part 15 B Section 15.107		
Test Frequency Range:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dB μ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	0.5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:	 <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>		
Test procedure	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4(latest version) on conducted measurement. 		
Test Instruments:	Refer to section 5.11 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement data:

Product name:	BLOUS STREAMING DAC AMPLIFIER	Product model:	M33
Test by:	Yaro	Test mode:	Full load mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

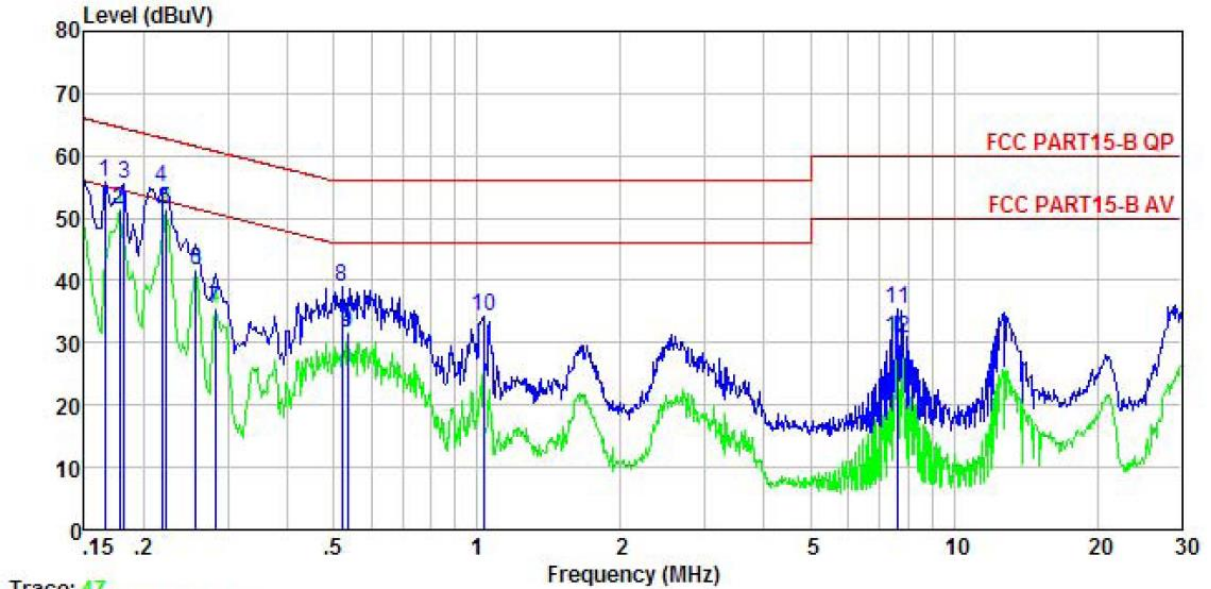


Trace: 47

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.166	45.43	-0.44	10.77	55.76	65.16	-9.40	QP
2	0.178	40.89	-0.43	10.77	51.23	54.59	-3.36	Average
3	0.182	45.29	-0.42	10.77	55.64	64.42	-8.78	QP
4	0.219	44.61	-0.40	10.76	54.97	62.88	-7.91	QP
5	0.222	40.91	-0.40	10.76	51.27	52.74	-1.47	Average
6	0.258	31.27	-0.40	10.75	41.62	51.51	-9.89	Average
7	0.282	24.94	-0.39	10.74	35.29	50.76	-15.47	Average
8	0.521	28.62	-0.39	10.76	38.99	56.00	-17.01	QP
9	0.535	21.15	-0.39	10.76	31.52	46.00	-14.48	Average
10	1.032	23.69	-0.38	10.87	34.18	56.00	-21.82	QP
11	7.646	25.26	-0.55	10.83	35.54	60.00	-24.46	QP
12	7.646	20.51	-0.55	10.83	30.79	50.00	-19.21	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

Product name:	BLOUS STREAMING DAC AMPLIFIER	Product model:	M33
Test by:	Yaro	Test mode:	Full load mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Huni: 55%

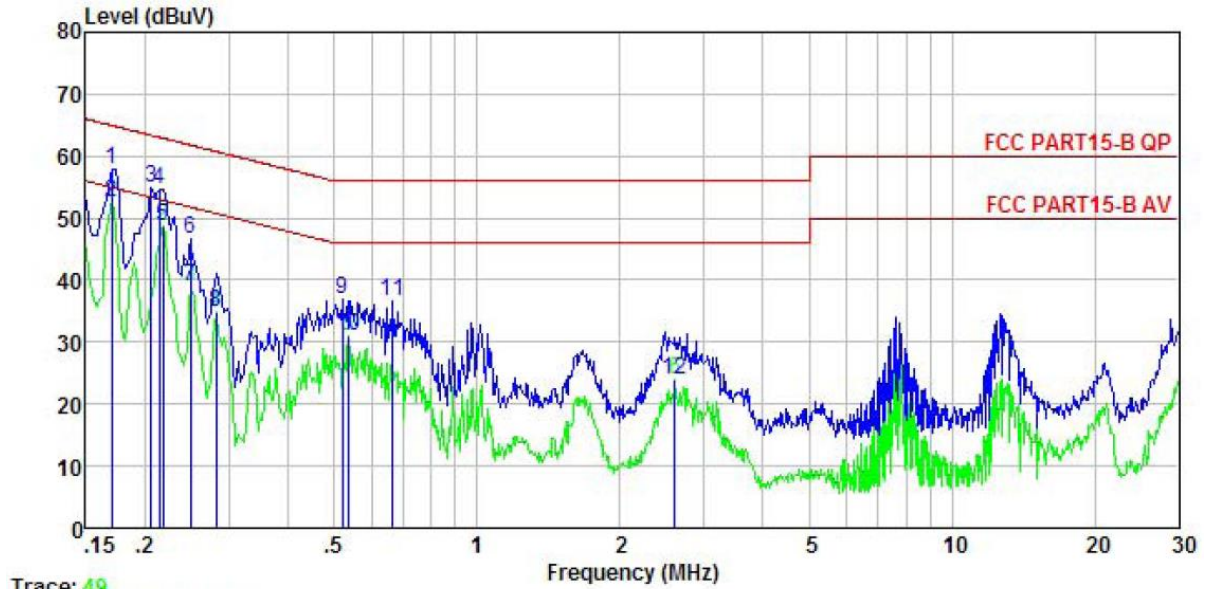

Trace: 49

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.170	47.85	-0.68	10.77	57.94	64.94	-7.00	QP
2	0.170	42.56	-0.68	10.77	52.65	54.94	-2.29	Average
3	0.206	44.82	-0.69	10.76	54.89	63.36	-8.47	QP
4	0.214	44.64	-0.68	10.76	54.72	63.05	-8.33	QP
5	0.219	38.49	-0.68	10.76	48.57	52.88	-4.31	Average
6	0.249	36.44	-0.66	10.75	46.53	61.78	-15.25	QP
7	0.249	29.00	-0.66	10.75	39.09	51.78	-12.69	Average
8	0.282	24.86	-0.64	10.74	34.96	50.76	-15.80	Average
9	0.521	26.74	-0.65	10.76	36.85	56.00	-19.15	QP
10	0.535	20.95	-0.65	10.76	31.06	46.00	-14.94	Average
11	0.665	26.59	-0.64	10.77	36.72	56.00	-19.28	QP
12	2.608	13.61	-0.67	10.93	23.87	46.00	-22.13	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.2 Radiated Emission


Test Requirement:	FCC Part 15 B Section 15.109				
Test Frequency Range:	30MHz to 6000MHz				
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak RMS	1MHz 1MHz	3MHz 3MHz	Peak Value Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
Above 1GHz	54.0		Average Value		
	74.0		Peak Value		
Test setup:	Below 1GHz				
Test setup:	Above 1GHz				
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 				

	<p>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>
Test Instruments:	Refer to section 5.11 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	All of the observed value above 6GHz were the noise floor , which were no recorded

Measurement Data:

Below 1GHz:

Product Name:	BLOUS STREAMING DAC AMPLIFIER	Product Model:	M33
Test By:	Yaro	Test mode:	Phono Input mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

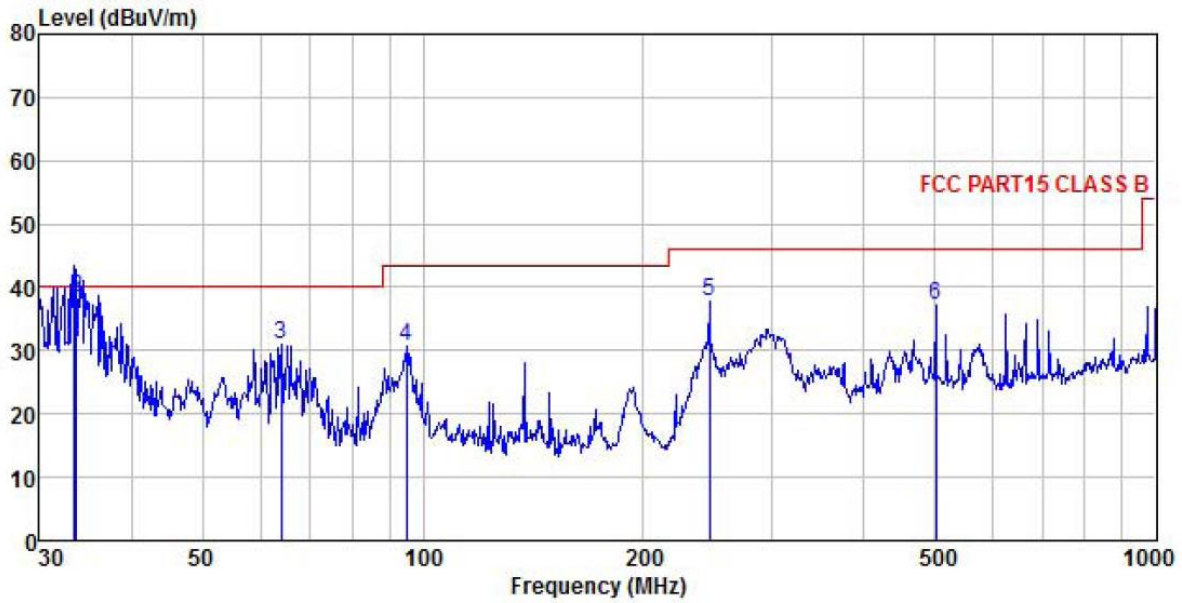


	ReadAntenna	Cable	Aux	Preamp	Limit	Over				
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark			
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB			
1	33.445	55.50	11.02	0.98	0.00	29.96	37.54	40.00	-2.46	QP
2	33.680	56.40	11.05	0.98	0.00	29.96	38.47	40.00	-1.53	QP
3	63.983	49.50	9.98	1.38	0.00	29.76	31.10	40.00	-8.90	QP
4	95.093	46.80	11.39	2.01	0.00	29.55	30.65	43.50	-12.85	QP
5	245.951	51.06	12.54	2.81	0.00	28.56	37.85	46.00	-8.15	QP
6	501.179	44.23	18.20	3.63	0.00	28.96	37.10	46.00	-8.90	QP

Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
- The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	BLOUS STREAMING DAC AMPLIFIER	Product Model:	M33
Test By:	Yaro	Test mode:	Phono Input mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Huni: 57%

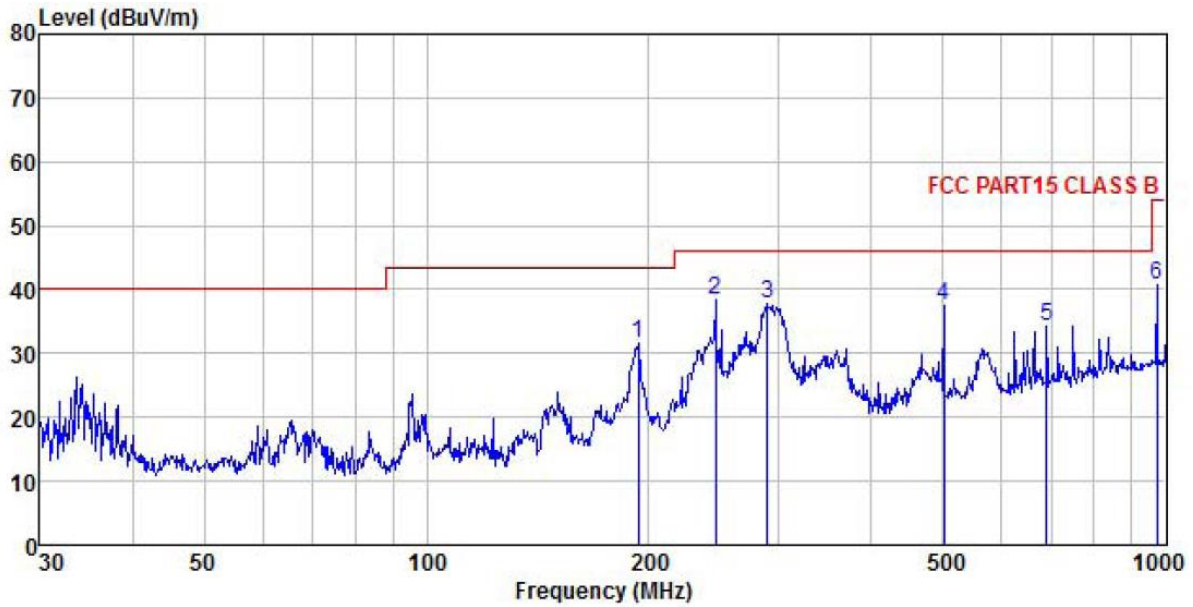


	Freq	Read Level	Antenna Factor	Cable Loss	Aux Factor	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	
1	193.095	47.13	10.38	2.82	0.00	28.88	31.45	43.50	-12.05	QP
2	245.951	51.57	12.54	2.81	0.00	28.56	38.36	46.00	-7.64	QP
3	289.002	49.89	13.41	2.91	0.00	28.47	37.74	46.00	-8.26	QP
4	501.179	44.48	18.20	3.63	0.00	28.96	37.35	46.00	-8.65	QP
5	689.565	38.67	20.24	4.11	0.00	28.69	34.33	46.00	-11.67	QP
6	972.337	41.23	22.74	4.33	0.00	27.59	40.71	54.00	-13.29	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz:

Product Name:	BLOUS STREAMING DAC AMPLIFIER	Product Model:	M33
Test By:	Yaro	Test mode:	Phono Input mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

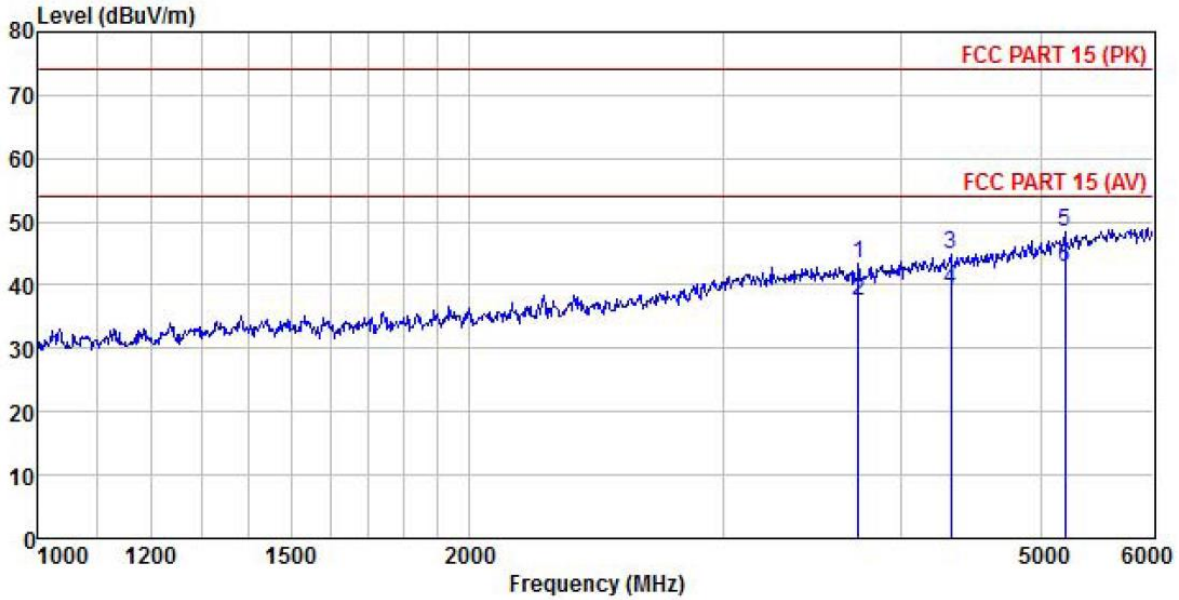


	Read	Antenna	Cable	Aux	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	3731.996	48.35	28.99	5.53	2.20	41.71	43.36	74.00 -30.64 Peak
2	3731.996	42.44	28.99	5.53	2.20	41.71	37.45	54.00 -16.55 Average
3	4330.397	48.59	29.84	6.01	2.31	41.91	44.84	74.00 -29.16 Peak
4	4330.397	42.91	29.84	6.01	2.31	41.91	39.16	54.00 -14.84 Average
5	5198.752	49.53	31.63	6.73	2.55	41.95	48.49	74.00 -25.51 Peak
6	5198.752	43.75	31.63	6.73	2.55	41.95	42.71	54.00 -11.29 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	BLOUS STREAMING DAC AMPLIFIER	Product Model:	M33
Test By:	Yaro	Test mode:	Phono Input mode
Test Frequency:	1 GHz ~ 6 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

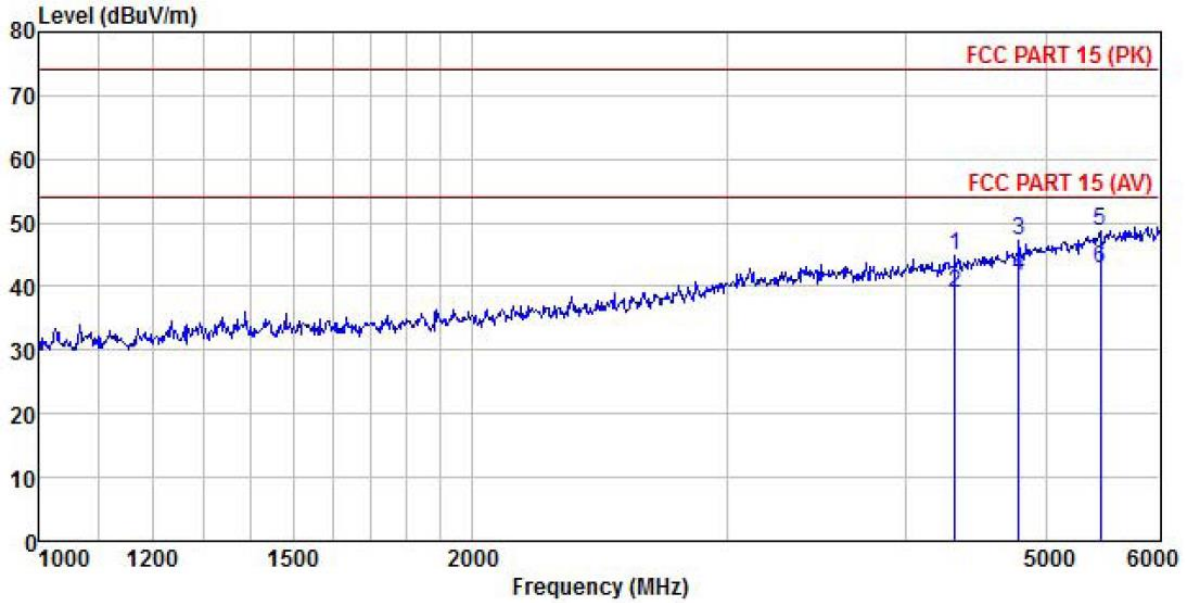

	Read	Antenna	Cable	Aux	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Factor	Line	Limit	Remark
-----	-----	-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB
1	4322.645	48.55	29.82	6.00	2.30	41.90	44.77	74.00 -29.23 Peak
2	4322.645	42.65	29.82	6.00	2.30	41.90	38.87	54.00 -15.13 Average
3	4787.449	49.36	30.75	6.39	2.44	41.83	47.11	74.00 -26.89 Peak
4	4787.449	43.93	30.75	6.39	2.44	41.83	41.68	54.00 -12.32 Average
5	5456.438	48.73	32.20	6.96	2.64	41.85	48.68	74.00 -25.32 Peak
6	5456.438	42.88	32.20	6.96	2.64	41.85	42.83	54.00 -11.17 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss + Aux Factor – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.