

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666 Fax: +86 (0) 21 6191 5678

ee.shanghai@sgs.com

Report No.: SHEM130400066702

Page 1 of 74

FCC Part 15C TEST REPORT

Application No. :	SHEM1304000667RF	
Applicant:	Lenbrook Industries Limited	
FCC ID:	SVC-NADD7050	
IC:	152C-NADD7050	
Equipment Under Test (I NOTE: The following sam	EUT): ple(s) submitted was/were identified on behalf of the client as	
Product Name:	Direct Digital Network Amplifier	
Brand Name:	NAD	
Model:	D7050 DIRECT DIGITAL NETWORK AMPLIFIER	
Added Model:	N/A	
Standards:	FCC PART 15 SUBPART C, Section 15.247:2012 RSS-210 Issue 8 (December 2010) RSS-Gen Issue 3 (December 2010)	
Date of Receipt:	April 23, 2013	
Date of Test:	May 02, 2013 to May 29, 2013	
Date of Issue:	May 31, 2013	
Test Result :	PASS *	

^{*} In the configuration tested, the EUT (Equipment under test) complied with the standards specified above.



The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM130400066702

Page: 2 of 74

2 Version

	Revision Record							
Version	Chapter	Date	Modifier	Remark				
00	/	May 31, 2013	1	Original				

Authorized for issue by:		
Engineer	Zenger Zhang	Zenger Zhang
	Print Name	
Clerk	Susie Liu	Suire Lin
	Print Name	
Reviewer	Keny Xu	Keny en
	Print Name	



Report No.: SHEM130400066702

Page: 3 of 74

3 Test Summary

Test Item	FCC Test Requirement	IC Test Requirement	Test method	Result
Antenna Requirement	FCC Part 15, Subpart C Section 15.203/15.247 (c)	RSS-Gen 7.1.2		PASS
AC Power Line Conducted Emission	FCC Part 15, Subpart C Section 15.207	RSS-Gen Section 7.2.4	ANSI C63.10 (2009) Section 6.2	PASS
20dB Occupied Bandwidth	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS 210 A 8.1(a)	ANSI C63.10 (2009) Section 6.9.1	PASS
Conducted Peak Output Power	FCC Part 15, Subpart C Section 15.247 (b)(1)	RSS 210 A 8.4(2)	ANSI C63.10 (2009) Section 6.10.1	PASS
Carrier Frequencies Separation	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS 210 A 8.1(b)	ANSI C63.10 (2009) Section 7.7.2	PASS
Hopping Channel Number	FCC Part 15, Subpart C Section 15.247 (b)	RSS 210 A 8.1(d)	ANSI C63.10 (2009) Section 7.7.3	PASS
Dwell Time	FCC Part 15, Subpart C Section 15.247 (a)(1)	RSS 210 A 8.1(d)	ANSI C63.10 (2009) Section 7.7.4	PASS
RF Conducted Spurious Emissions	FCC Part 15, Subpart C Section 15.247(d)	RSS 210 A 8.5	ANSI C63.10 (2009) Section 7.7.10	PASS
Radiated Spurious emissions	FCC Part 15, Subpart C Section 15.209 and Section 15.205	RSS-Gen section 4.9	ANSI C63.10 (2009) Section 6.12	PASS
Radiated Band-edge	FCC Part 15, Subpart C Section 15.205	RSS-Gen section 4.9	ANSI C63.10 (2009) Section 6.5	PASS
99% Occupied Bandwidth		RSS-Gen section 4.6.1	RSS-Gen section 4.6.1	Test



Report No.: SHEM130400066702

Page: 4 of 74

4 Contents

			Page
1	C	OVER PAGE	1
2	V	ERSION	2
3		EST SUMMARY	
4	C	ONTENTS	4
5	G	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF E.U.T.	
	5.3	TECHNICAL SPECIFICATIONS:	
	5.4	SUPPORT SOFTWARE FOR TESTING	6
	5.5	DETAILS OF TEST MODE	
	5.6	TEST LOCATION	
	5.7	TEST FACILITY	7
6	E	QUIPMENTS USED DURING TEST	8
7	T	EST RESULTS	10
-	7.1	E.U.T. TEST CONDITIONS	
	7.1	ANTENNA REQUIREMENT	
	7.3	CONDUCTED EMISSIONS ON MAINS TERMINALS	
	7.4	20DB OCCUPIED BANDWIDTH	
	7.5	CONDUCTED PEAK OUTPUT POWER	
	7.6	CARRIER FREQUENCIES SEPARATED	
	7.7	HOPPING CHANNEL NUMBER	32
	7.8	DWELL TIME	
	7.9	CONDUCTED SPURIOUS EMISSIONS	
	7.10		
	7.11	RADIATED SPURIOUS EMISSIONS	
	7.12		
	7.13	OCCUPIED BANDWIDTH TEST	68
8	T	EST SETUP PHOTOGRAPHS	73
a	F'	LIT CONSTRUCTIONAL DETAILS	73



Report No.: SHEM130400066702

Page: 5 of 74

5 General Information

5.1 Client Information

Applicant:	Lenbrook Industries Limited
Address of Applicant:	633 Granite Court, Pickering Ontario, Toronto L1W 3K1, Canada
Manufacturer:	Lenbrook Industries Limited
Address of Manufacturer:	633 Granite Court, Pickering Ontario, Toronto L1W 3K1, Canada
Factory:	Hansong (Nanjing) Technology Ltd.

5.2 General Description of E.U.T.

Product Name	Direct Digital Network Amplifier
Brand Name:	NAD
Model No:	D7050 DIRECT DIGITAL NETWORK AMPLIFIER
Added Model:	N/A
Product Description:	Mobile production

5.3 Technical Specifications:

Operation Frequency:	2402MHz~2480N	2402MHz~2480MHz		
Bluetooth Version:	3.0+EDR	3.0+EDR		
Modulation Technique:	Frequency Hopp	Frequency Hopping Spread Spectrum(FHSS)		
Modulation Type:	GFSK, π/4DQPS	GFSK, π/4DQPSK, 8DPSK		
Number of Channel:	79			
Power Supply:	Rated Input:	AC 100V-240V, 50-60Hz		
Cable:	AC Cable:	About 100cm Length (3 Wires)		
Antenna Type	Integral			
Antenna Gain	2.0dBi			



Report No.: SHEM130400066702

Page: 6 of 74

5.4 Support Software for Testing

Software name	Manufacturer	Supplied By
Blue Test3 (For CSR)	CSR	SGS

5.5 Details of Test Mode

Test Mode	Description of Test Mode
Transmitting mode:	Using the Blue Test3 make the EUT continue transmitting on working frequency.

5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. No.588 West Jindu Road, Songjiang District, Shanghai, China.201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5678



Report No.: SHEM130400066702

Page: 7 of 74

5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

• FCC – Registration No.: 402683

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

Industry Canada (IC) – IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.



Report No.: SHEM130400066702

Page: 8 of 74

6 Equipments Used during Test

Radiated Emission

Tidalai	ea Emission		ı			
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2013-02-23	2014-02-22
2	Antenna	SCHWARZBE CK	VULB916 8	9168-313	2013-03-07	2014-03-06
3	CONTROLLER	INNCO	CO200	474	/	/
4	Antenna	SCHWARZBE CK	BBHA912 0D	9120D-67 9	2013-03-07	2014-03-06
5	Antenna	SCHWARZBE CK	BBHA917 0	9170-373	2013-03-07	2014-03-06
6	Low nosie amplifier	LNA6900	TESEQ	71033	2013-02-23	2014-02-22

Conducted Emission

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal.Due date
1	EMI test	Rohde & Schwarz	ESCS30	100086	2013-02-23	2014-02-22
2	Line impedance stabilization network	SCHWARZBE CK	NSLK8127	8127-490	2013-02-23	2014-02-22
3	Line impedance stabilization network	ETS	3816/2	00034161	2013-02-23	2014-02-22

⊠ RF Conducted Test

Item	Test Equipment	Manufacturer	Model No. Serial No.		Cal. Date	Cal. Due date	
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-03	2013-06-01	
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-06-03	2013-06-01	
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-06-03	2013-06-01	



Report No.: SHEM130400066702

Page: 9 of 74

	1				, , , , , , , , , , , , , , , , , , , ,		
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-06-03	2013-06-01	
5	Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91703 73	2012-11-15	2013-11-14	
6	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-09	2013-10-08	
7	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P		2012-10-09	2013-10-08	
8	CLAMP METER	FLUKE	316	86080010	2012-06-03	2013-06-01	
9	Thermo- Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-09	2013-10-08	
11	High-low temperature cabinet	Shanghai YuanZhen	GW2050		2012-06-03	2013-06-01	
12	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT1800. 0/ 2000.0- 0.2/40-5SSK	11	2012-06-03	2013-06-01	
13	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT800.0/ 880.0- 0.2/40-5SSK	9	2012-06-03	2013-06-01	
14	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	2012-06-03	2013-06-01	
15	Low nosie amplifier	TESEQ	LNA6900	70133	2012-06-03	2013-06-01	
16	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-03	2013-06-01	
17	Line impedance stabilization network	SCHWARZBECK	NSLK8127	8127-490	2012-06-03	2013-06-01	



Report No.: SHEM130400066702

Page: 10 of 74

7 Test Results

7.1 E.U.T. test conditions

Test Power: AC 120V, 60Hz

Requirements: 15.31(e) For intentional radiators, measurements of the variation of the input

power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a

new battery.

Operating Environment:

Temperature:20.0 -25.0 °CHumidity:35-75 % RHAtmospheric Pressure:992 -1020 mbar

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test frequencies: According to the 15.31(m) Measurements on intentional radiators or

receivers, other than TV broadcast receivers, shall be performed and. if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in

the following table:

Frequency range over which device operates	Number of frequencies	Location in the range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top. 1 near middle and 1 near bottom

Pursuant to Part 15.31(c) For swept frequency equipment, measurements shall be made with the frequency sweep stopped at those frequencies chosen for the measurements to be reported.

Test frequency is the lowest channel: 0 channel (2402MHz), middle channel: 39 channel (2441MHz) and highest channel: 78 channel (2480MHz) with fixed at channel.



Report No.: SHEM130400066702

Page: 11 of 74

7.2 Antenna Requirement

Standard requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The gain of the antenna is less than 2.0 dBi.



Report No.: SHEM130400066702

Page: 12 of 74

7.3 Conducted Emissions on Mains Terminals

Test Requirement: FCC Part 15C, Section 15.207

RSS-Gen Section 7.2.4

Test Method: ANSI C63.10:2009 Section 6.2

Test Date: May 13, 2013

Test Result: Pass

Test Voltage: AC 120V 60Hz
Frequency Range: 150 KHz to 30 MHz

Class/Severity: Class B

Test mode: Transmitting mode

Limit:

Frequency range MHz	Class B Limits dB (μV)			
2	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note1: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.


Note2: The lower limit is applicable at the transition frequency.



Report No.: SHEM130400066702

Page: 13 of 74

Test Setup and Procedure

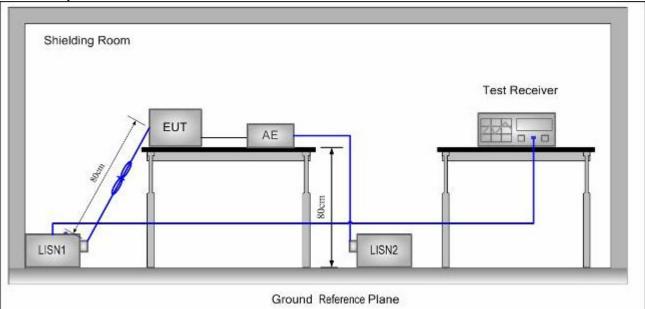

- 1. The mains terminal disturbance voltage was measured with the EUT in a shielded room.
- 2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu H + 5\Omega$ linear impedance. The power cables of all other units of the EUT was connected to a second LISN, which was bonded to the ground reference plane in the same way as the LISN for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded
- 3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
- 4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance was between the closest points of the LISN and the EUT. The mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m. All other units of the EUT and associated equipment was at least 0,8 m from the LISN.



Report No.: SHEM130400066702

Page: 14 of 74


Measurement Data

Pre-scan was performed with peak detected on all ports, Quasi-peak & average measurements were performed at the frequencies at which maximum peak emission level were detected.

Please see the attached Quasi-peak and Average test results.

Level = Read Level + LISN/ISN Factor + Cable Loss.

Test Mode: Transmitting mode Test Port: AC Live Line

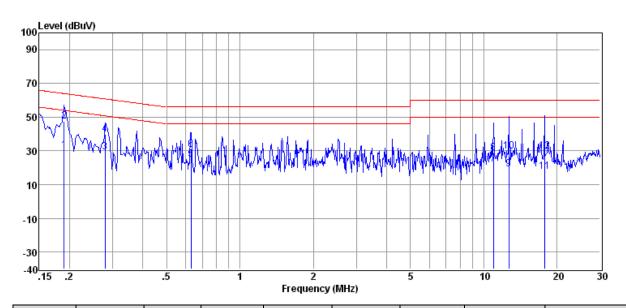


Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector	Phase
(MHz)	(dBµV)	(dB)	(dB)	(dBµV)	(dBµV)	(dB)		
0.190	30.06	0.12	0.10	30.28	54.02	-23.74	Average	Live
0.190	47.51	0.12	0.10	47.73	64.02	-16.29	QP	Live
0.280	28.89	0.13	0.10	29.12	50.81	-21.69	Average	Live
0.280	39.48	0.13	0.10	39.71	60.81	-21.10	QP	Live
0.630	24.49	0.20	0.10	24.79	46.00	-21.21	Average	Live
0.630	30.24	0.20	0.10	30.54	56.00	-25.46	QP	Live
10.963	21.34	0.60	0.10	22.04	50.00	-27.96	Average	Live
10.963	28.14	0.60	0.10	28.84	60.00	-31.16	QP	Live
12.649	18.54	0.60	0.10	19.24	50.00	-30.76	Average	Live
12.649	29.26	0.60	0.10	29.96	60.00	-30.04	QP	Live
17.755	16.82	0.60	0.16	17.58	50.00	-32.42	Average	Live
17.755	29.05	0.60	0.16	29.81	60.00	-30.19	QP	Live



Report No.: SHEM130400066702

Page: 15 of 74

Test Mode: Transmitting mode Test Port: AC Neutral Line

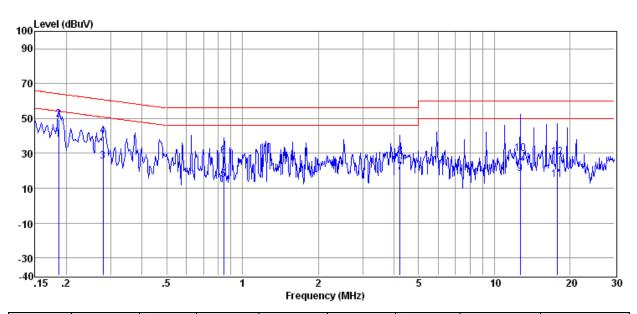

Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Detector	Phase
(MHz)	(dBµV)	(dB)	(dB)	(dBµV)	(dBµV)	(dB)		
0.186	37.49	0.12	0.10	37.71	54.20	-16.49	Average	Neutral
0.186	49.05	0.12	0.10	49.27	64.20	-14.93	QP	Neutral
0.280	25.01	0.10	0.10	25.21	50.81	-25.60	Average	Neutral
0.280	39.46	0.10	0.10	39.66	60.81	-21.15	QP	Neutral
0.844	14.69	0.20	0.10	14.99	46.00	-31.01	Average	Neutral
0.844	28.05	0.20	0.10	28.35	56.00	-27.65	QP	Neutral
4.224	18.92	0.22	0.17	19.31	46.00	-26.69	Average	Neutral
4.224	27.73	0.22	0.17	28.12	56.00	-27.88	QP	Neutral
12.649	17.47	0.50	0.10	18.07	50.00	-31.93	Average	Neutral
12.649	28.96	0.50	0.10	29.56	60.00	-30.44	QP	Neutral
17.755	14.25	0.56	0.16	14.97	50.00	-35.03	Average	Neutral
17.755	26.90	0.56	0.16	27.62	60.00	-32.38	QP	Neutral



Report No.: SHEM130400066702

Page: 16 of 74

7.4 20dB Occupied Bandwidth

Test Requirement: FCC Part 15 C Section 15.247 (a)(1)

RSS 210 A 8.1(a)

Test Method: ANSI C63.10:2009 Clause 6.9.1

Test Date: May 28, 2013
Final Test Mode: Transmitting mode

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

- 2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20dB bandwidth, centered on the hopping channel;
- 3. Set the spectrum analyzer: RBW >= 1% of the 20dB bandwidth (set 100kHz). VBW >= RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
- 4. Mark the peak frequency and -20dB points.

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test date


Test Channel	Channel Frequency (MHz)	Modulation	Bandwidth(MHz)	
Low	2402	8DPSK	1.203	
Middle	2441	8DPSK	1.206	
High	2480	8DPSK	1.209	
Low	2402	GFSK	0.807	
Middle	2441	GFSK	0.798	
High	2480	GFSK	0.807	
Low	2402	π/4DQPSK	1.200	
Middle	2441	π/4DQPSK	1.218	
High	2480	π/4DQPSK	1.215	




Report No.: SHEM130400066702

Page: 17 of 74

Test plot as follows:

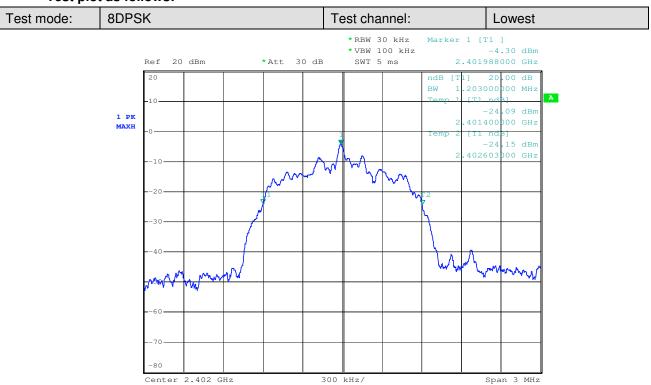



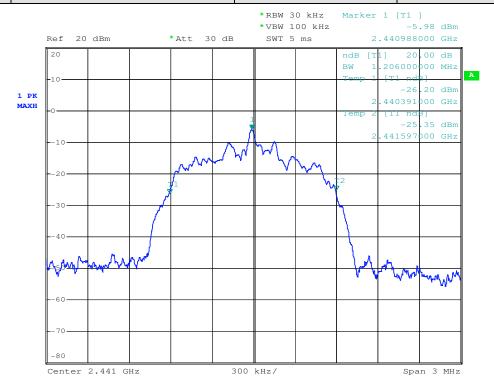



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 18 of 74

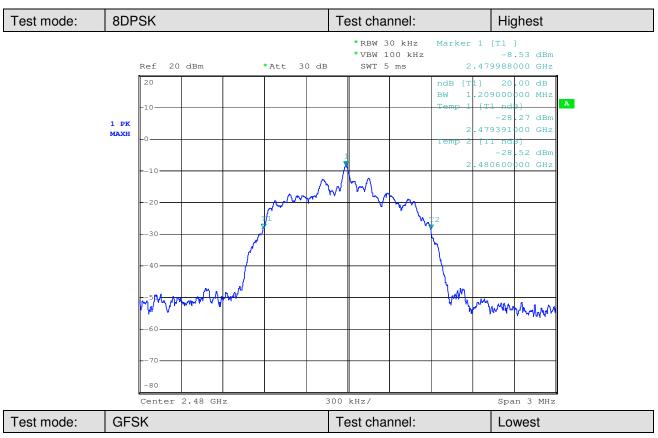


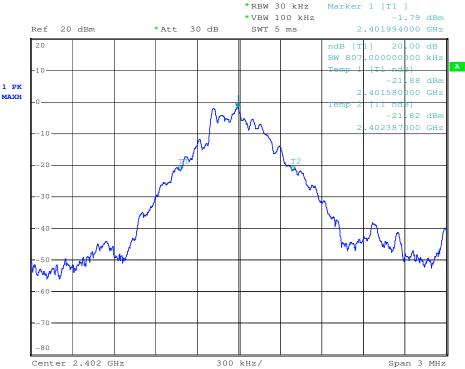




Report No.: SHEM130400066702

Page: 19 of 74

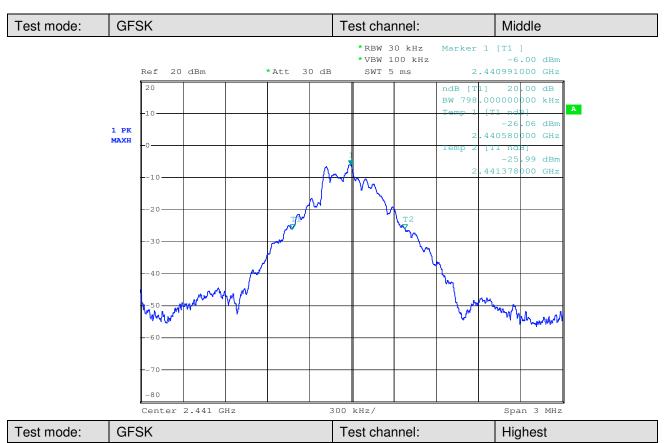

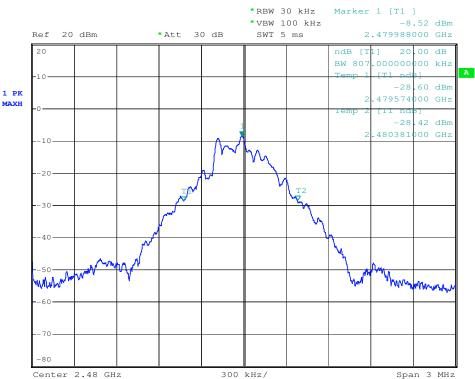


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702

Page: 20 of 74

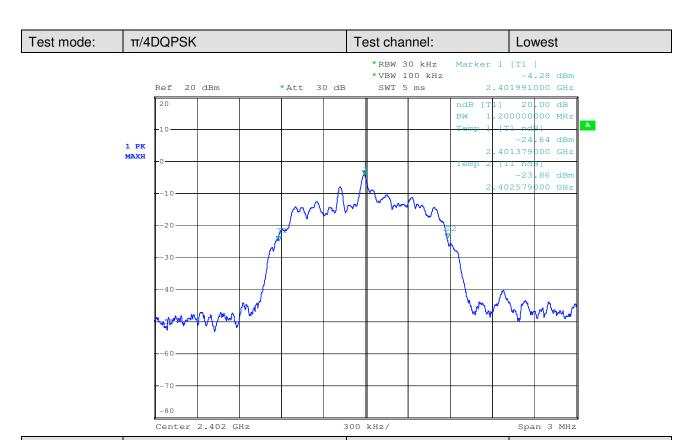



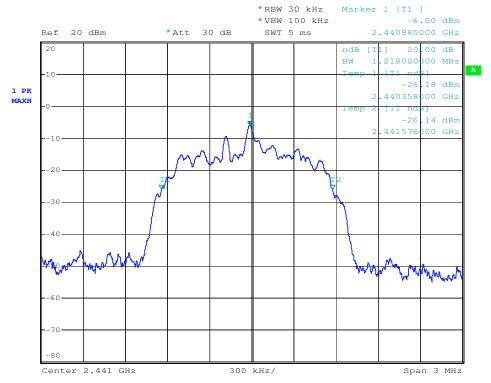


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 21 of 74

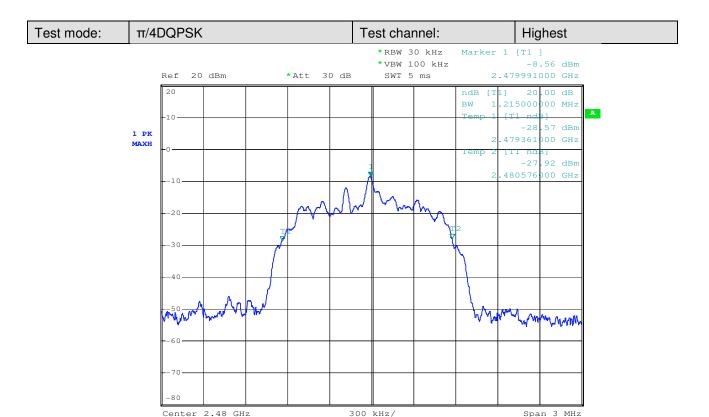



Report No.: SHEM130400066702

Page: 22 of 74

7.5 Conducted Peak Output Power

Test Requirement: FCC Part 15.247 Section 15.247(b)(1)

RSS 210 A 8.4(2)

Test Method: ANSI C64.10:2009 Section 6.10.1

Test Date: May 28, 2013

Test Result: Pass

Test Limit: Regulation 15.247 (b)(1)For frequency hopping systems operating in

the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in

the 2400-2483.5 MHz band: 0.125 watts.


Refer to the result "Hopping channel number" of this document. The

0.125 watt (20.0dBm) limit applies.

Final Test Mode: Transmitting mode

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 3 MHz, VBW = 10 MHz, Sweep = auto; Detector Function = Peak.
- 3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.



Report No.: SHEM130400066702

Page: 23 of 74

Test Results record:

Test Channel	Modulation	Fundamental Frequency (MHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Lowest	8DPSK	2402	-1.21	0.5	-0.71	20	20.71
Middle	8DPSK	2441	-3.23	0.5	-2.73	20	22.73
Highest	8DPSK	2480	-5.67	0.5	-5.17	20	25.17
Lowest	GFSK	2402	-2.86	0.5	-2.36	20	22.36
Middle	GFSK	2441	-4.66	0.5	-4.16	20	24.16
Highest	GFSK	2480	-7.16	0.5	-6.66	20	26.66
Lowest	π/4DQPSK	2402	-1.91	0.5	-1.41	20	21.41
Middle	π/4DQPSK	2441	-3.78	0.5	-3.28	20	23.28
Highest	π/4DQPSK	2480	-6.28	0.5	-5.78	20	25.78



Report No.: SHEM130400066702


Page: 24 of 74

Span 6 MHz

Test result plot as follows:


Center 2.402 GHz

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

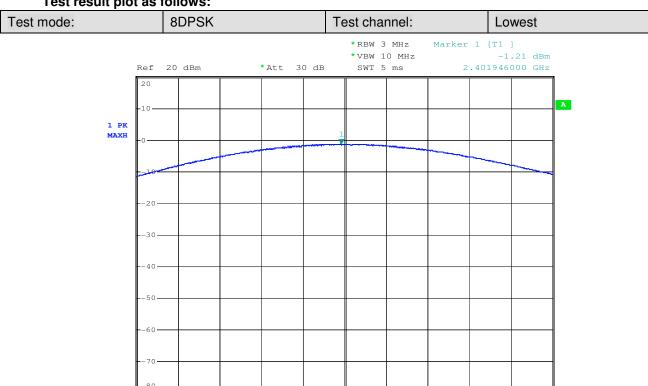



600 kHz/

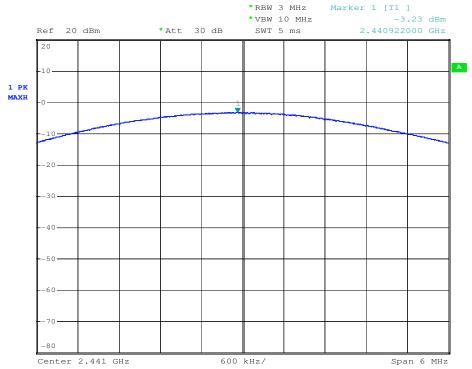



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 25 of 74

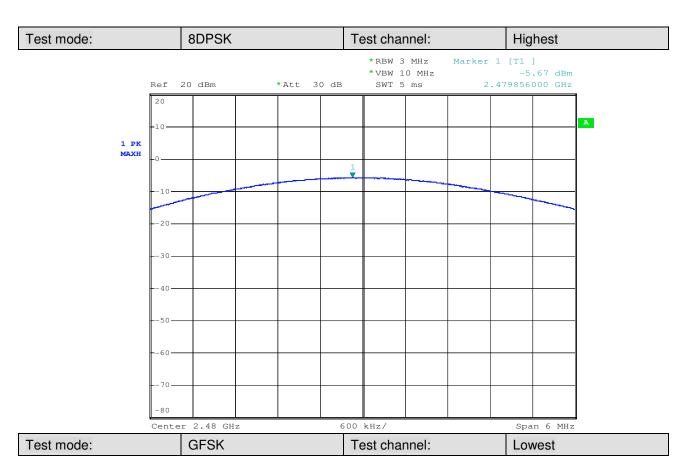

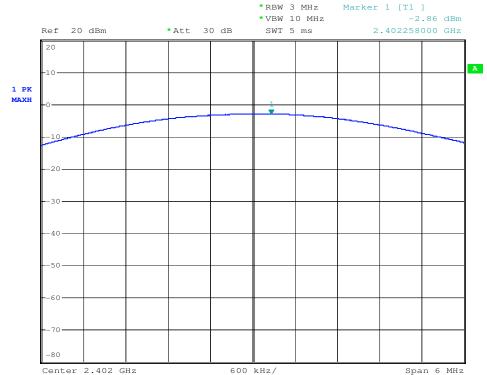


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702

Page: 26 of 74

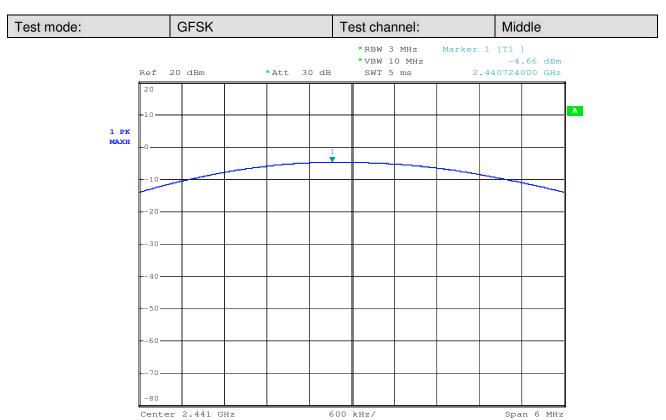



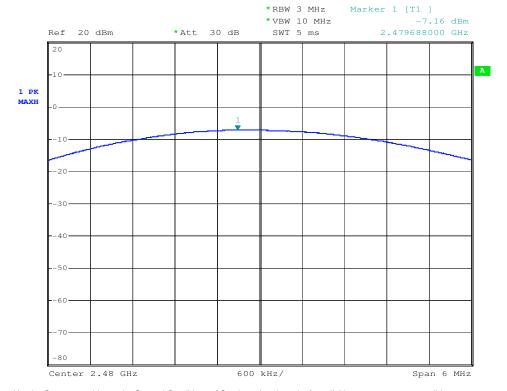


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702

Page: 27 of 74

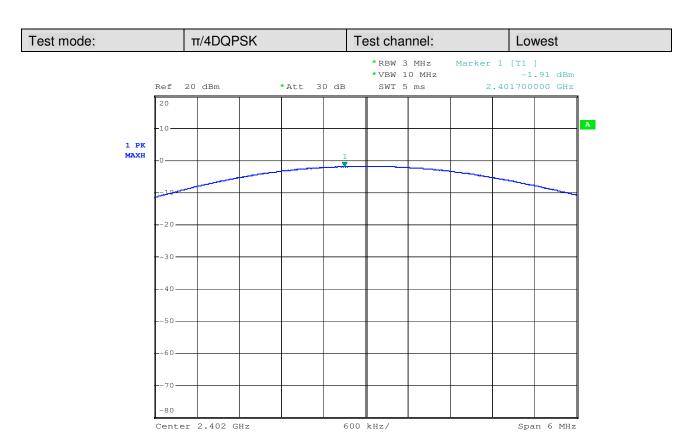



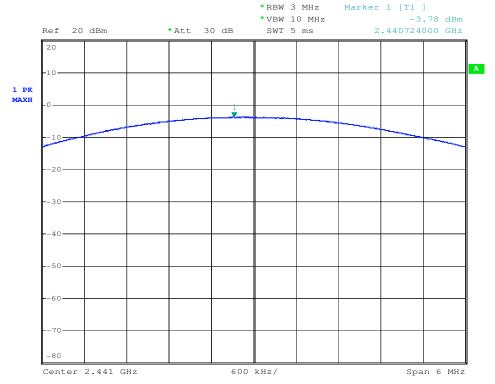


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 28 of 74

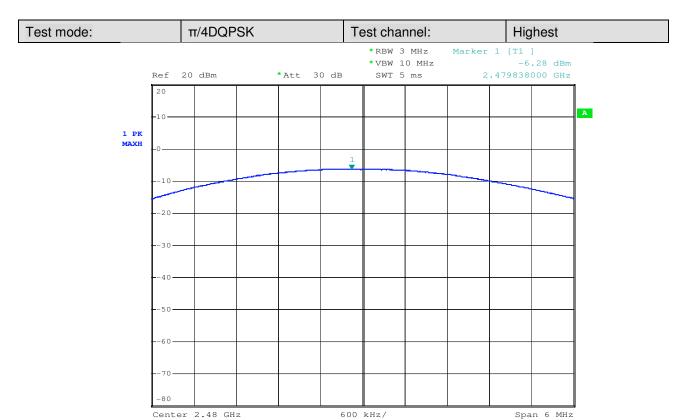



Report No.: SHEM130400066702

Page: 29 of 74

7.6 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C Section 15.247 (a)(1)

RSS 210 A 8.4(2)

Test Method: ANSI C63.10:2009 Clause 7.7.2

Test Date: May 28, 2013

Limit: 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)

Test result: Pass

Final Test Mode: Transmitting mode

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set the spectrum analyzer: RBW >= 1% of the span (set 100 kHz). VBW >= RBW, Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max,hold.
- 3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Test Channel	Modulation	Carrier Frequencies Separated	Limit (25kHz or two- thirds of the 20 dB bandwidth)	Results
Middle Channels (channel 39 and channel 40)	8DPSK	1.01 MHz	25kHz/812kHz	PASS
Middle Channels (channel 39 and channel 40)	GFSK	1.00 MHz	25kHz/812kHz	PASS
Middle Channels (channel 39 and channel 40)	π/4DQPSK	1.02 MHz	25kHz/812kHz	PASS


Note: 20dB bandwidth reference Section 7.4



Report No.: SHEM130400066702

Page: 30 of 74

Test plot as follows:

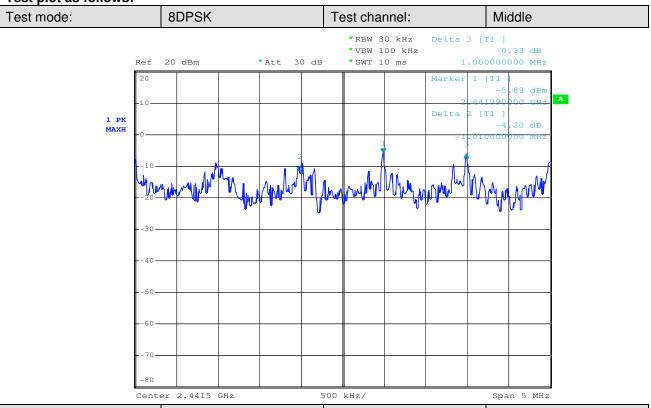

Test mode: GFSK Test channel: Middle




This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 31 of 74

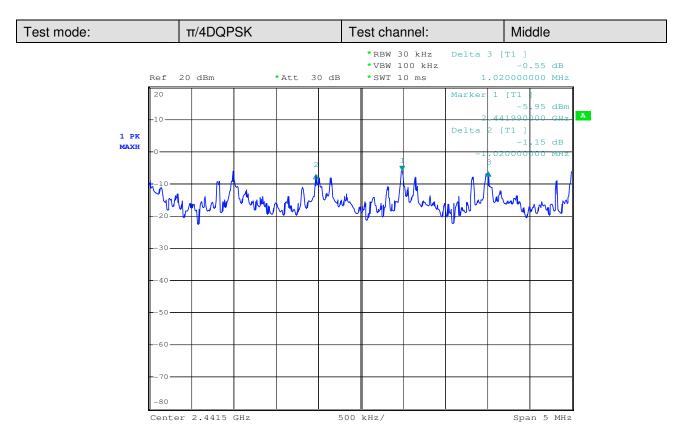



Report No.: SHEM130400066702

Page: 32 of 74

7.7 Hopping Channel Number

Test Requirement: FCC Part15 C Section 15.247(b)

RSS 210 A 8.1(d)

Test Method: ANSI C63.10:2009 Clause 7.7.3

Test Date: May 28, 2013

Limit: At least 15 channels

Test Result: Pass

Test Mode: Transmitting mode

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 300 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
- 3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
- 4. Set the spectrum analyzer: start frequency = 2400MHz. stop frequency = 2483.5MHz. Submit the test result graph.

Measurement Data


Mode	Hopping channel numbers	Limit	Results
8DPSK	79	≥15	Pass
GFSK	79	≥15	Pass
π/4DQPSK	79	≥15	Pass




Report No.: SHEM130400066702

Page: 33 of 74

Test plot as follows:

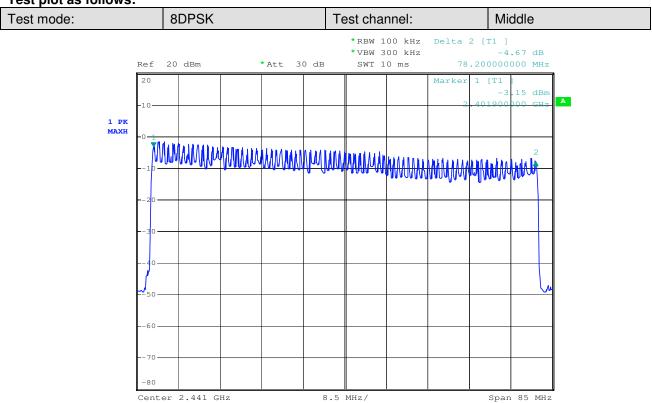

Test mode: GFSK Test channel: Middle

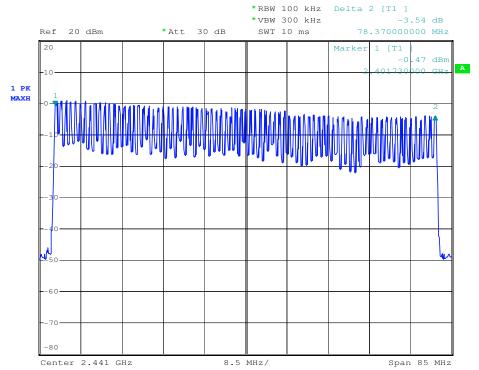


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 34 of 74

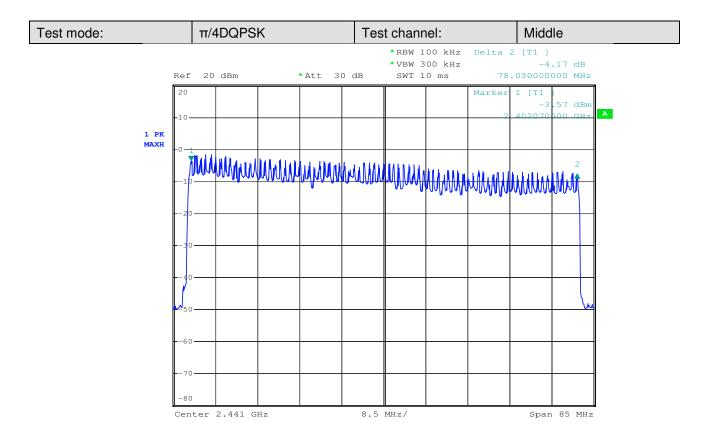



Report No.: SHEM130400066702

Page: 35 of 74

7.8 Dwell Time

Test Requirement: FCC Part 15 C Section 15.247(a)(1)

RSS 210 A 8.1(d)

Test Method: ANSI C63.10:2009 Clause 7.7.4

Test Date: May 28, 2013

Limit: Regulation 15.247(a)(1)(iii) Frequency hopping systems in the

2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are

used.

Test Status: Hopping transmitting with all kind of modulation.

Test Result: Pass

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.

- 2. Set spectrum analyzer span = 0. centered on a hopping channel;
- 3. Use Emission width / No. of Hopping Channels in 31.6s to determine the dwell time.

Frequency (MHz)	Modulation	Packet	Emission Width (ms)	Number of Hopping Channel in 31.6s	Average Time of Occupancy(s)	Limit(s)	Result
		DH1	0.41	201	0.082	0.4	Pass
	8DPSK	DH3	1.66	125	0.208	0.4	Pass
		DH5	2.79	90	0.251	0.4	Pass
	GFSK	DH1	0.39	211	0.082	0.4	Pass
2441		DH3	1.65	140	0.231	0.4	Pass
		DH5	2.84	88	0.250	0.4	Pass
		DH1	0.40	164	0.066	0.4	Pass
	π/4DQPSK	DH3	1.64	123	0.202	0.4	Pass
		DH5	1.70	102	0.173	0.4	Pass




Report No.: SHEM130400066702

Page: 36 of 74


Test plot as follows::



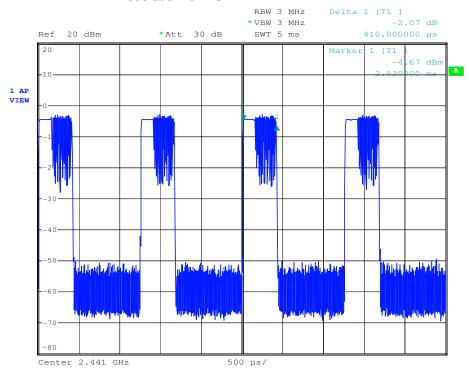

Frequency 2441MHz: Modulation: 8DPSK - DH3

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

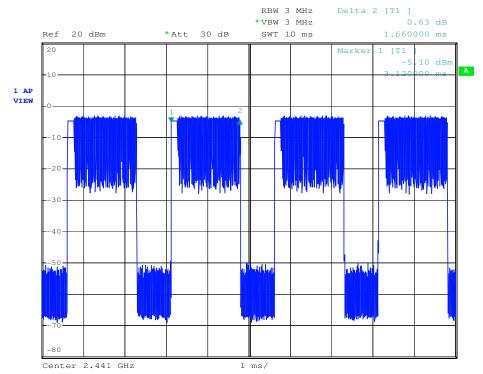


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702

Page: 37 of 74



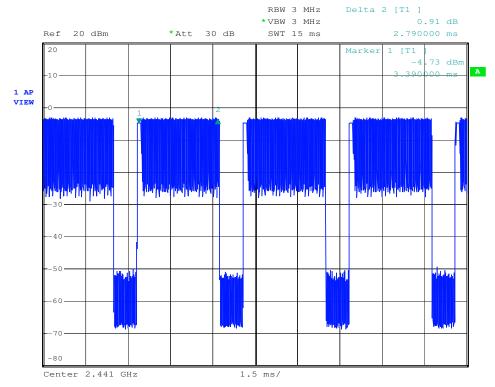

Frequency 2441MHz: Modulation: GFSK-DH1

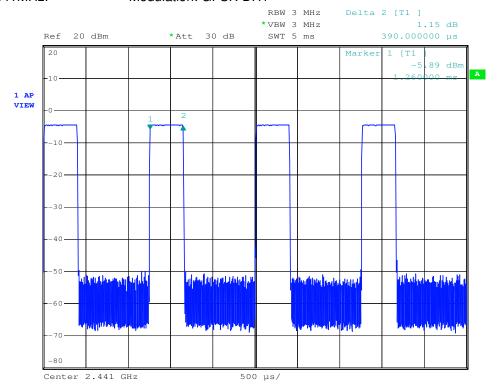




Report No.: SHEM130400066702


Page: 38 of 74



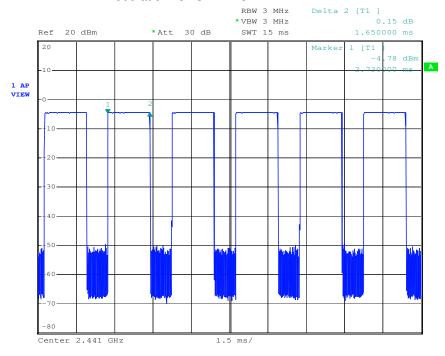

Date: 28.MAY.2013 13:17:09

Frequency 2441MHz: Modulation: GFSK- DH5

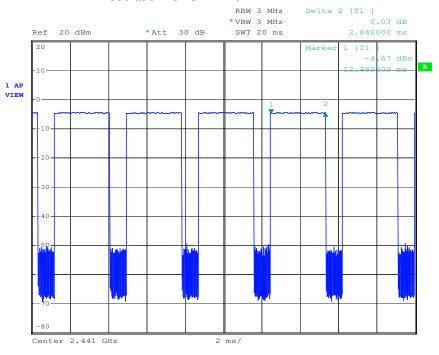



Date: 28.MAY.2013 13:17:50




Report No.: SHEM130400066702

Page: 39 of 74



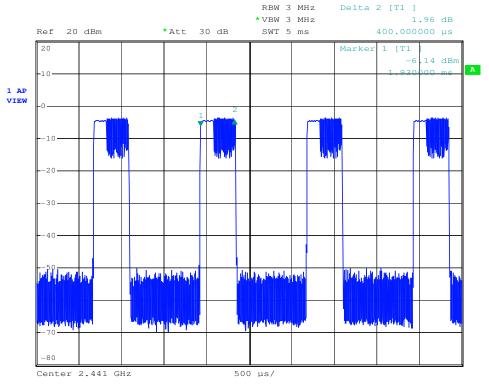

Frequency 2441MHz: Modulation: π/4DQPSK - DH3

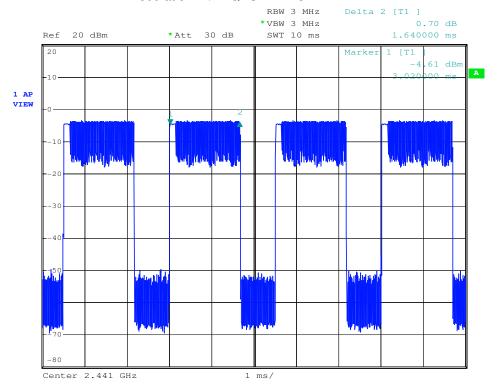




Report No.: SHEM130400066702

Page: 40 of 74

Frequency 2441MHz: Modulation: π/4DQPSK - DH5

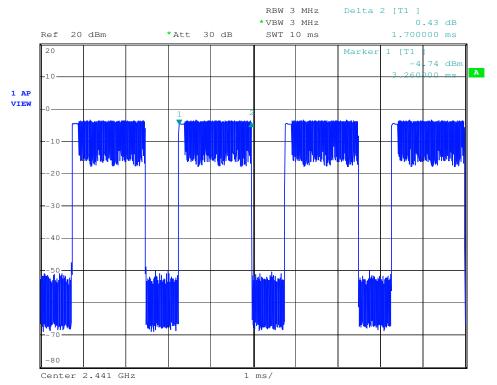



Report No.: SHEM130400066702

Page: 41 of 74

7.9 Conducted Spurious Emissions

Test Requirement: FCC Part 15 Section 15.247(d)

RSS 210 A 8.5

Test Method: ANSI C63.10:2009 Clause 7.7.10

Test Date: May 28, 2013

Limit: (d) In any 100 kHz bandwidth outside the frequency band in which the

spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at

least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. based on either an RF conducted or a radiated measurement. provided the transmitter


demonstrates compliance with the peak conducted power limits.

Final Test Mode: Transmitting mode

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Result: Pass

Test Configuration:



Test Procedure:


- 1. Remove the antenna from the EUT and then connect a low RF cable from
- the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto; Detector Function = Peak (Max. hold).




Report No.: SHEM130400066702

Page: 42 of 74


Test plot as follows:



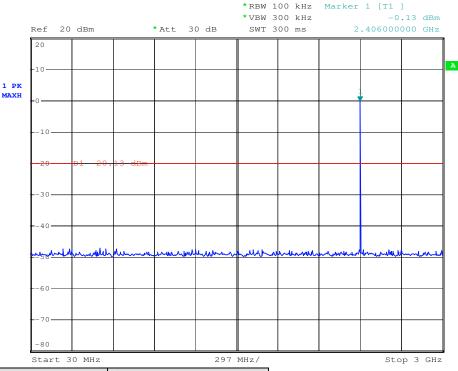

Test Frequency 2402MHz: 30MHz-3GHz:

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

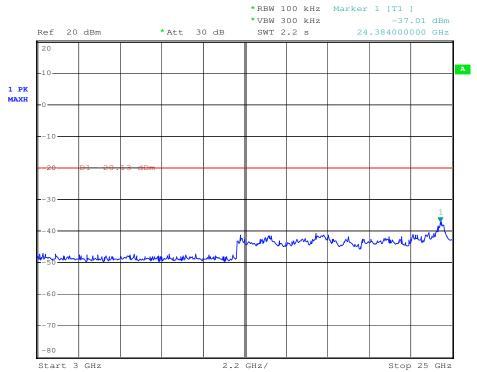

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 43 of 74

7.10 Conducted Band-edge

Test Requirement: FCC Part 15 Section 15.247(d)

RSS-Gen section 4.9

Test Method: ANSI C63.10:2009 Clause 7.7.10

Test Date: May 28, 2013

Limit: (d) In any 100 kHz bandwidth outside the frequency band in which the

spread spectrum or digitally modulated intentional radiator is operating. the radio frequency power that is produced by the intentional radiator shall be at

least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. based on either an RF conducted or a radiated measurement. provided the transmitter


demonstrates compliance with the peak conducted power limits.

Final Test Mode: Transmitting mode

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test Result: Pass

Test Configuration:



Test Procedure:

- 1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2. Set the spectrum analyzer: RBW = 100KHz. VBW >= RBW. Sweep = auto;
- Detector Function = Peak (Max. hold).



Report No.: SHEM130400066702

Page: 44 of 74


Test plot as follows:

Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

For Hopping:



For Static:

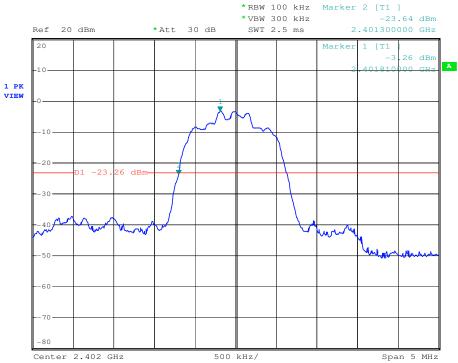

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 45 of 74




Report No.: SHEM130400066702


Page: 46 of 74



For Hopping:

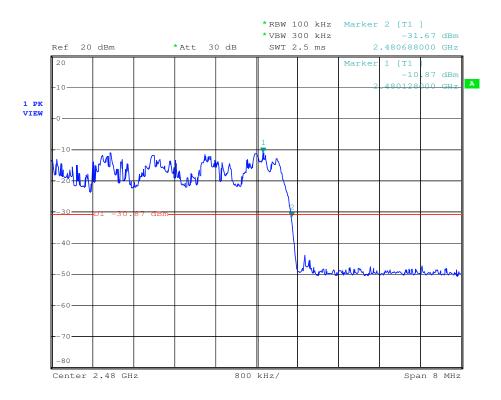

For Static:

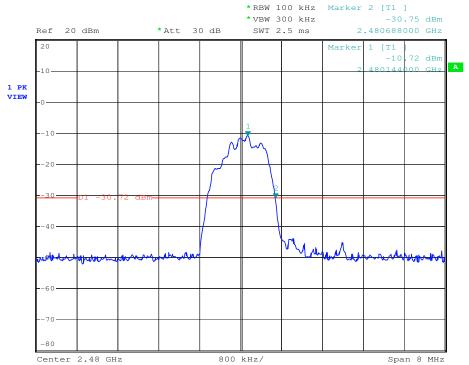

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702


Page: 47 of 74



For Hopping:

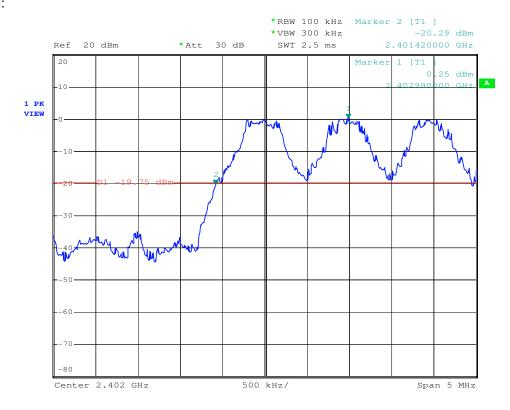

For Static:

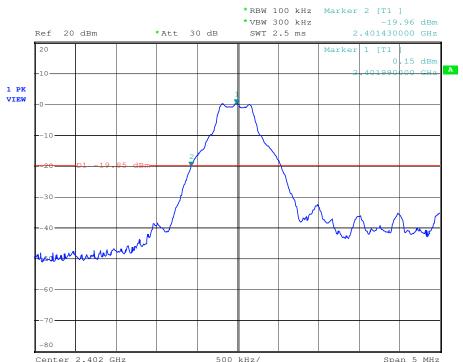




Report No.: SHEM130400066702


Page: 48 of 74



For Hopping:

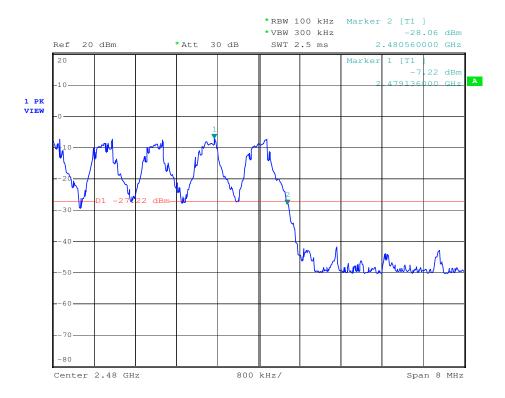

For Static:

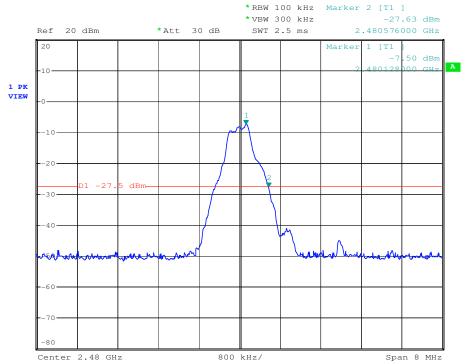

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702


Page: 49 of 74



For Hopping:

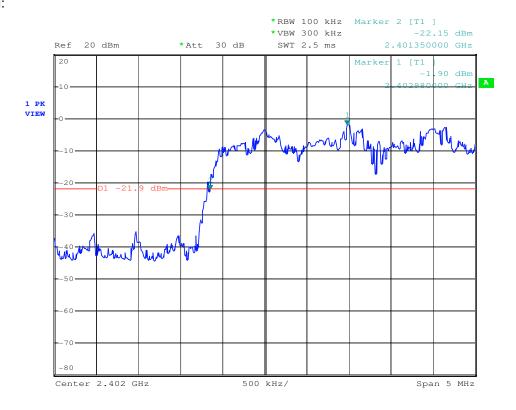

For Static:

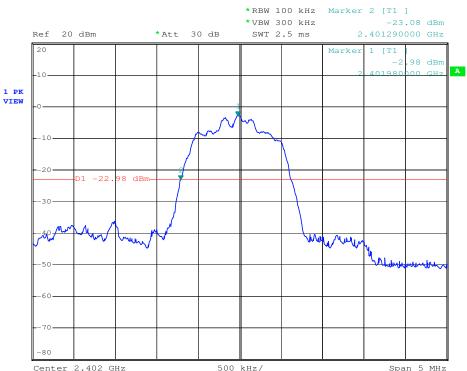

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test




Report No.: SHEM130400066702


Page: 50 of 74

Test mode: π/4DQPSK Test channel: Highest

For Hopping:

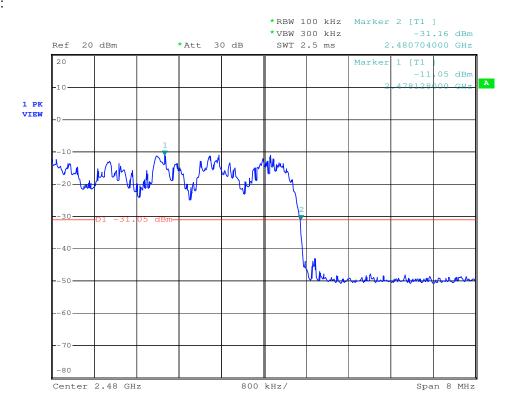

For Static:

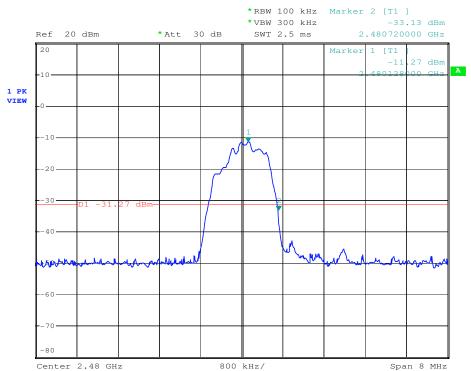

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test



Report No.: SHEM130400066702

Page: 51 of 74

7.11 Radiated Spurious Emissions

Test Requirement: FCC Part 15 Section 15.209 and Section 15.205

RSS-Gen section 4.9

Test Method: ANSI C63.10:2009 Clause 6.12

Test Date: May 29, 2013

Final Test Mode: Transmitting mode

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Test site/setup: Measurement Distance: 3m (Semi-Anechoic Chamber)

Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector

applies (30 MHz - 1000 MHz).

For PK value:

RBW = 1 MHz for $f \ge 1$ GHz VBW \ge RBW; Sweep = auto Detector function = peak

Trace = max hold For AV value:

RBW = 1 MHz for $f \ge 1$ GHz VBW =10Hz; Sweep = auto Detector function = peak

Trace = max hold

Receive antenna scan height 1 m - 4 m. polarization Vertical / Horizontal

15.209 Limit: $40.0 \text{ dB}\mu\text{V/m}$ between 30MHz & 88MHz

43.5 dBµV/m between 88MHz & 216MHz

 $46.0 \text{ dB}\mu\text{V/m}$ between 216MHz & 960MHz

54.0 dBµV/m above 960MHz



Report No.: SHEM130400066702

Page: 52 of 74

Test Configuration:

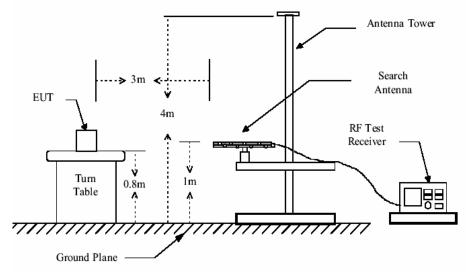


Figure 1. 30MHz to 1GHz radiated emissions test configuration

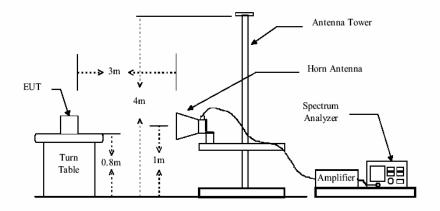


Figure 2. Above 1GHz radiated emissions test configuration

Test Procedure:

The procedure used was ANSI Standard C63.10:2009. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

Low nosie amplifier was used below 1GHz, High pass Filter was used above 3GHz. Between 1G and 3GHz, we did not use any amplifier or filter.

Pre-test was performed on GFSK and EDR mode with adapter, Compliance test was performed on worse case (8DPSK mode with adapter).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM130400066702

Page: 53 of 74

Test were performed for there spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was sumitted.


1) For this intentional radiator operates below 25 GHz. the spectrum shall be investigated to the tenth harmonic of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 5rd harmonic.

As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

30MHz-1GHz 8DPSK:

Vertical:

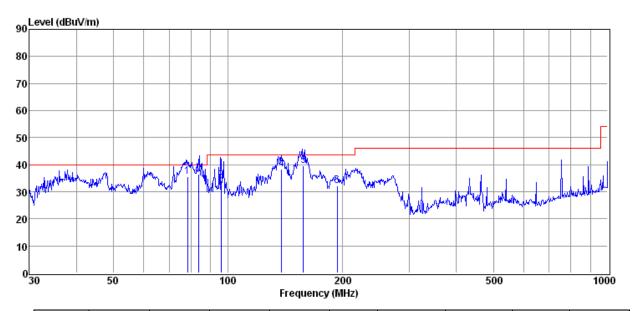


Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
1	78.36	50.30	9.13	24.70	0.86	35.59	40.00	-4.41	QP
2	83.98	51.50	8.68	24.70	0.90	36.38	40.00	-3.62	QP
3	95.99	48.90	8.92	24.70	1.00	34.12	43.50	-9.38	QP
4	138.39	50.12	11.86	24.70	1.22	38.50	43.50	-5.00	QP
5	158.21	50.39	12.62	24.70	1.31	39.62	43.50	-3.88	QP
6	194.03	45.77	9.54	24.60	1.48	32.19	43.50	-11.31	QP



Report No.: SHEM130400066702

Page: 54 of 74

Horizontal:

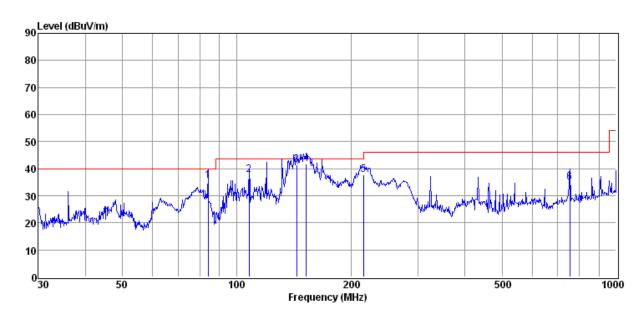

Item	Freq.	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Result Level	Limit Line	Over Limit	Detector
(Mark)	(MHz)	(dBµV)	(dB/m)	(dB)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
1	84.11	50.68	8.68	24.70	0.90	35.56	40.00	-4.44	QP
2	107.89	51.53	9.91	24.70	1.08	37.82	43.50	-5.68	QP
3	144.05	52.61	12.34	24.70	1.25	41.50	43.50	-2.00	QP
4	152.66	52.50	12.67	24.70	1.28	41.75	43.50	-1.75	QP
5	216.02	51.54	9.14	24.60	1.58	37.66	46.00	-8.34	QP
6	755.39	33.88	21.61	24.00	3.34	34.83	46.00	-11.17	QP



Report No.: SHEM130400066702

Page: 55 of 74

1GHz-12GHz: 8DPSK

Test Antenna: Horizontal Test Channel: Low

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3009.25	59.53	6.11	53.42	54	0.58	peak
2	5676.50	60.78	13.76	47.02	54	6.98	peak
3	7615.25	60.65	18.32	42.33	54	11.67	peak
4	8379.00	61.59	19.87	41.72	54	12.28	peak
5	9589.25	61.88	24.02	37.86	54	16.14	peak
6	11140.25	61.41	22.28	39.13	54	14.87	peak

Test Antenna: Vertical Test Channel: Low

	100t Antonnar Voltical							
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	
1	1470.00	53.62	-0.84	52.46	54	1.54	peak	
2	2128.00	58.22	5.43	52.79	54	1.21	peak	
3	4807.00	57.32	9.59	47.73	54	6.27	peak	
4	7615.25	61.01	17.93	43.08	54	10.92	peak	
5	9366.00	61.61	22.09	39.52	54	14.48	peak	
6	11210.75	61.26	20.49	40.77	54	13.23	peak	



Report No.: SHEM130400066702

Page: 56 of 74

Test Antenna: Horizontal Test Channel: Middle

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4877.50	59.64	10.73	48.91	54	5.09	peak
2	5617.75	60.44	13.64	46.80	54	7.20	peak
3	7885.50	61.09	19.00	42.09	54	11.91	peak
4	9624.50	61.86	23.99	37.87	54	16.13	peak
5	11210.75	60.93	22.07	38.86	54	15.14	peak
6	11645.50	61.84	20.88	40.96	54	13.04	peak

Test Antenna: Vertical Test Channel: Middle

	incommun rondio	A.					
Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1728.50	58.01	2.04	53.97	54	0.03	peak
2	4877.50	59.51	9.90	49.61	54	4.39	peak
3	6945.50	60.20	15.06	45.14	54	8.86	peak
4	7615.25	60.89	17.93	42.96	54	11.04	peak
5	9342.50	61.85	21.93	39.92	54	14.08	peak
6	11810.00	61.32	19.92	41.40	54	12.60	peak



Report No.: SHEM130400066702

Page: 57 of 74

Test Antenna: Horizontal Test Channel: High

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2116.25	59.93	5.31	52.62	54	1.38	peak
2	4959.75	59.81	10.96	48.85	54	5.15	peak
3	5688.25	60.67	13.80	46.87	54	7.13	peak
4	7638.75	60.47	18.37	42.10	54	11.90	peak
5	9460.00	62.40	23.85	38.55	54	15.45	peak
6	11128.50	61.43	22.32	39.11	54	14.89	peak

Test Antenna: Vertical Test Channel: High

Mark	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2128.00	60.02	5.43	52.59	54	1.41	peak
2	7838.50	60.51	17.94	42.57	54	11.43	peak
3	9601.00	62.44	22.46	39.98	54	14.02	peak
4	11152.00	62.25	20.57	41.68	54	12.32	peak
5	11904.00	61.14	19.89	41.25	54	12.75	peak

Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor.

Remark: No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part. Hence there no other emissions have been reported.



Report No.: SHEM130400066702

Page: 58 of 74

7.12 Band edge (Radiated Emission)

Test Requirement:

Section 15.247(d) In addition, radiated emissions which fall in the

restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section

15.205(c).

Test Method: ANSI 63.10:2009 Clause 6.12

Test Date: May 29, 2013

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dB μ V/m between 30MHz & 88MHz;

 $43.5 \text{ dB}_{\mu}\text{V/m}$ between 88MHz & 216MHz; $46.0 \text{ dB}_{\mu}\text{V/m}$ between 216MHz & 960MHz;

54.0 dBµV/m above 960MHz.

Detector: For PK value:

report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

RBW = 1 MHz for $f \ge 1$ GHz VBW \ge RBW; Sweep = auto Detector function = peak

Trace = max hold For AV value:

RBW = 1 MHz for f ≥ 1 GHz VBW =10Hz; Sweep = auto Detector function = peak

Trace = max hold

According to section,15.35(b) for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Pre-test were performed for there spatial orthogonal(X, Y, Z), the worst test data (X orthogonal) was sumitted.

Test Result: The EUT does meet the FCC requirements.




Report No.: SHEM130400066702

Page: 59 of 74

Measurement Result:

CH Low 2402MHz Radiated Bandedge


Horizontal, Peak Detector:

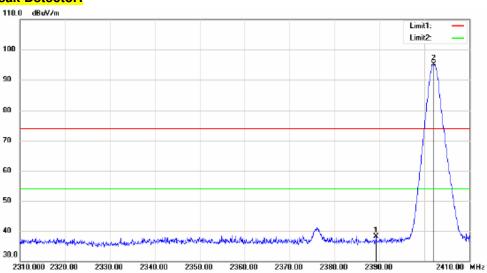

Modulation: 8DPSK

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2389.200	44.57	peak	-6.56	38.01	74.00	-35.99
2	2402.000	101.65	peak	-6.54	95.11	74.00	21.11

Vertical, Peak Detector:

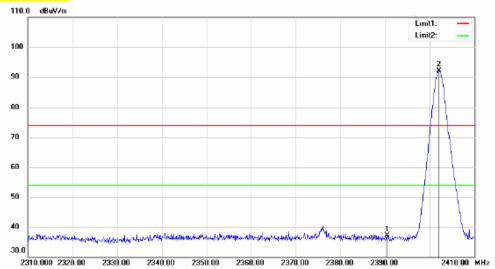

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2390.400	43.71	peak	-6.55	37.16	74.00	-36.84
2	2402.100	98.70	peak	-6.54	92.16	74.00	18.16




Report No.: SHEM130400066702

Page: 60 of 74

CH Low 2402MHz Radiated Bandedge


Horizontal, Peak Detector:

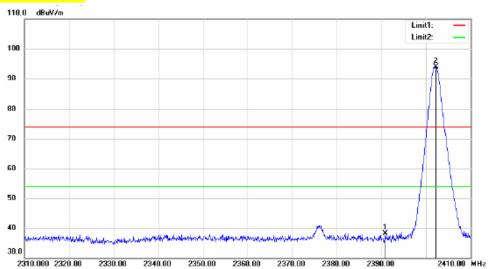

Modulation: GFSK

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2390.800	44.66	peak	-6.55	38.11	74.00	-35.89
2	2402.200	100.43	peak	-6.54	93.89	74.00	19.89

Vertical, Peak Detector:

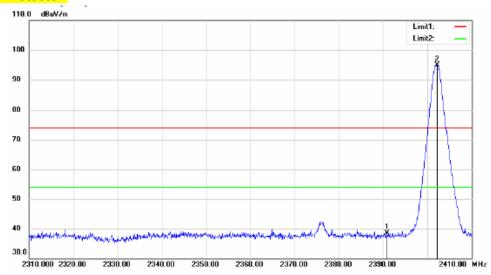

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2390.900	45.10	peak	-6.55	38.55	74.00	-35.45
2	2402.200	101.49	peak	-6.54	94.95	74.00	20.95




Report No.: SHEM130400066702

Page: 61 of 74

CH Low 2402MHz Radiated Bandedge


Horizontal, Peak Detector:

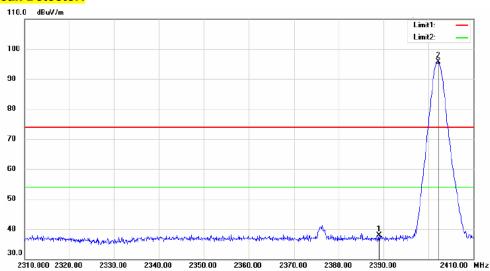

Modulation: π/4DQPSK

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2389.000	44.47	peak	-6.56	37.91	74.00	-36.09
2	2402.200	102.18	peak	-6.54	95.64	74.00	21.64

Vertical, Peak Detector:

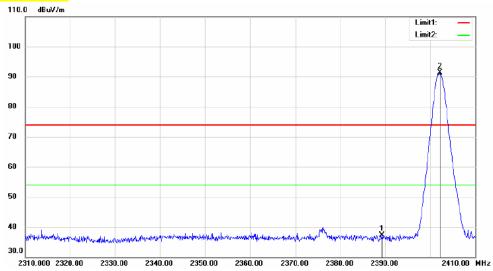


Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2389.300	43.90	peak	-6.55	37.35	74.00	-36.65
2	2402.200	97.76	peak	-6.54	91.22	74.00	17.22



Report No.: SHEM130400066702

Page: 62 of 74


CH Low 2480MHz Radiated Bandedge Horizontal, Peak Detector:

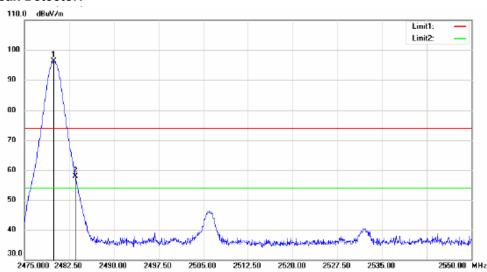

Modulation: 8DPSK

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2479.950	102.66	peak	-6.42	96.24	74.00	22.24
2	2483.550	64.28	peak	-6.41	57.87	74.00	-16.13

Horizontal, Average Detector:

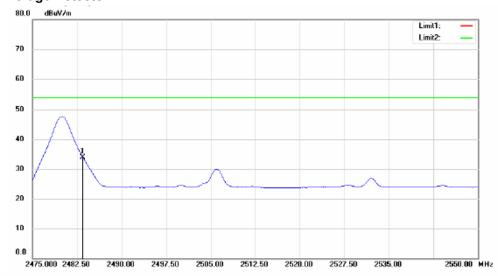


ı	Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Γ	1	2483.475	40.41	peak	-6.41	34.00	54.00	-20.00



Report No.: SHEM130400066702


Page: 63 of 74

Vertical, Peak Detector:

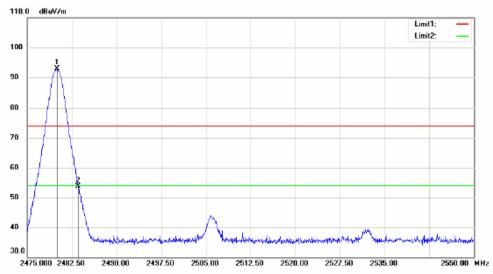

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2480.025	99.39	peak	-6.42	92.97	74.00	18.97
2	2483.550	60.09	peak	-6.41	53.68	74.00	-20.32

Vertical, Average Detector:

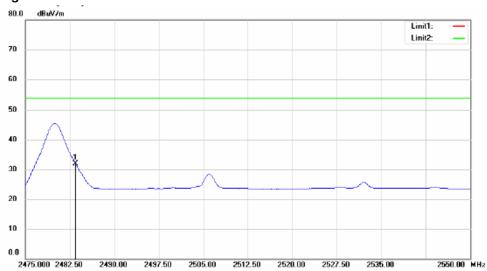

Mk	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2483.475	38.29	peak	-6.41	31.88	54.00	-22.12




Report No.: SHEM130400066702

Page: 64 of 74

Measurement Result: CH Low 2480MHz Radiated Bandedge


Modulation: GFSK

Horizontal, Peak Detector:

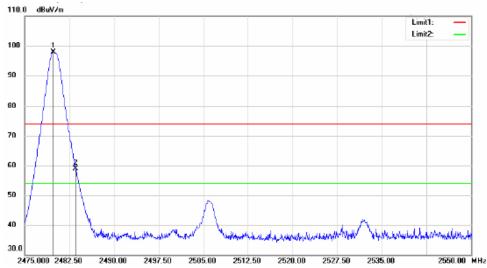

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2479.800	104.29	peak	-6.42	97.87	74.00	23.87
2	2483.550	65.39	peak	-6.41	58.98	74.00	-15.02

Horizontal, Average Detector:

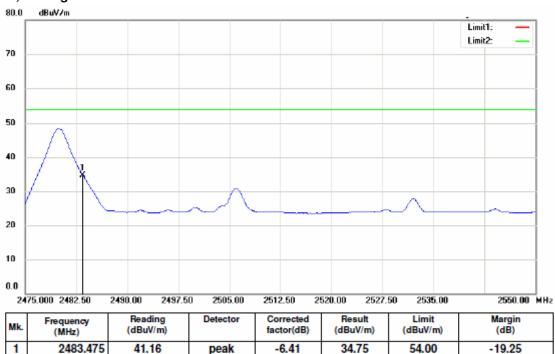




Report No.: SHEM130400066702


Page: 65 of 74

Vertical, Peak Detector:

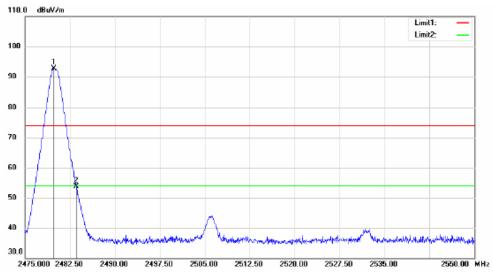

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2479.875	99.08	peak	-6.42	92.66	74.00	18.66
2	2483.550	60.17	peak	-6.41	53.76	74.00	-20.24

Vertical, Average Detector:

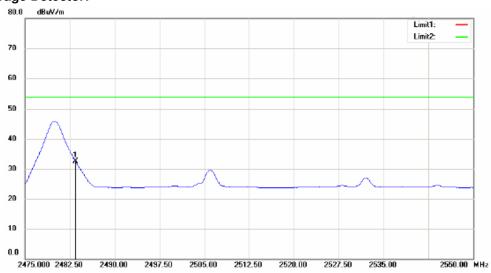

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2483.475	38.86	peak	-6.41	32.45	54.00	-21.55




Report No.: SHEM130400066702

Page: 66 of 74

Measurement Result: CH Low 2480MHz Radiated Bandedge


Modulation: π/4DQPSK

Horizontal, Peak Detector:

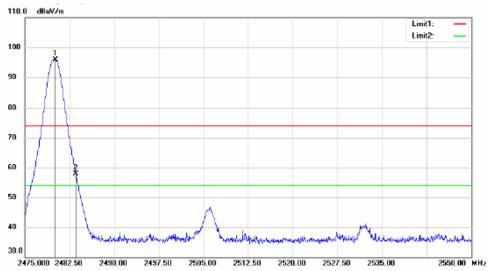

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2480.100	102.24	peak	-6.42	95.82	74.00	21.82
2	2483.550	64.41	peak	-6.41	58.00	74.00	-16.00

Horizontal, Average Detector:

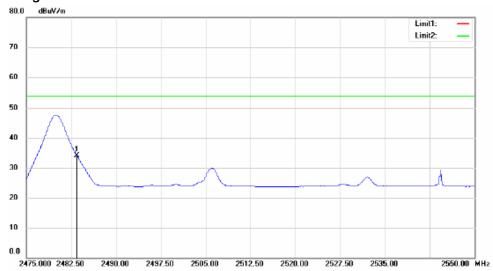


Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2483.475	40.42	peak	-6.41	34.01	54.00	-19.99



Report No.: SHEM130400066702


Page: 67 of 74

Vertical, Peak Detector:

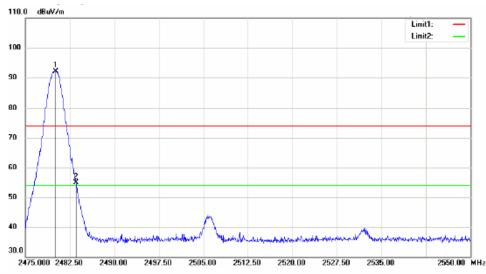

Mk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	2480.175	98.58	peak	-6.42	92.16	74.00	18.16
2	2483.550	61.41	peak	-6.41	55.00	74.00	-19.00

Vertical, Average Detector:

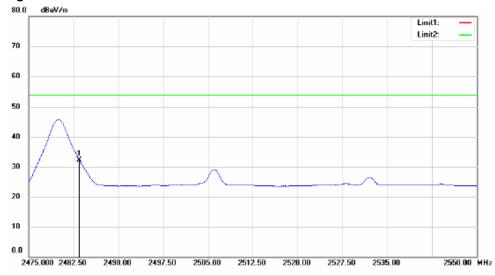

N	lk.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	1	2483.475	38.66	peak	-6.41	32.25	54.00	-21.75



Report No.: SHEM130400066702

Page: 68 of 74

7.13 Occupied Bandwidth Test

Test Requirement: RSS-Gen Issue 3 Clause 4.6.1

Standard Applicable According to the section RSS-Gen Issue 3 Clause 4.6.1

EUT Setup The occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was


measured using the Spectrum Analyzer with the resolutions set at

100kHz,the video bandwidth set at 300kHz.

Measurement Result:

Test Mode	Channel	Frequency (MHz)	Bandwidth (MHz)
	LOW	2402	0.840
GFSK	MID	2441	0.831
	HIGH	2480	0.837
	LOW	2402	1.164
π /4DQPSK	MID	2441	1.164
	HIGH	2480	1.164
	LOW	2402	1.146
8DPSK	MID	2441	1.143
	HIGH	2480	1 143


Test mode: GFSK Test channel: Low

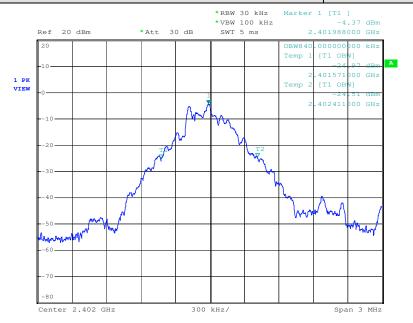




Report No.: SHEM130400066702

Page: 69 of 74

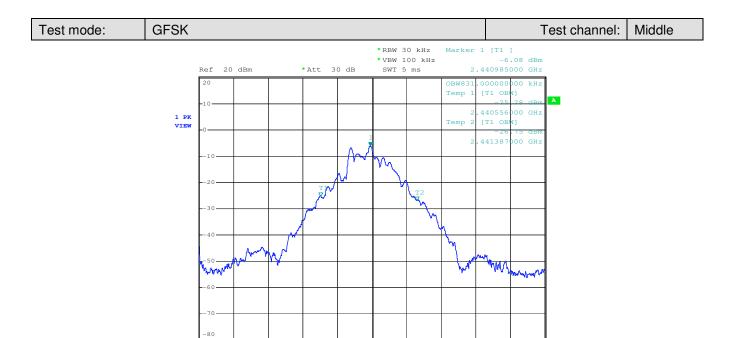



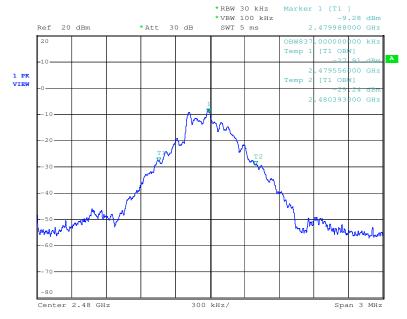





Report No.: SHEM130400066702

Page: 70 of 74

Span 3 MHz






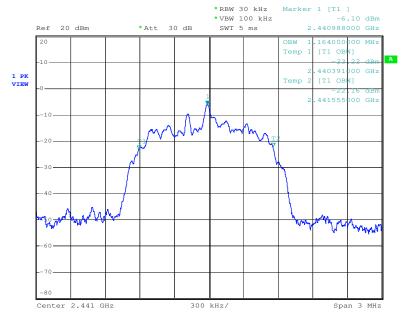




Report No.: SHEM130400066702

Page: 71 of 74

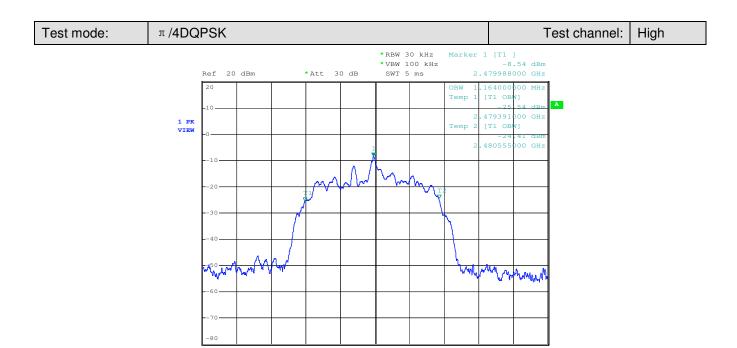


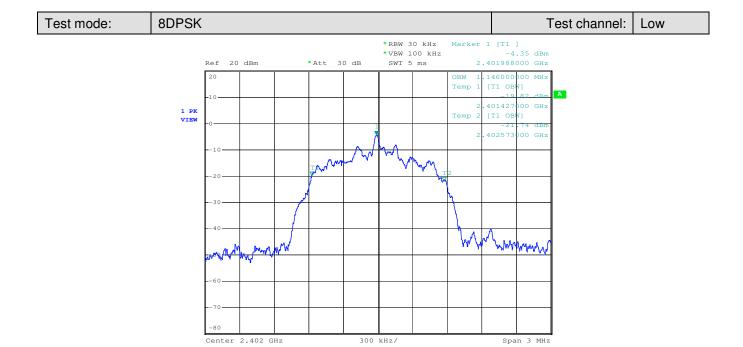



Report No.: SHEM130400066702

Page: 72 of 74

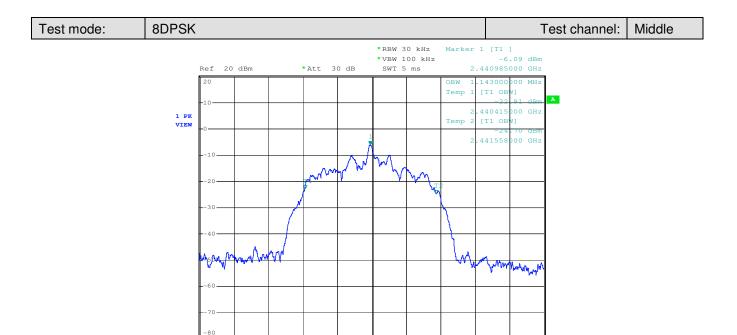



300 kHz/



Report No.: SHEM130400066702

Page: 73 of 74

8 Test Setup Photographs

Refer to the < D7050 DIRECT DIGITAL NETWORK AMPLIFIER Test Setup photos>.

9 EUT Constructional Details

Refer to the < D7050 DIRECT DIGITAL NETWORK AMPLIFIER_External Photos > & < D7050 DIRECT DIGITAL NETWORK AMPLIFIER_Internal Photos >.

End of Report