



**FCC 47 CFR PART 15 SUBPART C  
CERTIFICATION TEST REPORT**

*For*

**Face Recognition Access Controller**

**MODEL NUMBER: DHI-ASI6213J-FT1**

**PROJECT NUMBER: 4789949892**

**REPORT NUMBER: 4789949892-1**

**FCC ID: SVN-ASI6213J-FT**

**ISSUE DATE: Jun. 21, 2021**

*Prepared for*

**Zhejiang Dahua Vision Technology Co., Ltd.**

*Prepared by*

**UL-CCIC COMPANY LIMITED**

**No. 2, Chengwan Road, Suzhou Industrial Park, People's Republic of China**

**Tel: +86 512-6808 6400**

**Fax: +86 512-6808 4099**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	06/21/2021	Initial Issue	



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.3. <i>CHANNEL LIST .....</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>11</i>
5.7. <i>THE WORSE CASE CONFIGURATIONS .....</i>	<i>11</i>
5.8. <i>TEST ENVIRONMENT .....</i>	<i>12</i>
5.9. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>13</i>
5.10. <i>MEASURING INSTRUMENT AND SOFTWARE USED .....</i>	<i>15</i>
<b>6. MEASUREMENT METHODS .....</b>	<b>16</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>17</b>
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>17</i>
7.2. <i>6 dB BANDWIDTH.....</i>	<i>20</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>28</i>
7.4. <i>POWER SPECTRAL DENSITY.....</i>	<i>30</i>
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....</i>	<i>38</i>
7.6. <i>RADIATED TEST RESULTS .....</i>	<i>68</i>
7.6.1. <i>LIMITS AND PROCEDURE .....</i>	<i>68</i>
7.6.2. <i>TEST ENVIRONMENT .....</i>	<i>74</i>
7.6.3. <i>RESTRICTED BANDEDGE .....</i>	<i>74</i>
7.6.4. <i>SPURIOUS EMISSIONS .....</i>	<i>91</i>
<b>8. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>147</b>
<b>9. ANTENNA REQUIREMENTS.....</b>	<b>152</b>



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.  
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

## Manufacturer Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.  
Address: No.1199, Bin'an road, Binjiang District, Hangzhou, P.R.China.

## EUT Description

Product Name: Face Recognition Access Controller  
Model Name: DHI-ASI6213J-FT1  
Additional No.: ASI6213J-FT1, DH-ASI6213J-FT1, DHI-ASI6213J-FT, ASI6213J-FT, DH-ASI6213J-FT, DHI-ASI6213J-F, ASI6213J-F, DH-ASI6213J-F, DHI-ASI6214J-F, ASI6214J-F, DH-ASI6214J-F, DHI-ASI6213J-MW, ASI6213J-MW, DH- ASI6213J-MW, DHI-ASI6214J-MFW, ASI6214J-MFW, DH-ASI6214J-MFW  
Sample Number: 3928838  
Data of Receipt Sample: May. 24, 2021  
Test Date: May. 26, 2021 ~ Jun. 20, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6db DTS Bandwidth	FCC 15.247 (a) (2)	PASS
2	Conducted Power	FCC 15.247 (b) (3)	PASS
3	Power Spectral Density	FCC 15.247 (e)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	PASS
6	Conducted Emission Test For AC Power Port	FCC 15.207	PASS
7	Antenna Requirement	FCC 15.203	PASS
Remark: 1) The measurement result for the sample received is <Pass> according to < ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15C> when <Accuracy Method> decision rule is applied.			

Prepared By:

*Jason Yang*

---

Jason Yang  
Engineer

Reviewed By:

*Tom Tang*

---

Tom Tang  
Project Engineer

Authorized By:

*Chris Zhong*

---

Chris Zhong  
Laboratory Leader



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4829.01)</b>  <b>UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</b></p> <p><b>FCC (FCC Designation No.: CN1247)</b>  <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b></p> <p><b>IC (IC Designation No.: 25056)</b>  <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b></p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, People's Republic of China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS.

Note 3: The test anechoic chamber in UL-CCIC COMPANY LIMITED had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.1dB
Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	3.3dB
Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	3.3dB
Radiation Emission test (1GHz to 26GHz)( include Fundamental emission)	3.9dB (1GHz-18Gz)
	4.2dB (18GHz-26.5Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Product Name:	Face Recognition Access Controller
Model No.:	DHI-ASI6213J-FT1
Operating Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Type of Modulation:	IEEE for 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE for 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n (HT20 and HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)
Channels Step:	Channels with 5MHz step
Sample Type:	Fixed production
Test power grade:	N/A
Test software of EUT:	Secure CRT (manufacturer declare)
Antenna Type:	Patch Antenna
Antenna Gain:	2.0 dBi

Remark:

Model No.:

No.:	Name:	No.:	Name:	No.:	Name:
1	DHI-ASI6213J-FT1	2	ASI6213J-FT1	3	DH-ASI6213J-FT1
4	DHI-ASI6213J-FT	5	ASI6213J-FT	6	DH-ASI6213J-FT
7	DHI-ASI6213J-F	8	ASI6213J-F	9	DH-ASI6213J-F
10	DHI-ASI6214J-F	11	ASI6214J-F	12	DH-ASI6214J-F
13	DHI-ASI6213J-MW	14	ASI6213J-MW	15	DH- ASI6213J-MW
16	DHI-ASI6214J-MFW	17	ASI6214J-MFW	18	DH-ASI6214J-MFW

Only the main model DHI-ASI6213J-FT1 was tested and only the data of this model is shown in this test report. Since Their material, types of encloser, antenna location, electrical circuit design, layout, components used and internal wiring are identical, only the model name and software are different and the user can't change the RF parameters or others access the software setting.





## 5.2. MAXIMUM OUTPUT POWER

Number of Transmit Chains (NTX)	IEE Std. 802.11	Channel Number	Max AVG Conducted Power (dBm)
1	IEEE 802.11B	1-11[11]	15.86
1	IEEE 802.11G	1-11[11]	14.14
1	IEEE 802.11nHT20	1-11[11]	13.16
1	IEEE 802.11nHT40	3-9[7]	12.50

## 5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452		

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447		



#### 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel (MHz)
IEEE 802.11B	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11G	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11n HT20	LCH: CH01 2412
	MCH: CH06 2437
	HCH: CH11 2462
IEEE 802.11n HT40	LCH: CH03 2422
	MCH: CH06 2437
	HCH: CH09 2452

#### 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		SecureCRT					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	N/A	N/A	N/A	/		
802.11g	1	N/A	N/A	N/A			
802.11n HT20	1	N/A	N/A	N/A			
802.11n HT40	1	/			N/A	N/A	N/A



## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2400-2483.5	Patch Antenna	2.0

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11g	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11N (HT20)	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
IEEE 802.11N (HT40)	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.

## 5.7. THE WORSE CASE CONFIGURATIONS

For WIFI module, the worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20 mode: MCS0  
802.11n HT40 mode: MCS0



### 5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	AC 120V
	VH	N/A

Note: VL= Lower Extreme Test Voltage  
VN= Nominal Voltage  
VH= Upper Extreme Test Voltage  
TN= Normal Temperature



## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Description
1	Laptop	ThinkPad	E590	N/A
2	Alarm Light	N/A	N/A	Supply by UL Lab
3	Electric-magnetic Lock	N/A	N/A	Supply by UL Lab
4	Fixed Frequency Board	N/A	N/A	Supply by UL Lab
5	SD Card	N/A	N/A	Supply by UL Lab

### I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	USB to TTL	USB	100cm Length	N/A
2	LAN	LAN	LAN	100cm Length	N/A
3	Open Button	TRS	TRS	100cm Length	N/A


### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	AC Adapter	MASS POWER	S024- 1A120200HU	INPUT:100-240V~50/60Hz 0.6A OUTPUT:12.0V-2.0A

**TEST SETUP**

The EUT can work in an engineer mode with a software through a table PC.

**SETUP DIAGRAM FOR TESTS**

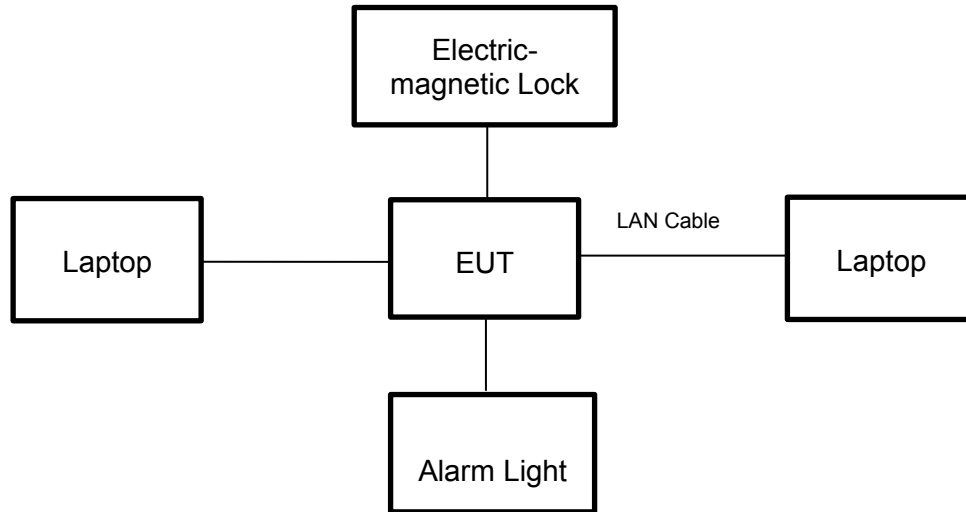



### 5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	126700	2020-12-11	2021-12-10	2022-12-09
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	126701	2020-12-11	2021-12-10	2022-12-09
<input checked="" type="checkbox"/>	Artificial Mains Networks	R&S	ENY81	126711	2020-12-11	2021-12-10	2022-12-09
Software							
Used	Description	Manufacturer	Name	Version			
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	R&S	EMC32	Ver. 9.25			
Radiated Emissions (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	MY57110128	2020-05-28	2021-05-27	2022-05-26
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR26	1267603	2020-12-21	2021-12-20	2022-12-19
<input checked="" type="checkbox"/>	Receiver Antenna (9kHz-30MHz)	Schwarzbeck	FMZB 1513	513-265	2020-06-15	2021-06-14	2022-06-13
<input checked="" type="checkbox"/>	Receiver Antenna (30MHz-1GHz)	SunAR RF Motion	JB1	126704	N/A	2019-01-28	2022-01-27
<input checked="" type="checkbox"/>	Receiver Antenna (1GHz-18GHz)	R&S	HF907	126705	2020-01-26	2021-01-25	2022-01-24
<input checked="" type="checkbox"/>	Receiver Antenna (18GHz-26.5GHz)	Schwarzbeck	BBHA9170	126706	2020-02-05	2021-02-04	2022-02-03
<input checked="" type="checkbox"/>	Receiver Antenna (26.5GHz-40GHz)	TOYO	HAP 26-40W	00000012	2020-07-22	2021-07-21	2022-07-20
<input checked="" type="checkbox"/>	Pre-amplification (To 1GHz)	R&S	SCU-03D	134666	2020-02-05	2021-02-04	2022-02-03
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	Compliance Direction System Inc.	PAP-1G18-50	14140-13467	2020-03-17	2021-03-16	2022-03-15
<input checked="" type="checkbox"/>	Pre-amplification (To 26.5GHz)	R&S	SCU-26D	134668	2020-02-05	2021-02-04	2022-02-03
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	1	2020-05-28	2021-05-27	2022-05-26
<input checked="" type="checkbox"/>	Highpass Filter	Wainwright	WHKX10-2700-3000-18000-40SS	2	2020-05-28	2021-05-27	2022-05-26
Software							
Used	Description	Manufacturer	Name	Version			
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Tonscend	JS32	V1.0			
Other instruments							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	MY57110128	2020-05-28	2021-05-27	2022-05-26
<input checked="" type="checkbox"/>	Power Meter	Keysight	U2021XA	MY57110002	2020-06-11	2021-06-10	2022-06-09



## 6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	8.2
2	Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	8.3.1.3/8.3.2.3
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r02	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2





## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only

#### PROCEDURE

FCC KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP

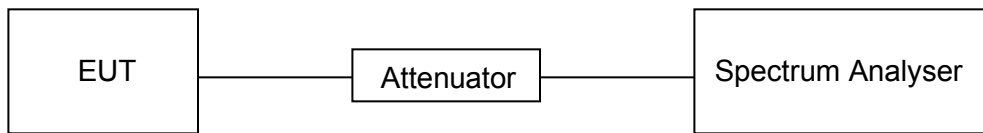

#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V



#### TEST RESULTS TABLE

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final VBW (kHz)
11B	12.41	12.505	0.9924	99.24%	0.03	0.08	0.1
11G	2.063	2.200	0.9377	93.77%	0.28	0.48	1
802.11n HT20	1.919	2.0829	0.9213	92.13%	0.36	0.52	1
802.11n HT40	0.9435	1.0692	0.8824	88.24%	0.54	1.06	2

Note: 1) Duty Cycle Correction Factor=10log(1/x).  
2) Where: x is Duty Cycle(Linear)  
3) Where: T is On Time (transmit duration)




TEST GRAPHS

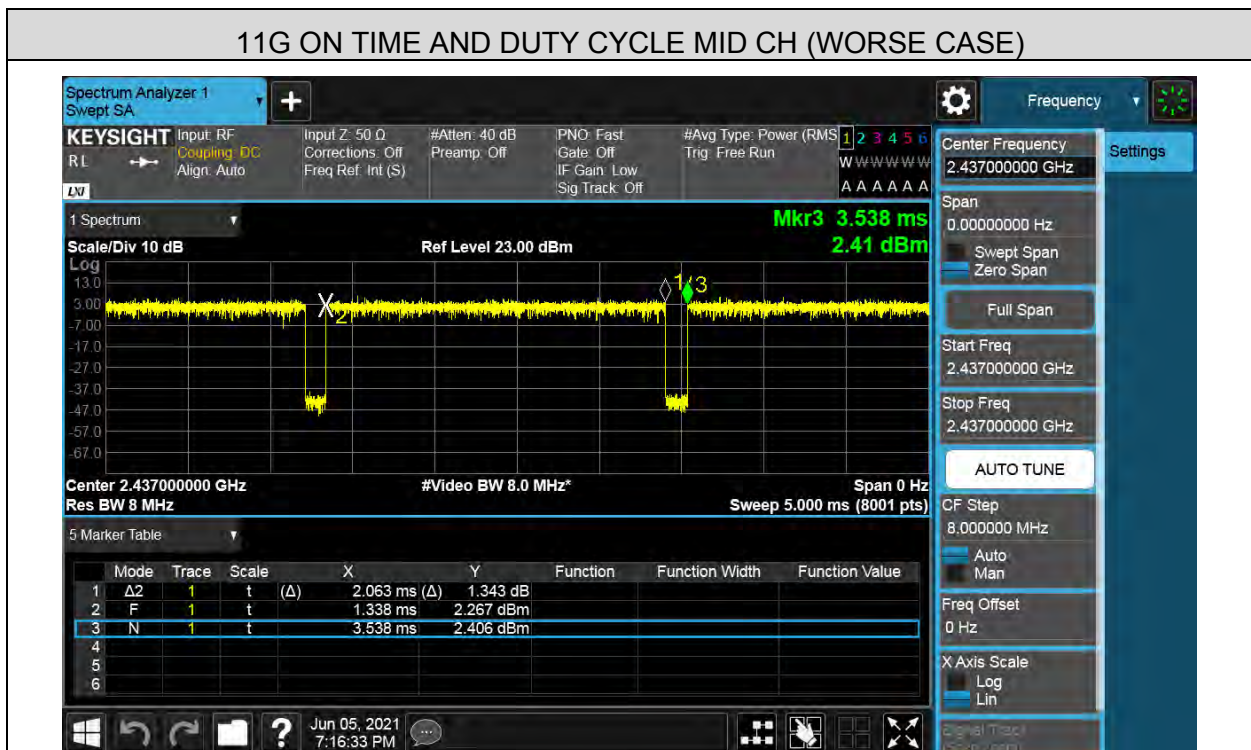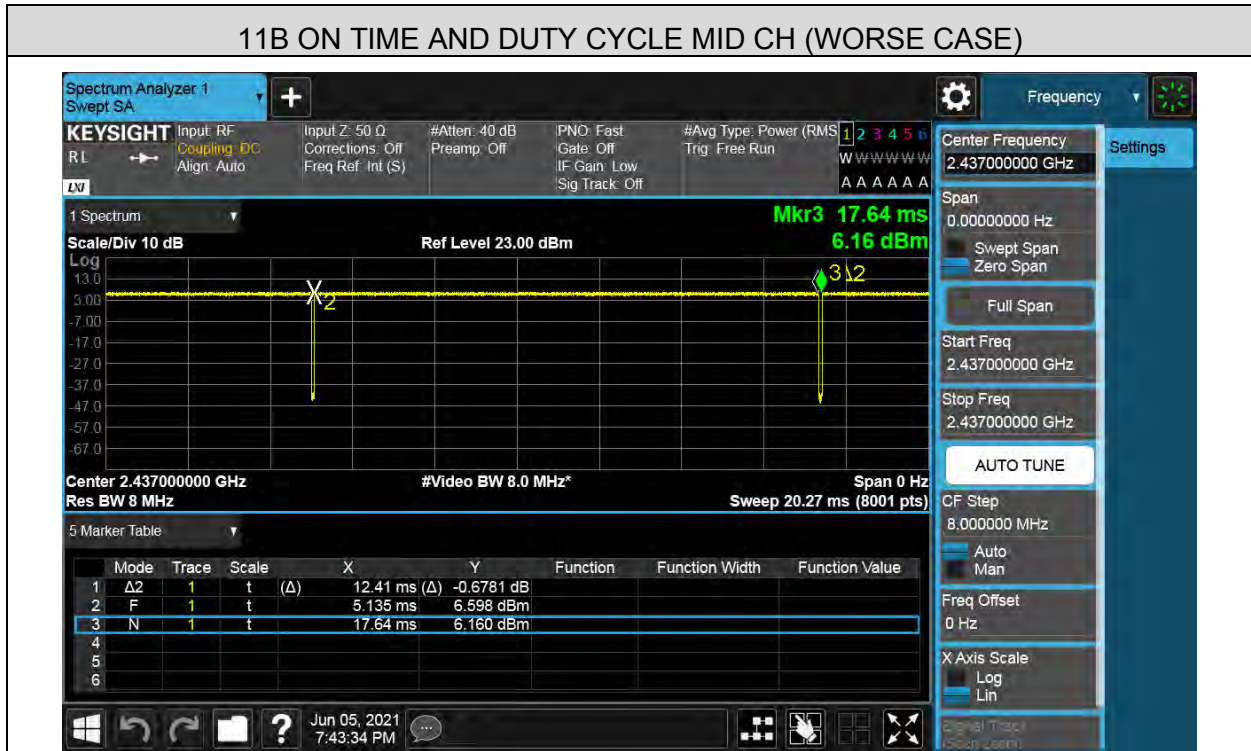




### 11N (HT20) ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

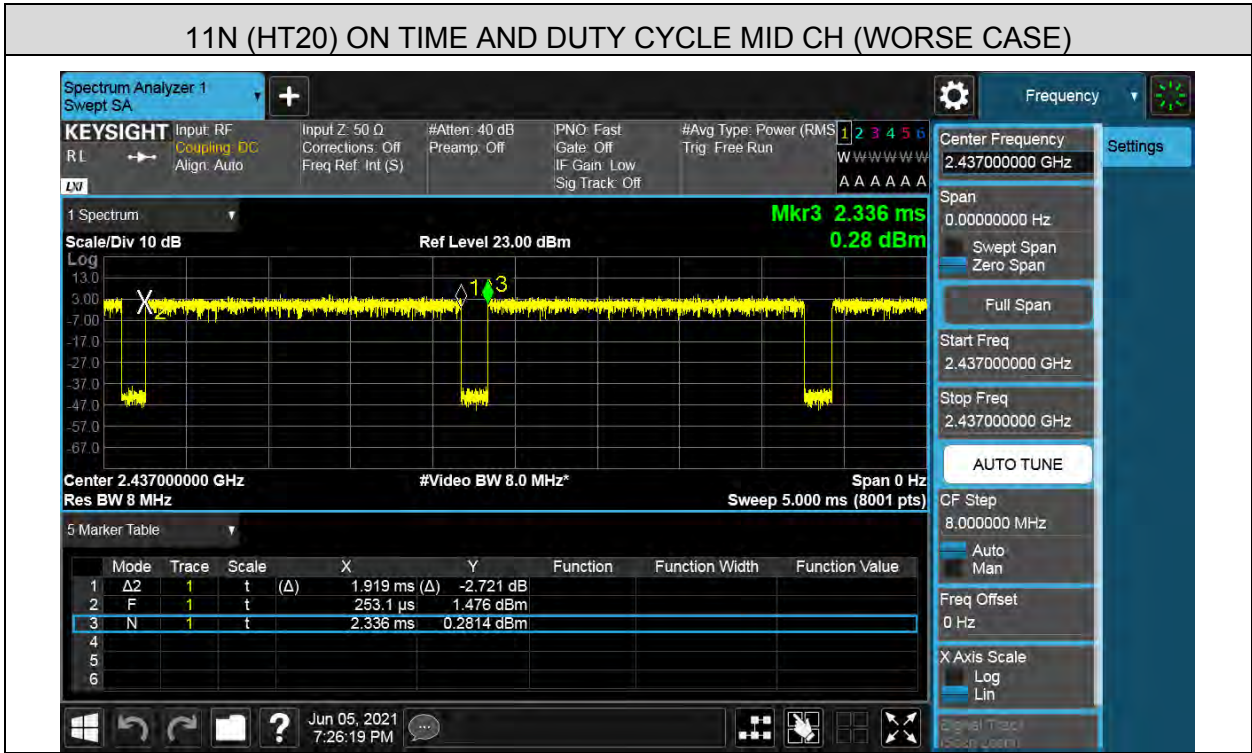

### 11N (HT40) ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

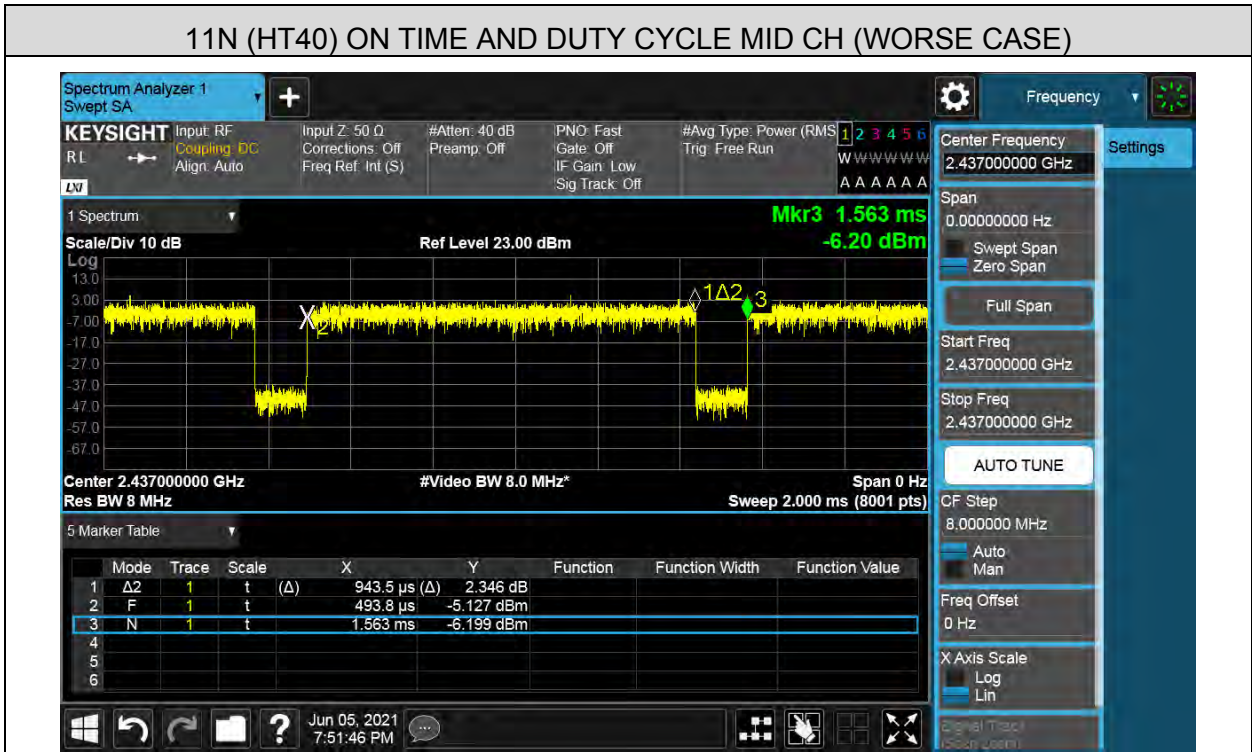

## 7.2. 6 dB BANDWIDTH

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Frequency Span	Between 0.5 times and 1.5 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth :100K
VBW	For 6dB Bandwidth : $\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

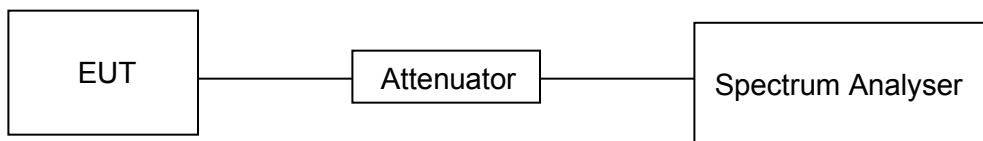



**TEST ENVIRONMENT**

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

**TEST RESULTS TABLE**


Test Mode	Test Channel	6dB bandwidth (MHz)	Result
11B	LCH	10.07	Pass
	MCH	10.04	Pass
	HCH	10.07	Pass
11G	LCH	16.34	Pass
	MCH	16.34	Pass
	HCH	16.34	Pass
11N HT20	LCH	17.52	Pass
	MCH	17.53	Pass
	HCH	17.24	Pass
11N HT40	LCH	35.13	Pass
	MCH	35.29	Pass
	HCH	35.10	Pass









**TEST GRAPHS**

**6dB Bandwidth**

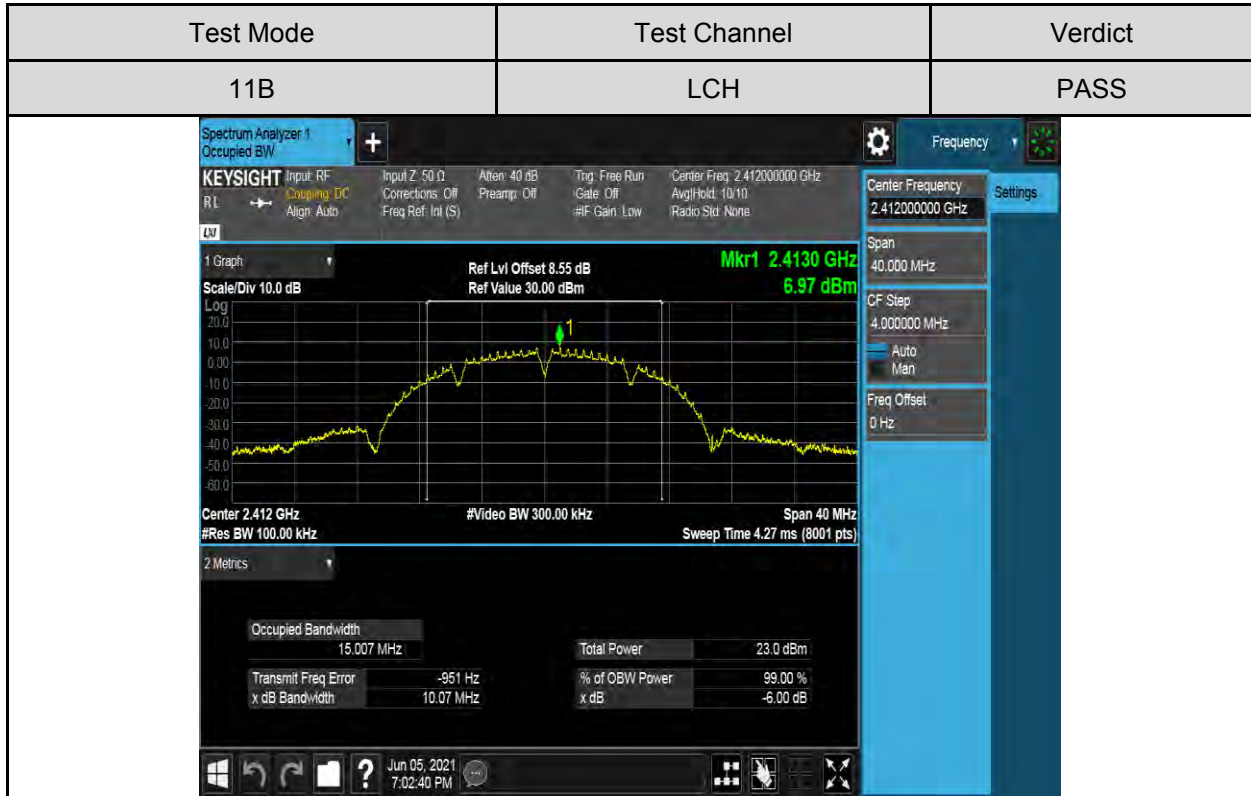

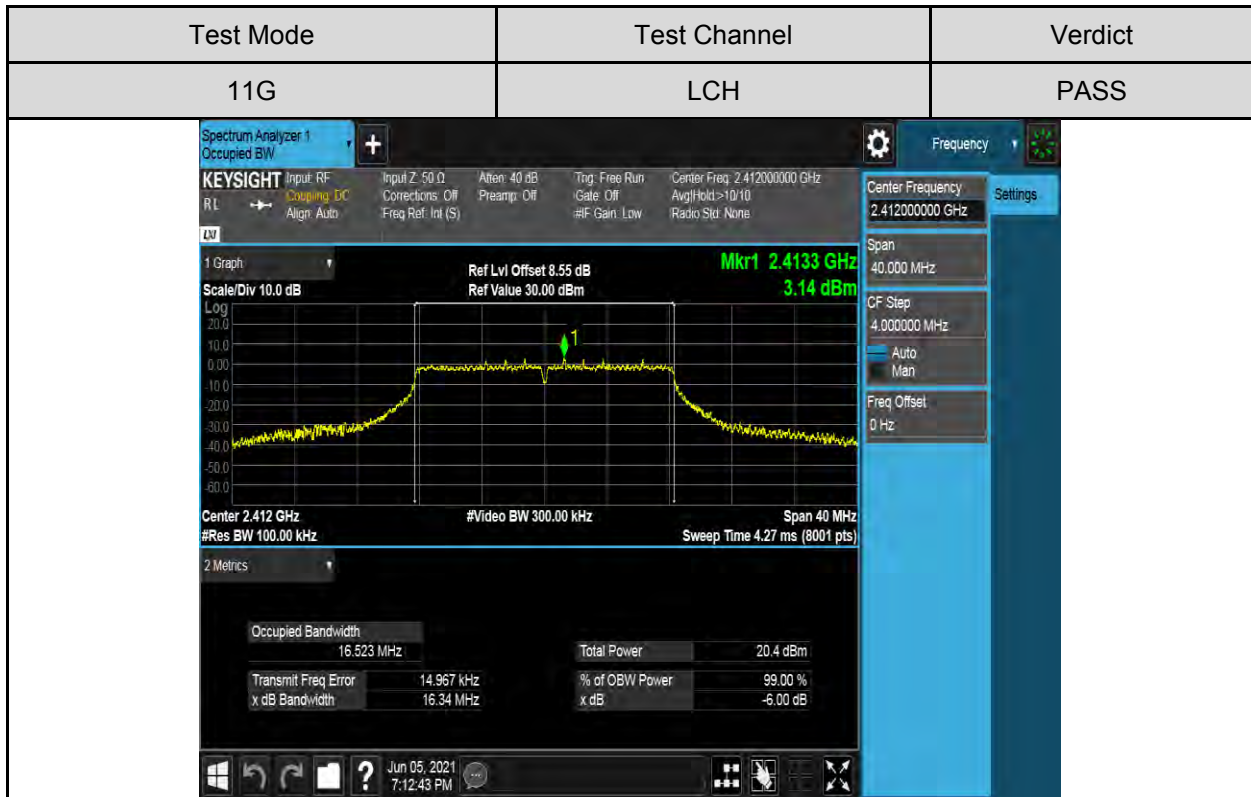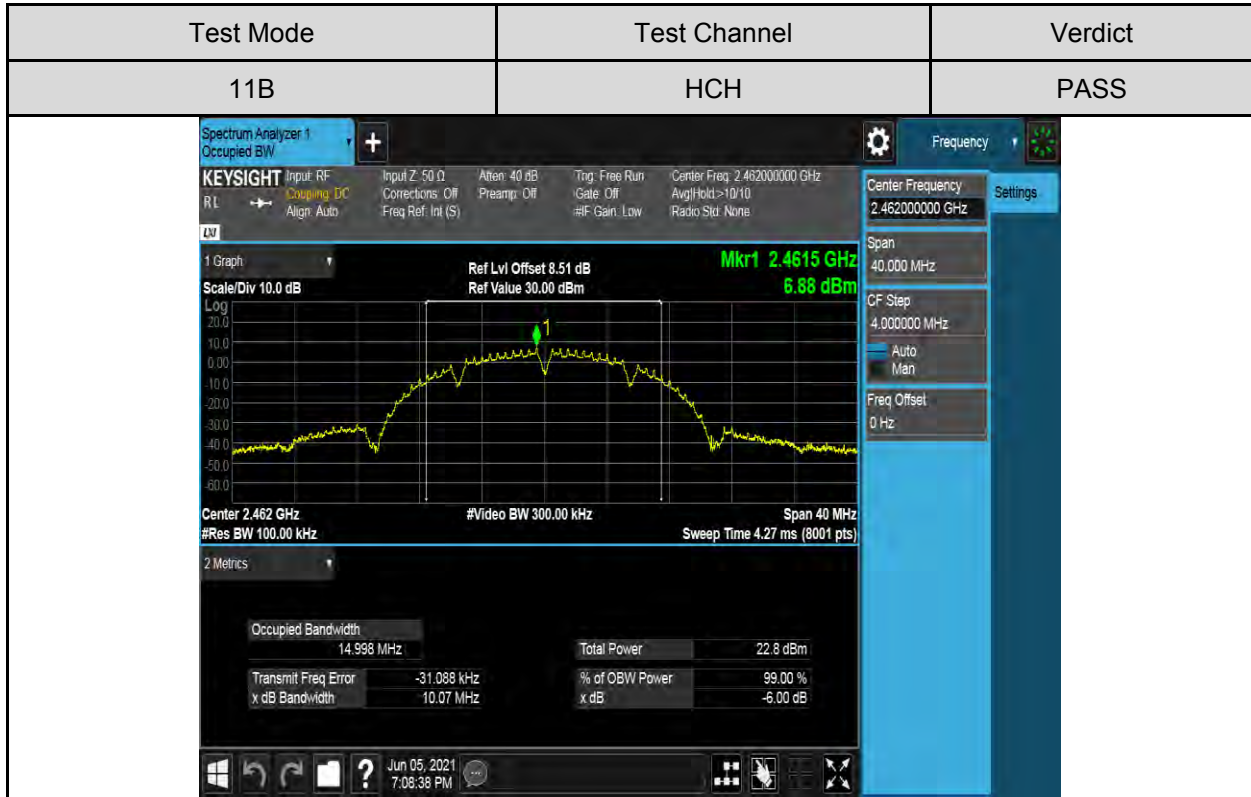

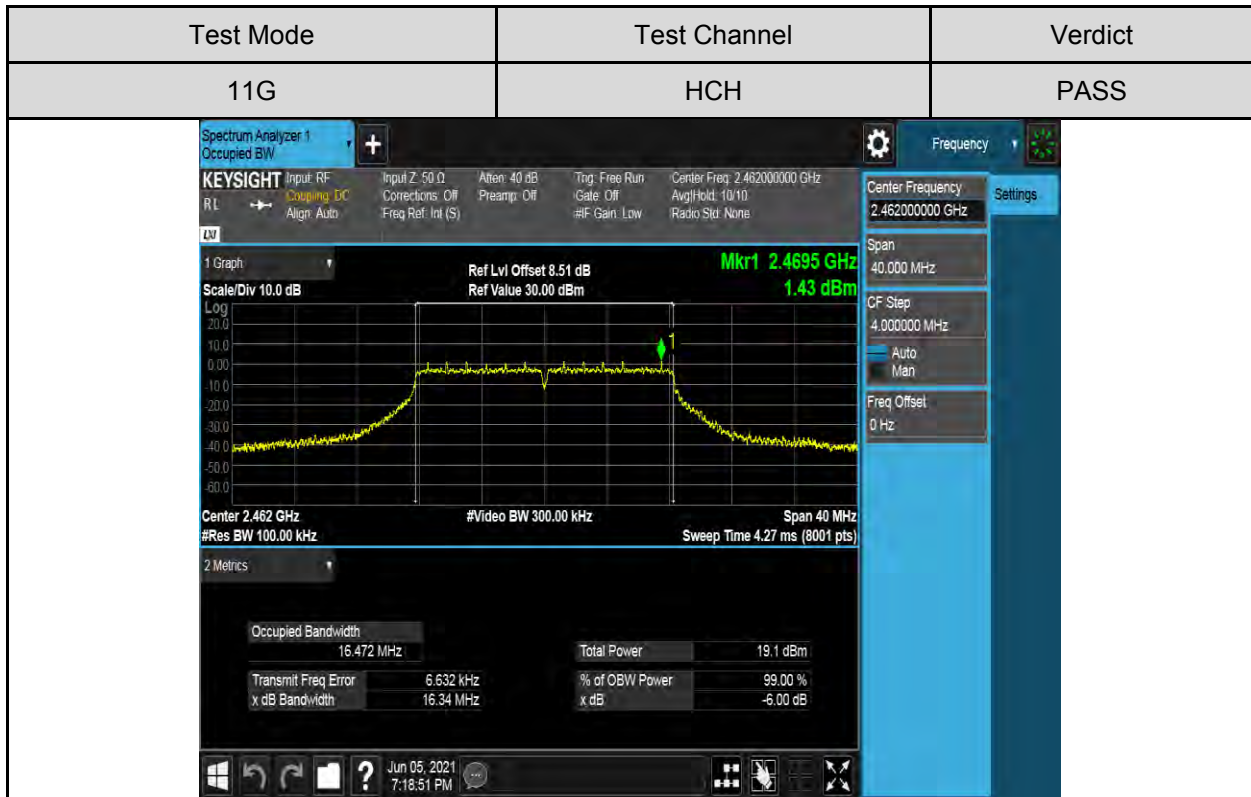
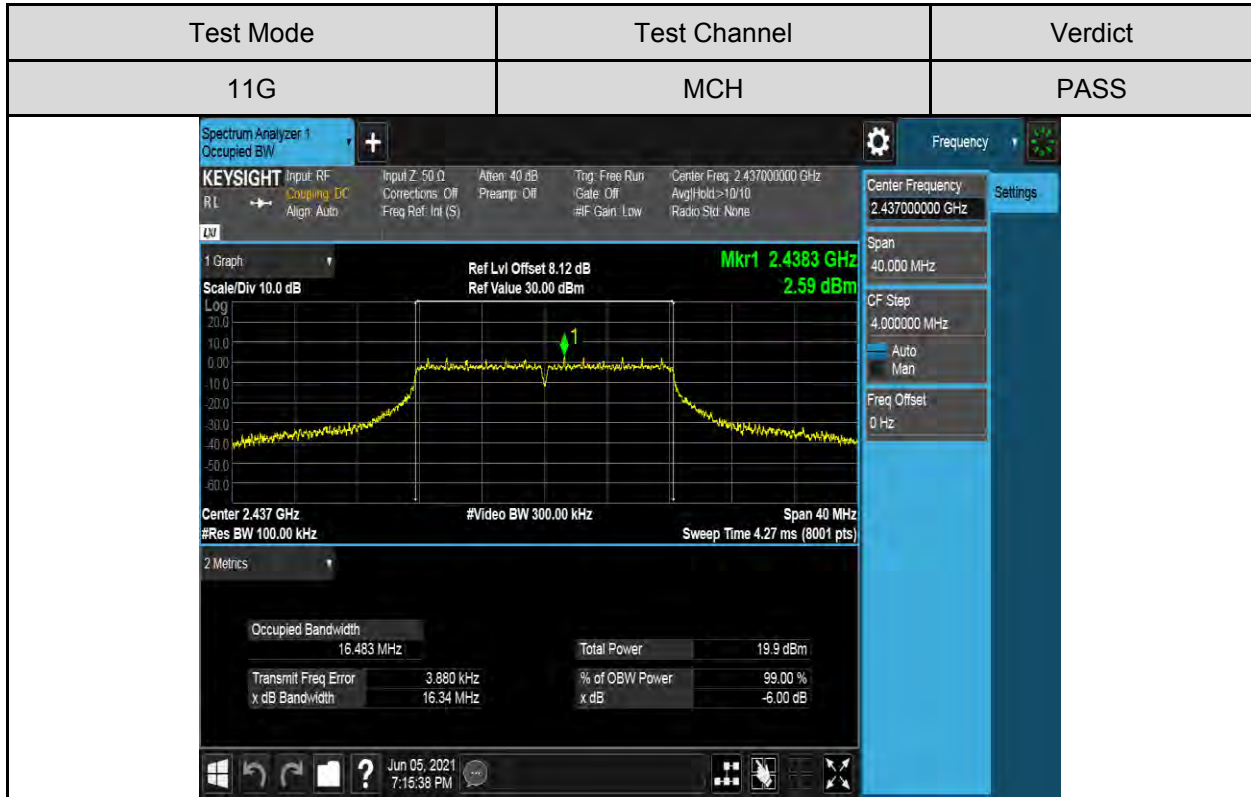








Test Mode	Test Channel	Verdict
11N HT20	LCH	PASS

Test Mode	Test Channel	Verdict
11N HT20	MCH	PASS

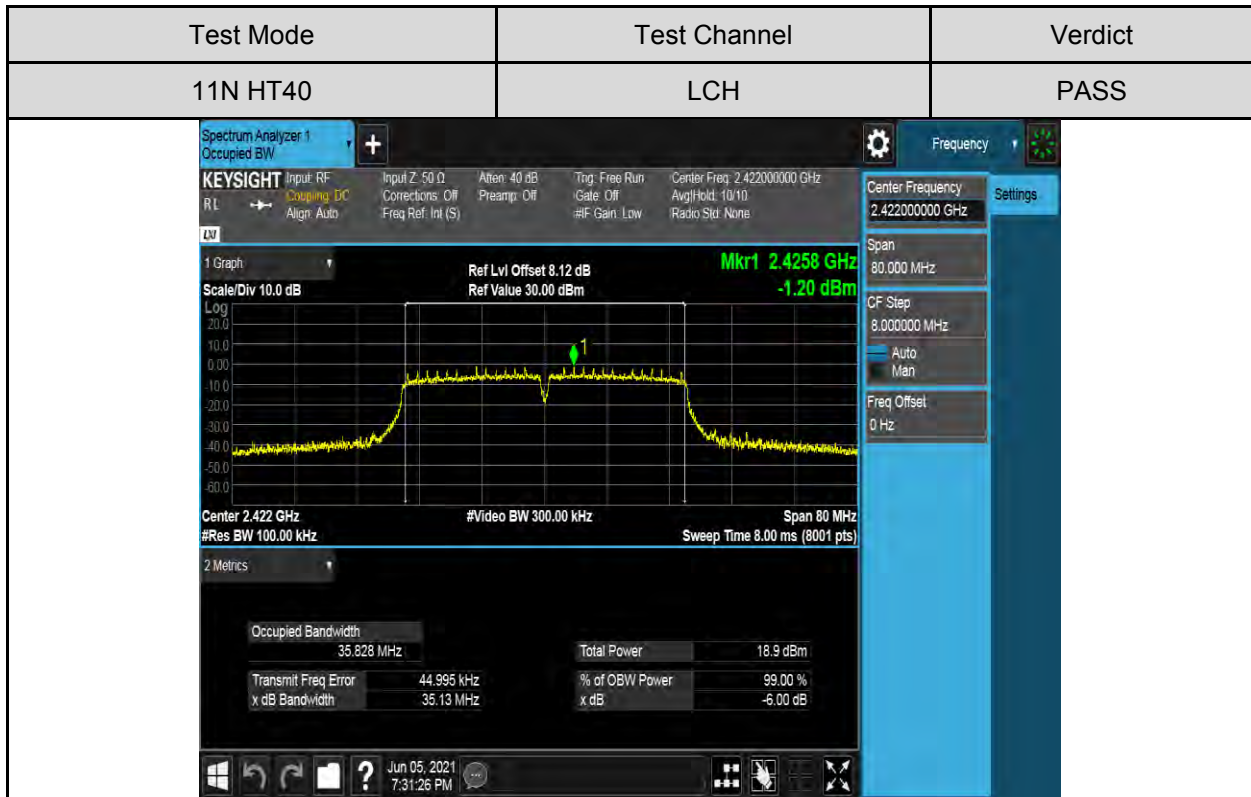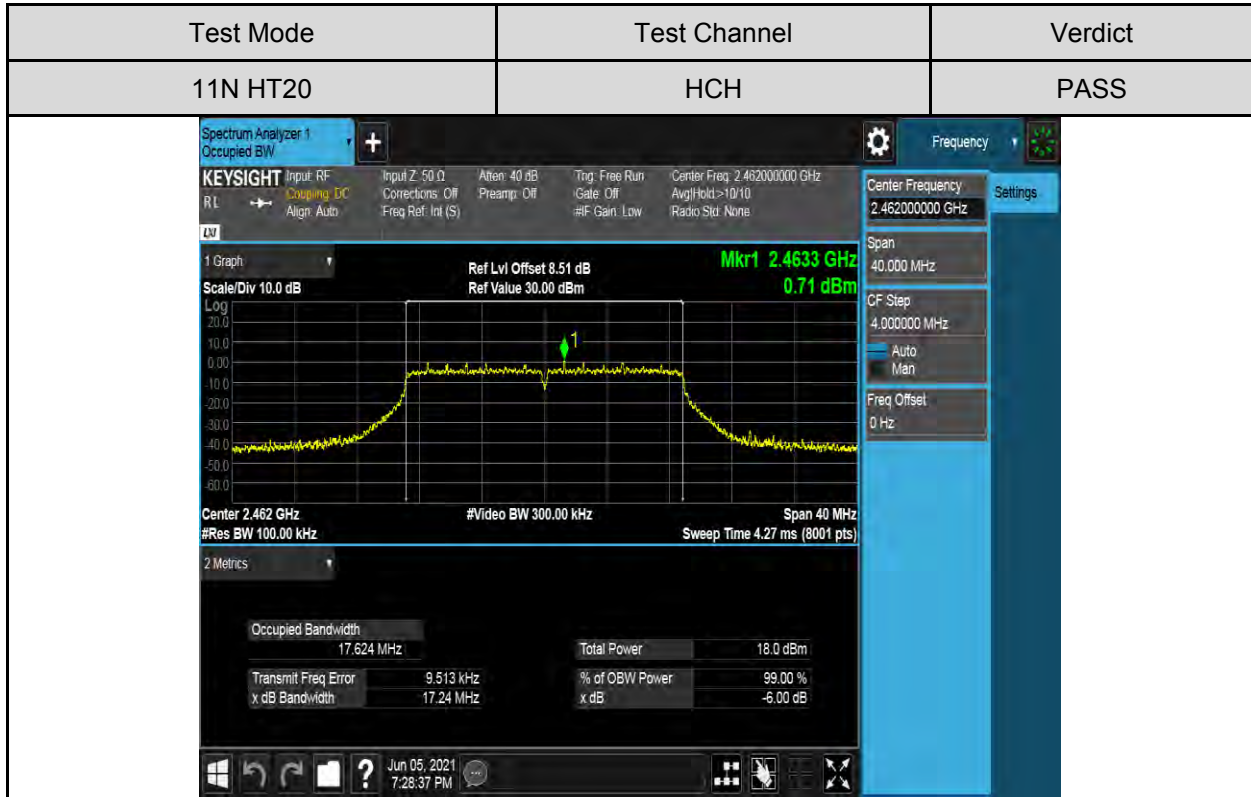

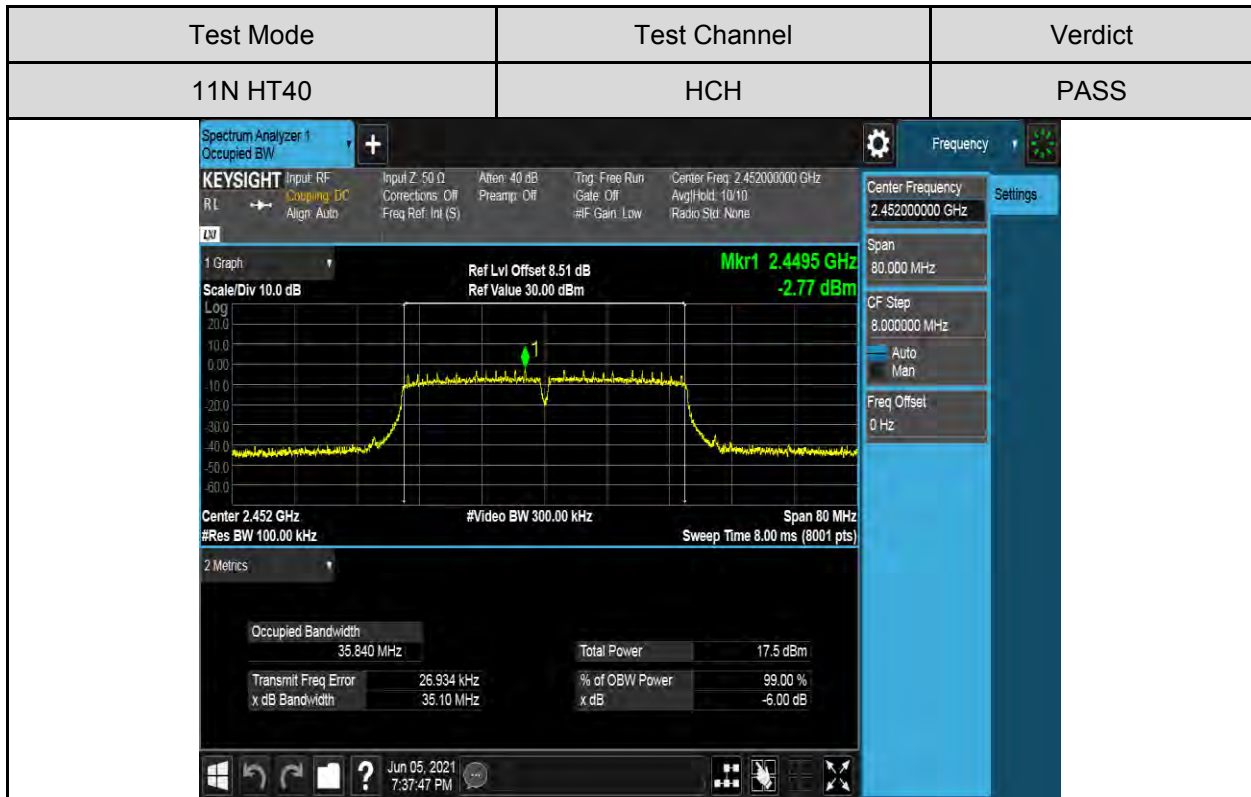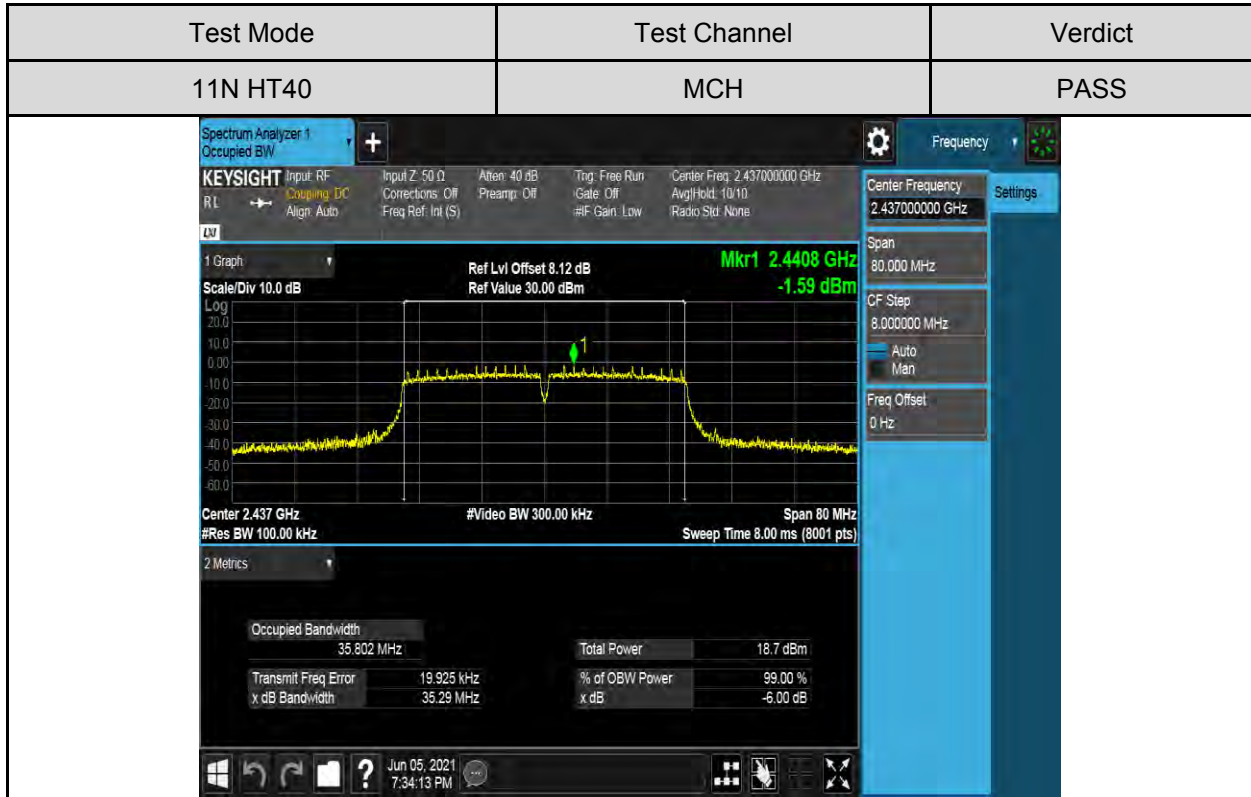



### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5


#### TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.  
Measure the power of each channel.  
Peak Detector use for Peak result.  
AVG Detector use for AVG result.

#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

#### TEST SETUP





**TEST RESULTS TABLE**

Test Mode	Test Channel	Maximum Conducted Output Power (AV)	LIMIT
		dBm	dBm
11B	LCH	15.84	30
	MCH	15.62	30
	HCH	15.86	30
11G	LCH	14.14	30
	MCH	13.53	30
	HCH	12.76	30
11n HT20	LCH	13.16	30
	MCH	12.61	30
	HCH	11.74	30
11n HT40	LCH	12.50	30
	MCH	12.22	30
	HCH	11.17	30



## 7.4. POWER SPECTRAL DENSITY

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

### TEST SETUP









**TEST RESULTS TABLE**

Test Mode	Test Channel	Maximum Peak power spectral density (dBm/30kHz)	Result
11B	LCH	2.82	Pass
	MCH	3.93	Pass
	HCH	3.68	Pass
11G	LCH	-1.41	Pass
	MCH	-2.32	Pass
	HCH	-3.16	Pass
11n HT20	LCH	-3.12	Pass
	MCH	-3.30	Pass
	HCH	-4.16	Pass
11n HT40	LCH	-6.27	Pass
	MCH	-6.18	Pass
	HCH	-7.29	Pass







**TEST GRAPHS**

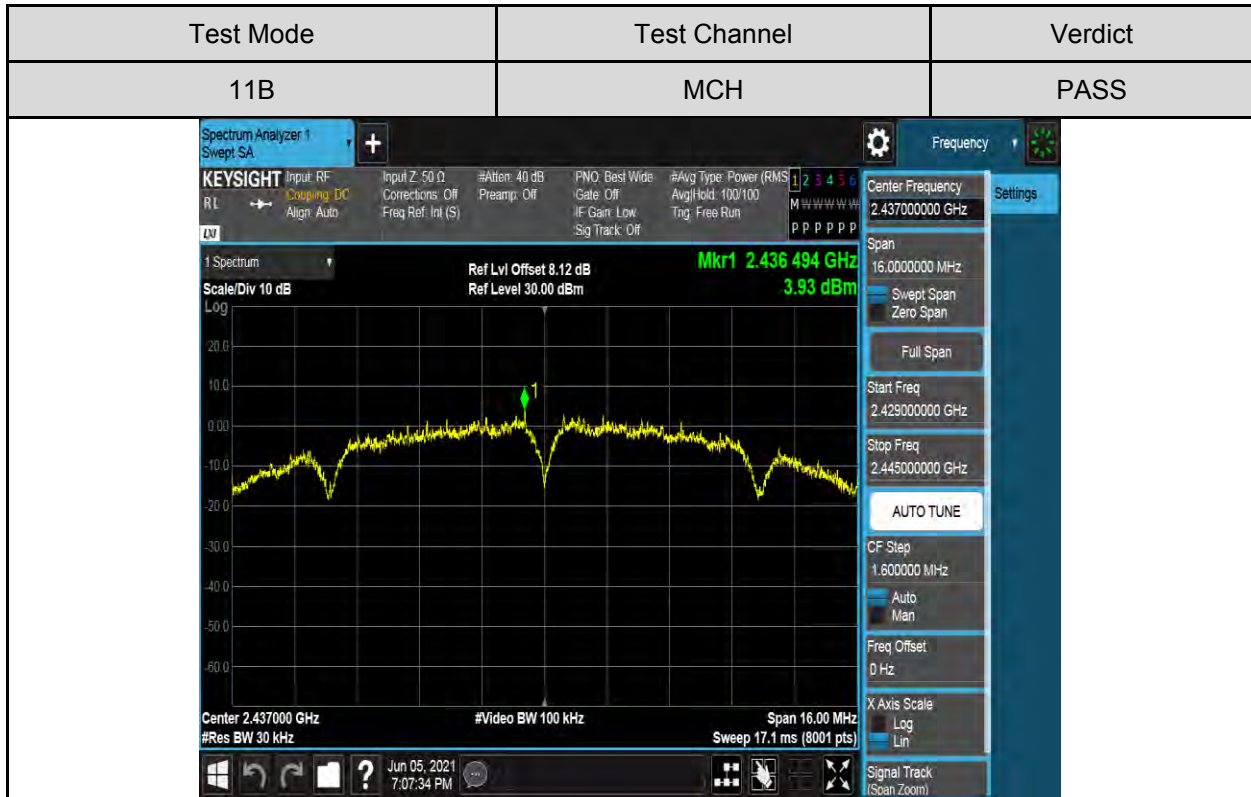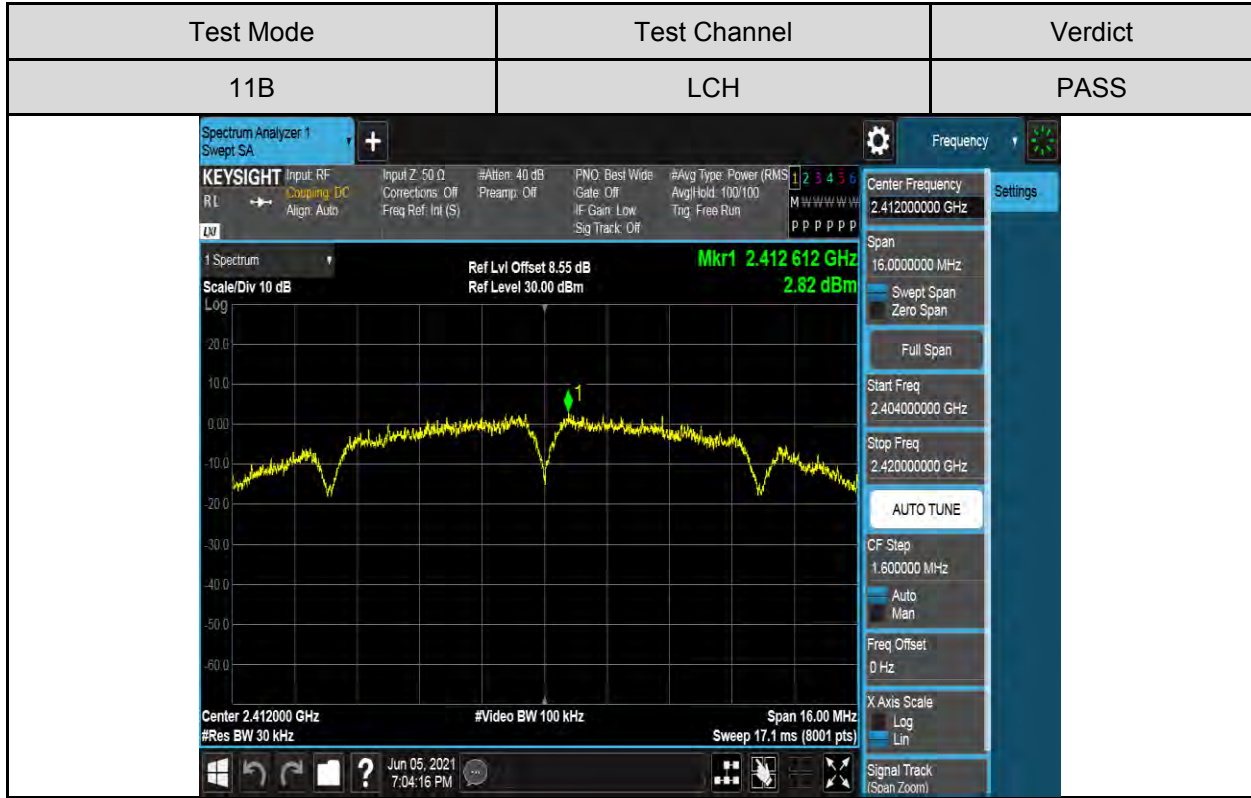









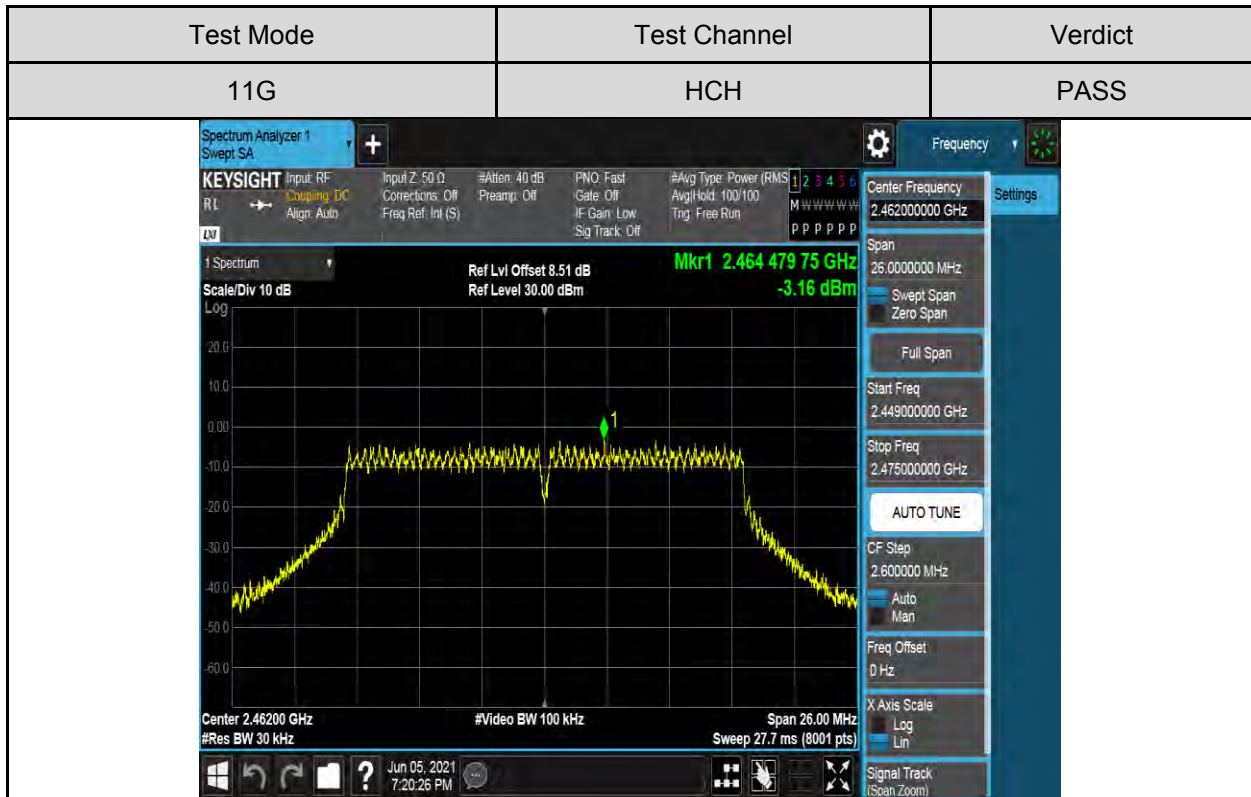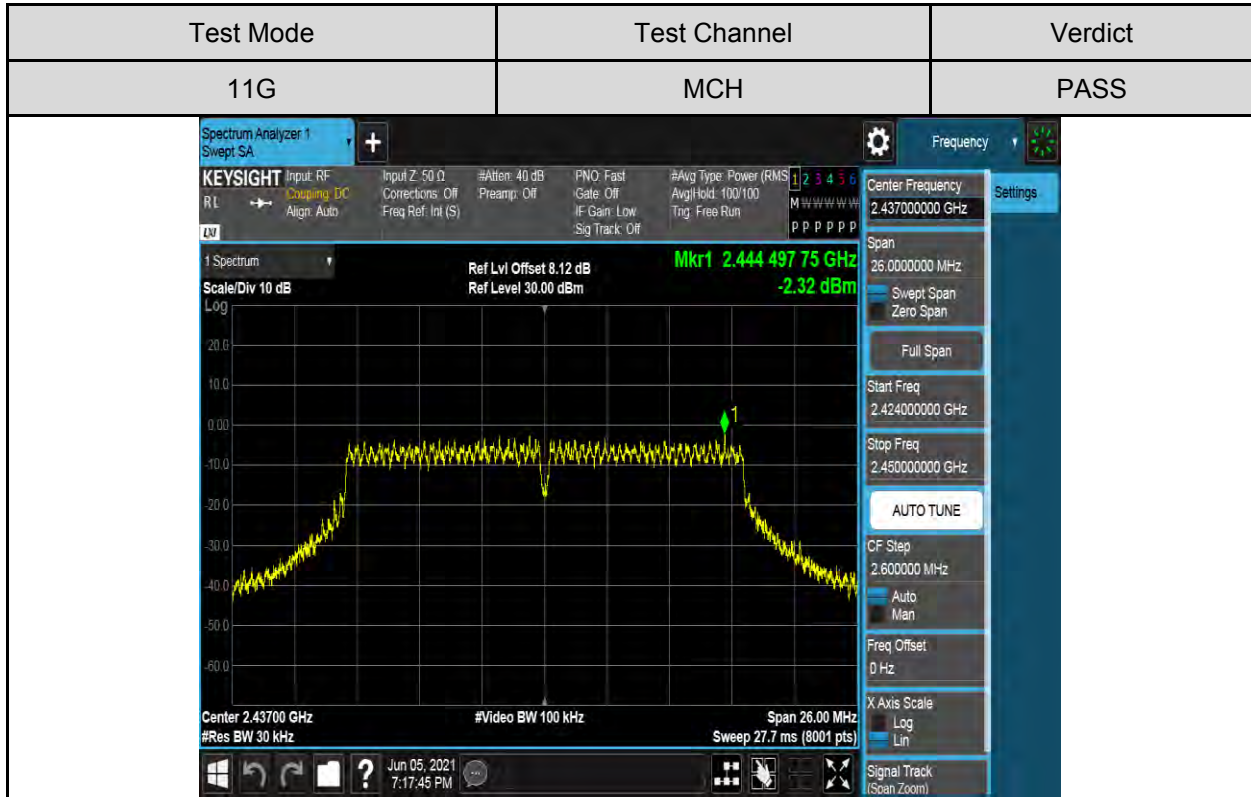

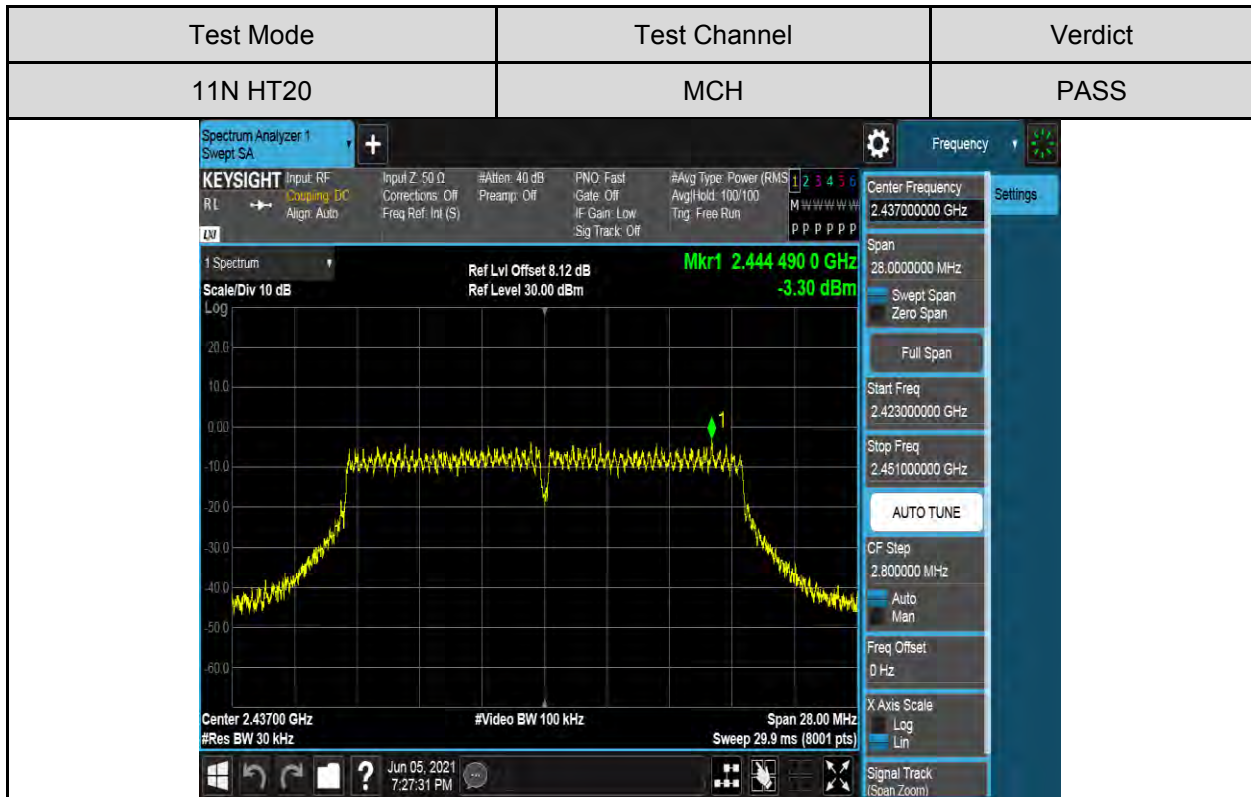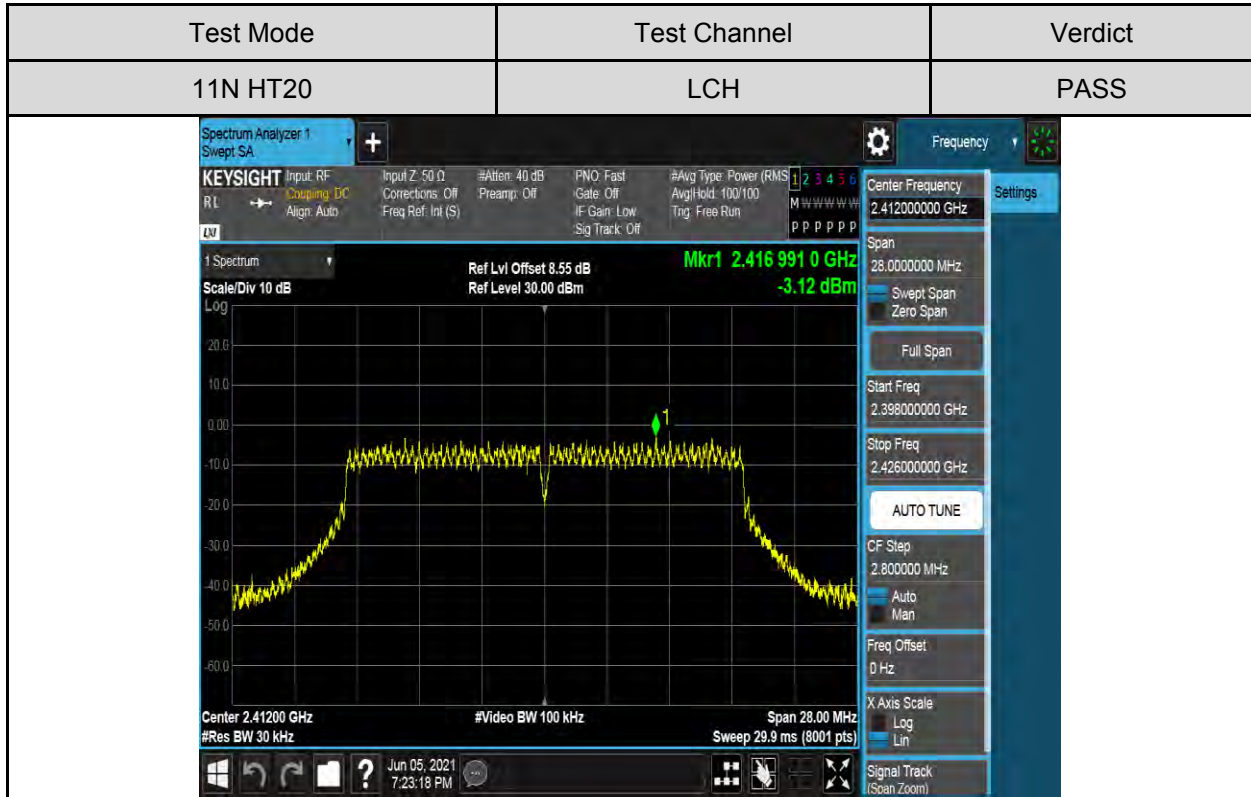



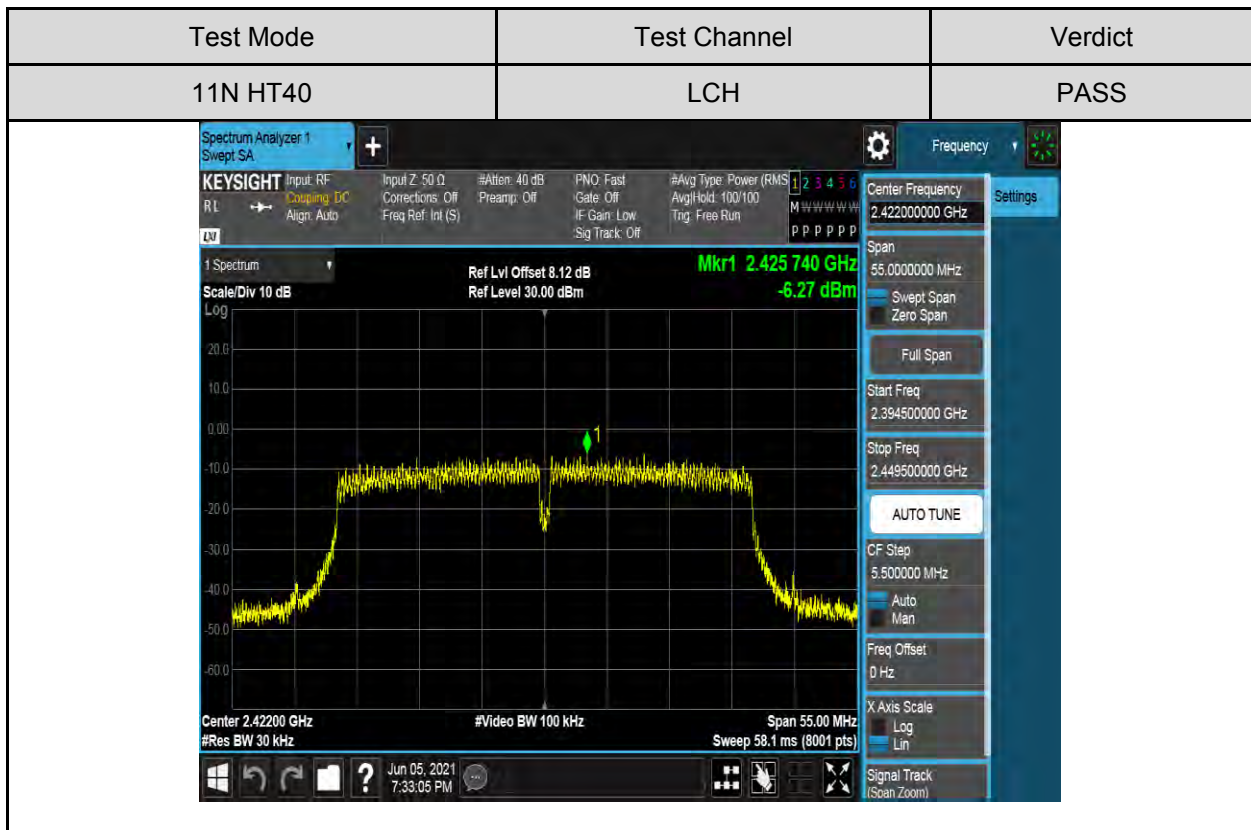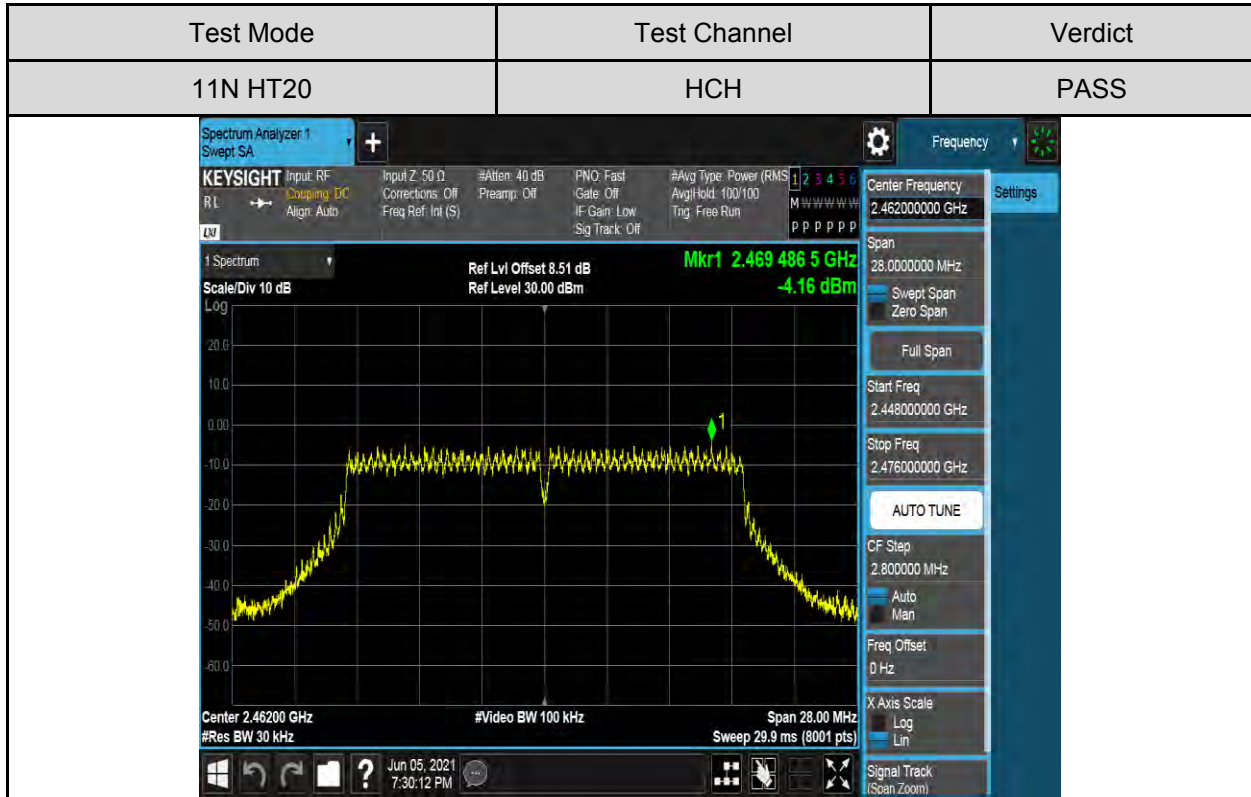

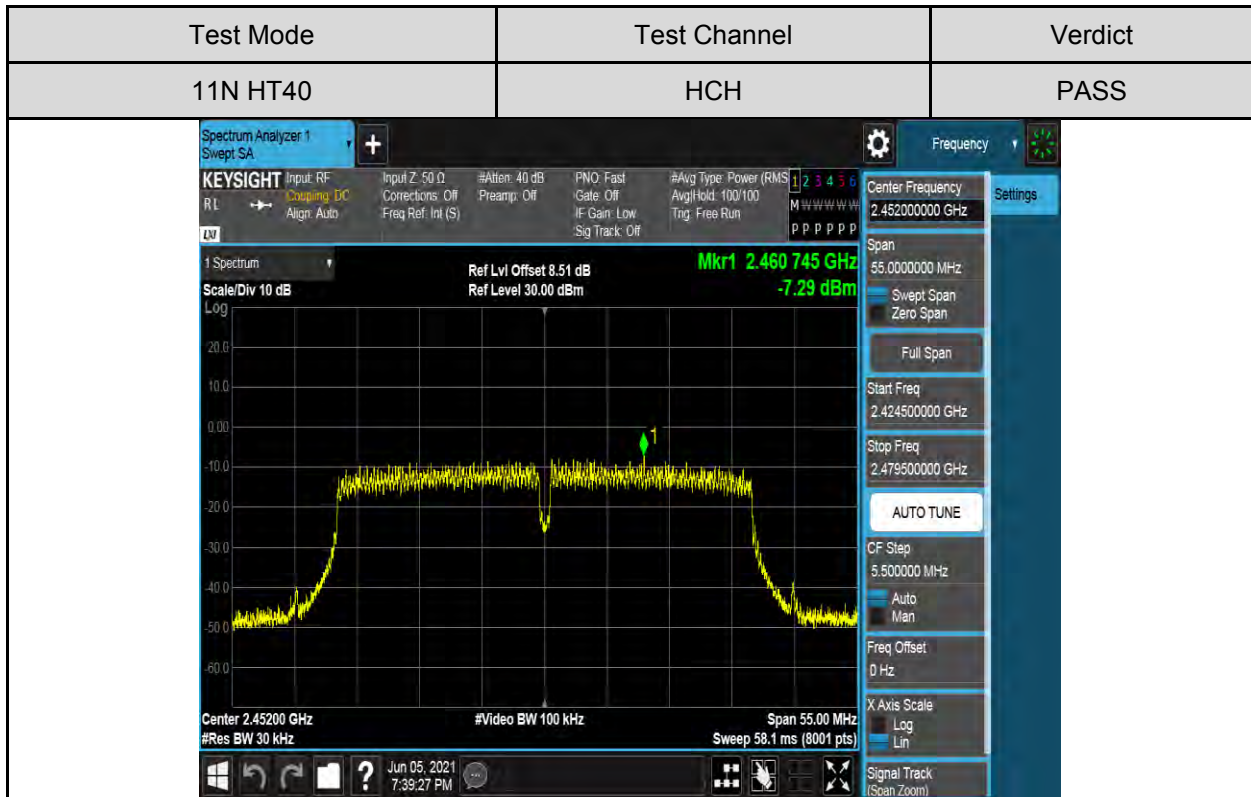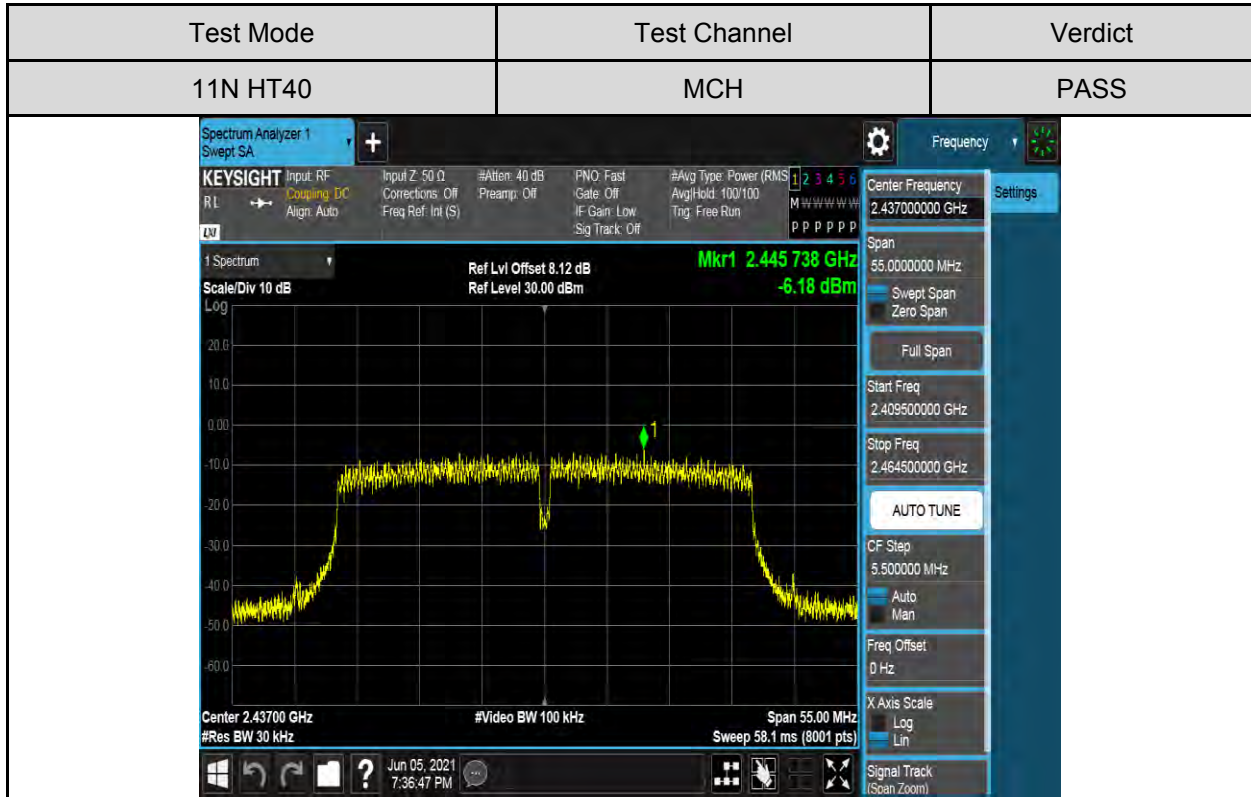

## 7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

### LIMITS

FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


settings:

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

### TEST SETUP

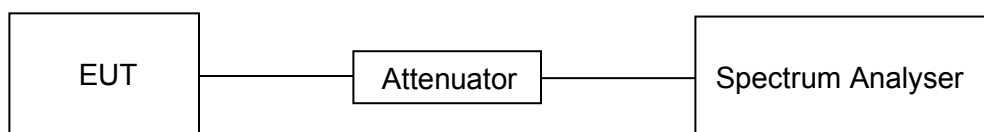



**TEST ENVIRONMENT**

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

**PART I: CONDUCTED BANDEGE**



**TEST RESULTS TABLE**

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	6.909	-41.10	-23.09	PASS
	HCH	7.266	-40.78	-22.73	PASS
11G	LCH	2.417	-39.07	-27.58	PASS
	HCH	0.9751	-41.16	-29.03	PASS
11N HT20	LCH	1.910	-39.55	-28.09	PASS
	HCH	0.4259	-41.14	-29.57	PASS
11N HT40	LCH	-1.251	-38.42	-31.25	PASS
	HCH	-2.724	-40.21	-32.72	PASS









**TEST GRAPHS**

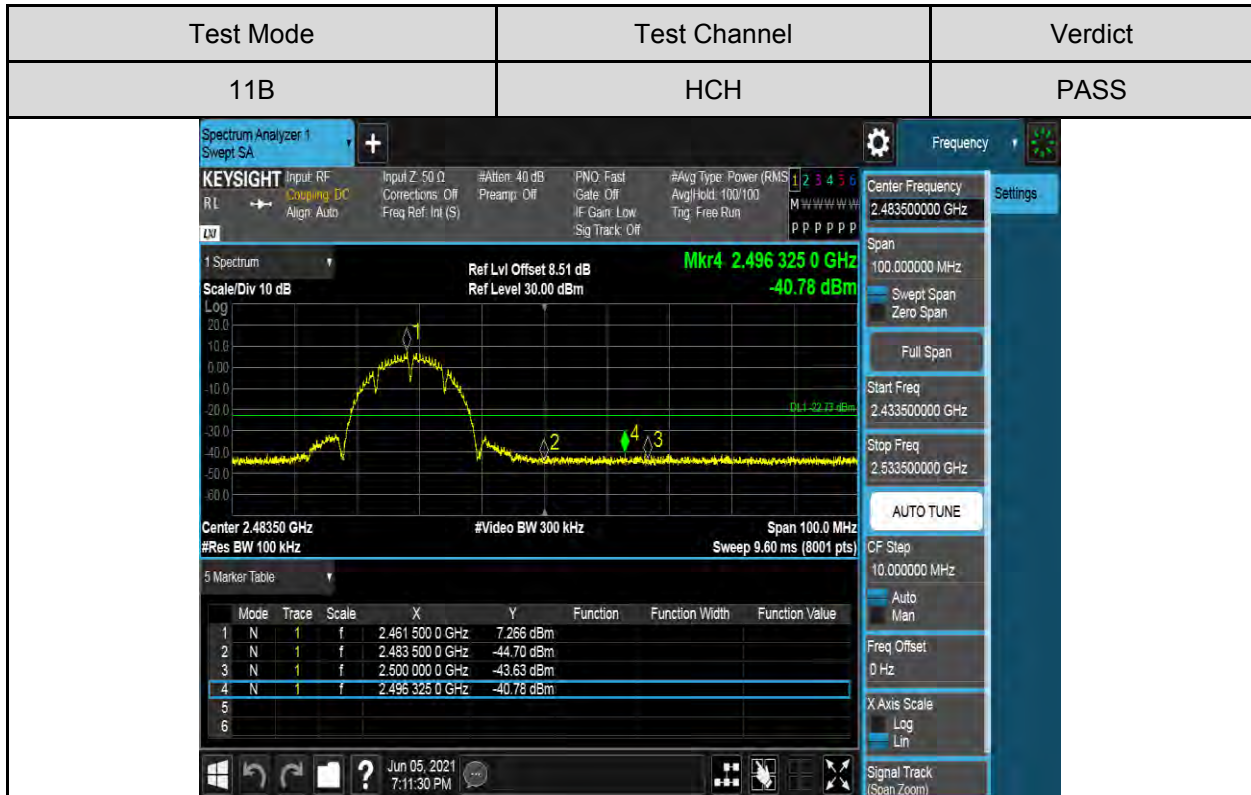
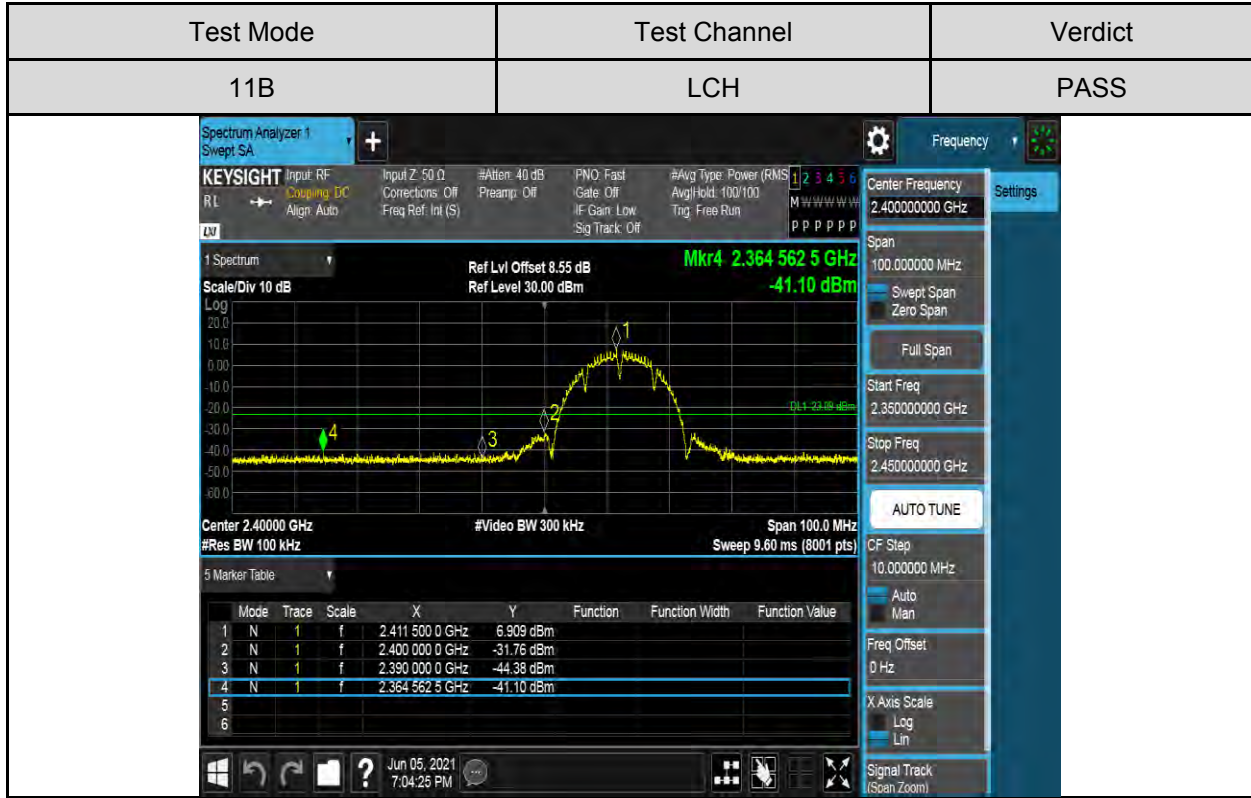




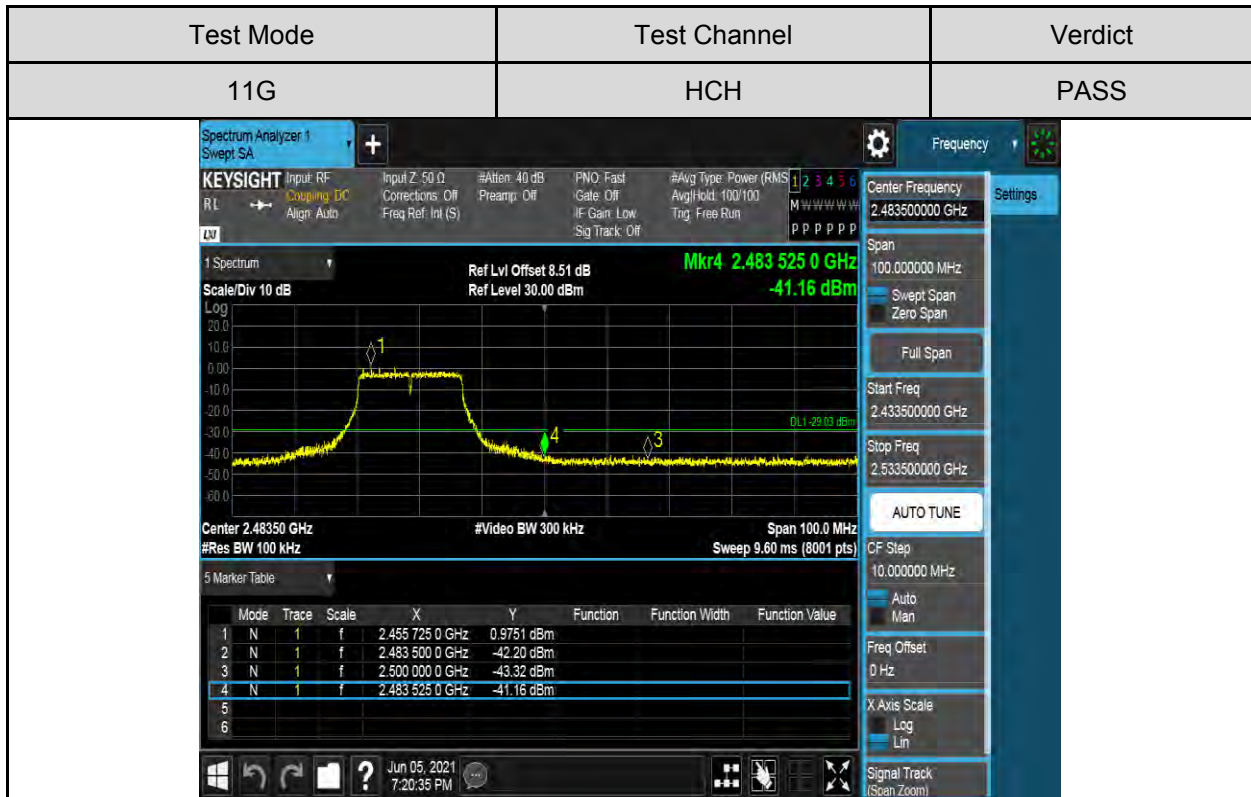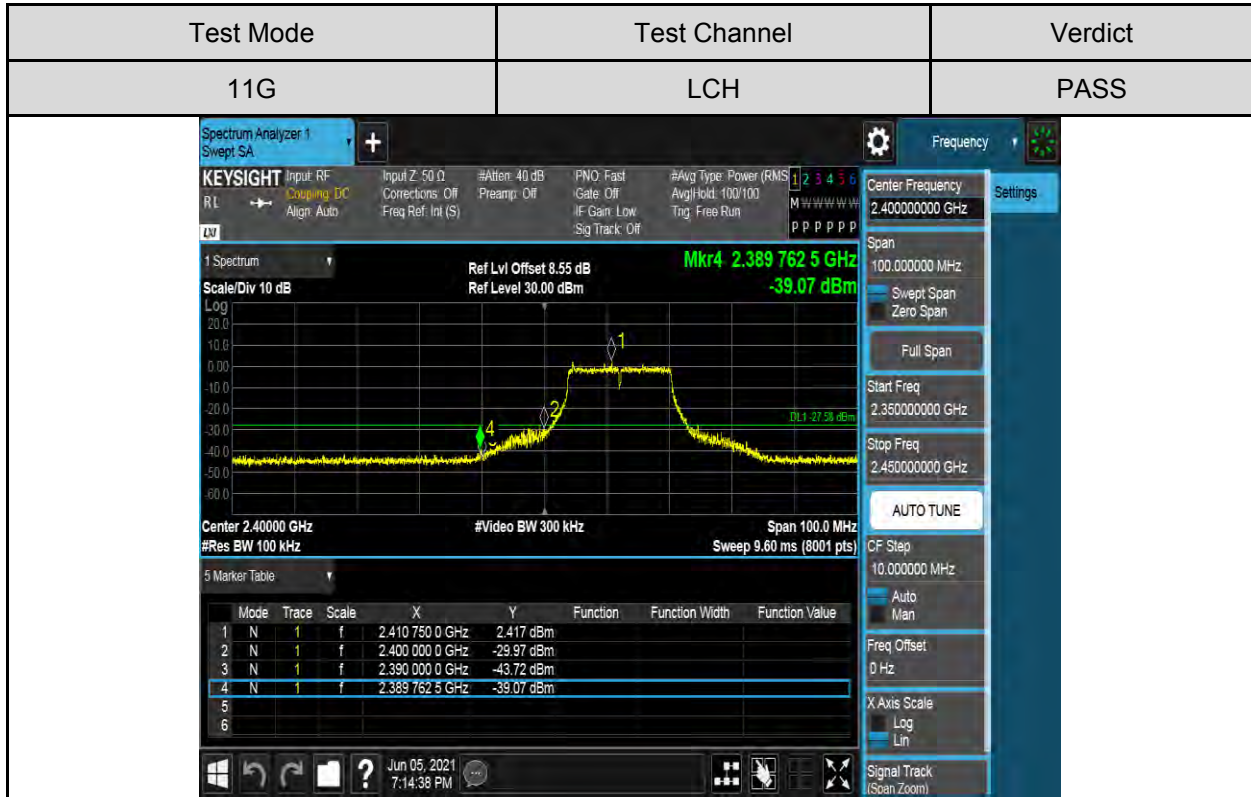

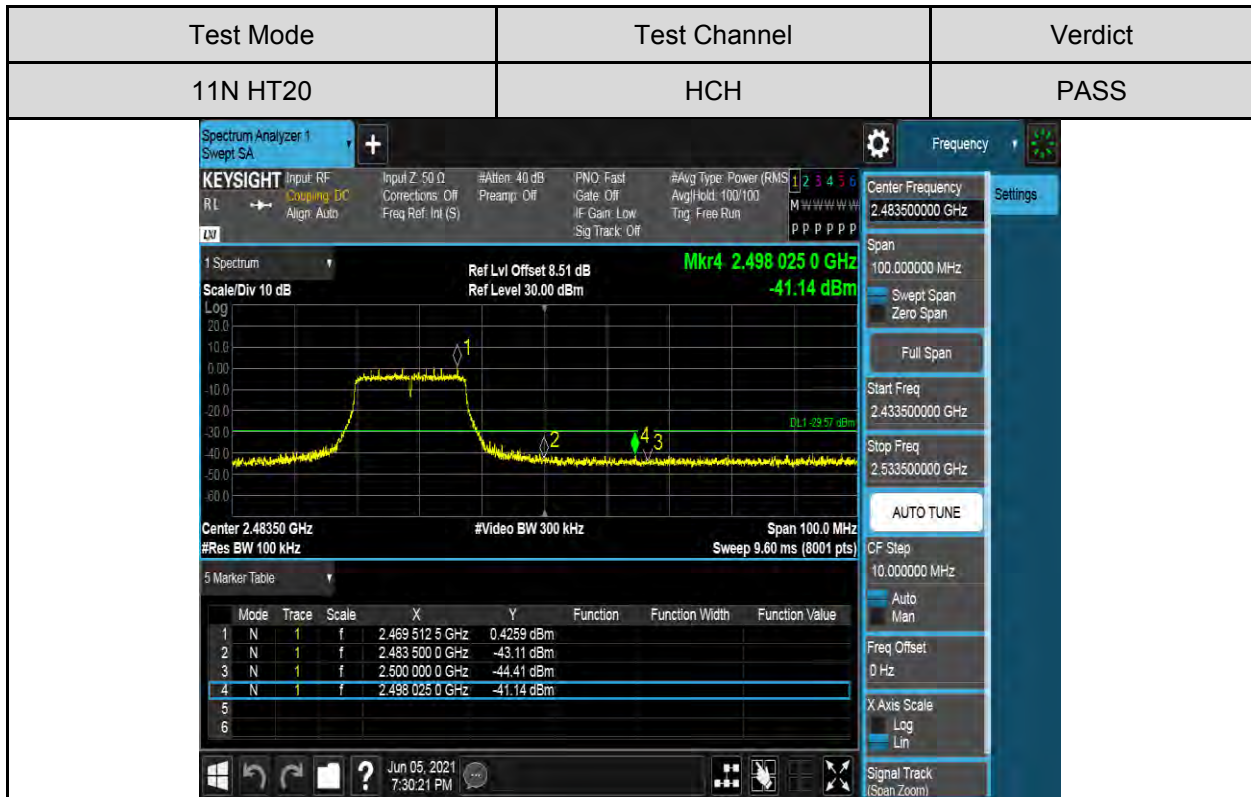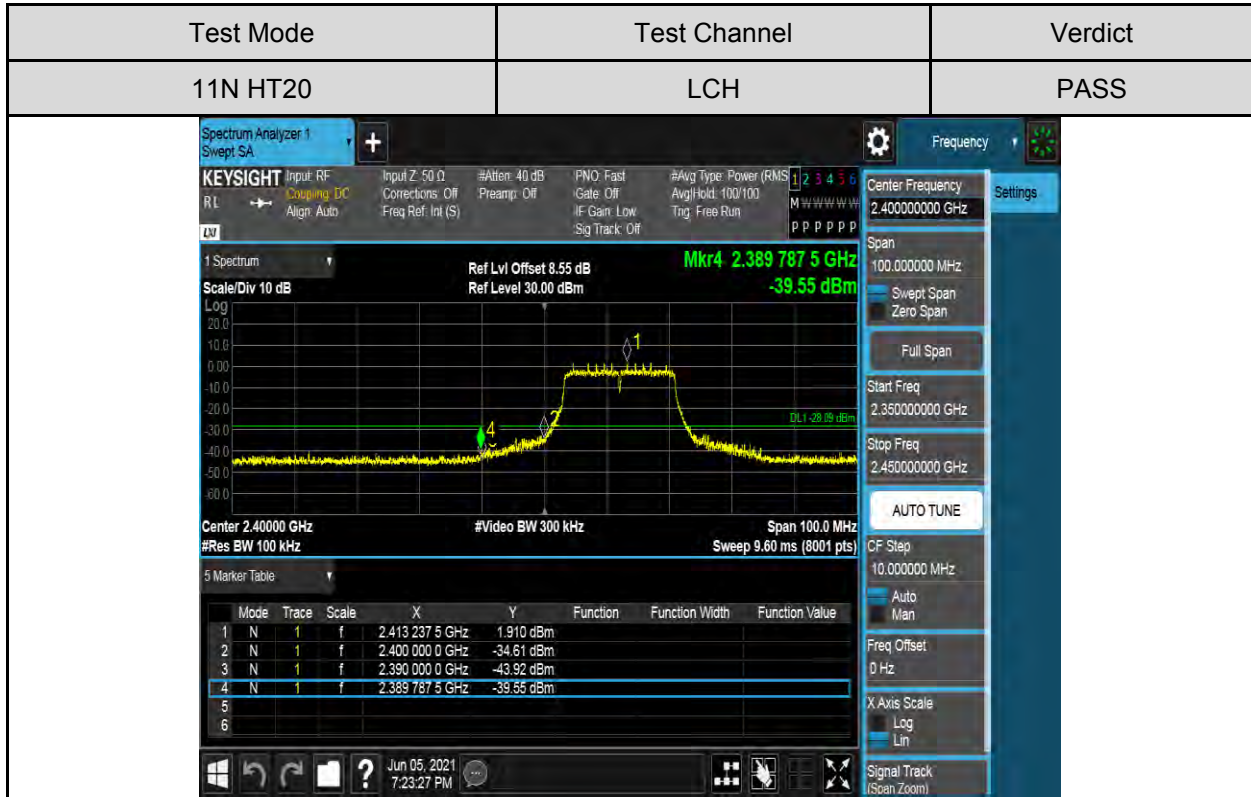



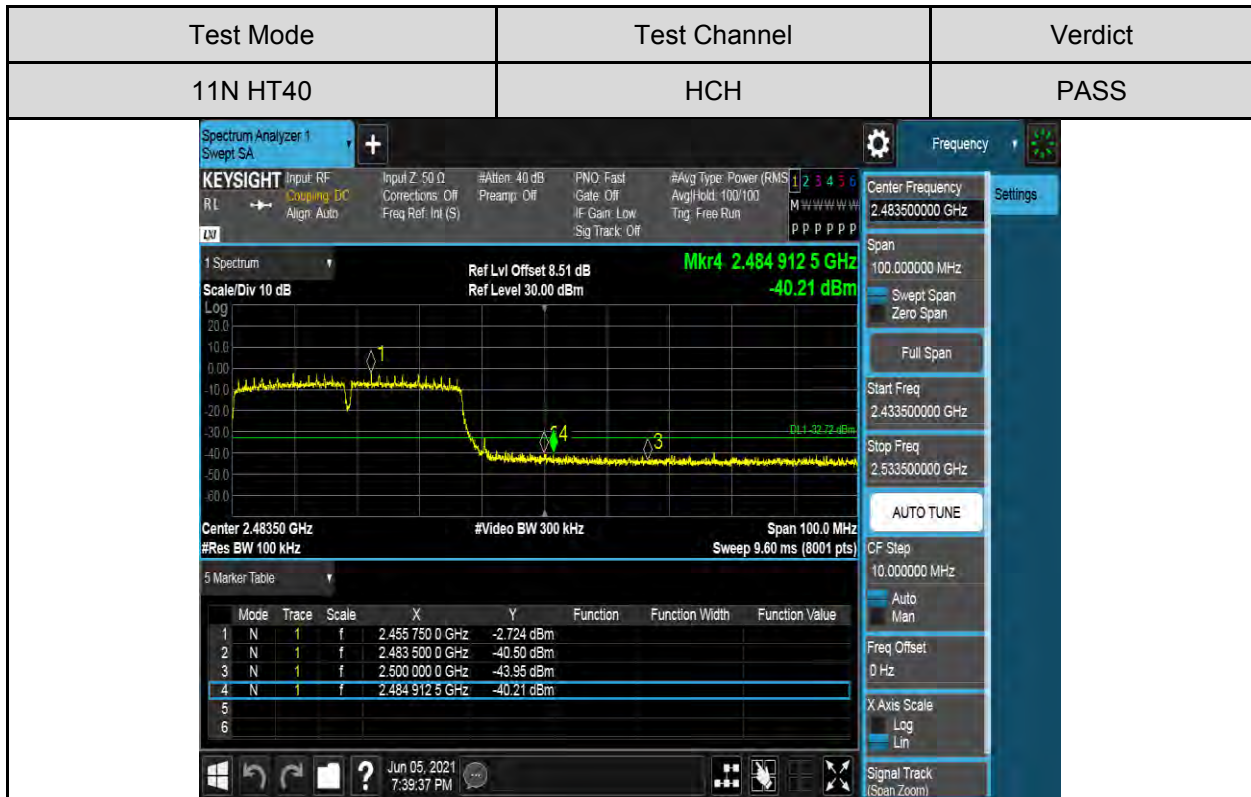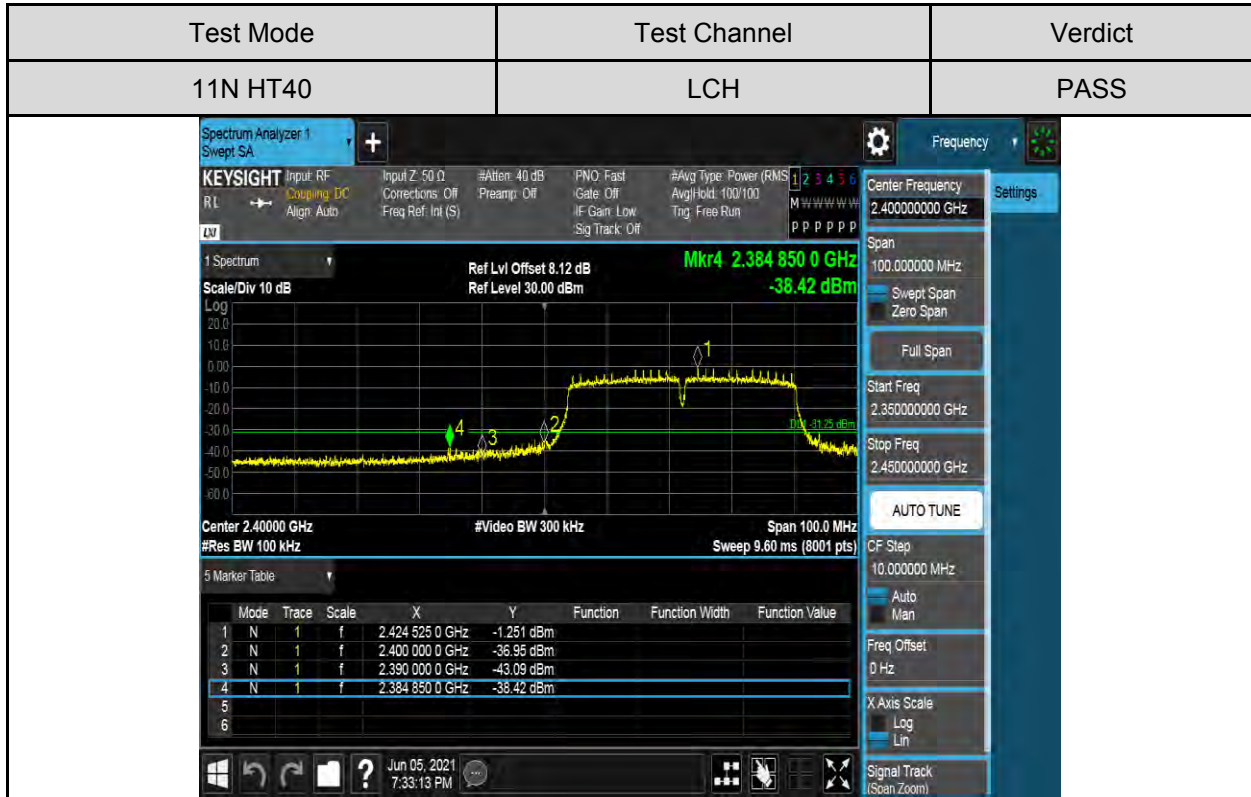



**PART II: CONDUCTED EMISSION**

**TEST RESULTS TABLE**

Test Mode	Channel	Pref(dBm)	Puw(dBm)	Verdict
11B	LCH	6.83	<Limit	PASS
	MCH	6.69	<Limit	PASS
	HCH	7.10	<Limit	PASS
11G	LCH	2.80	<Limit	PASS
	MCH	2.17	<Limit	PASS
	HCH	1.42	<Limit	PASS
11N HT20	LCH	2.20	<Limit	PASS
	MCH	1.20	<Limit	PASS
	HCH	0.31	<Limit	PASS
11N HT40	LCH	-1.21	<Limit	PASS
	MCH	-1.51	<Limit	PASS
	HCH	-2.67	<Limit	PASS

**TEST GRAPHS**



Test Mode	Channel	Verdict
11B	LCH	PASS

**Pref test Plot**





Puw test Plot

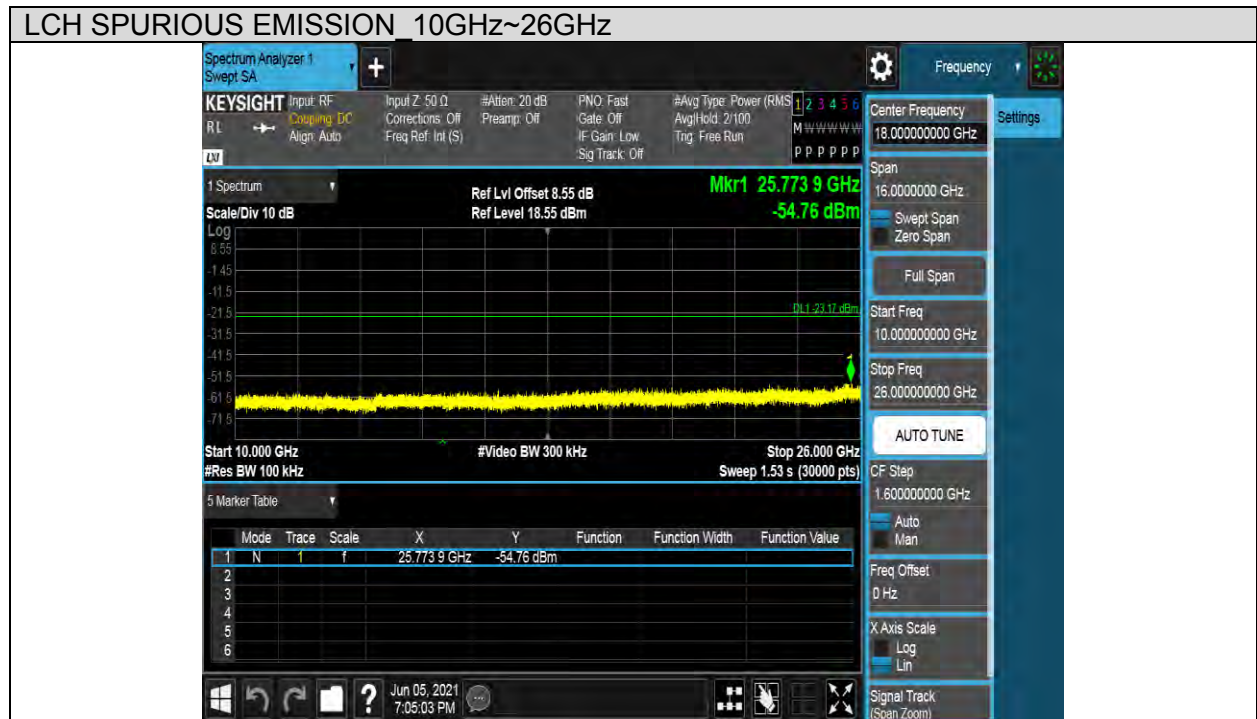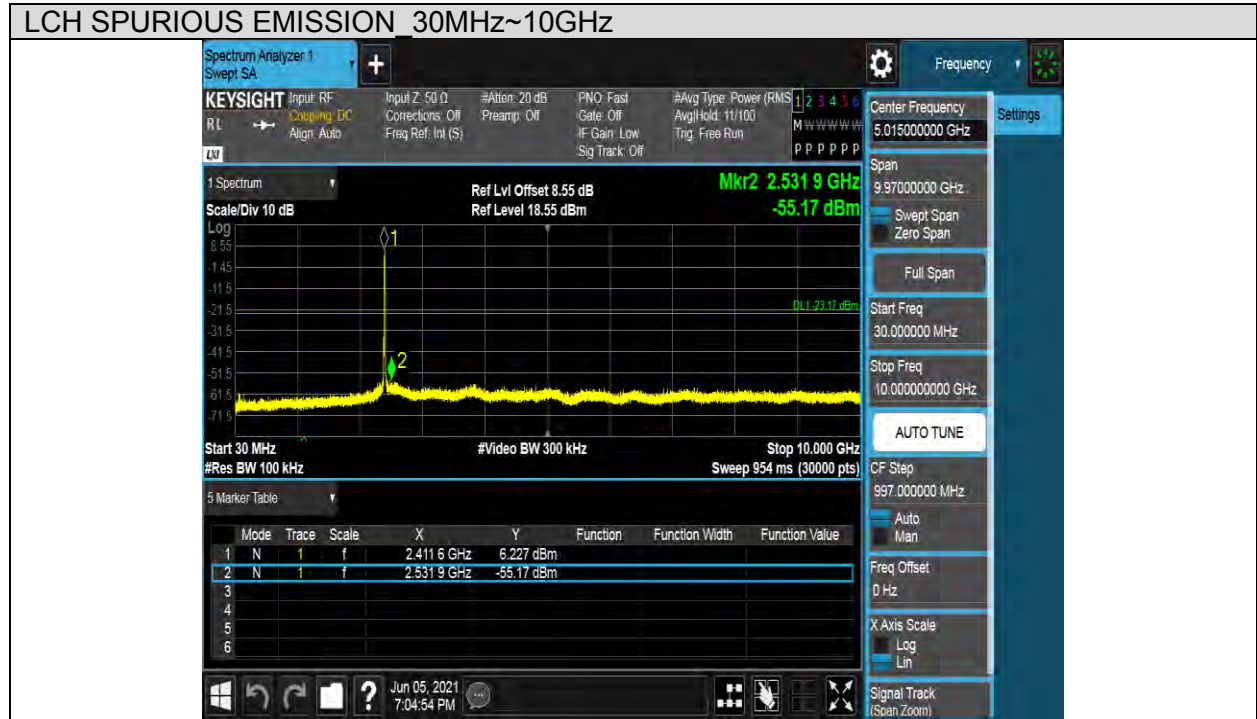






Test Mode	Channel	Verdict
11B	MCH	PASS

Pref test Plot





Puw test Plot

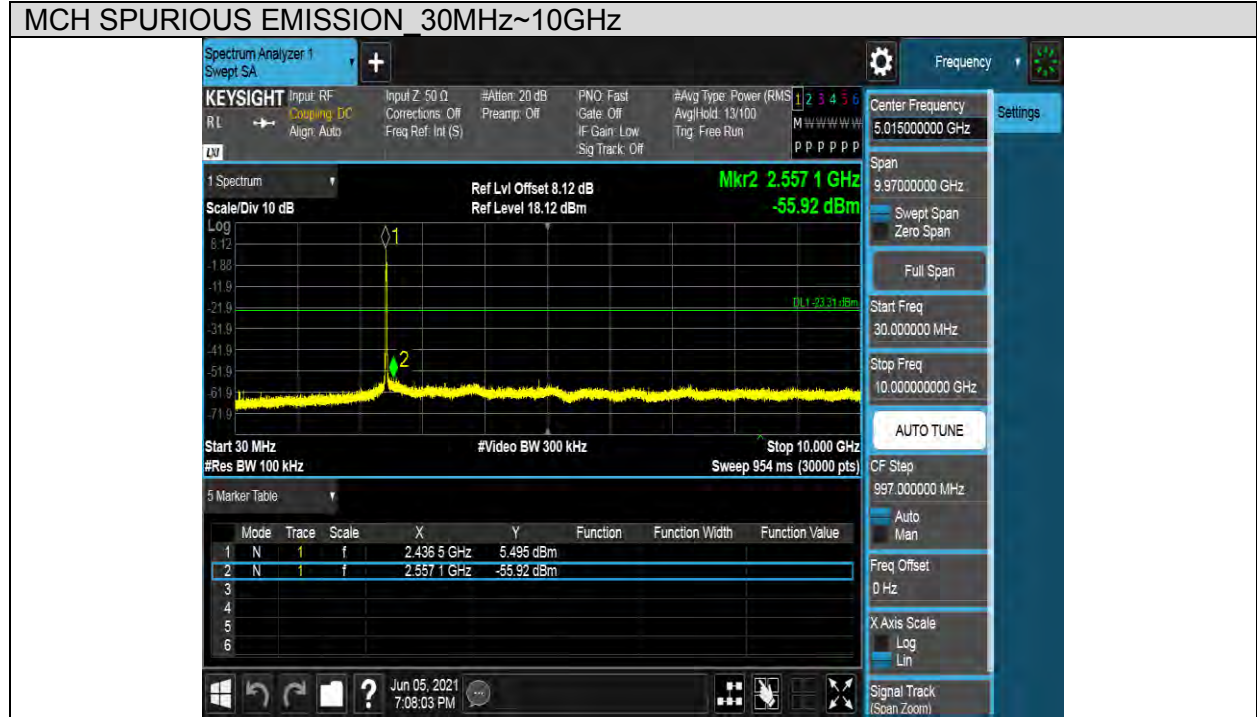



Test Mode	Channel	Verdict
11B	HCH	PASS



Pref test Plot








Puw test Plot

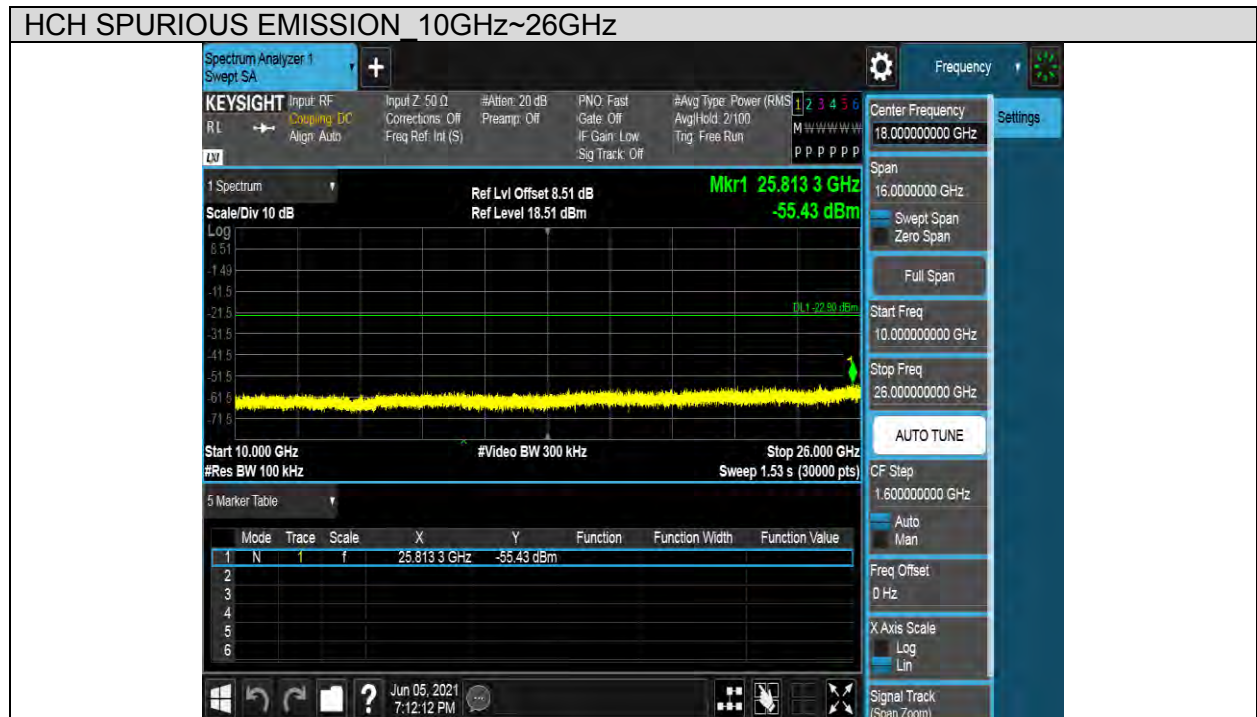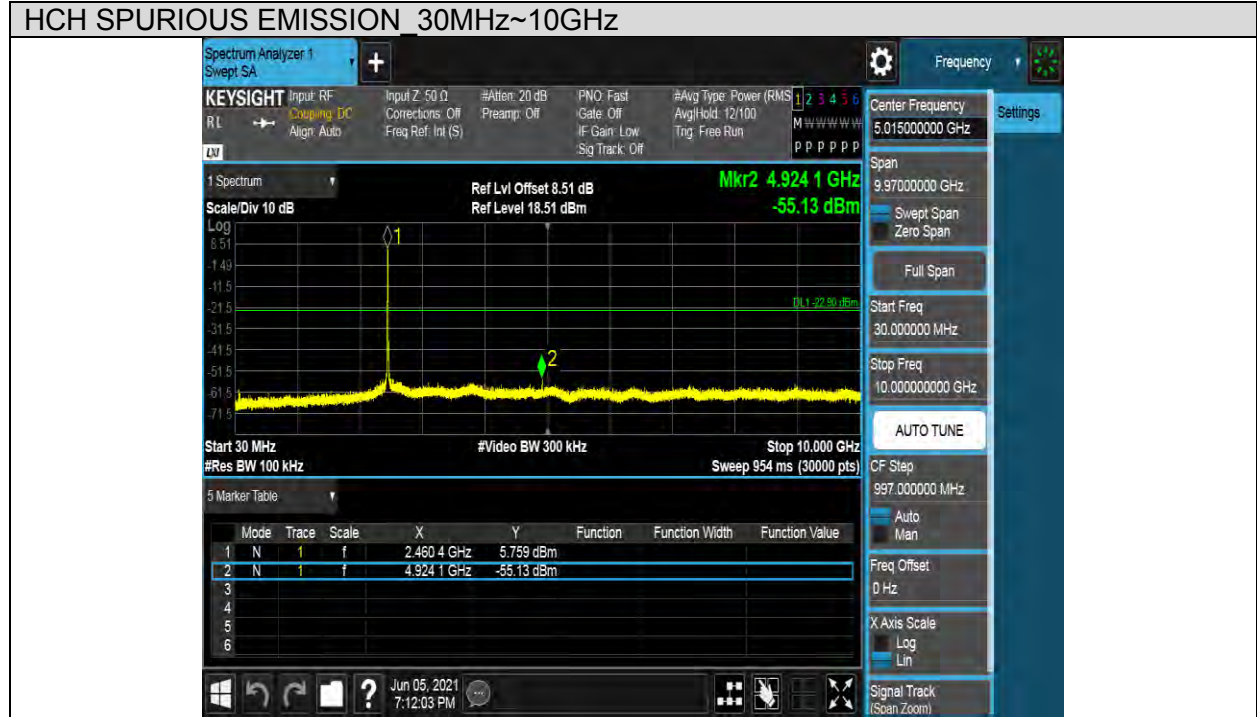





Test Mode	Channel	Verdict
11G	LCH	PASS

Pref test Plot

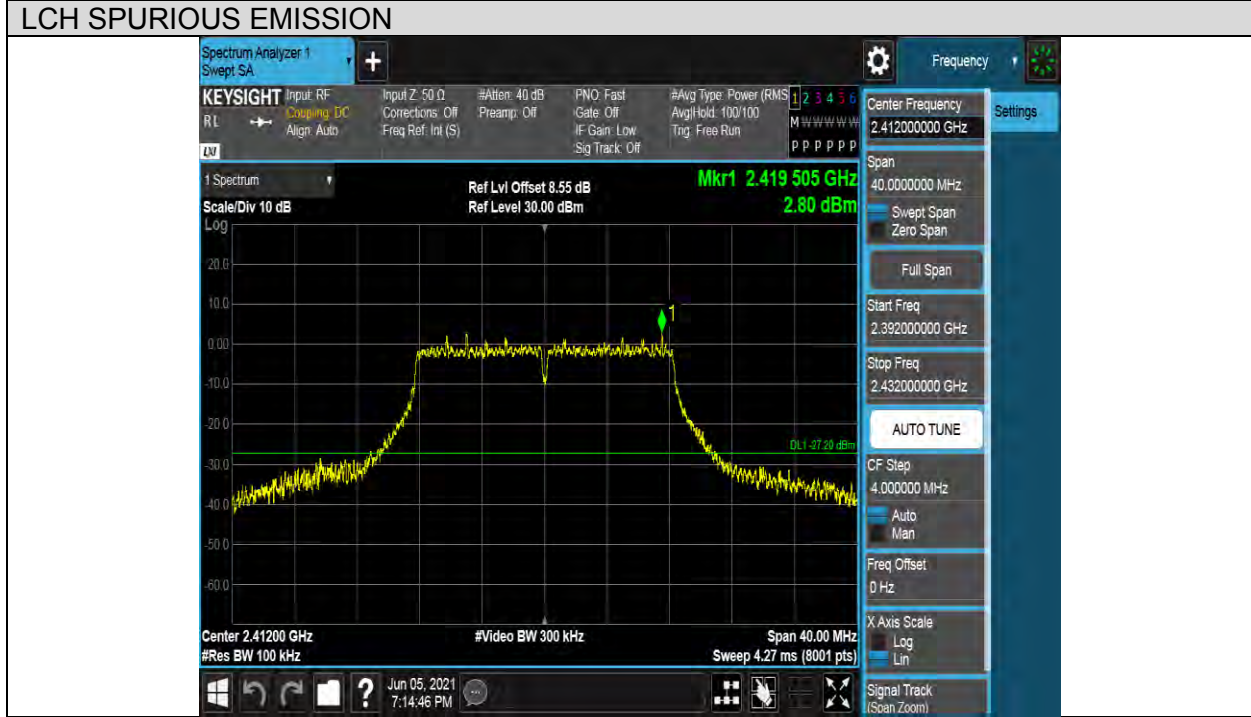




Puw test Plot

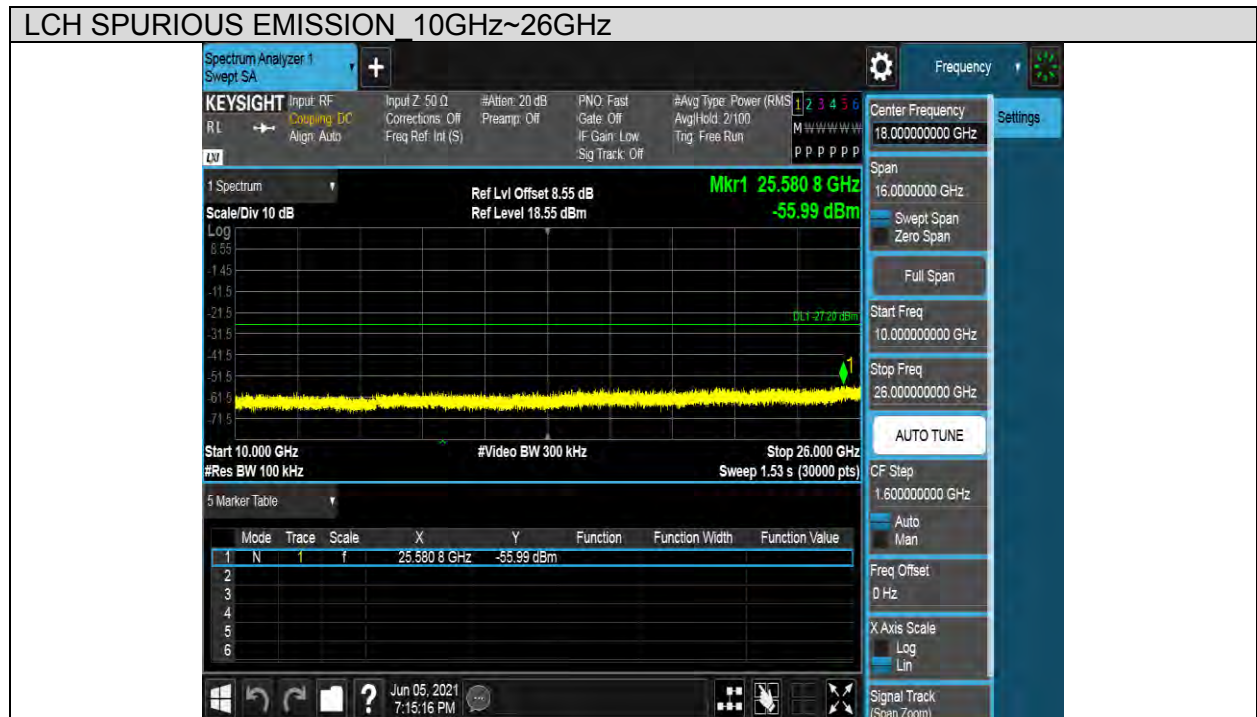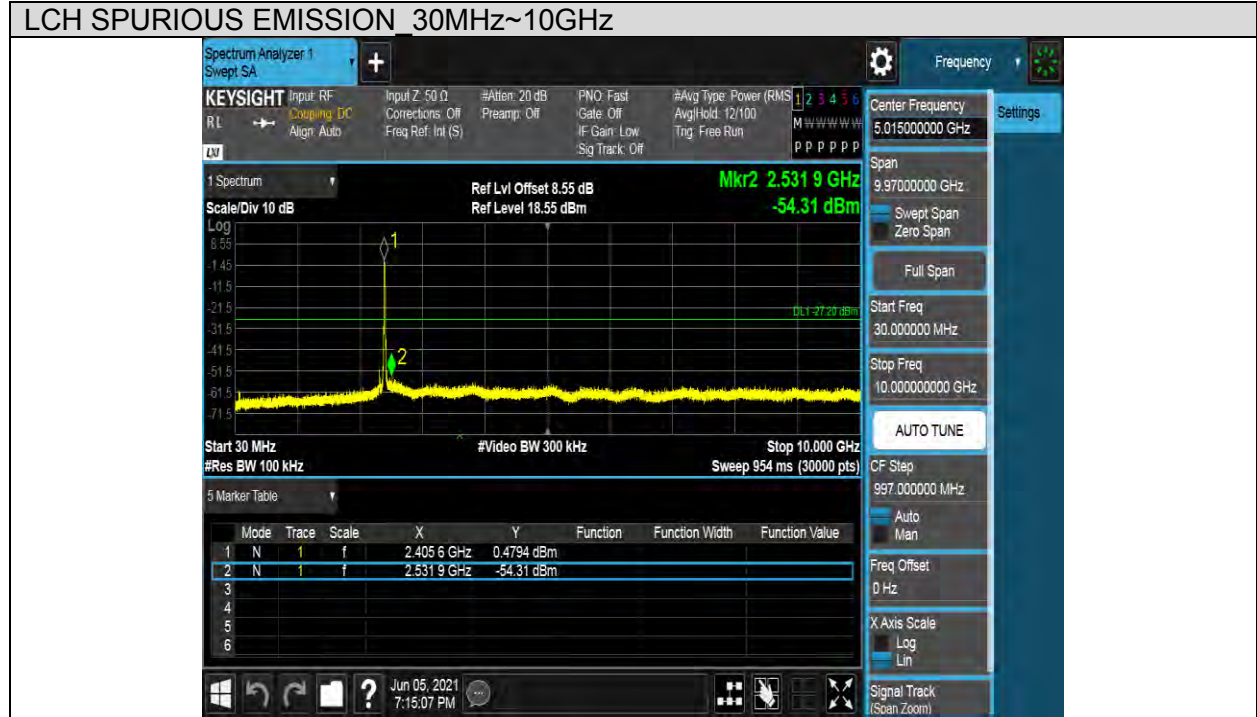



Test Mode	Channel	Verdict
11G	MCH	PASS

Pref test Plot

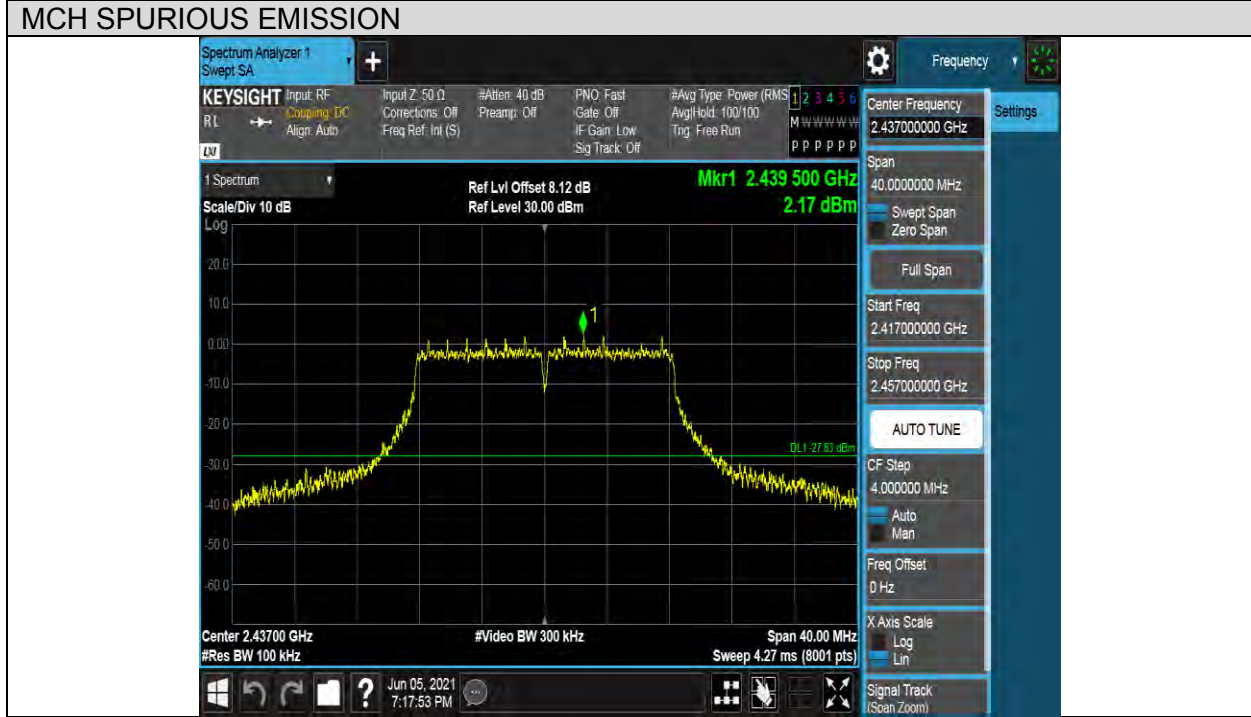









Test Mode	Channel	Verdict
11G	HCH	PASS

Pref test Plot

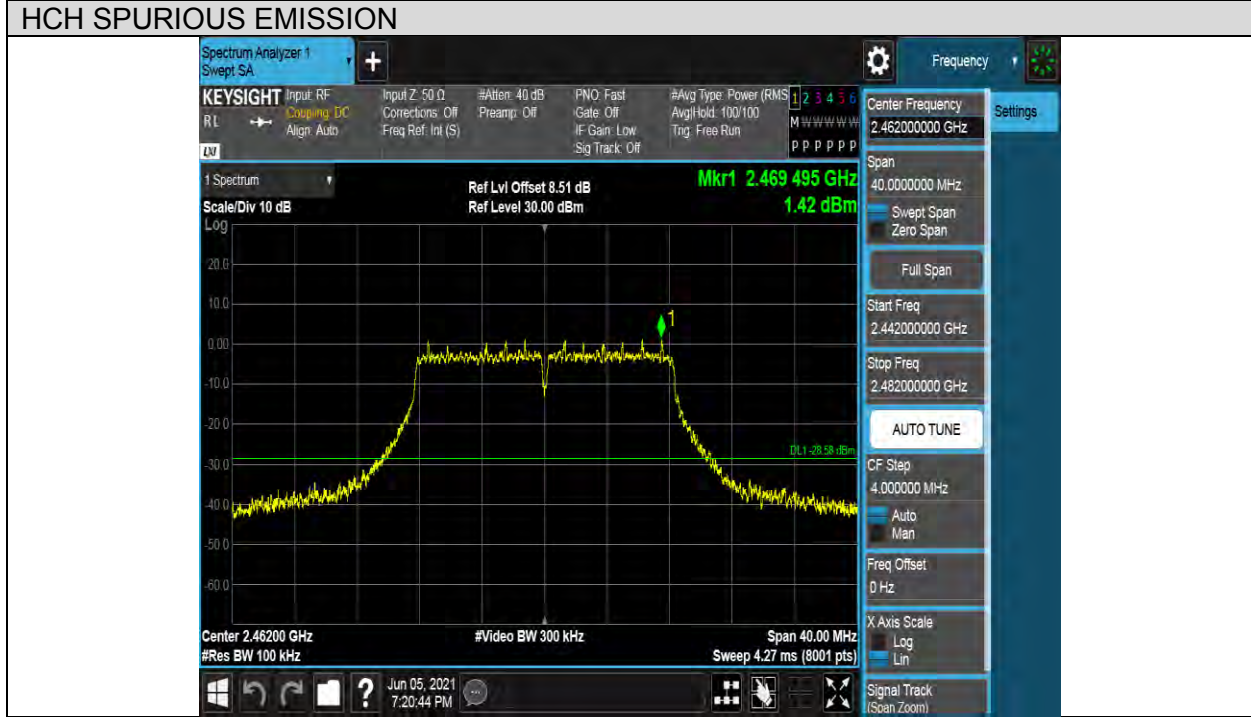



Puw test Plot

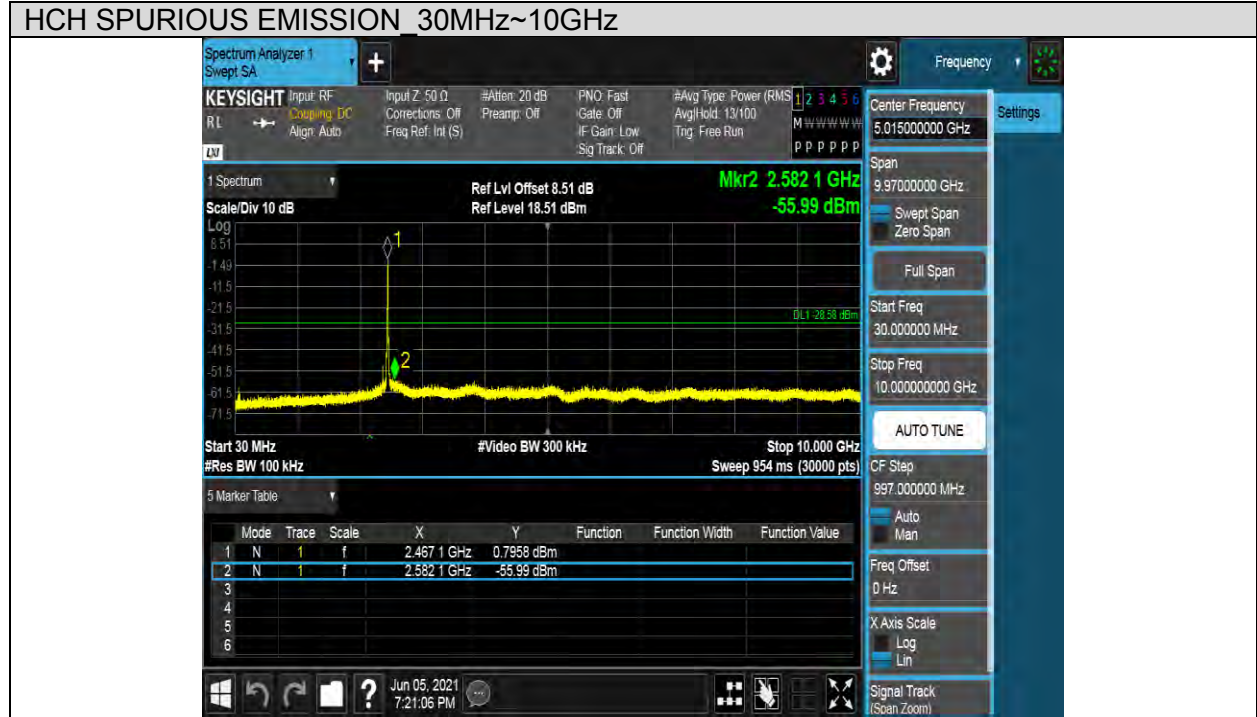








Test Mode	Channel	Verdict
11N HT20	LCH	PASS

Pref test Plot

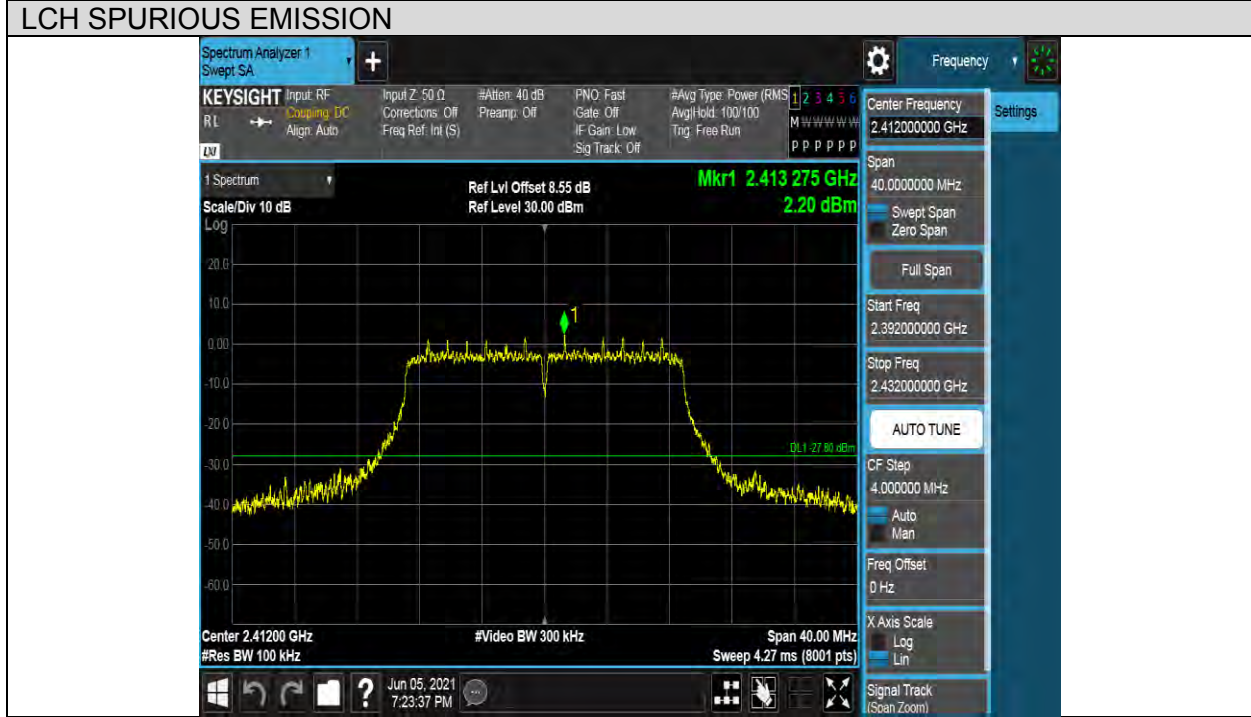




Puw test Plot

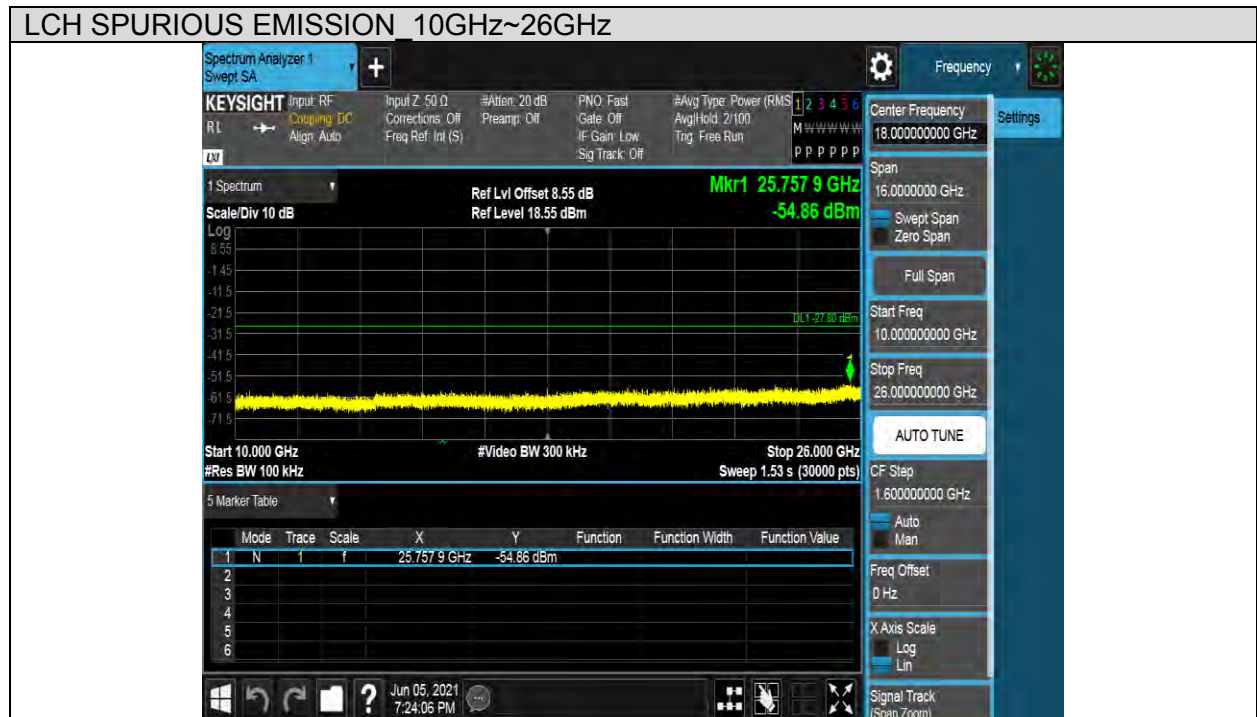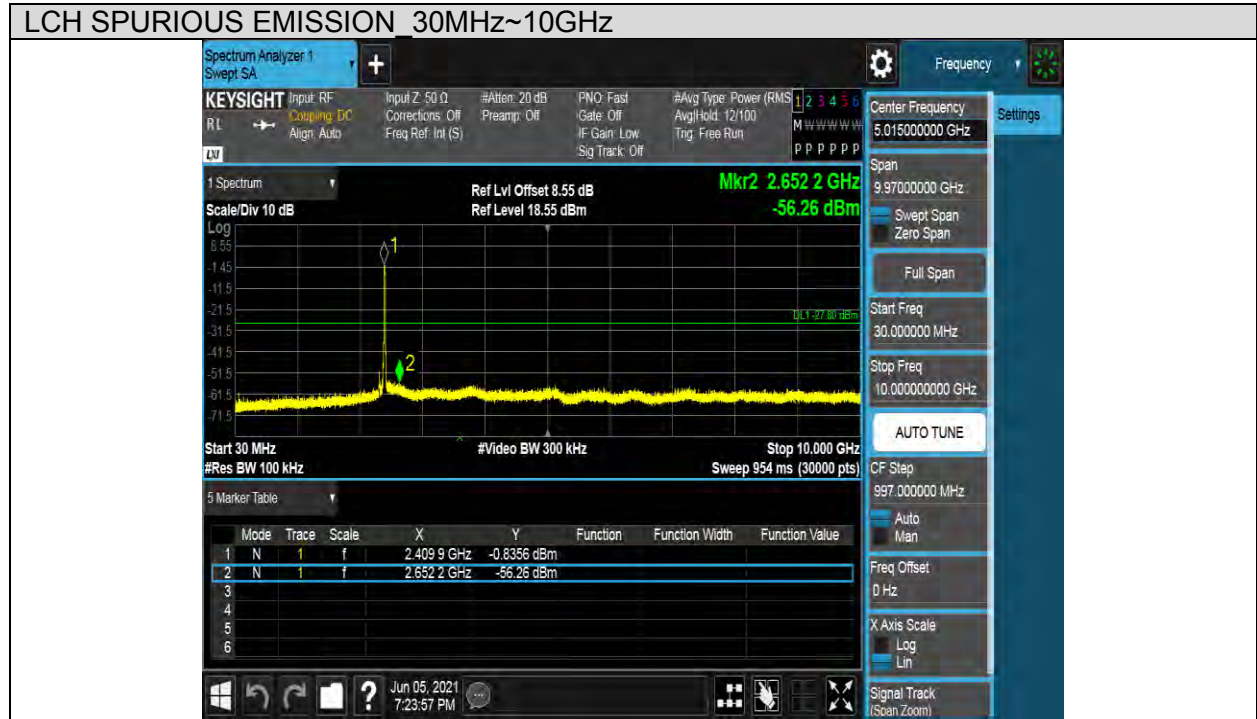





Test Mode	Channel	Verdict
11N HT20	MCH	PASS

Pref test Plot

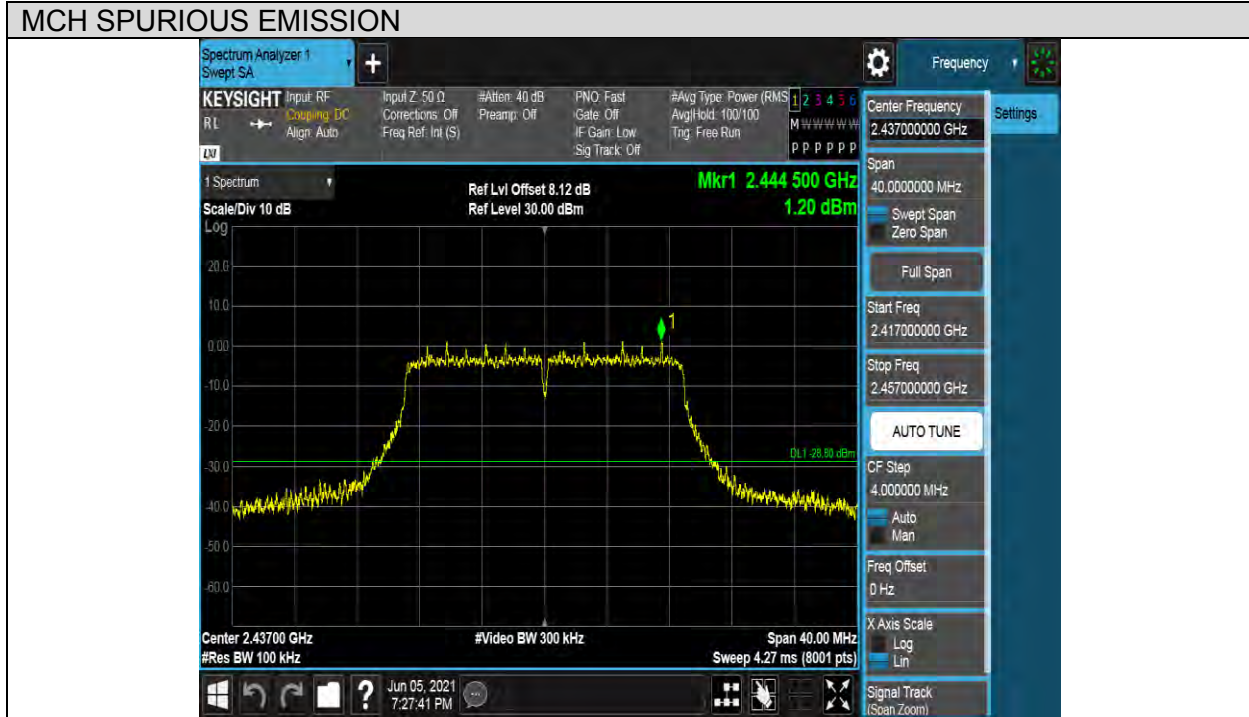



Puw test Plot

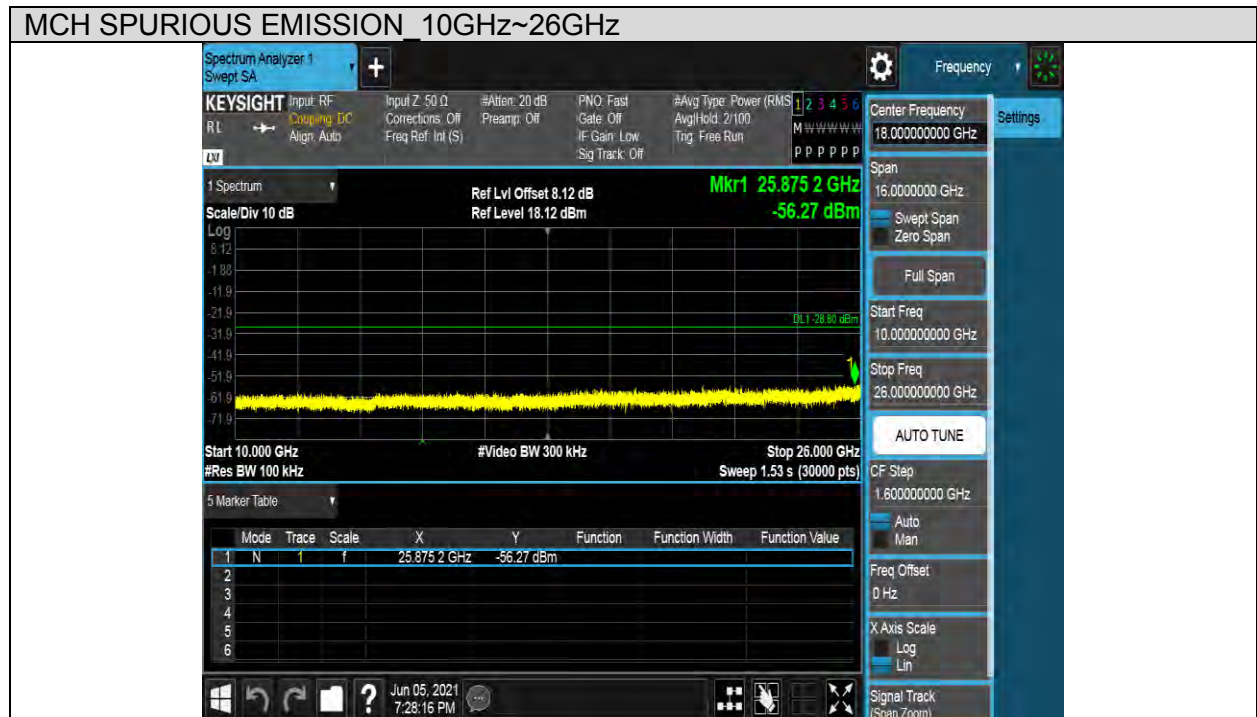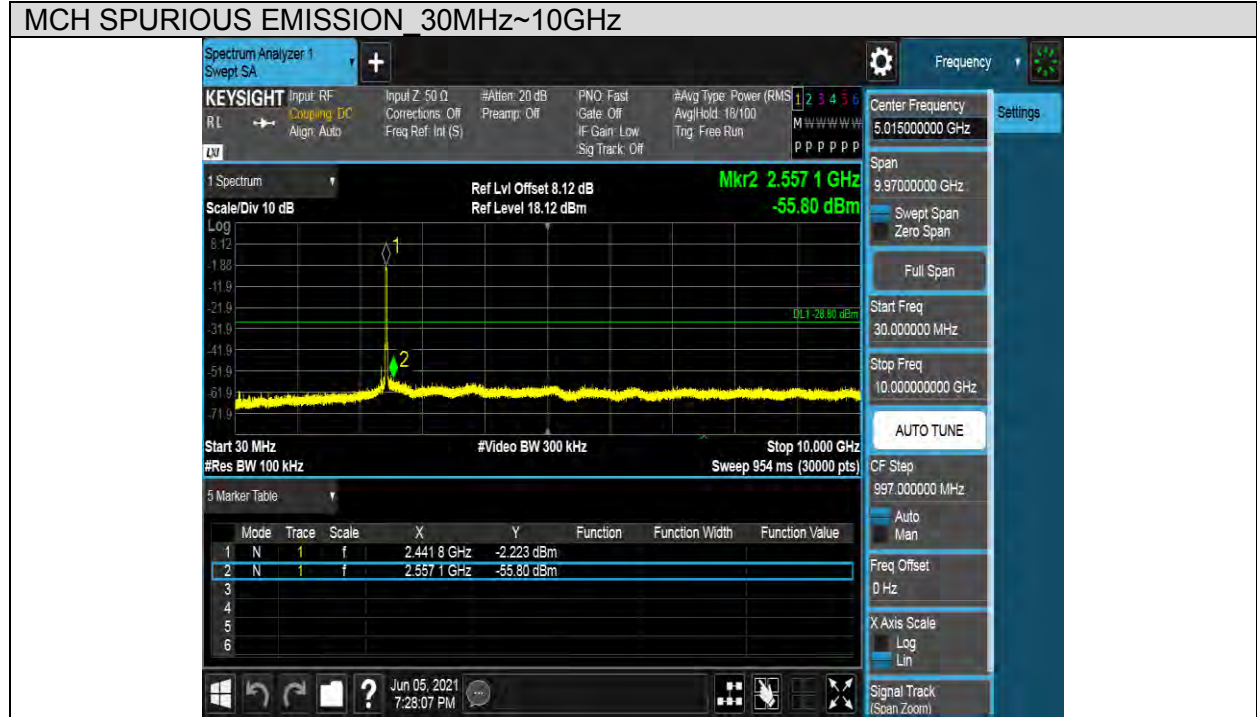






Test Mode	Channel	Verdict
11N HT20	HCH	PASS

Pref test Plot

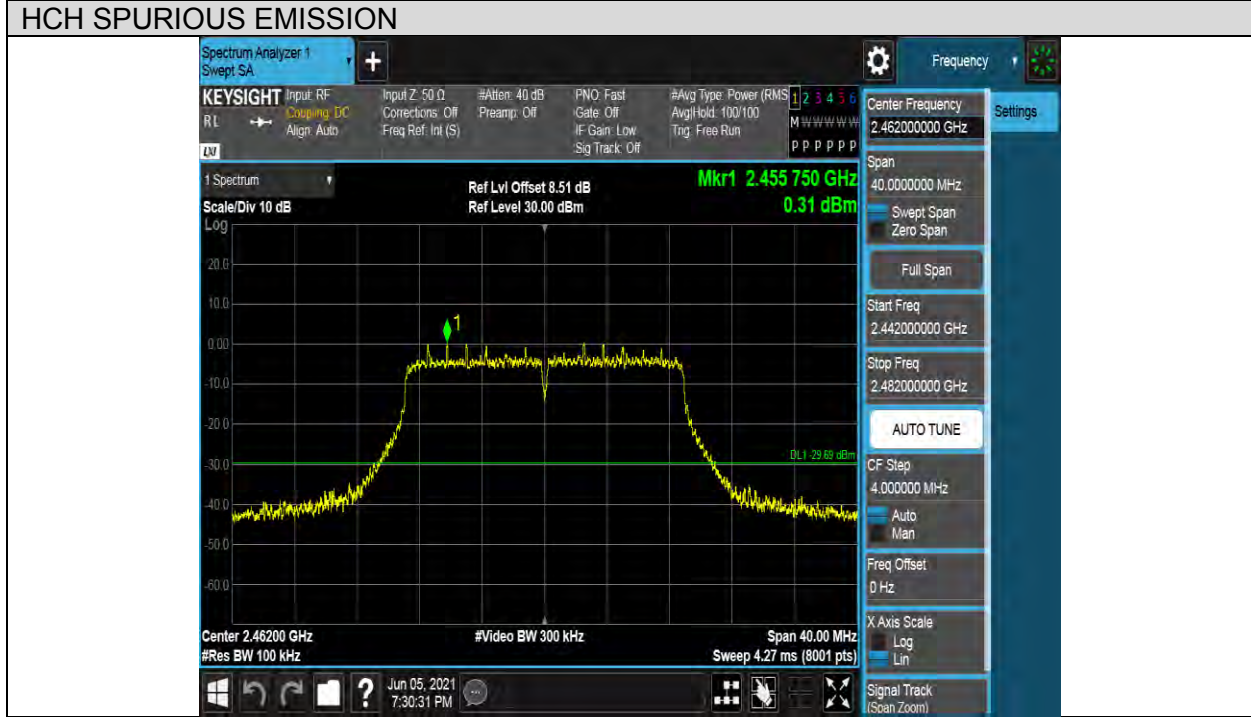






Test Mode	Channel	Verdict
11N HT40	LCH	PASS


Pref test Plot

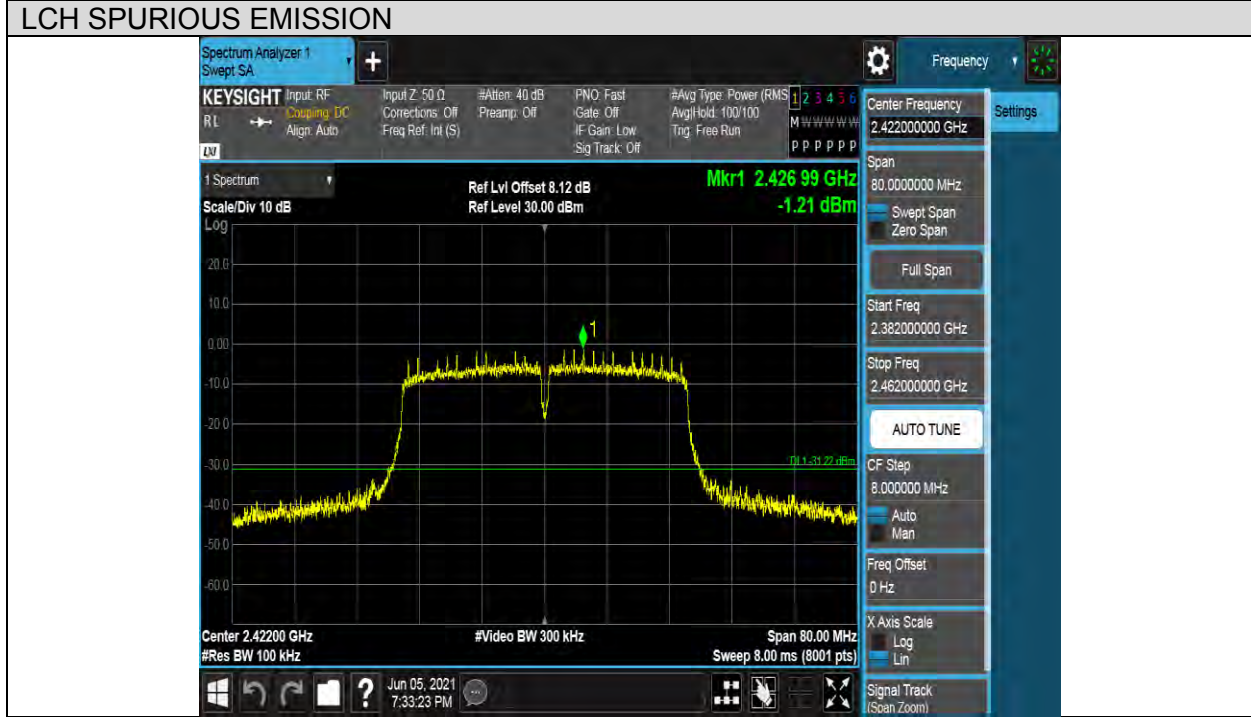





Puw test Plot

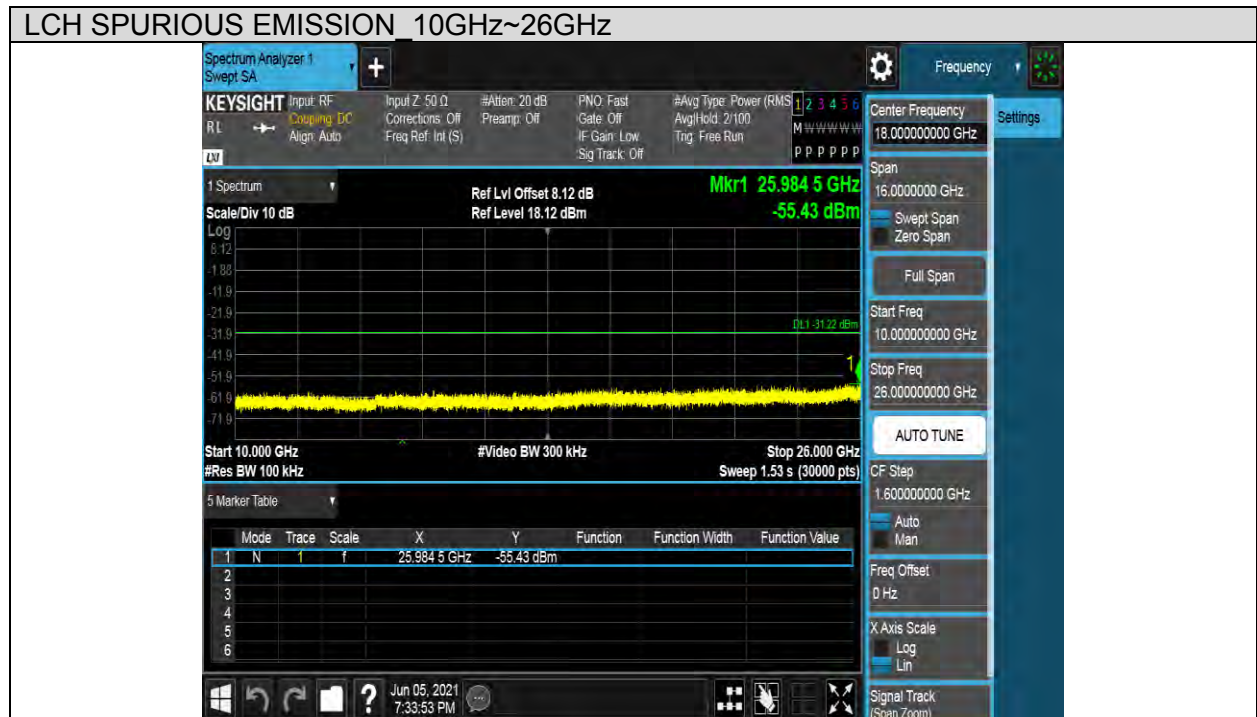




Test Mode	Channel	Verdict
11N HT40	MCH	PASS

Pref test Plot






Puw test Plot

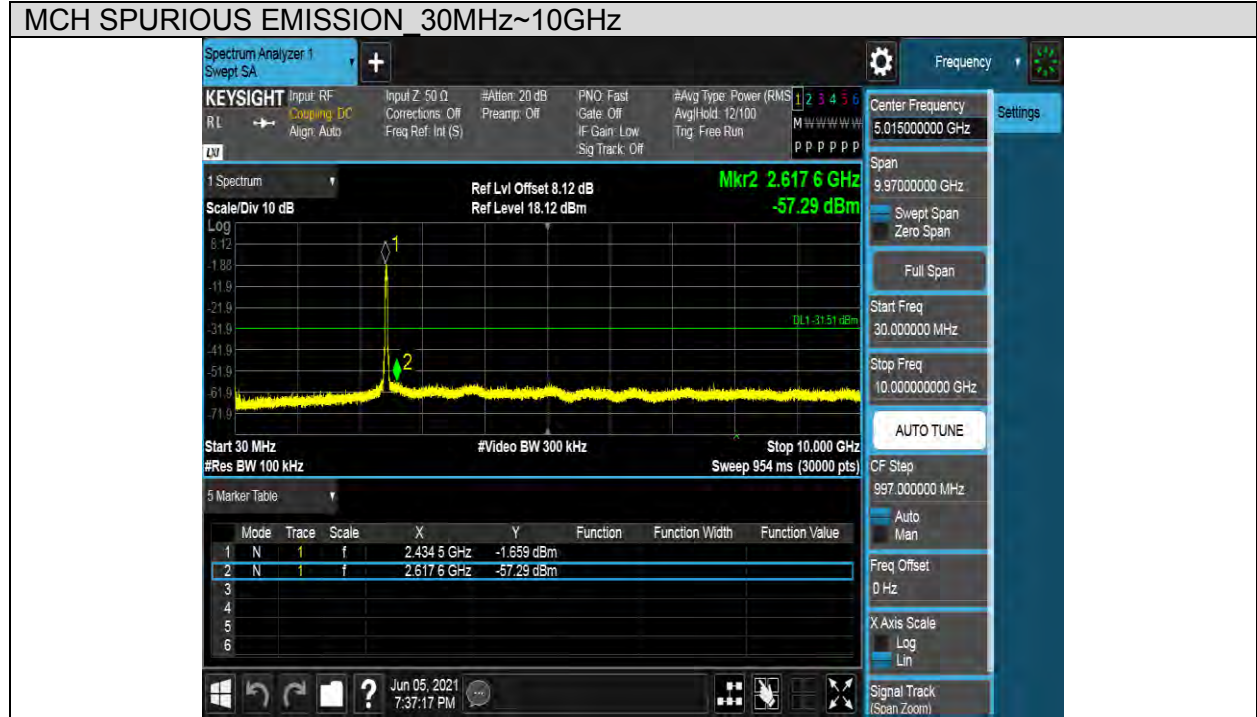



Test Mode	Channel	Verdict
11N HT40	HCH	PASS


Pref test Plot

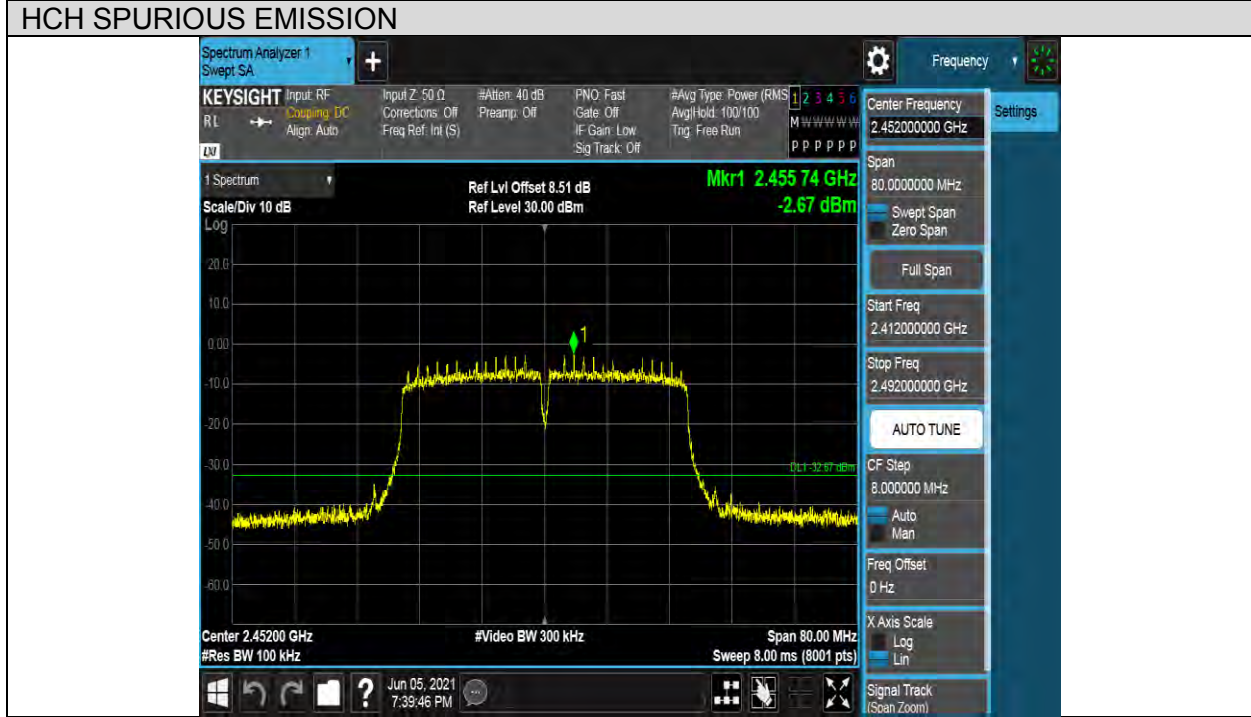





Puw test Plot

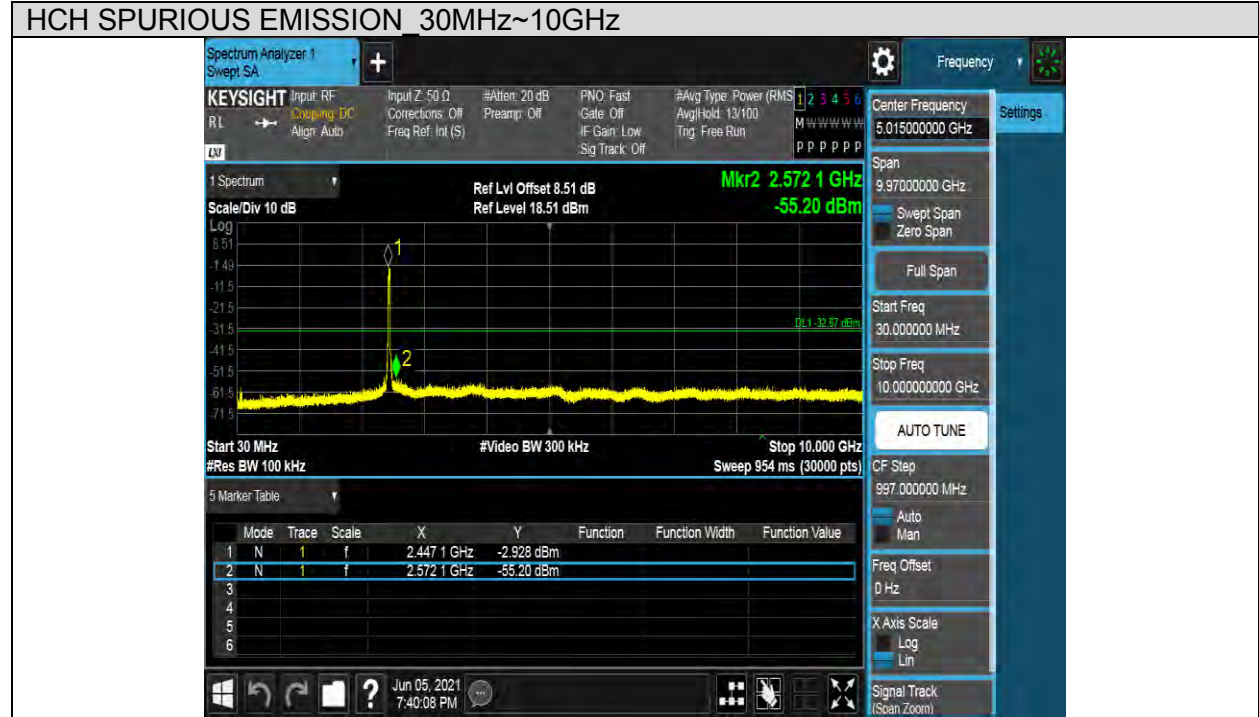



## 7.6. RADIATED TEST RESULTS

### 7.6.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.





Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30MHz

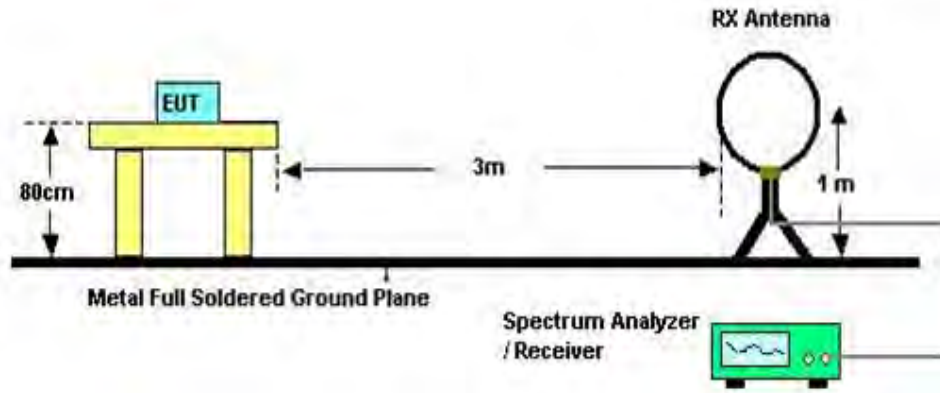


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

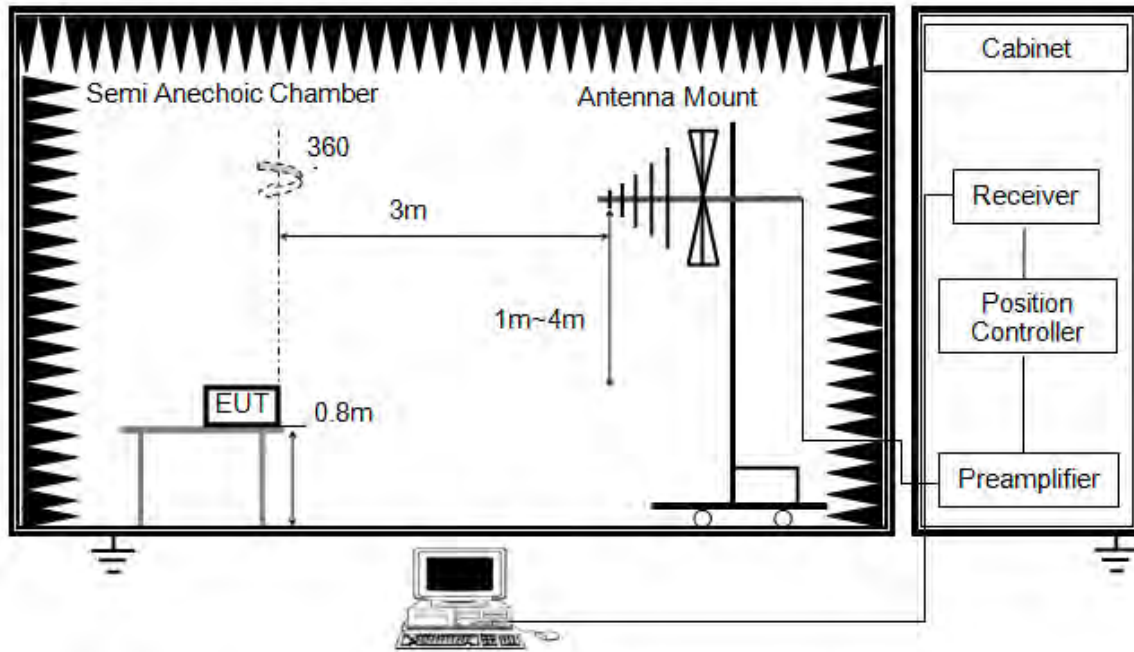


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

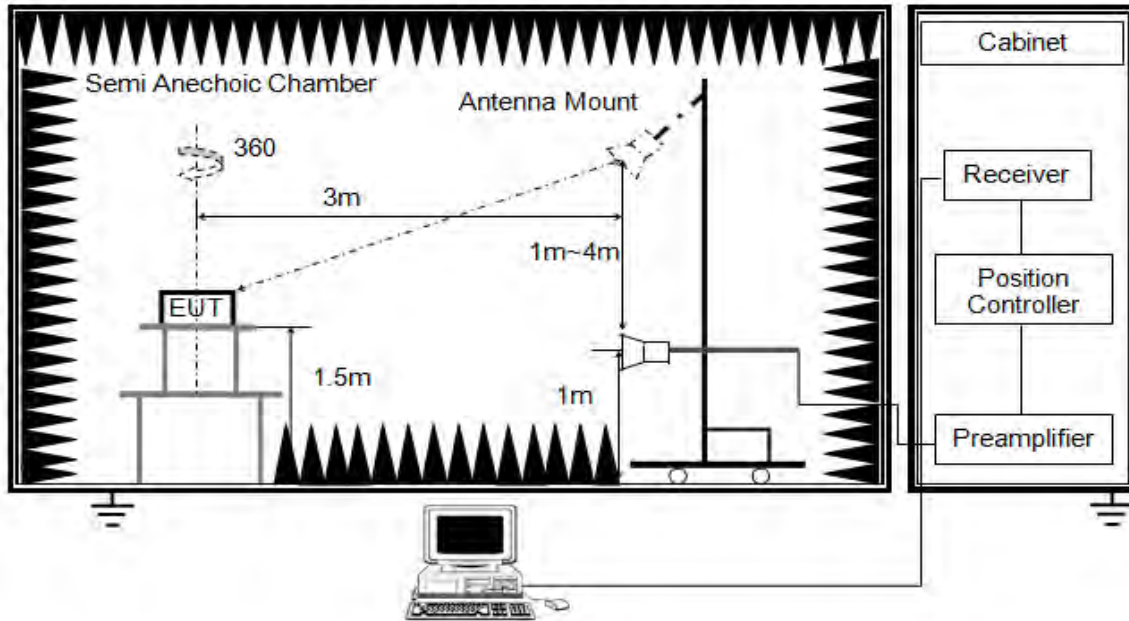


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set  $VBW \leq RBW/100$ , but not less than list in section 7.1 with average detector, max hold to run for at least 50 traces for average measurements.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis positions:

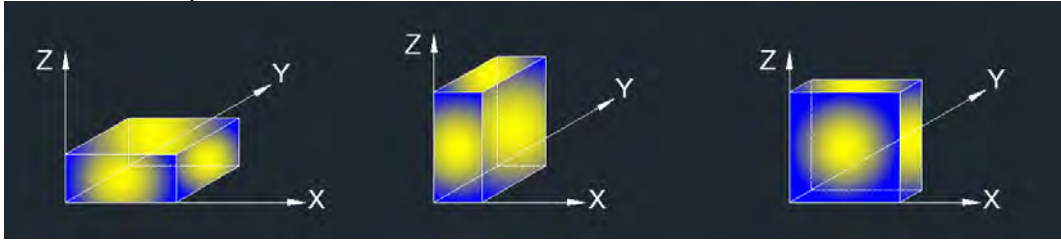

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worse case (X axis) data recorded in the report.





### 7.6.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

### 7.6.3. RESTRICTED BANDEDGE


#### TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS



**TEST GRAPHS**

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

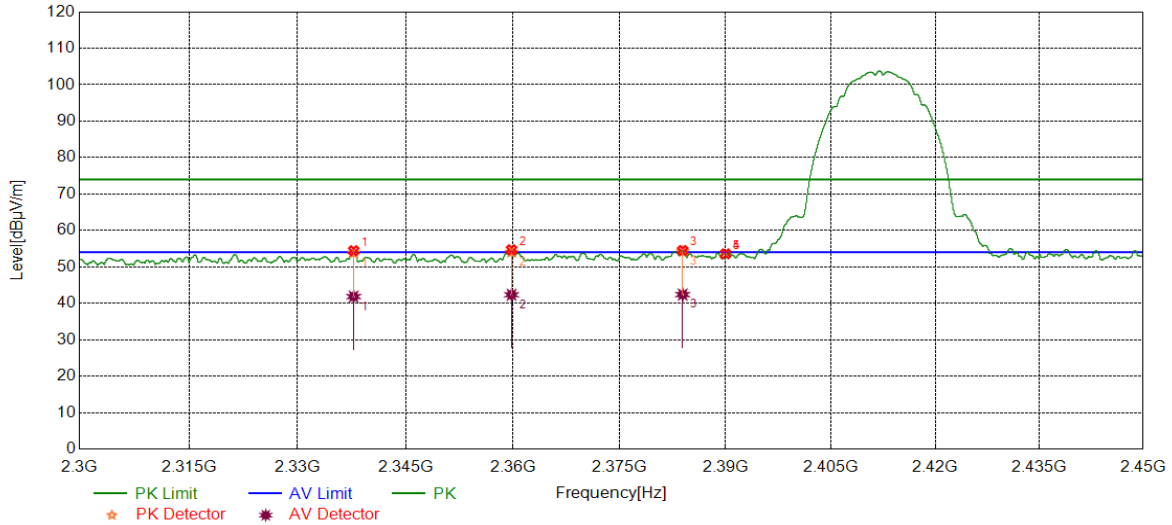

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2337.7672	41.87	12.57	54.44	74.00	-19.56	Horizontal
2	2359.8012	41.93	12.77	54.70	74.00	-19.30	Horizontal
3	2383.9167	41.44	13.06	54.50	74.00	-19.50	Horizontal
4	2390.0000	40.52	13.07	53.59	74.00	-20.41	Horizontal
5	2390.0000	40.52	13.07	53.59	74.00	-20.41	Horizontal


**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2337.7672	29.27	12.57	41.84	54.00	-12.16	Horizontal
2	2359.8012	29.57	12.77	42.34	54.00	-11.66	Horizontal
3	2383.9167	29.34	13.06	42.40	54.00	-11.60	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

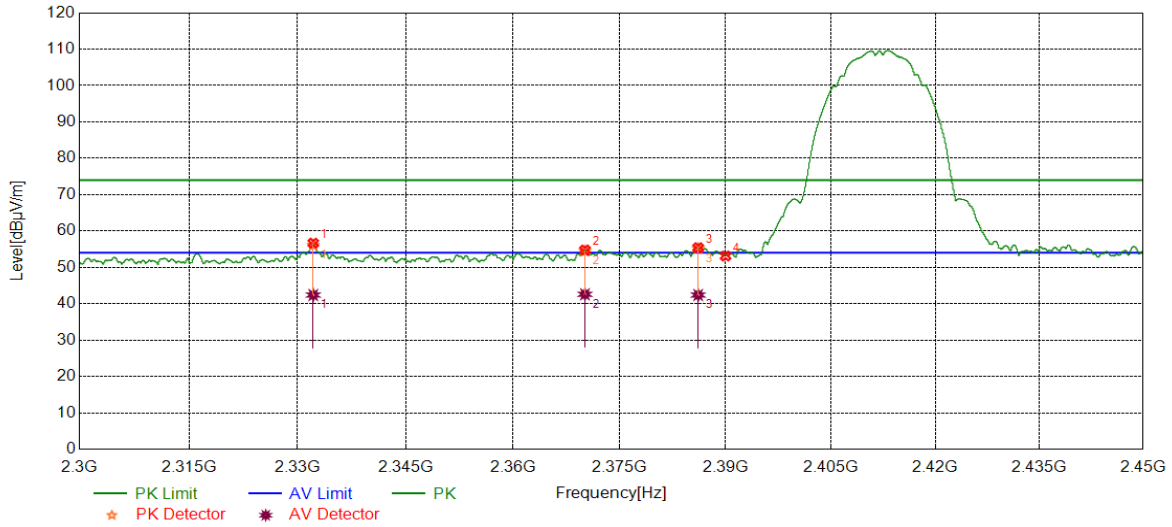

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.1603	44.17	12.50	56.67	74.00	-17.33	Vertical
2	2370.1150	41.84	12.93	54.77	74.00	-19.23	Vertical
3	2386.1108	42.35	13.06	55.41	74.00	-18.59	Vertical
4	2390.0000	40.06	13.07	53.13	74.00	-20.87	Vertical


**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.1603	29.89	12.50	42.39	54.00	-11.61	Vertical
2	2370.1150	29.67	12.93	42.60	54.00	-11.40	Vertical
3	2386.1108	29.34	13.06	42.40	54.00	-11.60	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

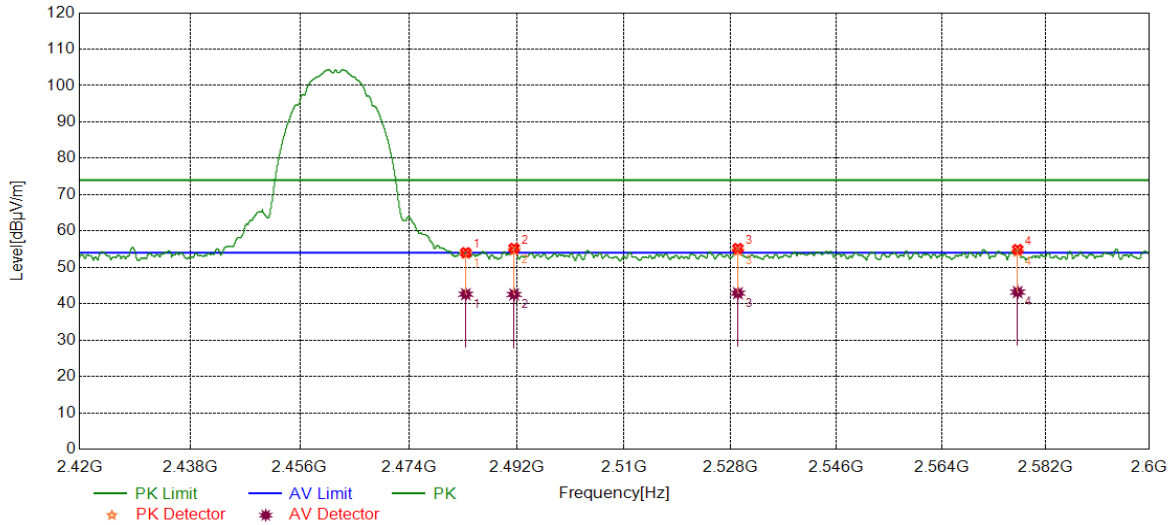

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.10	12.97	54.07	74.00	-19.93	Horizontal
2	2491.5589	42.25	13.02	55.27	74.00	-18.73	Horizontal
3	2529.2287	41.82	13.41	55.23	74.00	-18.77	Horizontal
4	2577.1146	41.49	13.46	54.95	74.00	-19.05	Horizontal


**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	29.64	12.97	42.61	54.00	-11.39	Horizontal
2	2491.5589	29.53	13.02	42.55	54.00	-11.45	Horizontal
3	2529.2287	29.48	13.41	42.89	54.00	-11.11	Horizontal
4	2577.1146	29.73	13.46	43.19	54.00	-10.81	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

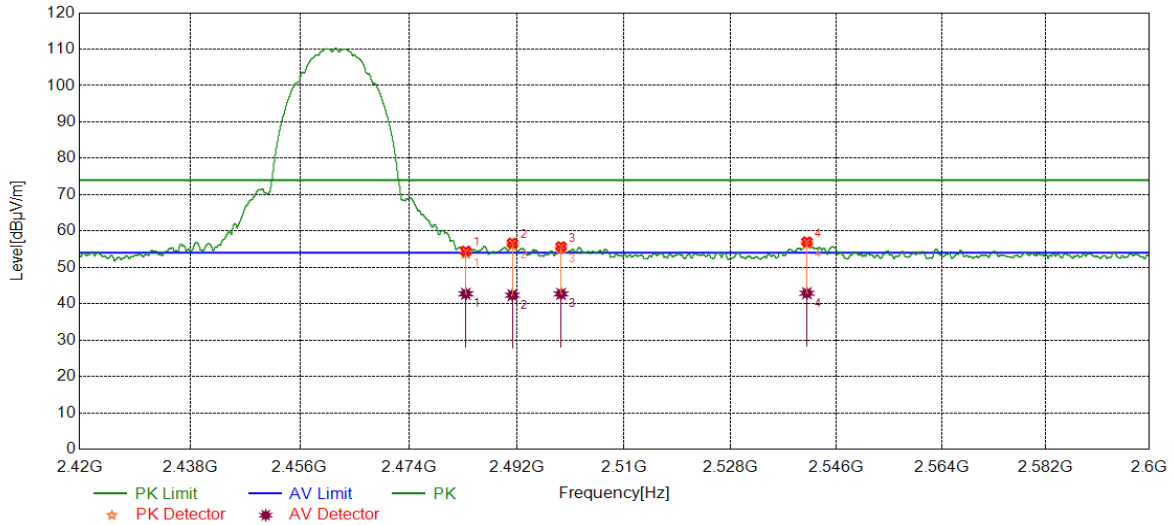

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.51	12.97	54.48	74.00	-19.52	Vertical
2	2491.2664	43.67	13.01	56.68	74.00	-17.32	Vertical
3	2499.4124	42.58	13.13	55.71	74.00	-18.29	Vertical
4	2540.9526	43.62	13.41	57.03	74.00	-16.97	Vertical

AV Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	29.76	12.97	42.73	54.00	-11.27	Vertical
2	2491.2664	29.35	13.01	42.36	54.00	-11.64	Vertical
3	2499.4124	29.57	13.13	42.70	54.00	-11.30	Vertical
4	2540.9526	29.47	13.41	42.88	54.00	-11.12	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

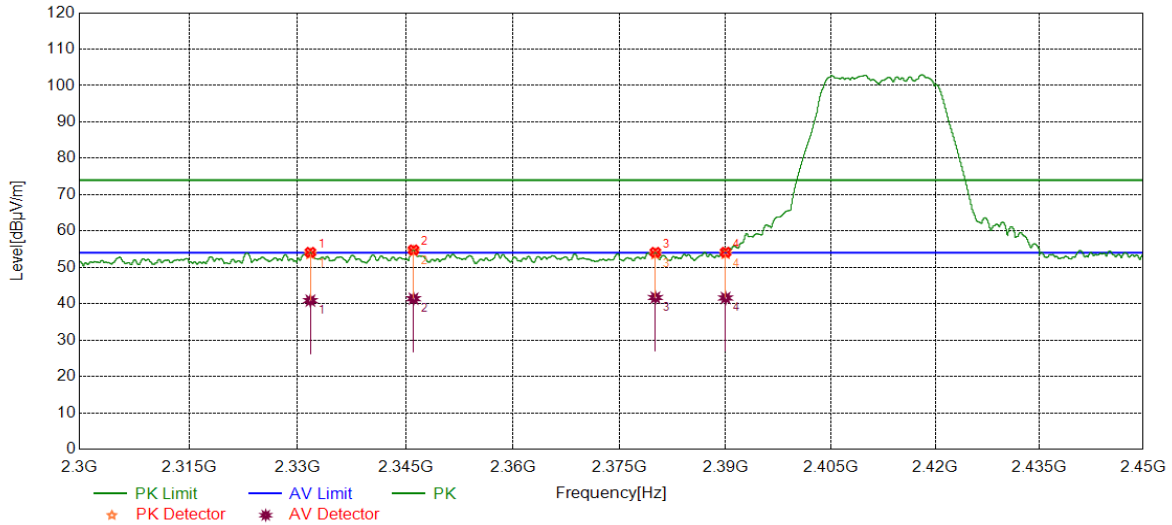

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.7665	41.65	12.49	54.14	74.00	-19.86	Horizontal
2	2346.0933	42.15	12.65	54.80	74.00	-19.20	Horizontal
3	2380.0538	41.07	13.06	54.13	74.00	-19.87	Horizontal
4	2390.0000	41.09	13.07	54.16	74.00	-19.84	Horizontal


**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.7665	28.37	12.49	40.86	54.00	-13.14	Horizontal
2	2346.0933	28.73	12.65	41.38	54.00	-12.62	Horizontal
3	2380.0538	28.64	13.06	41.70	54.00	-12.30	Horizontal
4	2390.0000	28.52	13.07	41.59	54.00	-12.41	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

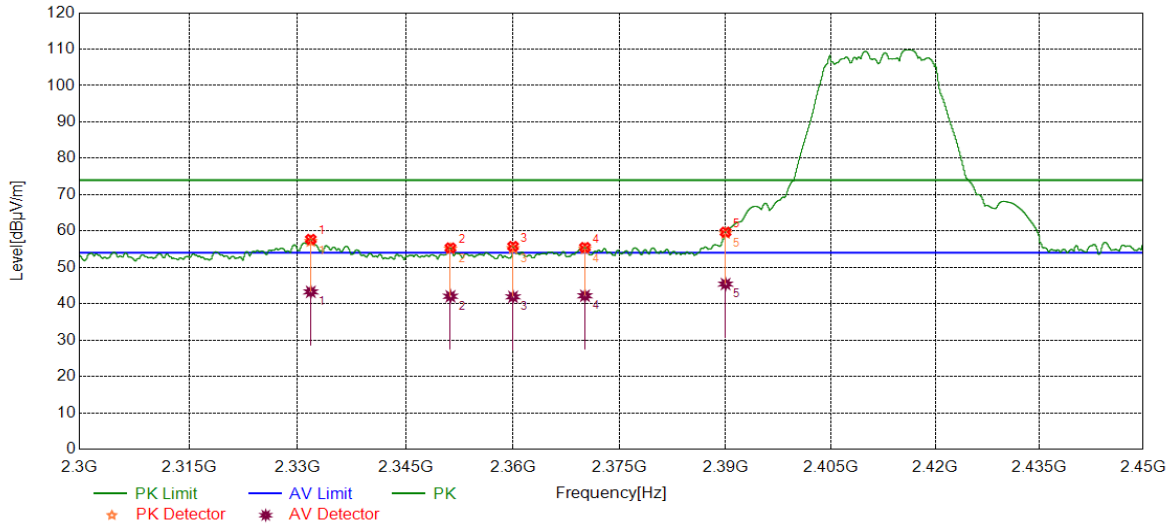

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.8227	45.23	12.49	57.72	74.00	-16.28	Vertical
2	2351.2502	42.66	12.70	55.36	74.00	-18.64	Vertical
3	2360.0075	43.01	12.77	55.78	74.00	-18.22	Vertical
4	2370.1150	42.55	12.93	55.48	74.00	-18.52	Vertical
5	2390.0000	46.63	13.07	59.70	74.00	-14.30	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.8227	30.78	12.49	43.27	54.00	-10.73	Vertical
2	2351.2502	29.34	12.70	42.04	54.00	-11.96	Vertical
3	2360.0075	29.13	12.77	41.90	54.00	-12.10	Vertical
4	2370.1150	29.26	12.93	42.19	54.00	-11.81	Vertical
5	2390.0000	32.34	13.07	45.41	54.00	-8.59	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

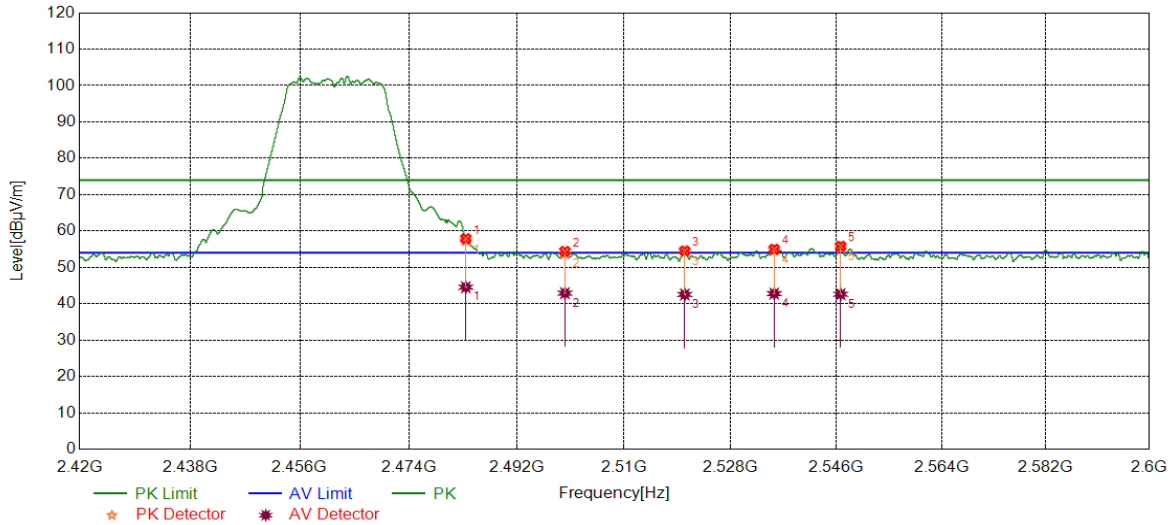

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	44.95	12.97	57.92	74.00	-16.08	Horizontal
2	2500.0650	41.27	13.14	54.41	74.00	-19.59	Horizontal
3	2520.2275	41.32	13.22	54.54	74.00	-19.46	Horizontal
4	2535.3944	41.59	13.42	55.01	74.00	-18.99	Horizontal
5	2546.7133	42.48	13.37	55.85	74.00	-18.15	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	31.57	12.97	44.54	54.00	-9.46	Horizontal
2	2500.0650	29.76	13.14	42.90	54.00	-11.10	Horizontal
3	2520.2275	29.32	13.22	42.54	54.00	-11.46	Horizontal
4	2535.3944	29.36	13.42	42.78	54.00	-11.22	Horizontal
5	2546.7133	29.24	13.37	42.61	54.00	-11.39	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

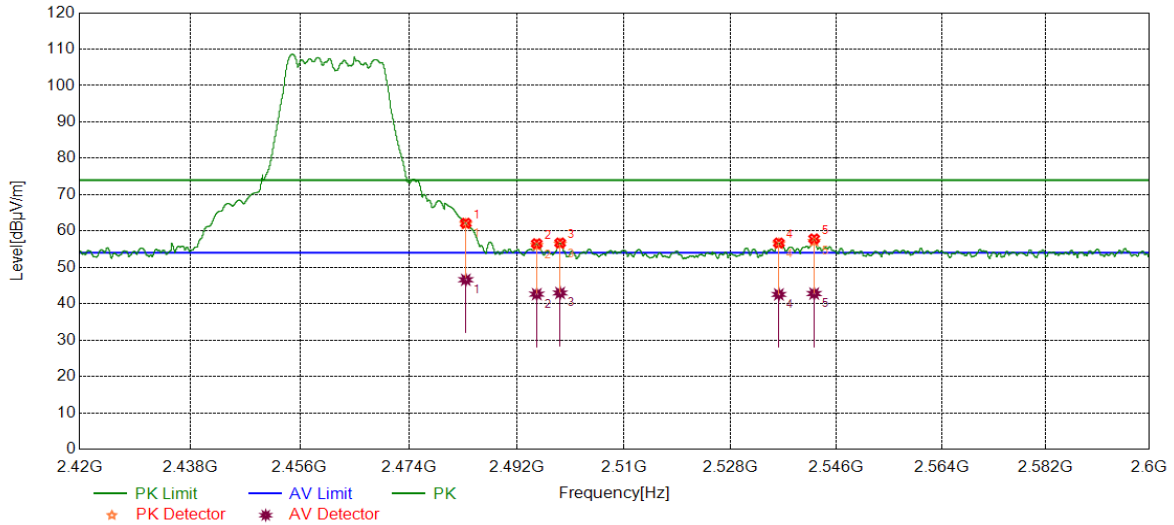

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	49.18	12.97	62.15	74.00	-11.85	Vertical
2	2495.3394	43.45	13.07	56.52	74.00	-17.48	Vertical
3	2499.2549	43.58	13.13	56.71	74.00	-17.29	Vertical
4	2536.1820	43.28	13.42	56.70	74.00	-17.30	Vertical
5	2542.1903	44.44	13.40	57.84	74.00	-16.16	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	33.62	12.97	46.59	54.00	-7.41	Vertical
2	2495.3394	29.56	13.07	42.63	54.00	-11.37	Vertical
3	2499.2549	29.83	13.13	42.96	54.00	-11.04	Vertical
4	2536.1820	29.14	13.42	42.56	54.00	-11.44	Vertical
5	2542.1903	29.39	13.40	42.79	54.00	-11.21	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

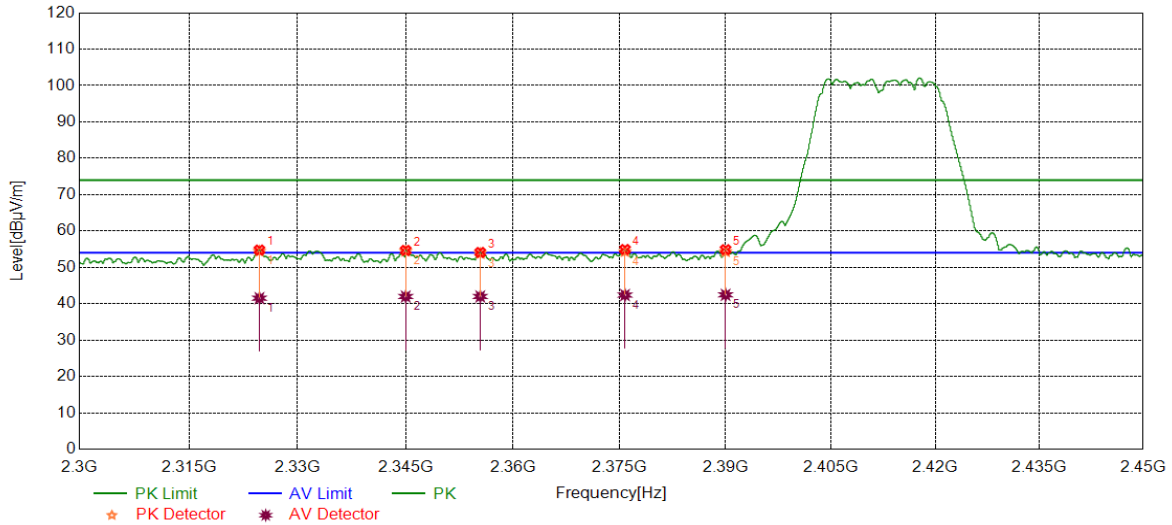

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2324.7156	42.37	12.41	54.78	74.00	-19.22	Horizontal
2	2345.0056	42.04	12.64	54.68	74.00	-19.32	Horizontal
3	2355.4132	41.38	12.74	54.12	74.00	-19.88	Horizontal
4	2375.7595	41.93	13.01	54.94	74.00	-19.06	Horizontal
5	2390.0000	41.81	13.07	54.88	74.00	-19.12	Horizontal

AV Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2324.7156	29.12	12.41	41.53	54.00	-12.47	Horizontal
2	2345.0056	29.34	12.64	41.98	54.00	-12.02	Horizontal
3	2355.4132	29.26	12.74	42.00	54.00	-12.00	Horizontal
4	2375.7595	29.37	13.01	42.38	54.00	-11.62	Horizontal
5	2390.0000	29.38	13.07	42.45	54.00	-11.55	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.





Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

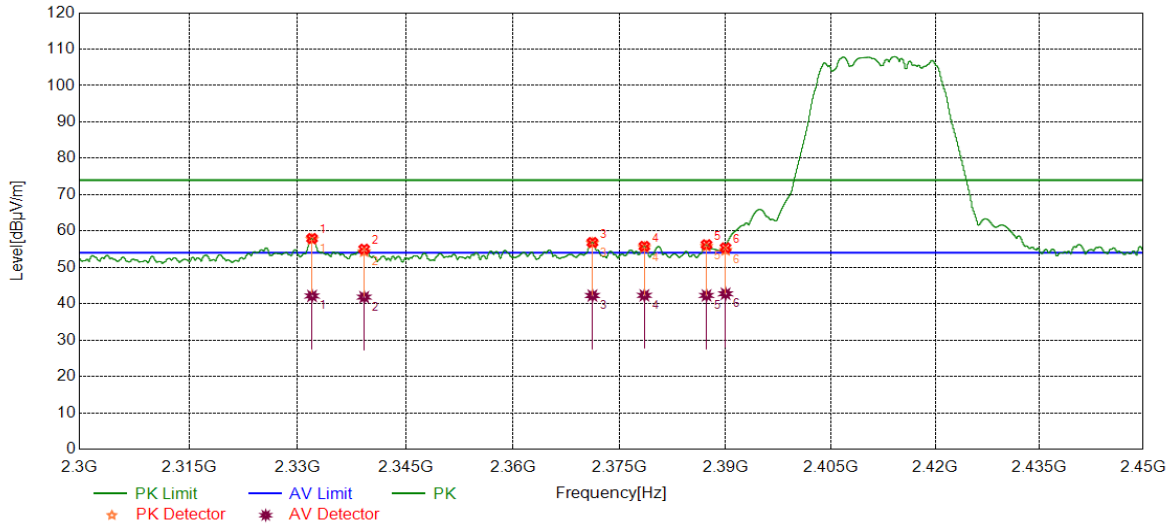

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.9915	45.45	12.50	57.95	74.00	-16.05	Vertical
2	2339.2299	42.42	12.59	55.01	74.00	-18.99	Vertical
3	2371.1651	43.92	12.94	56.86	74.00	-17.14	Vertical
4	2378.4973	42.75	13.04	55.79	74.00	-18.21	Vertical
5	2387.2922	43.18	13.06	56.24	74.00	-17.76	Vertical
6	2390.0000	42.31	13.07	55.38	74.00	-18.62	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2331.9915	29.65	12.50	42.15	54.00	-11.85	Vertical
2	2339.2299	29.23	12.59	41.82	54.00	-12.18	Vertical
3	2371.1651	29.31	12.94	42.25	54.00	-11.75	Vertical
4	2378.4973	29.26	13.04	42.30	54.00	-11.70	Vertical
5	2387.2922	29.22	13.06	42.28	54.00	-11.72	Vertical
6	2390.0000	29.67	13.07	42.74	54.00	-11.26	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

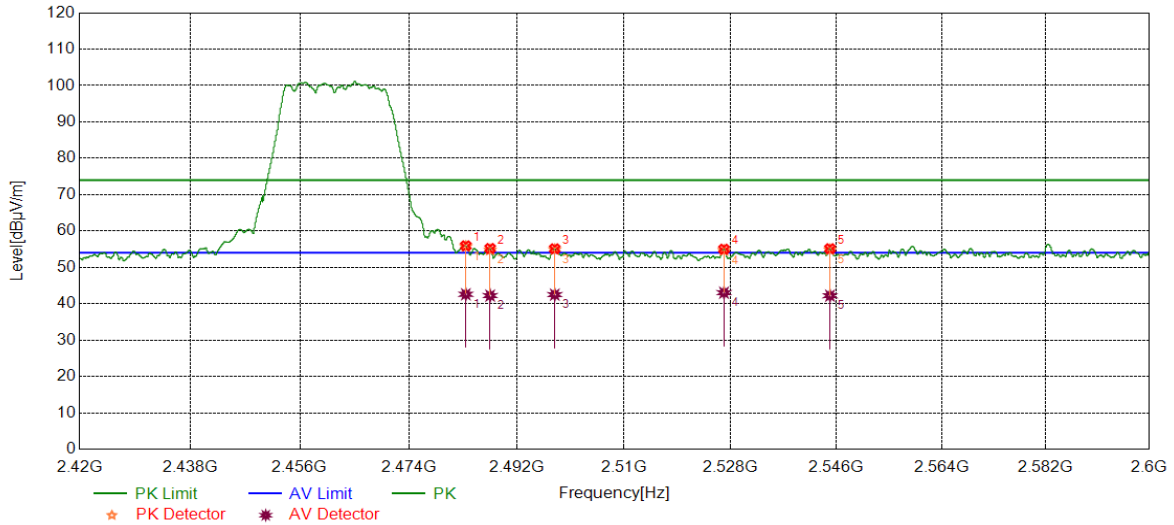

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.96	12.97	55.93	74.00	-18.07	Horizontal
2	2487.5534	42.22	12.99	55.21	74.00	-18.79	Horizontal
3	2498.3548	42.00	13.12	55.12	74.00	-18.88	Horizontal
4	2526.8659	41.65	13.36	55.01	74.00	-18.99	Horizontal
5	2544.8906	41.77	13.38	55.15	74.00	-18.85	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	29.63	12.97	42.60	54.00	-11.40	Horizontal
2	2487.5534	29.24	12.99	42.23	54.00	-11.77	Horizontal
3	2498.3548	29.38	13.12	42.50	54.00	-11.50	Horizontal
4	2526.8659	29.67	13.36	43.03	54.00	-10.97	Horizontal
5	2544.8906	28.83	13.38	42.21	54.00	-11.79	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

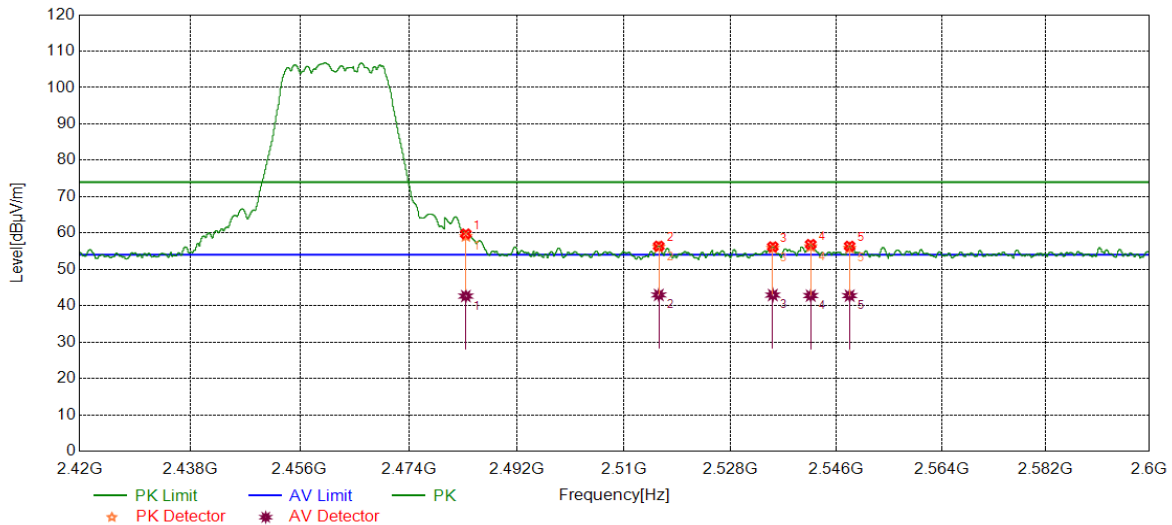

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	46.79	12.97	59.76	74.00	-14.24	Vertical
2	2515.8395	43.19	13.21	56.40	74.00	-17.60	Vertical
3	2535.1469	42.80	13.42	56.22	74.00	-17.78	Vertical
4	2541.6052	43.46	13.41	56.87	74.00	-17.13	Vertical
5	2548.2435	43.03	13.36	56.39	74.00	-17.61	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	29.68	12.97	42.65	54.00	-11.35	Vertical
2	2515.8395	29.76	13.21	42.97	54.00	-11.03	Vertical
3	2535.1469	29.52	13.42	42.94	54.00	-11.06	Vertical
4	2541.6052	29.37	13.41	42.78	54.00	-11.22	Vertical
5	2548.2435	29.41	13.36	42.77	54.00	-11.23	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

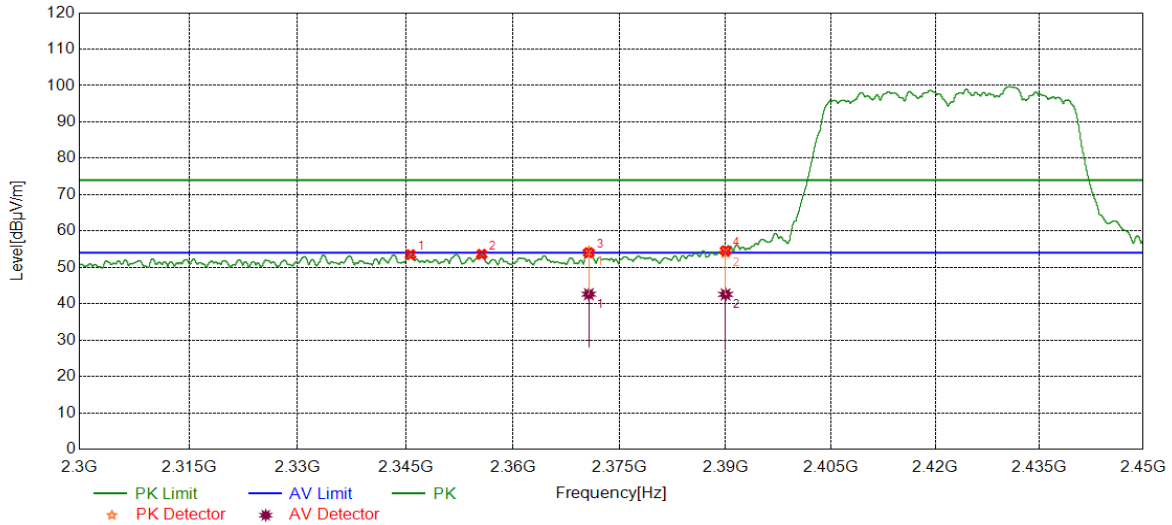

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2345.6807	40.85	12.65	53.50	74.00	-20.50	Horizontal
2	2355.6195	40.86	12.74	53.60	74.00	-20.40	Horizontal
3	2370.6401	41.09	12.94	54.03	74.00	-19.97	Horizontal
4	2390.0000	41.51	13.07	54.58	74.00	-19.42	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2370.6595	29.68	12.94	42.62	54.00	-11.38	Horizontal
2	2390.0000	29.50	13.07	42.57	54.00	-11.43	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;  
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);  
 3. Measurement = Reading Level + Correct Factor;  
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.