




Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

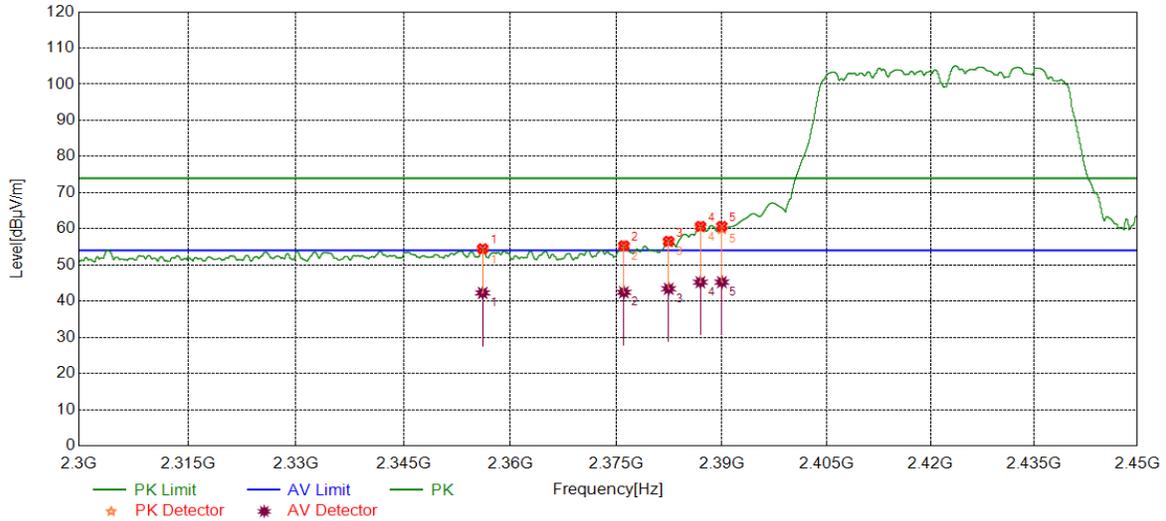

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2356.1070	41.76	12.74	54.50	74.00	-19.50	Vertical
2	2376.0595	42.33	13.01	55.34	74.00	-18.66	Vertical
3	2382.4166	43.51	13.06	56.57	74.00	-17.43	Vertical
4	2386.9546	47.64	13.06	60.70	74.00	-13.30	Vertical
5	2390.0000	47.62	13.07	60.69	74.00	-13.31	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2356.1070	29.53	12.74	42.27	54.00	-11.73	Vertical
2	2376.0595	29.42	13.01	42.43	54.00	-11.57	Vertical
3	2382.4166	30.35	13.06	43.41	54.00	-10.59	Vertical
4	2386.9345	32.17	13.07	45.24	54.00	-8.76	Vertical
5	2390.0000	32.18	13.07	45.25	54.00	-8.75	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 3. Measurement = Reading Level + Correct Factor;
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

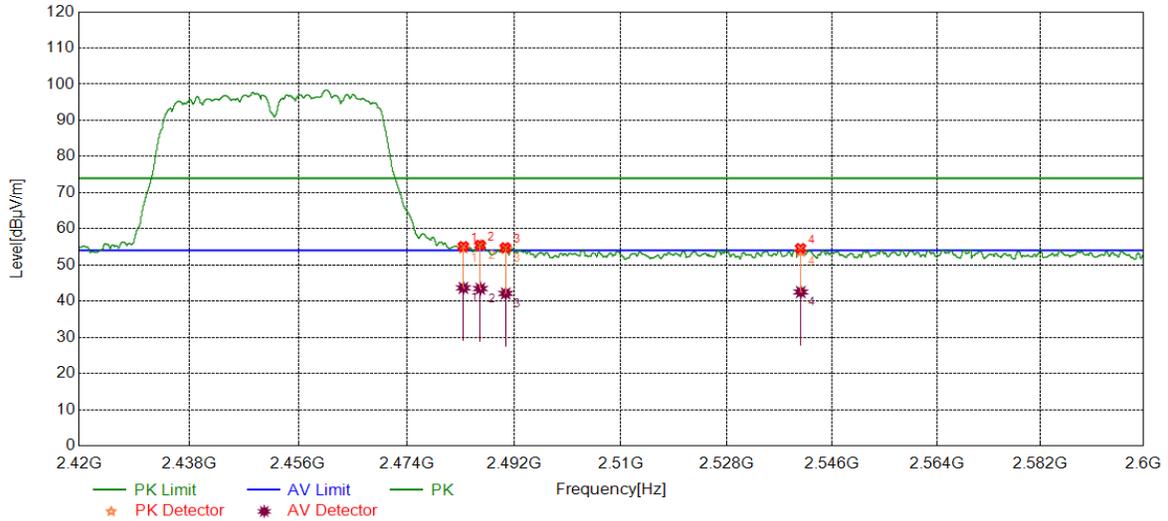

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	42.15	12.97	55.12	74.00	-18.88	Horizontal
2	2486.2933	42.51	12.98	55.49	74.00	-18.51	Horizontal
3	2490.5463	41.78	13.00	54.78	74.00	-19.22	Horizontal
4	2540.5701	41.18	13.41	54.59	74.00	-19.41	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	30.68	12.97	43.65	54.00	-10.35	Horizontal
2	2486.3432	30.47	12.98	43.45	54.00	-10.55	Horizontal
3	2490.5961	29.11	13.01	42.12	54.00	-11.88	Horizontal
4	2540.6125	29.10	13.42	42.52	54.00	-11.48	Horizontal

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 3. Measurement = Reading Level + Correct Factor;
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

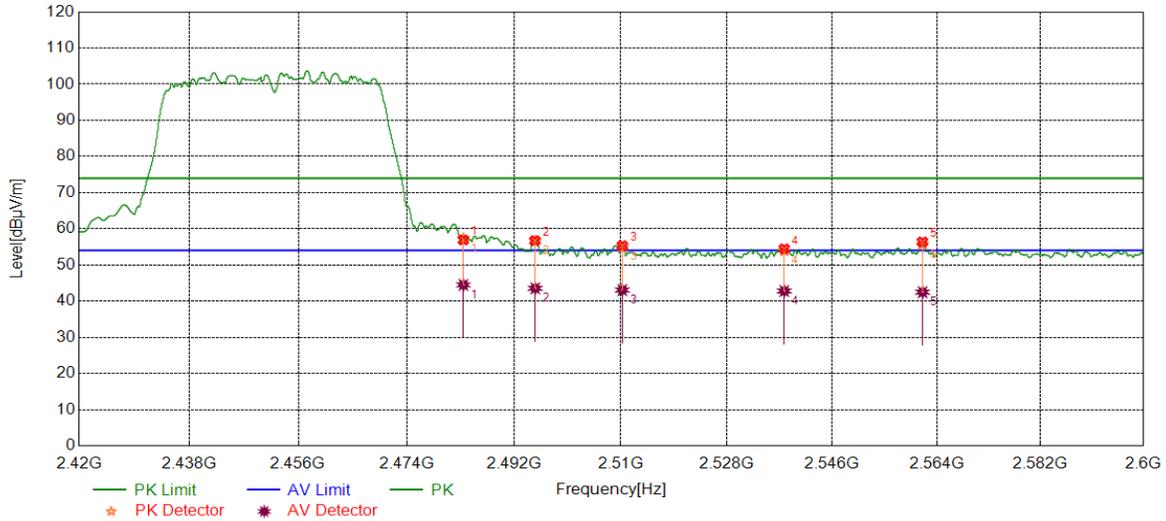

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.95	12.97	56.92	74.00	-17.08	Vertical
2	2495.5194	43.66	13.08	56.74	74.00	-17.26	Vertical
3	2510.2363	42.14	13.20	55.34	74.00	-18.66	Vertical
4	2537.7797	41.05	13.42	54.47	74.00	-19.53	Vertical
5	2561.5202	42.95	13.42	56.37	74.00	-17.63	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	31.52	12.97	44.49	54.00	-9.51	Vertical
2	2495.5465	30.46	13.08	43.54	54.00	-10.46	Vertical
3	2510.2363	29.86	13.20	43.06	54.00	-10.94	Vertical
4	2537.7797	29.38	13.42	42.80	54.00	-11.20	Vertical
5	2561.5473	29.06	13.41	42.47	54.00	-11.53	Vertical

- Note: 1. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 3. Measurement = Reading Level + Correct Factor;
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



7.6.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9KHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	HCH	<Limit	PASS

Remark:


1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.



Part I: 1GHz~3GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

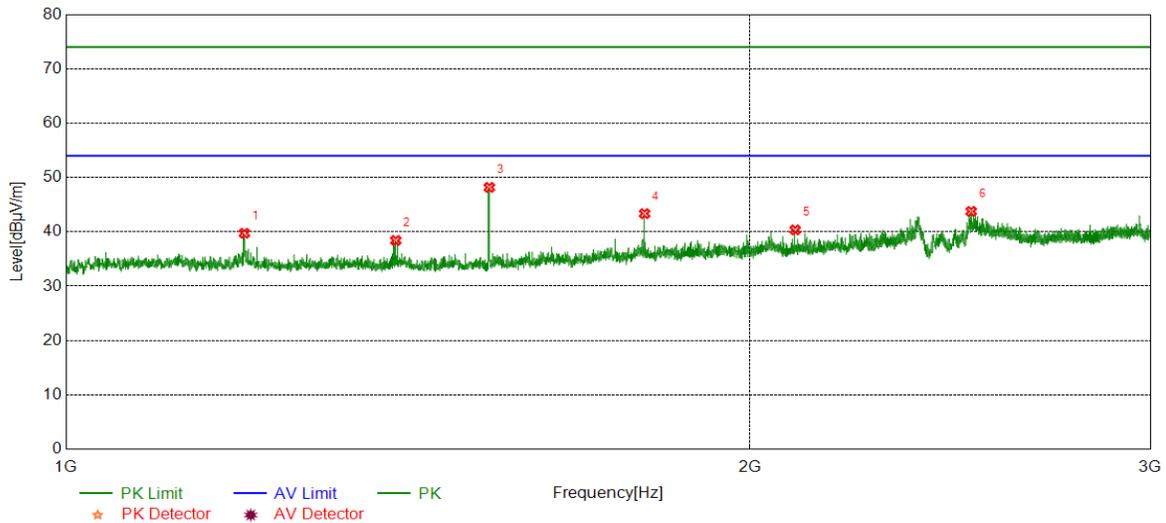


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.2748	45.30	-5.56	39.74	74.00	-34.26	Horizontal
2	1396.7996	44.10	-5.69	38.41	74.00	-35.59	Horizontal
3	1535.8170	53.93	-5.75	48.18	74.00	-25.82	Horizontal
4	1797.3497	47.17	-3.82	43.35	74.00	-30.65	Horizontal
5	2093.6367	42.91	-2.55	40.36	74.00	-33.64	Horizontal
6	2502.1878	44.20	-0.44	43.76	74.00	-30.24	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

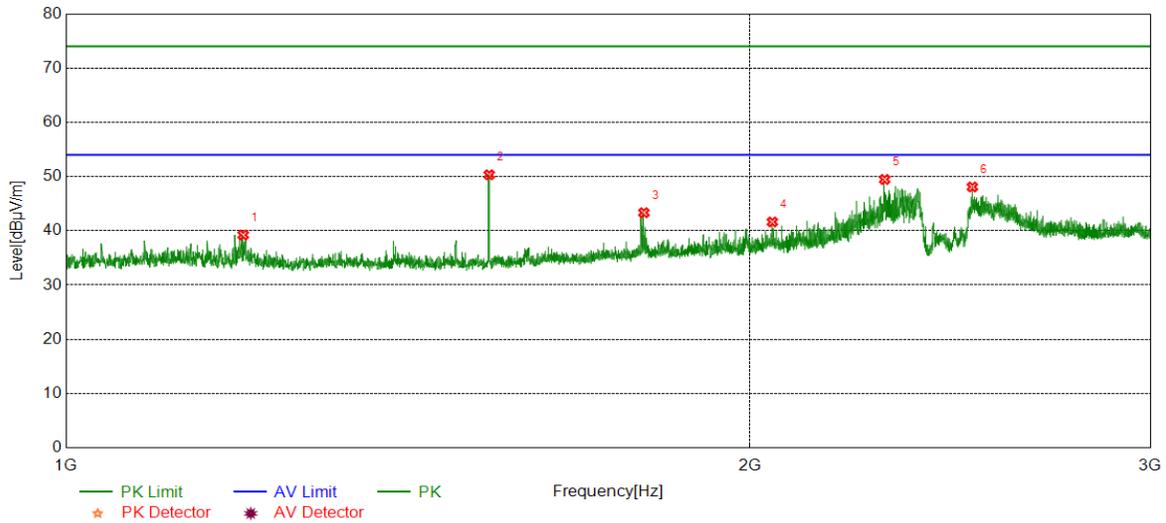


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	44.79	-5.56	39.23	74.00	-34.77	Vertical
2	1535.5669	56.08	-5.75	50.33	74.00	-23.67	Vertical
3	1796.0995	47.14	-3.80	43.34	74.00	-30.66	Vertical
4	2045.6307	44.02	-2.39	41.63	74.00	-32.37	Vertical
5	2292.1615	51.39	-1.92	49.47	74.00	-24.53	Vertical
6	2505.1881	48.51	-0.42	48.09	74.00	-25.91	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

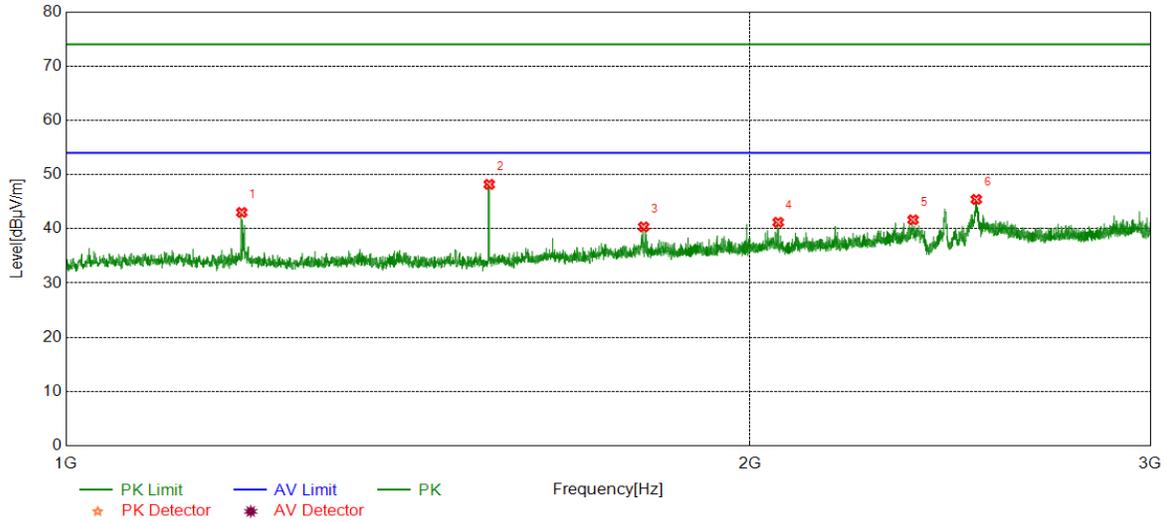


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.0244	48.59	-5.57	43.02	74.00	-30.98	Horizontal
2	1535.5669	53.94	-5.75	48.19	74.00	-25.81	Horizontal
3	1795.5995	44.15	-3.80	40.35	74.00	-33.65	Horizontal
4	2057.8822	43.77	-2.58	41.19	74.00	-32.81	Horizontal
5	2359.1699	42.88	-1.23	41.65	74.00	-32.35	Horizontal
6	2515.1894	45.77	-0.35	45.42	74.00	-28.58	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

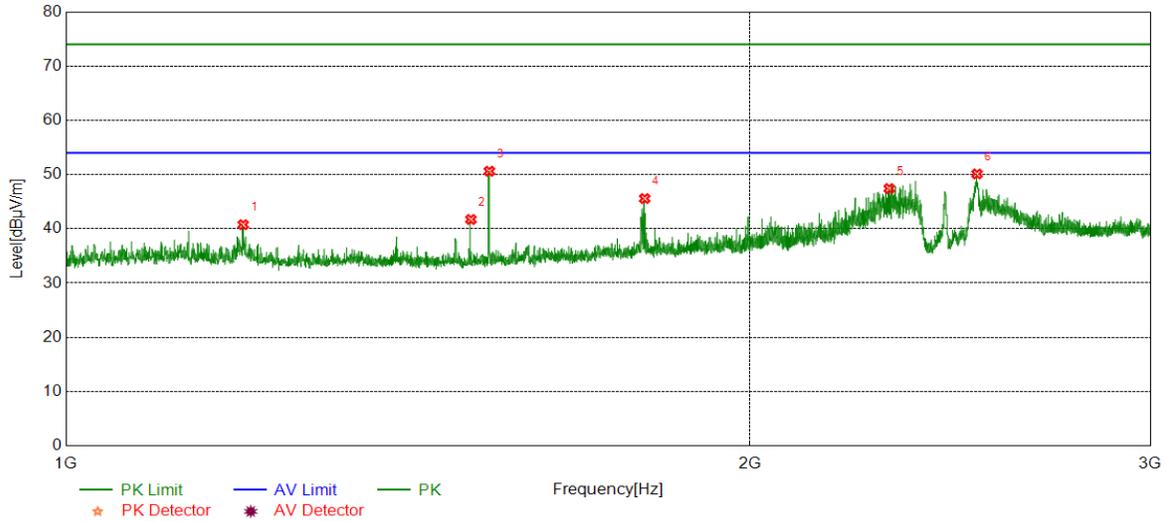


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	46.32	-5.56	40.76	74.00	-33.24	Vertical
2	1507.3134	47.48	-5.76	41.72	74.00	-32.28	Vertical
3	1535.8170	56.37	-5.75	50.62	74.00	-23.38	Vertical
4	1797.5997	49.40	-3.82	45.58	74.00	-28.42	Vertical
5	2302.9129	49.22	-1.79	47.43	74.00	-26.57	Vertical
6	2517.1896	50.46	-0.34	50.12	74.00	-23.88	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

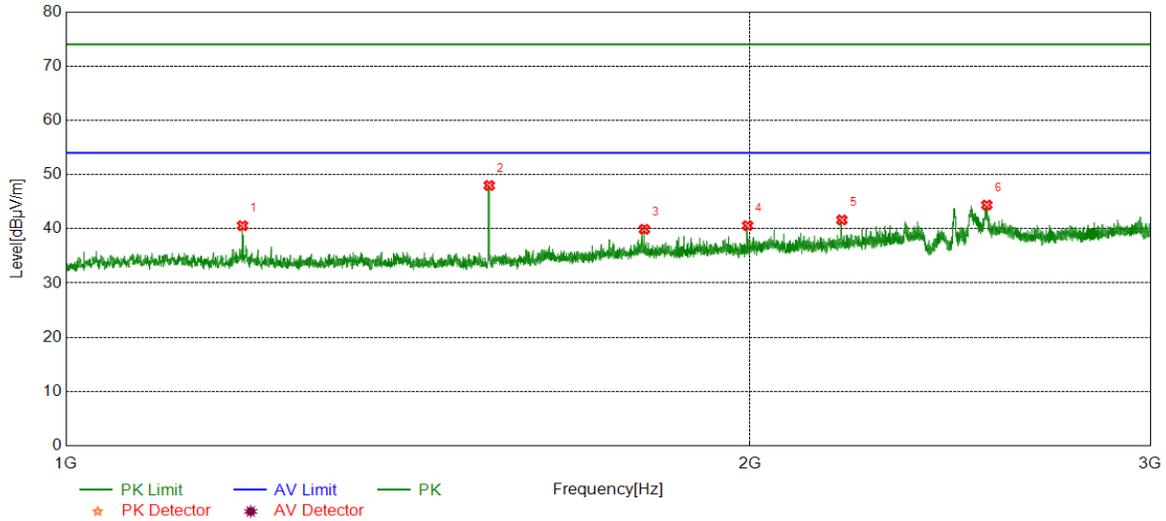


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.0245	46.13	-5.56	40.57	74.00	-33.43	Horizontal
2	1535.5669	53.74	-5.75	47.99	74.00	-26.01	Horizontal
3	1796.8496	43.72	-3.81	39.91	74.00	-34.09	Horizontal
4	1995.1244	43.62	-3.04	40.58	74.00	-33.42	Horizontal
5	2194.8994	43.96	-2.33	41.63	74.00	-32.37	Horizontal
6	2542.1928	45.36	-0.97	44.39	74.00	-29.61	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

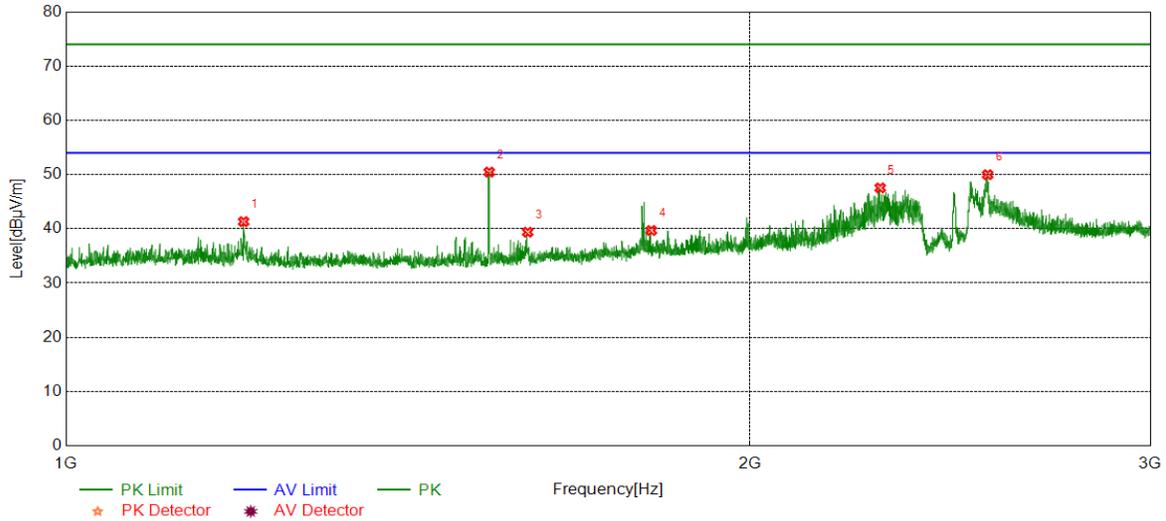


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.2747	46.88	-5.56	41.32	74.00	-32.68	Vertical
2	1535.5669	56.21	-5.75	50.46	74.00	-23.54	Vertical
3	1596.5746	44.48	-5.10	39.38	74.00	-34.62	Vertical
4	1809.6012	43.77	-4.08	39.69	74.00	-34.31	Vertical
5	2281.9102	49.48	-1.94	47.54	74.00	-26.46	Vertical
6	2544.4431	50.95	-0.97	49.98	74.00	-24.02	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

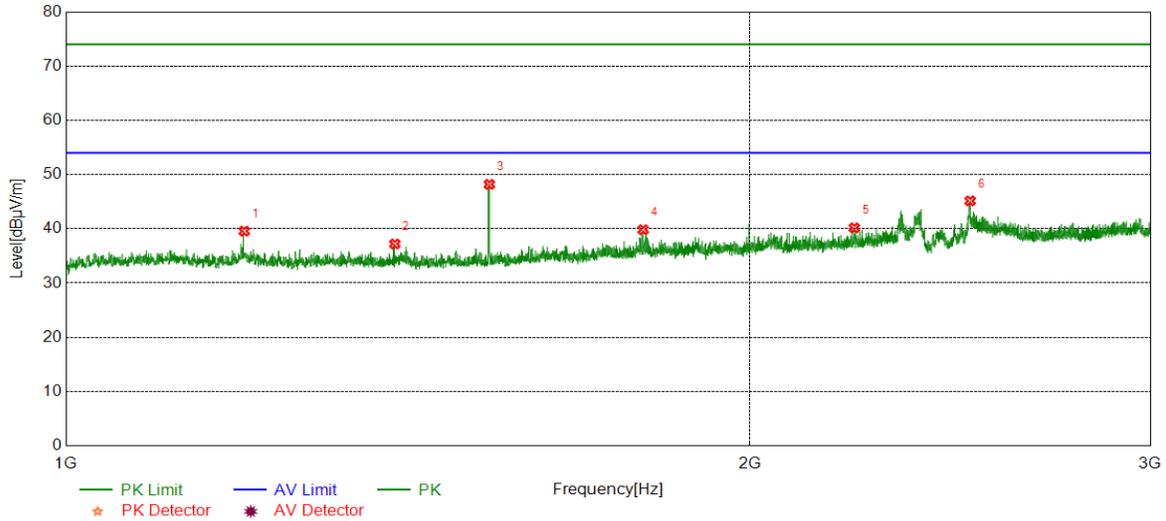


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.0248	45.13	-5.56	39.57	74.00	-34.43	Horizontal
2	1395.5494	42.92	-5.71	37.21	74.00	-36.79	Horizontal
3	1535.8170	53.94	-5.75	48.19	74.00	-25.81	Horizontal
4	1794.8494	43.62	-3.79	39.83	74.00	-34.17	Horizontal
5	2222.9029	42.37	-2.20	40.17	74.00	-33.83	Horizontal
6	2499.6875	45.60	-0.45	45.15	74.00	-28.85	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

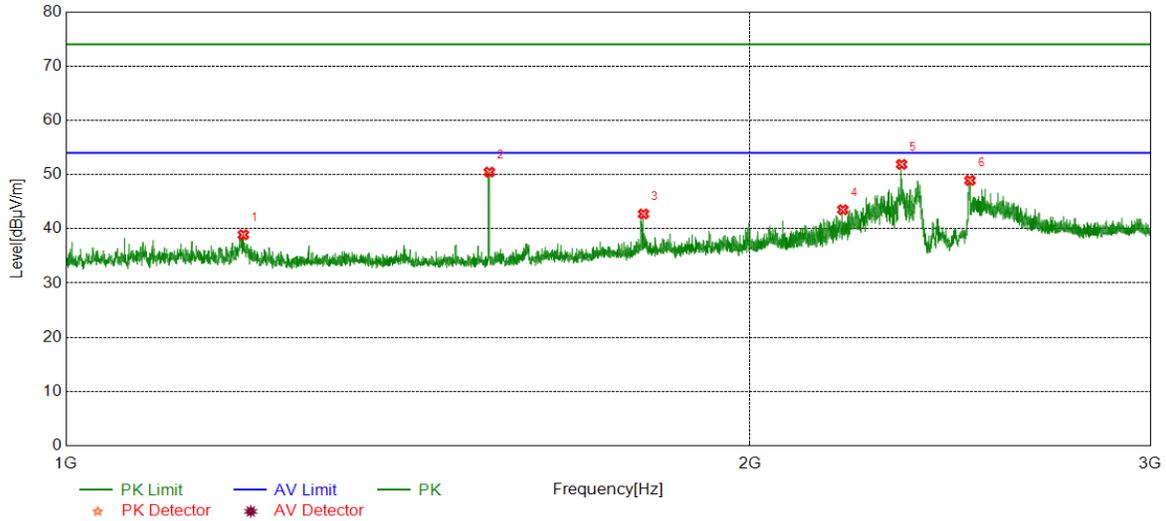


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.0246	44.46	-5.56	38.90	74.00	-35.10	Vertical
2	1535.8170	56.20	-5.75	50.45	74.00	-23.55	Vertical
3	1795.3494	46.53	-3.79	42.74	74.00	-31.26	Vertical
4	2197.1496	45.85	-2.33	43.52	74.00	-30.48	Vertical
5	2331.9165	53.70	-1.82	51.88	74.00	-22.12	Vertical
6	2499.1874	49.37	-0.45	48.92	74.00	-25.08	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

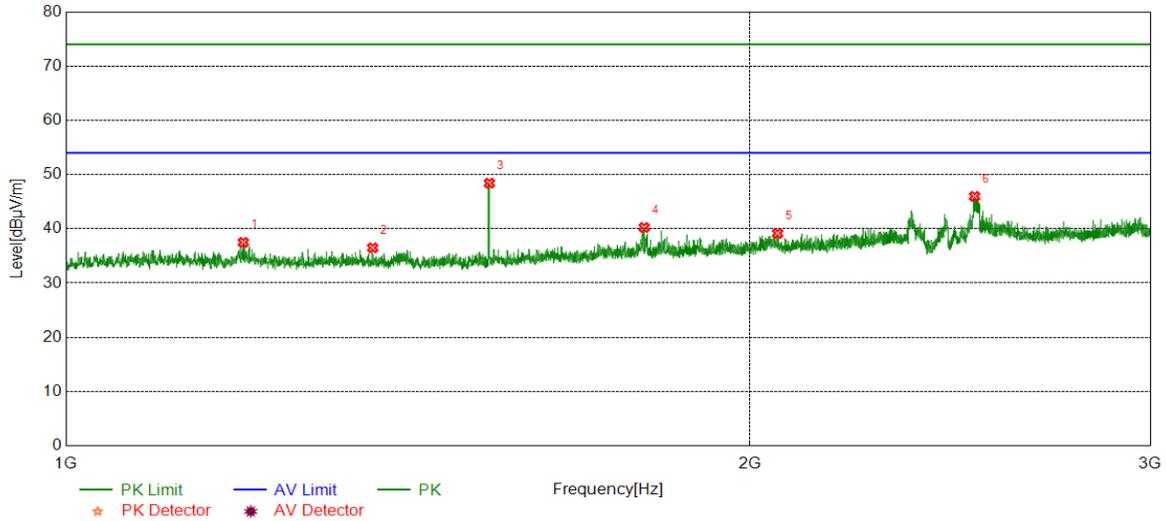


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.0246	43.06	-5.56	37.50	74.00	-36.50	Horizontal
2	1364.5456	42.21	-5.71	36.50	74.00	-37.50	Horizontal
3	1535.8170	54.17	-5.75	48.42	74.00	-25.58	Horizontal
4	1796.5996	44.05	-3.81	40.24	74.00	-33.76	Horizontal
5	2056.6321	41.70	-2.55	39.15	74.00	-34.85	Horizontal
6	2510.9389	46.36	-0.38	45.98	74.00	-28.02	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

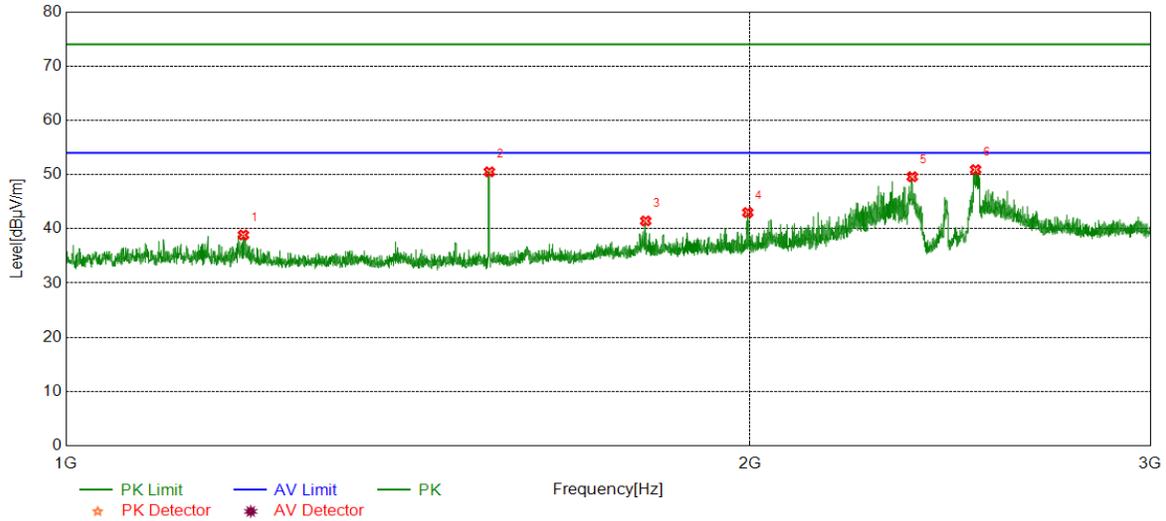


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.0246	44.42	-5.56	38.86	74.00	-35.14	Vertical
2	1535.8170	56.25	-5.75	50.50	74.00	-23.50	Vertical
3	1799.3499	45.29	-3.84	41.45	74.00	-32.55	Vertical
4	1995.3744	46.04	-3.04	43.00	74.00	-31.00	Vertical
5	2357.1696	50.92	-1.32	49.60	74.00	-24.40	Vertical
6	2513.4392	51.27	-0.36	50.91	74.00	-23.09	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

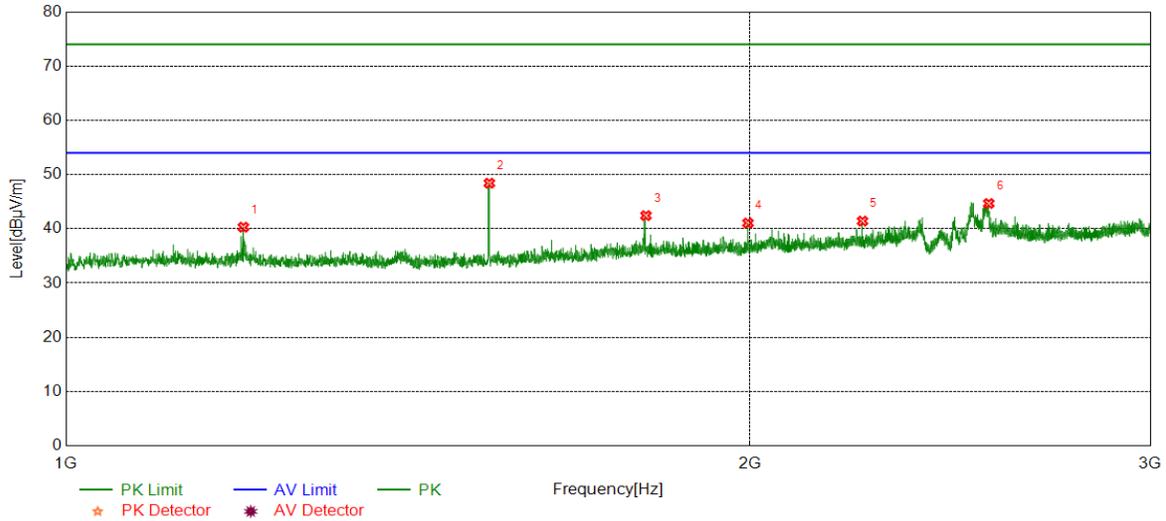


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.0246	45.86	-5.56	40.30	74.00	-33.70	Horizontal
2	1535.8170	54.16	-5.75	48.41	74.00	-25.59	Horizontal
3	1799.8500	46.27	-3.84	42.43	74.00	-31.57	Horizontal
4	1995.8745	44.09	-3.03	41.06	74.00	-32.94	Horizontal
5	2241.4052	43.67	-2.25	41.42	74.00	-32.58	Horizontal
6	2547.1934	45.65	-0.98	44.67	74.00	-29.33	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

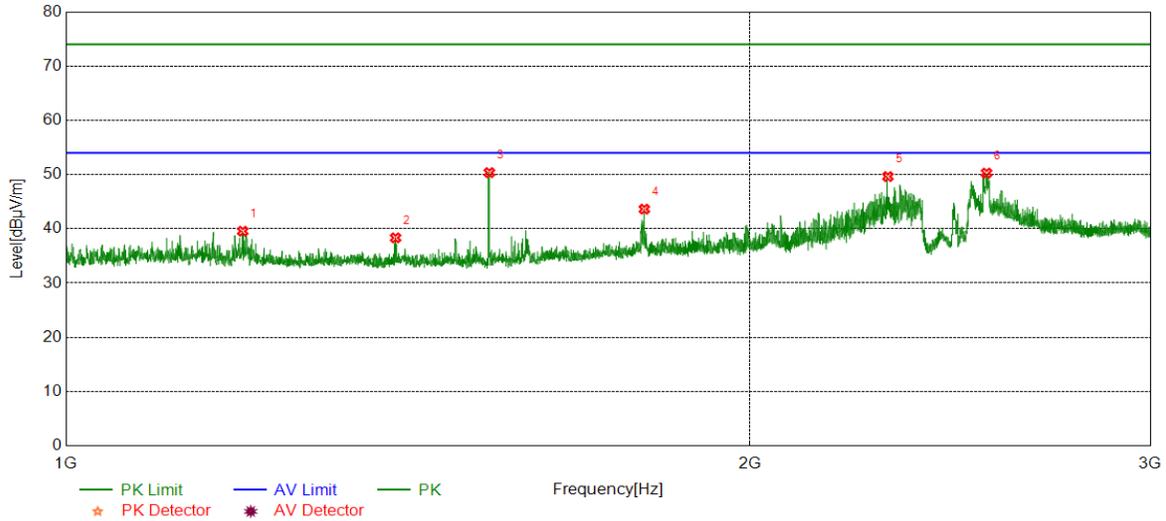


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.2745	45.12	-5.56	39.56	74.00	-34.44	Vertical
2	1396.5496	44.04	-5.70	38.34	74.00	-35.66	Vertical
3	1535.8170	56.11	-5.75	50.36	74.00	-23.64	Vertical
4	1796.8496	47.44	-3.81	43.63	74.00	-30.37	Vertical
5	2299.6625	51.49	-1.86	49.63	74.00	-24.37	Vertical
6	2541.4427	51.25	-0.97	50.28	74.00	-23.72	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

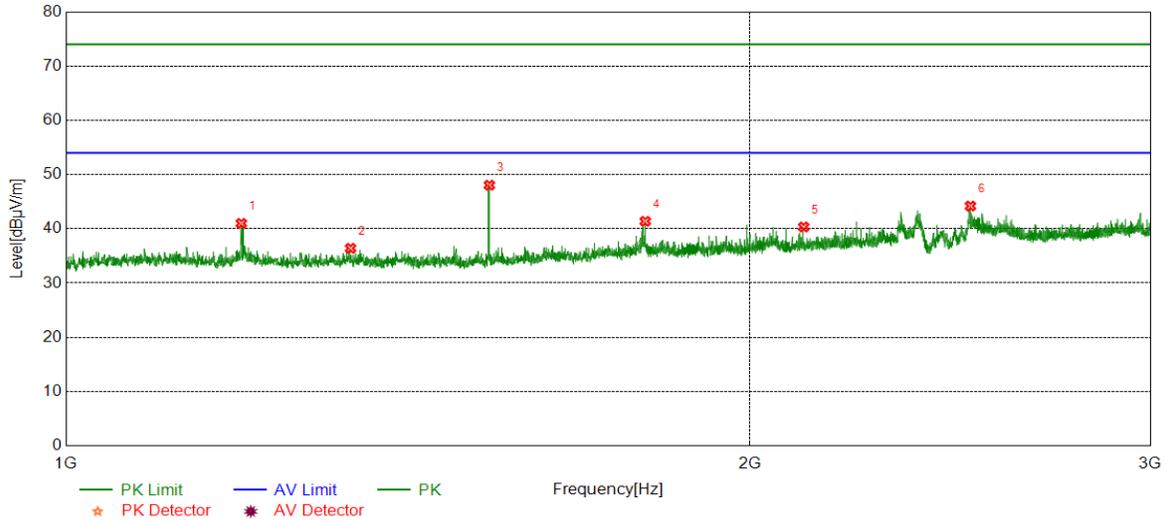


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.5243	46.57	-5.57	41.00	74.00	-33.00	Horizontal
2	1334.2918	42.08	-5.67	36.41	74.00	-37.59	Horizontal
3	1535.8170	53.79	-5.75	48.04	74.00	-25.96	Horizontal
4	1798.5998	45.21	-3.83	41.38	74.00	-32.62	Horizontal
5	2111.6390	42.87	-2.53	40.34	74.00	-33.66	Horizontal
6	2500.4376	44.65	-0.45	44.20	74.00	-29.80	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

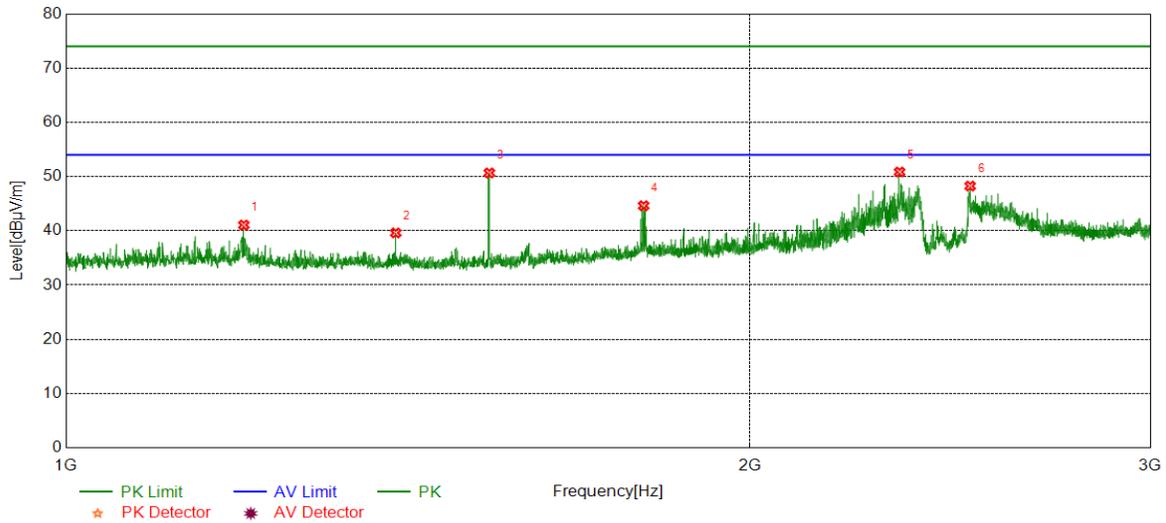


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.5247	46.62	-5.56	41.06	74.00	-32.94	Vertical
2	1396.7996	45.30	-5.69	39.61	74.00	-34.39	Vertical
3	1535.8170	56.42	-5.75	50.67	74.00	-23.33	Vertical
4	1795.5995	48.42	-3.80	44.62	74.00	-29.38	Vertical
5	2327.1659	52.62	-1.78	50.84	74.00	-23.16	Vertical
6	2499.6875	48.70	-0.45	48.25	74.00	-25.75	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

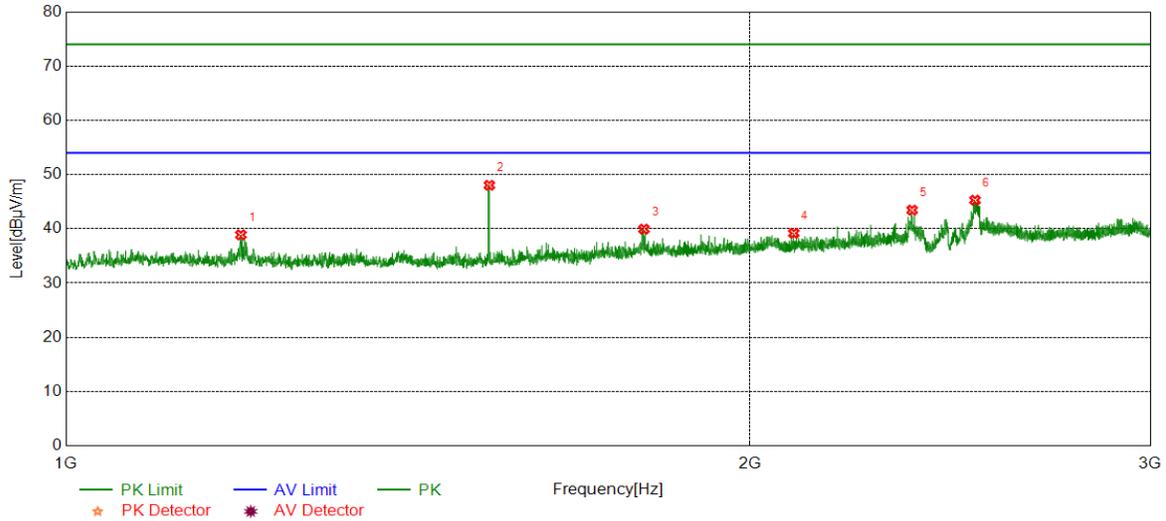


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.0243	44.46	-5.57	38.89	74.00	-35.11	Horizontal
2	1535.8170	53.78	-5.75	48.03	74.00	-25.97	Horizontal
3	1796.0995	43.74	-3.80	39.94	74.00	-34.06	Horizontal
4	2090.6363	41.76	-2.58	39.18	74.00	-34.82	Horizontal
5	2356.9196	44.79	-1.34	43.45	74.00	-30.55	Horizontal
6	2511.9390	45.65	-0.37	45.28	74.00	-28.72	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

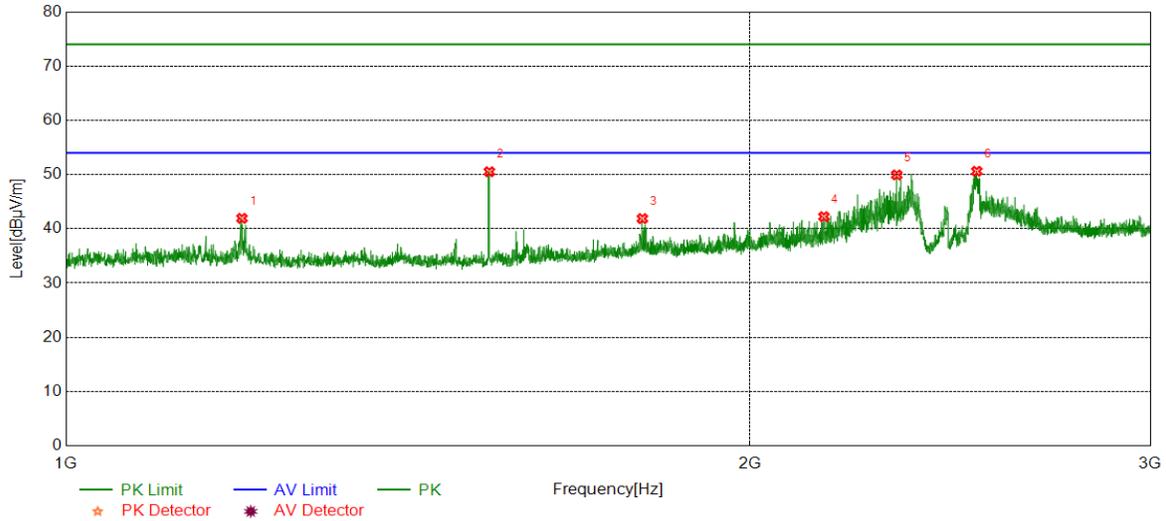


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	47.50	-5.57	41.93	74.00	-32.07	Vertical
2	1535.8170	56.27	-5.75	50.52	74.00	-23.48	Vertical
3	1793.3492	45.65	-3.77	41.88	74.00	-32.12	Vertical
4	2155.3944	44.70	-2.46	42.24	74.00	-31.76	Vertical
5	2320.4151	51.60	-1.66	49.94	74.00	-24.06	Vertical
6	2516.4396	50.96	-0.35	50.61	74.00	-23.39	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

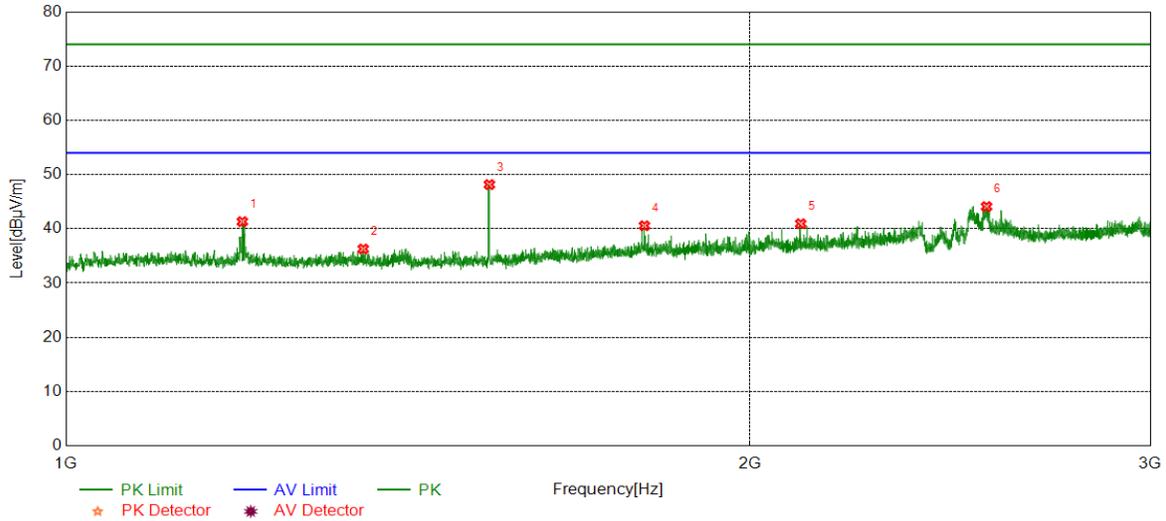


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.7745	46.88	-5.56	41.32	74.00	-32.68	Horizontal
2	1351.5439	41.67	-5.39	36.28	74.00	-37.72	Horizontal
3	1535.8170	53.90	-5.75	48.15	74.00	-25.85	Horizontal
4	1797.0996	44.37	-3.81	40.56	74.00	-33.44	Horizontal
5	2105.3882	43.47	-2.53	40.94	74.00	-33.06	Horizontal
6	2541.4427	45.06	-0.97	44.09	74.00	-29.91	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

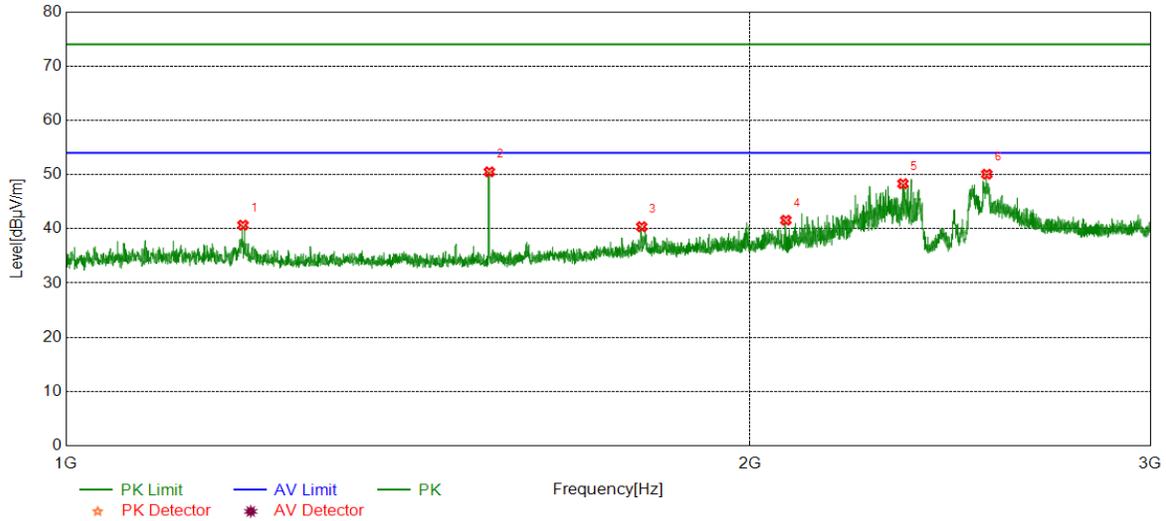


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.5246	46.23	-5.56	40.67	74.00	-33.33	Vertical
2	1535.8170	56.25	-5.75	50.50	74.00	-23.50	Vertical
3	1792.0990	44.14	-3.76	40.38	74.00	-33.62	Vertical
4	2073.8842	44.36	-2.78	41.58	74.00	-32.42	Vertical
5	2335.1669	50.13	-1.82	48.31	74.00	-25.69	Vertical
6	2542.1928	51.04	-0.97	50.07	74.00	-23.93	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

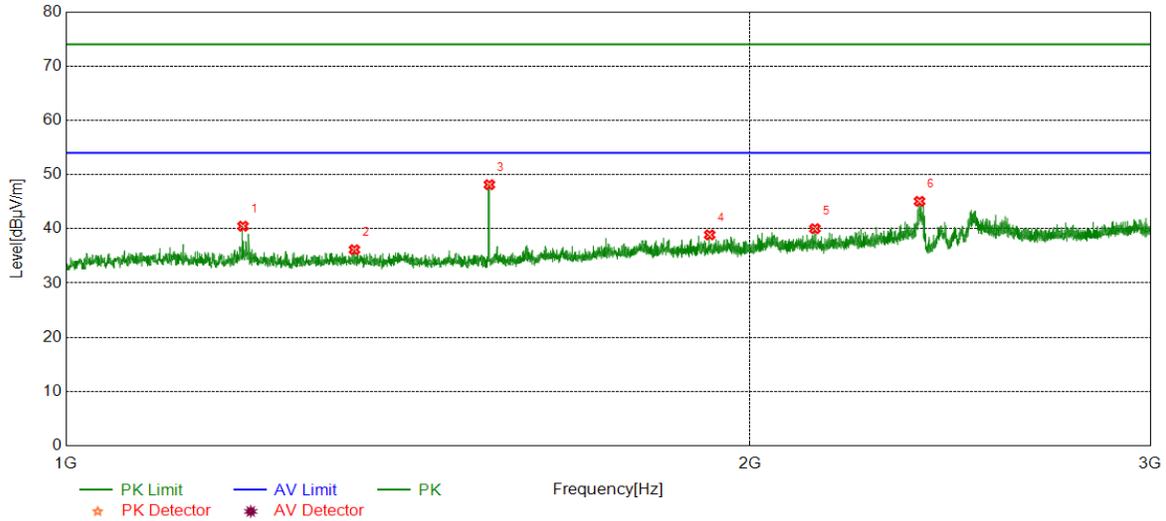


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.5246	46.04	-5.56	40.48	74.00	-33.52	Horizontal
2	1339.5424	41.81	-5.66	36.15	74.00	-37.85	Horizontal
3	1535.8170	53.88	-5.75	48.13	74.00	-25.87	Horizontal
4	1919.8650	42.10	-3.22	38.88	74.00	-35.12	Horizontal
5	2135.8920	42.38	-2.36	40.02	74.00	-33.98	Horizontal
6	2374.6718	46.18	-1.11	45.07	74.00	-28.93	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

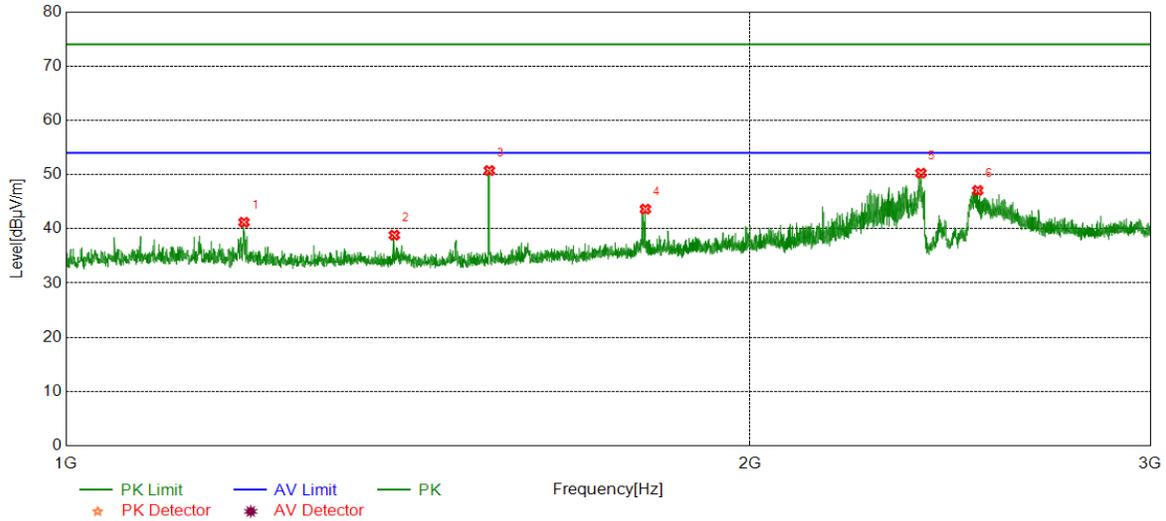


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1197.7747	46.76	-5.56	41.20	74.00	-32.80	Vertical
2	1394.7994	44.55	-5.72	38.83	74.00	-35.17	Vertical
3	1535.8170	56.49	-5.75	50.74	74.00	-23.26	Vertical
4	1798.8499	47.46	-3.83	43.63	74.00	-30.37	Vertical
5	2377.9222	51.35	-1.09	50.26	74.00	-23.74	Vertical
6	2518.9399	47.40	-0.33	47.07	74.00	-26.93	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

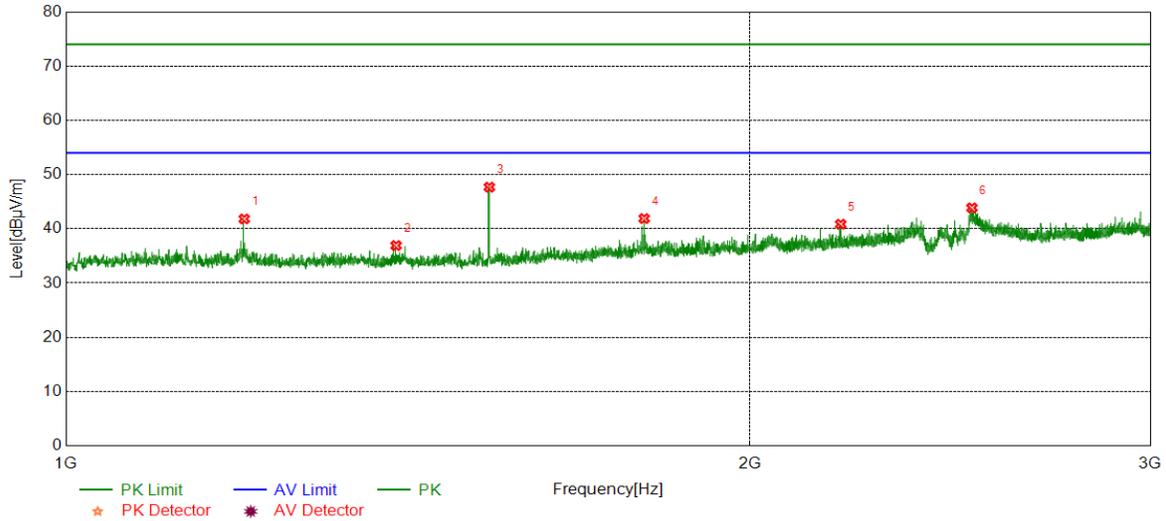


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.0248	47.38	-5.56	41.82	74.00	-32.18	Horizontal
2	1397.2997	42.60	-5.69	36.91	74.00	-37.09	Horizontal
3	1535.8170	53.43	-5.75	47.68	74.00	-26.32	Horizontal
4	1796.5996	45.70	-3.81	41.89	74.00	-32.11	Horizontal
5	2192.3991	43.18	-2.33	40.85	74.00	-33.15	Horizontal
6	2504.1880	44.28	-0.42	43.86	74.00	-30.14	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

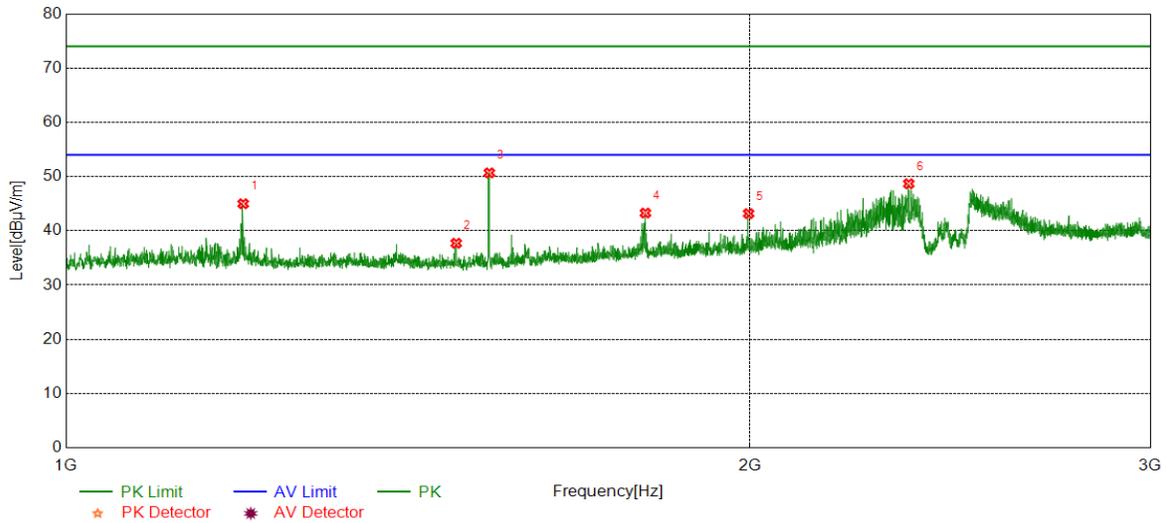


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1196.7746	50.55	-5.56	44.99	74.00	-29.01	Vertical
2	1485.0606	43.50	-5.79	37.71	74.00	-36.29	Vertical
3	1535.8170	56.43	-5.75	50.68	74.00	-23.32	Vertical
4	1798.8499	47.11	-3.83	43.28	74.00	-30.72	Vertical
5	1997.1246	46.20	-3.02	43.18	74.00	-30.82	Vertical
6	2348.9186	50.37	-1.69	48.68	74.00	-25.32	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

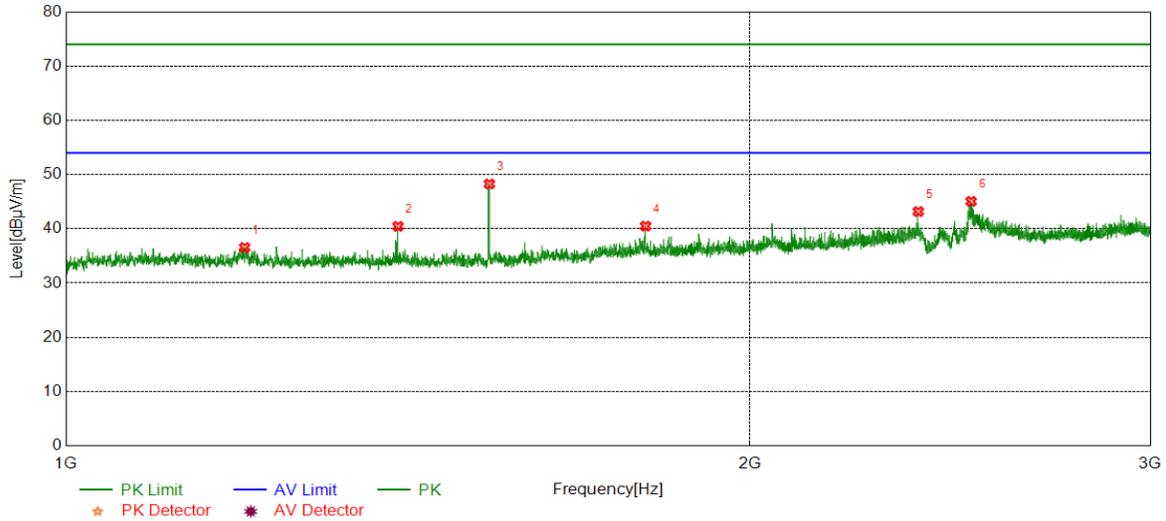


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1198.5248	42.11	-5.56	36.55	74.00	-37.45	Horizontal
2	1400.0500	46.10	-5.65	40.45	74.00	-33.55	Horizontal
3	1535.8170	54.02	-5.75	48.27	74.00	-25.73	Horizontal
4	1799.0999	44.33	-3.84	40.49	74.00	-33.51	Horizontal
5	2371.6715	44.30	-1.12	43.18	74.00	-30.82	Horizontal
6	2501.9377	45.50	-0.44	45.06	74.00	-28.94	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

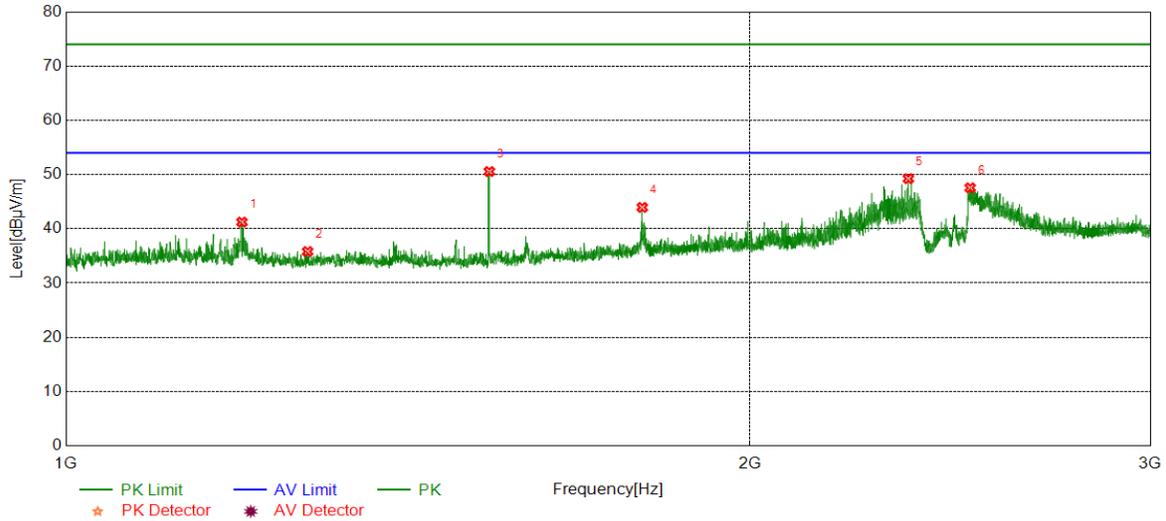

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1195.2744	46.81	-5.57	41.24	74.00	-32.76	Vertical
2	1277.5347	41.38	-5.57	35.81	74.00	-38.19	Vertical
3	1535.8170	56.31	-5.75	50.56	74.00	-23.44	Vertical
4	1793.0991	47.72	-3.77	43.95	74.00	-30.05	Vertical
5	2347.9185	50.95	-1.71	49.24	74.00	-24.76	Vertical
6	2499.6875	48.01	-0.45	47.56	74.00	-26.44	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part II: 3GHz~18GHz

HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

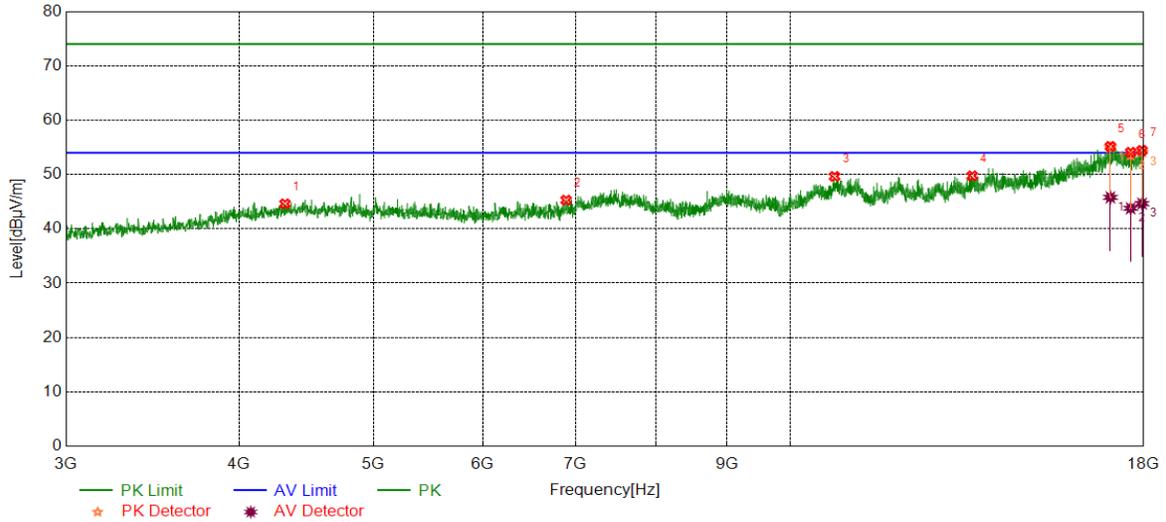

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4318.2898	39.44	5.16	44.60	74.00	-29.40	Horizontal
2	6891.1114	37.12	8.16	45.28	74.00	-28.72	Horizontal
3	10767.2209	37.44	12.20	49.64	74.00	-24.36	Horizontal
4	13535.0669	37.07	12.68	49.75	74.00	-24.25	Horizontal
5	17030.5038	36.13	19.03	55.16	74.00	-18.84	Horizontal
6	17613.7017	36.30	17.78	54.08	74.00	-19.92	Horizontal
7	17949.3687	35.88	18.55	54.43	74.00	-19.57	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17030.5038	26.76	19.03	45.79	54.00	-8.21	Horizontal
2	17613.7017	25.99	17.78	43.77	54.00	-10.23	Horizontal
3	17949.3687	26.09	18.55	44.64	54.00	-9.36	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

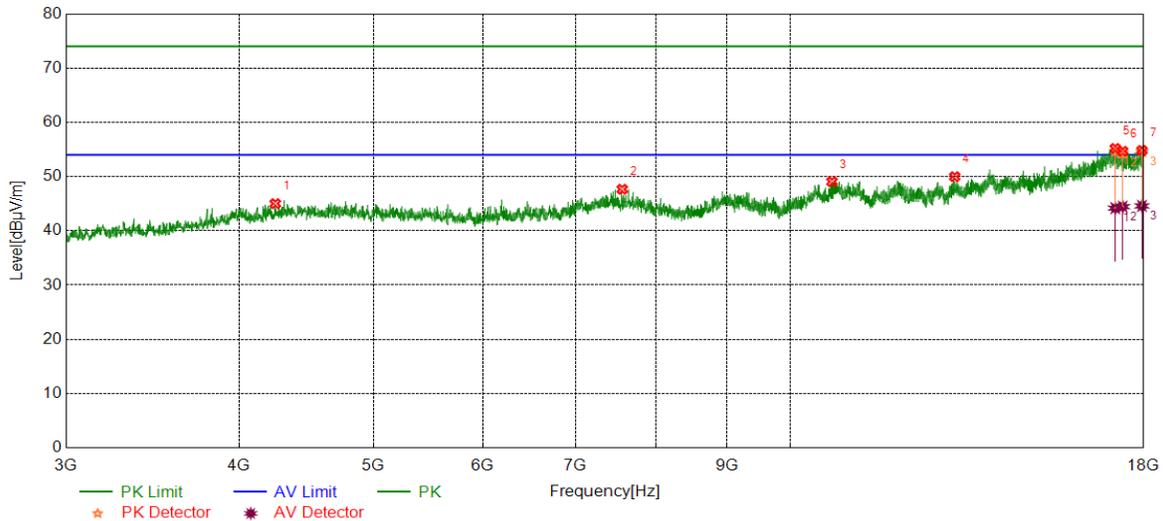

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4248.9061	40.15	4.86	45.01	74.00	-28.99	Vertical
2	7564.3205	39.09	8.57	47.66	74.00	-26.34	Vertical
3	10720.3400	37.21	11.85	49.06	74.00	-24.94	Vertical
4	13146.8934	37.69	12.29	49.98	74.00	-24.02	Vertical
5	17169.2712	36.83	18.36	55.19	74.00	-18.81	Vertical
6	17381.1726	36.16	18.51	54.67	74.00	-19.33	Vertical
7	17947.4934	36.31	18.50	54.81	74.00	-19.19	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17169.2712	25.82	18.36	44.18	54.00	-9.82	Vertical
2	17381.1726	25.94	18.51	44.45	54.00	-9.55	Vertical
3	17947.4934	26.09	18.50	44.59	54.00	-9.41	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

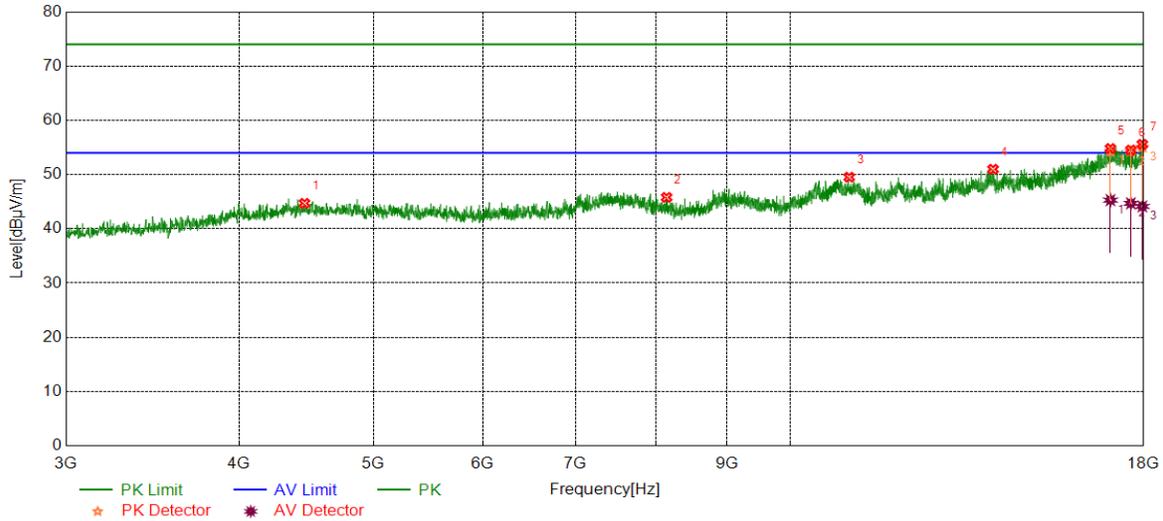

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4460.8076	38.91	5.78	44.69	74.00	-29.31	Horizontal
2	8143.7680	38.40	7.39	45.79	74.00	-28.21	Horizontal
3	11031.6290	37.25	12.27	49.52	74.00	-24.48	Horizontal
4	14013.2517	36.69	14.29	50.98	74.00	-23.02	Horizontal
5	17032.3790	35.80	19.00	54.80	74.00	-19.20	Horizontal
6	17619.3274	36.88	17.64	54.52	74.00	-19.48	Horizontal
7	17958.7448	37.10	18.48	55.58	74.00	-18.42	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17032.3790	26.29	19.00	45.29	54.00	-8.71	Horizontal
2	17619.3274	27.06	17.64	44.70	54.00	-9.30	Horizontal
3	17958.7448	25.65	18.48	44.13	54.00	-9.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

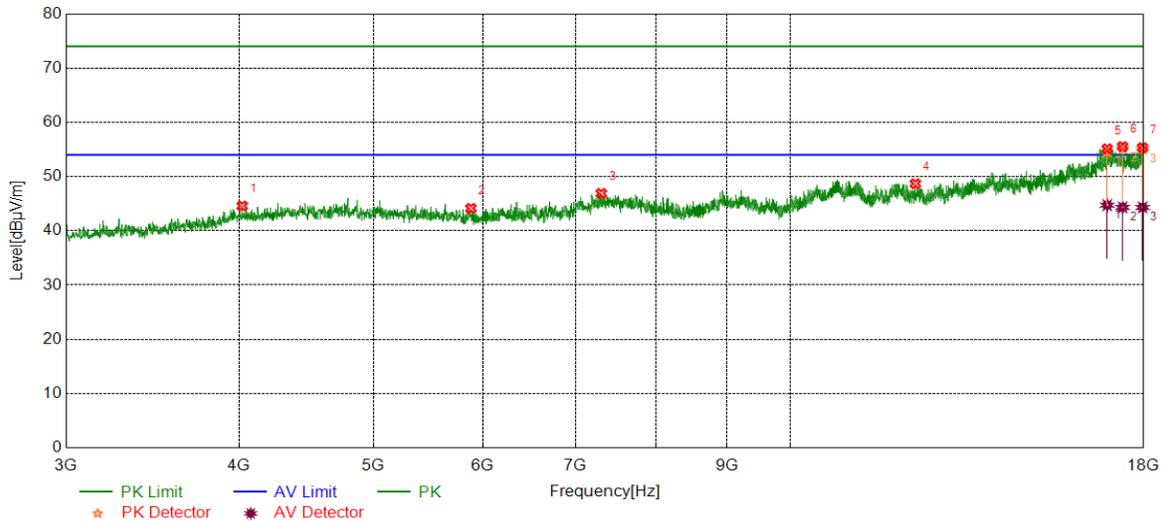

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4022.0028	40.14	4.45	44.59	74.00	-29.41	Vertical
2	5882.2353	38.90	5.24	44.14	74.00	-29.86	Vertical
3	7305.5382	38.42	8.48	46.90	74.00	-27.10	Vertical
4	12314.2893	37.13	11.56	48.69	74.00	-25.31	Vertical
5	16940.4926	36.66	18.46	55.12	74.00	-18.88	Vertical
6	17379.2974	36.94	18.60	55.54	74.00	-18.46	Vertical
7	17966.2458	37.37	17.96	55.33	74.00	-18.67	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16940.4926	26.28	18.46	44.74	54.00	-9.26	Vertical
2	17379.2974	25.72	18.60	44.32	54.00	-9.68	Vertical
3	17966.2458	26.35	17.96	44.31	54.00	-9.69	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

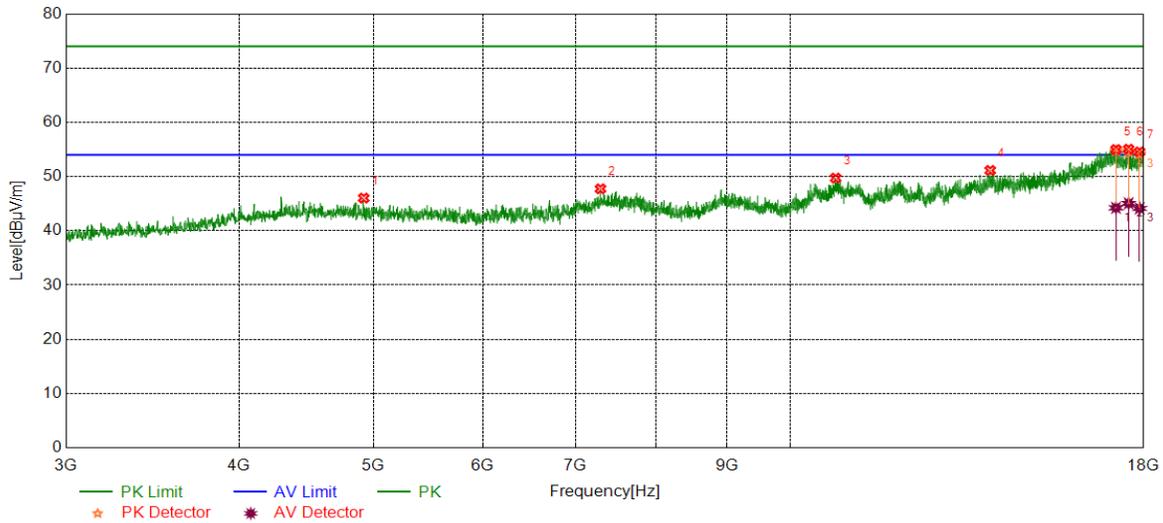

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4922.1153	40.84	5.19	46.03	74.00	-27.97	Horizontal
2	7296.1620	39.14	8.60	47.74	74.00	-26.26	Horizontal
3	10785.9732	37.61	12.12	49.73	74.00	-24.27	Horizontal
4	13945.7432	36.84	14.30	51.14	74.00	-22.86	Horizontal
5	17189.8987	36.81	18.18	54.99	74.00	-19.01	Horizontal
6	17553.6942	37.05	18.01	55.06	74.00	-18.94	Horizontal
7	17878.1098	36.36	18.19	54.55	74.00	-19.45	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17189.8987	26.06	18.18	44.24	54.00	-9.76	Horizontal
2	17553.6942	27.05	18.01	45.06	54.00	-8.94	Horizontal
3	17878.1098	25.94	18.19	44.13	54.00	-9.87	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

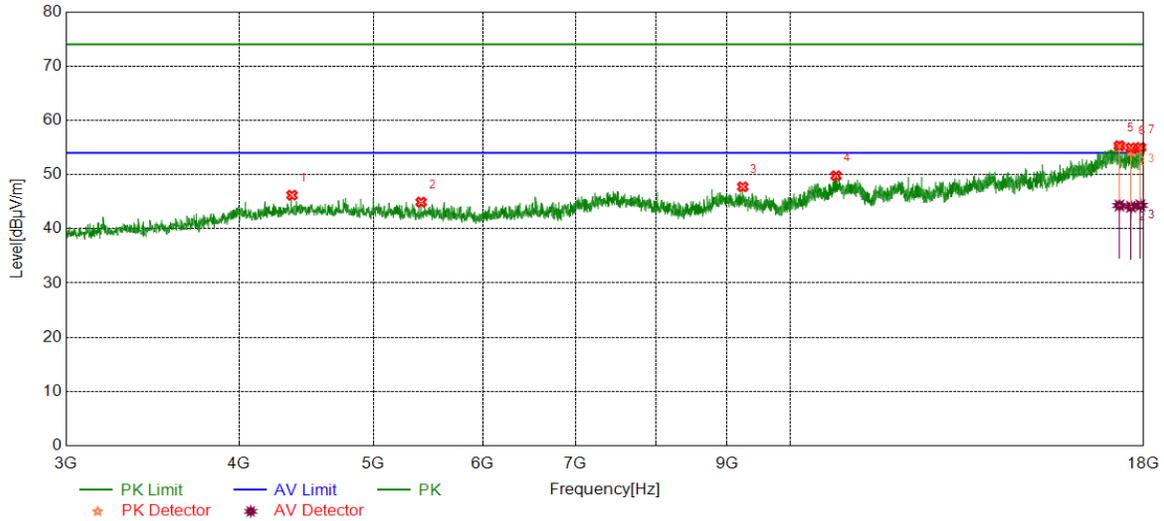

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4368.9211	41.26	4.94	46.20	74.00	-27.80	Vertical
2	5415.3019	39.68	5.24	44.92	74.00	-29.08	Vertical
3	9242.6553	38.92	8.82	47.74	74.00	-26.26	Vertical
4	10793.4742	37.70	12.08	49.78	74.00	-24.22	Vertical
5	17287.4109	37.51	17.82	55.33	74.00	-18.67	Vertical
6	17623.0779	37.43	17.50	54.93	74.00	-19.07	Vertical
7	17904.3630	36.66	18.35	55.01	74.00	-18.99	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17287.4109	26.48	17.82	44.30	54.00	-9.70	Vertical
2	17623.0779	26.57	17.50	44.07	54.00	-9.93	Vertical
3	17904.3630	25.98	18.35	44.33	54.00	-9.67	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

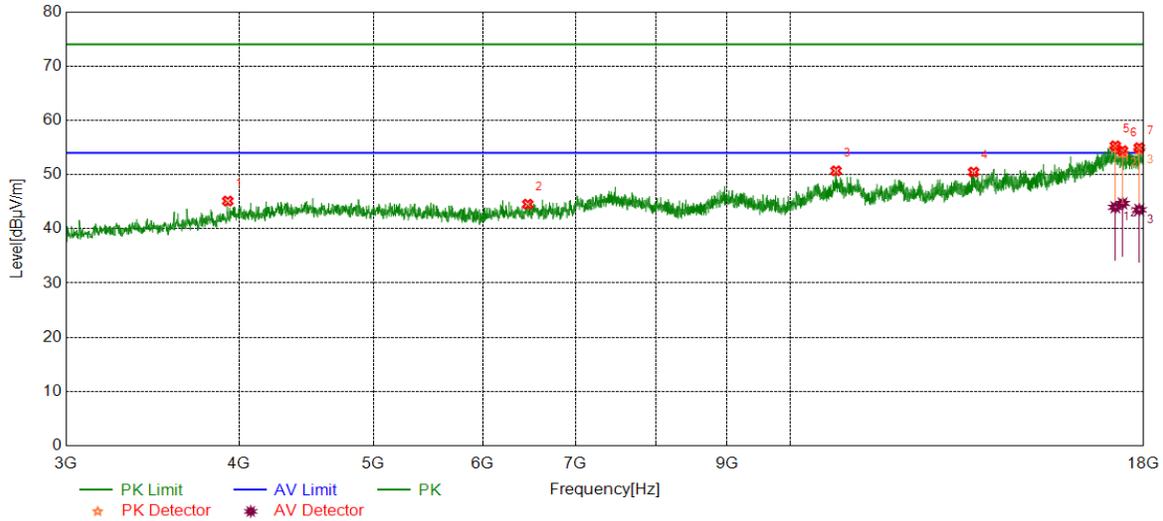

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3926.3658	41.31	3.81	45.12	74.00	-28.88	Horizontal
2	6465.4332	37.23	7.31	44.54	74.00	-29.46	Horizontal
3	10793.4742	38.61	12.08	50.69	74.00	-23.31	Horizontal
4	13566.9459	37.63	12.83	50.46	74.00	-23.54	Horizontal
5	17171.1464	36.96	18.33	55.29	74.00	-18.71	Horizontal
6	17377.4222	35.83	18.58	54.41	74.00	-19.59	Horizontal
7	17866.8584	36.55	18.39	54.94	74.00	-19.06	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.1464	25.64	18.33	43.97	54.00	-10.03	Horizontal
2	17377.4222	26.11	18.58	44.69	54.00	-9.31	Horizontal
3	17866.8584	25.12	18.39	43.51	54.00	-10.49	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

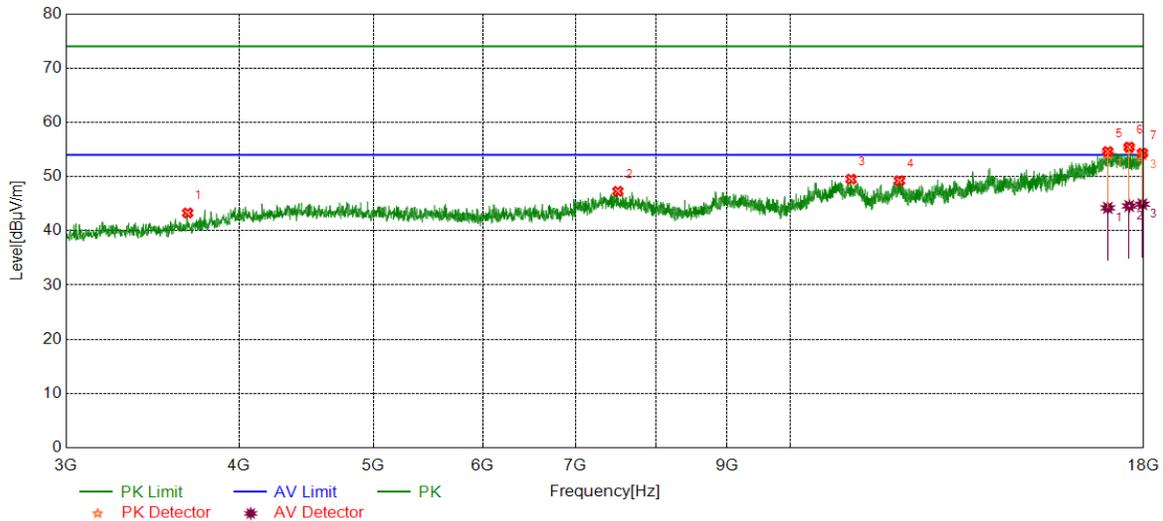

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3673.2092	40.55	2.74	43.29	74.00	-30.71	Vertical
2	7509.9387	38.66	8.62	47.28	74.00	-26.72	Vertical
3	11067.2584	37.36	12.17	49.53	74.00	-24.47	Vertical
4	11993.6242	36.32	12.92	49.24	74.00	-24.76	Vertical
5	16957.3697	36.04	18.58	54.62	74.00	-19.38	Vertical
6	17570.5713	37.34	18.10	55.44	74.00	-18.56	Vertical
7	17960.6201	35.90	18.42	54.32	74.00	-19.68	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16957.3697	25.65	18.58	44.23	54.00	-9.77	Vertical
2	17570.5713	26.48	18.10	44.58	54.00	-9.42	Vertical
3	17960.6201	26.49	18.42	44.91	54.00	-9.09	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

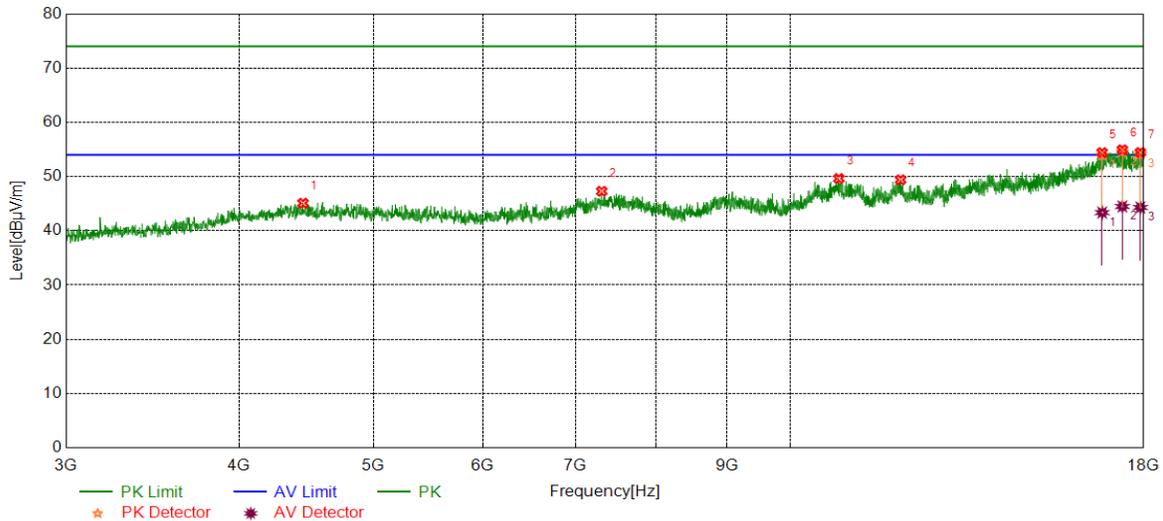

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4449.5562	39.58	5.51	45.09	74.00	-28.91	Horizontal
2	7311.1639	38.85	8.44	47.29	74.00	-26.71	Horizontal
3	10844.1055	37.38	12.26	49.64	74.00	-24.36	Horizontal
4	12016.1270	36.69	12.71	49.40	74.00	-24.60	Horizontal
5	16797.9747	36.95	17.47	54.42	74.00	-19.58	Horizontal
6	17371.7965	36.42	18.52	54.94	74.00	-19.06	Horizontal
7	17900.6126	36.04	18.40	54.44	74.00	-19.56	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16797.9747	25.89	17.47	43.36	54.00	-10.64	Horizontal
2	17371.7965	25.97	18.52	44.49	54.00	-9.51	Horizontal
3	17900.6126	25.91	18.40	44.31	54.00	-9.69	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

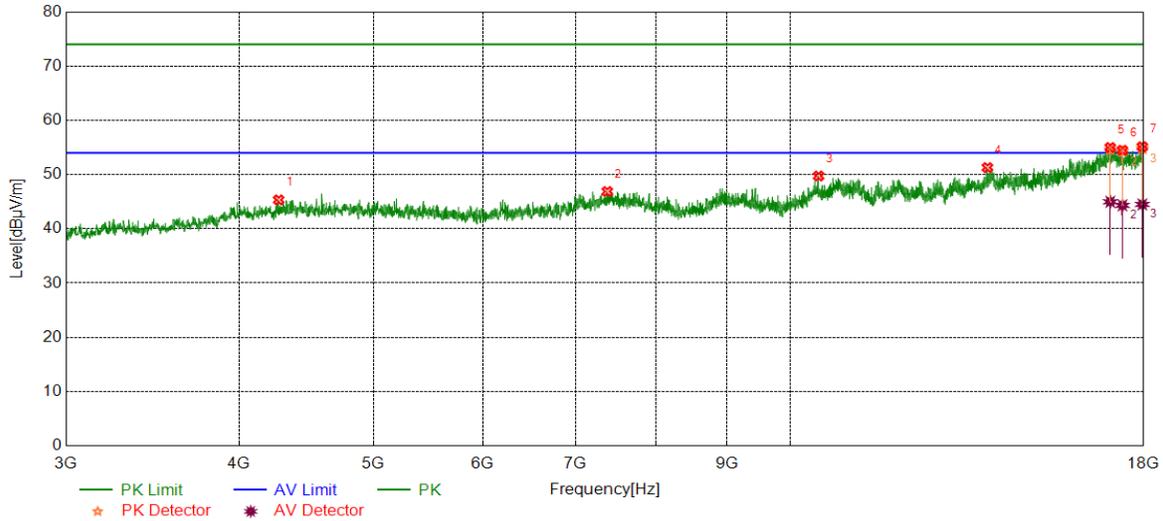

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4273.2842	40.02	5.31	45.33	74.00	-28.67	Vertical
2	7378.6723	38.30	8.58	46.88	74.00	-27.12	Vertical
3	10484.0605	38.13	11.61	49.74	74.00	-24.26	Vertical
4	13881.9852	37.54	13.75	51.29	74.00	-22.71	Vertical
5	17026.7533	36.18	18.81	54.99	74.00	-19.01	Vertical
6	17375.5469	35.93	18.56	54.49	74.00	-19.51	Vertical
7	17958.7448	36.65	18.48	55.13	74.00	-18.87	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17026.7533	26.17	18.81	44.98	54.00	-9.02	Vertical
2	17375.5469	25.77	18.56	44.33	54.00	-9.67	Vertical
3	17958.7448	26.02	18.48	44.50	54.00	-9.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

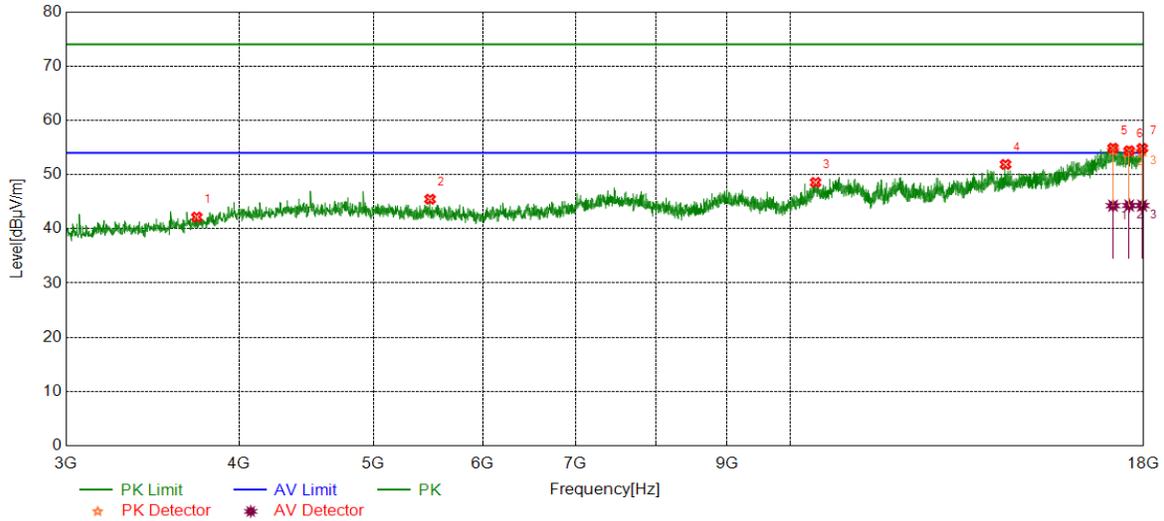

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3729.4662	38.93	3.23	42.16	74.00	-31.84	Horizontal
2	5495.9370	39.96	5.50	45.46	74.00	-28.54	Horizontal
3	10431.5539	36.98	11.57	48.55	74.00	-25.45	Horizontal
4	14305.7882	38.00	13.87	51.87	74.00	-22.13	Horizontal
5	17105.5132	36.72	18.16	54.88	74.00	-19.12	Horizontal
6	17570.5713	36.29	18.10	54.39	74.00	-19.61	Horizontal
7	17954.9944	36.30	18.52	54.82	74.00	-19.18	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17105.5132	26.10	18.16	44.26	54.00	-9.74	Horizontal
2	17570.5713	26.20	18.10	44.30	54.00	-9.70	Horizontal
3	17954.9944	25.77	18.52	44.29	54.00	-9.71	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

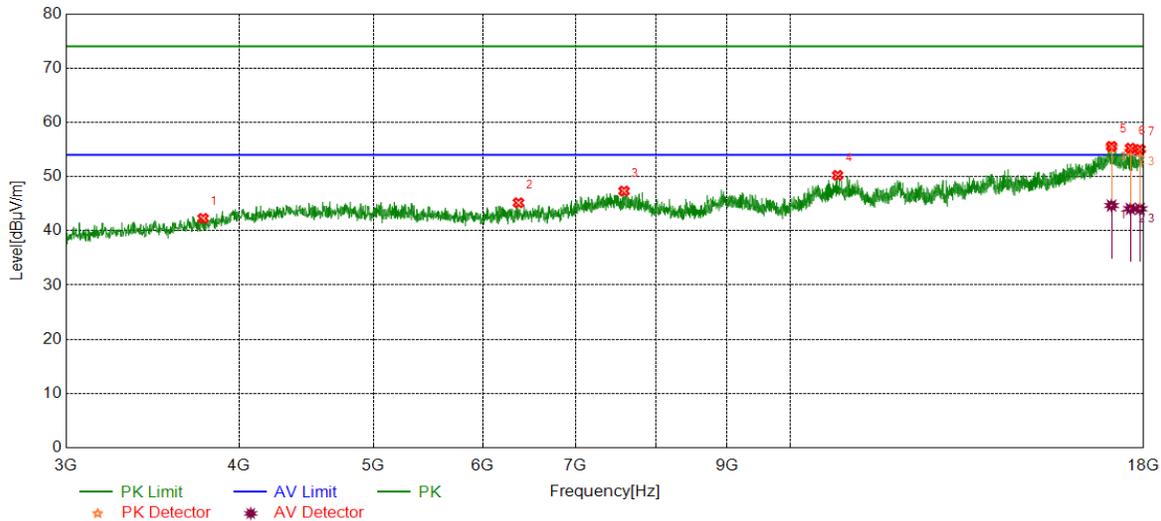

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3768.8461	39.29	3.00	42.29	74.00	-31.71	Vertical
2	6366.0458	38.61	6.56	45.17	74.00	-28.83	Vertical
3	7586.8234	38.79	8.54	47.33	74.00	-26.67	Vertical
4	10821.6027	38.03	12.19	50.22	74.00	-23.78	Vertical
5	17064.2580	36.63	18.94	55.57	74.00	-18.43	Vertical
6	17608.0760	37.45	17.79	55.24	74.00	-18.76	Vertical
7	17889.3612	36.49	18.53	55.02	74.00	-18.98	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17064.2580	25.72	18.94	44.66	54.00	-9.34	Vertical
2	17608.0760	26.27	17.79	44.06	54.00	-9.94	Vertical
3	17889.3612	25.52	18.53	44.05	54.00	-9.95	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

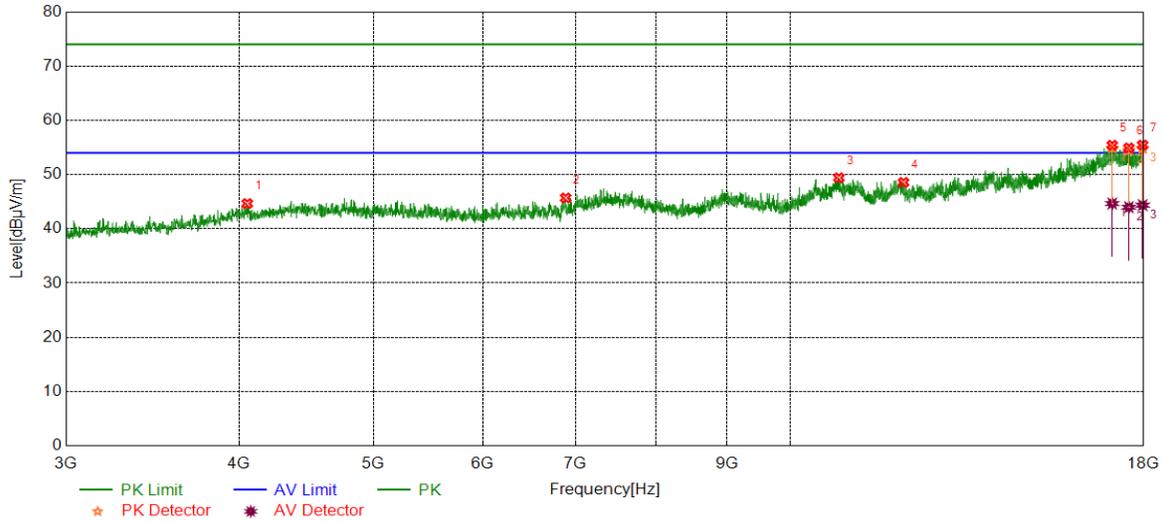

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4055.7570	40.42	4.24	44.66	74.00	-29.34	Horizontal
2	6885.4857	37.49	8.20	45.69	74.00	-28.31	Horizontal
3	10844.1055	37.15	12.26	49.41	74.00	-24.59	Horizontal
4	12074.2593	35.94	12.61	48.55	74.00	-25.45	Horizontal
5	17083.0104	36.89	18.52	55.41	74.00	-18.59	Horizontal
6	17561.1951	36.99	17.92	54.91	74.00	-19.09	Horizontal
7	17968.1210	37.64	17.81	55.45	74.00	-18.55	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17083.0104	26.14	18.52	44.66	54.00	-9.34	Horizontal
2	17561.1951	26.06	17.92	43.98	54.00	-10.02	Horizontal
3	17968.1210	26.55	17.81	44.36	54.00	-9.64	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

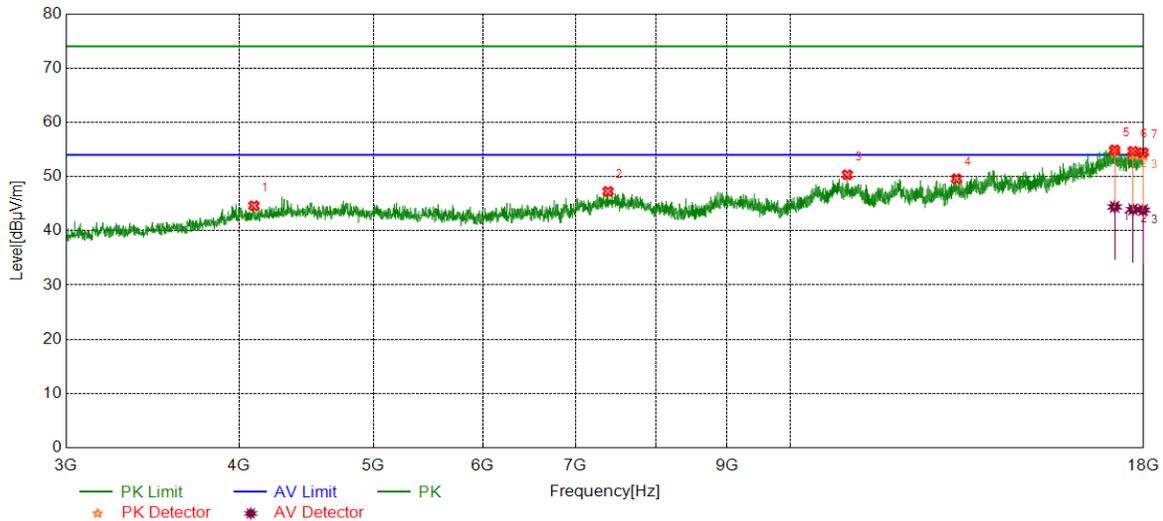

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4100.7626	40.15	4.47	44.62	74.00	-29.38	Vertical
2	7388.0485	38.67	8.59	47.26	74.00	-26.74	Vertical
3	10997.8747	38.01	12.32	50.33	74.00	-23.67	Vertical
4	13186.2733	37.09	12.50	49.59	74.00	-24.41	Vertical
5	17152.3940	36.65	18.26	54.91	74.00	-19.09	Vertical
6	17683.0854	36.69	17.97	54.66	74.00	-19.34	Vertical
7	17981.2477	36.38	18.04	54.42	74.00	-19.58	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17152.3940	26.16	18.26	44.42	54.00	-9.58	Vertical
2	17683.0854	25.97	17.97	43.94	54.00	-10.06	Vertical
3	17981.2477	25.81	18.04	43.85	54.00	-10.15	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS

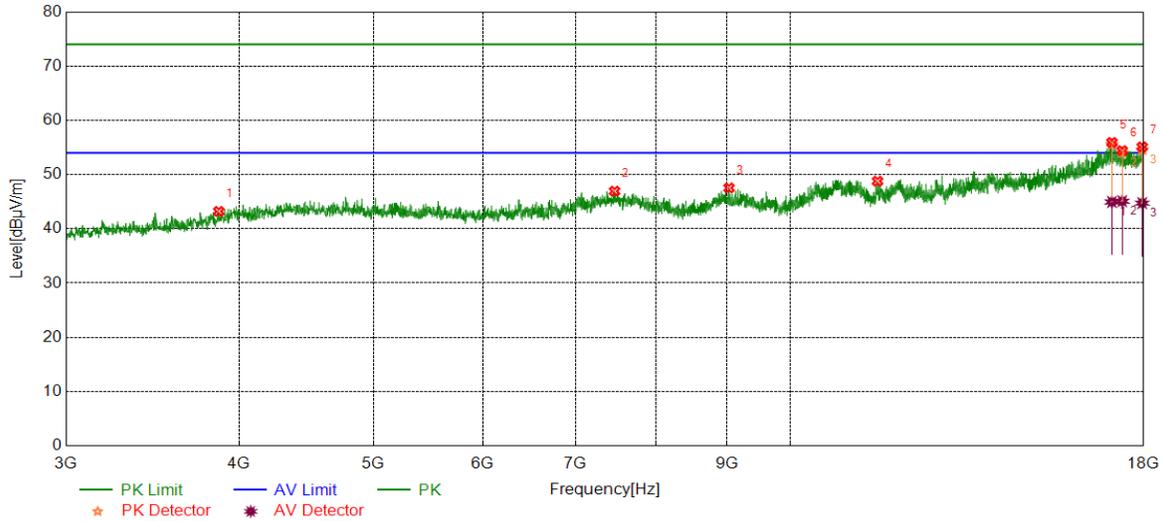

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3868.2335	39.85	3.36	43.21	74.00	-30.79	Horizontal
2	7468.6836	38.21	8.73	46.94	74.00	-27.06	Horizontal
3	9034.5043	38.52	9.02	47.54	74.00	-26.46	Horizontal
4	11564.1955	37.44	11.34	48.78	74.00	-25.22	Horizontal
5	17073.6342	36.90	19.02	55.92	74.00	-18.08	Horizontal
6	17368.0460	36.01	18.40	54.41	74.00	-19.59	Horizontal
7	17954.9944	36.58	18.52	55.10	74.00	-18.90	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17073.6342	25.93	19.02	44.95	54.00	-9.05	Horizontal
2	17368.0460	26.69	18.40	45.09	54.00	-8.91	Horizontal
3	17954.9944	26.22	18.52	44.74	54.00	-9.26	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS

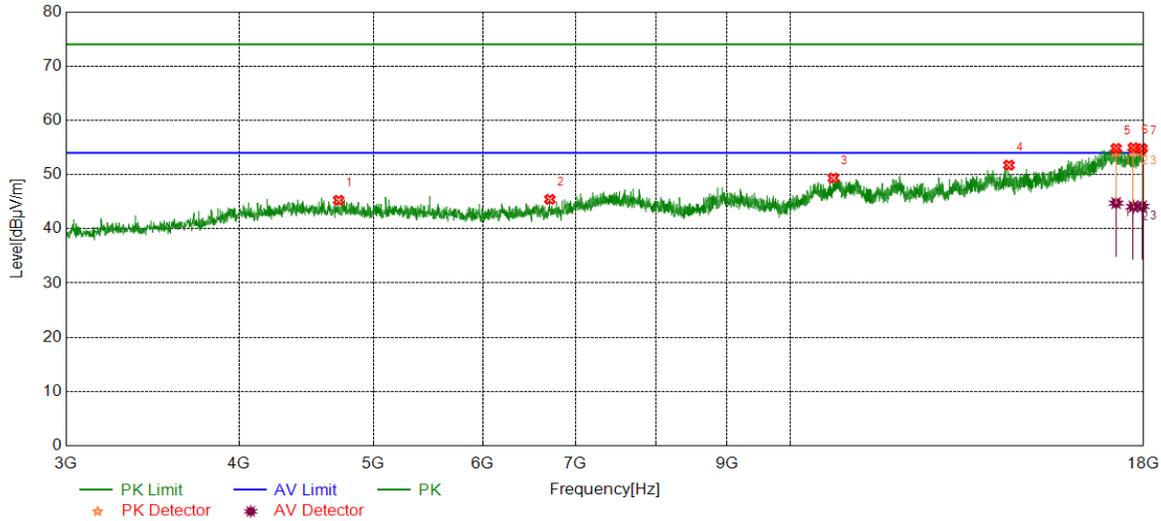

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4721.4652	39.79	5.47	45.26	74.00	-28.74	Vertical
2	6707.3384	37.40	8.03	45.43	74.00	-28.57	Vertical
3	10744.7181	37.34	12.02	49.36	74.00	-24.64	Vertical
4	14386.4233	37.99	13.75	51.74	74.00	-22.26	Vertical
5	17193.6492	36.59	18.24	54.83	74.00	-19.17	Vertical
6	17694.3368	37.09	17.87	54.96	74.00	-19.04	Vertical
7	17949.3687	36.24	18.55	54.79	74.00	-19.21	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17193.6492	26.50	18.24	44.74	54.00	-9.26	Vertical
2	17694.3368	26.22	17.87	44.09	54.00	-9.91	Vertical
3	17949.3687	25.59	18.55	44.14	54.00	-9.86	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

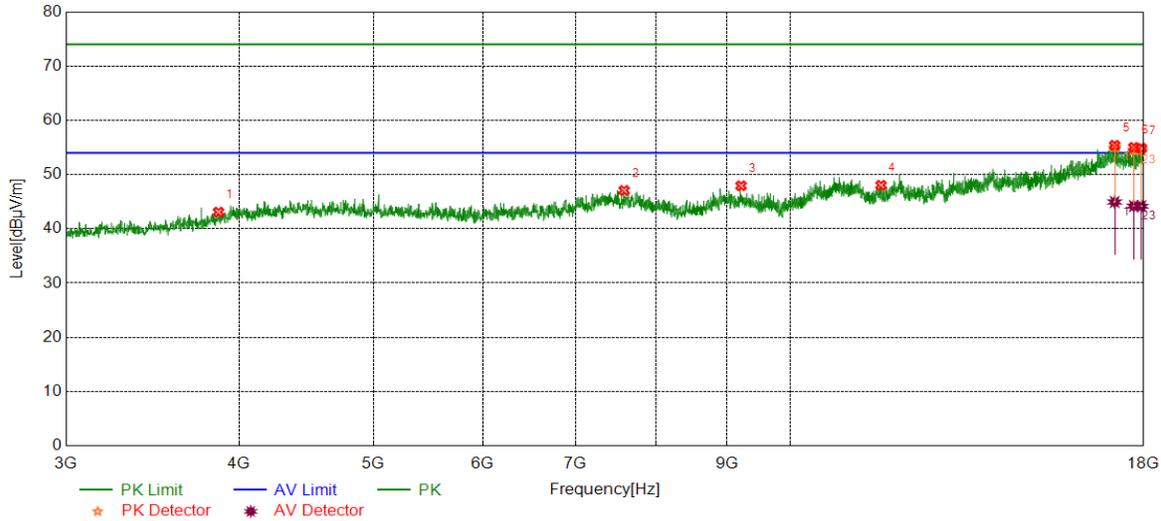

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3866.3583	39.71	3.37	43.08	74.00	-30.92	Horizontal
2	7588.6986	38.49	8.58	47.07	74.00	-26.93	Horizontal
3	9216.4021	39.25	8.68	47.93	74.00	-26.07	Horizontal
4	11631.7040	36.59	11.43	48.02	74.00	-25.98	Horizontal
5	17152.3940	37.13	18.26	55.39	74.00	-18.61	Horizontal
6	17705.5882	37.33	17.68	55.01	74.00	-18.99	Horizontal
7	17930.6163	36.71	18.15	54.86	74.00	-19.14	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17152.3940	26.68	18.26	44.94	54.00	-9.06	Horizontal
2	17705.5882	26.51	17.68	44.19	54.00	-9.81	Horizontal
3	17930.6163	26.02	18.15	44.17	54.00	-9.83	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

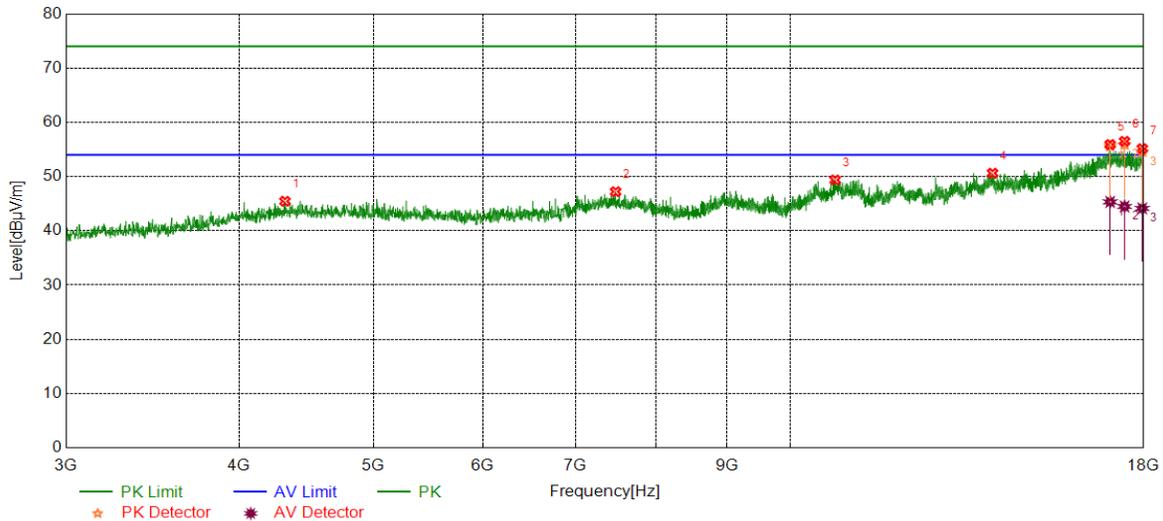

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4318.2898	40.29	5.16	45.45	74.00	-28.55	Vertical
2	7481.8102	38.41	8.80	47.21	74.00	-26.79	Vertical
3	10776.5971	37.17	12.21	49.38	74.00	-24.62	Vertical
4	14000.1250	36.27	14.36	50.63	74.00	-23.37	Vertical
5	17023.0029	37.36	18.55	55.91	74.00	-18.09	Vertical
6	17435.5544	38.63	17.88	56.51	74.00	-17.49	Vertical
7	17956.8696	36.65	18.50	55.15	74.00	-18.85	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17023.0029	26.78	18.55	45.33	54.00	-8.67	Vertical
2	17435.5544	26.60	17.88	44.48	54.00	-9.52	Vertical
3	17956.8696	25.63	18.50	44.13	54.00	-9.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

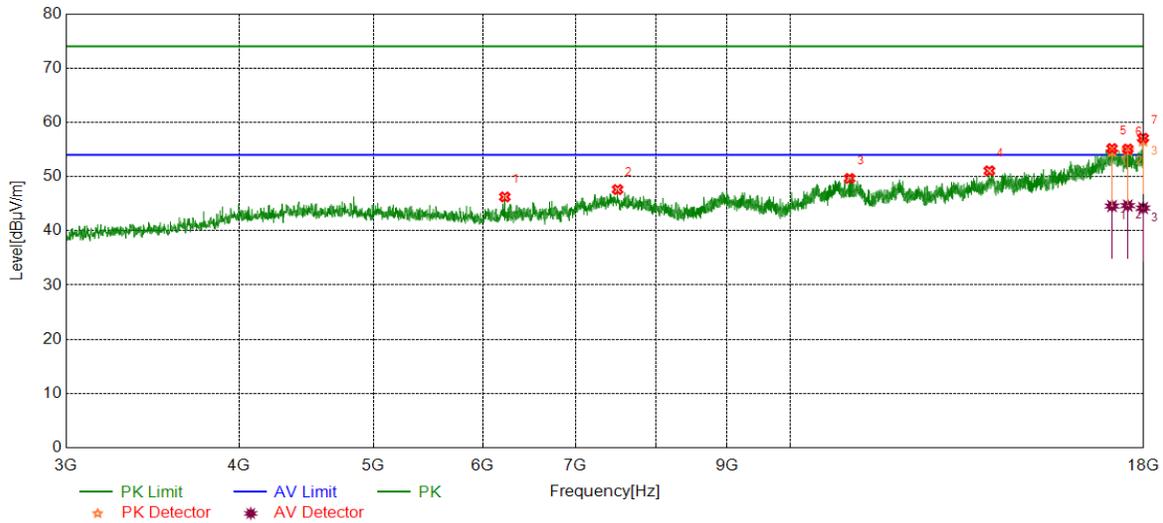

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	6223.5279	40.21	6.04	46.25	74.00	-27.75	Horizontal
2	7506.1883	39.00	8.61	47.61	74.00	-26.39	Horizontal
3	11039.1299	37.49	12.17	49.66	74.00	-24.34	Horizontal
4	13926.9909	36.74	14.32	51.06	74.00	-22.94	Horizontal
5	17077.3847	36.34	18.84	55.18	74.00	-18.82	Horizontal
6	17529.3162	37.17	17.91	55.08	74.00	-18.92	Horizontal
7	17981.2477	39.04	18.04	57.08	74.00	-16.92	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17077.3847	25.73	18.84	44.57	54.00	-9.43	Horizontal
2	17529.3162	26.74	17.91	44.65	54.00	-9.35	Horizontal
3	17981.2477	26.17	18.04	44.21	54.00	-9.79	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

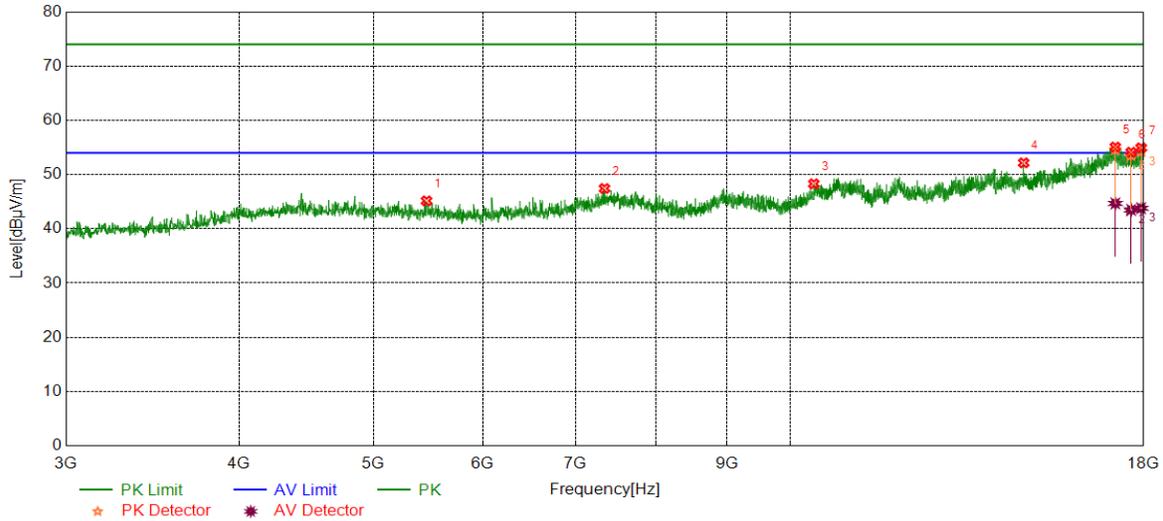

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	5464.0580	39.57	5.58	45.15	74.00	-28.85	Vertical
2	7344.9181	38.92	8.51	47.43	74.00	-26.57	Vertical
3	10401.5502	37.07	11.23	48.30	74.00	-25.70	Vertical
4	14744.5931	38.20	13.96	52.16	74.00	-21.84	Vertical
5	17171.1464	36.75	18.33	55.08	74.00	-18.92	Vertical
6	17628.7036	36.84	17.28	54.12	74.00	-19.88	Vertical
7	17924.9906	36.97	17.96	54.93	74.00	-19.07	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17171.1464	26.35	18.33	44.68	54.00	-9.32	Vertical
2	17628.7036	26.20	17.28	43.48	54.00	-10.52	Vertical
3	17924.9906	25.84	17.96	43.80	54.00	-10.20	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS

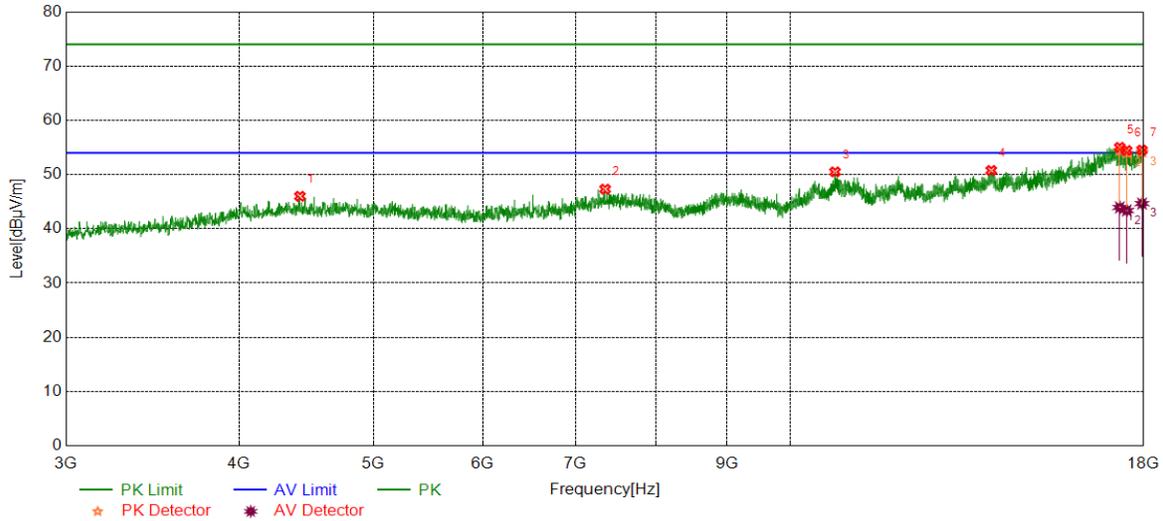

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4427.0534	40.87	5.13	46.00	74.00	-28.00	Horizontal
2	7352.4191	38.87	8.44	47.31	74.00	-26.69	Horizontal
3	10774.7218	38.26	12.23	50.49	74.00	-23.51	Horizontal
4	13970.1213	36.94	13.82	50.76	74.00	-23.24	Horizontal
5	17296.7871	37.23	17.79	55.02	74.00	-18.98	Horizontal
6	17499.3124	36.40	18.03	54.43	74.00	-19.57	Horizontal
7	17949.3687	35.96	18.55	54.51	74.00	-19.49	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17296.7871	26.15	17.79	43.94	54.00	-10.06	Horizontal
2	17499.3124	25.35	18.03	43.38	54.00	-10.62	Horizontal
3	17949.3687	26.10	18.55	44.65	54.00	-9.35	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS

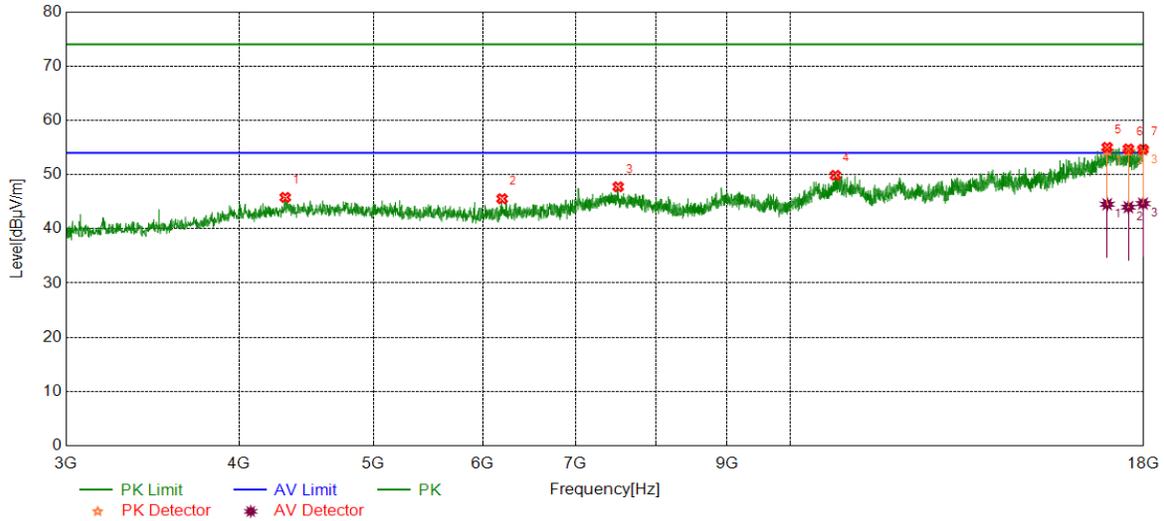

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4320.1650	40.61	5.18	45.79	74.00	-28.21	Vertical
2	6195.3994	39.42	6.12	45.54	74.00	-28.46	Vertical
3	7513.6892	39.08	8.67	47.75	74.00	-26.25	Vertical
4	10782.2228	37.71	12.15	49.86	74.00	-24.14	Vertical
5	16940.4926	36.56	18.46	55.02	74.00	-18.98	Vertical
6	17548.0685	36.78	17.95	54.73	74.00	-19.27	Vertical
7	17979.3724	36.57	18.09	54.66	74.00	-19.34	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	16940.4926	26.07	18.46	44.53	54.00	-9.47	Vertical
2	17548.0685	26.04	17.95	43.99	54.00	-10.01	Vertical
3	17979.3724	26.56	18.09	44.65	54.00	-9.35	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

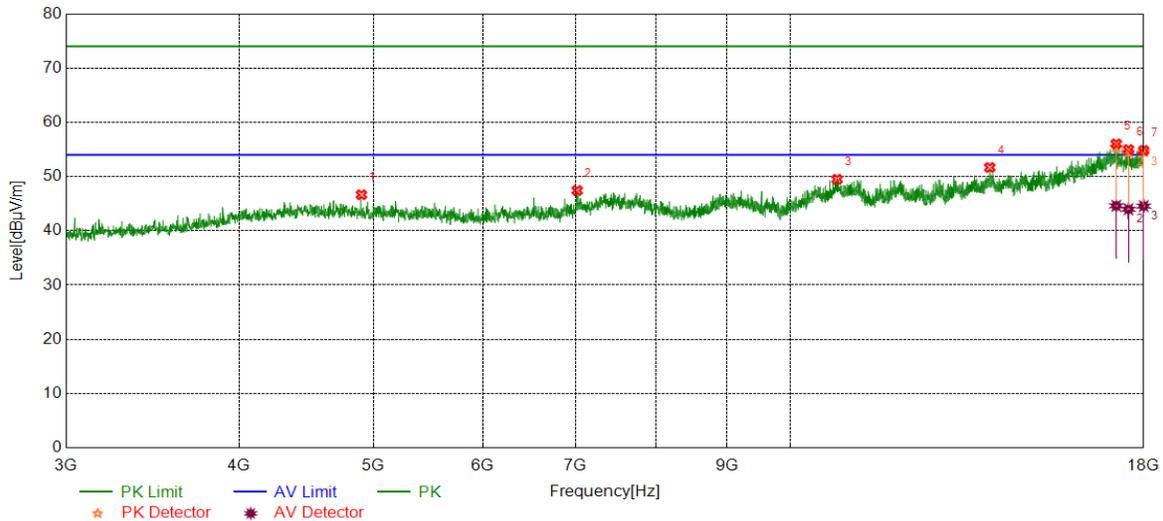

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4903.3629	41.31	5.34	46.65	74.00	-27.35	Horizontal
2	7018.6273	39.16	8.28	47.44	74.00	-26.56	Horizontal
3	10812.2265	37.29	12.21	49.50	74.00	-24.50	Horizontal
4	13936.3670	37.26	14.41	51.67	74.00	-22.33	Horizontal
5	17197.3997	37.72	18.31	56.03	74.00	-17.97	Horizontal
6	17549.9437	36.90	18.08	54.98	74.00	-19.02	Horizontal
7	18000.0000	36.69	18.13	54.82	74.00	-19.18	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17197.3997	26.30	18.31	44.61	54.00	-9.39	Horizontal
2	17549.9437	25.90	18.08	43.98	54.00	-10.02	Horizontal
3	18000.0000	26.43	18.13	44.56	54.00	-9.44	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

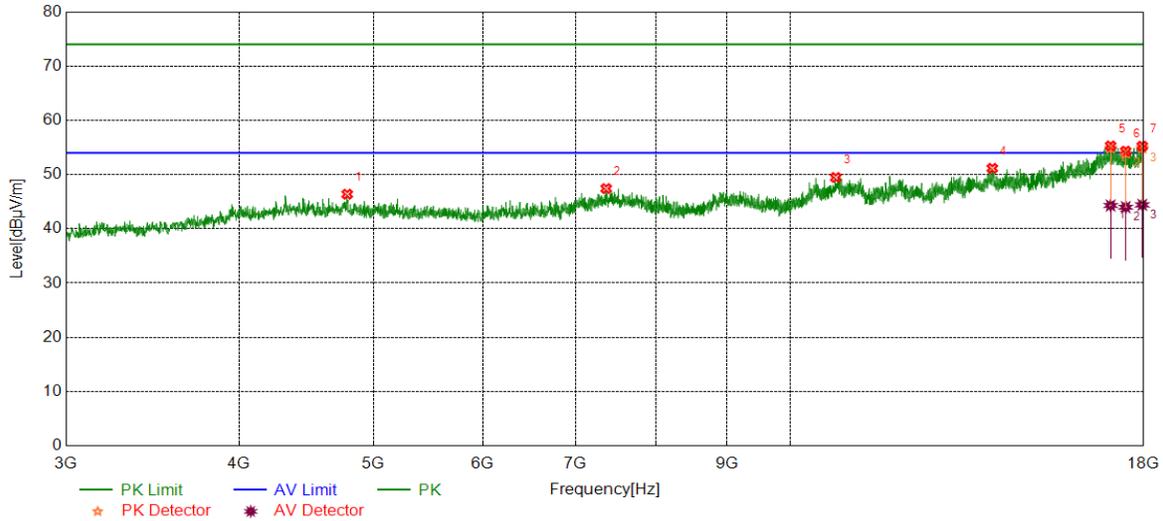

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	4788.9736	40.29	6.09	46.38	74.00	-27.62	Vertical
2	7365.5457	38.99	8.43	47.42	74.00	-26.58	Vertical
3	10787.8485	37.35	12.11	49.46	74.00	-24.54	Vertical
4	13994.4993	36.98	14.17	51.15	74.00	-22.85	Vertical
5	17038.0048	36.36	18.92	55.28	74.00	-18.72	Vertical
6	17469.3087	36.57	17.75	54.32	74.00	-19.68	Vertical
7	17956.8696	36.73	18.50	55.23	74.00	-18.77	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	17038.0048	25.38	18.92	44.30	54.00	-9.70	Vertical
2	17469.3087	26.24	17.75	43.99	54.00	-10.01	Vertical
3	17956.8696	25.92	18.50	44.42	54.00	-9.58	Vertical


- Note: 1. Measurement = Reading Level + Correct Factor;
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz;
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.);
 5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses;
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part III: 18GHz~26.5GHz

SPURIOUS EMISSIONS 18GHz TO 26.5GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

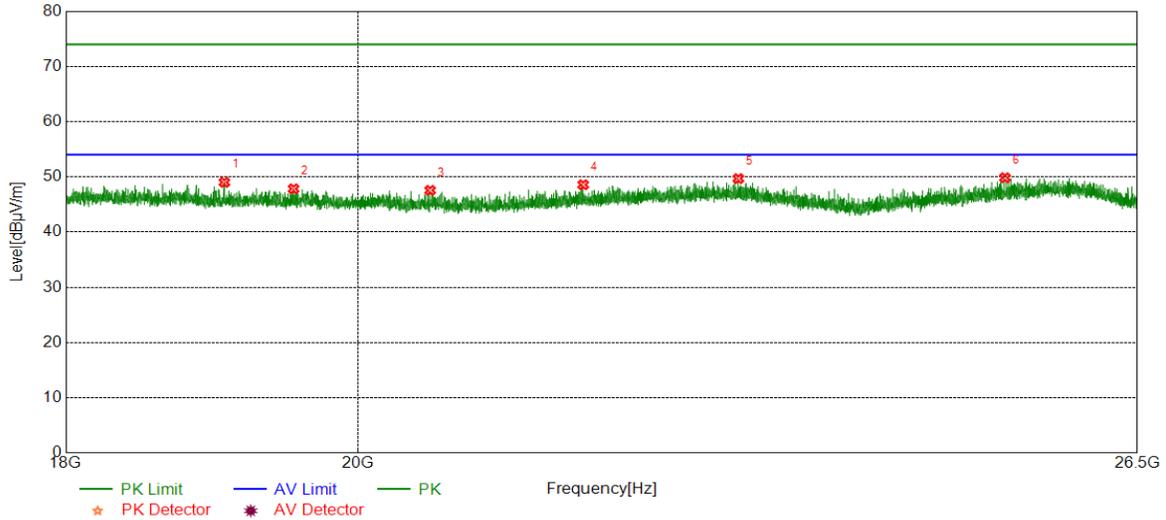


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	19060.0560	50.09	-1.08	49.01	74.00	-24.99	Horizontal
2	19542.0542	48.54	-0.71	47.83	74.00	-26.17	Horizontal
3	20529.8530	48.28	-0.72	47.56	74.00	-26.44	Horizontal
4	21696.1696	48.81	-0.24	48.57	74.00	-25.43	Horizontal
5	22946.6447	48.50	1.19	49.69	74.00	-24.31	Horizontal
6	25264.8265	49.39	0.46	49.85	74.00	-24.15	Horizontal

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

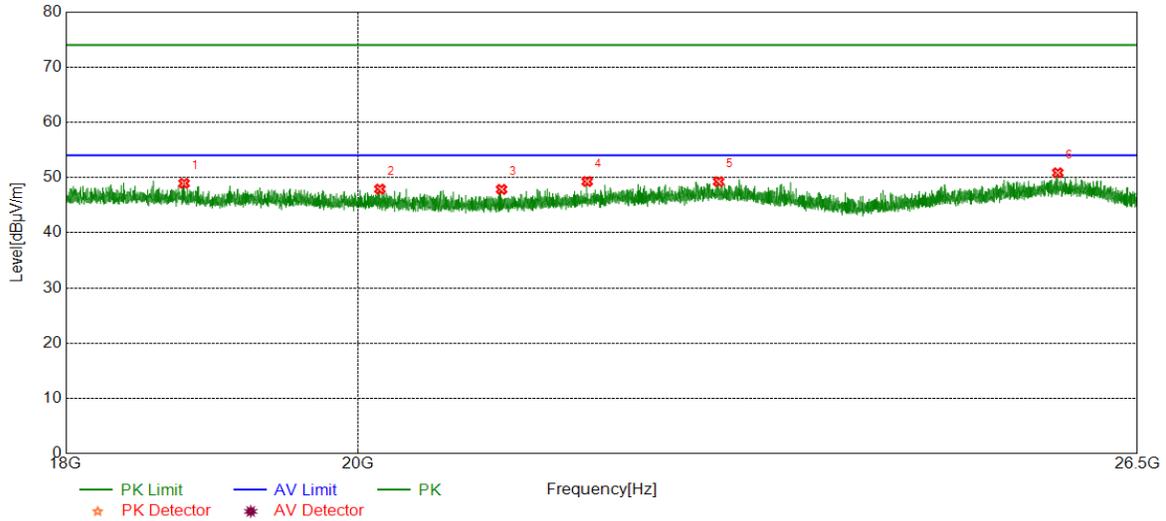

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18784.6285	49.99	-1.04	48.95	74.00	-25.05	Vertical
2	20160.9161	48.49	-0.58	47.91	74.00	-26.09	Vertical
3	21066.2566	48.80	-0.95	47.85	74.00	-26.15	Vertical
4	21727.6228	49.48	-0.20	49.28	74.00	-24.72	Vertical
5	22783.4283	48.20	1.06	49.26	74.00	-24.74	Vertical
6	25751.0751	49.59	1.27	50.86	74.00	-23.14	Vertical


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



Part IV: 30MHz~1GHz

SPURIOUS EMISSIONS 30M TO 1GHz (WORST-CASE CONFIGURATION)

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

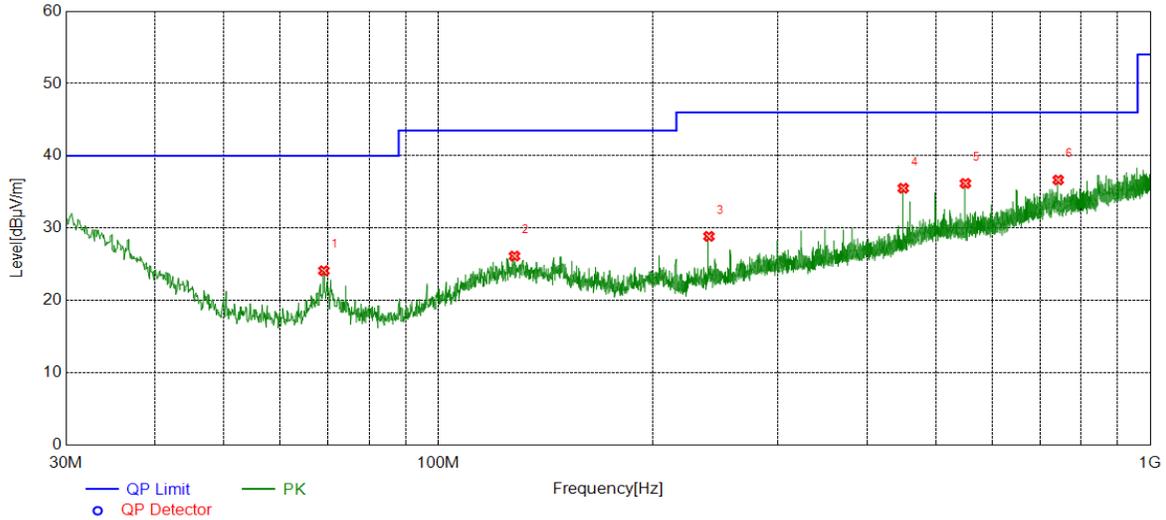


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	69.0949	9.40	14.71	24.11	40.00	-15.89	Horizontal
2	127.9798	5.90	20.24	26.14	43.50	-17.36	Horizontal
3	240.0260	10.04	18.83	28.87	46.00	-17.13	Horizontal
4	449.9550	11.18	24.34	35.52	46.00	-10.48	Horizontal
5	550.0690	10.08	26.11	36.19	46.00	-9.81	Horizontal
6	742.5363	7.63	29.04	36.67	46.00	-9.33	Horizontal

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

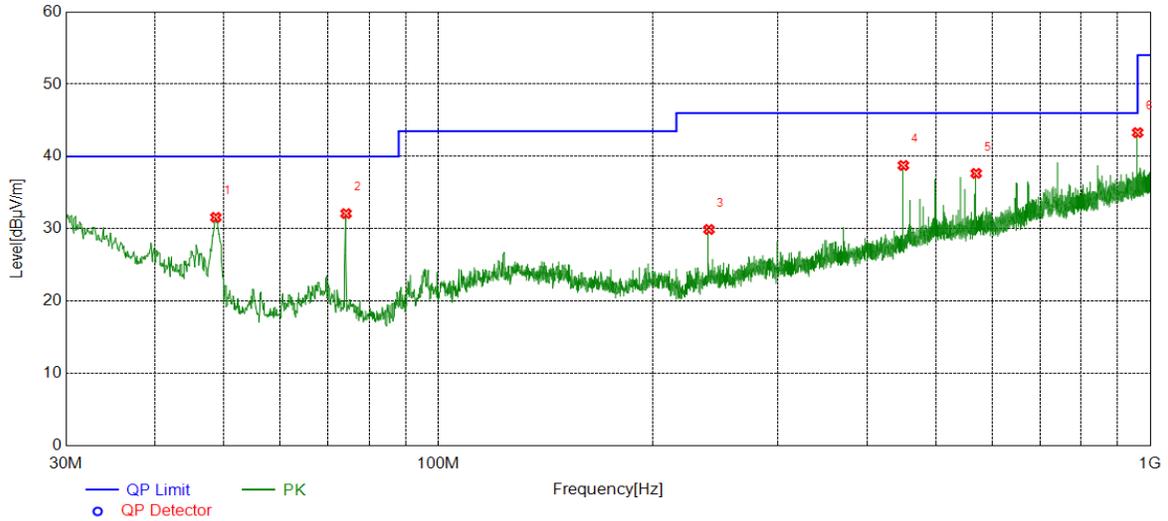

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	48.7229	16.24	15.34	31.58	40.00	-8.42	Vertical
2	74.2364	17.50	14.61	32.11	40.00	-7.89	Vertical
3	240.0260	11.08	18.83	29.91	46.00	-16.09	Vertical
4	450.0520	14.42	24.34	38.76	46.00	-7.24	Vertical
5	569.5680	11.36	26.31	37.67	46.00	-8.33	Vertical
6	960.0320	11.40	31.90	43.30	54.00	-10.70	Vertical


Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.



Part V: 9KHz~30MHz

SPURIOUS EMISSIONS Below 30MHz (WORST CASE CONFIGURATION-FACE ON)

Test Mode	Channel	Frequency Range	Verdict
11B	HCH	9kHz~150kHz	PASS

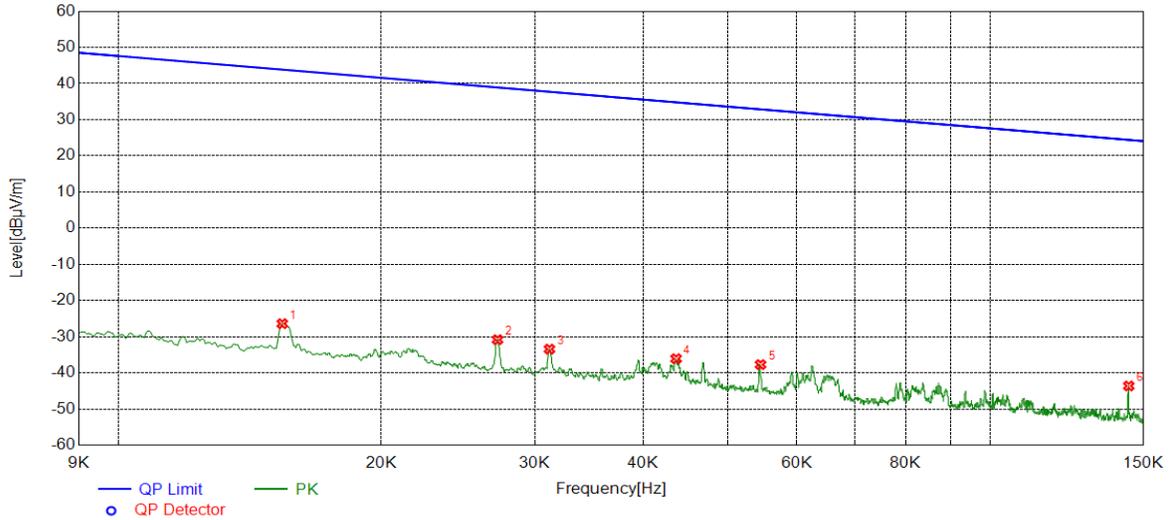


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.0154	34.57	-60.98	-26.41	43.83	-70.24	Horizontal
2	0.0272	30.06	-60.89	-30.83	38.91	-69.74	Horizontal
3	0.0312	27.47	-60.92	-33.45	37.72	-71.17	Horizontal
4	0.0436	24.89	-61.00	-36.11	34.82	-70.93	Horizontal
5	0.0545	23.38	-61.11	-37.73	32.88	-70.61	Horizontal
6	0.1442	17.61	-61.25	-43.64	24.42	-68.06	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	HCH	150kHz~490kHz	PASS

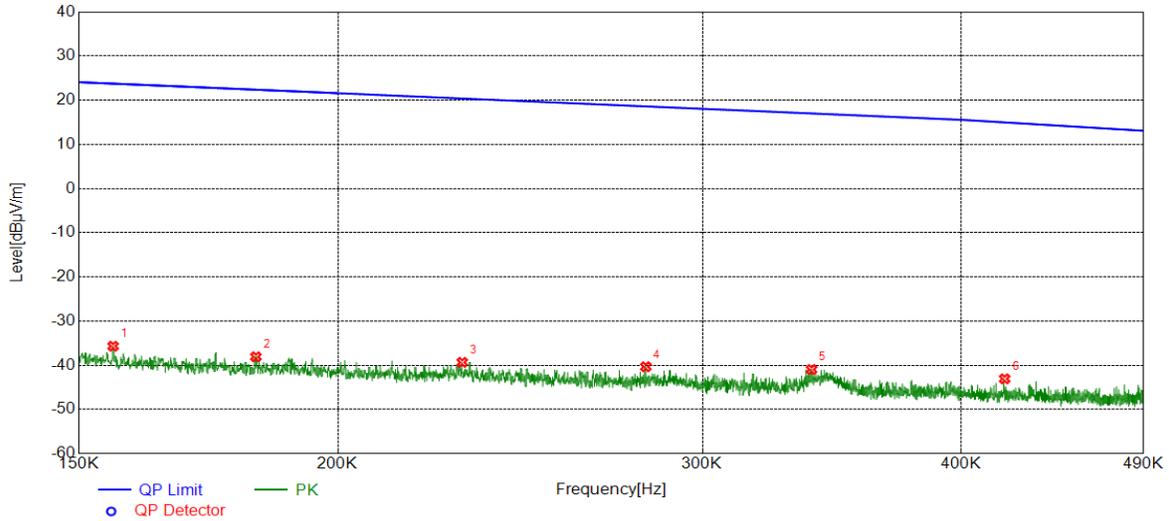


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	0.1558	25.61	-61.29	-35.68	23.75	-59.43	Vertical
2	0.1826	23.07	-61.15	-38.08	22.38	-60.46	Vertical
3	0.2297	21.57	-60.91	-39.34	20.38	-59.72	Vertical
4	0.2817	20.45	-60.78	-40.33	18.61	-58.94	Vertical
5	0.3387	19.77	-60.73	-40.96	17.01	-57.97	Vertical
6	0.4198	17.59	-60.66	-43.07	14.97	-58.04	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.



Test Mode	Channel	Frequency Range	Verdict
11B	HCH	490kHz~30MHz	PASS

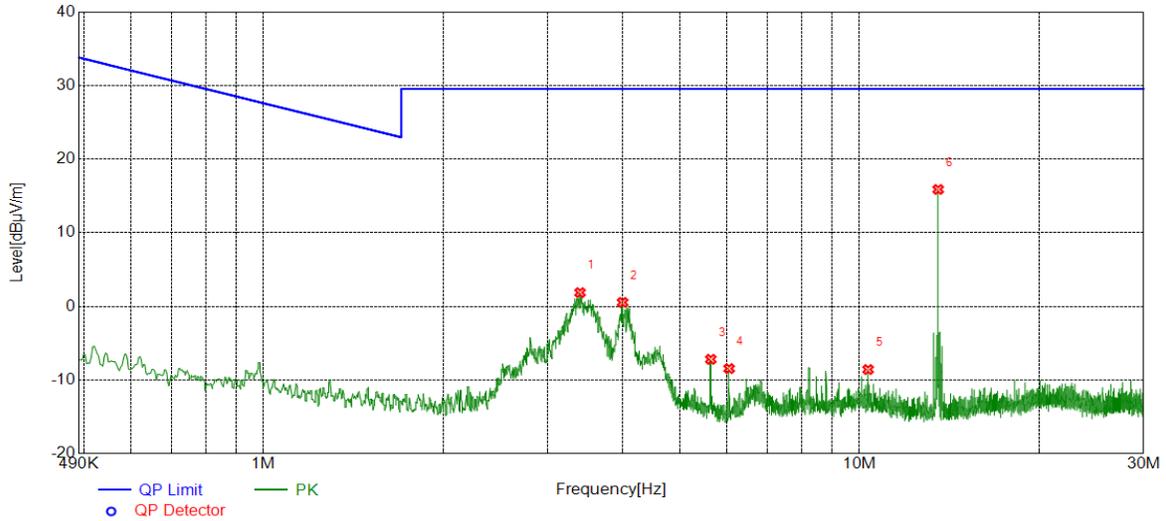

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	3.3970	22.17	-20.30	1.87	29.54	-27.67	Vertical
2	4.0050	20.58	-20.04	0.54	29.54	-29.00	Vertical
3	5.6312	12.86	-20.05	-7.19	29.54	-36.73	Vertical
4	6.0443	11.48	-19.93	-8.45	29.54	-37.99	Vertical
5	10.3414	10.26	-18.84	-8.58	29.54	-38.12	Vertical
6	13.5583	35.05	-19.17	15.88	29.54	-13.66	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

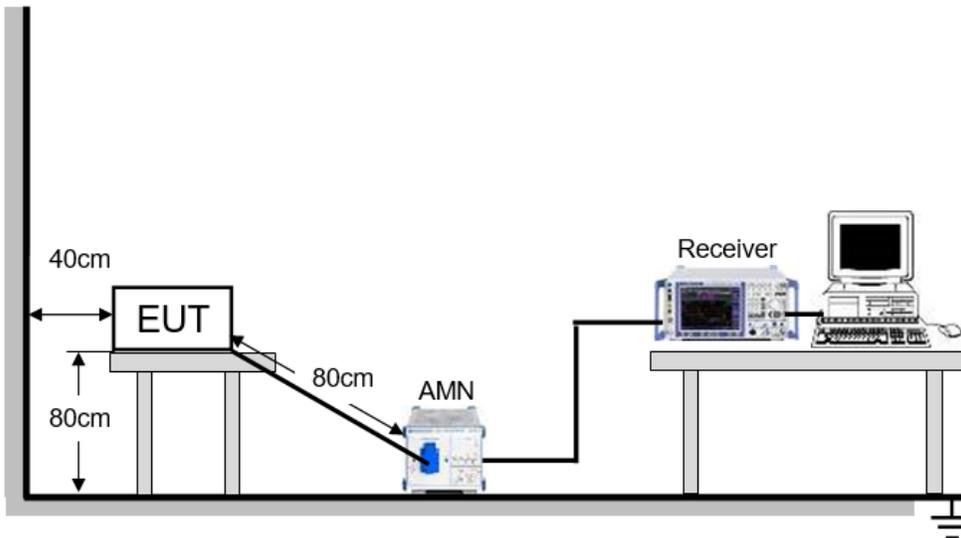


The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

RESULTS WITH THE NFC ANTENNA CONNECTED

LINE L RESULTS (WORST-CASE CONFIGURATION)

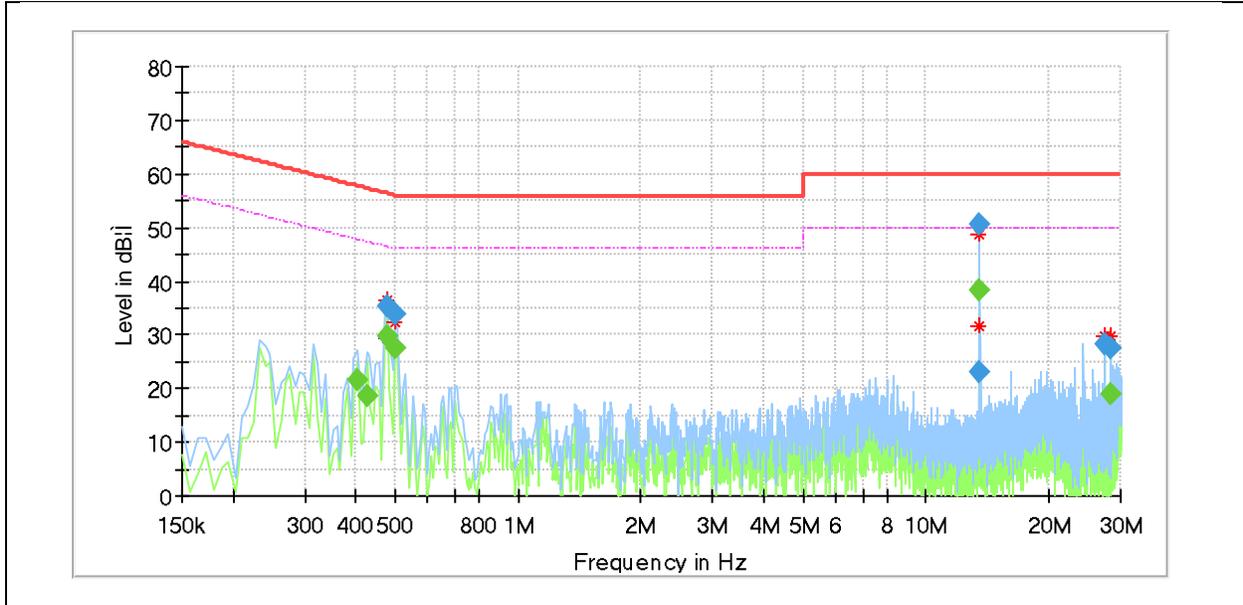


Final_Result

Frequency [MHz]	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.403725	---	21.48	47.78	26.30	1000.0	9.000	L1	OFF	9.6
0.426113	---	18.67	47.33	28.66	1000.0	9.000	L1	OFF	9.7
0.478350	35.37	---	56.37	21.00	1000.0	9.000	L1	OFF	9.7
0.478350	---	29.59	46.37	16.77	1000.0	9.000	L1	OFF	9.7
0.500738	---	27.54	46.00	18.46	1000.0	9.000	L1	OFF	9.7
0.500738	33.93	---	56.00	22.07	1000.0	9.000	L1	OFF	9.7
13.485488	22.94	---	60.00	37.06	1000.0	9.000	L1	OFF	9.5
13.560113	---	38.38	50.00	11.62	1000.0	9.000	L1	OFF	9.5
13.560113	50.60	---	60.00	9.40	1000.0	9.000	L1	OFF	9.5
27.343350	28.29	---	60.00	31.71	1000.0	9.000	L1	OFF	10.0
28.320938	---	18.85	50.00	31.15	1000.0	9.000	L1	OFF	10.1
28.320938	27.66	---	60.00	32.34	1000.0	9.000	L1	OFF	10.1

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11b which is the worst case, so only the worst case is included in this test report.



LINE N RESULTS (WORST-CASE CONFIGURATION)

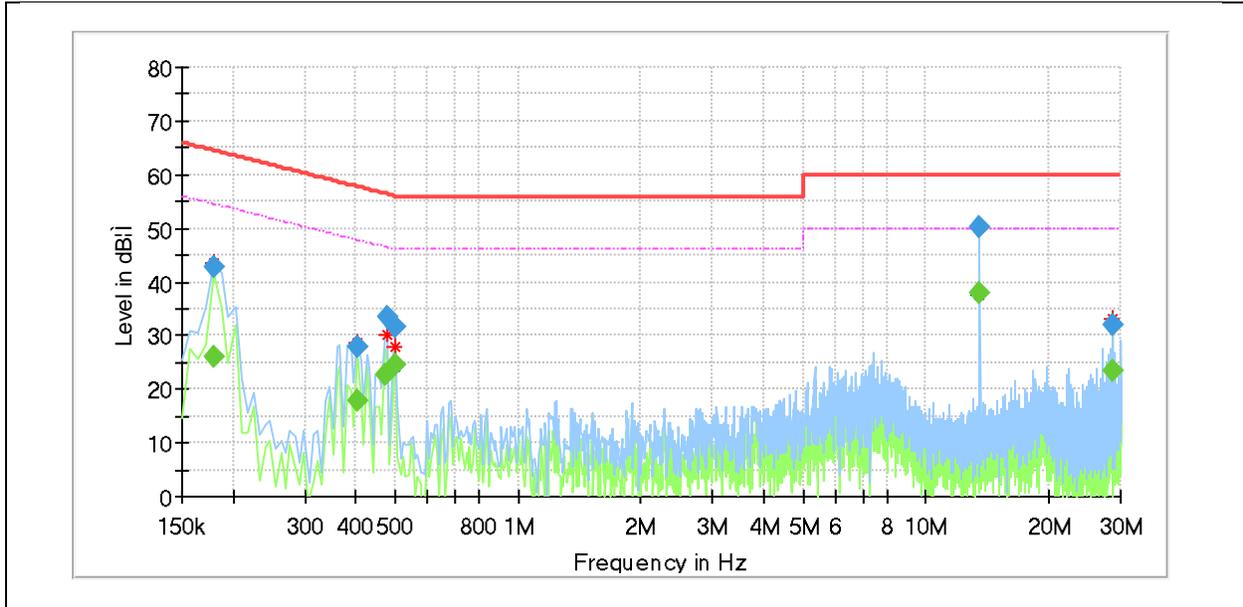

Final_Result


Frequency [MHz]	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.179850	---	26.05	54.49	28.44	1000.0	9.000	N	OFF	9.5
0.179850	42.70	---	64.49	21.79	1000.0	9.000	N	OFF	9.5
0.403725	---	17.90	47.78	29.87	1000.0	9.000	N	OFF	9.6
0.403725	27.95	---	57.78	29.82	1000.0	9.000	N	OFF	9.6
0.470888	---	22.86	46.50	23.64	1000.0	9.000	N	OFF	9.6
0.478350	33.39	---	56.37	22.97	1000.0	9.000	N	OFF	9.6
0.500738	31.57	---	56.00	24.43	1000.0	9.000	N	OFF	9.6
0.500738	---	24.59	46.00	21.41	1000.0	9.000	N	OFF	9.6
13.560113	50.22	---	60.00	9.78	1000.0	9.000	N	OFF	9.6
13.560113	---	37.91	50.00	12.09	1000.0	9.000	N	OFF	9.6
28.686600	---	23.35	50.00	26.65	1000.0	9.000	N	OFF	9.9
28.686600	32.07	---	60.00	27.93	1000.0	9.000	N	OFF	9.9

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11b which is the worst case, so only the worst case is included in this test report.



RESULTS WITH A DUMMY LOAD IN LIEU OF THE NFC ANTENNA


LINE L RESULTS (WORST-CASE CONFIGURATION)

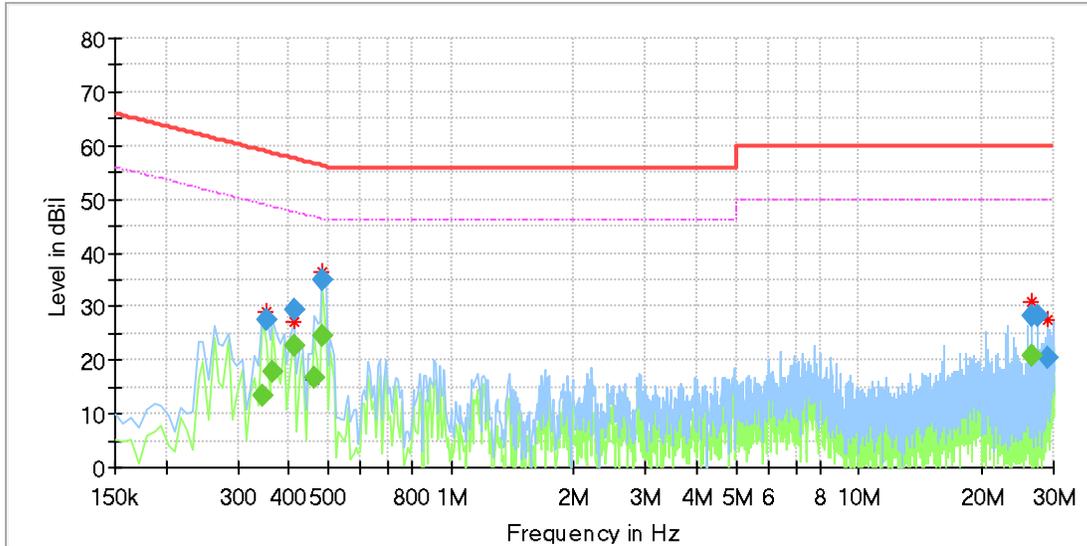

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.344025	---	13.50	49.11	35.60	1000.0	9.000	L1	OFF	9.6
0.351488	27.52	---	58.93	31.41	1000.0	9.000	L1	OFF	9.6
0.366413	---	17.83	48.58	30.75	1000.0	9.000	L1	OFF	9.6
0.411188	---	22.87	47.62	24.75	1000.0	9.000	L1	OFF	9.6
0.411188	29.58	---	57.62	28.05	1000.0	9.000	L1	OFF	9.6
0.463425	---	16.64	46.63	29.99	1000.0	9.000	L1	OFF	9.7
0.485813	35.00	---	56.24	21.24	1000.0	9.000	L1	OFF	9.7
0.485813	---	24.66	46.24	21.58	1000.0	9.000	L1	OFF	9.7
26.612025	28.23	---	60.00	31.77	1000.0	9.000	L1	OFF	10.0
26.612025	---	20.82	50.00	29.18	1000.0	9.000	L1	OFF	10.0
27.343350	28.24	---	60.00	31.76	1000.0	9.000	L1	OFF	10.0
29.119425	20.59	---	60.00	39.41	1000.0	9.000	L1	OFF	10.1

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11B which is the worst case, so only the worst case is included in this test report.

LINE N RESULTS (WORST-CASE CONFIGURATION)

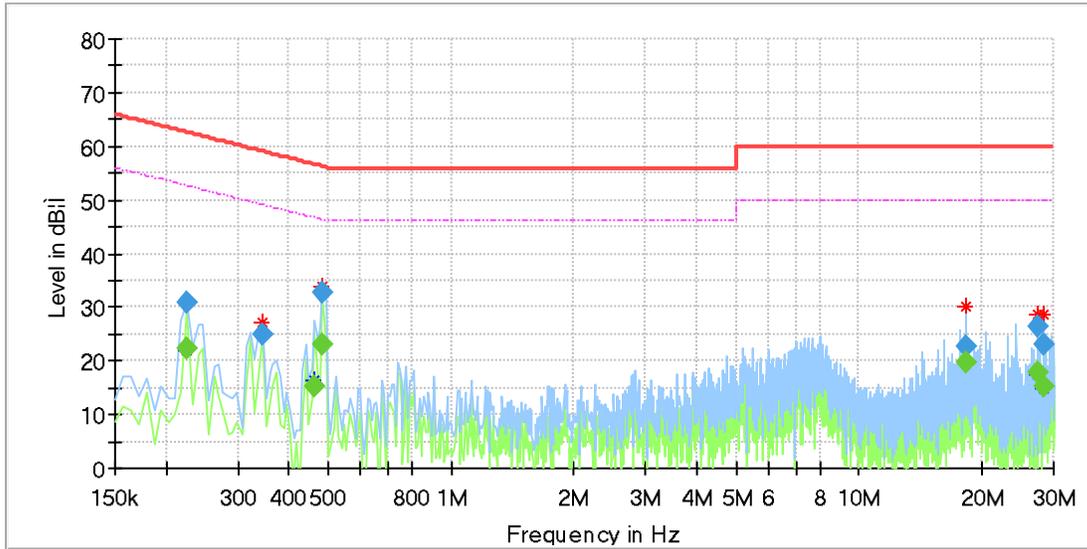

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.224625	---	22.15	52.65	30.50	1000.0	9.000	N	OFF	9.6
0.224625	30.95	---	62.65	26.69	1000.0	9.000	N	OFF	9.6
0.344025	24.77	---	59.11	34.34	1000.0	9.000	N	OFF	9.7
0.463425	---	15.31	46.63	31.32	1000.0	9.000	N	OFF	9.6
0.485813	---	22.91	46.24	23.32	1000.0	9.000	N	OFF	9.6
0.485813	32.57	---	56.24	23.67	1000.0	9.000	N	OFF	9.6
18.239100	22.73	---	60.00	37.27	1000.0	9.000	N	OFF	9.6
18.246563	---	19.67	50.00	30.33	1000.0	9.000	N	OFF	9.6
27.343350	26.27	---	60.00	33.73	1000.0	9.000	N	OFF	9.9
27.343350	---	17.74	50.00	32.26	1000.0	9.000	N	OFF	9.9
28.320938	---	15.15	50.00	34.85	1000.0	9.000	N	OFF	9.9
28.320938	23.03	---	60.00	36.97	1000.0	9.000	N	OFF	9.9

- Note: 1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
 4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
 5. Pre-testing all test modes and channels, and find the HCH of 11B which is the worst case, so only the worst case is included in this test report.



9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

END OF REPORT