



# FCC RADIO TEST REPORT

Applicant : Zhejiang Dahua Vision Technology Co., Ltd.

---

Address : No.1199, Bin'an Road, Binjiang District, Hangzhou,  
P.R. China

---

Equipment : Dahua Bluetooth/Wired Omnidirectional Digital  
Speakerphone

---

Model No. : DH-VCS-MCA400, VCS-MCA400, MCA400,  
DH-VCS-MCA400E, VCS-MCA400H, VCS-MCA400E,  
DH-VCS-MCA400 Series, VCS-MCA Series,  
DH-VCS-MCA400H Series, DH-VCS-MCA400E  
Series, MCA400, MCA400E, MCA400H, MCA400  
Series

---

Trade Name : Dahua

---

FCC ID. : SVN-MAC400

---

Standard : FCC part 15 Subpart C §15.247

---

## I HEREBY CERTIFY THAT :

The sample was received on Mar. 02, 2021 and the testing was completed on Mar. 15, 2021 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

Leevin Li / Supervisor



## Contents

<b>1. Summary of Test Procedure and Test Results .....</b>	<b>5</b>
1.1 Applicable Standards .....	5
<b>2. Test Configuration of Equipment under Test .....</b>	<b>6</b>
2.1 Feature of Equipment under Test.....	6
2.2 Carrier Frequency of Channels.....	6
2.3 Test Mode and Test Software.....	7
2.4 Description of Test System.....	7
2.5 General Information of Test.....	8
2.6 Measurement Uncertainty .....	8
<b>3. Test Equipment and Ancillaries Used for Tests .....</b>	<b>9</b>
<b>4. Antenna Requirements.....</b>	<b>10</b>
4.1 Standard Applicable .....	10
4.2 Antenna Construction and Directional Gain.....	10
<b>5. Test of Conducted Emission.....</b>	<b>11</b>
5.1 Test Limit .....	11
5.2 Test Procedures .....	11
5.3 Typical Test Setup .....	12
5.4 Test Result and Data.....	13
<b>6. Test of Spurious Emission (Radiated) .....</b>	<b>15</b>
6.1 Test Limit .....	15
6.2 Test Procedures .....	16
6.3 Typical Test Setup .....	16
6.4 Test Result and Data (9kHz ~ 30MHz).....	18
6.5 Test Result and Data (30MHz ~ 1GHz) .....	18
6.6 Test Result and Data (1GHz ~ 25GHz).....	20
6.7 Restricted Bands of Operation .....	26
<b>7. Test of Spurious Emission (Conducted).....</b>	<b>31</b>
7.1 Test Limit .....	31
7.2 Test Procedure .....	31
7.3 Test Setup Layout .....	31
7.4 Test Result and Data.....	31
<b>8. 6dB Bandwidth Measurement Data.....</b>	<b>33</b>
8.1 Test Limit .....	33
8.2 Test Procedures .....	33
8.3 Test Setup Layout .....	33
8.4 Test Result and Data.....	33
<b>9. Maximum Output Power .....</b>	<b>35</b>
9.1 Test Limit .....	35
9.2 Test Procedures .....	35
9.3 Test Setup Layout .....	35
9.4 Test Result and Data.....	35
<b>10. Power Spectral Density .....</b>	<b>36</b>
10.1 Test Limit .....	36



10.2	Test Procedures .....	36
10.3	Test Setup Layout .....	36
10.4	Test Result and Data.....	37



### History of this test report

Original

Additional attachment as following record:

Report No.	Issue Date	Description
DEFQ2109052	Sept. 24, 2021	Original

Report Type		Description
<input type="checkbox"/>	Original report	NA
<input checked="" type="checkbox"/>	Derivative Report	This sample provided has been confirmed to be identical to the original report sample. The only difference are as listed below. As it doesn't affect the test result, the original report number DEFQ2102034 and content will be used. 1. Model number and trade mark change. 2. Applicant information change.



# 1. Summary of Test Procedure and Test Results

## 1.1 Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart C §15.247**

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	PASS
15.207	AC Power Line Conducted Emission	PASS
15.209 15.205	Radiated Spurious Emission	PASS
15.247(d)	Conducted Spurious Emission	PASS
15.247(a)(2)	6dB Bandwidth	PASS
15.247(b)	Maximum Peak Output Power	PASS
15.247(e)	Power Spectral Density	PASS

Note: Deviations    Yes     No



## 2. Test Configuration of Equipment under Test

### 2.1 Feature of Equipment under Test

Equipment	Dahua Bluetooth/Wired Omnidirectional Digital Speakerphone
Model Name	DH-VCS-MCA400, VCS-MCA400, MCA400, DH-VCS-MCA400E, VCS-MCA400H, VCS-MCA400E, DH-VCS-MCA400 Series, VCS-MCA Series, DH-VCS-MCA400H Series, DH-VCS-MCA400E Series, MCA400, MCA400E, MCA400H, MCA400 Series
Model Discrepancy	All models are electrically identical, different model names are for marketing purpose. Model DH-VCS-MCA400 is the representative for final test.
Modulation Type	GFSK
Frequency Range	2400 – 2483.5 MHz
Channel Number	40
Data Rate	1Mbps
Power Source	Input: 5Vdc, 2A Rechargeable Li-ion Battery Model: ICR18650-2S Spec: 7.4V, 2200mAh, 16.28Wh

### 2.2 Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>*00</b>	<b>2402</b>	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	<b>*19</b>	<b>2440</b>	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	<b>*39</b>	<b>2480</b>
12	2426	26	2454	--	--
13	2428	27	2456	--	--

Note: Channels remarked \* are selected to perform test.



### 2.3 Test Mode and Test Software

- a. During testing, the interface cables and equipment positions were varied according to ANSI C63.10.
- b. The complete test system included Notebook and EUT for RF test.
- c. An executive program, "SecureCRT.exe" under Android was executed to transmit and receive data via Bluetooth.
- d. The following test modes were performed for the test:

Conducted Emissions from the AC mains power ports	
Test Mode	Operating Description
Mode 1	GFSK (1Mbps): CH 00: 2402MHz, CH 19: 2440MHz, CH 39: 2480MHz.(120V)
Mode 2	GFSK (1Mbps): CH 00: 2402MHz, CH 19: 2440MHz, CH 39: 2480MHz.(240V)
caused "Test Mode 1: GFSK: CH 00: 2402MHz (120V)" generated the worst case, it was reported as the final data.	
Radiation Emissions (30MHz ~ 1GHz)	
Test Mode	Operating Description
Mode 1	GFSK (1Mbps): CH 00: 2402MHz, CH 19: 2440MHz, CH 39: 2480MHz.
caused "Test Mode 1: GFSK: CH 00: 2402MHz." generated the worst case, it was reported as the final data.	
Radiation Emissions (1GHz ~ 25GHz)	
Test Mode	Operating Description
1	GFSK (1Mbps)
caused "Test Mode 1" generated the worst case, they were reported as the final data.	

### 2.4 Description of Test System

Device	Manufacturer	Model No.	Description
Notebook	Sony	PCG-71811P	N/A

Used cable

Cable	Quantity	Description
Type-C Cable	1	1.0m Non Shielding



## 2.5 General Information of Test

Test Site	<b>Cerpass Technology Corporation(Cerpass Laboratory)</b> Address: Room 102, No. 5, Xing'an Road, Chang'an Town, Dongguan City, Guangdong Province Tel: +86-769-8547-1212 Fax: +86-769-8547-1912
FCC Designation No.:	CN1288

## 2.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

### RF Conducted Measurement

Test Item	Uncertainty	Limit
Radio Frequency	$\pm 8.7 \times 10^{-7}$	$\pm 1 \times 10^{-5}$
RF output power, conducted	$\pm 0.63 \text{dB}$	$\pm 1.5 \text{dB}$
Power density, conducted	$\pm 1.21 \text{dB}$	$\pm 3 \text{dB}$
Unwanted emissions, conducted	30-1000MHz	$\pm 0.51 \text{dB}$
	1-25GHz	$\pm 0.67 \text{dB}$
All emissions, radiated	30-1000MHz	$\pm 2.28 \text{dB}$
	1-25GHz	$\pm 2.59 \text{dB}$
Temperature	$\pm 0.8^\circ\text{C}$	$\pm 1^\circ\text{C}$
Humidity	$\pm 3\%$	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$	$\pm 3\%$

### AC Conducted Measurement

Measurement	Frequency	Uncertainty
Conducted emissions(LINE)	9KHz-30MHz	+/- 0.7738 dB
Conducted emissions(NEUTRAL)	9KHz-30MHz	+/- 0.7886 dB
Conducted emissions(10Mbps)	150KHz-30MHz	+/- 1.3013dB
Conducted emissions(100Mbps)	150KHz-30MHz	+/- 1.3197 dB
Conducted emissions(1000Mbps)	150KHz-30MHz	+/- 1.2987 dB

### Radiated Measurement

Measurement	Polarity	Frequency	Uncertainty
Radiated emissions	Horizontal	below 1GHz	+/- 3.8936 dB
	Vertical	below 1GHz	+/- 3.8928 dB
	Horizontal	above 1GHz	+/- 5.18858dB
	Vertical	above 1GHz	+/- 5.18928 dB





### 3. Test Equipment and Ancillaries Used for Tests

Test Item	AC Power Line Conducted Emission				
Instrument/Ancillary	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100564	2021.01.07	2022.01.06
LISN	SCHWARZBECK	NSLK 8127	8127748	2021.01.07	2022.01.06
LISN	SCHWARZBECK	NSLK 8127	8127749	2021.01.07	2022.01.06
ISN	TESEQ	ISN T800	42809	2020.05.18	2021.05.17
Pulse Limiter with 10dB Attenuation	SCHWARZBECK	VTSD 9561-F	9561-F106	2021.01.07	2022.01.06
Temperature/ Humidity Meter	mingle	ETH529	N/A	2021.01.07	2022.01.06

Test Item	Radiated Emissions				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100565	2020.06.08	2021.06.07
Amplifier	EMCI	EMC330	980082	2020.06.08	2021.06.07
Loop Antenna	R&S	HFH2-Z2	100150	2020.06.08	2022.06.07
Bilog Antenna	Sunol Science	JB1	A072414-2	2020.06.08	2022.06.07
Preamplifier	EMCI	EMC-051835	980085	2020.06.08	2021.06.07
Preamplifier	COM-POWER	PA-840	711885	2020.06.08	2021.06.07
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2020.06.08	2022.06.07
Standard Gain Horn Antenna	TRC	HA-2640	18050	2020.06.08	2022.06.07
Standard Gain Horn Antenna	TRC	HA-1726	18051	2020.06.08	2022.06.07
FSQ Sinal Analyzer	R&S	FSQ40	1163.039.02	2020.06.08	2021.06.07
Temperature/ Humidity Meter	mingle	ETH529	N/A	2021.01.07	2022.01.06

Test Item	RF Conducted				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date
Temperature/ Humidity Meter	mingle	ETH529	N/A	2018.01.29	2019.01.28
MXA Signal Analyzer	KEYSIGHT	N9020A	US46220290	2020.05.15	2021.05.14
ESG VECTOR SIGNAL GENERATOR	Agilent	E4438C	MY45092582	2020.05.15	2021.05.14
MXG VECTOR SIGNAL GENERATOR	Agilent	N5182B	MY53050127	2020.05.15	2021.05.14
USB Average Power Sensor	Boonton	55006	9778	2020.03.10	2021.03.09



## 4. Antenna Requirements

### 4.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2 Antenna Construction and Directional Gain

Antenna Type	Antenna Gain
PCB Antenna	3dBi



## 5. Test of Conducted Emission

### 5.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.10-2013. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 6.2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions

Frequency (MHz)	Quasi Peak (dB $\mu$ V)	Average (dB $\mu$ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


\*Decreases with the logarithm of the frequency.

### 5.2 Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.




### 5.3 Typical Test Setup

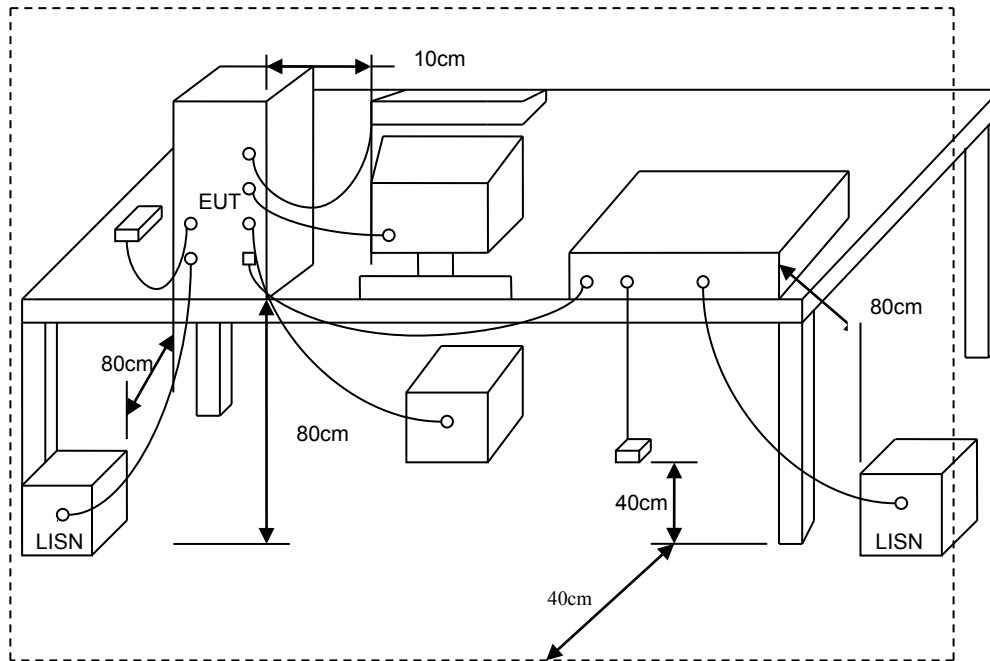



5.4 Test Result and Data

Test Mode :	TX		
AC Power :	AC 120V/60Hz	Phase:	LINE
Temperature :	26°C	Humidity:	60%
Pressure(mbar) :	1002	Date:	2021-03-13

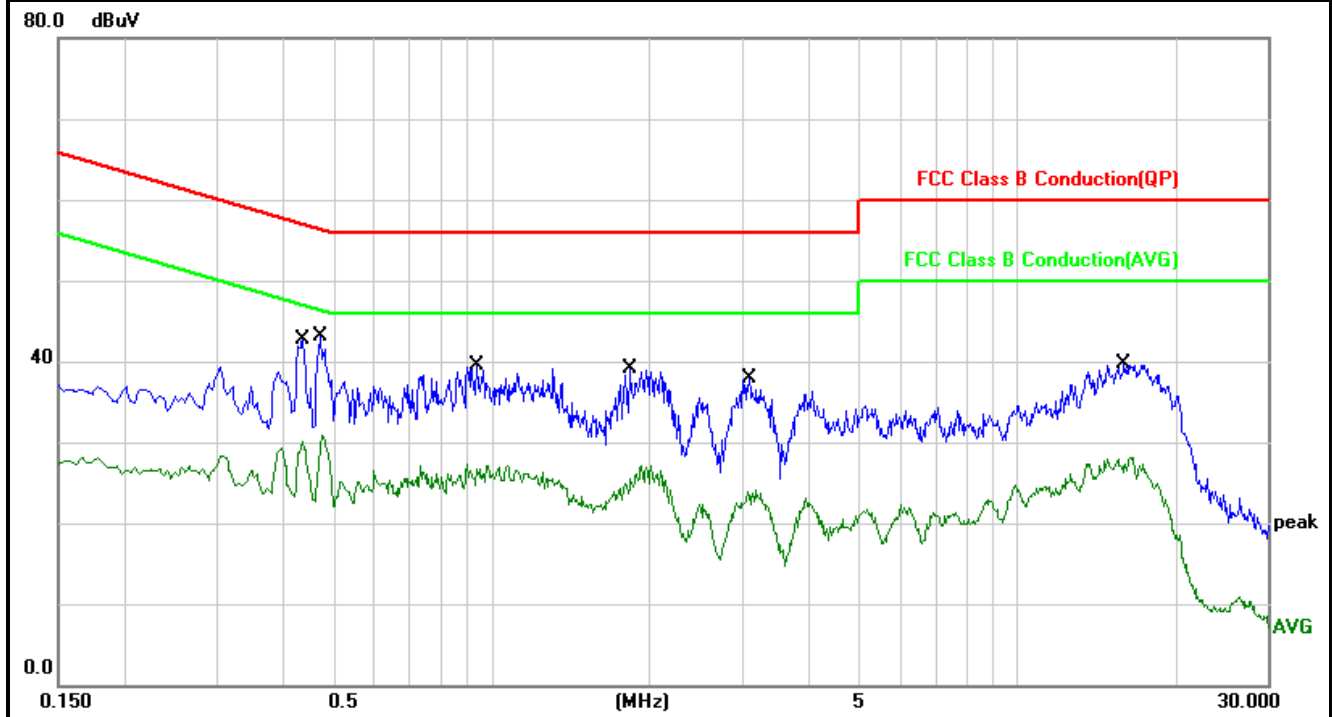


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4380	10.04	30.33	40.37	57.10	-16.73	QP
2	0.4380	10.04	19.75	29.79	47.10	-17.31	AVG
3	0.4740	10.04	29.70	39.74	56.44	-16.70	QP
4	0.4740	10.04	19.79	29.83	46.44	-16.61	AVG
5	0.9420	10.04	24.37	34.41	56.00	-21.59	QP
6	0.9420	10.04	16.03	26.07	46.00	-19.93	AVG
7	1.8380	10.10	21.92	32.02	56.00	-23.98	QP
8	1.8380	10.10	14.31	24.41	46.00	-21.59	AVG
9	3.0940	10.15	21.95	32.10	56.00	-23.90	QP
10	3.0940	10.15	13.14	23.29	46.00	-22.71	AVG
11	16.0300	10.44	23.20	33.64	60.00	-26.36	QP
12	16.0300	10.44	15.73	26.17	50.00	-23.83	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	TX		
AC Power :	AC 120V/60Hz	Phase:	NEUTRAL
Temperature :	26°C	Humidity:	60%
Pressure(mbar) :	1002	Date:	2021-03-13

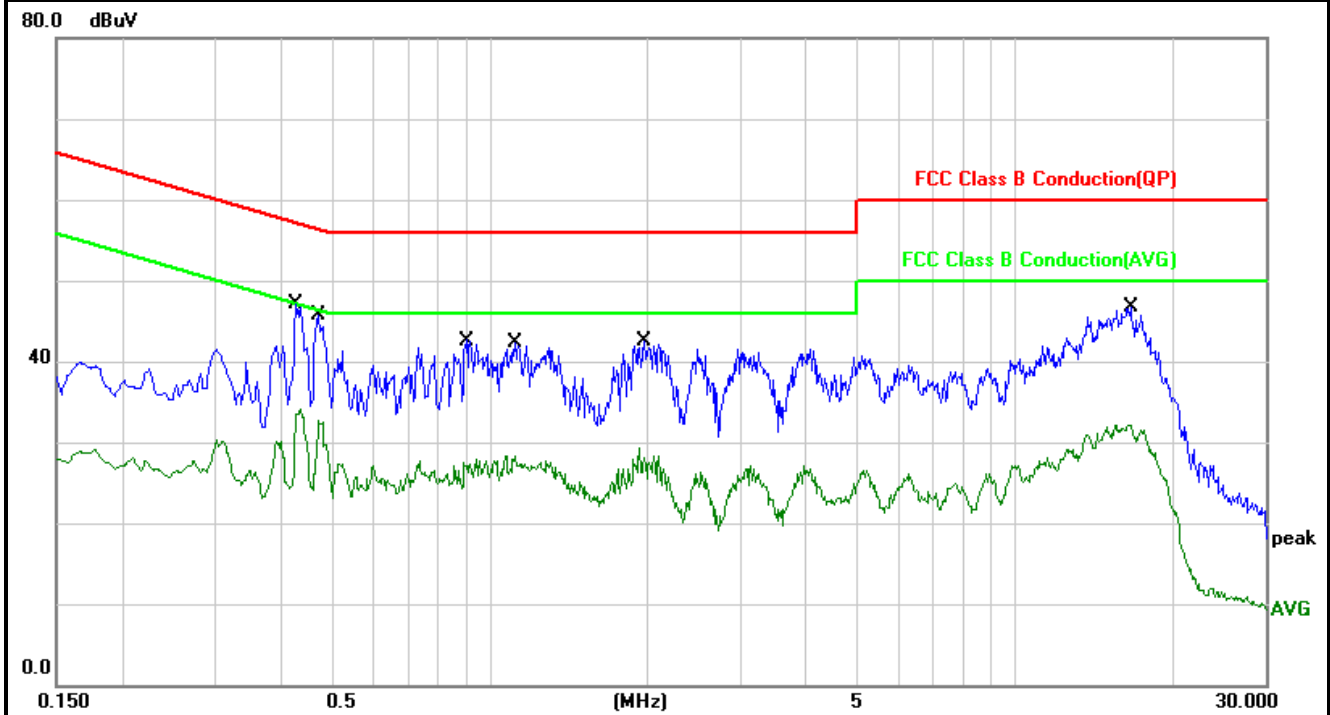

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4300	10.11	34.29	44.40	57.25	-12.85	QP
2	0.4300	10.11	21.27	31.38	47.25	-15.87	AVG
3	0.4740	10.11	32.77	42.88	56.44	-13.56	QP
4	0.4740	10.11	21.40	31.51	46.44	-14.93	AVG
5	0.9060	10.09	27.51	37.60	56.00	-18.40	QP
6	0.9060	10.09	16.10	26.19	46.00	-19.81	AVG
7	1.1220	10.10	26.04	36.14	56.00	-19.86	QP
8	1.1220	10.10	16.78	26.88	46.00	-19.12	AVG
9	1.9700	10.14	27.03	37.17	56.00	-18.83	QP
10	1.9700	10.14	17.19	27.33	46.00	-18.67	AVG
11	16.5900	10.48	28.89	39.37	60.00	-20.63	QP
12	16.5900	10.48	20.25	30.73	50.00	-19.27	AVG

Note: Measurement Level = Reading Level + Correct Factor



## 6. Test of Spurious Emission (Radiated)

### 6.1 Test Limit

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter measurement is based on the maximum conducted output power, the attenuation required under this paragraph shall be 30dB instead of 20dB. In addition, radiated emissions which fall in section 15.205(a) the restricted bands must also comply with the radiated emission limit specified in section 15.209(a).

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3




## 6.2 Test Procedures

- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- “Cone of radiation” has been considered to be 3dB bandwidth of the measurement antenna.

**Note: The supporting fixture shall permit orientation of the EUT in each of three orthogonal axis positions such that emissions from the EUT are maximized.(X AXIS is the worst.)**


## 6.3 Typical Test Setup

Below 30MHz test setup

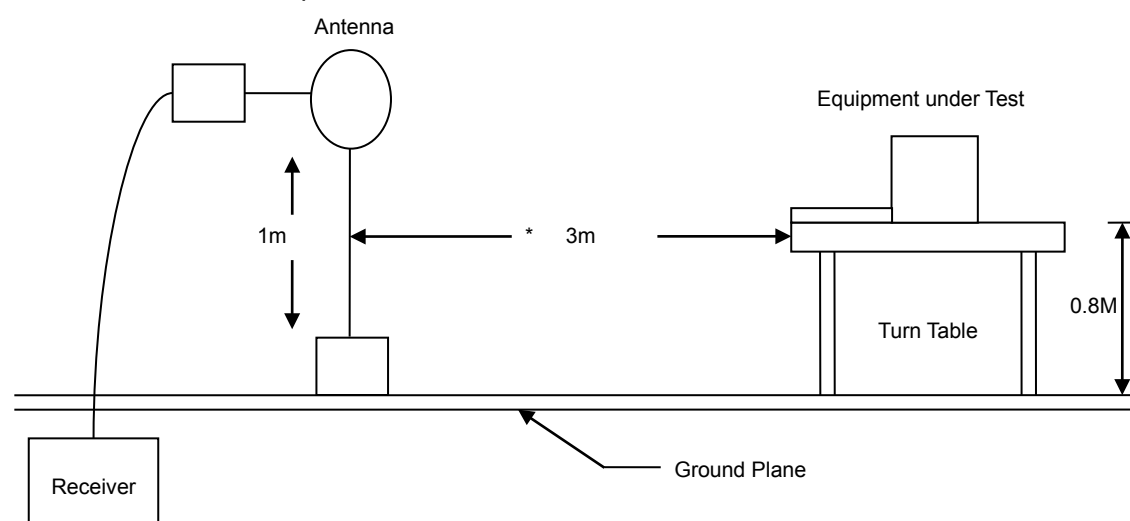


30MHz- 1GHz Test Setup



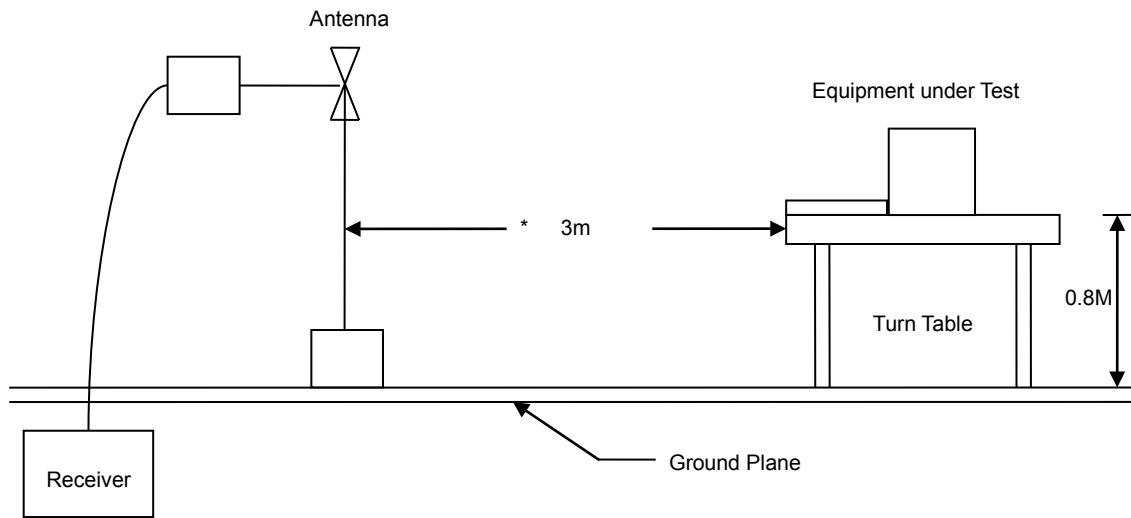

Above 1GHz Test Setup

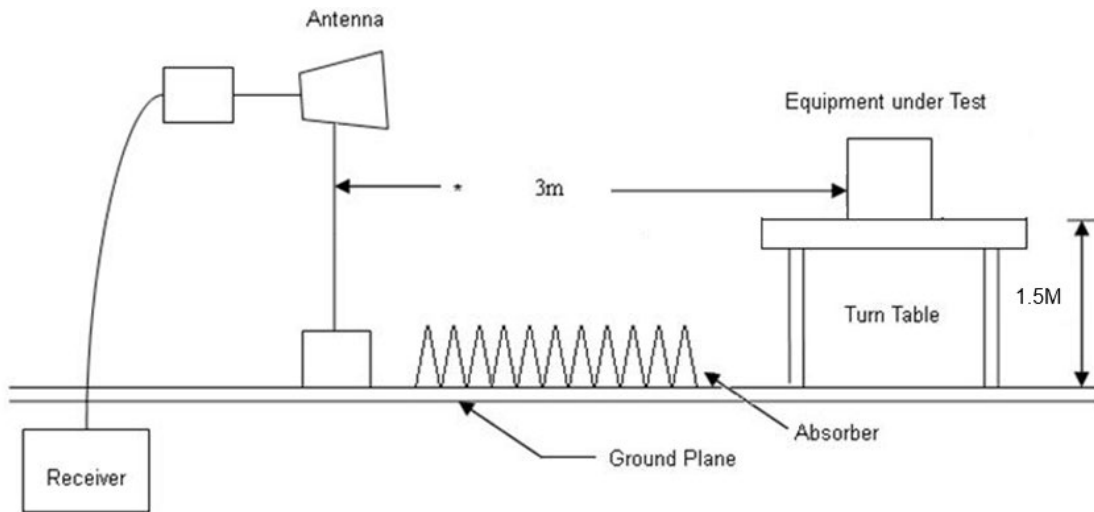




### 6.4 Test Result and Data (9kHz ~ 30MHz)

The 9kHz - 30MHz spurious emission is under limit 20dB more.


### 6.5 Test Result and Data (30MHz ~ 1GHz)

<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	VERTICAL
<b>Test Mode</b>	TX Mode		

Note : Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss – Amplifier Factor

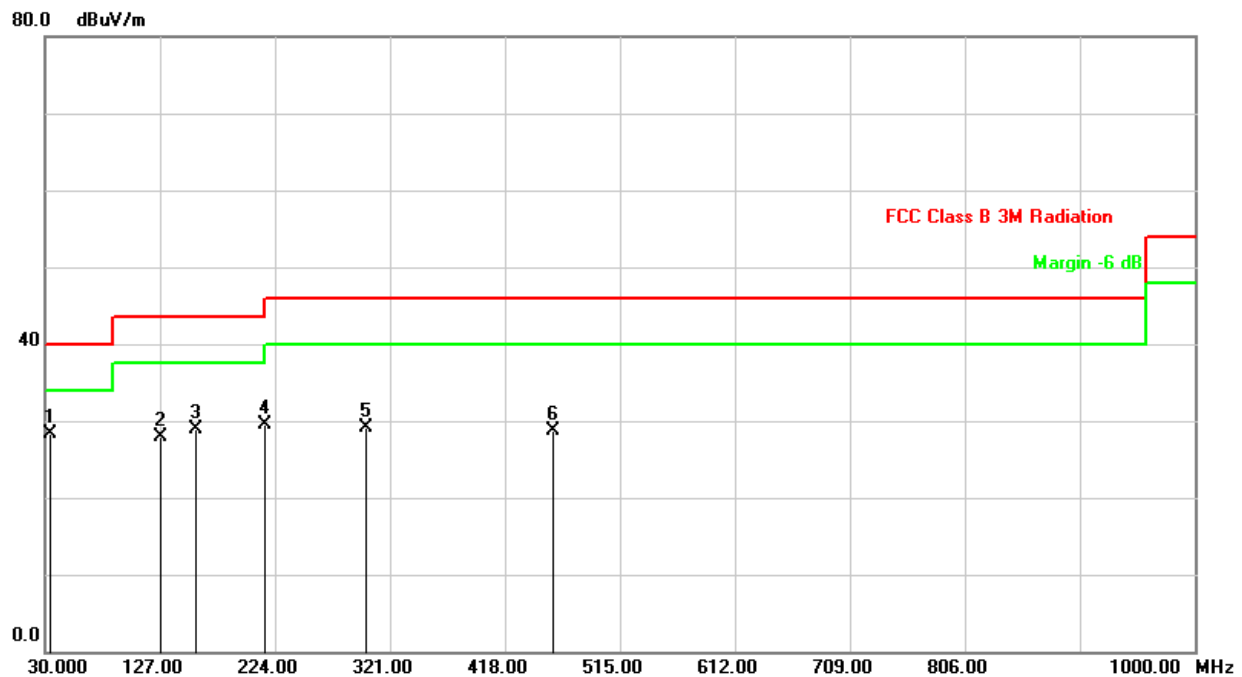

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	34.8500	-21.84	50.21	28.37	40.00	-11.63	peak	200	175
2	127.0000	-20.93	48.75	27.82	43.50	-15.68	peak	100	41
3	158.0398	-20.65	49.51	28.86	43.50	-14.64	peak	100	138
4	215.2700	-20.04	49.49	29.45	43.50	-14.05	peak	100	186
5	300.6298	-5.18	34.24	29.06	46.00	-16.94	peak	100	55
6	458.7400	-2.04	30.74	28.70	46.00	-17.30	peak	100	104

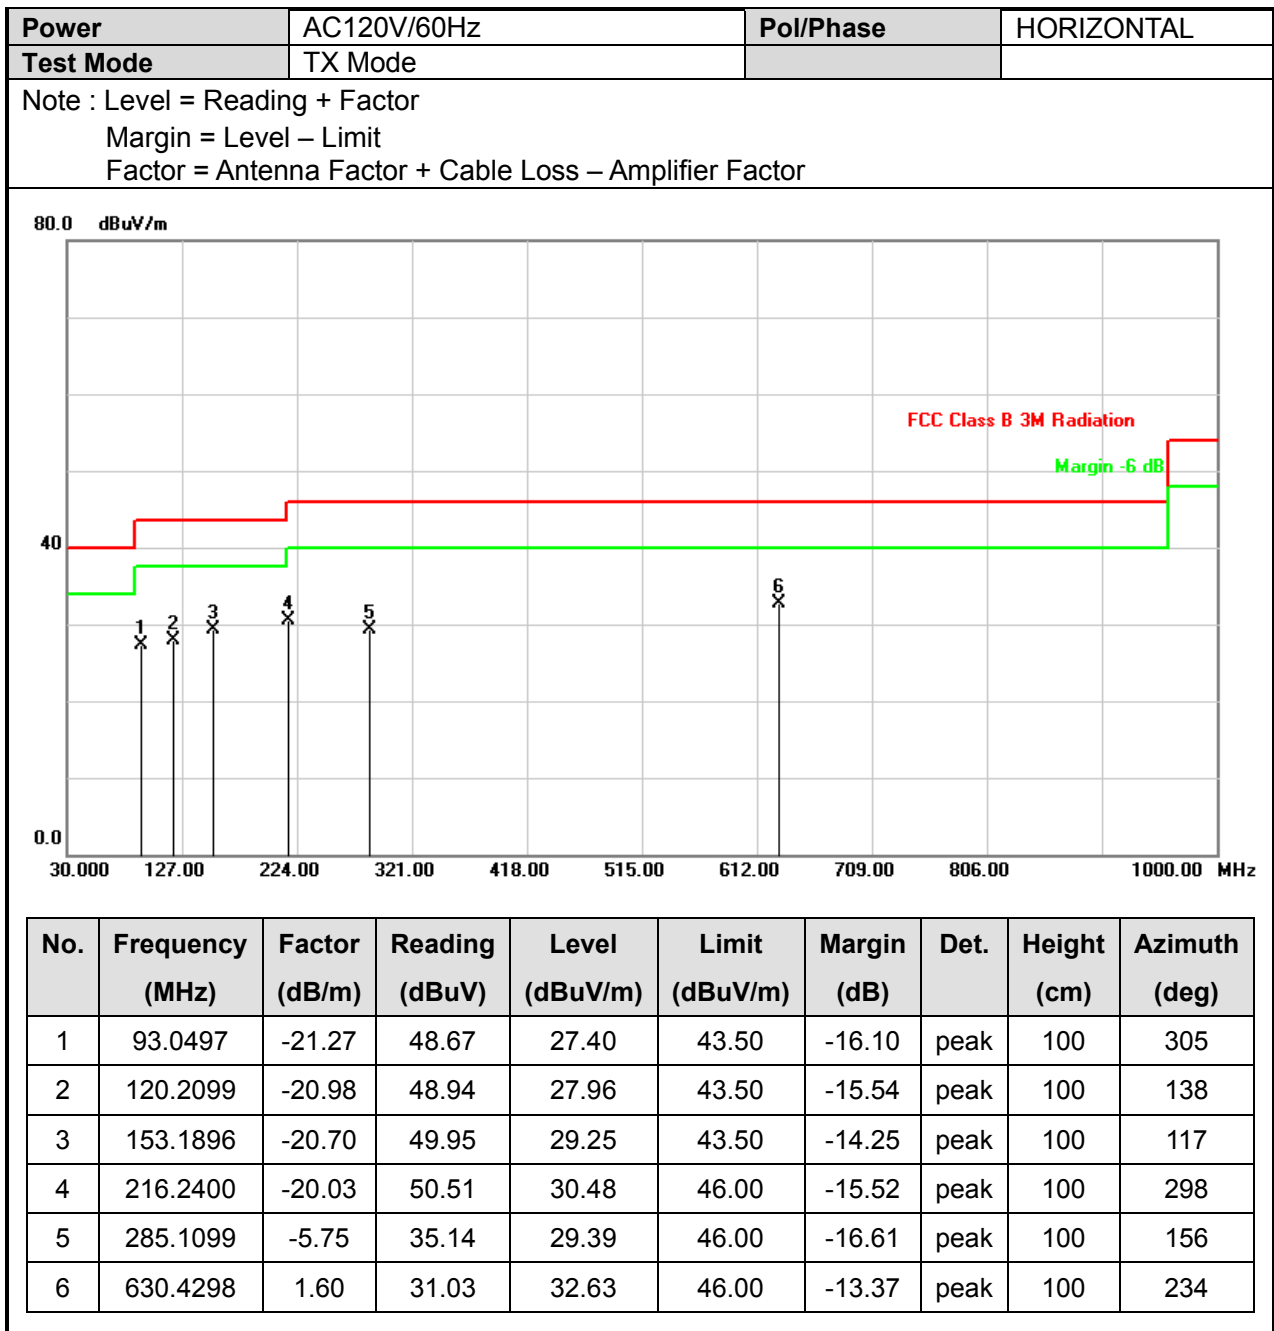




### 6.6 Test Result and Data (1GHz ~ 25GHz)

<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	VERTICAL
<b>Test Mode</b>	Mode 1, CH 00	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss – Amplifier Factor  
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

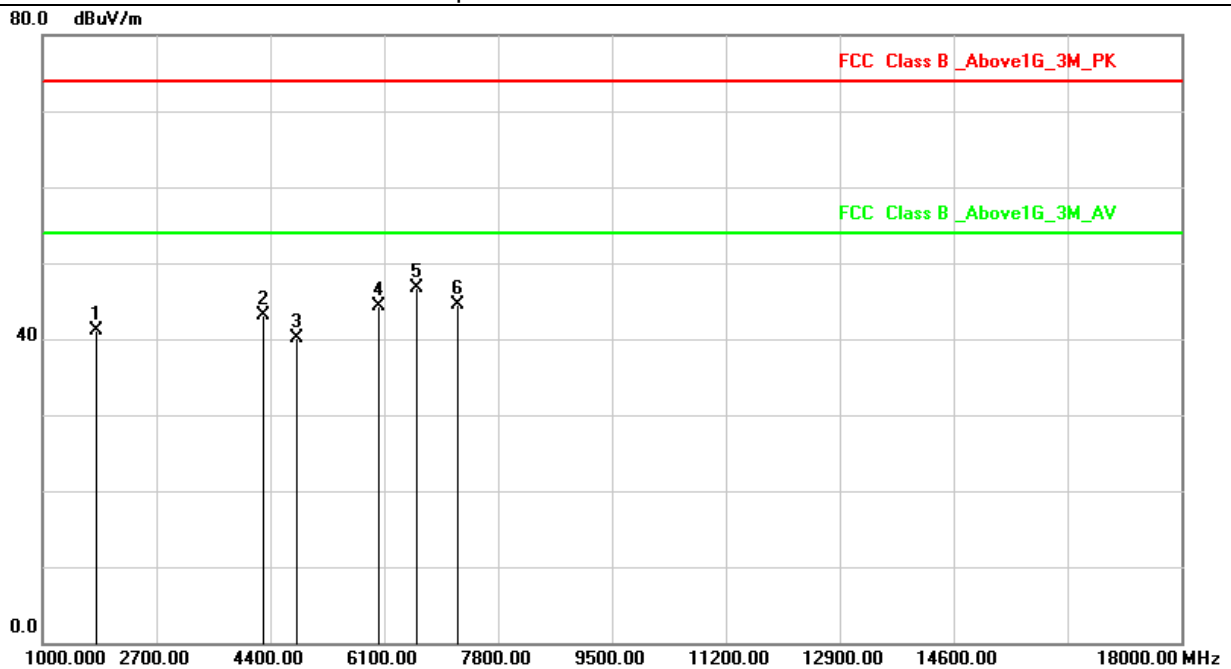


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1799.000	-32.76	73.78	41.02	74.00	-32.98	peak
2	4298.000	-32.27	75.46	43.19	74.00	-30.81	peak
3	4804.012	-32.48	72.50	40.02	74.00	-33.98	peak
4	6015.000	-31.69	76.04	44.35	74.00	-29.65	peak
5	6593.000	-31.22	78.00	46.78	74.00	-27.22	peak
6	7206.152	-31.88	76.40	44.52	74.00	-29.48	peak



<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	HORIZONTAL
<b>Test Mode</b>	Mode 1, CH 00	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss – Amplifier Factor  
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

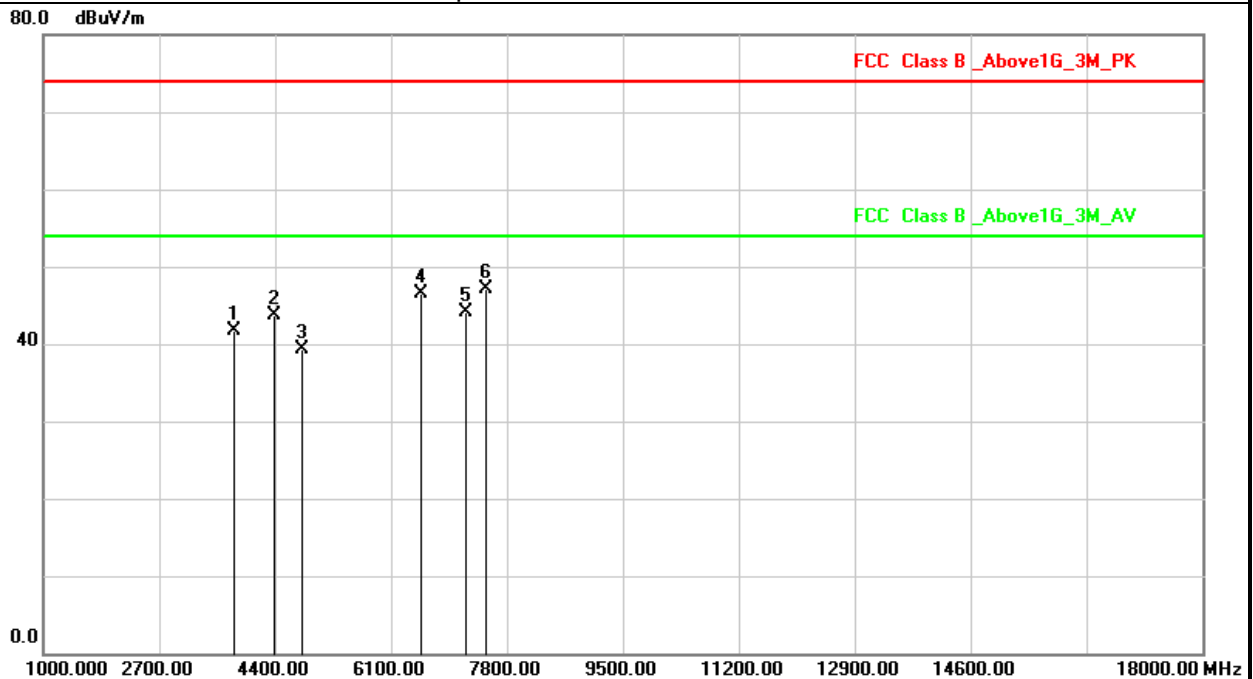


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3788.000	-32.92	74.65	41.73	74.00	-32.27	peak
2	4383.000	-32.42	76.10	43.68	74.00	-30.32	peak
3	4804.155	-32.48	71.82	39.34	74.00	-34.66	peak
4	6542.000	-31.25	77.72	46.47	74.00	-27.53	peak
5	7206.452	-31.88	75.97	44.09	74.00	-29.91	peak
6	7494.000	-31.35	78.51	47.16	74.00	-26.84	peak



<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	VERTICAL
<b>Test Mode</b>	Mode 1, CH 19	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss – Amplifier Factor  
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

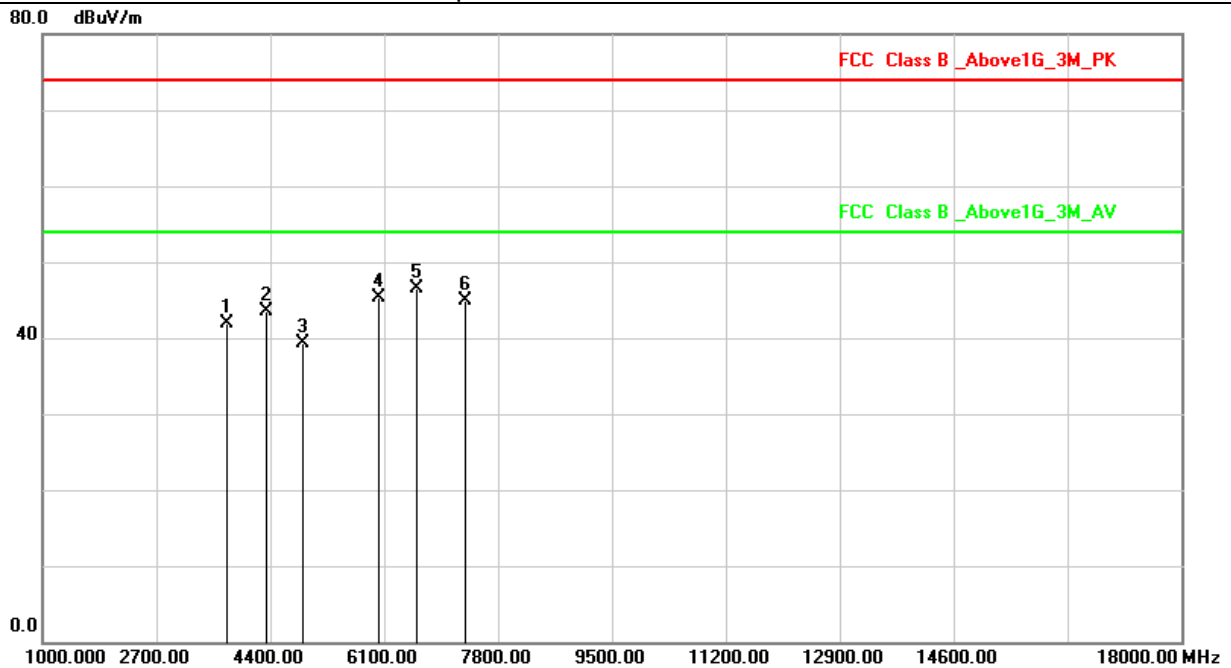


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3754.000	-32.96	74.87	41.91	74.00	-32.09	peak
2	4349.000	-32.36	75.93	43.57	74.00	-30.43	peak
3	4880.154	-32.28	71.52	39.24	74.00	-34.76	peak
4	6015.000	-31.69	76.99	45.30	74.00	-28.70	peak
5	6576.000	-31.23	77.79	46.56	74.00	-27.44	peak
6	7320.121	-31.63	76.46	44.83	74.00	-29.17	peak



<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	HORIZONTAL
<b>Test Mode</b>	Mode 1, CH 19	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss – Amplifier Factor  
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

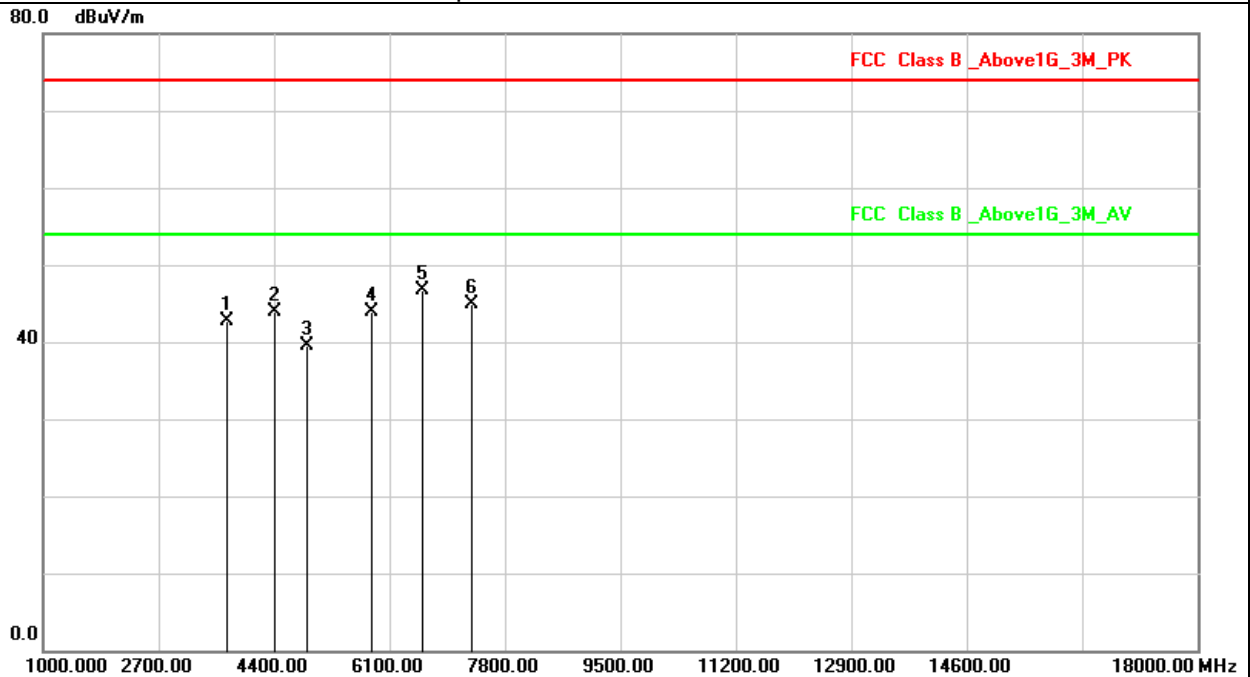


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3703.000	-33.02	75.74	42.72	74.00	-31.28	peak
2	4400.000	-32.45	76.35	43.90	74.00	-30.10	peak
3	4880.115	-32.28	71.84	39.56	74.00	-34.44	peak
4	5845.000	-31.87	75.81	43.94	74.00	-30.06	peak
5	6576.000	-31.23	77.91	46.68	74.00	-27.32	peak
6	7320.454	-31.62	76.62	45.00	74.00	-29.00	peak



<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	VERTICAL
<b>Test Mode</b>	Mode 1, CH 39	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
Margin = Level – Limit  
Factor = Antenna Factor + Cable Loss – Amplifier Factor  
The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

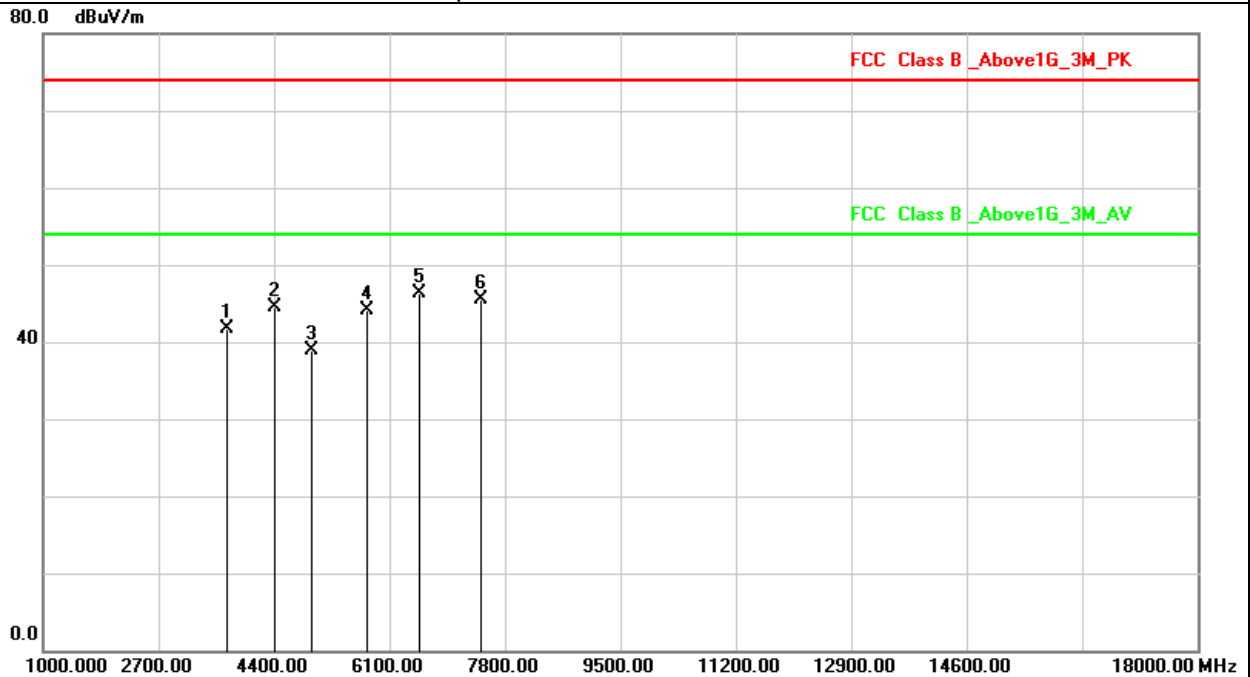


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3703.000	-33.02	74.69	41.67	74.00	-32.33	peak
2	4400.000	-32.45	76.86	44.41	74.00	-29.59	peak
3	4960.154	-32.07	71.01	38.94	74.00	-35.06	peak
4	5760.000	-31.86	75.87	44.01	74.00	-29.99	peak
5	6542.000	-31.25	77.48	46.23	74.00	-27.77	peak
6	7440.124	-31.41	76.93	45.52	74.00	-28.48	peak





<b>Power</b>	AC120V/60Hz	<b>Pol/Phase</b>	HORIZONTAL
<b>Test Mode</b>	Mode 1, CH 39	<b>Operation mode</b>	TX

Note : Level = Reading + Factor  
 Margin = Level – Limit  
 Factor = Antenna Factor + Cable Loss – Amplifier Factor  
 The 18000MHz - 25000MHz spurious emission is under limit 20dB more.

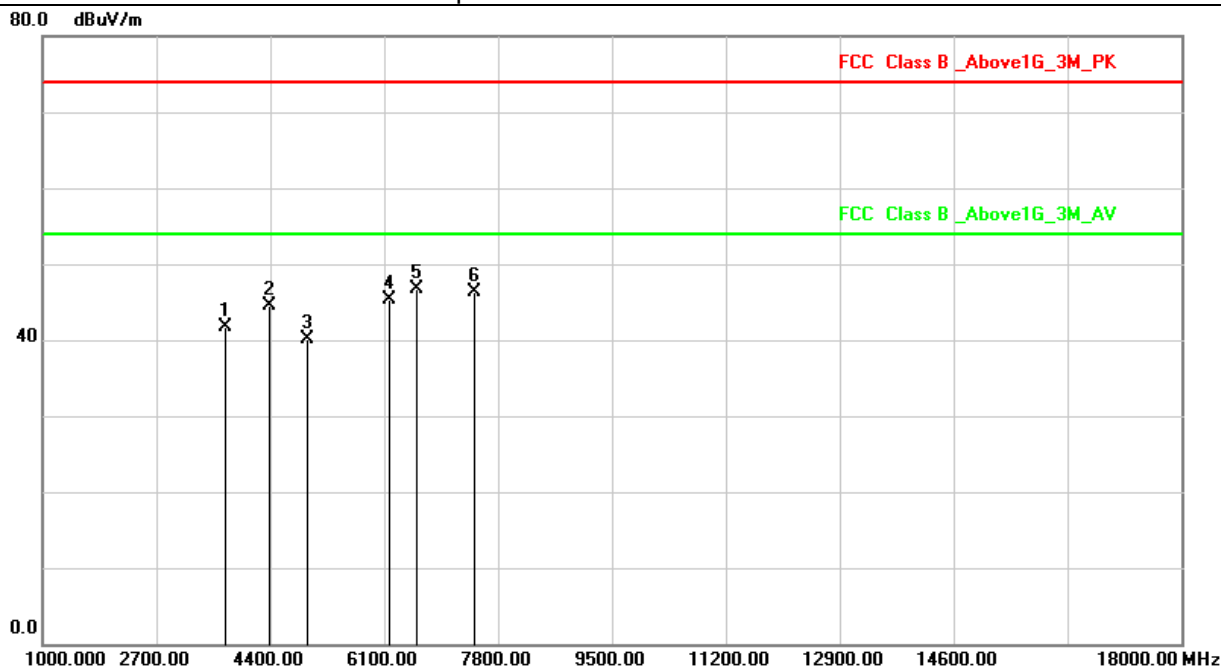

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	3720.000	-33.00	74.70	41.70	74.00	-32.30	peak
2	4383.000	-32.42	76.94	44.52	74.00	-29.48	peak
3	4960.140	-32.07	72.11	40.04	74.00	-33.96	peak
4	6168.000	-31.41	76.69	45.28	74.00	-28.72	peak
5	6576.000	-31.23	78.00	46.77	74.00	-27.23	peak
6	7440.125	-31.41	77.74	46.33	74.00	-27.67	peak




**6.7 Restricted Bands of Operation**


Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

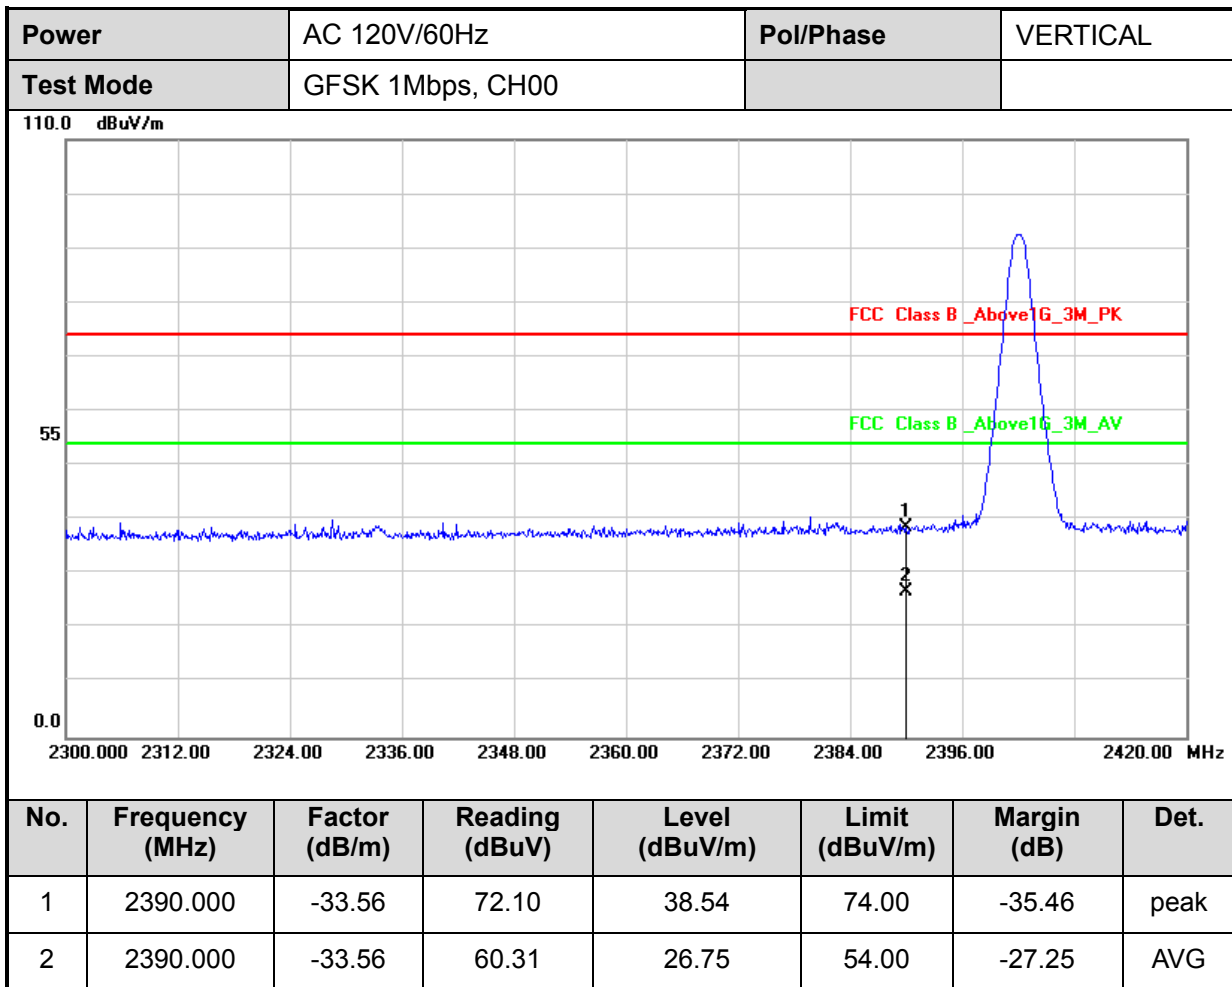


Note: Level = Reading + Factor  
 Margin = Level – Limit

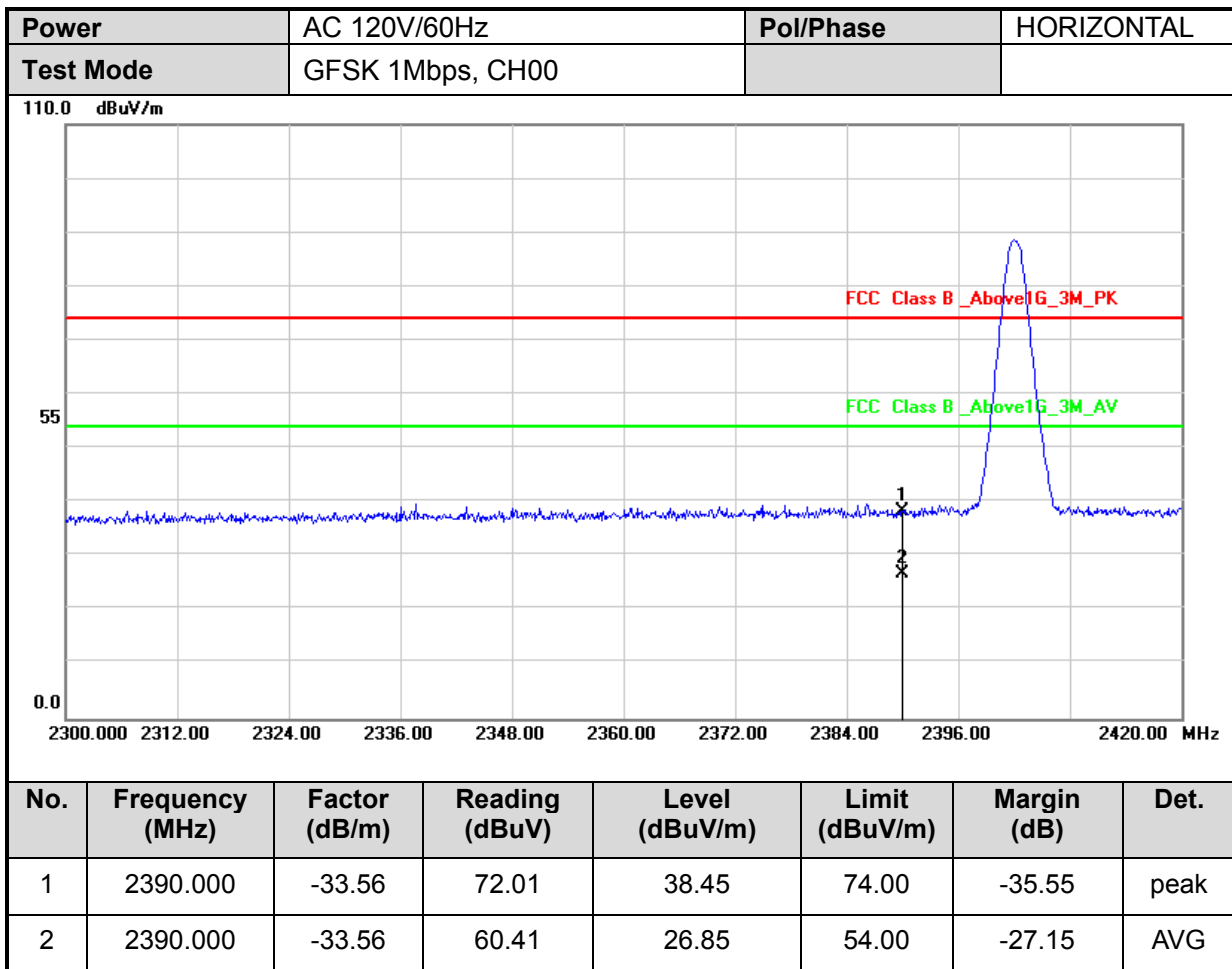


Note: Level = Reading + Factor

Margin = Level – Limit

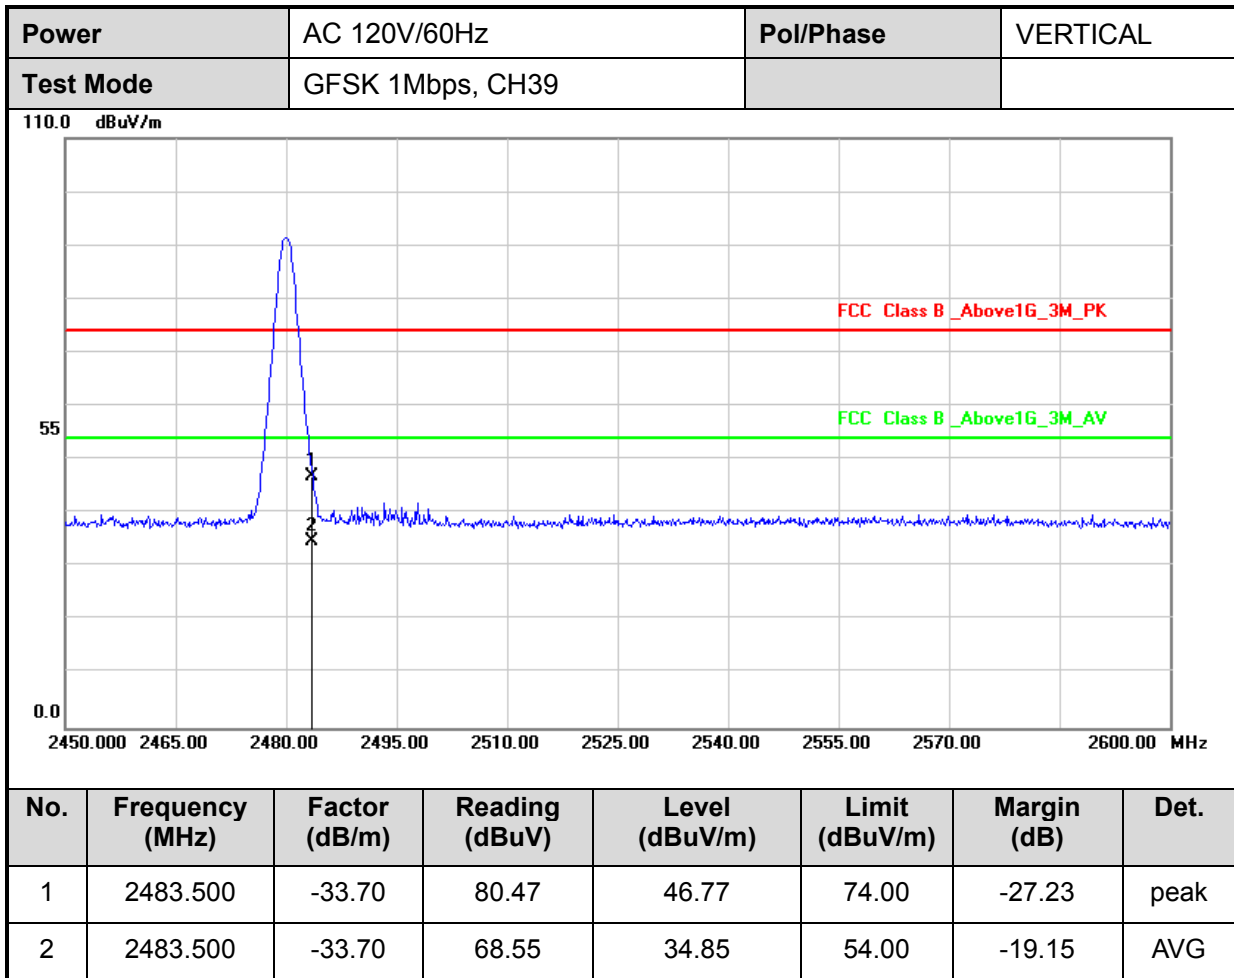

Note: Level = Reading + Factor  
 Margin = Level – Limit

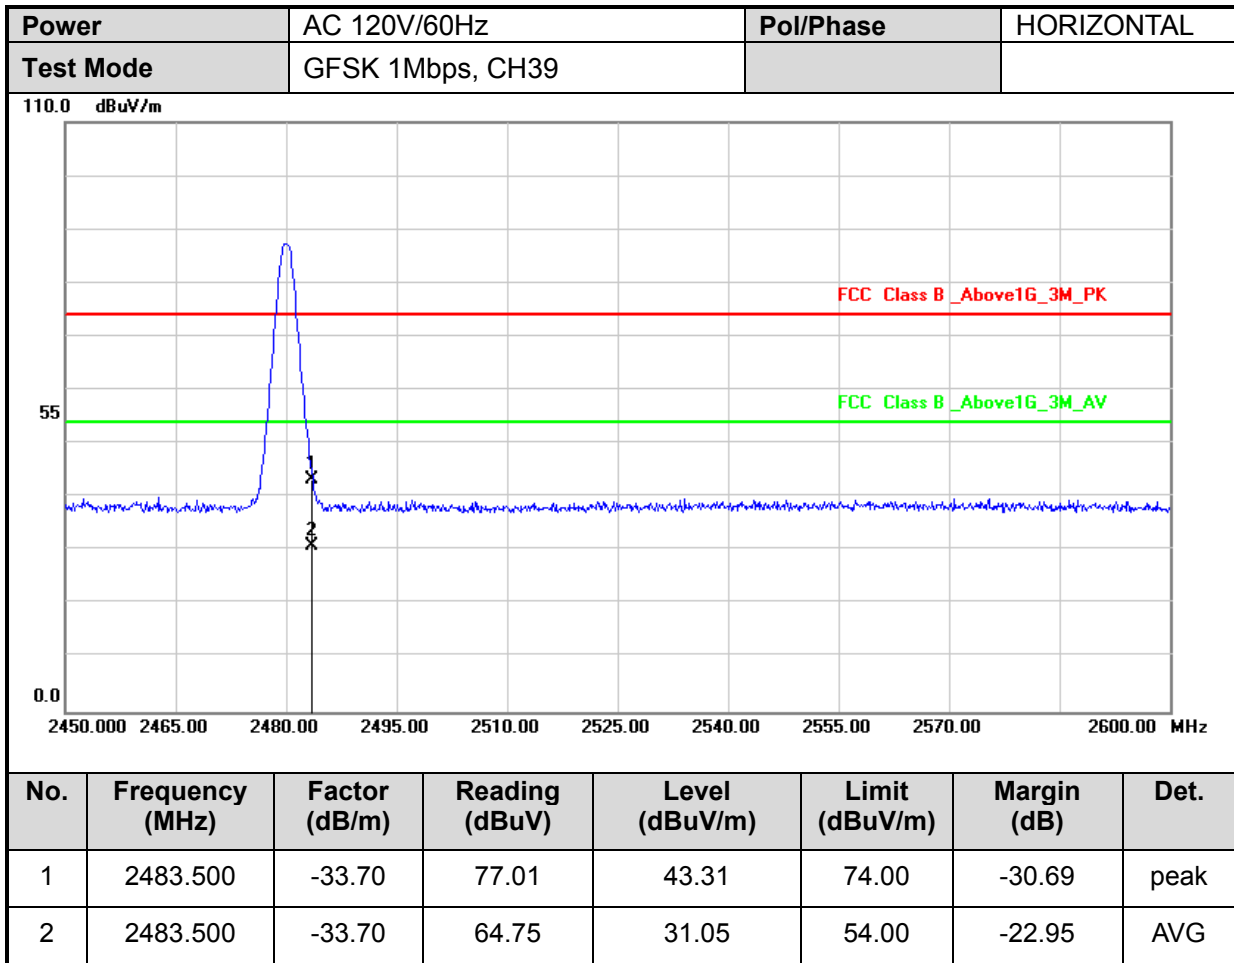

Note: Level = Reading + Factor  
 Margin = Level – Limit



## 7. Test of Spurious Emission (Conducted)


### 7.1 Test Limit

Below  $-20\text{dB}$  of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

### 7.2 Test Procedure

- a. The transmitter output was connected to the spectrum analyzer via a low loss cable.
- b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- c. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20dB relative to the maximum measured in-band peak PSD level.
- d. The band edges was measured and recorded.

### 7.3 Test Setup Layout





### 7.4 Test Result and Data



Note: Test plots refer to the following pages.





Modulation Type: GFSK  
CH00

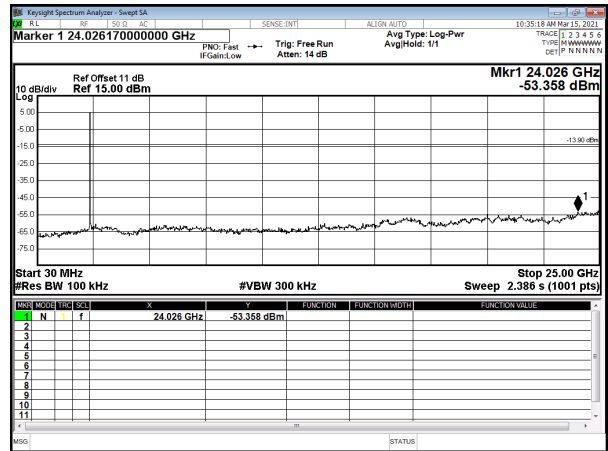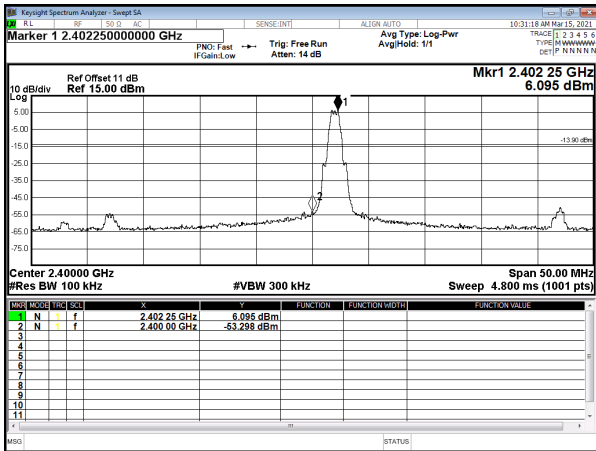

Modulation Type: GFSK  
CH19

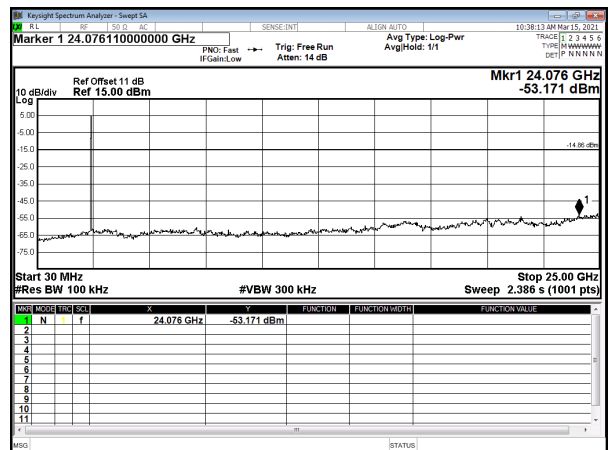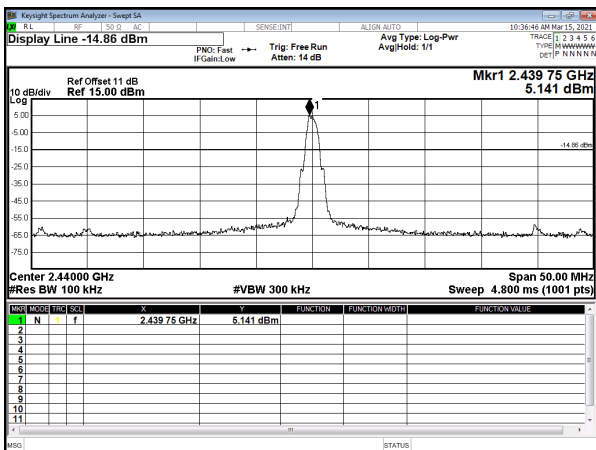

Modulation Type: GFSK  
CH39

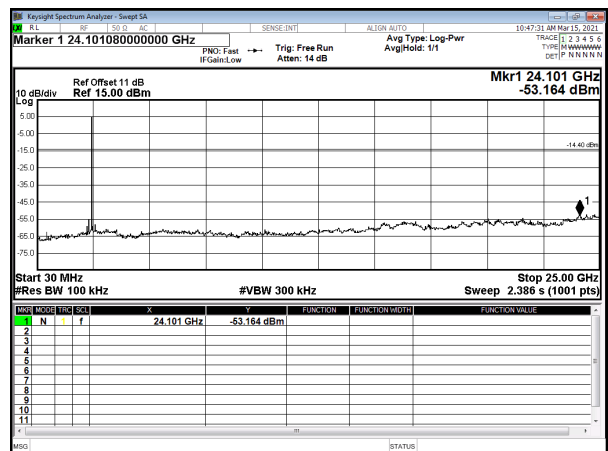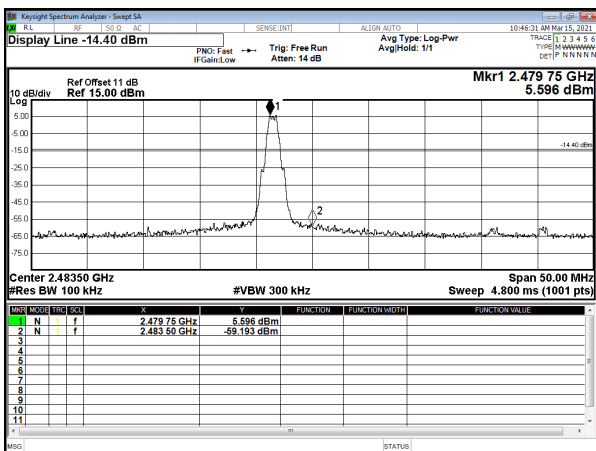





## 8. 6dB Bandwidth Measurement Data


### 8.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

### 8.2 Test Procedures

- a. The transmitter output was connected to the spectrum analyzer.
- b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW  $\geq$  3x RBW.
- c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.
- d. The 6dB Bandwidth was measured and recorded.

### 8.3 Test Setup Layout




### 8.4 Test Result and Data


Modulation Type	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limit (KHz)
GFSK	00	2402	685.8	500
	19	2440	656.5	500
	39	2480	689.2	500




Modulation Standard: GFSK (1Mbps)  
Channel: 00

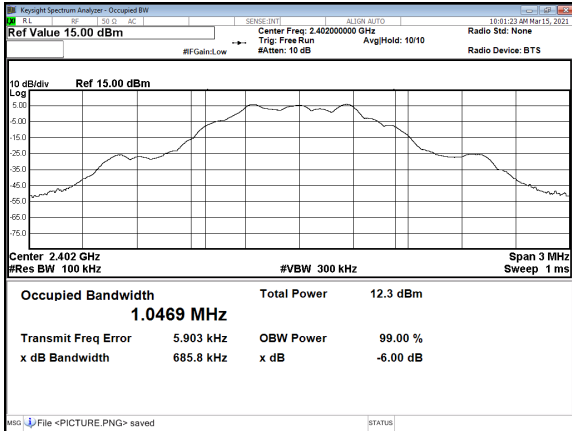

Modulation Standard: GFSK (1Mbps)  
Channel: 19

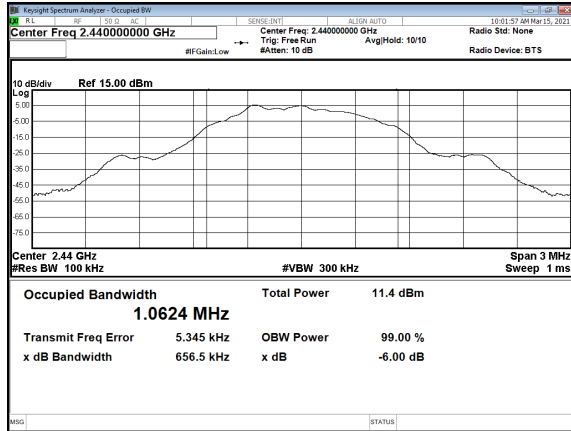

Modulation Standard: GFSK (1Mbps)  
Channel: 39

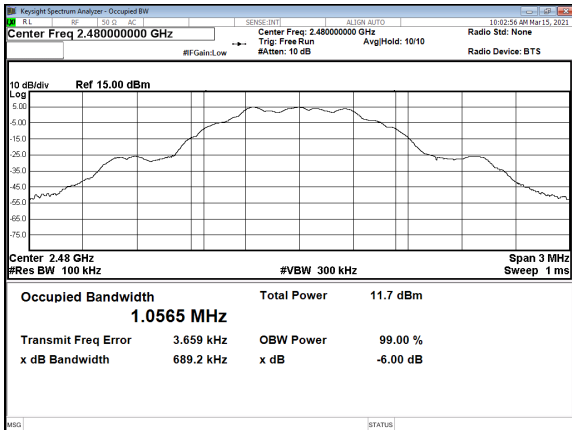



## 9. Maximum Output Power


### 9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

### 9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

### 9.3 Test Setup Layout



### 9.4 Test Result and Data

Modulation Standard	Channel	Frequency (MHz)	Power Output (dBm)	Peak Power Output (mW)
GFSK	00	2402	6.80	4.786
	19	2440	6.03	4.009
	39	2480	6.04	4.018



## 10. Power Spectral Density


### 10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

### 10.2 Test Procedures

- a. The transmitter output was connected to spectrum analyzer.
- b. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 10KHz VBW as that of the fundamental frequency. Set the sweep time=auto couple.
- c. The power spectral density was measured and recorded.

### 10.3 Test Setup Layout







### 10.4 Test Result and Data

Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)	Limit
GFSK	00	2402	-10.17	8.00
	19	2440	-9.155	8.00
	39	2480	-11.174	8.00


Modulation Standard: GFSK (1Mbps)  
Channel: 00

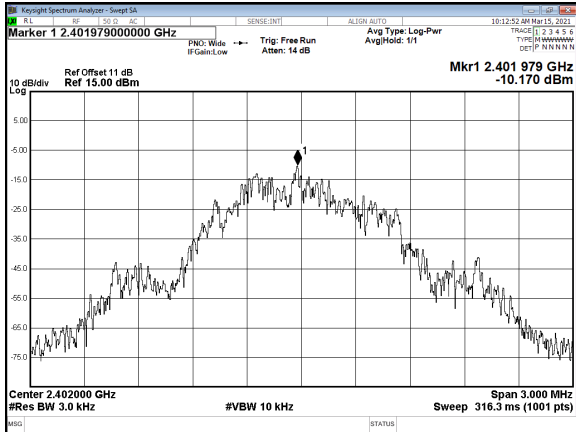

Modulation Standard: GFSK (1Mbps)  
Channel: 19

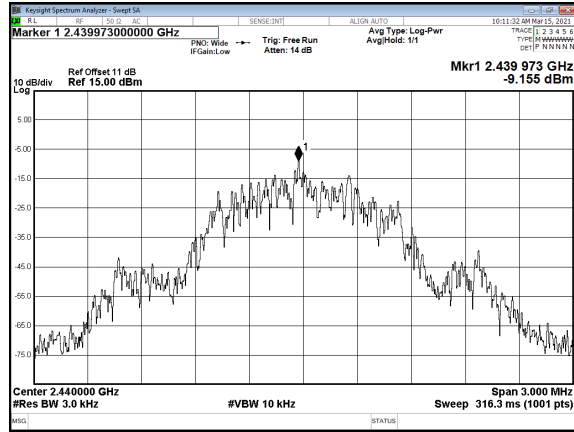

Modulation Standard: GFSK (1Mbps)  
Channel: 39

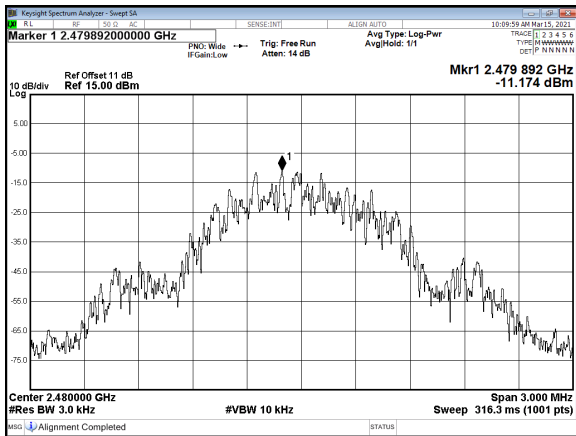

----- End of the report -----