
Puw test Plot



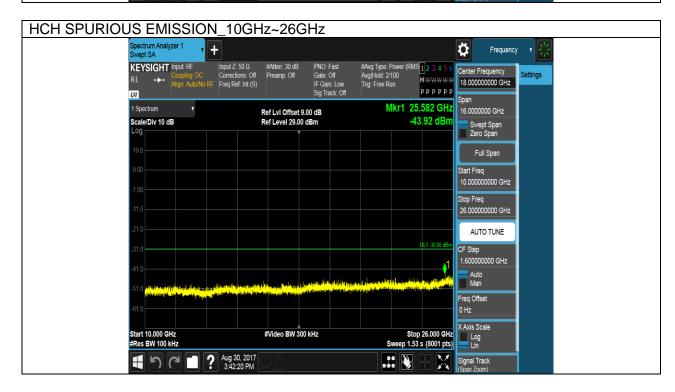


Antenna2


Test Mode	Channel	Verdict	
11B SISO	LCH	PASS	

DATE: Dec. 10, 2017



Puw test Plot

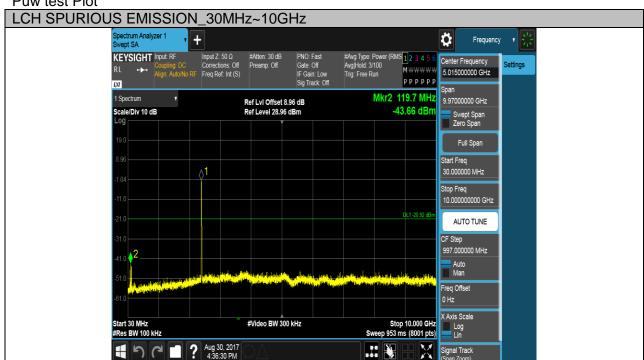

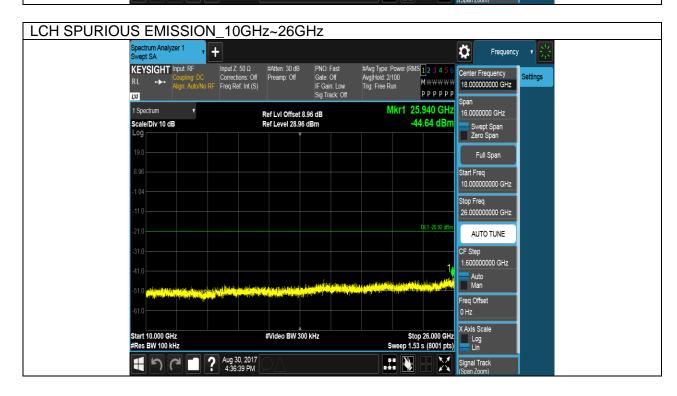


 Test Mode
 Channel
 Verdict


 11B SISO
 MCH
 PASS

DATE: Dec. 10, 2017



Puw test Plot

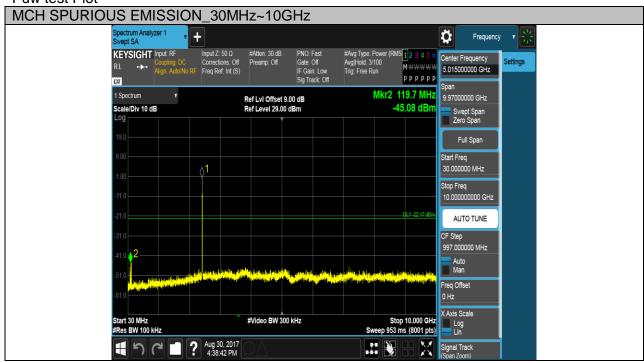

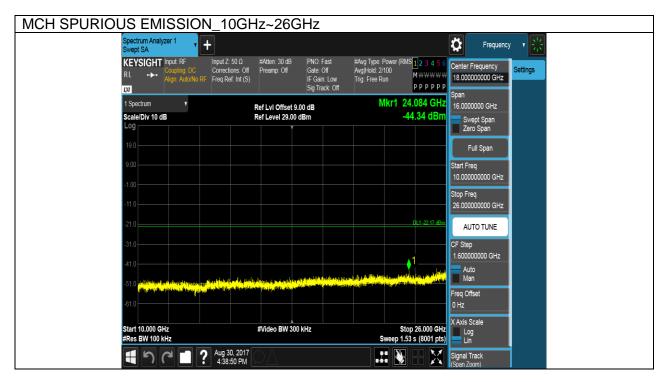


 Test Mode
 Channel
 Verdict

 11B SISO
 HCH
 PASS

DATE: Dec. 10, 2017





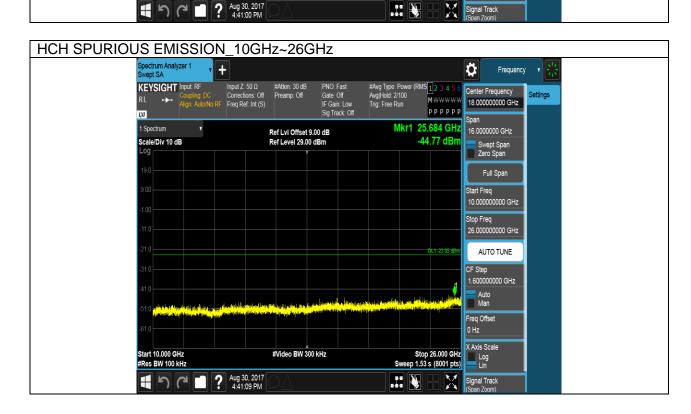


 Test Mode
 Channel
 Verdict


 11G SISO
 LCH
 PASS

DATE: Dec. 10, 2017



Puw test Plot

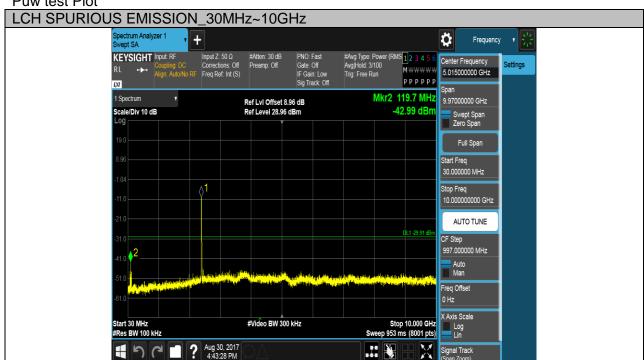

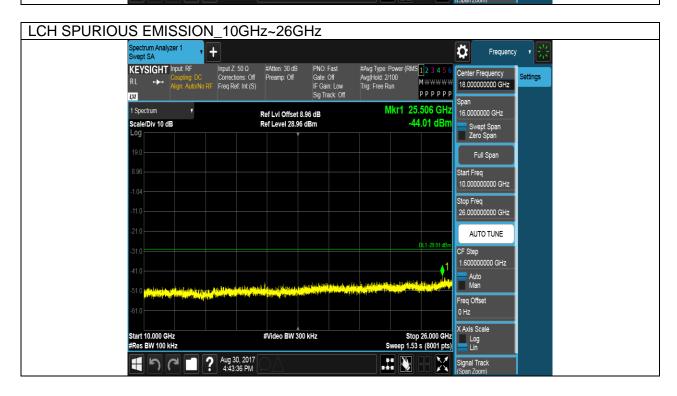



Test Mode Channel Verdict
11G SISO MCH PASS

DATE: Dec. 10, 2017




Puw test Plot

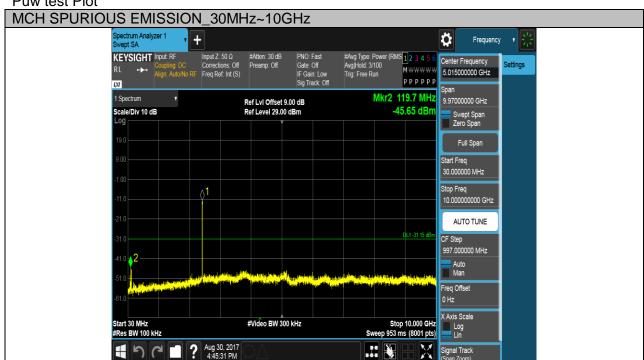

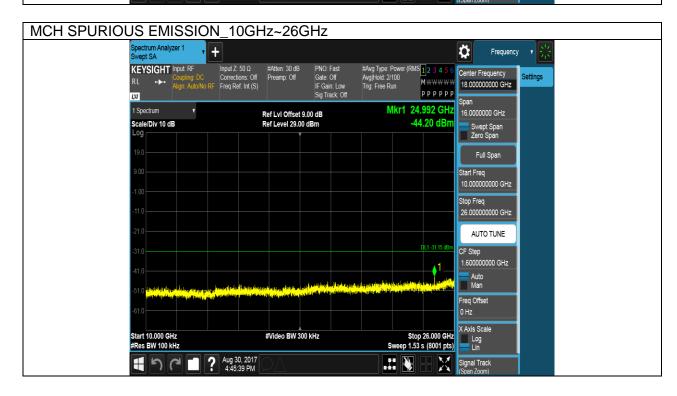


Test Mode Channel Verdict
11G SISO HCH PASS

DATE: Dec. 10, 2017

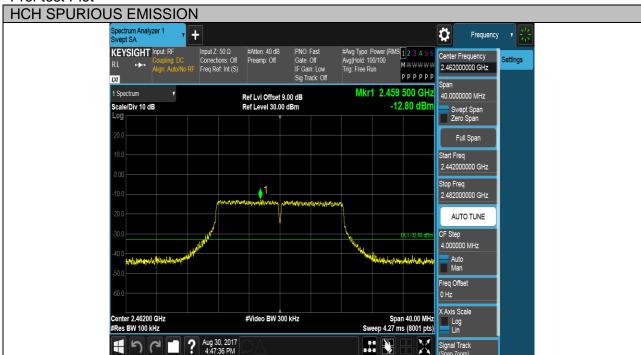




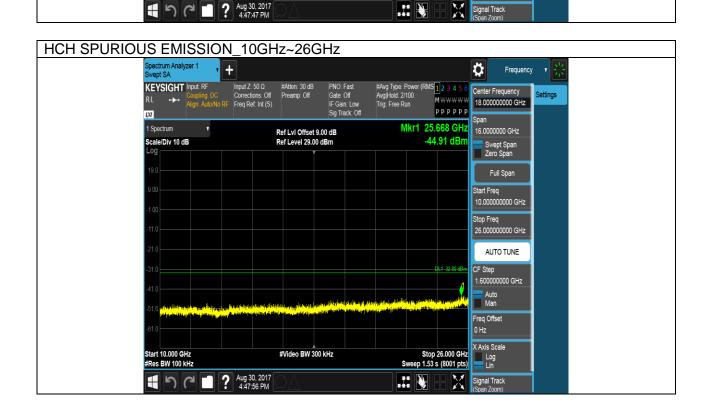


Test Mode	Channel	Verdict	
11N20MIMO	LCH	PASS	

DATE: Dec. 10, 2017

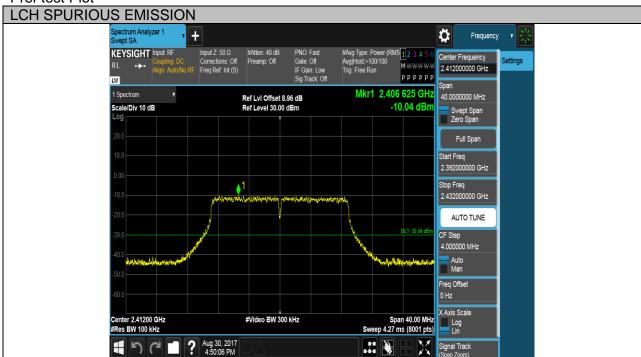

Puw test Plot



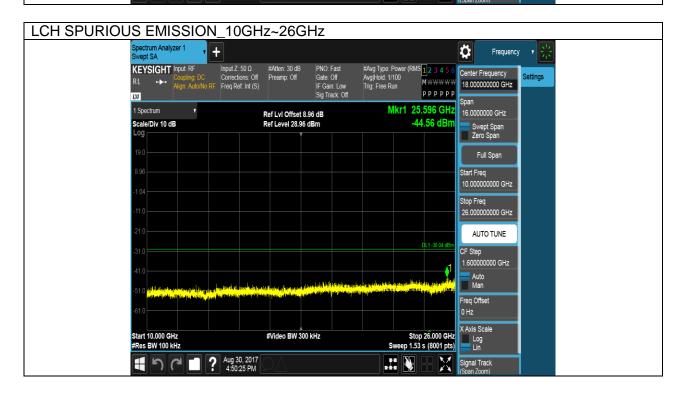

 Test Mode
 Channel
 Verdict


 11N20MIMO
 MCH
 PASS

DATE: Dec. 10, 2017





# 1

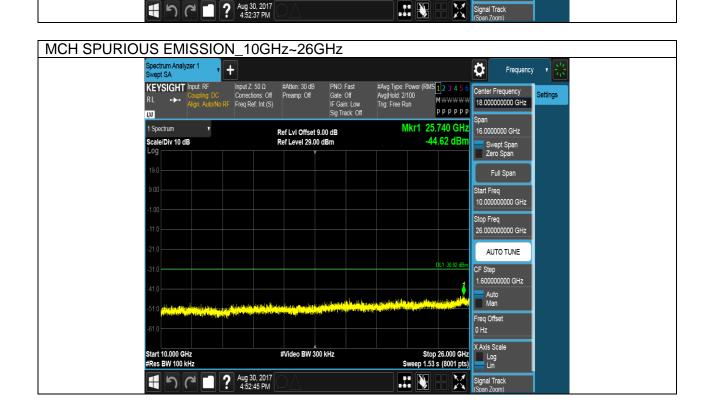


 Test Mode
 Channel
 Verdict

 11N20MIMO
 HCH
 PASS

DATE: Dec. 10, 2017




Puw test Plot

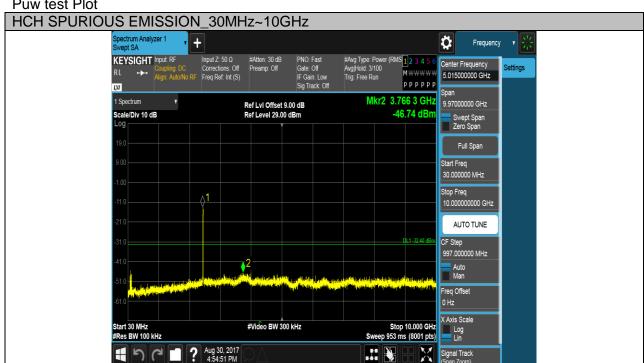





Test Mode	Channel	Verdict	
11N40MIMO	LCH	PASS	

DATE: Dec. 10, 2017

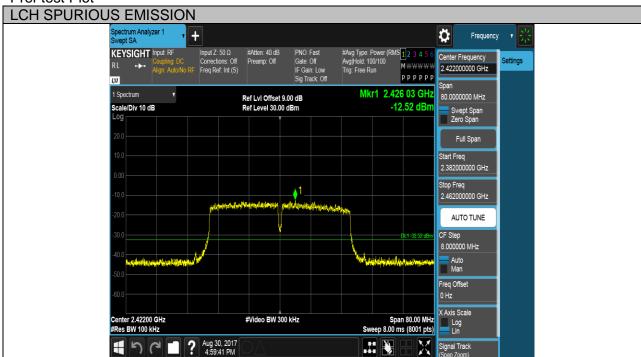

Puw test Plot

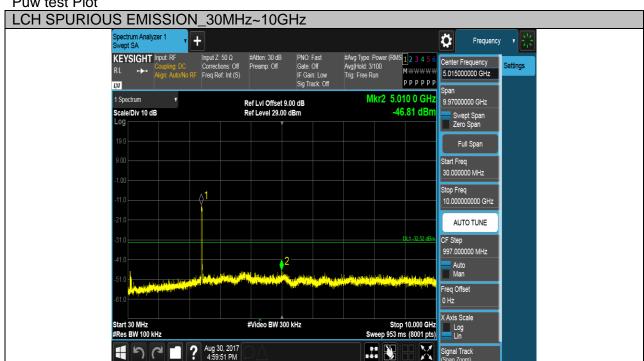


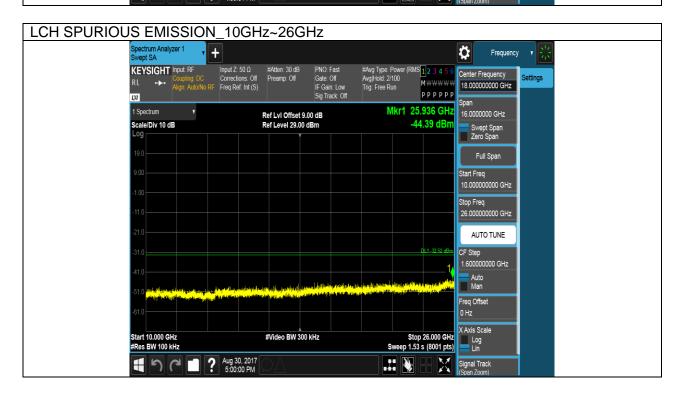


 Test Mode
 Channel
 Verdict


 11N40MIMO
 MCH
 PASS

DATE: Dec. 10, 2017

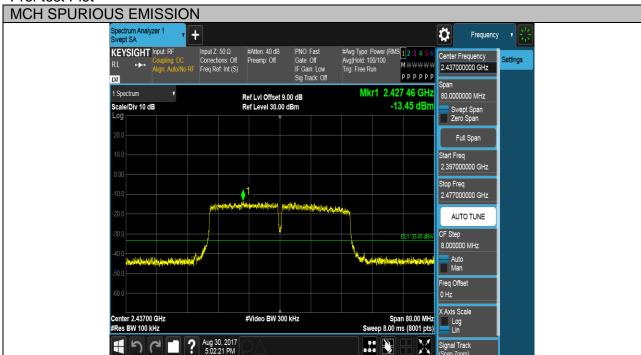

Puw test Plot

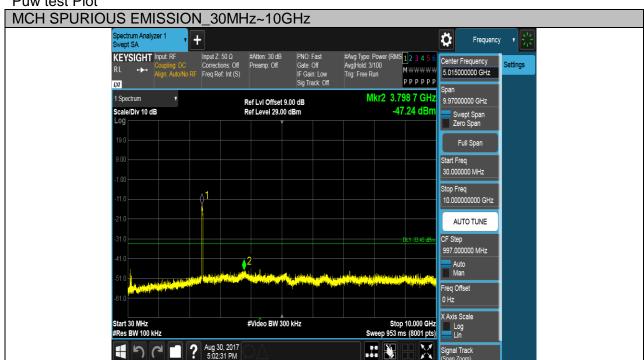


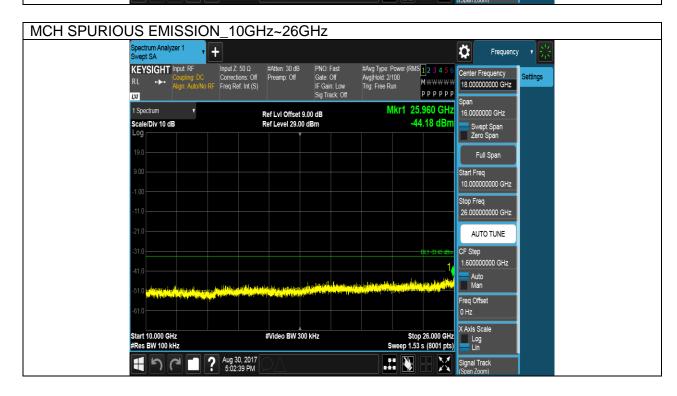


 Test Mode
 Channel
 Verdict

 11N40MIMO
 HCH
 PASS

DATE: Dec. 10, 2017

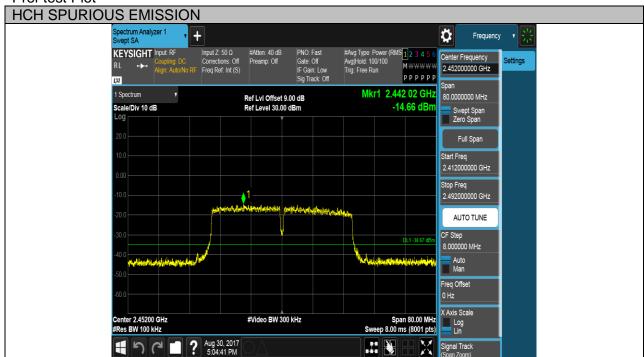



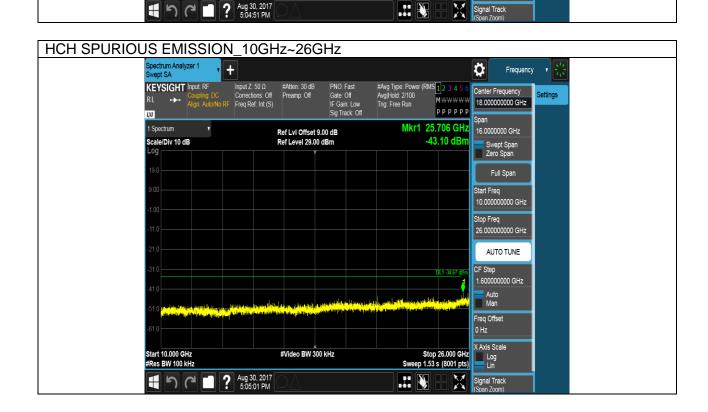

REPORT NO: 4788109955-5 DATE: Dec. 10, 2017 FCC ID: SVNDH-IPC-GX6

# 6.6. RADIATED TEST RESULTS

#### 6.6.1. LIMITS AND PROCEDURE

#### **LIMITS**

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B) (9 KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)	
0.009~0.490	2400/F(KHz)	300	
0.490~1.705	24000/F(KHz)	30	
1.705~30.0	30	30	
30~88	100	3	
88~216	150	3	
216~960	200	3	
960~1000	500	3	

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

REPORT NO: 4788109955-5 DATE: Dec. 10, 2017 FCC ID: SVNDH-IPC-GX6

# Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)		
Frequency (Miriz)	Peak	Average	
Above 1000	74	54	


# Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. <sup>2</sup>Above 38.6c

#### **TEST SETUP AND PROCEDURE**

Below 30MHz

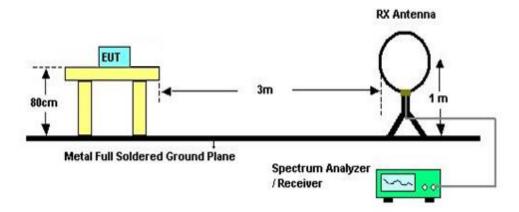

DATE: Dec. 10, 2017


#### The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013
- 2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
- 6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

REPORT NO: 4788109955-5 DATE: Dec. 10, 2017 FCC ID: SVNDH-IPC-GX6

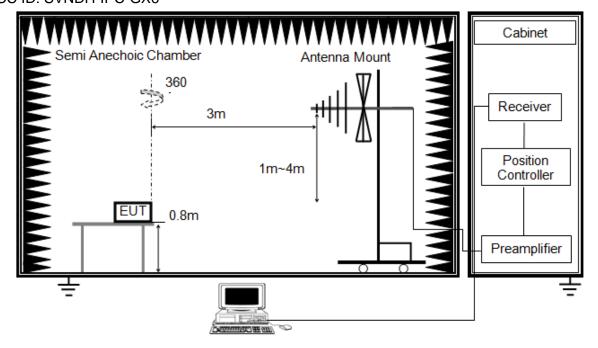


# The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 0.8 meter above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
- 6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

#### **ABOVE 1G**

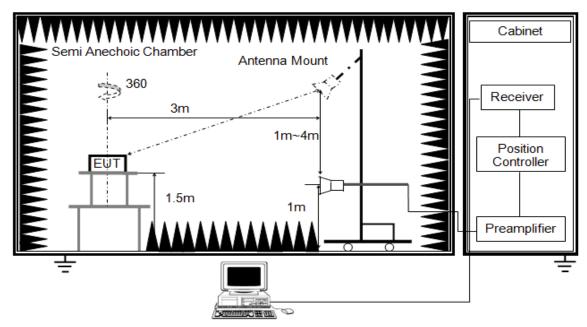

DATE: Dec. 10, 2017


The setting of the spectrum analyser

RBW	1M
IV/RW/	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

- 1. The testing follows the guidelines in ANSI C63.10-2013.
- 2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 3. The EUT was placed on a turntable with 1.5m above ground.
- 4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
- 5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
- 6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector, max hold to be run for at least  $50 \times (1/\text{duty cycle})$  traces for average measurements..
- 8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

DATE: Dec. 10, 2017

X axis, Y axis, Z axis positions:

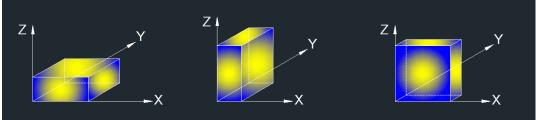

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

# **6.6.2. RESTRICTED BANDEDGE**

**Test Result Table** 


Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
		LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	Antenna 1	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
11B SISO		HCH	<limit< td=""><td>PASS</td></limit<>	PASS
116 3130		LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	Antenna 2	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
		HCH	<limit< td=""><td>PASS</td></limit<>	PASS
		LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	Antenna 1	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
11G SISO		HCH	<limit< td=""><td>PASS</td></limit<>	PASS
116 3130		LCH	<limit< td=""><td>PASS</td></limit<>	PASS
	Antenna 2	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
		HCH	<limit< td=""><td>PASS</td></limit<>	PASS
		LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11N20MIMO	Antenna 1+2	MCH	<limit< td=""><td>PASS</td></limit<>	PASS
		HCH	<limit< td=""><td>PASS</td></limit<>	PASS
	/IMO Antenna 1+2	LCH	<limit< td=""><td>PASS</td></limit<>	PASS
11N40MIMO		MCH	<limit< td=""><td>PASS</td></limit<>	PASS
		HCH	<limit< td=""><td>PASS</td></limit<>	PASS

#### **Test Graphs:**

#### Antenna 1

Test Mode	Channel	Polarization	Verdict
11B SISO	LCH	Horizontal	PASS

DATE: Dec. 10, 2017

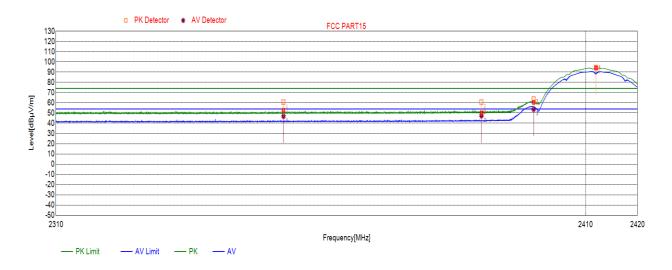


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2352.4415	36.02	60.42	74.00	-13.58	peak
			46.84	54.00	-7.16	average
2	2390.0000	36.22	60.60	74.00	-13.40	peak
			47.28	54.00	-6.72	average
3	2412.000	36.39	94.38	74.00	20.38	peak

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11B SISO	LCH	Vertical	PASS	

DATE: Dec. 10, 2017

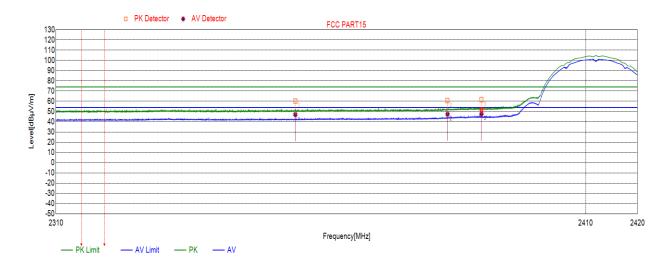


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2354.6682	36.02	60.26	74.00	-13.74	peak
		36.02	46.98	54.00	-7.02	average
2	2383.5238	36.15	60.72	74.00	-13.28	peak
		36.15	47.40	54.00	-6.60	average
3	2390.0000	36.22	61.52	74.00	-12.48	peak
		36.22	47.67	54.00	-6.33	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11B SISO	HCH	Horizontal	PASS	

DATE: Dec. 10, 2017

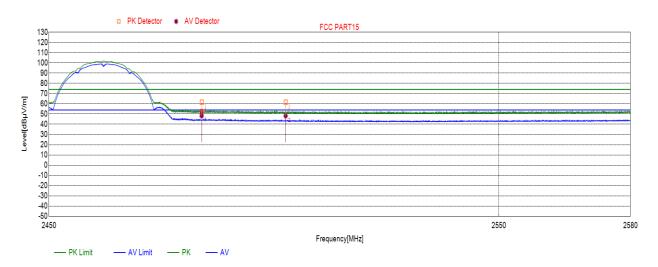


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	61.47	74.00	-12.53	peak
		36.77	48.38	54.00	-5.62	average
2	2502.1190	36.70	61.38	74.00	-12.62	peak
		36.70	48.22	54.00	-5.78	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Test Mode Channel		Verdict	
11B SISO	HCH	Vertical	PASS	

DATE: Dec. 10, 2017

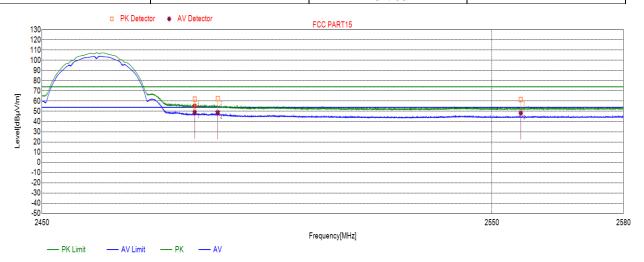


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	61.96	74.00	-12.04	peak
		36.77	49.12	54.00	-4.88	average
2	2488.5883	36.74	62.16	74.00	-11.84	peak
		36.74	48.80	54.00	-5.20	average
3	2556.5738	36.84	61.67	74.00	-12.33	peak
		36.84	48.33	54.00	-5.67	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	LCH	Horizontal	PASS	

DATE: Dec. 10, 2017

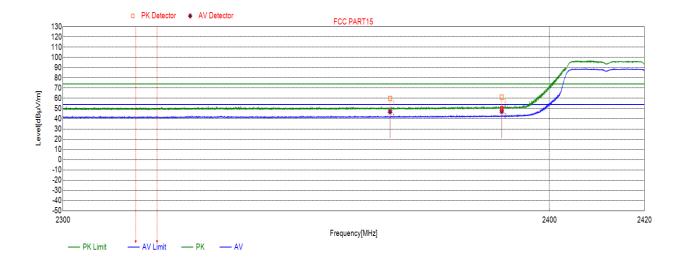


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2366.7595	36.06	59.80	74.00	-14.20	peak
		36.06	46.97	54.00	-7.03	average
2	2390.0000	36.22	61.09	74.00	-12.91	peak
		36.22	47.31	54.00	-6.69	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11G SISO	LCH	Vertical	PASS

DATE: Dec. 10, 2017

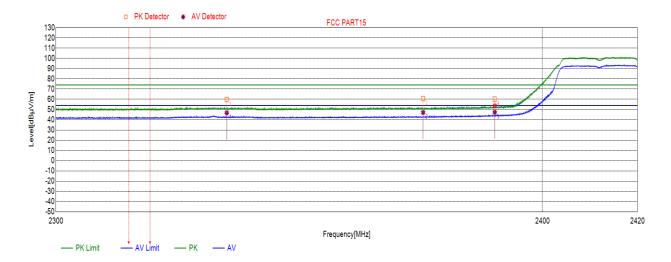


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2334.6246	35.97	59.62	74.00	-14.38	peak
		35.97	46.82	54.00	-7.18	average
2	2375.0668	36.08	60.61	74.00	-13.39	peak
		36.08	47.18	54.00	-6.82	average
3	2390.0000	36.22	60.29	74.00	-13.71	peak
		36.22	47.46	54.00	-6.54	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	HCH	Horizontal	PASS	

DATE: Dec. 10, 2017

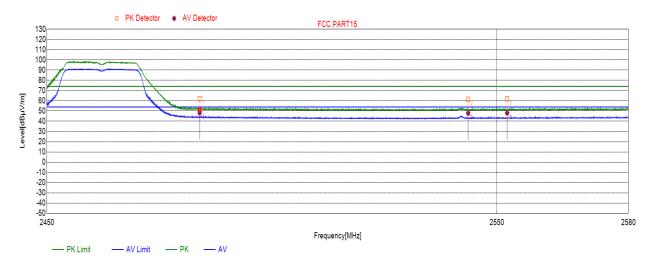


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	62.11	74.00	-11.89	peak
		36.77	48.40	54.00	-5.60	average
2	2543.5052	36.80	61.62	74.00	-12.38	peak
		36.80	47.97	54.00	-6.03	average
	2552.3358	36.82	62.07	74.00	-11.93	peak
		36.82	48.13	54.00	-5.87	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11G SISO	HCH	Vertical	PASS

DATE: Dec. 10, 2017

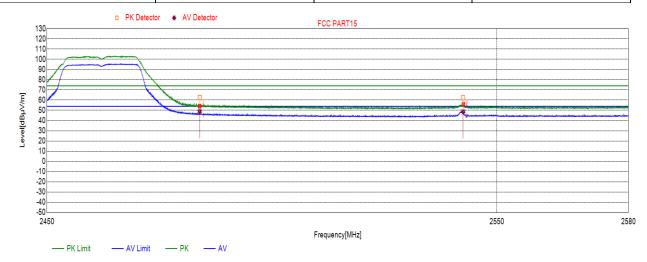


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	62.28	74.00	-11.72	peak
		36.77	48.89	54.00	-5.11	average
2	2542.3812	36.80	62.54	74.00	-11.46	peak
		36.80	48.55	54.00	-5.45	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

REPORT NO: 4788109955-5 DATE: Dec. 10, 2017 FCC ID: SVNDH-IPC-GX6

# Antenna 2

Test Mode	Channel	Polarization	Verdict	
11B SISO	LCH	Horizontal	PASS	

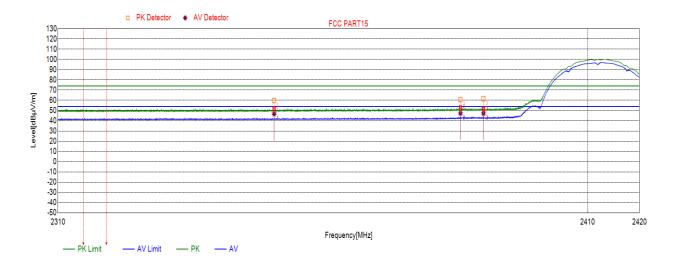


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2350.3080	36.01	59.92	74.00	-22.19	peak
		36.01	46.84	54.00	-7.16	average
2	2385.5996	36.17	60.66	74.00	-21.03	peak
		36.17	47.34	54.00	-6.66	average
3	2390.000	36.22	61.37	74.00	-22.53	peak
		36.22	47.33	54.00	-6.67	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11B SISO	LCH	Vertical	PASS	

DATE: Dec. 10, 2017

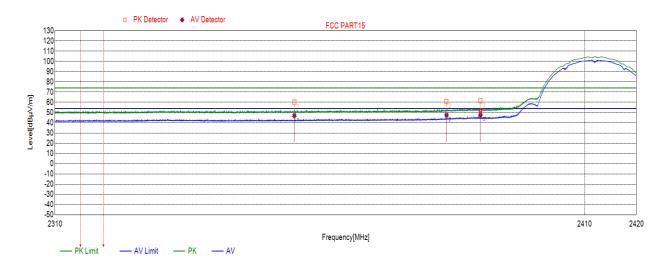


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2354.6682	36.02	60.26	74.00	-13.74	peak
		36.02	46.98	54.00	-7.02	average
2	2383.5238	36.15	60.72	74.00	-13.28	peak
		36.15	47.40	54.00	-6.60	average
3	2390.0000	36.22	61.52	74.00	-12.48	peak
		36.22	47.67	54.00	-6.33	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11B SISO	HCH	Horizontal	PASS

DATE: Dec. 10, 2017

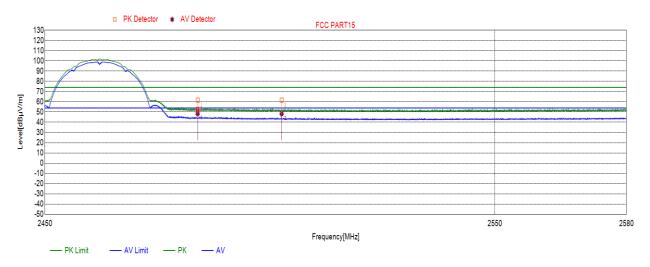


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	61.47	74.00	-12.53	peak
		36.77	48.38	54.00	-5.62	average
2	2502.1190	36.70	61.38	74.00	-12.62	peak
		36.70	48.22	54.00	-5.78	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11B SISO	HCH	Vertical	PASS	

DATE: Dec. 10, 2017

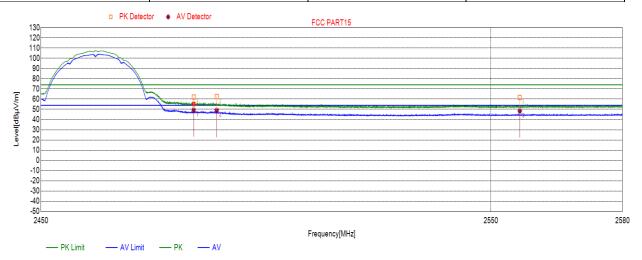


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	61.96	74.00	-12.04	peak
		36.77	49.12	54.00	-4.88	average
2	2488.5883	36.74	62.16	74.00	-11.84	peak
		36.74	48.80	54.00	-5.20	average
3	2556.5738	36.84	61.67	74.00	-12.33	peak
		36.84	48.33	54.00	-5.67	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	LCH	Horizontal	PASS	

DATE: Dec. 10, 2017

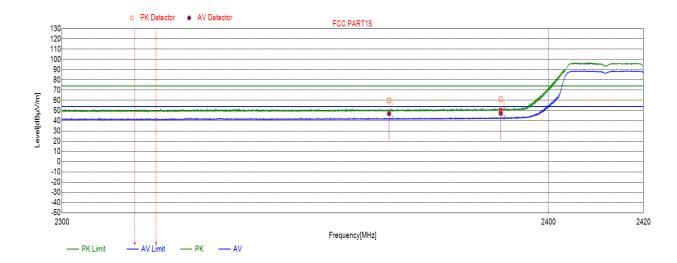


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2366.7595	36.06	59.80	74.00	-14.20	peak
		36.06	46.97	54.00	-7.03	average
2	2390.0000	36.22	61.09	74.00	-12.91	peak
		36.22	47.31	54.00	-6.69	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	LCH	Vertical	PASS	

DATE: Dec. 10, 2017

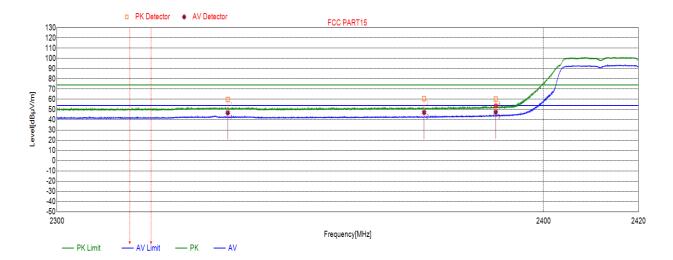


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2334.6246	35.97	59.62	74.00	-14.38	peak
		35.97	46.82	54.00	-7.18	average
2	2375.0668	36.08	60.61	74.00	-13.39	peak
		36.08	47.18	54.00	-6.82	average
3	2390.0000	36.22	60.29	74.00	-13.71	peak
		36.22	47.46	54.00	-6.54	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	HCH	Horizontal	PASS	

DATE: Dec. 10, 2017

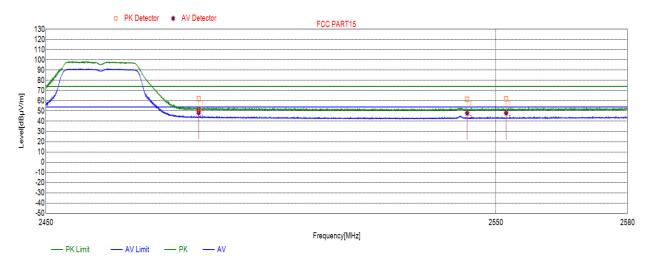


No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	62.11	74.00	-11.89	peak
		36.77	48.40	54.00	-5.60	average
2	2543.5052	36.80	61.62	74.00	-12.38	peak
		36.80	47.97	54.00	-6.03	average
	2552.3358	36.82	62.07	74.00	-11.93	peak
		36.82	48.13	54.00	-5.87	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict	
11G SISO	HCH	Vertical	PASS	

DATE: Dec. 10, 2017

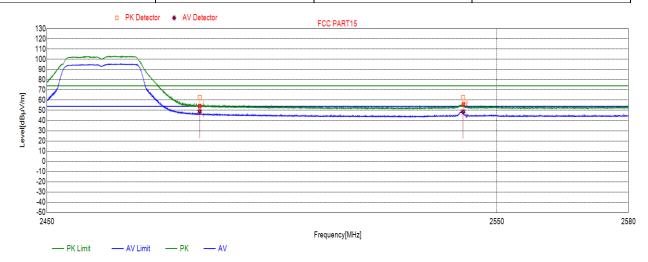

No.	Frequency	Factor[dB]	Result	Limit	Margin	Remark
	(MHz)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	36.77	62.28	74.00	-11.72	peak
		36.77	48.89	54.00	-5.11	average
2	2542.3812	36.80	62.54	74.00	-11.46	peak
		36.80	48.55	54.00	-5.45	average

- 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
- 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.