




Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

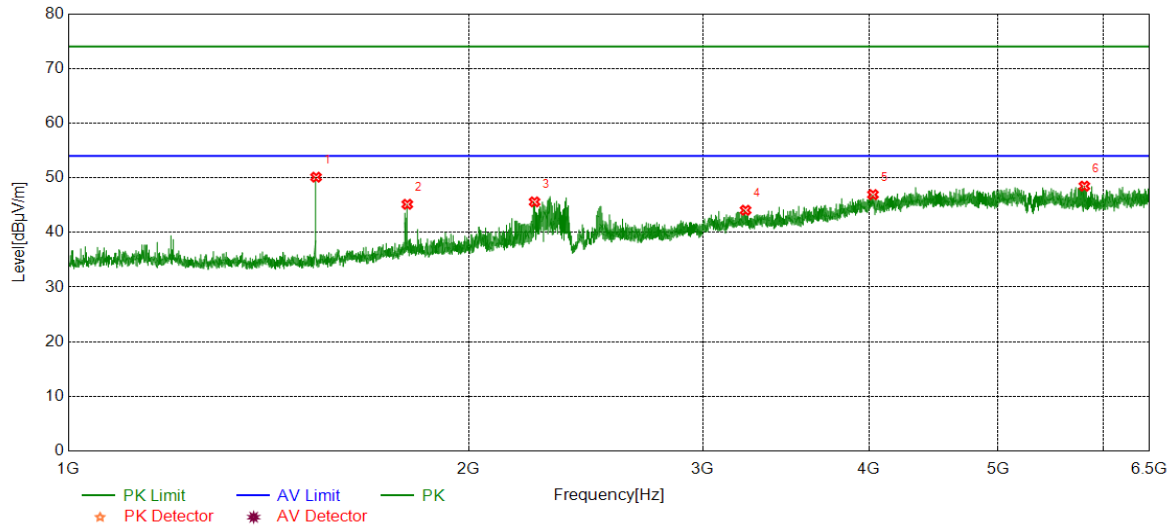


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	55.86	-5.75	50.11	74.00	-23.89	peak
2	1798.4664	48.98	-3.83	45.15	74.00	-28.85	peak
3	2241.5403	47.84	-2.25	45.59	74.00	-28.41	peak
4	3229.8589	41.37	2.69	44.06	74.00	-29.94	peak
5	4026.7808	40.59	6.33	46.92	74.00	-27.08	peak
6	5806.1451	41.15	7.32	48.47	74.00	-25.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5200	Horizontal	PASS

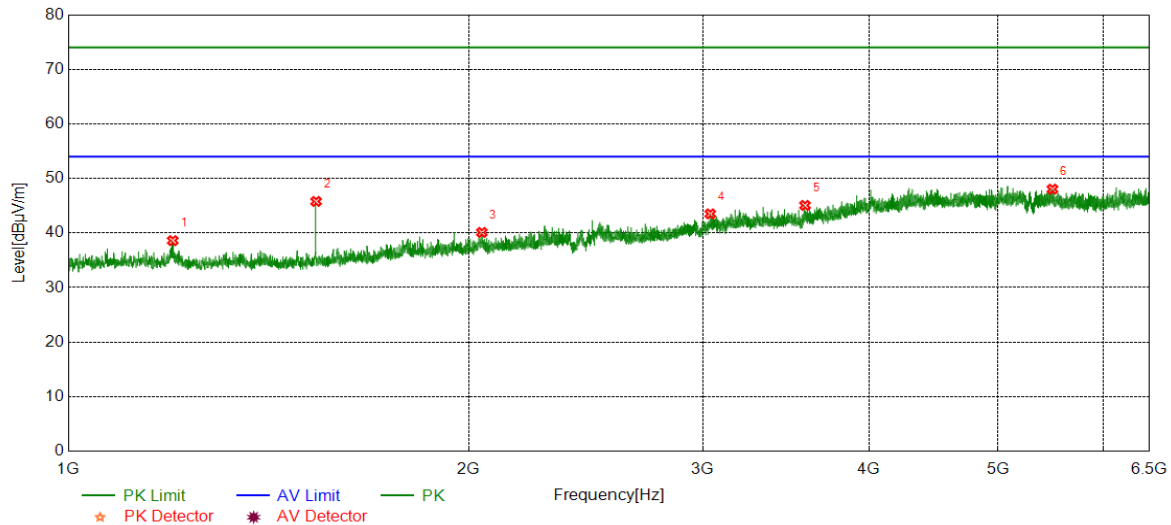


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.3664	44.16	-5.56	38.60	74.00	-35.40	peak
2	1535.7560	51.54	-5.75	45.79	74.00	-28.21	peak
3	2046.1744	42.49	-2.39	40.10	74.00	-33.90	peak
4	3038.5043	40.75	2.76	43.51	74.00	-30.49	peak
5	3579.8978	41.12	3.94	45.06	74.00	-28.94	peak
6	5493.8326	39.90	8.14	48.04	74.00	-25.96	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5200	Vertical	PASS

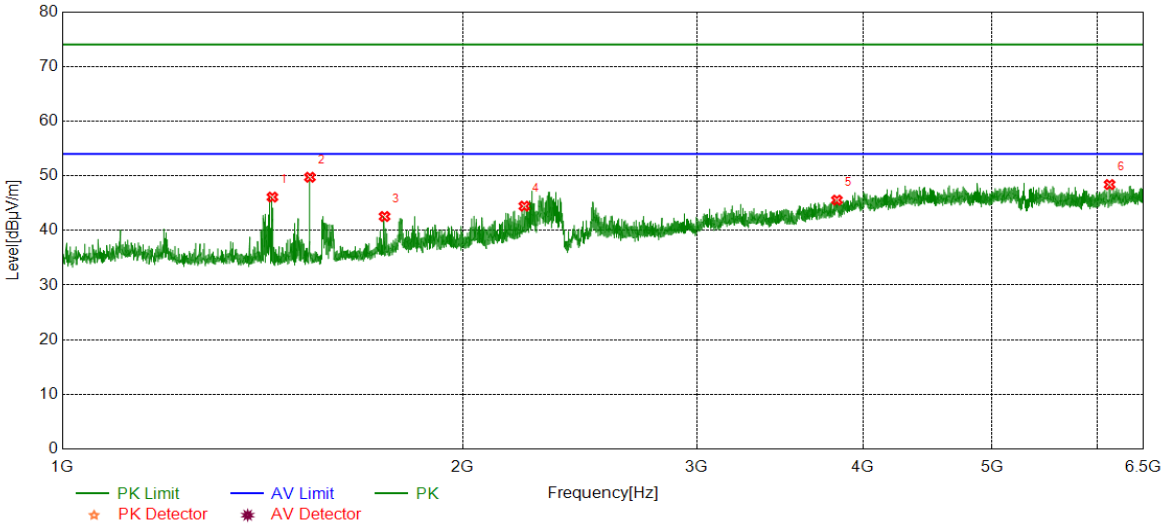


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1438.7398	51.90	-5.80	46.10	74.00	-27.90	peak
2	1535.4226	55.48	-5.75	49.73	74.00	-24.27	peak
3	1747.1245	47.03	-4.48	42.55	74.00	-31.45	peak
4	2225.2042	46.63	-2.19	44.44	74.00	-29.56	peak
5	3822.5914	40.12	5.43	45.55	74.00	-28.45	peak
6	6128.1809	40.27	8.12	48.39	74.00	-25.61	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

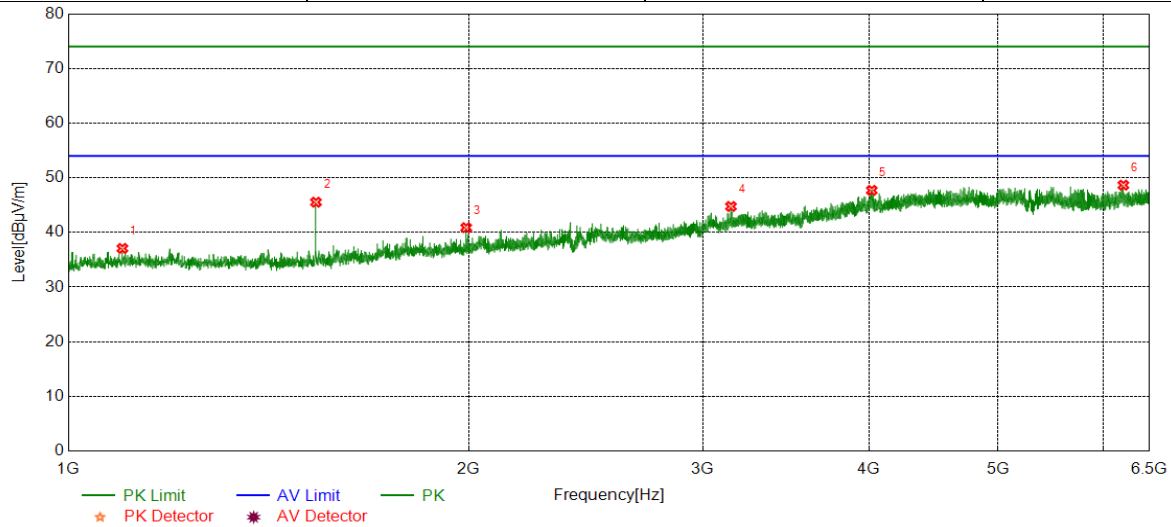


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1098.3497	42.65	-5.58	37.07	74.00	-36.93	peak
2	1535.4226	51.28	-5.75	45.53	74.00	-28.47	peak
3	1991.4986	43.94	-3.07	40.87	74.00	-33.13	peak
4	3149.3499	42.19	2.56	44.75	74.00	-29.25	peak
5	4018.2242	41.26	6.44	47.70	74.00	-26.30	peak
6	6211.8013	40.37	8.28	48.65	74.00	-25.35	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

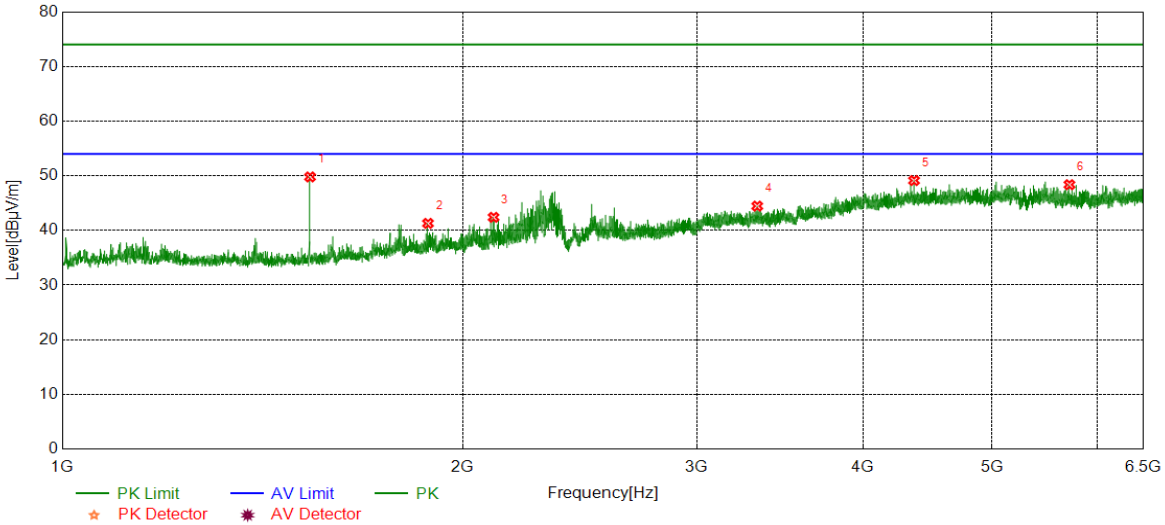


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	55.54	-5.75	49.79	74.00	-24.21	peak
2	1883.4806	44.91	-3.62	41.29	74.00	-32.71	peak
3	2109.8516	44.95	-2.55	42.40	74.00	-31.60	peak
4	3330.2034	41.70	2.75	44.45	74.00	-29.55	peak
5	4368.2631	42.53	6.60	49.13	74.00	-24.87	peak
6	5716.6907	40.97	7.40	48.37	74.00	-25.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5260	Horizontal	PASS

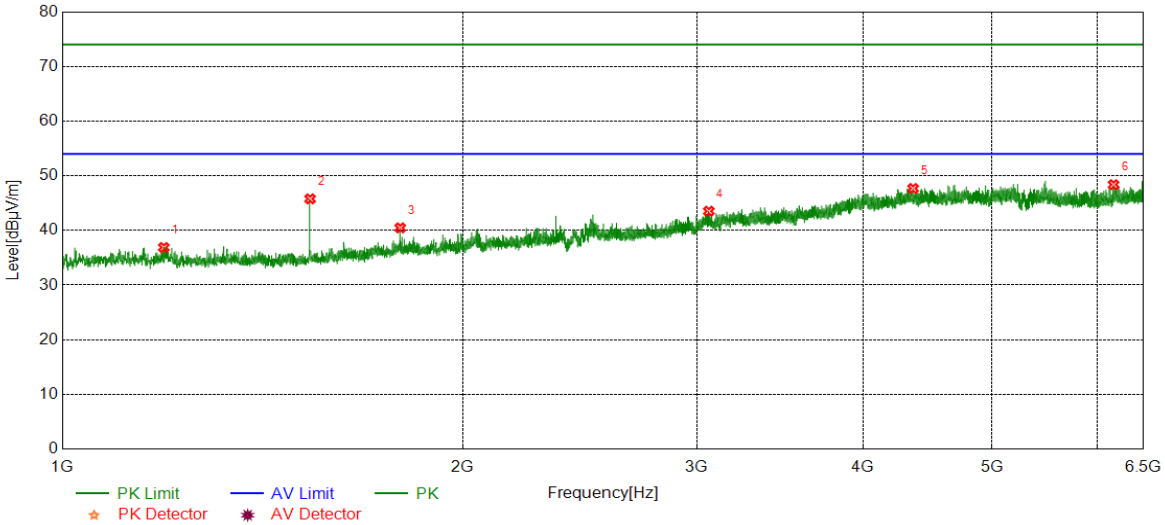


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1192.3654	42.45	-5.57	36.88	74.00	-37.12	peak
2	1535.7560	51.53	-5.75	45.78	74.00	-28.22	peak
3	1795.1325	44.26	-3.79	40.47	74.00	-33.53	peak
4	3062.6181	41.32	2.20	43.52	74.00	-30.48	peak
5	4361.2624	40.95	6.72	47.67	74.00	-26.33	peak
6	6170.9634	40.27	8.10	48.37	74.00	-25.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5260	Vertical	PASS

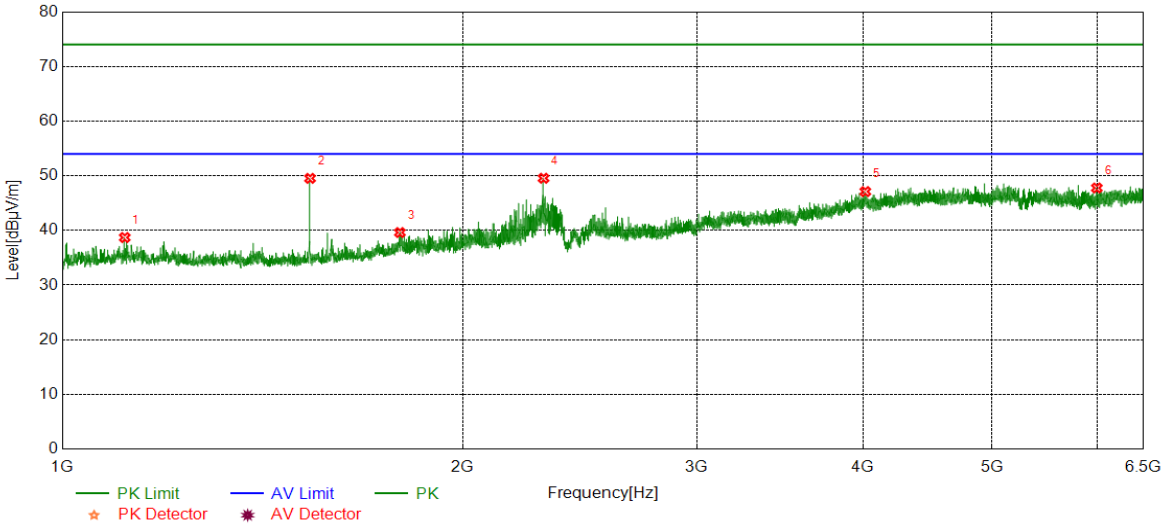


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1114.3524	44.19	-5.49	38.70	74.00	-35.30	peak
2	1535.7560	55.28	-5.75	49.53	74.00	-24.47	peak
3	1794.1324	43.40	-3.78	39.62	74.00	-34.38	peak
4	2300.5501	51.39	-1.84	49.55	74.00	-24.45	peak
5	4015.1128	40.79	6.32	47.11	74.00	-26.89	peak
6	5994.3883	40.20	7.57	47.77	74.00	-26.23	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5280	Horizontal	PASS

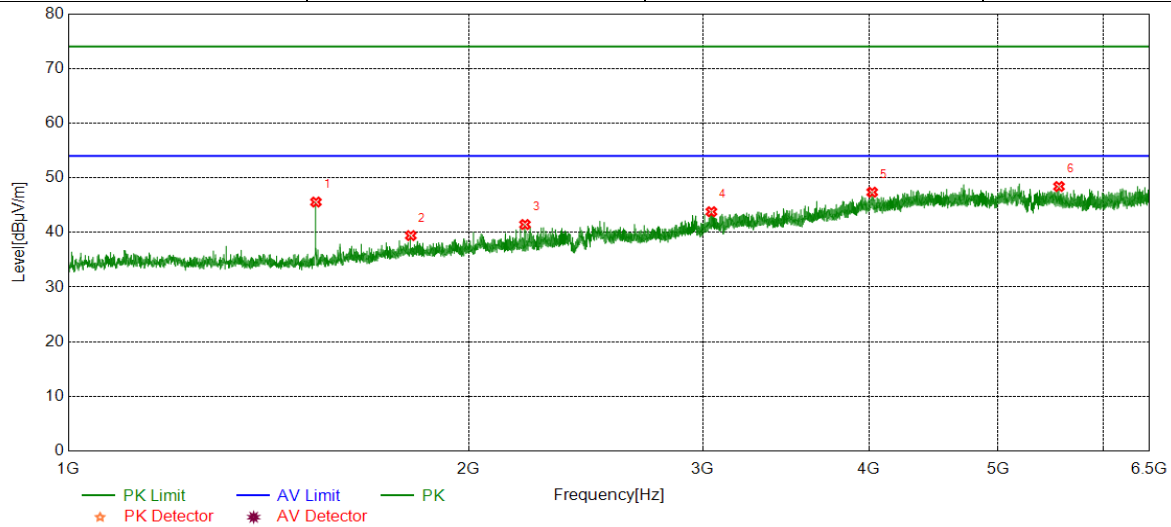


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.4226	51.31	-5.75	45.56	74.00	-28.44	peak
2	1809.4682	43.49	-4.07	39.42	74.00	-34.58	peak
3	2204.8675	43.78	-2.33	41.45	74.00	-32.55	peak
4	3044.3383	40.98	2.81	43.79	74.00	-30.21	peak
5	4020.9468	40.87	6.49	47.36	74.00	-26.64	peak
6	5556.4507	40.92	7.48	48.40	74.00	-25.60	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5280	Vertical	PASS

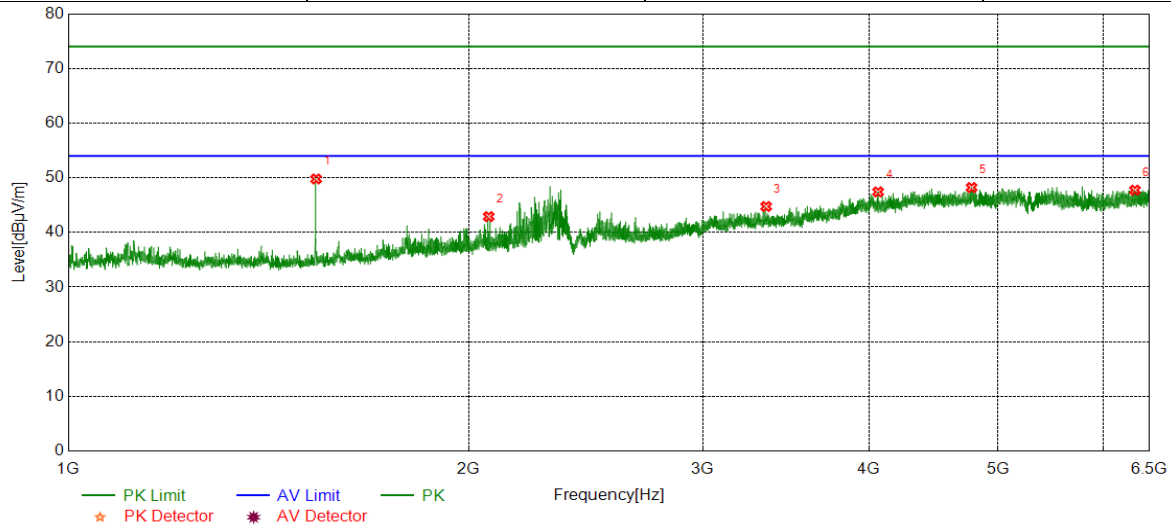


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	55.53	-5.75	49.78	74.00	-24.22	peak
2	2070.8451	45.71	-2.81	42.90	74.00	-31.10	peak
3	3346.9274	42.05	2.69	44.74	74.00	-29.26	peak
4	4062.5625	41.48	5.94	47.42	74.00	-26.58	peak
5	4776.2529	40.70	7.51	48.21	74.00	-25.79	peak
6	6337.0374	39.06	8.68	47.74	74.00	-26.26	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5320	Horizontal	PASS

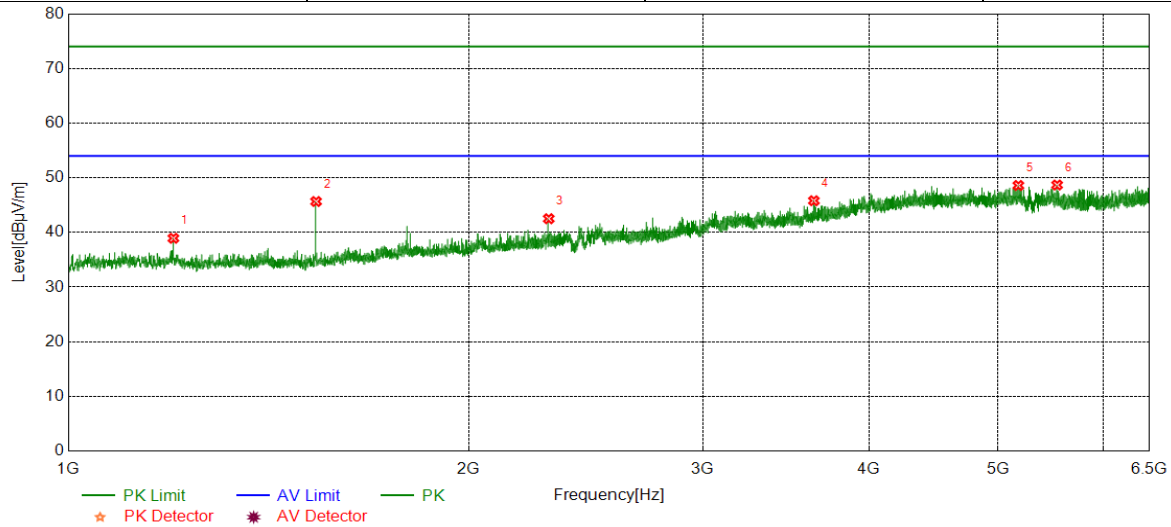


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.7000	44.49	-5.56	38.93	74.00	-35.07	peak
2	1535.7560	51.41	-5.75	45.66	74.00	-28.34	peak
3	2297.2162	44.39	-1.88	42.51	74.00	-31.49	peak
4	3635.1261	41.82	3.98	45.80	74.00	-28.20	peak
5	5178.7976	40.66	7.93	48.59	74.00	-25.41	peak
6	5538.1709	41.03	7.65	48.68	74.00	-25.32	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5320	Vertical	PASS

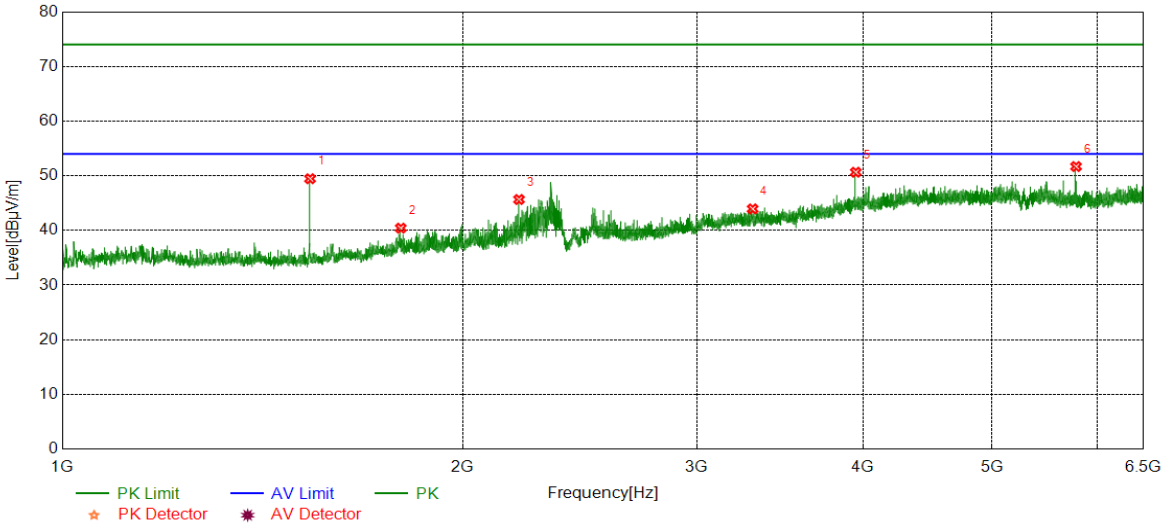


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	55.21	-5.75	49.46	74.00	-24.54	peak
2	1796.7995	44.23	-3.81	40.42	74.00	-33.58	peak
3	2204.8675	47.99	-2.33	45.66	74.00	-28.34	peak
4	3303.7560	41.06	2.88	43.94	74.00	-30.06	peak
5	3949.3833	44.92	5.73	50.65	74.00	-23.35	peak
6	5782.8092	44.30	7.39	51.69	74.00	-22.31	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5500	Horizontal	PASS

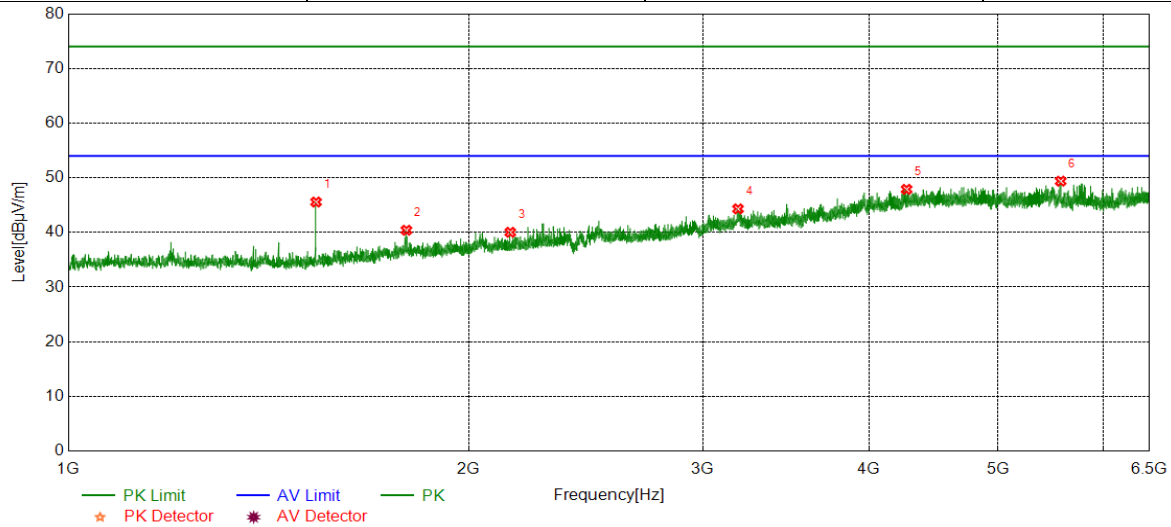


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	51.31	-5.75	45.56	74.00	-28.44	peak
2	1795.7993	44.20	-3.80	40.40	74.00	-33.60	peak
3	2149.5249	42.39	-2.36	40.03	74.00	-33.97	peak
4	3187.8542	41.12	3.19	44.31	74.00	-29.69	peak
5	4267.9187	40.63	7.26	47.89	74.00	-26.11	peak
6	5572.7859	41.04	8.34	49.38	74.00	-24.62	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5500	Vertical	PASS

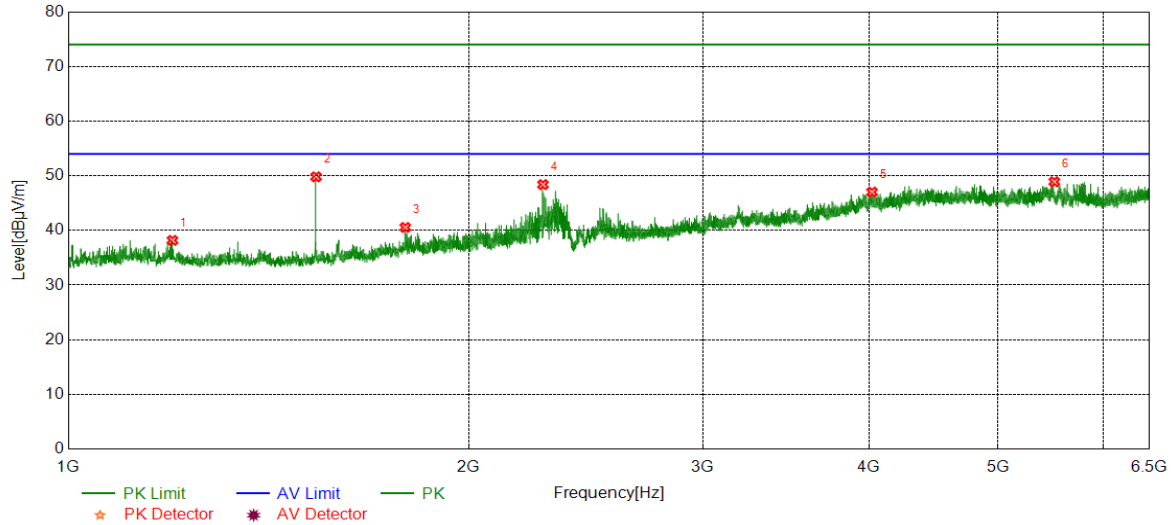


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.6996	43.74	-5.56	38.18	74.00	-35.82	peak
2	1535.7560	55.56	-5.75	49.81	74.00	-24.19	peak
3	1792.1320	44.30	-3.76	40.54	74.00	-33.46	peak
4	2274.5458	50.42	-2.03	48.39	74.00	-25.61	peak
5	4020.1689	40.80	6.22	47.02	74.00	-26.98	peak
6	5511.3346	40.43	8.48	48.91	74.00	-25.09	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5580	Horizontal	PASS

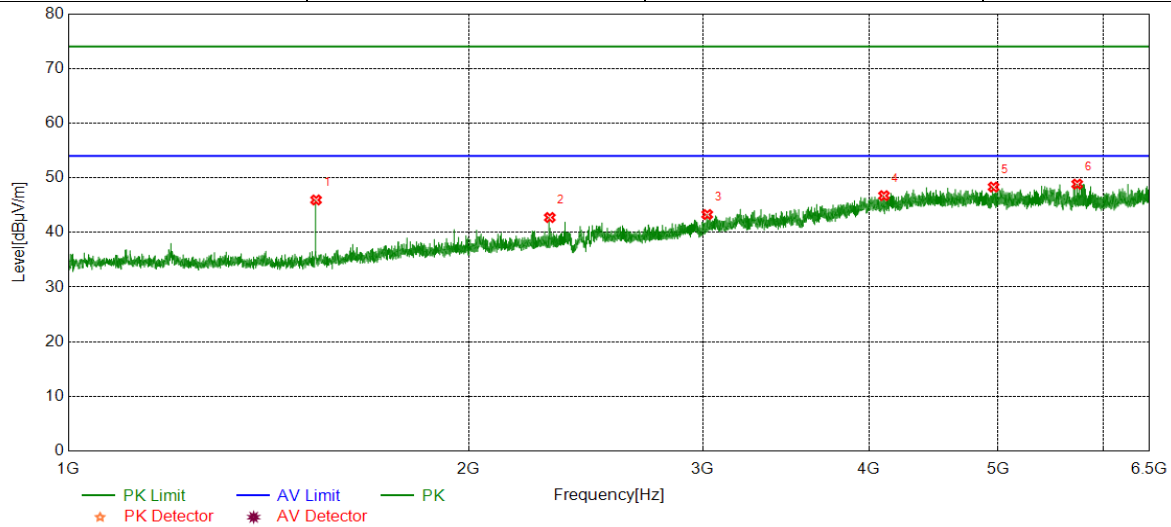


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	51.69	-5.75	45.94	74.00	-28.06	peak
2	2301.5503	44.55	-1.82	42.73	74.00	-31.27	peak
3	3022.5581	41.31	1.97	43.28	74.00	-30.72	peak
4	4104.1782	40.72	6.00	46.72	74.00	-27.28	peak
5	4961.3846	40.61	7.70	48.31	74.00	-25.69	peak
6	5734.5816	40.62	8.22	48.84	74.00	-25.16	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5580	Vertical	PASS

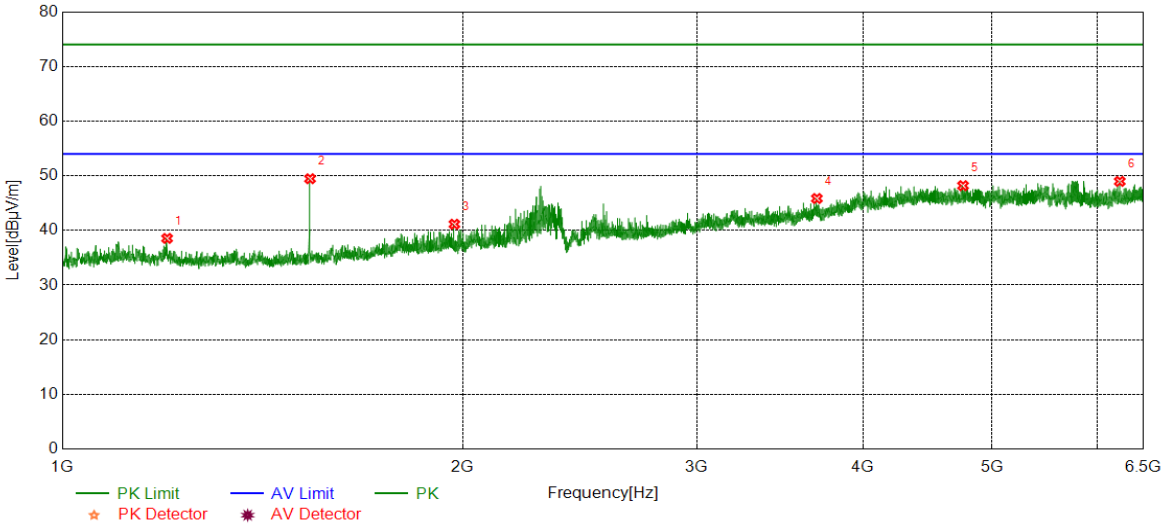


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.0332	44.10	-5.56	38.54	74.00	-35.46	peak
2	1535.7560	55.21	-5.75	49.46	74.00	-24.54	peak
3	1971.4952	44.30	-3.16	41.14	74.00	-32.86	peak
4	3692.2991	41.08	4.76	45.84	74.00	-28.16	peak
5	4755.2506	40.59	7.60	48.19	74.00	-25.81	peak
6	6237.0819	40.65	8.32	48.97	74.00	-25.03	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5700	Horizontal	PASS

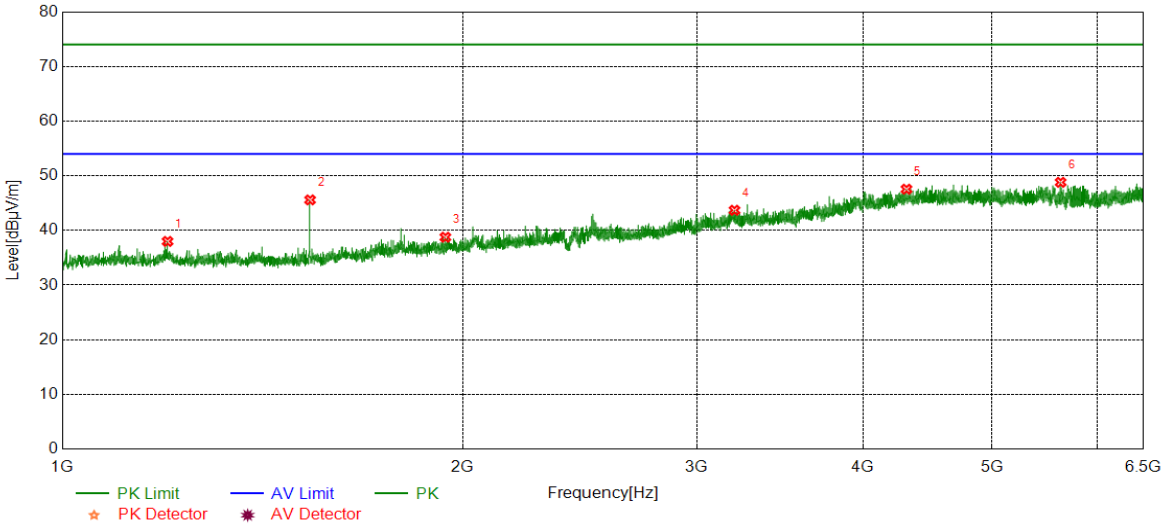


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1200.0333	43.55	-5.56	37.99	74.00	-36.01	peak
2	1535.7560	51.34	-5.75	45.59	74.00	-28.41	peak
3	1941.1569	41.85	-3.09	38.76	74.00	-35.24	peak
4	3201.4668	40.88	2.81	43.69	74.00	-30.31	peak
5	4311.8680	40.78	6.77	47.55	74.00	-26.45	peak
6	5630.3478	40.53	8.27	48.80	74.00	-25.20	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5700	Vertical	PASS

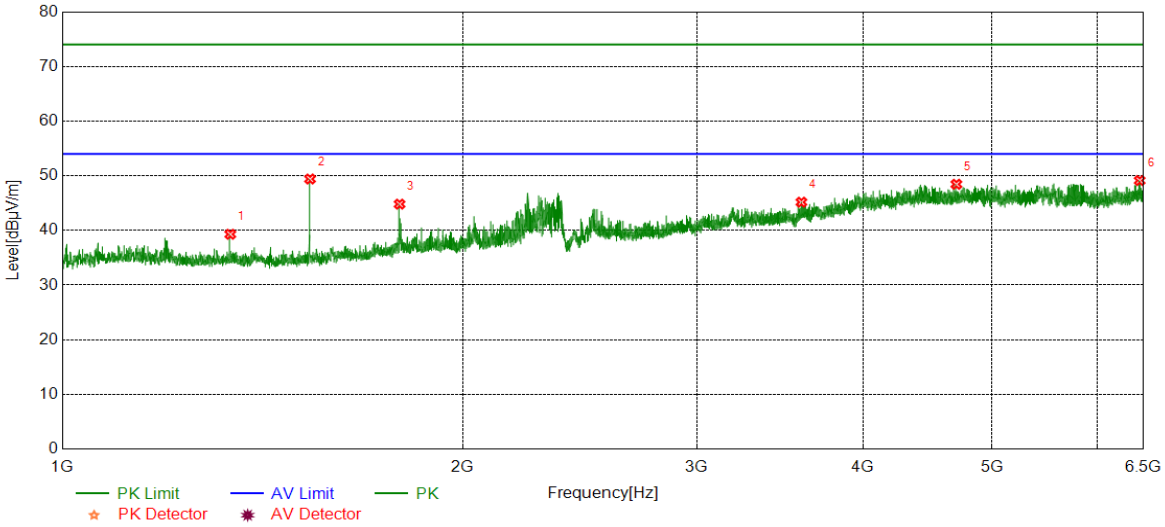


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1337.7230	44.97	-5.67	39.30	74.00	-34.70	peak
2	1535.7560	55.16	-5.75	49.41	74.00	-24.59	peak
3	1793.1322	48.58	-3.77	44.81	74.00	-29.19	peak
4	3594.6772	41.36	3.81	45.17	74.00	-28.83	peak
5	4700.8001	41.00	7.45	48.45	74.00	-25.55	peak
6	6456.0507	39.45	9.68	49.13	74.00	-24.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5720	Horizontal	PASS

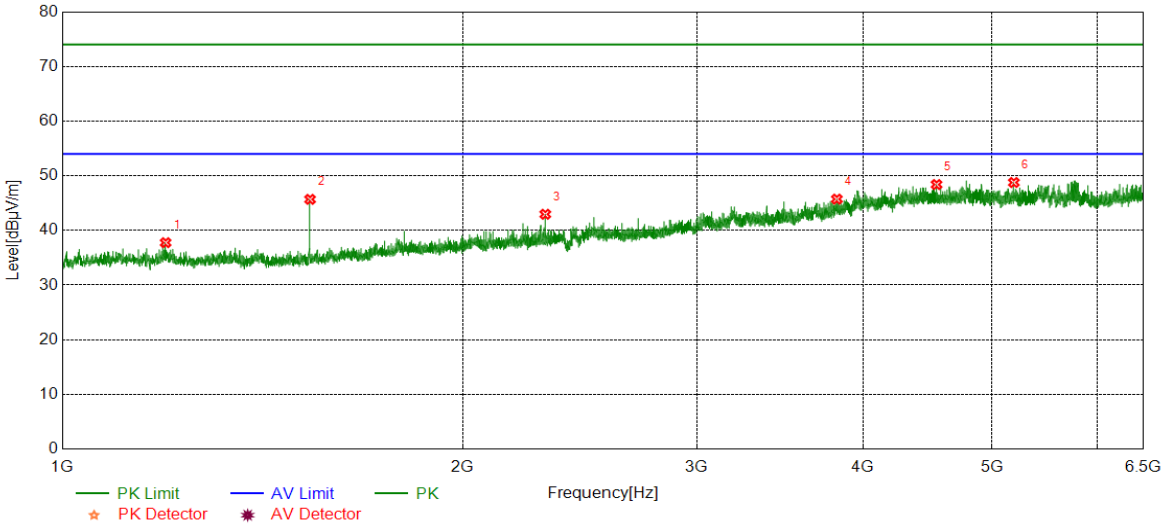


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.0327	43.32	-5.56	37.76	74.00	-36.24	peak
2	1535.7560	51.44	-5.75	45.69	74.00	-28.31	peak
3	2307.5513	44.66	-1.70	42.96	74.00	-31.04	peak
4	3822.2025	40.57	5.16	45.73	74.00	-28.27	peak
5	4542.1158	41.00	7.40	48.40	74.00	-25.60	peak
6	5192.4103	41.61	7.16	48.77	74.00	-25.23	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5720	Vertical	PASS

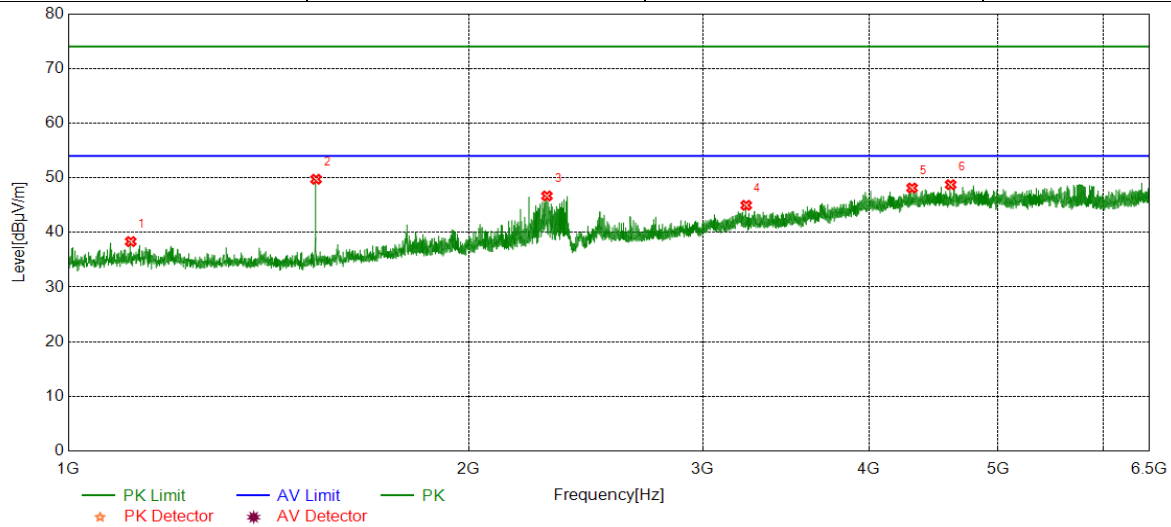


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1114.3524	43.82	-5.49	38.33	74.00	-35.67	peak
2	1535.7560	55.48	-5.75	49.73	74.00	-24.27	peak
3	2290.2150	48.62	-1.94	46.68	74.00	-27.32	peak
4	3233.3593	42.71	2.25	44.96	74.00	-29.04	peak
5	4308.3676	41.36	6.77	48.13	74.00	-25.87	peak
6	4606.2896	41.55	7.18	48.73	74.00	-25.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

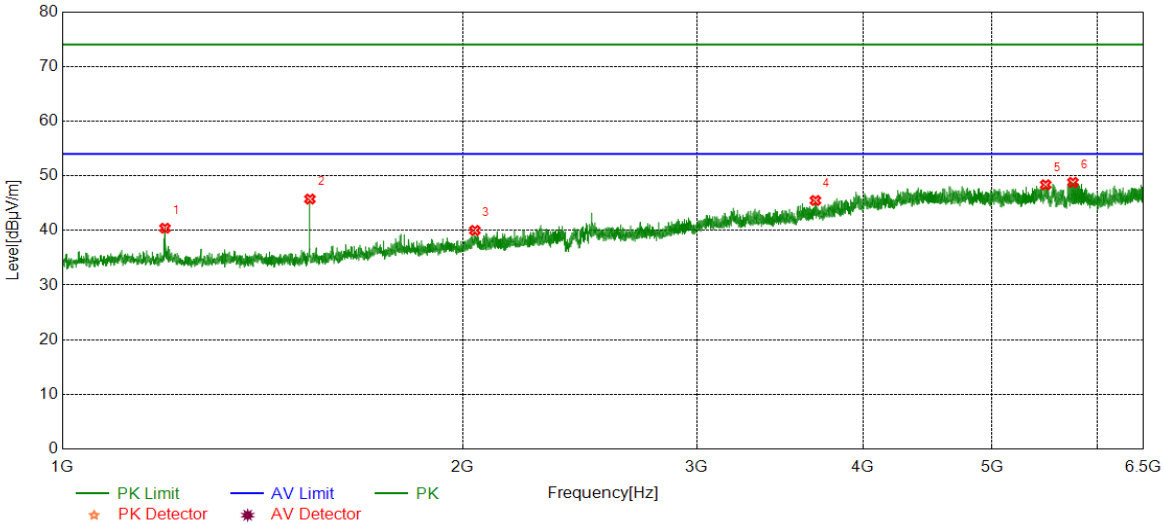


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.6991	45.98	-5.57	40.41	74.00	-33.59	peak
2	1535.4226	51.49	-5.75	45.74	74.00	-28.26	peak
3	2042.8405	42.39	-2.39	40.00	74.00	-34.00	peak
4	3683.3537	40.91	4.57	45.48	74.00	-28.52	peak
5	5486.4429	39.88	8.47	48.35	74.00	-25.65	peak
6	5751.3057	40.60	8.20	48.80	74.00	-25.20	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

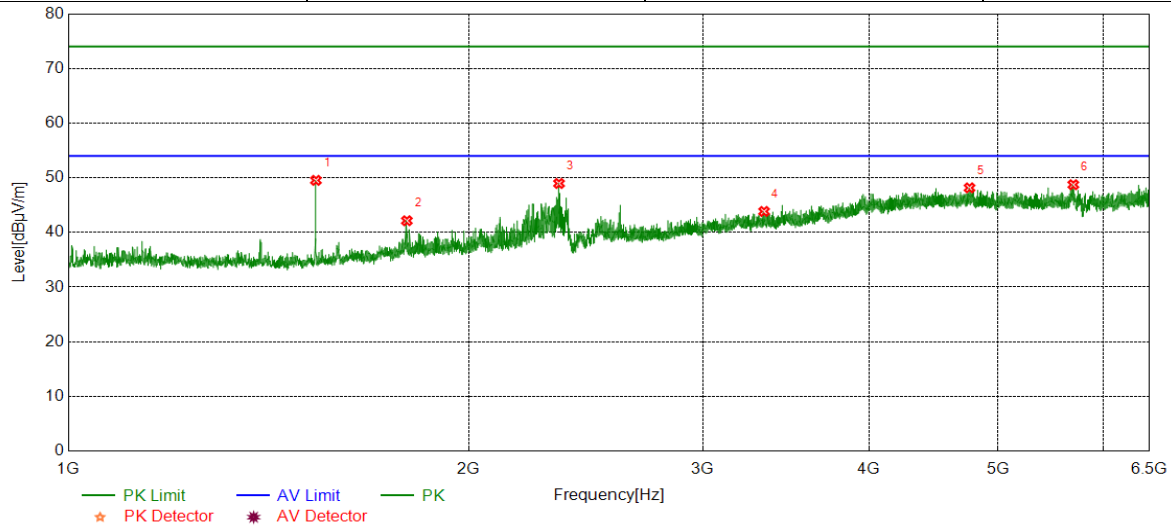


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.4226	55.28	-5.75	49.53	74.00	-24.47	peak
2	1797.1329	45.95	-3.81	42.14	74.00	-31.86	peak
3	2338.5564	50.77	-1.81	48.96	74.00	-25.04	peak
4	3334.8705	41.07	2.77	43.84	74.00	-30.16	peak
5	4759.1399	40.55	7.61	48.16	74.00	-25.84	peak
6	5695.6884	40.85	7.88	48.73	74.00	-25.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5785	Horizontal	PASS

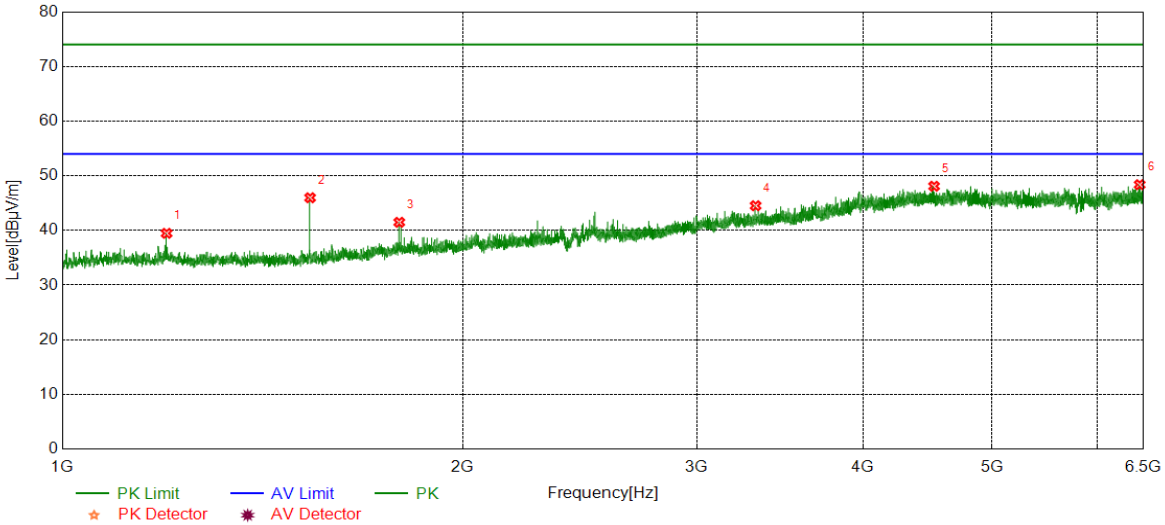


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.0330	45.03	-5.56	39.47	74.00	-34.53	peak
2	1535.7560	51.73	-5.75	45.98	74.00	-28.02	peak
3	1792.1320	45.25	-3.76	41.49	74.00	-32.51	peak
4	3320.8690	42.04	2.48	44.52	74.00	-29.48	peak
5	4522.6692	41.09	7.00	48.09	74.00	-25.91	peak
6	6456.0507	38.88	9.49	48.37	74.00	-25.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5785	Vertical	PASS

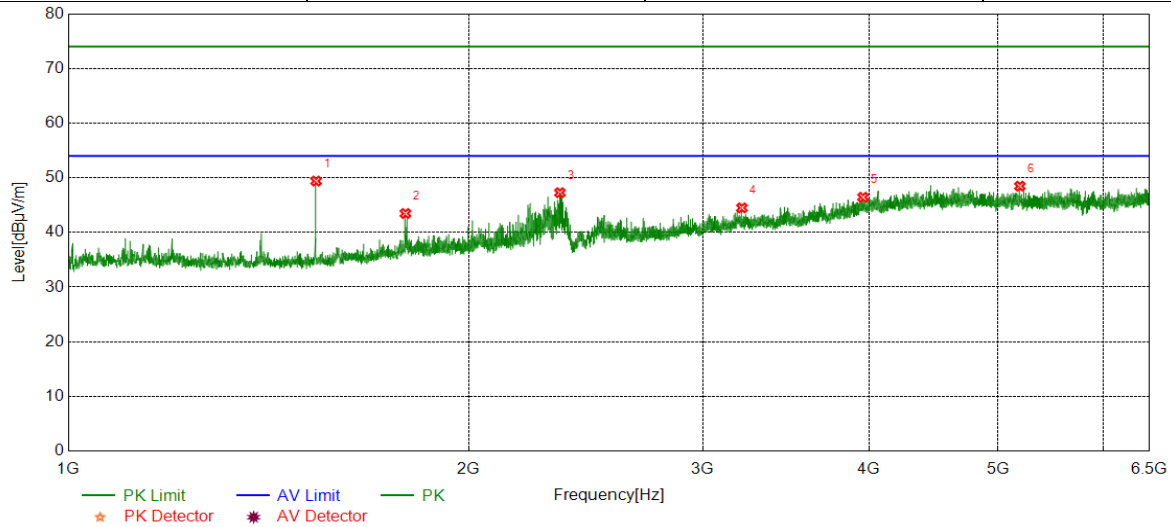


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	55.15	-5.75	49.40	74.00	-24.60	peak
2	1792.7988	47.23	-3.77	43.46	74.00	-30.54	peak
3	2342.2237	49.05	-1.78	47.27	74.00	-26.73	peak
4	3209.6344	42.45	2.04	44.49	74.00	-29.51	peak
5	3957.9398	40.50	5.93	46.43	74.00	-27.57	peak
6	5192.7992	41.55	6.91	48.46	74.00	-25.54	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

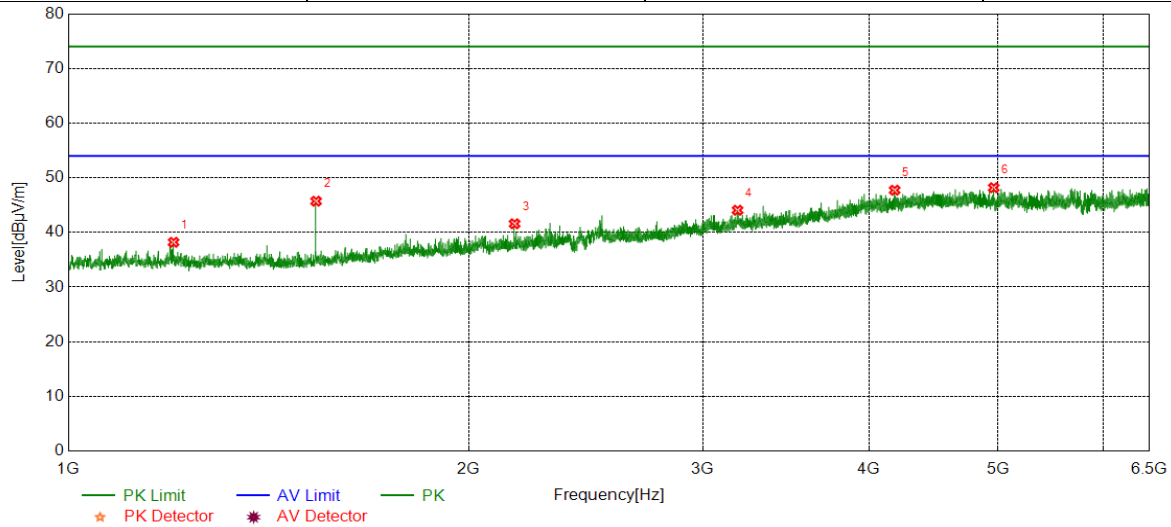


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1200.0333	43.76	-5.56	38.20	74.00	-35.80	peak
2	1535.7560	51.47	-5.75	45.72	74.00	-28.28	peak
3	2165.5276	44.00	-2.42	41.58	74.00	-32.42	peak
4	3185.5206	41.59	2.47	44.06	74.00	-29.94	peak
5	4180.7979	41.69	6.04	47.73	74.00	-26.27	peak
6	4962.9403	41.10	7.08	48.18	74.00	-25.82	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

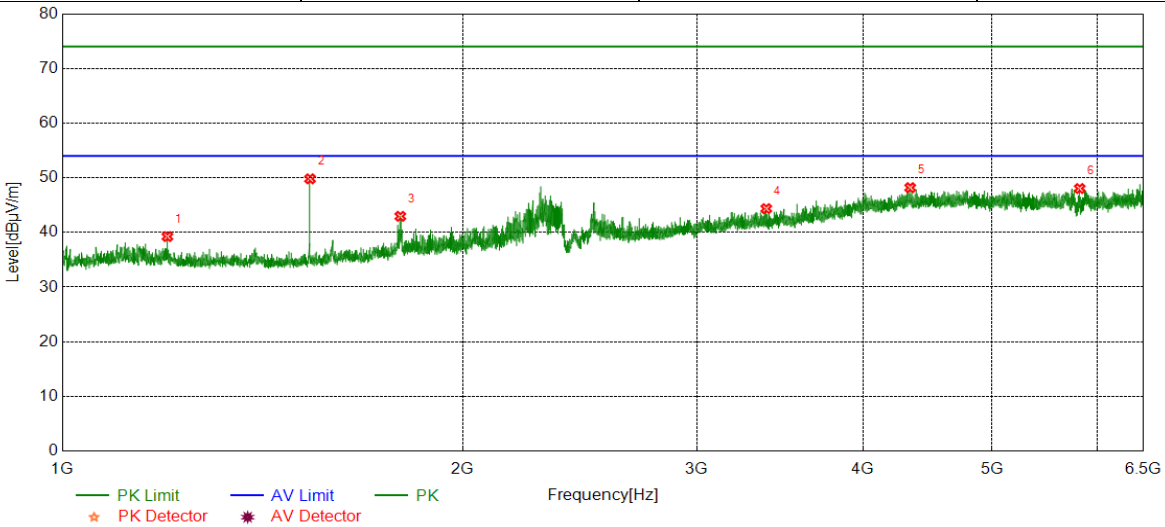


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.7000	44.80	-5.56	39.24	74.00	-34.76	peak
2	1535.7560	55.56	-5.75	49.81	74.00	-24.19	peak
3	1795.4659	46.75	-3.80	42.95	74.00	-31.05	peak
4	3382.7092	41.58	2.77	44.35	74.00	-29.65	peak
5	4339.4822	41.29	6.90	48.19	74.00	-25.81	peak
6	5819.3688	40.45	7.58	48.03	74.00	-25.97	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5180	Horizontal	PASS

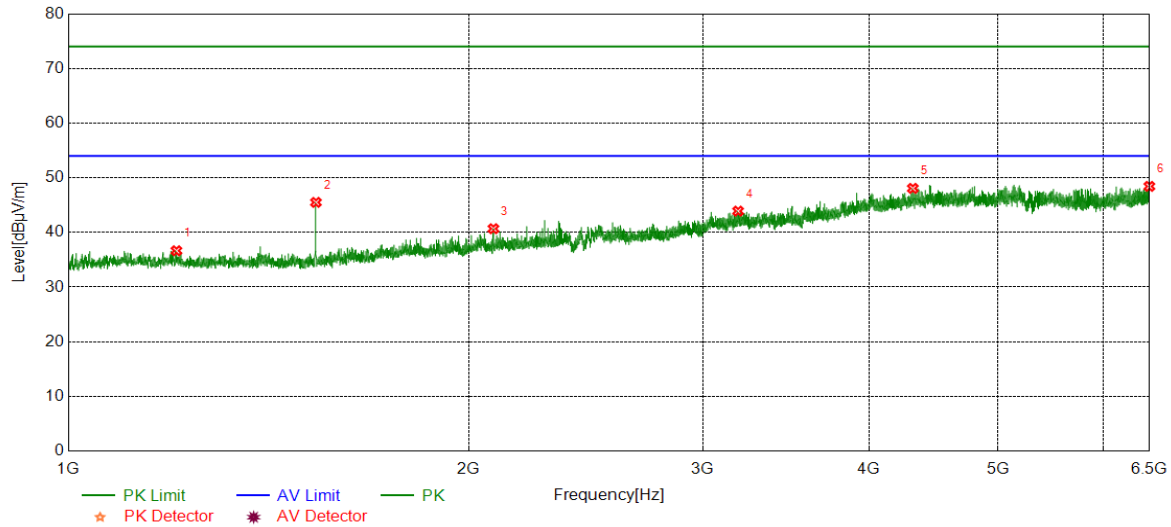


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1206.0343	42.06	-5.41	36.65	74.00	-37.35	peak
2	1535.4226	51.25	-5.75	45.50	74.00	-28.50	peak
3	2087.5146	43.29	-2.61	40.68	74.00	-33.32	peak
4	3188.2431	41.24	2.66	43.90	74.00	-30.10	peak
5	4314.2016	41.30	6.76	48.06	74.00	-25.94	peak
6	6497.2775	38.94	9.49	48.43	74.00	-25.57	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5180	Vertical	PASS

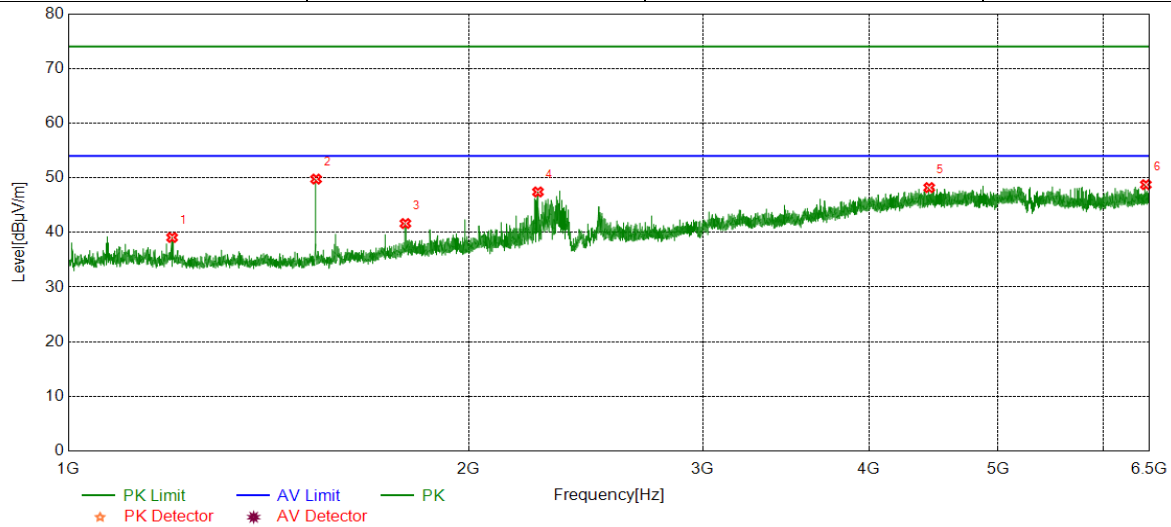


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.0328	44.63	-5.56	39.07	74.00	-34.93	peak
2	1535.7560	55.51	-5.75	49.76	74.00	-24.24	peak
3	1792.4654	45.39	-3.76	41.63	74.00	-32.37	peak
4	2254.8758	49.50	-2.09	47.41	74.00	-26.59	peak
5	4438.2709	41.27	6.93	48.20	74.00	-25.80	peak
6	6457.9953	39.27	9.47	48.74	74.00	-25.26	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5200	Horizontal	PASS

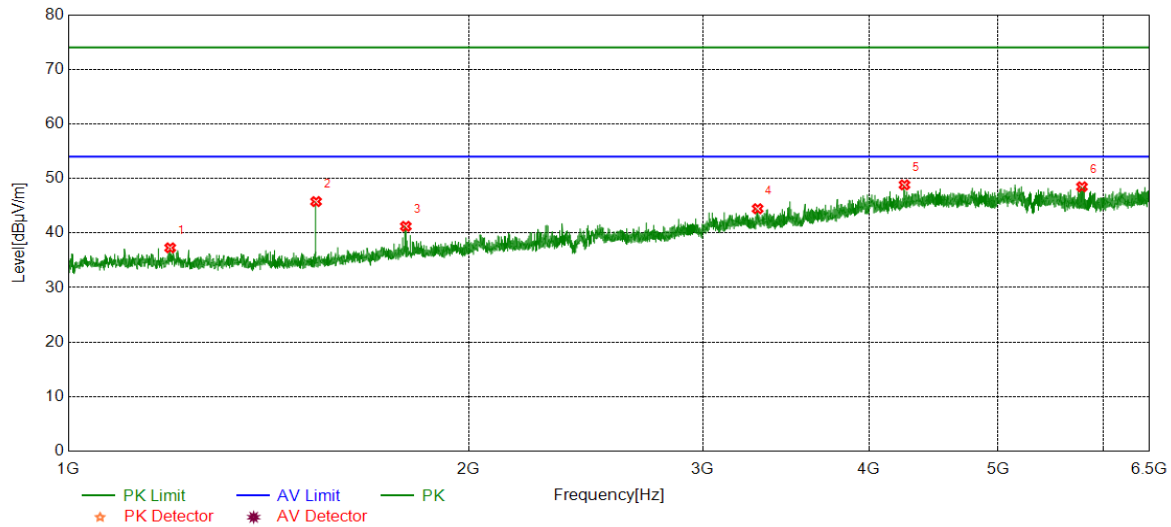


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1193.0322	42.85	-5.57	37.28	74.00	-36.72	peak
2	1535.7560	51.51	-5.75	45.76	74.00	-28.24	peak
3	1793.7990	45.00	-3.78	41.22	74.00	-32.78	peak
4	3297.9220	41.57	2.88	44.45	74.00	-29.55	peak
5	4252.3614	41.96	6.86	48.82	74.00	-25.18	peak
6	5781.6424	41.08	7.39	48.47	74.00	-25.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5200	Vertical	PASS

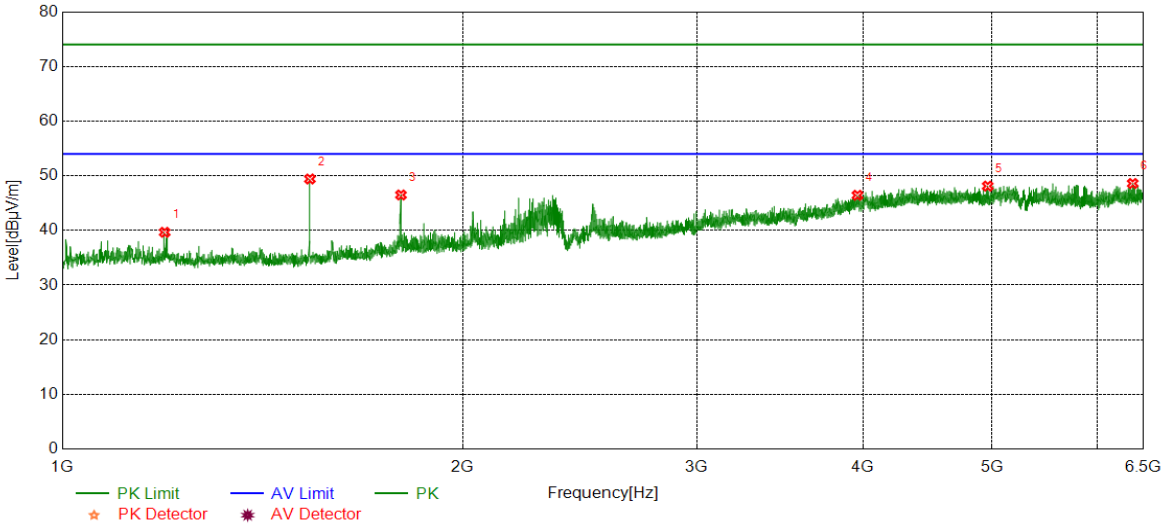


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.0323	45.23	-5.57	39.66	74.00	-34.34	peak
2	1535.4226	55.16	-5.75	49.41	74.00	-24.59	peak
3	1797.4662	50.31	-3.82	46.49	74.00	-27.51	peak
4	3961.0512	40.50	5.93	46.43	74.00	-27.57	peak
5	4962.9403	40.72	7.39	48.11	74.00	-25.89	peak
6	6378.2643	39.52	9.07	48.59	74.00	-25.41	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5240	Horizontal	PASS

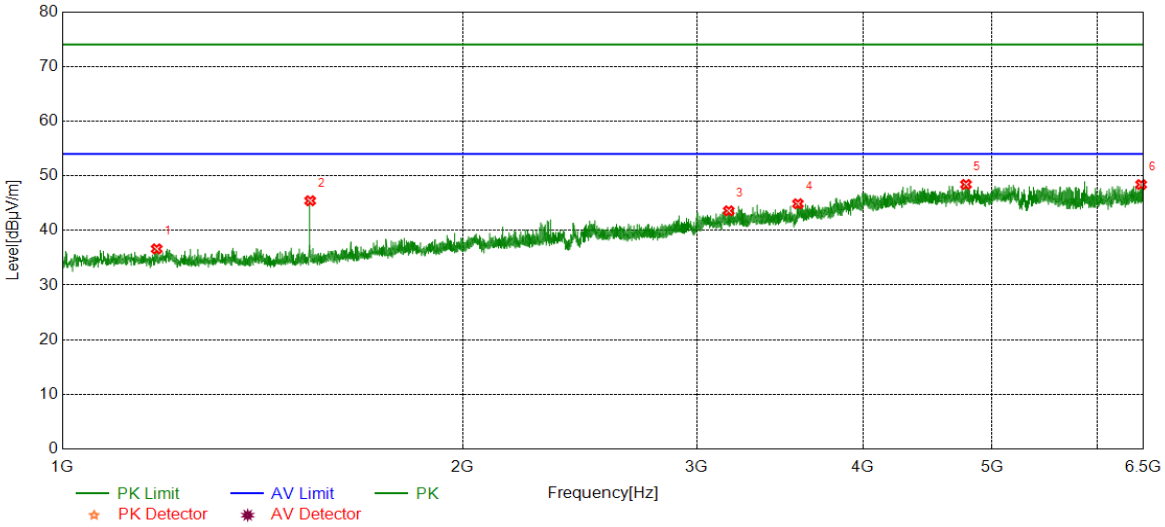


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1177.6963	42.25	-5.63	36.62	74.00	-37.38	peak
2	1536.0893	51.18	-5.75	45.43	74.00	-28.57	peak
3	3169.9633	41.38	2.21	43.59	74.00	-30.41	peak
4	3572.8970	41.20	3.68	44.88	74.00	-29.12	peak
5	4779.7533	40.84	7.57	48.41	74.00	-25.59	peak
6	6471.9969	38.86	9.53	48.39	74.00	-25.61	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5240	Vertical	PASS

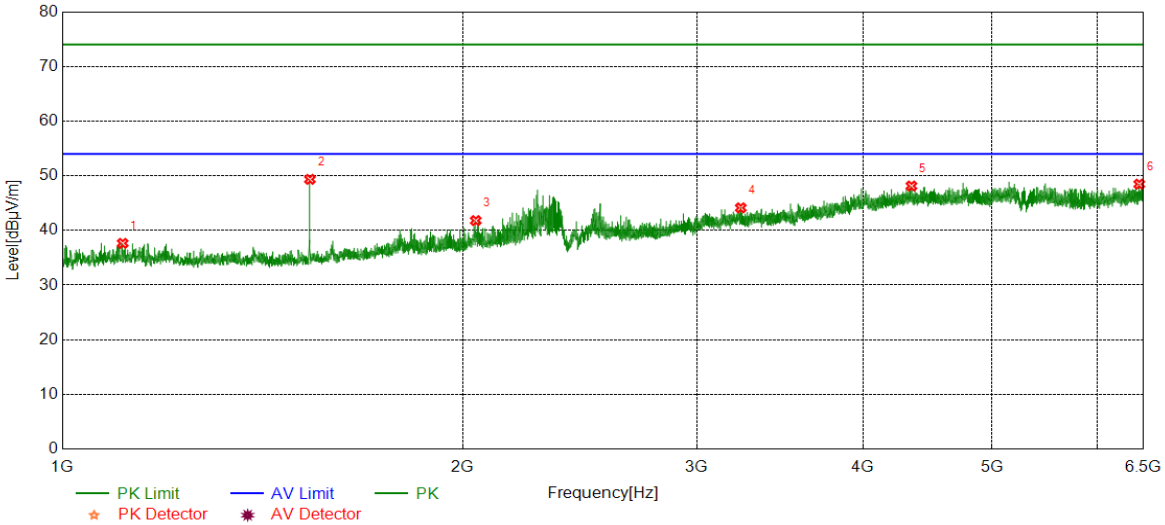


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1110.3517	43.14	-5.50	37.64	74.00	-36.36	peak
2	1535.4226	55.10	-5.75	49.35	74.00	-24.65	peak
3	2045.8410	44.19	-2.39	41.80	74.00	-32.20	peak
4	3236.4707	41.47	2.66	44.13	74.00	-29.87	peak
5	4348.8165	40.97	7.16	48.13	74.00	-25.87	peak
6	6450.9946	39.12	9.35	48.47	74.00	-25.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5260	Horizontal	PASS

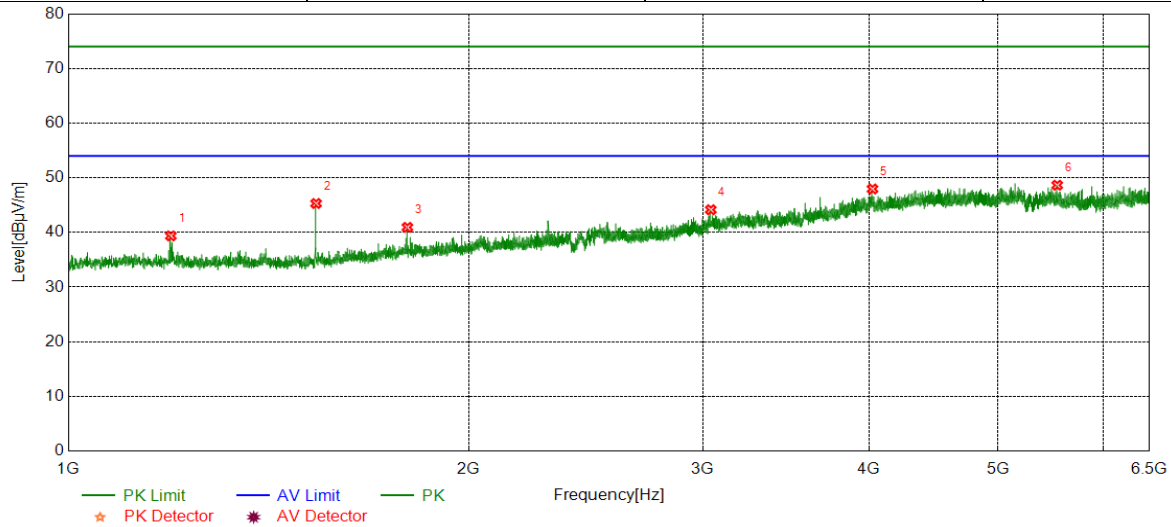


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.3657	44.94	-5.57	39.37	74.00	-34.63	peak
2	1535.7560	51.05	-5.75	45.30	74.00	-28.70	peak
3	1798.7998	44.76	-3.83	40.93	74.00	-33.07	peak
4	3041.2268	41.33	2.82	44.15	74.00	-29.85	peak
5	4023.2804	41.52	6.43	47.95	74.00	-26.05	peak
6	5539.3377	40.99	7.65	48.64	74.00	-25.36	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5260	Vertical	PASS

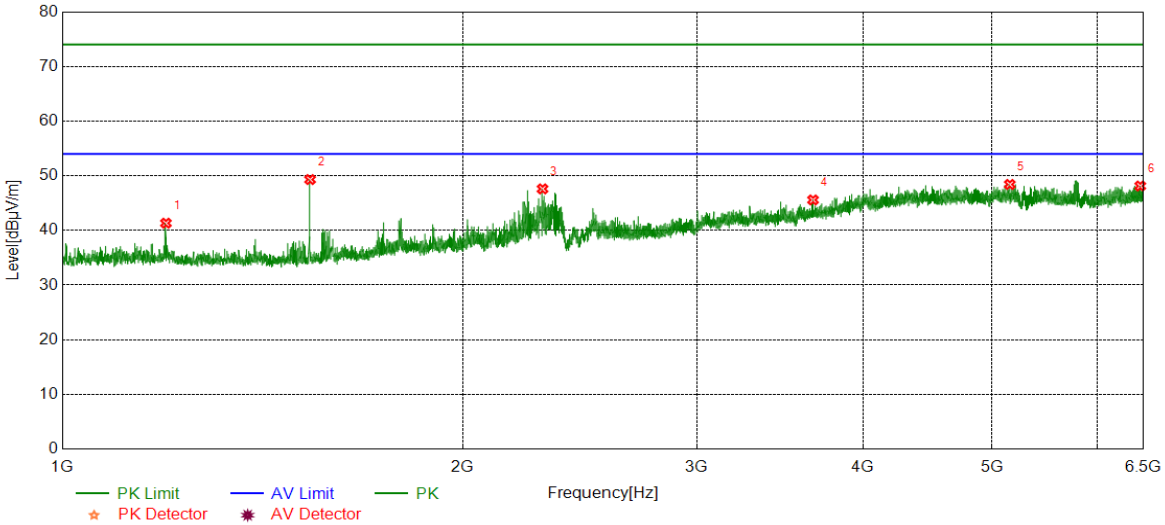


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.6995	46.89	-5.56	41.33	74.00	-32.67	peak
2	1535.7560	55.06	-5.75	49.31	74.00	-24.69	peak
3	2296.5494	49.48	-1.88	47.60	74.00	-26.40	peak
4	3667.7964	41.38	4.20	45.58	74.00	-28.42	peak
5	5156.2396	40.44	7.98	48.42	74.00	-25.58	peak
6	6462.2736	38.61	9.52	48.13	74.00	-25.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5280	Horizontal	PASS

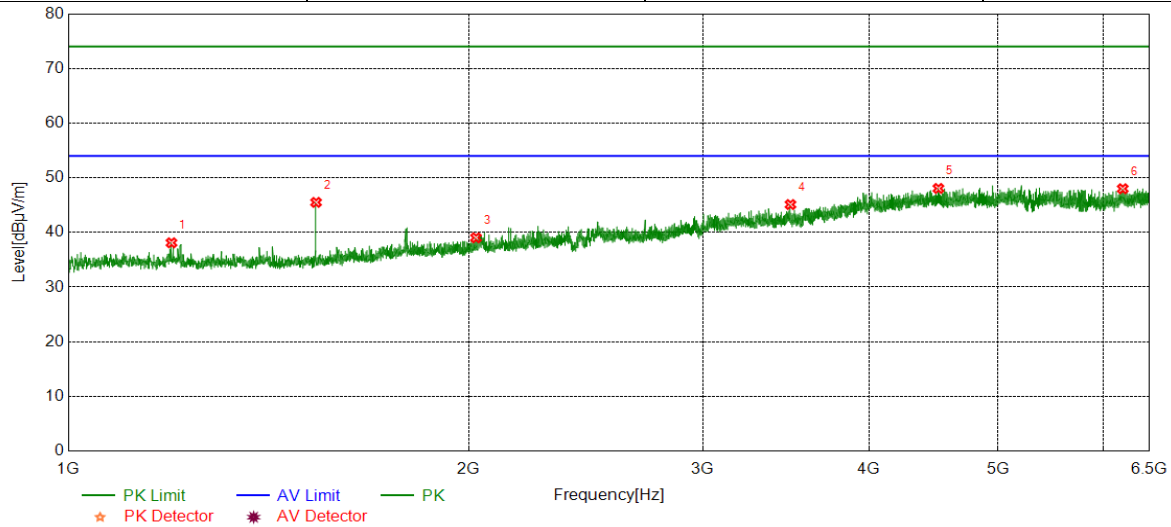


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.6993	43.66	-5.56	38.10	74.00	-35.90	peak
2	1535.7560	51.25	-5.75	45.50	74.00	-28.50	peak
3	2025.5043	41.80	-2.78	39.02	74.00	-34.98	peak
4	3490.8323	41.50	3.60	45.10	74.00	-28.90	peak
5	4509.8344	40.65	7.40	48.05	74.00	-25.95	peak
6	6204.8005	39.61	8.38	47.99	74.00	-26.01	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5280	Vertical	PASS

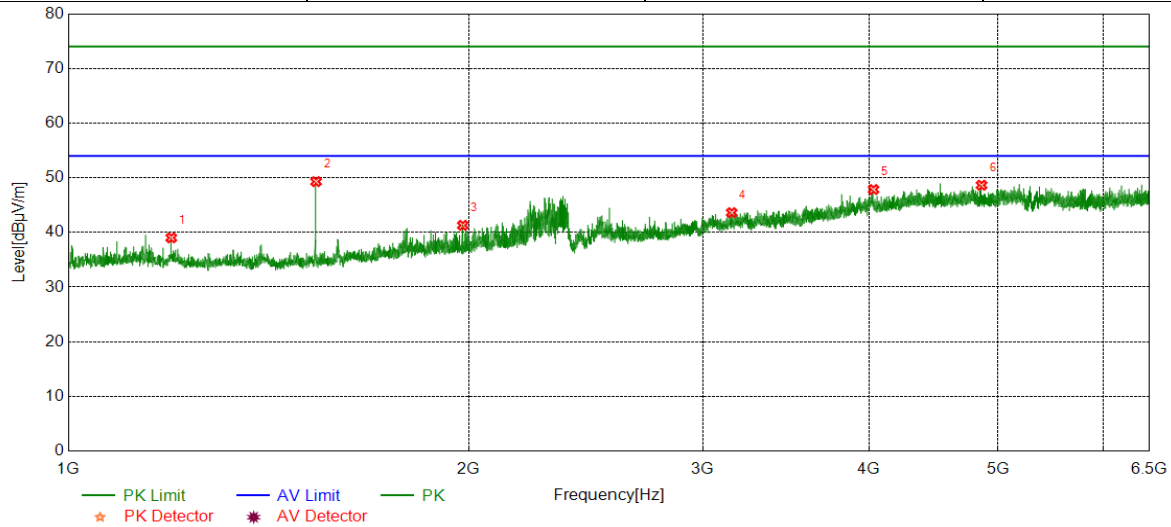


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.3659	44.57	-5.56	39.01	74.00	-34.99	peak
2	1535.7560	55.05	-5.75	49.30	74.00	-24.70	peak
3	1979.8300	44.50	-3.20	41.30	74.00	-32.70	peak
4	3153.2392	41.17	2.45	43.62	74.00	-30.38	peak
5	4030.2811	41.62	6.23	47.85	74.00	-26.15	peak
6	4859.0955	41.28	7.36	48.64	74.00	-25.36	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5320	Horizontal	PASS

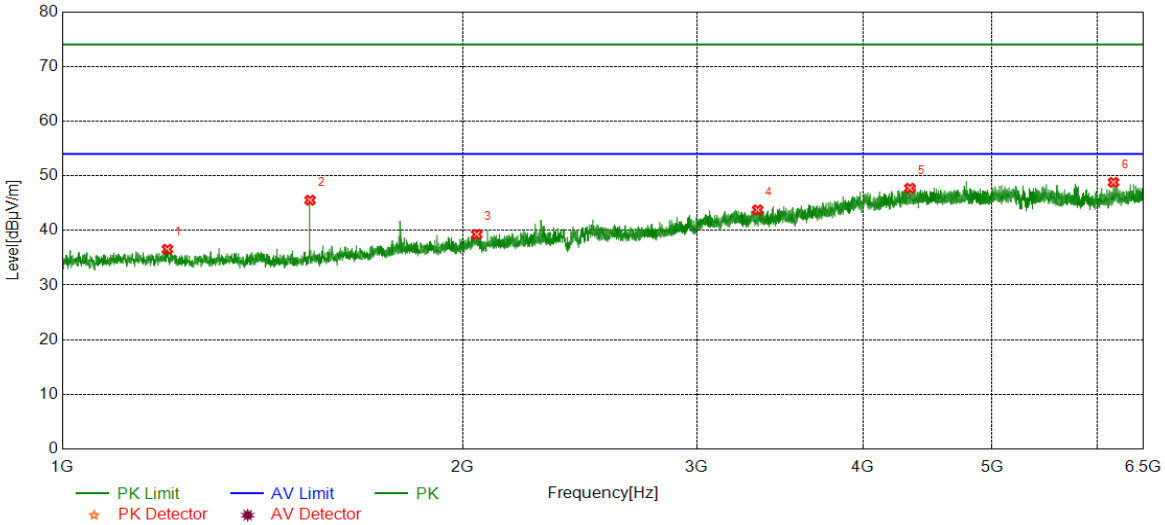


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.7000	42.12	-5.56	36.56	74.00	-37.44	peak
2	1535.7560	51.29	-5.75	45.54	74.00	-28.46	peak
3	2049.5083	41.66	-2.38	39.28	74.00	-34.72	peak
4	3332.5369	41.00	2.75	43.75	74.00	-30.25	peak
5	4337.1486	40.70	7.03	47.73	74.00	-26.27	peak
6	6169.7966	40.71	8.09	48.80	74.00	-25.20	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5320	Vertical	PASS

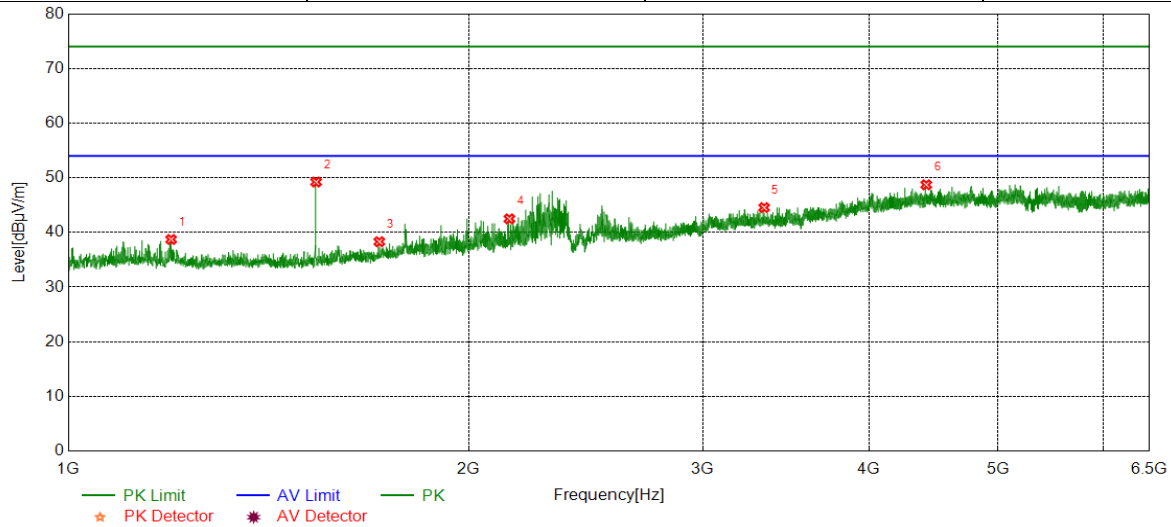


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.0325	44.28	-5.57	38.71	74.00	-35.29	peak
2	1535.7560	54.98	-5.75	49.23	74.00	-24.77	peak
3	1713.4522	42.73	-4.43	38.30	74.00	-35.70	peak
4	2146.1910	44.86	-2.37	42.49	74.00	-31.51	peak
5	3335.2595	41.79	2.75	44.54	74.00	-29.46	peak
6	4415.7129	41.76	6.96	48.72	74.00	-25.28	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5500	Horizontal	PASS

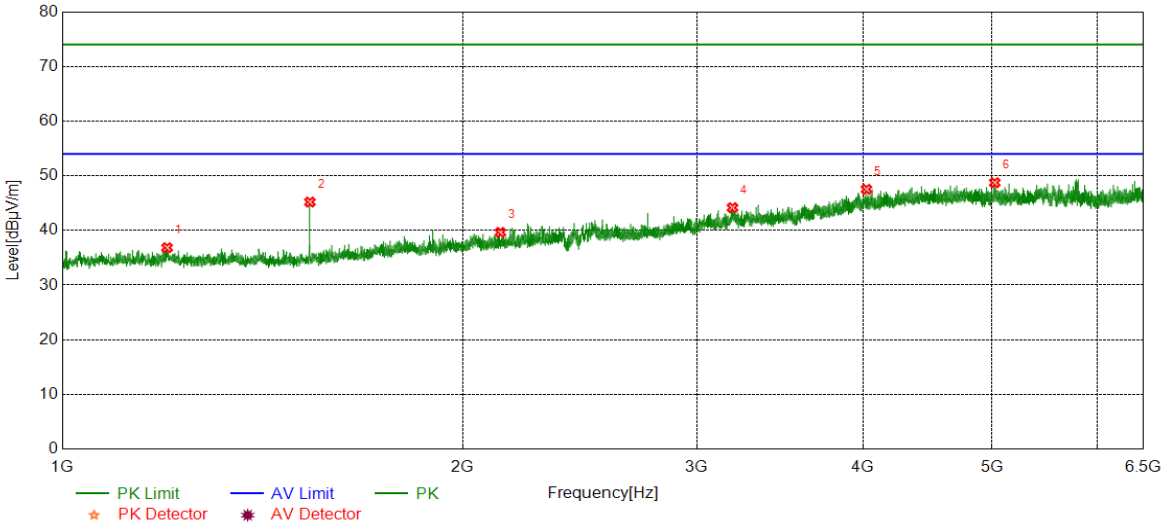


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.0332	42.40	-5.56	36.84	74.00	-37.16	peak
2	1535.4226	50.94	-5.75	45.19	74.00	-28.81	peak
3	2134.8558	42.00	-2.36	39.64	74.00	-34.36	peak
4	3190.5767	40.89	3.27	44.16	74.00	-29.84	peak
5	4023.2804	41.43	6.09	47.52	74.00	-26.48	peak
6	5023.6137	41.20	7.53	48.73	74.00	-25.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5500	Vertical	PASS

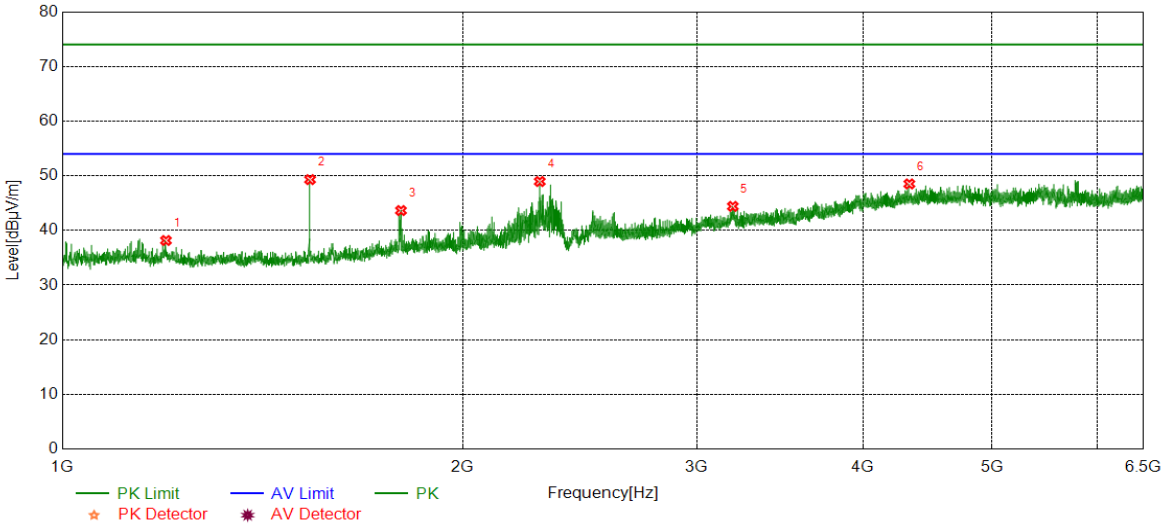


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.6995	43.72	-5.56	38.16	74.00	-35.84	peak
2	1535.7560	55.05	-5.75	49.30	74.00	-24.70	peak
3	1797.4662	47.46	-3.82	43.64	74.00	-30.36	peak
4	2285.5476	50.89	-1.94	48.95	74.00	-25.05	peak
5	3192.1325	41.19	3.21	44.40	74.00	-29.60	peak
6	4333.2593	41.65	6.86	48.51	74.00	-25.49	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5580	Horizontal	PASS

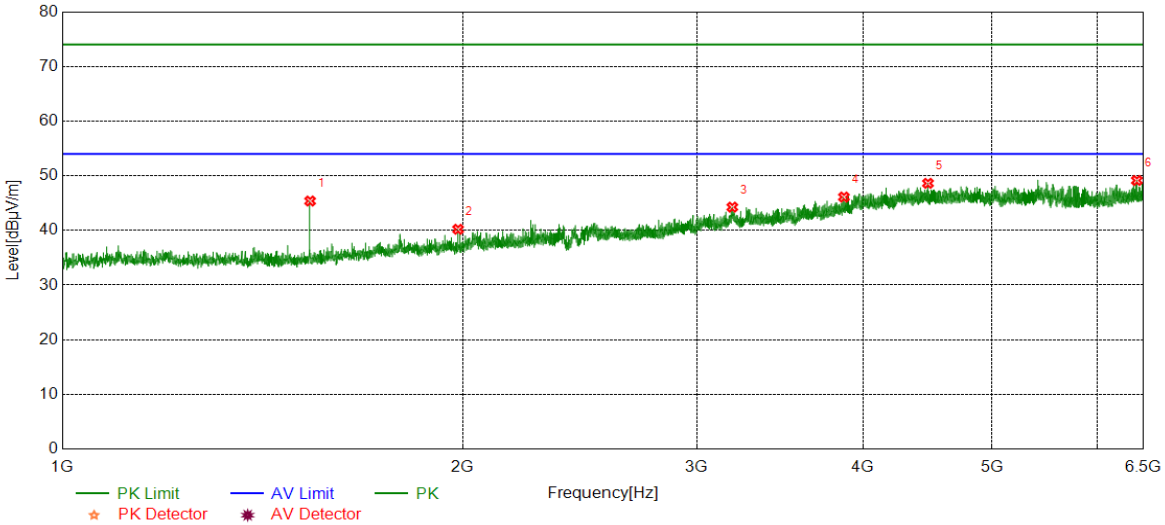


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	51.13	-5.75	45.38	74.00	-28.62	peak
2	1984.1640	43.36	-3.15	40.21	74.00	-33.79	peak
3	3189.4099	40.99	3.27	44.26	74.00	-29.74	peak
4	3869.2633	40.95	5.16	46.11	74.00	-27.89	peak
5	4475.2195	41.50	7.12	48.62	74.00	-25.38	peak
6	6424.5472	39.16	9.98	49.14	74.00	-24.86	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5580	Vertical	PASS

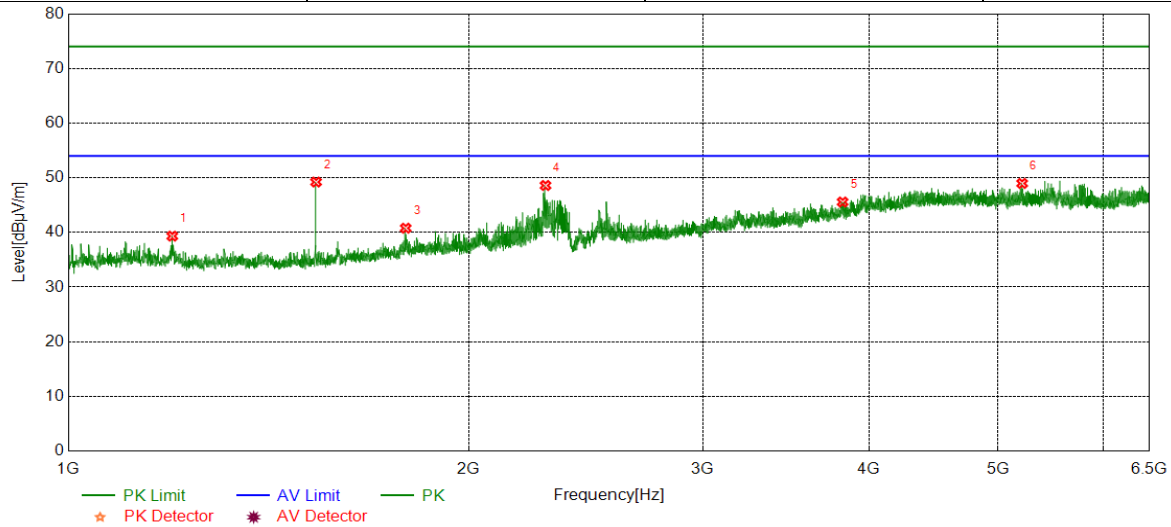


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.3662	44.88	-5.56	39.32	74.00	-34.68	peak
2	1535.7560	54.97	-5.75	49.22	74.00	-24.78	peak
3	1793.4656	44.55	-3.77	40.78	74.00	-33.22	peak
4	2284.5474	50.53	-1.94	48.59	74.00	-25.41	peak
5	3820.6467	40.40	5.17	45.57	74.00	-28.43	peak
6	5213.0237	41.30	7.67	48.97	74.00	-25.03	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5700	Horizontal	PASS

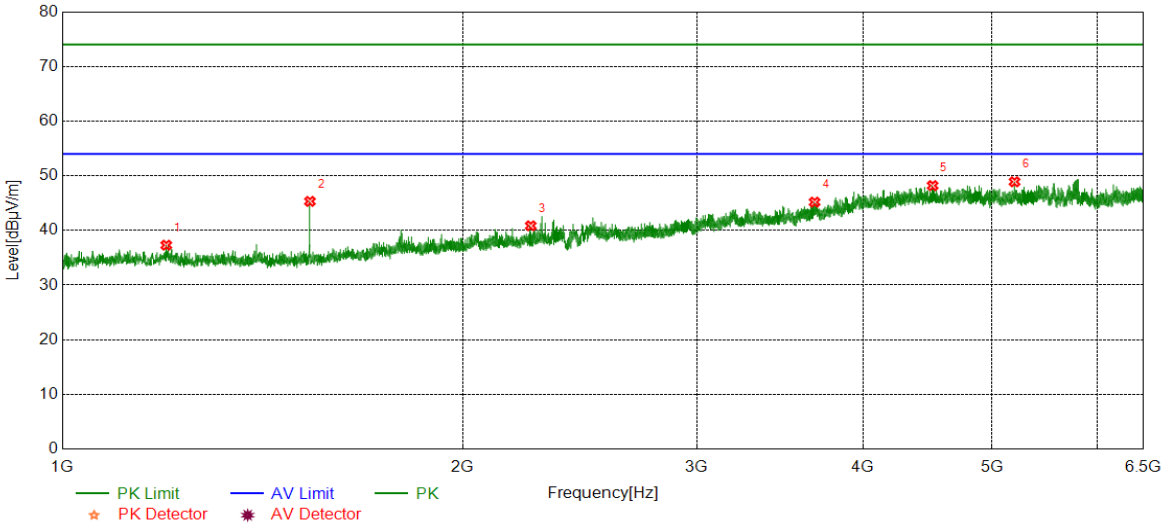


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.3662	42.86	-5.56	37.30	74.00	-36.70	peak
2	1535.4226	51.07	-5.75	45.32	74.00	-28.68	peak
3	2250.2084	42.92	-2.07	40.85	74.00	-33.15	peak
4	3677.9087	40.79	4.39	45.18	74.00	-28.82	peak
5	4511.3902	40.72	7.48	48.20	74.00	-25.80	peak
6	5198.6332	41.60	7.30	48.90	74.00	-25.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5700	Vertical	PASS

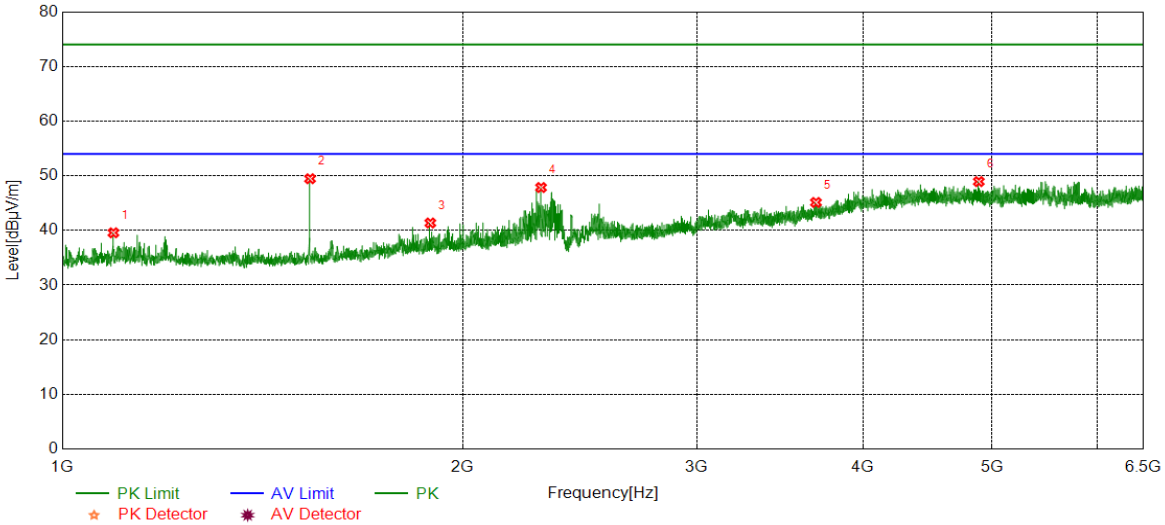


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1092.6821	45.17	-5.60	39.57	74.00	-34.43	peak
2	1535.7560	55.21	-5.75	49.46	74.00	-24.54	peak
3	1891.1485	44.89	-3.53	41.36	74.00	-32.64	peak
4	2290.5484	49.78	-1.93	47.85	74.00	-26.15	peak
5	3686.4652	40.46	4.66	45.12	74.00	-28.88	peak
6	4886.7096	41.62	7.31	48.93	74.00	-25.07	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5720	Horizontal	PASS

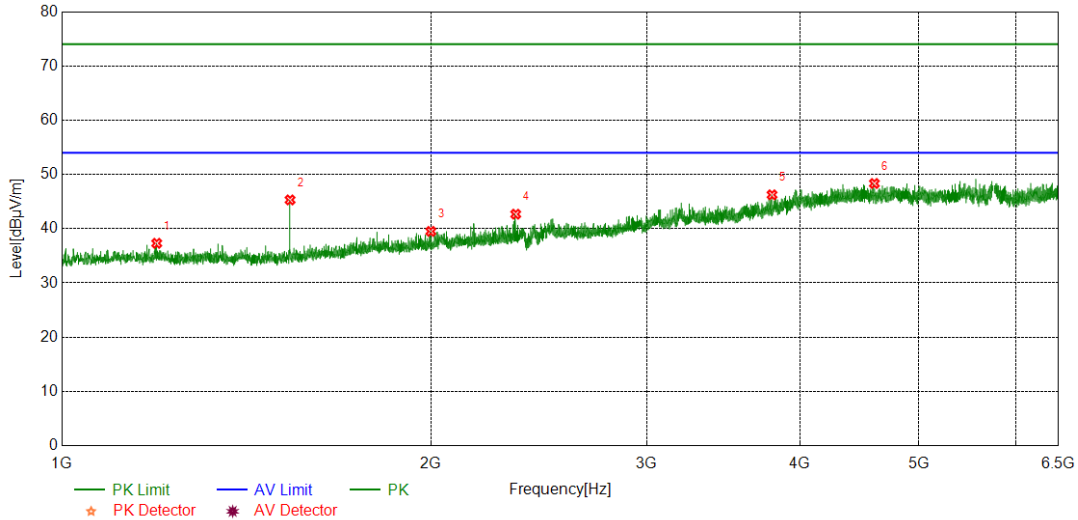


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.3659	42.87	-5.56	37.31	74.00	-36.69	peak
2	1535.4226	51.06	-5.75	45.31	74.00	-28.69	peak
3	1999.8333	42.50	-2.99	39.51	74.00	-34.49	peak
4	2345.5576	44.42	-1.74	42.68	74.00	-31.32	peak
5	3795.3662	41.14	5.11	46.25	74.00	-27.75	peak
6	4598.8999	41.13	7.21	48.34	74.00	-25.66	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5720	Vertical	PASS

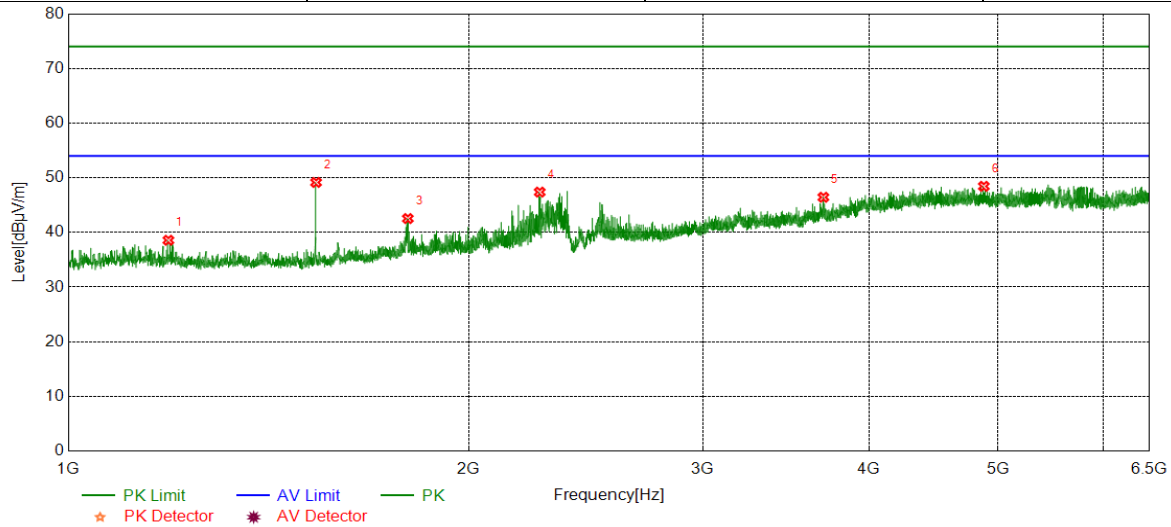


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1189.3649	44.15	-5.58	38.57	74.00	-35.43	peak
2	1535.7560	54.90	-5.75	49.15	74.00	-24.85	peak
3	1800.1334	46.39	-3.85	42.54	74.00	-31.46	peak
4	2261.8770	49.49	-2.11	47.38	74.00	-26.62	peak
5	3695.4106	41.66	4.77	46.43	74.00	-27.57	peak
6	4878.1531	41.18	7.26	48.44	74.00	-25.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5745	Horizontal	PASS

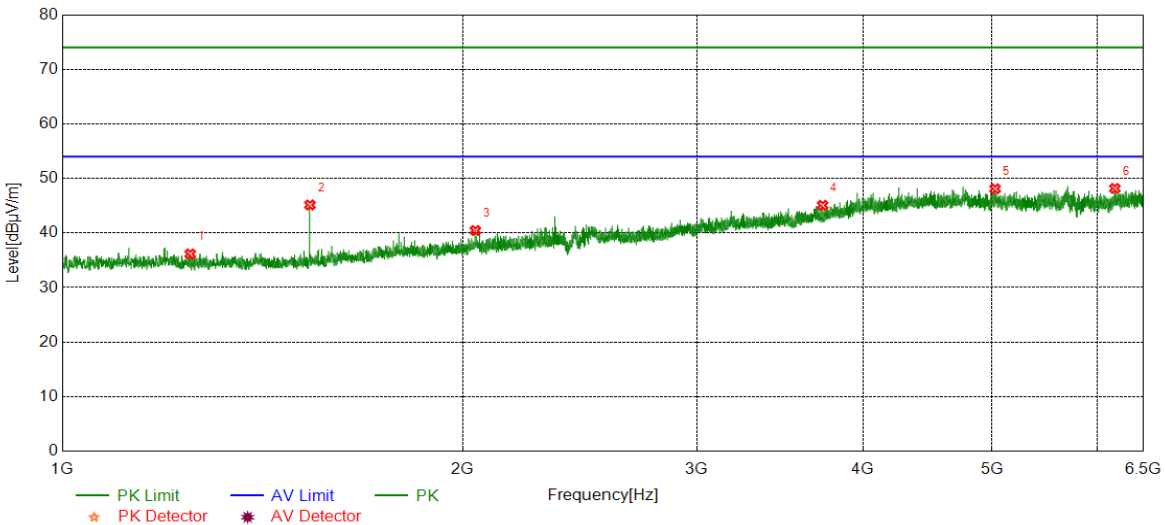


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1248.0413	41.80	-5.64	36.16	74.00	-37.84	peak
2	1535.4226	50.89	-5.75	45.14	74.00	-28.86	peak
3	2044.5074	42.85	-2.39	40.46	74.00	-33.54	peak
4	3729.2477	40.93	4.14	45.07	74.00	-28.93	peak
5	5026.7252	41.10	7.00	48.10	74.00	-25.90	peak
6	6184.5761	40.13	8.04	48.17	74.00	-25.83	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5745	Vertical	PASS

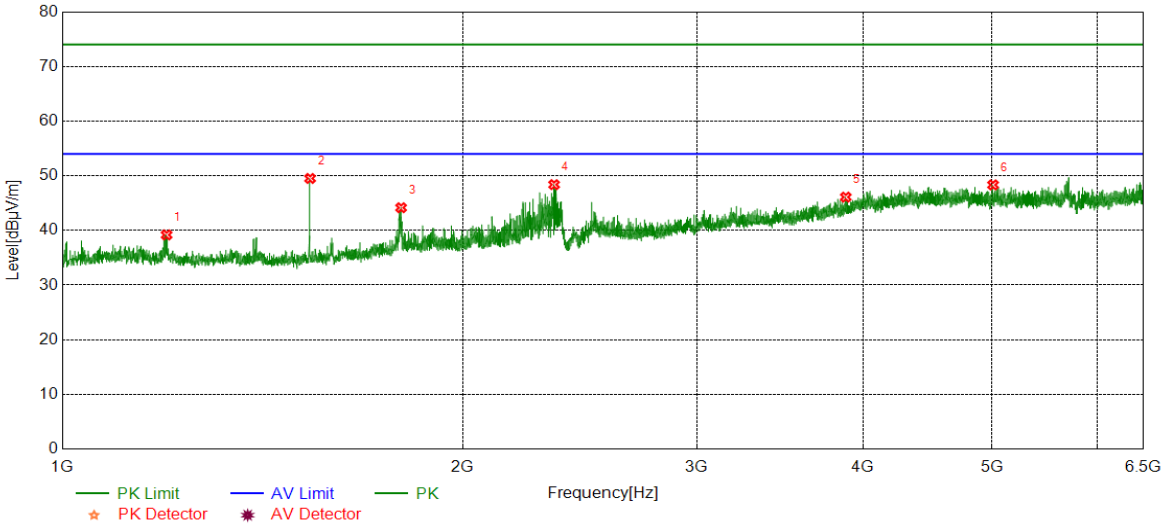


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.0330	44.74	-5.56	39.18	74.00	-34.82	peak
2	1535.7560	55.26	-5.75	49.51	74.00	-24.49	peak
3	1797.7996	47.98	-3.82	44.16	74.00	-29.84	peak
4	2342.8905	50.15	-1.77	48.38	74.00	-25.62	peak
5	3881.7091	41.08	5.02	46.10	74.00	-27.90	peak
6	5008.4454	41.37	6.96	48.33	74.00	-25.67	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5785	Horizontal	PASS

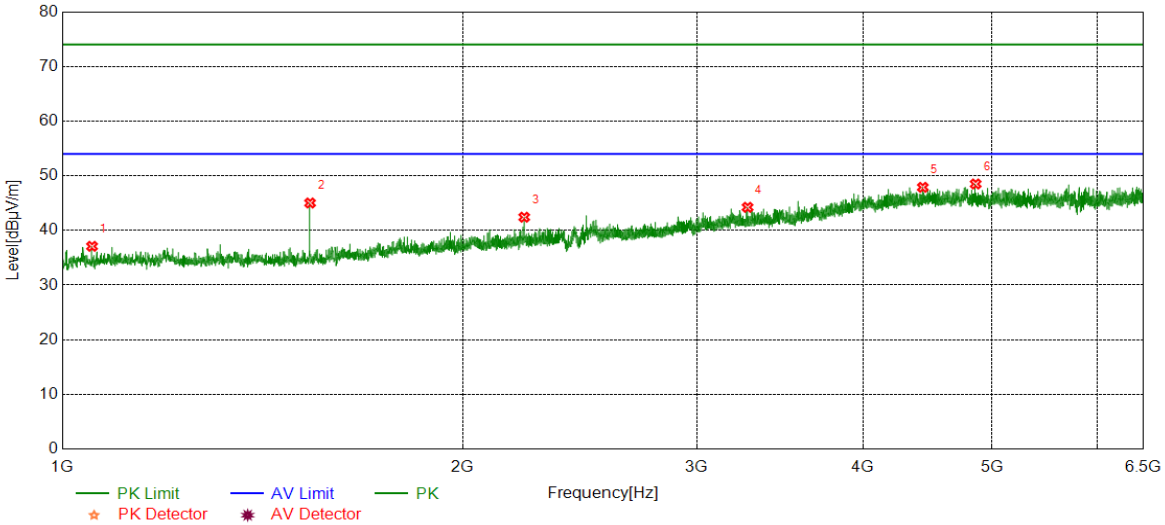


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1053.0088	42.72	-5.63	37.09	74.00	-36.91	peak
2	1535.7560	50.77	-5.75	45.02	74.00	-28.98	peak
3	2224.8708	44.61	-2.19	42.42	74.00	-31.58	peak
4	3274.9750	41.85	2.38	44.23	74.00	-29.77	peak
5	4435.1595	41.38	6.51	47.89	74.00	-26.11	peak
6	4860.2623	41.52	6.98	48.50	74.00	-25.50	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5785	Vertical	PASS

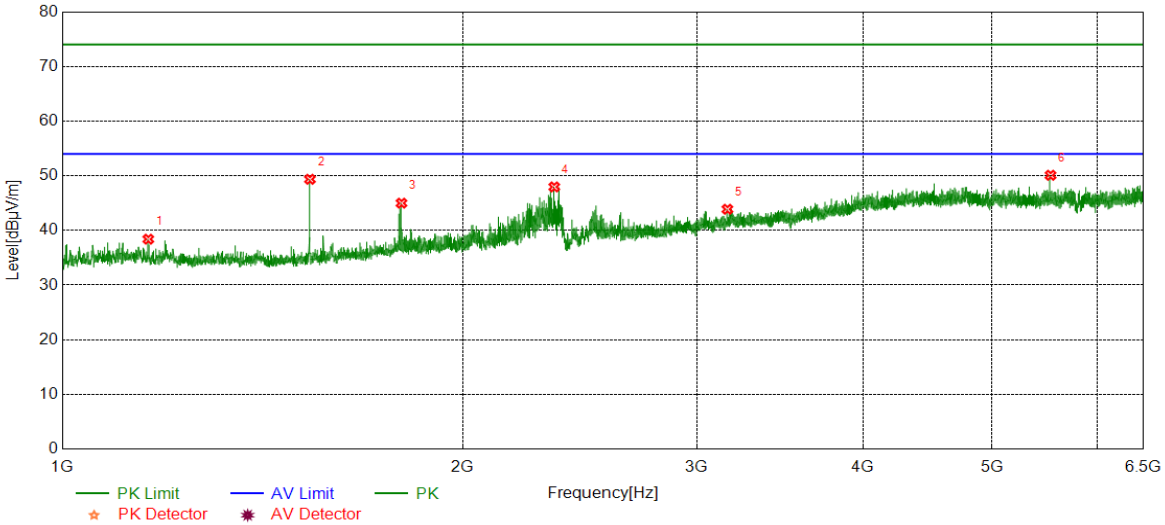


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1160.6934	43.93	-5.53	38.40	74.00	-35.60	peak
2	1535.4226	55.11	-5.75	49.36	74.00	-24.64	peak
3	1799.1332	48.83	-3.84	44.99	74.00	-29.01	peak
4	2343.5573	49.72	-1.76	47.96	74.00	-26.04	peak
5	3162.5736	41.76	2.12	43.88	74.00	-30.12	peak
6	5533.1148	42.71	7.38	50.09	74.00	-23.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5825	Horizontal	PASS

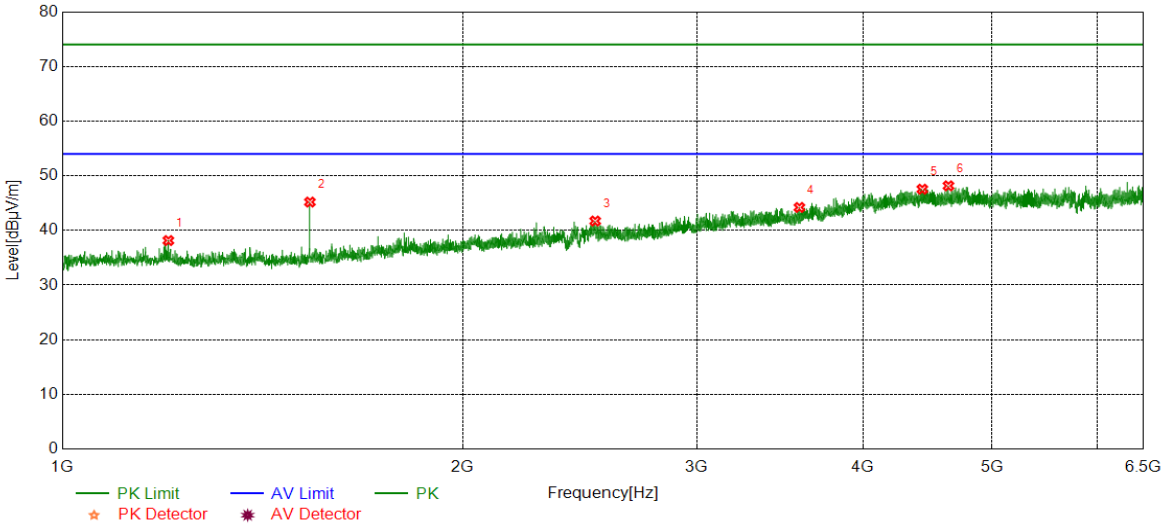


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1201.7003	43.67	-5.52	38.15	74.00	-35.85	peak
2	1535.4226	50.94	-5.75	45.19	74.00	-28.81	peak
3	2515.5859	42.07	-0.35	41.72	74.00	-32.28	peak
4	3582.2314	40.85	3.36	44.21	74.00	-29.79	peak
5	4431.6591	41.03	6.52	47.55	74.00	-26.45	peak
6	4636.6263	41.25	6.91	48.16	74.00	-25.84	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5825	Vertical	PASS

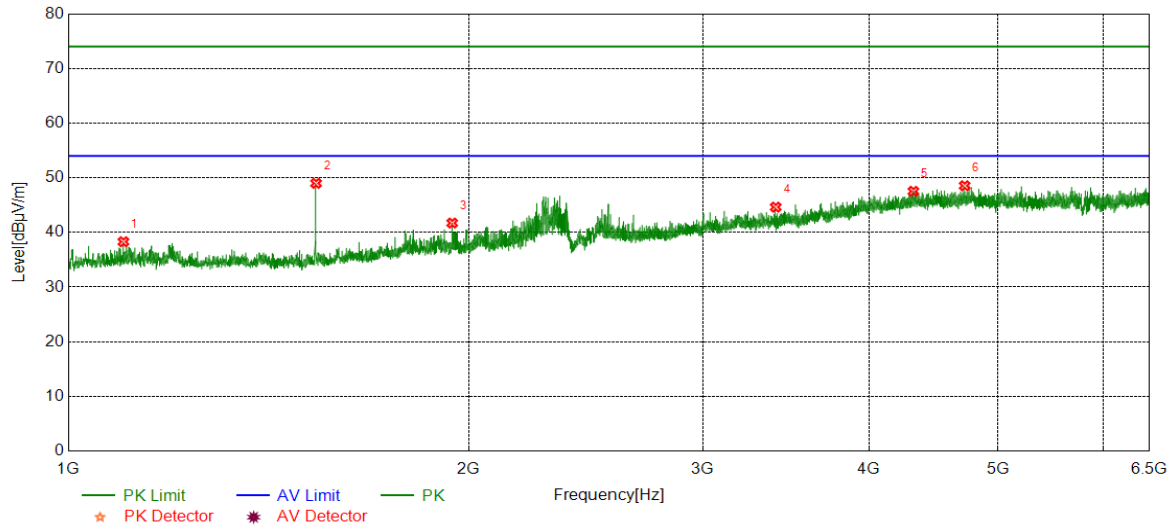


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1100.3501	43.87	-5.57	38.30	74.00	-35.70	peak
2	1535.7560	54.74	-5.75	48.99	74.00	-25.01	peak
3	1943.8240	44.75	-3.03	41.72	74.00	-32.28	peak
4	3402.9337	41.97	2.66	44.63	74.00	-29.37	peak
5	4318.8688	40.97	6.56	47.53	74.00	-26.47	peak
6	4719.4688	41.41	7.13	48.54	74.00	-25.46	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5190	Horizontal	PASS

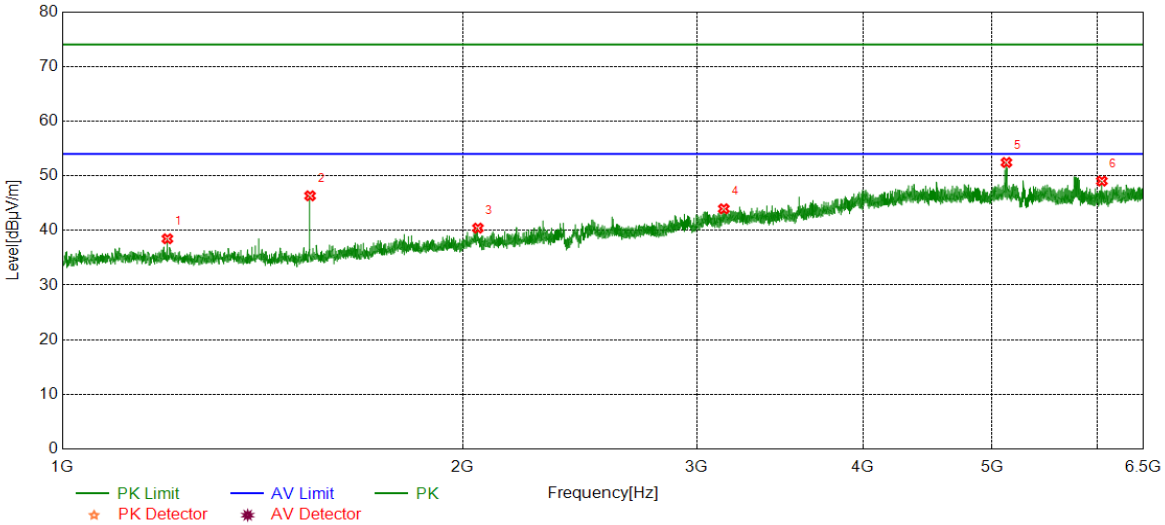


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.7000	44.03	-5.56	38.47	74.00	-35.53	peak
2	1535.7560	52.08	-5.75	46.33	74.00	-27.67	peak
3	2053.5089	42.89	-2.47	40.42	74.00	-33.58	peak
4	3142.7381	41.24	2.72	43.96	74.00	-30.04	peak
5	5126.2918	44.42	8.02	52.44	74.00	-21.56	peak
6	6046.8941	41.38	7.65	49.03	74.00	-24.97	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5190	Vertical	PASS

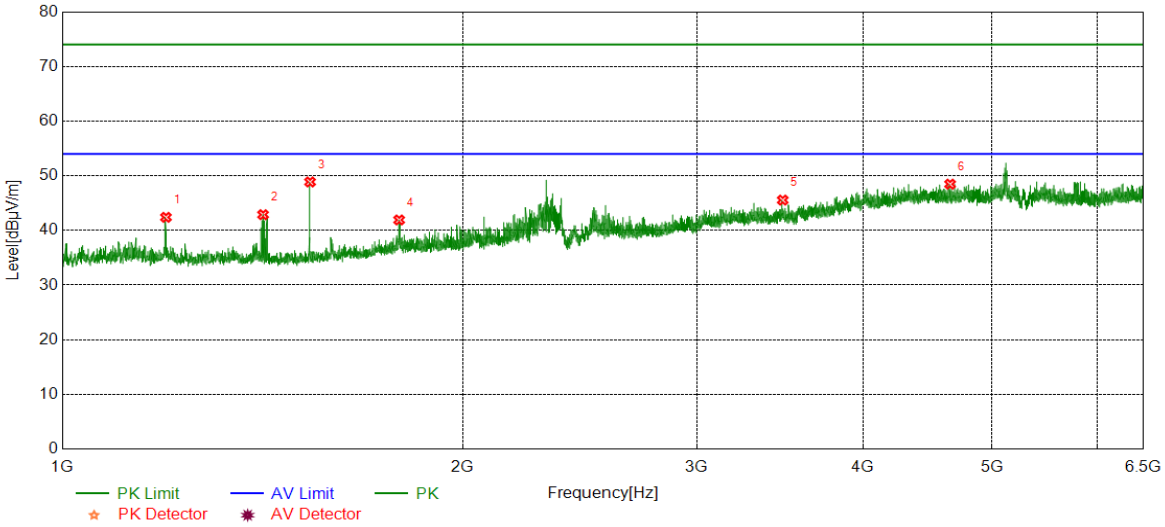


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1196.6995	47.96	-5.56	42.40	74.00	-31.60	peak
2	1415.7360	48.49	-5.61	42.88	74.00	-31.12	peak
3	1535.7560	54.62	-5.75	48.87	74.00	-25.13	peak
4	1791.7986	45.68	-3.76	41.92	74.00	-32.08	peak
5	3480.3311	41.79	3.76	45.55	74.00	-28.45	peak
6	4649.8500	41.11	7.36	48.47	74.00	-25.53	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5230	Horizontal	PASS

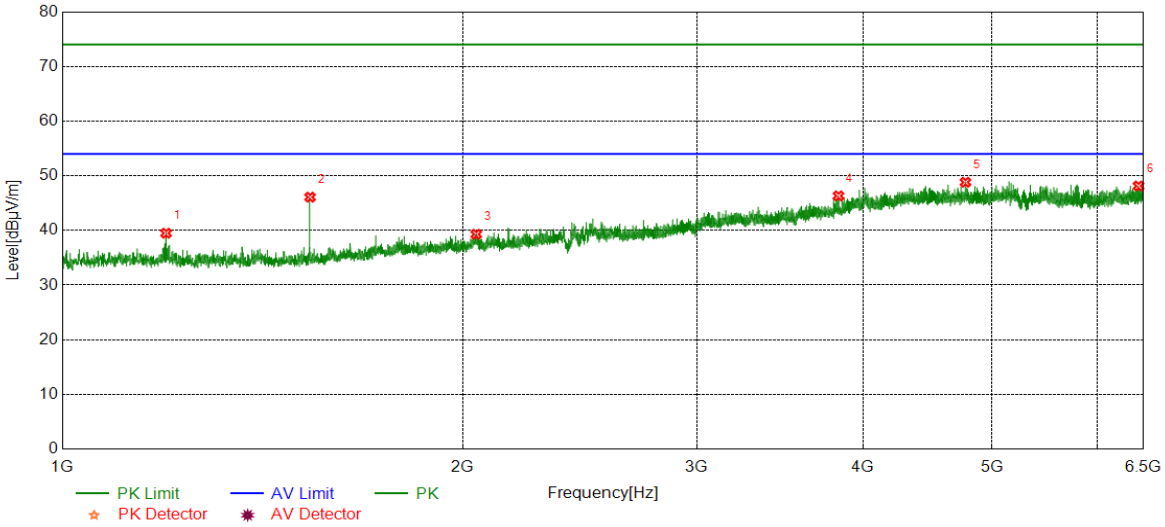


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1197.0328	45.05	-5.56	39.49	74.00	-34.51	peak
2	1535.7560	51.84	-5.75	46.09	74.00	-27.91	peak
3	2047.5079	41.68	-2.38	39.30	74.00	-34.70	peak
4	3833.0926	40.95	5.37	46.32	74.00	-27.68	peak
5	4775.4751	41.32	7.49	48.81	74.00	-25.19	peak
6	6442.8270	38.79	9.34	48.13	74.00	-25.87	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5230	Vertical	PASS

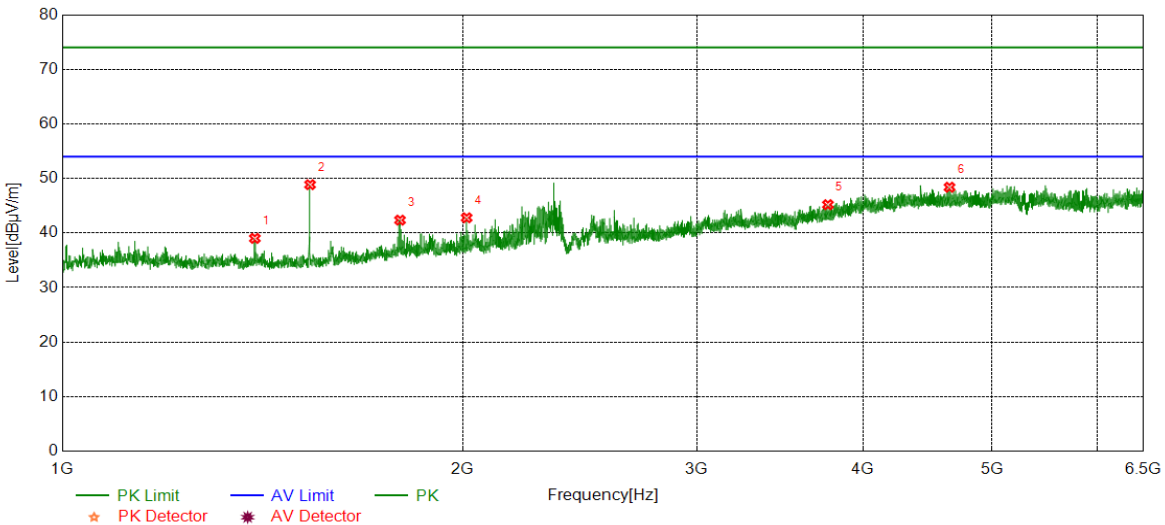


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1395.7326	44.72	-5.71	39.01	74.00	-34.99	peak
2	1535.7560	54.61	-5.75	48.86	74.00	-25.14	peak
3	1794.4657	46.15	-3.79	42.36	74.00	-31.64	peak
4	2013.8356	45.65	-2.86	42.79	74.00	-31.21	peak
5	3763.4737	40.52	4.67	45.19	74.00	-28.81	peak
6	4645.1828	41.12	7.27	48.39	74.00	-25.61	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5270	Horizontal	PASS

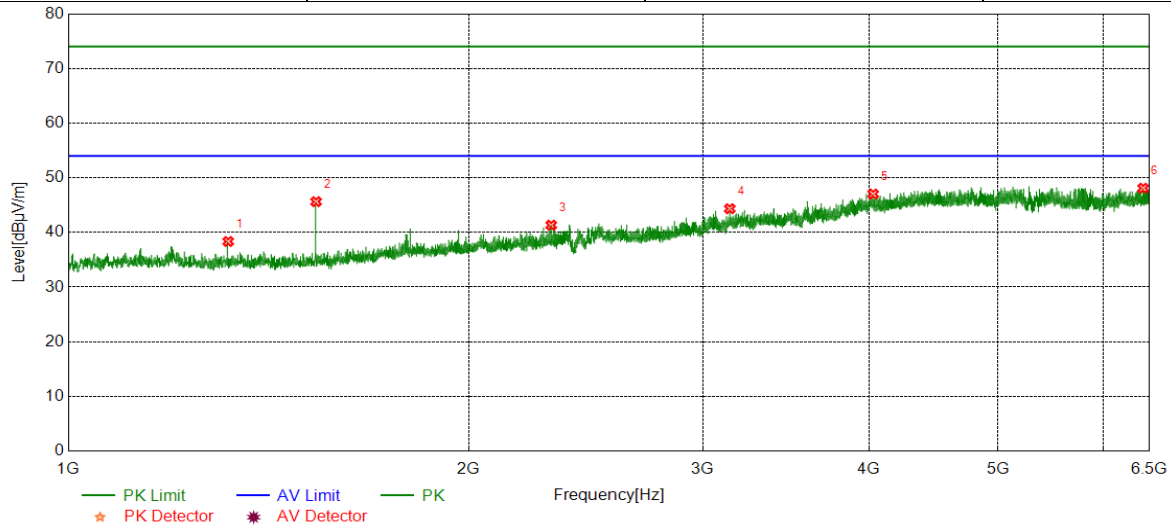


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1319.0532	43.92	-5.58	38.34	74.00	-35.66	peak
2	1535.7560	51.38	-5.75	45.63	74.00	-28.37	peak
3	2307.2179	43.04	-1.71	41.33	74.00	-32.67	peak
4	3142.7381	41.62	2.72	44.34	74.00	-29.66	peak
5	4027.5586	40.72	6.31	47.03	74.00	-26.97	peak
6	6427.6586	38.72	9.37	48.09	74.00	-25.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5270	Vertical	PASS

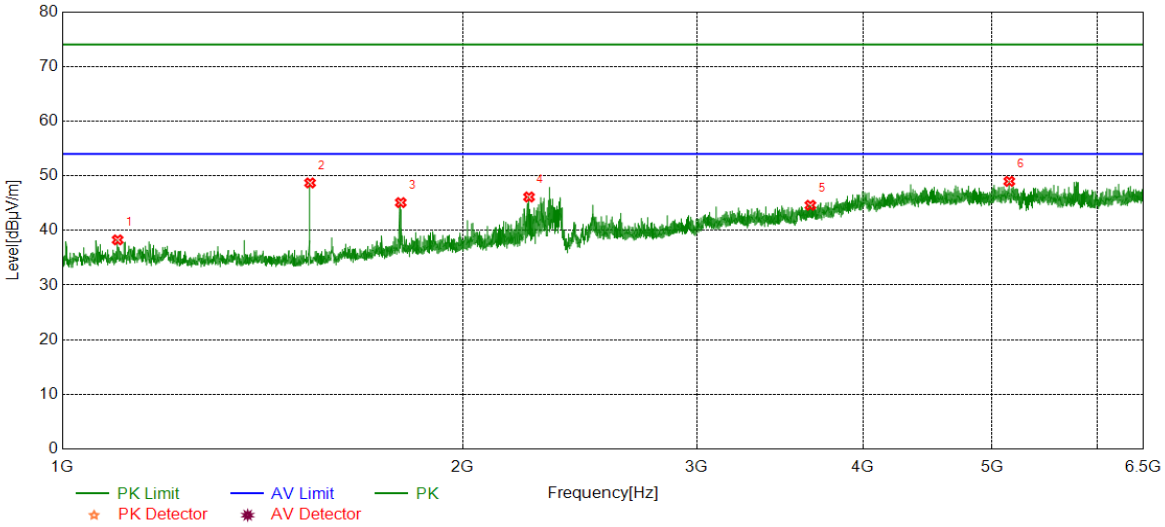


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1100.6834	43.84	-5.57	38.27	74.00	-35.73	peak
2	1535.7560	54.44	-5.75	48.69	74.00	-25.31	peak
3	1796.7995	48.90	-3.81	45.09	74.00	-28.91	peak
4	2243.5406	48.33	-2.21	46.12	74.00	-27.88	peak
5	3651.0723	40.41	4.19	44.60	74.00	-29.40	peak
6	5151.5724	40.99	7.99	48.98	74.00	-25.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5310	Horizontal	PASS

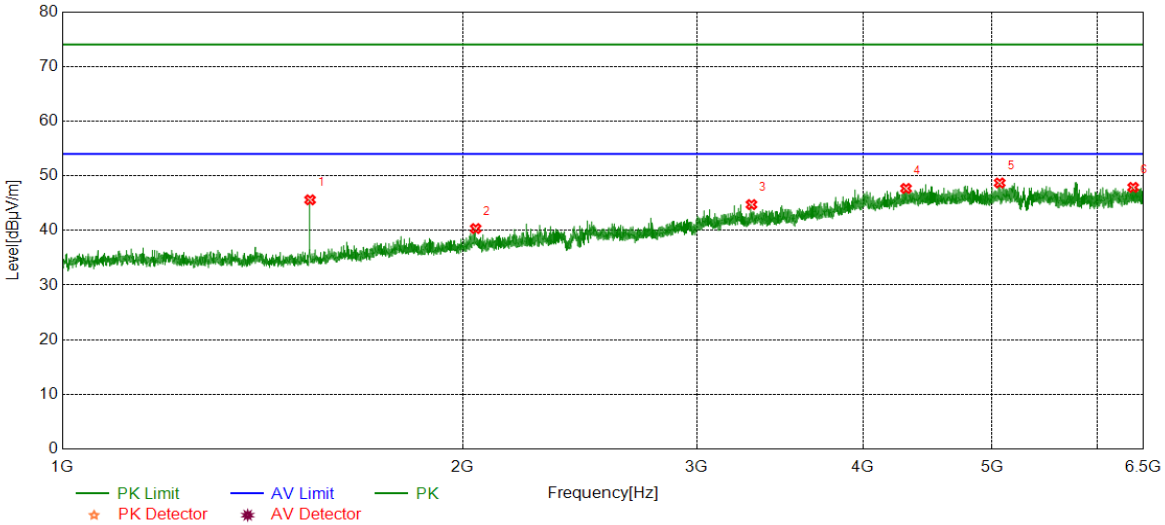


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	51.35	-5.75	45.60	74.00	-28.40	peak
2	2045.5076	42.73	-2.39	40.34	74.00	-33.66	peak
3	3297.1441	41.86	2.87	44.73	74.00	-29.27	peak
4	4308.3676	40.94	6.74	47.68	74.00	-26.32	peak
5	5066.7852	41.05	7.64	48.69	74.00	-25.31	peak
6	6383.3204	38.85	9.03	47.88	74.00	-26.12	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5310	Vertical	PASS

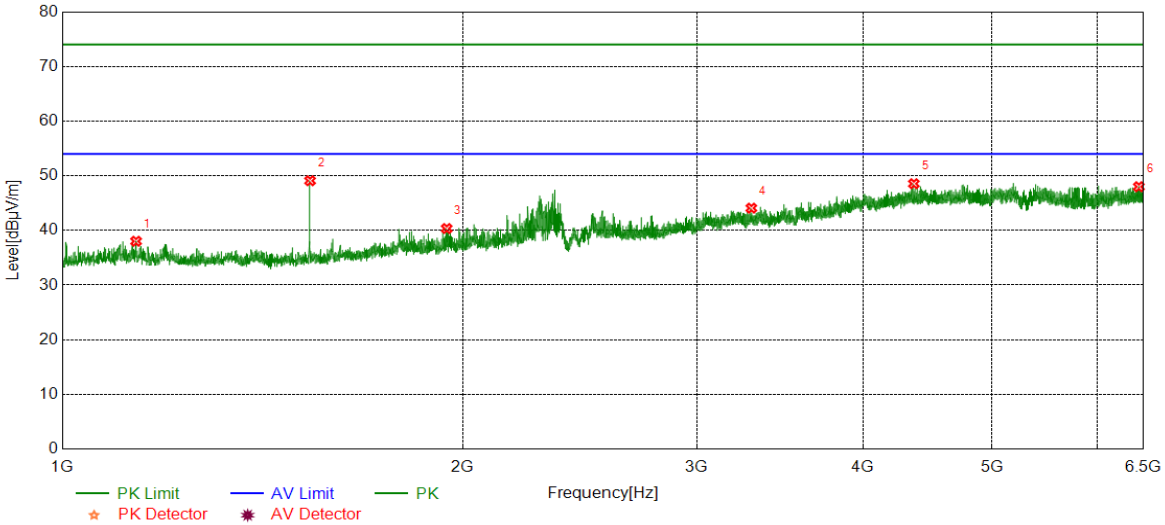


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1136.3561	43.53	-5.51	38.02	74.00	-35.98	peak
2	1535.7560	54.84	-5.75	49.09	74.00	-24.91	peak
3	1945.4909	43.34	-2.99	40.35	74.00	-33.65	peak
4	3296.3663	41.23	2.85	44.08	74.00	-29.92	peak
5	4367.0963	41.93	6.62	48.55	74.00	-25.45	peak
6	6446.7163	38.66	9.34	48.00	74.00	-26.00	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5510	Horizontal	PASS

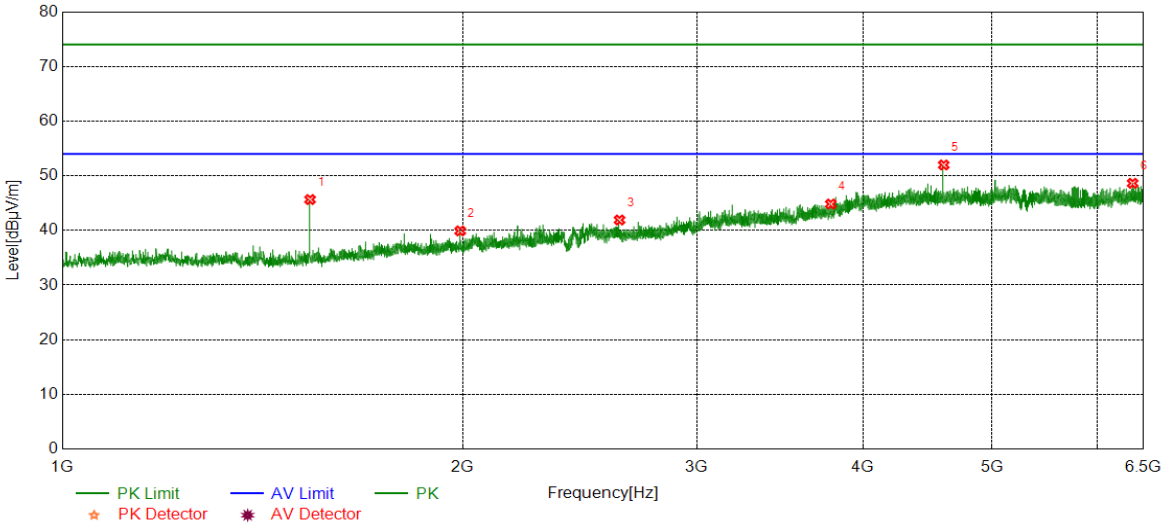


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.7560	51.40	-5.75	45.65	74.00	-28.35	peak
2	1991.4986	42.98	-3.07	39.91	74.00	-34.09	peak
3	2623.9373	42.31	-0.40	41.91	74.00	-32.09	peak
4	3782.5314	40.22	4.61	44.83	74.00	-29.17	peak
5	4598.8999	44.77	7.21	51.98	74.00	-22.02	peak
6	6377.4864	39.55	9.08	48.63	74.00	-25.37	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5510	Vertical	PASS

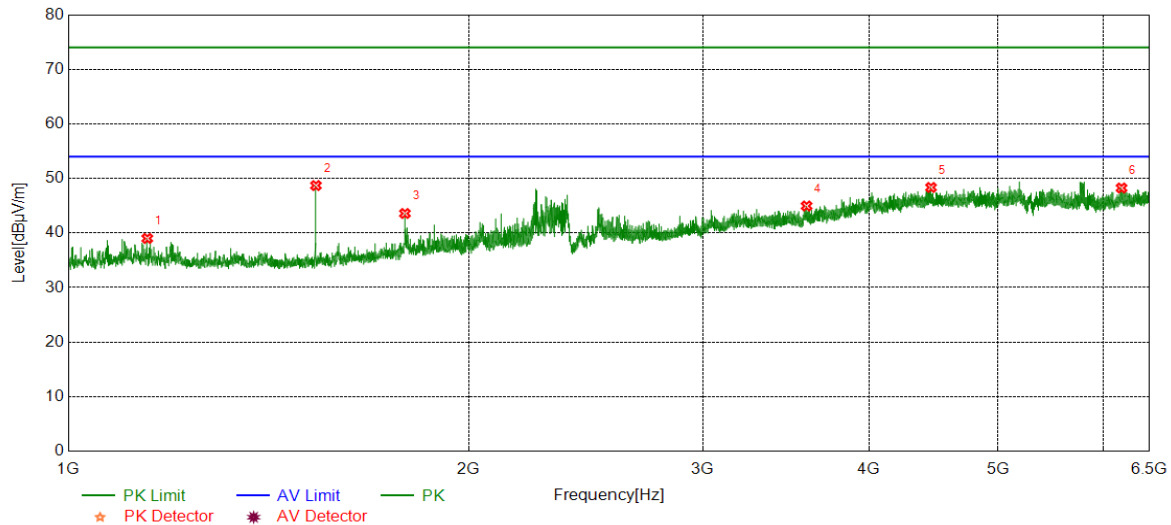


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1146.6911	44.59	-5.59	39.00	74.00	-35.00	peak
2	1535.4226	54.45	-5.75	48.70	74.00	-25.30	peak
3	1791.1319	47.33	-3.75	43.58	74.00	-30.42	peak
4	3589.6211	41.01	3.94	44.95	74.00	-29.05	peak
5	4452.6614	41.09	7.26	48.35	74.00	-25.65	peak
6	6191.1879	39.68	8.57	48.25	74.00	-25.75	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5550	Horizontal	PASS

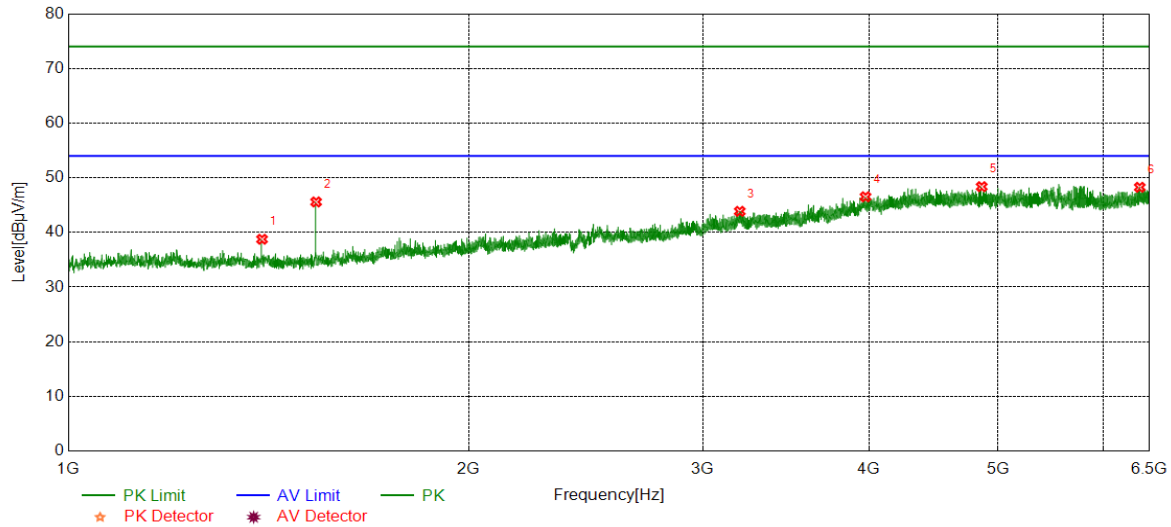


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1398.7331	44.42	-5.67	38.75	74.00	-35.25	peak
2	1535.7560	51.33	-5.75	45.58	74.00	-28.42	peak
3	3197.5775	40.86	3.00	43.86	74.00	-30.14	peak
4	3975.0528	40.65	5.87	46.52	74.00	-27.48	peak
5	4860.6512	40.90	7.47	48.37	74.00	-25.63	peak
6	6389.9322	39.22	9.04	48.26	74.00	-25.74	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5550	Vertical	PASS

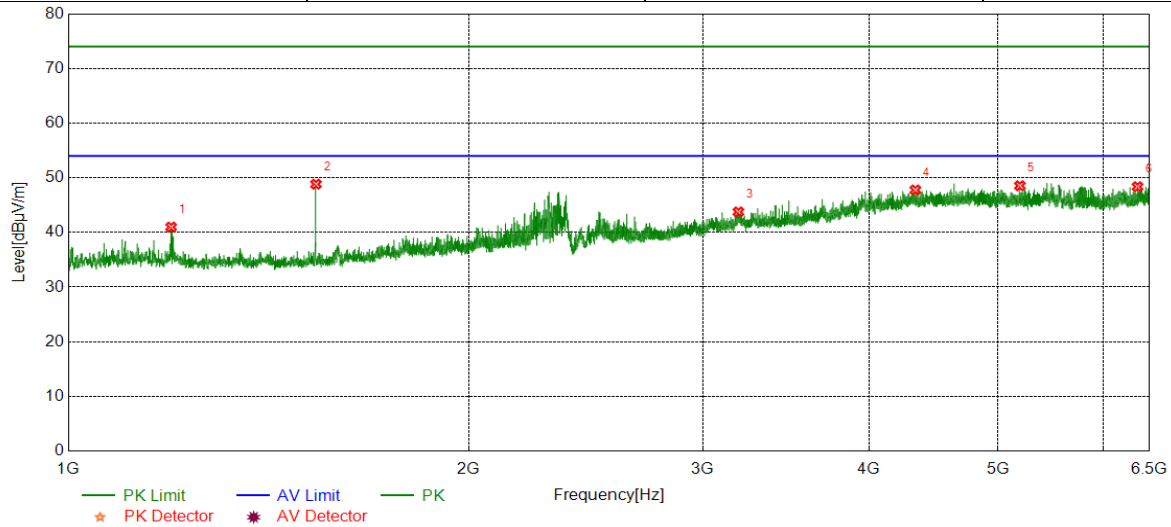


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.0325	46.56	-5.57	40.99	74.00	-33.01	peak
2	1535.4226	54.58	-5.75	48.83	74.00	-25.17	peak
3	3190.1878	40.46	3.29	43.75	74.00	-30.25	peak
4	4333.2593	40.91	6.86	47.77	74.00	-26.23	peak
5	5192.4103	41.38	7.16	48.54	74.00	-25.46	peak
6	6365.4295	39.33	9.04	48.37	74.00	-25.63	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5670	Horizontal	PASS

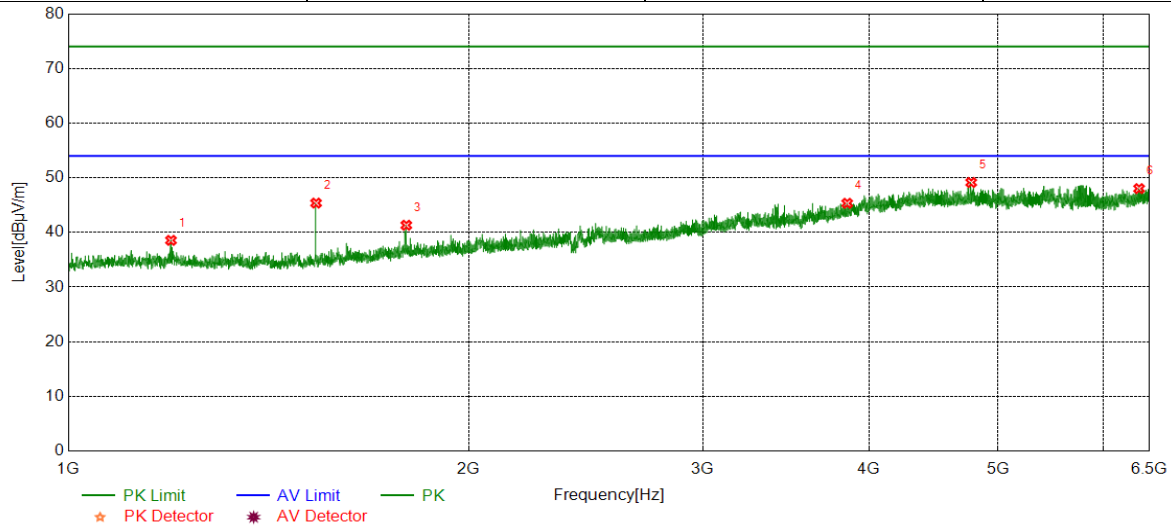


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.6991	44.12	-5.57	38.55	74.00	-35.45	peak
2	1535.7560	51.12	-5.75	45.37	74.00	-28.63	peak
3	1795.4659	45.12	-3.80	41.32	74.00	-32.68	peak
4	3850.9834	40.08	5.25	45.33	74.00	-28.67	peak
5	4773.1415	41.76	7.38	49.14	74.00	-24.86	peak
6	6382.5425	38.88	9.14	48.02	74.00	-25.98	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5670	Vertical	PASS

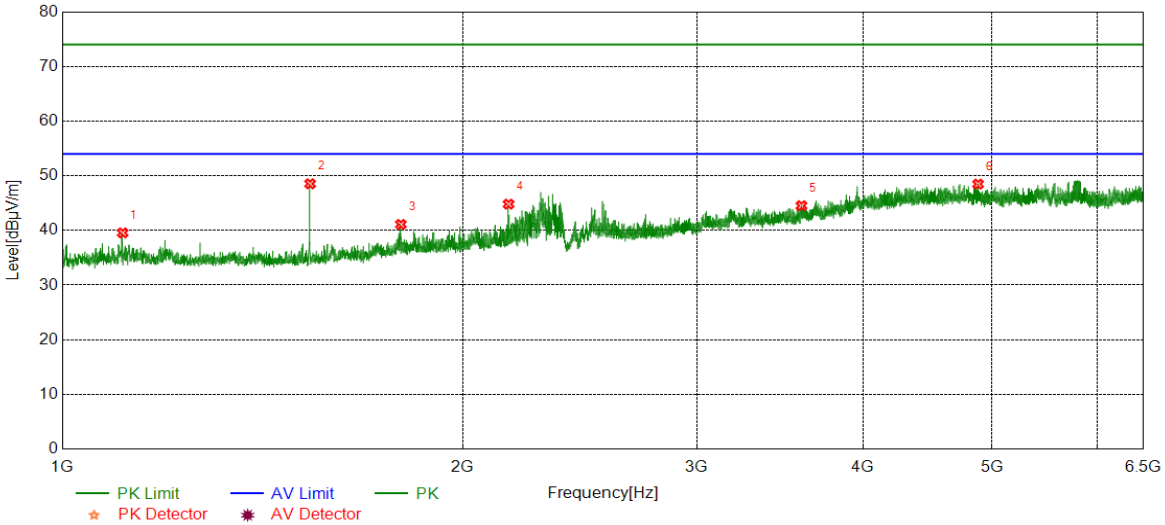


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1110.3517	45.05	-5.50	39.55	74.00	-34.45	peak
2	1535.7560	54.29	-5.75	48.54	74.00	-25.46	peak
3	1797.1329	44.91	-3.81	41.10	74.00	-32.90	peak
4	2165.5276	47.23	-2.42	44.81	74.00	-29.19	peak
5	3595.0661	40.69	3.83	44.52	74.00	-29.48	peak
6	4880.8757	41.20	7.28	48.48	74.00	-25.52	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5710	Horizontal	PASS

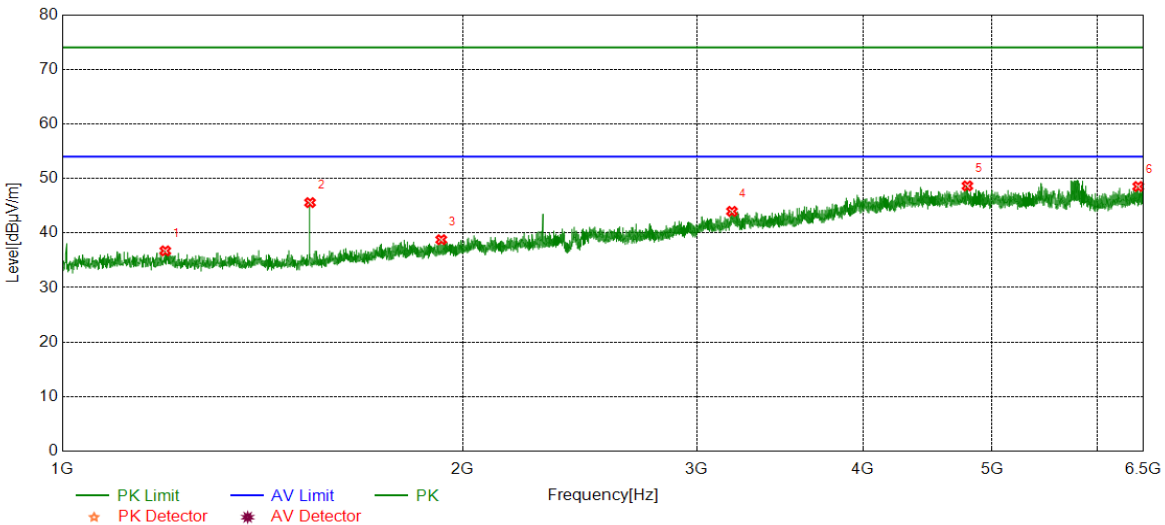


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1195.3659	42.28	-5.56	36.72	74.00	-37.28	peak
2	1535.7560	51.32	-5.75	45.57	74.00	-28.43	peak
3	1927.1545	41.77	-3.00	38.77	74.00	-35.23	peak
4	3187.4653	40.80	3.17	43.97	74.00	-30.03	peak
5	4791.0323	40.59	8.04	48.63	74.00	-25.37	peak
6	6439.7155	38.64	9.88	48.52	74.00	-25.48	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5710	Vertical	PASS

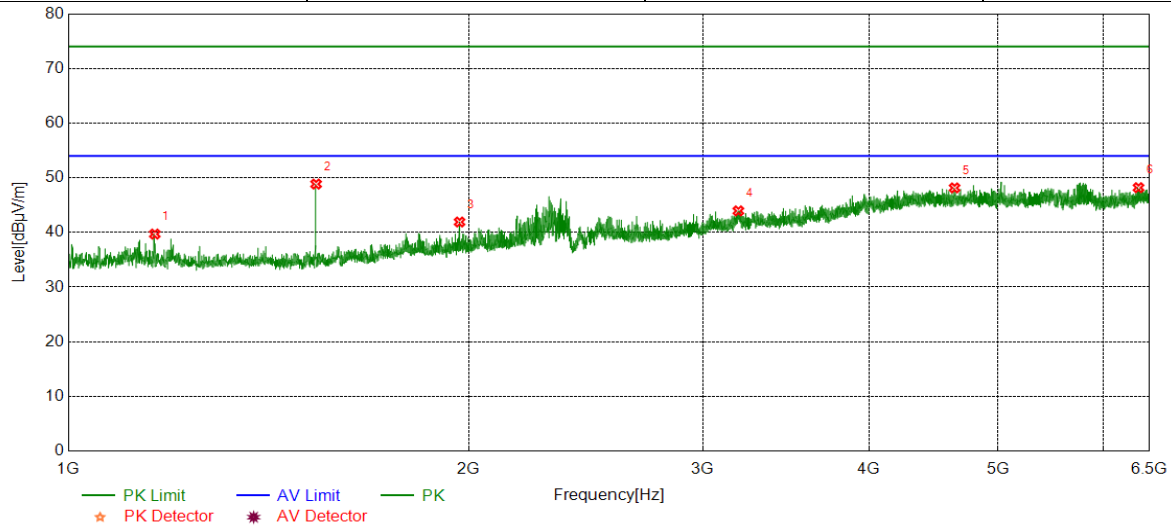


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1161.6936	45.22	-5.52	39.70	74.00	-34.30	peak
2	1535.7560	54.60	-5.75	48.85	74.00	-25.15	peak
3	1968.8281	45.06	-3.15	41.91	74.00	-32.09	peak
4	3189.7989	40.65	3.29	43.94	74.00	-30.06	peak
5	4637.7931	41.02	7.13	48.15	74.00	-25.85	peak
6	6376.3196	39.03	9.16	48.19	74.00	-25.81	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5755	Horizontal	PASS

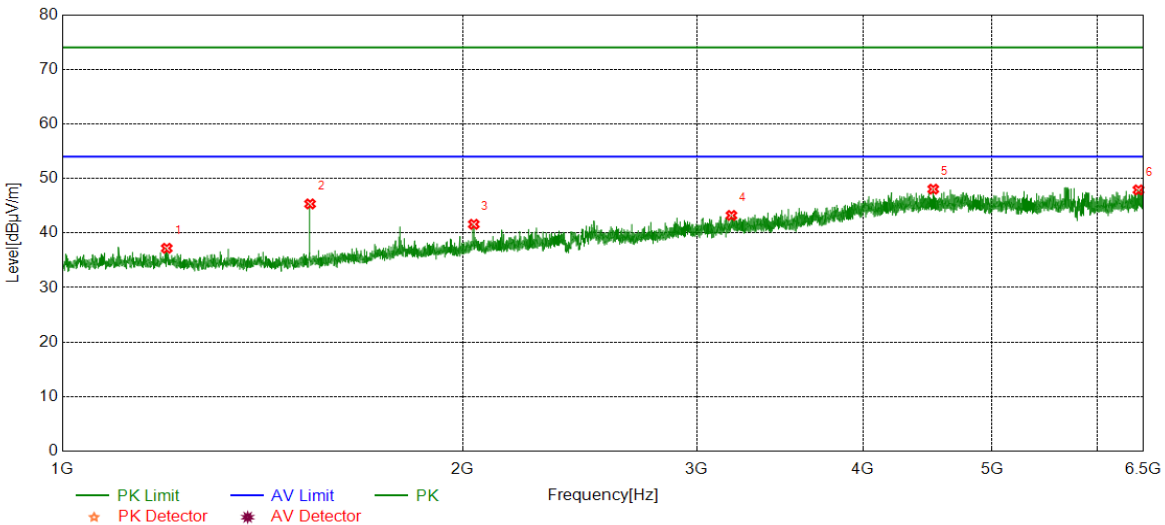


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.3664	42.76	-5.56	37.20	74.00	-36.80	peak
2	1535.7560	51.08	-5.75	45.33	74.00	-28.67	peak
3	2038.8398	44.03	-2.43	41.60	74.00	-32.40	peak
4	3184.7427	40.77	2.45	43.22	74.00	-30.78	peak
5	4516.0573	40.96	7.08	48.04	74.00	-25.96	peak
6	6442.4380	38.52	9.38	47.90	74.00	-26.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5755	Vertical	PASS

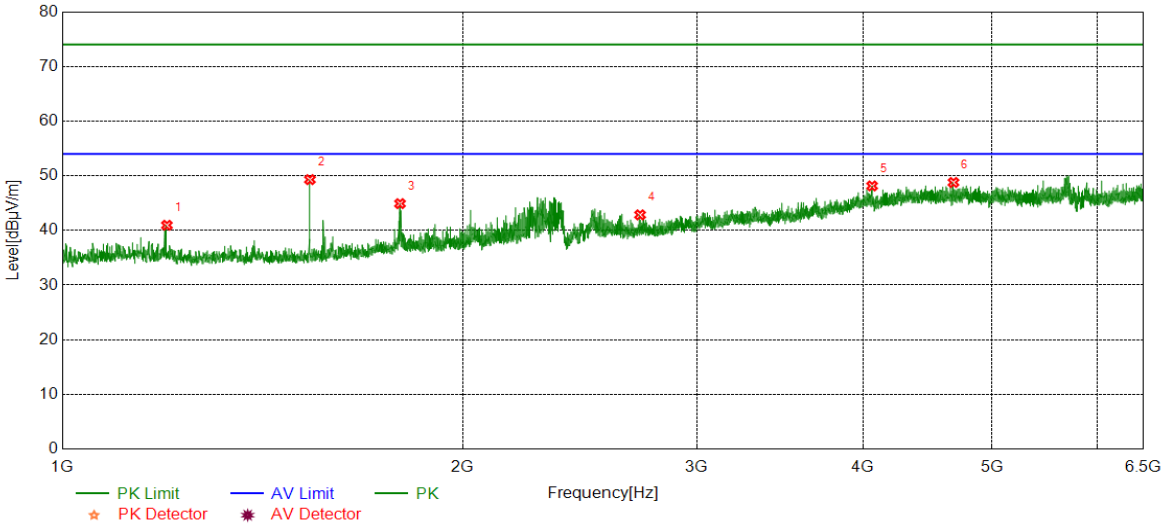


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.6998	46.51	-5.56	40.95	74.00	-33.05	peak
2	1535.4226	55.05	-5.75	49.30	74.00	-24.70	peak
3	1794.4657	48.70	-3.79	44.91	74.00	-29.09	peak
4	2718.9532	43.20	-0.35	42.85	74.00	-31.15	peak
5	4062.5625	42.03	6.11	48.14	74.00	-25.86	peak
6	4677.0752	41.72	7.06	48.78	74.00	-25.22	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5795	Horizontal	PASS

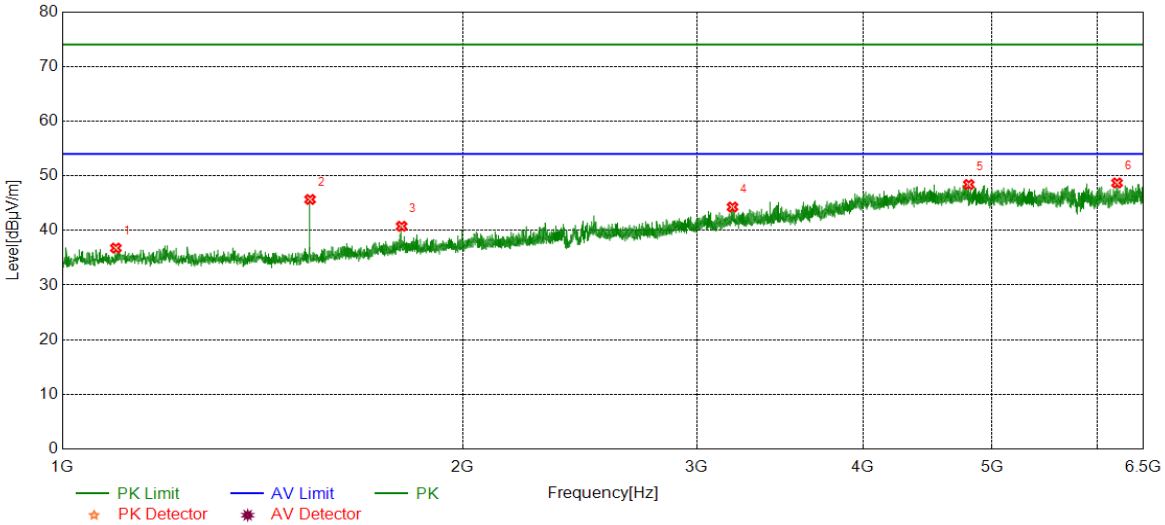


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1097.3496	42.35	-5.58	36.77	74.00	-37.23	peak
2	1535.7560	51.42	-5.75	45.67	74.00	-28.33	peak
3	1799.4666	44.60	-3.84	40.76	74.00	-33.24	peak
4	3190.5767	41.71	2.57	44.28	74.00	-29.72	peak
5	4802.7003	41.37	7.03	48.40	74.00	-25.60	peak
6	6207.9120	40.76	7.93	48.69	74.00	-25.31	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 40	5795	Vertical	PASS

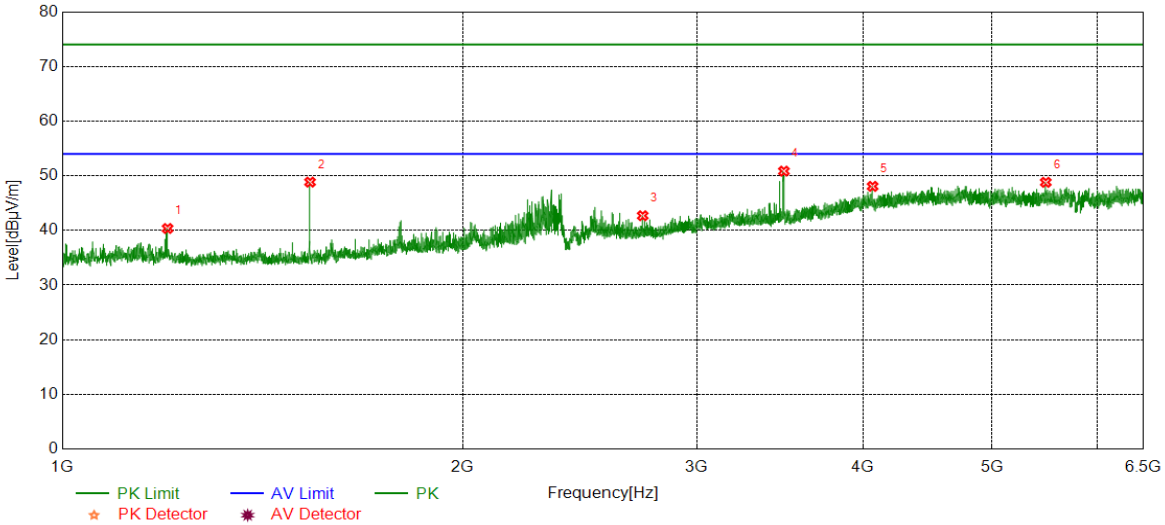


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1200.0333	45.92	-5.56	40.36	74.00	-33.64	peak
2	1535.7560	54.59	-5.75	48.84	74.00	-25.16	peak
3	2731.2885	43.18	-0.49	42.69	74.00	-31.31	peak
4	3487.3319	47.69	3.16	50.85	74.00	-23.15	peak
5	4066.0629	41.94	6.12	48.06	74.00	-25.94	peak
6	5487.2208	41.39	7.41	48.80	74.00	-25.20	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5210	Horizontal	PASS

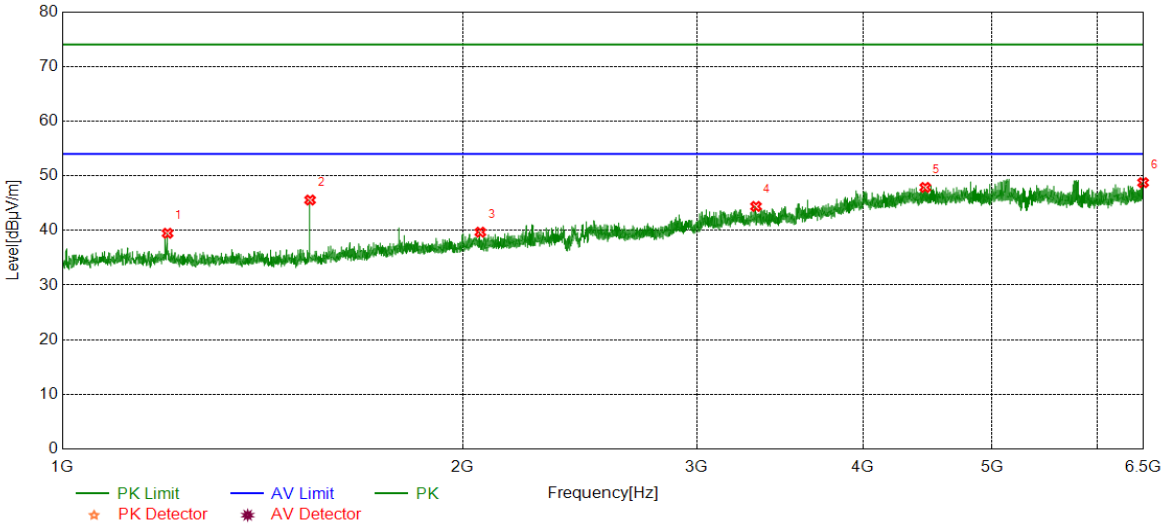

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1200.0333	45.04	-5.56	39.48	74.00	-34.52	peak
2	1535.7560	51.31	-5.75	45.56	74.00	-28.44	peak
3	2062.1770	42.35	-2.67	39.68	74.00	-34.32	peak
4	3323.2026	41.68	2.71	44.39	74.00	-29.61	peak
5	4454.2171	40.59	7.28	47.87	74.00	-26.13	peak
6	6494.1660	39.30	9.44	48.74	74.00	-25.26	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.