




Test Mode	Channel	Polarization	Verdict
11AC 80	5210	Vertical	PASS

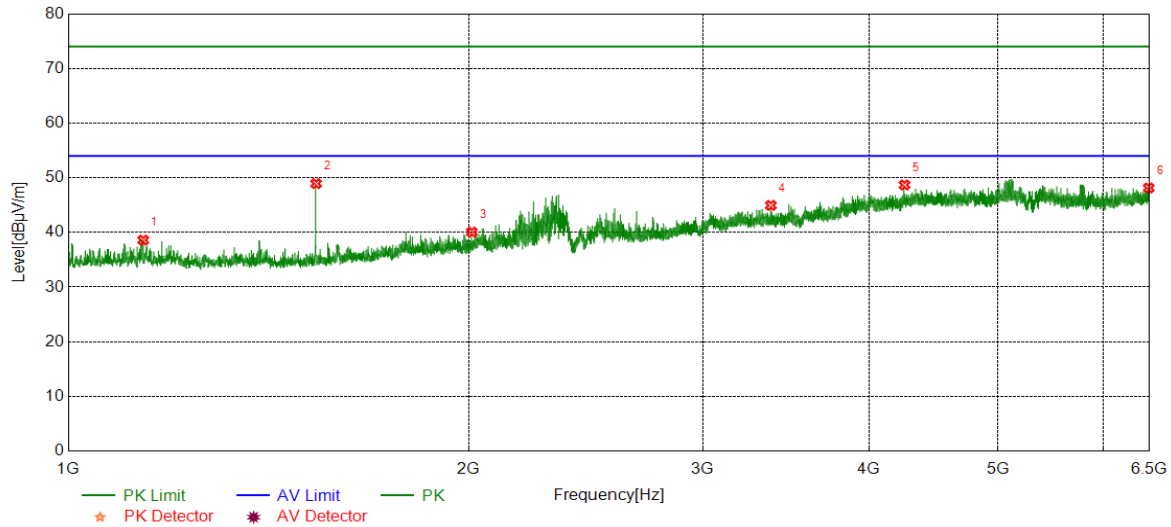


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1138.6898	44.13	-5.53	38.60	74.00	-35.40	peak
2	1535.7560	54.68	-5.75	48.93	74.00	-25.07	peak
3	2010.8351	42.93	-2.87	40.06	74.00	-33.94	peak
4	3374.5416	41.99	2.96	44.95	74.00	-29.05	peak
5	4253.1392	41.82	6.87	48.69	74.00	-25.31	peak
6	6490.2767	38.77	9.37	48.14	74.00	-25.86	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5290	Horizontal	PASS

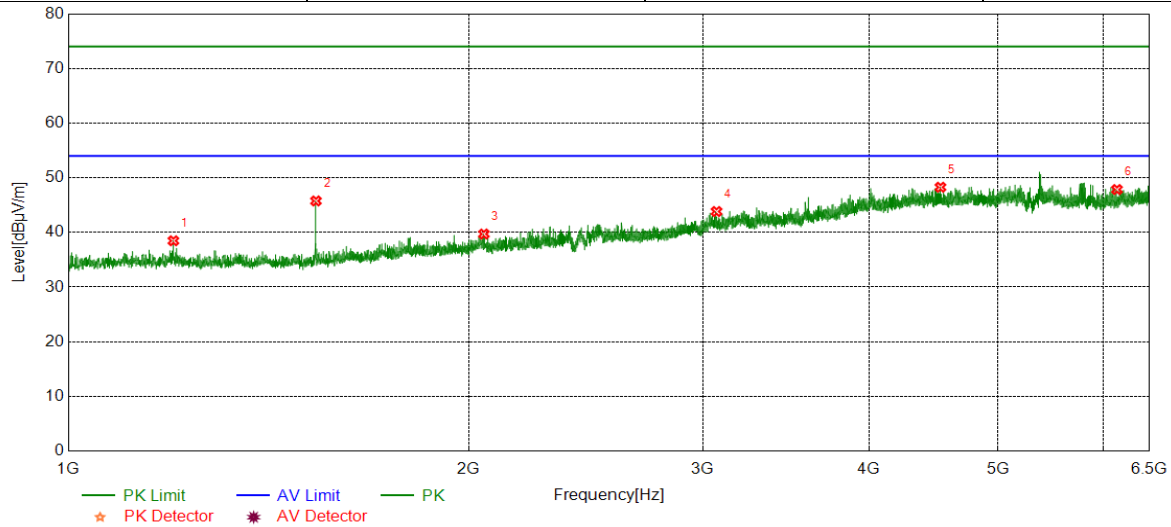


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.7000	44.03	-5.56	38.47	74.00	-35.53	peak
2	1535.4226	51.51	-5.75	45.76	74.00	-28.24	peak
3	2053.5089	42.18	-2.47	39.71	74.00	-34.29	peak
4	3071.5635	41.91	1.92	43.83	74.00	-30.17	peak
5	4525.7806	41.00	7.27	48.27	74.00	-25.73	peak
6	6143.3493	39.96	7.89	47.85	74.00	-26.15	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5290	Vertical	PASS

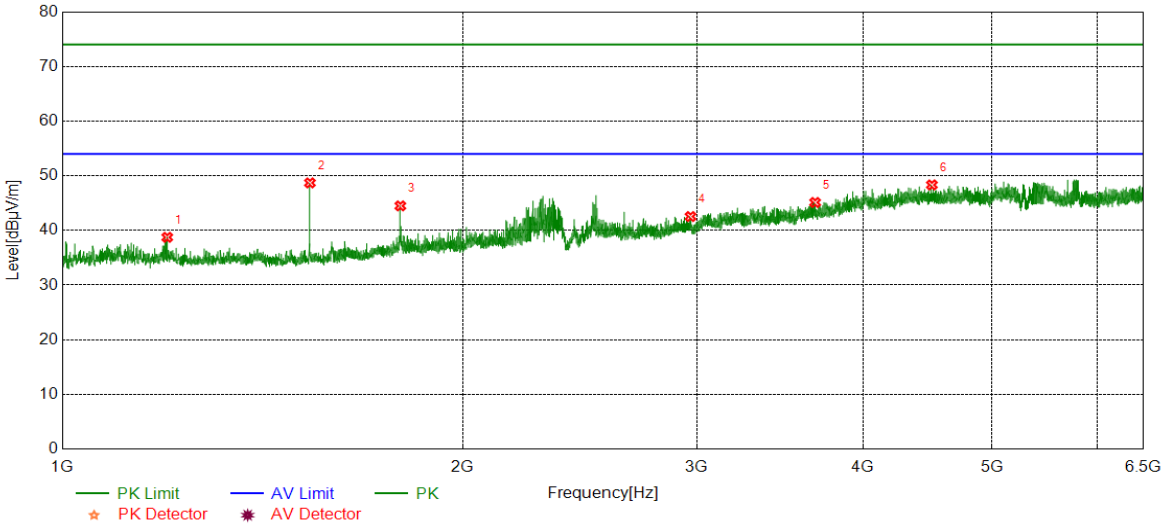


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.3666	44.30	-5.56	38.74	74.00	-35.26	peak
2	1535.4226	54.45	-5.75	48.70	74.00	-25.30	peak
3	1795.4659	48.29	-3.80	44.49	74.00	-29.51	peak
4	2966.9945	41.47	1.07	42.54	74.00	-31.46	peak
5	3681.0201	40.64	4.48	45.12	74.00	-28.88	peak
6	4505.5562	41.01	7.32	48.33	74.00	-25.67	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5530	Horizontal	PASS

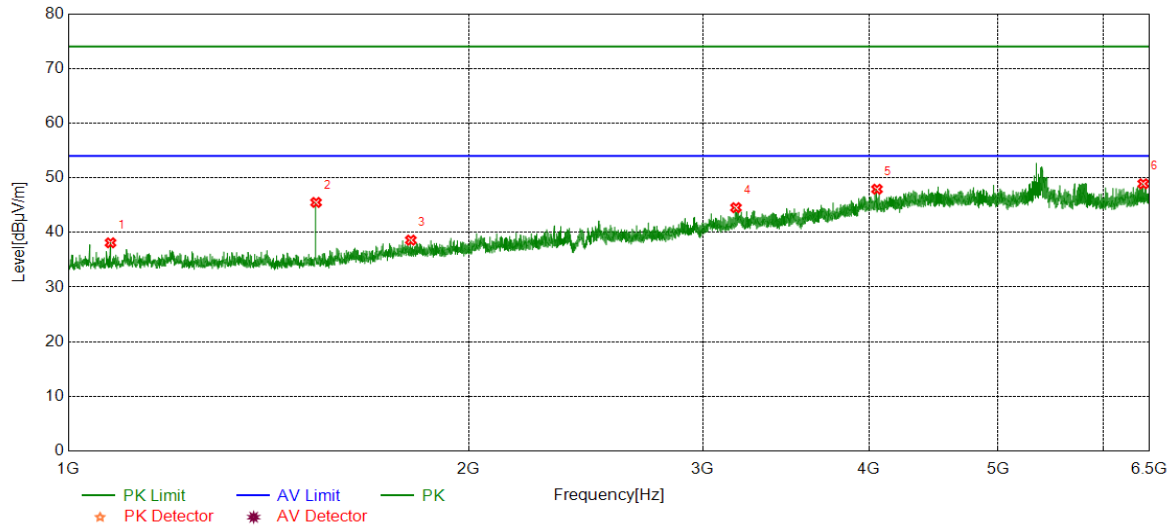


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1076.0127	43.47	-5.37	38.10	74.00	-35.90	peak
2	1535.7560	51.24	-5.75	45.49	74.00	-28.51	peak
3	1809.4682	42.66	-4.07	38.59	74.00	-35.41	peak
4	3176.5752	41.90	2.63	44.53	74.00	-29.47	peak
5	4054.7839	41.92	5.99	47.91	74.00	-26.09	peak
6	6429.2144	38.96	9.94	48.90	74.00	-25.10	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5530	Vertical	PASS

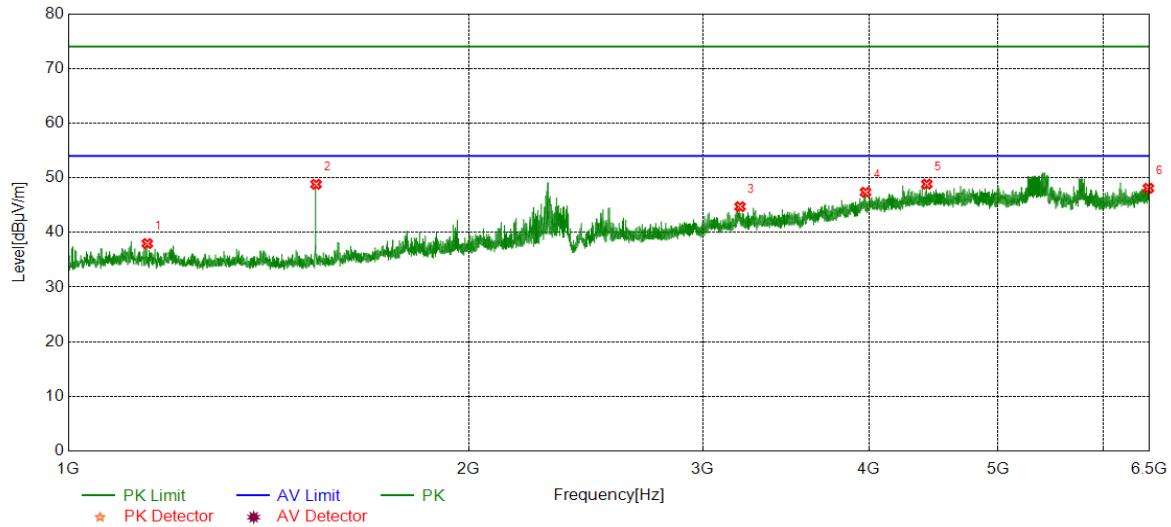


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1146.6911	43.56	-5.59	37.97	74.00	-36.03	peak
2	1535.7560	54.56	-5.75	48.81	74.00	-25.19	peak
3	3199.1332	41.77	2.94	44.71	74.00	-29.29	peak
4	3975.0528	41.49	5.87	47.36	74.00	-26.64	peak
5	4419.9911	41.40	7.44	48.84	74.00	-25.16	peak
6	6485.9984	38.76	9.33	48.09	74.00	-25.91	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5610	Horizontal	PASS

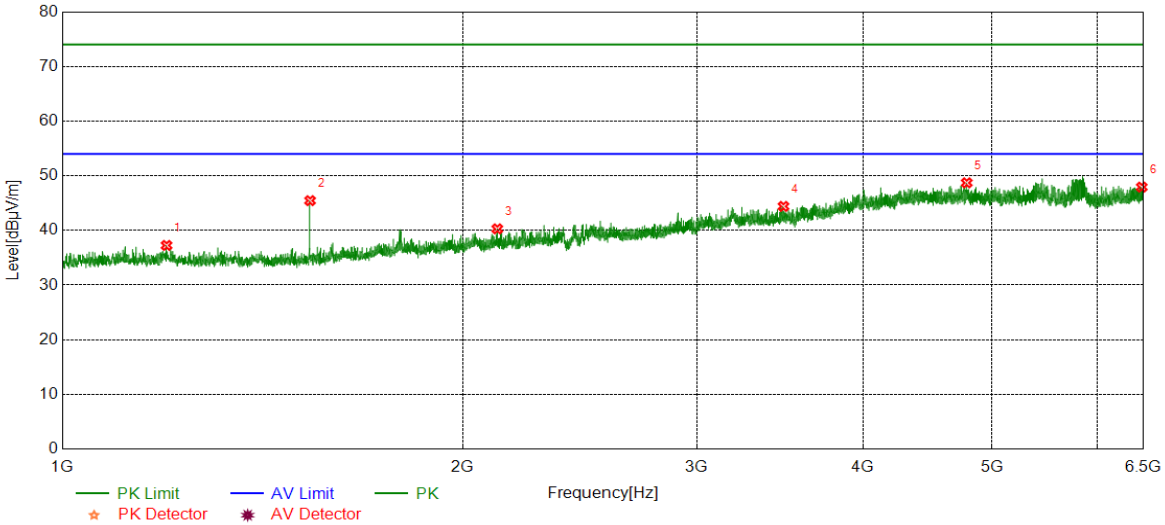


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1198.0330	42.82	-5.56	37.26	74.00	-36.74	peak
2	1535.7560	51.20	-5.75	45.45	74.00	-28.55	peak
3	2123.5206	42.67	-2.38	40.29	74.00	-33.71	peak
4	3484.9983	41.06	3.34	44.40	74.00	-29.60	peak
5	4785.9762	40.88	7.83	48.71	74.00	-25.29	peak
6	6479.3866	38.63	9.30	47.93	74.00	-26.07	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5610	Vertical	PASS

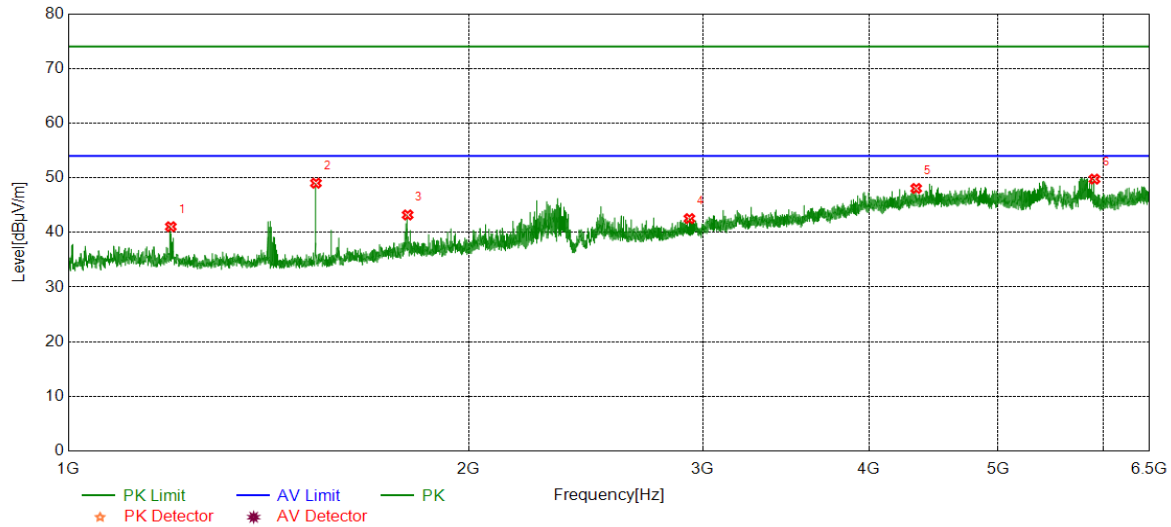


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.3657	46.62	-5.57	41.05	74.00	-32.95	peak
2	1535.4226	54.76	-5.75	49.01	74.00	-24.99	peak
3	1799.4666	47.04	-3.84	43.20	74.00	-30.80	peak
4	2930.6551	42.01	0.52	42.53	74.00	-31.47	peak
5	4339.4822	41.01	7.04	48.05	74.00	-25.95	peak
6	5908.0453	42.35	7.41	49.76	74.00	-24.24	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5690	Horizontal	PASS

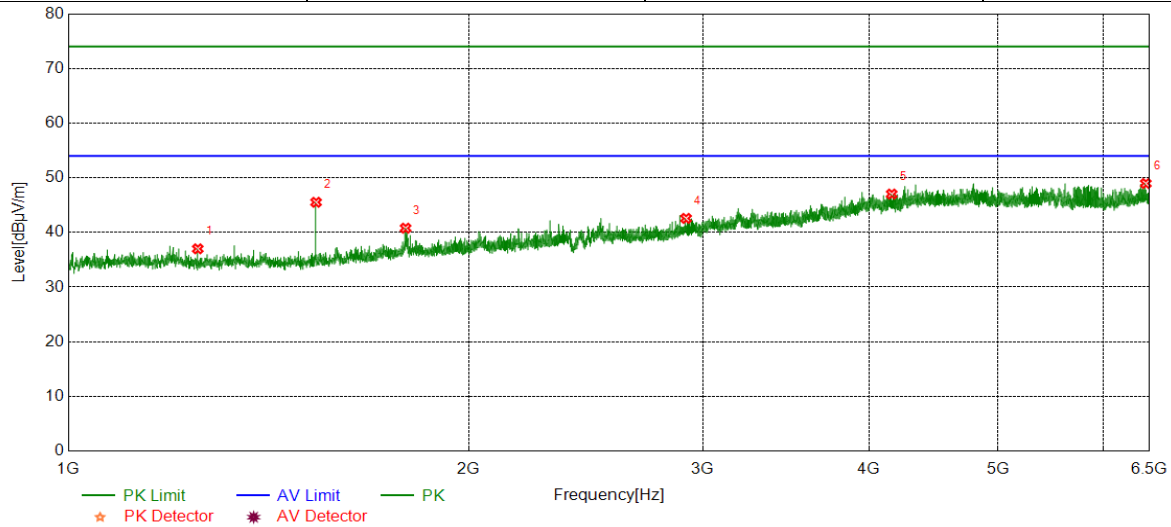


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1251.3752	42.67	-5.67	37.00	74.00	-37.00	peak
2	1535.7560	51.27	-5.75	45.52	74.00	-28.48	peak
3	1793.1322	44.55	-3.77	40.78	74.00	-33.22	peak
4	2913.6523	42.06	0.51	42.57	74.00	-31.43	peak
5	4159.4066	40.42	6.60	47.02	74.00	-26.98	peak
6	6457.2175	39.27	9.69	48.96	74.00	-25.04	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5690	Vertical	PASS

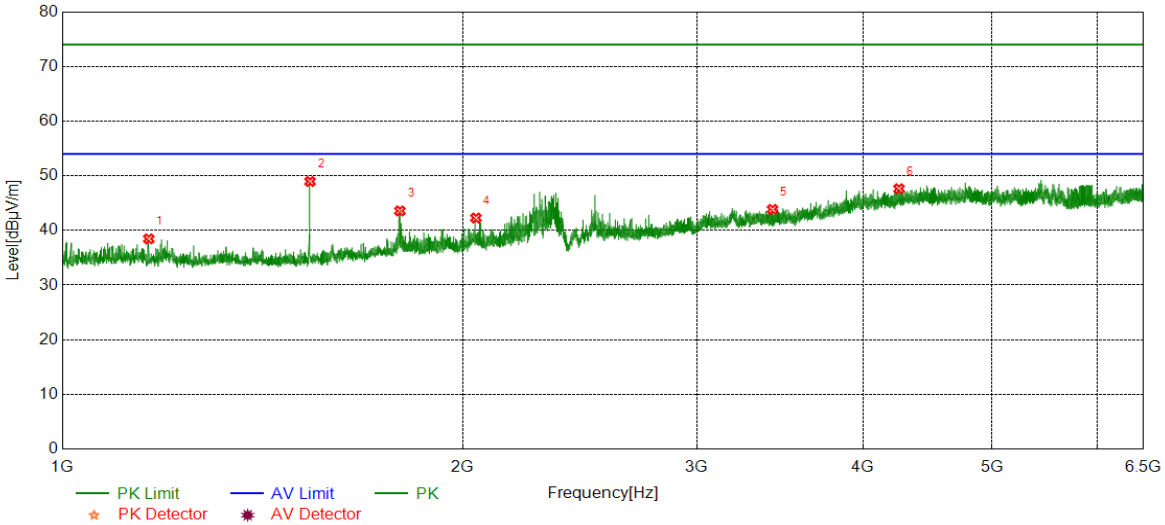


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1161.6936	43.98	-5.52	38.46	74.00	-35.54	peak
2	1535.7560	54.70	-5.75	48.95	74.00	-25.05	peak
3	1794.1324	47.35	-3.78	43.57	74.00	-30.43	peak
4	2046.5078	44.67	-2.39	42.28	74.00	-31.72	peak
5	3419.2688	40.95	2.90	43.85	74.00	-30.15	peak
6	4256.2507	40.74	6.89	47.63	74.00	-26.37	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5775	Horizontal	PASS

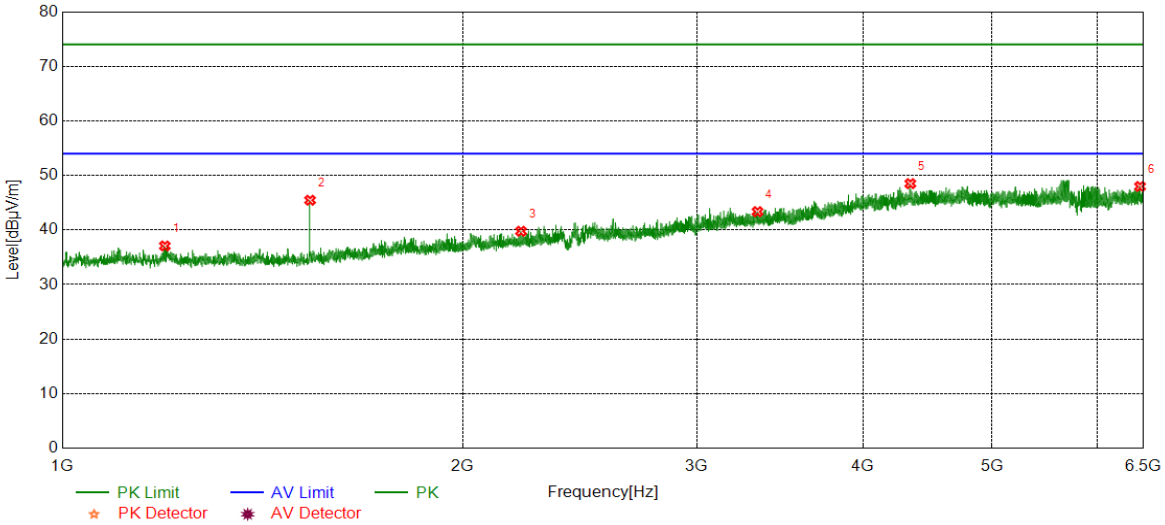


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1194.3657	42.65	-5.57	37.08	74.00	-36.92	peak
2	1535.7560	51.21	-5.75	45.46	74.00	-28.54	peak
3	2212.5354	42.07	-2.30	39.77	74.00	-34.23	peak
4	3331.7591	40.59	2.77	43.36	74.00	-30.64	peak
5	4340.6490	41.58	6.92	48.50	74.00	-25.50	peak
6	6460.3289	38.47	9.51	47.98	74.00	-26.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 80	5775	Vertical	PASS

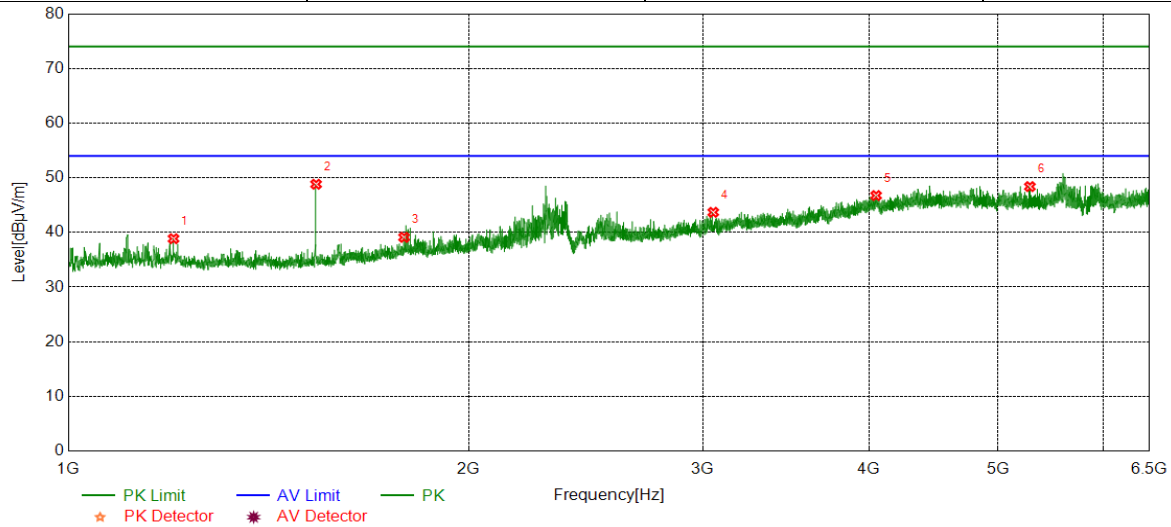


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1200.0333	44.41	-5.56	38.85	74.00	-35.15	peak
2	1535.7560	54.57	-5.75	48.82	74.00	-25.18	peak
3	1788.4647	42.87	-3.77	39.10	74.00	-34.90	peak
4	3054.0616	42.01	1.67	43.68	74.00	-30.32	peak
5	4048.5610	40.71	6.04	46.75	74.00	-27.25	peak
6	5283.4204	41.06	7.32	48.38	74.00	-25.62	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses
 The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



PART II: For 6.5GHz to 18GHz:

Test Mode	Channel	Polarization	Verdict
11A	5180	Horizontal	PASS

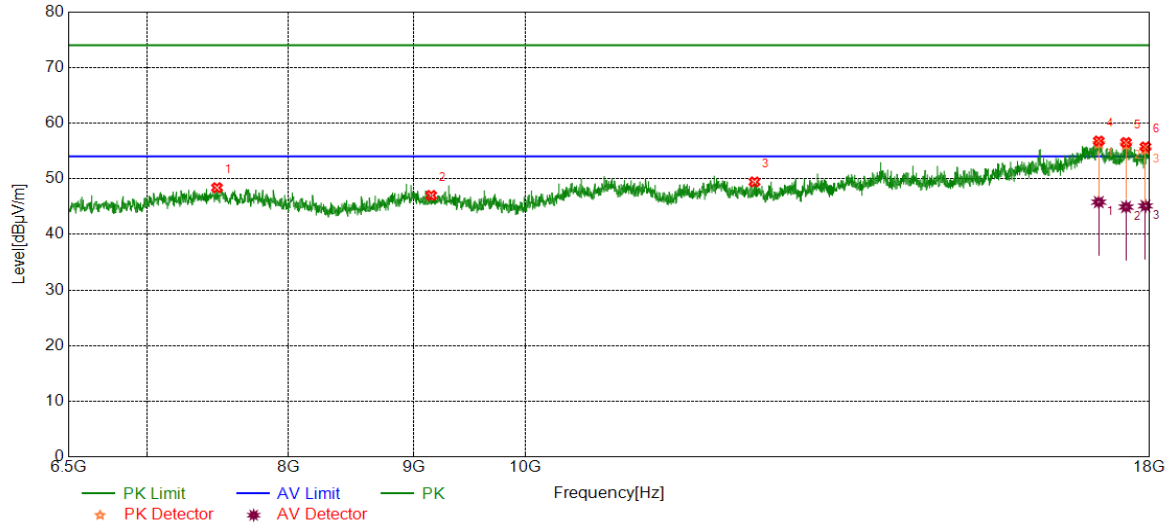


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7477.6629	38.52	9.87	48.39	74.00	-25.61	peak
2	9149.2749	37.57	9.43	47.00	74.00	-27.00	peak
3	12406.2344	37.29	12.14	49.43	74.00	-24.57	peak
4	17158.4431	36.92	19.87	56.79	74.00	-17.21	peak
		25.93	19.87	45.80	54.00	-8.20	average
5	17605.1009	37.93	18.59	56.52	74.00	-17.48	peak
		26.33	18.59	44.92	54.00	-9.08	average
6	17929.0715	36.91	18.82	55.73	74.00	-18.27	peak
		26.29	18.82	45.11	54.00	-8.89	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5180	Vertical	PASS

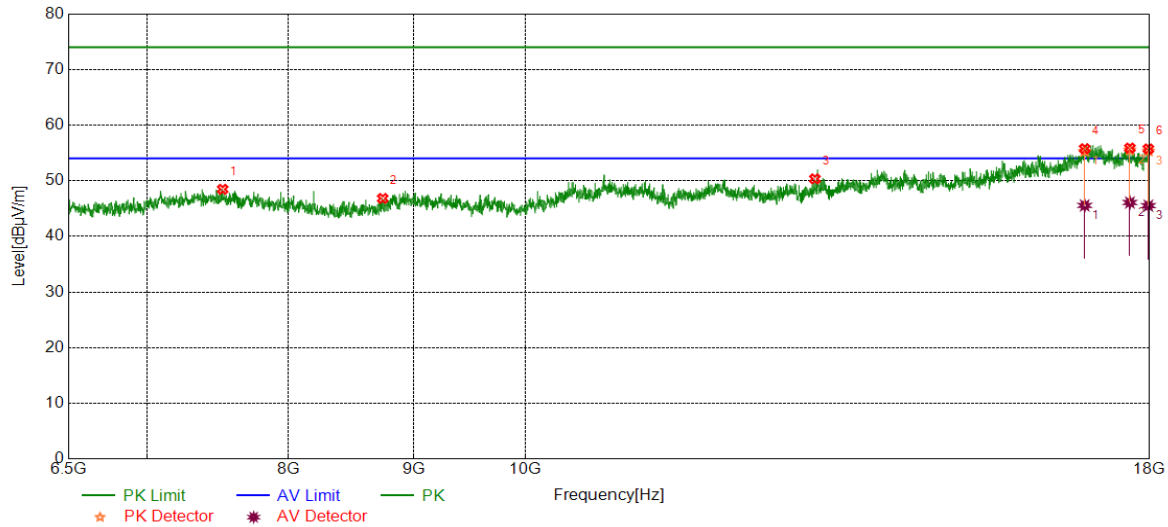


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7517.9197	39.09	9.38	48.47	74.00	-25.53	peak
2	8740.9568	38.40	8.42	46.82	74.00	-27.18	peak
3	13132.7721	37.64	12.70	50.34	74.00	-23.66	peak
4	16932.2387	36.62	19.14	55.76	74.00	-18.24	peak
		26.42	19.14	45.56	54.00	-8.44	average
5	17668.3614	36.69	19.19	55.88	74.00	-18.12	peak
		26.90	19.19	46.09	54.00	-7.91	average
6	17978.9132	36.76	18.96	55.72	74.00	-18.28	peak
		26.56	18.96	45.52	54.00	-8.48	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5200	Horizontal	PASS

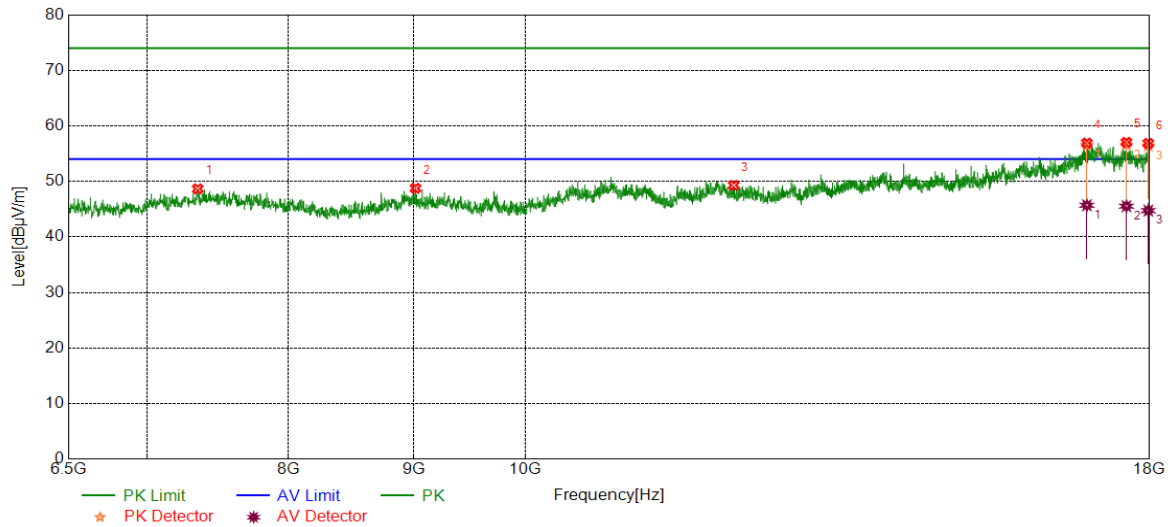


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7343.4739	39.10	9.56	48.66	74.00	-25.34	peak
2	9015.0858	39.07	9.69	48.76	74.00	-25.24	peak
3	12164.6941	36.51	12.78	49.29	74.00	-24.71	peak
4	16966.7445	36.60	20.31	56.91	74.00	-17.09	peak
		25.40	20.31	45.71	54.00	-8.29	average
5	17610.8518	38.41	18.64	57.05	74.00	-16.95	peak
		26.90	18.64	45.54	54.00	-8.46	average
6	17976.9962	37.92	18.93	56.85	74.00	-17.15	peak
		25.82	18.93	44.75	54.00	-9.25	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5200	Vertical	PASS

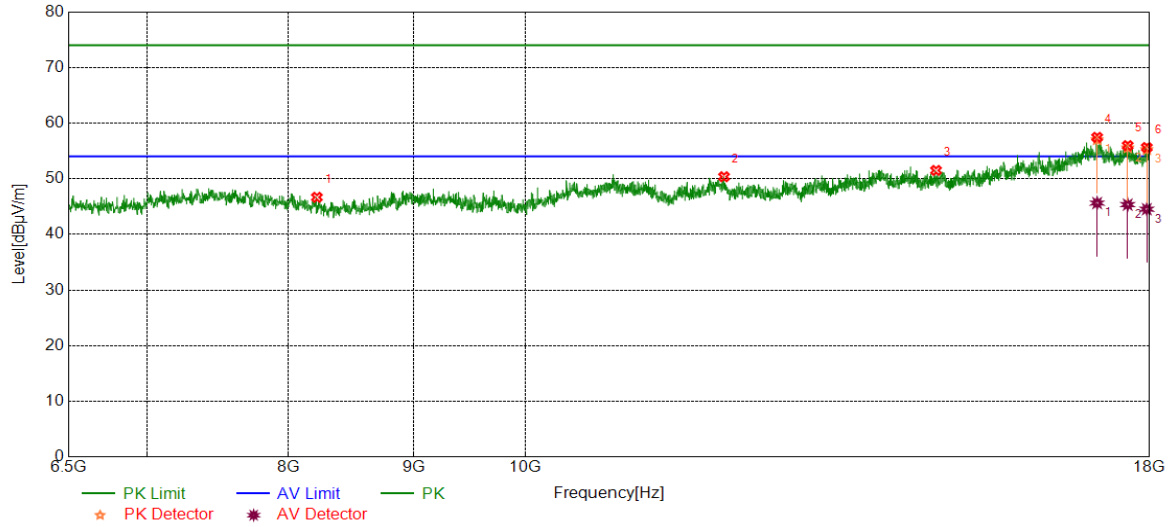


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8215.7026	38.67	8.00	46.67	74.00	-27.33	peak
2	12055.4259	37.24	13.12	50.36	74.00	-23.64	peak
3	14720.0367	37.43	14.07	51.50	74.00	-22.50	peak
4	17131.6053	38.41	19.03	57.44	74.00	-16.56	peak
		26.60	19.03	45.63	54.00	-8.37	average
5	17631.9387	37.02	18.94	55.96	74.00	-18.04	peak
		26.41	18.94	45.35	54.00	-8.65	average
6	17952.0753	37.06	18.56	55.62	74.00	-18.38	peak
		25.97	18.56	44.53	54.00	-9.47	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5240	Horizontal	PASS

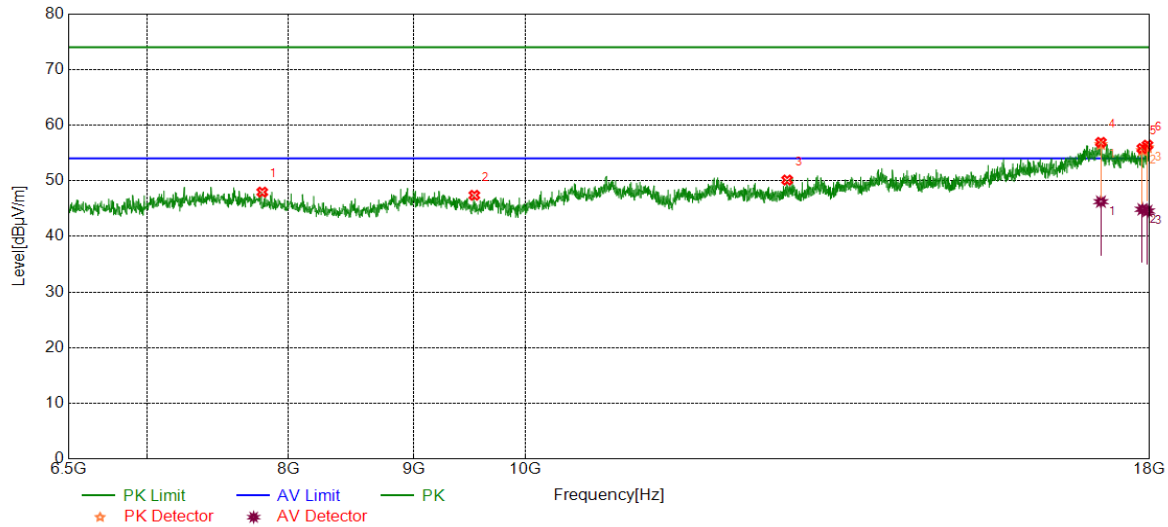


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7803.5506	39.23	8.73	47.96	74.00	-26.04	peak
2	9528.8381	38.52	8.87	47.39	74.00	-26.61	peak
3	12793.4656	37.92	12.21	50.13	74.00	-23.87	peak
4	17192.9488	37.49	19.41	56.90	74.00	-17.10	peak
		26.83	19.41	46.24	54.00	-7.76	average
5	17877.3129	37.12	18.68	55.80	74.00	-18.20	peak
		26.19	18.68	44.87	54.00	-9.13	average
6	17963.5773	37.67	18.73	56.40	74.00	-17.60	peak
		25.84	18.73	44.57	54.00	-9.43	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5240	Vertical	PASS

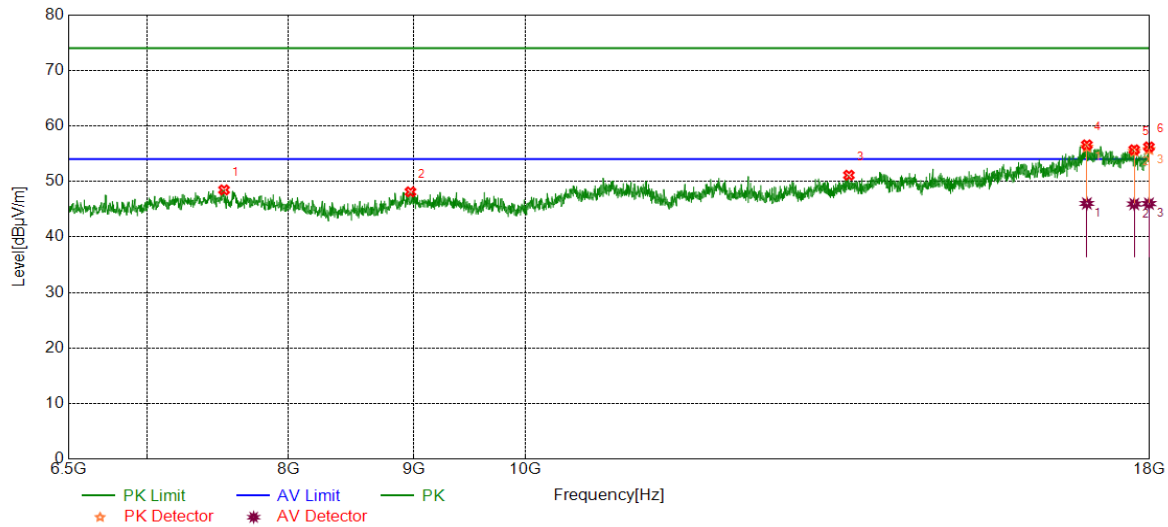


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7527.5046	38.94	9.53	48.47	74.00	-25.53	peak
2	8972.9122	38.63	9.49	48.12	74.00	-25.88	peak
3	13560.2600	37.85	13.27	51.12	74.00	-22.88	peak
4	16966.7445	36.27	20.31	56.58	74.00	-17.42	peak
		25.72	20.31	46.03	54.00	-7.97	average
5	17741.2069	36.67	19.03	55.70	74.00	-18.30	peak
		26.90	19.03	45.93	54.00	-8.07	average
6	17988.4981	37.14	19.08	56.22	74.00	-17.78	peak
		26.92	19.08	46.00	54.00	-8.00	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5260	Horizontal	PASS

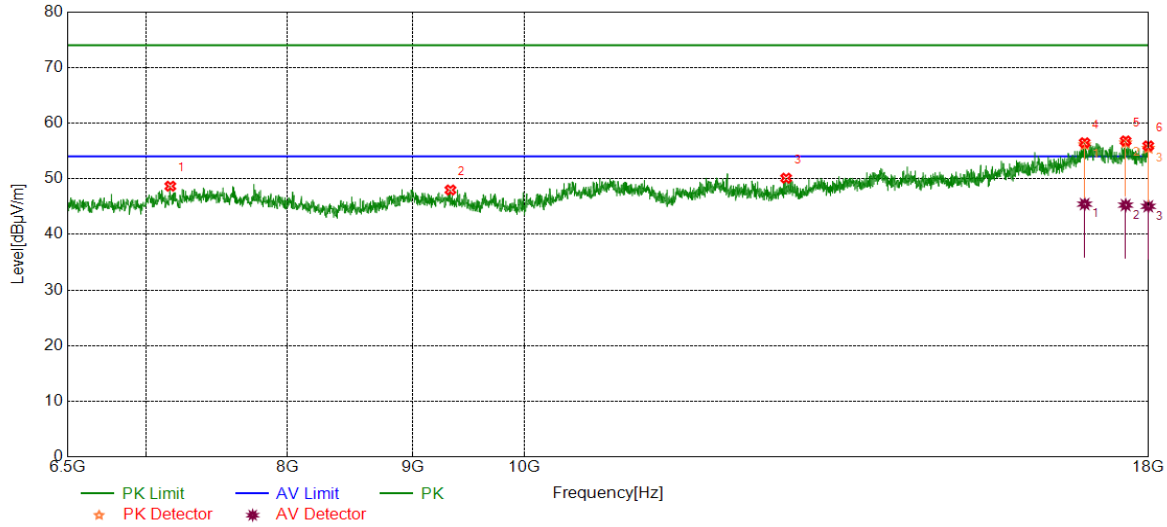


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7163.2772	39.03	9.63	48.66	74.00	-25.34	peak
2	9325.6376	38.91	9.07	47.98	74.00	-26.02	peak
3	12793.4656	37.89	12.21	50.10	74.00	-23.90	peak
4	16947.5746	36.99	19.48	56.47	74.00	-17.53	peak
		25.97	19.48	45.45	54.00	-8.55	average
5	17614.6858	38.30	18.50	56.80	74.00	-17.20	peak
		26.76	18.50	45.26	54.00	-8.74	average
6	17994.2490	37.02	18.88	55.90	74.00	-18.10	peak
		26.17	18.88	45.05	54.00	-8.95	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5260	Vertical	PASS

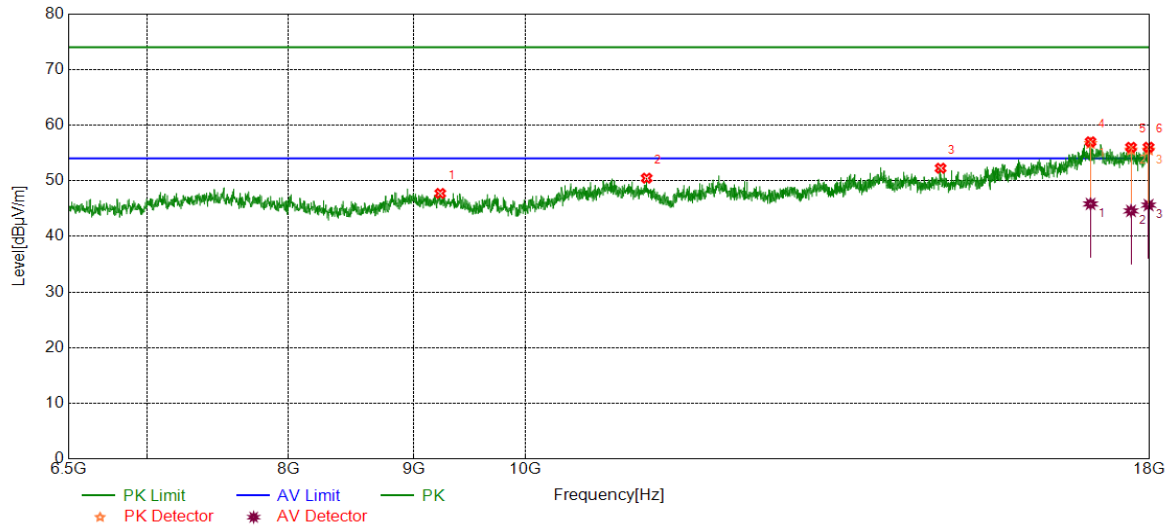


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	9227.8713	38.47	9.25	47.72	74.00	-26.28	peak
2	11208.1180	38.27	12.19	50.46	74.00	-23.54	peak
3	14783.2972	37.37	14.88	52.25	74.00	-21.75	peak
4	17026.1710	37.52	19.48	57.00	74.00	-17.00	peak
		26.36	19.48	45.84	54.00	-8.16	average
5	17687.5313	37.45	18.56	56.01	74.00	-17.99	peak
		26.02	18.56	44.58	54.00	-9.42	average
6	17982.7471	37.01	19.01	56.02	74.00	-17.98	peak
		26.62	19.01	45.63	54.00	-8.37	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5280	Horizontal	PASS

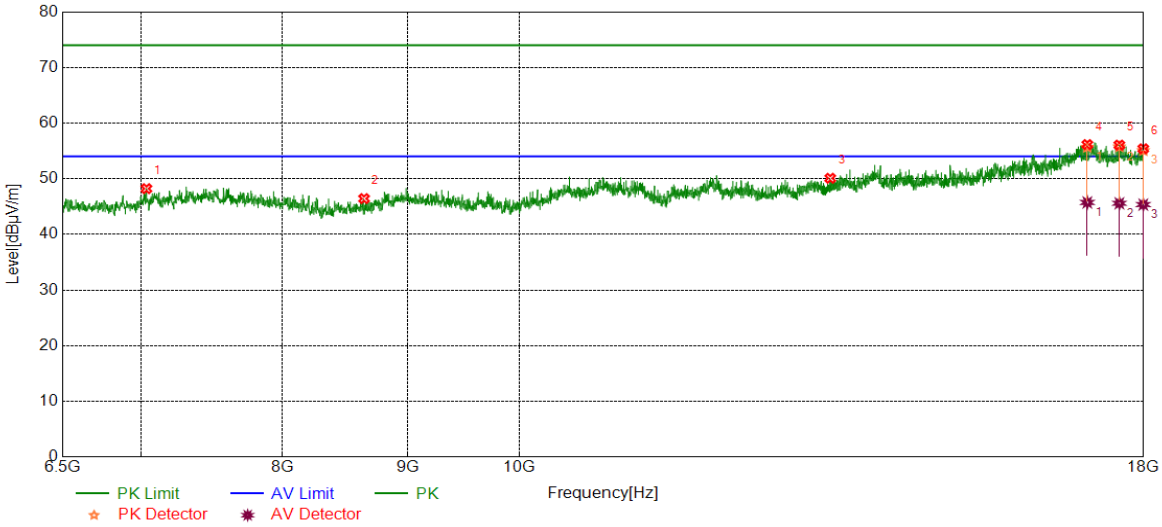


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7036.7561	38.99	9.23	48.22	74.00	-25.78	peak
2	8637.4396	38.59	7.84	46.43	74.00	-27.57	peak
3	13399.2332	37.20	12.89	50.09	74.00	-23.91	peak
4	17070.2617	35.68	20.46	56.14	74.00	-17.86	peak
		25.28	20.46	45.74	54.00	-8.26	average
5	17593.5989	37.42	18.63	56.05	74.00	-17.95	peak
		26.96	18.63	45.59	54.00	-8.41	average
6	17994.2490	36.51	18.88	55.39	74.00	-18.61	peak
		26.48	18.88	45.36	54.00	-8.64	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5280	Vertical	PASS

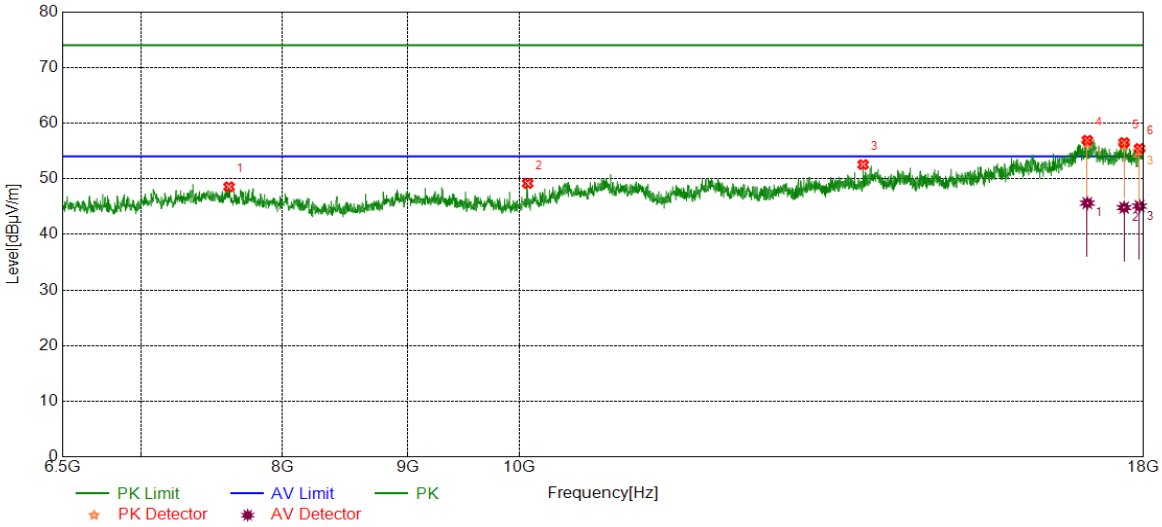


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7606.1010	39.04	9.51	48.55	74.00	-25.45	peak
2	10077.0962	39.76	9.40	49.16	74.00	-24.84	peak
3	13820.9702	38.38	14.16	52.54	74.00	-21.46	peak
4	17070.2617	36.45	20.46	56.91	74.00	-17.09	peak
		25.16	20.46	45.62	54.00	-8.38	average
5	17672.1954	37.35	19.15	56.50	74.00	-17.50	peak
		25.66	19.15	44.81	54.00	-9.19	average
6	17930.9885	36.62	18.81	55.43	74.00	-18.57	peak
		26.27	18.81	45.08	54.00	-8.92	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5320	Horizontal	PASS

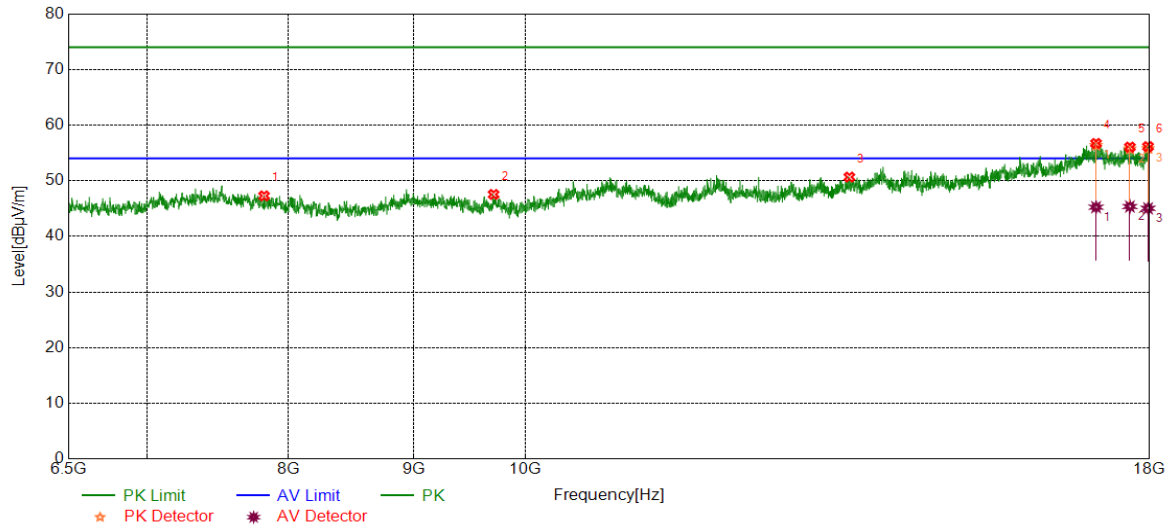


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7816.9695	38.54	8.74	47.28	74.00	-26.72	peak
2	9703.2839	38.33	9.21	47.54	74.00	-26.46	peak
3	13566.0110	37.32	13.34	50.66	74.00	-23.34	peak
4	17114.3524	37.52	19.19	56.71	74.00	-17.29	peak
		26.06	19.19	45.25	54.00	-8.75	average
5	17668.3614	36.86	19.19	56.05	74.00	-17.95	peak
		26.18	19.19	45.37	54.00	-8.63	average
6	17973.1622	37.28	18.85	56.13	74.00	-17.87	peak
		26.19	18.85	45.04	54.00	-8.96	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5320	Vertical	PASS

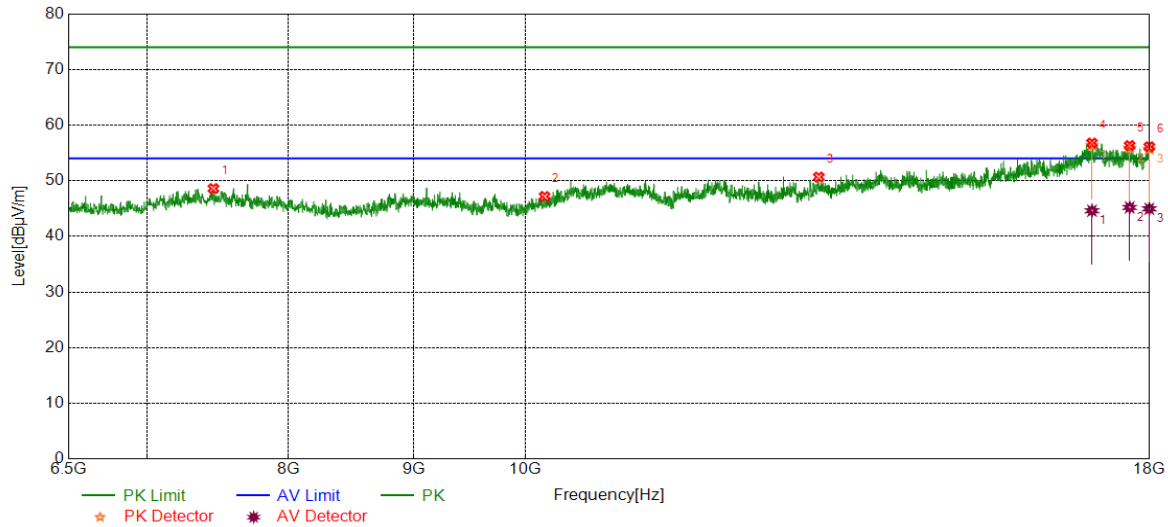


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7452.7421	39.16	9.44	48.60	74.00	-25.40	peak
2	10180.6134	37.00	10.18	47.18	74.00	-26.82	peak
3	13180.6968	37.91	12.76	50.67	74.00	-23.33	peak
4	17049.1749	37.04	19.74	56.78	74.00	-17.22	peak
		24.87	19.74	44.61	54.00	-9.39	average
5	17664.5274	37.40	18.92	56.32	74.00	-17.68	peak
		26.28	18.92	45.20	54.00	-8.80	average
6	17994.2490	37.23	18.88	56.11	74.00	-17.89	peak
		26.08	18.88	44.96	54.00	-9.04	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5500	Horizontal	PASS

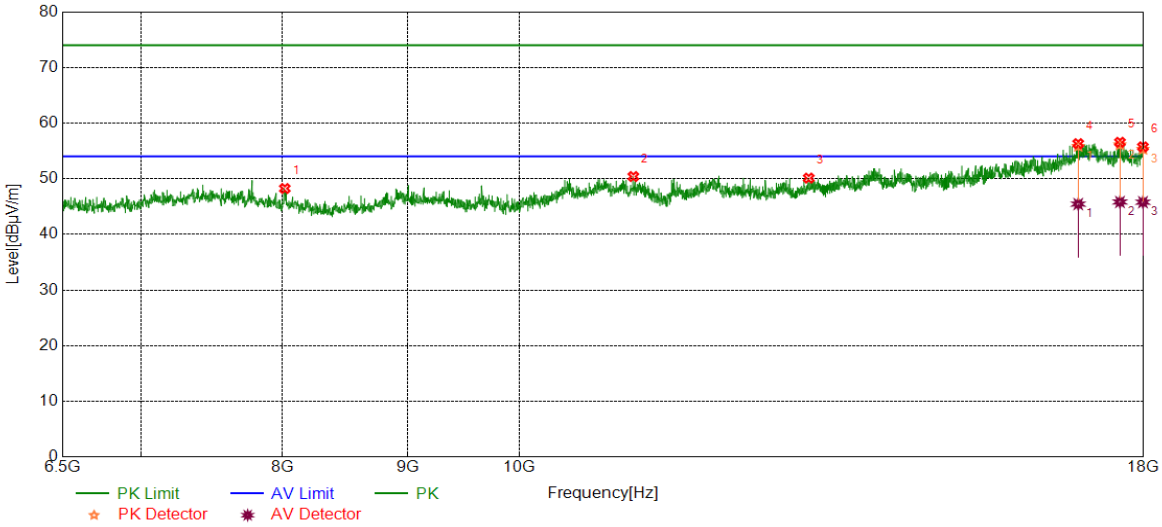


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8016.3361	39.43	8.82	48.25	74.00	-25.75	peak
2	11131.4386	37.87	12.53	50.40	74.00	-23.60	peak
3	13130.8551	37.45	12.67	50.12	74.00	-23.88	peak
4	16924.5708	37.17	19.14	56.31	74.00	-17.69	peak
		26.31	19.14	45.45	54.00	-8.55	average
5	17603.1839	38.00	18.56	56.56	74.00	-17.44	peak
		27.27	18.56	45.83	54.00	-8.17	average
6	17988.4981	36.66	19.08	55.74	74.00	-18.26	peak
		26.71	19.08	45.79	54.00	-8.21	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5500	Vertical	PASS

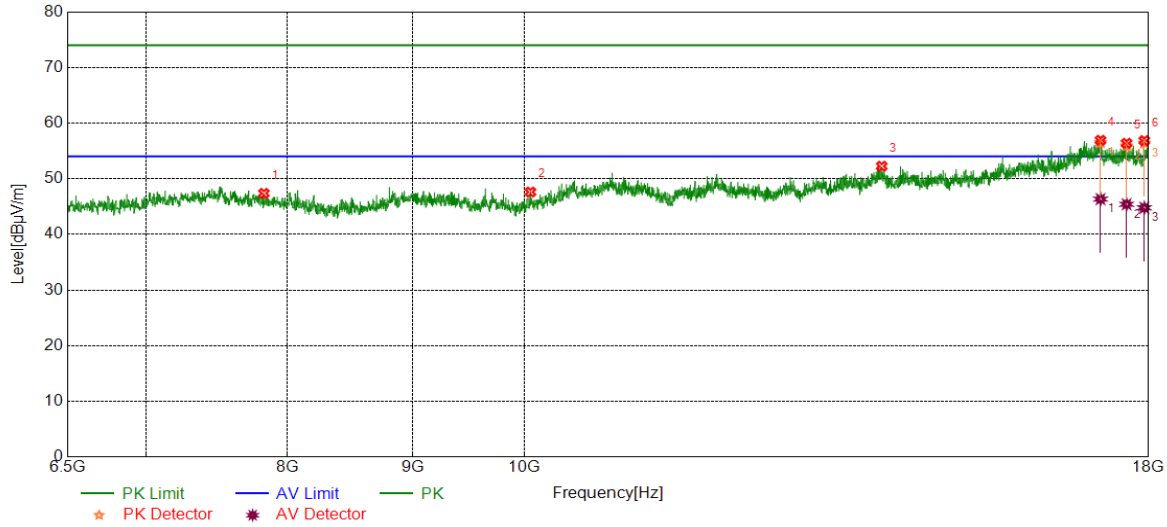


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7822.7205	38.67	8.71	47.38	74.00	-26.62	peak
2	10056.0093	38.14	9.47	47.61	74.00	-26.39	peak
3	13999.2499	37.05	15.20	52.25	74.00	-21.75	peak
4	17202.5338	37.27	19.64	56.91	74.00	-17.09	peak
		26.70	19.64	46.34	54.00	-7.66	average
5	17630.0217	37.35	19.02	56.37	74.00	-17.63	peak
		26.39	19.02	45.41	54.00	-8.59	average
6	17927.1545	38.13	18.72	56.85	74.00	-17.15	peak
		26.06	18.72	44.78	54.00	-9.22	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5580	Horizontal	PASS

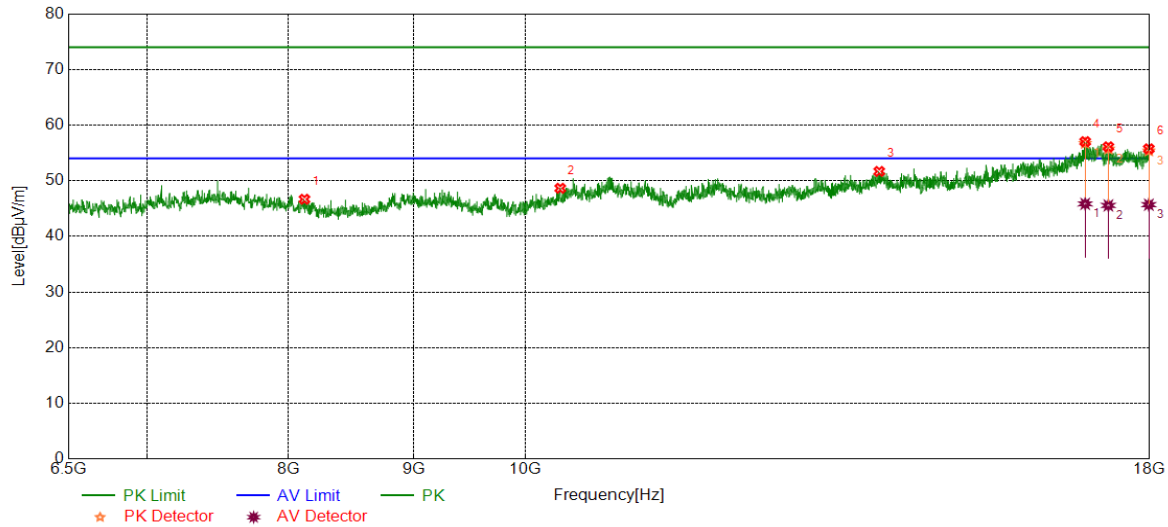


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8119.8533	38.54	8.14	46.68	74.00	-27.32	peak
2	10332.0553	37.53	11.12	48.65	74.00	-25.35	peak
3	13953.2422	37.08	14.60	51.68	74.00	-22.32	peak
4	16939.9067	37.48	19.55	57.03	74.00	-16.97	peak
		26.30	19.55	45.85	54.00	-8.15	average
5	17313.7190	37.48	18.62	56.10	74.00	-17.90	peak
		26.94	18.62	45.56	54.00	-8.44	average
6	17986.5811	36.68	19.06	55.74	74.00	-18.26	peak
		26.64	19.06	45.70	54.00	-8.30	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5580	Vertical	PASS

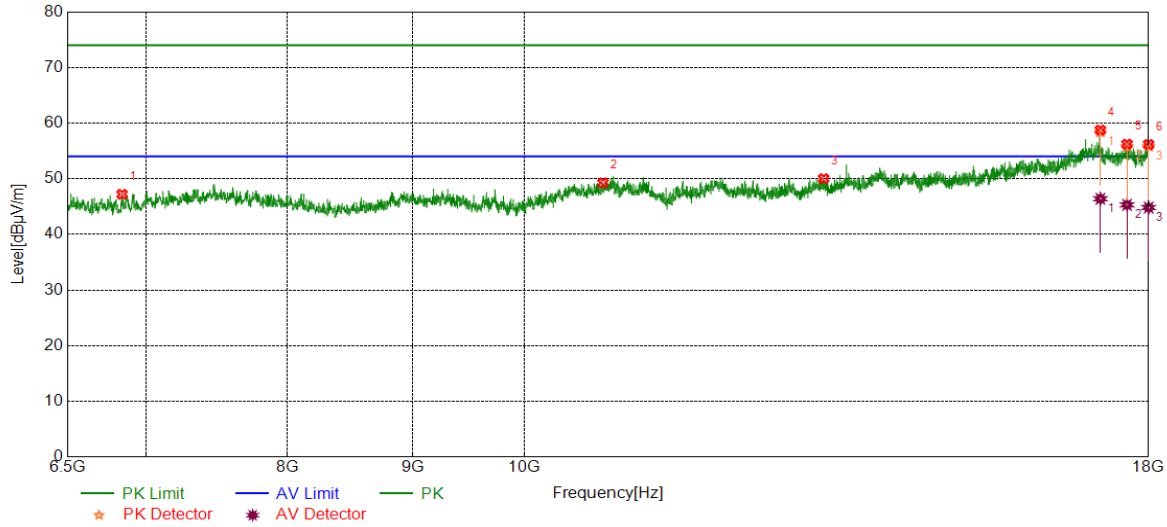


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	6845.0575	38.26	8.95	47.21	74.00	-26.79	peak
2	10767.2112	36.64	12.63	49.27	74.00	-24.73	peak
3	13253.5423	37.19	12.84	50.03	74.00	-23.97	peak
4	17200.6168	38.95	19.80	58.75	74.00	-15.25	peak
		26.60	19.80	46.40	54.00	-7.60	average
5	17637.6896	37.56	18.67	56.23	74.00	-17.77	peak
		26.64	18.67	45.31	54.00	-8.69	average
6	18000.0000	37.58	18.58	56.16	74.00	-17.84	peak
		26.24	18.58	44.82	54.00	-9.18	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5700	Horizontal	PASS

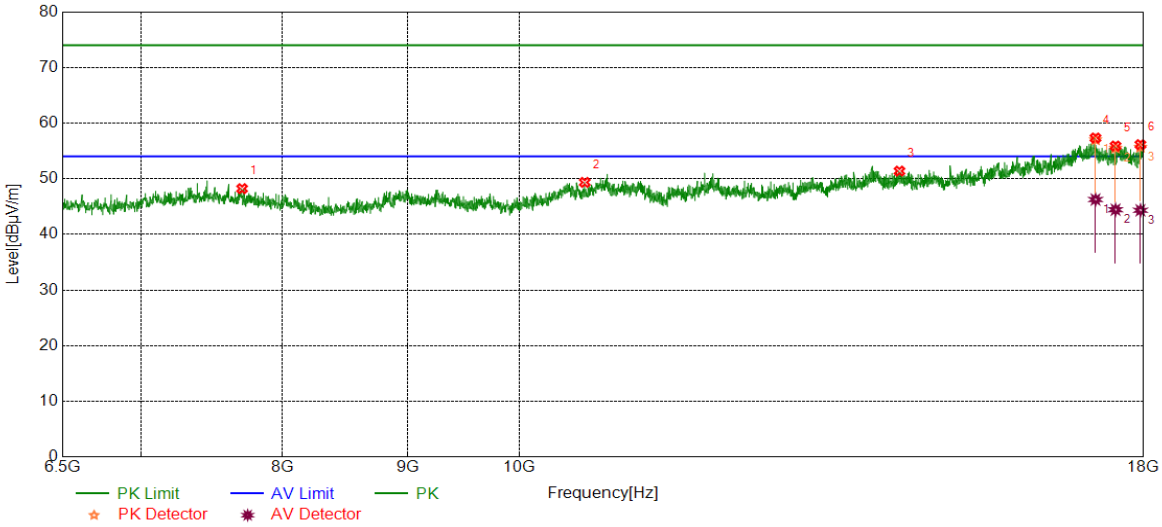


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7700.0333	38.88	9.34	48.22	74.00	-25.78	peak
2	10633.0222	37.10	12.25	49.35	74.00	-24.65	peak
3	14302.1337	36.93	14.45	51.38	74.00	-22.62	peak
4	17202.5338	37.68	19.64	57.32	74.00	-16.68	peak
		26.62	19.64	46.26	54.00	-7.74	average
5	17530.3384	37.54	18.34	55.88	74.00	-18.12	peak
		26.10	18.34	44.44	54.00	-9.56	average
6	17946.3244	37.68	18.45	56.13	74.00	-17.87	peak
		25.88	18.45	44.33	54.00	-9.67	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5700	Vertical	PASS

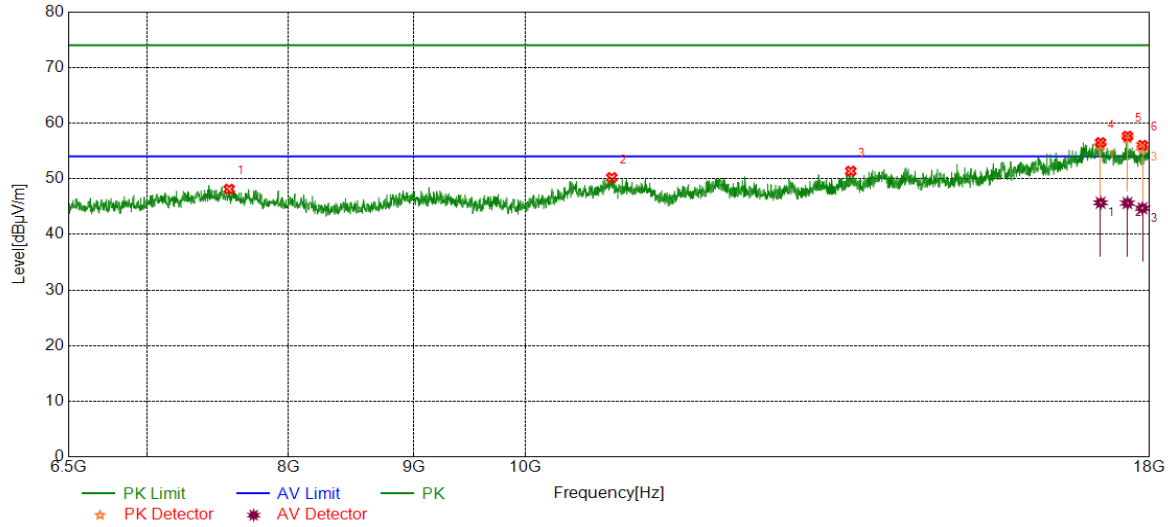


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7563.9273	38.60	9.54	48.14	74.00	-25.86	peak
2	10845.8076	37.59	12.63	50.22	74.00	-23.78	peak
3	13583.2639	37.88	13.50	51.38	74.00	-22.62	peak
4	17187.1979	37.31	19.20	56.51	74.00	-17.49	peak
		26.48	19.20	45.68	54.00	-8.32	average
5	17628.1047	38.77	18.89	57.66	74.00	-16.34	peak
		26.73	18.89	45.62	54.00	-8.38	average
6	17879.2299	37.23	18.79	56.02	74.00	-17.98	peak
		25.90	18.79	44.69	54.00	-9.31	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5720	Horizontal	PASS

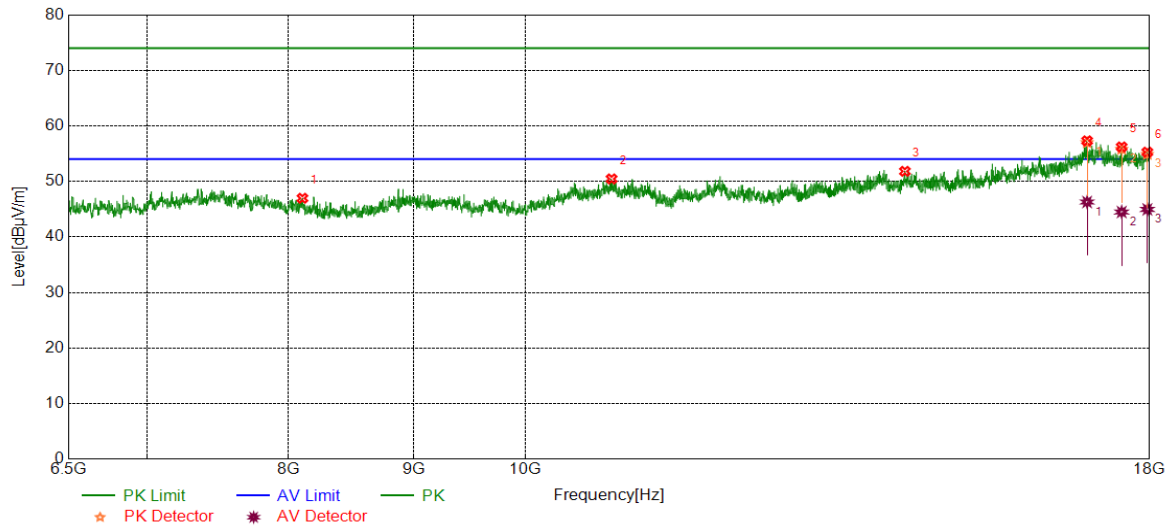


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8104.5174	38.77	8.20	46.97	74.00	-27.03	peak
2	10843.8906	37.79	12.66	50.45	74.00	-23.55	peak
3	14294.4657	37.18	14.64	51.82	74.00	-22.18	peak
4	16970.5784	36.74	20.57	57.31	74.00	-16.69	peak
		25.72	20.57	46.29	54.00	-7.71	average
5	17532.2554	37.94	18.27	56.21	74.00	-17.79	peak
		26.22	18.27	44.49	54.00	-9.51	average
6	17961.6603	36.56	18.71	55.27	74.00	-18.73	peak
		26.25	18.71	44.96	54.00	-9.04	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5720	Vertical	PASS

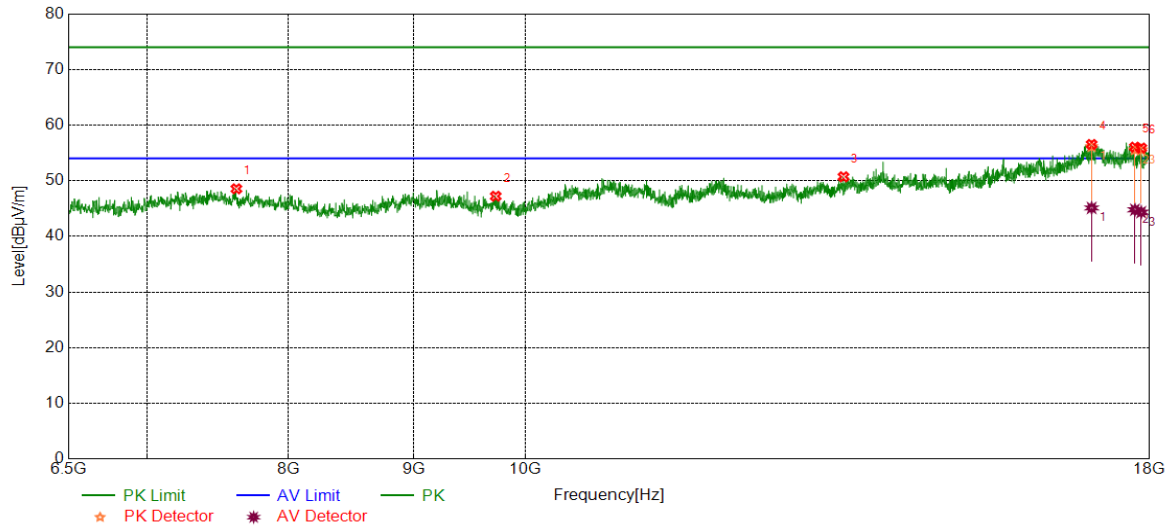


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7615.6859	39.27	9.28	48.55	74.00	-25.45	peak
2	9722.4537	38.20	9.02	47.22	74.00	-26.78	peak
3	13491.2485	37.40	13.31	50.71	74.00	-23.29	peak
4	17043.4239	36.93	19.60	56.53	74.00	-17.47	peak
		25.51	19.60	45.11	54.00	-8.89	average
5	17752.7088	37.07	18.97	56.04	74.00	-17.96	peak
		25.82	18.97	44.79	54.00	-9.21	average
6	17858.1430	37.26	18.62	55.88	74.00	-18.12	peak
		25.73	18.62	44.35	54.00	-9.65	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5745	Horizontal	PASS

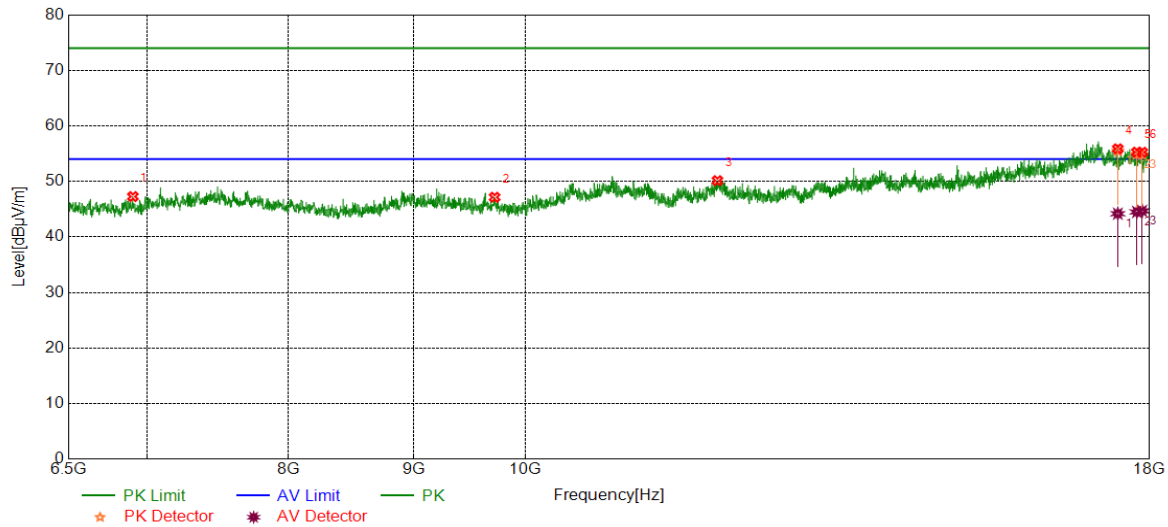


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	6908.3181	38.14	9.13	47.27	74.00	-26.73	peak
2	9712.8688	37.90	9.25	47.15	74.00	-26.85	peak
3	11980.6634	36.66	13.48	50.14	74.00	-23.86	peak
4	17468.9948	37.21	18.66	55.87	74.00	-18.13	peak
		25.53	18.66	44.19	54.00	-9.81	average
5	17785.2976	36.87	18.40	55.27	74.00	-18.73	peak
		26.11	18.40	44.51	54.00	-9.49	average
6	17875.3959	36.70	18.56	55.26	74.00	-18.74	peak
		26.13	18.56	44.69	54.00	-9.31	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5745	Vertical	PASS

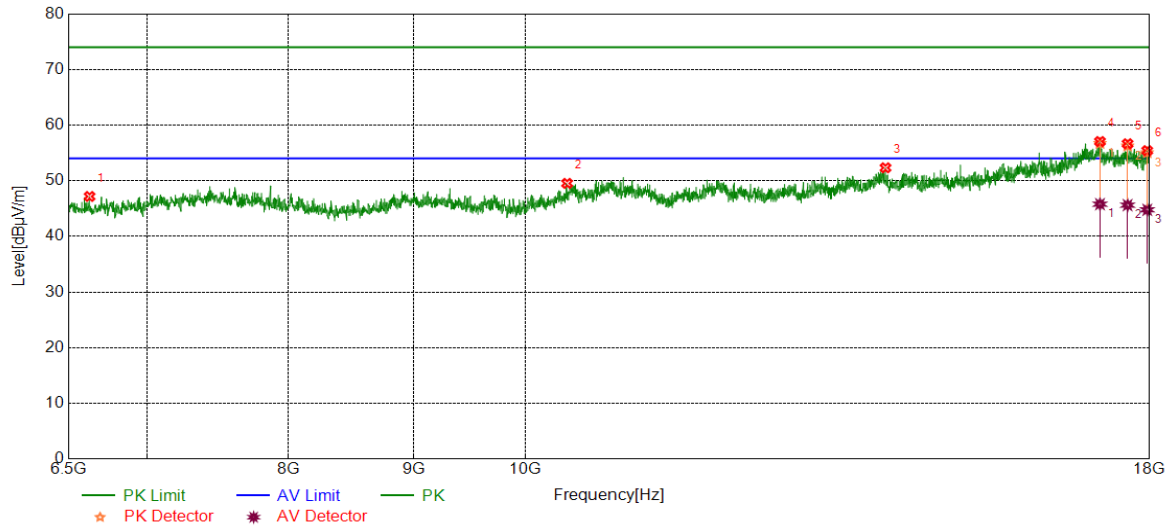


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	6632.2720	38.22	8.96	47.18	74.00	-26.82	peak
2	10399.1499	38.03	11.50	49.53	74.00	-24.47	peak
3	14035.6726	37.41	14.92	52.33	74.00	-21.67	peak
4	17177.6129	37.84	19.21	57.05	74.00	-16.95	peak
		26.58	19.21	45.79	54.00	-8.21	average
5	17630.0217	37.63	19.02	56.65	74.00	-17.35	peak
		26.60	19.02	45.62	54.00	-8.38	average
6	17959.7433	36.72	18.69	55.41	74.00	-18.59	peak
		26.09	18.69	44.78	54.00	-9.22	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5785	Horizontal	PASS

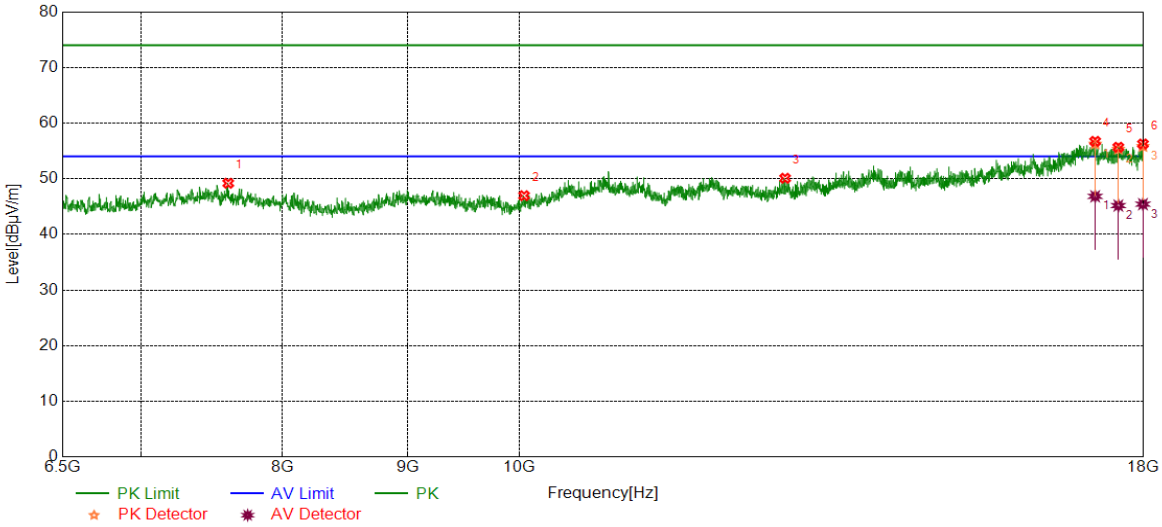


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7600.3501	39.54	9.65	49.19	74.00	-24.81	peak
2	10042.5904	37.72	9.24	46.96	74.00	-27.04	peak
3	12841.3902	37.88	12.21	50.09	74.00	-23.91	peak
4	17196.7828	37.07	19.65	56.72	74.00	-17.28	peak
		27.19	19.65	46.84	54.00	-7.16	average
5	17576.3461	37.04	18.62	55.66	74.00	-18.34	peak
		26.56	18.62	45.18	54.00	-8.82	average
6	17988.4981	37.17	19.08	56.25	74.00	-17.75	peak
		26.35	19.08	45.43	54.00	-8.57	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5785	Vertical	PASS

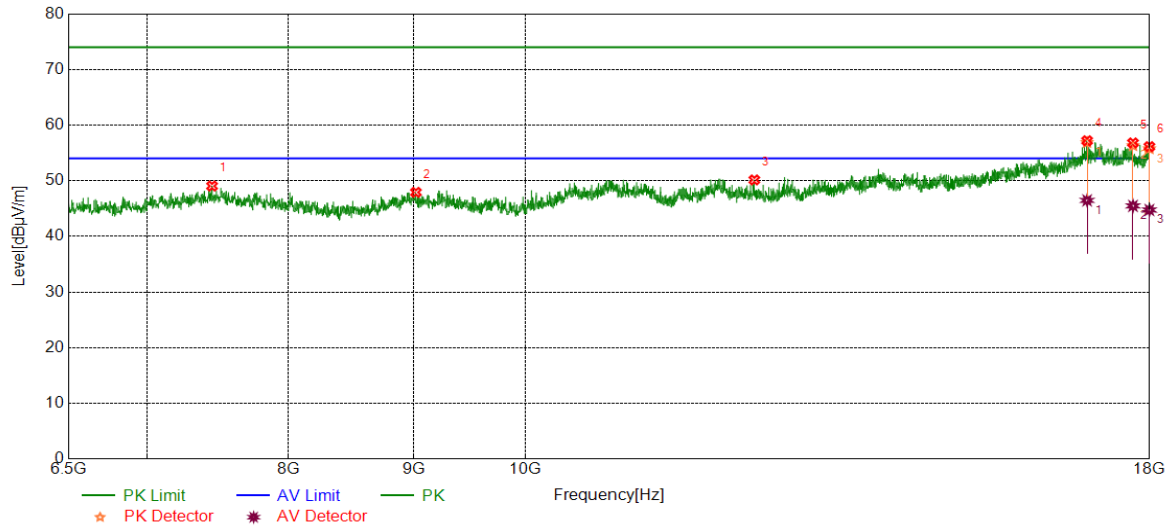


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7443.1572	39.67	9.38	49.05	74.00	-24.95	peak
2	9018.9198	38.27	9.65	47.92	74.00	-26.08	peak
3	12404.3174	38.05	12.10	50.15	74.00	-23.85	peak
4	16970.5784	36.62	20.57	57.19	74.00	-16.81	peak
		25.90	20.57	46.47	54.00	-7.53	average
5	17720.1200	37.69	19.11	56.80	74.00	-17.20	peak
		26.37	19.11	45.48	54.00	-8.52	average
6	17996.1660	37.35	18.78	56.13	74.00	-17.87	peak
		25.97	18.78	44.75	54.00	-9.25	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5825	Horizontal	PASS

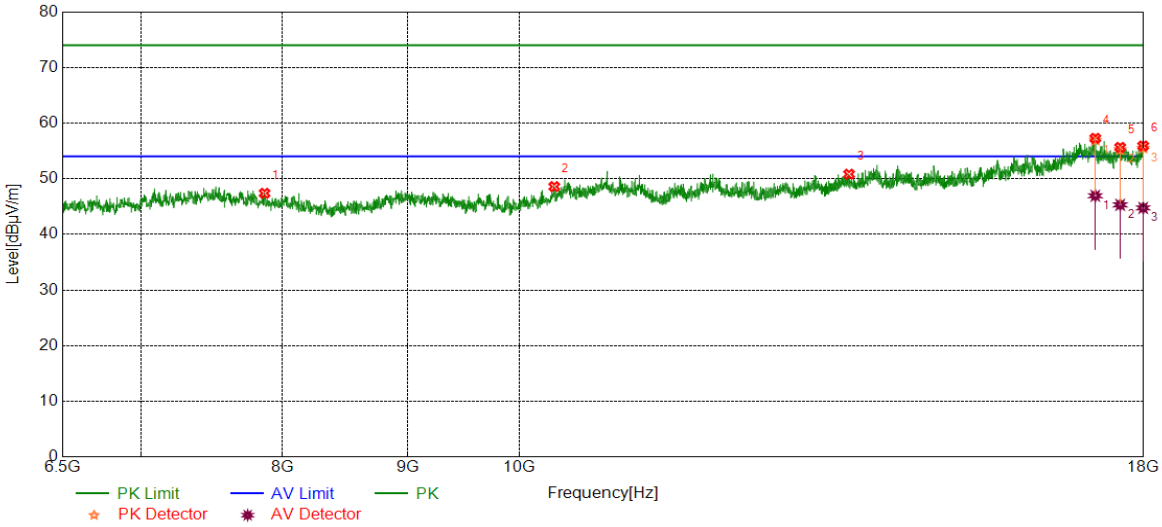


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7864.8941	38.77	8.62	47.39	74.00	-26.61	peak
2	10332.0553	37.47	11.12	48.59	74.00	-25.41	peak
3	13638.8565	37.14	13.68	50.82	74.00	-23.18	peak
4	17198.6998	37.50	19.77	57.27	74.00	-16.73	peak
		27.17	19.77	46.94	54.00	-7.06	average
5	17607.0178	37.02	18.62	55.64	74.00	-18.36	peak
		26.69	18.62	45.31	54.00	-8.69	average
6	17992.3321	36.92	18.98	55.90	74.00	-18.10	peak
		25.78	18.98	44.76	54.00	-9.24	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11A	5825	Vertical	PASS

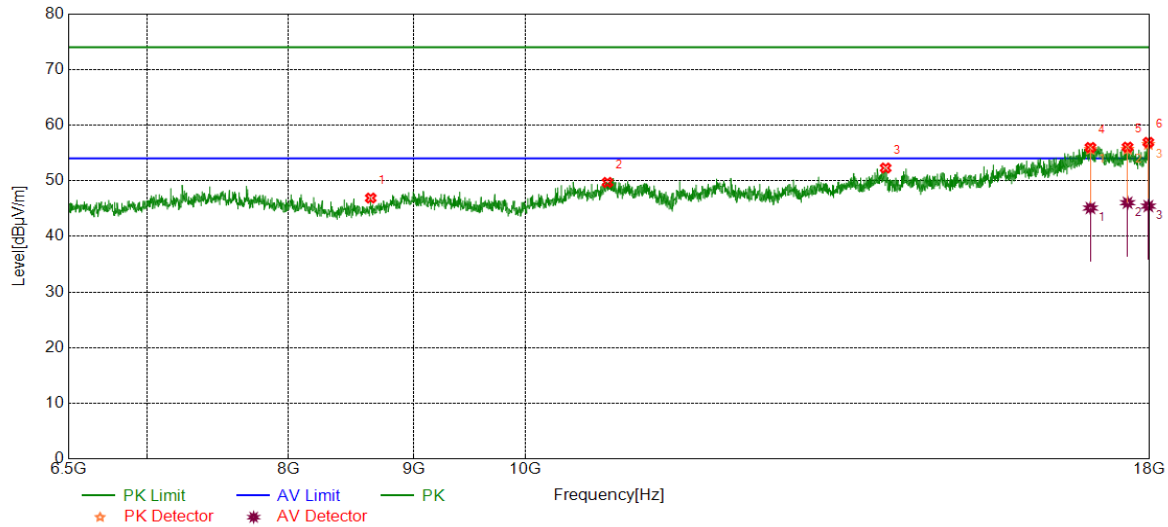


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8643.1905	39.08	7.81	46.89	74.00	-27.11	peak
2	10801.7170	37.25	12.45	49.70	74.00	-24.30	peak
3	14037.5896	37.40	14.89	52.29	74.00	-21.71	peak
4	17024.2540	36.48	19.50	55.98	74.00	-18.02	peak
		25.60	19.50	45.10	54.00	-8.90	average
5	17630.0217	37.02	19.02	56.04	74.00	-17.96	peak
		27.03	19.02	46.05	54.00	-7.95	average
6	17978.9132	37.94	18.96	56.90	74.00	-17.10	peak
		26.48	18.96	45.44	54.00	-8.56	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5180	Horizontal	PASS

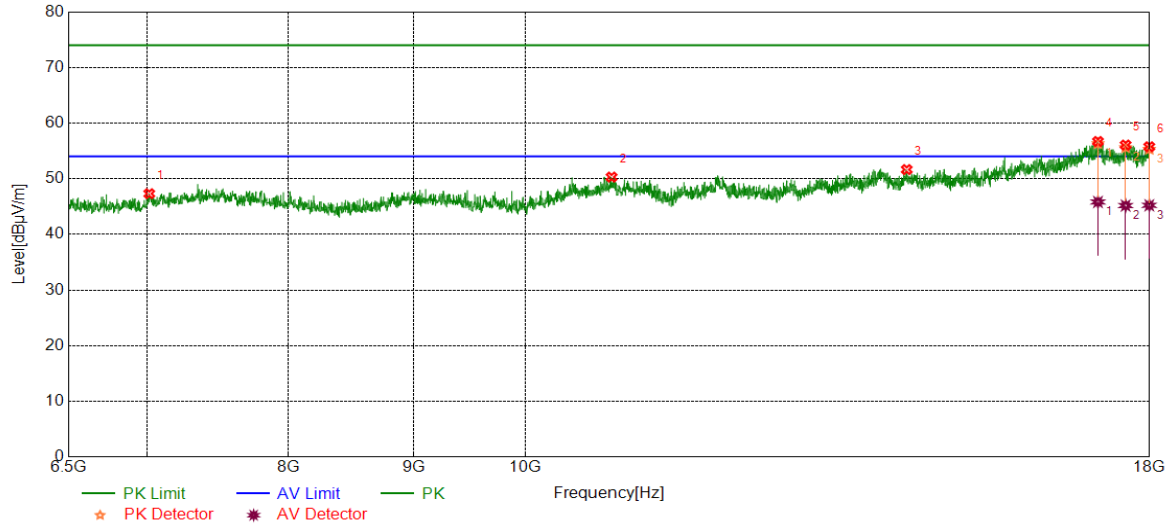


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7015.6693	38.08	9.24	47.32	74.00	-26.68	peak
2	10843.8906	37.64	12.66	50.30	74.00	-23.70	peak
3	14319.3866	36.86	14.79	51.65	74.00	-22.35	peak
4	17145.0242	37.41	19.29	56.70	74.00	-17.30	peak
		26.54	19.29	45.83	54.00	-8.17	average
5	17597.4329	37.50	18.56	56.06	74.00	-17.94	peak
		26.62	18.56	45.18	54.00	-8.82	average
6	17994.2490	36.87	18.88	55.75	74.00	-18.25	peak
		26.35	18.88	45.23	54.00	-8.77	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5180	Vertical	PASS

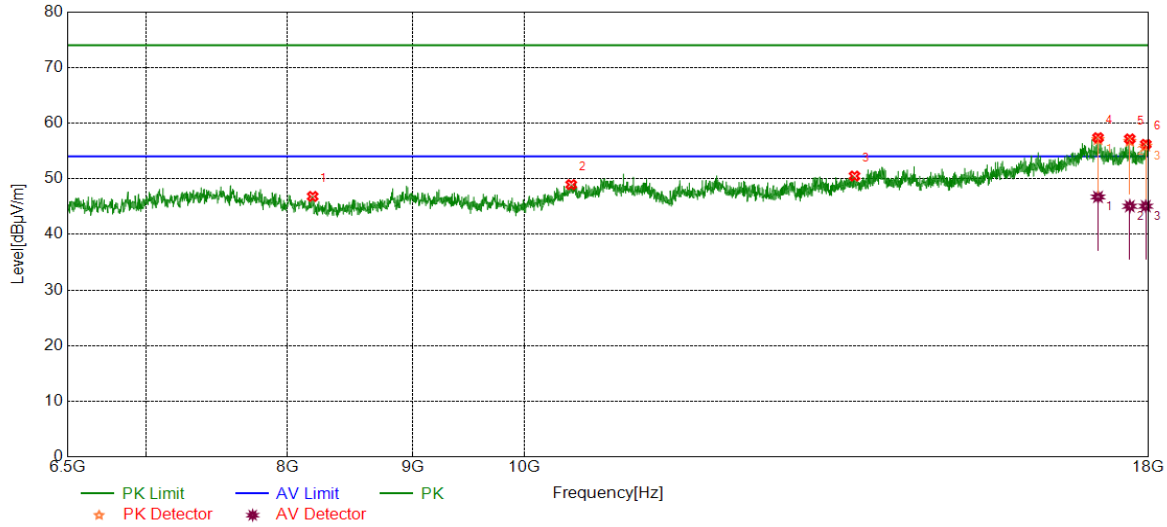


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8190.7818	38.77	8.05	46.82	74.00	-27.18	peak
2	10448.9915	37.16	11.79	48.95	74.00	-25.05	peak
3	13644.6074	36.88	13.61	50.49	74.00	-23.51	peak
4	17162.2770	37.54	19.84	57.38	74.00	-16.62	peak
		26.89	19.84	46.73	54.00	-7.27	average
5	17683.6973	38.59	18.57	57.16	74.00	-16.84	peak
		26.49	18.57	45.06	54.00	-8.94	average
6	17952.0753	37.64	18.56	56.20	74.00	-17.80	peak
		26.51	18.56	45.07	54.00	-8.93	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5200	Horizontal	PASS

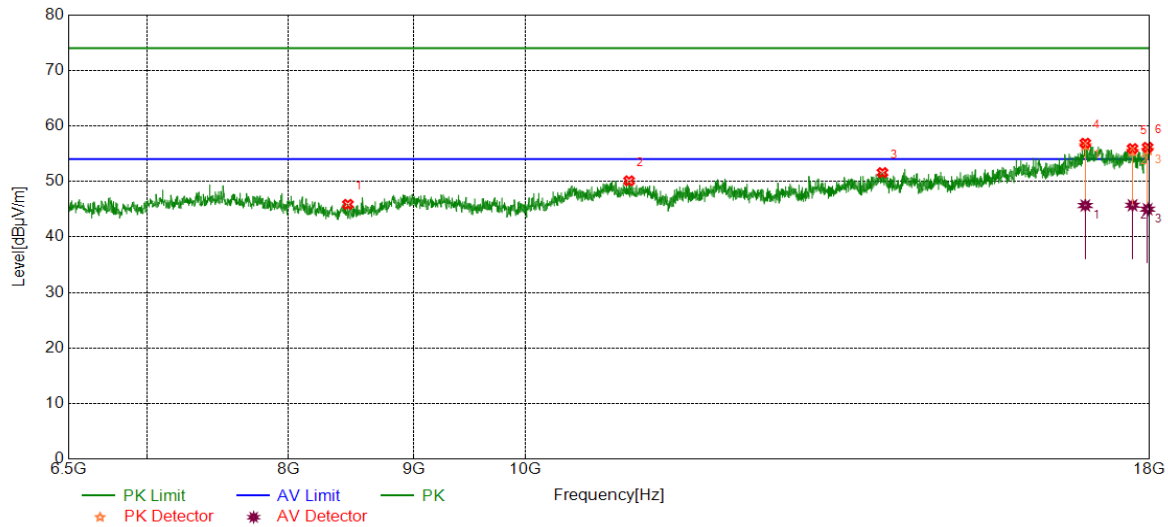


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8459.1599	38.59	7.28	45.87	74.00	-28.13	peak
2	11024.0873	37.31	12.80	50.11	74.00	-23.89	peak
3	13995.4159	36.50	15.09	51.59	74.00	-22.41	peak
4	16941.8236	37.35	19.54	56.89	74.00	-17.11	peak
		26.12	19.54	45.66	54.00	-8.34	average
5	17712.4521	37.02	18.90	55.92	74.00	-18.08	peak
		26.81	18.90	45.71	54.00	-8.29	average
6	17965.4942	37.40	18.75	56.15	74.00	-17.85	peak
		26.25	18.75	45.00	54.00	-9.00	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5200	Vertical	PASS

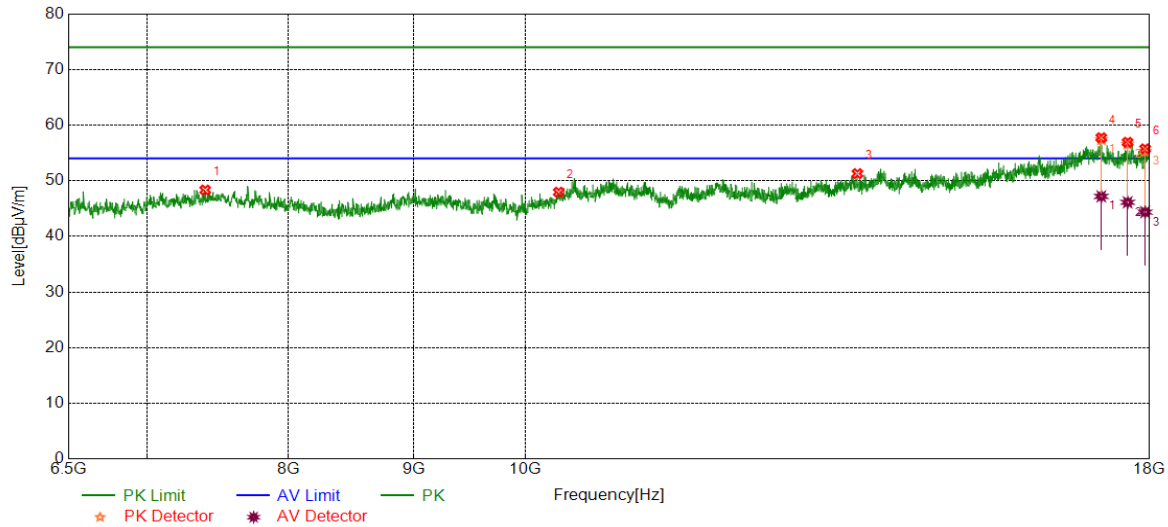


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7395.2325	38.95	9.38	48.33	74.00	-25.67	peak
2	10316.7195	37.03	10.92	47.95	74.00	-26.05	peak
3	13669.5283	37.51	13.77	51.28	74.00	-22.72	peak
4	17198.6998	37.96	19.77	57.73	74.00	-16.27	peak
		27.42	19.77	47.19	54.00	-6.81	average
5	17630.0217	37.89	19.02	56.91	74.00	-17.09	peak
		27.10	19.02	46.12	54.00	-7.88	average
6	17923.3206	37.21	18.53	55.74	74.00	-18.26	peak
		25.83	18.53	44.36	54.00	-9.64	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5240	Horizontal	PASS

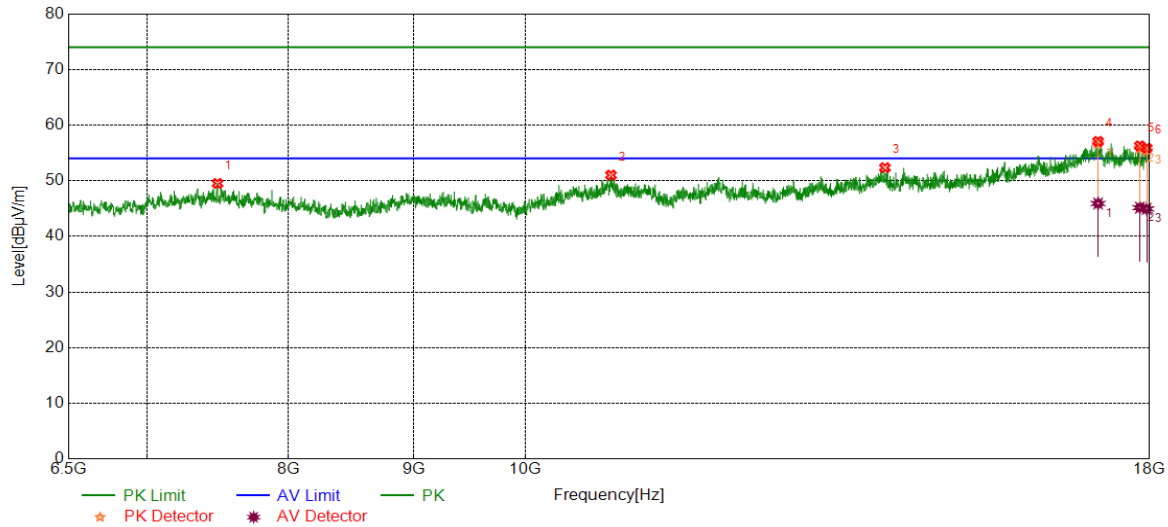


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7481.4969	39.66	9.86	49.52	74.00	-24.48	peak
2	10838.1397	38.34	12.68	51.02	74.00	-22.98	peak
3	14028.0047	37.35	15.00	52.35	74.00	-21.65	peak
4	17146.9412	37.76	19.31	57.07	74.00	-16.93	peak
		26.60	19.31	45.91	54.00	-8.09	average
5	17835.1392	37.12	19.14	56.26	74.00	-17.74	peak
		26.02	19.14	45.16	54.00	-8.84	average
6	17950.1584	37.34	18.53	55.87	74.00	-18.13	peak
		26.42	18.53	44.95	54.00	-9.05	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5240	Vertical	PASS

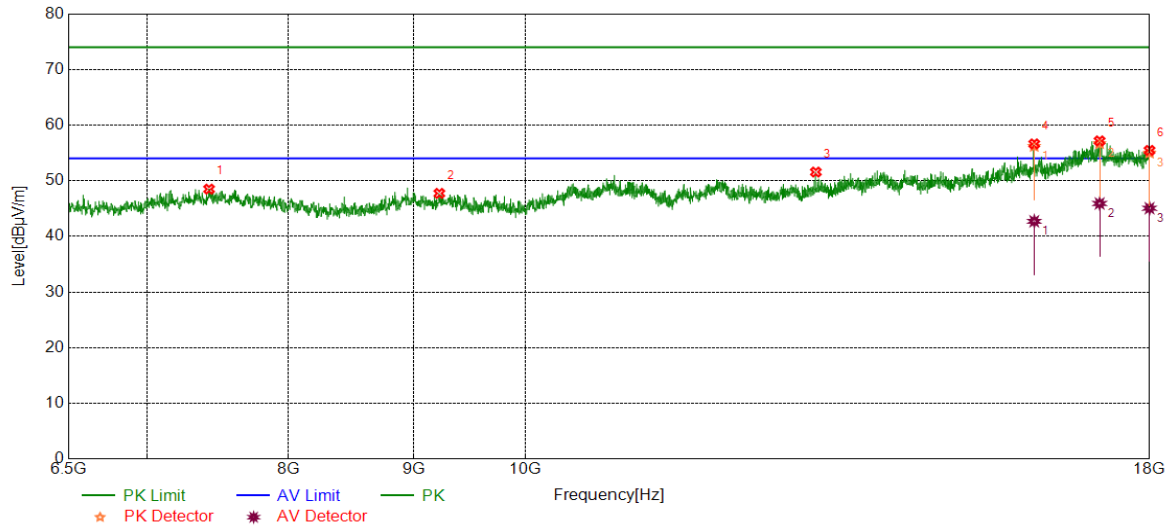


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7422.0703	39.09	9.41	48.50	74.00	-25.50	peak
2	9220.2034	38.68	9.05	47.73	74.00	-26.27	peak
3	13144.2740	38.91	12.65	51.56	74.00	-22.44	peak
4	16146.2744	40.13	16.49	56.62	74.00	-17.38	peak
		26.22	16.49	42.71	54.00	-11.29	average
5	17171.8620	37.78	19.38	57.16	74.00	-16.84	peak
		26.53	19.38	45.91	54.00	-8.09	average
6	17998.0830	36.77	18.68	55.45	74.00	-18.55	peak
		26.38	18.68	45.06	54.00	-8.94	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5260	Horizontal	PASS

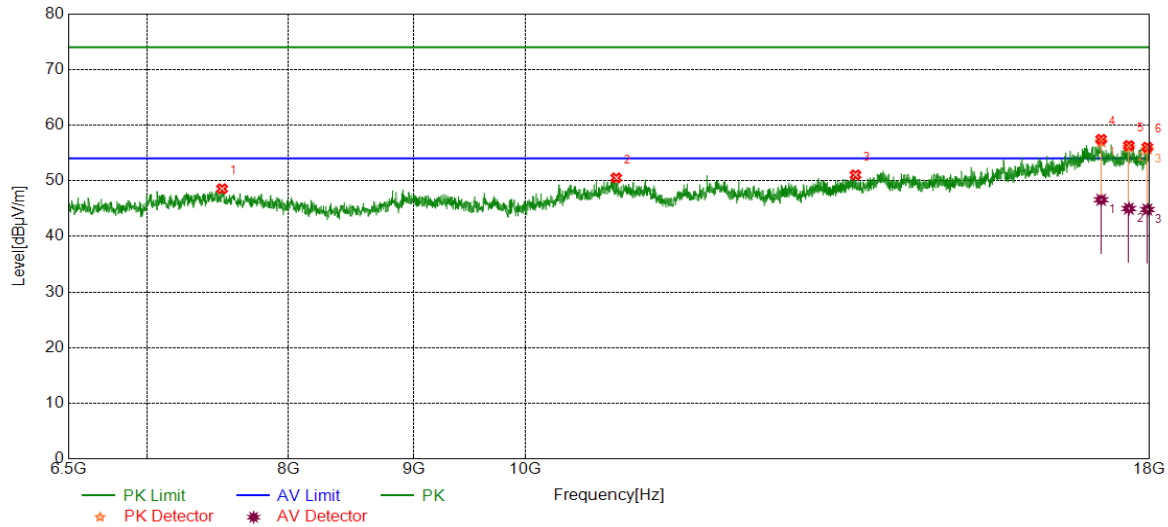


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7514.0857	39.13	9.43	48.56	74.00	-25.44	peak
2	10891.8153	38.02	12.49	50.51	74.00	-23.49	peak
3	13644.6074	37.44	13.61	51.05	74.00	-22.95	peak
4	17196.7828	37.79	19.65	57.44	74.00	-16.56	peak
		26.93	19.65	46.58	54.00	-7.42	average
5	17651.1085	37.92	18.41	56.33	74.00	-17.67	peak
		26.59	18.41	45.00	54.00	-9.00	average
6	17961.6603	37.31	18.71	56.02	74.00	-17.98	peak
		26.11	18.71	44.82	54.00	-9.18	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5260	Vertical	PASS

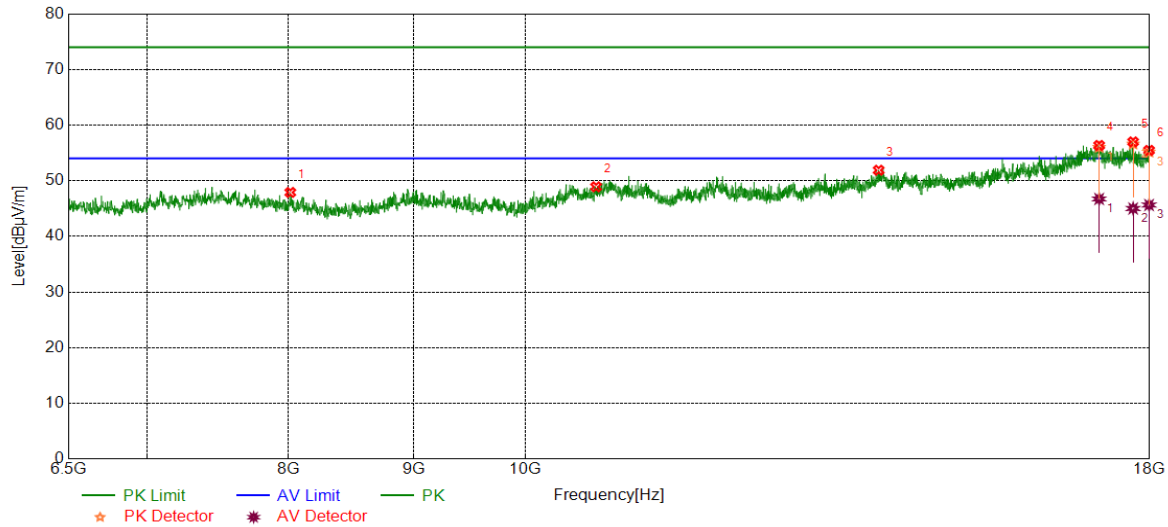


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8012.5021	39.12	8.78	47.90	74.00	-26.10	peak
2	10686.6978	36.35	12.56	48.91	74.00	-25.09	peak
3	13945.5743	37.05	14.84	51.89	74.00	-22.11	peak
4	17164.1940	36.61	19.74	56.35	74.00	-17.65	peak
		26.99	19.74	46.73	54.00	-7.27	average
5	17722.0370	37.98	19.01	56.99	74.00	-17.01	peak
		26.00	19.01	45.01	54.00	-8.99	average
6	17990.4151	36.38	19.08	55.46	74.00	-18.54	peak
		26.56	19.08	45.64	54.00	-8.36	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5280	Horizontal	PASS

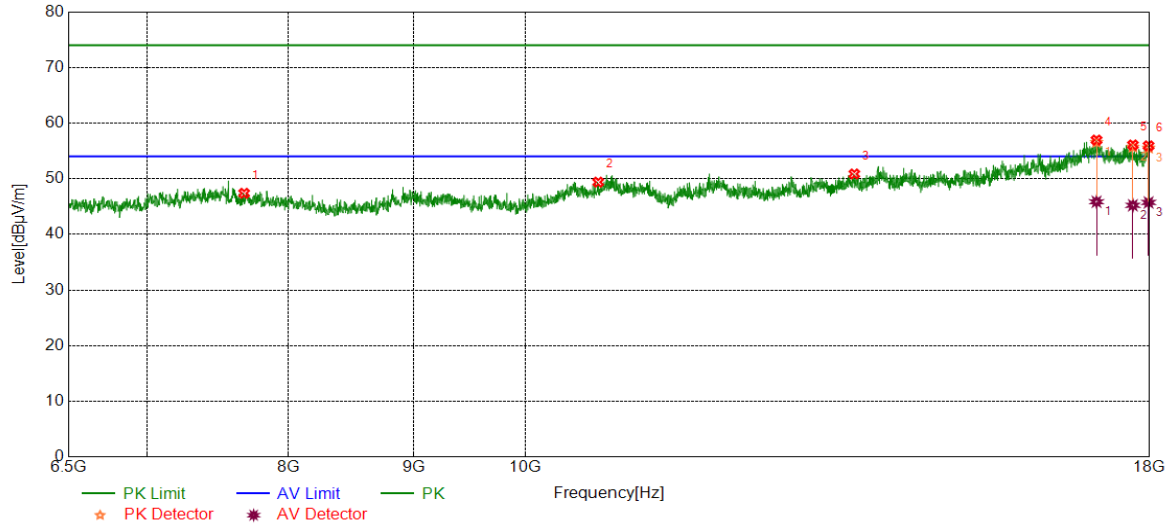


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7671.2785	38.24	9.15	47.39	74.00	-26.61	peak
2	10707.7846	36.89	12.50	49.39	74.00	-24.61	peak
3	13629.2715	37.29	13.57	50.86	74.00	-23.14	peak
4	17122.0203	37.61	19.34	56.95	74.00	-17.05	peak
		26.52	19.34	45.86	54.00	-8.14	average
5	17718.2030	37.01	19.06	56.07	74.00	-17.93	peak
		26.17	19.06	45.23	54.00	-8.77	average
6	17982.7471	36.91	19.01	55.92	74.00	-18.08	peak
		26.73	19.01	45.74	54.00	-8.26	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5280	Vertical	PASS

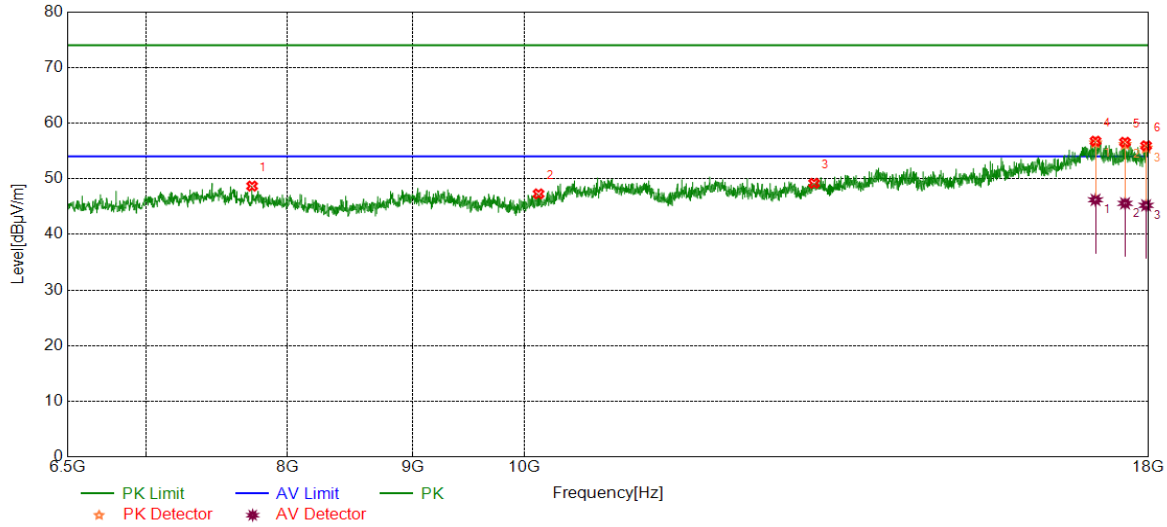


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7736.4561	39.71	8.97	48.68	74.00	-25.32	peak
2	10132.6888	37.63	9.65	47.28	74.00	-26.72	peak
3	13134.6891	36.45	12.74	49.19	74.00	-24.81	peak
4	17122.0203	37.42	19.34	56.76	74.00	-17.24	peak
		26.87	19.34	46.21	54.00	-7.79	average
5	17605.1009	37.97	18.59	56.56	74.00	-17.44	peak
		26.99	18.59	45.58	54.00	-8.42	average
6	17957.8263	37.27	18.66	55.93	74.00	-18.07	peak
		26.55	18.66	45.21	54.00	-8.79	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5320	Horizontal	PASS

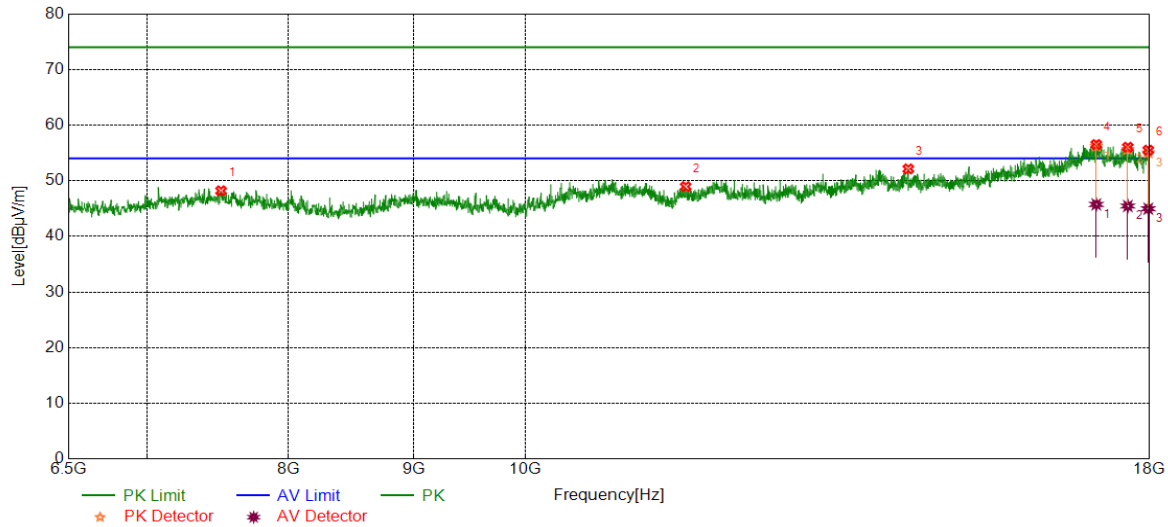


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7506.4177	38.75	9.45	48.20	74.00	-25.80	peak
2	11627.9380	37.11	11.84	48.95	74.00	-25.05	peak
3	14340.4734	37.17	14.96	52.13	74.00	-21.87	peak
4	17118.1864	37.16	19.35	56.51	74.00	-17.49	peak
		26.40	19.35	45.75	54.00	-8.25	average
5	17633.8556	37.18	18.85	56.03	74.00	-17.97	peak
		26.61	18.85	45.46	54.00	-8.54	average
6	17976.9962	36.57	18.93	55.50	74.00	-18.50	peak
		26.04	18.93	44.97	54.00	-9.03	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5320	Vertical	PASS

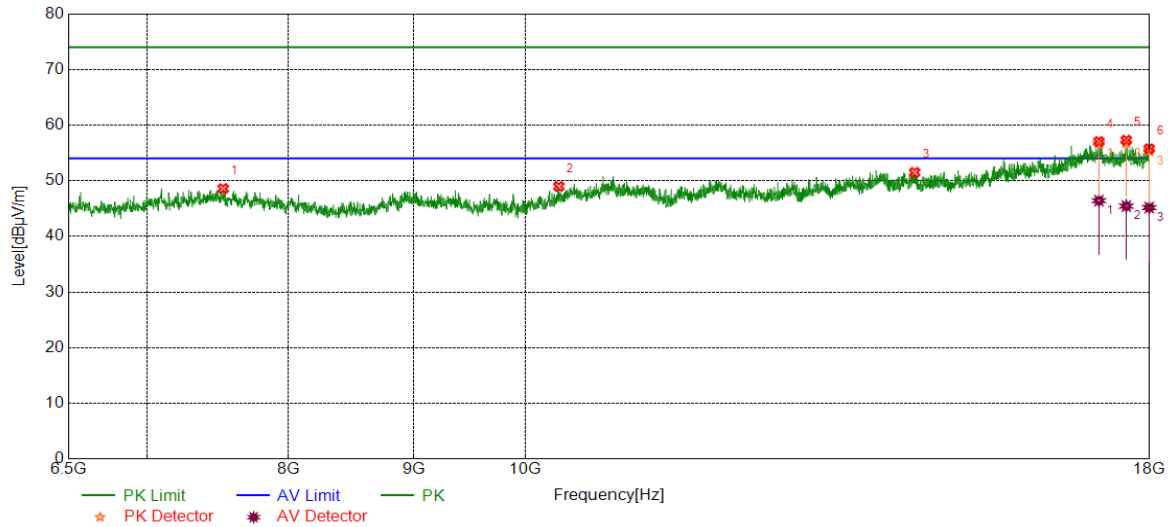


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7521.7536	39.18	9.40	48.58	74.00	-25.42	peak
2	10318.6364	38.04	10.94	48.98	74.00	-25.02	peak
3	14426.7378	37.06	14.44	51.50	74.00	-22.50	peak
4	17160.3601	37.10	19.94	57.04	74.00	-16.96	peak
		26.48	19.94	46.42	54.00	-7.58	average
5	17608.9348	38.63	18.65	57.28	74.00	-16.72	peak
		26.79	18.65	45.44	54.00	-8.56	average
6	17992.3321	36.76	18.98	55.74	74.00	-18.26	peak
		26.20	18.98	45.18	54.00	-8.82	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5500	Horizontal	PASS

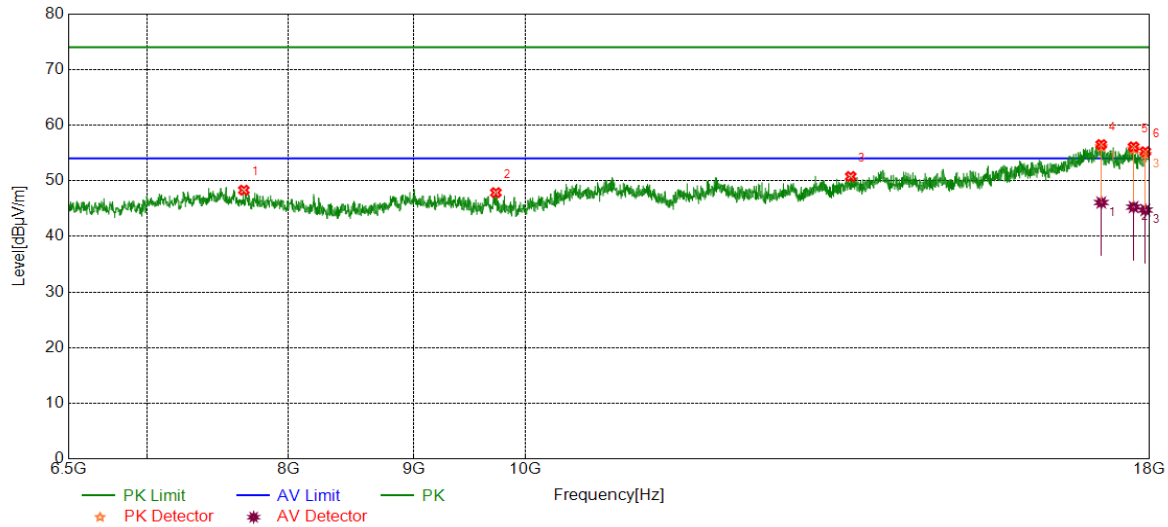


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7669.3616	39.19	9.12	48.31	74.00	-25.69	peak
2	9724.3707	38.79	9.07	47.86	74.00	-26.14	peak
3	13583.2639	37.26	13.50	50.76	74.00	-23.24	peak
4	17198.6998	36.73	19.77	56.50	74.00	-17.50	peak
		26.32	19.77	46.09	54.00	-7.91	average
5	17729.7050	37.49	18.60	56.09	74.00	-17.91	peak
		26.67	18.60	45.27	54.00	-8.73	average
6	17927.1545	36.50	18.72	55.22	74.00	-18.78	peak
		26.02	18.72	44.74	54.00	-9.26	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5500	Vertical	PASS

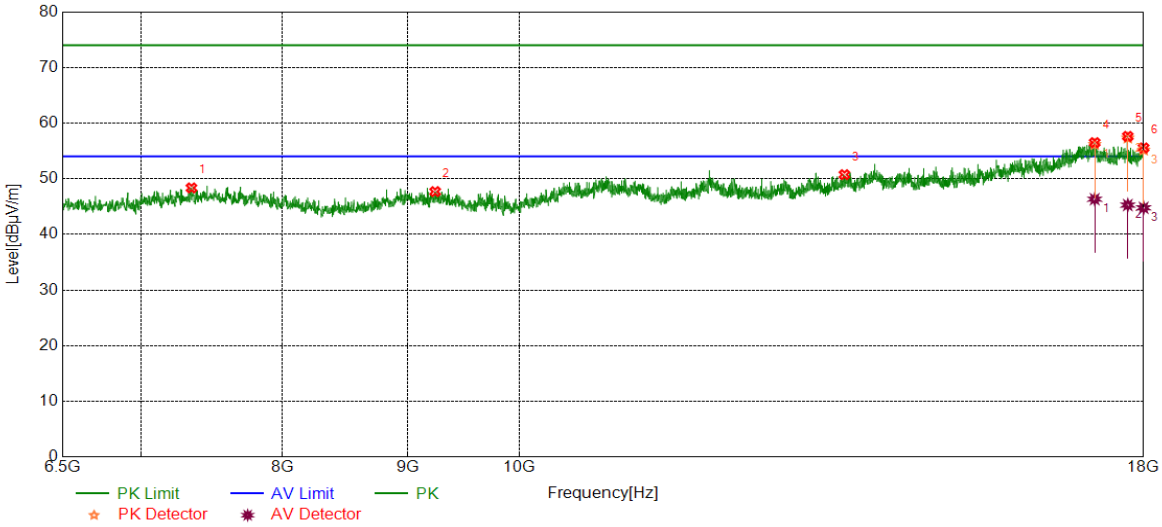


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7341.5569	38.79	9.56	48.35	74.00	-25.65	peak
2	9235.5393	38.40	9.29	47.69	74.00	-26.31	peak
3	13579.4299	37.24	13.50	50.74	74.00	-23.26	peak
4	17189.1149	37.27	19.22	56.49	74.00	-17.51	peak
		27.11	19.22	46.33	54.00	-7.67	average
5	17733.5389	38.87	18.75	57.62	74.00	-16.38	peak
		26.52	18.75	45.27	54.00	-8.73	average
6	18000.0000	36.96	18.58	55.54	74.00	-18.46	peak
		26.20	18.58	44.78	54.00	-9.22	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5580	Horizontal	PASS

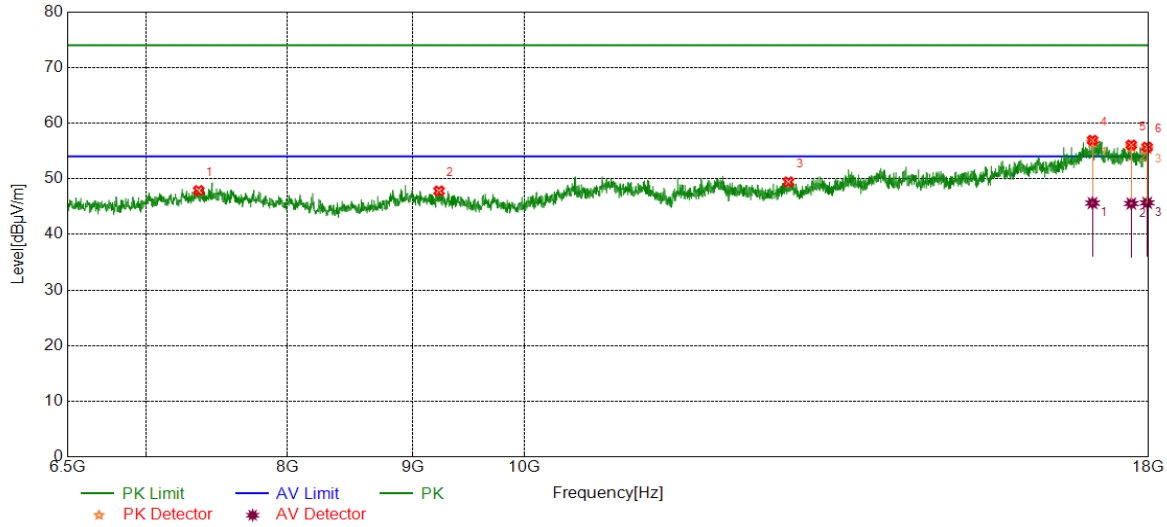


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7356.8928	38.47	9.41	47.88	74.00	-26.12	peak
2	9225.9543	38.61	9.20	47.81	74.00	-26.19	peak
3	12822.2204	37.24	12.20	49.44	74.00	-24.56	peak
4	17074.0957	36.95	19.97	56.92	74.00	-17.08	peak
		25.65	19.97	45.62	54.00	-8.38	average
5	17708.6181	37.27	18.80	56.07	74.00	-17.93	peak
		26.74	18.80	45.54	54.00	-8.46	average
6	17975.0792	36.80	18.89	55.69	74.00	-18.31	peak
		26.78	18.89	45.67	54.00	-8.33	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5580	Vertical	PASS

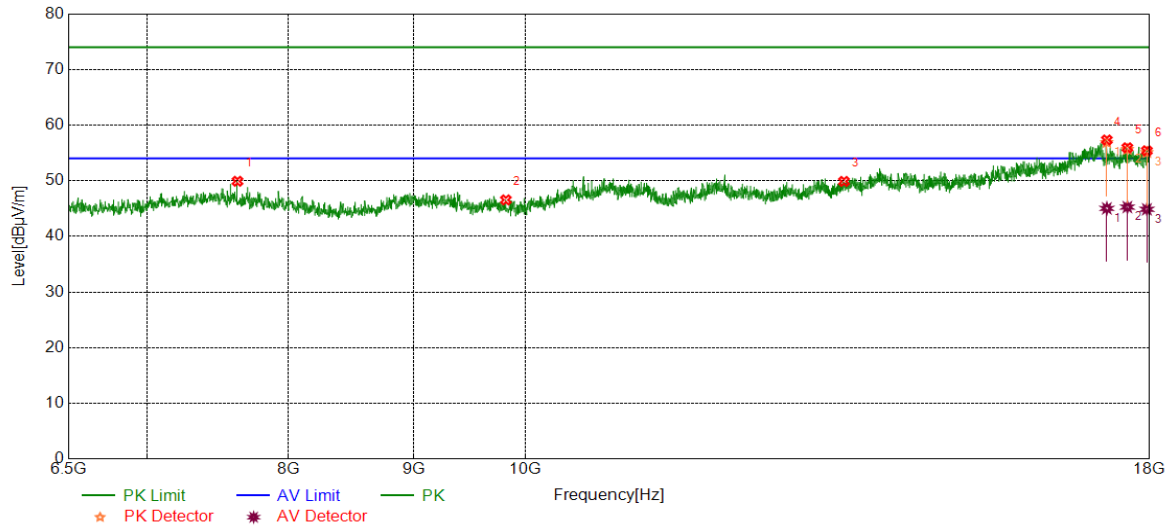


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7623.3539	40.80	9.11	49.91	74.00	-24.09	peak
2	9816.3861	37.38	9.18	46.56	74.00	-27.44	peak
3	13496.9995	36.66	13.22	49.88	74.00	-24.12	peak
4	17288.7981	38.62	18.71	57.33	74.00	-16.67	peak
		26.32	18.71	45.03	54.00	-8.97	average
5	17626.1877	37.17	18.76	55.93	74.00	-18.07	peak
		26.51	18.76	45.27	54.00	-8.73	average
6	17953.9923	36.80	18.59	55.39	74.00	-18.61	peak
		26.28	18.59	44.87	54.00	-9.13	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5700	Horizontal	PASS

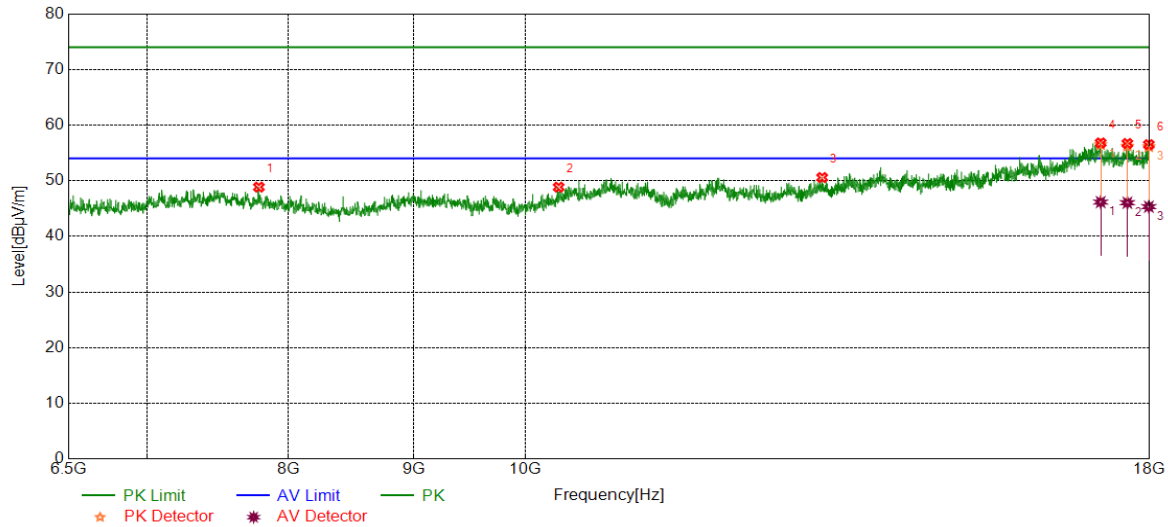


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7778.6298	39.95	8.91	48.86	74.00	-25.14	peak
2	10316.7195	37.93	10.92	48.85	74.00	-25.15	peak
3	13222.8705	37.75	12.83	50.58	74.00	-23.42	peak
4	17189.1149	37.58	19.22	56.80	74.00	-17.20	peak
		26.95	19.22	46.17	54.00	-7.83	average
5	17626.1877	37.94	18.76	56.70	74.00	-17.30	peak
		27.29	18.76	46.05	54.00	-7.95	average
6	17986.5811	37.44	19.06	56.50	74.00	-17.50	peak
		26.28	19.06	45.34	54.00	-8.66	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5700	Vertical	PASS

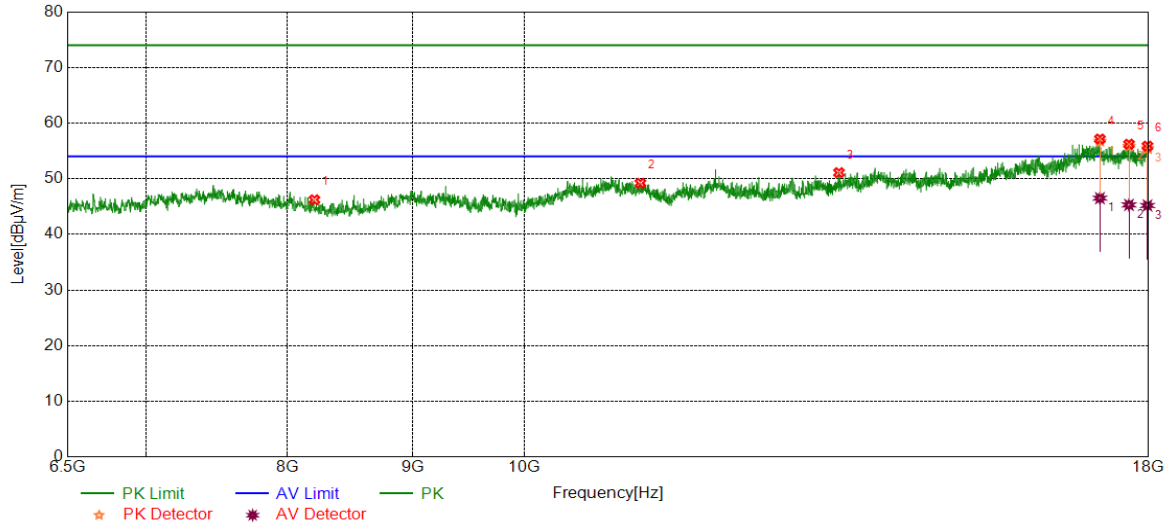


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	8204.2007	38.16	8.06	46.22	74.00	-27.78	peak
2	11152.5254	36.87	12.33	49.20	74.00	-24.80	peak
3	13447.1579	38.02	13.08	51.10	74.00	-22.90	peak
4	17192.9488	37.73	19.41	57.14	74.00	-16.86	peak
		27.10	19.41	46.51	54.00	-7.49	average
5	17670.2784	36.92	19.29	56.21	74.00	-17.79	peak
		26.01	19.29	45.30	54.00	-8.70	average
6	17980.8301	36.87	18.99	55.86	74.00	-18.14	peak
		26.20	18.99	45.19	54.00	-8.81	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5720	Horizontal	PASS

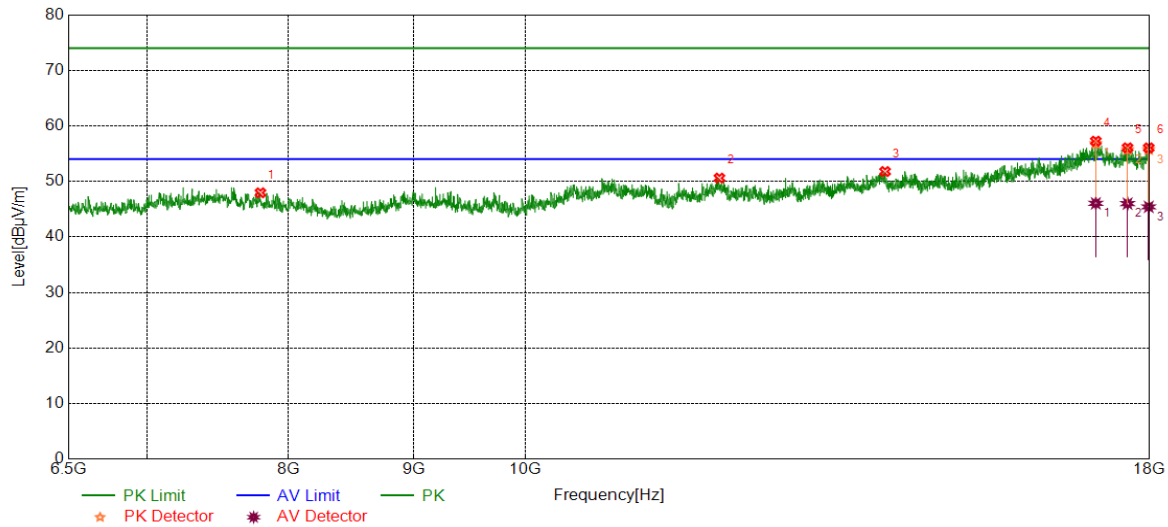


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7790.1317	39.17	8.78	47.95	74.00	-26.05	peak
2	12003.6673	37.20	13.40	50.60	74.00	-23.40	peak
3	14029.9217	36.79	14.99	51.78	74.00	-22.22	peak
4	17110.5184	38.23	19.02	57.25	74.00	-16.75	peak
		27.03	19.02	46.05	54.00	-7.95	average
5	17630.0217	37.03	19.02	56.05	74.00	-17.95	peak
		26.98	19.02	46.00	54.00	-8.00	average
6	17984.6641	37.00	19.04	56.04	74.00	-17.96	peak
		26.38	19.04	45.42	54.00	-8.58	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5720	Vertical	PASS

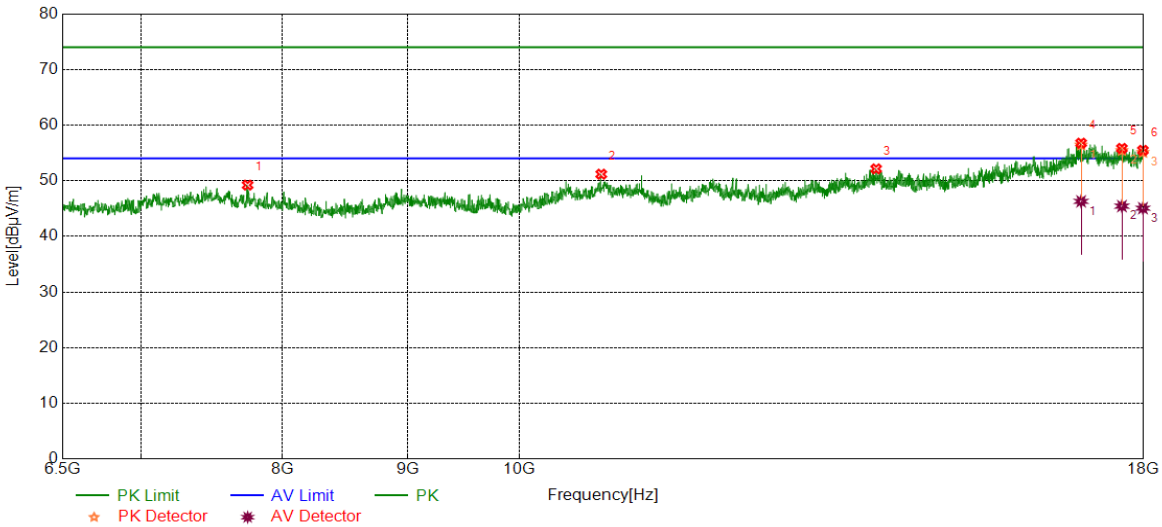


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7740.2900	40.18	9.04	49.22	74.00	-24.78	peak
2	10799.8000	38.74	12.44	51.18	74.00	-22.82	peak
3	13991.5819	37.16	14.98	52.14	74.00	-21.86	peak
4	16970.5784	36.19	20.57	56.76	74.00	-17.24	peak
		25.73	20.57	46.30	54.00	-7.70	average
5	17635.7726	37.06	18.76	55.82	74.00	-18.18	peak
		26.68	18.76	45.44	54.00	-8.56	average
6	17988.4981	36.39	19.08	55.47	74.00	-18.53	peak
		25.99	19.08	45.07	54.00	-8.93	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5745	Horizontal	PASS

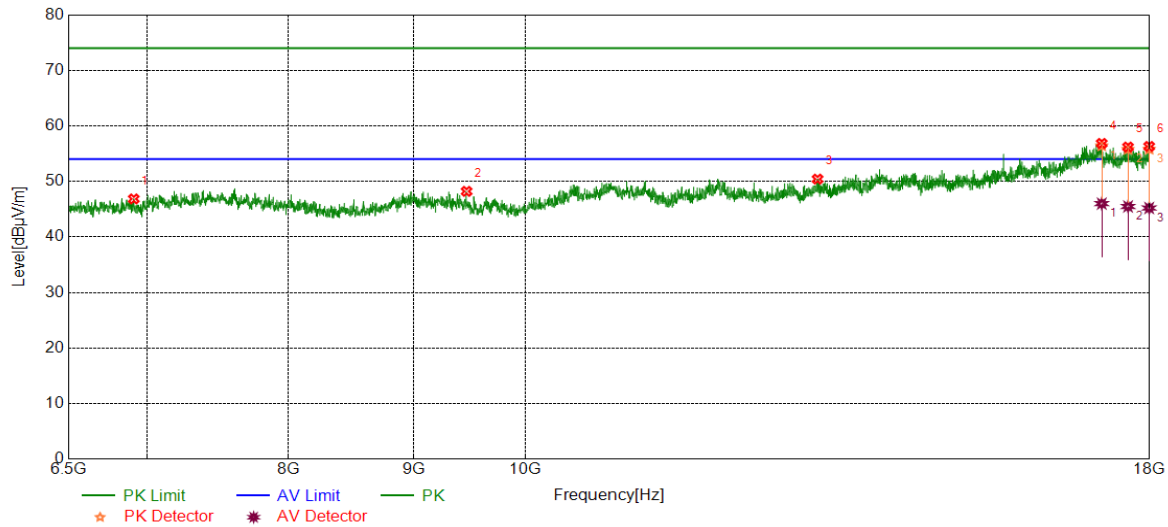


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	6914.0690	37.71	9.14	46.85	74.00	-27.15	peak
2	9459.8266	39.23	8.98	48.21	74.00	-25.79	peak
3	13165.3609	37.59	12.83	50.42	74.00	-23.58	peak
4	17206.3677	37.51	19.33	56.84	74.00	-17.16	peak
		26.67	19.33	46.00	54.00	-8.00	average
5	17637.6896	37.52	18.67	56.19	74.00	-17.81	peak
		26.82	18.67	45.49	54.00	-8.51	average
6	17992.3321	37.32	18.98	56.30	74.00	-17.70	peak
		26.23	18.98	45.21	54.00	-8.79	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.



Test Mode	Channel	Polarization	Verdict
11AC 20	5745	Vertical	PASS

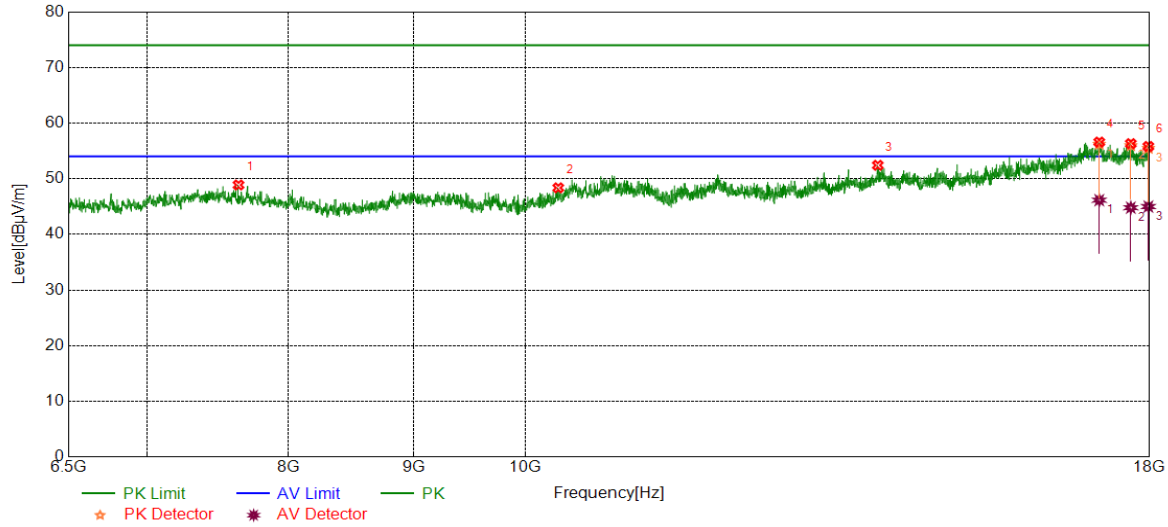

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	7631.0218	39.88	9.00	48.88	74.00	-25.12	peak
2	10312.8855	37.50	10.87	48.37	74.00	-25.63	peak
3	13934.0723	37.63	14.79	52.42	74.00	-21.58	peak
4	17166.1110	36.95	19.64	56.59	74.00	-17.41	peak
		26.51	19.64	46.15	54.00	-7.85	average
5	17683.6973	37.74	18.57	56.31	74.00	-17.69	peak
		26.23	18.57	44.80	54.00	-9.20	average
6	17978.9132	36.85	18.96	55.81	74.00	-18.19	peak
		26.04	18.96	45.00	54.00	-9.00	average

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW refer to section 6.2.
 6. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses. The proper operation of the transmitter prior to adding the filter to the measurement chain.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
 8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27dBm/MHz (68.2dBuV/m) limit.