



Test Mode	Channel	Verdict
11B	MCH	PASS

Pref test Plot


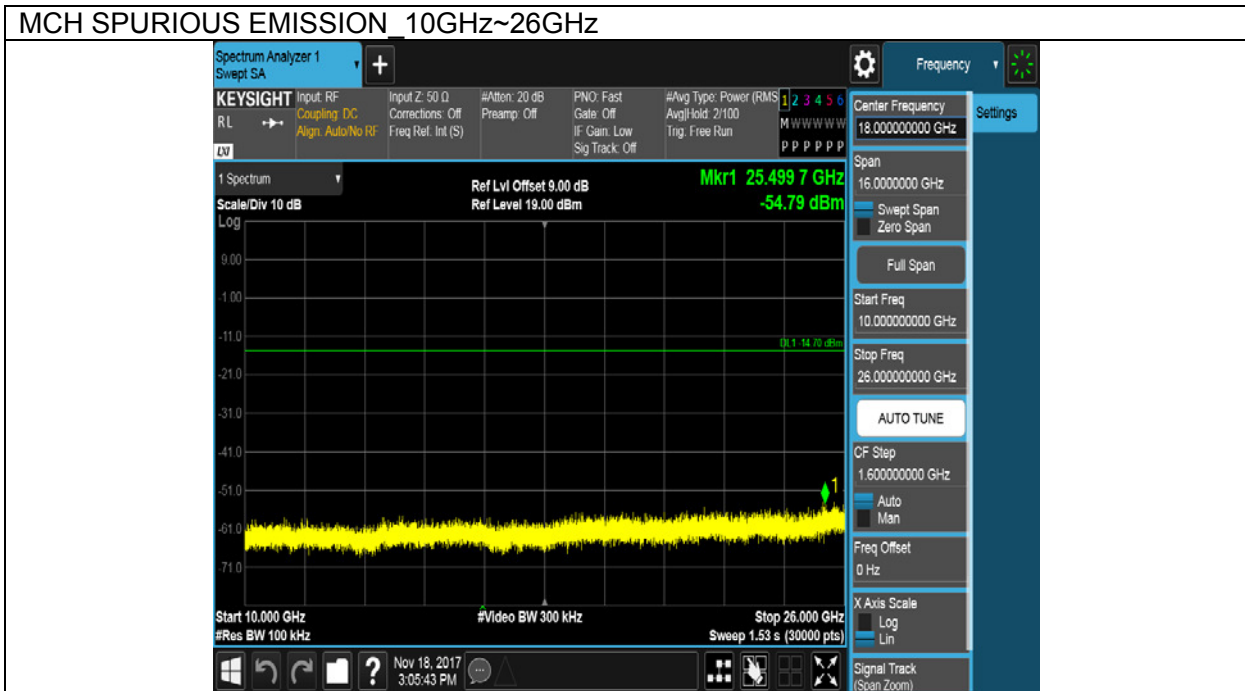


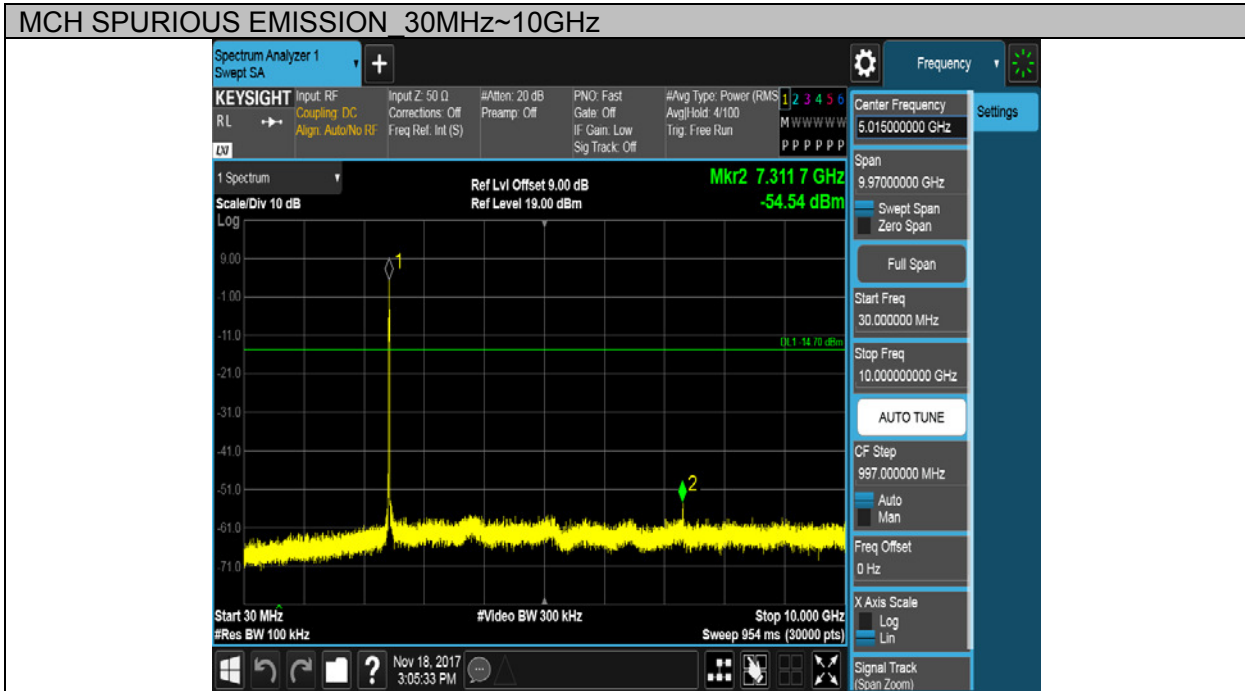

Test Mode	Channel	Verdict
11B	HCH	PASS


Pref test Plot





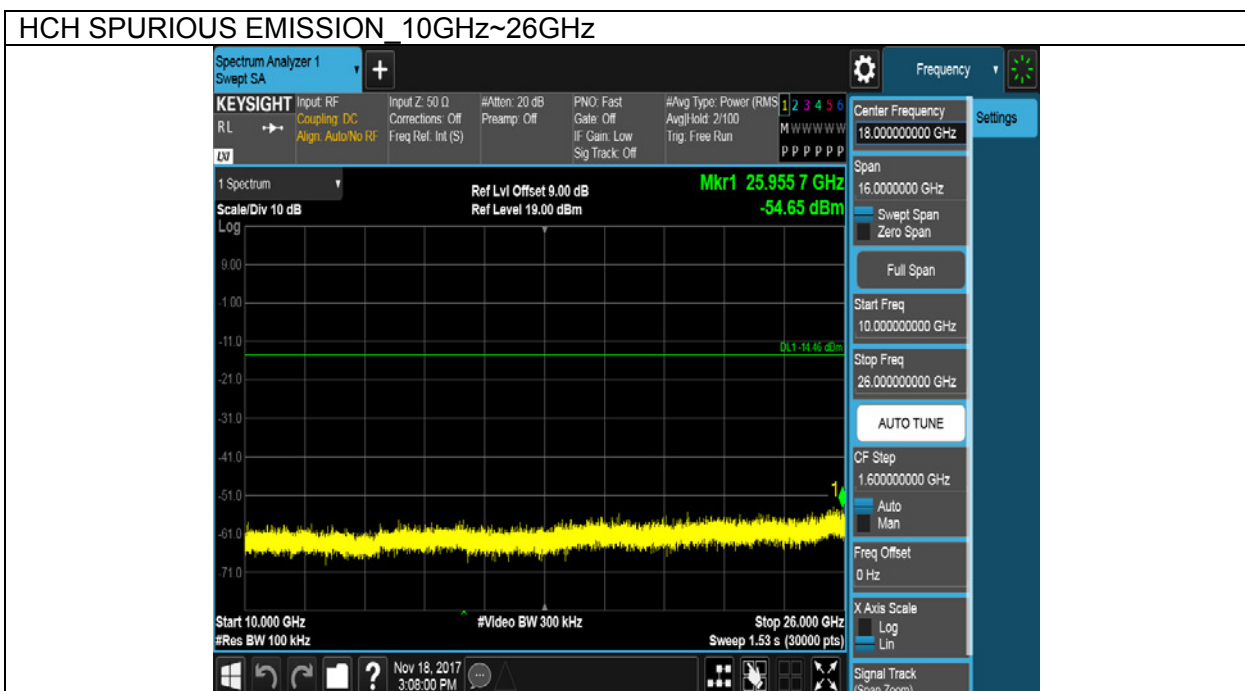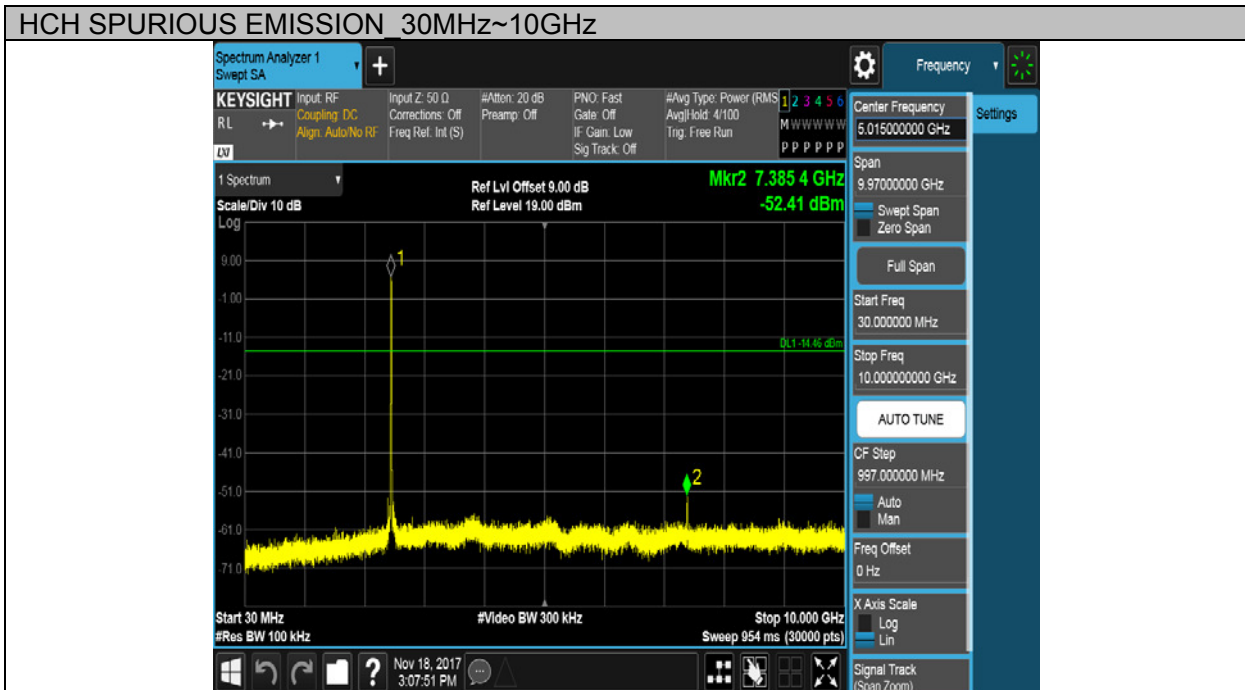

Test Mode	Channel	Verdict
11G	LCH	PASS


Pref test Plot

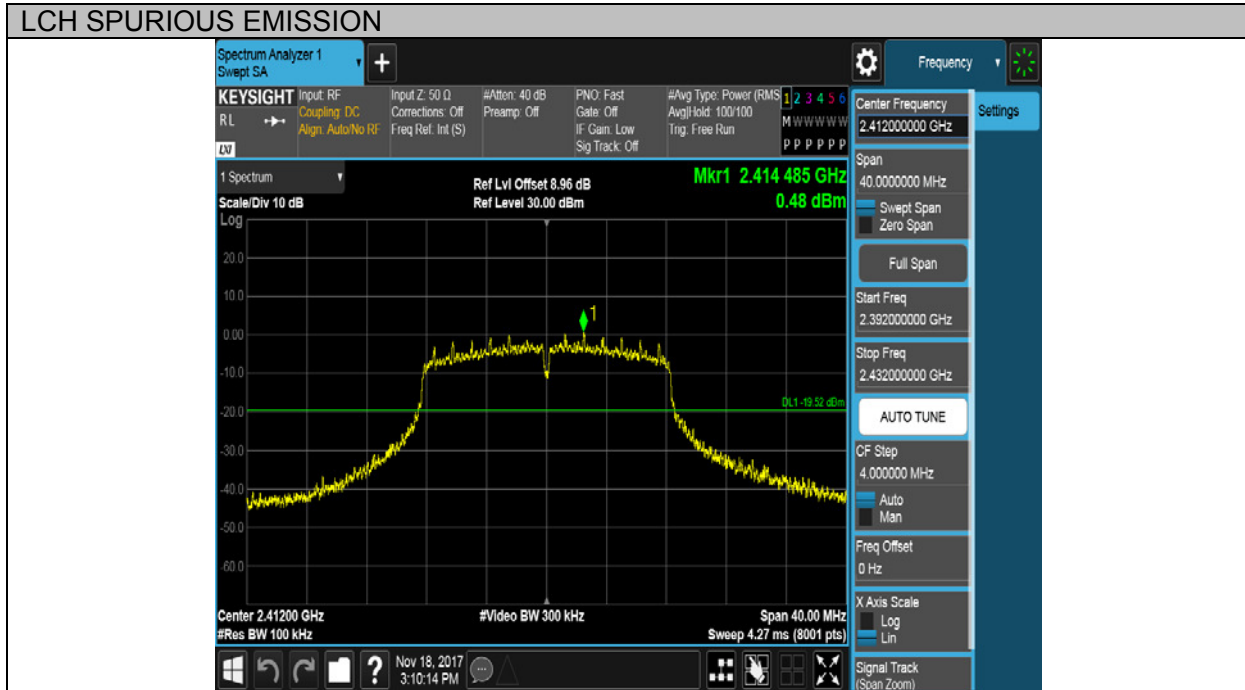

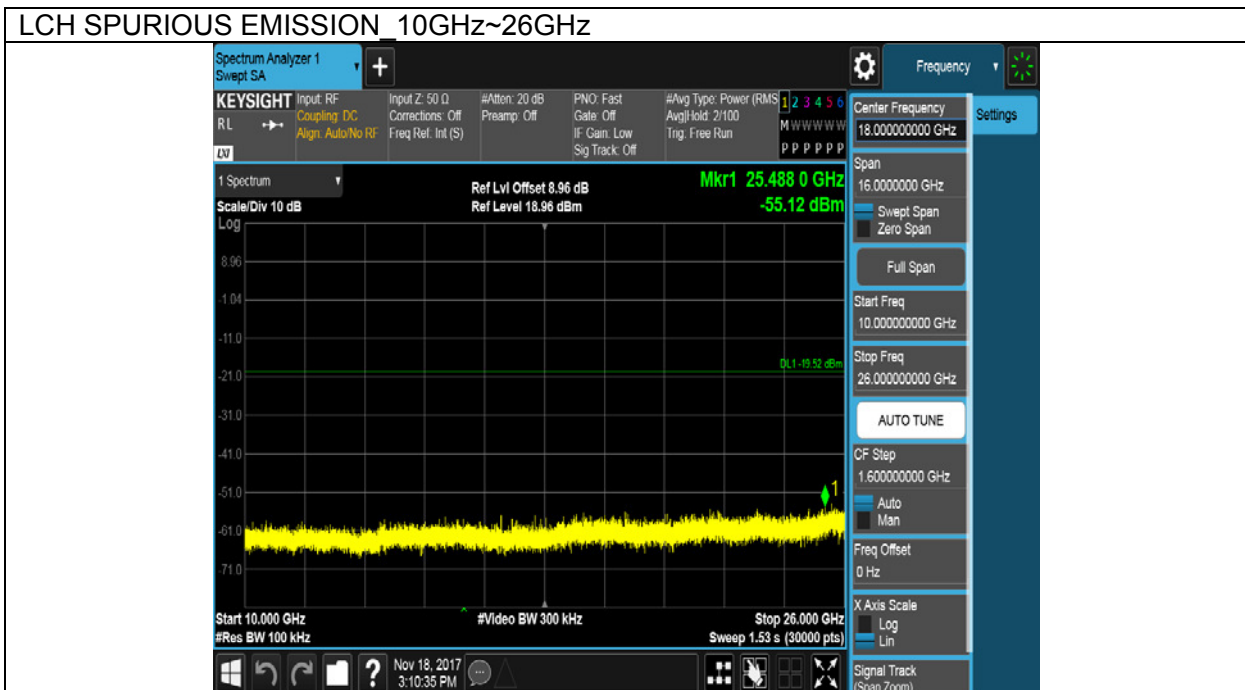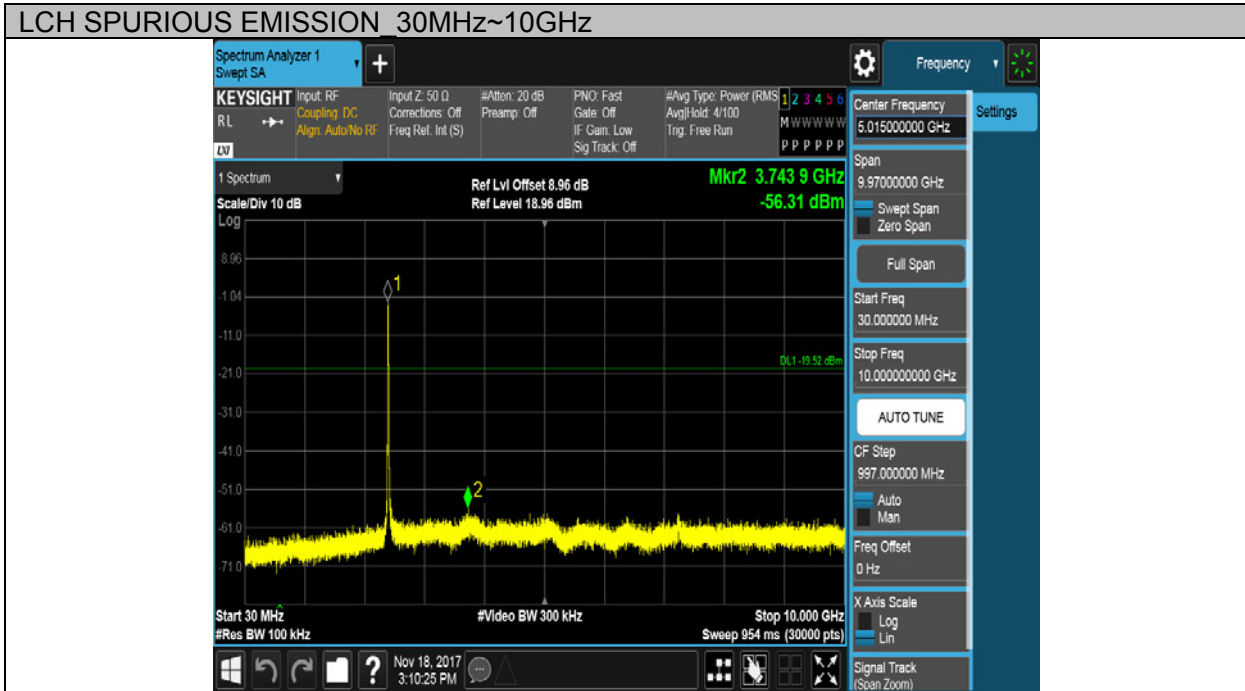


Test Mode	Channel	Verdict
11G	MCH	PASS

Pref test Plot

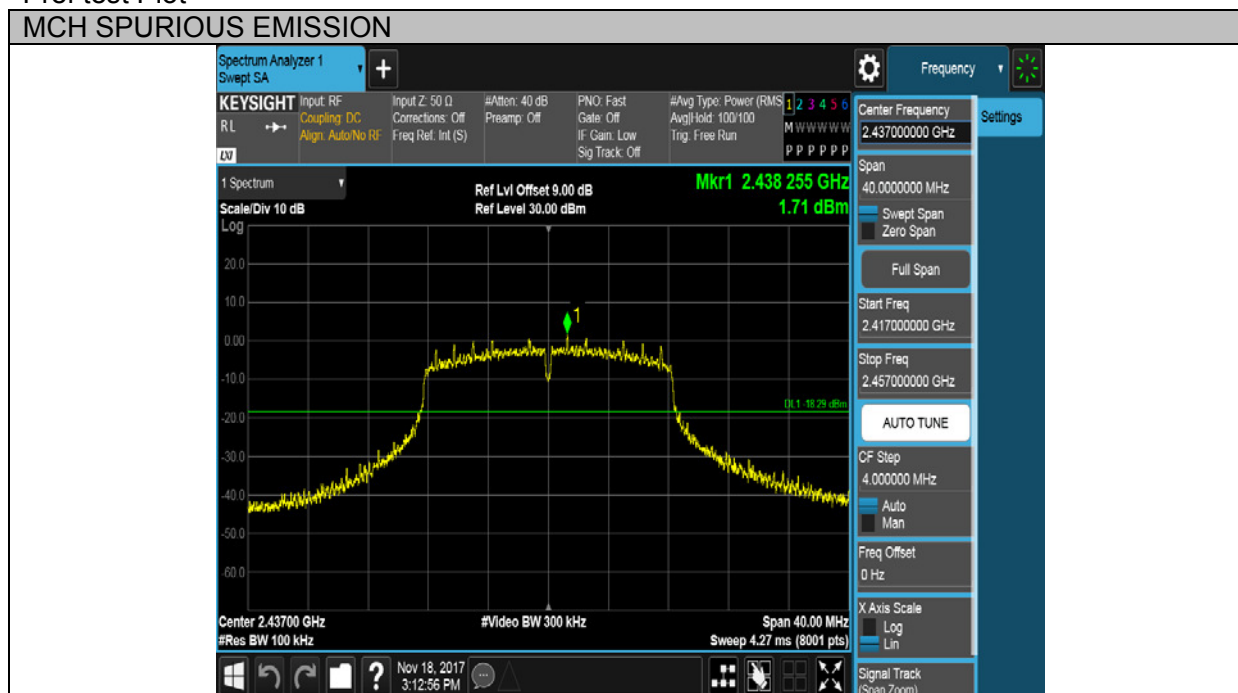




MCH SPURIOUS EMISSION 30MHz~10GHz

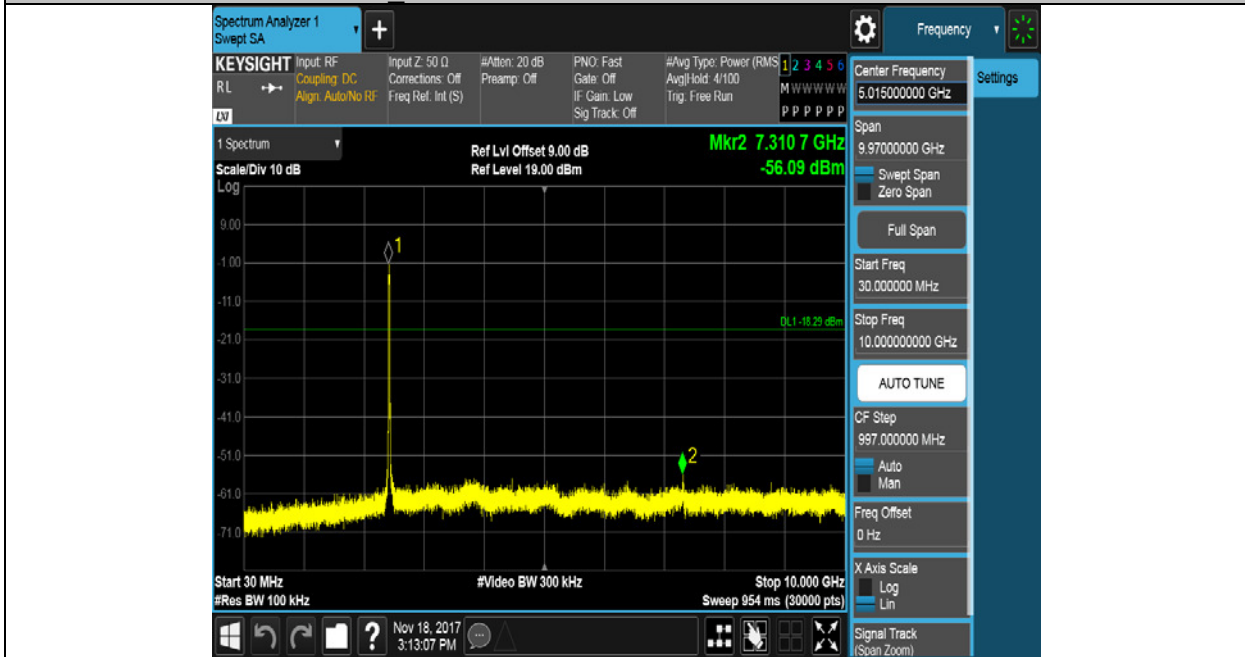


MCH SPURIOUS EMISSION 10GHz~26GHz


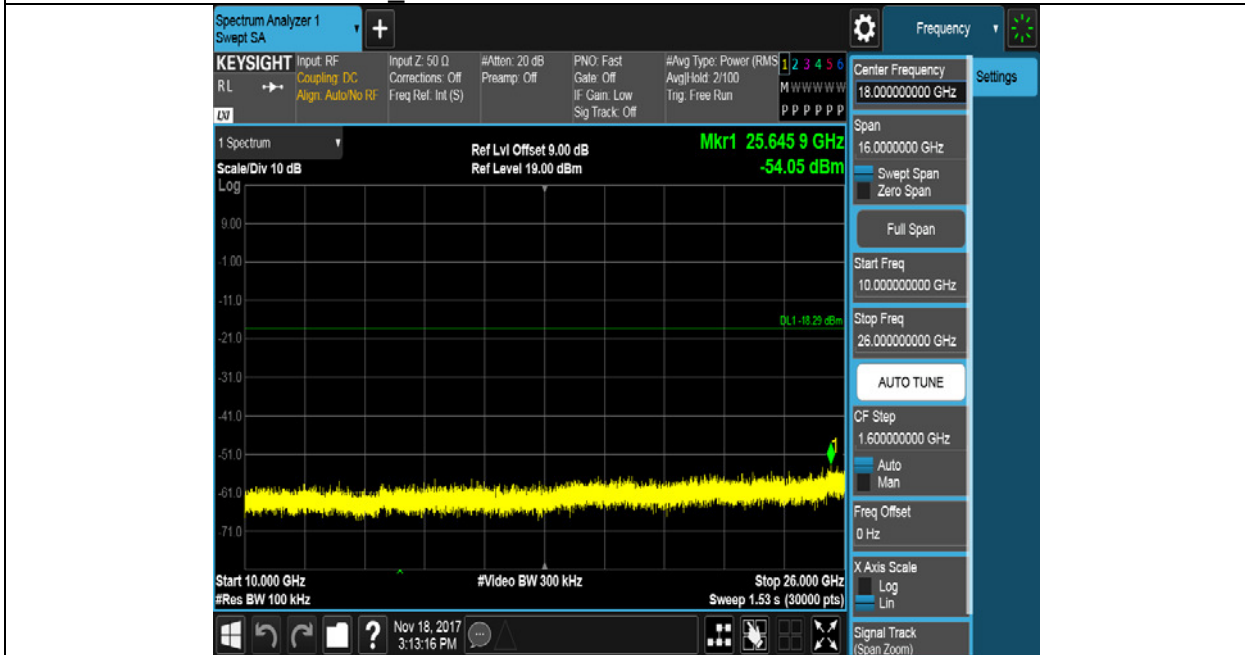




Test Mode	Channel	Verdict
11G	HCH	PASS


Pref test Plot


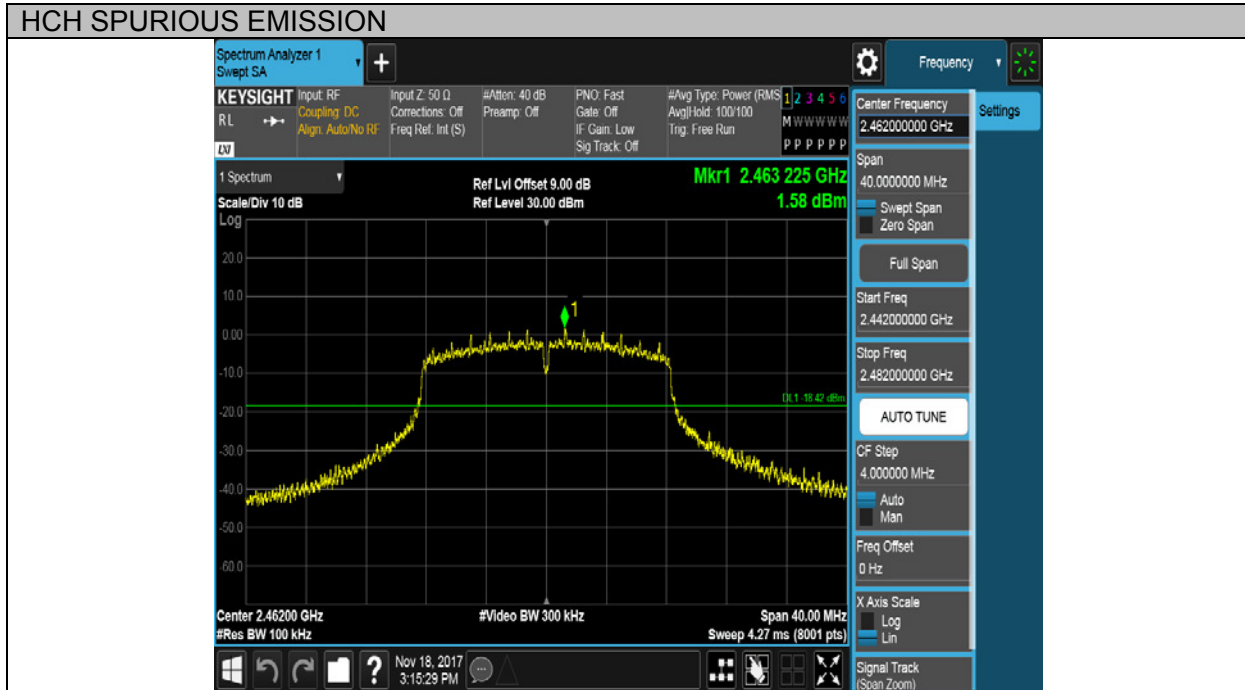


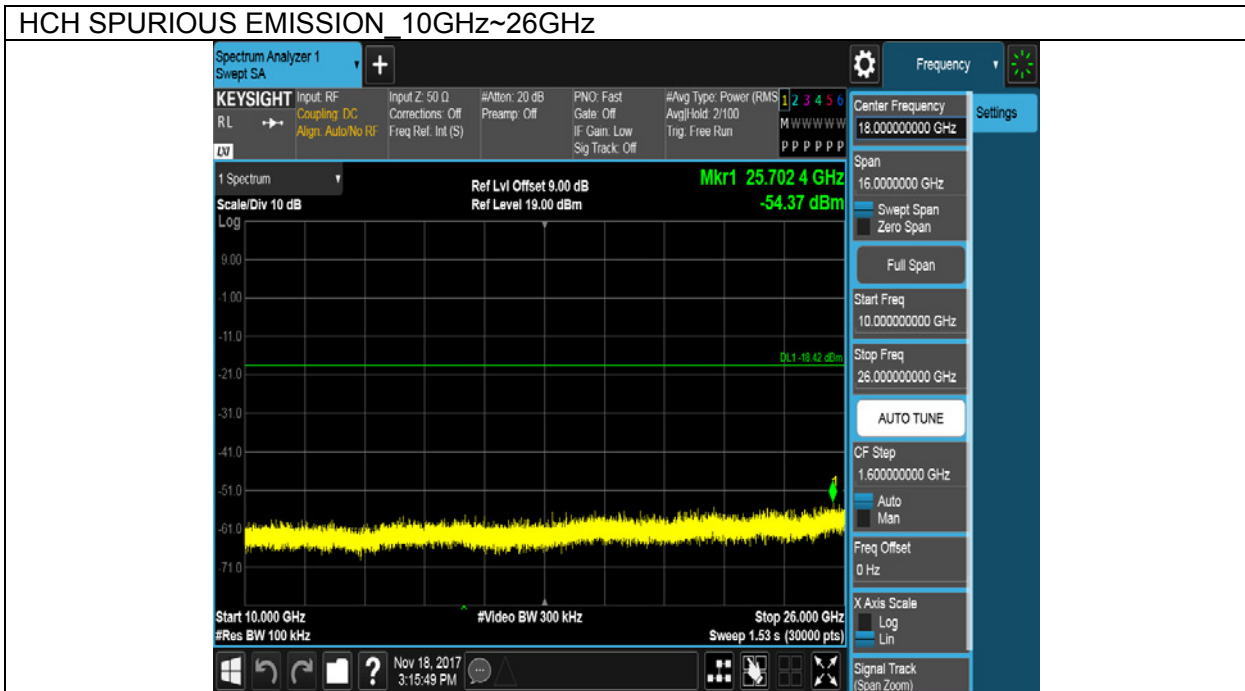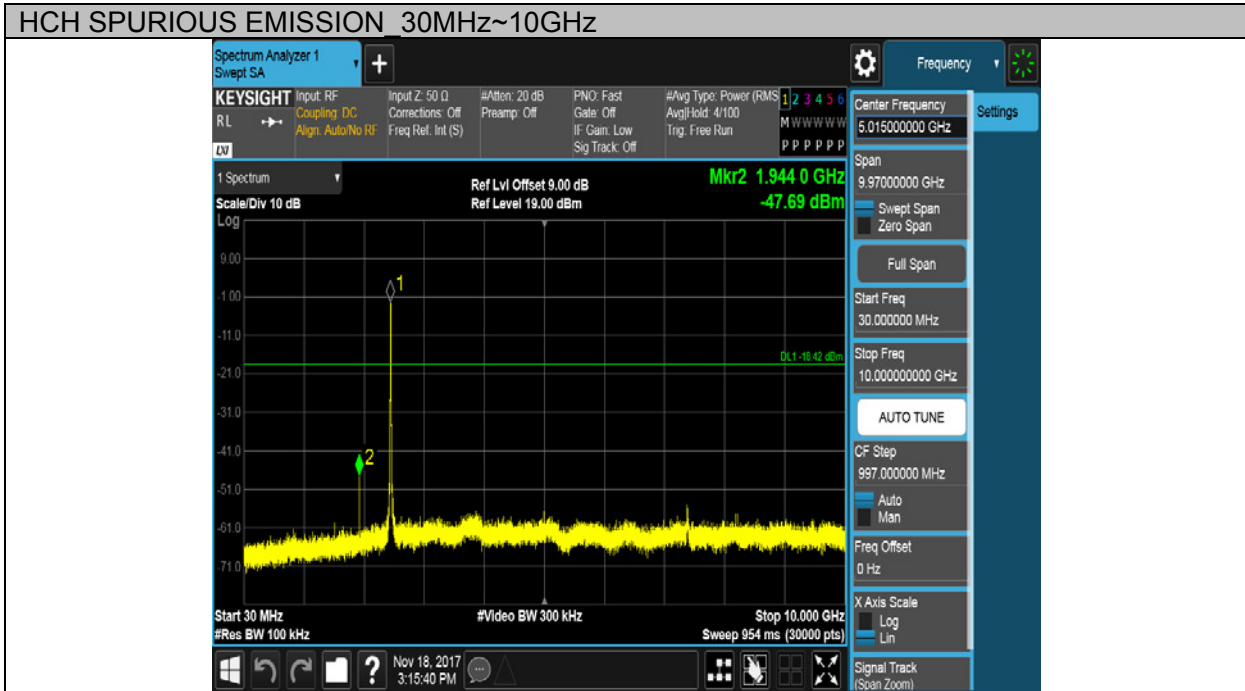

Test Mode	Channel	Verdict
11NSISO20	LCH	PASS


Pref test Plot


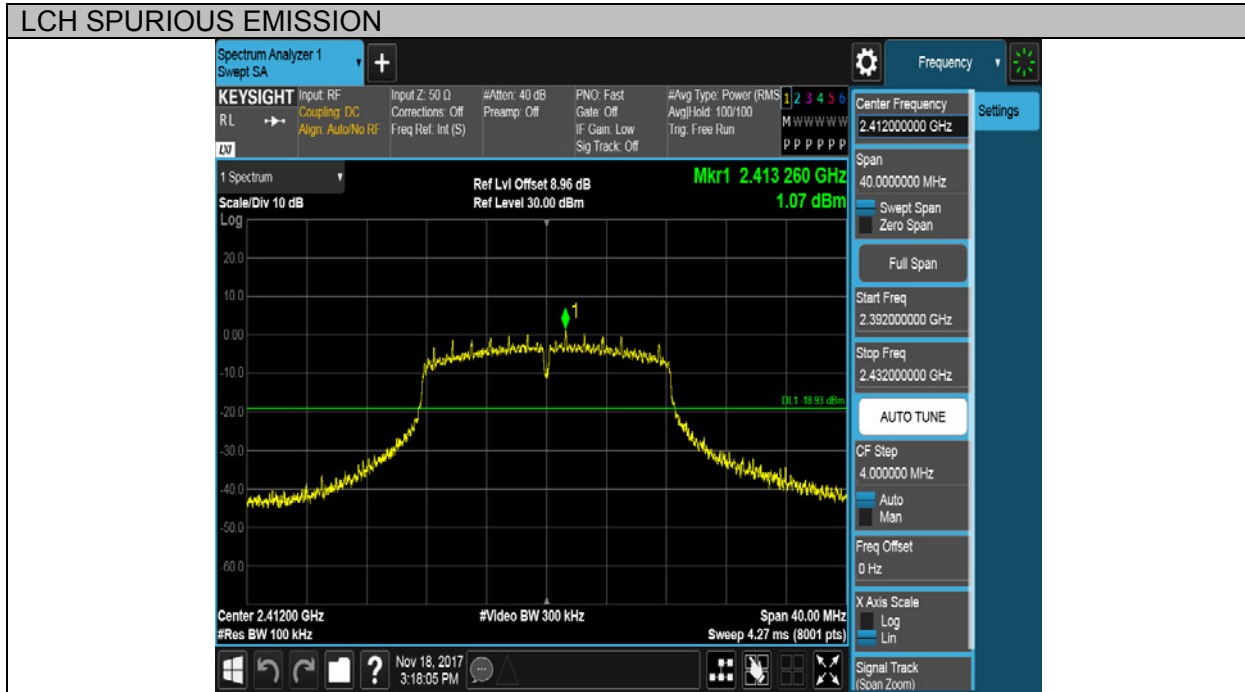


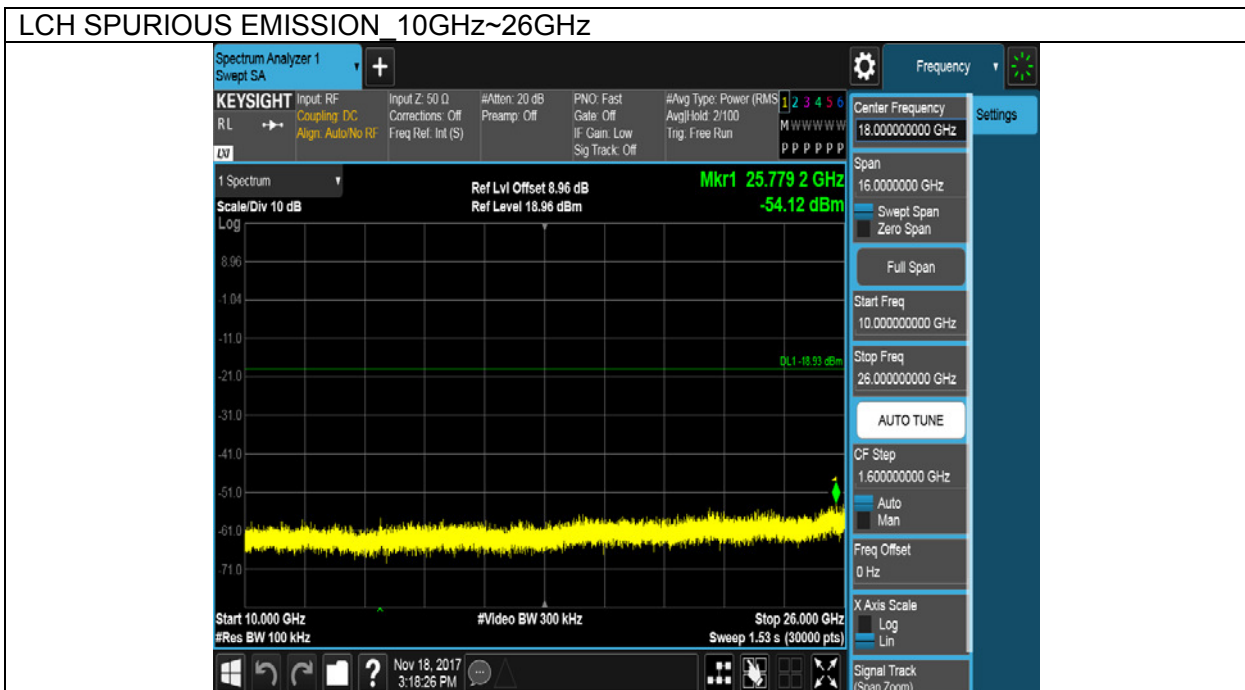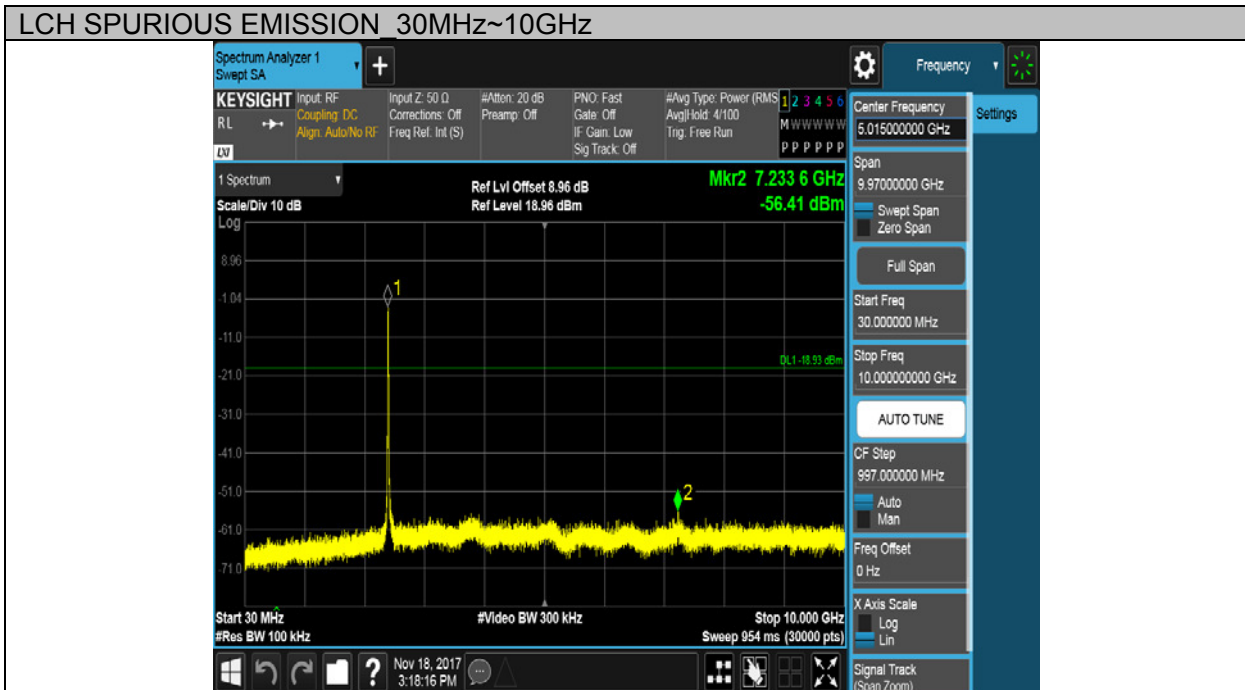

Test Mode	Channel	Verdict
11NSISO20	MCH	PASS


Pref test Plot

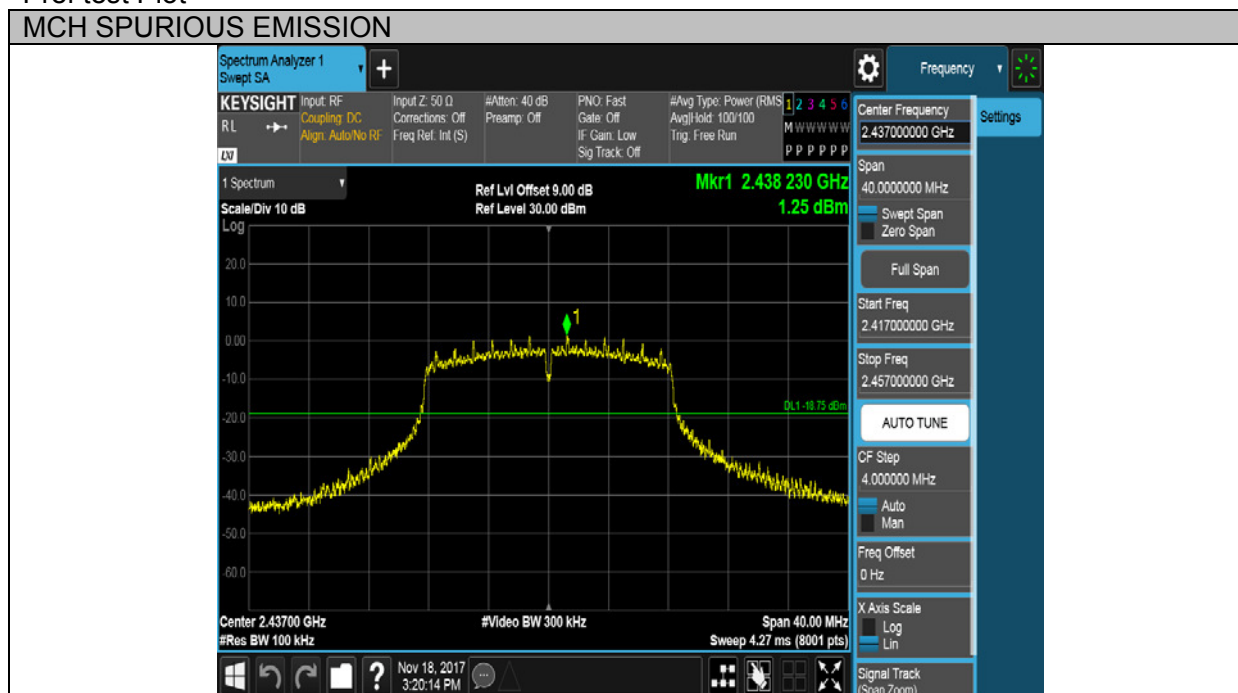

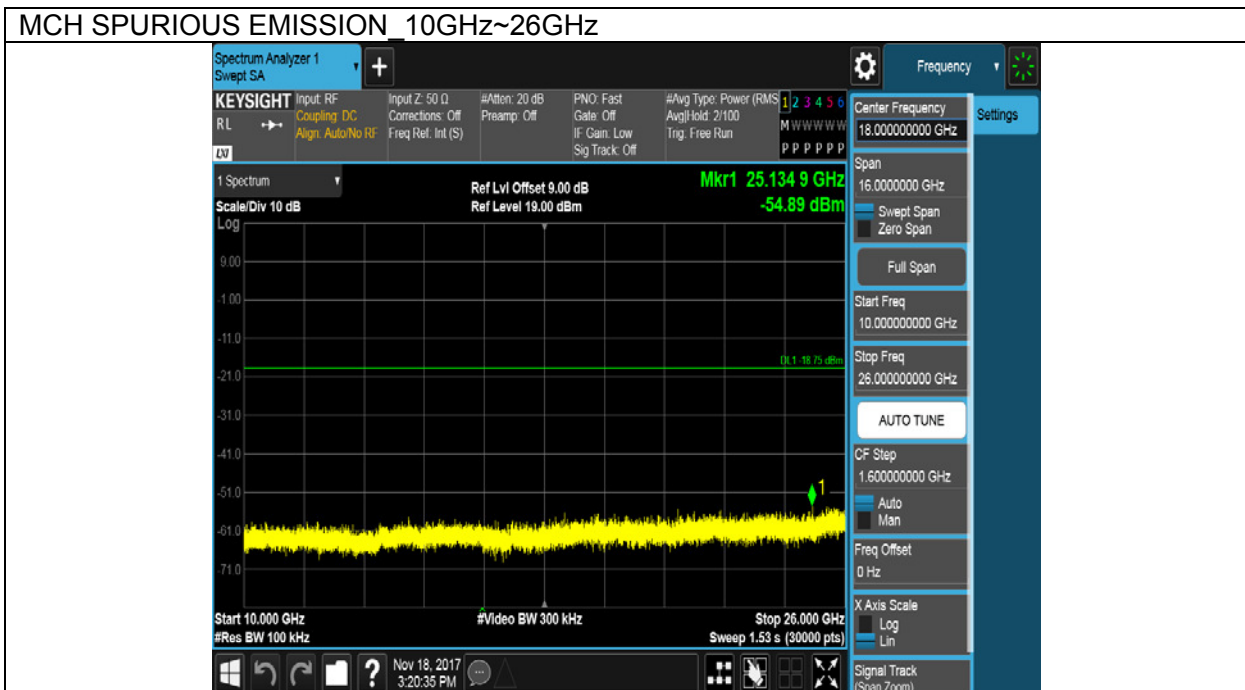
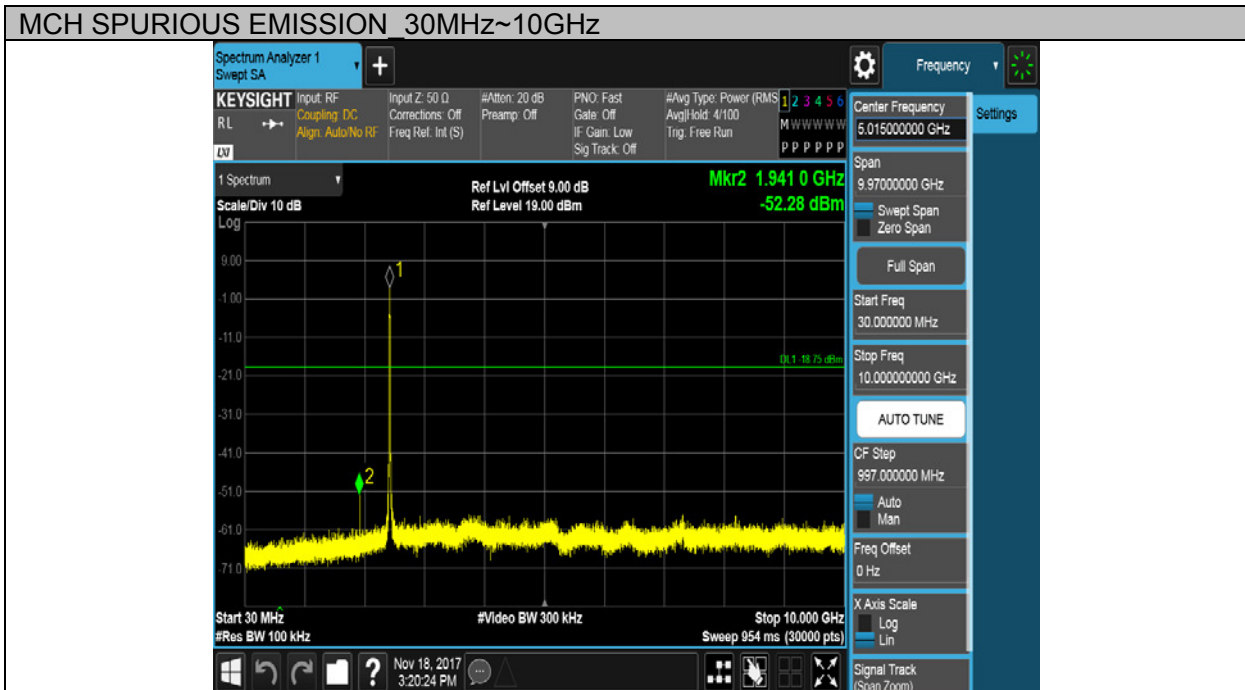


Test Mode	Channel	Verdict
11NSISO20	HCH	PASS

Pref test Plot

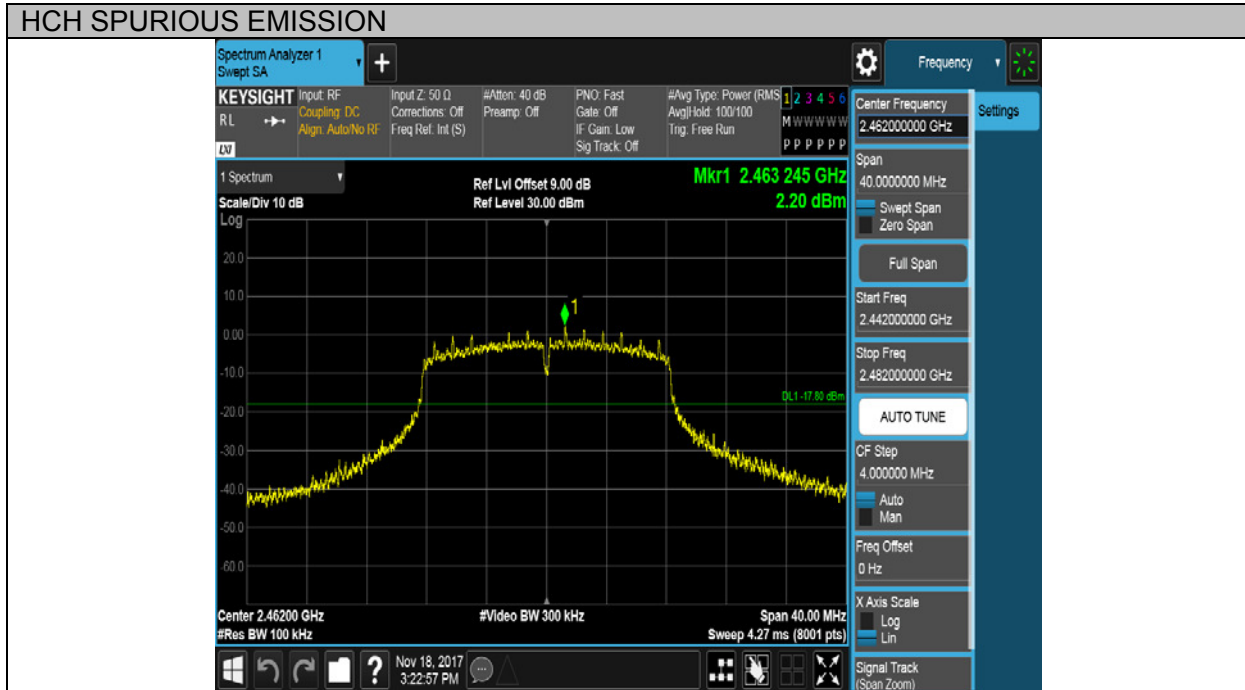



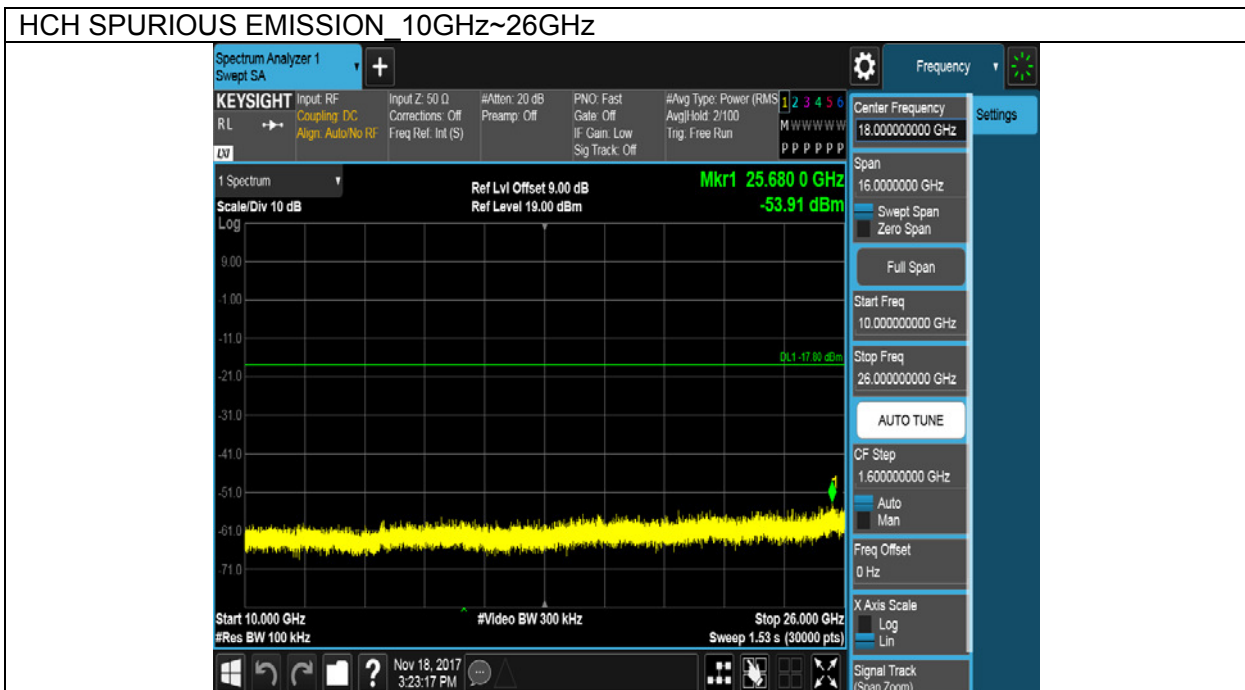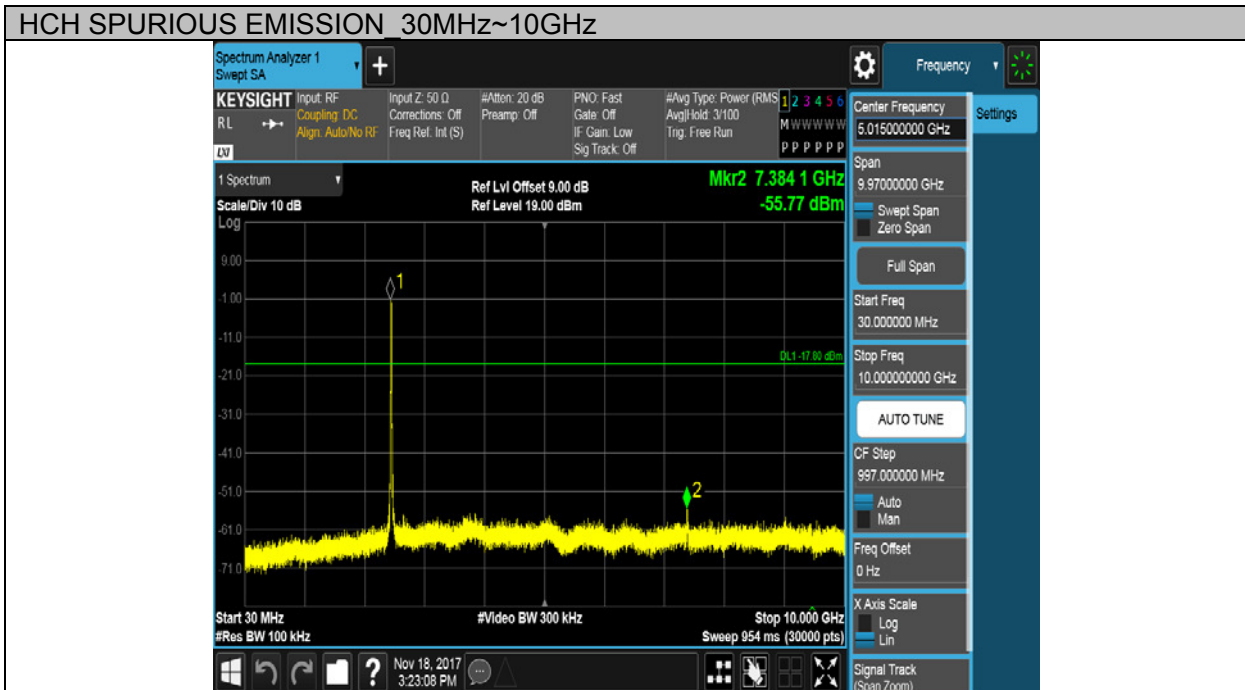

## 6.6. RADIATED TEST RESULTS

### 6.6.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30MHz

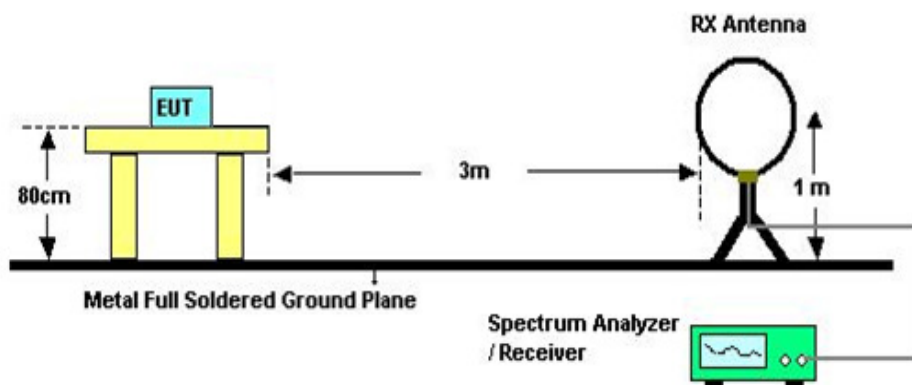


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

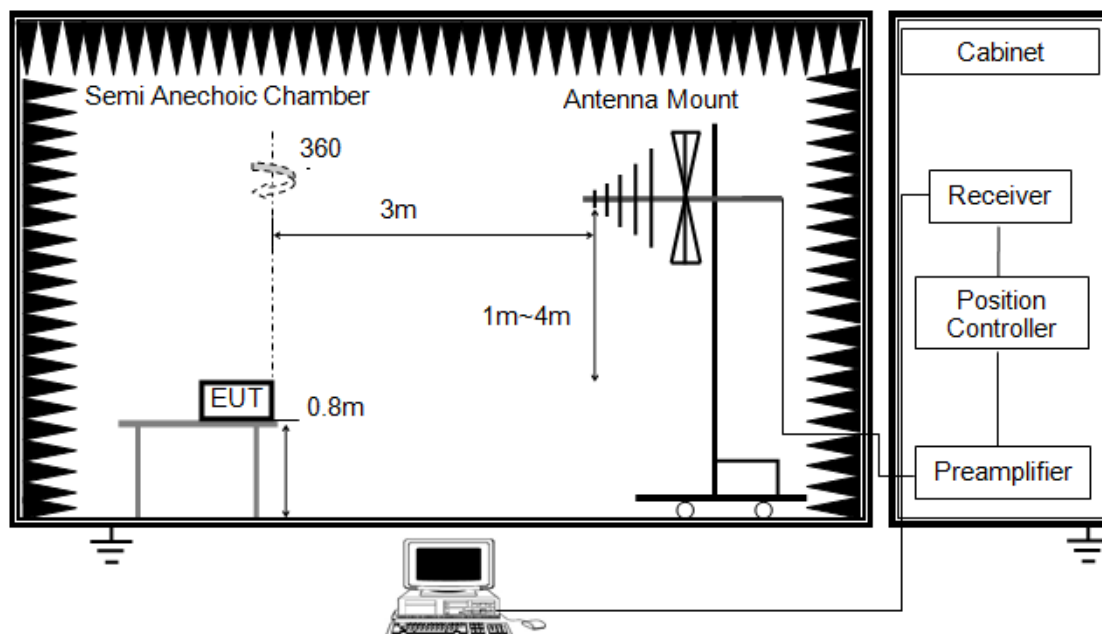


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

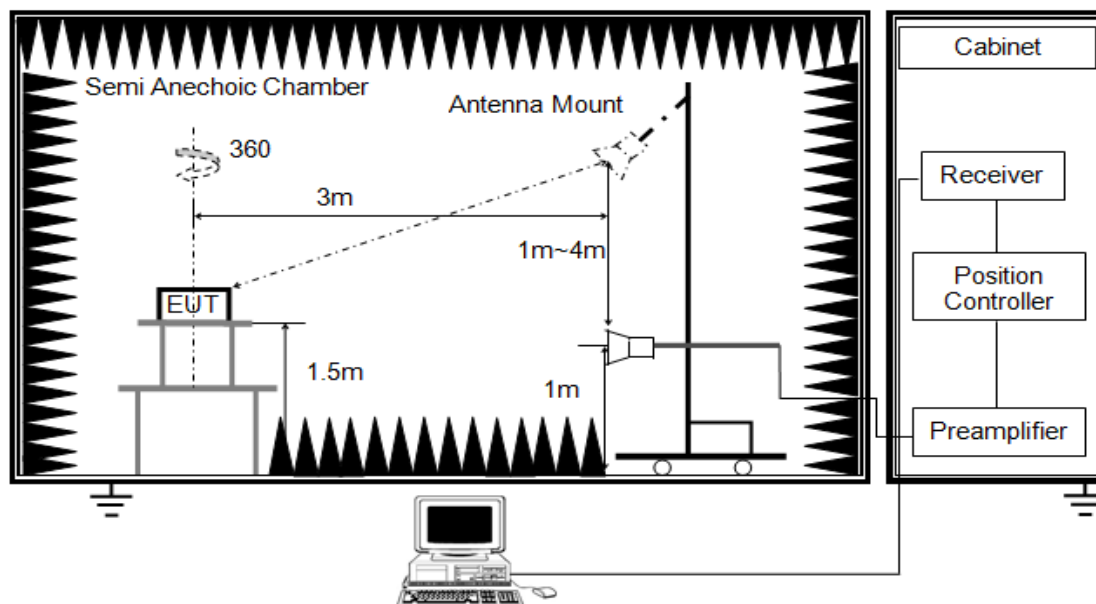


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth, max hold to be run for at least 50 x (1/duty cycle) traces for average measurements.
8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

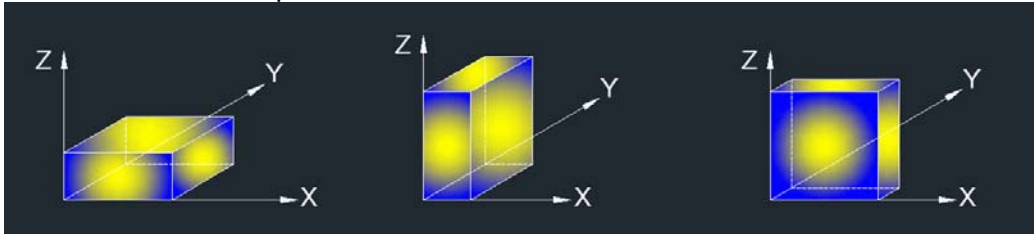

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Z axis) data recorded in the report.

### 6.6.2. RESTRICTED BANDEDGE


Test Result Table

Test Mode	Channel	P <sub>uw</sub> (dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11NSISO20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS



**Test Graphs:**


Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

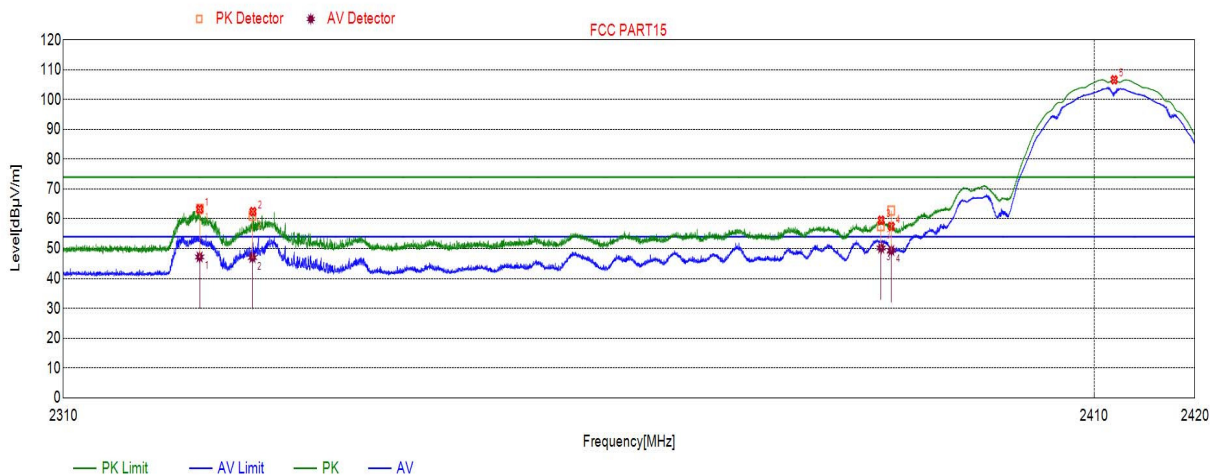

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2322.9839	63.39	74.00	-10.61	peak
	2322.9839	47.24	54.00	-6.76	average
2	2328.0385	60.94	74.00	-13.06	peak
	2328.0385	47.03	54.00	-6.97	average
3	2388.9989	57.41	74.00	-16.59	peak
	2388.9989	50.22	54.00	-3.78	average
4	2390.0000	62.78	74.00	-11.22	peak
	2390.0000	49.41	54.00	-4.59	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

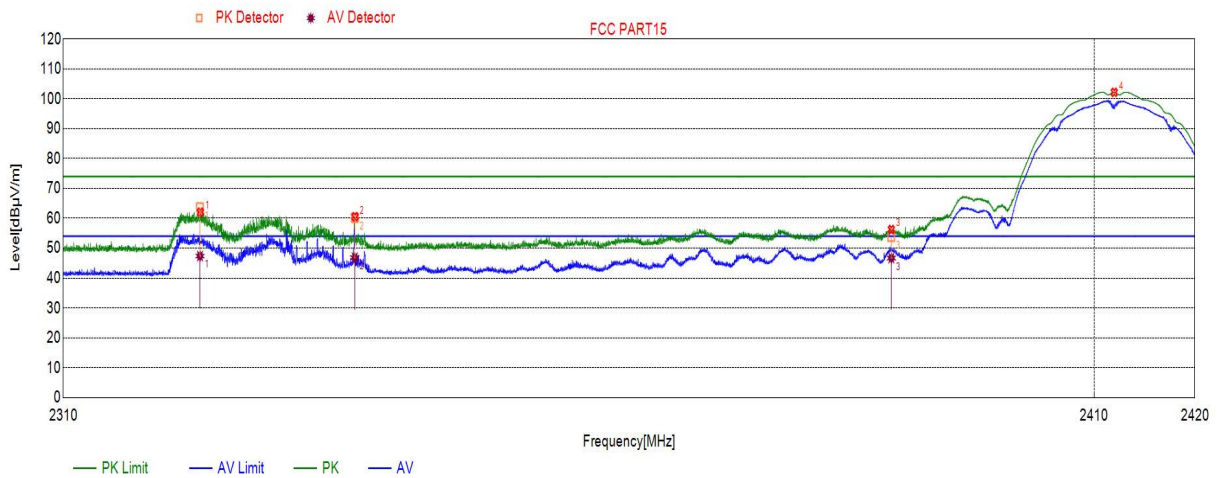

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2323.0234	63.61	74.00	-10.39	peak
	2323.0234	47.37	54.00	-6.63	average
2	2337.8455	60.28	74.00	-13.72	peak
	2337.8455	46.81	54.00	-7.19	average
3	2390.000	53.83	74.00	-20.17	peak
	2390.000	46.71	54.00	-7.29	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

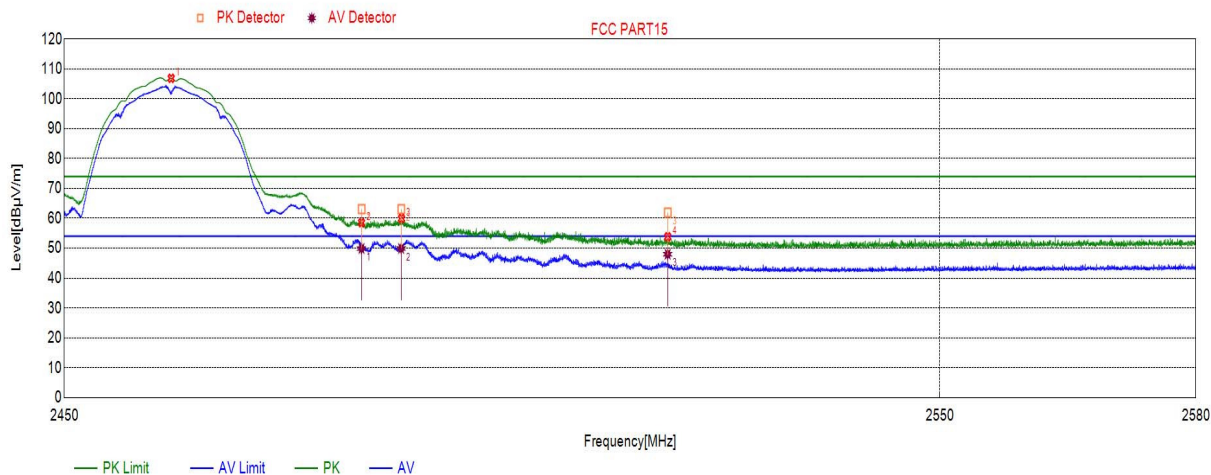

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	63.01	74.00	-10.99	peak
	2483.5000	49.89	54.00	-4.11	average
2	2488.0037	63.07	74.00	-10.93	peak
	2488.0037	49.91	54.00	-4.09	average
3	2518.4847	62.00	74.00	-12.00	peak
	2518.4847	47.98	54.00	-6.02	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

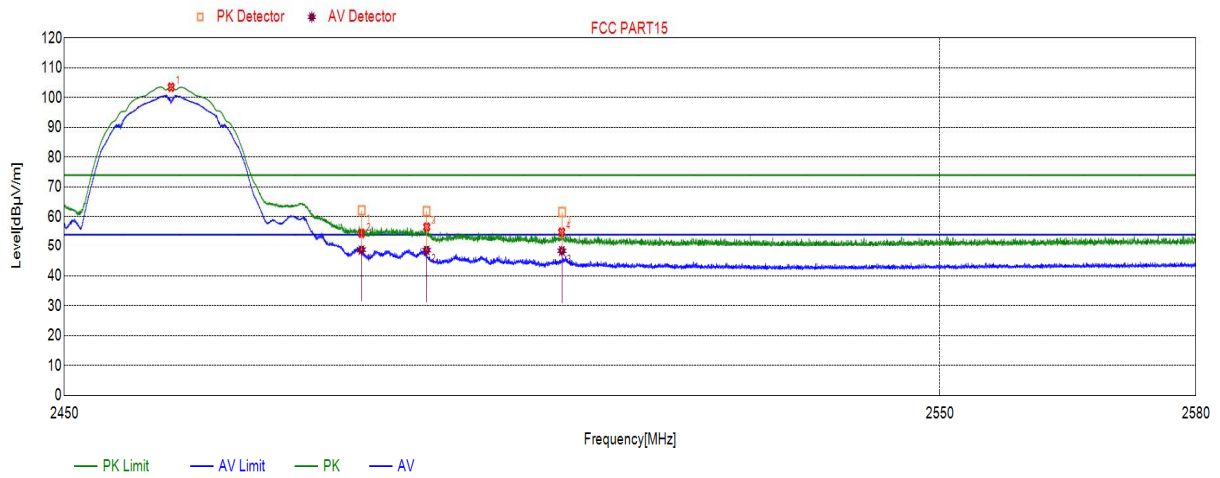

No.	Frequency (MHz)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
1	2483.5000	62.26	74.00	-11.74	peak
	2483.5000	48.68	54.00	-5.32	average
2	2490.9008	61.81	74.00	-12.19	peak
	2490.9008	48.53	54.00	-5.47	average
3	2506.3414	61.54	74.00	-12.46	peak
	2506.3414	48.31	54.00	-5.69	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

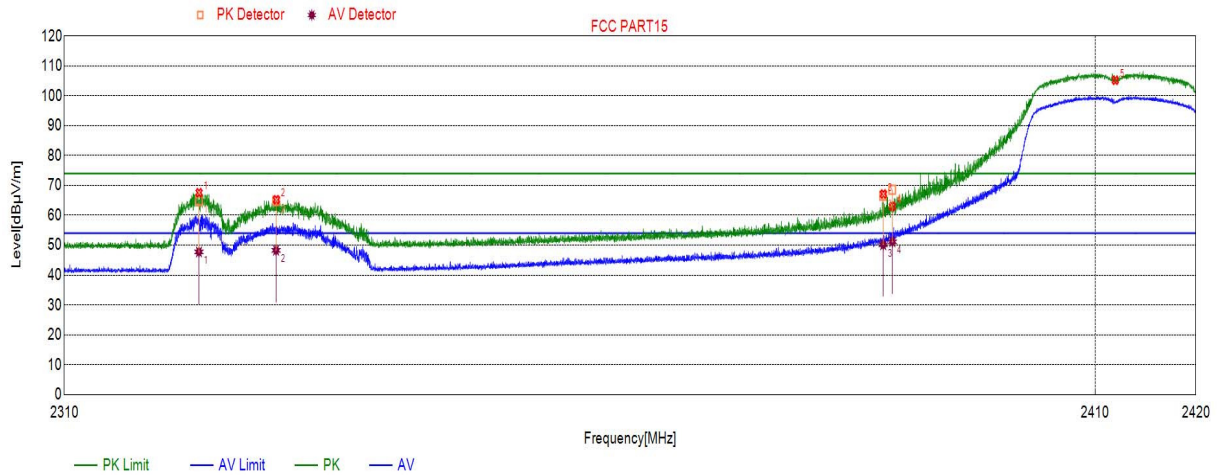

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2322.8240	64.76	74.00	-9.24	peak
	2322.8240	47.76	54.00	-6.24	average
2	2330.2003	64.83	74.00	-9.17	peak
	2330.2003	48.28	54.00	-5.72	average
3	2389.0988	66.55	74.00	-7.45	peak
	2389.0988	50.14	54.00	-3.86	average
4	2390.0000	68.64	74.00	-5.36	peak
	2390.0000	51.14	54.00	-2.86	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

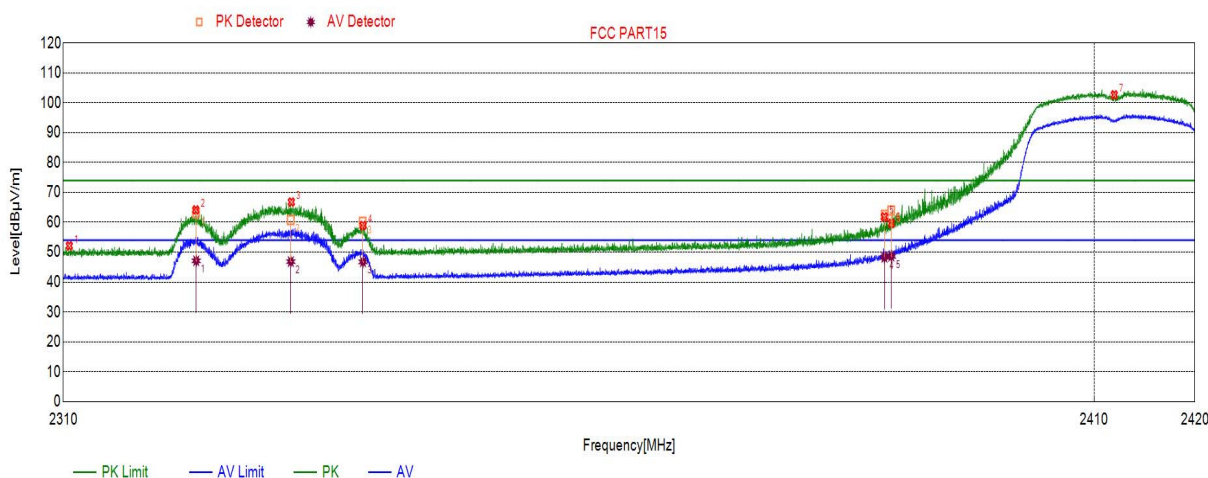

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2322.6607	62.91	74.00	-11.09	peak
	2322.6607	47.12	54.00	-6.88	average
2	2331.7103	60.69	74.00	-13.31	peak
	2331.7103	46.85	54.00	-7.15	average
3	2338.6379	60.11	74.00	-13.89	peak
	2338.6379	46.76	54.00	-7.24	average
4	2389.3204	62.36	74.00	-11.64	peak
	2389.3204	48.26	54.00	-5.74	average
5	2390.0000	63.84	74.00	-10.16	peak
	2390.0000	48.64	54.00	-5.36	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

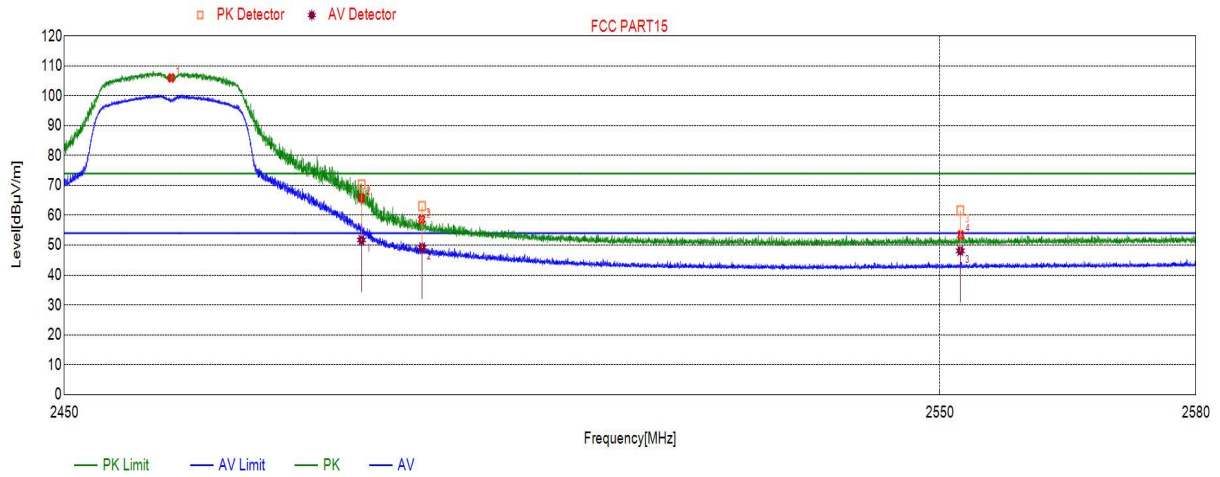


No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	70.26	74.00	-3.74	peak
	2483.5000	51.74	54.00	-2.26	average
2	2490.3912	63.01	74.00	-10.99	peak
	2490.3912	49.27	54.00	-4.73	average
3	2552.3958	61.68	74.00	-12.32	peak
	2552.3958	48.14	54.00	-5.86	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.




Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

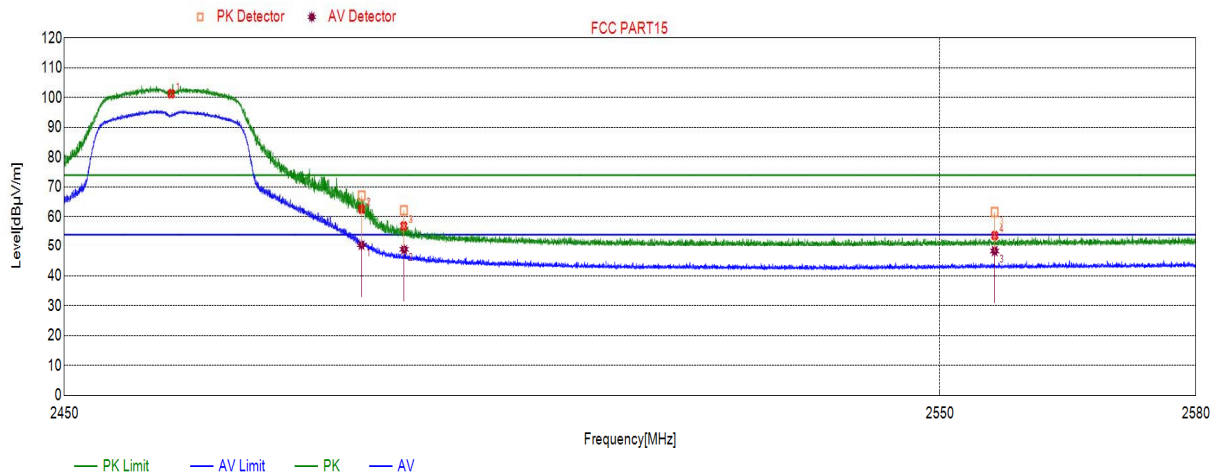

No.	Frequency (MHz)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Remark
1	2483.5000	67.21	74.00	-6.79	peak
	2483.5000	50.35	54.00	-3.65	average
2	2488.3433	62.07	74.00	-11.93	peak
	2488.3433	48.81	54.00	-5.19	average
3	2556.3990	61.45	74.00	-12.55	peak
	2556.3990	48.23	54.00	-5.77	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11NSISO20	LCH	Horizontal	PASS

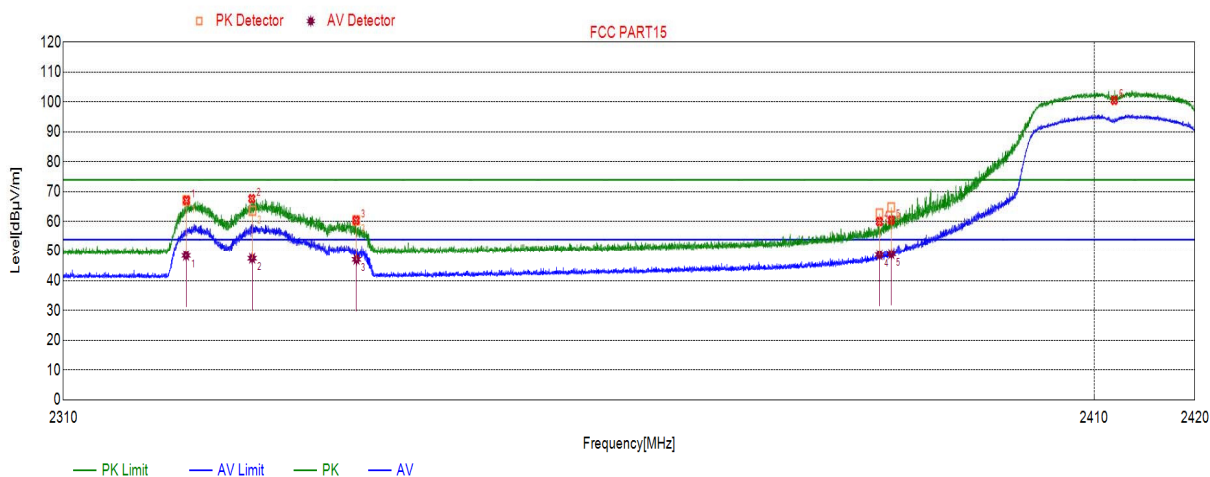

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2321.6928	67.01	74.00	-6.99	peak
	2321.6928	48.46	54.00	-5.54	average
2	2328.0075	63.51	74.00	-10.49	peak
	2328.0075	47.49	54.00	-6.51	average
3	2338.0157	60.37	74.00	-13.63	peak
	2338.0157	47.10	54.00	-6.90	average
4	2388.8343	62.77	74.00	-11.23	peak
	2388.8343	48.73	54.00	-5.27	average
5	2390.0000	64.65	74.00	-9.35	peak
	2390.0000	49.00	54.00	-5.00	average

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11NSISO20	LCH	Vertical	PASS

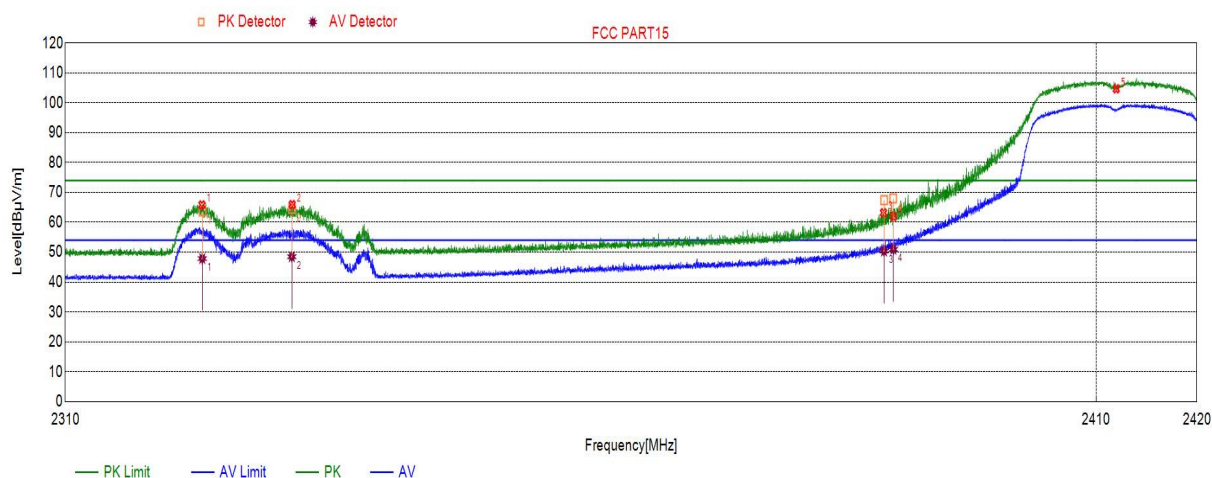

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2323.0454	63.48	74.00	-10.52	peak
	2323.0454	47.86	54.00	-6.14	average
2	2331.6150	64.36	74.00	-9.64	peak
	2331.6150	48.48	54.00	-5.52	average
3	2389.0810	67.45	74.00	-6.55	peak
	2389.0810	50.36	54.00	-3.64	average
4	2390.0000	67.99	74.00	-6.01	peak
	2390.0000	50.96	54.00	-3.04	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.


Test Mode	Channel	Polarization	Verdict
11NSISO20	HCH	Horizontal	PASS

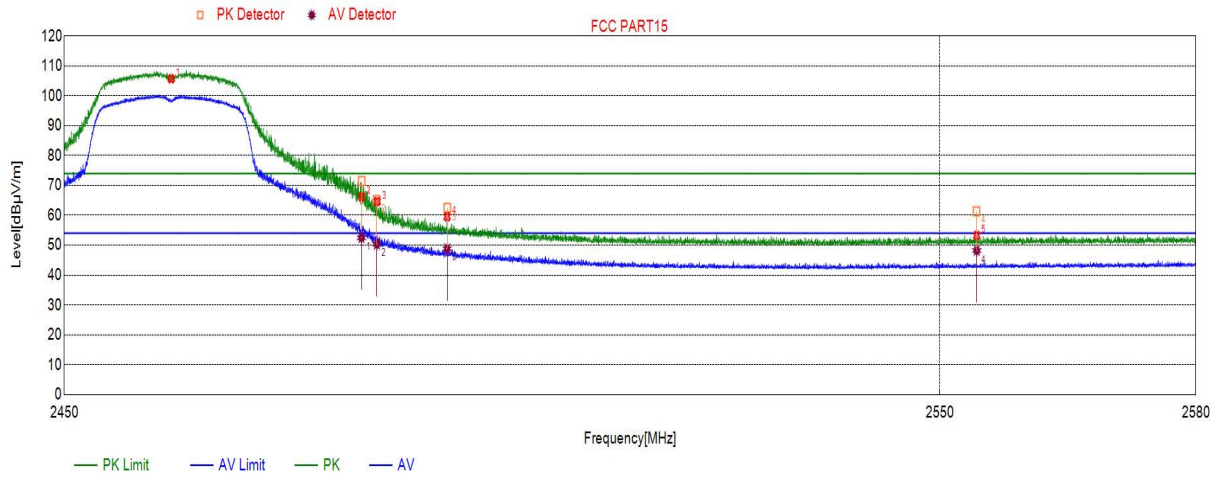

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	71.55	74.00	-2.45	peak
	2483.5000	52.48	54.00	-1.52	average
2	2485.2537	65.10	74.00	-8.90	peak
	2485.2537	50.27	54.00	-3.73	average
3	2493.2387	62.38	74.00	-11.62	peak
	2493.2387	48.82	54.00	-5.18	average
4	2554.3064	61.33	74.00	-12.67	peak
	2554.3064	48.19	54.00	-5.81	average

- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

Test Mode	Channel	Polarization	Verdict
11NSISO20	HCH	Vertical	PASS

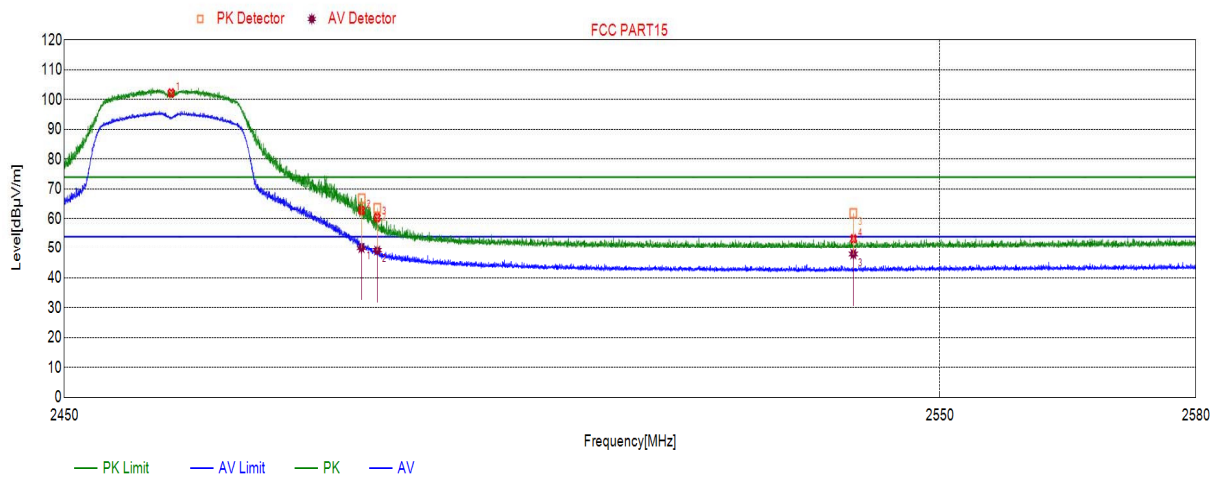

No.	Frequency (MHz)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	66.94	74.00	-7.06	peak
	2483.5000	50.03	54.00	-3.97	average
2	2485.2898	63.50	74.00	-10.50	peak
	2485.2898	49.23	54.00	-4.77	average
3	2539.9464	61.92	74.00	-12.08	peak
	2539.9464	47.90	54.00	-6.10	average


- Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.

### 6.6.3. SPURIOUS EMISSIONS

#### Part I: 1GHz~18GHz

#### HARMONICS AND SPURIOUS EMISSIONS


Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

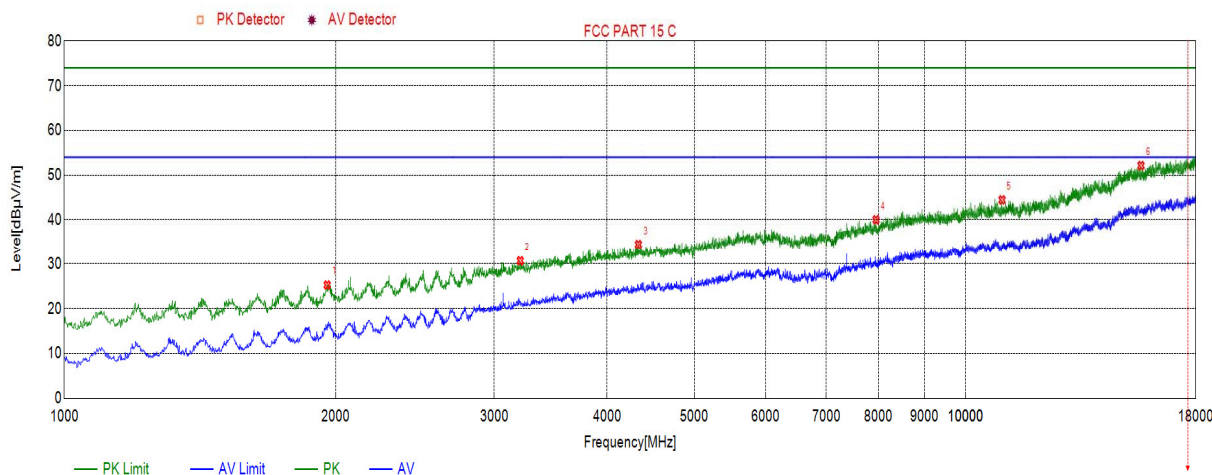

No.	Frequency (MHz)	Result (dBµV/m)	Limit (Peak) (dBµV/m)	Margin (Peak) (dB)	Limit (Ave) (dBµV/m)	Margin (Ave) (dB)	Remark
1	1957.1957	25.24	74.00	-48.76	54.00	-28.76	peak
2	3205.1205	30.66	74.00	-43.34	54.00	-23.34	peak
3	4334.0334	34.46	74.00	-39.54	54.00	-19.54	peak
4	7953.6954	40.02	74.00	-33.98	54.00	-13.98	peak
5	10973.1973	44.46	74.00	-29.54	54.00	-9.54	peak
6	15648.6649	52.15	74.00	-21.85	54.00	-1.85	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

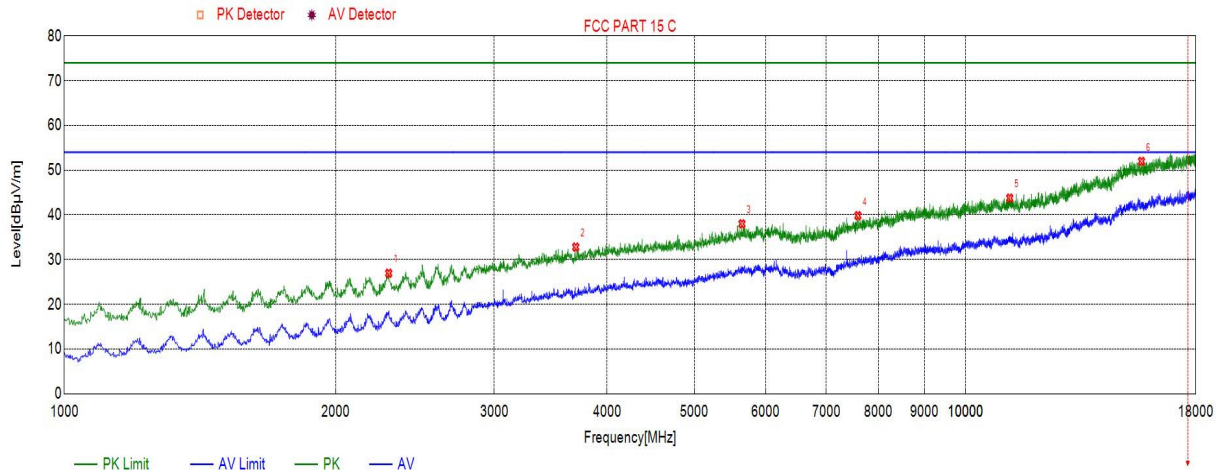


No.	Frequency (MHz)	Result (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (Peak) (dB)	Limit (Ave) (dBuV/m)	Margin (Ave) (dB)	Remark
1	2290.4290	26.94	74.00	-47.06	54.00	-27.06	peak
2	3693.0693	32.78	74.00	-41.22	54.00	-21.22	peak
3	5646.5647	38.00	74.00	-36.00	54.00	-16	peak
4	7593.2593	39.82	74.00	-34.18	54.00	-14.18	peak
5	11190.8191	43.75	74.00	-30.25	54.00	-10.25	peak
6	15670.7671	51.96	74.00	-22.04	54.00	-2.04	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.




Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

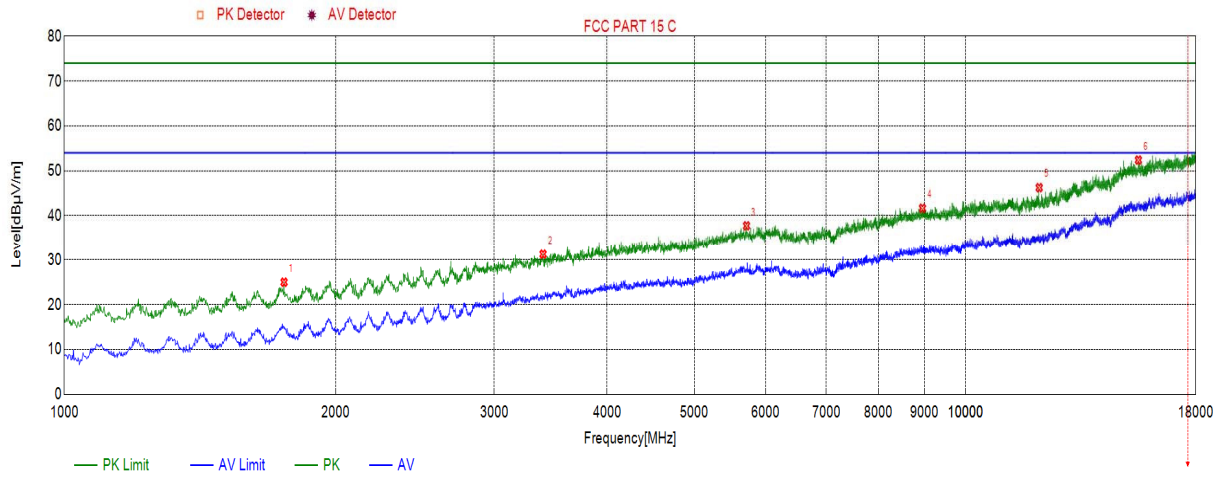

No.	Frequency (MHz)	Result (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (Peak) (dB)	Limit (Ave) (dBuV/m)	Margin (Ave) (dB)	Remark
1	1753.1753	24.98	74.00	-49.02	54.00	-29.02	peak
2	3397.2397	31.24	74.00	-42.76	54.00	-22.76	peak
3	5712.8713	37.75	74.00	-36.25	54.00	-16.25	peak
4	8955.0955	41.68	74.00	-32.32	54.00	-12.32	peak
5	12066.4066	46.26	74.00	-27.74	54.00	-7.74	peak
6	15546.6547	52.40	74.00	-21.60	54.00	-1.6	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

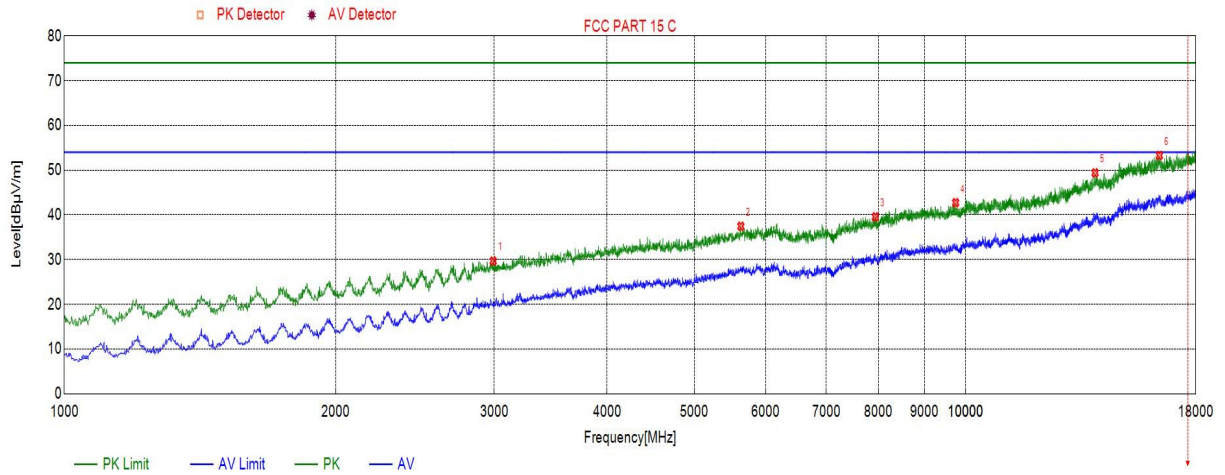

No.	Frequency (MHz)	Result (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (Peak) (dB)	Limit (Ave) (dBuV/m)	Margin (Ave) (dB)	Remark
1	2990.8991	29.66	74.00	-44.34	54.00	-24.34	peak
2	5631.2631	37.45	74.00	-36.55	54.00	-16.55	peak
3	7940.0940	39.55	74.00	-34.45	54.00	-14.45	peak
4	9747.3747	42.73	74.00	-31.27	54.00	-11.27	peak
5	13917.8918	49.40	74.00	-24.60	54.00	-4.6	peak
6	16403.5404	53.29	74.00	-20.71	54.00	-0.71	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

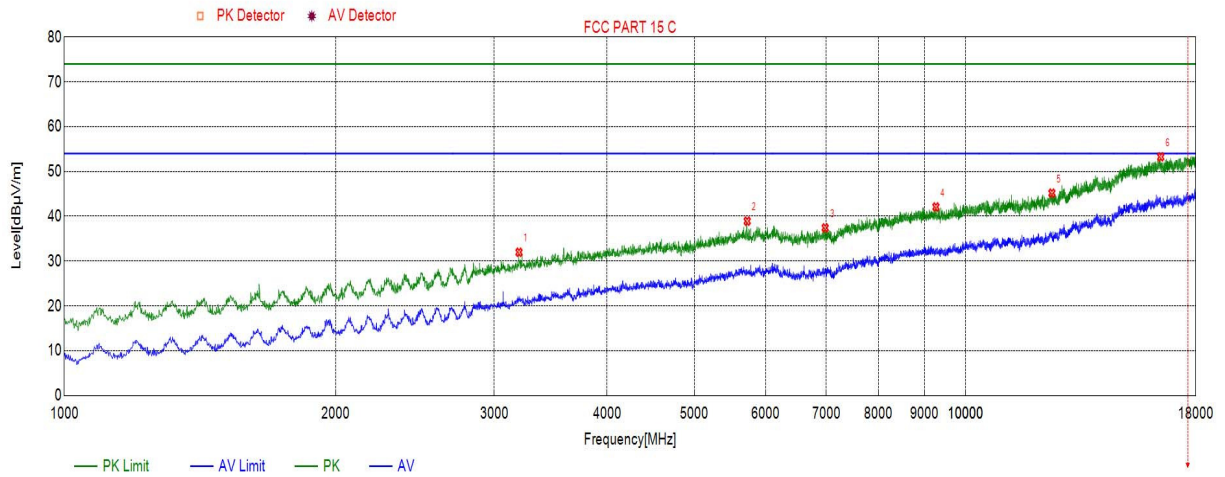

No.	Frequency (MHz)	Result (dBµV/m)	Limit (Peak) (dBµV/m)	Margin (Peak) (dB)	Limit (Ave) (dBµV/m)	Margin (Ave) (dB)	Remark
1	3194.9195	31.98	74.00	-42.02	54.00	-22.02	peak
2	5723.0723	38.92	74.00	-35.08	54.00	-15.08	peak
3	6984.5985	37.41	74.00	-36.59	54.00	-16.59	peak
4	9267.9268	42.09	74.00	-31.91	54.00	-11.91	peak
5	12464.2464	45.17	74.00	-28.83	54.00	-8.83	peak
6	16459.6460	53.27	74.00	-20.73	54.00	-0.73	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

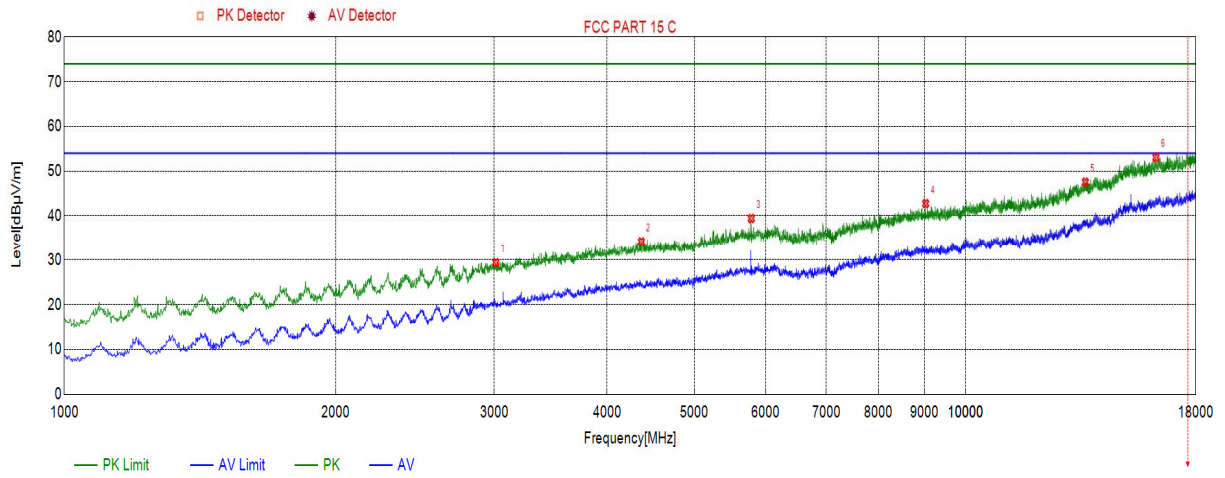

No.	Frequency (MHz)	Result (dBµV/m)	Limit (Peak) (dBµV/m)	Margin (Peak) (dB)	Limit (Ave) (dBµV/m)	Margin (Ave) (dB)	Remark
1	3011.3011	29.32	74.00	-44.68	54.00	-24.68	peak
2	4368.0368	34.16	74.00	-39.84	54.00	-19.84	peak
3	5782.5783	39.40	74.00	-34.60	54.00	-14.6	peak
4	9028.2028	42.75	74.00	-31.25	54.00	-11.25	peak
5	13576.1576	47.54	74.00	-26.46	54.00	-6.46	peak
6	16257.3257	53.05	74.00	-20.95	54.00	-0.95	peak

Note: 1.If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Test Mode	Channel	Polarization	Verdict
-----------	---------	--------------	---------