FCC TEST REPORT

According to

FCC CFR Title 47 Part 15 Subpart C

Applicant	: Zhejiang Dahua Vision Technology Co., Ltd.
Address	: The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.
Equipment	: IP CAMERA
Model No.	: DH-IPC-HFW1200S*-W-xxxx,DH-IPC-HFW1200S*-WS-xxxx, IPC-HFW1200S*-W-xxxx, IPC-HFW1200S*-WS-xxxx, DH-IPC-HFW1000S*-W-xxxx,DH-IPC-HFW1000S*-WS-xxxx, IPC-HFW1000S*-W-xxxx, IPC-HFW1000S*-WS-xxxx, ("*" can be P, N, or blank; "xxxx" can be 0360B or 0600B)

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of ***Cerpass Technology Corp.*** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.

Table of Contents

1. Report of Measurements and Examinations 6
1.1 List of Measurements and Examinations 6
2. Test Configuration of Equipment under Test 7
2.1 Feature of Equipment under Test 7
2.2 Carrier Frequency of Channels 9
The power level setting for 802.11b/g/n 9
2.3 Test Manner 13
2.4 Description of Test System 14
2.5 General Information of Test 15
2.6 Measurement Uncertainty 15
3. Antenna Requirements 16
3.1 Standard Applicable 16
3.2 Antenna Construction and Directional Gain 16
4. Test of Conducted Emission 17
4.1 Test Limit 17
4.2 Test Procedures 17
4.3 Typical Test Setup 18
4.4 Measurement Equipment 18
4.5 Test Result and Data 19
5. Test of Radiated Emission 21
5.1 Test Limit 21
5.2 Test Procedures 21
5.3 Typical Test Setup 22
5.4 Measurement Equipment 23
5.5 Test Result and Data 24
6. Occupied Bandwidth 37
6.1 Test Limit 37
6.2 Test Procedures 37
6.3 Test Setup Layout 37
6.4 Measurement Equipment 37
6.5 Test Result and Data 38
7. Maximum Peak Output Power 46
7.1 Test Limit 46
7.2 Test Procedure 46
7.3 Test Setup Layout 46
7.4 Measurement Equipment 46
7.5 Test Result and Data 47
8. Band Edges Measurement 50

8.1 Test Limit....50
8.2 Test Procedure....50
8.3 Test Setup Layout....50
8.4 Measurement Equipment....50
8.5 Test Result and Data....51
9. Power Spectral Density....64
9.1 Test Limit....64
9.2 Test Procedure....64
9.3 Test Setup Layout....64
9.4 Measurement Equipment....64
9.5 Test Result and Data....65
10. Restricted Bands of Operation....73
10.1 Labeling Requirement....73

Document history

Attachment No.	Date	Description

FCC TEST REPORT

according to

FCC CFR Title 47 Part 15 Subpart C

Applicant	: Zhejiang Dahua Vision Technology Co., Ltd.
Address	: The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.
Equipment	: IP CAMERA
Model No.	: DH-IPC-HFW1200S*-W-xxxx,DH-IPC-HFW1200S*-WS-xxxx, IPC-HFW1200S*-W-xxxx, IPC-HFW1200S*-WS-xxxx, DH-IPC-HFW1000S*-W-xxxx,DH-IPC-HFW1000S*-WS-xxxx, IPC-HFW1000S*-W-xxxx, IPC-HFW1000S*-WS-xxxx, ("*" can be P, N, or blank; "xxxx" can be 0360B or 0600B)

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 – 2009** and the energy emitted by this equipment was ***passed*** **CISPR PUB. 22 and FCC Part 15** in both radiated and conducted emission class B limits. Testing was carried out on Apr, 21, 2015 at ***Cerpass Technology Corp.***

Signature

Miro Chueh/ Technical director

1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	. Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass

2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Product Name:	IP CAMERA	
Model Name:	IPC-HFW1200S-W-0360B, IPC-HFW1000S-W-0360B	
Series Model:	DH-IPC-HFW1200S*-W-xxxx, DH-IPC-HFW1200S*-WS-xxxx, IPC-HFW1200S*-W-xxxx, IPC-HFW1200S*-WS-xxxx, DH-IPC-HFW1000S*-W-xxxx, DH-IPC-HFW1000S*-WS-xxxx, IPC-HFW1000S*-W-xxxx, IPC-HFW1000S*-WS-xxxx, (“*” can be P, N, or blank); “xxxx” can be 0360B or 0600B	
Model Discrepancy:	1) “*” can be P, N, or blank (different software formats); “xxxx” can be 0360B or 0600B (different lens). 2) IPC-HFW1200S-W uses the main chip of 368 platform with sensor AR0330; IPC-HFW1000S-W uses the main chip of Hisilicon with sensor OV9712. 3) The difference between IPC-HFW1X00S-W and IPC-HFW1X00S-WS is SD card function; IPC-HFW1X00S-WS is equipped with SD card while IPC-HFW1X00S-W isn’t.	
Housing material:	Metal case	
Adapter	Model No.:	ADS-12B-12 12012Gz
	Input:	100-240V~50/60Hz 0.3A Max.
	Output:	12V,1.0A

Note: Please refer to user manual.

WLAN	
Spreading	802.11b: CCK, DQPSK, DBPSK 802.11g: 64 QAM, 16 QAM, QPSK, BPSK 802.11n: BPSK, QPSK,16QAM, 64QAM
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Data Rate	802.11b: 11, 5.5, 2, 1 Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps 802.11n: up to 300Mbps
Antenna	Dipole Antenna 2.0 dBi

2.2 Carrier Frequency of Channels

For 2.4G 802.11b, 802.11g, 802.11n (20MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

For 2.4G 802.11n (40MHz)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	---	08	2447
02	---	09	2452
03	2422	---	---
04	2427	---	---
05	2432	---	---
06	2437	---	---
07	2442	---	---

The power level setting for 802.11b/g/n

Mode 1	Frequency (MHz)	Setting
802.11b	2412	40
	2437	40
	2462	40
802.11g	2412	26
	2437	26
	2462	26
802.11n20	2412	22
	2437	22
	2462	22
802.11n40	2422	14
	2437	14
	2452	14

Test Item	Duty cycle
Test Date	2014-03-26

Mode	Frequency (MHz)	Measurement (%)
b	2437	99
g	2437	99
n(20MHz)	2437	99
n(40MHz)	2437	99

Transmit at channel 6 by 802.11b

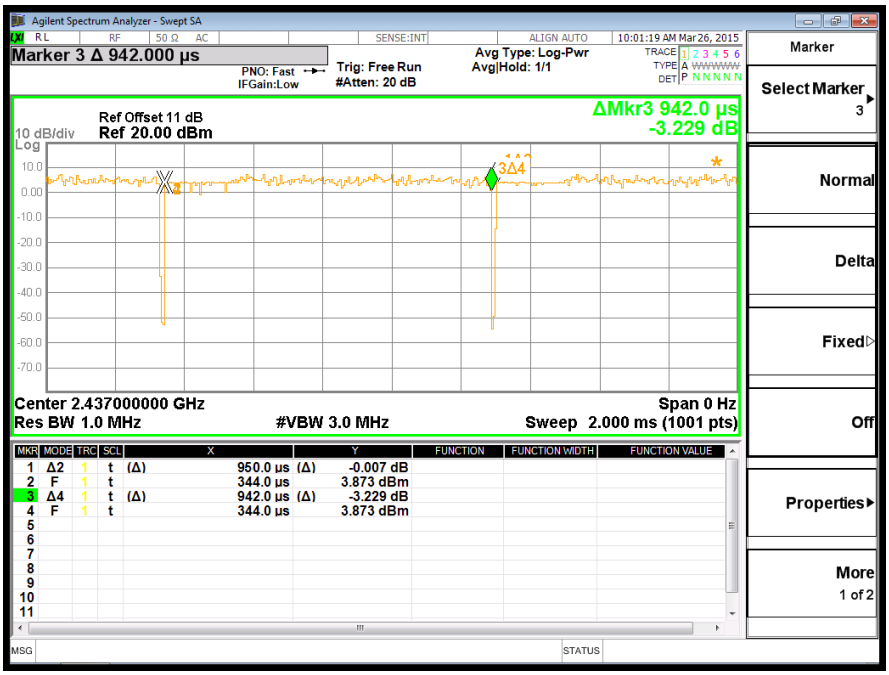

Transmit at channel 6 by 802.11g

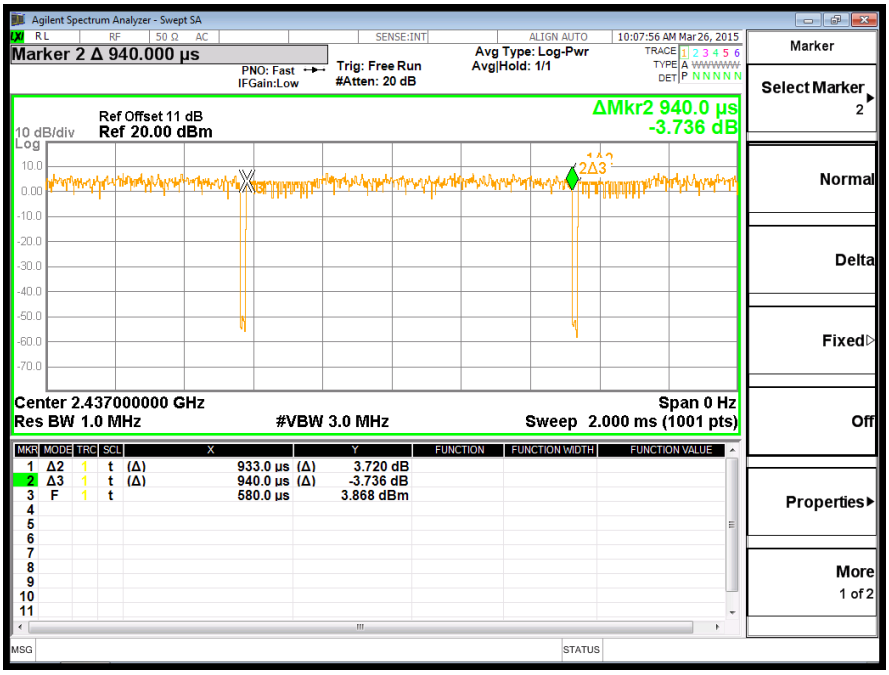

Transmit at channel 6 by 802.11n(20MHz)

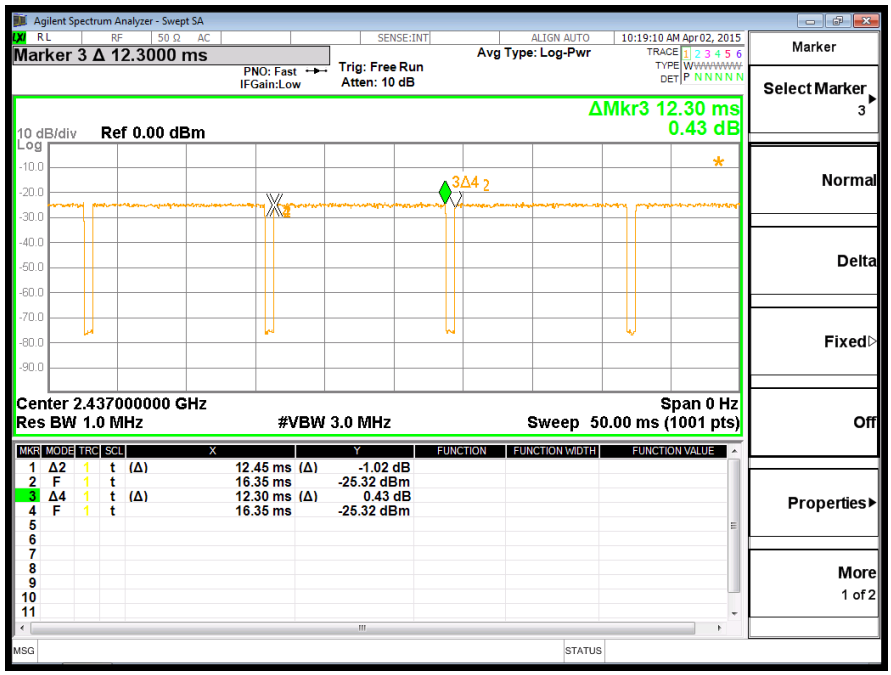

Transmit at channel 6 by 802.11n(40MHz)

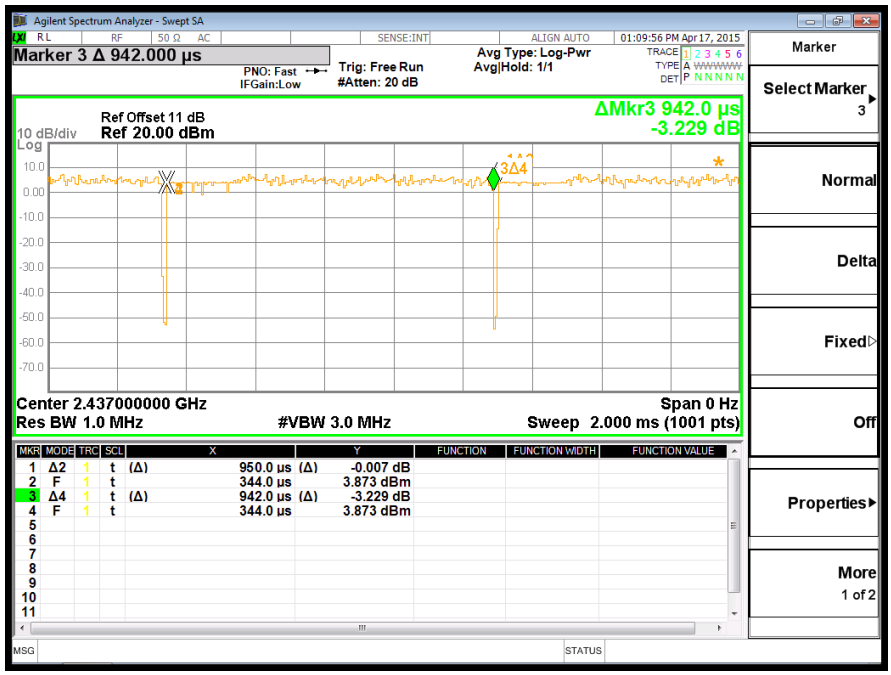

2.3 Test Manner

Test Manner	
a	During testing, the interface cables and equipment positions were varied according to 47 CFR, Part 2, Part 15
b	Adjust the EUT at the test mode and the test channel. Then test.

The test modes:

The EUT transmitting and receiving with one antenna working at b/g/n mode.

The chip set MT6627 supports 802.11 b/g/n configuration was finally used in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n Standard-20 MHz Channel mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with MCS0 data rate were chosen for full testing.

IEEE 802.11n Standard-40 MHz Channel mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with MCS0 data rate were chosen for full testing.

2.4 Description of Test System

No	Device	Manufacturer	Model No.	Description
1	N/A	N/A	N/A	N/A

Use Cable:

No.	Cable	Quantity	Description
N/A	N/A	N/A	N/A

2.5 General Information of Test

Test Site:	Cerpass Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz

Laboratory accreditation

Laboratory Accreditation:

☐ Cerpass Technology Corporation Test Laboratory

☒ Cerpass Technology(SuZhou) Co., Ltd.

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	±2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	±4.11 dB
		Horizontal	±4.10 dB
Occupied Bandwidth	---	---	±7500 Hz
Maximum Peak Output Power	---	---	±1.4 dB
Band Edges	---	---	±2.2 dB
Power Spectral Density	---	---	±2.2 dB

3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna type: Dipole Antenna
Antenna Gain: 2.0 dBi

4. Test of Conducted Emission

4.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

The EUT was setup according to ANSI C63.4, 2003 and tested according to DTS test procedure of Oct 2002 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

4.3 Typical Test Setup

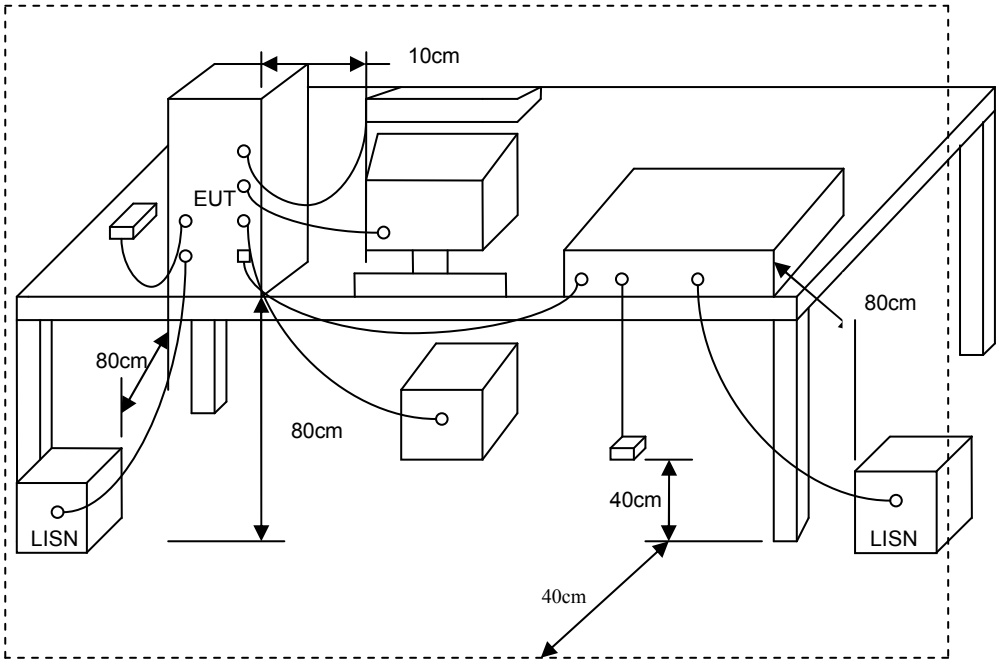

4.4 Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2015.03.24	2016.03.23
AMN	R&S	ESH2-Z5	100182	2014.09.04	2015.09.03
Two-Line V-Network	R&S	ENV216	100325	2014.12.04	2015.12.03
ISN	FCC	FCC-TLISN-T 2-02	20379	2015.03.24	2016.03.23
ISN	FCC	FCC-TLISN-T 4-02	20380	2015.03.24	2016.03.23
ISN	FCC	FCC-TLISN-T 8-02	20381	2015.03.24	2016.03.23
ISN	TESEQ	ISN ST08	30175	2015.03.24	2016.03.23
Current Probe	R&S	EZ-17	100303	2015.04.04	2016.04.03
Passive Voltage Probe	R&S	ESH2-Z3	100026	2015.03.24	2016.03.23
Pulse Limiter	R&S	ESH3-Z2	100529	2015.03.24	2016.03.23
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2015.03.31	2016.03.30

4.5 Test Result and Data

Test Mode :	Mode 1: Normal Link		
AC Power :	AC 120V/60Hz	Phase :	LINE
Temperature :	26℃	Humidity :	60%
Pressure(mbar) :	1002	Date :	2015/03/30

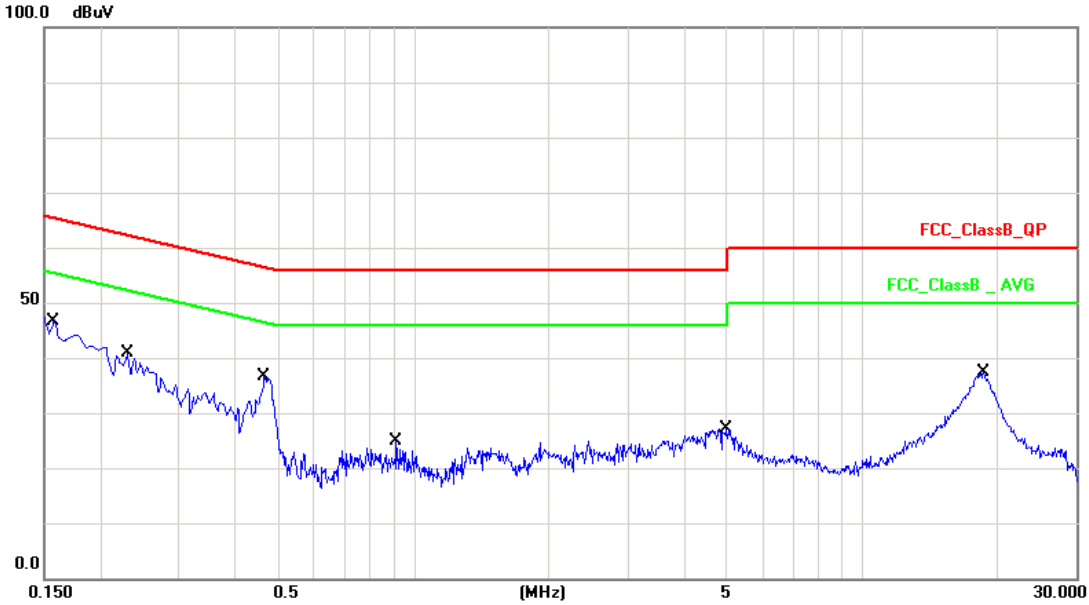

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	10.13	29.37	39.50	65.56	-26.06	QP
2	0.1580	10.13	9.87	20.00	55.56	-35.56	AVG
3	0.2304	10.12	24.09	34.21	62.43	-28.22	QP
4	0.2304	10.12	10.77	20.89	52.43	-31.54	AVG
5	0.4660	10.16	22.86	33.02	56.58	-23.56	QP
6	0.4660	10.16	13.87	24.03	46.58	-22.55	AVG
7	0.9140	10.15	7.67	17.82	56.00	-38.18	QP
8	0.9140	10.15	1.16	11.31	46.00	-34.69	AVG
9	4.9820	10.24	9.44	19.68	56.00	-36.32	QP
10	4.9820	10.24	1.17	11.41	46.00	-34.59	AVG
11	18.6900	10.39	22.54	32.93	60.00	-27.07	QP
12	18.6900	10.39	15.43	25.82	50.00	-24.18	AVG

Note: Measurement Level = Reading Level + Correct Factor

Test Mode :	Mode 1: Normal Link		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Temperature :	26℃	Humidity :	60%
Pressure(mbar) :	1002	Date :	2015/03/30

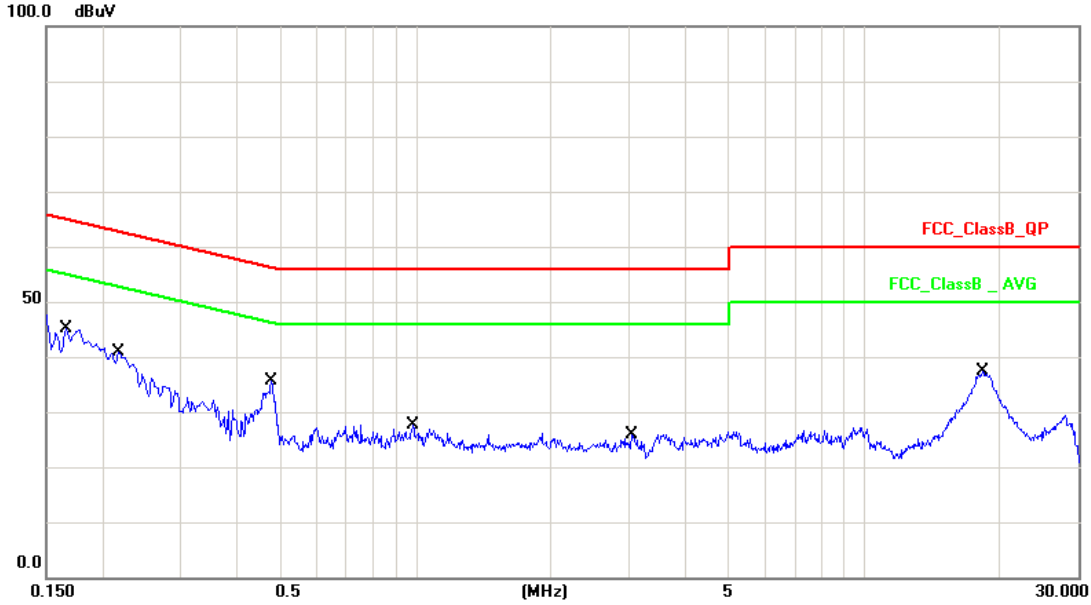

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	10.13	30.18	40.31	65.16	-24.85	QP
2	0.1660	10.13	12.23	22.36	55.16	-32.80	AVG
3	0.2180	10.13	25.11	35.24	62.89	-27.65	QP
4	0.2180	10.13	11.85	21.98	52.89	-30.91	AVG
5	0.4780	10.15	20.02	30.17	56.37	-26.20	QP
6	0.4780	10.15	11.02	21.17	46.37	-25.20	AVG
7	0.9860	10.18	4.14	14.32	56.00	-41.68	QP
8	0.9860	10.18	-0.62	9.56	46.00	-36.44	AVG
9	3.0260	10.20	4.14	14.34	56.00	-41.66	QP
10	3.0260	10.20	-1.70	8.50	46.00	-37.50	AVG
11	18.3980	10.47	22.63	33.10	60.00	-26.90	QP
12	18.3980	10.47	15.45	25.92	50.00	-24.08	AVG

Note: Measurement Level = Reading Level + Correct Factor

5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 9 KHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ m)
30-230	10	30
230-1000	10	37

5.2 Test Procedures

a. The EUT was placed on a rotatable table top 0.8 meter above ground.

b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.

c. The table was rotated 360 degrees to determine the position of the highest radiation.

d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.

e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.

f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.

g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

Below 1GHz Test Setup

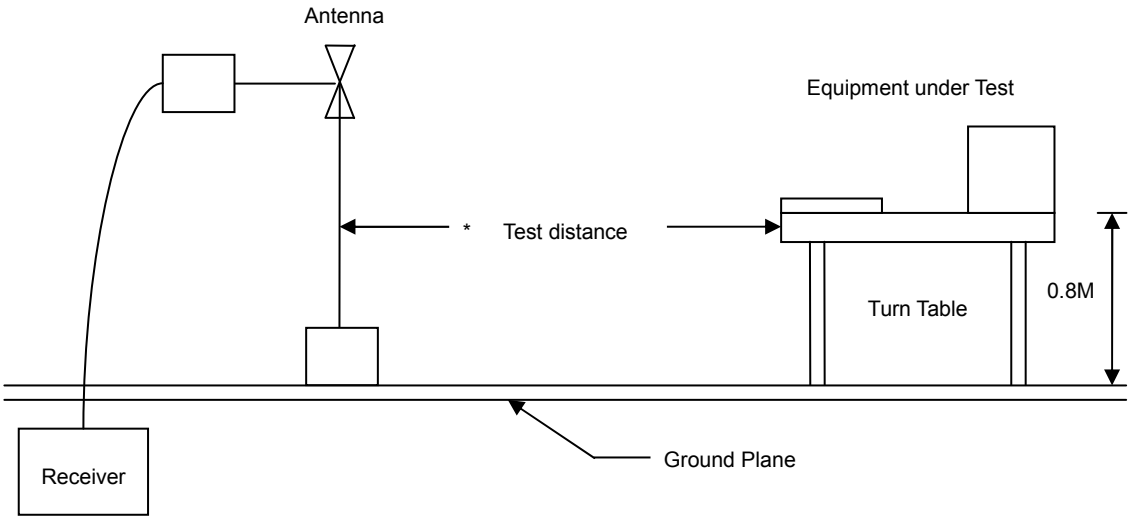

Above 1GHz Test Setup

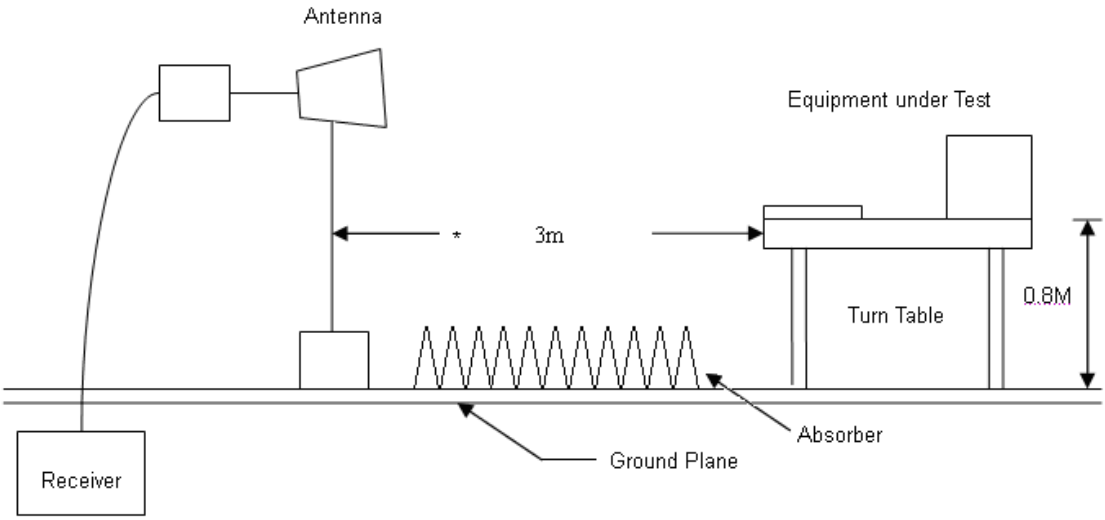

5.4 Measurement Equipment

Instrument	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100563	2015.02.10	2016.02.09
H64 Preamplifier	HP	8447F	3113A05582	2015.03.24	2016.03.23
Preamplifier	Agilent	8449B	3008A02342	2015.03.24	2016.03.23
Ultra Broadband Antenna	R&S	HL562	100362	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2014.05.24	2015.05.23
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2014.05.24	2015.05.23
Spectrum Analyzer	R&S	FSP40	100324	2015.03.23	2016.03.24
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2015.03.31	2016.03.30

5.5 Test Result and Data

The 9kHz-30MHz spurious emission is under limit 20dB more.

5.5.1 Test Result and Data of Transmitter

Under 1G:

Engineer :Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_CLASS_B_03M_QP	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Normal Link**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	36.7899	-7.68	35.69	28.01	40.00	-11.99	QP	H
2	155.1299	-13.57	41.80	28.23	40.00	-11.77	QP	H
3	339.4300	-9.11	35.12	26.01	47.00	-20.99	QP	H
4	576.1100	-7.68	33.70	26.02	47.00	-20.98	QP	H
5	693.4800	-6.18	28.96	22.78	47.00	-24.22	QP	H
6	799.2100	-4.72	29.01	24.29	47.00	-22.71	QP	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	32.9100	-7.00	34.34	27.34	40.00	-12.66	QP	V
2	125.0600	-13.82	41.61	27.79	40.00	-12.21	QP	V
3	158.0399	-13.51	36.05	22.54	40.00	-17.46	QP	V
4	535.3700	-8.56	31.34	22.78	47.00	-24.22	QP	V
5	602.3000	-6.88	31.37	24.49	47.00	-22.51	QP	V
6	795.3300	-4.66	27.80	23.14	47.00	-23.86	QP	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Above 1G:

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11b (2412MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.31	43.55	74.00	-30.45	peak	H
2	4824.000	4.24	39.77	44.01	54.00	-9.99	AVG	H
3	7236.000	8.74	40.49	49.23	74.00	-24.77	peak	H
4	7236.000	8.74	35.22	43.96	54.00	-10.04	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.42	43.66	74.00	-30.34	peak	V
2	4824.000	4.24	39.26	43.50	54.00	-10.50	AVG	V
3	7236.000	8.74	40.53	49.27	74.00	-24.73	peak	V
4	7236.000	8.74	34.11	42.85	54.00	-11.15	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11b (2437MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	41.11	45.20	74.00	-28.80	peak	H
2	4874.000	4.09	37.13	41.22	54.00	-12.78	AVG	H
3	7311.000	8.96	39.67	48.63	74.00	-25.37	peak	H
4	7311.000	8.96	33.61	42.57	54.00	-11.43	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.39	43.48	74.00	-30.52	peak	V
2	4874.000	4.09	36.29	40.38	54.00	-13.62	AVG	V
3	7311.000	8.96	39.60	48.56	74.00	-25.44	peak	V
4	7311.000	8.96	32.58	41.54	54.00	-12.46	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11b (2462MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	38.49	42.67	74.00	-31.33	peak	H
2	4924.000	4.18	38.48	42.66	54.00	-11.34	AVG	H
3	7386.000	9.07	38.58	47.65	74.00	-26.35	peak	H
4	7386.000	9.07	32.27	41.34	54.00	-12.66	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	38.01	42.19	74.00	-31.81	peak	V
2	4924.000	4.18	38.15	42.33	54.00	-11.67	AVG	V
3	7386.000	9.07	40.38	49.45	74.00	-24.55	peak	V
4	7386.000	9.07	32.89	41.96	54.00	-12.04	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11g (2412MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.30	43.54	74.00	-30.46	peak	H
2	4824.000	4.24	40.11	44.35	54.00	-9.65	AVG	H
3	7236.000	8.74	39.09	47.83	74.00	-26.17	peak	H
4	7236.000	8.74	34.41	43.15	54.00	-10.85	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.29	43.53	74.00	-30.47	peak	V
2	4824.000	4.24	40.32	44.56	54.00	-9.44	AVG	V
3	7236.000	8.74	40.26	49.00	74.00	-25.00	peak	V
4	7236.000	8.74	34.93	43.67	54.00	-10.33	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11g (2437MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.81	43.90	74.00	-30.10	peak	H
2	7311.000	8.96	39.03	47.99	74.00	-26.01	peak	H
3	4874.000	4.09	38.00	42.09	54.00	-11.91	AVG	H
4	7311.000	8.96	32.86	41.82	54.00	-12.18	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	40.30	44.39	74.00	-29.61	peak	V
2	4874.000	4.09	35.58	39.67	54.00	-14.33	AVG	V
3	7311.000	8.96	39.26	48.22	74.00	-25.78	peak	V
4	7311.000	8.96	31.36	40.32	54.00	-13.68	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11g (2462MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	39.20	43.38	74.00	-30.62	peak	H
2	4924.000	4.18	37.17	41.35	54.00	-12.65	AVG	H
3	7386.000	9.07	39.94	49.01	74.00	-24.99	peak	H
4	7386.000	9.07	33.50	42.57	54.00	-11.43	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.80	43.89	74.00	-30.11	peak	V
2	4874.000	4.09	39.56	43.65	54.00	-10.35	AVG	V
3	7386.000	9.07	38.50	47.57	74.00	-26.43	peak	V
4	7386.000	9.07	33.79	42.86	54.00	-11.14	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (20MHz) (2412MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.30	43.54	74.00	-30.46	peak	H
2	4824.000	4.24	38.37	42.61	54.00	-11.39	AVG	H
3	7236.000	8.74	39.09	47.83	74.00	-26.17	peak	H
4	7236.000	8.74	34.51	43.25	54.00	-10.75	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4824.000	4.24	39.29	43.53	74.00	-30.47	peak	V
2	4824.000	4.24	38.34	42.58	54.00	-11.42	AVG	V
3	7236.000	8.74	41.26	50.00	74.00	-24.00	peak	V
4	7236.000	8.74	32.28	41.02	54.00	-12.98	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (20MHz) (2437MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.81	43.90	74.00	-30.10	peak	H
2	4874.000	4.09	40.23	44.32	54.00	-9.68	AVG	H
3	7311.000	8.96	39.03	47.99	74.00	-26.01	peak	H
4	7311.000	8.96	34.92	43.88	54.00	-10.12	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	4.09	39.80	43.89	74.00	-30.11	peak	V
2	4874.000	4.09	38.06	42.15	54.00	-11.85	AVG	V
3	7311.000	8.96	41.76	50.72	74.00	-23.28	peak	V
4	7311.000	8.96	34.56	43.52	54.00	-10.48	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (20MHz) (2462MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	38.70	42.88	74.00	-31.12	peak	H
2	4924.000	4.18	40.17	44.35	54.00	-9.65	AVG	H
3	7386.000	9.07	39.94	49.01	74.00	-24.99	peak	H
4	7386.000	9.07	34.67	43.74	54.00	-10.26	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4924.000	4.18	39.87	44.05	74.00	-29.95	peak	V
2	4924.000	4.18	38.43	42.61	54.00	-11.39	AVG	V
3	7386.000	9.07	38.50	47.57	74.00	-26.43	peak	V
4	7386.000	9.07	34.47	43.54	54.00	-10.46	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (40MHz) (2422MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	40.32	46.78	74.00	-27.22	peak	H
2	4844.000	6.46	37.42	43.88	54.00	-10.12	AVG	H
3	7236.000	12.54	39.33	51.87	74.00	-22.13	peak	H
4	7236.000	12.54	34.21	46.75	54.00	-7.25	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4844.000	6.46	39.34	45.8	74.00	-28.2	peak	V
2	4844.000	6.46	32.09	38.55	54.00	-15.45	AVG	V
3	7236.000	12.54	38.22	50.76	74.00	-23.24	peak	V
4	7236.000	12.54	35.32	47.86	54.00	-6.14	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (40MHz) (2437MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	39.43	45.97	74.00	-28.03	peak	H
2	4874.000	6.54	35.32	41.86	54.00	-12.14	AVG	H
3	7311.000	12.72	40.43	53.15	74.00	-20.85	peak	H
4	7311.000	12.72	30.94	43.66	54.00	-10.34	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4874.000	6.54	41.03	47.57	74.00	-26.43	peak	V
2	4874.000	6.54	30.42	36.96	54.00	-17.04	AVG	V
3	7311.000	12.72	40.44	53.16	74.00	-20.84	peak	V
4	7311.000	12.72	31.23	43.95	54.00	-10.05	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Engineer : Wind	
Site : EMC Lab AC 102	**Time : 2015-3-29**
Limit : FCC_15_03M_PK	**Margin : 6**
EUT : IP CAMERA	**Probe : VERTICAL/ HORIZONTAL**
Power : AC 120V/60Hz	**Note : Transmit by 802.11n (40MHz) (2452MHz)**

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	39.21	45.82	74.00	-28.18	peak	H
2	4904.000	6.61	33.69	40.3	54.00	-13.7	AVG	H
3	7356.000	12.83	38.49	51.32	74.00	-22.68	peak	H
4	7356.000	12.83	32.3	45.13	54.00	-8.87	AVG	H

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	4904.000	6.61	40.89	47.5	74.00	-26.50	peak	V
2	4904.000	6.61	32.05	38.66	54.00	-15.34	AVG	V
3	7356.000	12.83	40.08	52.91	74.00	-21.09	peak	V
4	7356.000	12.83	29.33	42.16	54.00	-16.56	AVG	V

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

6. Occupied Bandwidth

6.1 Test Limit

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725- 5850 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedures

a. The transmitter output was connected to the spectrum analyzer.

b. Set RBW of spectrum analyzer to 1~5% of the emission bandwidth and VBW ⩾ 3x RBW.

c. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

d. The 6dB Bandwidth was measured and recorded.

6.3 Test Setup Layout

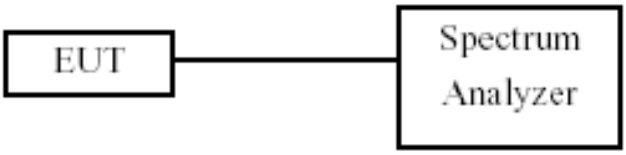

6.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	N9010A	Agilent	MY51350515	2014.11.03	2015.11.03

6.5 Test Result and Data

Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11b
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	12670	500	Pass
06	2437	12730	500	Pass
11	2462	12660	500	Pass

Channel 01 (2412MHz)

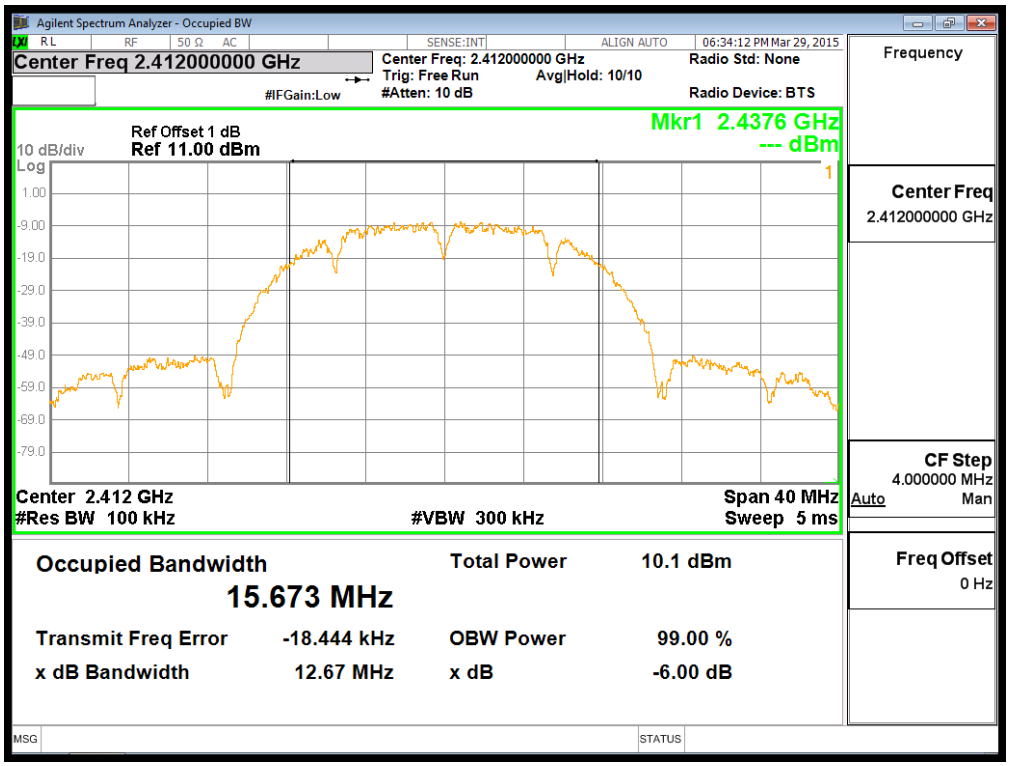

Channel 06 (2437MHz)

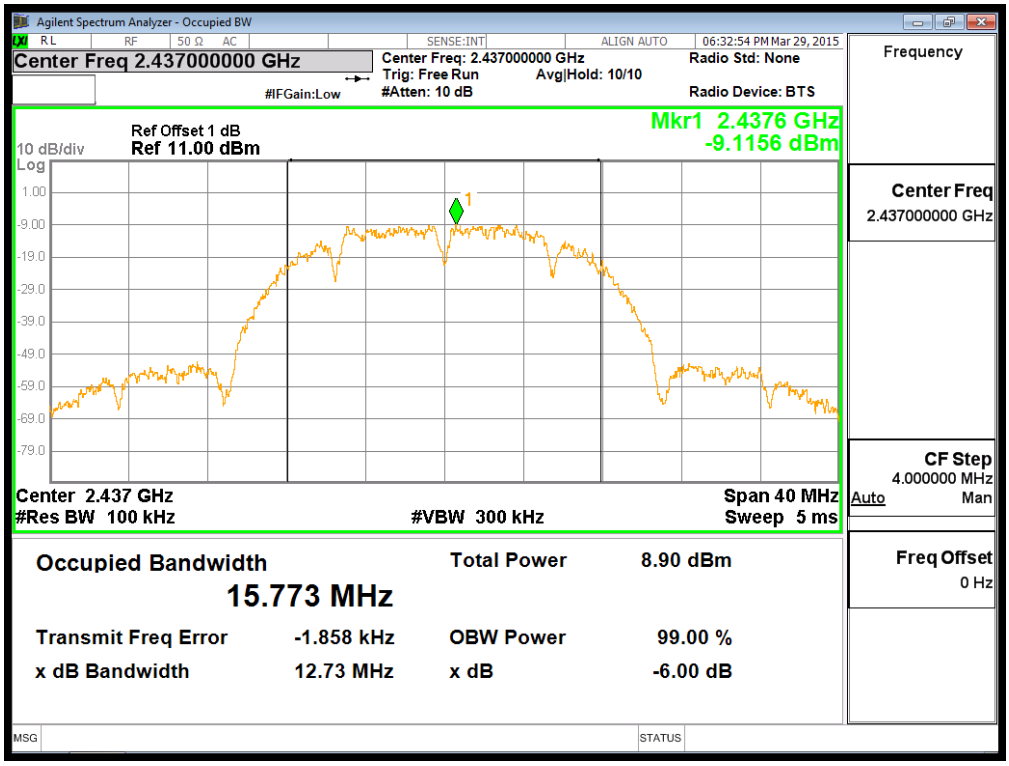

Channel11(2462MHz)

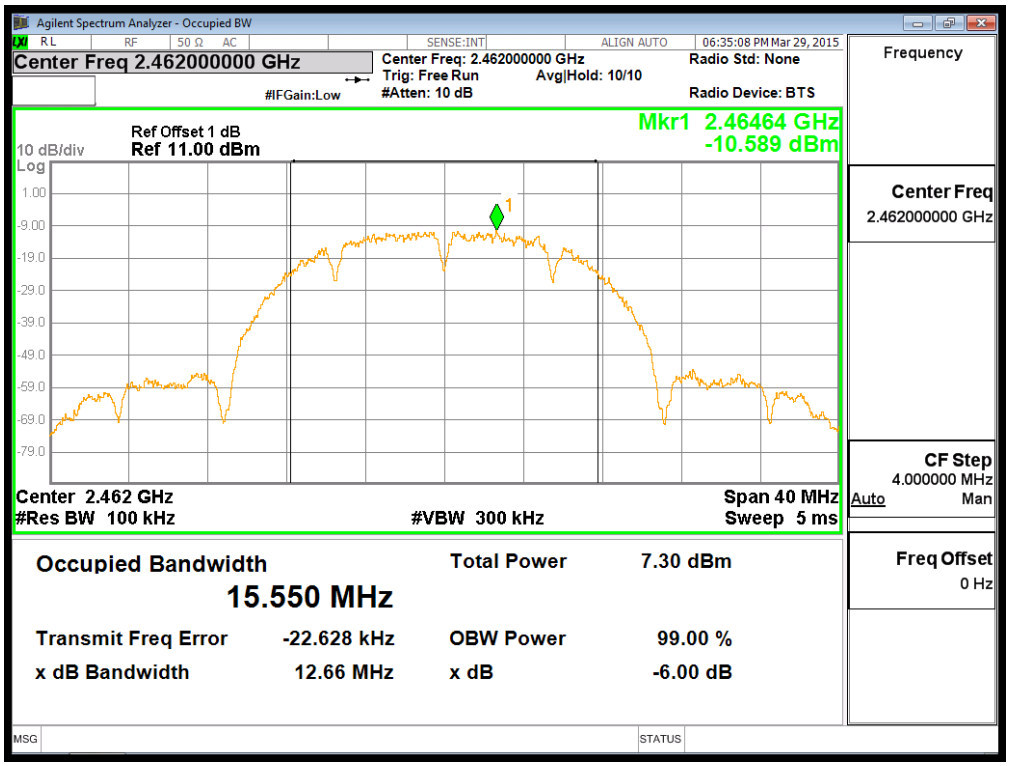

Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11g
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	16480	500	Pass
06	2437	16460	500	Pass
11	2462	16500	500	Pass

Channel 01 (2412MHz)

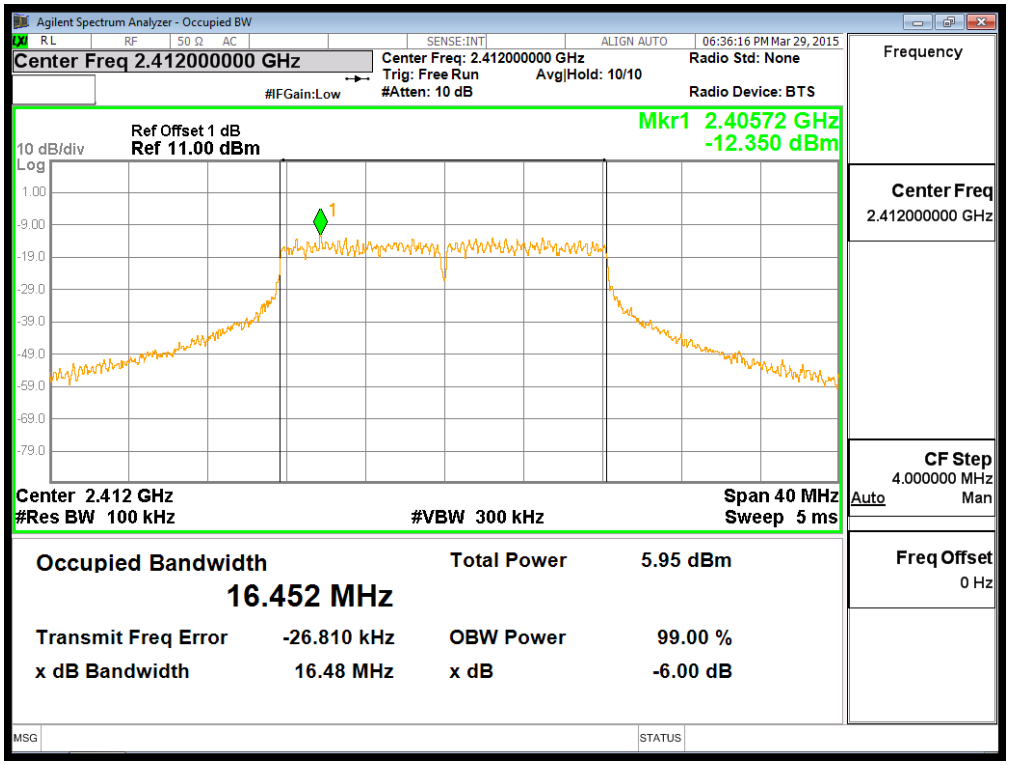

Channel 06 (2437MHz)

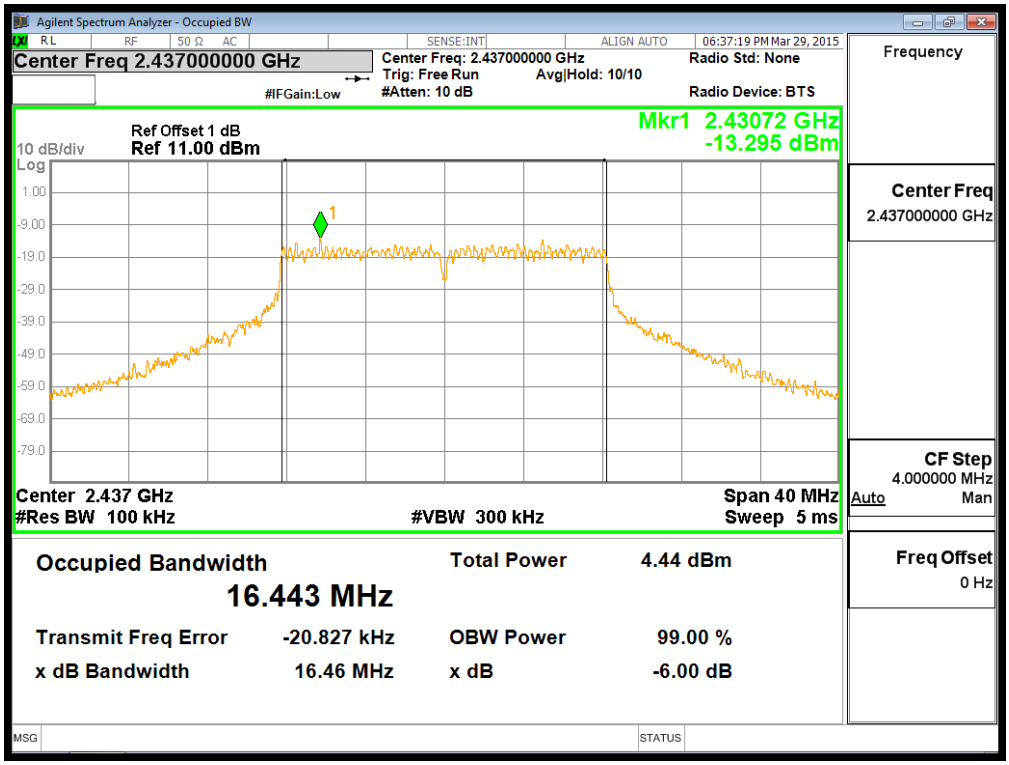

Channel 11 (2462MHz)

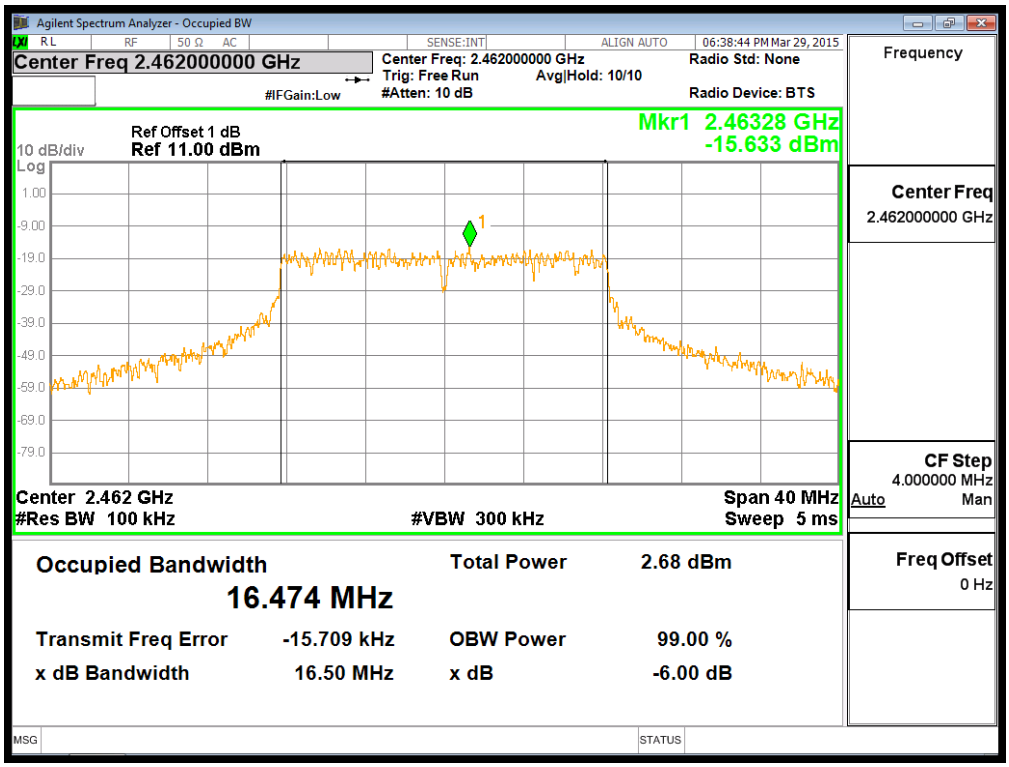

Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (20MHz)
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
01	2412	17750	500	Pass
06	2437	17660	500	Pass
11	2462	17700	500	Pass

Channel 01 (2412MHz)

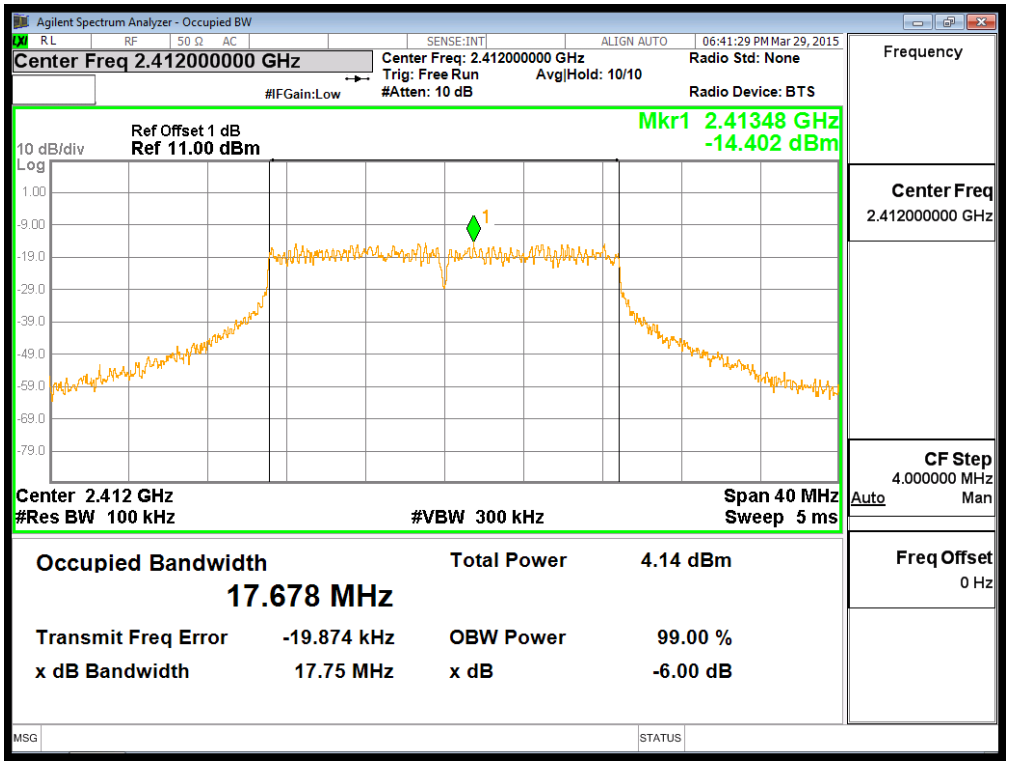

Channel 06 (2437MHz)

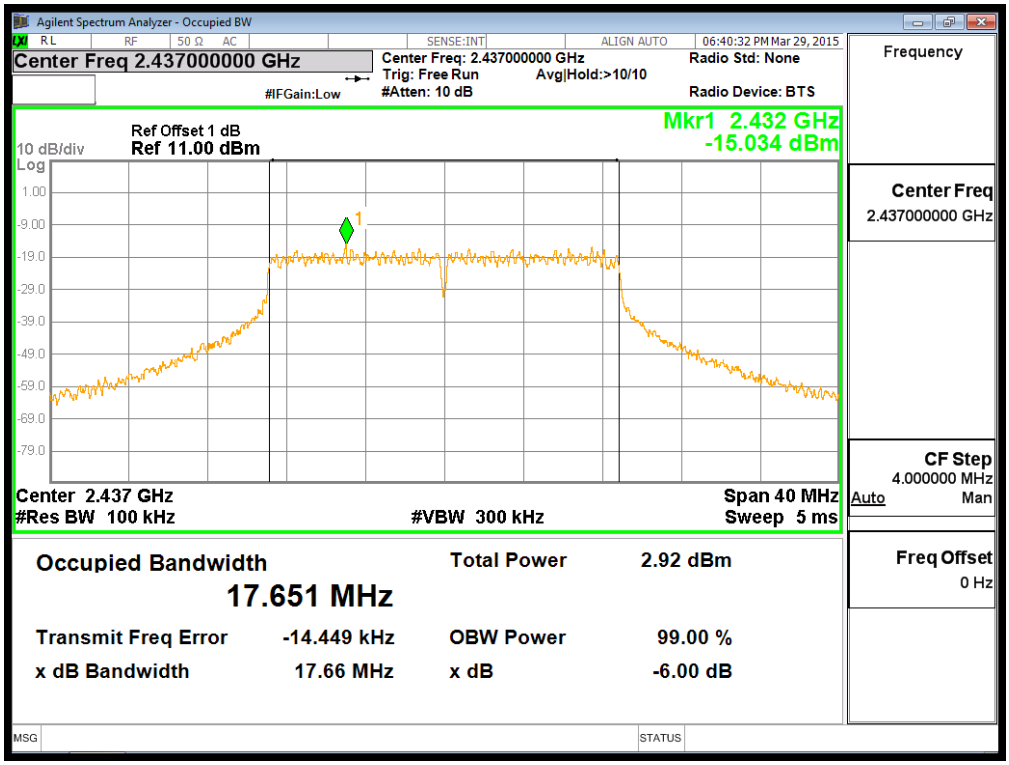

Channel 11 (2462MHz)

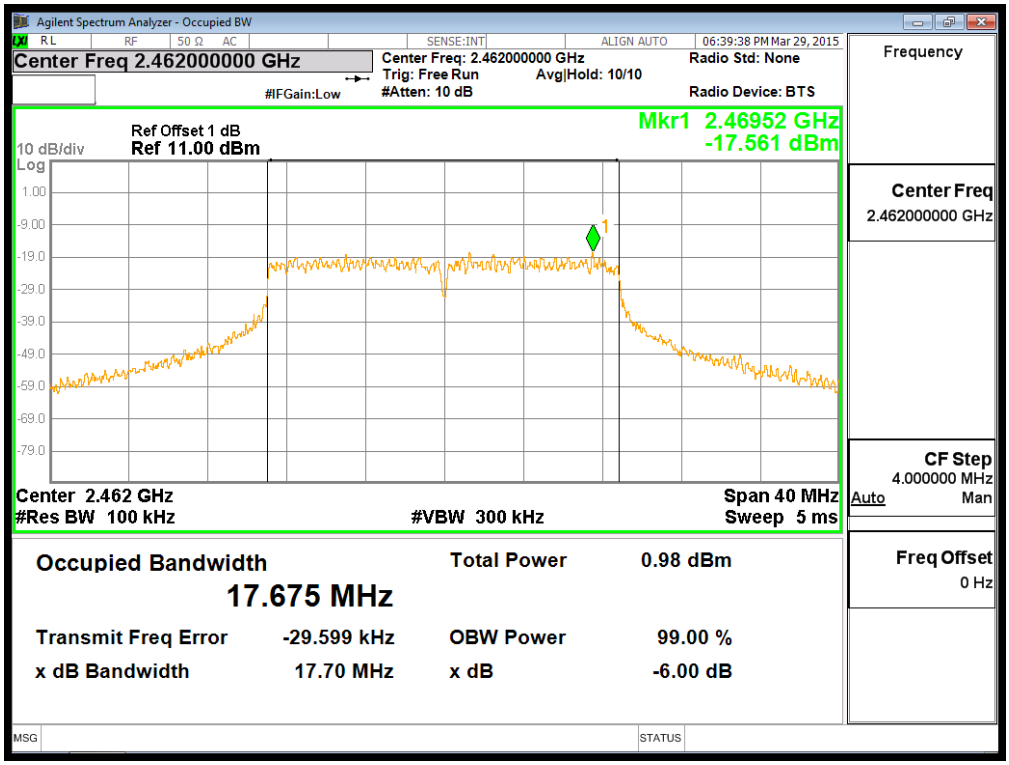

Test Item	Occupied Bandwidth
Test Mode	Transmit by 802.11n (40MHz)
Test Date	2015-4-17

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
03	2422	36480	500	Pass
06	2437	36430	500	Pass
09	2452	36510	500	Pass

Channel 3 (2422MHz)

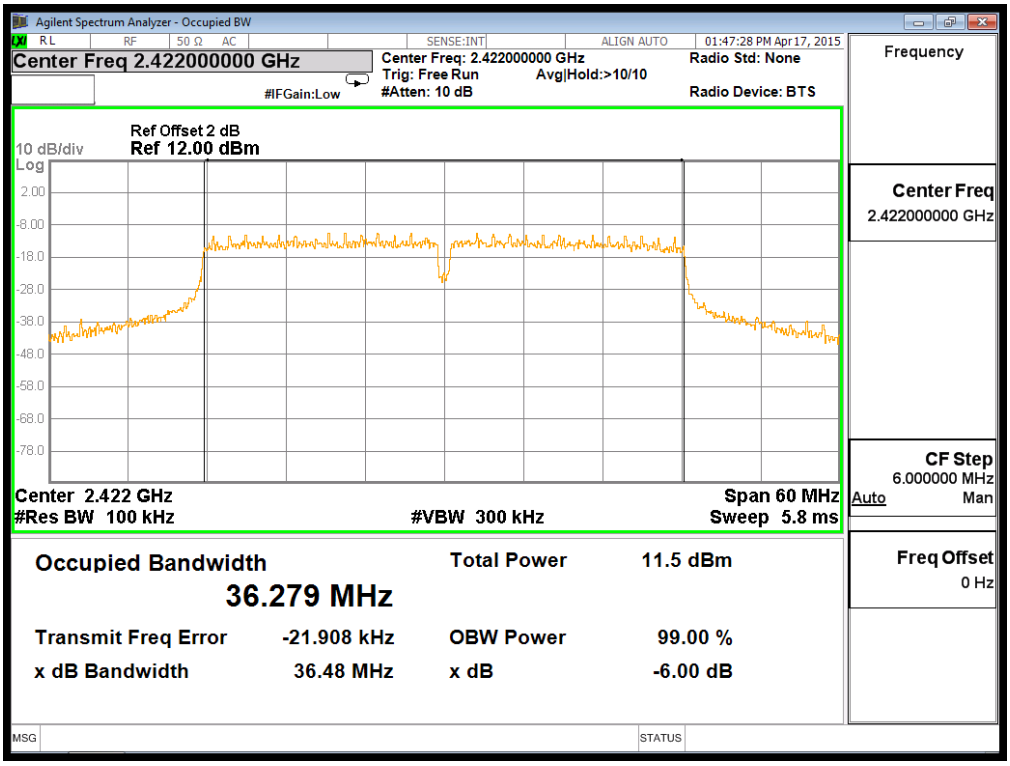

Channel 6 (2437MHz)

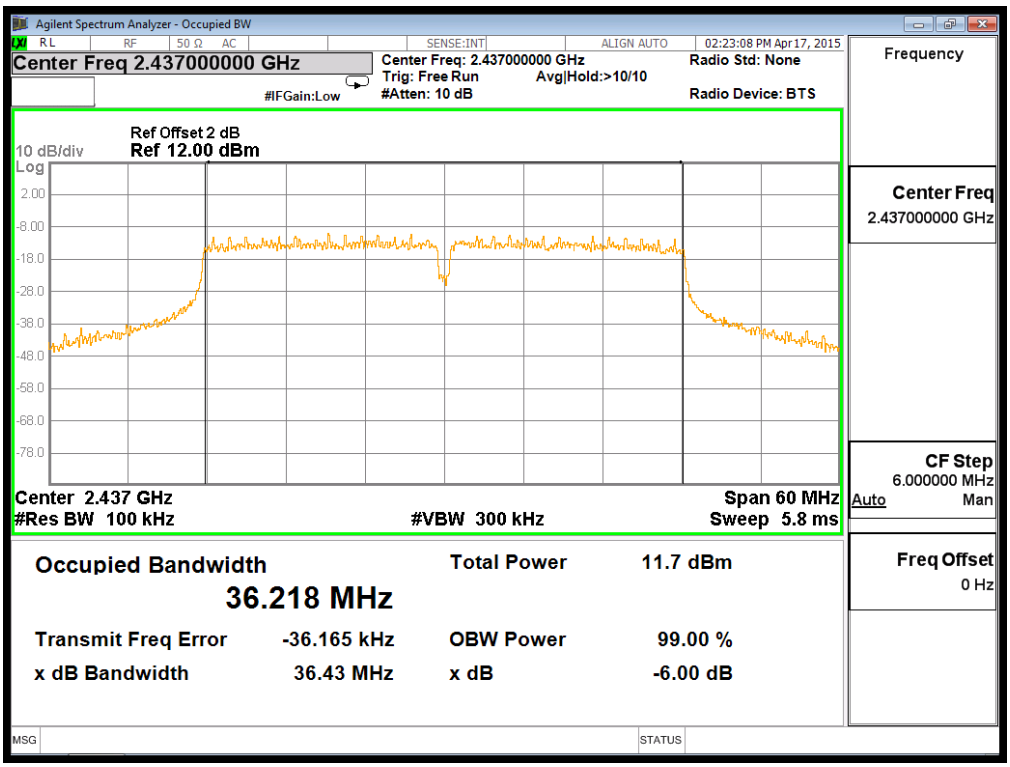

Channel 9 (2452MHz)

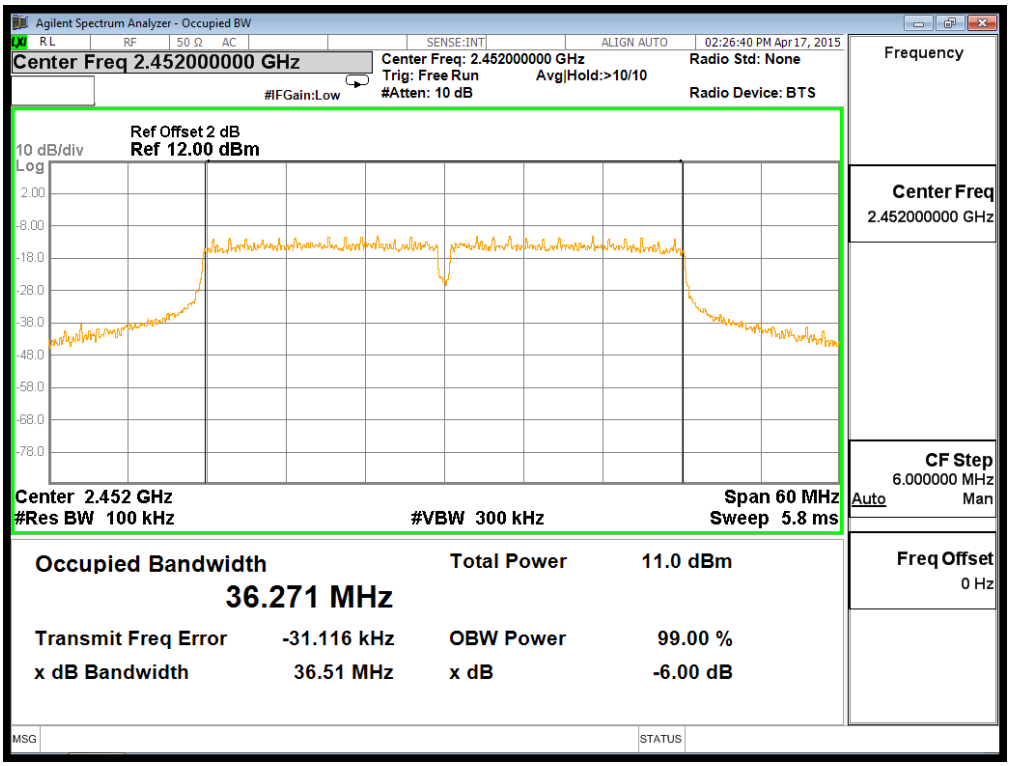

7. Maximum Peak Output Power

7.1 Test Limit

The maximum peak power shall be less 1Watt (30dBm).

The conducted output power limits specified in §15.247(b) are based on the use of transmit antennae with directional gains that do not exceed 6 dBi. If transmit antennae with an effective directional gain greater than 6 dBi are used, then the conducted output power from the EUT shall be reduced as specified in §15.247(b) and (c).

7.2 Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 Peak power meter method.

7.3 Test Setup Layout



7.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
SERIES POWER METER	ANRITSU	ML2495A	1224005	2015/03/27	2016/03/26
POWER SENSOR	ANRITSU	MA2411B	1207295	2015/03/27	2016/03/26

7.5 Test Result and Data

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (blue marker) for final test of each channel.

MCS Index for 802.11n	Spatial Streams	Data Rate(Mbps)					
		802.11b	802.11g	20MHz Bandwidth		40MHz Bandwidth	
				800ns GI	400ns GI	800ns GI	400ns GI
0	1	1	6	6.5	7.2	13.5	15.0
1	1	2	9	13.0	14.4	27.0	30.0
2	1	5.5	12	19.5	21.7	40.5	45.0
3	1	11	18	26.0	28.9	54.0	60.0
4	1	--	24	39.0	43.3	81.0	90.0
5	1	--	36	52.0	57.8	108.0	120.0
6	1	--	48	58.5	65.0	121.5	135.0
7	1	--	54	65.0	72.2	135.0	150.0
8	2	--	--	13.0	14.4	27.0	30.0
9	2	--	--	26.0	28.9	54.0	60.0
10	2	--	--	39.0	43.3	81.0	90.0
11	2	--	--	52.0	57.8	108.0	120.0
12	2	--	--	78.0	86.7	162.0	180.0
13	2	--	--	104.0	115.6	216.0	240.0
14	2	--	--	117.0	130.0	243.0	270.0
15	2	--	--	130.0	144.0	270.0	300.0

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11b
Duty cycle	99%
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	13.04	30	Pass
06	2437	11.98	30	Pass
11	2462	10.56	30	Pass

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11g
Duty cycle	99%
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	15.27	30	Pass
06	2437	14.30	30	Pass
11	2462	12.22	30	Pass

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11n (20MHz)
Duty cycle	99%
Test Date	2015-3-29

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	13.60	30	Pass
06	2437	12.49	30	Pass
11	2462	10.43	30	Pass

Test Item	Maximum Peak Output Power
Test Mode	Transmit by 802.11n (40MHz)
Duty cycle	99%
Test Date	2015-4-17

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit (dBm)	Result
		Peak		
01	2412	11.14	30	Pass
06	2437	11.21	30	Pass
11	2462	10.61	30	Pass

8. Band Edges Measurement

8.1 Test Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

8.2 Test Procedure

a. The transmitter output was connected to the spectrum analyzer via a low lose cable.
b. Set RBW of spectrum analyzer to 100 KHz and VBW of spectrum analyzer to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
c. The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	N9010A	Agilent	MY51350515	2014.11.03	2015.11.03

8.5 Test Result and Data

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value(dBm)	Limit (dBm)
802.11b	01	2412	2397.00	-40.161	-13.60
	11	2462	2483.50	-52.425	-18.70
802.11g	01	2412	2400.00	-28.739	-20.79
	11	2462	2483.50	-55.121	-25.80
802.11n HT20	01	2412	2400.00	-44.014	-31.50
	11	2462	2483.50	-59.523	-30.30
802.11n HT40	03	2422	2496.5	-44.660	-11.03
	09	2452	2484.5	-40.251	-11.83

Transmit by 802.11b Channel 1

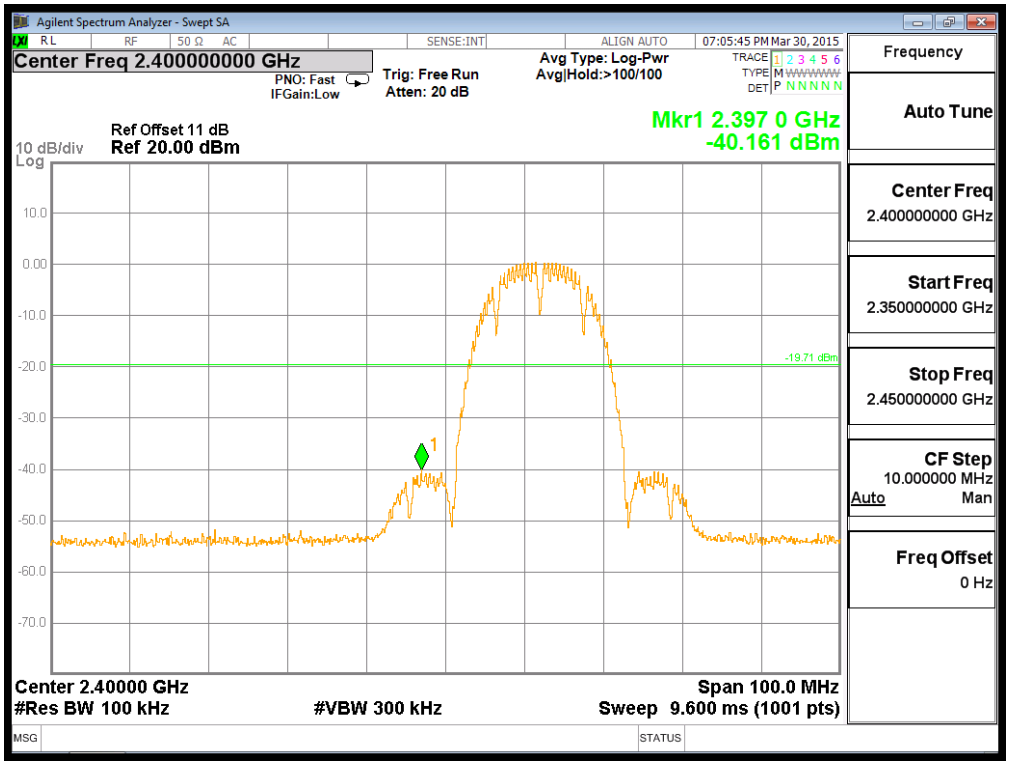

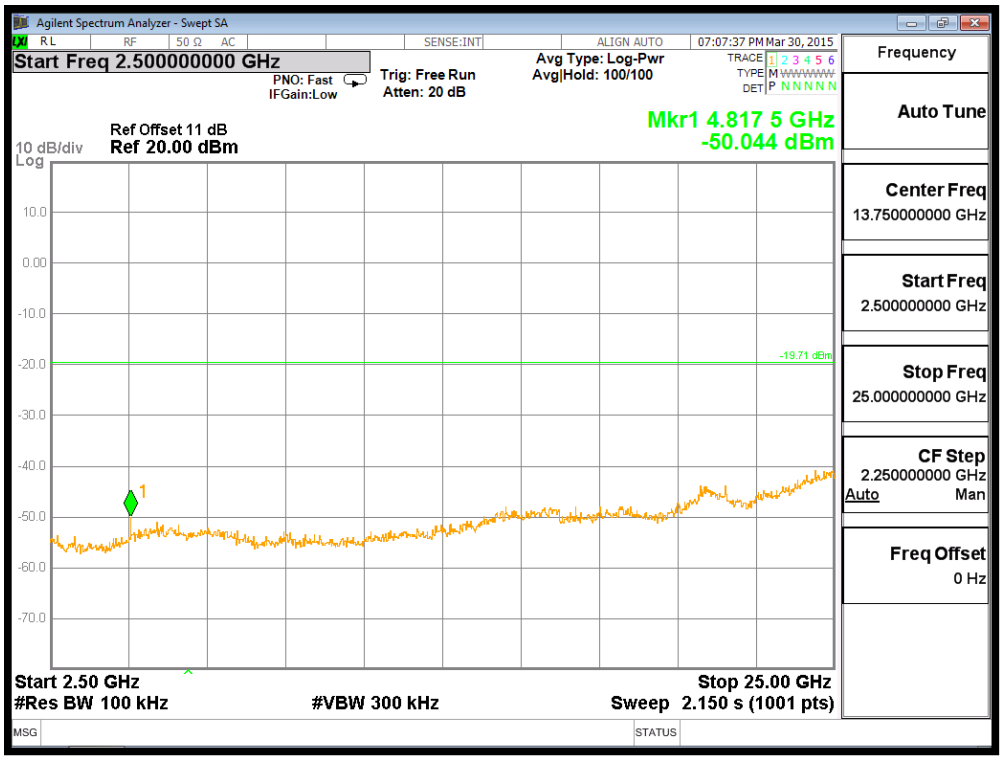

Transmit by 802.11b Channel 11

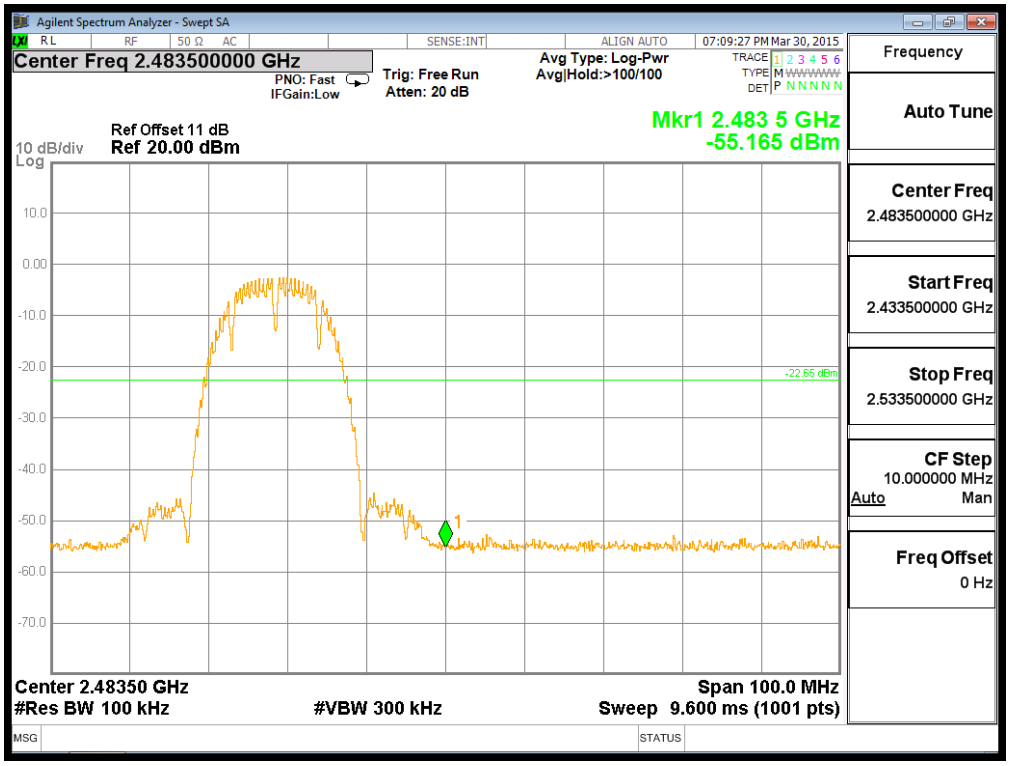

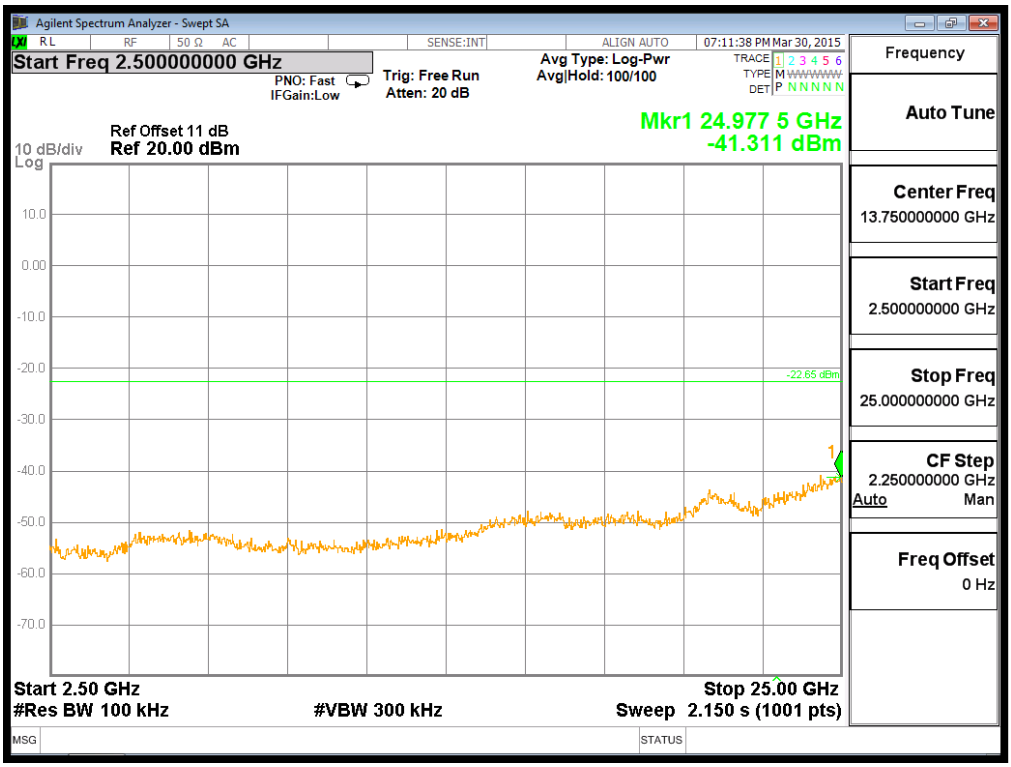

Transmit by 802.11g Channel 1

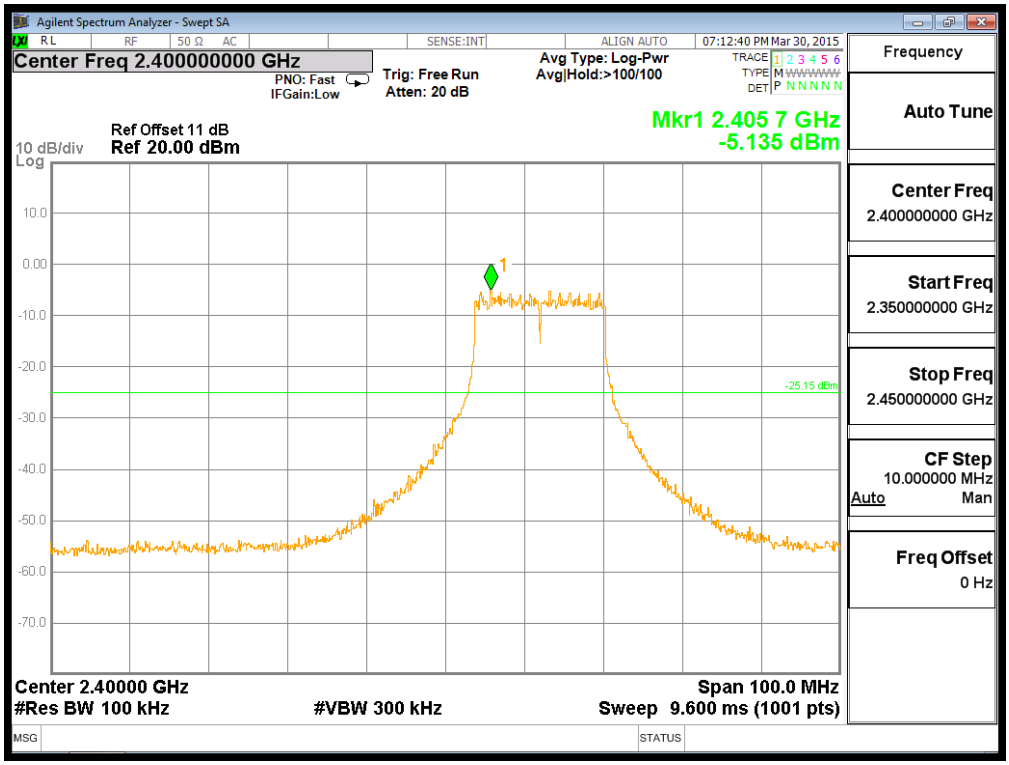

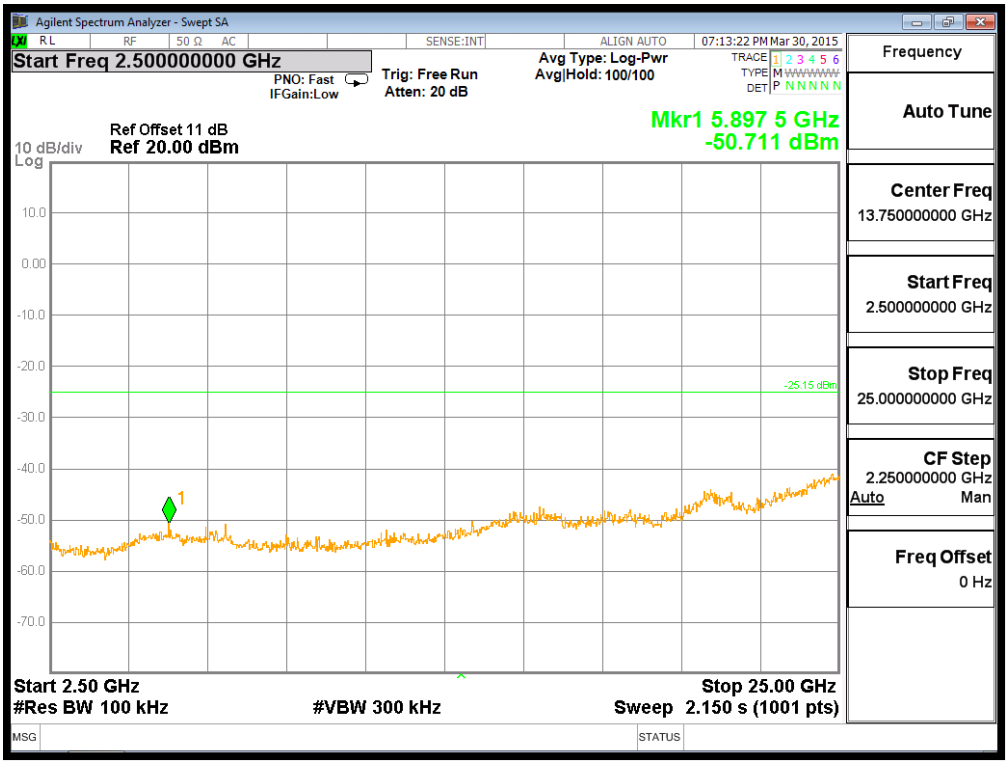

Transmit by 802.11g Channel 11

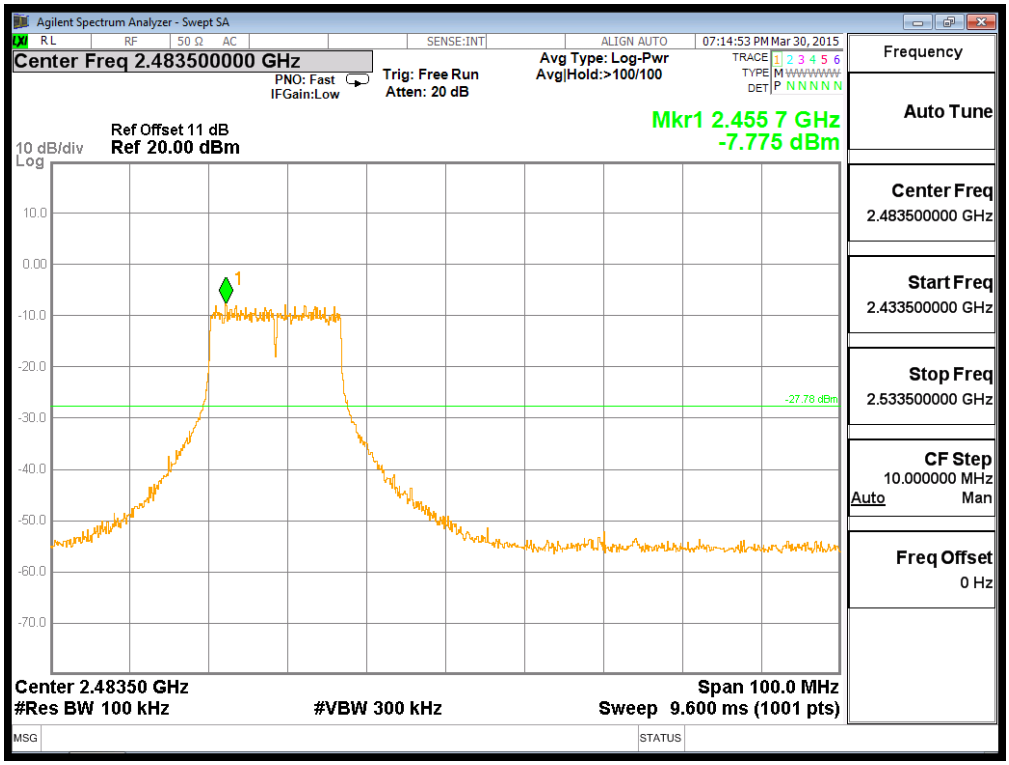

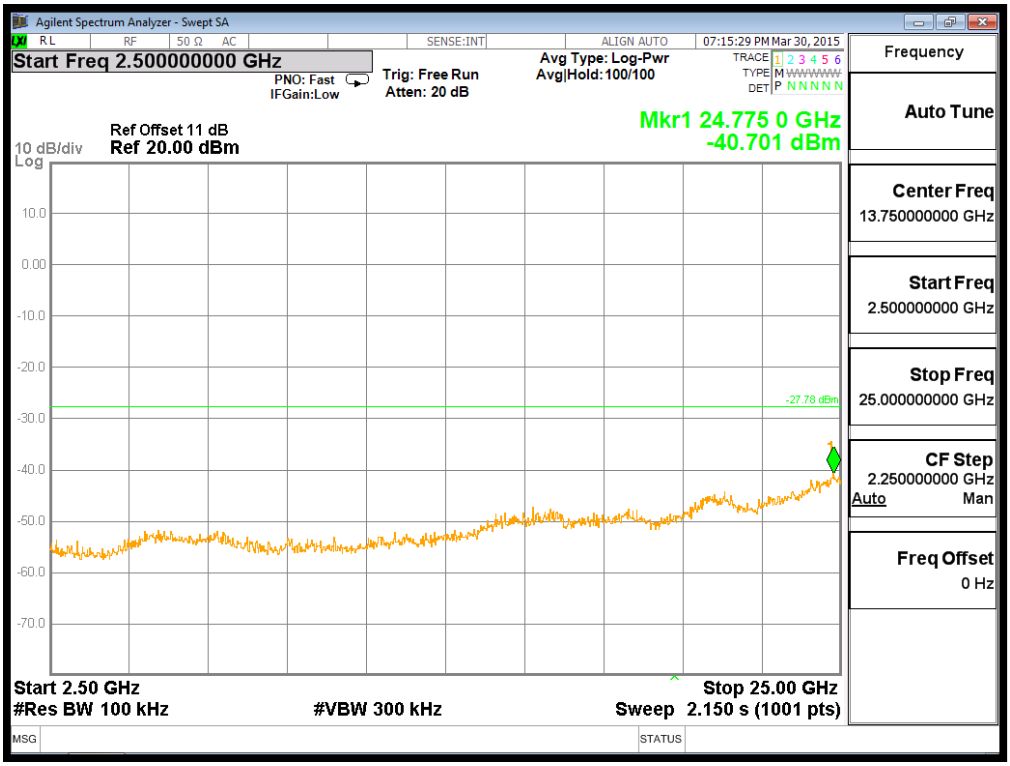

Transmit by 802.11n HT20 Channel 1

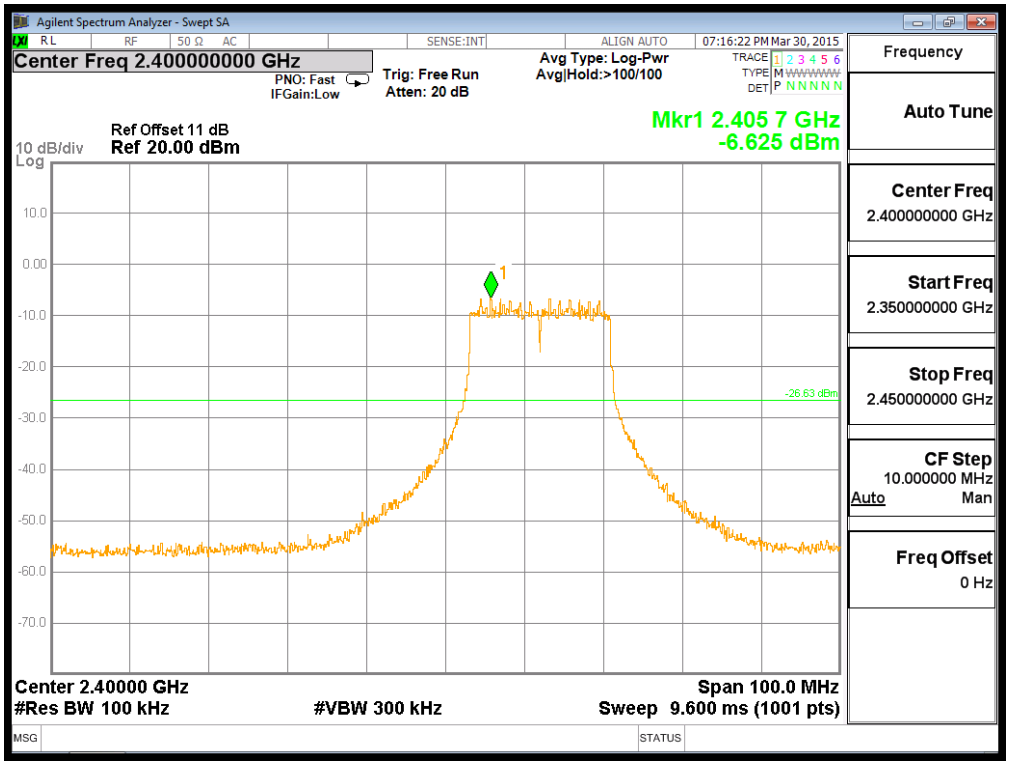

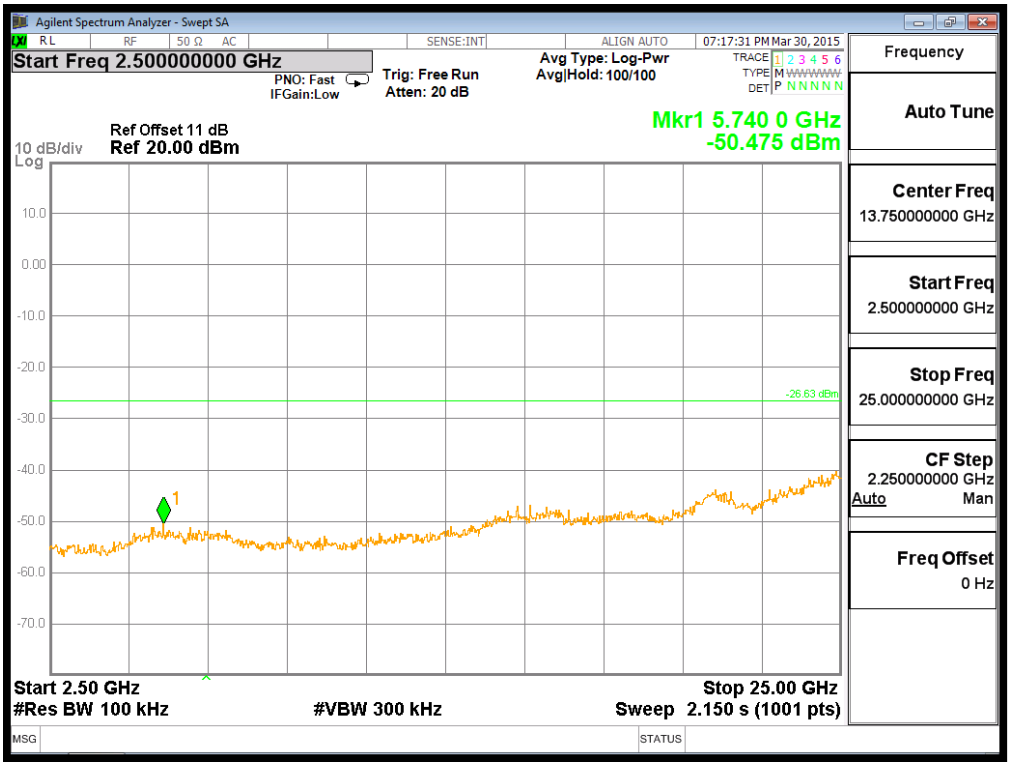

Transmit by 802.11n HT20 Channel 11

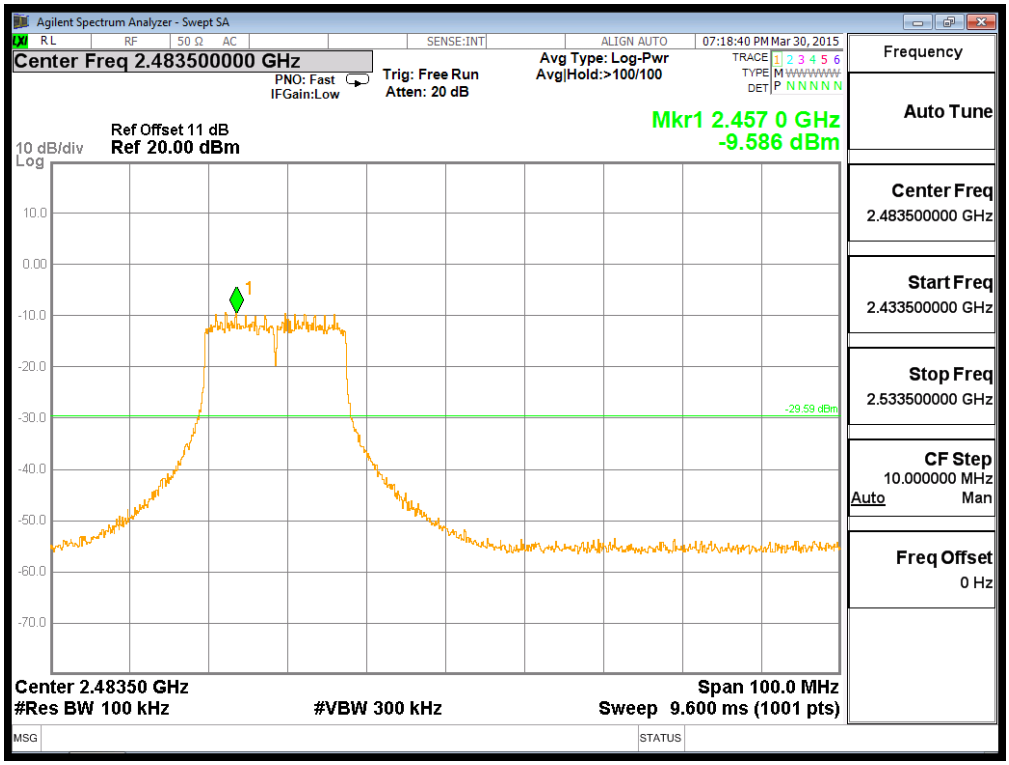

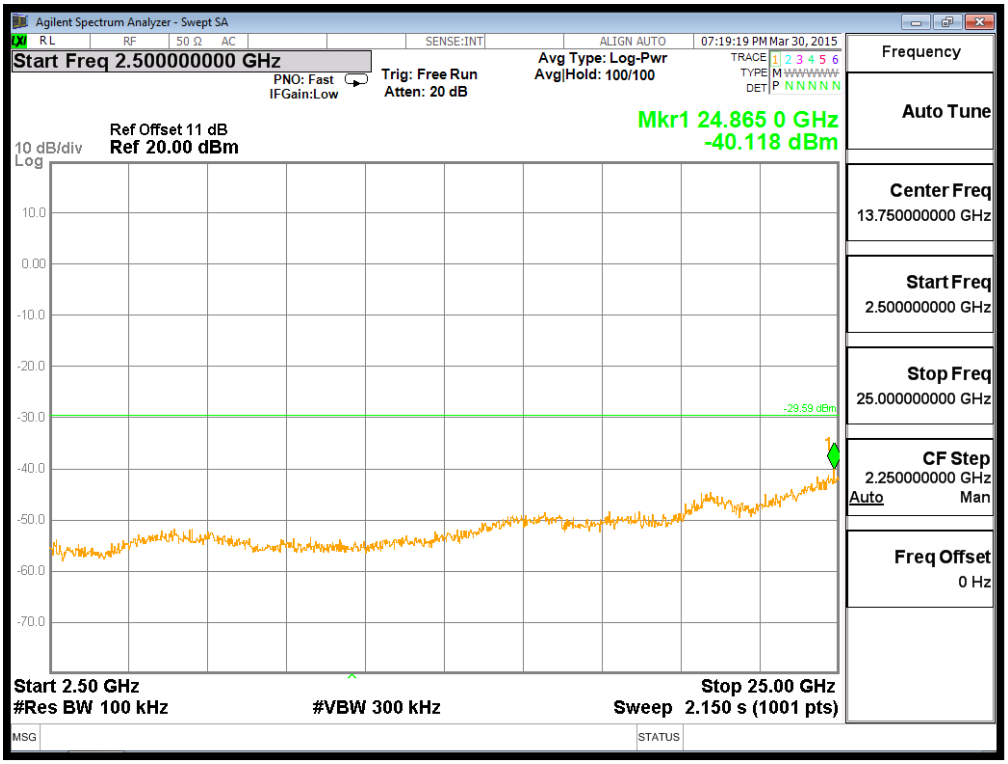

Transmit by 802.11n HT40 Channel 3

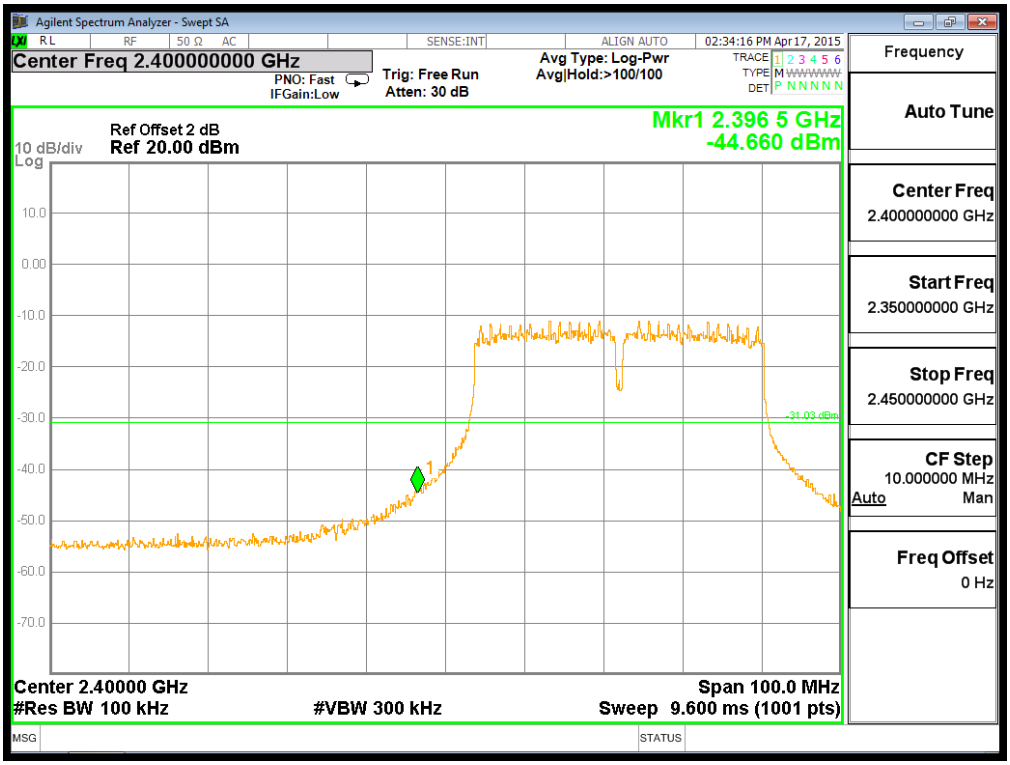

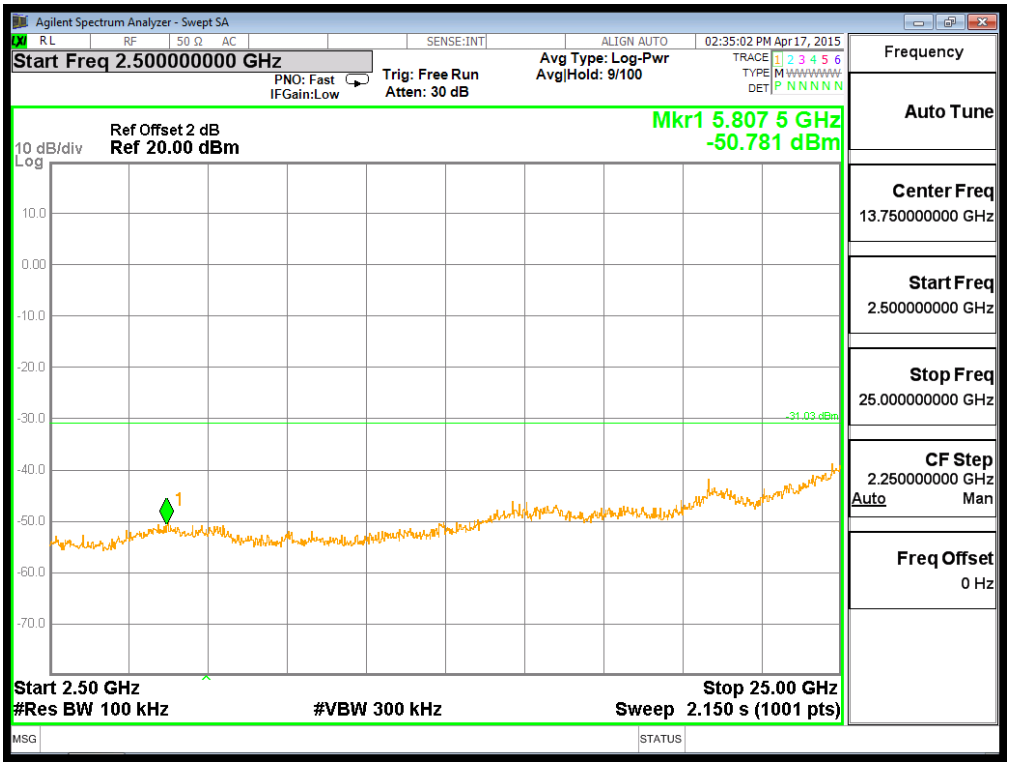

Transmit by 802.11n HT40 Channel 9

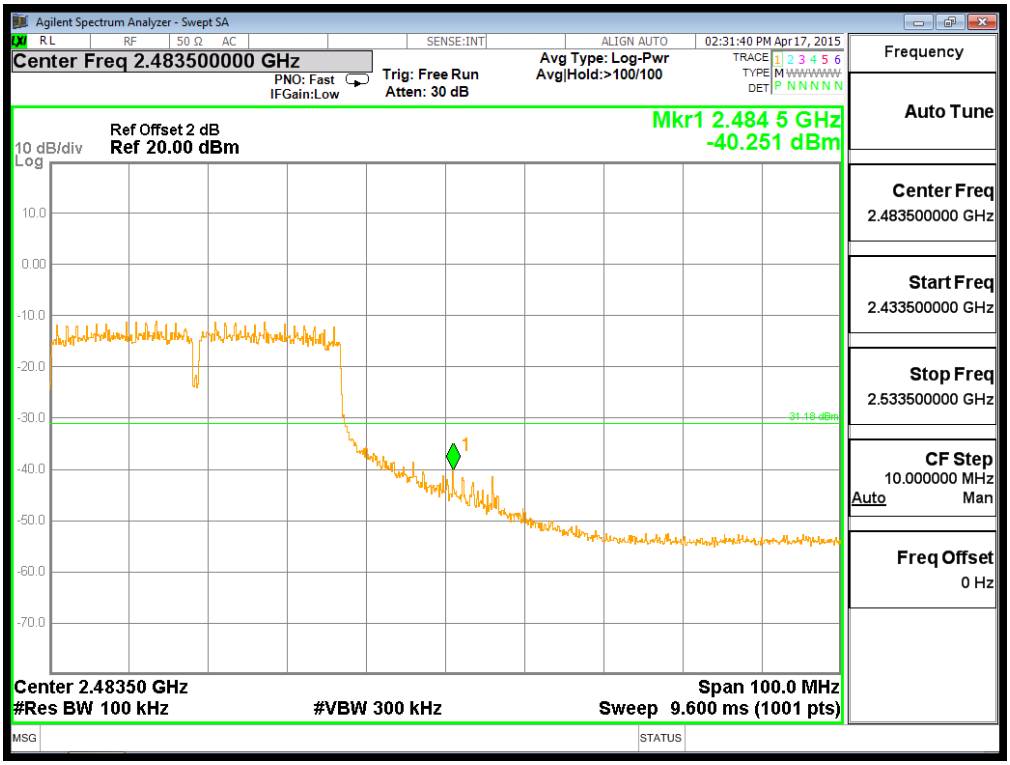

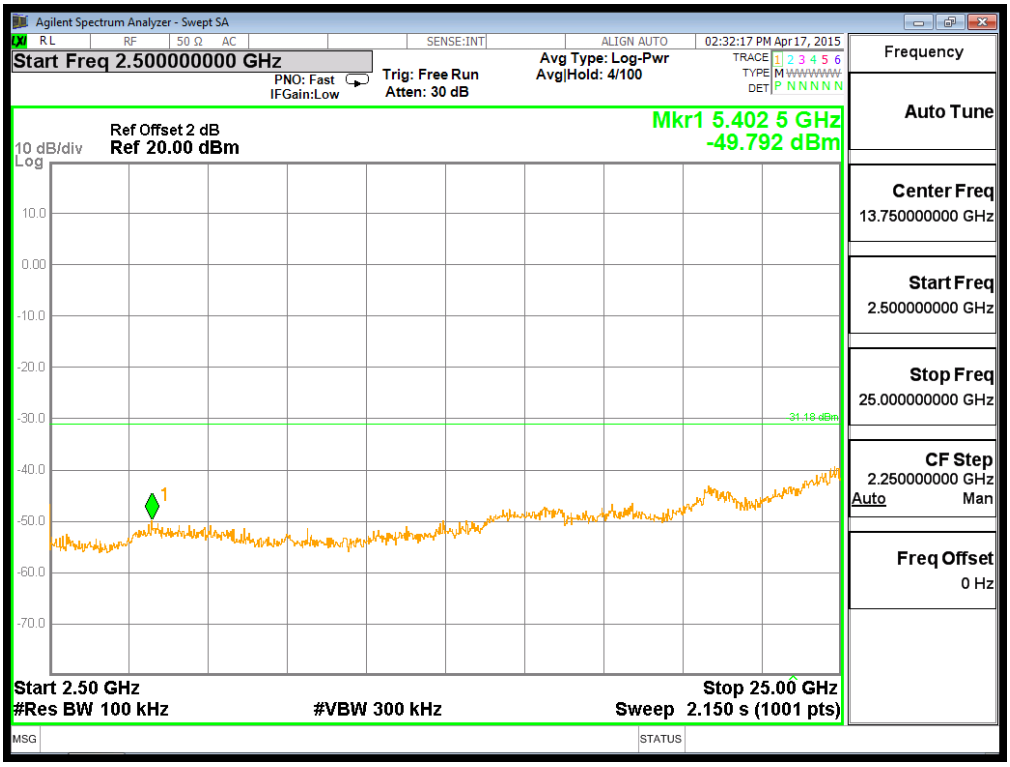

Restrict Band Emission Measurement Data

Test Date : 2015-3-29
Temperature : 24 ℃
Humidity : 52 %
Atmospheric Pressure : 1023 hPa

Modulation Standard: IEEE 802.11b

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390.000	-4.11	34.30	30.19	74.00	-43.81	peak	H
2	2390.000	-4.11	28.46	24.35	54.00	-29.65	AVG	H
1	2390.000	-4.11	33.84	29.73	74.00	-44.27	peak	V
2	2390.000	-4.11	26.52	22.41	54.00	-31.59	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.500	-3.52	36.38	32.86	74.00	-41.14	peak	H
2	2483.500	-3.52	25.62	22.10	54.00	-31.90	AVG	H
1	2483.500	-3.52	33.88	30.36	74.00	-43.64	peak	V
2	2483.500	-3.52	23.06	19.54	54.00	-34.46	AVG	V

Modulation Standard: IEEE 802.11g

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390.000	-4.11	37.21	33.10	74.00	-40.90	peak	H
2	2390.000	-4.11	28.21	24.10	54.00	-29.90	AVG	H
1	2390.000	-4.11	37.55	33.44	74.00	-40.56	peak	V
2	2390.000	-4.11	28.41	24.30	54.00	-29.70	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.500	-3.52	40.01	36.49	74.00	-37.51	peak	H
2	2483.500	-3.52	28.39	24.87	54.00	-29.13	AVG	H
1	2483.500	-3.52	35.75	32.23	74.00	-41.77	peak	V
2	2483.500	-3.52	29.36	25.84	54.00	-28.16	AVG	V

Modulation Standard: IEEE 802.11n HT20

Channel 1

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390.000	-4.11	38.87	34.76	74.00	-39.24	peak	H
2	2390.000	-4.11	27.79	23.68	54.00	-30.32	AVG	H
1	2390.000	-4.11	40.07	35.96	74.00	-38.04	peak	V
2	2390.000	-4.11	28.68	24.57	54.00	-29.43	AVG	V

Channel 11

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.500	-3.52	38.90	35.38	74.00	-38.62	peak	H
2	2483.500	-3.52	28.36	24.84	54.00	-29.16	AVG	H
3	2483.500	-3.52	36.49	32.97	74.00	-41.03	peak	V
4	2483.500	-3.52	28.88	25.36	54.00	-28.64	AVG	V

Modulation Standard: IEEE 802.11n HT40

Channel 3

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2390.000	-4.11	36.32	32.21	74.00	-41.79	peak	H
2	2390.000	-4.11	25.36	21.25	54.00	-32.75	AVG	H
1	2390.000	-4.11	39.06	34.95	74.00	-39.05	peak	V
2	2390.000	-4.11	25.32	21.21	54.00	-32.79	AVG	V

Channel 9

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	AntPol. H/V
1	2483.500	-3.52	36.88	33.36	74.00	-40.64	peak	H
2	2483.500	-3.52	23.75	20.23	54.00	-33.77	AVG	H
3	2483.500	-3.52	37.65	34.13	74.00	-39.87	peak	V
4	2483.500	-3.52	25.64	22.12	54.00	-31.88	AVG	V

Notes:1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.

9. Power Spectral Density

9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedure

a) Set instrument center frequency to DTS channel center frequency.

b) Set span to at least 1.5 times the OBW.

c) Set RBW to: 3 kHz ≤ RBW ≤ 100 kHz. .

d) Set VBW ≥3 x RBW.

e) Detector = power averaging (RMS) or sample detector (when RMS not available).

f) Ensure that the number of measurement points in the sweep ≥ 2 x span/RBW.

g) Sweep time = auto couple.

h) Employ trace averaging (RMS) mode over a minimum of 100 traces.

i) Use the peak marker function to determine the maximum amplitude level.

j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

9.3 Test Setup Layout



9.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	N9010A	Agilent	MY51350515	2014.11.03	2015.11.03

9.5 Test Result and Data

Test Item	Power Spectral Density
Test Mode	Transmit by 802.11b
Test Date	2015-3-29

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-12.956	8	Pass
06	2437	-15.686	8	Pass
11	2462	-16.310	8	Pass

Channel 01 (2412MHz)

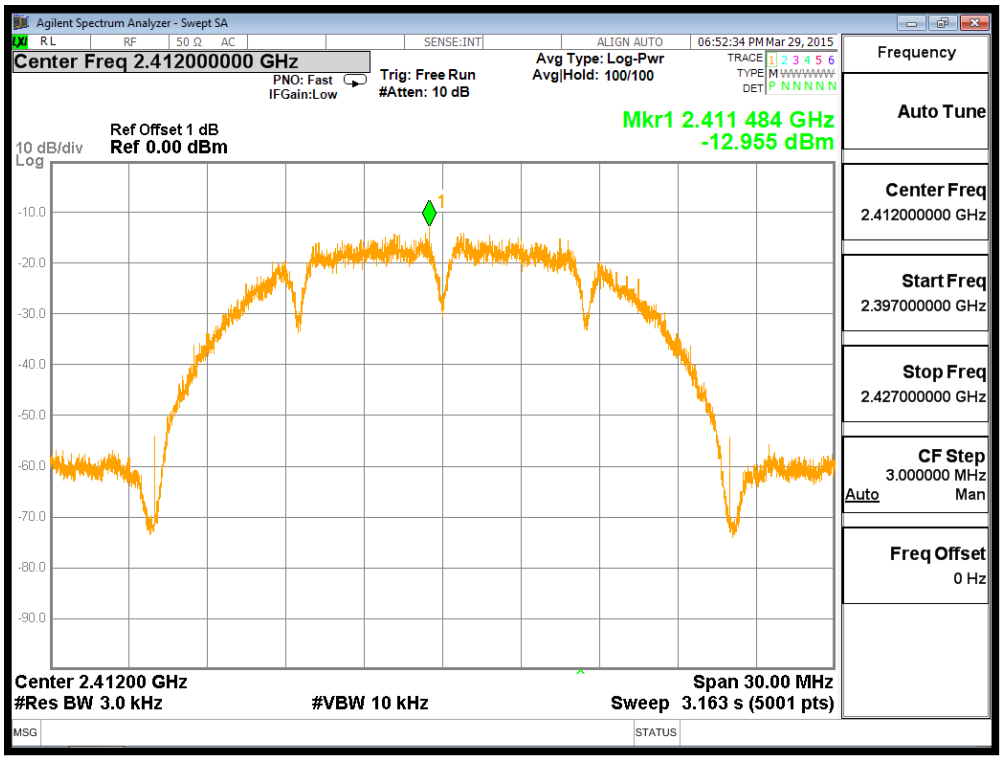

Channel 06 (2437MHz)

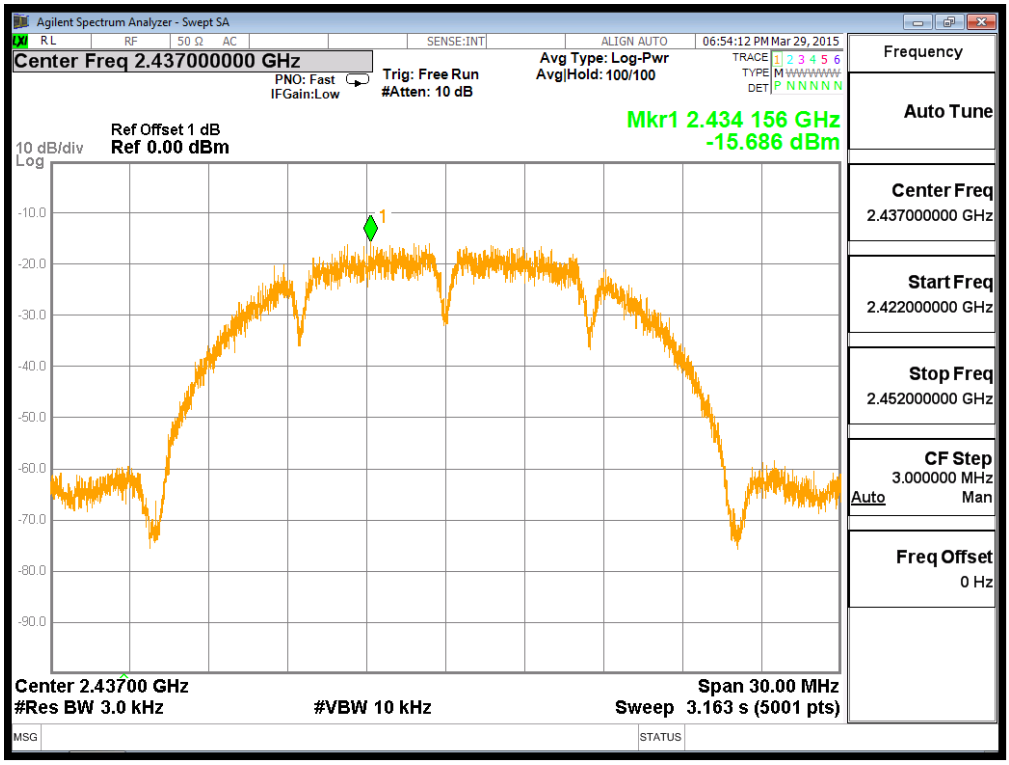

Channel 11 (2462MHz)

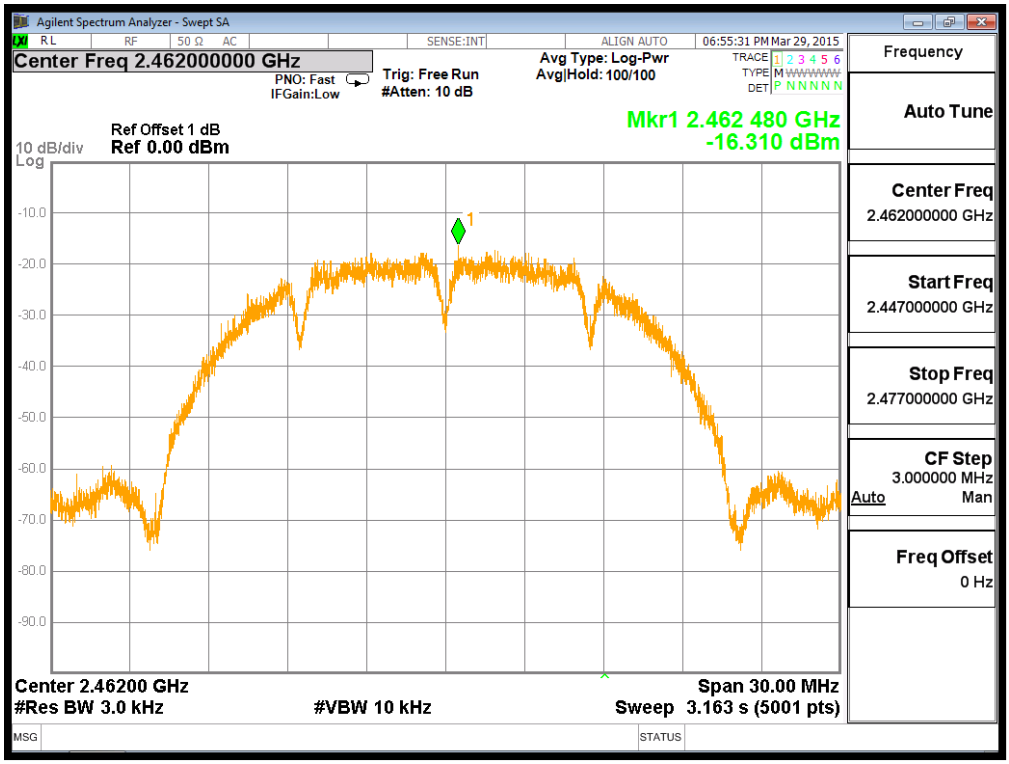

Test Item	Power Spectral Density
Test Mode	Transmit by 802.11g
Test Date	2015-3-29

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-18.840	8	Pass
06	2437	-21.203	8	Pass
11	2462	-23.203	8	Pass

Channel 01 (2412MHz)

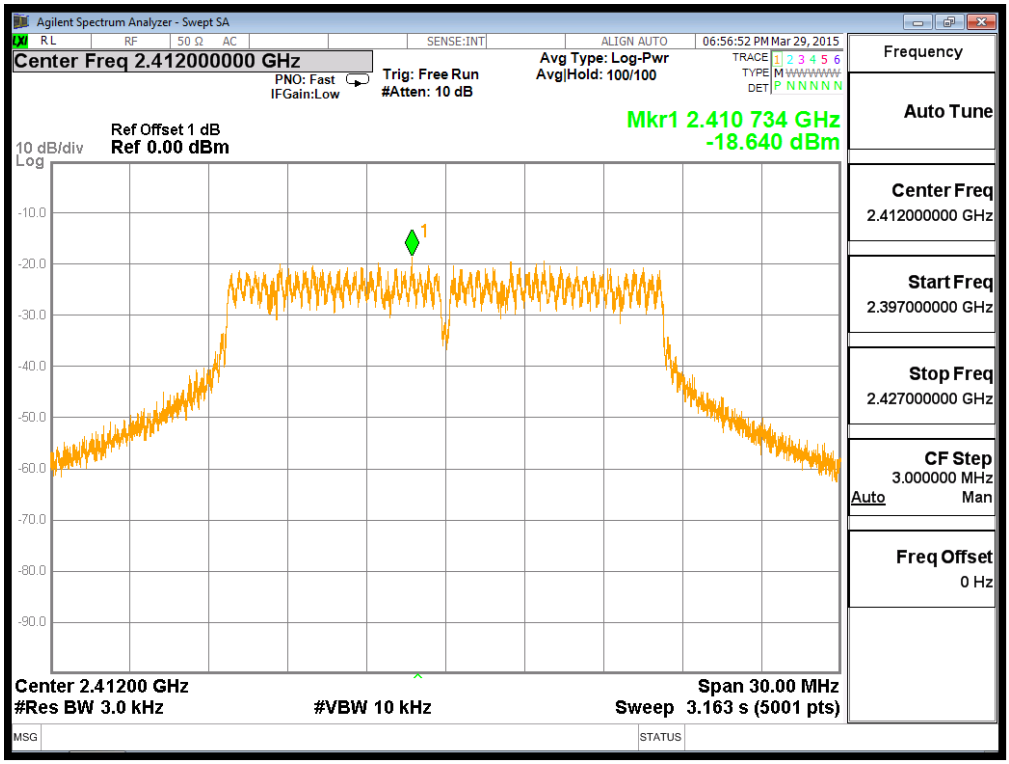

Channel 06 (2437MHz)

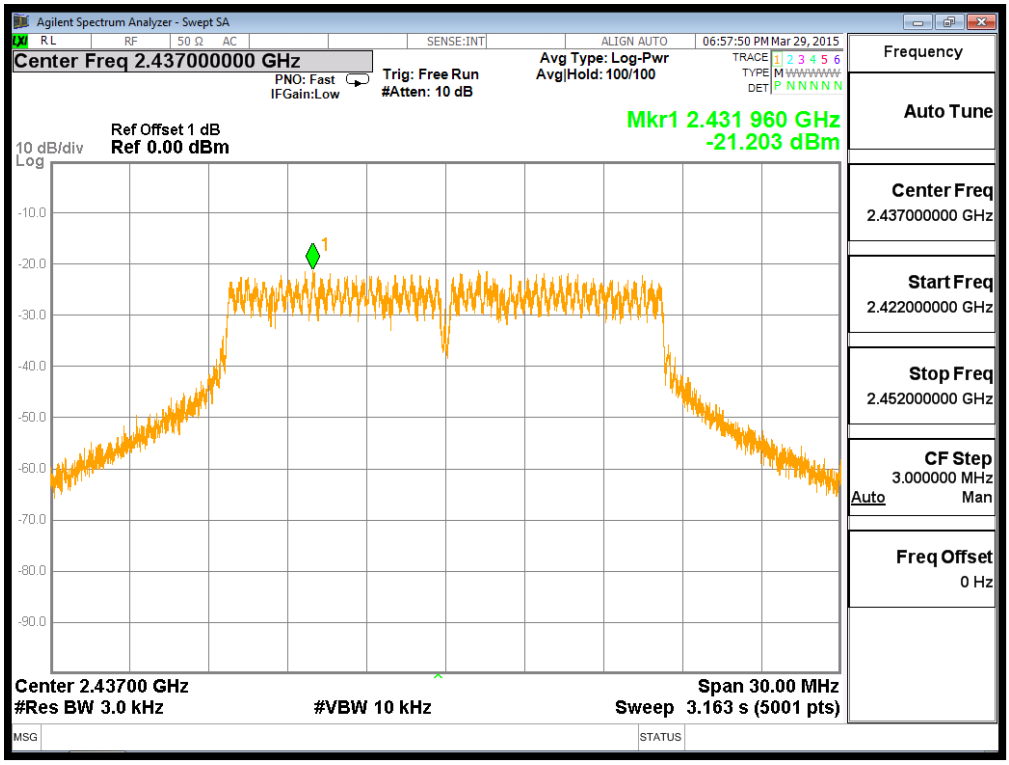

Channel 11 (2462MHz)

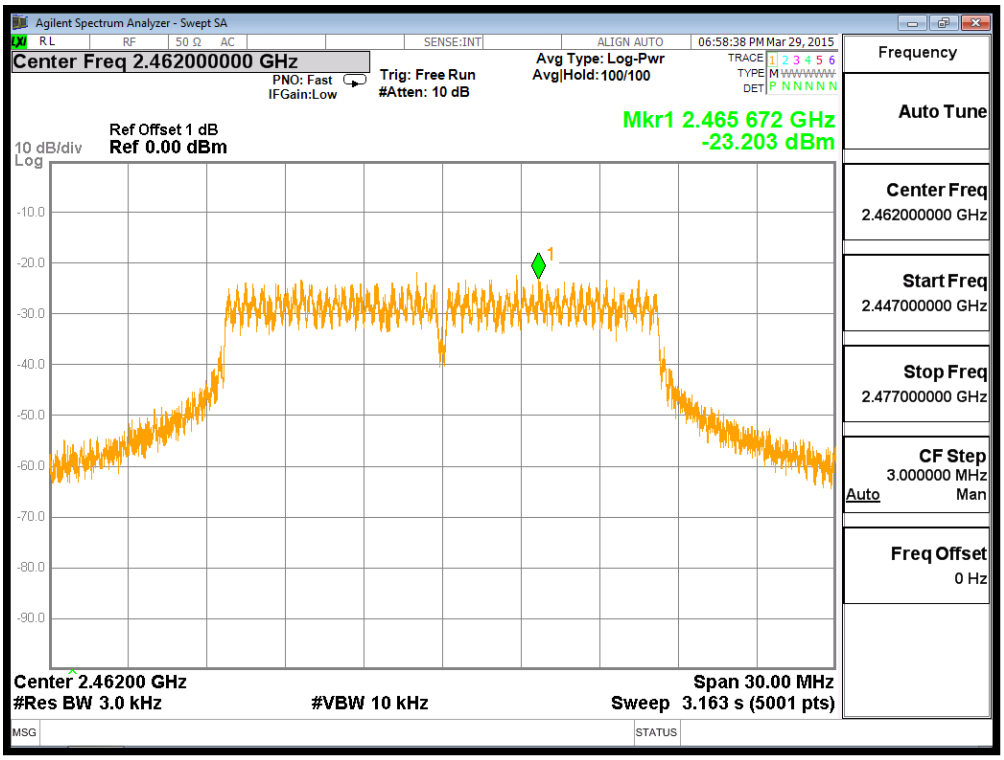

Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n (20MHz)
Test Date	2015-3-29

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
01	2412	-21.206	8	Pass
06	2437	-22.744	8	Pass
11	2462	-23.328	8	Pass

Channel 01 (2412MHz)

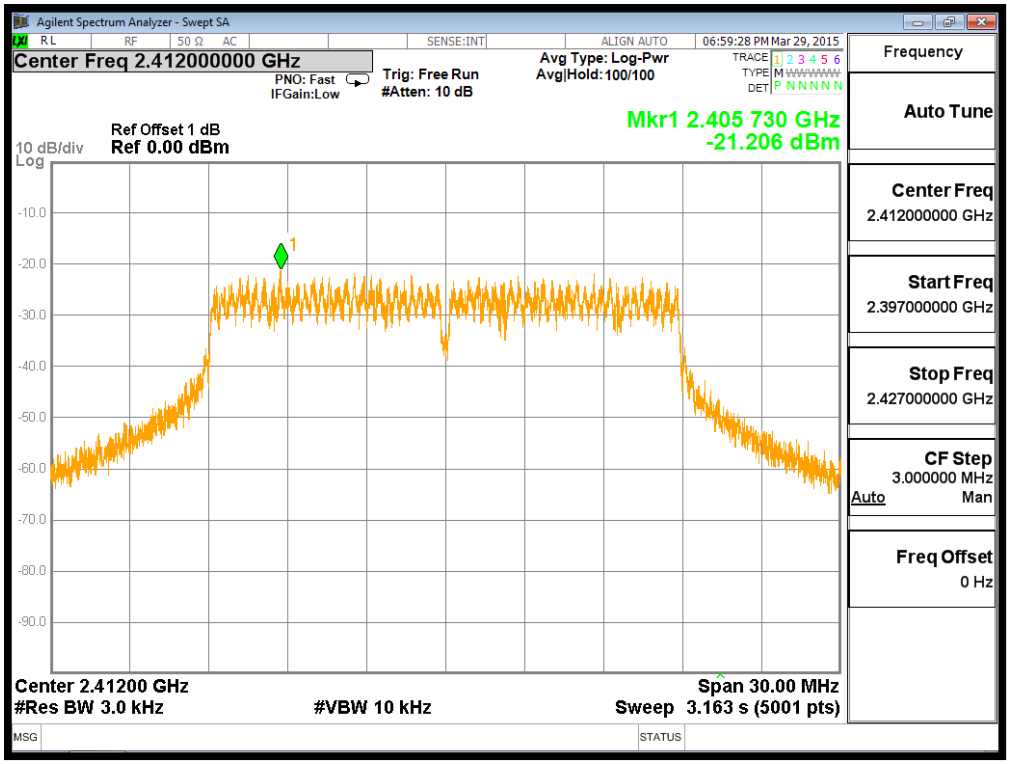

Channel 06 (2437MHz)

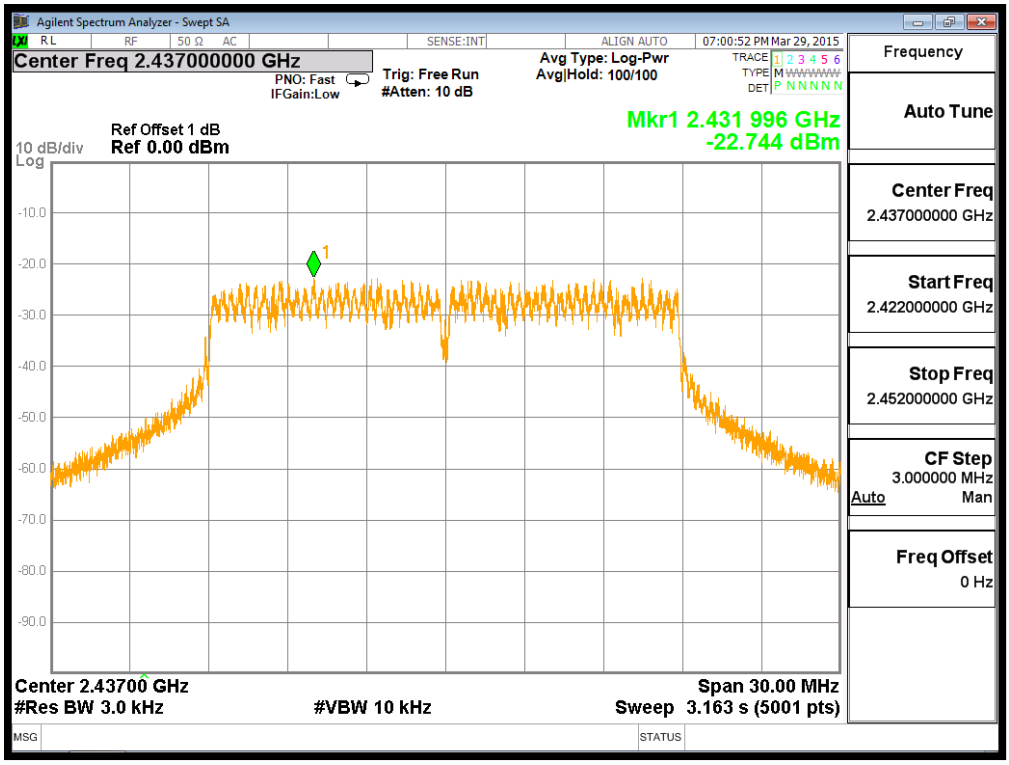

Channel 11 (2462MHz)

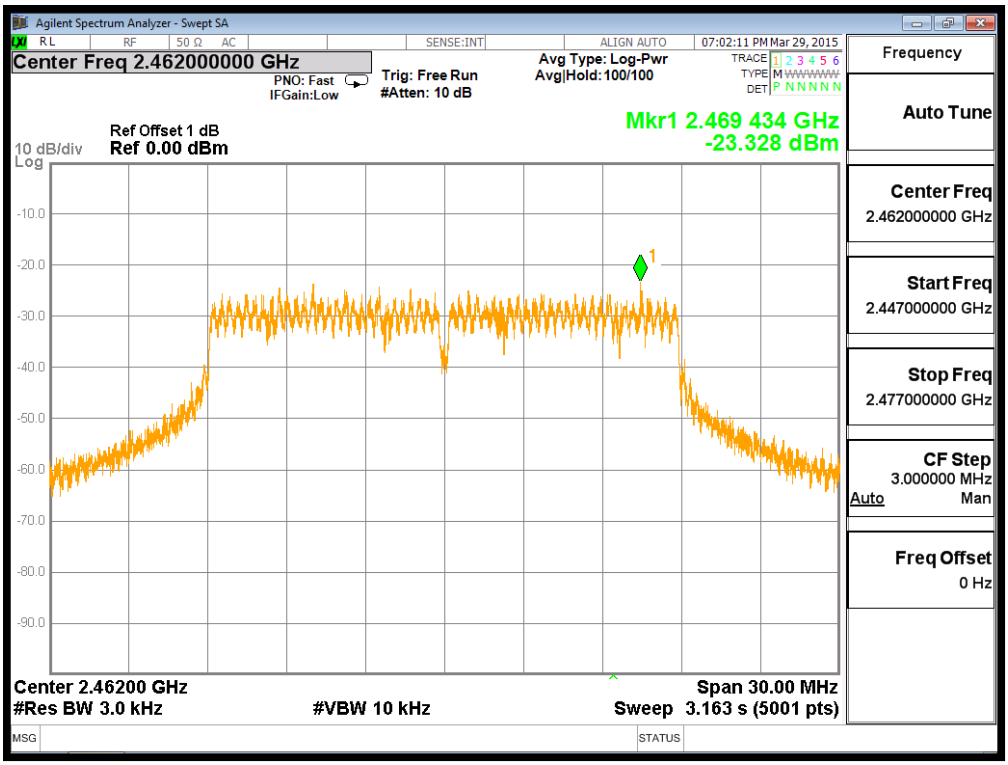

Test Item	Power Spectral Density
Test Mode	Transmit by 802.11n (40MHz)
Test Date	2015-4-16

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
03	2422	-25.360	8	Pass
06	2437	-26.238	8	Pass
09	2452	-25.790	8	Pass

Channel 03 (2422MHz)

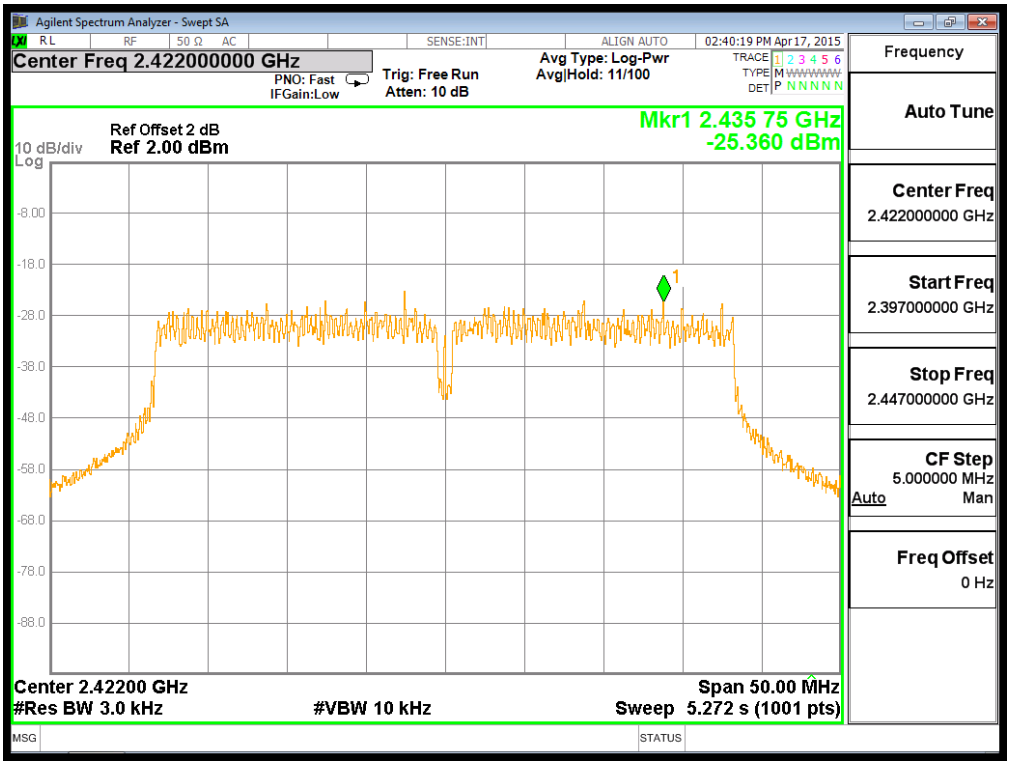

Channel 06 (2437MHz)

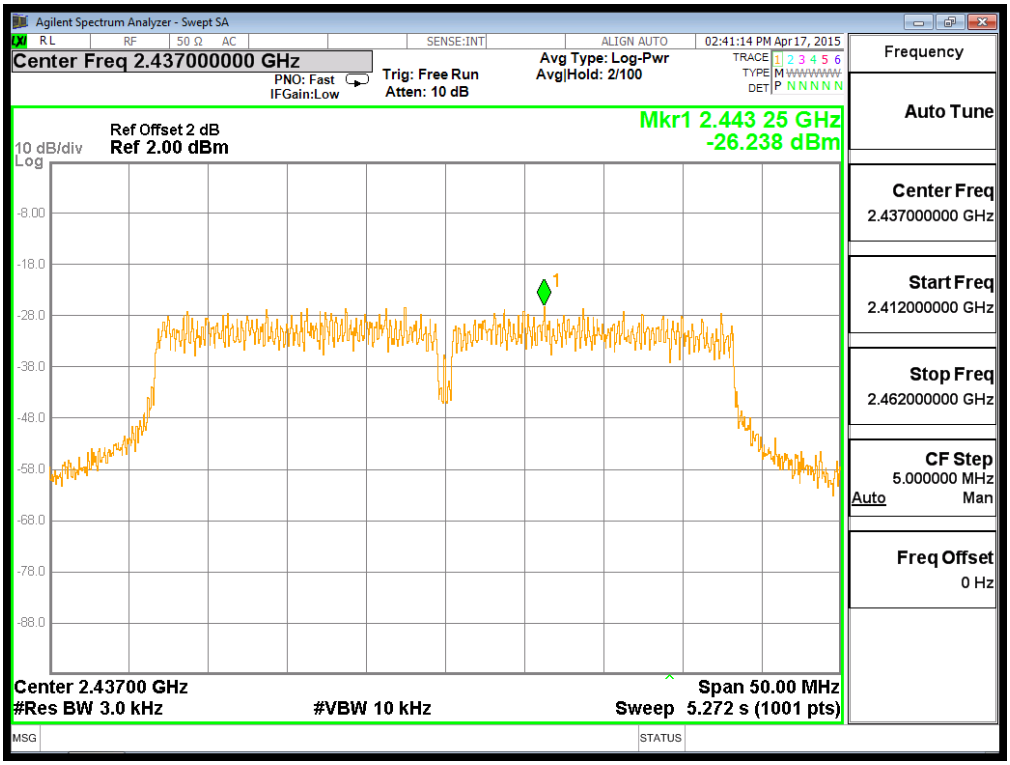

Channel 9 (2452MHz)

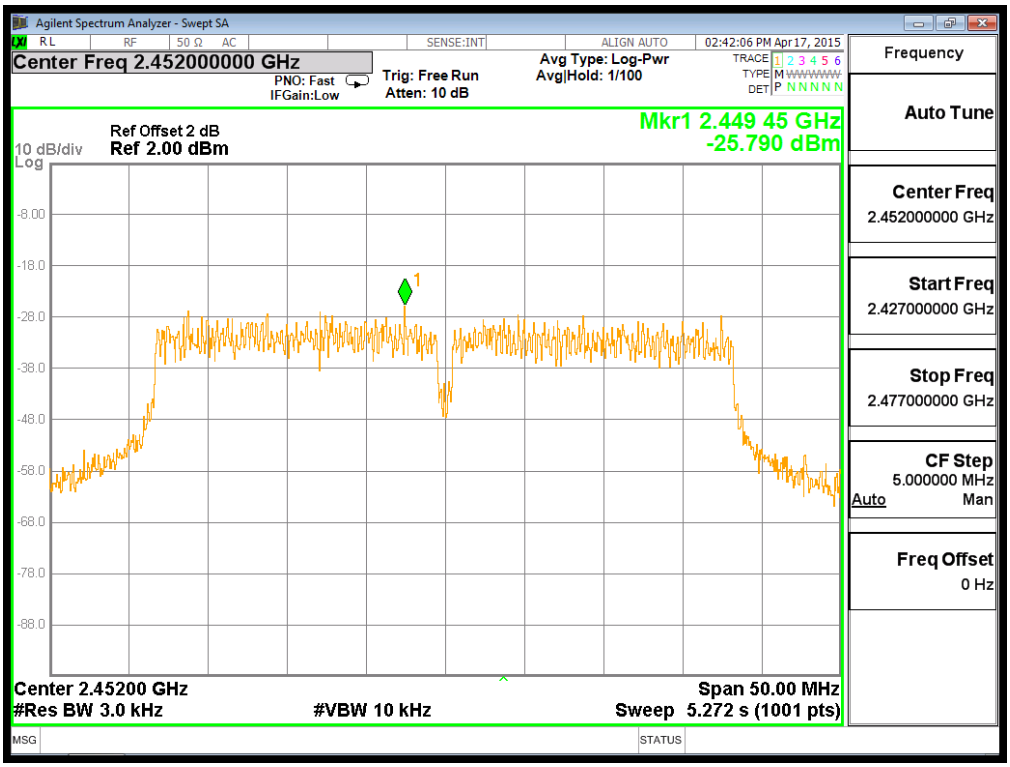

10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

**: Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.