



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

NAVIGATOR X650

MODEL NUMBER: DHI-UAV-Aircraft-X650

FCC ID: SVNX650

REPORT NUMBER: 4788510931-8

ISSUE DATE: July 26, 2018

Prepared for

**Zhejiang Dahua Vision Technology Co., Ltd.
No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park,
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Tel: +86 769 33817100
Fax: +86 769 33244054
Website: www.ul.com**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	07/26/2018	Initial Issue	



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY.....	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM EMISSIONS FIELD STRENGTH</i>	<i>7</i>
5.3. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>7</i>
5.4. <i>TEST ENVIRONMENT</i>	<i>8</i>
5.5. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>9</i>
5.6. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>10</i>
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>11</i>
5.8. <i>MEASURING INSTRUMENT AND SOFTWARE USED.....</i>	<i>12</i>
6. SUMMARY OF TEST RESULTS.....	13
7. ANTENNA PORT TEST RESULTS	14
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>14</i>
7.2. <i>20 dB BANDWIDTH.....</i>	<i>16</i>
8. RADIATED TEST RESULTS.....	21
8.1. <i>LIMITS AND PROCEDURE.....</i>	<i>21</i>
8.2. <i>RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS</i> <i>26</i>	
8.3. <i>SPURIOUS EMISSIONS BELOW 30M (WORST-CASE CONFIGURATION).....</i>	<i>74</i>
8.4. <i>SPURIOUS EMISSIONS BELOW 1 GHz (WORST-CASE CONFIGURATION).....</i>	<i>78</i>
8.5. <i>SPURIOUS EMISSIONS 1~18GHz</i>	<i>80</i>
8.1. <i>SPURIOUS EMISSIONS 18G ~ 26GHz (WORST-CASE CONFIGURATION).....</i>	<i>128</i>
9. AC POWER LINE CONDUCTED EMISSIONS.....	130
Not Applicable.....	131
10. ANTENNA REQUIREMENTS	132



1. ATTESTATION OF TEST RESULTS

Applicant Information


Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Manufacturer Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Factory Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

EUT Name: NAVIGATOR X650
Brand: 
Model: DHI-UAV-Aircraft-X650
Serial Model: See chapter 5.1
Sample Received Date: May 26, 2018
Date of Tested: July 01, 2018 ~ July 26, 2018

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Prepared By:

Denny Huang
Engineer Project Associate

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2.TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15 and ANSI C63.10-2013.

3.FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>IAS (Lab Code: TL-702) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has demonstrated compliance with ISO/IEC Standard 17025:2005, General requirements for the competence of testing and calibration laboratories</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OATS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5.EQUIPMENT UNDER TEST

5.1.DESCRPTION OF EUT

Equipment	NAVIGATOR X650
Model Name	DHI-UAV-Aircraft-X650
Series Model	DHI-UAV-Aircraft-X650-1023,DHI-UAV-Aircraft-X650-1033, UAV-Aircraft-X650-1023,UAV-Aircraft-X650-1033, UAV-Aircraft-X650, DHI-UAV-Aircraft-X650, OEM-Aircraft-X650
Model Difference	All the same except for the appearance of the different color and graphic pattern.
Operation frequency	2413MHz~2475MHz
Modulation	QPSK, OFDM
Bandwidth	10M/20M
Rated Input Voltage	DC 22.2
Battery	DC 22.2V, 12000mAh

5.2.MAXIMUM EMISSIONS FIELD STRENGTH

Frequency Range (MHz)	Number of Transmit Chains (NTX)	Frequency (MHz)	Max. Emissions Field Strength (dB μ V/m)
2413 ~ 2475	1	2413 ~ 2475	108.22

5.3.TEST CHANNEL CONFIGURATION

Bandwidth	Low	Middle	High
10M	59830	60140	60450
	2413MHz	2444MHz	2475MHz
20M	59880	60140	60400
	2418MHz	2444MHz	2470MHz



5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	DC 22.2
	VH	N/A

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.5.DESRIPTION OF AVAILABLE ANTENNAS


Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
3	2413MHz~2475MHz	External Antenna	4.00

Test Mode	Transmit and Receive Mode	Description
QPSK, OFDM	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 3 can be used as transmitting/receiving antenna.

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
4	2413MHz~2475MHz	External Antenna	4.00

Test Mode	Transmit and Receive Mode	Description
QPSK, OFDM	<input checked="" type="checkbox"/> 1RX	Chain 4 can be used as receiving antenna.

Note: The antenna 3 can be used to transmitting and receiving when Chain 4 can be used to receiving only.

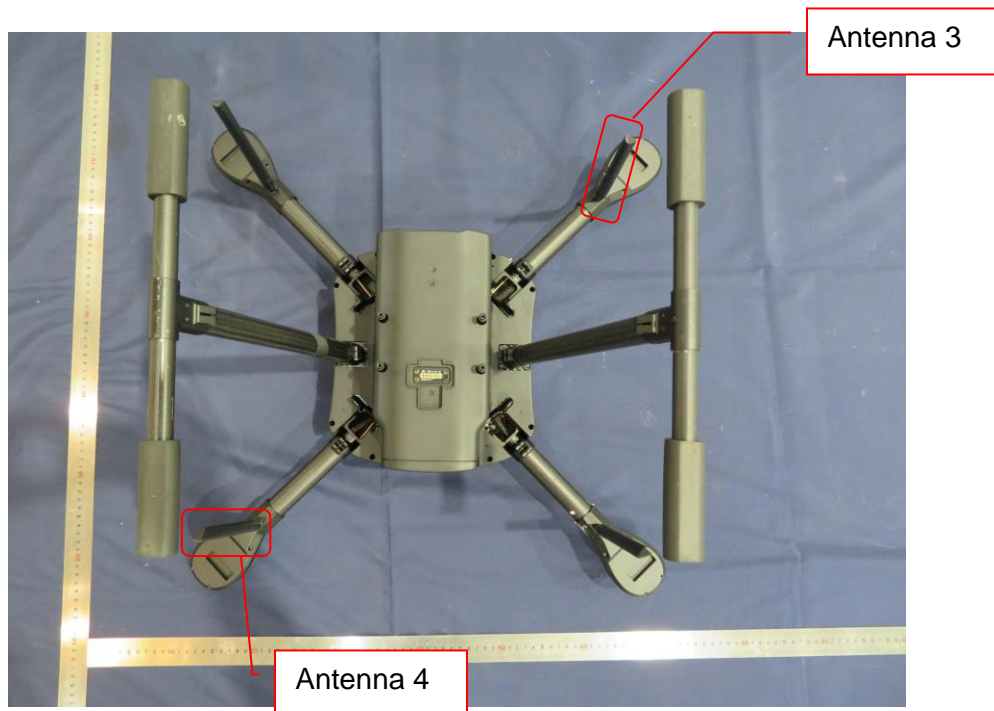



5.6.THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter				
Test Software Version		10M Bandwidth Test Channel		
Modulation Type	Transmit Antenna Number	CH 59830	CH 60140	CH 60450
QPSK	3	118	122	122
OFDM	3	120	120	122

The Worse Case Power Setting Parameter				
Test Software Version		20M Bandwidth Test Channel		
Modulation Type	Transmit Antenna Number	CH 59880	CH 60140	CH 60400
QPSK	3	105	107	122
OFDM	3	105	107	122

5.7.DESCRPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	N/A	N/A	N/A	N/A

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

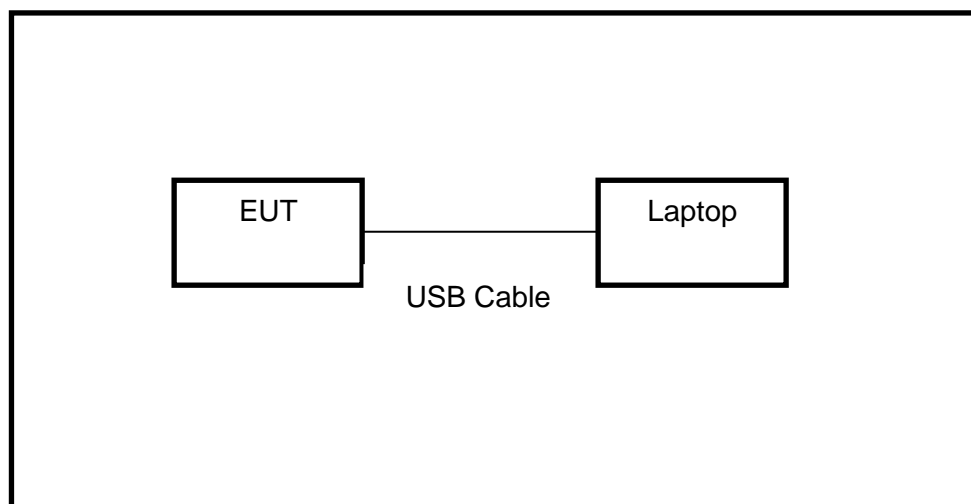



5.8.MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Two-Line V- Network	R&S	ENV216	101983	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.12,2017	Dec.11,2018
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400 036	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A090 99	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305- 00066	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307- 00003	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 25, 2019
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Signal Analyzer	R&S	FSV40	A1512015	Dec.20,2016	Dec.20,2017
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.12,2017	Dec.11,2018
<input checked="" type="checkbox"/>	Power Sensor	Keysight	N1921A	MY51100041	Dec.12,2017	Dec.11,2018



6. SUMMARY OF TEST RESULTS

Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	20dB Bandwidth	FCC 15.215	Pass
2	TX Spurious Emission	FCC 15.249 (a)(d)(e) FCC 15.209 FCC 15.205	Pass
3	Conducted Emission Test For AC Power Port	FCC 15.207	N/A



7. ANTENNA PORT TEST RESULTS

7.1.ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

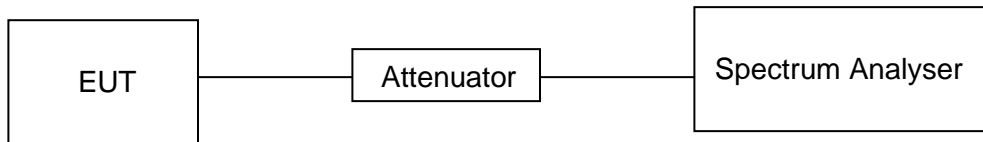


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
QPSK	0.9855	10.0	0.099	9.9	10.044	2

Note: Duty Cycle Correction Factor= $10\log(1/x)$.
Where: x is Duty Cycle (Linear)
Where: T is On Time (transmit duration)




ON TIME AND DUTY CYCLE MID CH PLOT-1

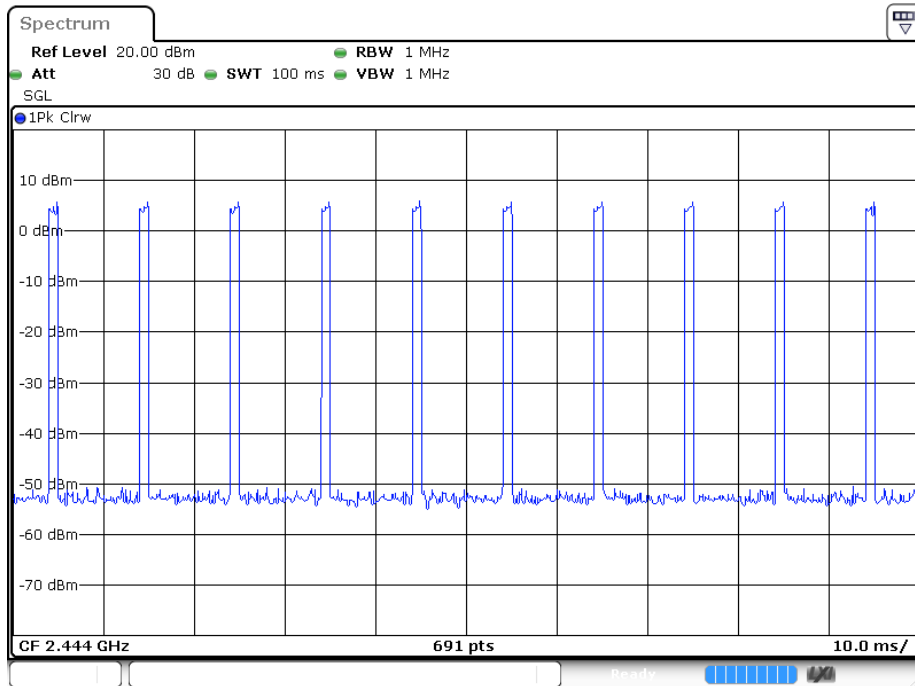

Date: 9 JUL 2018 04:48:08

ON TIME AND DUTY CYCLE MID CH PLOT-2

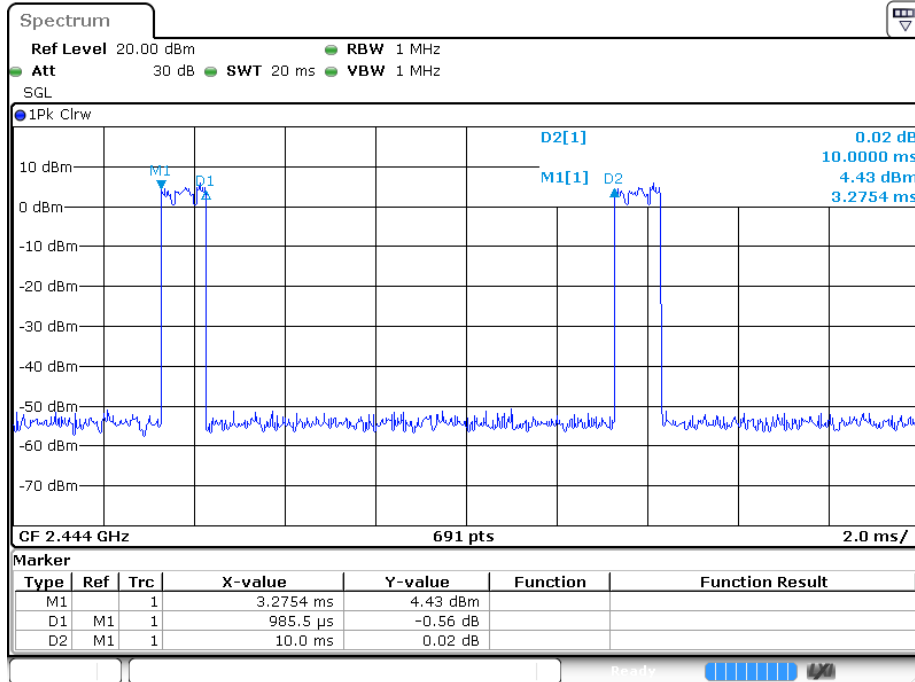

Date: 9 JUL 2018 04:47:09

Note: The duty cycle of all modulations and bandwidths are the same, so we only report one mode and this will apply for all other mode.

7.2.20 dB BANDWIDTH

LIMITS

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.249(d)	Bandwidth	for reporting purposes only	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the occupied bandwidth
VBW	approximately 3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP








RESULTS

Note: All the modes had been tested, but only the worst data recorded in the report.

QPSK 10MHz Bandwidth Mode

Channel	Frequency (MHz)	20dB bandwidth (MHz)	Result
Low	2413	9.262	Pass
Middle	2444	9.262	Pass
High	2475	9.262	Pass

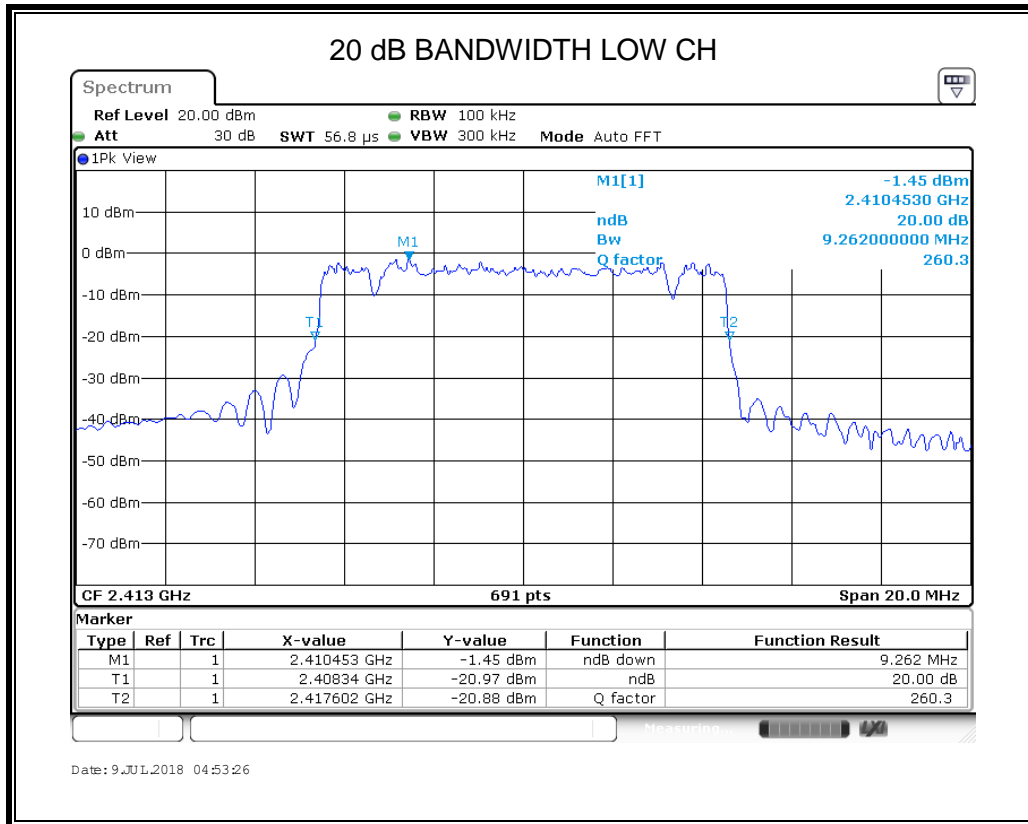


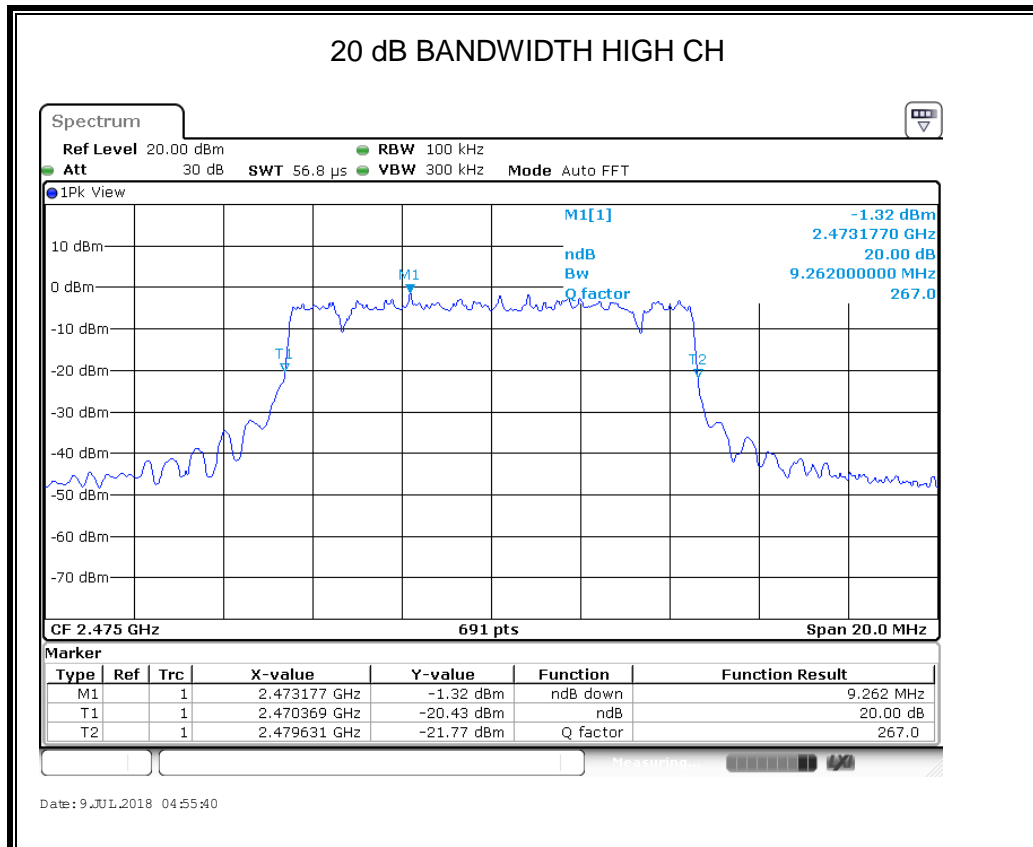
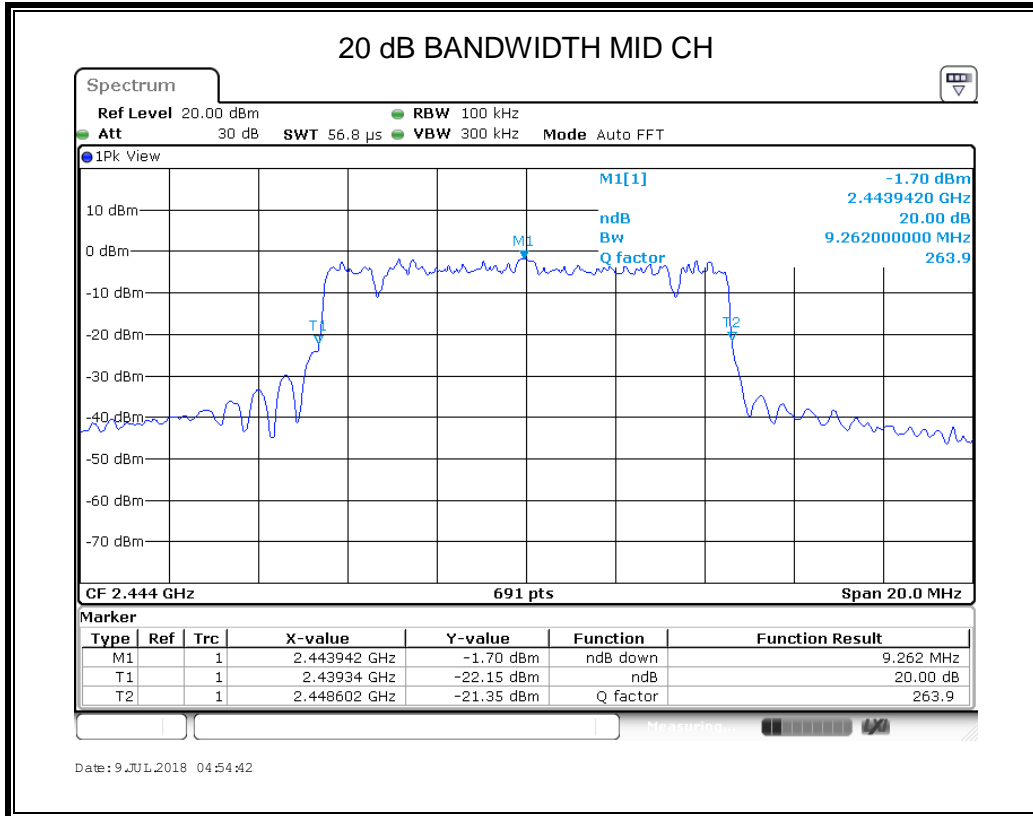




QPSK 20MHz Bandwidth Mode

Channel	Frequency (MHz)	20dB bandwidth (MHz)	Result
Low	2418	18.408	Pass
Middle	2444	18.234	Pass
High	2470	18.292	Pass

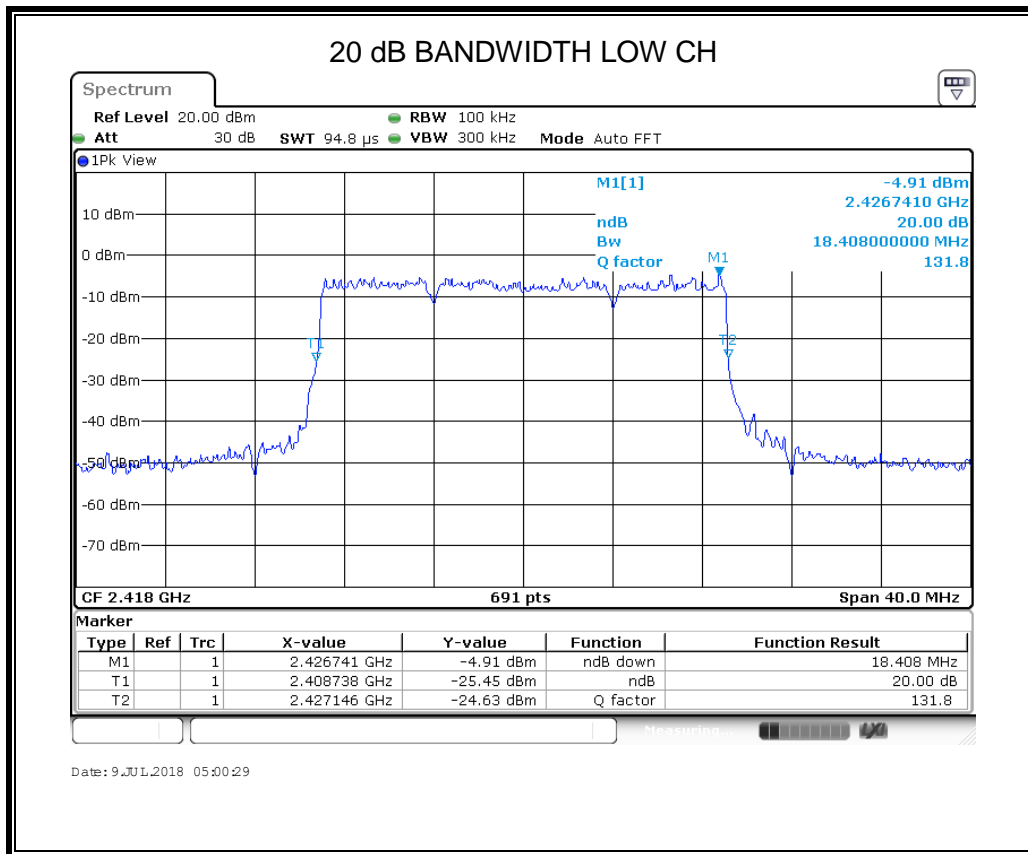

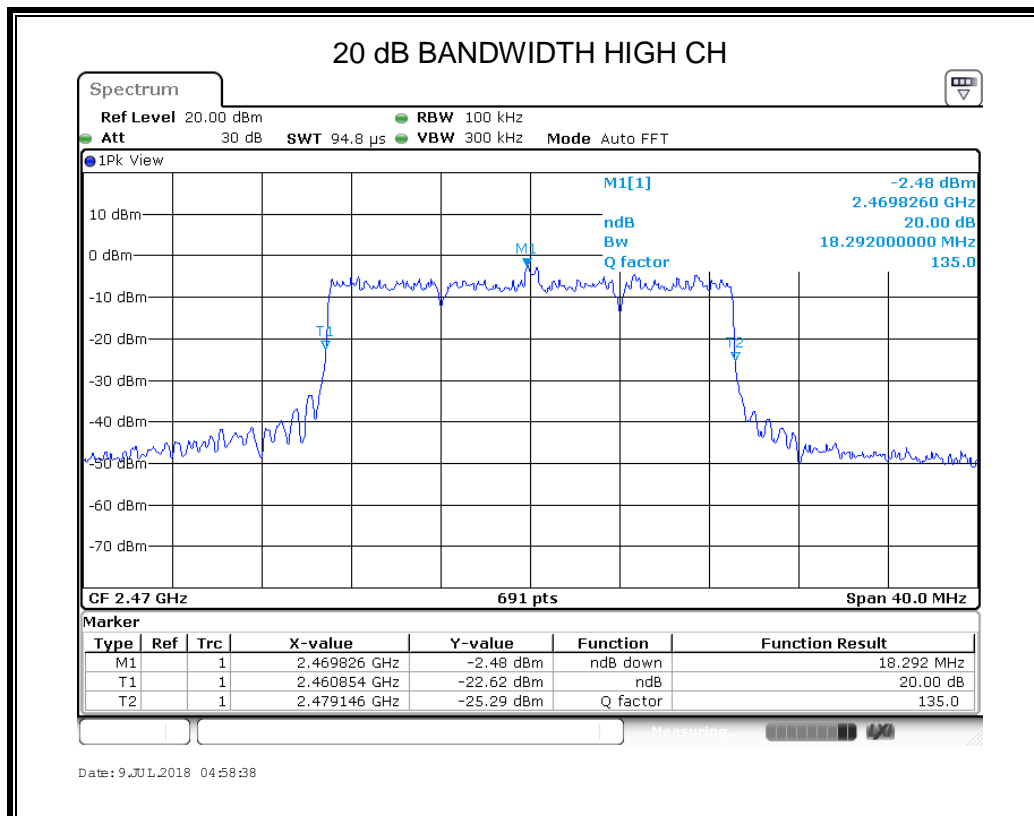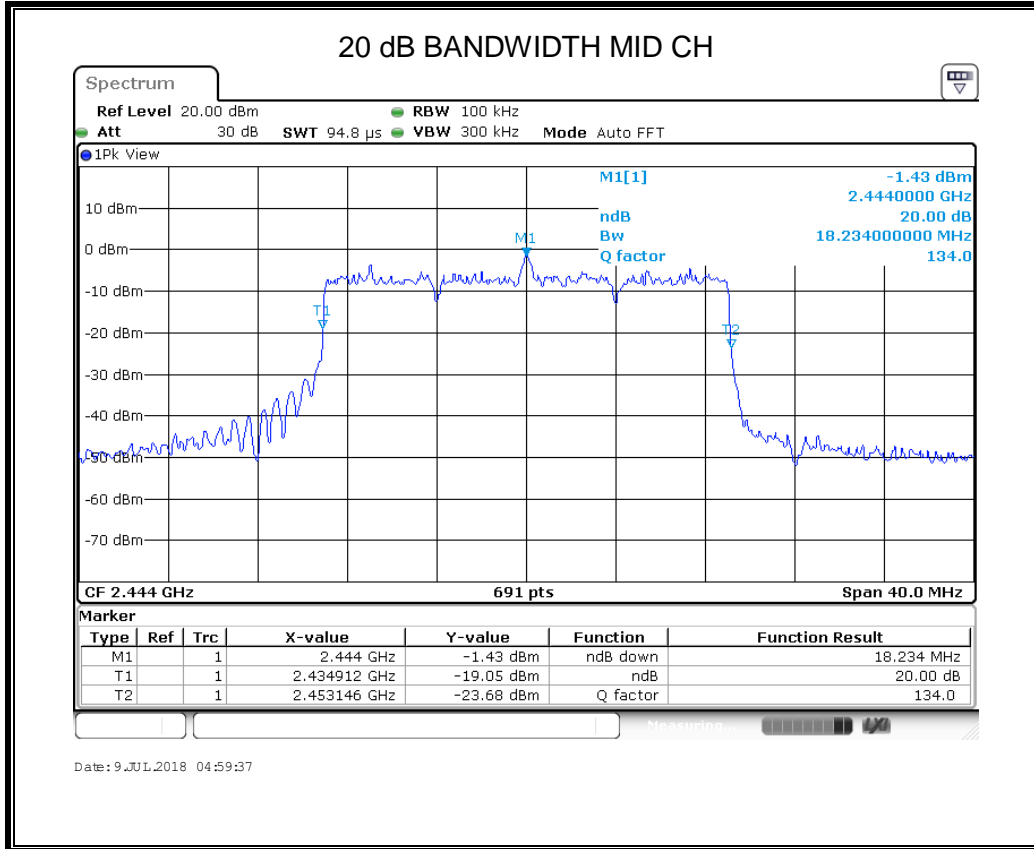



8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC §15.249 (a)(d)(e)

The field strength of emissions from intentional radiators operated within these frequency bands			
Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 - 928	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
2400 – 2483.5	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3
5725 – 5875	50 mV/m (94dBuV/m)	500 uV/m (54dBuV/m)	3

Emissions radiated outside of the specified frequency bands			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

TEST SETUP AND PROCEDURE

Below 30MHz

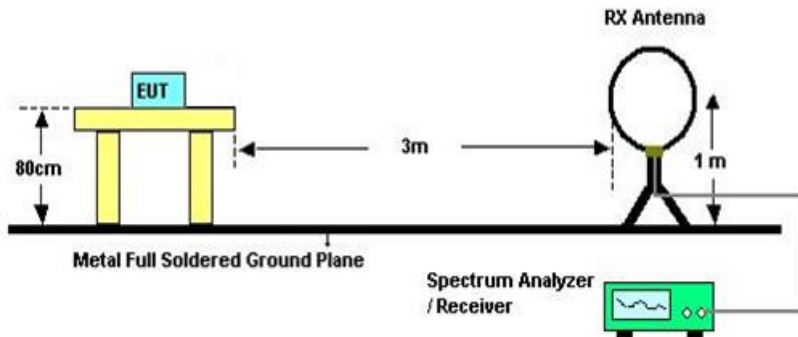


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 and 414788 D01 Radiated Test Site v01.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Below 1G

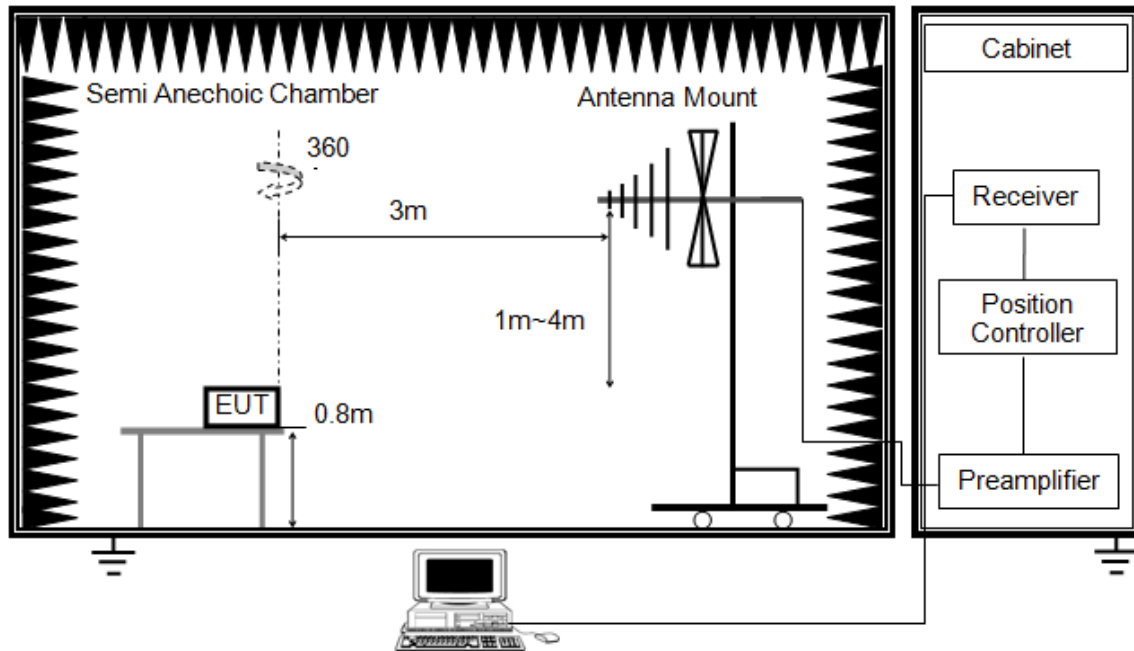


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

ABOVE 1G

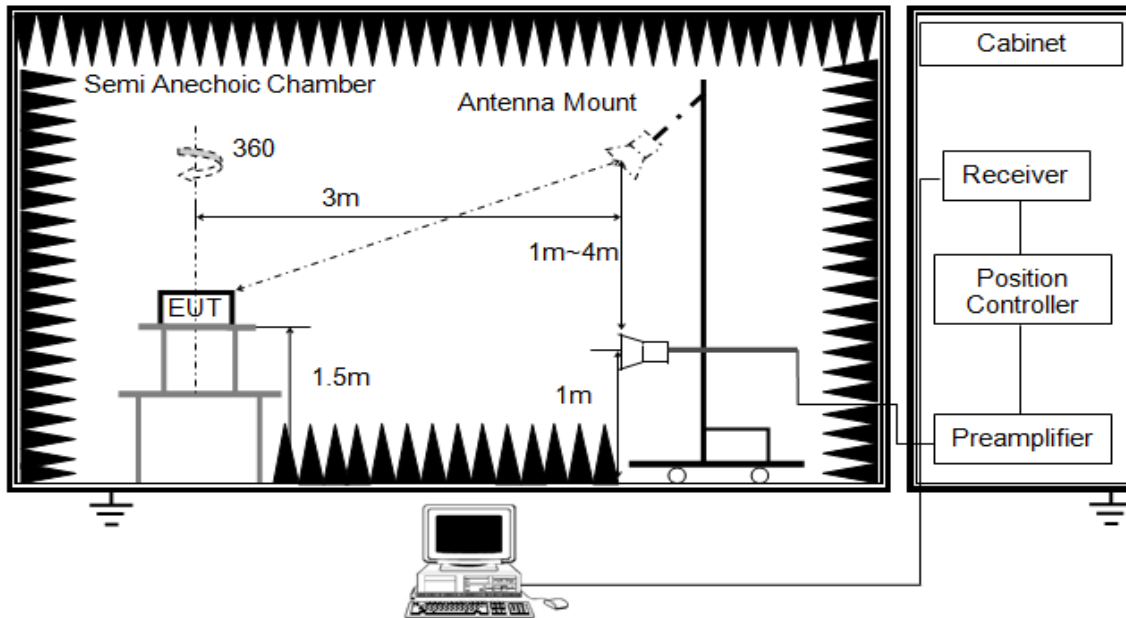


The setting of the spectrum analyser

RBW	1M MHz
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector. For the Duty Cycle please refer to clause 6.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

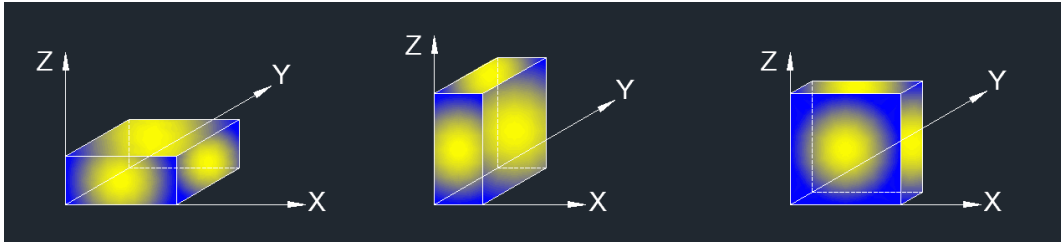

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: All the EUT's emissions had been evaluated for simultaneous transmission with the other 915MHz transmitter and there were no any additional or worse emissions found.




8.2.RESTRICTED BANDEGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS

QPSK 10MHz Bandwidth Mode

RESTRICTED BANDEGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

PEAK

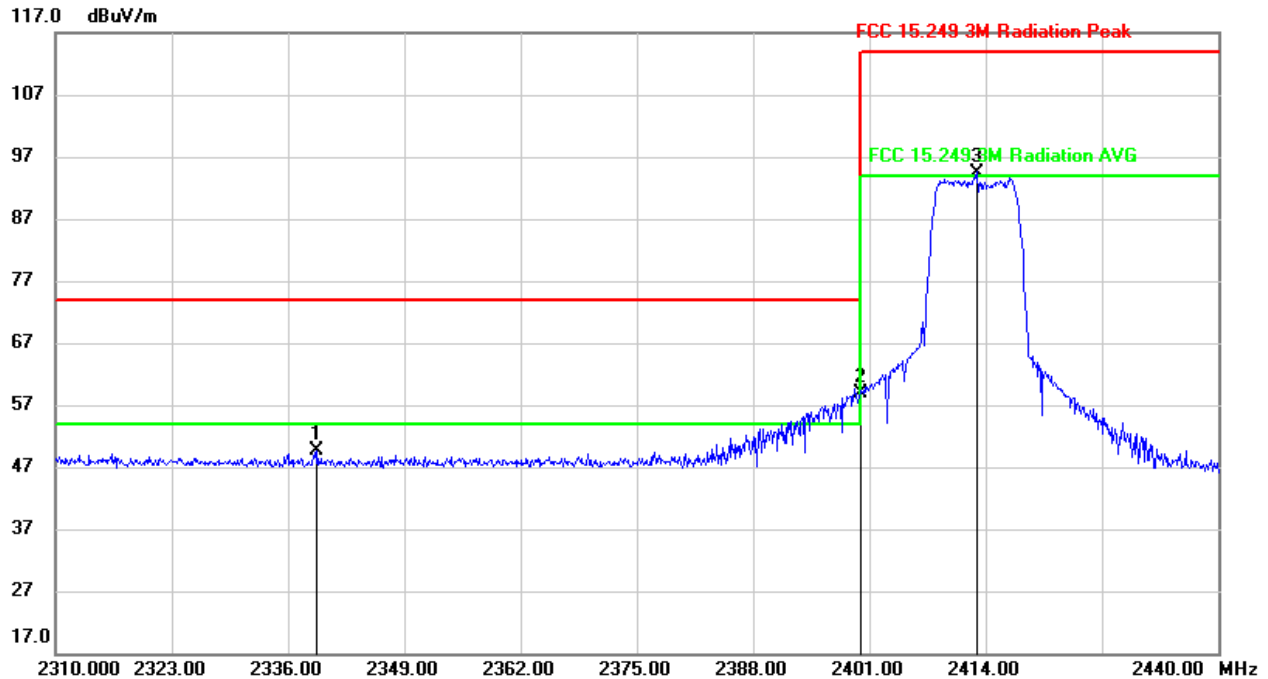


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2339.315	16.13	33.51	49.64	74.00	-24.36	peak
2	2400.000	25.85	33.07	58.92	74.00	-15.08	peak
3	2413.000	61.26	33.00	94.26	114.00	-19.74	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

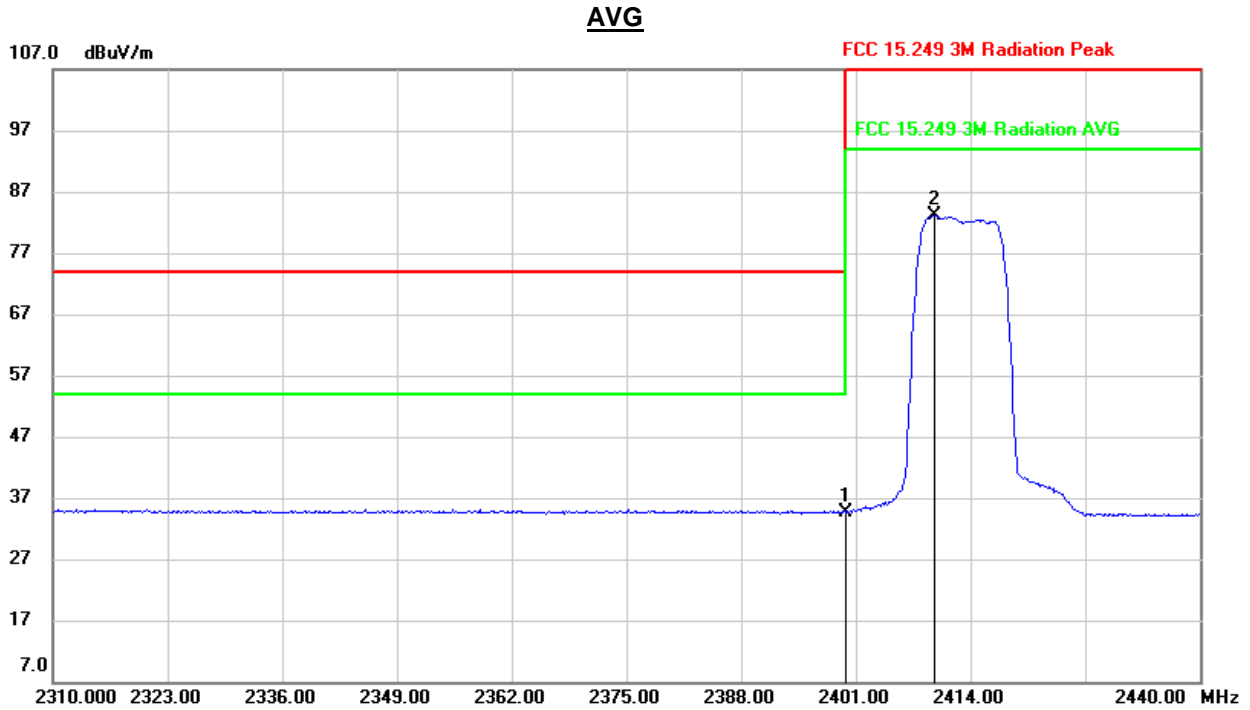


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	1.63	33.07	34.70	54.00	-19.30	AVG
2	2409.938	50.08	33.02	83.10	94.00	-10.90	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)

PEAK

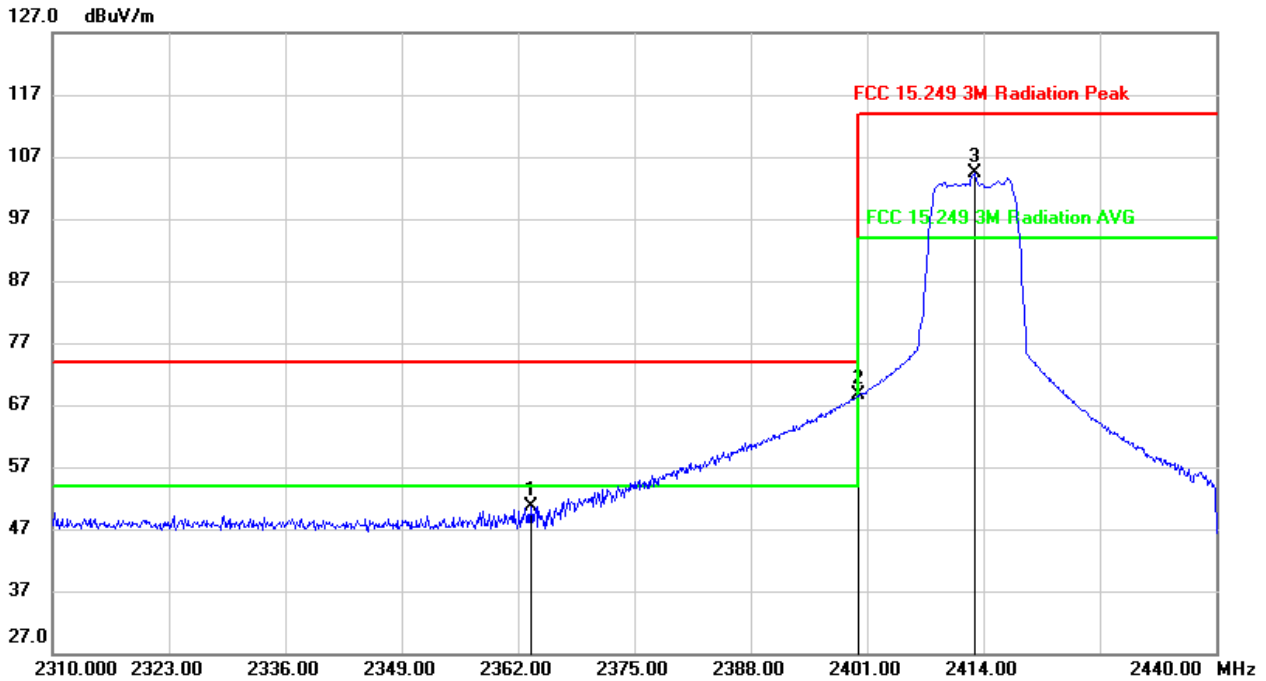

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2363.430	17.24	33.43	50.67	74.00	-23.33	peak
2	2400.000	35.36	33.17	68.53	74.00	-5.47	peak
3	2413.000	71.16	33.10	104.26	114.00	-9.74	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



AVG

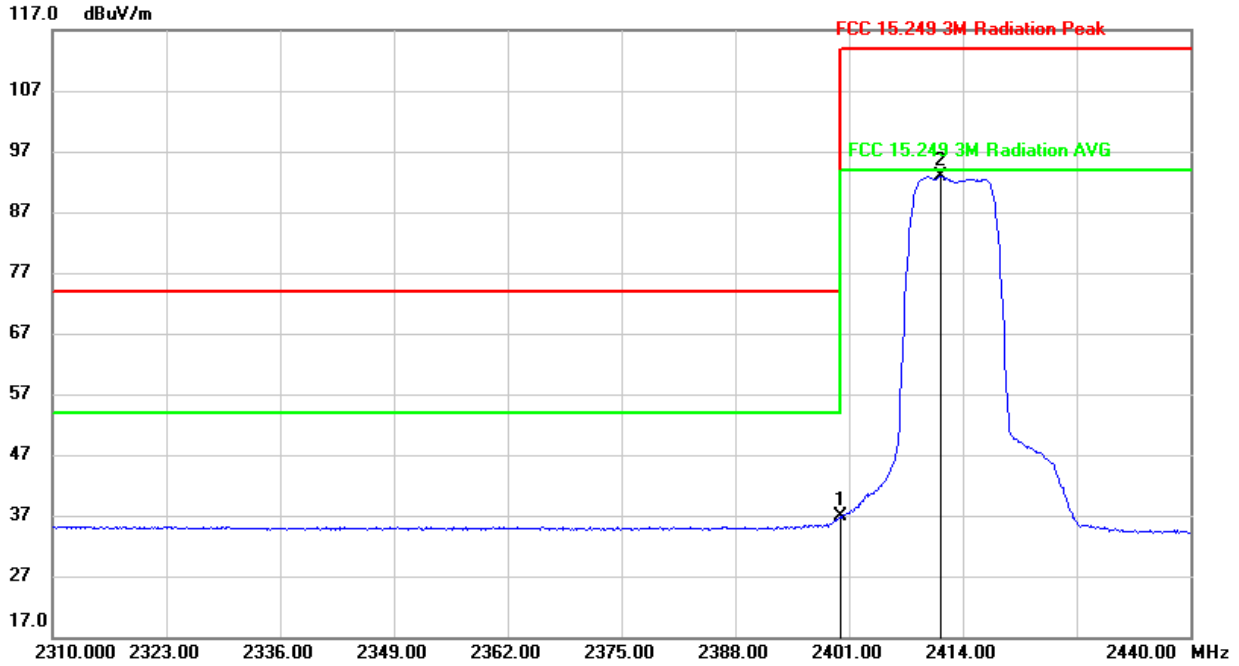


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	3.59	33.17	36.76	54.00	-17.24	AVG
2	2411.514	59.73	33.11	92.84	94.00	-1.16	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, HORIZONTAL)

PEAK

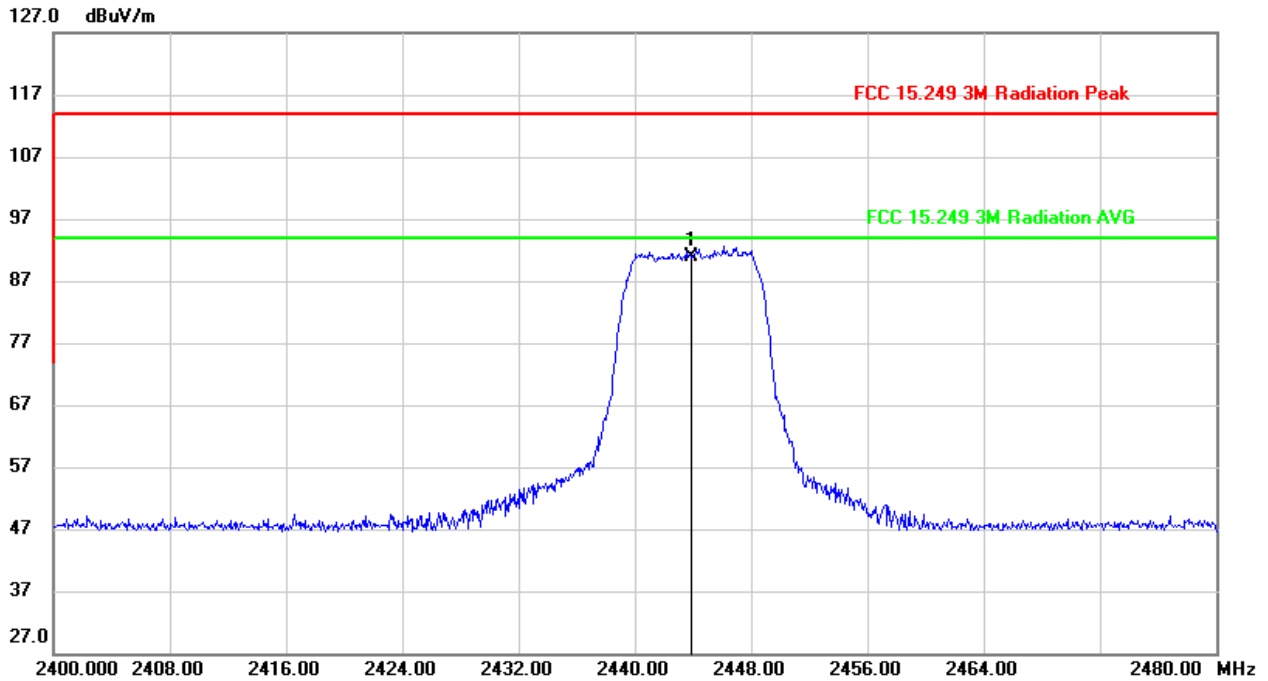


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	58.07	32.85	90.92	114.00	-23.08	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

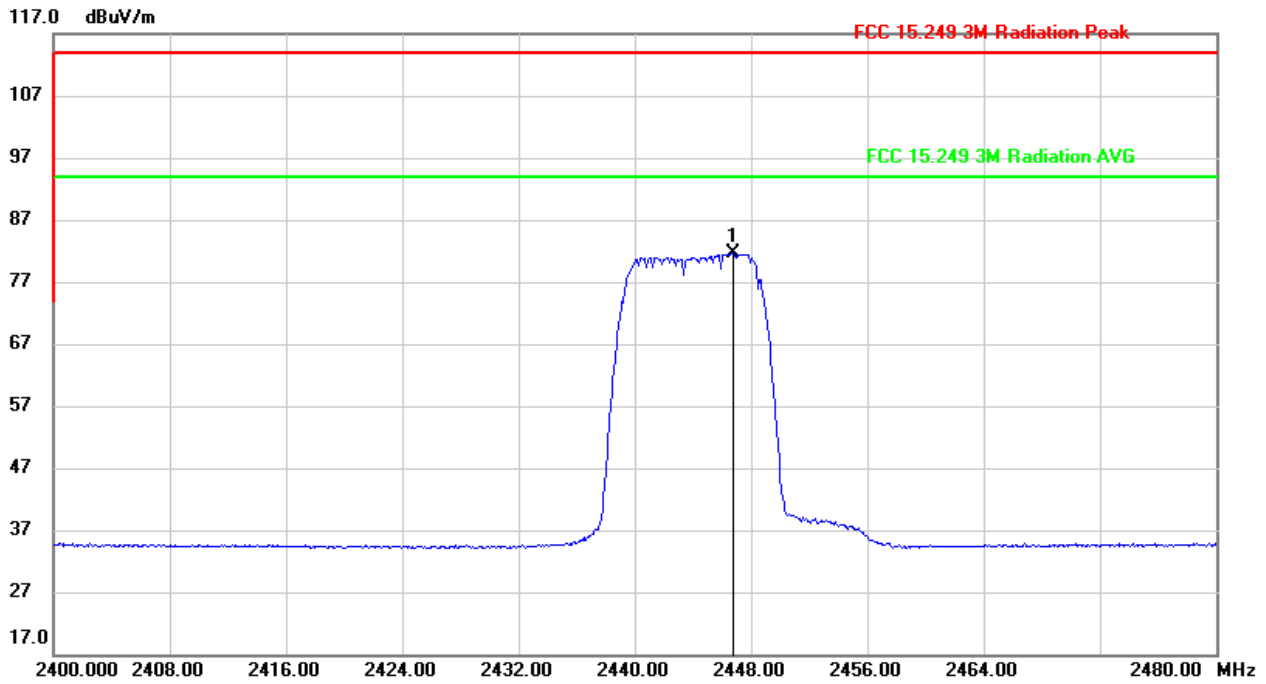


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.830	48.72	32.84	81.56	94.00	-12.44	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, VERTICAL)

PEAK

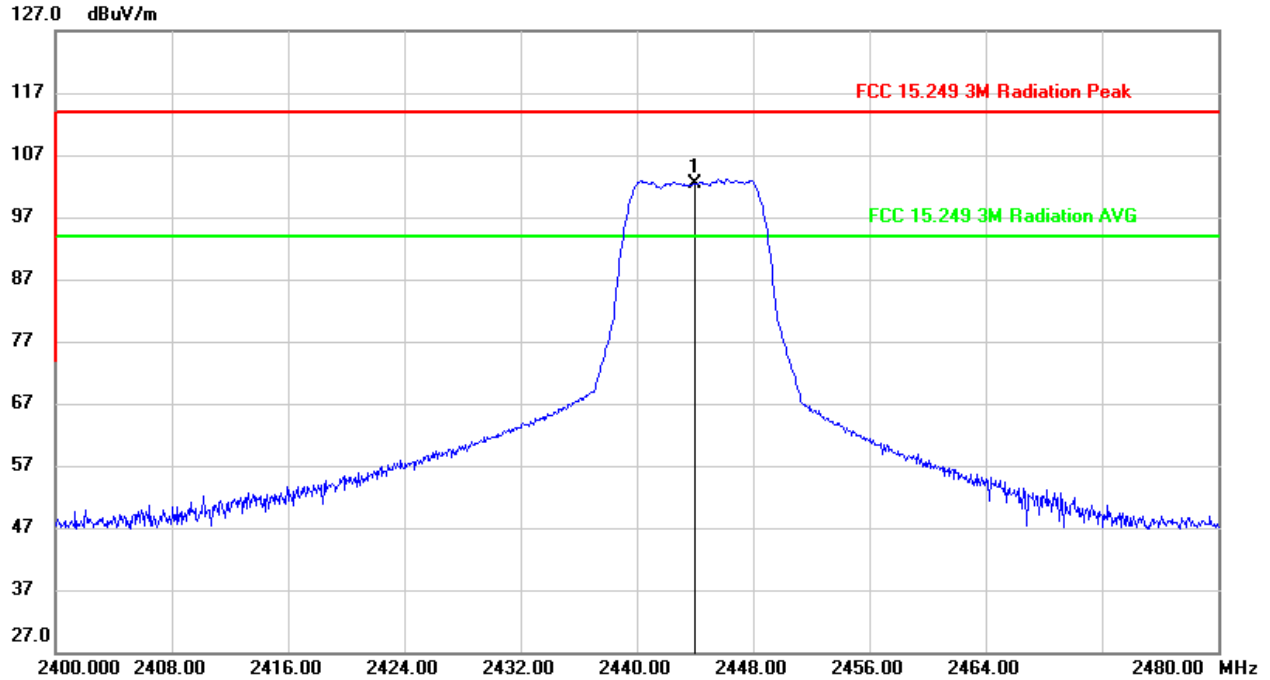


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	69.49	32.95	102.44	114.00	-11.56	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

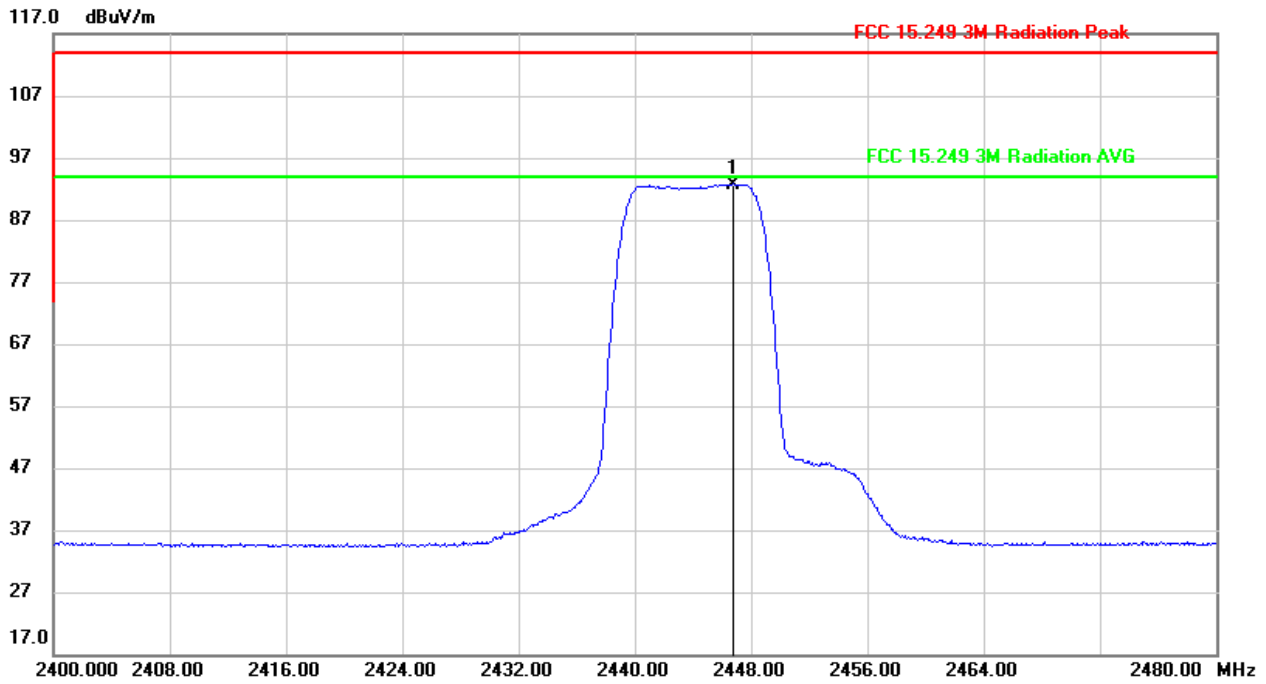


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.720	59.81	32.94	92.75	94.00	-1.25	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, HORIZONTAL)

PEAK

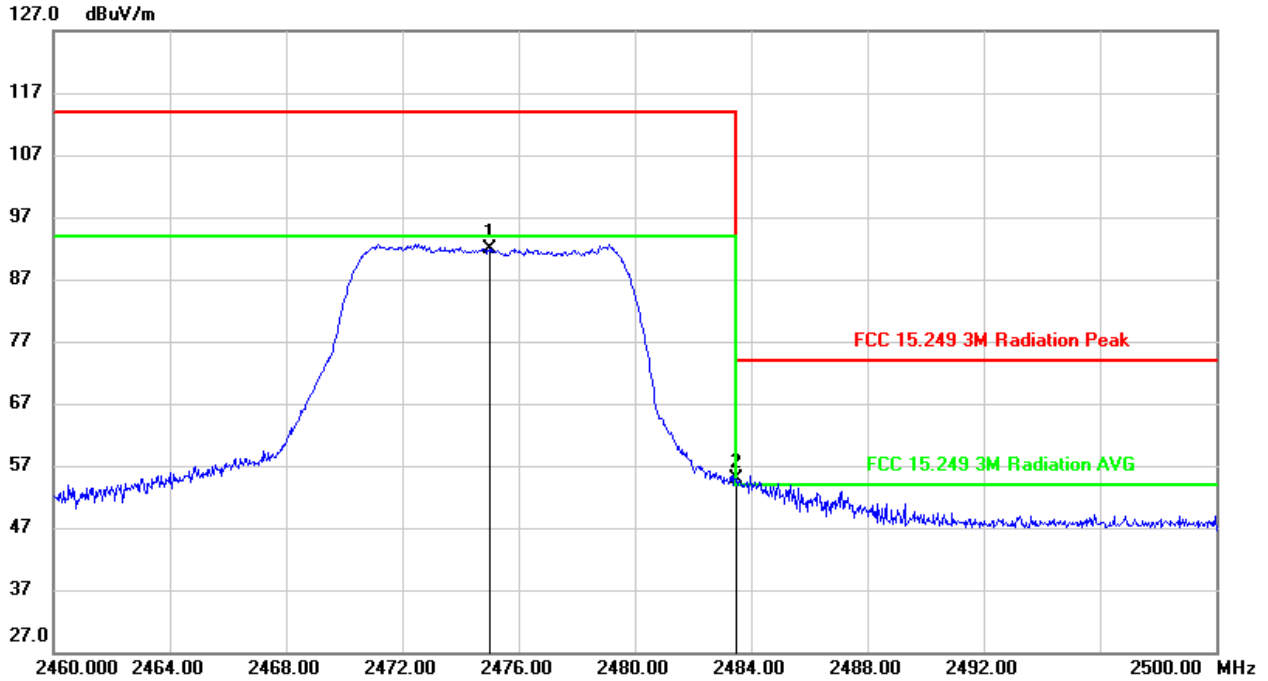


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.000	59.05	32.79	91.84	114.00	-22.16	peak
2	2483.500	22.18	32.78	54.96	74.00	-19.04	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

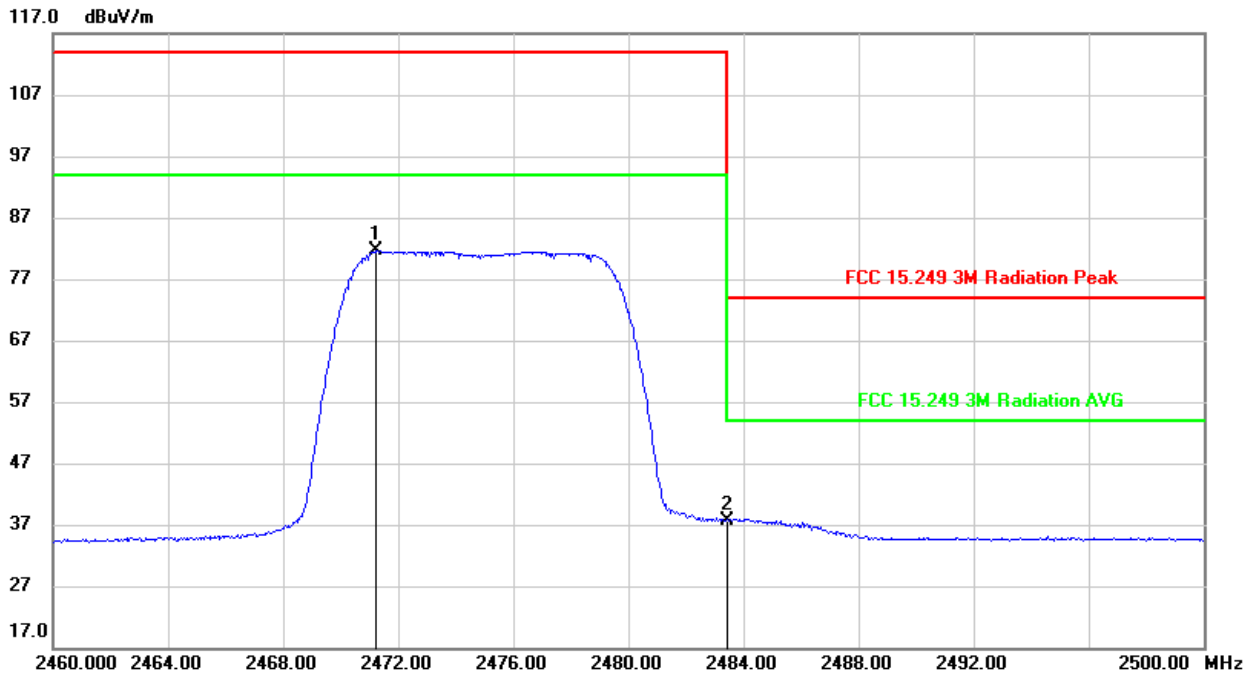


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2471.260	48.74	32.80	81.54	94.00	-12.46	AVG
2	2483.500	4.84	32.78	37.62	54.00	-16.38	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, VERTICAL)

PEAK

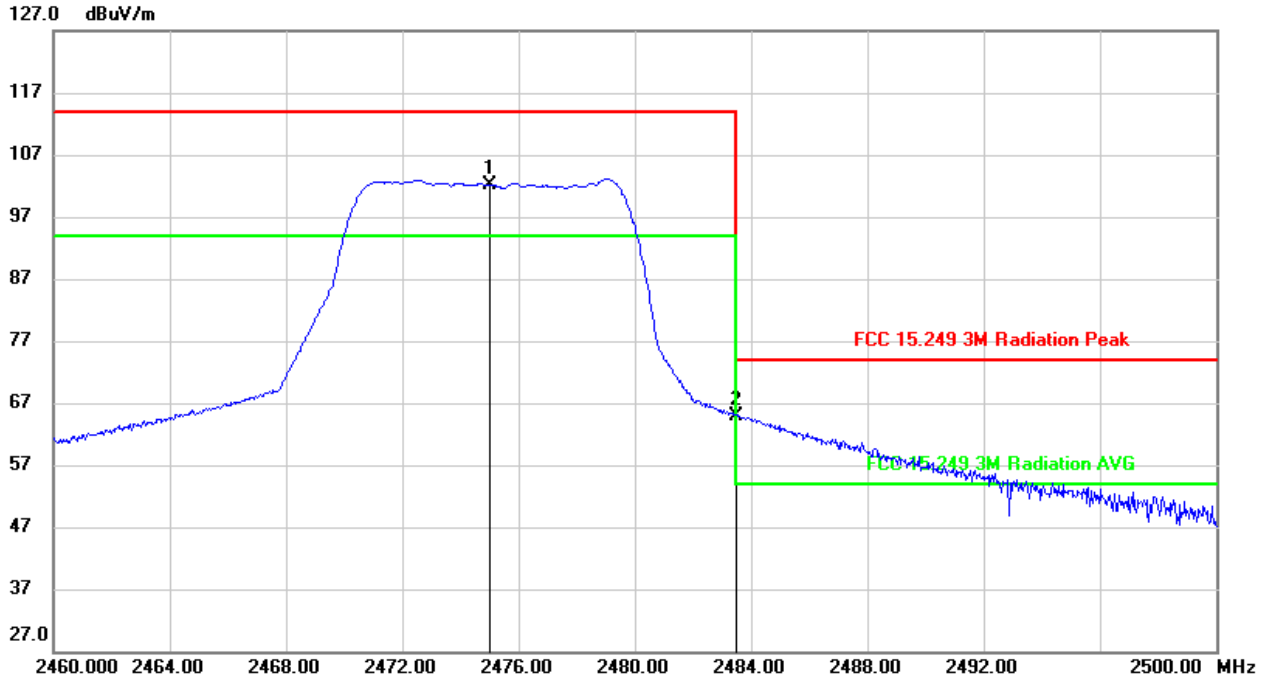


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.000	69.23	32.89	102.12	114.00	-11.88	peak
2	2483.500	31.99	32.88	64.87	74.00	-9.13	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

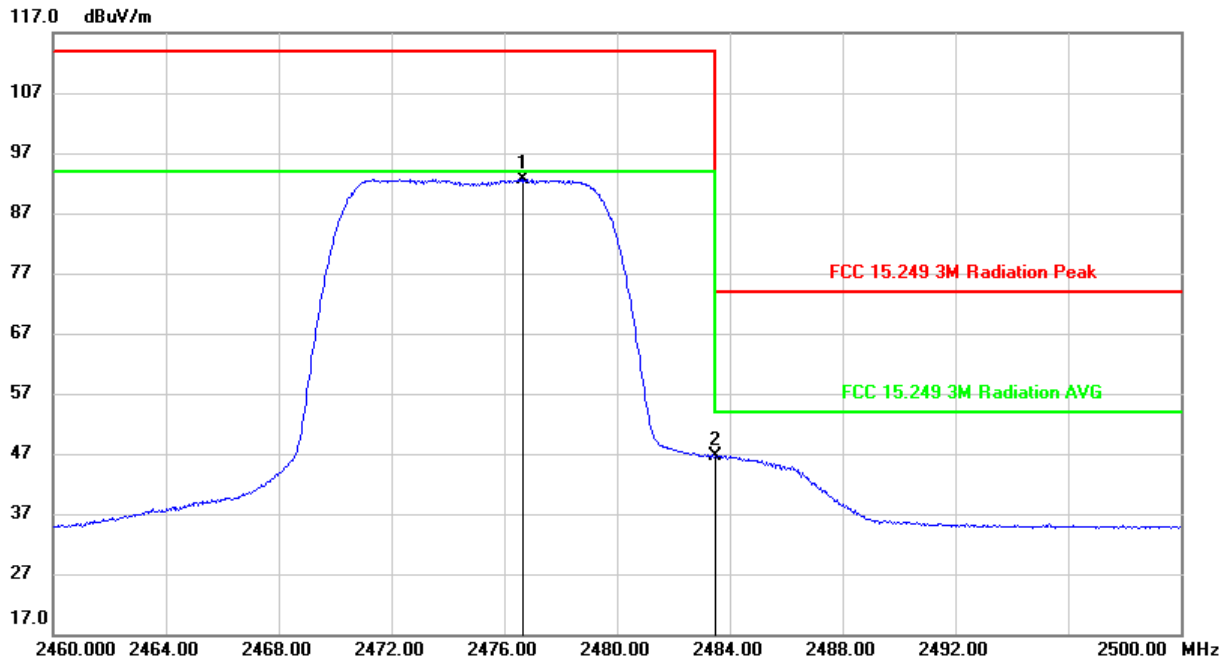

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2476.715	59.72	32.90	92.62	94.00	-1.38	AVG
2	2483.500	13.68	32.88	46.56	54.00	-7.44	AVG


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



OFDM 10MHz Bandwidth Mode

RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

PEAK

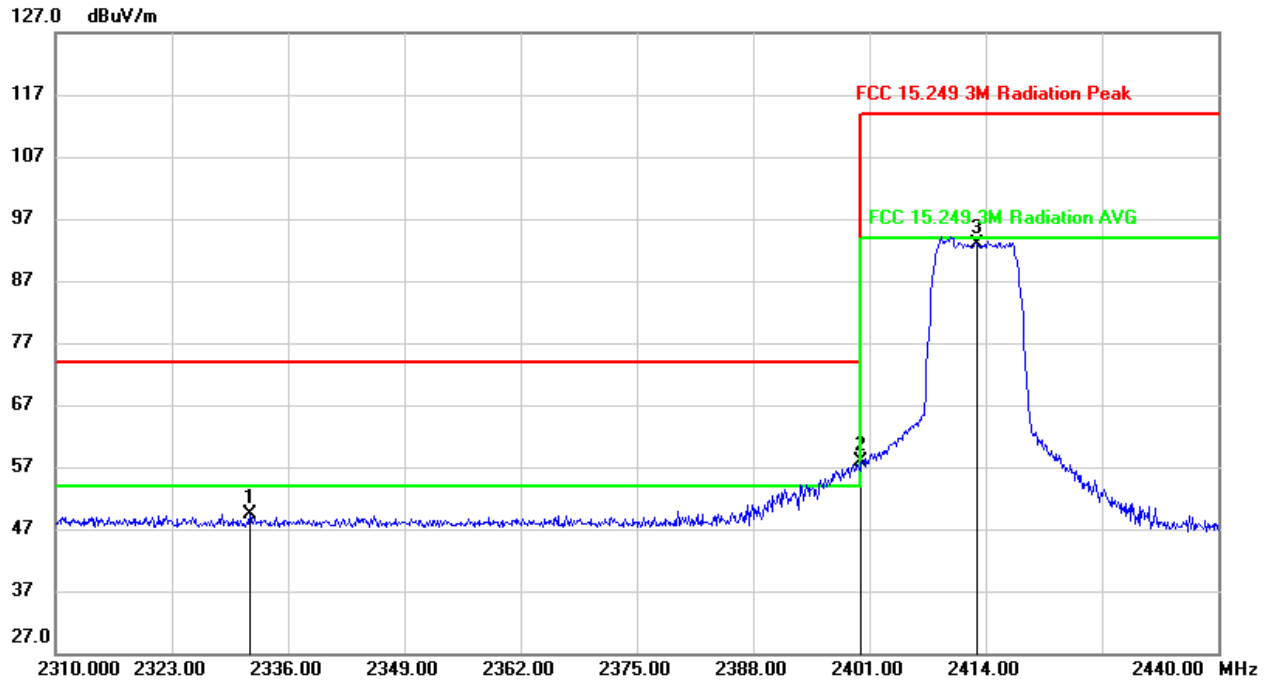

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2331.710	15.88	33.57	49.45	74.00	-24.55	peak
2	2400.000	24.86	33.07	57.93	74.00	-16.07	peak
3	2413.000	59.78	33.00	92.78	114.00	-21.22	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



AVG

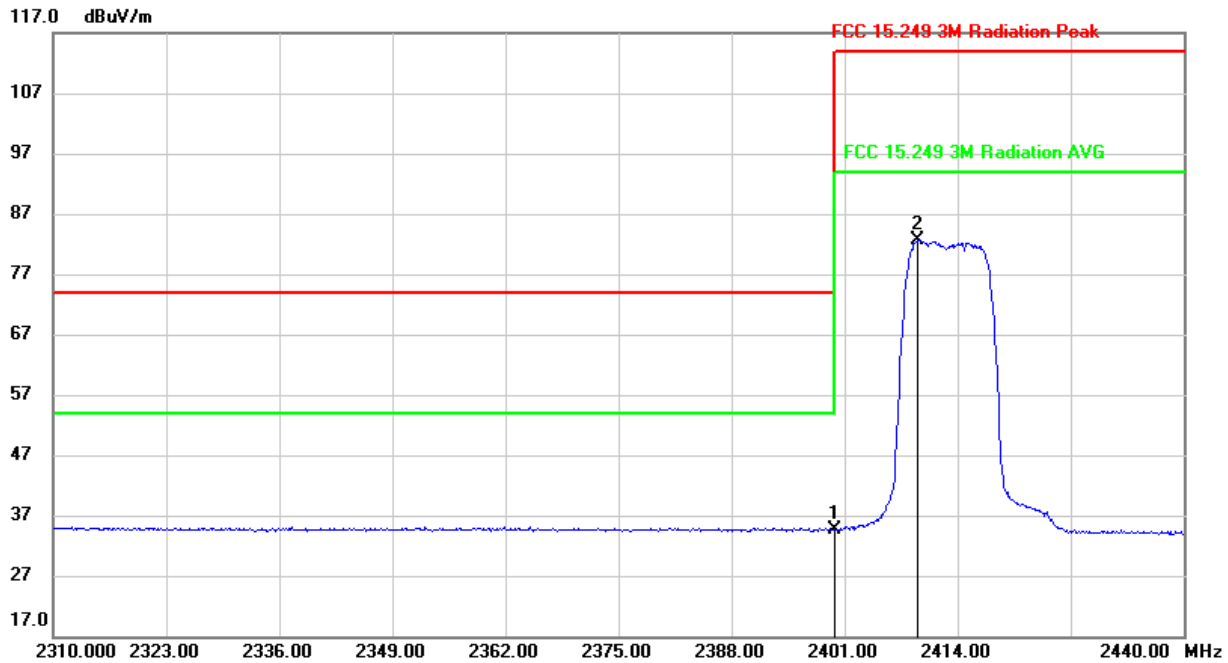


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	1.46	33.07	34.53	54.00	-19.47	AVG
2	2409.564	49.57	33.02	82.59	94.00	-11.41	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)

PEAK

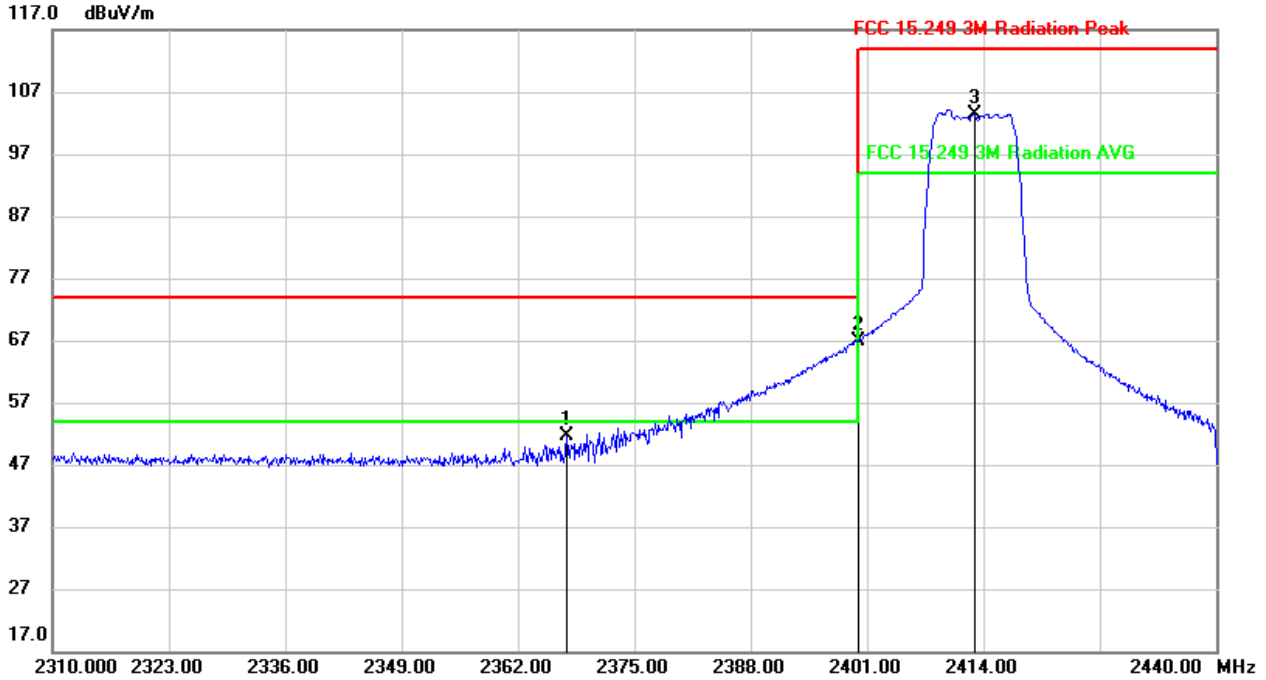

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.557	18.17	33.40	51.57	74.00	-22.43	peak
2	2400.000	33.82	33.17	66.99	74.00	-7.01	peak
3	2413.000	70.24	33.10	103.34	114.00	-10.66	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



AVG

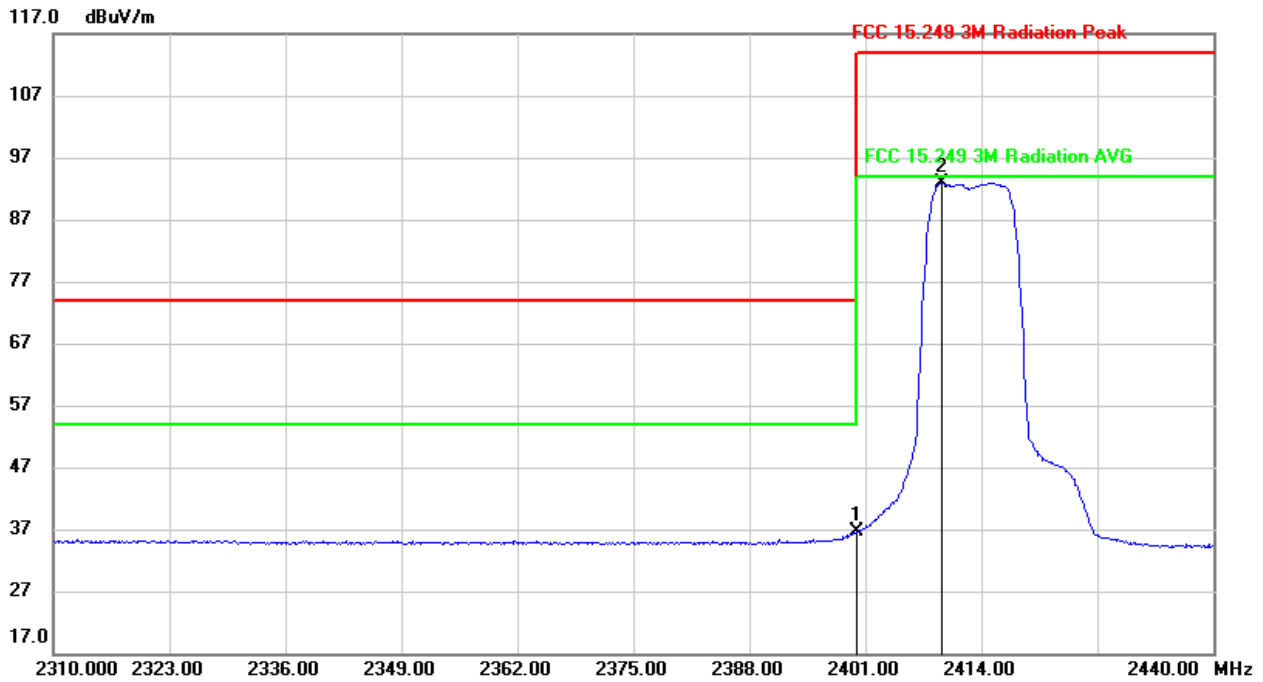


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	3.48	33.17	36.65	54.00	-17.35	AVG
2	2409.677	59.73	33.12	92.85	94.00	-1.15	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, HORIZONTAL)

PEAK

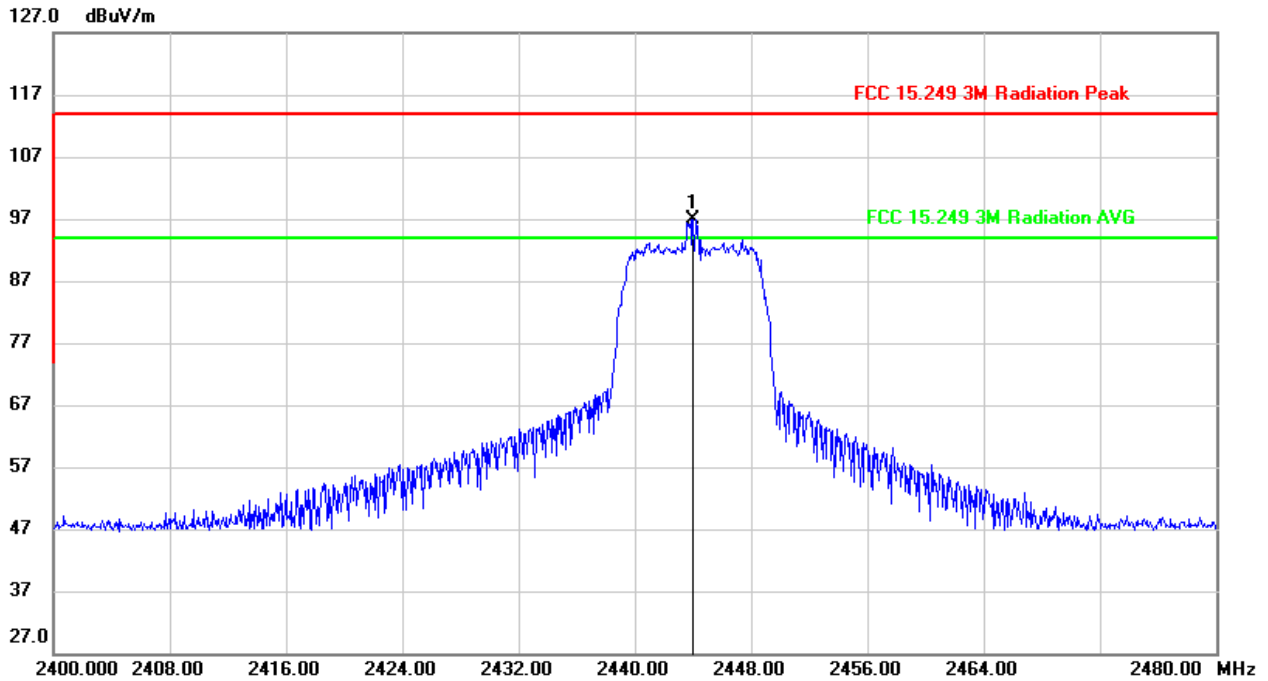

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	64.13	32.85	96.98	114.00	-17.02	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

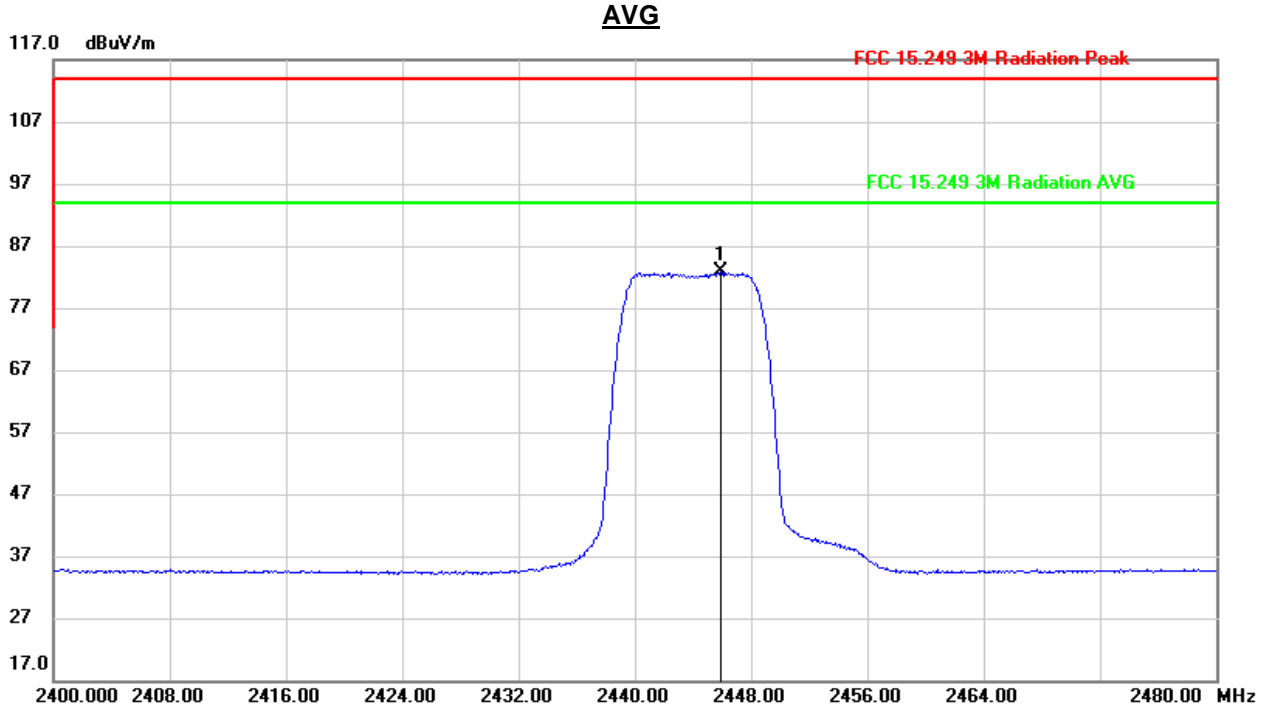


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2445.980	49.99	32.84	82.83	94.00	-11.17	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, VERTICAL)

PEAK

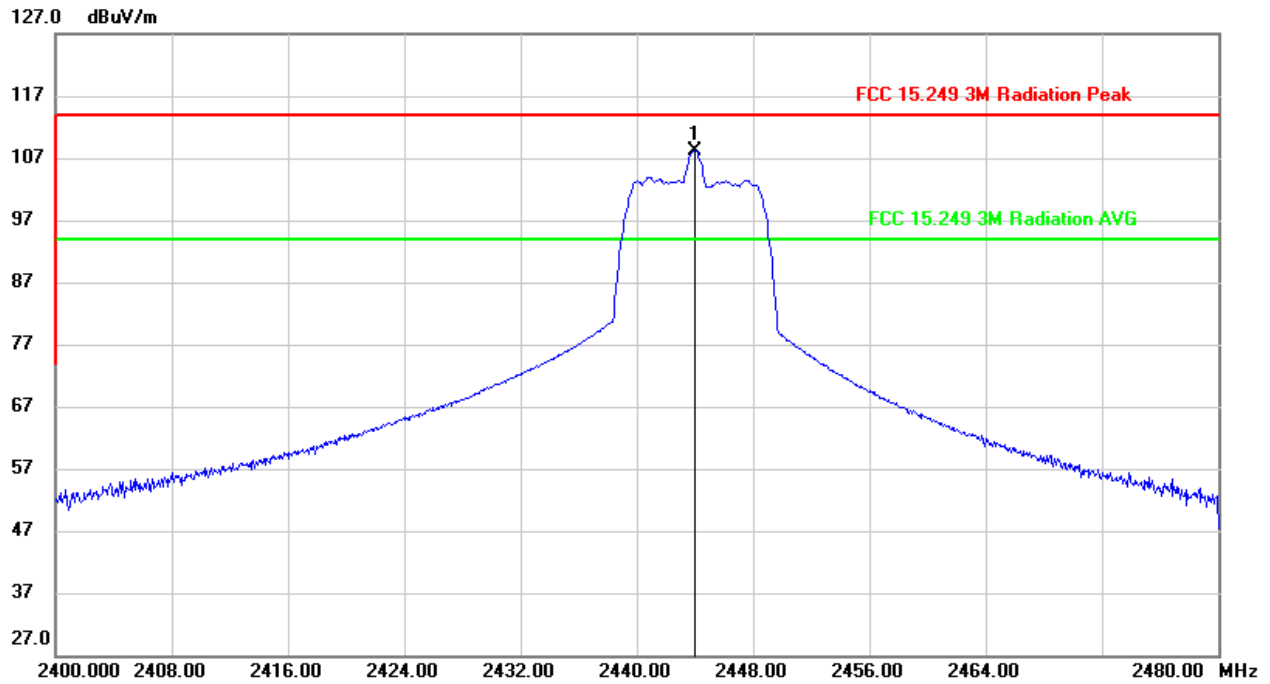

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	75.20	32.95	108.15	114.00	-5.85	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

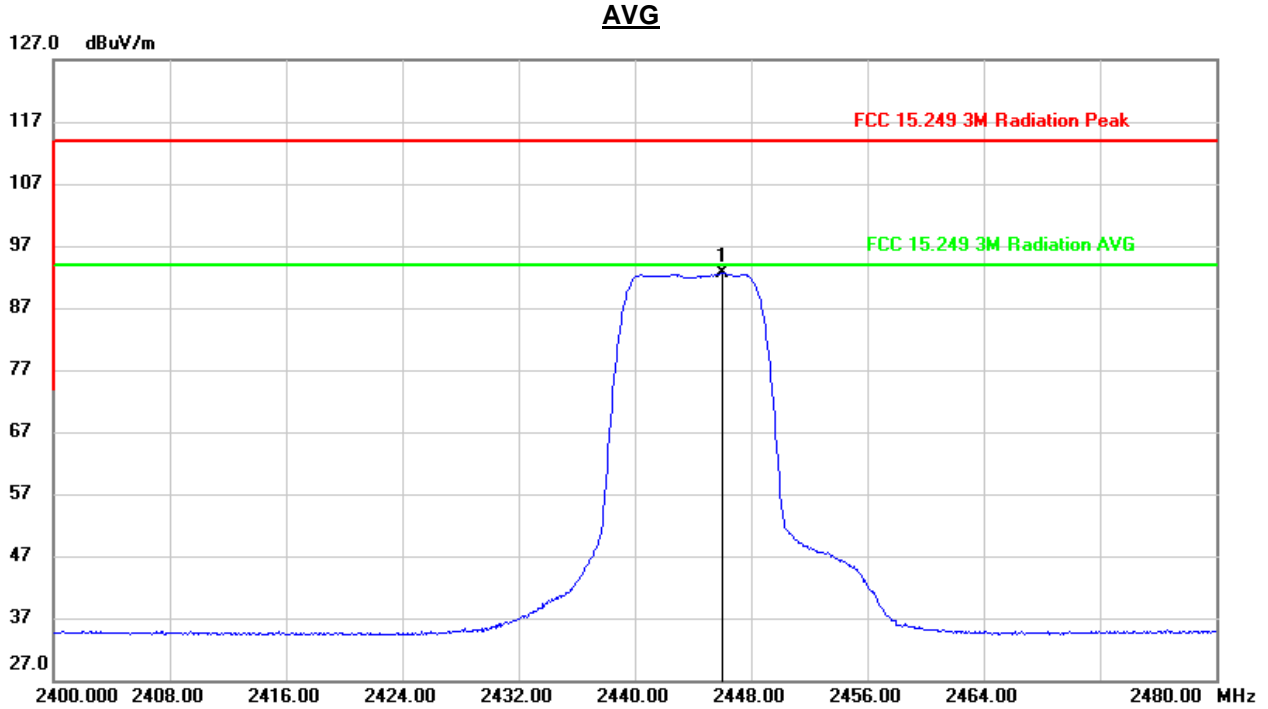


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2446.050	59.63	32.94	92.57	94.00	-1.43	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: VBW=1/Ton=2K, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, HORIZONTAL)

PEAK

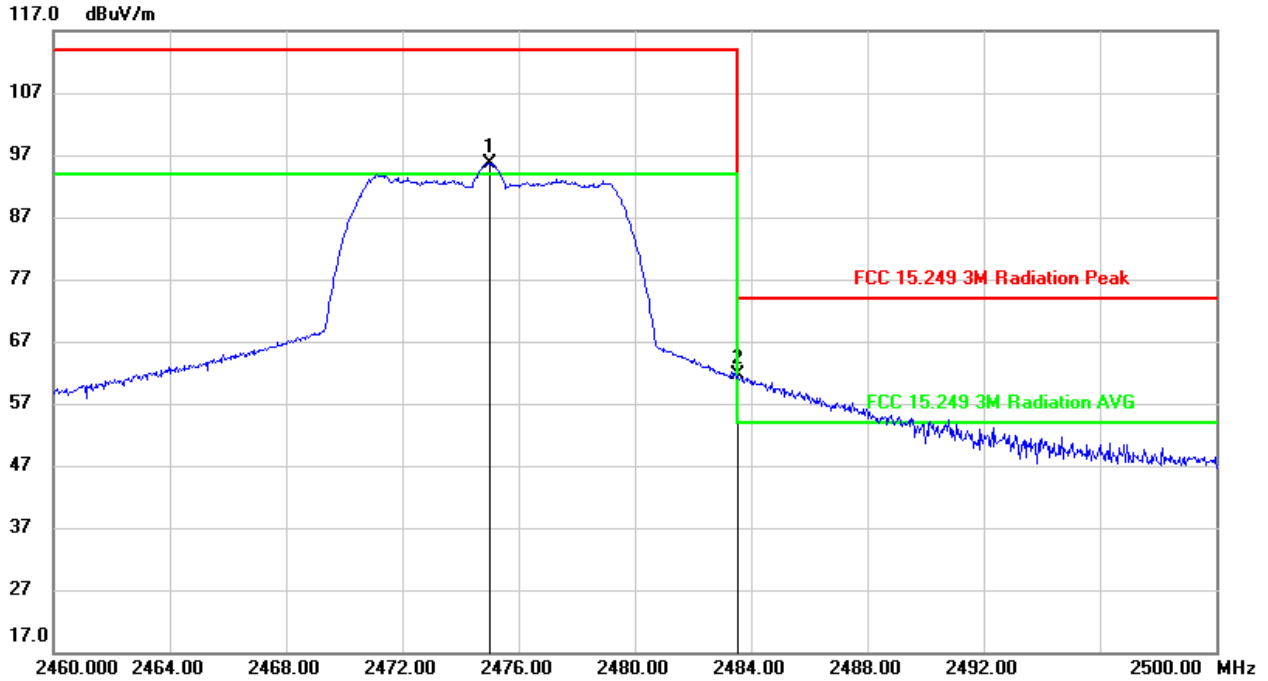


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.000	62.82	32.79	95.61	114.00	-18.39	peak
2	2483.500	28.88	32.78	61.66	74.00	-12.34	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

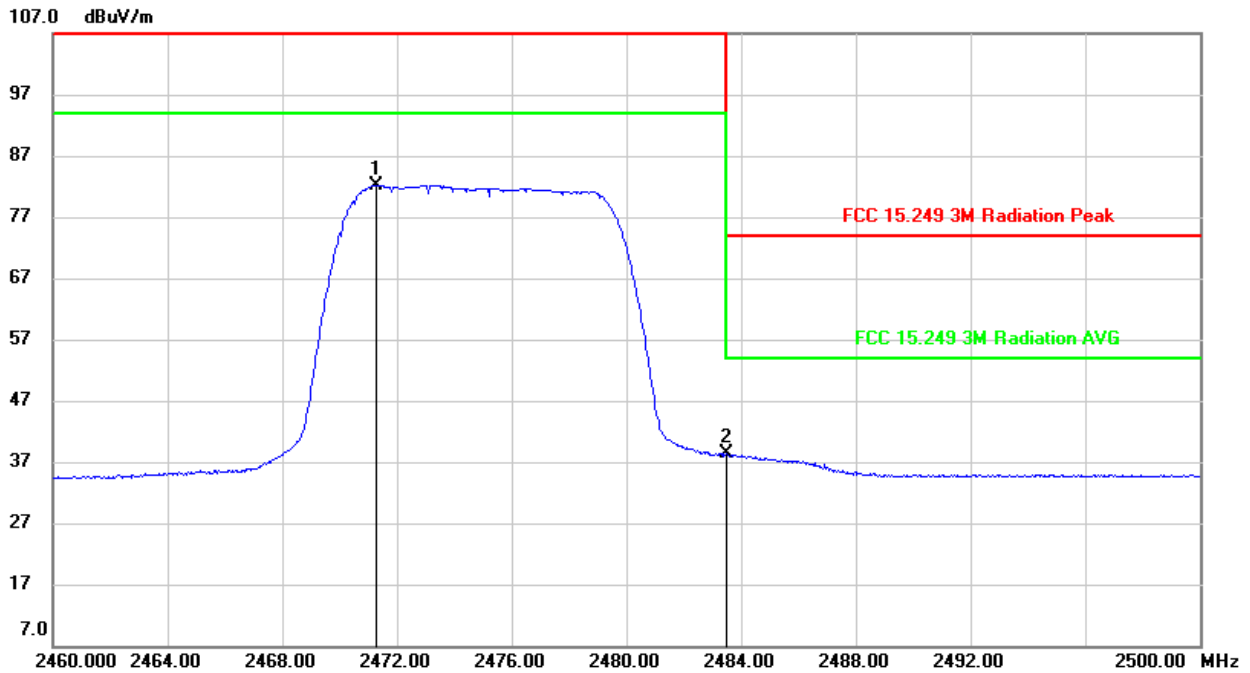


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2471.285	49.39	32.80	82.19	94.00	-11.81	AVG
2	2483.500	5.57	32.78	38.35	54.00	-15.65	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, VERTICAL)

PEAK

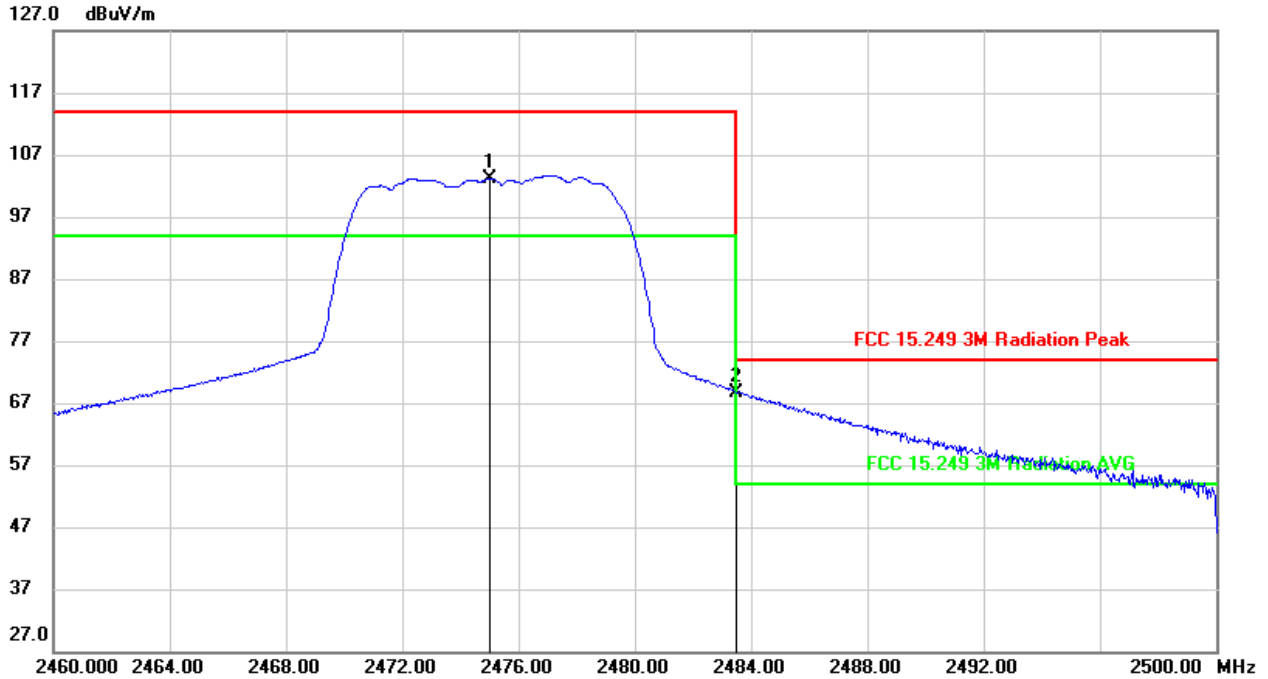

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2475.000	70.28	32.89	103.17	114.00	-10.83	peak
2	2483.500	35.77	32.88	68.65	74.00	-5.35	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

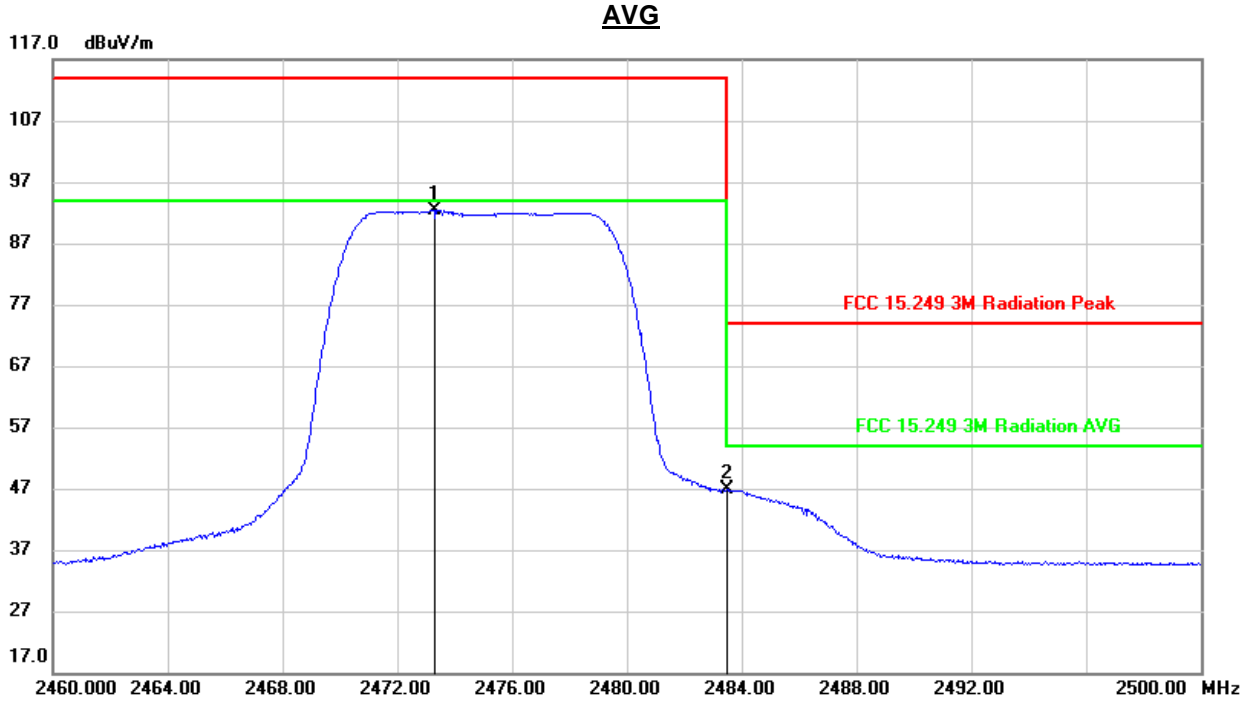

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2422.596	50.29	32.95	83.24	94.00	-10.76	AVG
2	2483.500	13.89	32.88	46.77	54.00	-7.23	AVG


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



QPSK 20MHz Bandwidth Mode

RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

PEAK

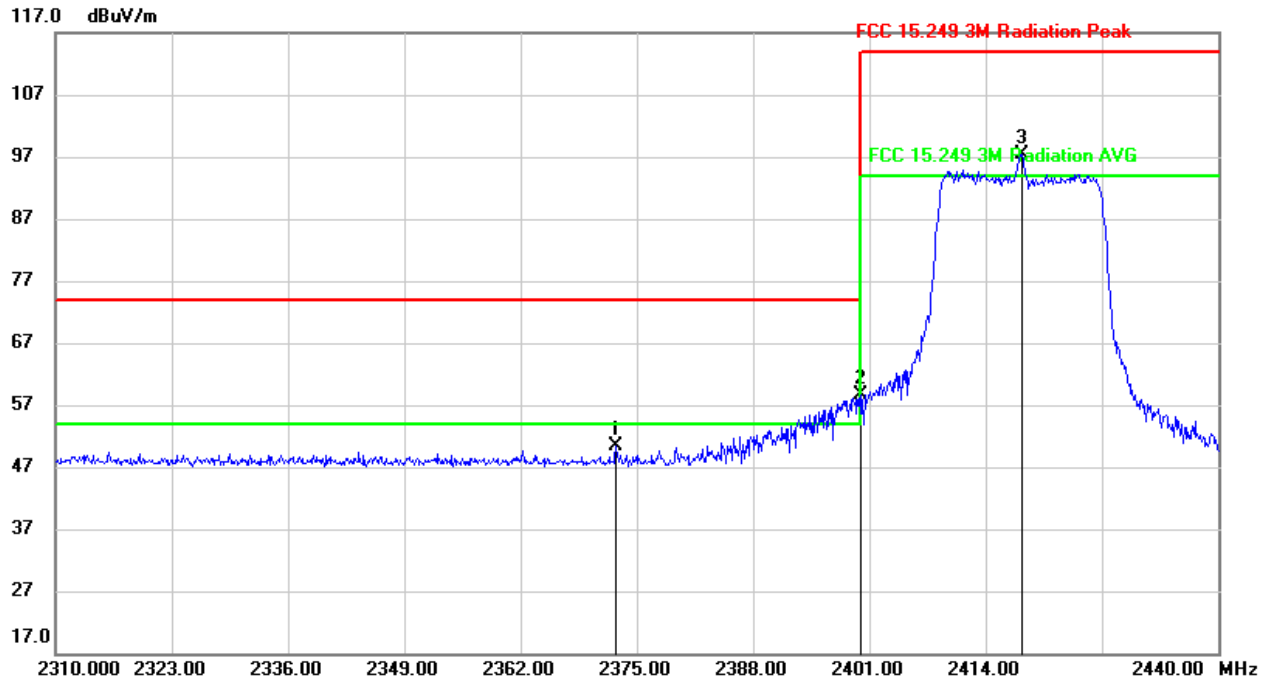

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2372.758	17.11	33.27	50.38	74.00	-23.62	peak
2	2400.000	25.67	33.07	58.74	74.00	-15.26	peak
3	2418.000	64.51	32.98	97.49	114.00	-16.51	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



AVG

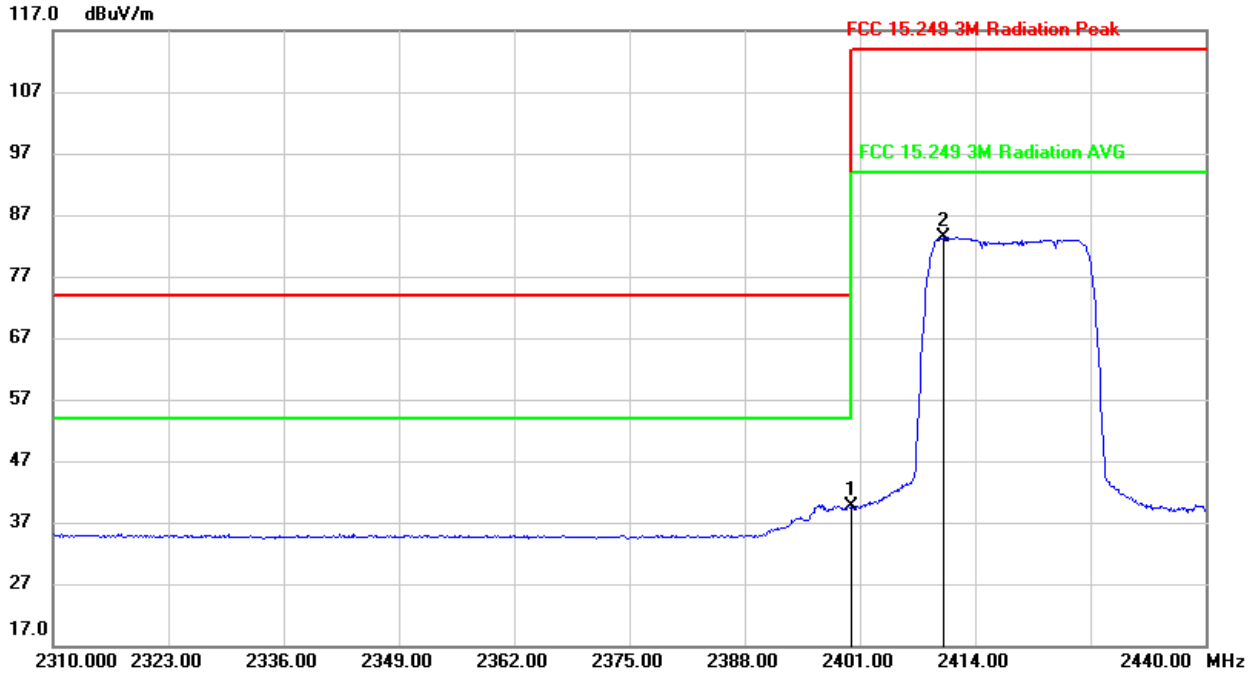


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	6.44	33.07	39.51	54.00	-14.49	AVG
2	2410.571	50.35	33.02	83.37	94.00	-10.63	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)

PEAK

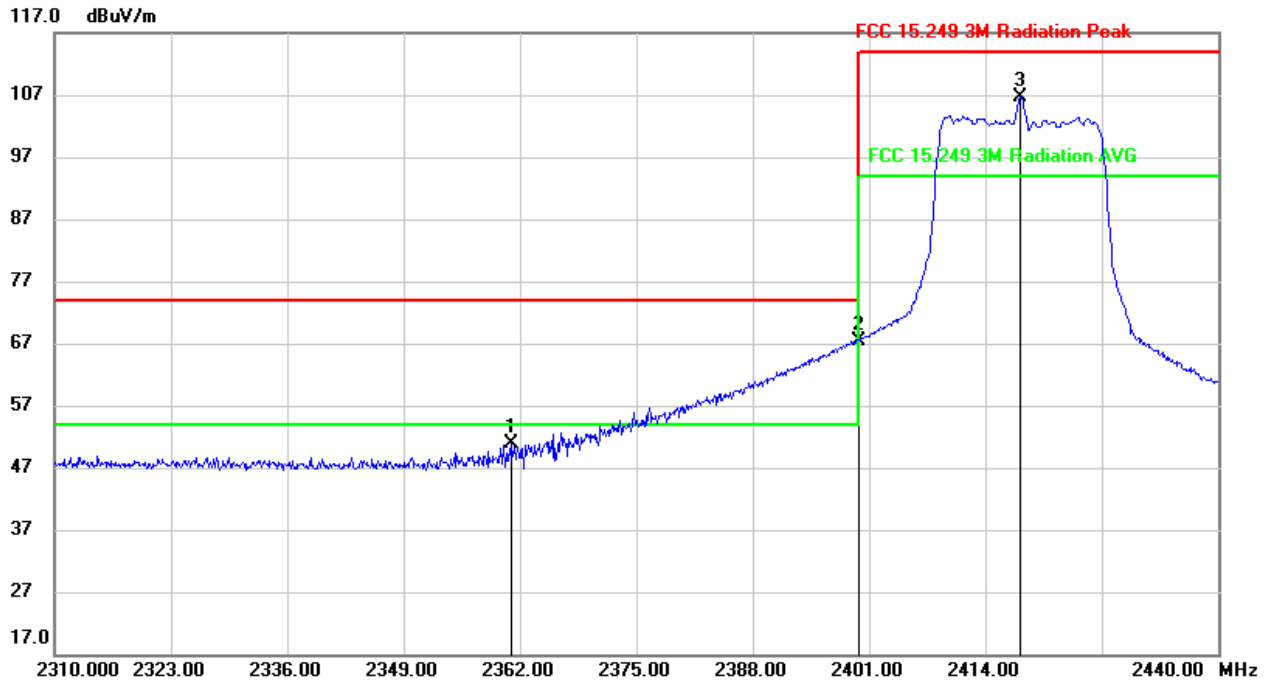


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2361.171	17.42	33.45	50.87	74.00	-23.13	peak
2	2400.000	34.25	33.17	67.42	74.00	-6.58	peak
3	2418.000	73.54	33.08	106.62	114.00	-7.38	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

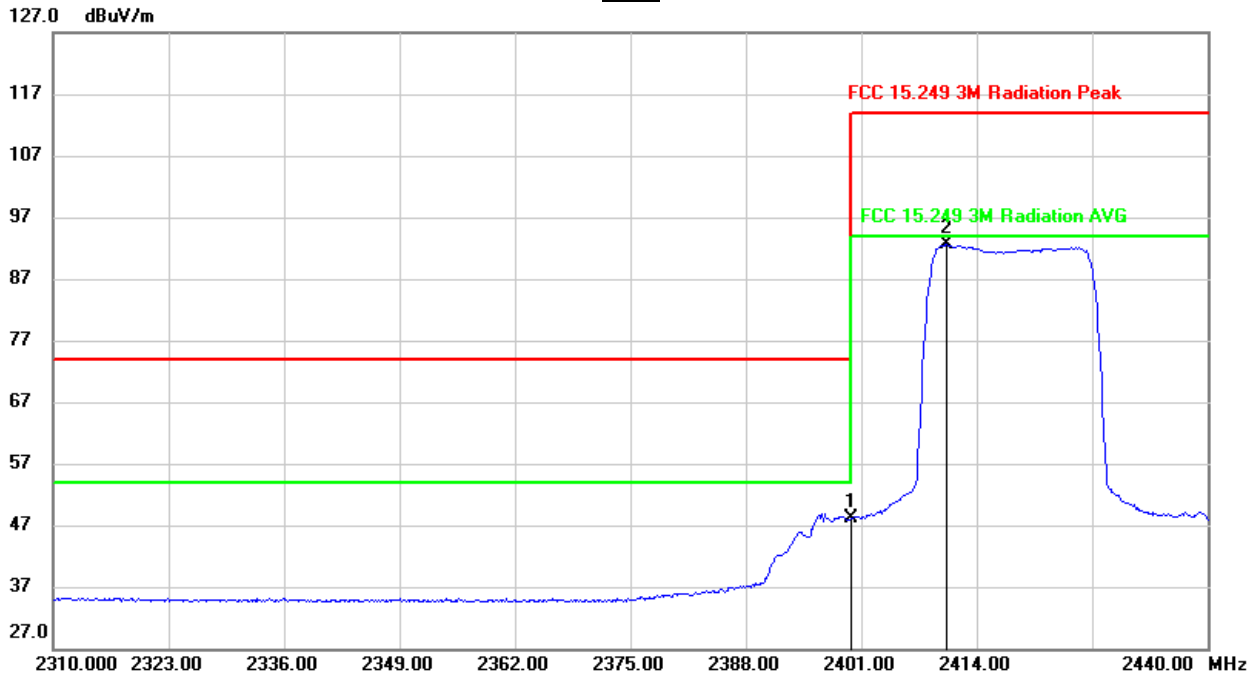


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	14.99	33.17	48.16	54.00	-5.84	AVG
2	2410.653	59.41	33.12	92.53	94.00	-1.47	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, HORIZONTAL)

PEAK

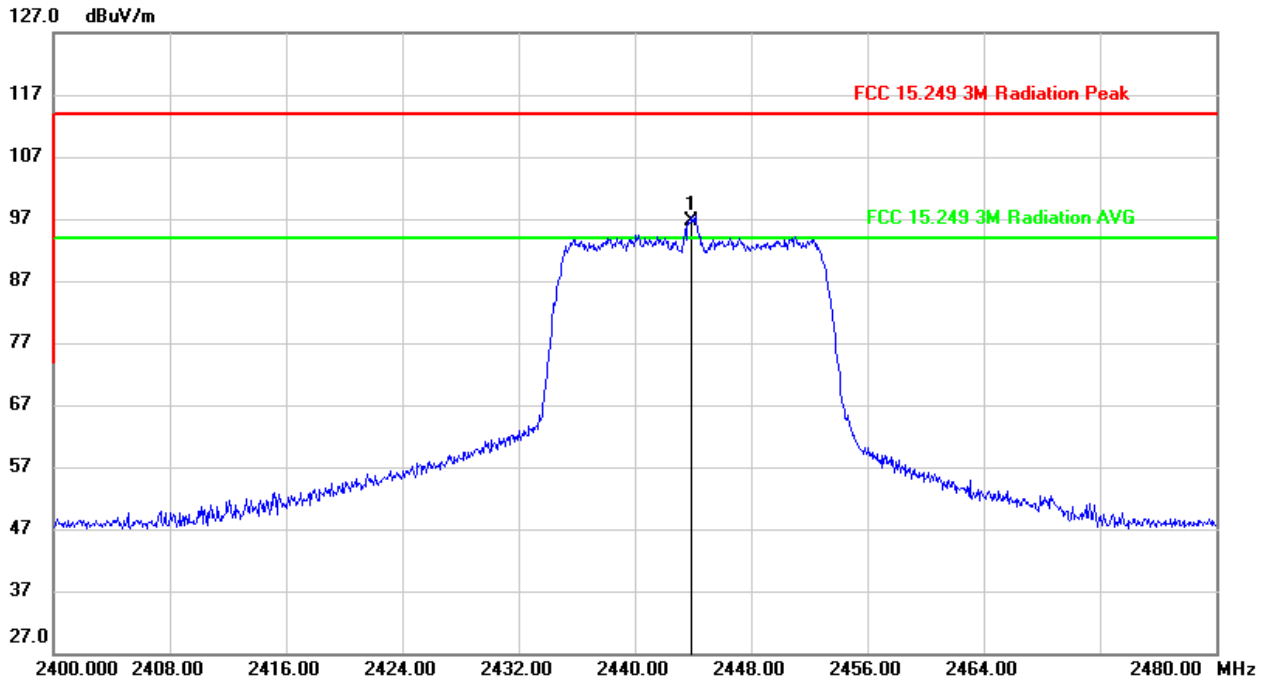


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	63.87	32.85	96.72	114.00	-17.28	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

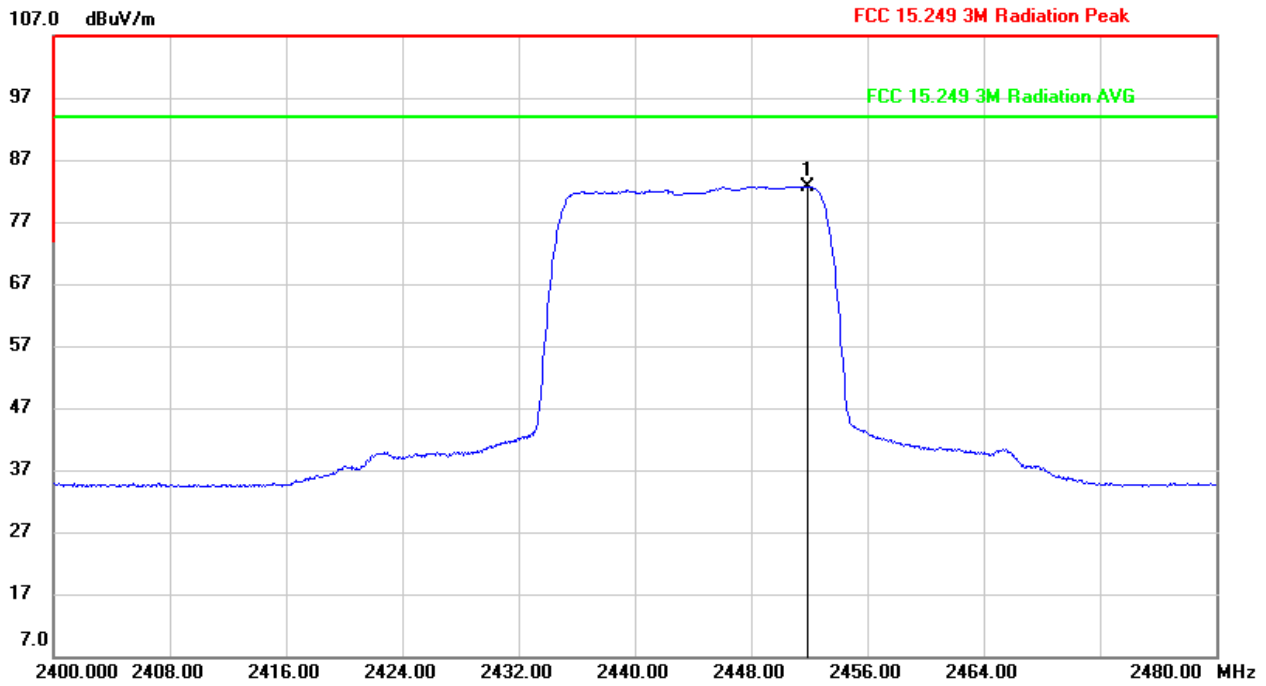


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2451.910	49.90	32.82	82.72	94.00	-11.28	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, VERTICAL)

PEAK

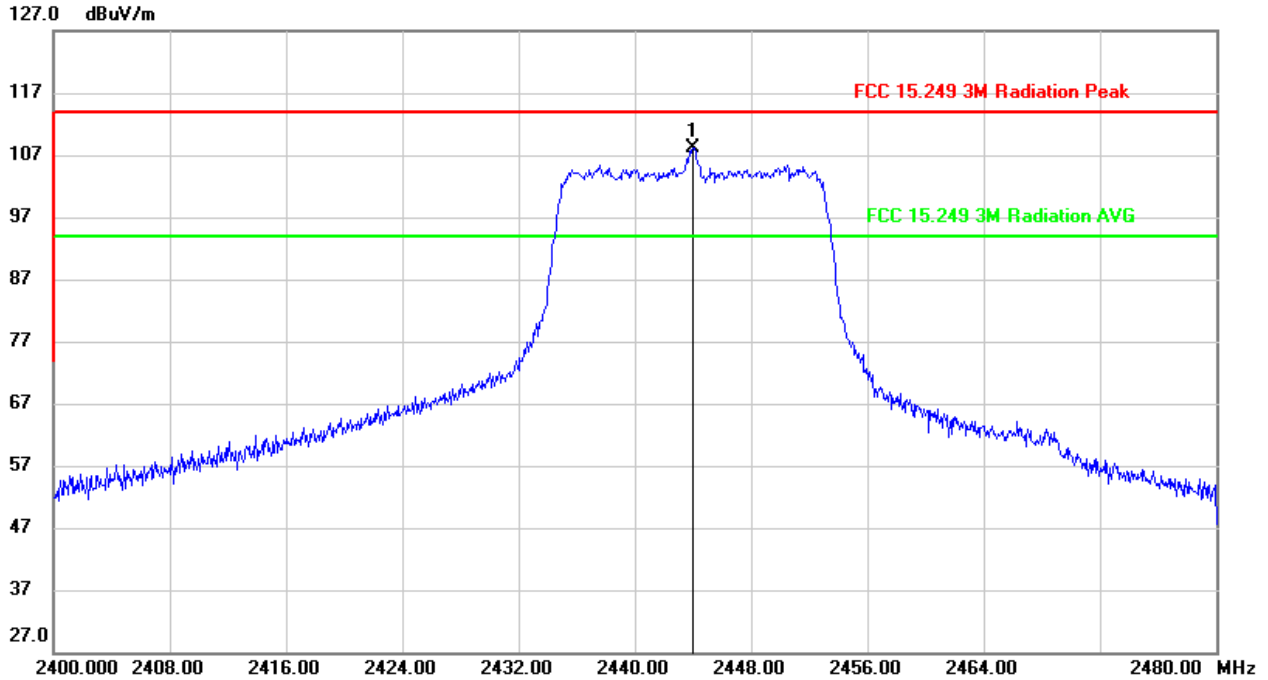


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	75.27	32.95	108.22	114.00	-5.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

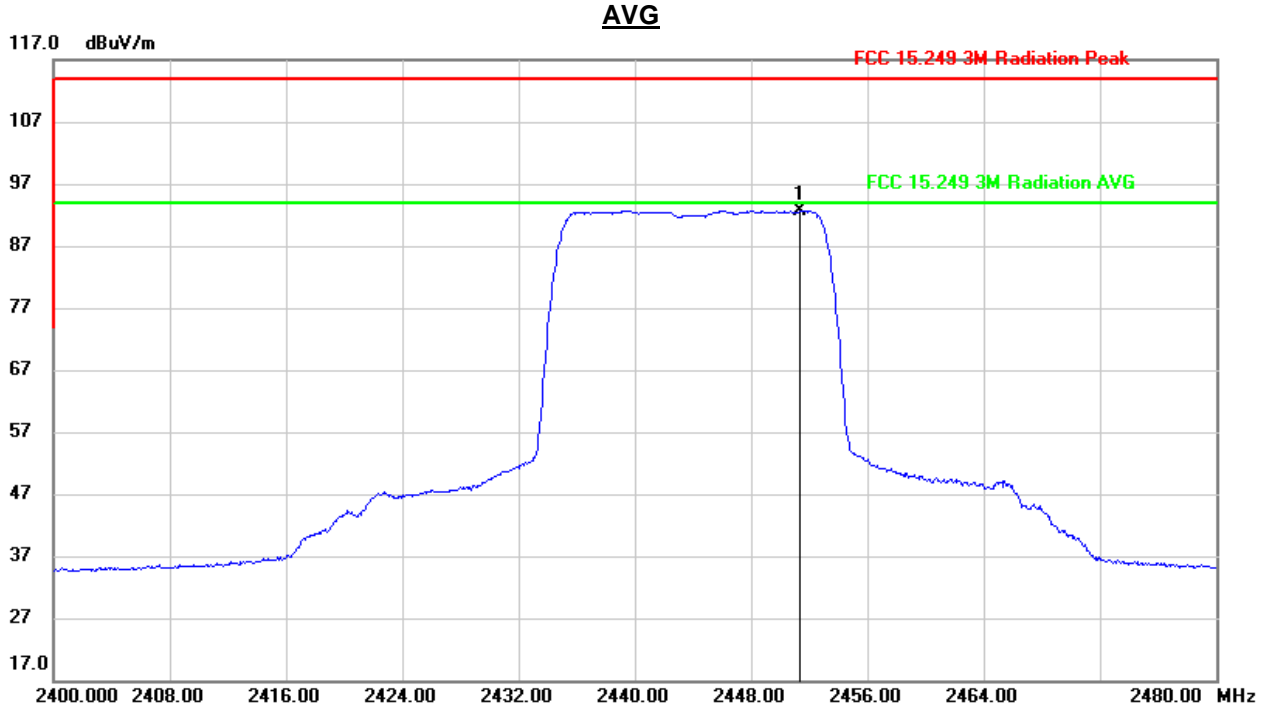


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2451.370	59.80	32.92	92.72	94.00	-1.28	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, HORIZONTAL)

PEAK

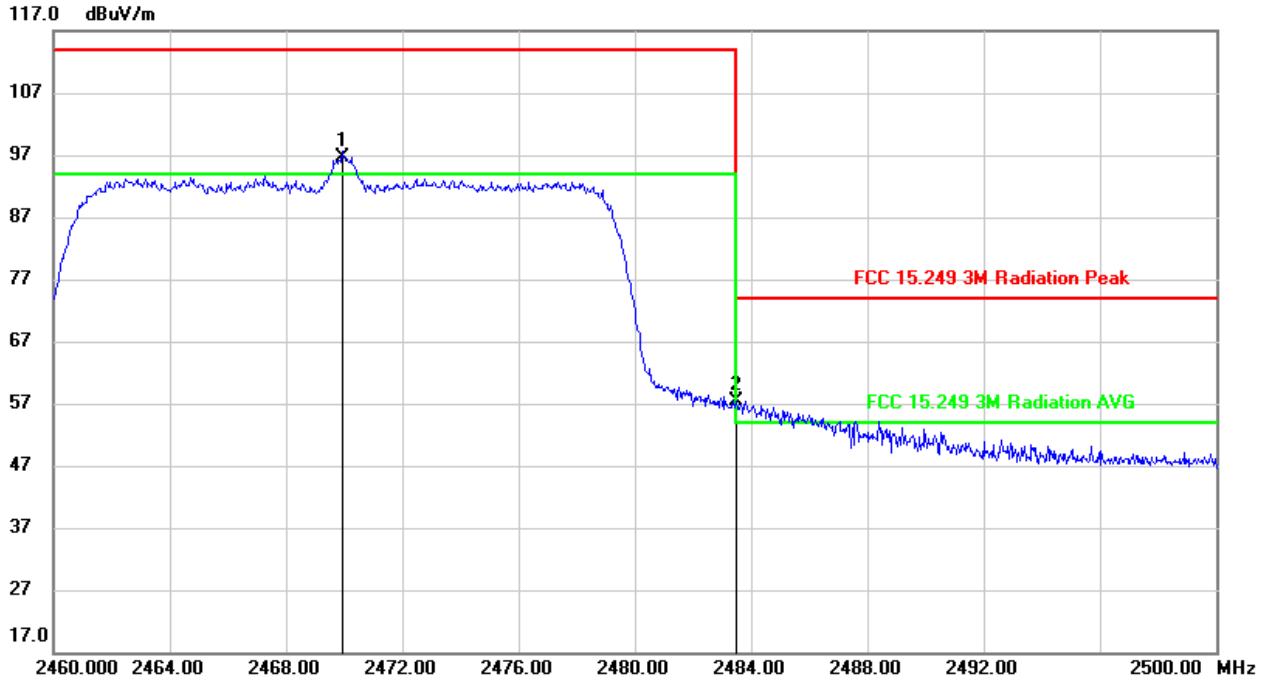

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.000	63.76	32.80	96.56	114.00	-17.44	peak
2	2483.500	24.55	32.78	57.33	74.00	-16.67	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

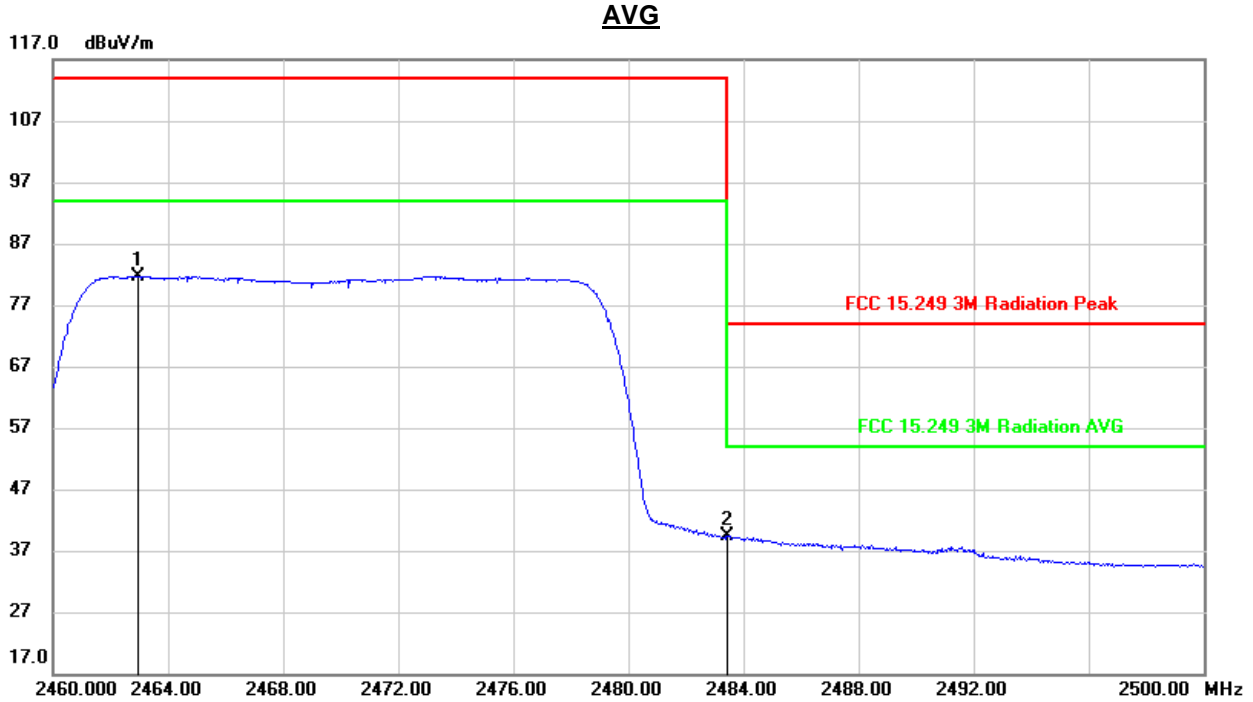


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.980	48.88	32.80	81.68	94.00	-12.32	AVG
2	2483.500	6.55	32.78	39.33	54.00	-14.67	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, VERTICAL)

PEAK

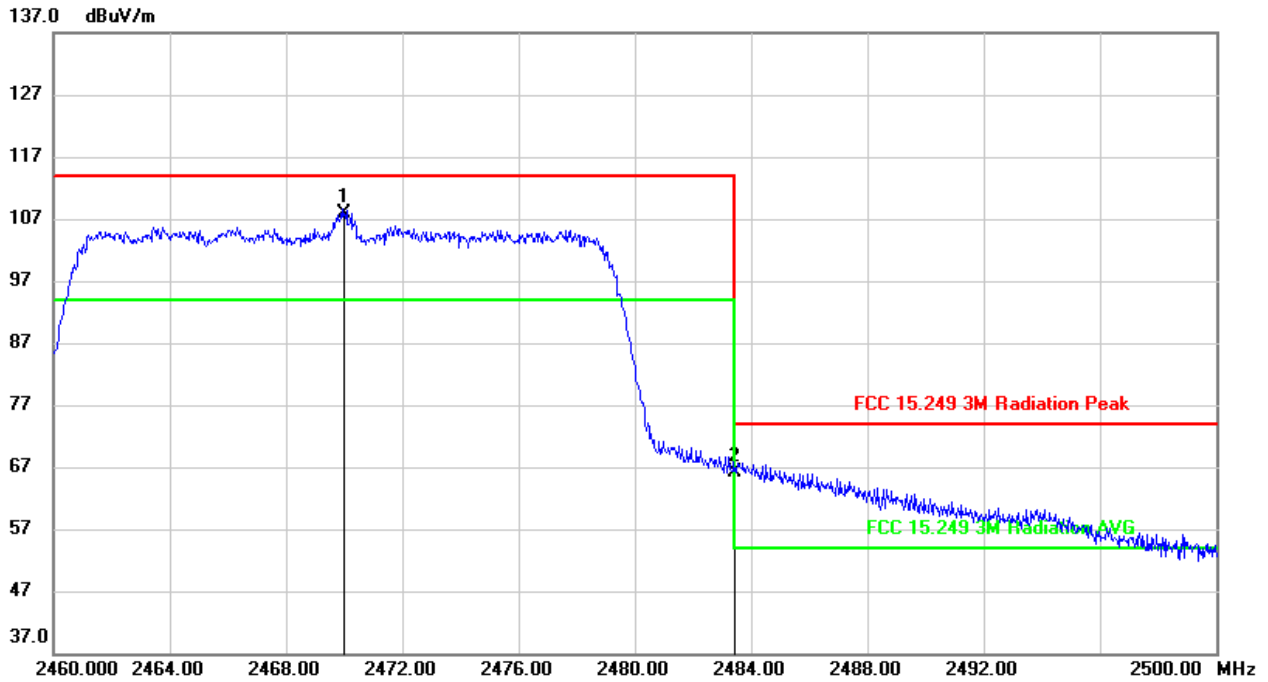


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.000	75.00	32.90	107.90	114.00	-6.10	peak
2	2483.500	33.21	32.88	66.09	74.00	-7.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

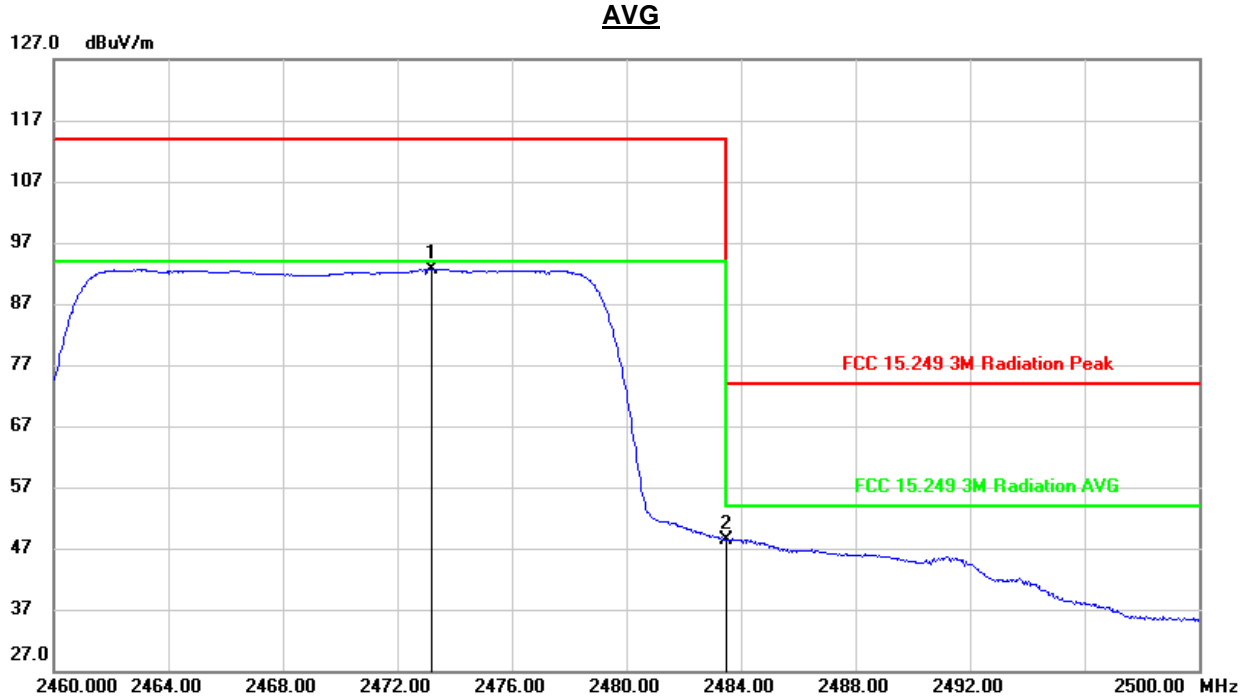

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2473.235	59.82	32.89	92.71	94.00	-1.29	AVG
2	2483.500	15.57	32.88	48.45	54.00	-5.55	AVG


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



OFDM 20MHz Bandwidth Mode

RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, HORIZONTAL)

PEAK

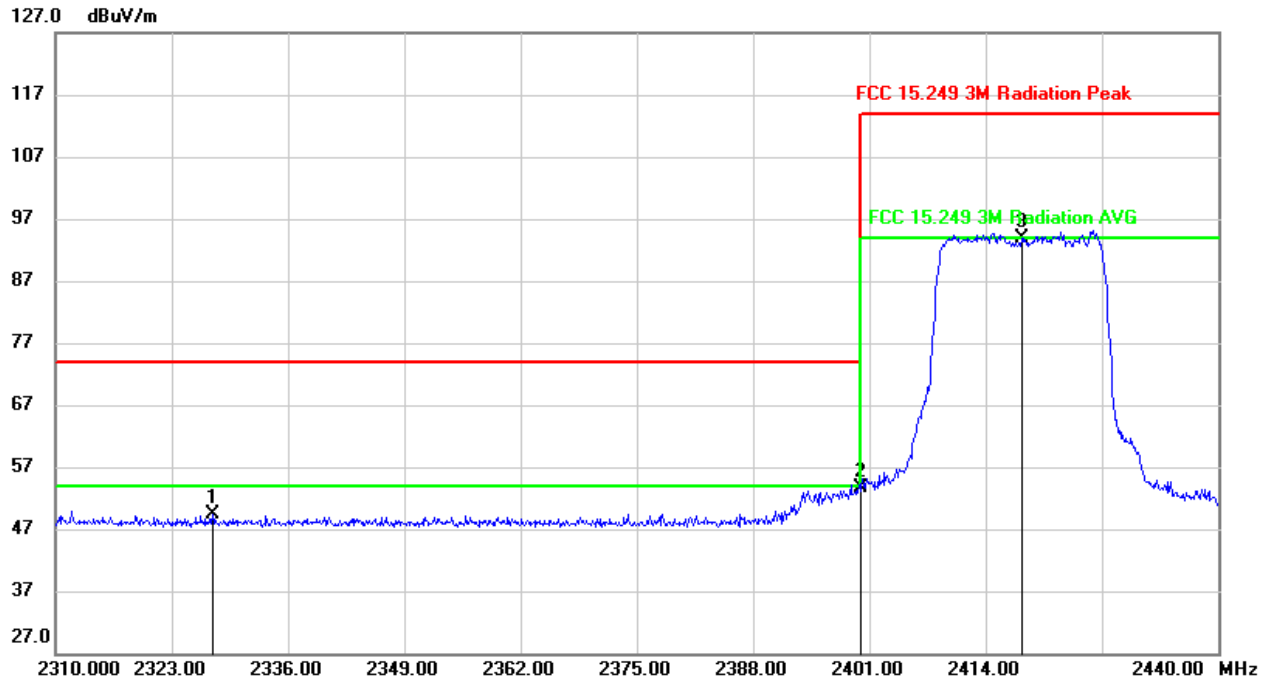

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2327.664	15.85	33.59	49.44	74.00	-24.56	peak
2	2400.000	20.62	33.07	53.69	74.00	-20.31	peak
3	2418.000	60.97	32.98	93.95	114.00	-20.05	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



AVG

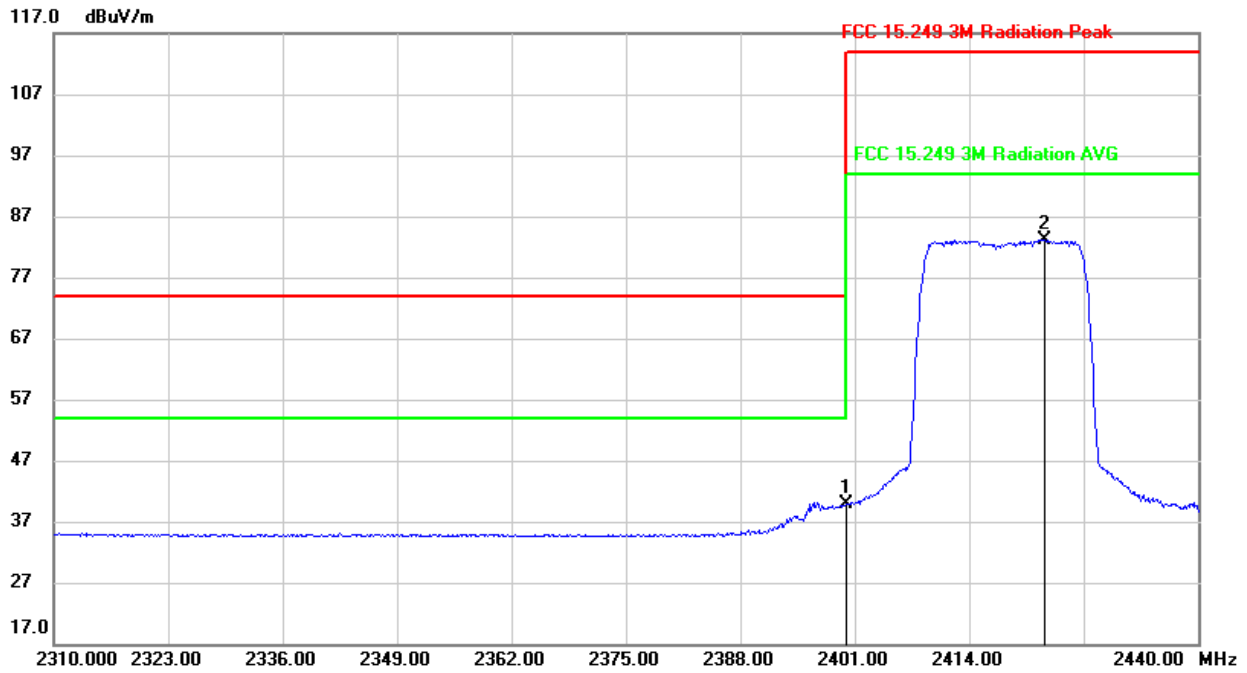


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	6.80	33.07	39.87	54.00	-14.13	AVG
2	2422.596	50.29	32.95	83.24	94.00	-10.76	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOW CHANNEL, VERTICAL)

PEAK

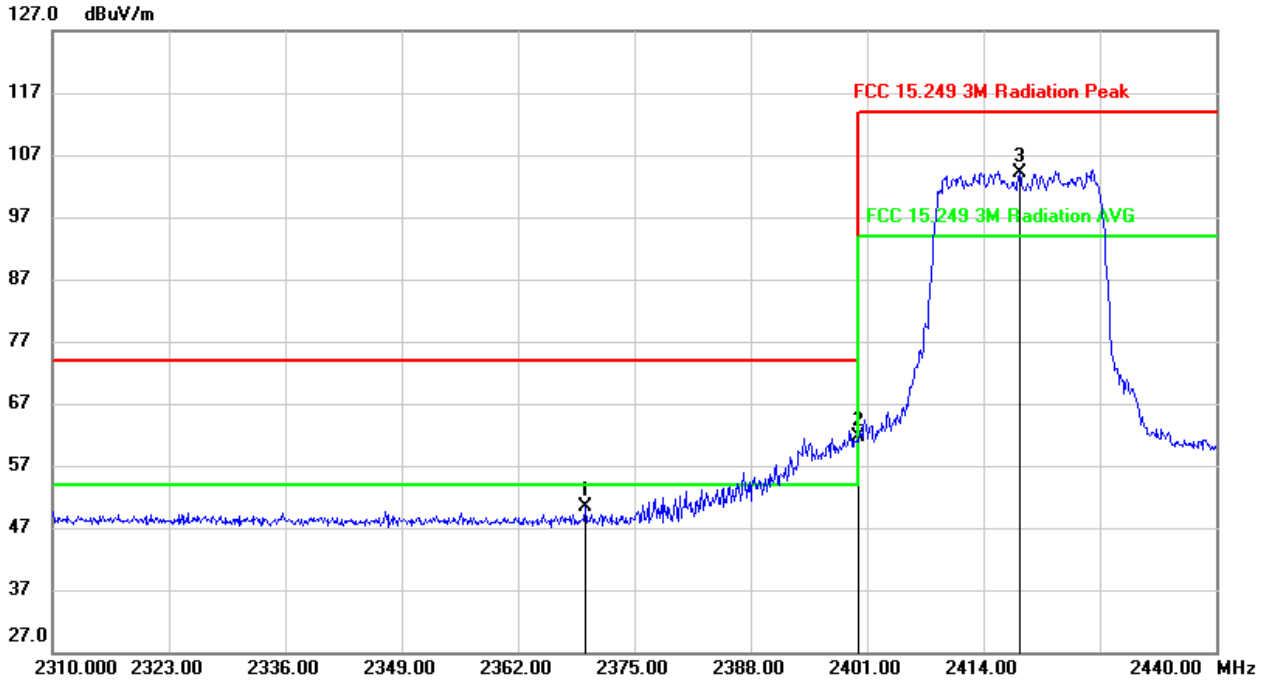

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.556	17.00	33.39	50.39	74.00	-23.61	peak
2	2400.000	28.39	33.17	61.56	74.00	-12.44	peak
3	2418.000	70.99	33.08	104.07	114.00	-9.93	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

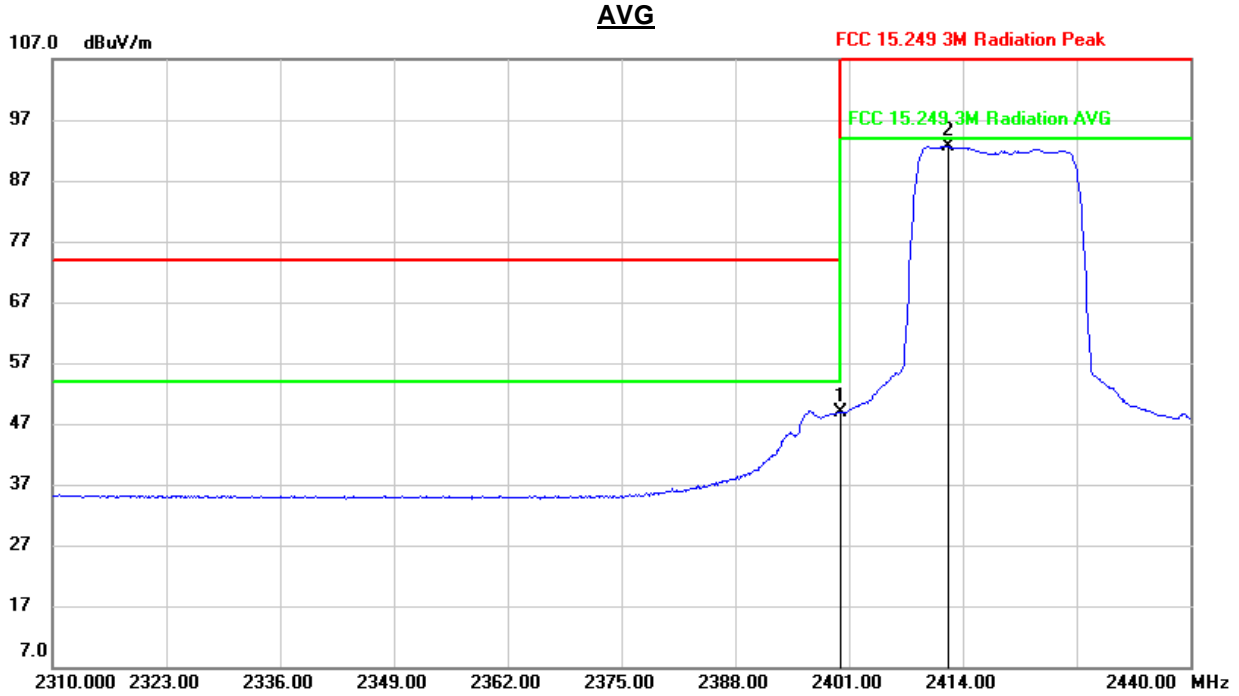


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	15.72	33.17	48.89	54.00	-5.11	AVG
2	2412.407	59.48	33.11	92.59	94.00	-1.41	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, HORIZONTAL)

PEAK

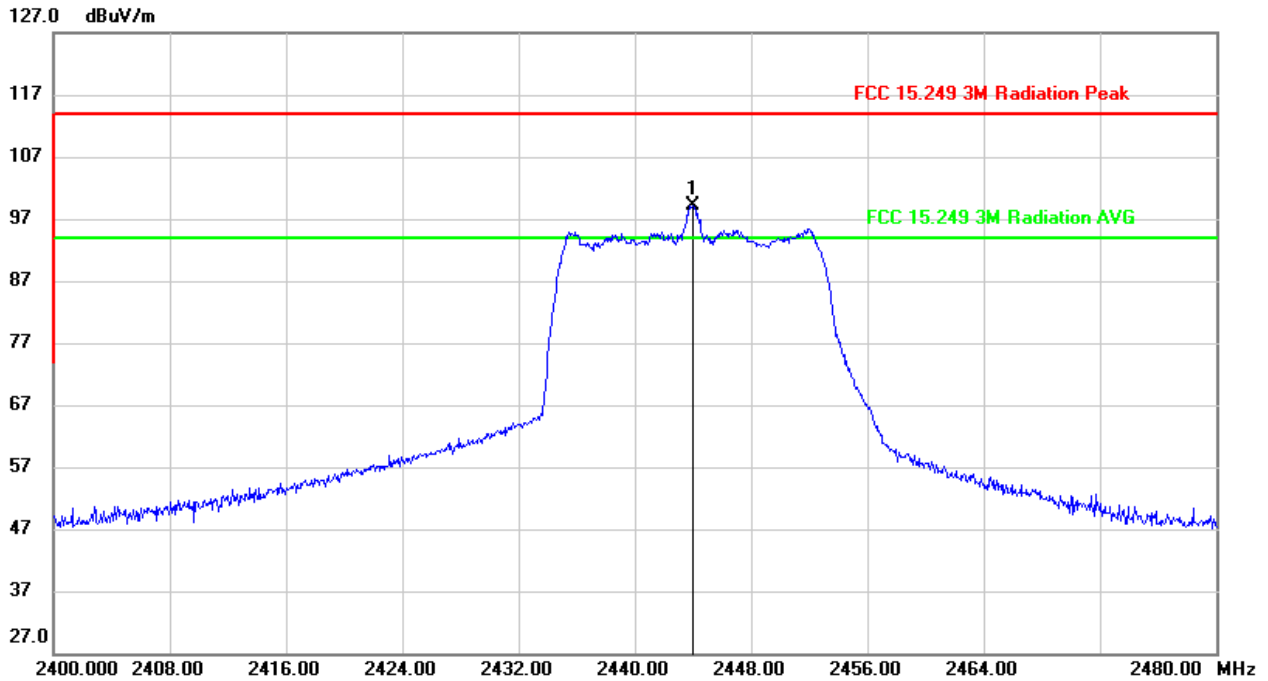


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	66.21	32.85	99.06	114.00	-14.94	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



AVG

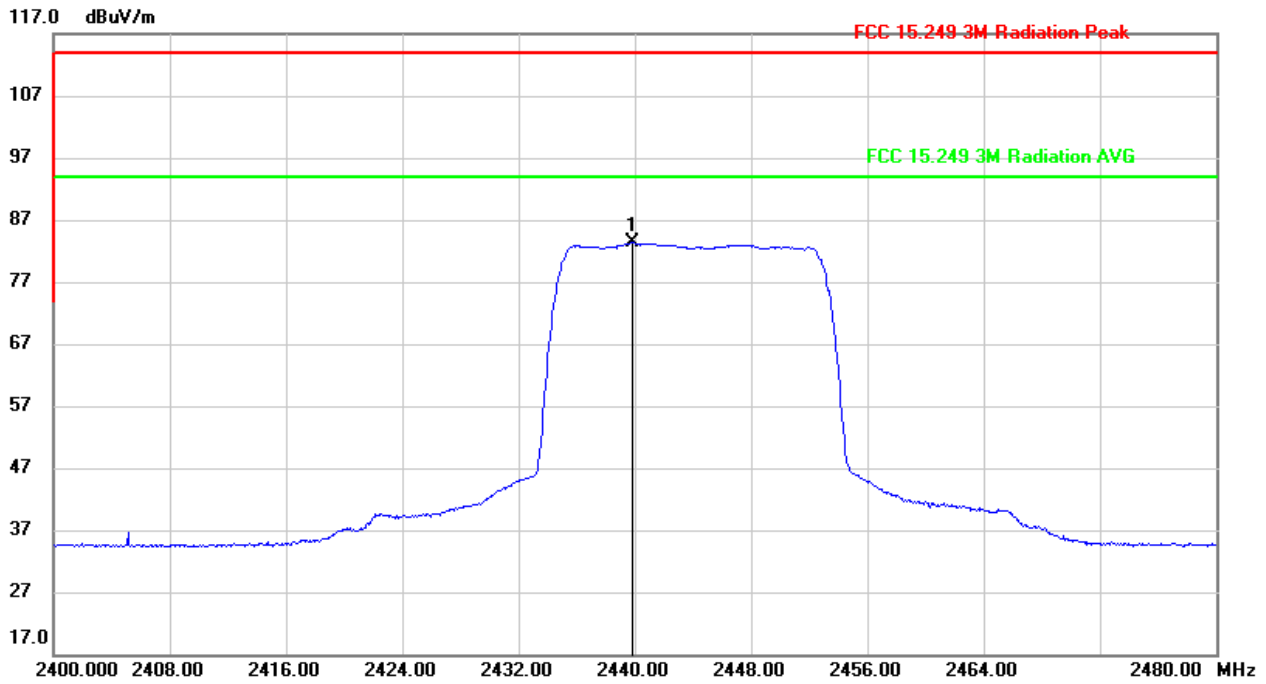


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2439.890	50.44	32.87	83.31	94.00	-10.69	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



FIELD STRENGTH OF INTENTIONAL EMISSIONS (MID CHANNEL, VERTICAL)

PEAK

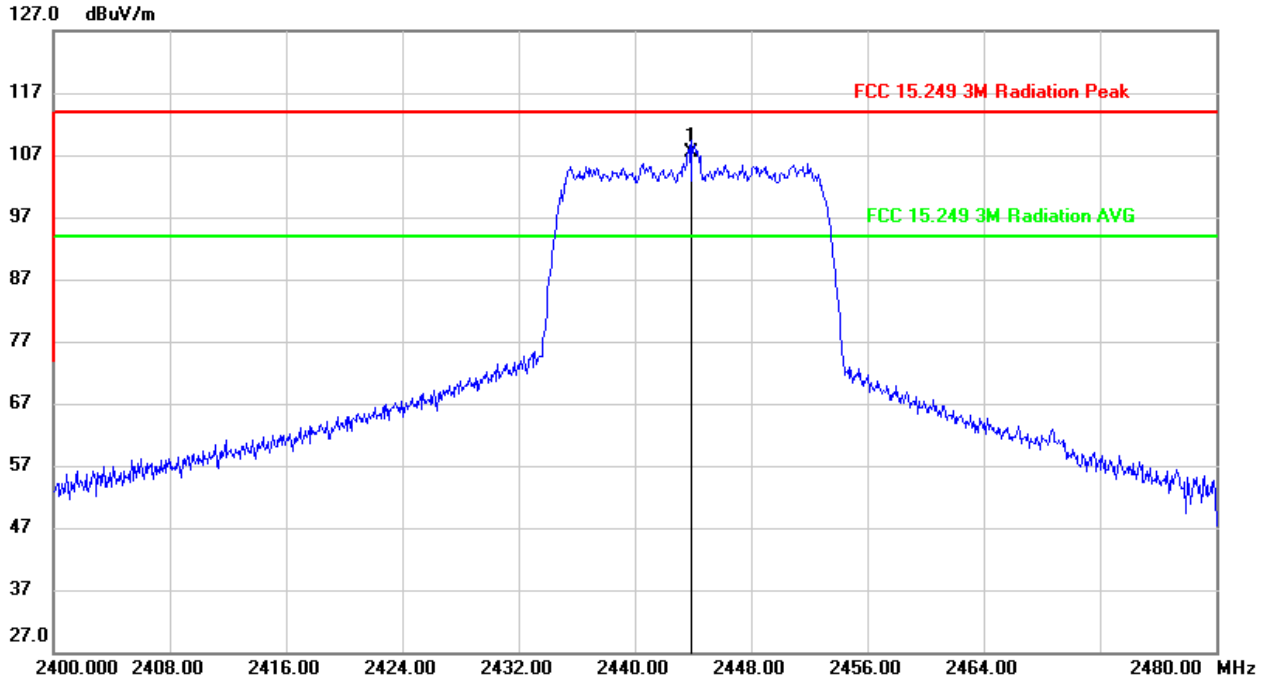


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2444.000	74.43	32.95	107.38	114.00	-6.62	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

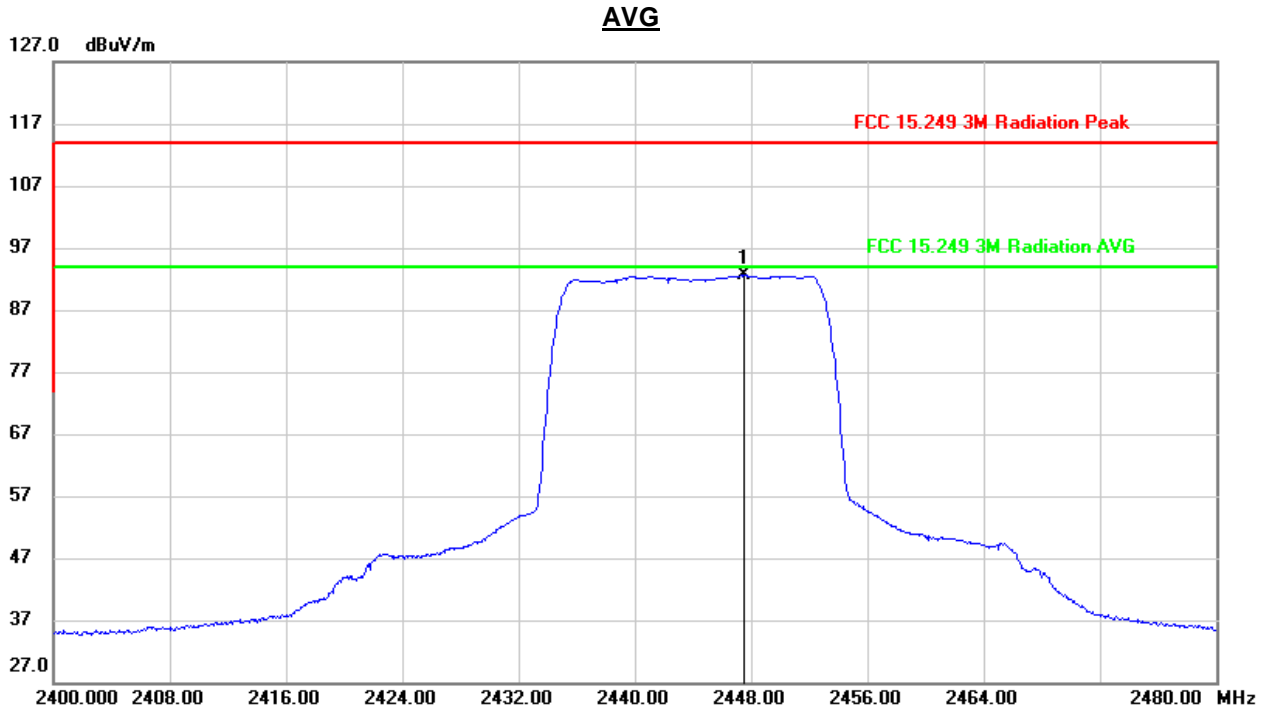


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2447.530	59.66	32.93	92.59	94.00	-1.41	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/T_{on}=2K$, where: T_{on} is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result



RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, HORIZONTAL)

PEAK

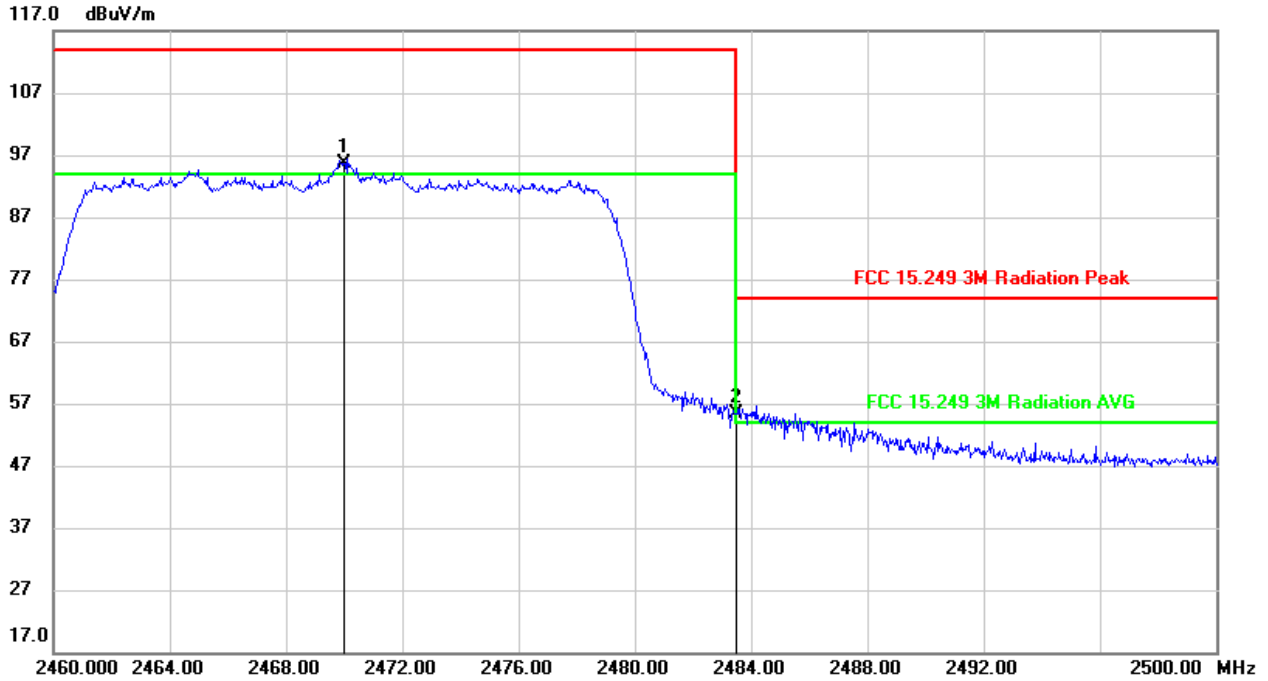


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.000	62.89	32.80	95.69	114.00	-18.31	peak
2	2483.500	22.52	32.78	55.30	74.00	-18.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

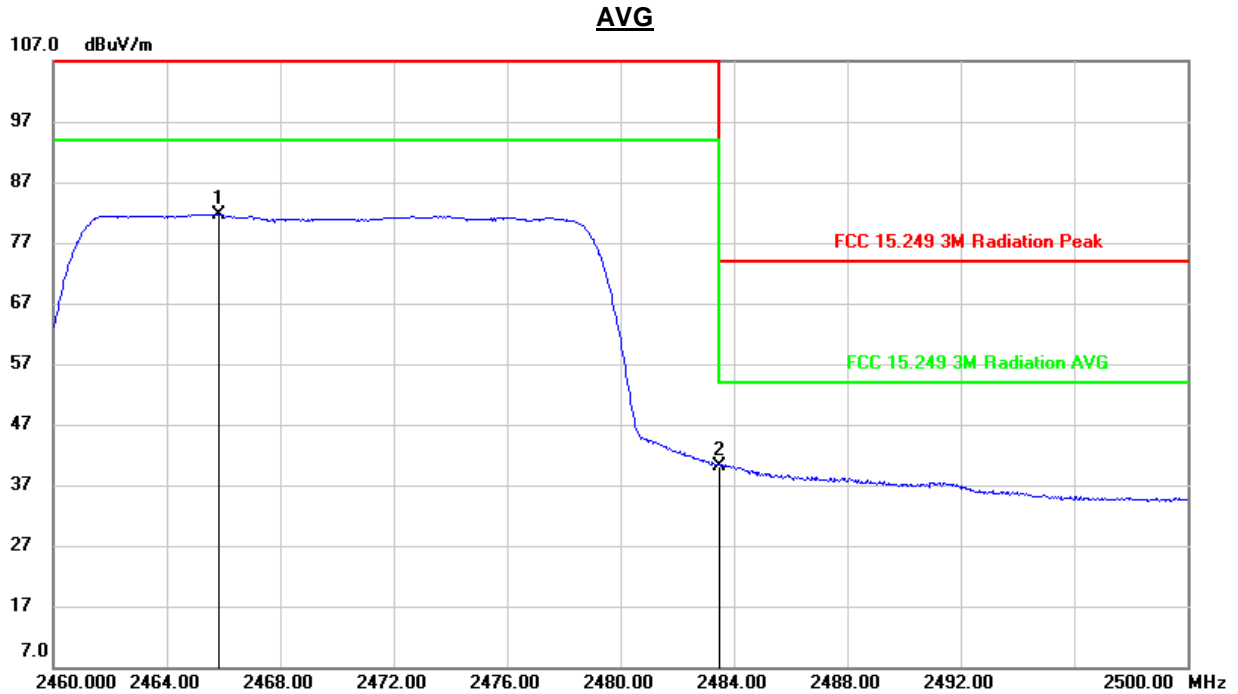


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.850	48.79	32.81	81.60	94.00	-12.40	AVG
2	2483.500	7.39	32.78	40.17	54.00	-13.83	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




RESTRICTED BANDEDGE AND FIELD STRENGTH OF INTENTIONAL EMISSIONS (HIGH CHANNEL, VERTICAL)

PEAK

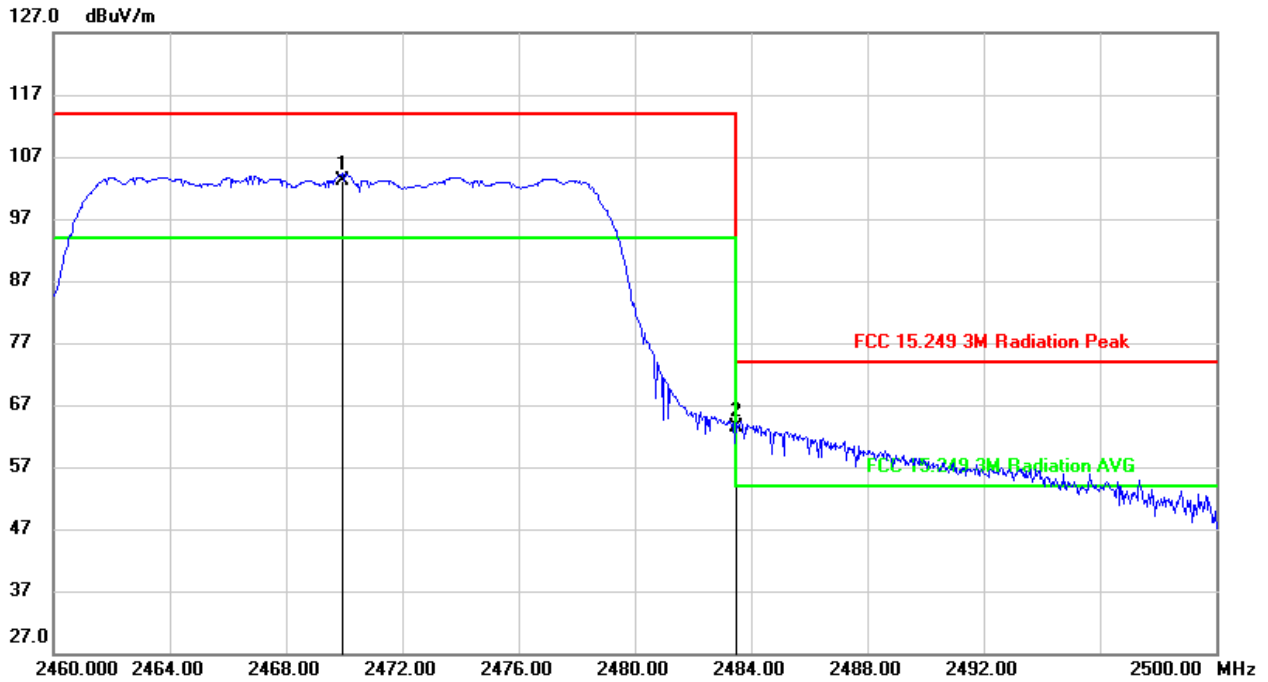

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2470.000	70.18	32.90	103.08	114.00	-10.92	peak
2	2483.500	30.62	32.88	63.50	74.00	-10.50	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. Only the worst case emission recorded in the report, if Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

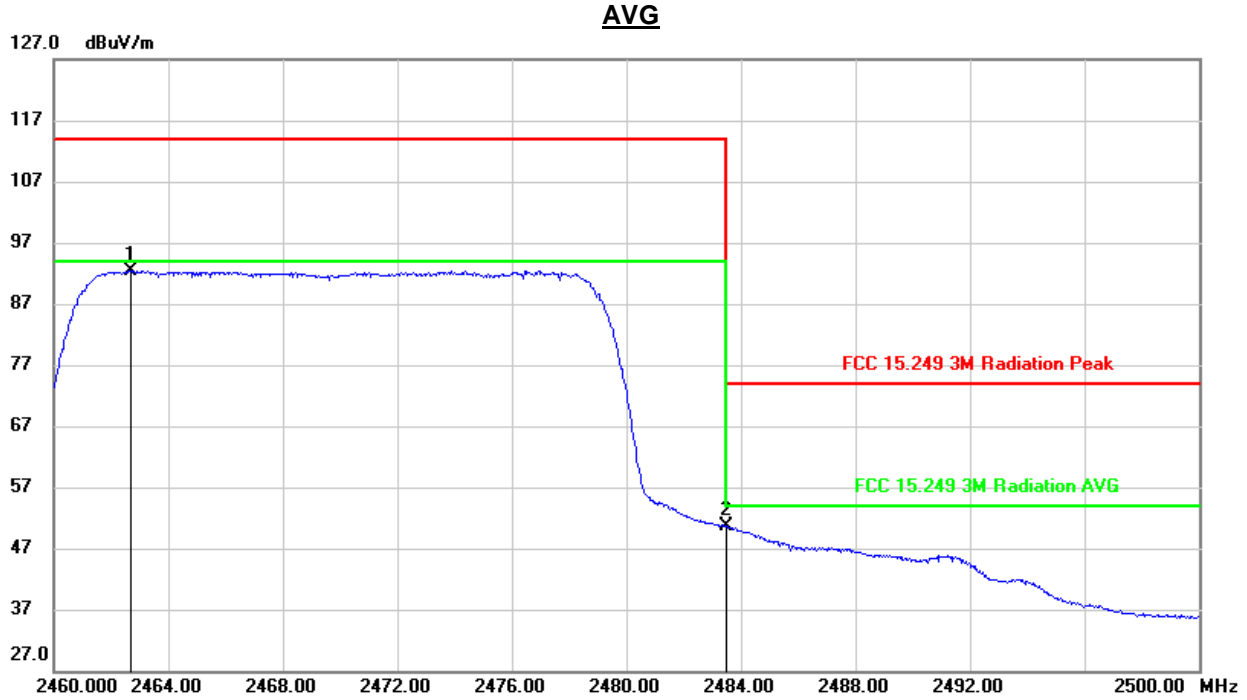

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.700	59.50	32.90	92.40	94.00	-1.60	AVG
2	2483.500	17.64	32.88	50.52	54.00	-3.48	AVG

- Note:
1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. AVG: $VBW=1/Ton=2K$, where: Ton is transmit duration.
 5. For transmit duration, please refer to clause 7.1.
 6. About the AVG value of fundamental frequency, we only mark the worse frequency point, the others point are deemed to comply with AV limit include the point mark in the Peak result




8.3.SPURIOUS EMISSIONS BELOW 30M (WORST-CASE CONFIGURATION)

QPSK 20MHz Bandwidth Mode

SPURIOUS EMISSIONS BELOW 30MHz (MIDDLE CHANNEL, HORIZONTAL)

9KHz~150KHz

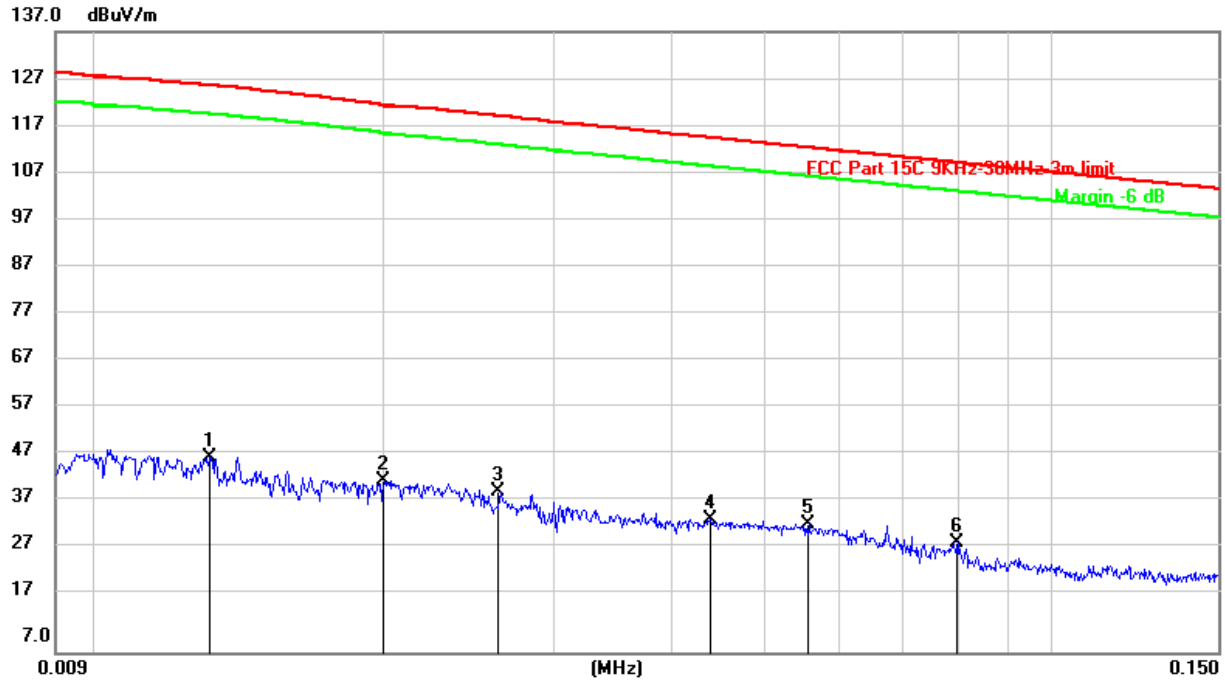


No.	Frequency (KHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0131	27.46	20.24	47.70	125.73	-78.03	peak
2	0.0200	22.59	20.31	42.90	121.58	-78.68	peak
3	0.0263	20.25	20.31	40.56	119.36	-78.80	peak
4	0.0439	14.42	20.31	34.73	114.80	-80.07	peak
5	0.0555	13.39	20.31	33.70	112.75	-79.05	peak
6	0.0796	9.77	20.29	30.06	109.59	-79.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.



150KHz~30MHz

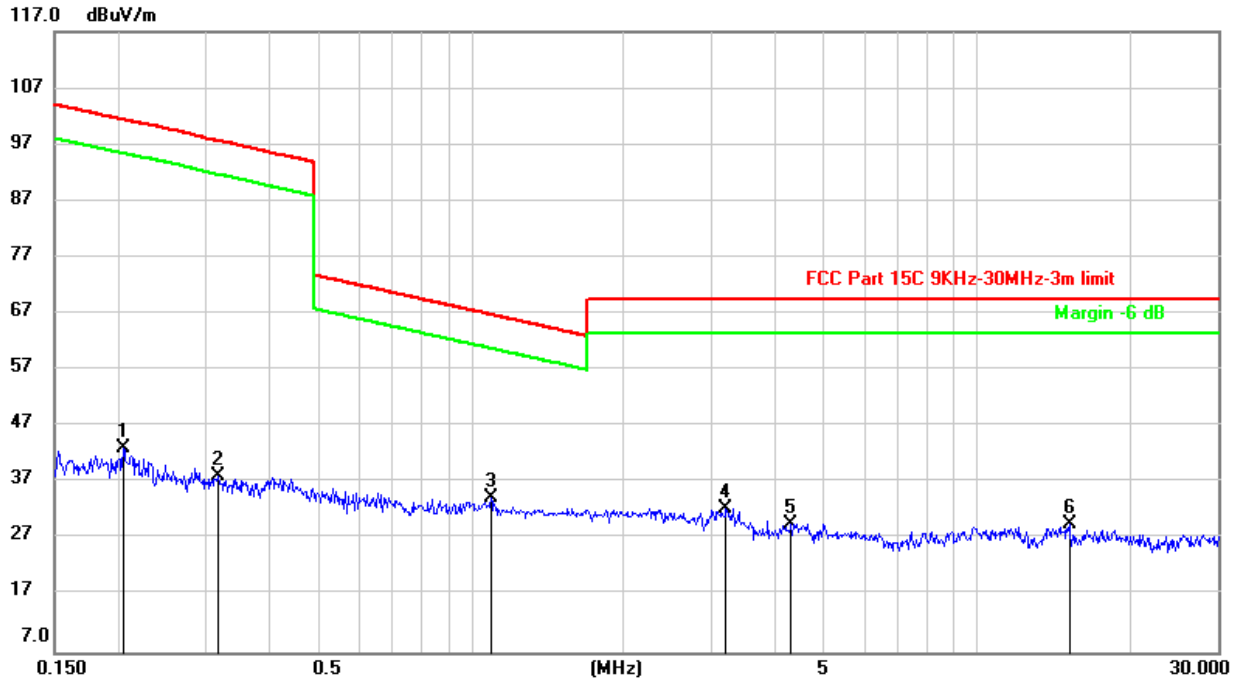


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2048	22.70	20.36	43.06	101.41	-58.35	peak
2	0.3165	17.80	20.30	38.10	97.65	-59.55	peak
3	1.0939	13.93	20.41	34.34	66.83	-32.49	peak
4	3.1900	11.63	20.93	32.56	69.54	-36.98	peak
5	4.2918	8.80	20.99	29.79	69.54	-39.75	peak
6	15.2261	8.73	20.93	29.66	69.54	-39.88	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.



SPURIOUS EMISSIONS BELOW 30MHz (MIDDLE CHANNEL, VERTICAL)

9KHz~150KHz

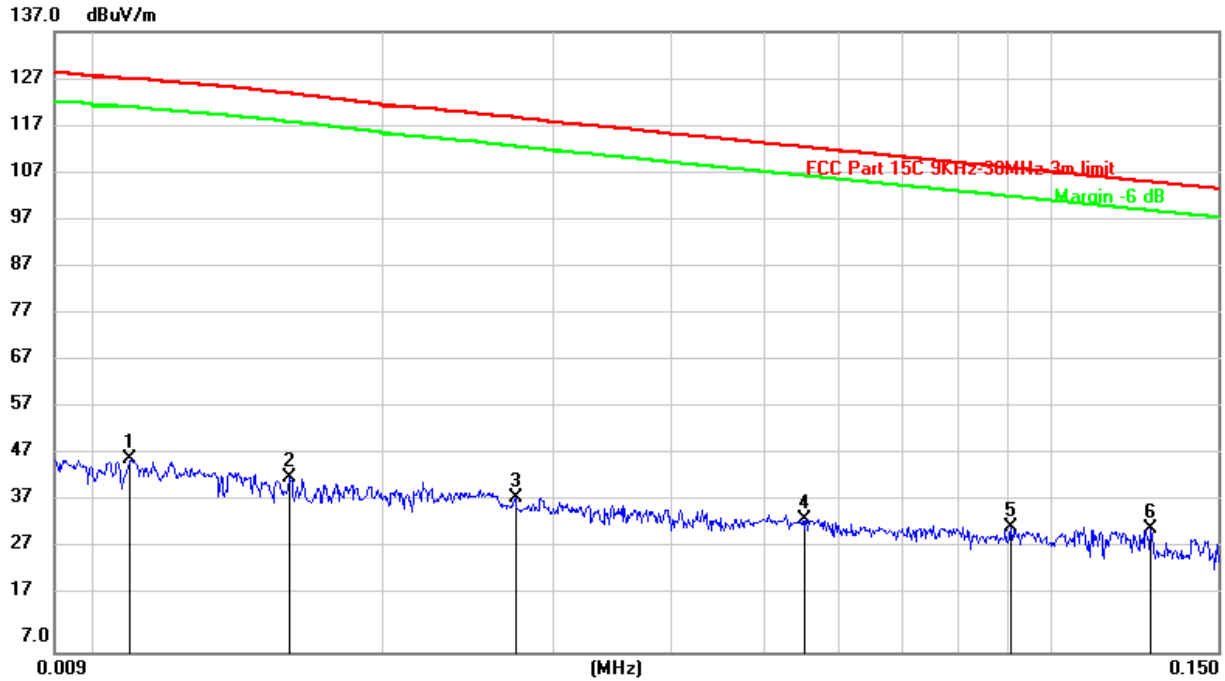


No.	Frequency (KHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0108	27.24	20.22	47.46	127.12	-79.66	peak
2	0.0159	23.28	20.27	43.55	124.05	-80.50	peak
3	0.0274	19.10	20.31	39.41	118.98	-79.57	peak
4	0.0553	14.38	20.31	34.69	112.78	-78.09	peak
5	0.0908	12.84	20.26	33.10	108.45	-75.35	peak
6	0.1274	12.35	20.33	32.68	105.51	-72.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.



150KHz~30MHz

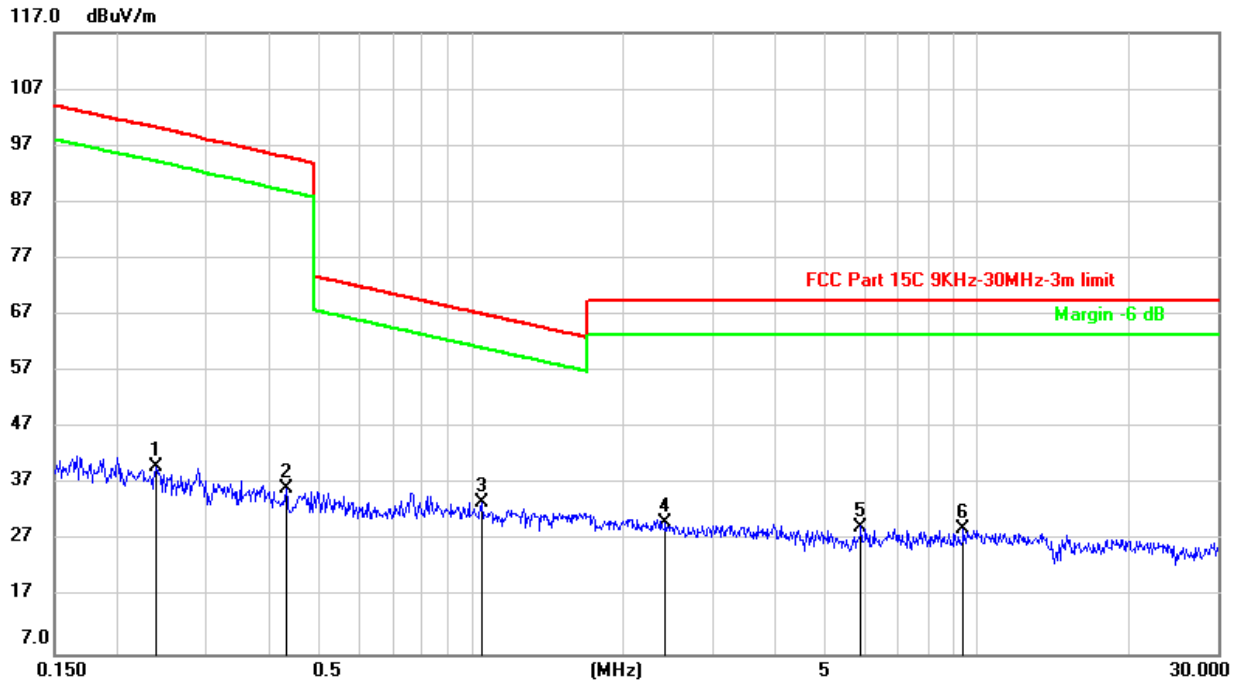

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2378	19.85	20.33	40.18	100.25	-60.07	peak
2	0.4304	15.93	20.27	36.20	94.97	-58.77	peak
3	1.0483	13.39	20.38	33.77	67.20	-33.43	peak
4	2.4218	9.32	20.80	30.12	69.54	-39.42	peak
5	5.8978	8.68	20.87	29.55	69.54	-39.99	peak
6	9.4015	8.11	21.03	29.14	69.54	-40.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.


Note 2: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



8.4.SPURIOUS EMISSIONS BELOW 1 GHz (WORST-CASE CONFIGURATION)

QPSK 20MHz Bandwidth Mode

SPURIOUS EMISSIONS BELOW 1GHz (MIDDLE CHANNEL, HORIZONTAL)

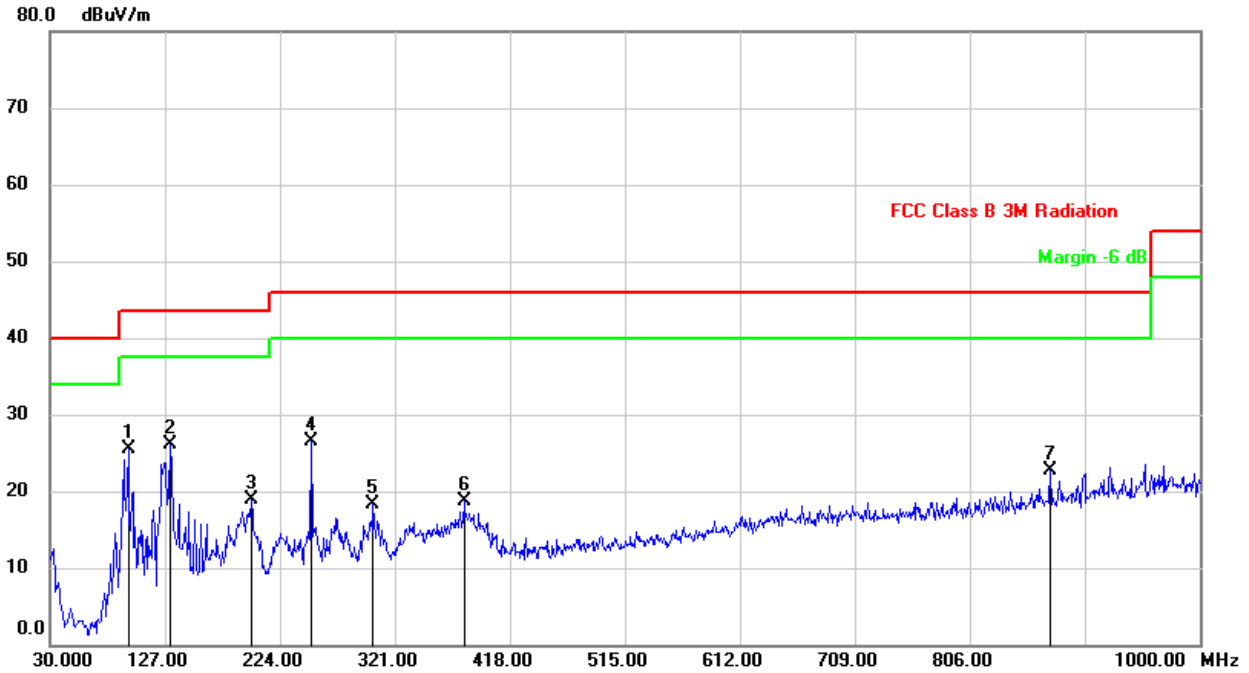


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	95.9600	47.47	-21.93	25.54	43.50	-17.96	QP
2	131.8500	44.71	-18.58	26.13	43.50	-17.37	QP
3	199.7500	33.74	-14.88	18.86	43.50	-24.64	QP
4	250.1900	44.25	-17.70	26.55	46.00	-19.45	QP
5	302.5700	33.44	-15.12	18.32	46.00	-27.68	QP
6	379.2000	31.70	-12.95	18.75	46.00	-27.25	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.



SPURIOUS EMISSIONS BELOW 1GHz (MIDDLE CHANNEL, VERTICAL)

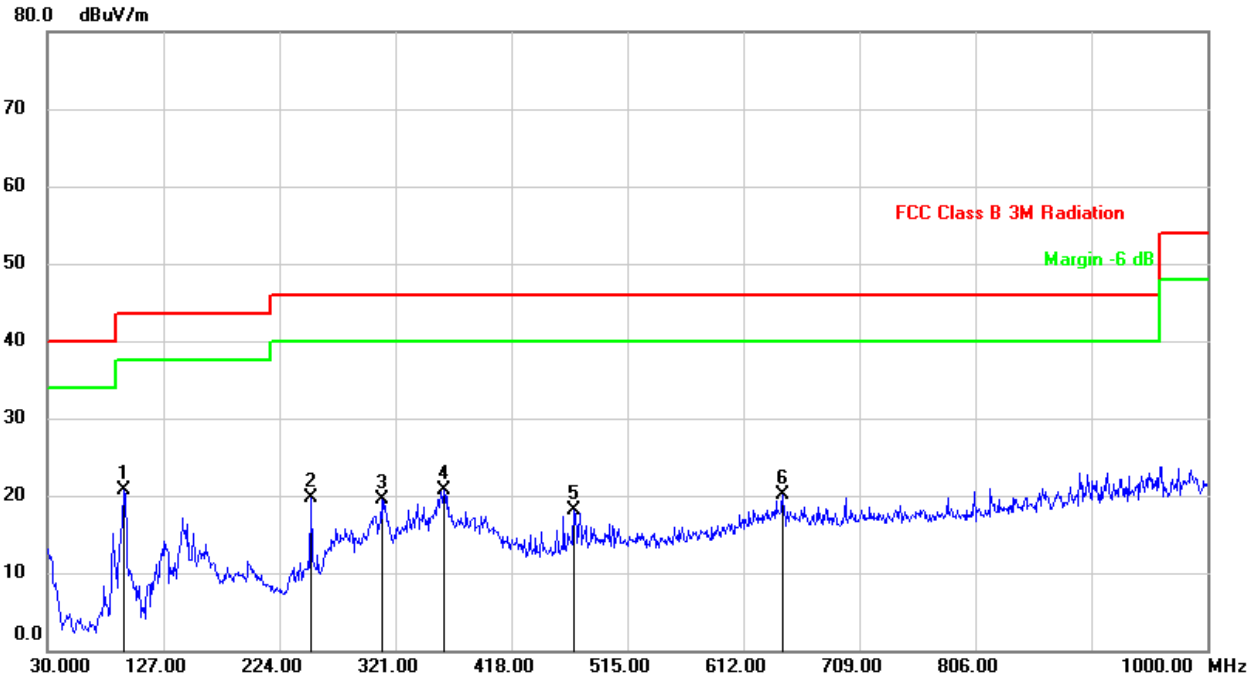

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	94.0199	42.56	-21.92	20.64	43.50	-22.86	QP
2	250.1900	37.42	-17.70	19.72	46.00	-26.28	QP
3	309.3599	34.44	-14.95	19.49	46.00	-26.51	QP
4	361.7400	34.18	-13.45	20.73	46.00	-25.27	QP
5	470.3800	29.48	-11.42	18.06	46.00	-27.94	QP
6	644.9800	28.63	-8.59	20.04	46.00	-25.96	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note 2: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.




8.5.SPURIOUS EMISSIONS 1~18GHz

QPSK 10MHz Bandwidth Mode

HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, HORIZONTAL)

1-3G

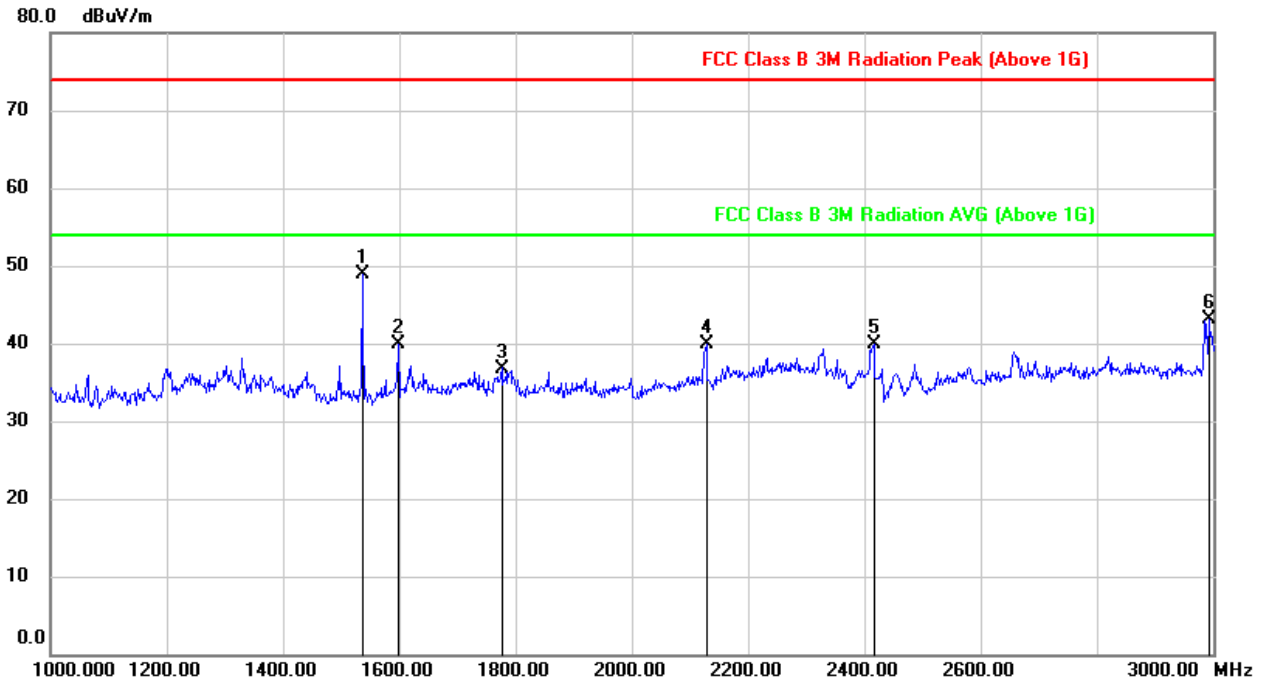


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	61.15	-12.31	48.84	74.00	-25.16	peak
2	1598.250	52.01	-12.07	39.94	74.00	-34.06	peak
3	1776.000	48.00	-11.20	36.80	74.00	-37.20	peak
4	2128.750	49.05	-9.21	39.84	74.00	-34.16	peak
5	2416.500	48.02	-8.18	39.84	74.00	-34.16	peak
6	2992.250	49.72	-6.59	43.13	74.00	-30.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



3-18G

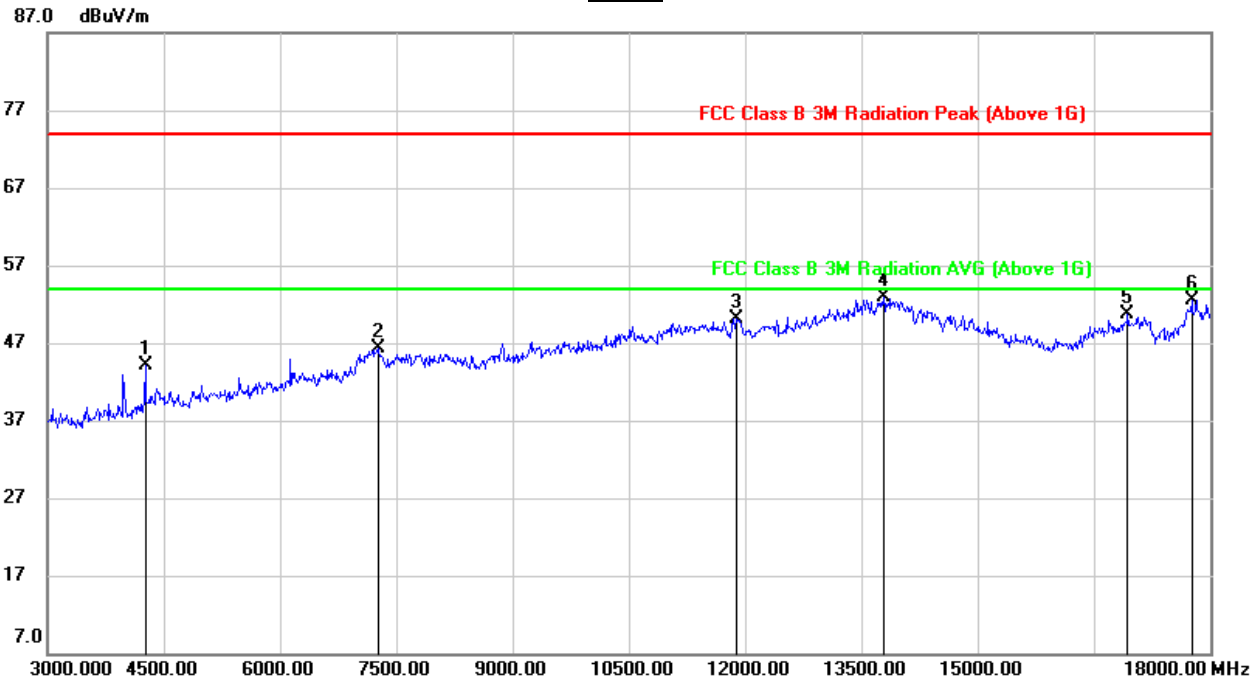


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4261.875	46.05	-1.89	44.16	74.00	-29.84	peak
2	7261.875	38.38	7.86	46.24	74.00	-27.76	peak
3	11885.625	33.34	16.85	50.19	74.00	-23.81	peak
4	13786.875	32.22	20.75	52.97	74.00	-21.03	peak
5	16944.375	29.18	21.43	50.61	74.00	-23.39	peak
6	17769.375	26.39	26.11	52.50	74.00	-21.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, VERTICAL)

1-3G

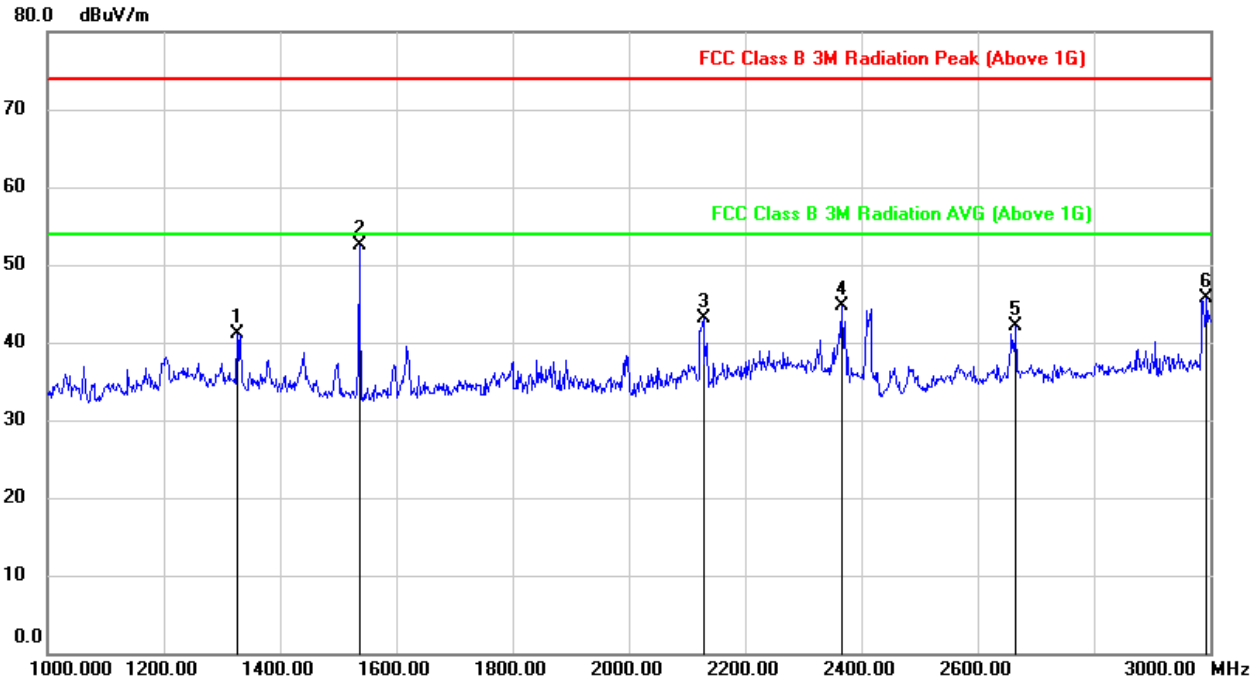


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1327.750	53.60	-12.51	41.09	74.00	-32.91	peak
2	1537.000	64.68	-12.26	52.42	74.00	-21.58	peak
3	2129.750	52.35	-9.29	43.06	74.00	-30.94	peak
4	2367.750	52.52	-7.78	44.74	74.00	-29.26	peak
5	2666.500	49.93	-7.84	42.09	74.00	-31.91	peak
6	2994.750	52.22	-6.59	45.63	74.00	-28.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

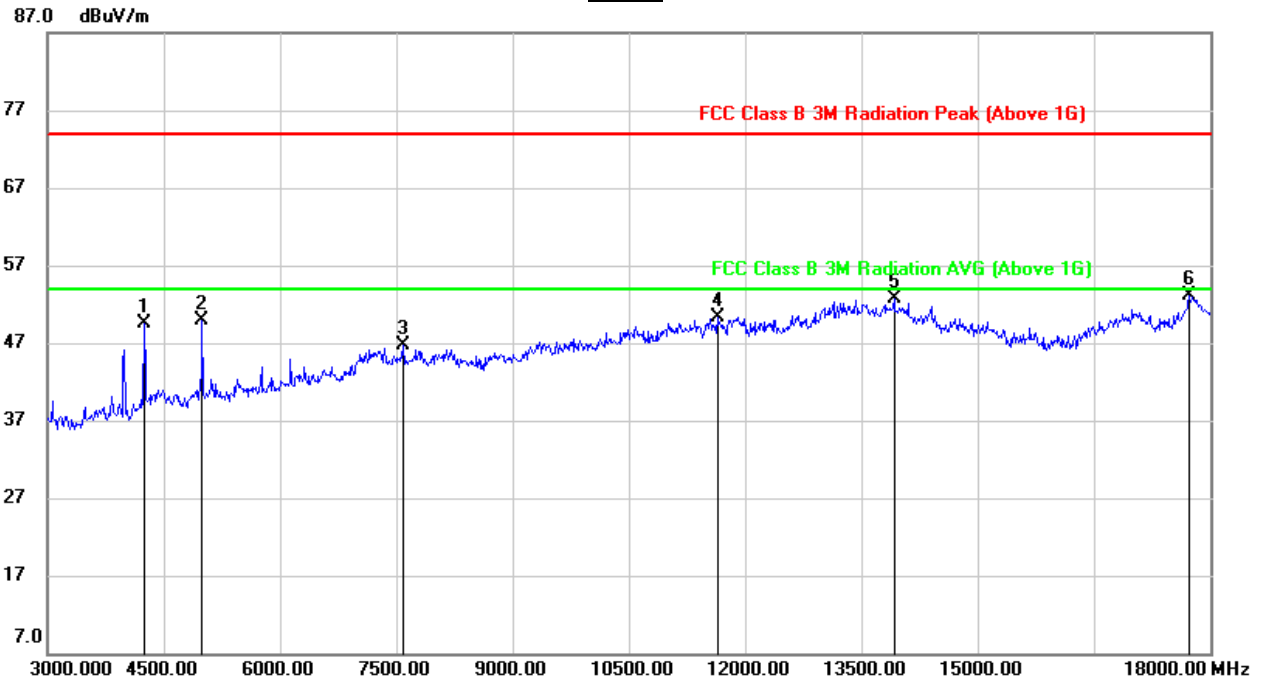


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4254.375	51.27	-1.85	49.42	74.00	-24.58	peak
2	4996.875	49.41	0.57	49.98	74.00	-24.02	peak
3	7597.500	38.57	8.07	46.64	74.00	-27.36	peak
4	11649.375	34.13	16.26	50.39	74.00	-23.61	peak
5	13925.625	31.84	20.82	52.66	74.00	-21.34	peak
6	17739.375	26.87	26.15	53.02	74.00	-20.98	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, HORIZONTAL)

1-3G

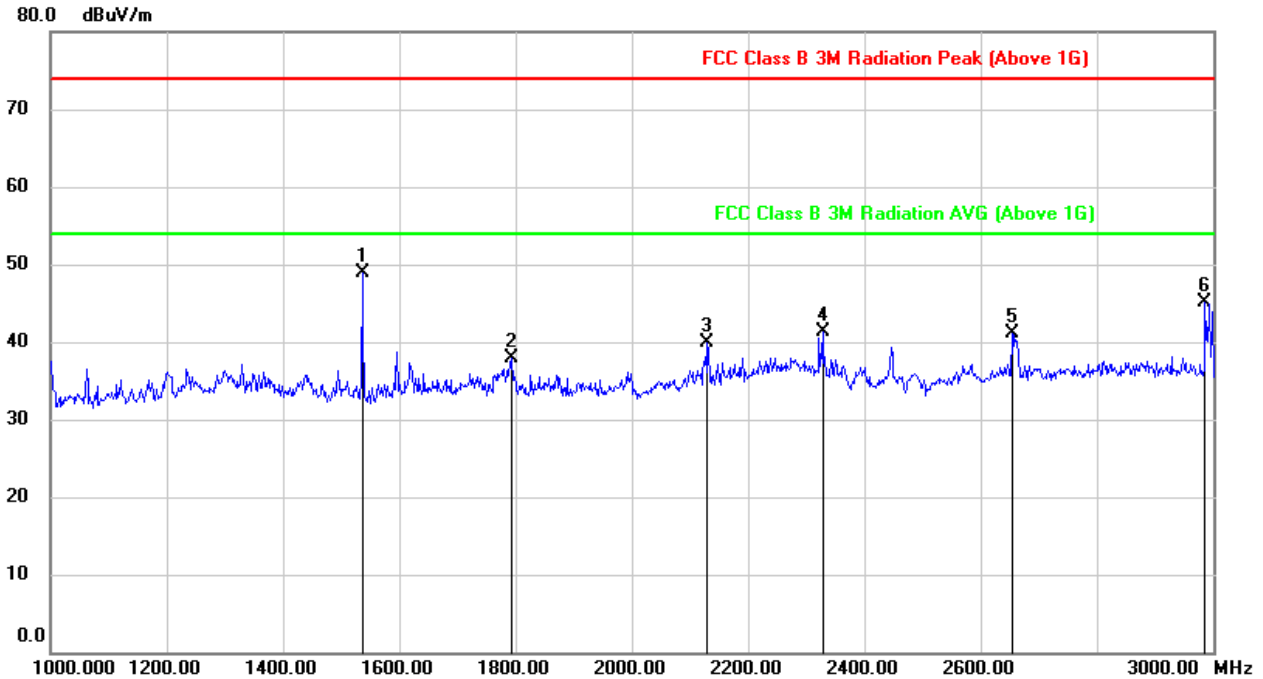


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	61.19	-12.31	48.88	74.00	-25.12	peak
2	1795.750	49.09	-11.14	37.95	74.00	-36.05	peak
3	2131.500	49.11	-9.16	39.95	74.00	-34.05	peak
4	2328.250	48.94	-7.61	41.33	74.00	-32.67	peak
5	2654.250	48.94	-7.83	41.11	74.00	-32.89	peak
6	2986.250	51.70	-6.59	45.11	74.00	-28.89	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

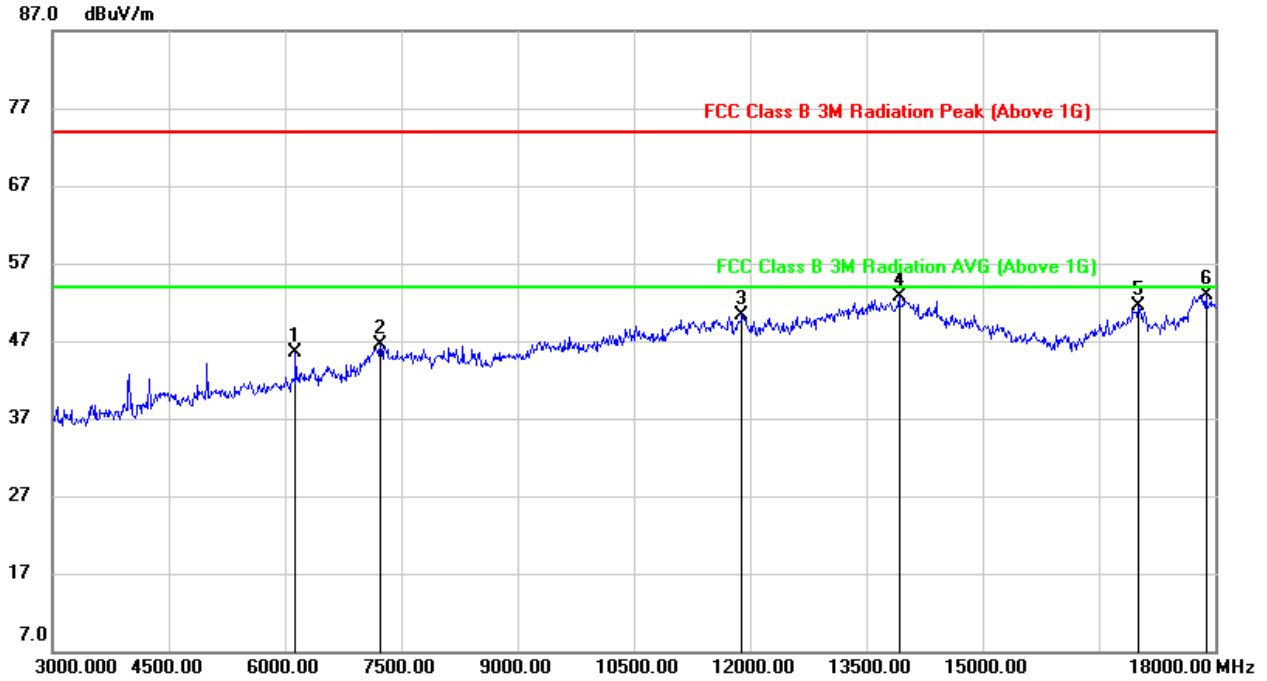


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6148.125	41.65	3.78	45.43	74.00	-28.57	peak
2	7239.375	38.59	7.83	46.42	74.00	-27.58	peak
3	11900.625	33.27	17.13	50.40	74.00	-23.60	peak
4	13923.750	32.11	20.67	52.78	74.00	-21.22	peak
5	17021.250	29.43	22.00	51.43	74.00	-22.57	peak
6	17880.000	26.62	26.32	52.94	74.00	-21.06	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, VERTICAL)

1-3G

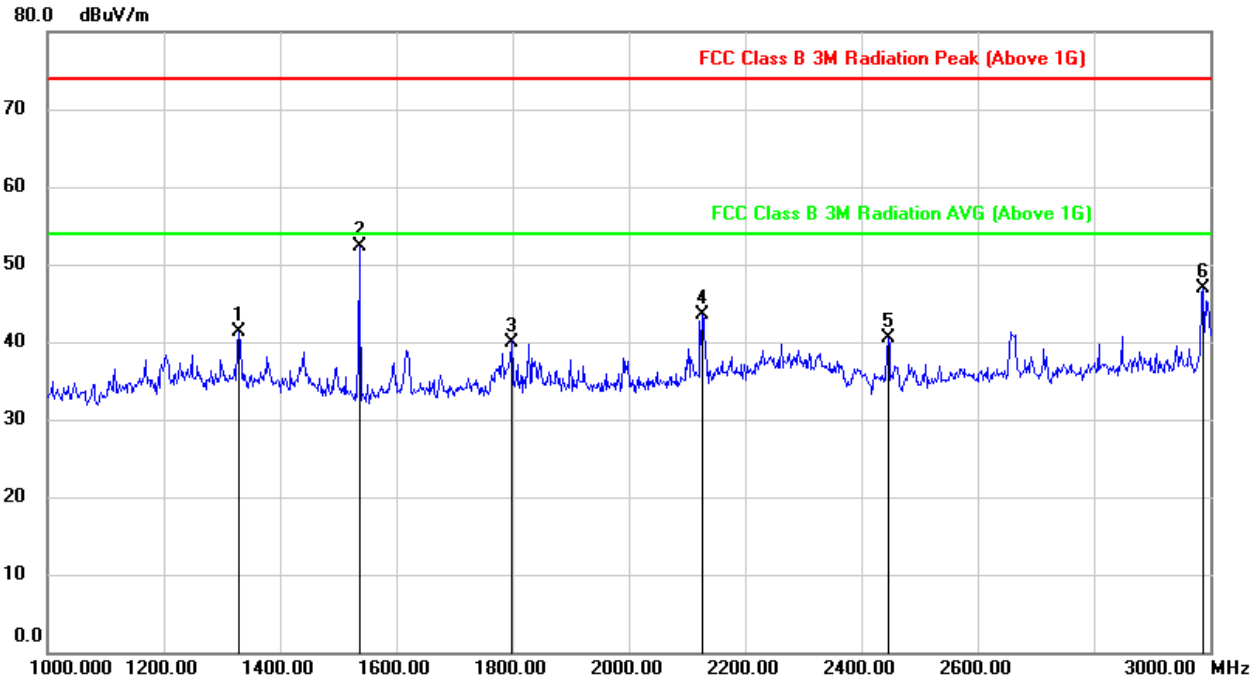


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.500	53.91	-12.51	41.40	74.00	-32.60	peak
2	1537.000	64.64	-12.26	52.38	74.00	-21.62	peak
3	1799.250	51.13	-11.13	40.00	74.00	-34.00	peak
4	2127.250	52.92	-9.32	43.60	74.00	-30.40	peak
5	2447.000	48.84	-8.24	40.60	74.00	-33.40	peak
6	2989.750	53.57	-6.60	46.97	74.00	-27.03	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

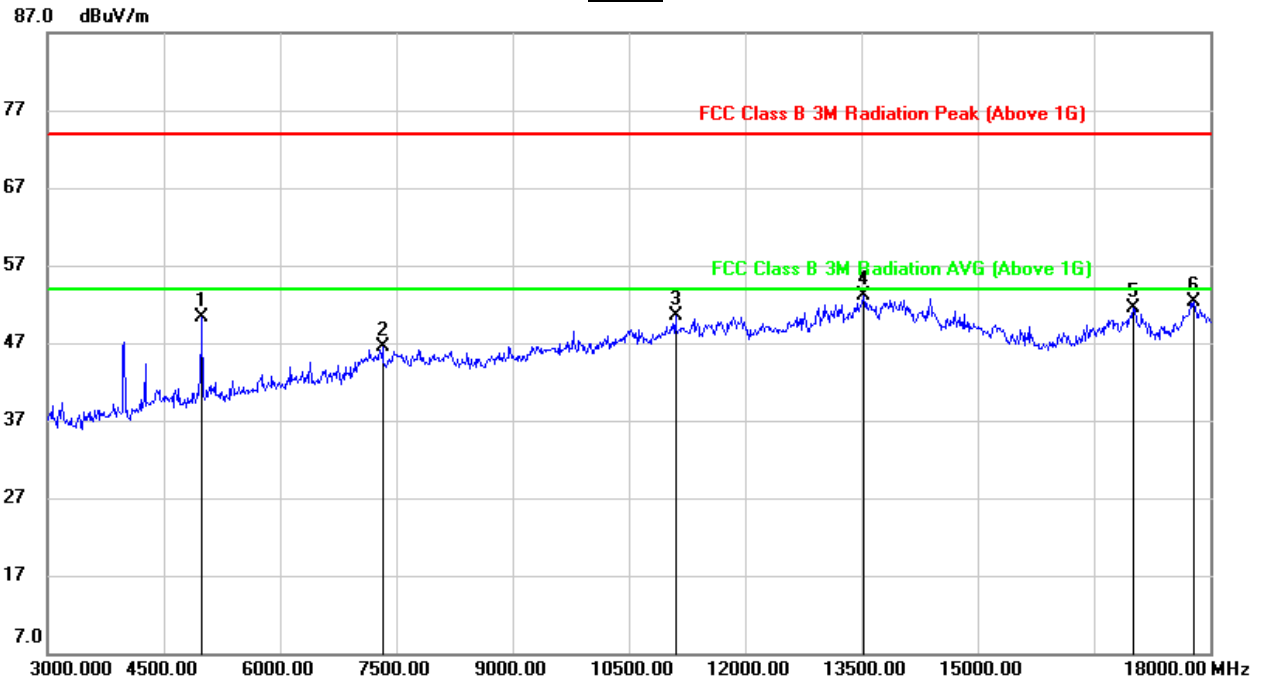


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4996.875	49.78	0.57	50.35	74.00	-23.65	peak
2	7320.000	38.79	7.67	46.46	74.00	-27.54	peak
3	11109.375	35.47	15.00	50.47	74.00	-23.53	peak
4	13543.125	32.20	20.87	53.07	74.00	-20.93	peak
5	17017.500	29.01	22.42	51.43	74.00	-22.57	peak
6	17803.125	25.41	26.83	52.24	74.00	-21.76	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, HORIZONTAL)

1-3G

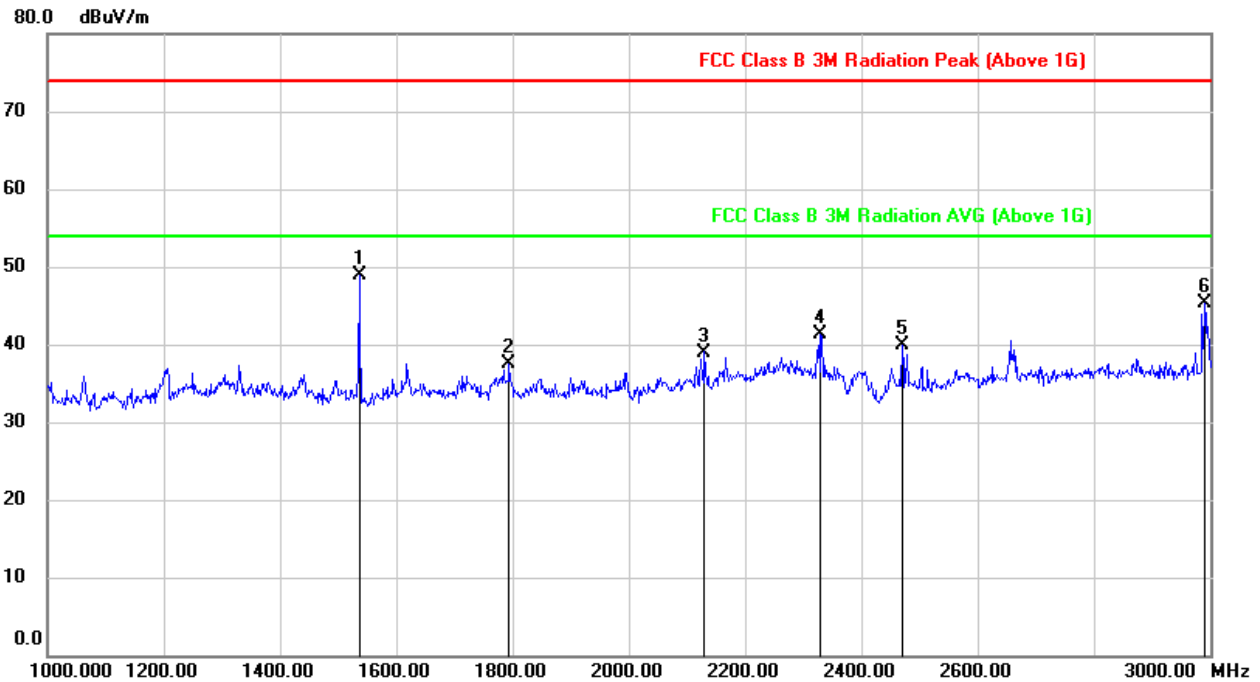


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	61.19	-12.31	48.88	74.00	-25.12	peak
2	1794.500	48.67	-11.15	37.52	74.00	-36.48	peak
3	2131.250	48.17	-9.17	39.00	74.00	-35.00	peak
4	2330.500	48.86	-7.60	41.26	74.00	-32.74	peak
5	2470.750	48.33	-8.36	39.97	74.00	-34.03	peak
6	2990.500	51.89	-6.59	45.30	74.00	-28.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

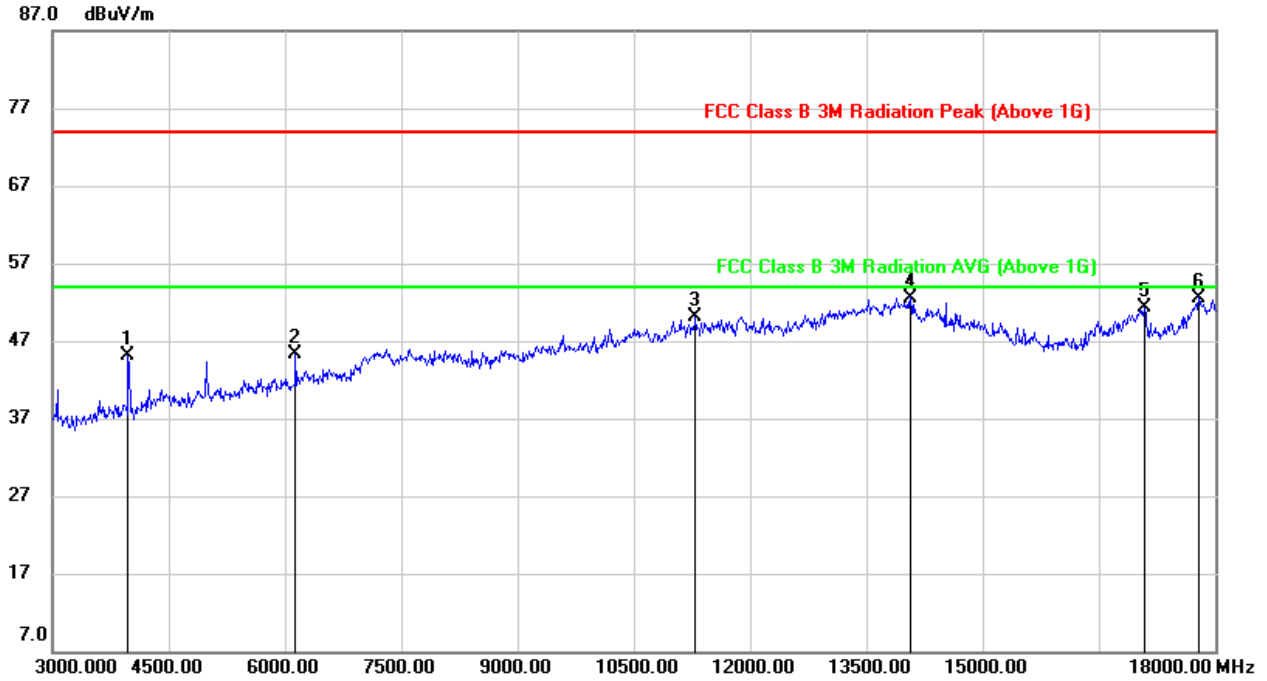


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3982.500	48.08	-3.01	45.07	74.00	-28.93	peak
2	6148.125	41.60	3.78	45.38	74.00	-28.62	peak
3	11295.000	34.64	15.53	50.17	74.00	-23.83	peak
4	14075.625	31.94	20.66	52.60	74.00	-21.40	peak
5	17098.125	29.01	22.24	51.25	74.00	-22.75	peak
6	17797.500	26.15	26.45	52.60	74.00	-21.40	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, VERTICAL)

1-3G

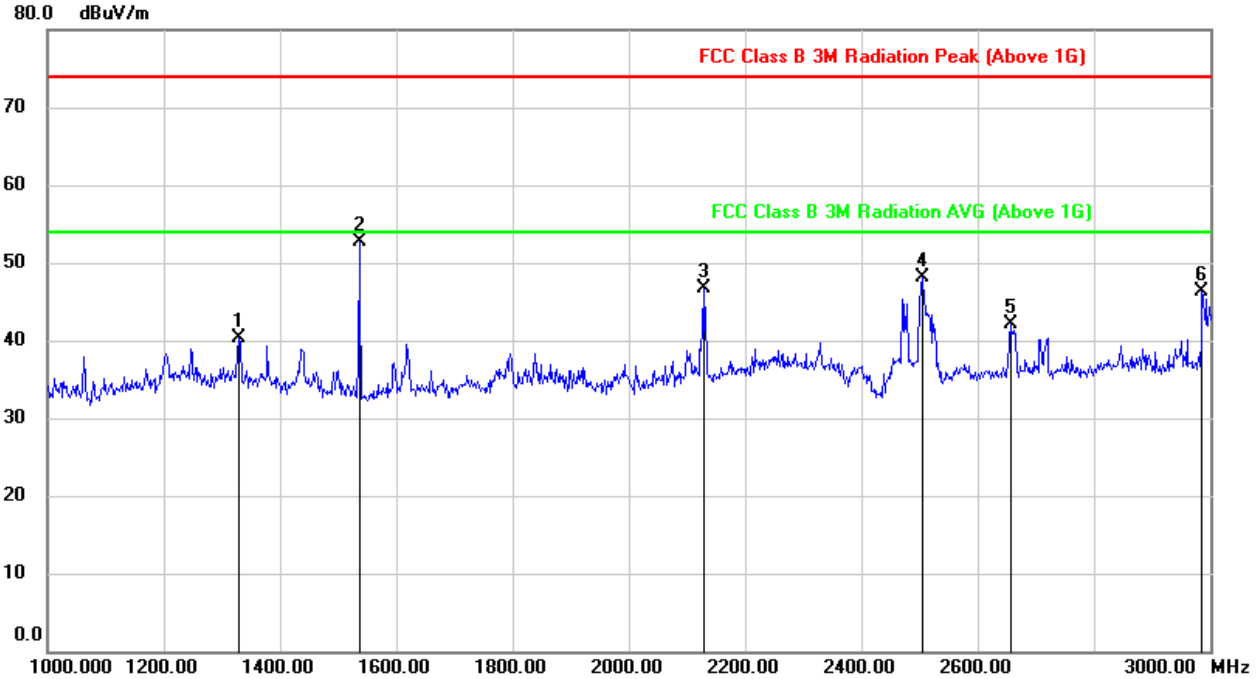


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.250	52.86	-12.51	40.35	74.00	-33.65	peak
2	1537.000	64.96	-12.26	52.70	74.00	-21.30	peak
3	2128.000	55.94	-9.31	46.63	74.00	-27.37	peak
4	2505.000	56.50	-8.30	48.20	74.00	-25.80	peak
5	2657.250	49.94	-7.91	42.03	74.00	-31.97	peak
6	2987.750	52.95	-6.60	46.35	74.00	-27.65	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

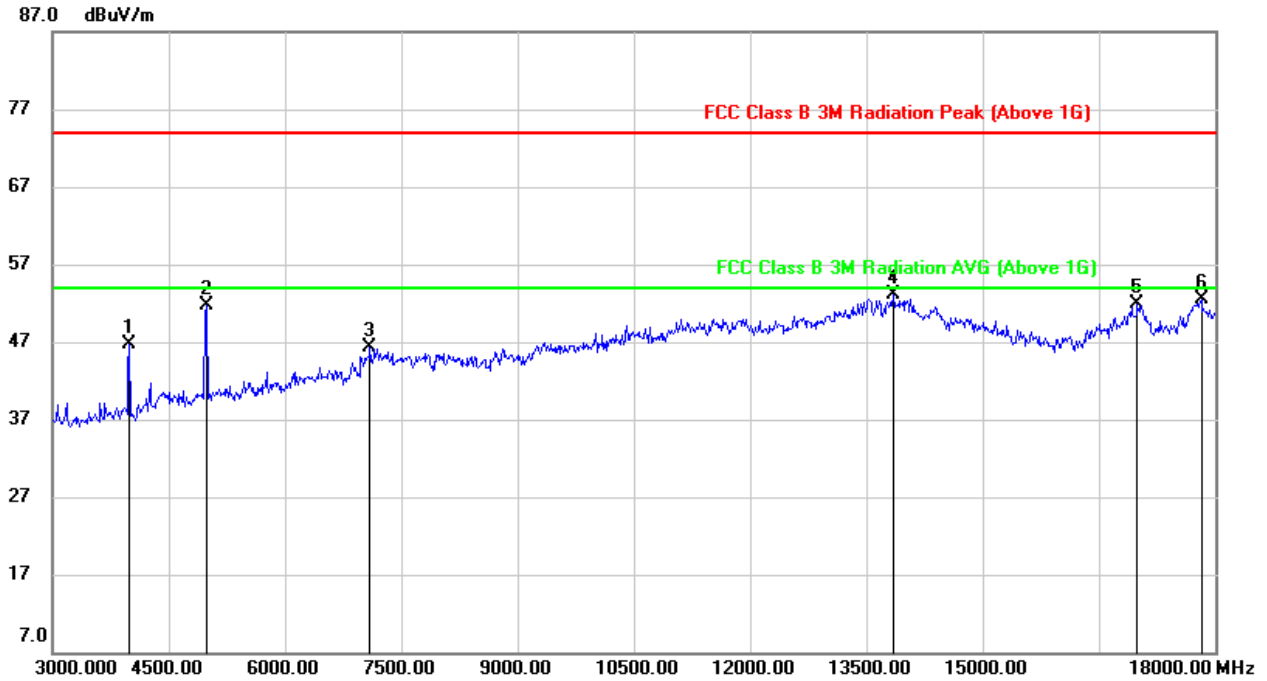

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3995.625	49.64	-2.99	46.65	74.00	-27.35	peak
2	4987.500	51.13	0.57	51.70	74.00	-22.30	peak
3	7108.125	38.83	7.50	46.33	74.00	-27.67	peak
4	13850.625	32.09	20.93	53.02	74.00	-20.98	peak
5	16995.000	29.60	22.22	51.82	74.00	-22.18	peak
6	17833.125	26.10	26.36	52.46	74.00	-21.54	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



OFDM 10MHz Bandwidth Mode

HARMONICS AND SPURIOUS EMISSIONS 1G~18GHZ (LOW CHANNEL, HORIZONTAL)

1-3G

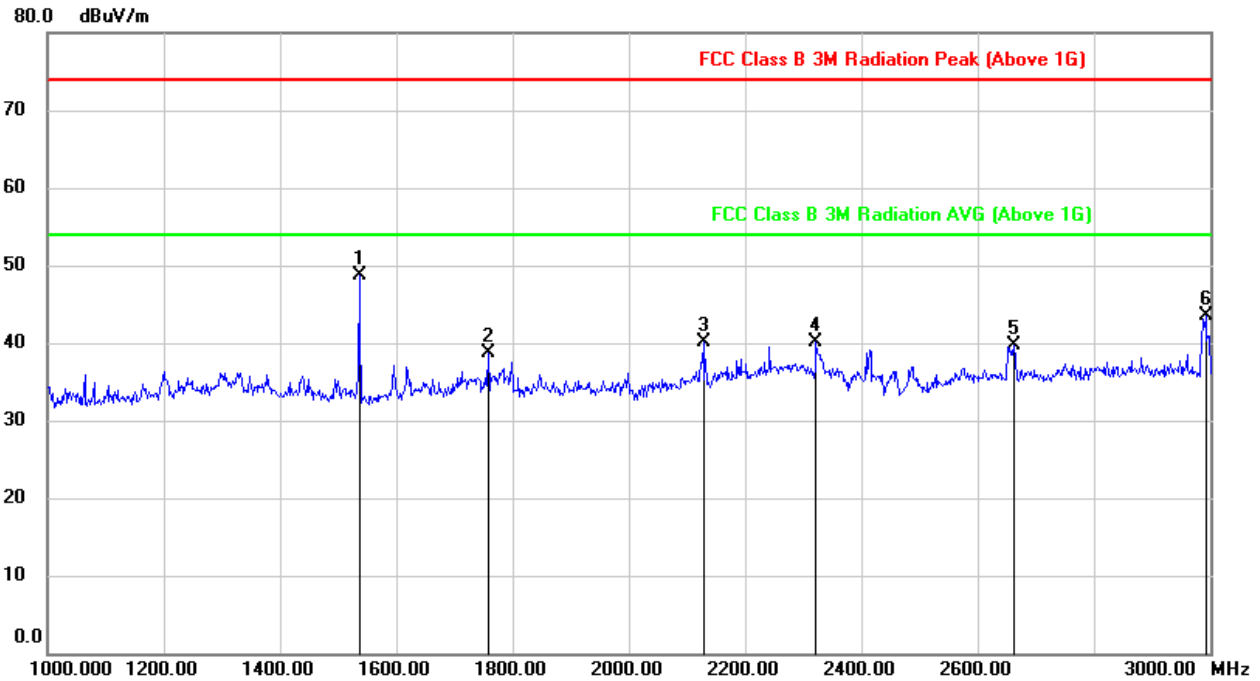


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	61.03	-12.31	48.72	74.00	-25.28	peak
2	1759.750	49.86	-11.25	38.61	74.00	-35.39	peak
3	2129.000	49.35	-9.20	40.15	74.00	-33.85	peak
4	2323.250	47.75	-7.57	40.18	74.00	-33.82	peak
5	2662.250	47.41	-7.79	39.62	74.00	-34.38	peak
6	2992.000	50.07	-6.59	43.48	74.00	-30.52	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

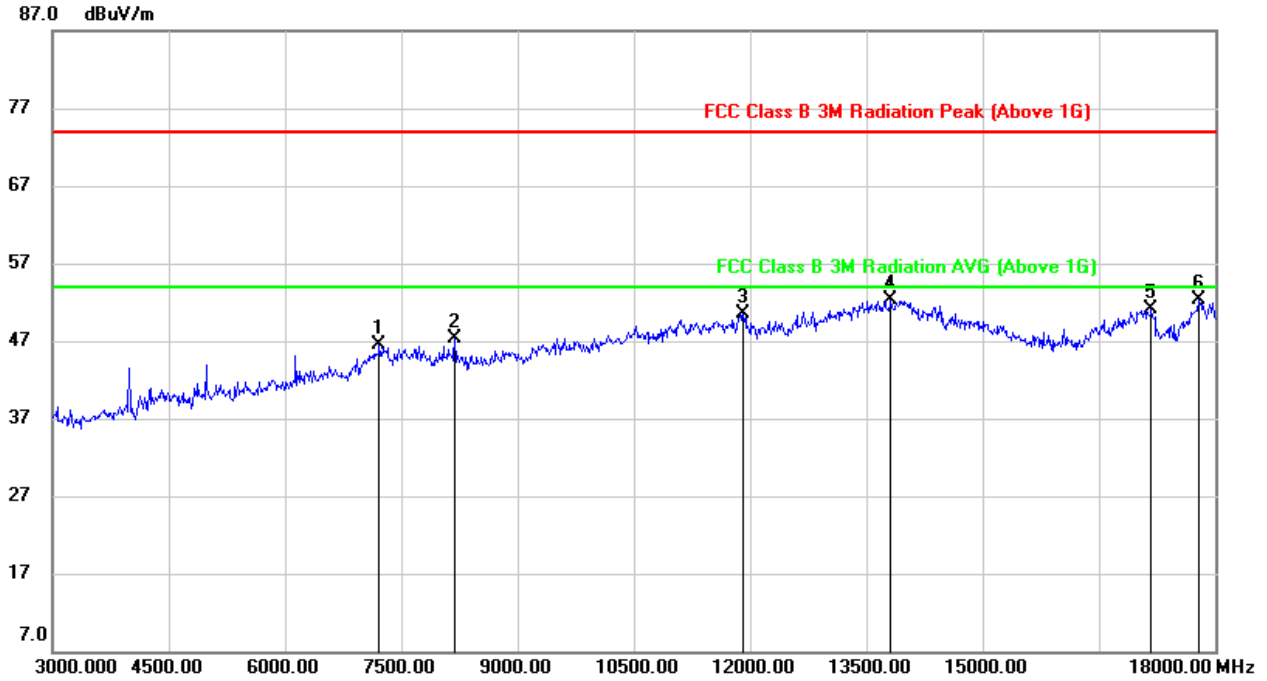


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7222.500	38.63	7.80	46.43	74.00	-27.57	peak
2	8193.750	38.49	8.81	47.30	74.00	-26.70	peak
3	11915.625	33.70	16.89	50.59	74.00	-23.41	peak
4	13822.500	31.52	20.72	52.24	74.00	-21.76	peak
5	17178.750	28.32	22.74	51.06	74.00	-22.94	peak
6	17801.250	25.74	26.48	52.22	74.00	-21.78	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, VERTICAL)

1-3G

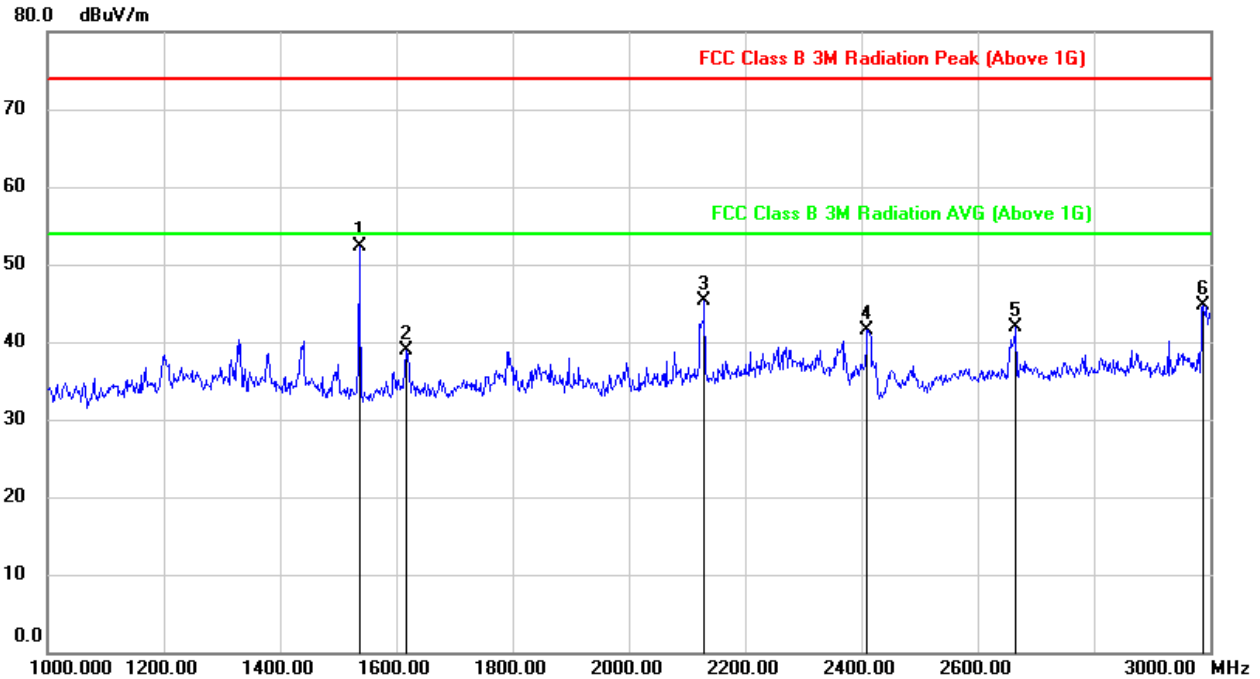


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	64.59	-12.26	52.33	74.00	-21.67	peak
2	1617.500	50.94	-11.95	38.99	74.00	-35.01	peak
3	2130.500	54.55	-9.27	45.28	74.00	-28.72	peak
4	2410.500	49.46	-8.04	41.42	74.00	-32.58	peak
5	2666.500	49.82	-7.84	41.98	74.00	-32.02	peak
6	2989.250	51.27	-6.60	44.67	74.00	-29.33	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

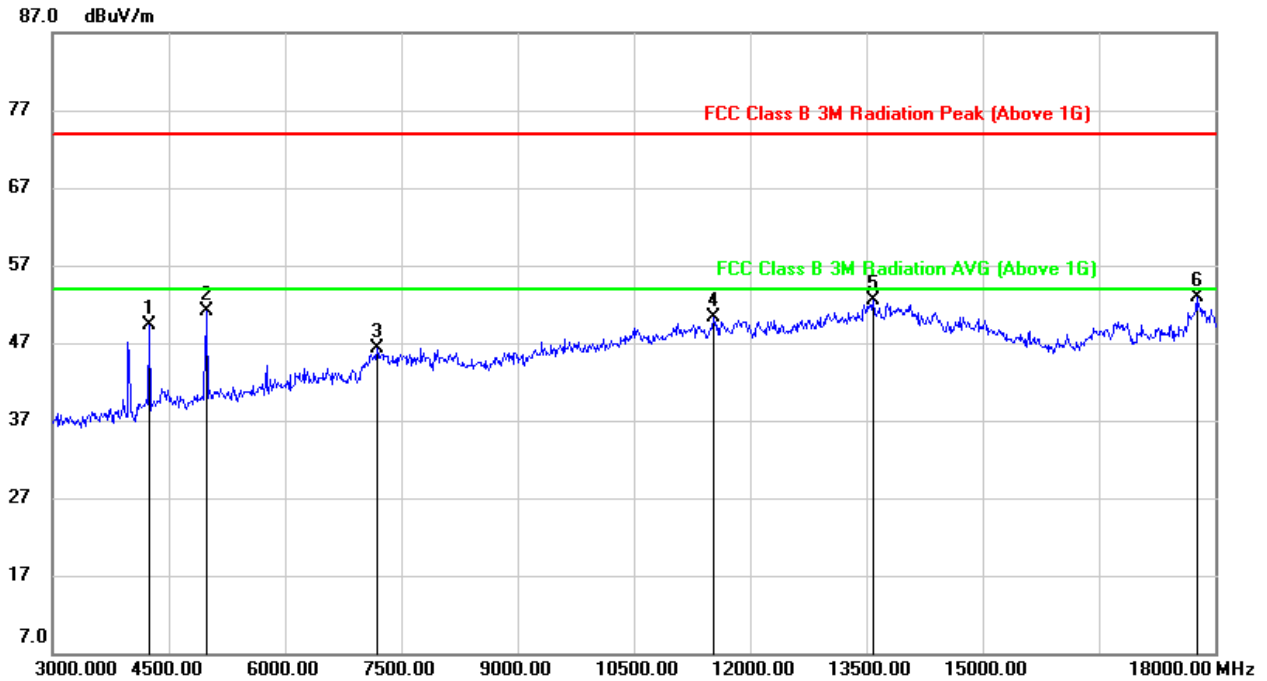


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4256.250	51.13	-1.82	49.31	74.00	-24.69	peak
2	4998.750	50.52	0.57	51.09	74.00	-22.91	peak
3	7188.750	38.43	7.84	46.27	74.00	-27.73	peak
4	11523.750	34.12	16.25	50.37	74.00	-23.63	peak
5	13599.375	32.10	20.37	52.47	74.00	-21.53	peak
6	17771.250	26.45	26.53	52.98	74.00	-21.02	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, HORIZONTAL)

1-3G

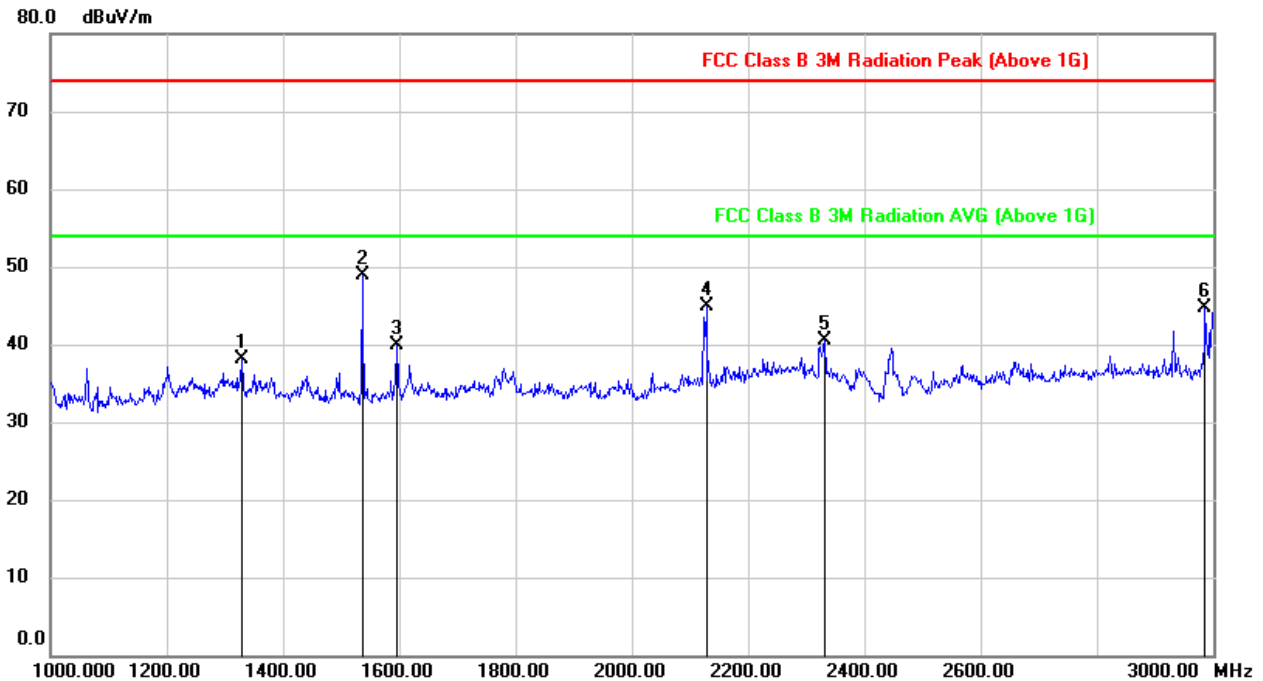


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1331.250	50.52	-12.37	38.15	74.00	-35.85	peak
2	1537.250	61.15	-12.31	48.84	74.00	-25.16	peak
3	1597.500	51.90	-12.08	39.82	74.00	-34.18	peak
4	2128.250	54.09	-9.21	44.88	74.00	-29.12	peak
5	2333.750	48.19	-7.63	40.56	74.00	-33.44	peak
6	2987.000	51.36	-6.59	44.77	74.00	-29.23	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

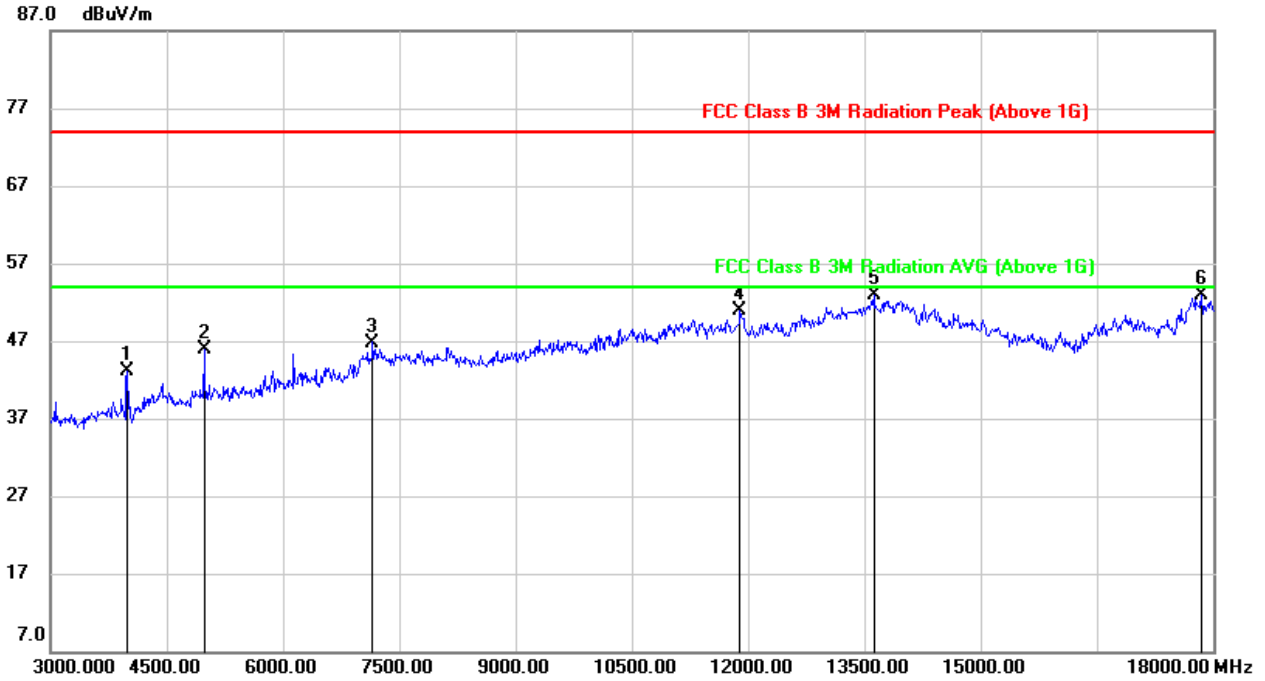


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3999.375	46.10	-2.98	43.12	74.00	-30.88	peak
2	4989.375	45.32	0.50	45.82	74.00	-28.18	peak
3	7158.750	39.09	7.71	46.80	74.00	-27.20	peak
4	11908.125	33.82	17.01	50.83	74.00	-23.17	peak
5	13621.875	32.38	20.50	52.88	74.00	-21.12	peak
6	17853.750	26.37	26.47	52.84	74.00	-21.16	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, VERTICAL)

1-3G

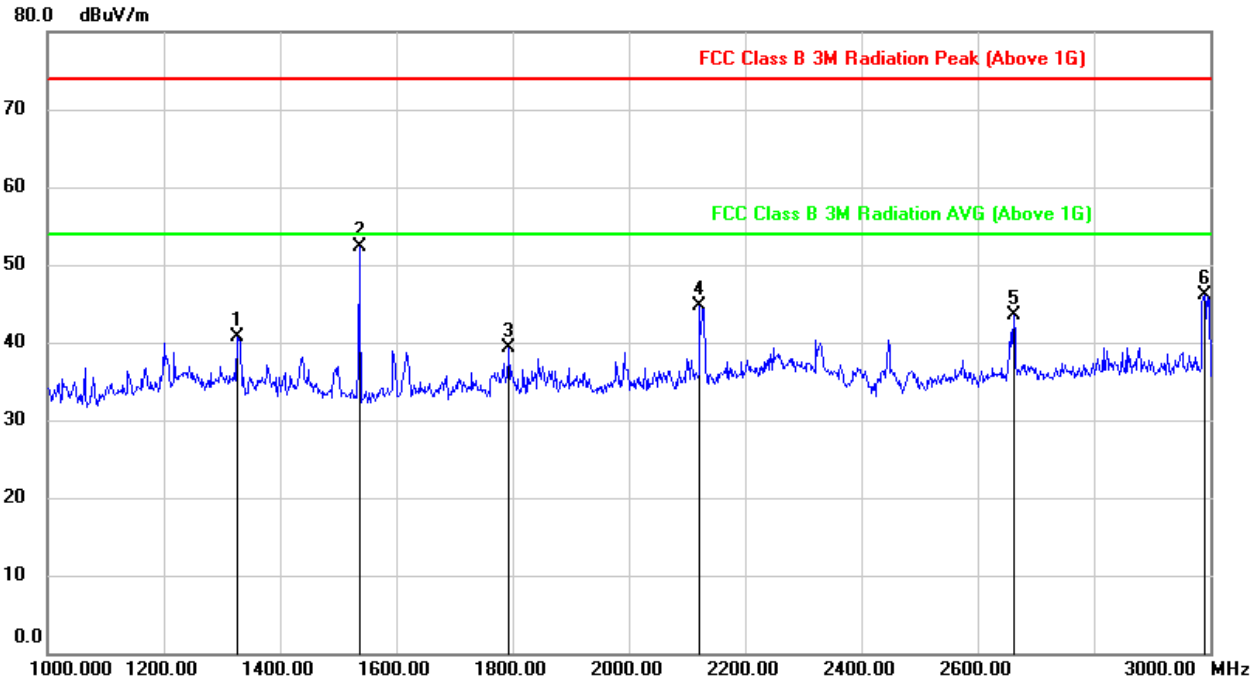


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1327.750	53.17	-12.51	40.66	74.00	-33.34	peak
2	1537.250	64.65	-12.26	52.39	74.00	-21.61	peak
3	1794.500	50.46	-11.15	39.31	74.00	-34.69	peak
4	2123.750	54.14	-9.37	44.77	74.00	-29.23	peak
5	2662.000	51.34	-7.87	43.47	74.00	-30.53	peak
6	2991.750	52.67	-6.59	46.08	74.00	-27.92	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

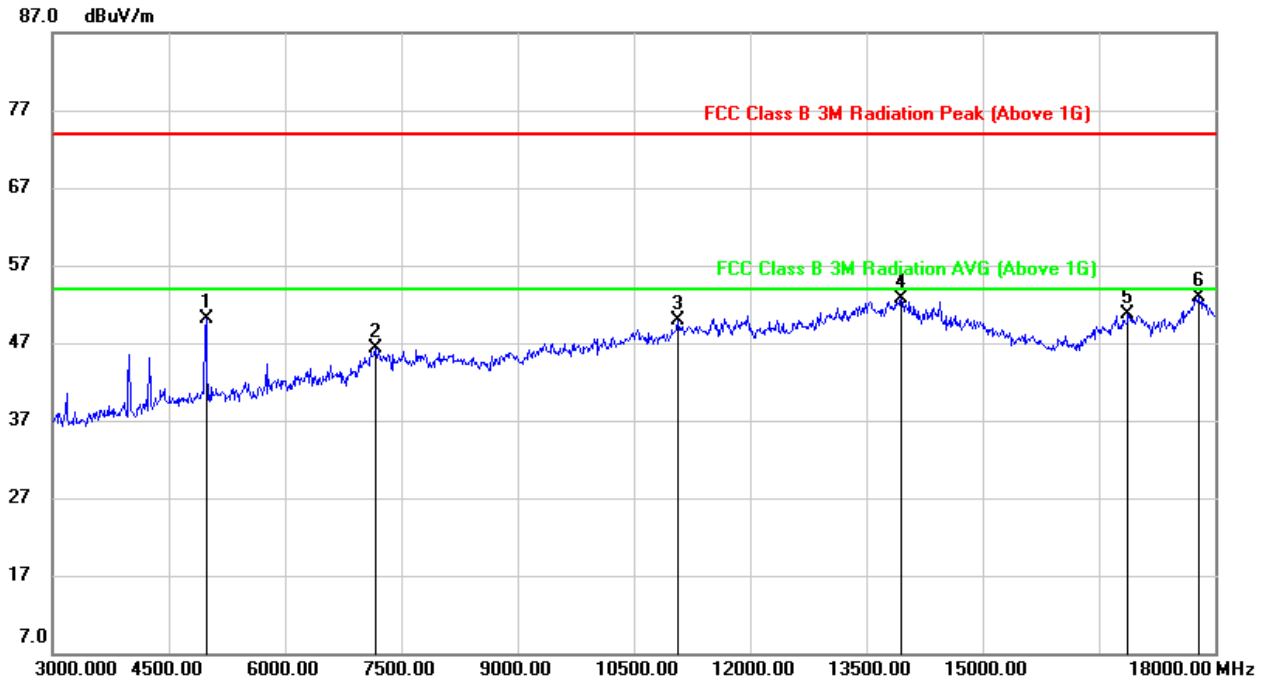


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4989.375	49.45	0.58	50.03	74.00	-23.97	peak
2	7177.500	38.56	7.82	46.38	74.00	-27.62	peak
3	11081.250	35.03	14.94	49.97	74.00	-24.03	peak
4	13955.625	31.93	20.78	52.71	74.00	-21.29	peak
5	16888.125	29.66	21.14	50.80	74.00	-23.20	peak
6	17799.375	26.11	26.87	52.98	74.00	-21.02	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, HORIZONTAL)

1-3G

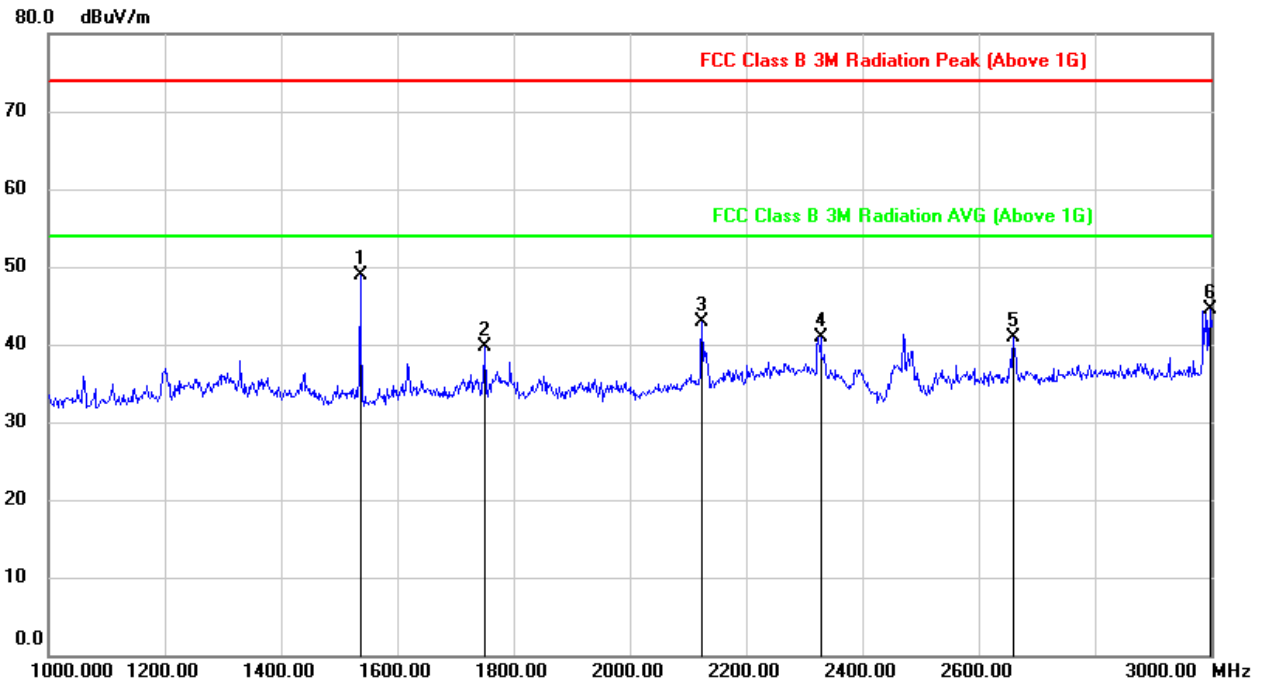


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	61.23	-12.31	48.92	74.00	-25.08	peak
2	1751.000	50.94	-11.28	39.66	74.00	-34.34	peak
3	2124.750	52.12	-9.25	42.87	74.00	-31.13	peak
4	2328.750	48.49	-7.61	40.88	74.00	-33.12	peak
5	2661.750	48.74	-7.79	40.95	74.00	-33.05	peak
6	2998.500	51.07	-6.60	44.47	74.00	-29.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

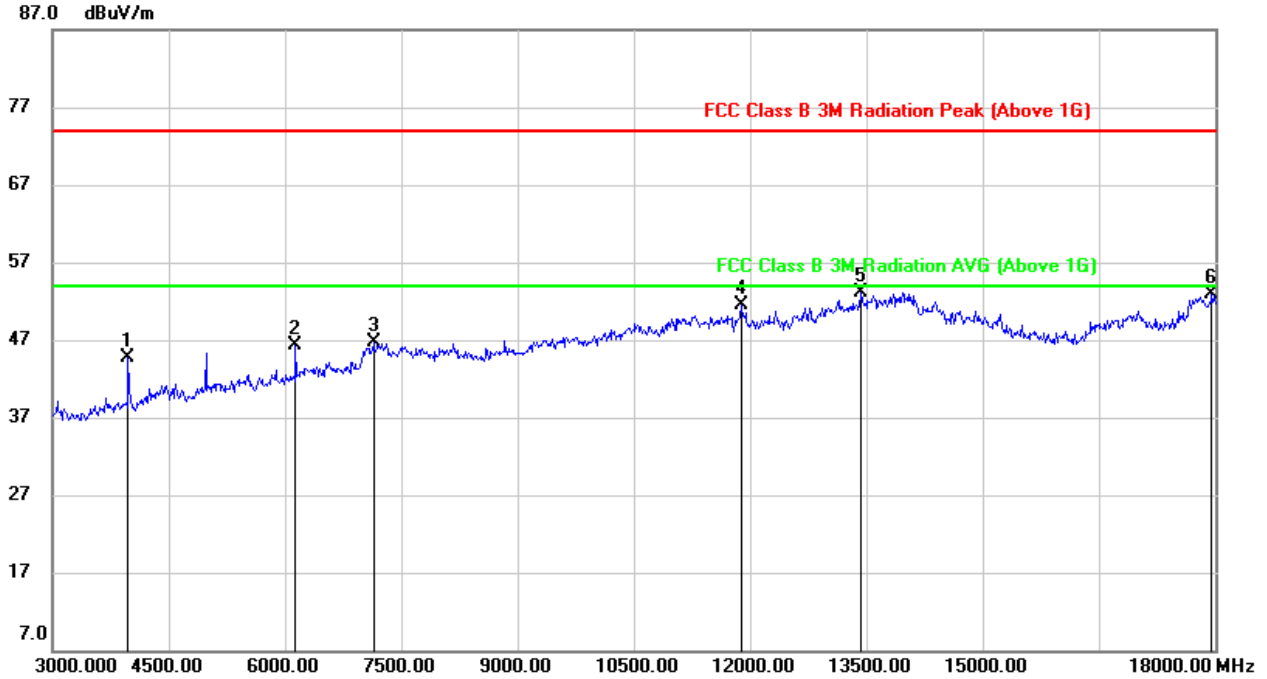


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3986.250	47.79	-3.00	44.79	74.00	-29.21	peak
2	6148.125	42.51	3.78	46.29	74.00	-27.71	peak
3	7141.875	39.13	7.63	46.76	74.00	-27.24	peak
4	11883.750	34.60	16.81	51.41	74.00	-22.59	peak
5	13438.125	33.18	19.92	53.10	74.00	-20.90	peak
6	17964.375	25.91	27.04	52.95	74.00	-21.05	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, VERTICAL)

1-3G

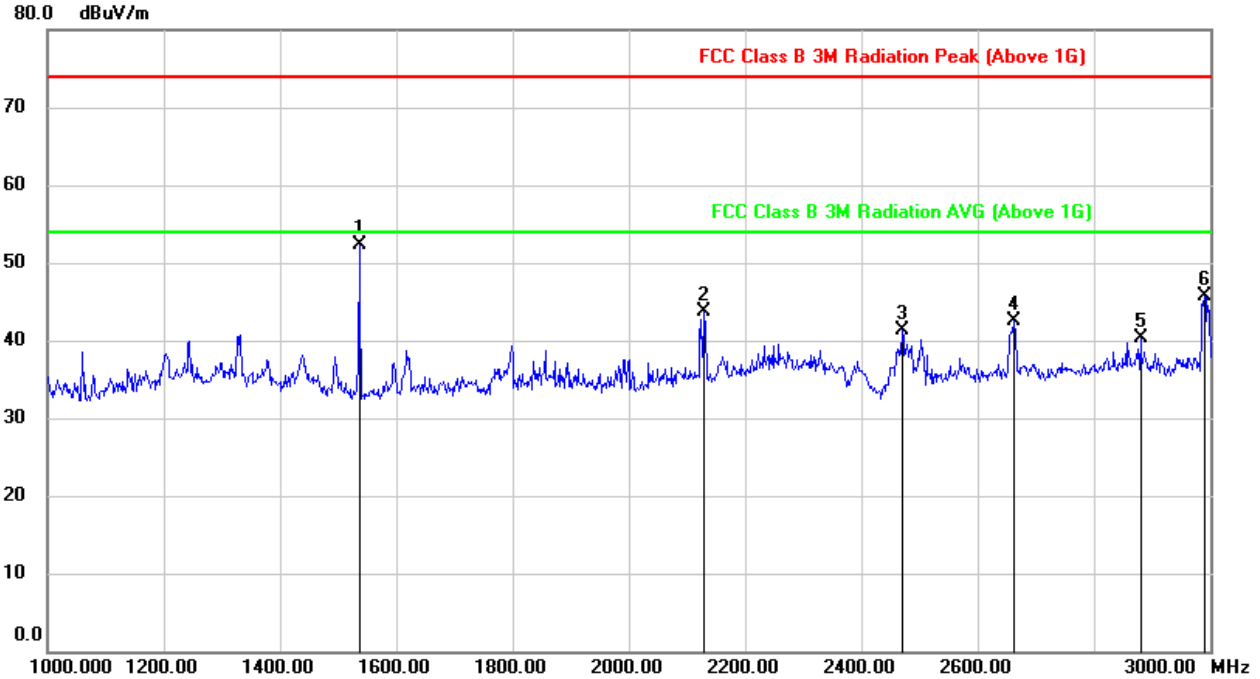


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	64.65	-12.26	52.39	74.00	-21.61	peak
2	2131.000	53.02	-9.27	43.75	74.00	-30.25	peak
3	2471.500	49.48	-8.26	41.22	74.00	-32.78	peak
4	2662.500	50.40	-7.86	42.54	74.00	-31.46	peak
5	2881.250	46.90	-6.59	40.31	74.00	-33.69	peak
6	2991.500	52.22	-6.59	45.63	74.00	-28.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

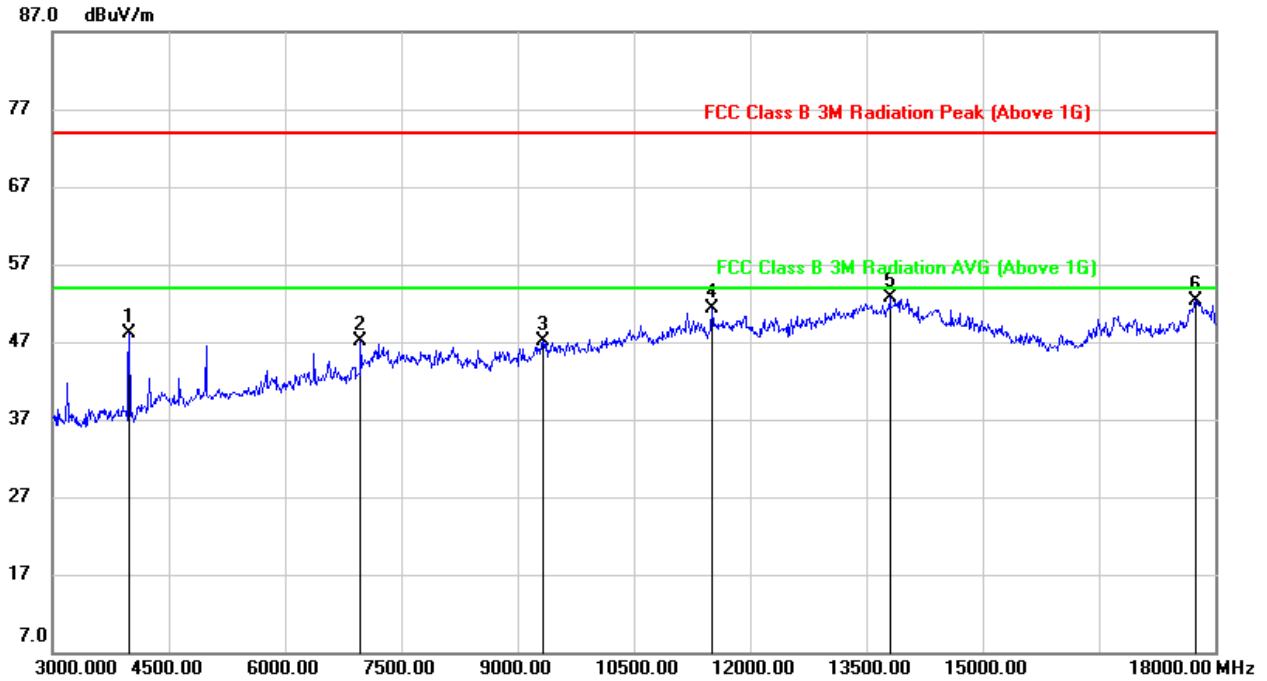

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3991.875	51.18	-2.99	48.19	74.00	-25.81	peak
2	6988.125	40.14	6.92	47.06	74.00	-26.94	peak
3	9343.125	36.16	10.93	47.09	74.00	-26.91	peak
4	11516.250	35.03	16.25	51.28	74.00	-22.72	peak
5	13809.375	31.48	21.15	52.63	74.00	-21.37	peak
6	17752.500	26.03	26.30	52.33	74.00	-21.67	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



QPSK 20MHz Bandwidth Mode

HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, HORIZONTAL)

1-3G

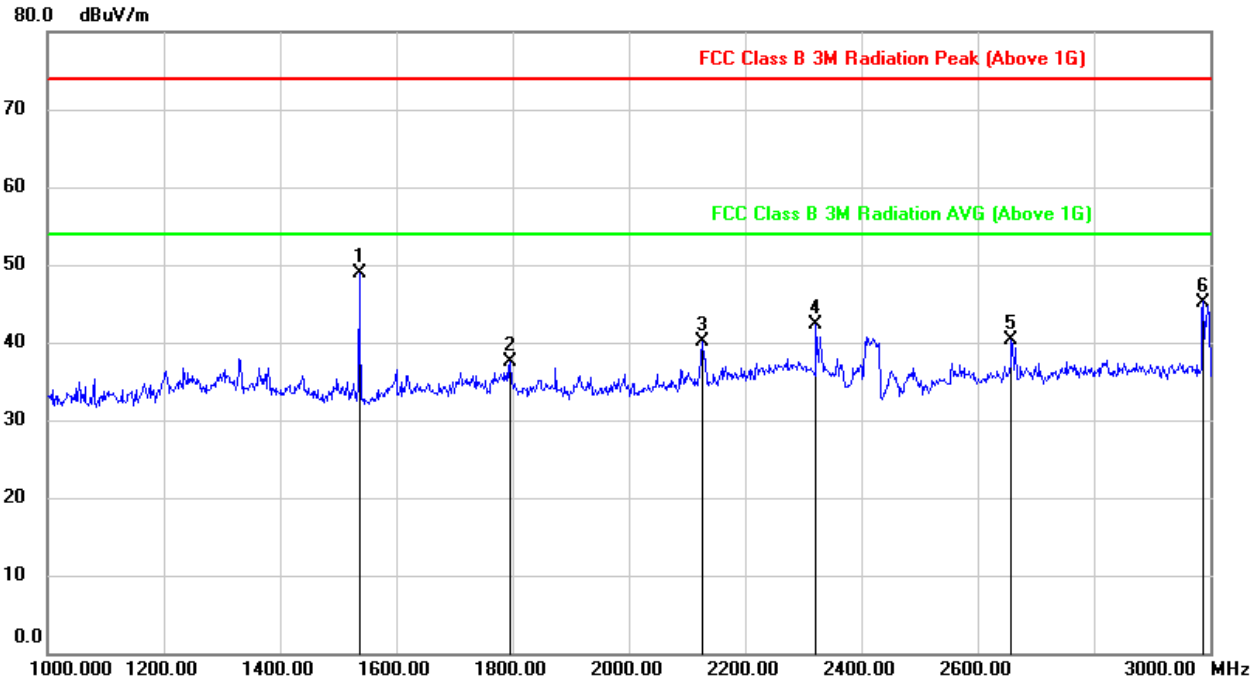


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	61.18	-12.31	48.87	74.00	-25.13	peak
2	1796.750	48.70	-11.14	37.56	74.00	-36.44	peak
3	2126.500	49.34	-9.23	40.11	74.00	-33.89	peak
4	2322.250	49.79	-7.56	42.23	74.00	-31.77	peak
5	2659.500	48.08	-7.80	40.28	74.00	-33.72	peak
6	2989.250	51.80	-6.60	45.20	74.00	-28.80	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

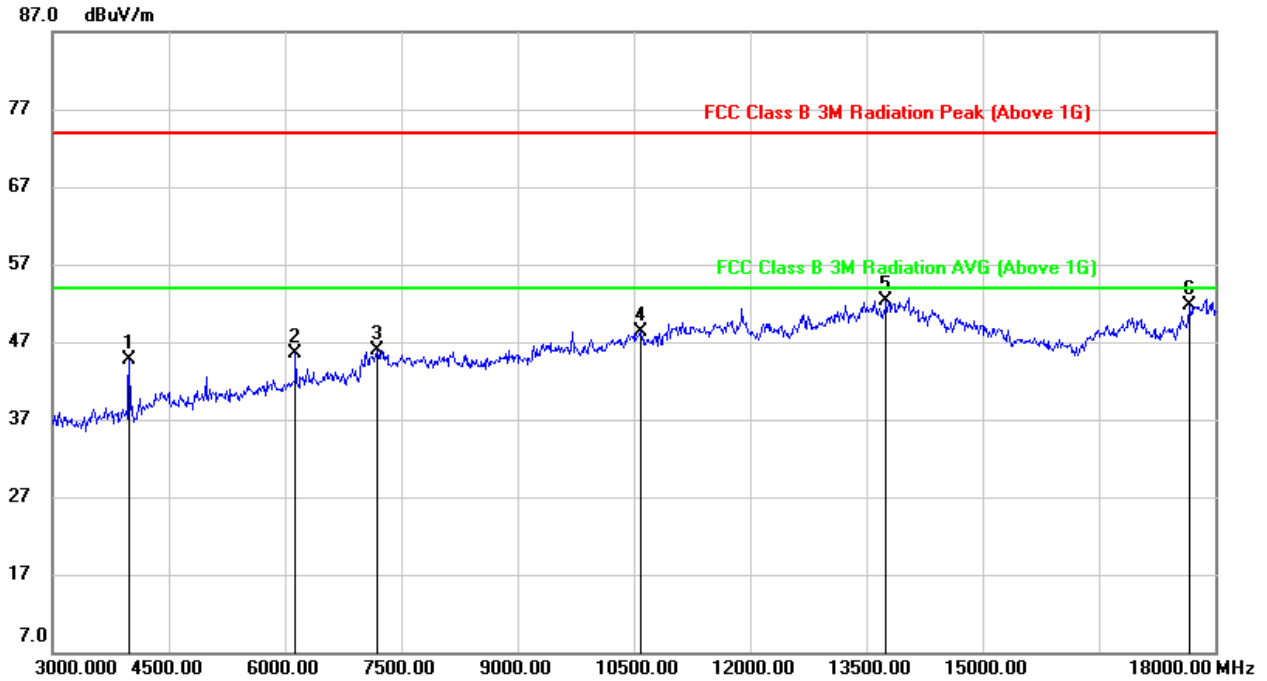


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.76	-3.00	44.76	74.00	-29.24	peak
2	6148.125	41.80	3.78	45.58	74.00	-28.42	peak
3	7192.500	38.19	7.74	45.93	74.00	-28.07	peak
4	10601.250	34.77	13.59	48.36	74.00	-25.64	peak
5	13768.125	31.54	20.80	52.34	74.00	-21.66	peak
6	17683.125	26.31	25.33	51.64	74.00	-22.36	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, VERTICAL)

1-3G

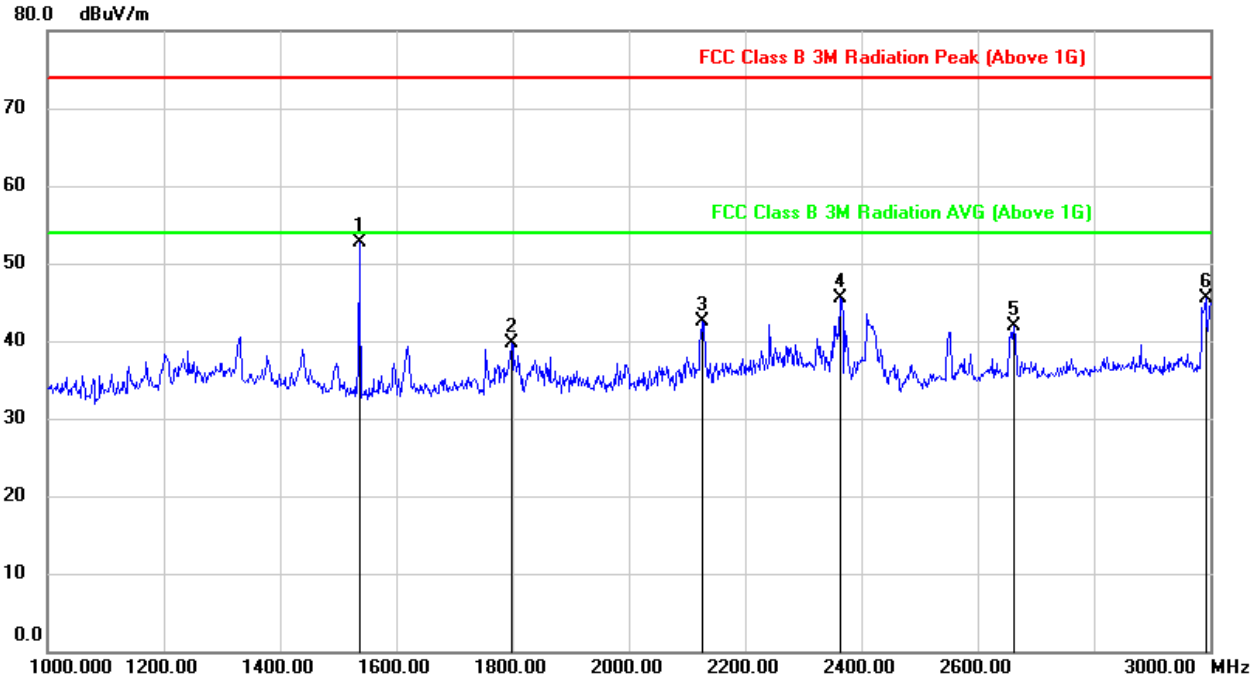


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	64.87	-12.26	52.61	74.00	-21.39	peak
2	1799.750	50.78	-11.13	39.65	74.00	-34.35	peak
3	2127.000	51.81	-9.33	42.48	74.00	-31.52	peak
4	2365.750	53.22	-7.77	45.45	74.00	-28.55	peak
5	2663.000	49.70	-7.86	41.84	74.00	-32.16	peak
6	2993.000	52.13	-6.59	45.54	74.00	-28.46	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

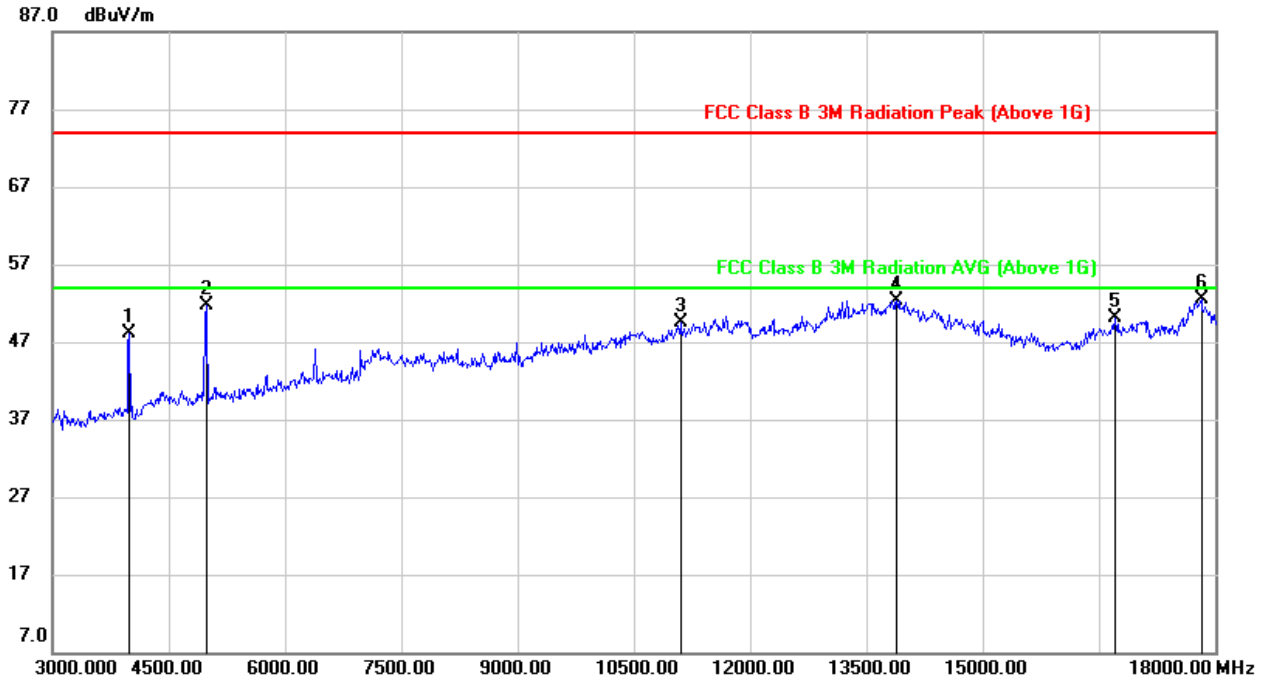


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3999.375	51.06	-2.98	48.08	74.00	-25.92	peak
2	4989.375	51.21	0.58	51.79	74.00	-22.21	peak
3	11105.625	34.46	14.99	49.45	74.00	-24.55	peak
4	13903.125	31.55	20.84	52.39	74.00	-21.61	peak
5	16717.500	29.28	20.79	50.07	74.00	-23.93	peak
6	17821.875	25.89	26.53	52.42	74.00	-21.58	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, HORIZONTAL)

1-3G

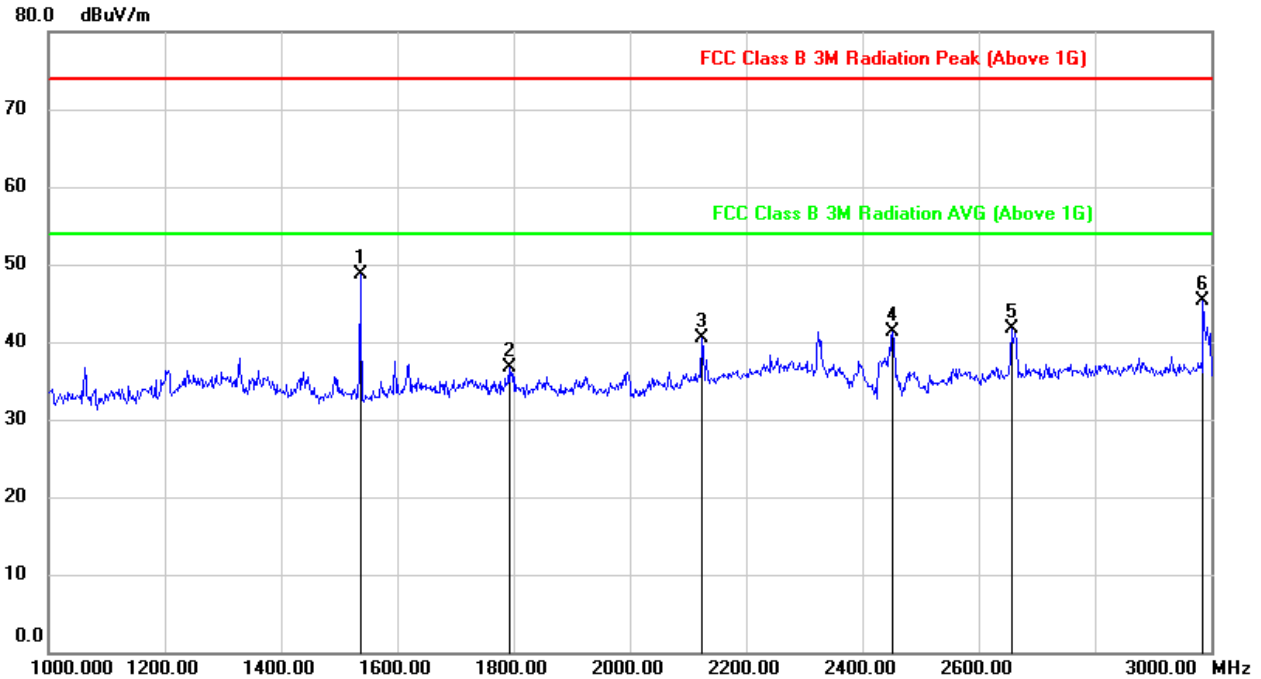


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	61.11	-12.31	48.80	74.00	-25.20	peak
2	1793.000	47.81	-11.15	36.66	74.00	-37.34	peak
3	2124.250	49.84	-9.26	40.58	74.00	-33.42	peak
4	2452.000	49.61	-8.34	41.27	74.00	-32.73	peak
5	2657.750	49.55	-7.82	41.73	74.00	-32.27	peak
6	2986.500	51.86	-6.59	45.27	74.00	-28.73	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

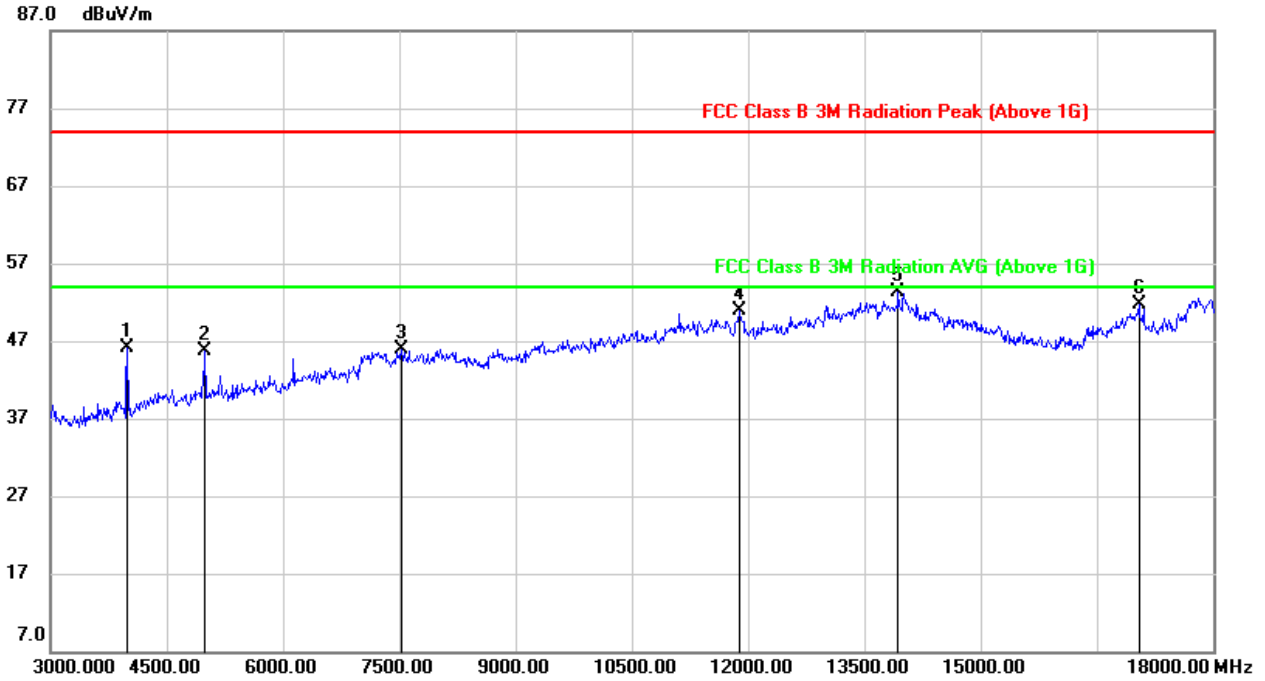


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3999.375	49.10	-2.98	46.12	74.00	-27.88	peak
2	4995.000	45.18	0.48	45.66	74.00	-28.34	peak
3	7537.500	37.76	8.19	45.95	74.00	-28.05	peak
4	11891.250	33.96	16.97	50.93	74.00	-23.07	peak
5	13948.125	32.56	20.67	53.23	74.00	-20.77	peak
6	17047.500	29.51	22.15	51.66	74.00	-22.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, VERTICAL)

1-3G

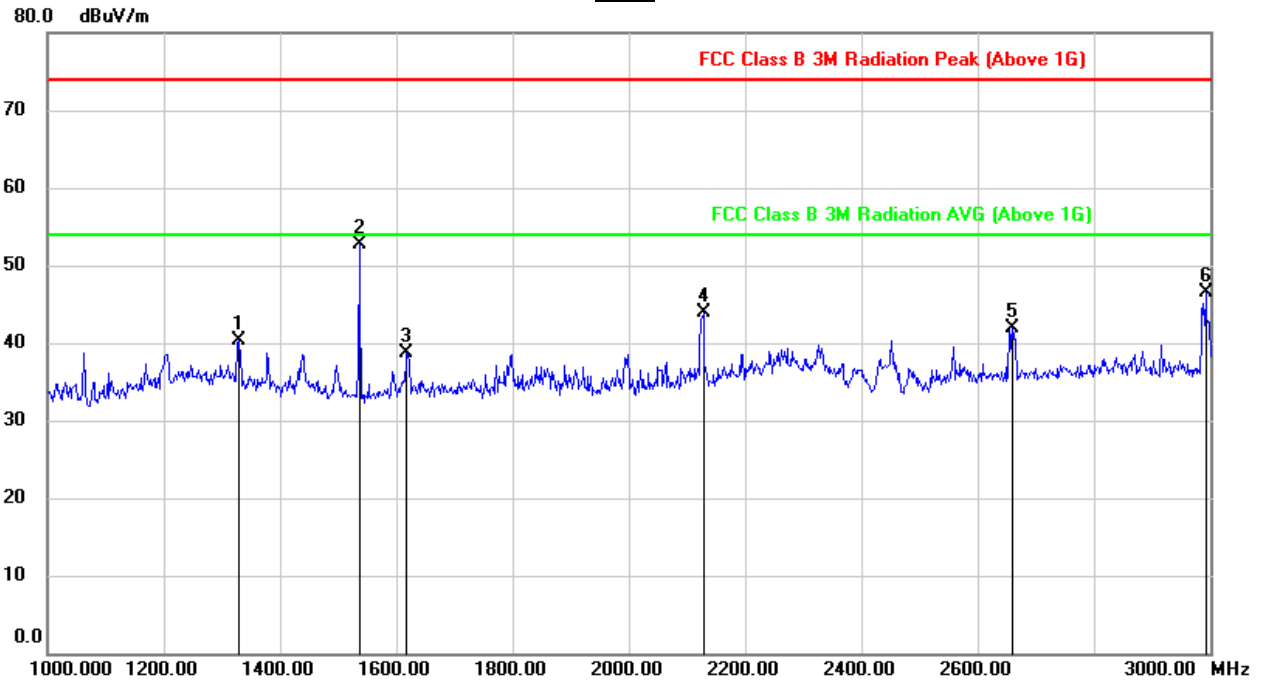


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1328.000	52.82	-12.51	40.31	74.00	-33.69	peak
2	1537.250	65.01	-12.26	52.75	74.00	-21.25	peak
3	1618.750	50.69	-11.94	38.75	74.00	-35.25	peak
4	2128.500	53.28	-9.31	43.97	74.00	-30.03	peak
5	2661.250	49.73	-7.87	41.86	74.00	-32.14	peak
6	2993.000	53.07	-6.59	46.48	74.00	-27.52	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

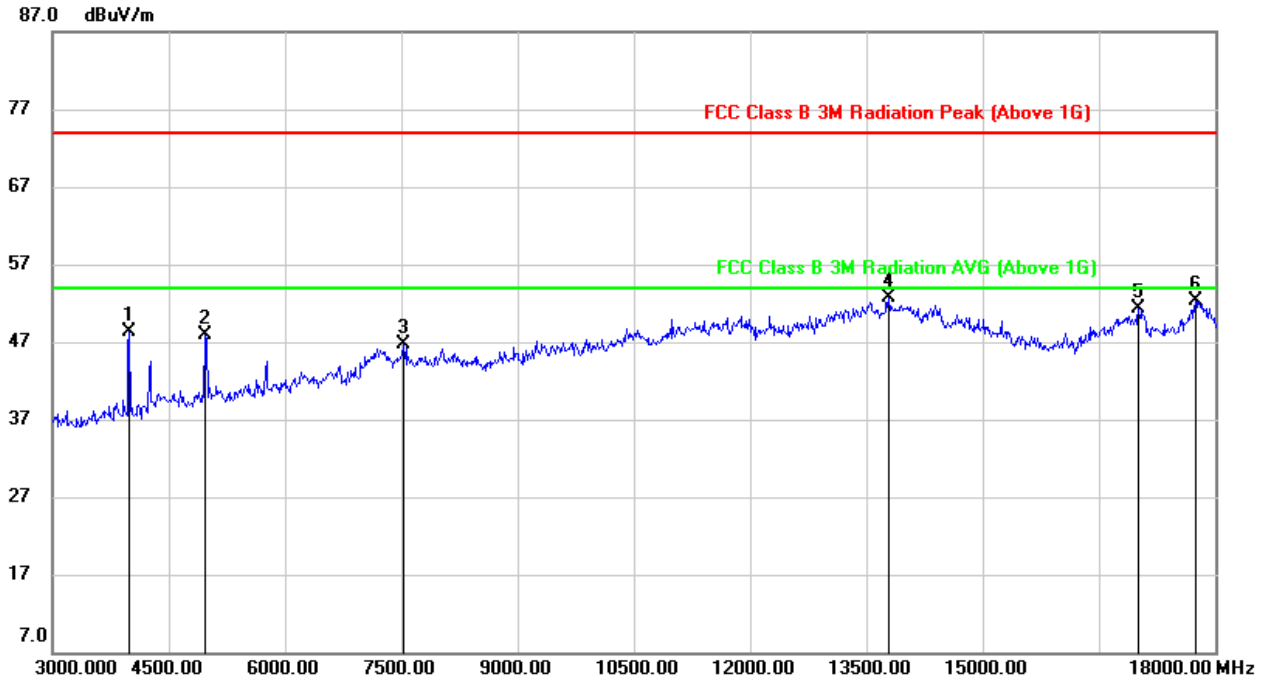


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3991.875	51.36	-2.99	48.37	74.00	-25.63	peak
2	4978.125	47.40	0.58	47.98	74.00	-26.02	peak
3	7535.625	38.32	8.29	46.61	74.00	-27.39	peak
4	13788.750	31.66	21.09	52.75	74.00	-21.25	peak
5	17017.500	28.80	22.42	51.22	74.00	-22.78	peak
6	17756.250	25.95	26.35	52.30	74.00	-21.70	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, HORIZONTAL)

1-3G

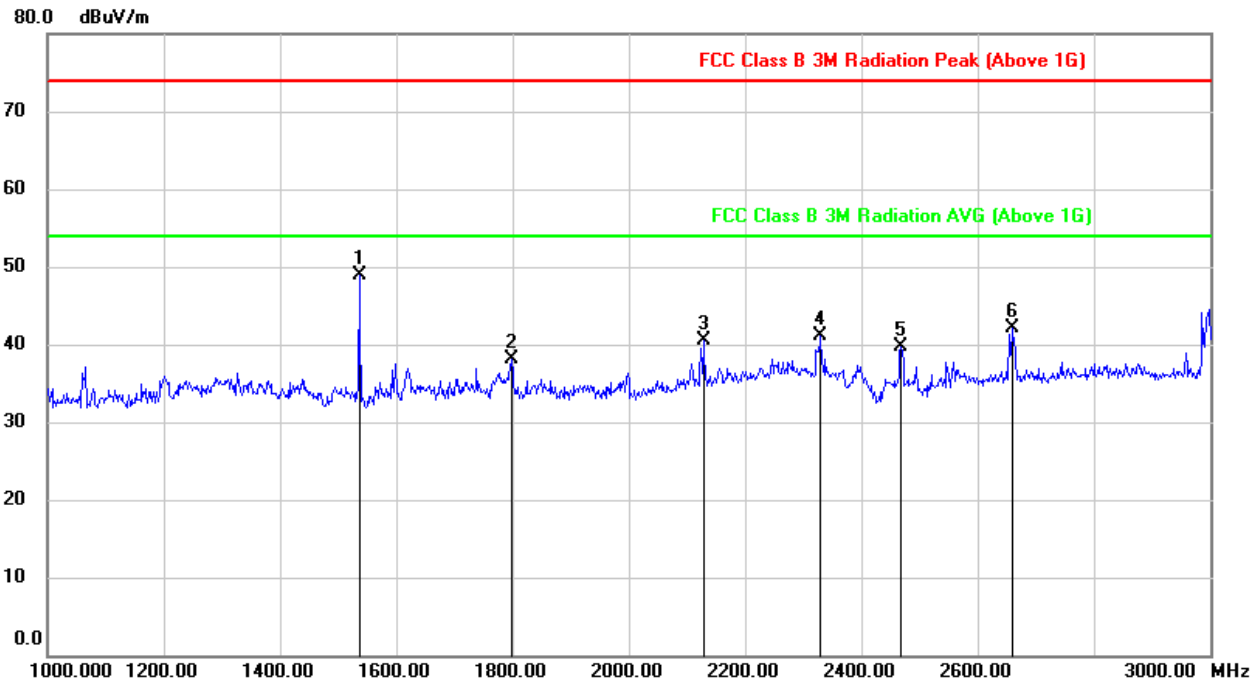


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	61.17	-12.31	48.86	74.00	-25.14	peak
2	1799.750	49.28	-11.13	38.15	74.00	-35.85	peak
3	2128.500	49.62	-9.21	40.41	74.00	-33.59	peak
4	2330.000	48.62	-7.61	41.01	74.00	-32.99	peak
5	2468.000	48.14	-8.38	39.76	74.00	-34.24	peak
6	2660.000	49.89	-7.80	42.09	74.00	-31.91	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

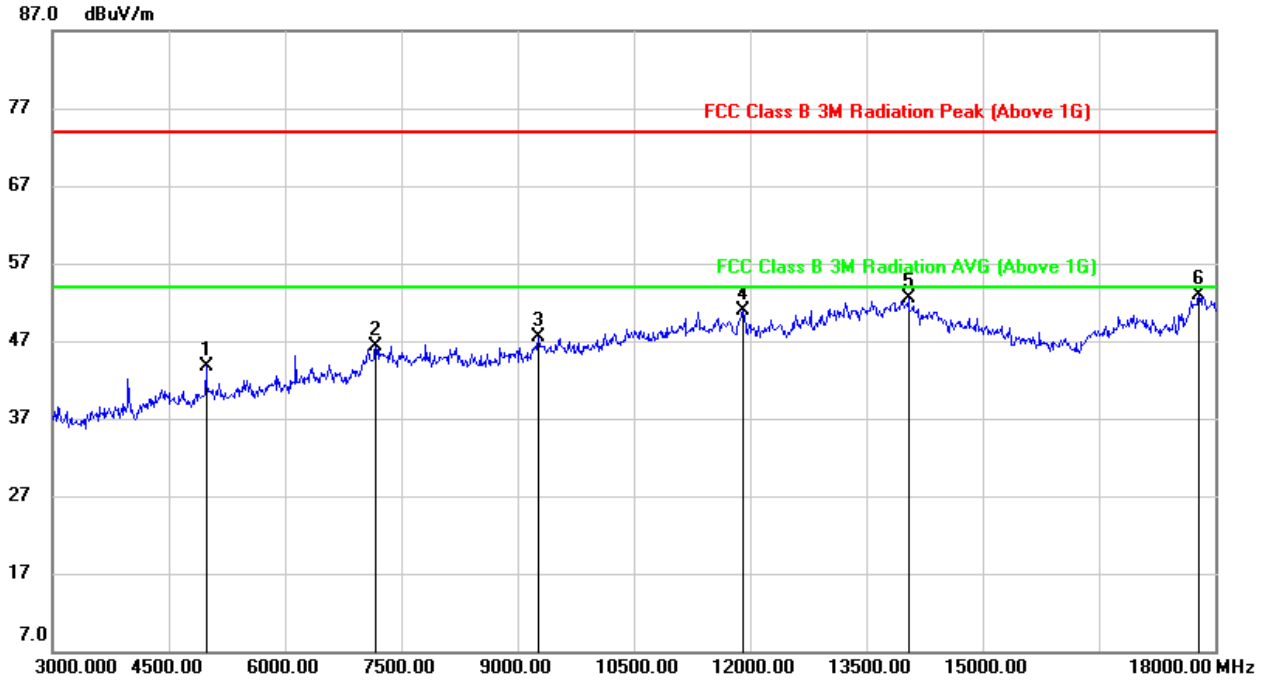


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4985.625	43.19	0.51	43.70	74.00	-30.30	peak
2	7179.375	38.63	7.72	46.35	74.00	-27.65	peak
3	9271.875	37.06	10.50	47.56	74.00	-26.44	peak
4	11921.250	34.08	16.81	50.89	74.00	-23.11	peak
5	14051.250	31.87	20.64	52.51	74.00	-21.49	peak
6	17793.750	26.48	26.40	52.88	74.00	-21.12	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, VERTICAL)

1-3G

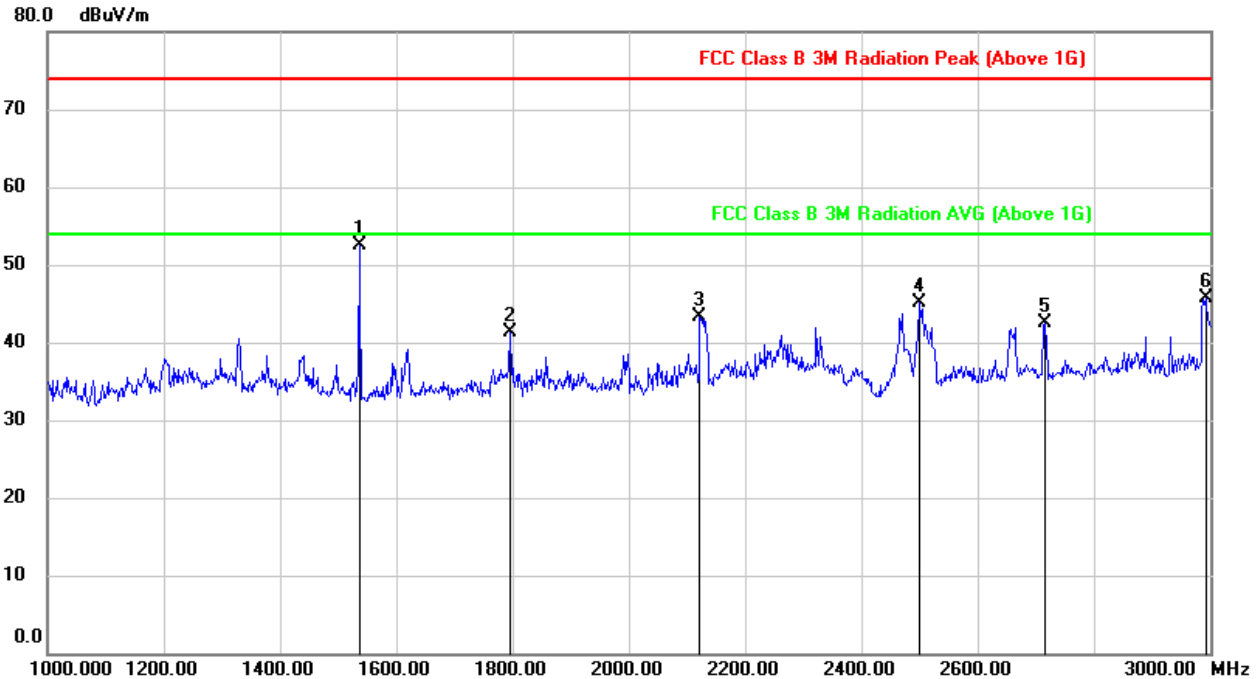


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.250	64.68	-12.26	52.42	74.00	-21.58	peak
2	1796.250	52.37	-11.14	41.23	74.00	-32.77	peak
3	2123.750	52.69	-9.37	43.32	74.00	-30.68	peak
4	2500.500	53.35	-8.30	45.05	74.00	-28.95	peak
5	2717.000	49.99	-7.50	42.49	74.00	-31.51	peak
6	2992.000	52.26	-6.59	45.67	74.00	-28.33	peak

- Note: 1. Result = Reading + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



3-18G

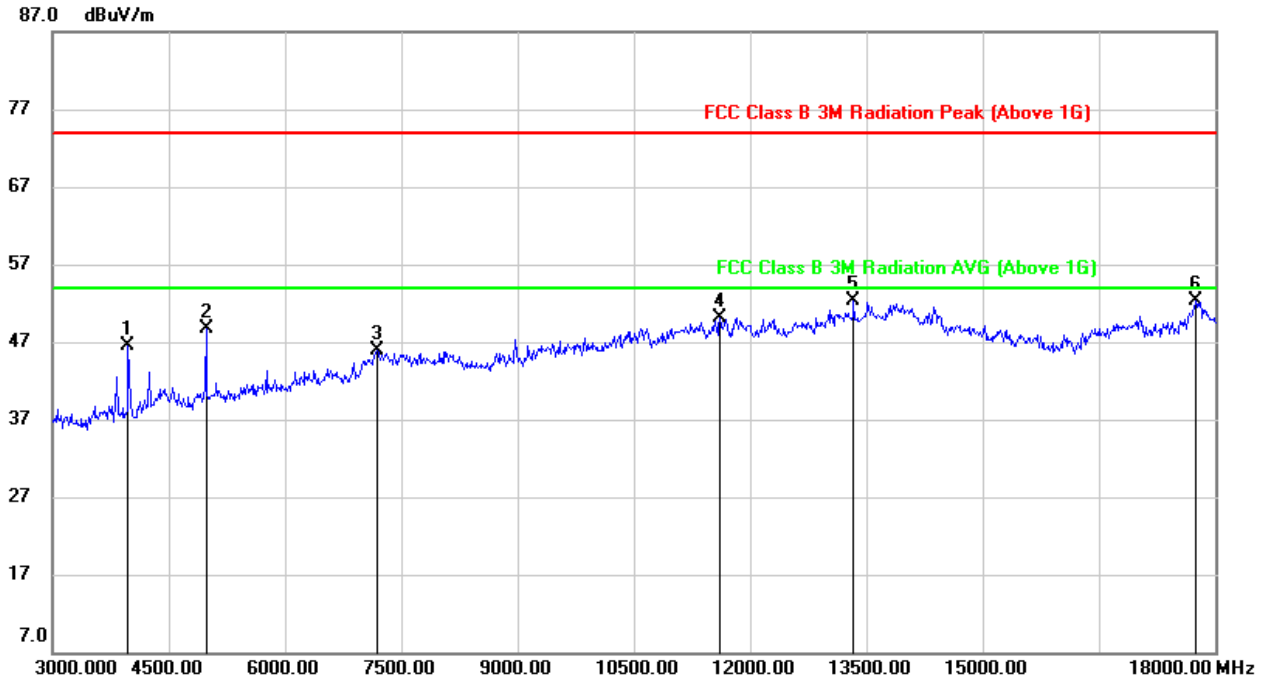

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3988.125	49.48	-3.00	46.48	74.00	-27.52	peak
2	4985.625	48.15	0.58	48.73	74.00	-25.27	peak
3	7198.125	38.05	7.85	45.90	74.00	-28.10	peak
4	11611.875	34.30	15.88	50.18	74.00	-23.82	peak
5	13346.250	32.79	19.55	52.34	74.00	-21.66	peak
6	17758.125	26.03	26.36	52.39	74.00	-21.61	peak


Note: 1. Result = Reading + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



OFDM 20MHz Bandwidth Mode

HARMONICS AND SPURIOUS EMISSIONS 1G~18GHZ (LOW CHANNEL, HORIZONTAL)

1-3G

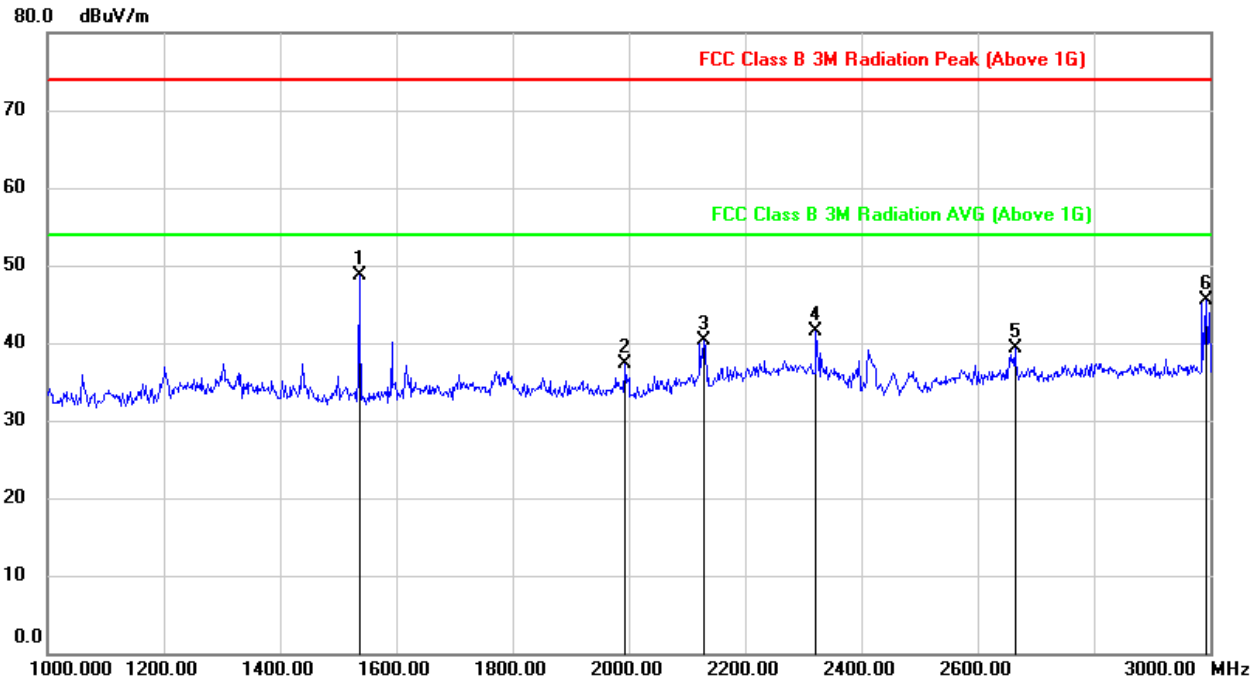


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	61.05	-12.31	48.74	74.00	-25.26	peak
2	1995.500	47.88	-10.64	37.24	74.00	-36.76	peak
3	2130.000	49.44	-9.18	40.26	74.00	-33.74	peak
4	2323.500	49.01	-7.57	41.44	74.00	-32.56	peak
5	2665.500	47.14	-7.78	39.36	74.00	-34.64	peak
6	2992.750	52.11	-6.59	45.52	74.00	-28.48	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

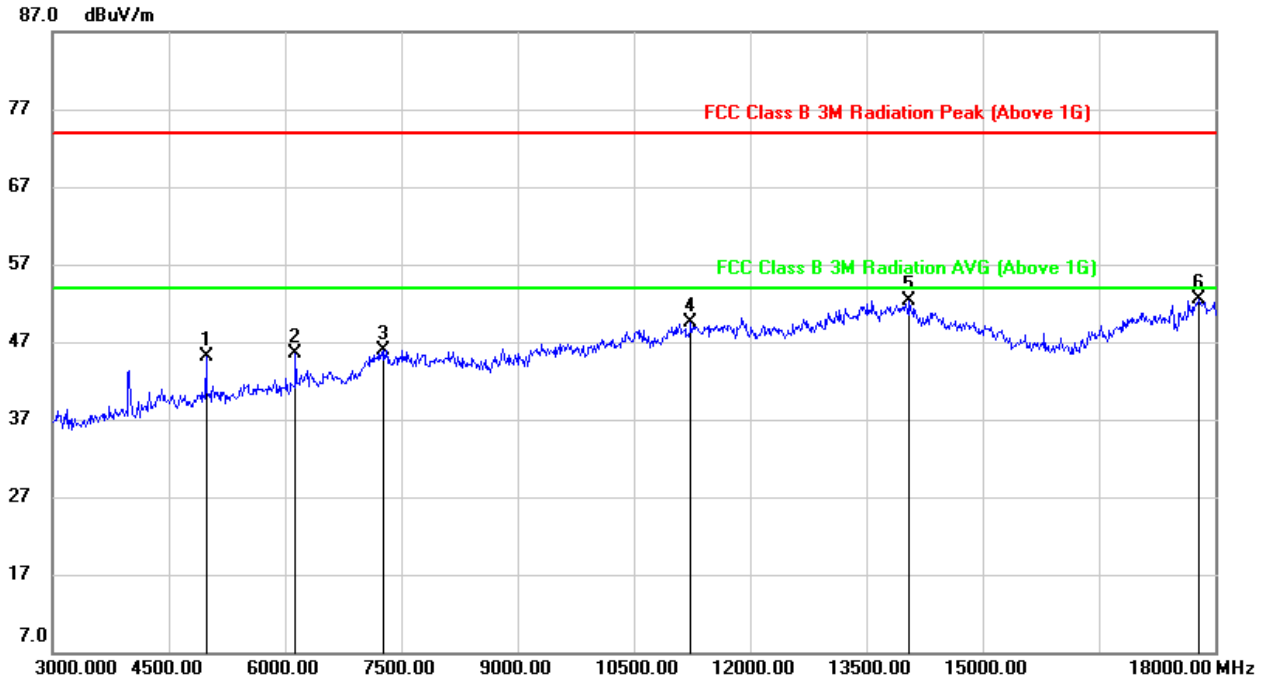


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4983.750	44.65	0.50	45.15	74.00	-28.85	peak
2	6148.125	41.67	3.78	45.45	74.00	-28.55	peak
3	7278.750	38.03	7.85	45.88	74.00	-28.12	peak
4	11246.250	34.41	15.11	49.52	74.00	-24.48	peak
5	14060.625	31.71	20.65	52.36	74.00	-21.64	peak
6	17791.875	26.17	26.39	52.56	74.00	-21.44	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (LOW CHANNEL, VERTICAL)

1-3G

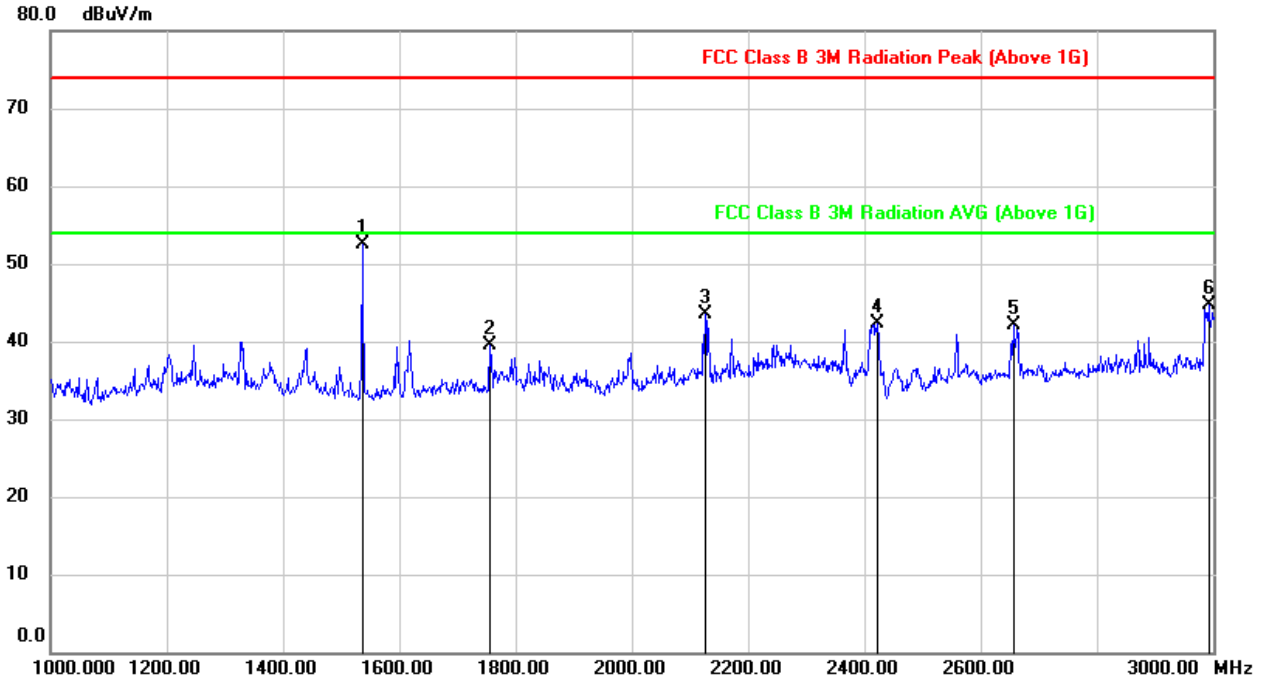


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	64.85	-12.26	52.59	74.00	-21.41	peak
2	1757.000	50.67	-11.26	39.41	74.00	-34.59	peak
3	2127.500	52.74	-9.32	43.42	74.00	-30.58	peak
4	2423.500	50.49	-8.12	42.37	74.00	-31.63	peak
5	2656.250	50.01	-7.91	42.10	74.00	-31.90	peak
6	2992.500	51.32	-6.59	44.73	74.00	-29.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

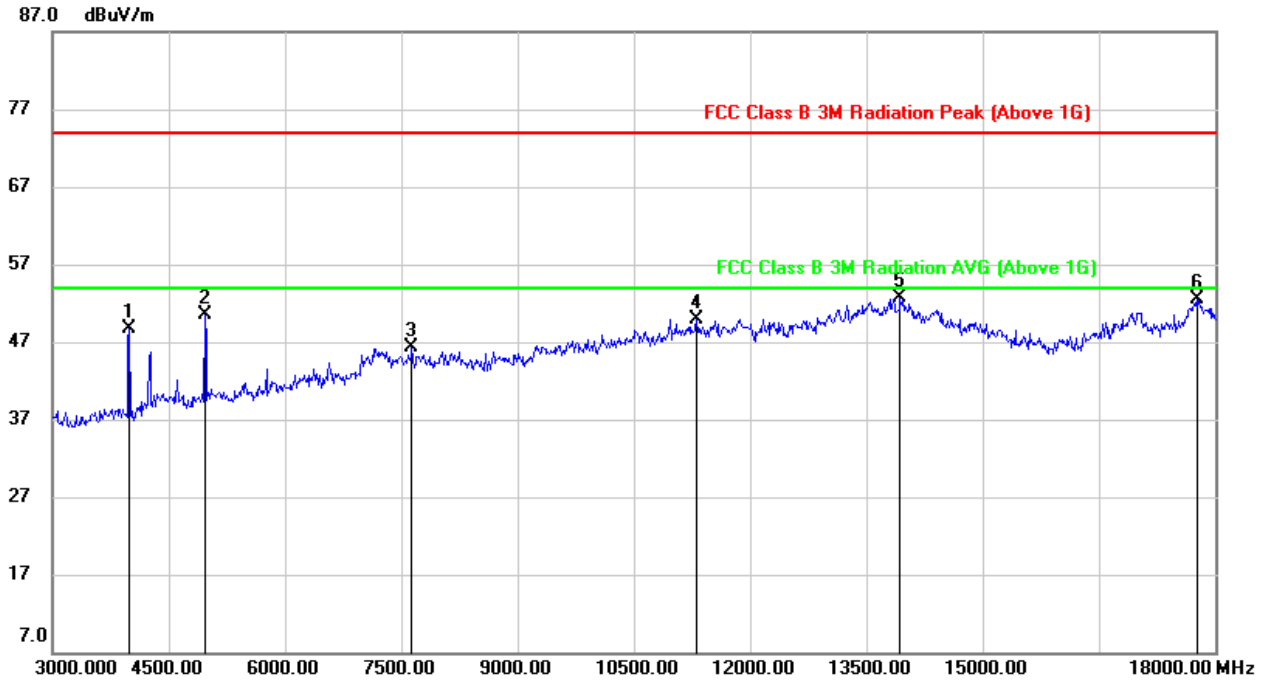


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3993.750	51.62	-2.99	48.63	74.00	-25.37	peak
2	4978.125	49.88	0.58	50.46	74.00	-23.54	peak
3	7635.000	38.31	8.04	46.35	74.00	-27.65	peak
4	11311.875	34.79	15.17	49.96	74.00	-24.04	peak
5	13942.500	31.99	20.79	52.78	74.00	-21.22	peak
6	17773.125	25.92	26.56	52.48	74.00	-21.52	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, HORIZONTAL)

1-3G

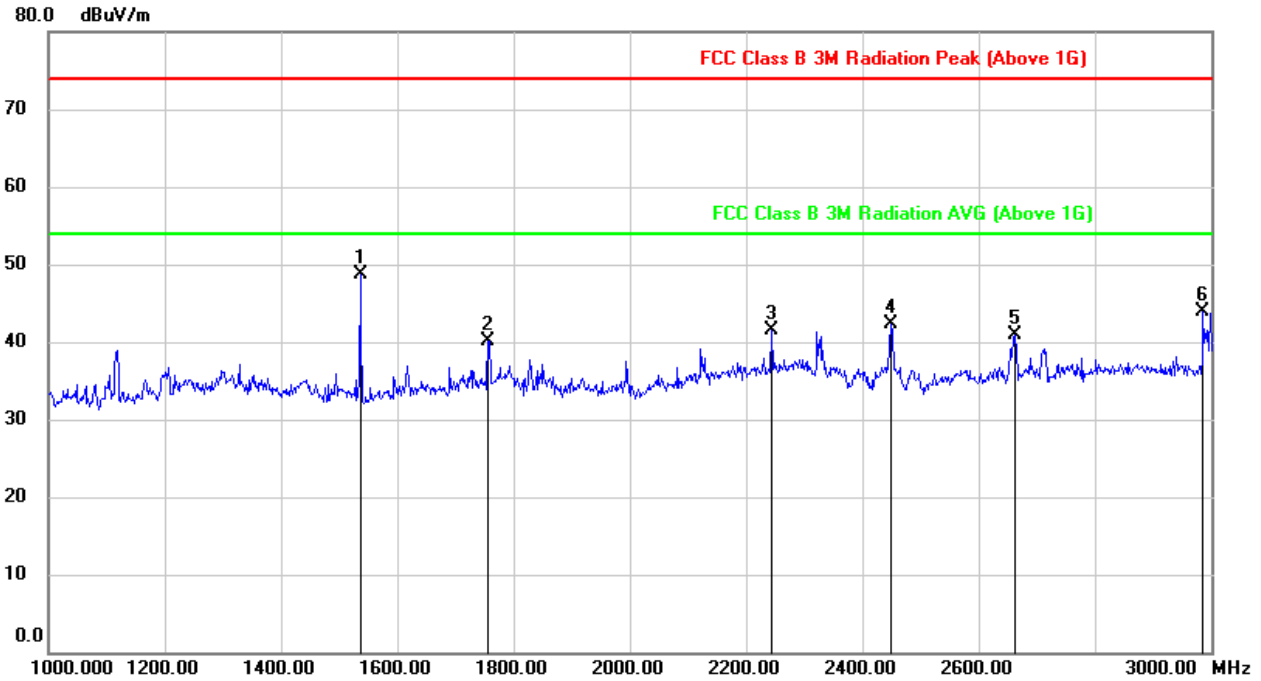


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1537.000	61.06	-12.31	48.75	74.00	-25.25	peak
2	1757.750	51.40	-11.25	40.15	74.00	-33.85	peak
3	2245.250	49.12	-7.67	41.45	74.00	-32.55	peak
4	2451.000	50.72	-8.34	42.38	74.00	-31.62	peak
5	2663.250	48.69	-7.79	40.90	74.00	-33.10	peak
6	2987.000	50.40	-6.59	43.81	74.00	-30.19	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

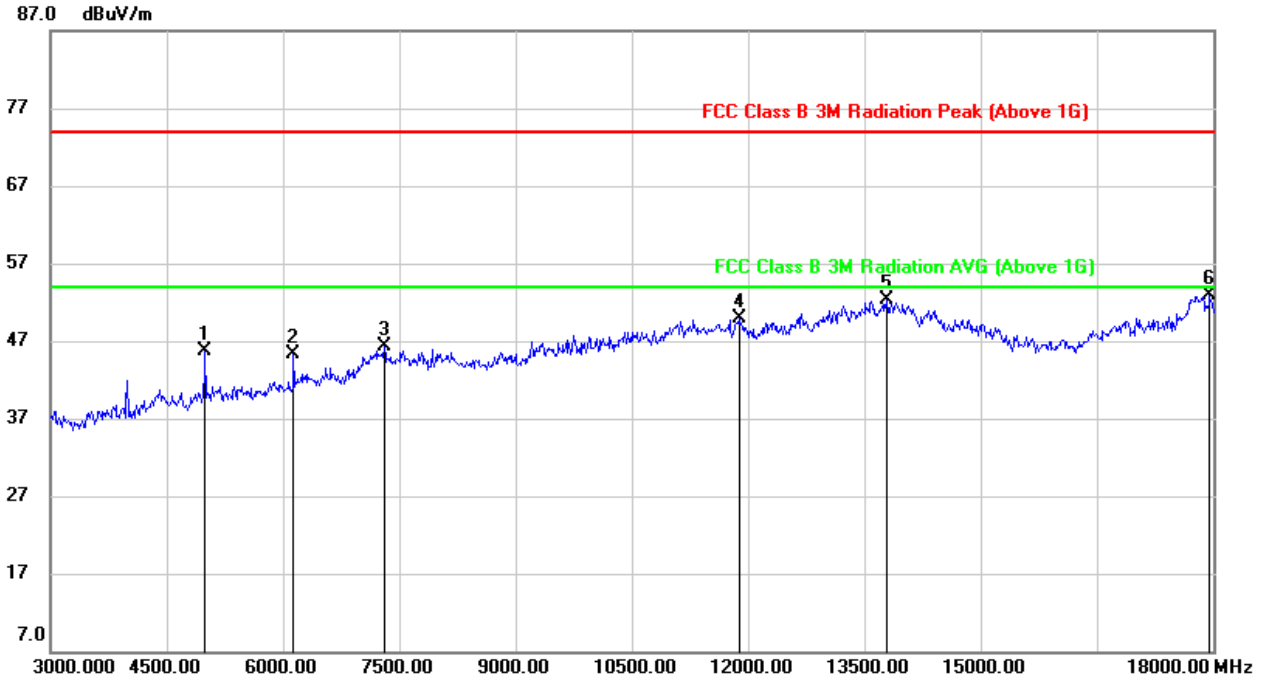


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4996.875	45.22	0.48	45.70	74.00	-28.30	peak
2	6148.125	41.55	3.78	45.33	74.00	-28.67	peak
3	7305.000	38.43	7.80	46.23	74.00	-27.77	peak
4	11883.750	33.12	16.81	49.93	74.00	-24.07	peak
5	13792.500	31.55	20.73	52.28	74.00	-21.72	peak
6	17956.875	25.83	27.03	52.86	74.00	-21.14	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (MIDDLE CHANNEL, VERTICAL)

1-3G

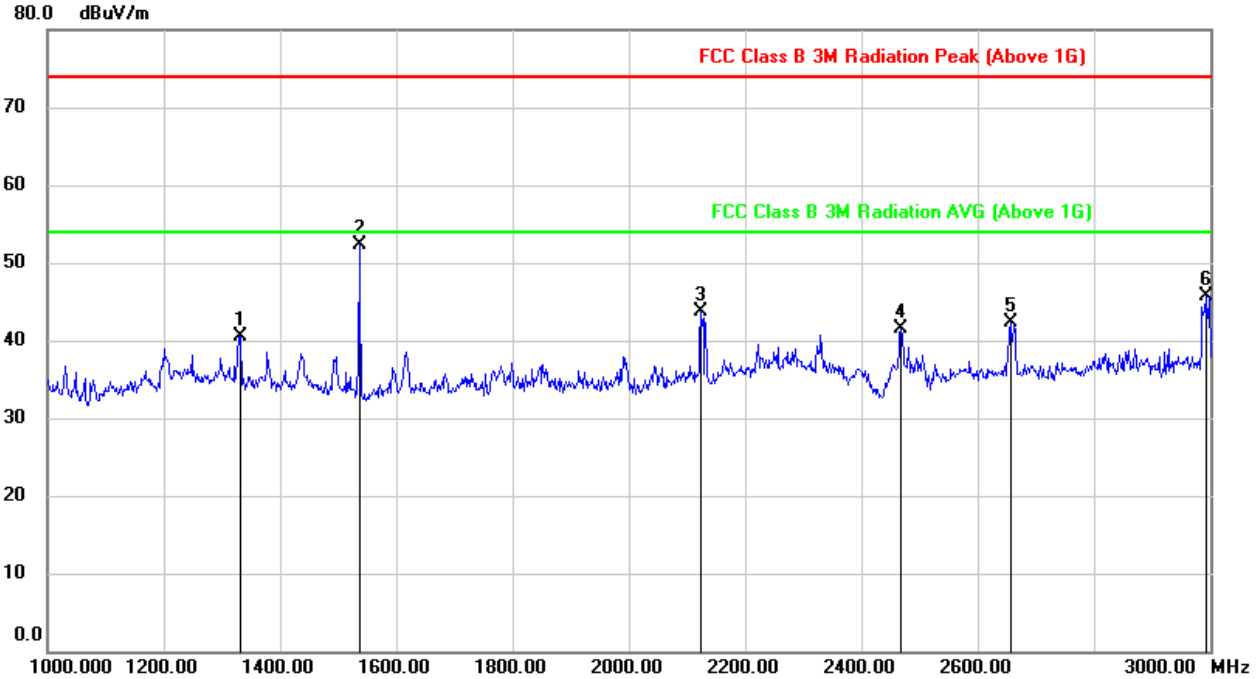


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1332.000	53.00	-12.48	40.52	74.00	-33.48	peak
2	1537.000	64.63	-12.26	52.37	74.00	-21.63	peak
3	2125.750	53.04	-9.34	43.70	74.00	-30.30	peak
4	2469.500	49.87	-8.28	41.59	74.00	-32.41	peak
5	2656.250	50.14	-7.91	42.23	74.00	-31.77	peak
6	2993.250	52.22	-6.59	45.63	74.00	-28.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

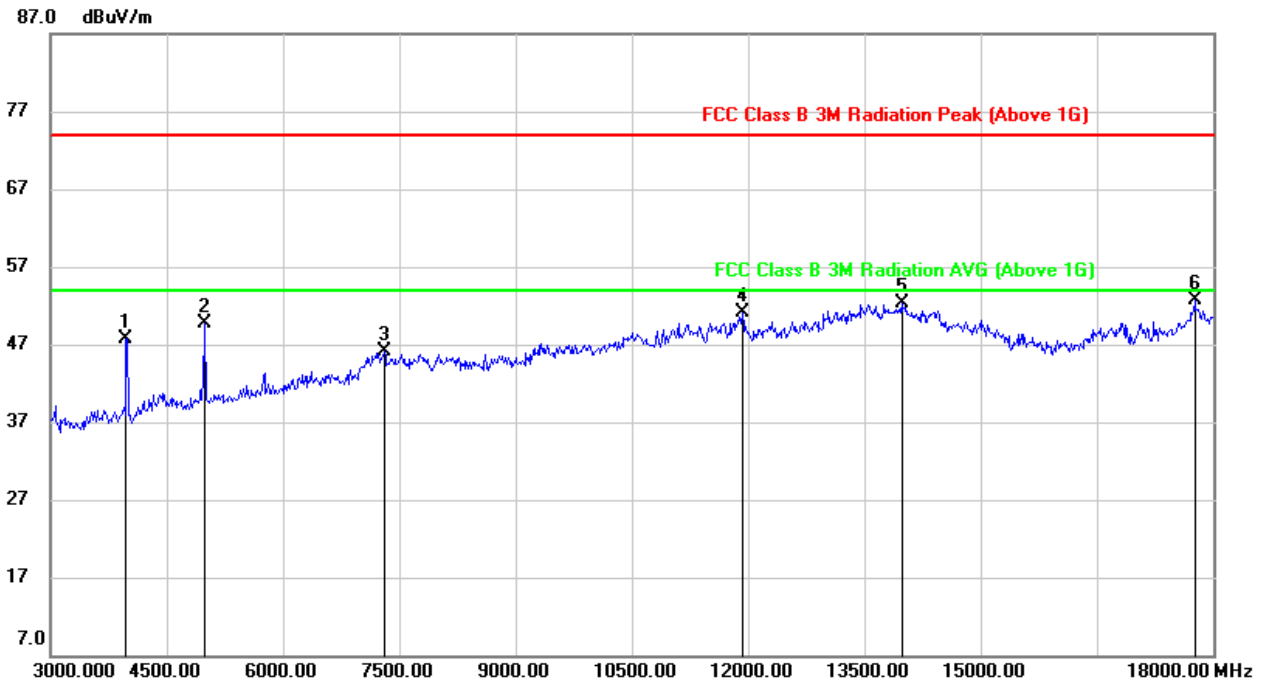


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3988.125	50.73	-3.00	47.73	74.00	-26.27	peak
2	4996.875	49.21	0.57	49.78	74.00	-24.22	peak
3	7316.250	38.30	7.71	46.01	74.00	-27.99	peak
4	11938.125	34.49	16.65	51.14	74.00	-22.86	peak
5	13987.500	31.58	20.73	52.31	74.00	-21.69	peak
6	17765.625	26.18	26.47	52.65	74.00	-21.35	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, HORIZONTAL)

1-3G

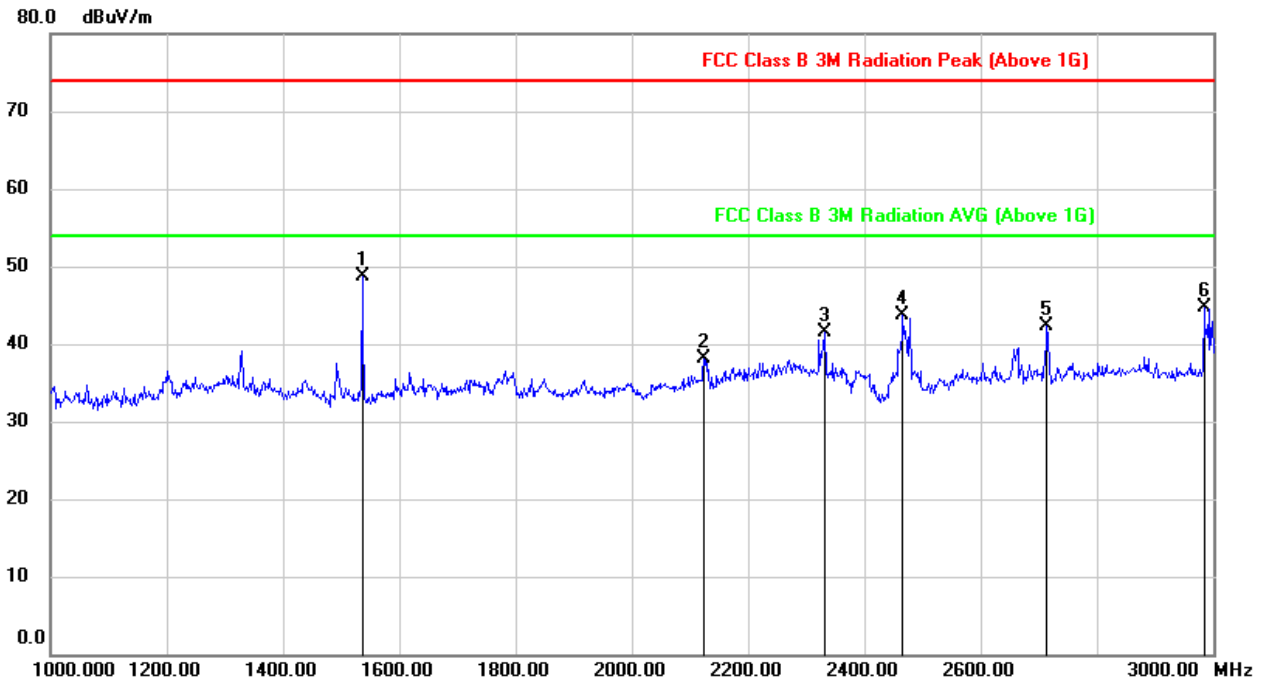


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	61.09	-12.32	48.77	74.00	-25.23	peak
2	2124.000	47.45	-9.26	38.19	74.00	-35.81	peak
3	2332.000	49.06	-7.62	41.44	74.00	-32.56	peak
4	2466.000	51.99	-8.37	43.62	74.00	-30.38	peak
5	2714.000	49.89	-7.50	42.39	74.00	-31.61	peak
6	2984.000	51.31	-6.59	44.72	74.00	-29.28	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



3-18G

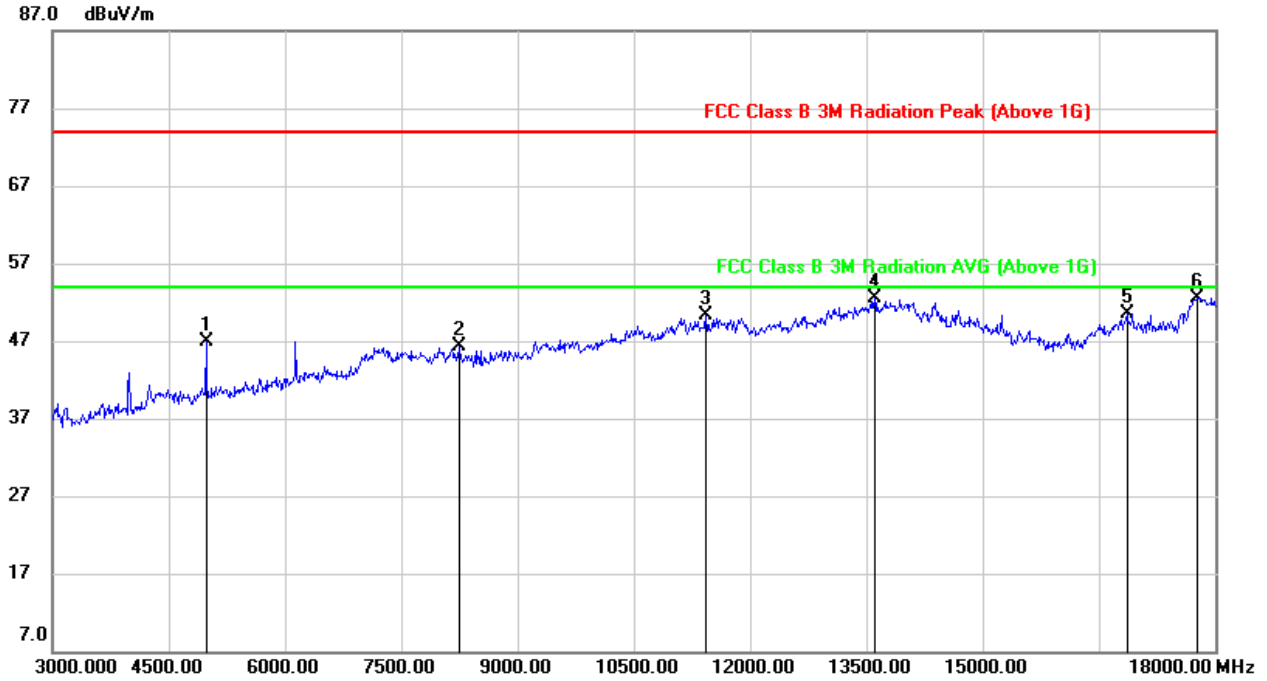


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4987.500	46.49	0.50	46.99	74.00	-27.01	peak
2	8261.250	37.82	8.49	46.31	74.00	-27.69	peak
3	11435.625	34.41	15.86	50.27	74.00	-23.73	peak
4	13606.875	31.92	20.54	52.46	74.00	-21.54	peak
5	16871.250	29.66	20.79	50.45	74.00	-23.55	peak
6	17776.875	26.33	26.19	52.52	74.00	-21.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



HARMONICS AND SPURIOUS EMISSIONS 1G~18GHz (HIGH CHANNEL, VERTICAL)

1-3G

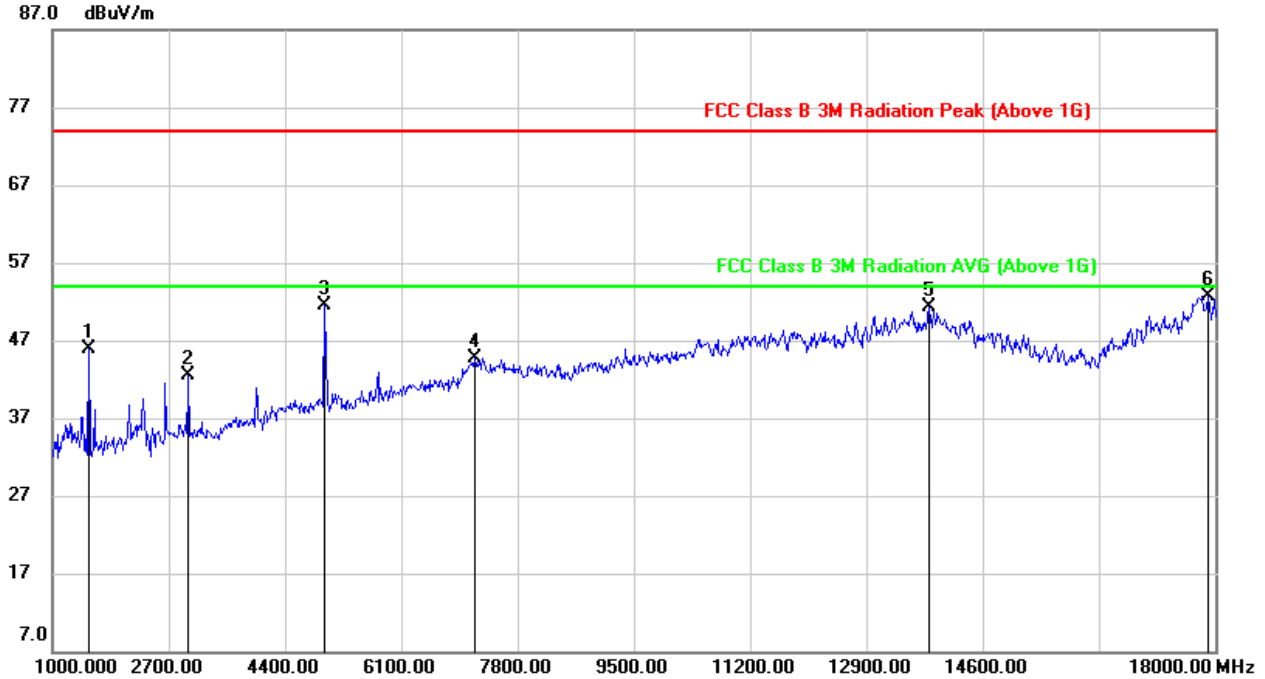


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.633	58.68	-12.75	45.93	74.00	-28.07	peak
2	2995.800	49.78	-7.29	42.49	74.00	-31.51	peak
3	4989.333	52.21	-0.78	51.43	74.00	-22.57	peak
4	7183.467	38.24	6.45	44.69	74.00	-29.31	peak
5	13818.567	32.31	18.96	51.27	74.00	-22.73	peak
6	17909.333	28.55	24.15	52.70	74.00	-21.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.



3-18G

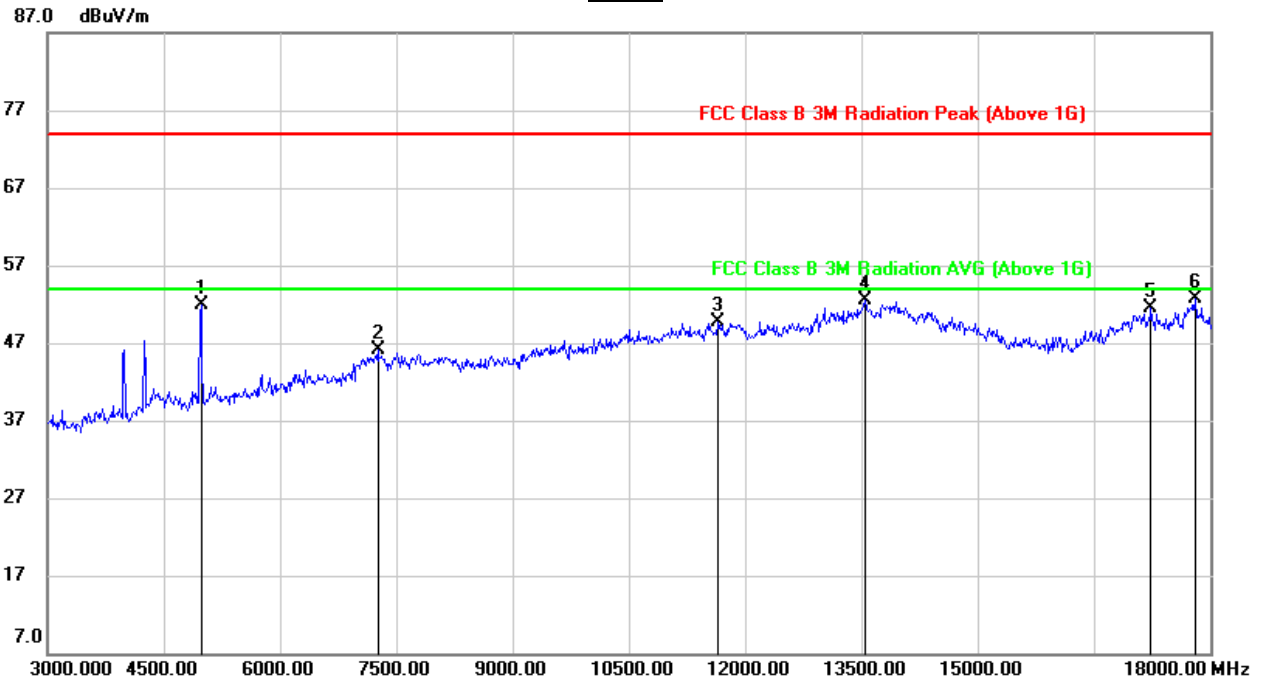

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4987.500	51.24	0.57	51.81	74.00	-22.19	peak
2	7267.500	38.24	7.80	46.04	74.00	-27.96	peak
3	11660.625	33.35	16.35	49.70	74.00	-24.30	peak
4	13548.750	31.65	20.90	52.55	74.00	-21.45	peak
5	17246.250	28.41	23.17	51.58	74.00	-22.42	peak
6	17806.875	25.86	26.77	52.63	74.00	-21.37	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.


Note: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



8.1.SPURIOUS EMISSIONS 18G ~ 26GHz (WORST-CASE CONFIGURATION)

QPSK 20MHz Bandwidth Mode

SPURIOUS EMISSIONS 18GHz TO 26GHz (MIDDLE CHANNEL, HORIZONTAL)

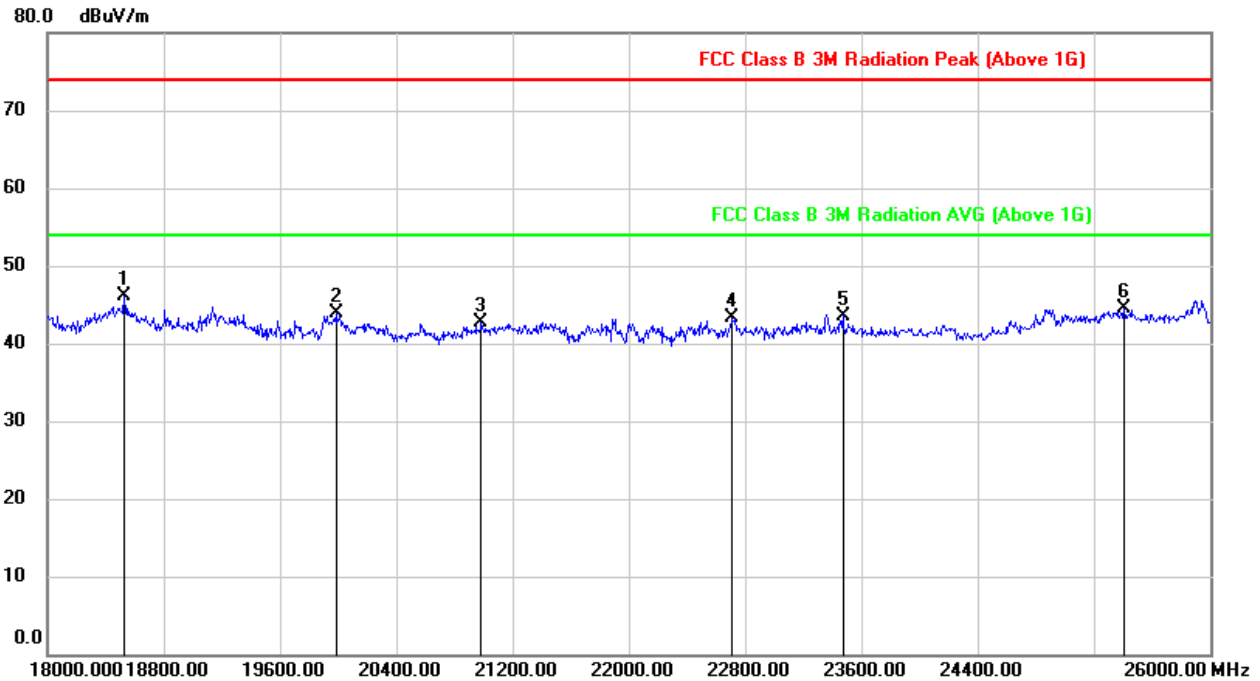


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	51.41	-5.26	46.15	74.00	-27.85	peak
2	19984.000	49.38	-5.44	43.94	74.00	-30.06	peak
3	20984.000	47.56	-4.89	42.67	74.00	-31.33	peak
4	22712.000	46.98	-3.72	43.26	74.00	-30.74	peak
5	23472.000	46.77	-3.17	43.60	74.00	-30.40	peak
6	25408.000	46.20	-1.73	44.47	74.00	-29.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.



SPURIOUS EMISSIONS 18GHz TO 26GHz (MIDDLE CHANNEL, VERTICAL)

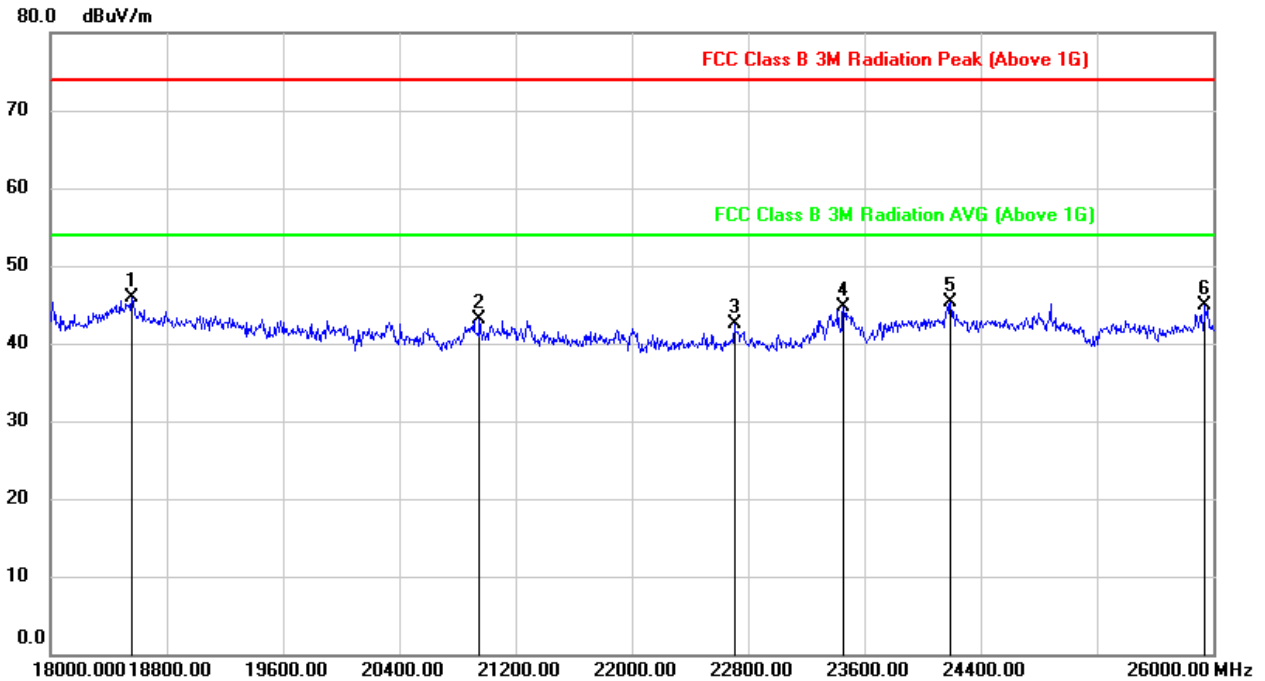

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18560.000	51.14	-5.29	45.85	74.00	-28.15	peak
2	20952.000	47.96	-4.92	43.04	74.00	-30.96	peak
3	22704.000	46.15	-3.73	42.42	74.00	-31.58	peak
4	23456.000	47.87	-3.17	44.70	74.00	-29.30	peak
5	24192.000	48.21	-2.81	45.40	74.00	-28.60	peak
6	25944.000	45.80	-0.96	44.84	74.00	-29.16	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

Note: EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8.

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

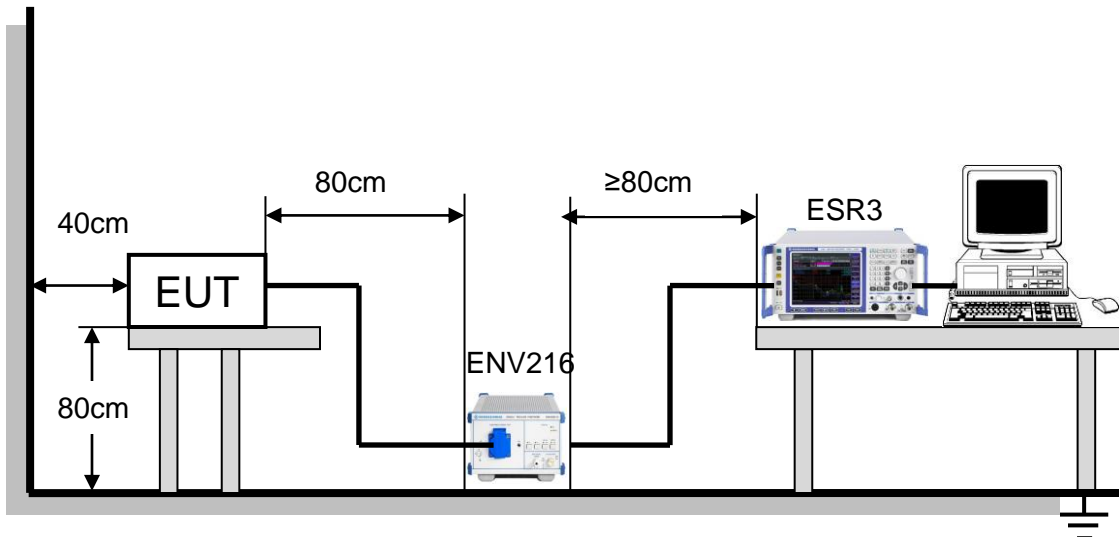

The EUT is put on a table of non-conducting material that is 0.8m high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	/	Relative Humidity	/
Atmosphere Pressure	/	Test Voltage	/



RESULTS

Not Applicable.

Note: The EUT is powered by battery and can't charge directly.



10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

ANTENNA CONNECTOR

EUT has an external antenna with antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT