

ISED CABid: ES1909  
 Lab Company Number: 4621A

Test report No:  
 NIE: 72082REM.002

## Test report

**FCC Rules and Regulations CFR 47, Part 15, Subpart B & Subpart C (10-1-20 Edition)**  
**ICES-003 Issue 7 (October 2020)**  
**RSS-Gen Issue 5 (April 2018)**

|   |   |
|---|---|
| (*) Identification of item tested         | CENTRAL FLEXA 4   |
| (*) Trademark                             | AIRZONE   |
| (*) Model and /or type reference          | AZCE8CB2MOT (USA)   |
| (*) Derived model not tested              | AZCE8CB1MOT (EU)  |
| Other identification of the product       | Not provided data   |
| (*) Features                              | FCC ID: SVS-CB-MOT<br>IC: 24685-CBMOT<br>HW version: V1.0<br>SW version: V3.5.0<br>Features: SRD, Bluetooth (See data sheet)                            |
| Manufacturer                              | CORPORACIÓN EMPRESARIAL ALTRA S.L.<br>C/ MARIE CURIE 21, MÁLAGA (29590), SPAIN  |
| Test method requested, standard           | FCC Rules and Regulations CFR 47, Part 15, Subpart B & Subpart C (10-1-20 Edition)<br>ICES-003 Issue 7 (October 2020) &<br>RSS-Gen Issue 5 (April 2018) |
| Summary                                   | IN COMPLIANCE   |
| Approved by (name / position & signature) | José Manuel Gómez<br>Industrial & Automotive<br>EMC Lab. Manager  |
| Date of issue                             | 2023-01-16  |
| Report template No                        | FDT08_24<br>(*) "Data provided by the client"   |



## Index

|  |    |
|--|----|
| ACRONYMS .....                               | 3  |
| COMPETENCES AND GUARANTEES .....             | 3  |
| GENERAL CONDITIONS .....                     | 4  |
| UNCERTAINTY .....                            | 4  |
| DATA PROVIDED BY THE CLIENT .....            | 4  |
| USAGE OF SAMPLES .....                       | 5  |
| TEST SAMPLE DESCRIPTION .....                | 6  |
| IDENTIFICATION OF THE CLIENT .....           | 8  |
| TESTING PERIOD AND PLACE .....               | 8  |
| DOCUMENT HISTORY .....                       | 8  |
| ENVIRONMENTAL CONDITIONS .....               | 9  |
| REMARKS AND COMMENTS .....                   | 10 |
| TESTING VERDICTS .....                       | 10 |
| LIST OF EQUIPMENT USED DURING THE TEST ..... | 11 |
| SUMMARY .....                                | 12 |
| APPENDIX A: TEST RESULTS .....               | 13 |

## Acronyms

| Acronym ID | Acronym Description               |
|------------|-----------------------------------|
| Code       | EMC Test Code                     |
| Freq Rng   | Frequency Range                   |
| Line       | Conducted Emissions - Tested Line |
| MP         | Measurement Point                 |
| OM         | Operation Mode                    |
| S/         | Sample                            |
| V          | Verdict                           |

## Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification S.A.U. is an FCC-recognized accredited testing laboratory with the appropriate scope of accreditation that covers the performed tests in this report, FCC designation number ES0004.

DEKRA Testing and Certification S.A.U. is an ISED recognized accredited testing laboratory, CABid: ES1909, Company Number: 4621A, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the measured conducted disturbance characteristics of EUT from 150 kHz to 30 MHz is  $I = \pm 3,9$  dB for quasi-peak measurements,  $I = \pm 3,2$  dB for peak measurements ( $k = 2$ ).

The total uncertainty of the measurement system for the measured radio disturbance characteristics of EUT from 30 MHz to 6000 MHz is  $I = \pm 4,7$  dB for quasi-peak measurements,  $I = \pm 4,3$  dB for peak and average measurements ( $k = 2$ ).

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested")
2. The sample consists of a Configurable electronic board that controls the system through wired and wireless devices. Externally powered at 110/230 Vac. Wall mounted.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

## Usage of samples

---

Samples undergoing test have been selected by: The client.

| Id   | Control Number | Description          | Model        | Serial N° | Date Reception | of | Application        |
|------|----------------|----------------------|--------------|-----------|----------------|----|--------------------|
| S/01 | 72082B_8.1     | Communication box    | AZCE8CB1MOT  | 0ACETY    | 2022-11-03     |    | Element Under Test |
| S/01 | 72082B_2.1     | Auxiliary Device     | AZCE6LITERB  | F00EM23   | 2022-06-24     |    | Auxiliary Element  |
| S/01 | 72232_3.1      | Touch pad (Auxiliar) | AZCE6THINKCB | F00C436   | 2022-06-13     |    | Auxiliary Element  |
| S/01 | 72232_4.1      | Temperature probe    | --           | --        | 2022-06-13     |    | Auxiliary Element  |
| S/01 | 73542_5.1      | Communication box    | --           | --        | 2022-10-20     |    | Auxiliary Element  |

Notes referenced to samples during the project.

## Test sample description

### Test Sample description (compulsory information for EMC and RF testing services)

| Ports..... :                                  | Port name and description   | Cable                    |                      |          |                                   |     |     |
|---|---|--------------------------|----------------------|----------|-----------------------------------|-----|-----|
|   |   | Specified max length [m] | Attached during test | Shielded | Coupled to patient <sup>(3)</sup> |     |     |
|   | Airzone connection bus  | 100                      | [X]                  | [X]      | [ ]                               |     |     |
|   | Automation bus  | 100                      | [X]                  | [X]      | [ ]                               |     |     |
|   | CAN connection bus  | 100                      | [ ]                  | [X]      | [ ]                               |     |     |
|   | AC unit bus   | 2                        | [ ]                  | [ ]      | [ ]                               |     |     |
|   | Actuator outputs  | 15                       | [X]                  | [ ]      | [ ]                               |     |     |
|   | Relay outputs   | -                        | [ ]                  | [ ]      | [ ]                               |     |     |
| Supplementary information to the ports..... : | Complete description of the ports in the file "List of devices and Manual test" |                          |                      |          |                                   |     |     |
| Rated power supply .....                      | Voltage and Frequency   |                          | Reference poles      |          |                                   |     |     |
|   |   |                          | L1                   | L2       | L3                                | N   | PE  |
| [ ]   | AC:   |                          | [ ]                  | [ ]      | [ ]                               | [ ] | [ ] |
| [X]   | AC: 110 (USA)   |                          | [X]                  | [ ]      | [ ]                               | [X] | [X] |
| [ ]   | DC: .....   |                          |                      |          |                                   |     |     |
| [ ]   | DC: .....   |                          |                      |          |                                   |     |     |
| Rated Power .....                             | 2.4 W   |                          |                      |          |                                   |     |     |
| Clock frequencies.....                        | Not provided data   |                          |                      |          |                                   |     |     |
| Other parameters .....                        | Not provided data   |                          |                      |          |                                   |     |     |
| Software version .....                        | V3.5.0  |                          |                      |          |                                   |     |     |
| Hardware version .....                        | V1.0  |                          |                      |          |                                   |     |     |
| Dimensions in cm (W x H x D) .....            | 195 x 180 x 55,5 mm   |                          |                      |          |                                   |     |     |

|   |                                     |                                |             |              |
|---|-------------------------------------|--------------------------------|-------------|--------------|
| Mounting position .....                       | <input type="checkbox"/>            | Table top equipment            |             |              |
|   | <input checked="" type="checkbox"/> | Wall/Ceiling mounted equipment |             |              |
|   | <input type="checkbox"/>            | Floor standing equipment       |             |              |
|   | <input type="checkbox"/>            | Hand-held equipment            |             |              |
|   | <input type="checkbox"/>            | Other: .....                   |             |              |
| Modules/parts.....                            | Module/parts of test item           |                                | Type        | Manufacturer |
|   | Central Flexa 4                     |                                | AZCE8CB1MO  | AIRZONE      |
|   | .....                               |                                | .....       | .....        |
|   | .....                               |                                | .....       | .....        |
|   | .....                               |                                | .....       | .....        |
| Accessories (not part of the test item) ..... | Description                         |                                | Type        | Manufacturer |
|   | Thermostat                          |                                | Think       | Airzone      |
|   | Gateway                             |                                | AZX6GTCDA1  | Airzone      |
|   | Webserver                           |                                | AZX6WSC5GE  | Airzone      |
|   | Thermostat radio                    |                                | Lite        | Airzone      |
|   | .....                               |                                | .....       | .....        |
|   | .....                               |                                | .....       | .....        |
| Documents as provided by the applicant .....  | Description                         |                                | File name   | Issue date   |
|   | Data sheet                          |                                | FTAZCE8CB1M | .....        |
|   | .....                               |                                | .....       | .....        |
|   | .....                               |                                | .....       | .....        |
|   | .....                               |                                | .....       | .....        |

<sup>(3)</sup> Only for Medical Equipment

## Identification of the client

CORPORACIÓN EMPRESARIAL ALTRA S.L.  
C/ MARIE CURIE 21, MÁLAGA (29590), SPAIN

## Testing period and place

|                      |  |
|----------------------|--|
| <b>Test Location</b> | DEKRA Testing and Certification S.A.U. |
| <b>Date (start)</b>  | 2022-12-01                             |
| <b>Date (finish)</b> | 2022-12-12                             |

## Document history

| Report number | Date       | Description   |
|---------------|------------|---------------|
| 72082REM.002  | 2023-01-16 | First release |



## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

|                          |                                   |
|--------------------------|-----------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C      |
| <b>Relative humidity</b> | Min. = 30 %<br>Max. = 75 %        |
| <b>Air pressure</b>      | Min. = 860mbar<br>Max. = 1060mbar |

In the semianechoic chamber, the following limits were not exceeded during the test.

|                          |                                   |
|--------------------------|-----------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C      |
| <b>Relative humidity</b> | Min. = 30 %<br>Max. = 75 %        |
| <b>Air pressure</b>      | Min. = 860mbar<br>Max. = 1060mbar |

In the chamber for conducted measurements, the following limits were not exceeded during the test:

|                          |                                   |
|--------------------------|-----------------------------------|
| <b>Temperature</b>       | Min. = 15 °C<br>Max. = 35 °C      |
| <b>Relative humidity</b> | Min. = 30 %<br>Max. = 60 %        |
| <b>Air pressure</b>      | Min. = 860mbar<br>Max. = 1060mbar |

## Remarks and comments

---

The tests have been performed by the technical personnel: Eduardo Gonzalez and Raul Alfaya Ruiz.

## Testing verdicts

---

|                |     |
|----------------|-----|
| Fail           | F   |
| Inconclusive   | I   |
| Not applicable | N/A |
| Not measured   | N/M |
| Pass           | P   |
| Partial Passed | P*  |

## List of equipment used during the test

| Control No. | Equipment                                | Model          | Manufacturer      | Next Calibration |
|-------------|--|----------------|-------------------|------------------|
| 2853        | CURRENT PROBE 10kHz-150MHz               | 9206-1         | SOLAR ELECTRONICS | 2023-10-06       |
| 7816        | EMI TEST RECEIVER 1Hz-26.5GHz            | ESW26          | ROHDE AND SCHWARZ | 2023-11-04       |
| 6666        | EMI TEST RECEIVER 2Hz-44GHz              | ESW44          | ROHDE AND SCHWARZ | 2024-03-04       |
| 5779        | ETHERNET TEMPERATURE AND HUMIDITY LOGGER | HWg-STE        | HW GROUP          | 2023-04-28       |
| 7743        | HORN ANTENNA 0,75-18GHz                  | 3115           | ETS LINDGREN      | 2023-08-24       |
| 6815        | HYBRID BILOG ANTENNA 30MHz-6GHz          | 3142E          | ETS LINDGREN      | 2025-03-04       |
| 9360        | PRE-AMPLIFIER G>40dB 1-18 GHz            | BLMA 0118-1M   | BONN ELEKTRONIK   | 2023-05-11       |
| 7614        | SEMIANECHOIC ABSORBER LINED CHAMBER V    | FACT 3 200 STP | ETS LINDGREN      | --               |
| 4848        | SOFTWARE FOR EMC/RF TESTING              | EMC32          | ROHDE AND SCHWARZ | --               |
| 4636        | CURRENT PROBE, 10kHz – 500MHz            | F55            | FCC               | 2023-09-30       |
| 1650        | THREE-PHASE ARTIFICIAL V-NETWORK 100A    | NNLK8121       | SCHWARZBECK       | 2023-02-08       |

## Summary

---

| Test Specification.   | Requirement – Test case                                | Verdict | Remark |
|---|--|---------|--------|
| FCC 47 CFR Part 15B   | RE Radiated emission.<br>Electromagnetic field measure | Pass    | --     |
| FCC 47 CFR Part 15B<br>FCC 47 CFR Part 15C<br>ICES-003<br>RSS-Gen | CE Continuous conducted emission                       | Pass    | --     |
| <u>Supplementary information and remarks:</u><br>None             |  |         |        |

## Appendix A: Test results

## Appendix A content

|  |    |
|--|----|
| DESCRIPTION OF THE OPERATION MODES .....                         | 15 |
| TEST STANDARDS VERSION APPLIED .....                             | 16 |
| TEST CASES DETAILS .....   | 17 |
| FCC 47 CFR PART 15B .....  | 17 |
| <i>RE Radiated emission. Electromagnetic field measure</i> ..... | 17 |
| <i>CE Continuous conducted emission</i> .....                    | 21 |

## Description of the operation modes

---

The operation modes described in this paragraph constitute a functionality of the sample under test for itself. Every operation mode takes a failure criteria for the immunity test that they were applying to it and a monitoring to guarantee performance of the same ones.

The operation modes used by the samples to which the present report refers, are shown in the following table:

| Id    | Description   |
|-------|---|
| OM/01 | EUT ON. SRD without transmission mode. BLE active and without transmission. Managing work by zones. Heating mode. Power supply: 115 Vac.                    |
| OM/02 | EUT ON. SRD in transmission mode. BLE ON with communication established with auxiliary device. Managing work by zones. Heating mode. Power supply: 115 Vac. |

## Test standards version applied

---

The product standards and test standards applied for each test cases are shown in the following table:

| Product Test Standard   | Test standard     | Requirement – Test case          |
|---|-------------------|----------------------------------|
| FCC CFR 47, Part 15, Subpart B (10-1-20 Edition) & ICES-003 Issue 7 (October 2020)  | ANSI C63.4 (2014) | RE Radiated emission.            |
| FCC CFR 47, Part 15, Subpart B and Subpart C (10-1-20 Edition) & ICES-003 Issue 7 (October 2020) RSS-Gen Issue 5 (April 2018) | ANSI C63.4 (2014) | CE Continuous conducted emission |



## Test Cases Details

### FCC 47 CFR Part 15B

#### RE Radiated emission. Electromagnetic field measure

#### Limits

##### Limits of interference Class B


The applied limit for radiated emissions, 3 m distance, according to the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-19 Edition), Secs. 15.109 & ICES-003 Issue 7 (October 2020)

| Frequency range (MHz) | FCC Part 15B        |                              | ICES-003 Issue 7    |                              | FCC Part 15B & ICES-003 Issue 7 |                              |
|-----------------------|---------------------|------------------------------|---------------------|------------------------------|---------------------------------|------------------------------|
|                       | QP Limit for 3 m    |                              | QP Limit for 3 m    |                              | PK Limit for 3 m                | AVG Limit for 3 m            |
|                       | ( $\mu\text{V/m}$ ) | ( $\text{dB}\mu\text{V/m}$ ) | ( $\mu\text{V/m}$ ) | ( $\text{dB}\mu\text{V/m}$ ) | ( $\text{dB}\mu\text{V/m}$ )    | ( $\text{dB}\mu\text{V/m}$ ) |
| 30 to 88              | 100                 | 40                           | 100                 | 40                           | ---                             | ---                          |
| 88 to 216             | 150                 | 43.5                         | 150                 | 43.5                         | ---                             | ---                          |
| 216 to 230            | 200                 | 46                           | 200                 | 46                           | ---                             | ---                          |
| 230 to 960            | 200                 | 46                           | 224                 | 47                           |                                 |                              |
| 960 to 1000           | 500                 | 54                           | 500                 | 54                           | ---                             | ---                          |
| Above 1000            | ---                 | ---                          | ---                 | ---                          | 74                              | 54                           |


NOTE: FCC QP and AVG limits are in concordance with RSS-Gen Issue 5 (March 2019), Secs. 7.1 and 7.3.

Limits according to FCC Part 15B, are equal or more stringent than those of ICES-003 Issue 7.

#### Setup for measurements

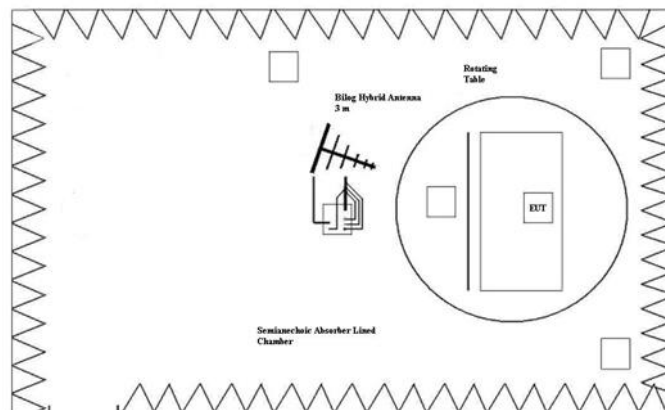

Setup for measurements < 1GHz.

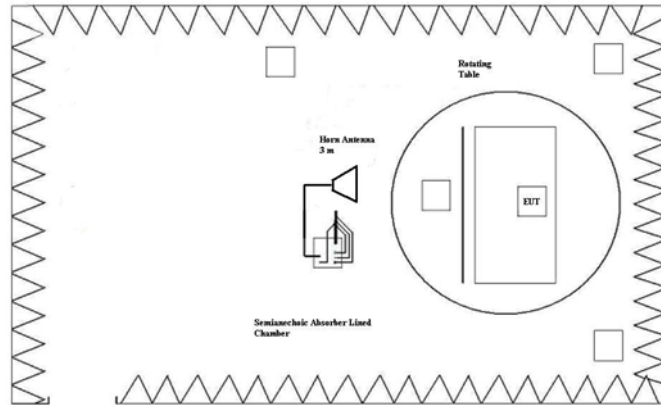

Setup for measurements > 1GHz.

**Results**

| S/ | OM    | Code     | Freq Rng (MHz) | V |
|----|-------|----------|----------------|---|
| 01 | OM/01 | RE0101LR | [30, 1000]     | P |
| 01 | OM/01 | RE0101HR | [1000, 12750]  | P |

**Verdict**

Pass


**Attachments**

**EMC Test Code = RE0101LR, Frequency Range MHz = [30, 1000]**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. SRD without transmission mode. BLE active and without transmission. Managing work by zones. Heating mode. Power Supply 115Vac

**Images:**

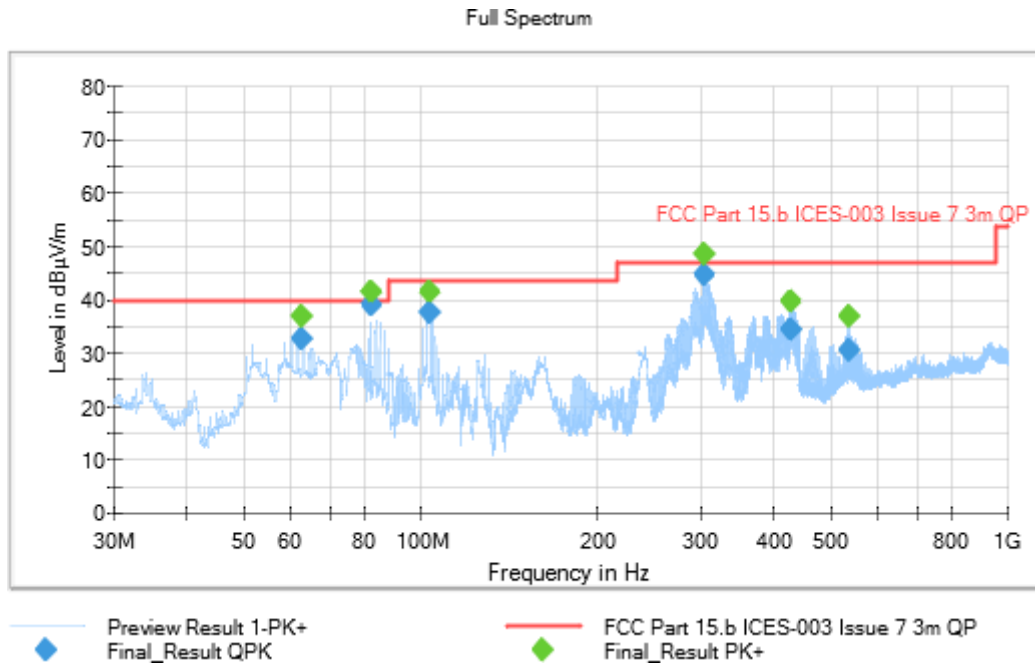

**Tables:**


| Frequency(MHz) | QuasiPeak(dBµV/m) | MaxPeak(dBµV/m) | Limit(dBµV/m) | Margin(dB) | Height(cm) | Po l | Azimuth(deg) |
|----------------|-------------------|-----------------|---------------|------------|------------|------|--------------|
| 62.910000      | ---               | 36.87           | ---           | ---        | 139.0      | V    | 176.0        |
| 62.910000      | 32.48             | ---             | 40.00         | 7.53       | 139.0      | V    | 176.0        |
| 82.518000      | 39.01             | ---             | 40.00         | 0.99       | 100.0      | V    | 170.0        |
| 82.518000      | ---               | 41.36           | ---           | ---        | 100.0      | V    | 170.0        |
| 103.630000     | 37.56             | ---             | 43.52         | 5.96       | 108.0      | V    | 269.0        |
| 103.630000     | ---               | 41.38           | ---           | ---        | 108.0      | V    | 269.0        |
| 303.598000     | 44.70             | ---             | 47.00         | 2.30       | 135.0      | V    | 172.0        |
| 303.598000     | ---               | 48.57           | ---           | ---        | 135.0      | V    | 172.0        |
| 429.380000     | ---               | 39.74           | ---           | ---        | 110.0      | V    | 101.0        |
| 429.380000     | 34.16             | ---             | 47.00         | 12.84      | 110.0      | V    | 101.0        |
| 539.498000     | 30.27             | ---             | 47.00         | 16.73      | 143.0      | H    | 351.0        |
| 539.498000     | ---               | 36.75           | ---           | ---        | 143.0      | H    | 351.0        |

**EMC Test Code = RE0101HR, Frequency Range MHz = [1000, 12750]**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. SRD without transmission mode. BLE active and without transmission.  
 Managing work by zones. Heating mode. Power Supply 115Vac

**Images:**

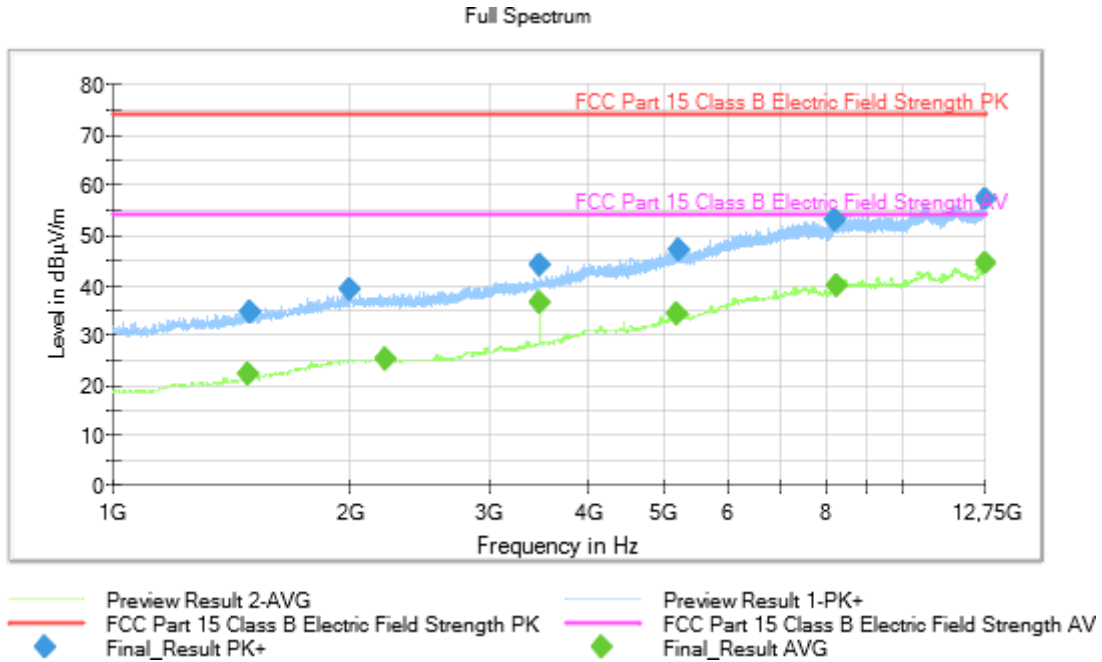

**Tables:**

| Frequency(MHz) | MaxPeak(dBµV/m) | Average(dBµV/m) | Limit(dBµV/m) | Margin(dB) |
|----------------|-----------------|-----------------|---------------|------------|
| 1484.800000    | ---             | 22.05           | 53.97         | 31.92      |
| 1496.000000    | 34.61           | ---             | 73.97         | 39.36      |
| 1996.800000    | 38.95           | ---             | 73.97         | 35.02      |
| 2216.400000    | ---             | 25.23           | 53.97         | 28.74      |
| 3471.200000    | ---             | 36.30           | 53.97         | 17.67      |
| 3471.200000    | 43.97           | ---             | 73.97         | 30.00      |
| 5187.600000    | ---             | 34.09           | 53.97         | 19.88      |
| 5220.800000    | 47.09           | ---             | 73.97         | 26.88      |
| 8234.000000    | 52.87           | ---             | 73.97         | 21.10      |
| 8282.000000    | ---             | 39.98           | 53.97         | 13.99      |
| 12734.800000   | ---             | 44.27           | 53.97         | 9.70       |
| 12745.600000   | 57.20           | ---             | 73.97         | 16.77      |

## CE Continuous conducted emission

### Limits

#### Limits of interference Class B

The applied limit for continuous conducted emissions in power leads, according with the requirements of FCC Rules and Regulations 47 CFR Part 15, Subpart B (10-1-19 Edition), Secs. 15.107 & ICES-003 Issue 6 (April 2019), in the frequency range 0,15 to 30 MHz, for Class B equipment was:

| Frequency range<br>(MHz) | Limit (dB $\mu$ V) |         |
|--------------------------|--------------------|---------|
|                          | Quasi-Peak         | Average |
| 0,15 to 0,5              | 66 - 56            | 56 - 46 |
| 0,5 to 5                 | 56                 | 46      |
| 5 to 30                  | 60                 | 50      |

### Results

| S/ | OM    | Code     | Freq Rng (MHz) | Line | V |
|----|-------|----------|----------------|------|---|
| 01 | OM/01 | CE01020N | [0.15, 30]     | N    | P |
| 01 | OM/01 | CE0102L1 | [0.15, 30]     | L1   | P |
| 01 | OM/02 | CE01020N | [0.15, 30]     | N    | P |
| 01 | OM/02 | CE0102L1 | [0.15, 30]     | L1   | P |

### Verdict

Pass


**Attachments**

**EMC Test Code= CE01010N, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = N**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. SRD without transmission mode. BLE active and without transmission.  
 Managing work by zones. Heating mode Power supply: 115 Vac

**Images:**

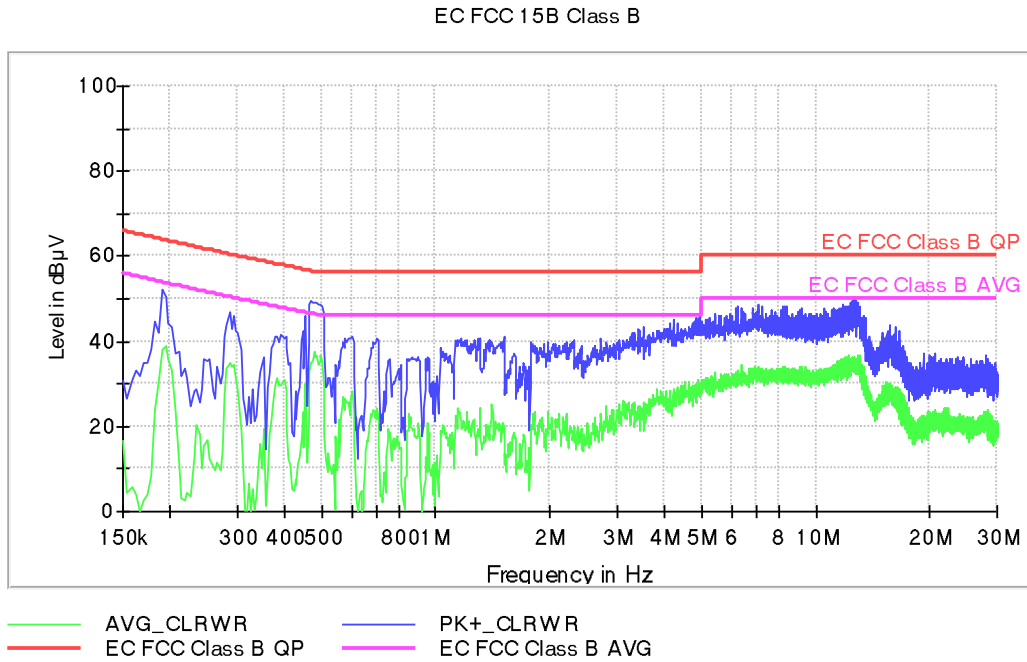

**Tables:**

| Frequency(MHz) | PK+_CLRWR(dBµV) | AVG_CLRWR(dBµV) | Line |
|----------------|-----------------|-----------------|------|
| 0.190000       | 52.1            | 38.2            | N    |
| 0.286000       | 47.1            | 34.8            | N    |
| 0.470000       | 49.4            | 35.1            | N    |
| 1.162000       | 40.5            | 21.4            | N    |
| 1.510000       | 41.0            | 19.7            | N    |
| 3.526000       | 43.5            | 25.8            | N    |
| 5.438000       | 46.6            | 32.6            | N    |
| 7.050000       | 48.8            | 33.2            | N    |
| 12.586000      | 50.6            | 35.4            | N    |
| 20.642000      | 37.4            | 23.8            | N    |


**EMC Test Code = CE0101L1, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = L1**

Sample ID: S/01

Operation Mode: OM/01. EUT ON. SRD without transmission mode. BLE active and without transmission.  
 Managing work by zones. Heating mode. Power supply: 115 Vac

**Images:**

EC FCC 15B Class B

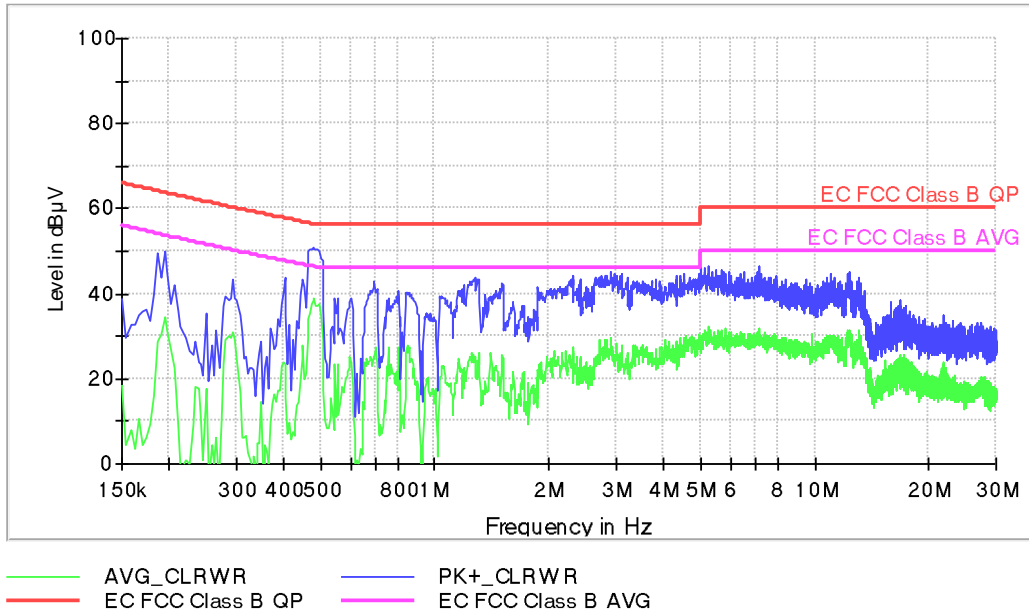

**Tables:**


| Frequency(MHz) | PK+_CLRWR(dBµV) | AVG_CLRWR(dBµV) | Line |
|----------------|-----------------|-----------------|------|
| 0.194000       | 50.1            | 34.4            | L1   |
| 0.402000       | 44.0            | 23.4            | L1   |
| 0.478000       | 50.7            | 38.4            | L1   |
| 1.238000       | 42.8            | 24.8            | L1   |
| 1.278000       | 43.7            | 24.3            | L1   |
| 2.914000       | 44.9            | 29.6            | L1   |
| 5.234000       | 46.4            | 32.4            | L1   |
| 7.146000       | 46.7            | 31.9            | L1   |
| 12.378000      | 45.3            | 31.0            | L1   |
| 17.754000      | 36.0            | 20.5            | L1   |

EMC Test Code = CE01020N, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = N

Sample ID: S/01

Operation Mode: OM/02. EUT ON. SRD in transmission mode. BLE ON with communication established with auxiliary device. Managing work by zones. Heating mode. Power supply: 115 Vac.

Images:

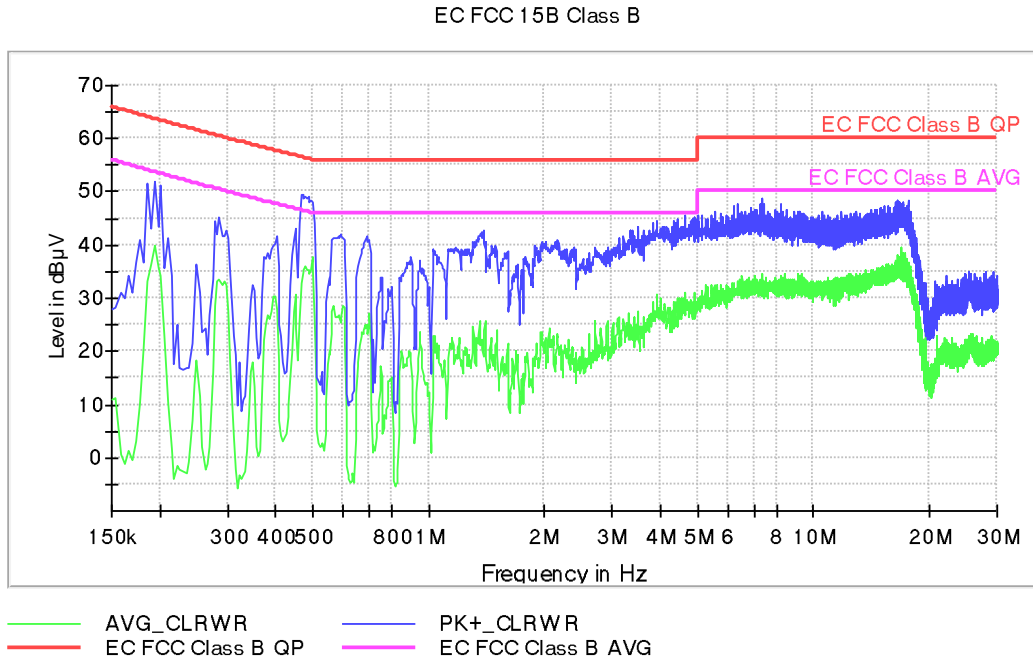

Tables:

| Frequency(MHz) | PK+_CLRWR(dBµV) | AVG_CLRWR(dBµV) | Line |
|----------------|-----------------|-----------------|------|
| 0.194000       | 52.0            | 40.0            | N    |
| 0.286000       | 45.1            | 33.6            | N    |
| 0.470000       | 49.6            | 34.9            | N    |
| 1.170000       | 39.5            | 18.8            | N    |
| 1.394000       | 42.6            | 22.4            | N    |
| 3.514000       | 43.3            | 27.4            | N    |
| 5.526000       | 46.2            | 31.8            | N    |
| 7.334000       | 48.6            | 34.6            | N    |
| 16.574000      | 48.4            | 38.0            | N    |
| 17.682000      | 46.8            | 36.5            | N    |




**EMC Test Code = CE0102L1, Frequency Range MHz = [0.15, 30], Conducted Emissions - Tested Line = L1**

Sample ID: S/01

Operation Mode: OM/02. EUT ON. SRD in transmission mode. BLE ON with communication established with auxiliary device. Managing work by zones. Heating mode. Power supply: 115 Vac

**Vac.Images:**

EC FCC 15B Class B

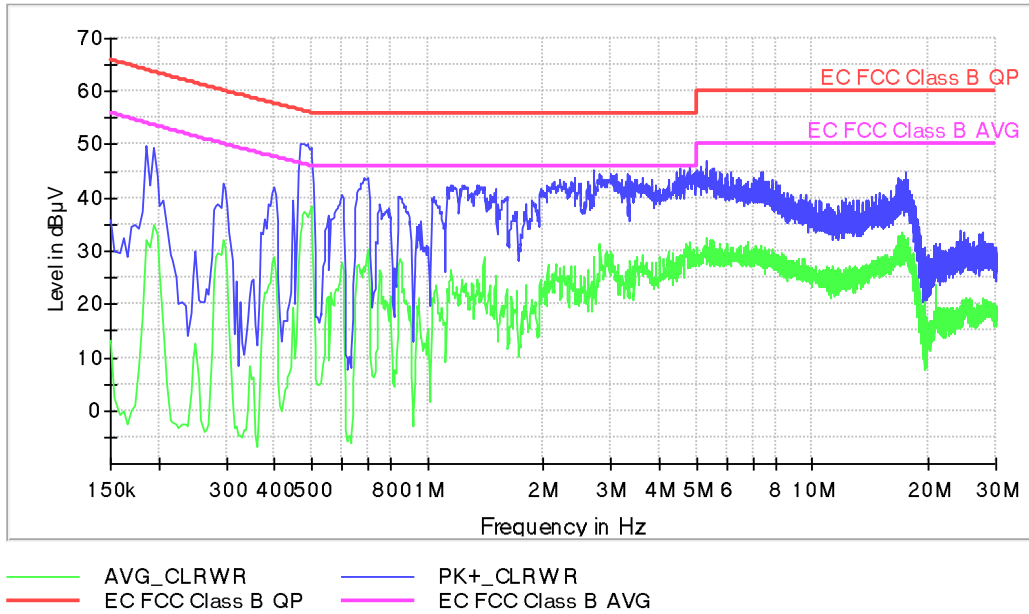

**Tables:**

| Frequency(MHz) | PK+_CLRWR(dBµV) | AVG_CLRWR(dBµV) | Line |
|----------------|-----------------|-----------------|------|
| 0.186000       | 49.8            | 32.0            | L1   |
| 0.294000       | 42.7            | 32.0            | L1   |
| 0.486000       | 50.3            | 36.3            | L1   |
| 1.150000       | 42.3            | 26.5            | L1   |
| 2.110000       | 42.8            | 25.4            | L1   |
| 2.702000       | 45.2            | 27.2            | L1   |
| 5.322000       | 47.0            | 31.2            | L1   |
| 6.122000       | 44.9            | 30.7            | L1   |
| 17.470000      | 45.0            | 30.5            | L1   |
| 17.674000      | 43.4            | 29.8            | L1   |