

# DAIKIN ZONING KIT

DAIKIN ZONING KIT



## Main & Wireless Thermostat User's Manual



# SUMMARY

1.	WARNINGS AND ENVIRONMENTAL POLICY .....	4
	1.1 SAFETY CONSIDERATIONS .....	4
	1.2 ENVIRONMENTAL POLICY .....	4
	1.3 FCC Regulatory Notices .....	5
2.	GETTING STARTED .....	5
3.	MAIN THERMOSTAT .....	6
	3.1 Home Screen Display .....	6
	3.2 Using you Main Thermostat .....	8
	3.2.1 Adjusting the temperature .....	8
	3.2.2 Operation Mode .....	8
	3.2.3 Cleaning the Main Thermostat .....	9
	3.2.4 Thermostat Help Screens .....	9
	3.3 Time Schedule Programming.....	13
	3.3.1 Time schedule programming activation .....	13
	3.3.2 Create a new time scheduled program .....	14
	3.3.3 Using the Time Schedule Programming editor.....	14
	3.4 Remote zone control.....	15
	3.4.1 Remote control.....	15
	3.4.2 Edit Name Zone .....	15
	3.5. Eco-Adapt .....	16
	3.5.1 Description .....	16
	3.5.2 Eco-Adapt menu .....	16
	3.6 Configuring your Main Thermostat.....	17
	3.6.1 Interface .....	17
	3.6.2 User settings.....	18
	3.7 Understanding the Alerts.....	19
	3.7.1 DZK Zoning system Alerts .....	19
4.	WIRELESS THERMOSTAT .....	20
	4.1 Home Screen Display .....	20
	4.2 Idle Screen.....	19
	4.3 Using your Wireless Thermostat .....	23
	4.3.1 Adjusting the temperature .....	23
	4.3.2 Low batteries.....	23
	4.3.3 Cleaning the Wireless thermostat .....	24
	4.4. Advanced functions in your Wireless Thermostat .....	24
	4.4.1 Time Schedule Programming.....	24
	4.4.2 Local Ventilation.....	24
	4.4.3 Sleep Mode.....	25
	4.5. Remote zone control.....	26
	4.6. Wireless Thermostat Configuraion .....	27
	4.7 Understanding the Alerts.....	27
	4.7.1 List of DZK system alerts .....	27
5.	NAVIGATION GUIDES .....	25
	5.1 Main Thermostat navigation guide .....	25
	5.2 Wireless Themostat navigation guide .....	26
6.	TROUBLESHOOTING .....	27



## 1. WARNINGS AND ENVIRONMENTAL POLICY

### 1.1 SAFETY CONSIDERATIONS

For personal safety and protection of the equipment, use the following safety precautions:

- Do not handle the system with wet or damp hands.
- Disconnect the power supply before making any connections.
- Disconnect the power supply from the air conditioning and heating system before connecting or disconnecting equipment.
- Take care not to cause a short circuit in any of the system's connections.

### 1.2 ENVIRONMENTAL POLICY



Do not dispose of this equipment with household waste. Electrical and electronic equipment contain substances that may damage the environment if not handled appropriately. The symbol of a crossed-out waste bin indicates electrical equipment that must be disposed separately from other urban waste. For correct environmental management, it must be taken to the collection centers provided for this purpose when it is no longer usable.

Equipment components may be recycled. Act in accordance with current regulations on environmental protection.

If you replace it with other equipment, you must return it to the distributor or take it to a specialized collection center.

Those breaking the law or by-laws will be subjected to environmental protection fines.

## 1.3. FCC Regulatory Notices

### **Modification statement**

Corporacion Empresarial Altra S.L. has not approved any changes or modifications to this device by the user. Any changes or modifications could void the user's authority to operate the equipment.

### **Interference statement:**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

### **Radiation Exposure Statement**

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65 This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

### **FCC Class B digital device notice**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



## 2. GETTING STARTED

### Main Thermostat



#### **Key features of the Main Thermostat**

- Color display.
- Precision +/- 1°F (0.5°C) temperature control.
- Dual set.
- Auto changeover mode.
- Remote zone control.
- Vacation programming.
- Seven day programming.
- Automatic adjustment for Daylight Savings Time (DST).

### Wireless Thermostat



#### **Key features of the Wireless Thermostat**

- Backlit LCD display.
- Precision +/- 1°F (0.5°C) temperature control.
- Dual set point - Remote zone control.




### 3. MAIN THERMOSTAT

The Main Thermostat has an user-friendly color screen that displays all the information you need to set and manage your DZK Zoning unit.

#### 3.1 Home Screen Display

The Main Screen options for the Main Thermostat are:

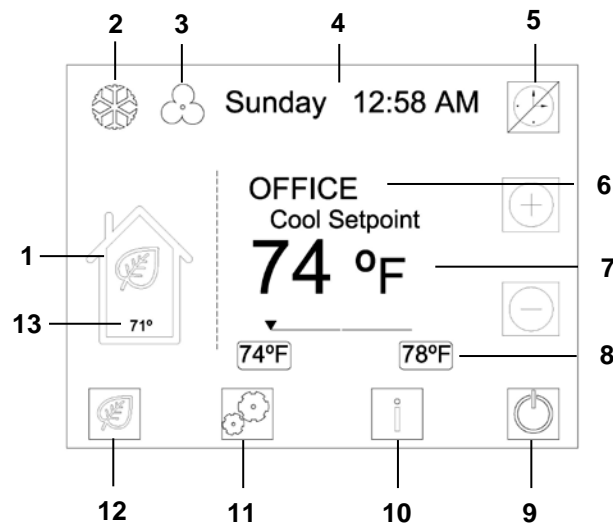

Home Screen

**To access Eco-Adapt menu**

- Press to access.

**1. Eco-Adapt & Efficiency Indicator**

The energy efficiency level is indicated by color and is a function of temperature and the Eco-Adapt system.

- Green: High Energy Efficiency
- Yellow: Medium-High Energy Efficiency
- Orange: Medium-Low Energy Efficiency
- Red: Low Energy Efficiency

See Eco-Adapt mode on page 16.

**To access Operation Mode**

- Press Operation mode icon to access.

**2. Operation Mode**

The current mode of temperature control: Stop, Heat, Cool, Dry, Emergency Heat, or Automatic. See Operation Mode on page 11.

**To change Local Ventilation Value**

- Press to change.

**3. Local ventilation**

This option allows activation (White icon) or deactivation (Grey icon) of the ventilation in the selected zone during system inactivity periods.

See Local Ventilation on page 19.

#### 4. Current day and time

Displays the current day and time for your time zone.

**To access Set Date & Time Menu**

- Press current day to access.

#### 5. Time schedule programming

This option allows activating  or deactivating  the Time schedule programming on the Main Thermostat.

See Time schedule programming on page 13.

**To change Time schedule programming value**

- Press  to change.

#### 6. Current Zone



Displays the current zone and allows access to remote zone control. See Remote Zone Control on page 15.

**To access Remote Zone control Menu**

- Press current Zone to access.

#### 7. Current Set point

The programmed temperature for a zone to maintain during a particular timeframe.

Press  (Up) or  (Down) to manually adjust by increments of 1°F (0.5°C).

If the system is set to Auto, press the set point temperature to switch between heating and cooling set points.



See Adjust the Temperature on page 11.

#### 8. Sleep Mode Activated

Display if the Sleep timer is activated.

See Sleep mode on page 18.

#### 9. On/Off Icon

On is indicated by  (Blue) and Off is indicated by  (Red) in the room where the Main Thermostat is installed.

#### 10. Info

Displays screen help information and alerts about your system.

See Info on page 12 and 19.

**To access Help info**

- Press  to access.

#### 11. Configuration Menu

Use to set the Operation mode, Remote zones, Time schedule programming, Eco-Adapt, and System setup.

See the Configuration Menu on page 14.

**To access Configuration menu**

- Press  to access.

#### 12. Eco-Adapt Menu

The energy efficiency level for the system is set through the Eco-Adapt Menu. See Eco-Adapt on page 16.

**To access Eco-Adapt menu**

- Press  to access.

#### 13. Current Room Temperature

The current (actual) temperature in the room where the Main Thermostat is installed.




## 3.2 Using your Main Thermostat

The color touch-screen on your Main thermostat makes it simple to review and adjust the settings at any time.

### 3.2.1 Adjusting the temperature

The set point displayed on the screen is the current default temperature.

You can easily adjust the temperature on your Main Thermostat.

- Press  to activate or deactivate the zone's air conditioning.
- Press  to increase the temperature set point by 1°F (0.5°C).
- Press  to decrease the temperature set point by 1°F (0.5°C).
- Press **74°F** (Current set point) to switch between heating and cooling set points.

The permitted temperature range is:

- Heating mode: 59° F – 84° F.
- Cooling mode: 64° F – 86° F.

If you are using Auto mode, note that there is a minimum difference allowed between heating and cooling set point temperatures. The system will prevent you from setting the temperatures to within those limits

#### To change Operation Mode

From the Home Screen:




- Press  (icon mode).
- Select your Operation Mode:

- **Stop**
- **Cool**
- **Heat**
- **Autochange**
- **Dry**
- **Emergency Heat\***



\*This option is only visible when it is configured.

### 3.2.2 Operation Mode

This menu sets your system to use heat, cool or auto mode.

- **STOP**  The air-conditioning system will remain switched off regardless of the demand status of any zone, and all the motorized dampers will stay open.
- **COOL**  In this mode the air-conditioning unit will start a Cooling cycle any time that any zone is in cool demand ( $T_{\text{Set-Point}} < T_{\text{room}}$ ).
- **HEAT**  Enables the heating cycle whenever a zone is in heat demand. ( $T_{\text{Set-Point}} > T_{\text{room}}$ ).

• **AUTOCHANGE A**

The AUTO mode allows automatic switching between Cool  and Heat , depending on the global demand.

• **EMERGENCY HEAT** 

This mode activates the **Auxiliary Heat** to provide heated air in case of a mechanical failure in the system.

*\*Note: This mode is only visible when the installation includes an auxiliary heating device.*

• **DRY** 

In this mode the air-conditioning unit will start a Dry Cooling cycle any time that any zone is under demand ( $T_{Set-Point} < T_{room}$ ).

**Dry**



Dry mode decreases humidity in the room by entering the dry cycle.

### 3.2.3 Cleaning the Main Thermostat

You can clean the Main Thermostat screen by spraying water or any mild, non-abrasive household cleaner onto a clean cloth. Wipe the surface of the screen with the dampened cloth.


*\*Note: Do not spray any liquids directly onto your Main Thermostat.*

**To clean the screen From the Home Screen**




- Press  to **turn off**.
- Press  to access to clean mode.
- Press **Clean** to Start.

Screen blocked during 30 sec.

### 3.2.4 Thermostat Help Screens

The help icon  is displayed on every screen on the Main thermostat. When touched, it displays informative help text. The help screens can be viewed at any time with easy access to return to a prior screen.

**Help Navigation buttons**

- Press  to go on.
- Press  to go back or exit.
- Press  to return to Home Screen.

### 3.3 Time Schedule Programming

Your heating and cooling needs, change depending on the time of day and the day of the week. For example, if no one is in the house during the workday, you can reduce energy by letting the temperature go up in the summer and down in the winter.

By default, the Main Thermostat includes six configurable periods:

- **WAKE:** The start time of this period typically represents when you get up in the morning. It is an occupied program.
- **DAY:** This represents when you leave to go to work. It is a setback program.
- **EVENING:** This represents when you get home from work in the evening. It is an occupied program.
- **SLEEP:** This represents when you go to bed at night. It is an occupied program.
- **OCCUPIED:** This represents when you are at work. It is an occupied program.
- **UNOCCUPIED:** This represents when you are not at work. It is a setback program.

For protection, the default programs cannot be deleted, but they can be edited, enabled, or disabled.



You can create 18 different additional programs.

The Main thermostat allows three types of Time schedule programming:

- **AC MODE:** Sets an operation mode for the defined period.
- **OCCUPIED:** Sets a comfortable temperature for the defined period.
- **SETBACK:** Defines a period when the room is unused so the Zoning system can establish a setback temperature for the zone.

#### 3.3.1 Time schedule programming activation

This menu can enable the option of time programs.

-  Time schedule programming activated.
-  Time schedule programming deactivated.

Remember to set the time-scheduled programs before Time Schedule Programming is activated.

#### To access the Programming menus

From the Home Screen:

- Press  for the Configuration menu.


- Press **Programming** for the Programming menu.

An **enabled** program displays a green button.





A **disabled** program displays a grey button.

#### To change Time Schedule Programming activation

From the Home Screen:

- Press  to change the value.






### 3.3.2 Create a new time scheduled program

- Press  CREATE PROG.
- Select type of program:
  - AC MODE
  - OCCUPIED
  - SETBACK
- Customize the name: Press  and use the arrows pad  :
  - Up-Down: Changes the character.
  - Left-right: Selects the next character position.
  - Delete : Deletes the selected character.
- Select:
  - *Operation mode* for OPERATION MODE programs.
  - *Cool & Heating set point* for Occupied/Setback programs.
- Select days desired for the program:
  - Full week
  - Week days
  - Weekend
  - Personalized
- Select the start and end time.

If you wish to define a time to end the schedule, touch the box to enable the end of schedule parameter.

- Check the time program summary.
- Once a program is completed, it will be displayed in the active time schedule programming list available in the memory.

#### **Keep in mind**

- Press  to confirm the value.
- Press the parameter to change or be edited.
- Use   to select the value.
- Press  to go back or exit to previous menu.
- Press  to return to Home Screen.

#### **Keep in mind**

If there is no another time schedule starting right away, there will be no airflow in the zone until the next schedule starts. If no end of time is used, the current schedule will end when the next schedule starts.

### 3.3.3 Using the Time Schedule Programming editor

The Time Schedule Programming editor lets you set specific times, temperatures, and Operation modes for each day of the week. If your system is enabled for auto-changeover mode, the heating and cooling set temperatures will automatically be adjusted to ensure a minimum difference.

The available options are:

- **COPY:** Allows the user to copy the selected program to any other zone in the system.
- **EDIT:** Allows editing of the values defined in the selected time program.
- **DISABLE/ENABLE:** Disable or Enable the selected time schedule programming.
- **DELETE:** Delete the selected time program from memory. This option is only available and visible for customer- created programs.

#### **Edit**


Same process as Create a New Program.

When the program is **enabled**, a green button next to the named program is displayed. When **disabled**, a grey button is displayed.


## 3.4 Remote zone control

### 3.4.1 Remote control

Selecting the Remote Zone menu, lists all zones in the system and by selecting the zone, the user can access any thermostat in the system from the Main Thermostat.

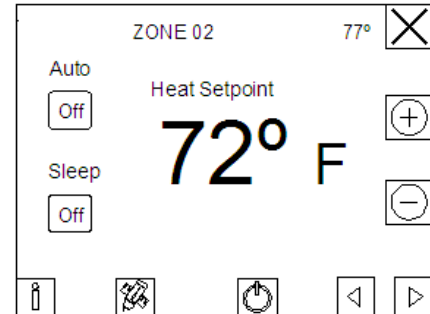

- Press the zone label  to access a remote zone to modify.


- Press  to access the global zone to modify all zones at the same time.


#### To Remote zone control From the Home Screen:


- Press  to access Configuration menu.





- Press **Remote zones** to access.

#### Keep in mind

- Press  to confirm the value.



- Press  to return to the previous menu.

- Press  to return to Home Screen.

- **Room Name & Temperature.**
- **Set point Mode.**
  - Press  to activate or deactivate the zone's air conditioning.
  - Press  to increase the temperature set point by 1°F (0.5°C).
  - Press  to decrease the temperature set point by 1°F (0.5°C).
  - Press **72°F** (Current set point) to switch between heating and cooling set points.
- **Auto:** Time schedule programming activation.
  - Press value to change.
- **Sleep:** Timer information on page 18.
  - Press on value to change.
- **Time schedule programming** : Access time schedule programming in selected zone.

### 3.4.2 Edit Name Zone

You can customize the name of your zone in the Main Thermostat from remote zone menu. The process is as follows:

- Press .
- Press the zone that you want to rename, i.e., .
- To change the name, use the arrows pad .
  - **Up-Down:** changes the character.
  - **Left-Right:** selects the next character position.
  - **Delete** : deletes the selected character.

**To edit Time schedule programming**  
See page 14.

## 3.5 Eco-Adapt

### 3.5.1 Description

Eco-Adapt allow the user to enhance the energy efficiency by setting a temperature limit for all zones. Setting temperatures allows the user to set different energy-efficient levels, choosing from Light, Medium, or Strong.



This function ensures a more efficient use of the DZK system installation.

### 3.5.2 Eco-Adapt menu



- **Off:** All temperature ranges are available and the system will work in **Comfort Mode**.
- **On:** Temperature ranges are limited and the system will work in **Efficiency Mode**.

The saving-modes available are:

- **Manual mode:** Temperature limit is defined manually by the temperature selected by the user on the Main thermostat.

Manual Mode	Lim. Min.	Lim. Max.
	64 F	86 F
	59 F	86 F

- **Efficiency Level:** Temperature limits are limited as follows:

Efficiency level	Light	Medium	Strong
	≥75 F	≥78 F	≥79 F
	≤72 F	≤70 F	≤68 F

#### To change Eco-Adapt

From the Home Screen:

- Press .
- Select **ON** or **OFF**.

If you are selected **ON**:

Press **Manual Mode** or select the **Efficiency level**:

- **Light**
- **Medium**
- **Strong**

**Note:** It is important to know that if a temperature time schedule programming is running, the set point temperatures will be limited to those selected on the Eco-Adapt.








## 3.6 Configuring your Main Thermostat

### To Configuration menu

From the Home Screen:

- Press .

In the configuration menu the following options are available.

-  **Mode.** See page 11.
-  **Programming.** See page 13.
-  **Remote zones.** See page 15.
-  **Eco-Adapt.** See page 16.
-  **Settings:**
  - **Interface**
  - **User settings**
  - **Configuration** (Only for contractors)

### To Interface settings

From the setting menu screen:

- Press **Interface**.


### 3.6.1 Interface

#### Brightness


- Select the screen brightness for both active modes.
- Select the standby mode (**Off** or **Bright**).


### Keep in mind

- Press the parameter to change or be edited.

- Use   to select the value.

- Press  to confirm.

- Press  to go back or exit to previous menu.

- Press  to return to main menu or Home Screen.

#### Date & Time

Select Date:

- Select current day, month and year.

Select Time:

- Select current time.
- Select a 12-hour (AM/PM) or 24-hour time format.
- Enable or disable daylight savings.

#### Language

Select among 3 languages:

- **Español**
- **English** (default)
- **Français**

#### Beeping

Select the beeping sound mode:

- **Sound ON** (default)
- **Sound OFF**

## 3.6.2 User settings

### Units

Select temperature to be displayed:

- °C (Celsius)
- °F (Fahrenheit)

### To Interface settings

From the setting menu screen, press **User setting**.

### Vacation

The Vacation mode feature helps you save energy while you are away for extended periods of time. Select type of Vacation mode:

- **System:** Activate (**On**) or deactivate (**Off**) vacation mode to all zone's system.
- **Zone:** Activate (**On**) or deactivate (**Off**) vacation mode to the current zone. Display the set temperatures:
  - **Heat:** Select 52-54-56°F.
  - **Cool:** Select 89-91-93°F.

### Sleep

Sleep mode is a zone timer that shifts the set point temperature to a more energy efficient value. Select the value.

- **OFF:** Eco-Timer is not activated.
- **30:** Thirty minutes after its activation, the zone will vary its set point temperature by 2°F (1°C).
- **60:** Thirty minutes after its activation, the zone will vary its set point temperature by 2°F (1°C) and sixty minutes after its activation, the zone will vary another 2°F (1°C).
- **90:** Thirty minutes after its activation, the zone's set point temperature will vary by 2°F (1°C), another 2°F (1°C) after sixty minutes, and will again vary 2°F (1°C) following ninety minutes after its activation.

After the selected time, the set point temperature will remain at the lowest value. When Sleep mode is activated, a timeline is displayed on the Home Screen that informs of its evolution.





### Global Ventilation

Global Ventilation allows activation of ventilation in all system zones during the system inactivity periods. Select Status.

- **NO.** Disable Global ventilation.
- **YES.** Enable Global ventilation.
  - **Every (mins).** Length of the interval between periods of ventilation (in minutes).
  - **Run for (mins).** Duration of ventilation(in minutes).

### Global ventilation\*

When global ventilation is activated, the icon modes are displayed on the Home Screen:

- Stop 
- Heat 
- Cool 
- Dry 

\*This option will be deactivated when a zone is in demand.

### Local ventilation

Not available for the  
Operation Mode.



## Local Ventilation


Local ventilation allows activation of ventilation in the Main Thermostat zone during system inactivity periods.

Select Status:

- **On:** Enable Local ventilation
- **Off:** Disable Local ventilation

## 3.7 Understanding the Alerts

If a problem arises, the DZK Alerts system displays a warning message about the current zone shown on the Home Screen.

If a problem arises in the Daikin system, a help icon  remains on the screen until the problem is resolved.

### 3.7.1 DZK system Alerts

The Main Thermostat can generate the following alert messages. Depending on your configuration, some of these may not apply.

**ECO:** If you do not want to retain the temperature limit set by the Eco-Adapt function, disable Eco-Adapt or select a lower efficiency setting.

**UNOCCUPIED:** The Setback time schedule programming is activated. If you touch the Home Screen, the setback program deactivates and returns to occupancy set point during the override time.

**OVERRIDE:** The override time is activated. When the override time has finished, the zone returns to its previous status.

**VACATION:** The vacation mode is activated.

**Error 1:** Communication error between Main Thermostat and controller board. This error blocks the thermostat and you should notify your contractor.


**Error 9:** Air-conditioning communication error with the system. The system will open every motorized outlet, enabling the air-conditioning controller. Contact your contractor.

## 4. WIRELESS THERMOSTAT

The Wireless Thermostat has a backlit LCD touch screen that displays all the information you need to set and manage your zone.

### 4.1 Home Screen Display

The Home Screen options for the Wireless Thermostat are:

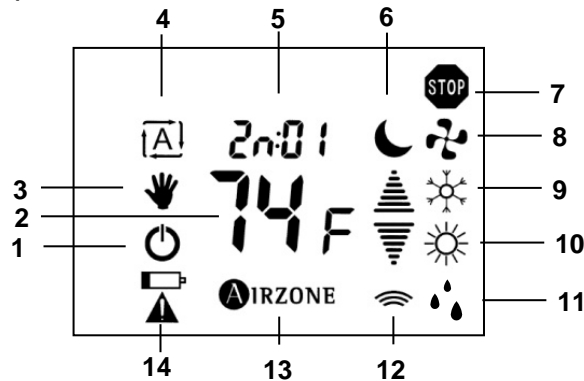

Home Screen

#### 1. On/Off icon

Enables turning the air conditioning On or Off in the zone where the Wireless Thermostat is installed.

#### 2. Current Set point

The zone temperature programmed to be maintained during a designated timeframe.

Press ▲ (Up) or ▼ (Down) to adjust manually by increments of 1°F (0.5°C). If the system is set to Auto, press the set point value to switch between heating and cooling set points.

See Adjusting the Temperature on page 23.

#### 3. Hand Icon


Indicates zone air conditioning is activated.

#### 4. Time Schedule Programming activated

Displays that Time schedule programming is activated.

See Time schedule programming information on page 24.

#### To deactivate Time Schedule Programming

- Press  on Home Screen.

#### 5. Current Zone

Displays the current zone allowing remote zone control.

See Remote Zone Control on page 23.

#### To deactivate the Sleep mode

- Press  on the Home Screen.

#### 6. Sleep Mode Activated

Displays sleep mode is activated in this zone.

See Sleep Mode on page 25.

**To deactivate the Local Ventilation**

- Press  on the Home Screen.

**7. Stop Operation mode**

The current operation mode is Stop.

**8. Local Ventilation activated**

Indicates local ventilation is activated in this zone. See Local Ventilation described on page 24.

**9. Cool Set point & Operation mode**

Display Cool Set point or Current operation mode.

**10. Heat Set point & Operation mode**

Display Heat Set point or Current operation mode.

**11. Dry Operation mode**

The current operation mode is Dry.

**12. Communication Icon**

Displays the communications between the Wireless Thermostat and the zoning box control board. To save battery life, the thermostat updates its screen every 5 minutes, and the current status may not be shown in the screen.

To manually update the screen just touch it and the current status will be shown.

**13. Airzone Icon**

Used to enter another menu or confirm a value.

**14. Low Battery**

Displayed when batteries have run low. It has 2 weeks of life left\*. See how to change the batteries on page 23.


*\*Note: The indicated battery life is based on the original batteries shipped from Manufacturing.*

## 4.2 Idle Screen

When you are not actively using your Wireless thermostat, the screen will dim to indicate an Idle Screen.

**To activate the Home Screen**

- Press the Idle Screen.

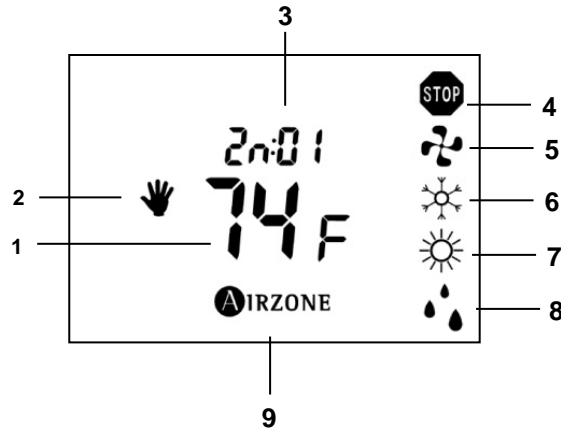

Idle Screen

### 1. Current Temperature

The current (actual) temperature in the room where the Wireless Thermostat is installed.

### 2. Hand Icon

Indicates active temperature control.

### 3. Current Zone

Displays the current zone.

### 4. Stop Mode

Zone is actively in Stop Operation Mode.

### 5. Local Ventilation activated

Local ventilation is activated in this zone.  
See Local Ventilation on page 24.

### 6. Cool Mode

Zone calling demand is currently in Cool Operation Mode.

### 7. Heat Mode

Zone calling demand is currently in Heat Operation Mode.

### 8. Dry Mode

Zone calling demand is currently in Dry Operation Mode.

### 9. Airzone icon

## 4.3 Using your Wireless Thermostat

### Keep in mind

To save battery life, the thermostat updates its screen every 5 minutes, and the current status may not be shown in the screen.

To manually update the screen just touch it and the current status will be shown.

The backlit LCD touch screen on your Wireless Thermostat allows easy access to adjust the settings.

### 4.3.1 Adjusting the temperature

By default, the set point displayed on the screen is the current Operation Mode.

You can easily adjust the temperature on your Main Thermostat.

- Press to activate or deactivate the zone's air conditioning.
- Press to increase the temperature set point by 1°F (0.5°C).
- Press to decrease the temperature set point by 1°F (0.5°C).
- Press (current set point) to switch between heating and cooling set points.

The permitted range is as follows:

- Heating mode: 59°F – 84°F.
- Cooling mode: 64°F – 86°F.

When the zone is activated, a hand icon is displayed.

### Cool & Heat set point


When you press the current set point, the mode's selected set point will be blinking.

If using Auto mode, note that there is a minimum difference allowed between heating and cooling set temperatures. The system prevents you from setting the temperatures outside these limits. See the DZK Zoning Box Installation manual for information about configuring the minimum temperature-difference settings.

### 4.3.2 Low batteries

When is displayed on Wireless Thermostat, batteries have 2 weeks of life left. It is time to change the batteries for new ones.

To replace the batteries, insert a coin in the slot placed at the bottom of the frame and turn the coin until the thermostat opens. Once the touch screen is separated from the support, replace the batteries according to the indicated polarity near the battery contacts (2 AAA 1.5V batteries). Reassemble both parts to their original positions.

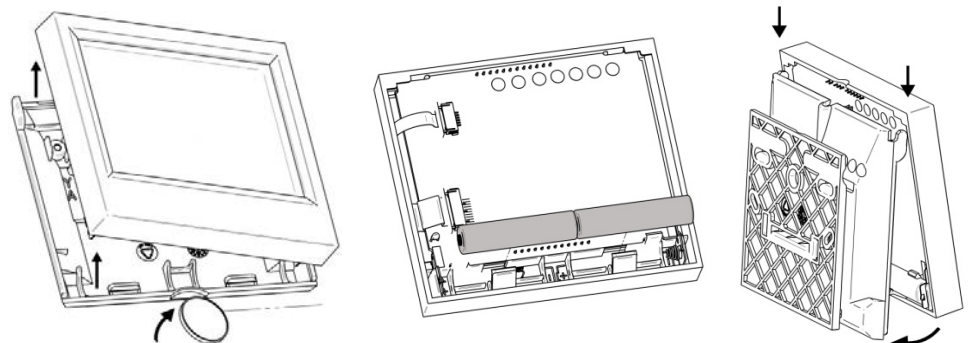

### 4.3.3 Cleaning the Wireless Thermostat

You can clean the Wireless Thermostat screen by spraying water or any mild, non-abrasive household cleaner onto a clean cloth. Wipe the surface of the screen with the dampened cloth.

*\*Note: Do not spray any liquids directly onto your Wireless Thermostat.*


## 4.4 Advanced functions in your Wireless Thermostat


From this menu, you can execute actions such as Time schedule programming, Local Ventilation and Sleep Mode.

### 4.4.1 Time Schedule Programming

The DZK Zoning system allows activation or deactivation of the Time schedule programming set on the Wireless Thermostat.


#### Activation

Press on  to activate time schedule programming in the current zone. The thermostat then returns to Home Screen.

The icon  is displayed on the Home Screen, indicating that this function is activated.

#### Deactivation


If the time schedule programming is activated, you can deactivate it from the Home Screen.


Press on  to deactivate time schedule programming. The icon will no longer be displayed.

### 4.4.2 Local Ventilation

This function activates the zone ventilation while the AC unit is not running a heating or cooling cycle.

#### Activation

Press on  to activate local ventilation in the current zone. The thermostat then returns to Home Screen.

The icon  will be displayed on both the Home and Idle screens, indicating that this function is activated.



#### To access the Advance Functions screen

From Home Screen.

- Short press on



The arrows   will disappear in Advance Screen.

The arrows   are displayed on the Home Screen.

#### Local Ventilation


Not available when the

AC unit is in  mode.








## Deactivation

If local ventilation is activated, you can deactivate it from the Home Screen.




Press on  to deactivate the local ventilation. The icon will no longer be displayed.

### To set Sleep Mode


- Press  to set the value.
- Press   to select the value.
- Press  to confirm.
- Press  to exit.

## 4.4.3 Sleep Mode

Sleep mode is a zone timer and operates as follows:

- : Sleep Mode Timer is activated 30 minutes after its activation, the zone varies its set point temperature by 2°F (1°C).
- : Sleep Mode Timer is activated 30 minutes after its activation, the zone varies its set point temperature by 2°F (1°C) and 60 minutes after its activation, varies by 2°F (1°C) more.
- : Sleep Mode Timer is activated 30 minutes after its activation, the zone varies its set point temperature by 2°F (1°C), another 2°F (1°C) after 60 minutes and 2°F (1°C) more after 90 minutes of activation.

## Activation

Press on  icon, then select the value and confirm to activate sleep mode in the current zone. The thermostat will return to Home Screen.

The icon  is displayed on the Home Screen, indicating that this function is activated.

## Deactivation

If the sleep mode is activated, you can deactivate it from the Home Screen.

Press on  to deactivate the sleep mode. The icon will no longer be displayed.

If you deactivate sleep mode before the selected time, the set point temperature remains as the last value set.

## 4.5 Remote zone control

Select the Remote Zone menu to list all zones in the system, and by selecting a zone, the user can access any thermostat in the system from the Wireless Thermostat.

- Select the room's zone number (ie, # 1.)
- **ALL** provides global zone access to modify all zones simultaneously and control all every room's system.



In remote zone screen, display:

- Room Number.
- On/Off icon.
  - On: Display Set point and hand icon are displayed.
  - Off: Set point and hand icon no longer displays.
- Set point mode.
- Operation mode. You can select the Operation mode only for all zones if you lost the Main thermostat.



**To Remote zone control**  
From Home Screen, press on **20:02** (current zone).

- Press to exit.
- Press to select the value.
- Press to confirm.

- Press to On/Off.
- Press to select the set point.
- Press to switch between heat and cool set point. The set point icon mode is blinking. The current mode icon is fixed.
- Press to confirm.

## 4.6 Wireless Thermostat Configuration

This section describes how to configure user settings.

### Units

Select temperatures to be displayed.

- **°C** (Celsius)
- **°F** (Fahrenheit)




**To configuration access**  
From Home Screen:

- Turn Off the room setting. .
- Short Press on to advance screen.

The icons are displayed.



- Long Press on till display .

### Keep in mind

- Press  to go back.
- Press  to select the value.
- Press  to edit a value or confirm.

## Vacation mode

The Vacation mode feature helps you save energy while you are away for extended periods of time. It also ensures your home is comfortable when you return. Select status:

-  Enable (Default)
-  Disable

## Vacation set point temperatures

Select the set temperatures:

- **Heat:** Select *52-54-55°*
- **Cool:** Select *89-91-93°*

## 4.7 Understanding the Alerts

In case of system alerts regarding problems in the DZK Zoning system, a message is posted for the current zone displayed on the Home Screen.

### 4.7.1 List of DZK zoning system alerts

Your Wireless Thermostat can generate the following alert messages:

**U7DC - Unoccupied:** The Setback time schedule programming is activated. If you touch on the Home Screen, it will deactivate the setback program and return to occupancy set point during the override time.

**ECD - Eco limit:** The user has tried to exceed the Eco-Adapt temperature limit. If required, disable the Eco-Adapt to set the desired temperature. See page 16

**OUEr - Override:** The override time is activated. When the override time has finished, the system returns to its previous status.


**UACA - Vacation:** The vacation mode is activated.

**Err 1. - Error 1:** Communication error between Wireless thermostat and the control board. This error blocks the thermostat so notify your contractor immediately.

**Err9. - Error 9:** Air-conditioning communication error with the system. The system will open every motorized outlet and the air-conditioning controller will be enabled. Notify your contractor.


## 5. NAVIGATION GUIDES

### 5.1 Main Thermostat navigation guide

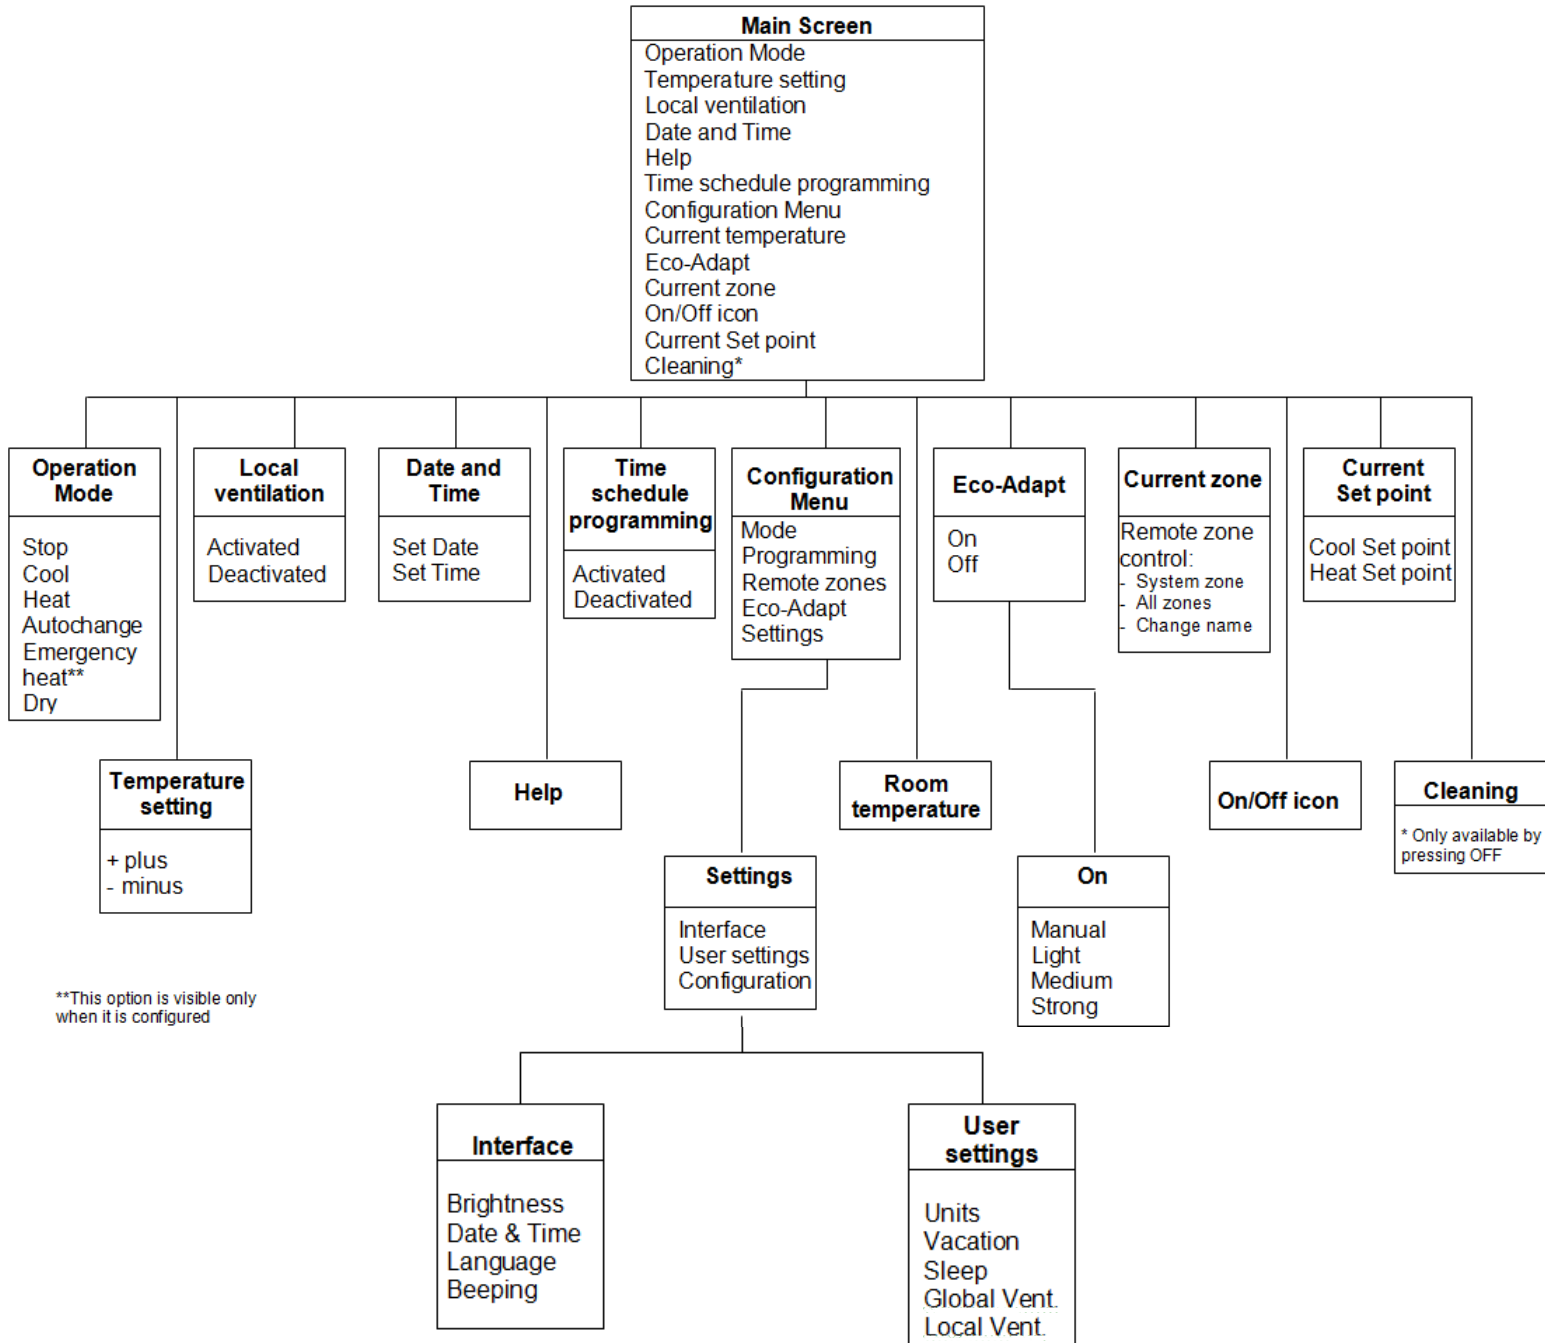

\*\*This option is visible only when it is configured

## 5.2 Wireless Thermostat navigation guide

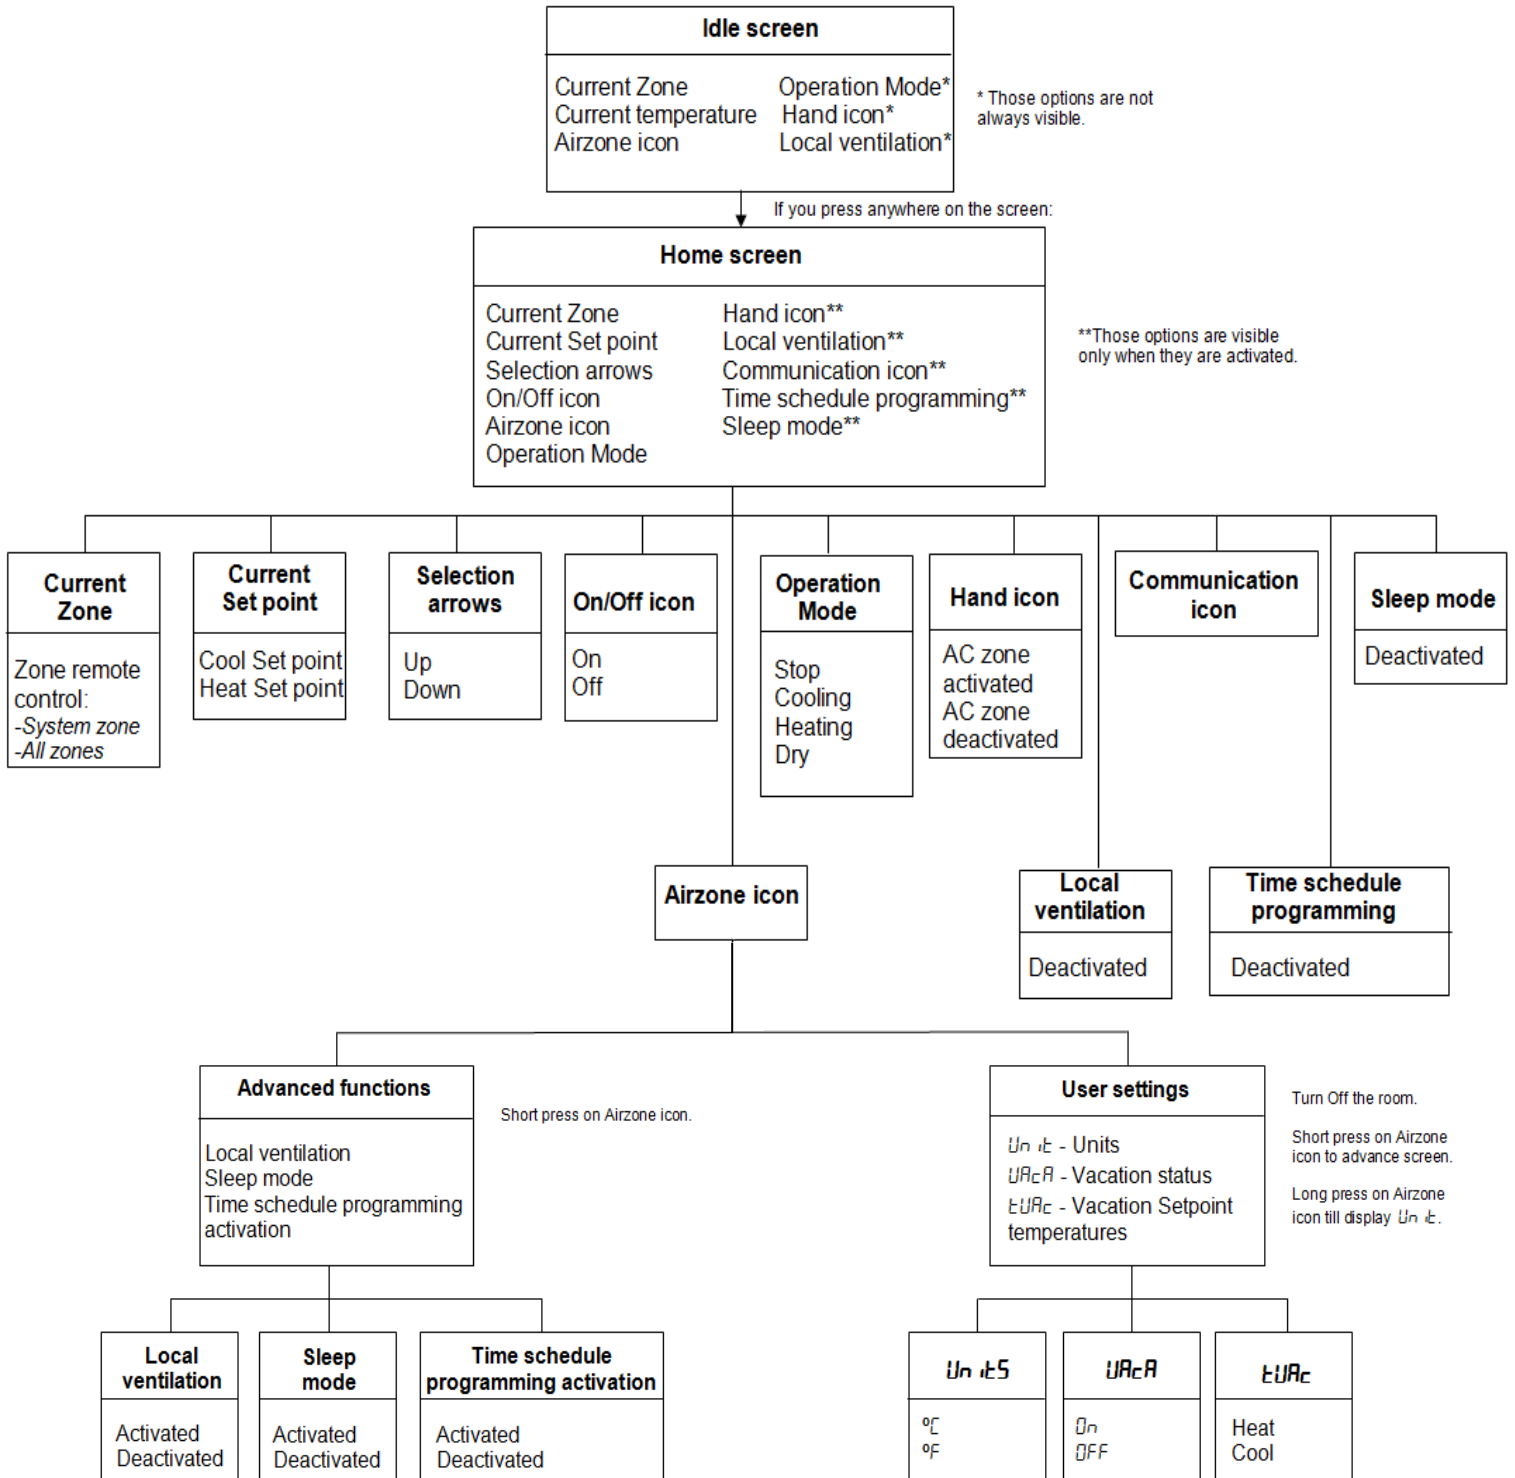

## 6. TROUBLESHOOTING

Item	Symptom	Verification/Action
1	Main Thermostat does not light up	Verify if the wireless thermostats show <i>Err 1</i> contact your service. Otherwise, proceed as indicated in pages 23 and 26 as a temporary solution until the Main thermostat is replaced
2	Wireless Thermostat does not work	If the screen is blank, replace the batteries. See page 23.
		If the screen is blocked, disconnect the batteries and re-install them back. If the problem persists contact your service. See page 23.
3	After a power failure, the Wireless Thermostat displays <i>Err 1</i>	The Wireless Thermostats can take up to 5 minutes to update the screen. Touch the screen to force an immediate update.
4	When accessing remote zones, one of them is not listed	Verify that the thermostat of the zone missing is working correctly. See pages 11 and 23.
5	The Wireless Thermostat shows all zones, but not its own	When trying to remote access other zones, the wireless thermostat will not show its own zone.
6	On activating the zone, no air is supplied to its grille (s)	Verify that the unit is not in Stop mode in the Main thermostat. See page 9.
		Verify if the zones is in demand, checking the ambient temperature (normally displayed in the thermostat and the set point (appears upon touching the thermostat screen) See pages 23 and 26.
		If this zone does not receive air, call your contractor.
7	One Wireless Thermostat displays " <i>SCAn</i> " permanently	Call your contractor for a replacement to verify the wireless communication.
8	Some time after changing the set point in the thermostat the set point varies 1 or 2 °F	Verify if the sleep mode is activated. See pages 18 and 25.
9	Some time after changing the set point in the thermostat it changes by itself to a different set point	Verify if the automatic mode is enabled. See page 11.
10	What do I do if one (or several) zones do not control the temperature?	Verify that the Operation mode is not STOP. See page 9.
		Verify ambient and set point temperatures in the non-working zone thermostat to see if it is creating demand. See pages 11 and 23.

11	How much time do I have left when the battery symbol is shown?	When the battery icon is shown in the screen there are about 15 days left to change the thermostat batteries.
12	When trying to lower or increase the set point ECO/ECO appears on the screen	You have tried to exceed the Eco-Adapt temperature limit. If required, disable the Eco-Adapt to set the desired temperature. See page 16.
13	Error 1 in the Main Thermostat	This error indicates that the Main thermostat is inoperative. The associated damper will remain open, and the use will be able to change the operation mode from any wireless thermostat. See page 16.
14	Err 1 in the Wireless Thermostat	This error indicates that the wireless thermostat is not communicating and the zone will not have temperature control. See page 27.
15	Error 9 in the Main & Wireless Thermostat	This error indicates that the zoning system is not controlling the Daikin system. See pages 19 and 27.







PHONE: 972 245 1510  
E-mail: [info@daikinac.com](mailto:info@daikinac.com)  
<http://www.daikinac.com>

