

FCC PART 15.247 TEST REPORT

For

Reality Robotics Limited

501 Silverside Road, STE 105, #3100, Wilmington, DE 19809, USA

FCC ID: SVTGC343156

Report Type: Original Report	Product Type: BERO-Be The Robot(Bluetooth Device)
Test Engineer: Mick Yin	<i>Mick Yin</i>
Report Number: RSZ130325831-00	
Report Date: 2013-05-07	
Reviewed By: RF Engineer	<i>Alvin Huang</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §2.1093 – RF EXPOSURE	9
APPLICABLE STANDARD	9
RESULT	9
FCC §15.203 – ANTENNA REQUIREMENT	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER SETUP.....	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED FACTOR & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	13
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	15
APPLICABLE STANDARD	15
MEASUREMENT UNCERTAINTY	15
EUT SETUP	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST RESULTS SUMMARY	17
TEST DATA	17
FCC §15.247(a) (1)-CHANNEL SEPARATION	20
APPLICABLE STANDARD	20
TEST PROCEDURE	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST DATA	27
FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST EQUIPMENT LIST AND DETAILS.....	33
TEST DATA	33
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	52
APPLICABLE STANDARD	52
TEST PROCEDURE	52
TEST EQUIPMENT LIST AND DETAILS.....	52
TEST DATA	52
FCC §15.247(d) - BAND EDGES	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST EQUIPMENT LIST AND DETAILS.....	58
TEST DATA	59
PRODUCT SIMILARITY DECLARATION LETTER.....	63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Reality Robotics Limited*'s product, model number: 12801 (FCC ID: SVTGC343156) or the "EUT" in this report was a Bluetooth device, named as *BERO-Be The Robot by the applicant*, which was measured approximately: 10.0 cm (L) x 8.0 cm (W) x 6.0 cm (H), rated with input voltage: DC 3.7 V battery & DC 5 V from the USB for charging.

Note: The series product, model 128XX, where XX is from 01 to 10, all the models share the same PCB layout, schematic and have identical electronic functions, they are vary just in the color of the plastic injection parts, model 12801 was selected for fully testing, the detailed information canbe referred to the attached declaration letter that stated and guaranteed by the applicant.

** All measurement and test data in this report was gathered from production sample serial number: 201303251 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-03-25.*

Objective

This test report is prepared on behalf of *Reality Robotics Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by Software.

Equipment Modifications

No modification was made to the EUT.

EUT Exercise Software


The test software “RF Control Kit V1.0” was provided by client, and it was embedded in the product.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUAJIN	Adapter	HJ-50600-10	/

Block Diagram of Test Setup

For conducted emission

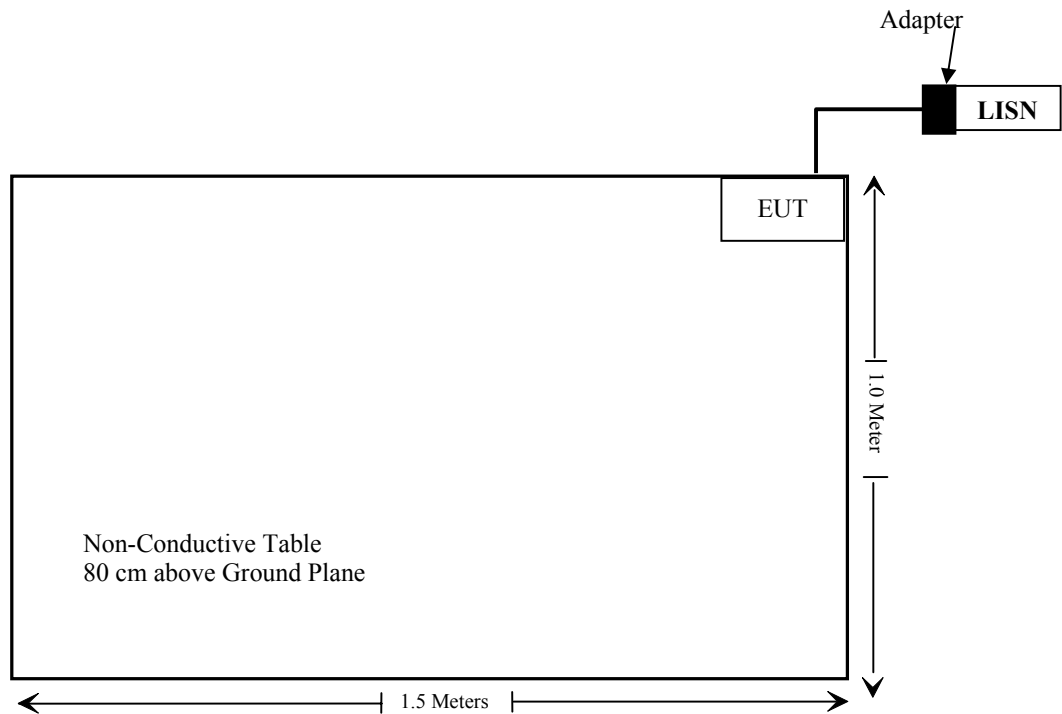

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1) & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The Max output power: $0.31\text{dBm} = 1.074\text{ mW}$

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

Conclusion:

The time-averaged output power is $1.074\text{ mW} < \text{the exclusion thresholds } 10\text{ mW}$, so stand-alone SAR evaluation is not required.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB antenna, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207(a)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

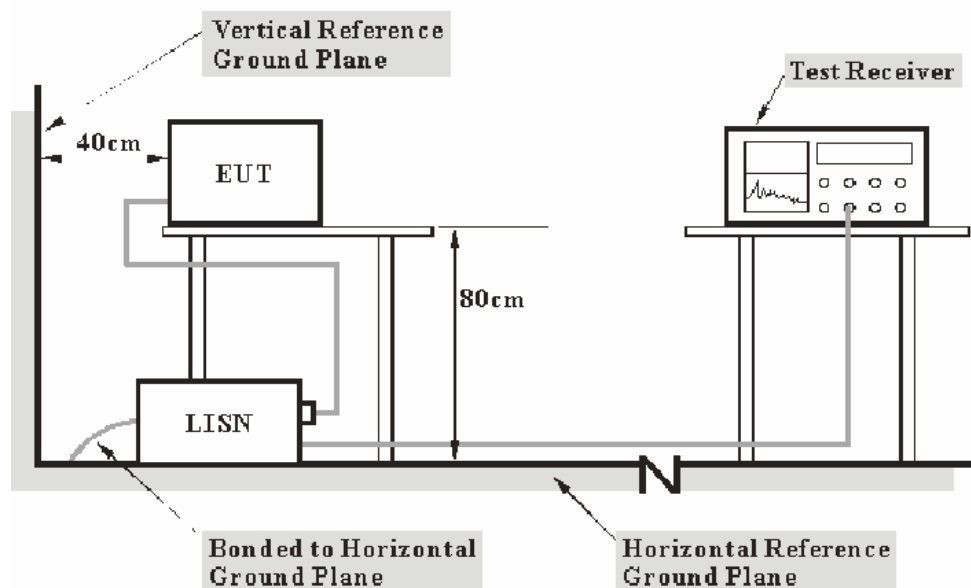

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2009. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2012-11-24	2013-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2012-08-22	2013-08-21
Rohde & Schwarz	Transient limiter	ESH3Z2	DE25985	2012-08-09	2013-08-09
BACL	CE Test software	BACL-CE	V1.0	-	-

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Pulse Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

19.88 dB at 0.185 MHz in the Neutral conducted mode

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Mick Yin on 2013-04-15.

EUT operation mode: Charging&Transmitting

AC 120 V, 60 Hz, Line:



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.165	44.77	10.10	65.57	20.80	QP
0.665	33.02	10.20	56.00	22.98	QP
0.255	38.97	10.11	63.00	24.03	QP
1.030	29.67	10.20	56.00	26.33	QP
0.665	18.96	10.20	46.00	27.04	Ave.
0.795	28.77	10.20	56.00	27.23	QP
0.915	28.55	10.20	56.00	27.45	QP
0.255	24.96	10.11	53.00	28.04	Ave.
0.165	26.32	10.10	55.57	29.25	Ave.
1.035	15.47	10.20	46.00	30.53	Ave.
0.795	14.28	10.20	46.00	31.72	Ave.
0.915	14.15	10.20	46.00	31.85	Ave.

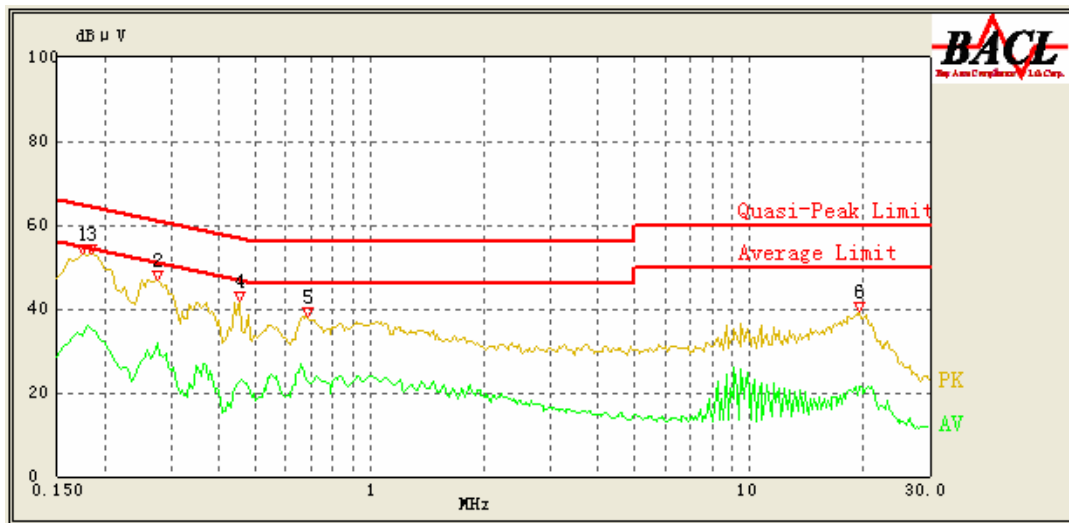AC 120V, 60 Hz, Neutral:

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.185	35.12	10.10	55.00	19.88	Ave.
0.275	32.03	10.10	52.43	20.40	Ave.
0.175	33.67	10.10	55.29	21.62	Ave.
0.175	43.10	10.10	65.29	22.19	QP
0.185	42.24	10.10	65.00	22.76	QP
0.685	22.58	10.20	46.00	23.42	Ave.
0.455	22.54	10.15	47.29	24.75	Ave.
0.275	36.16	10.10	62.43	26.27	QP
0.685	27.84	10.20	56.00	28.16	QP
19.450	21.36	10.60	50.00	28.64	Ave.
19.450	30.77	10.60	60.00	29.23	QP
0.455	25.85	10.15	57.29	31.44	QP

Note:

- 1) Correction Factor = LISN/ISN VDF (Voltage Division Factor) + Cable Loss + Pulse Limiter Attenuation
The corrected factor has been input into the transducer of the test software.
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

FCC §15.205; §15.209; §15.247(d)


Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-2, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB(k=2, 95% level of confidence), and the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1 GHz:

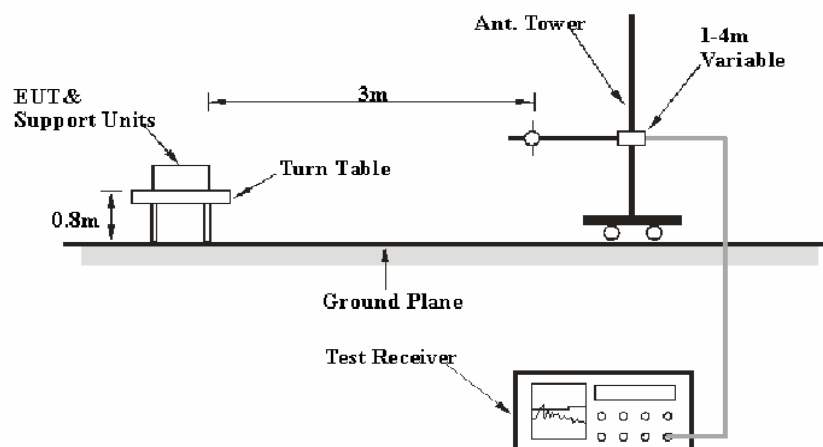

Above 1 GHz:

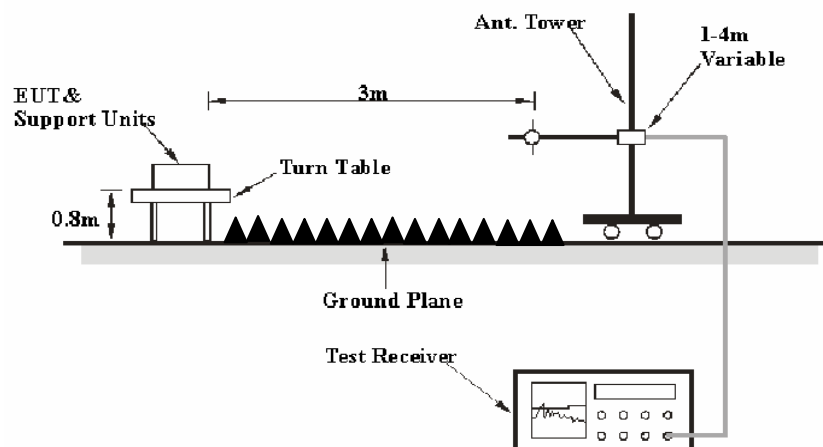

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to an AC 120V/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Corrected Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2012-08-08	2013-08-07
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

13.50 dB at 253.3 MHz in the Horizontal polarization

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Mick Yin on 2013-04-15.

EUT operation mode: Transmitting

30 MHz ~25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	83.51	PK	72	1.2	H	6.13	89.64	/	/
2402.0	73.16	Ave.	72	1.2	H	6.13	79.29	/	/
2402.0	85.29	PK	113	1.1	V	6.13	91.42	/	/
2402.0	74.15	Ave.	113	1.1	V	6.13	80.28	/	/
253.3	46.8	QP	32	1.1	H	-15.4	31.40	46	14.60
9608.0	17.07	Ave.	96	1.3	V	19.28	36.35	54	17.65
7206.0	17.88	Ave.	32	1.0	V	16.62	34.50	54	19.50
4804.0	19.75	Ave.	168	1.1	V	12.40	32.15	54	21.85
9608.0	31.51	PK	96	1.3	V	19.28	50.79	74	23.21
7206.0	32.85	PK	32	1.0	V	16.62	49.47	74	24.53
2486.7	21.79	Ave.	77	1.2	V	7.21	29.00	54	25.00
2379.3	22.59	Ave.	35	1.4	V	6.13	28.72	54	25.28
2342.5	22.08	Ave.	58	1.2	V	5.48	27.56	54	26.44
4804.0	34.17	PK	168	1.1	V	12.40	46.57	74	27.43
2379.3	36.24	PK	35	1.4	V	6.13	42.37	74	31.63
2486.7	35.08	PK	77	1.2	V	7.21	42.29	74	31.71
2342.5	35.13	PK	58	1.2	V	5.48	40.61	74	33.39
Middle Channel (2441 MHz)									
2441.0	82.80	PK	35	1.1	H	7.21	90.01	/	/
2441.0	71.65	Ave.	35	1.1	H	7.21	78.86	/	/
2441.0	84.48	PK	12	1.3	V	7.21	91.69	/	/
2441.0	74.13	Ave.	12	1.3	V	7.21	81.34	/	/
253.3	47.2	QP	119	1.2	H	-15.4	31.80	46	14.20
9764.0	18.73	Ave.	68	1.3	V	19.29	38.02	54	15.98
7323.0	20.08	Ave.	302	1.2	V	16.49	36.57	54	17.43
4882.0	21.59	Ave.	74	1.1	H	12.46	34.05	54	19.95
9764.0	31.26	PK	68	1.3	V	19.29	50.55	74	23.45
2493.4	22.16	Ave.	251	1.5	V	7.21	29.37	54	24.63
7323.0	32.11	PK	302	1.2	V	16.49	48.60	74	25.40
2365.7	22.07	Ave.	135	1.1	H	5.48	27.55	54	26.45
2332.5	21.82	Ave.	77	1.2	H	5.48	27.30	54	26.70
4882.0	33.56	PK	74	1.1	H	12.46	46.02	74	27.98
2493.4	35.87	PK	251	1.5	V	7.21	43.08	74	30.92
2332.5	35.74	PK	77	1.2	H	5.48	41.22	74	32.78
2365.7	34.79	PK	135	1.1	H	5.48	40.27	74	33.73

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	82.25	PK	55	1.2	H	7.21	89.46	/	/
2480.0	72.04	Ave.	55	1.2	H	7.21	79.25	/	/
2480.0	83.46	PK	134	1.1	V	7.21	90.67	/	/
2480.0	73.52	Ave.	134	1.1	V	7.21	80.73	/	/
253.3	47.9	QP	21	1.1	H	-15.4	32.50	46	13.50
9920.0	19.73	Ave.	74	1.1	H	19.38	39.11	54	14.89
7440.0	21.73	Ave.	33	1.2	H	15.90	37.63	54	16.37
4960.0	22.59	Ave.	102	1.3	V	12.50	35.09	54	18.91
7440.0	35.62	PK	33	1.2	H	15.90	51.52	74	22.48
9920.0	32.09	PK	74	1.1	H	19.38	51.47	74	22.53
4960.0	37.63	PK	102	1.3	V	12.50	50.13	74	23.87
2488.7	20.73	Ave.	85	1.1	H	7.21	27.94	54	26.06
2387.2	21.59	Ave.	32	1.0	V	6.13	27.72	54	26.28
2325.7	22.03	Ave.	11	1.2	H	5.48	27.51	54	26.49
2488.7	35.96	PK	85	1.1	H	7.21	43.17	74	30.83
2387.2	36.73	PK	32	1.0	V	6.13	42.86	74	31.14
2325.7	35.93	PK	11	1.2	H	5.48	41.41	74	32.59

Note:

1. Corrected Factor=Antenna factor (RX) +cable loss – amplifier factor
2. Corrected Amplitude = Corrected Factor + Receiver Reading
3. Margin = Limit- Corrected Amplitude

FCC §15.247(a) (1)-CHANNEL SEPARATION**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Mick Yin on 2013-04-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	$\geq$ Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.002	0.556	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.556	Pass
	Adjacent	2442			
	High	2480	1.002	0.556	Pass
	Adjacent	2479			
EDR ($\pi/4$-DQPSK)	Low	2402	1.002	0.834	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.834	Pass
	Adjacent	2442			
	High	2480	1.002	0.834	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.002	0.817	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.817	Pass
	Adjacent	2442			
	High	2480	1.002	0.817	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

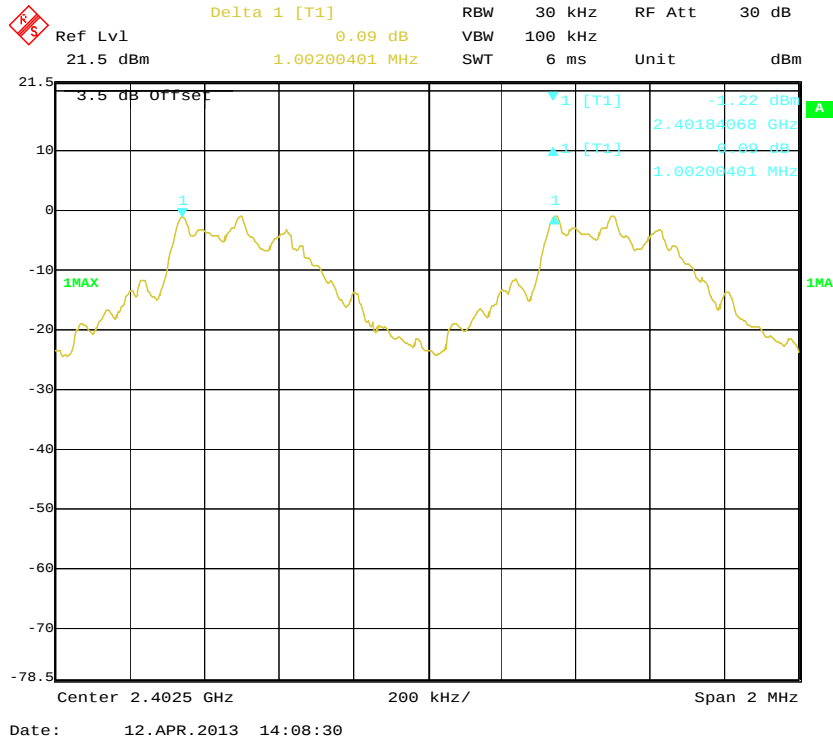


BDR (GFSK): Middle Channel

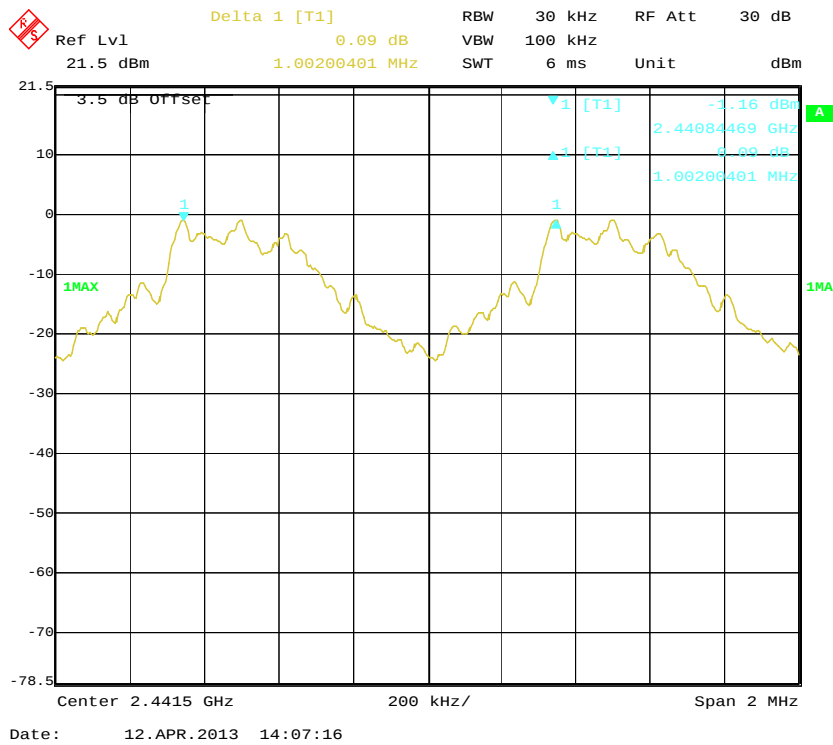


BDR (GFSK): High Channel

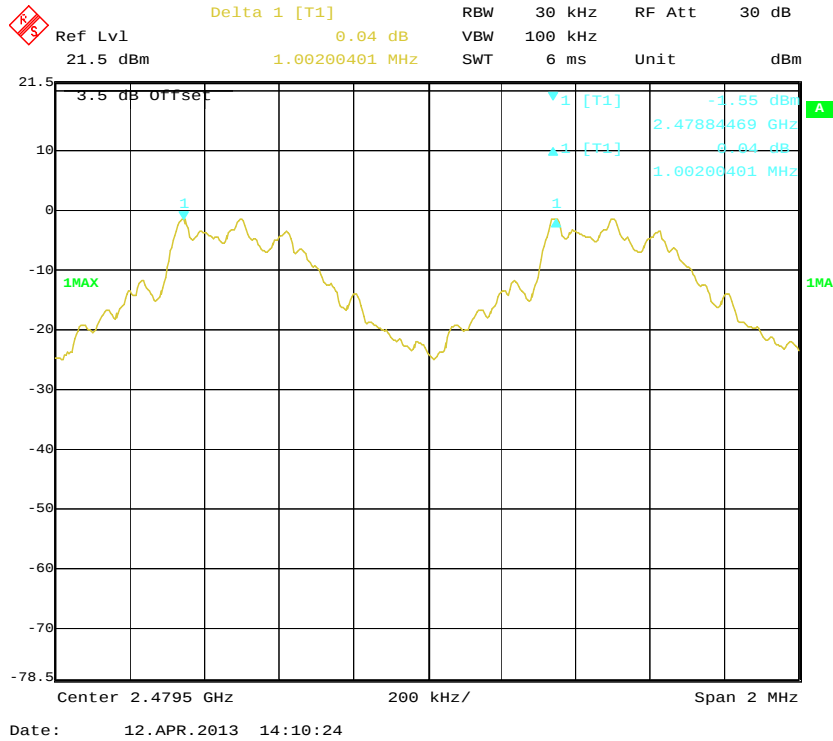


EDR ($\pi/4$ -DQPSK): Low Channel

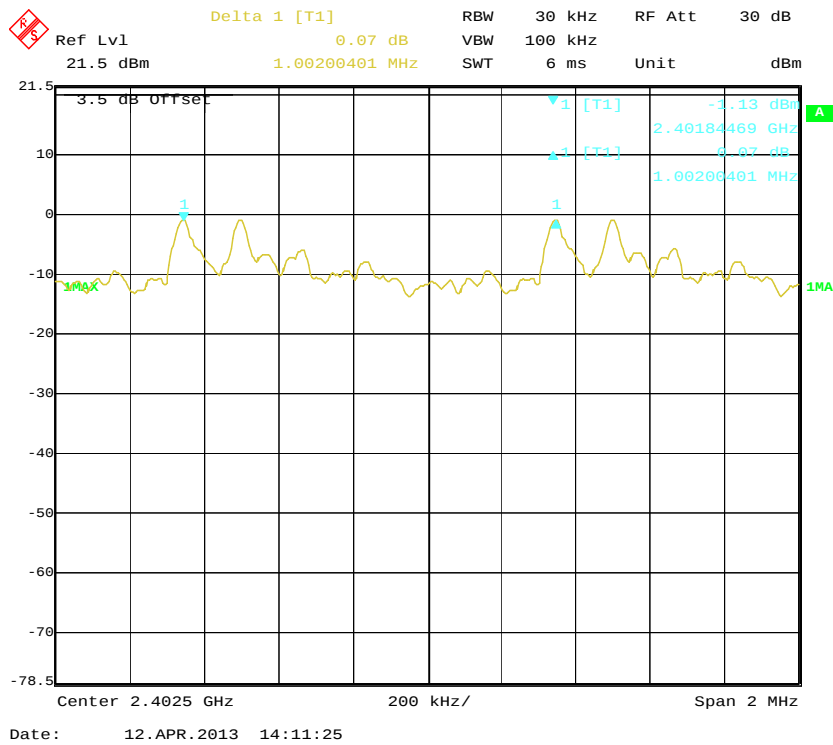


EDR ($\pi/4$ -DQPSK): Middle Channel

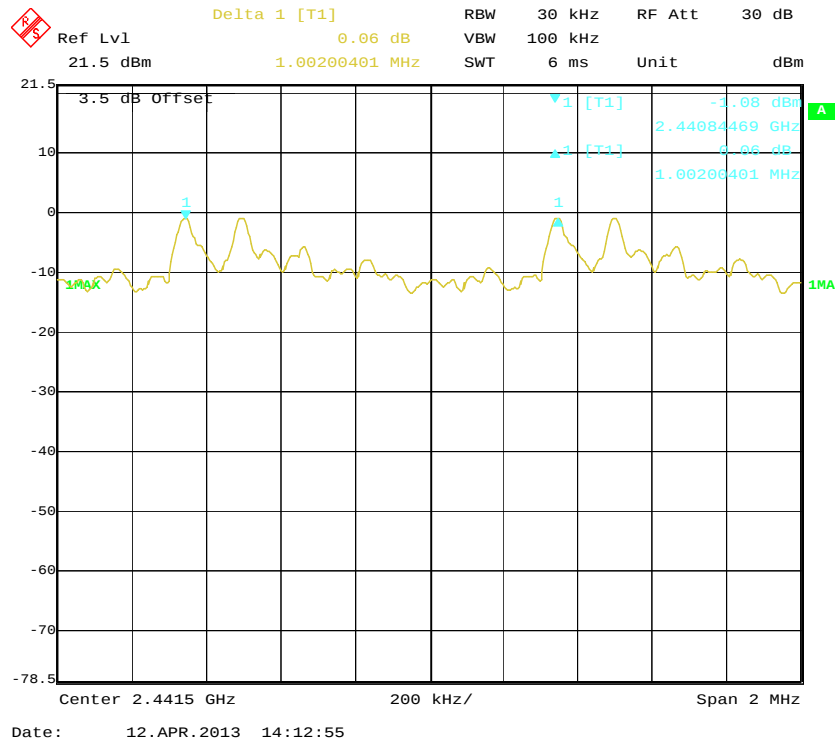


EDR ($\pi/4$ -DQPSK): High Channel

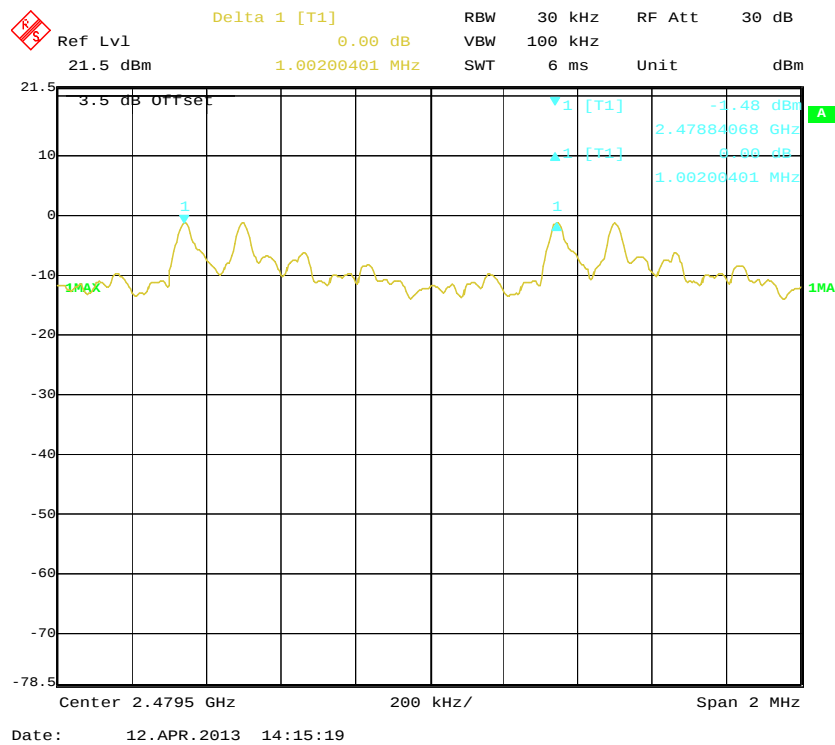


EDR (8DPSK): Low Channel

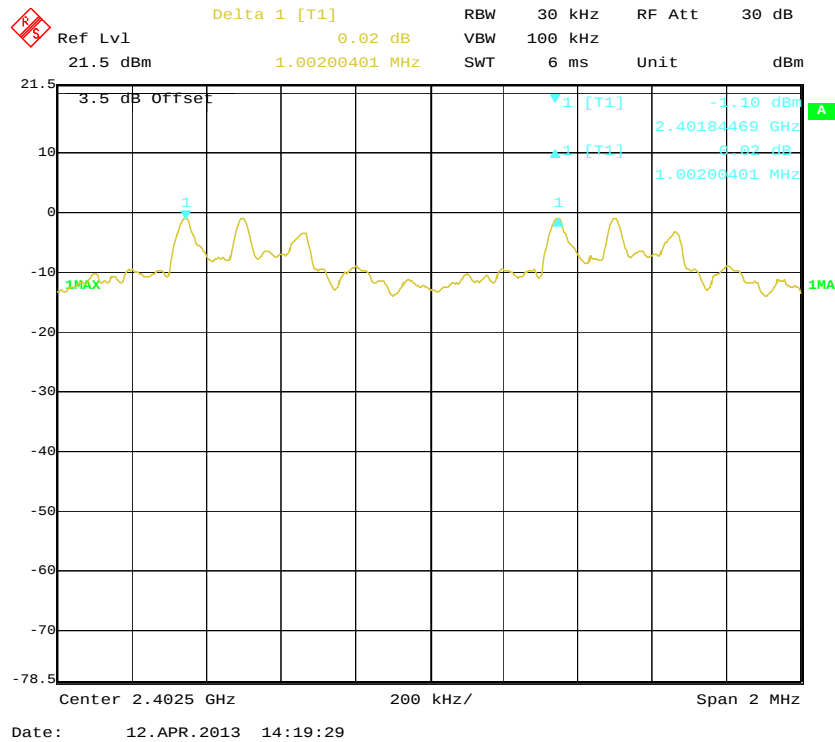

EDR (8DPSK): Middle Channel

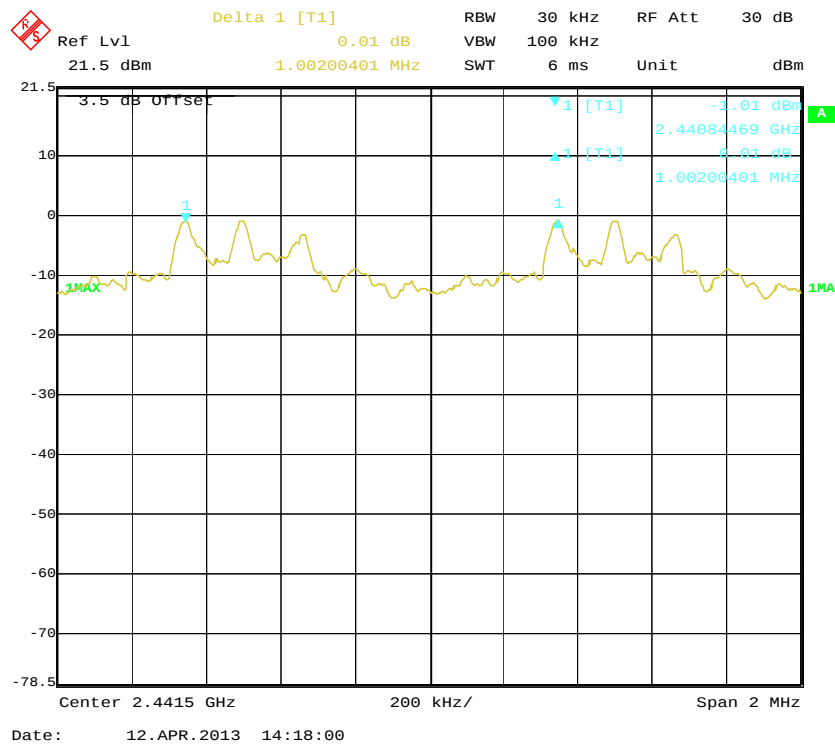

EDR (8DPSK): High Channel

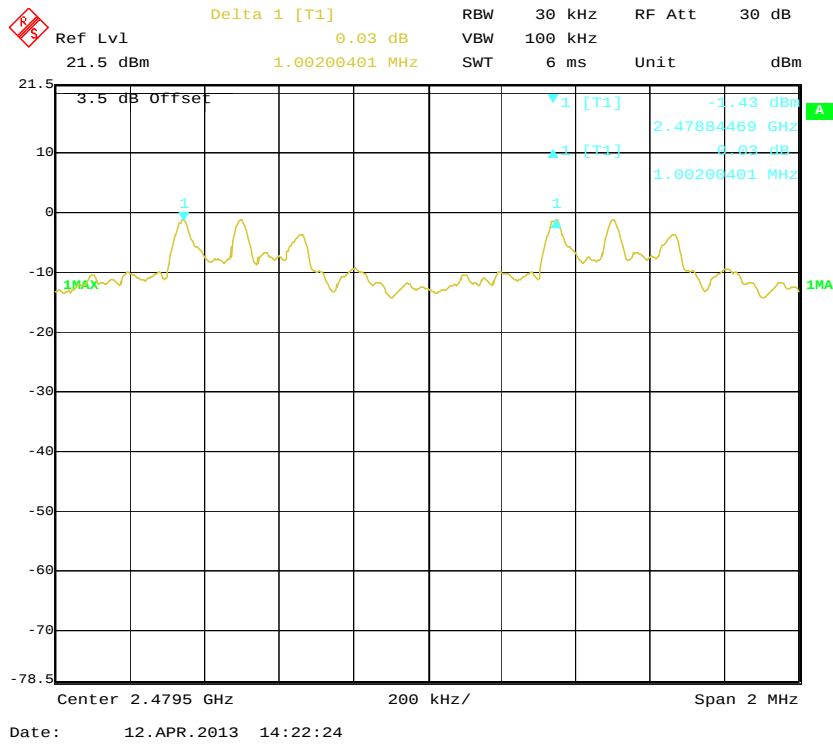

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

* The testing was performed by Mick Yin on 2013-04-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.834
	Middle	2441	0.834
	High	2480	0.834
EDR ($\pi/4$ -DQPSK)	Low	2402	1.251
	Middle	2441	1.251
	High	2480	1.251
EDR (8DPSK)	Low	2402	1.226
	Middle	2441	1.226
	High	2480	1.226

[illegible]

BDR (GFSK): Middle Channel

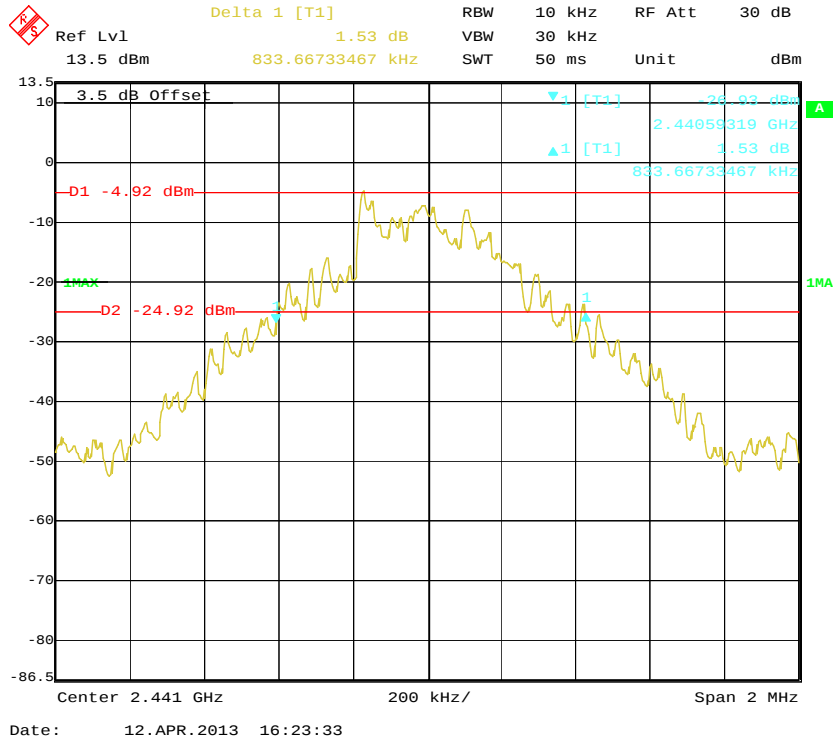

BDR (GFSK): High Channel

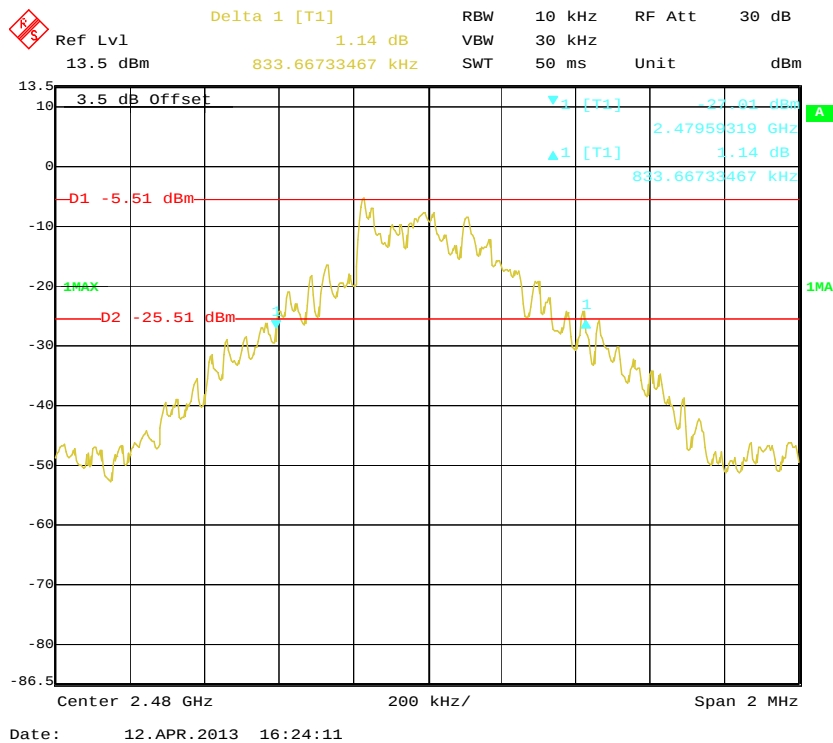

Ref Lvl 13.5 dBm Delta 1 [T1] 0.79 dB RBW 30 kHz RF Att 30 dB

13.5 dB Offset 3.5 dB Offset 1 [T1] -22.32 dBm 2.40136473 GHz 0.79 dB

D1 -1.07 dBm D2 -21.07 dBm 1MA

Center 2.402 GHz 200 kHz/ Span 2 MHz

Date: 12.APR.2013 12:25:25

Ref Lvl 13.5 dBm Delta 1 [T1] 1.24 dB RBW 30 kHz RF Att 30 dB
 1.25050100 MHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] -21.03 dBm 2.44036972 GHz 3.24 dB

1 [T1] 1.25050100 MHz

1MAX D2 -21.03 dBm

1MAX

Center 2.441 GHz 200 kHz/ Span 2 MHz

Date: 12.APR.2013 12:28:08

Ref Lvl 13.5 dBm Delta 1 [T1] 0.96 dB RBW 30 kHz RF Att 30 dB

13.5 dB Offset 1.25050100 MHz SWT 6 ms Unit dBm

3.5 dB Offset

D1 -1.58 dBm

D2 -21.58 dBm

2.47936473 GHz

Center 2.48 GHz Span 2 MHz

Ref Lvl 13.5 dBm Delta 1 [T1] 0.97 dB RBW 30 kHz RF Att 30 dB
 1.22645291 MHz SWT 6 ms Unit dBm

3.5 dB Offset

D1 -1.16 dBm

D2 -21.16 dBm

13.5 dB Offset

Center 2.402 GHz

Span 2 MHz

Ref Lvl 13.5 dBm Delta 1 [T1] 1.25 dB RBW 30 kHz RF Att 30 dB
 1.22645291 MHz SWT 6 ms Unit dBm

3.5 dB Offset

1 [T1] -22.05 dBm
 2.44039279 GHz 3.25 dB
 1.22645291 MHz

1MAX -21.13 dBm

Center 2.441 GHz 200 kHz/ Span 2 MHz

Date: 12.APR.2013 12:33:10

Ref Lvl 13.5 dBm Delta 1 [T1] -0.26 dB RBW 30 kHz RF Att 30 dB
 1.22645291 MHz SWT 6 ms Unit dBm

3.5 dB Offset

D1 -1.55 dBm

D2 -21.55 dBm

Delta 1 [T1] -0.26 dBm

2.47939679 GHz

Center 2.48 GHz 200 kHz/ Span 2 MHz

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Mick Yin on 2013-04-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥ 15
EDR ($\pi/4$ -DQPSK)	2402-2480	79	≥ 15
EDR (8DPSK)	2402-2480	79	≥ 15

BDR (GFSK): Number of Hopping Channels

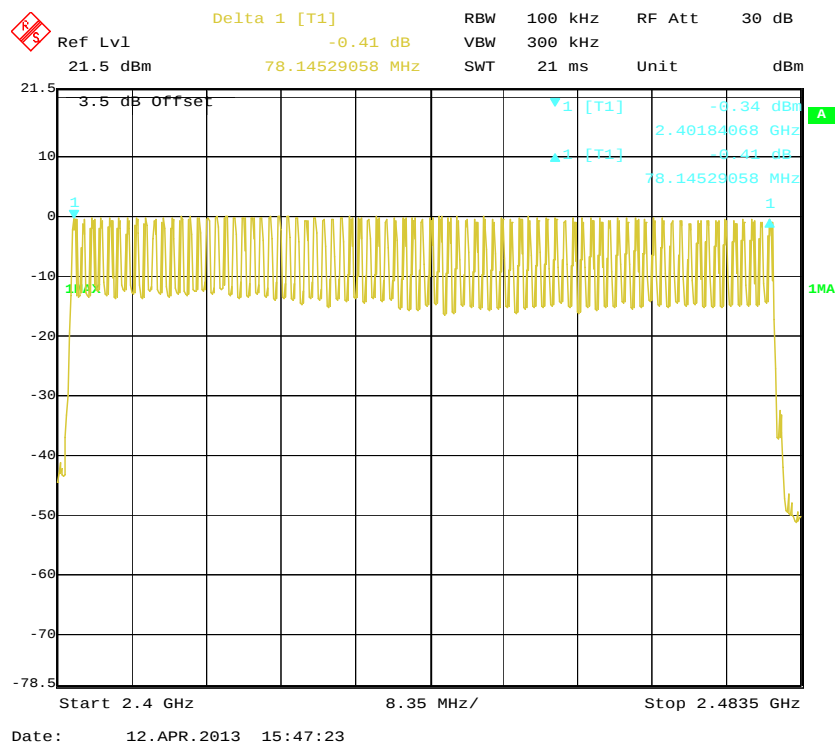

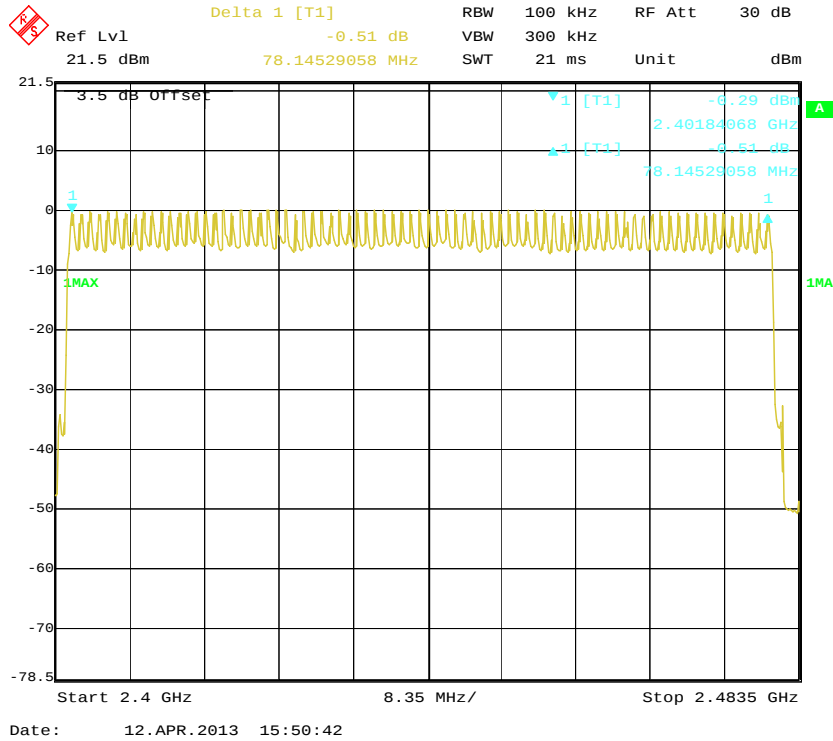EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

(8DPSK): Number of Hopping Channels

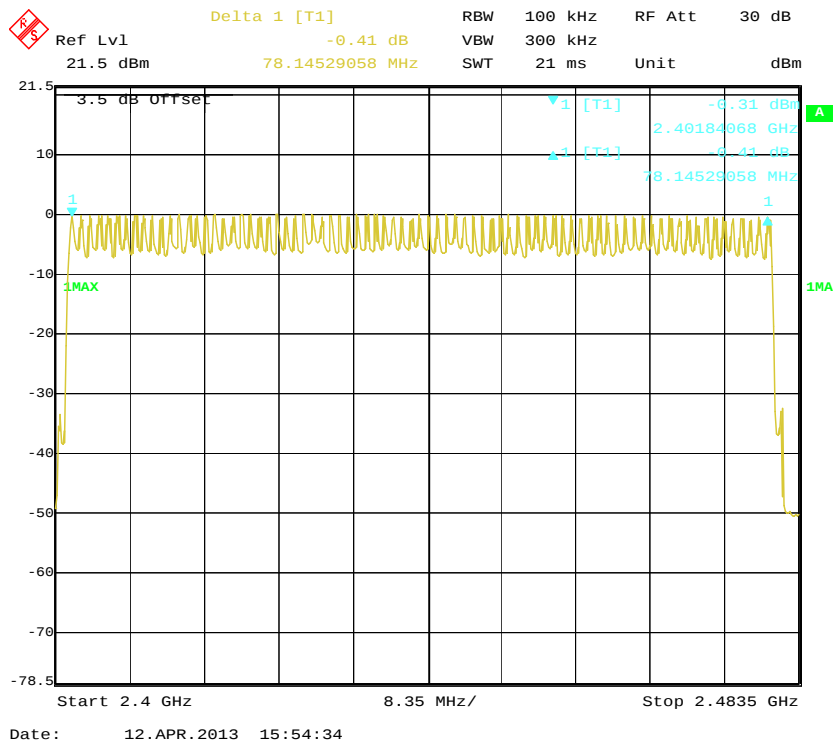

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Mick Yin on 2013-04-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
BDR (GFSK)	DH 1	Low	0.412	0.132	0.4	Pass
		Middle	0.412	0.132	0.4	Pass
		High	0.412	0.132	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.681	0.269	0.4	Pass
		Middle	1.681	0.269	0.4	Pass
		High	1.681	0.269	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.934	0.313	0.4	Pass
		Middle	2.934	0.313	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	DH 1	Low	0.423	0.135	0.4	Pass
		Middle	0.423	0.135	0.4	Pass
		High	0.423	0.135	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.687	0.270	0.4	Pass
		Middle	1.687	0.270	0.4	Pass
		High	1.687	0.270	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.934	0.313	0.4	Pass
		Middle	2.934	0.313	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	DH 1	Low	0.425	0.136	0.4	Pass
		Middle	0.425	0.136	0.4	Pass
		High	0.425	0.136	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH 3	Low	1.681	0.269	0.4	Pass
		Middle	1.681	0.269	0.4	Pass
		High	1.681	0.269	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH 5	Low	2.934	0.313	0.4	Pass
		Middle	2.934	0.313	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

BDR (GFSK):


Pulse time, Low Channel, DH1

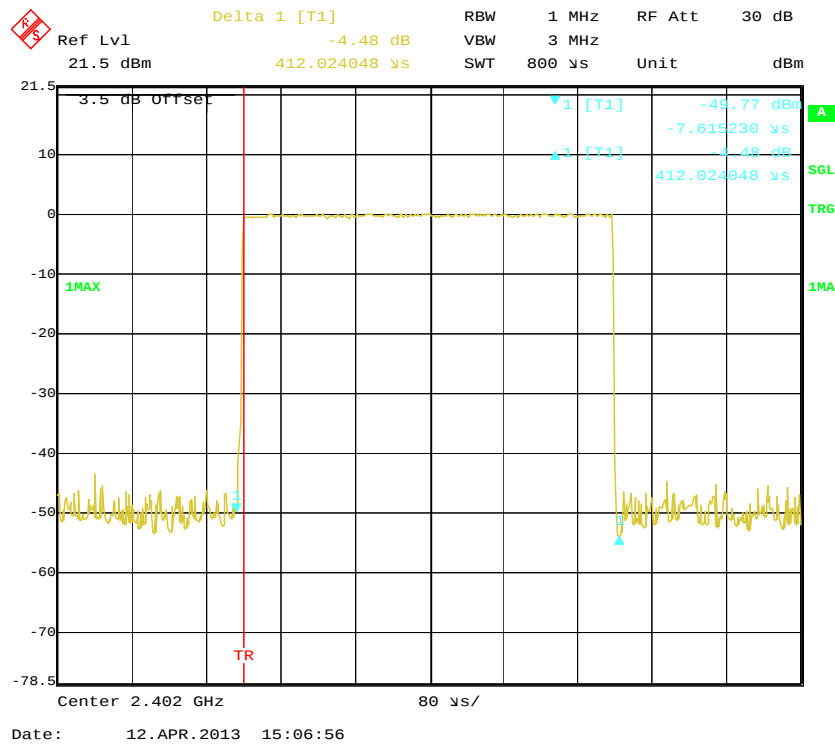


Pulse time, Middle Channel, DH1

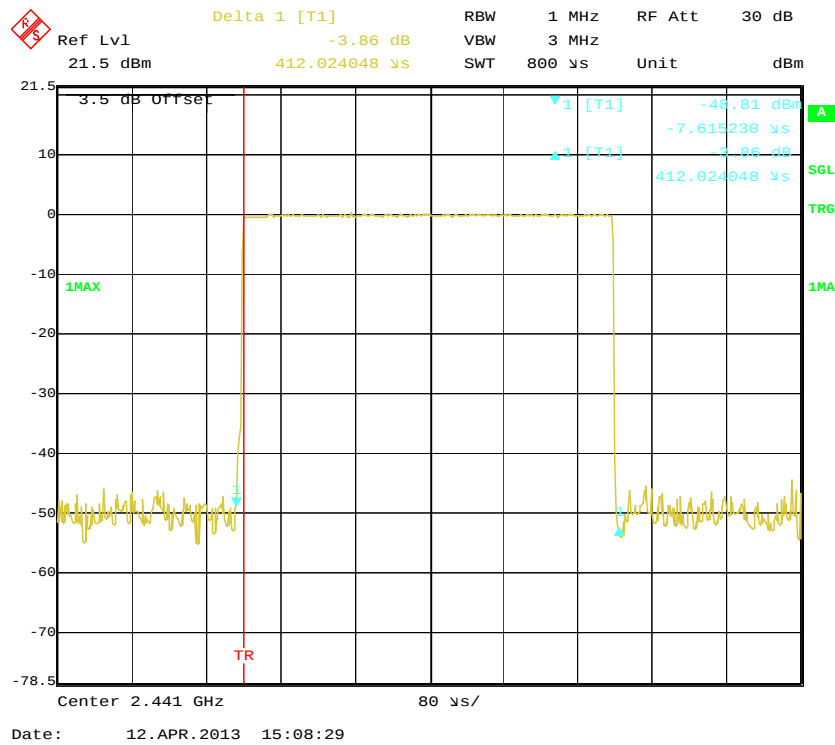


Pulse time, High Channel, DH1

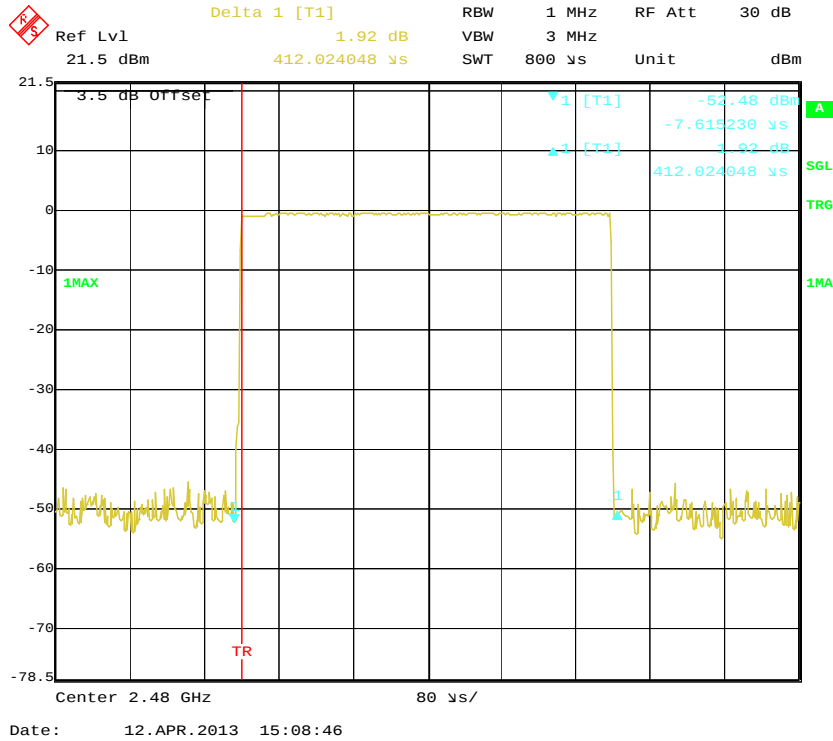


Pulse time, Low Channel, DH3

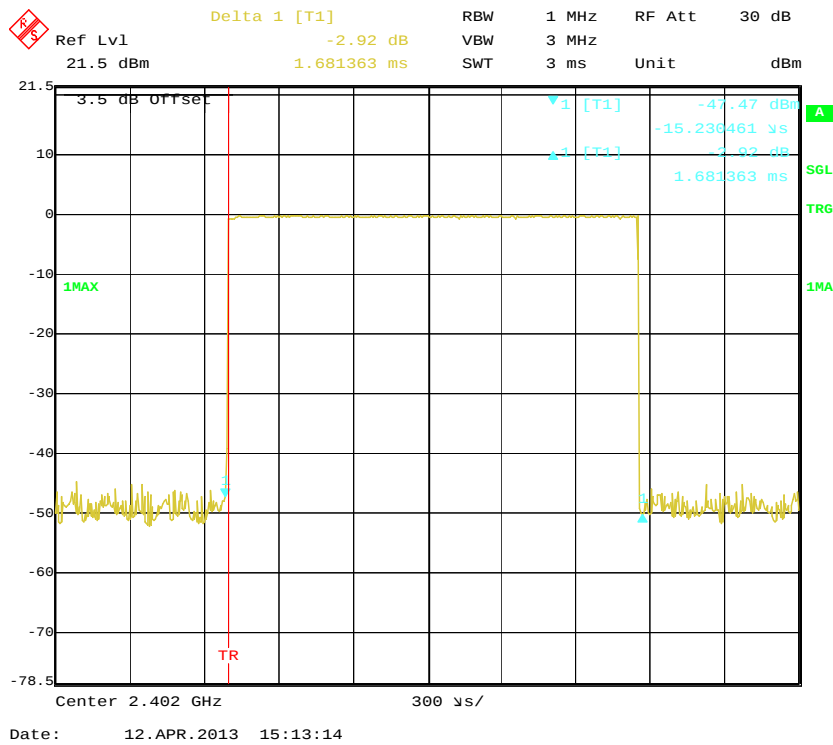



Pulse time, Middle Channel, DH3

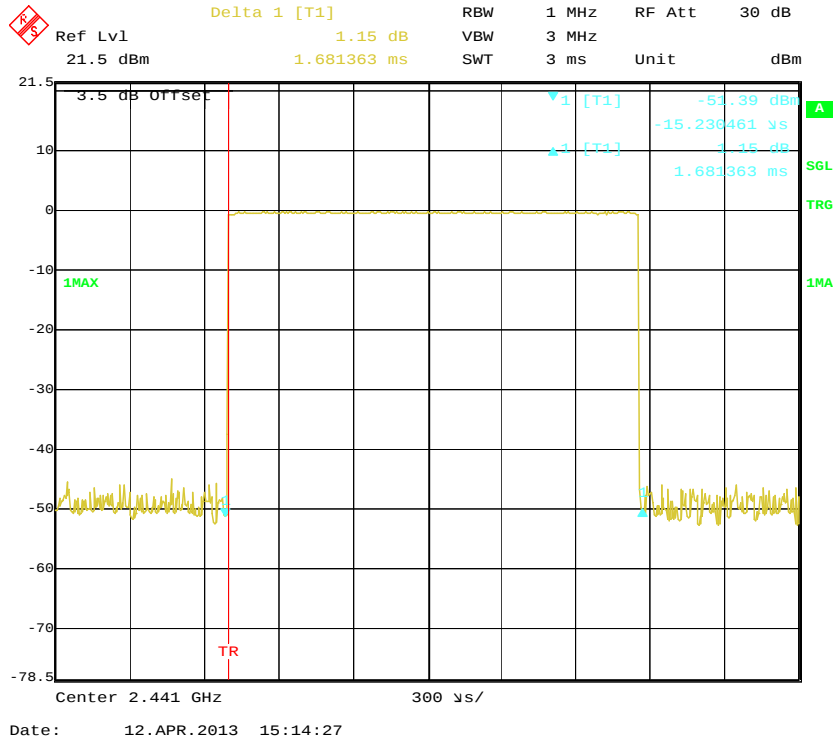

Pulse time, High Channel, DH3

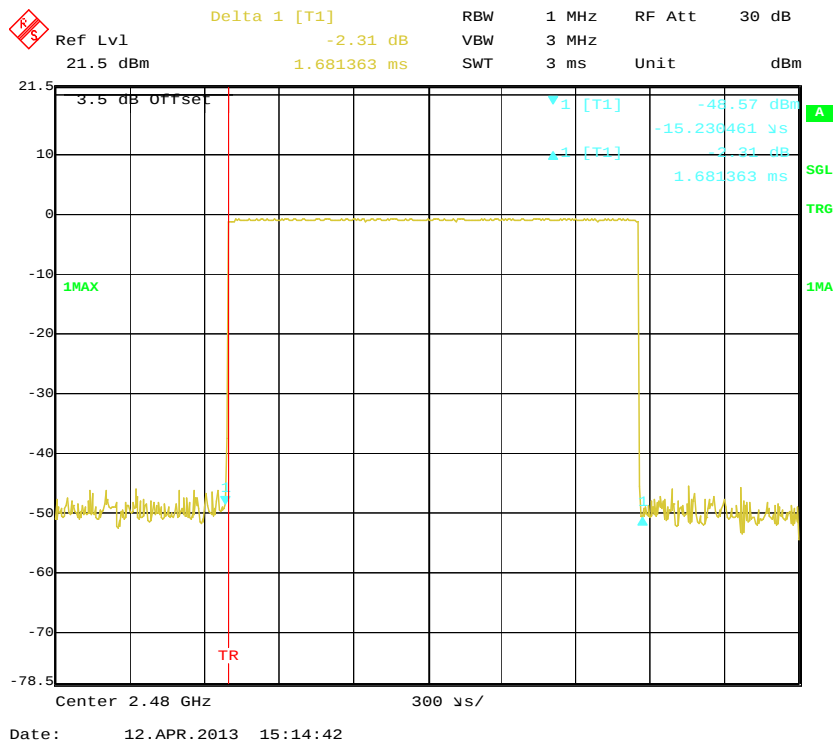

Pulse time, Low Channel, DH5

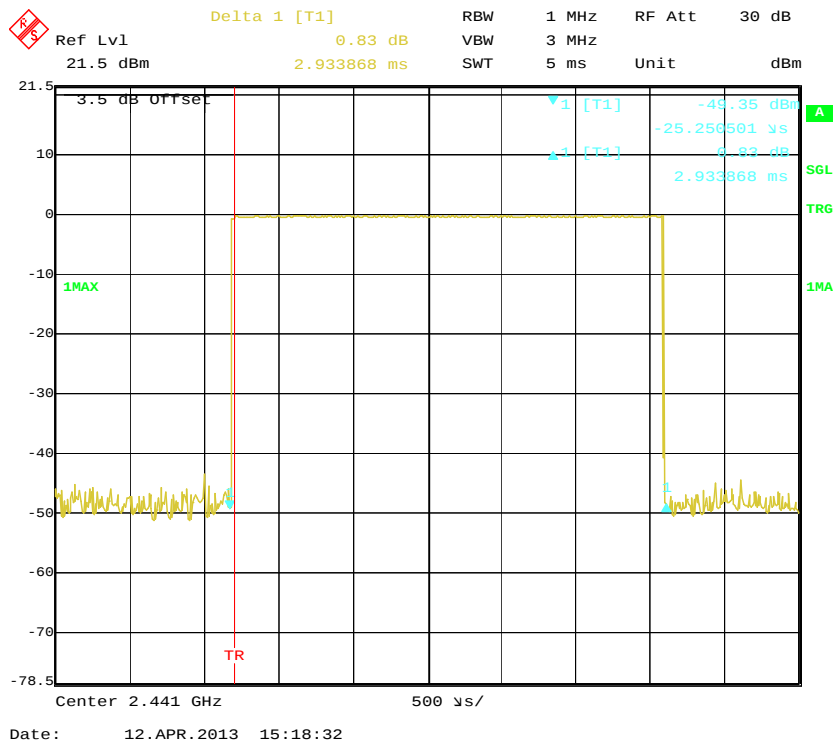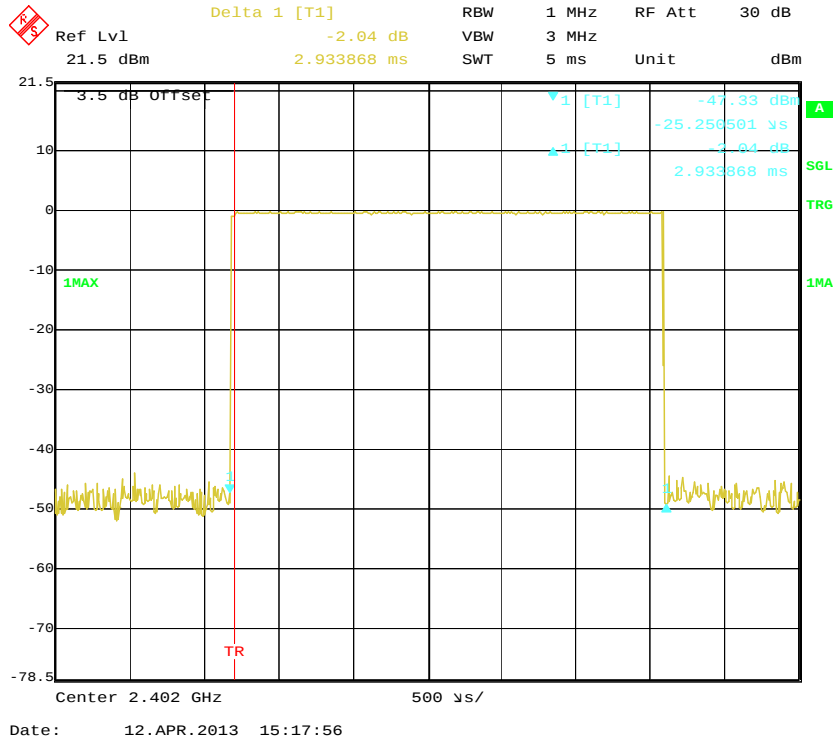

Delta 1 [T1] 0.99 dB
2.933868 ms

RBW 1 MHz RF Att 30 dB
VBW 3 MHz
SWT 5 ms

Ref Lvl 21.5 dBm Unit dBm

3.5 dB Offset


1MAX

TR


Center 2.48 GHz 500 μ s/

Date: 12.APR.2013 15:18:56


Pulse time, Low Channel, DH1

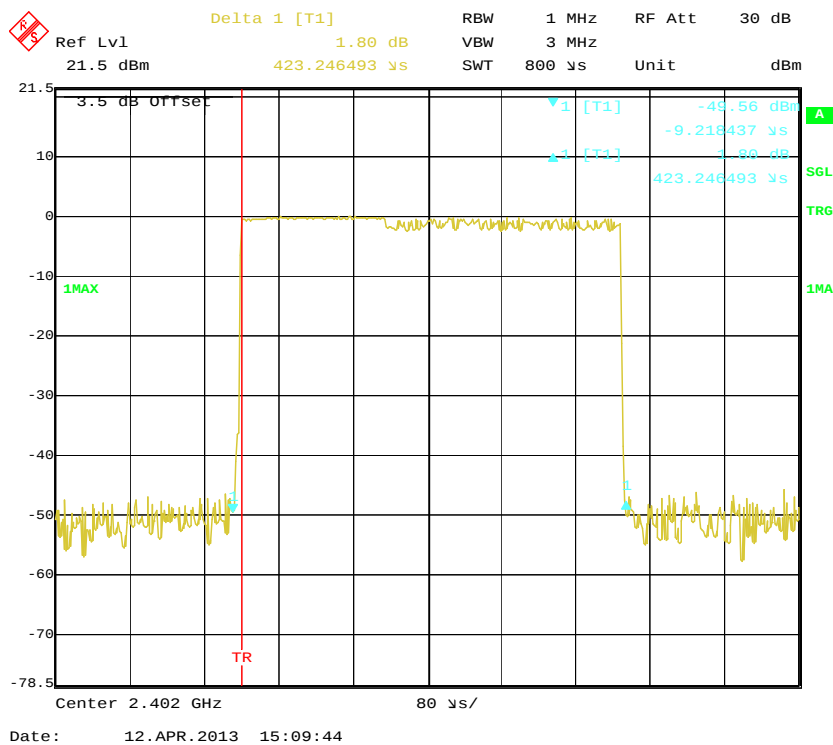


Pulse time, Middle Channel, DH1

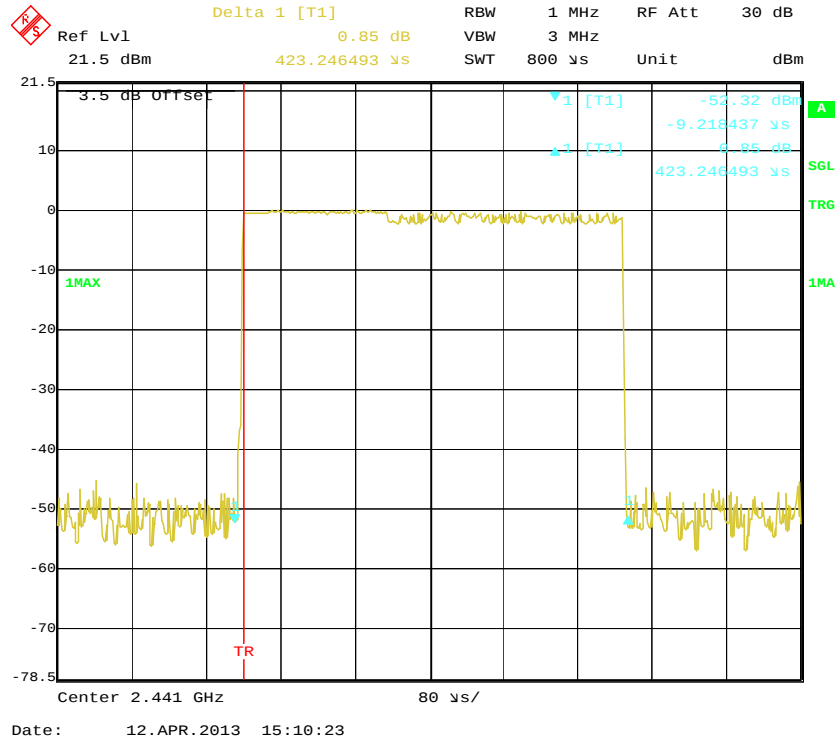


Pulse time, High Channel, DH1

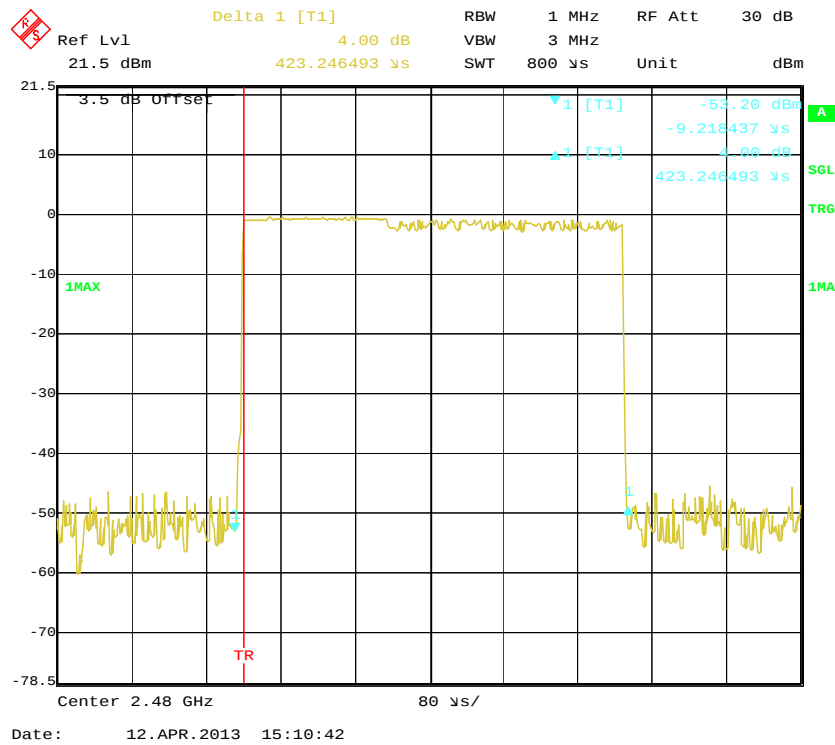


Pulse time, Low Channel, DH3

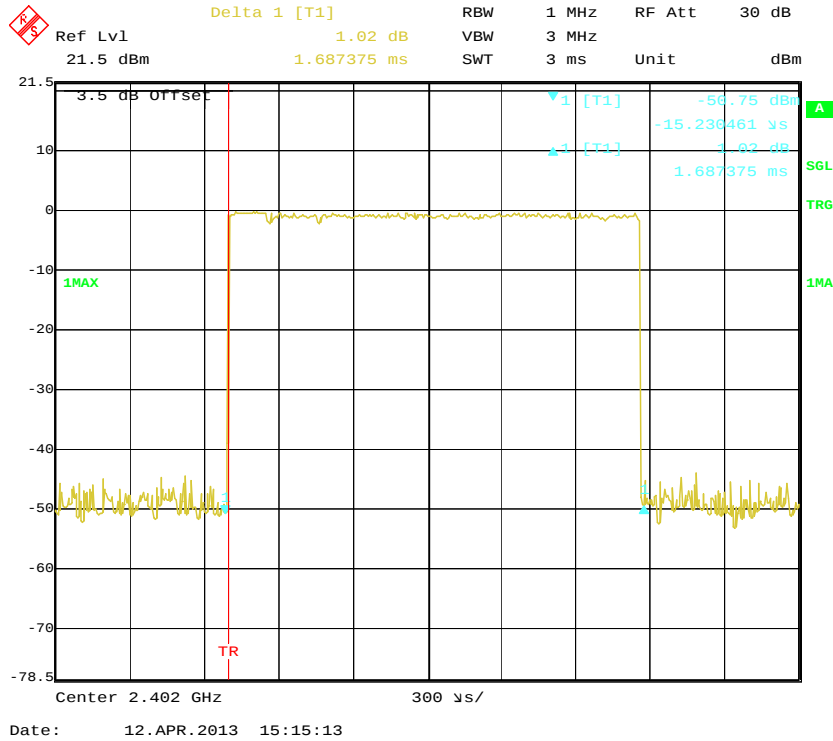


Pulse time, Middle Channel, DH3

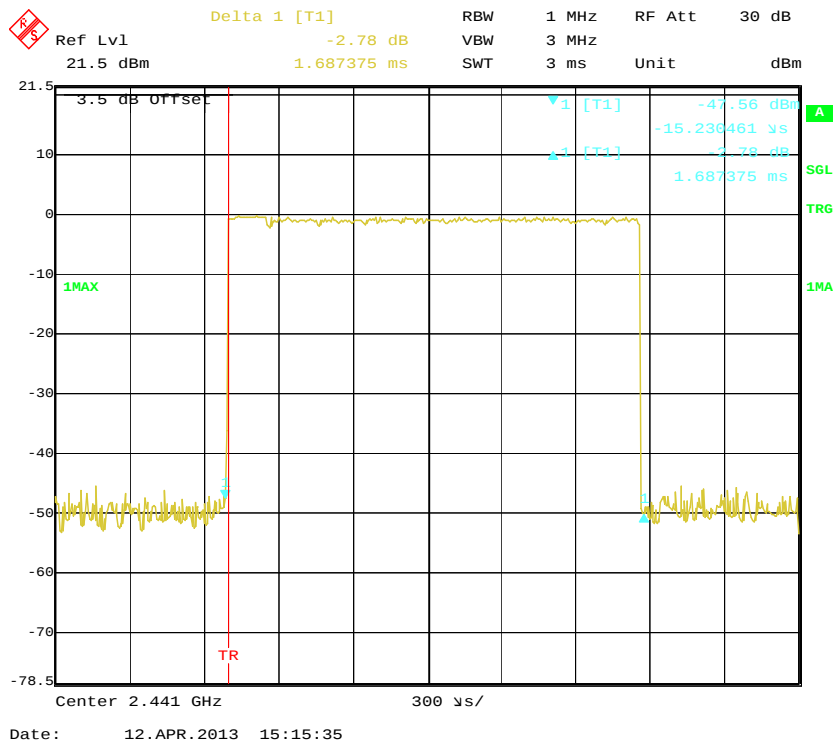


Pulse time, High Channel, DH3

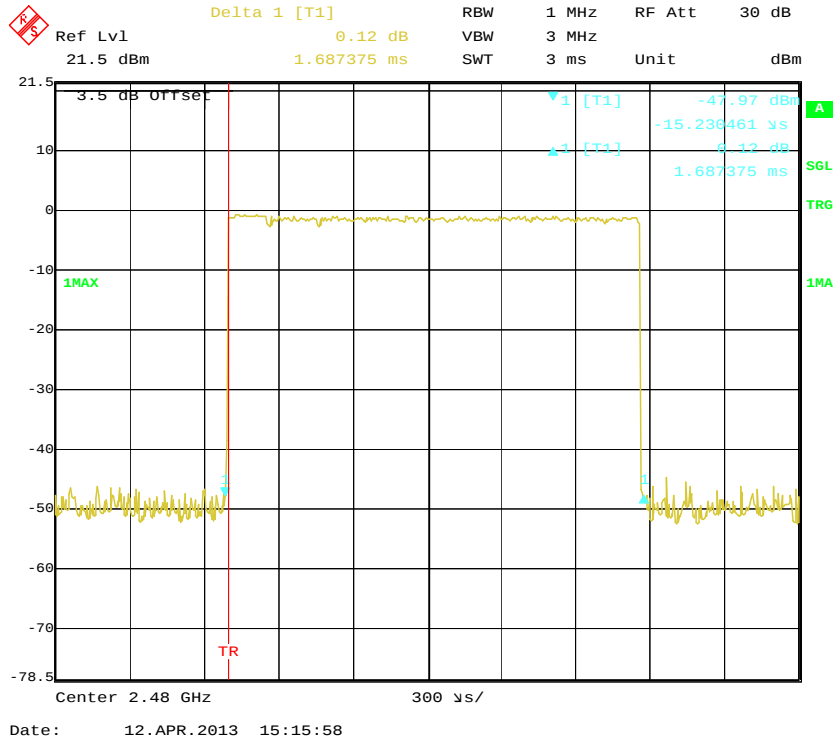


Pulse time, Low Channel, DH5

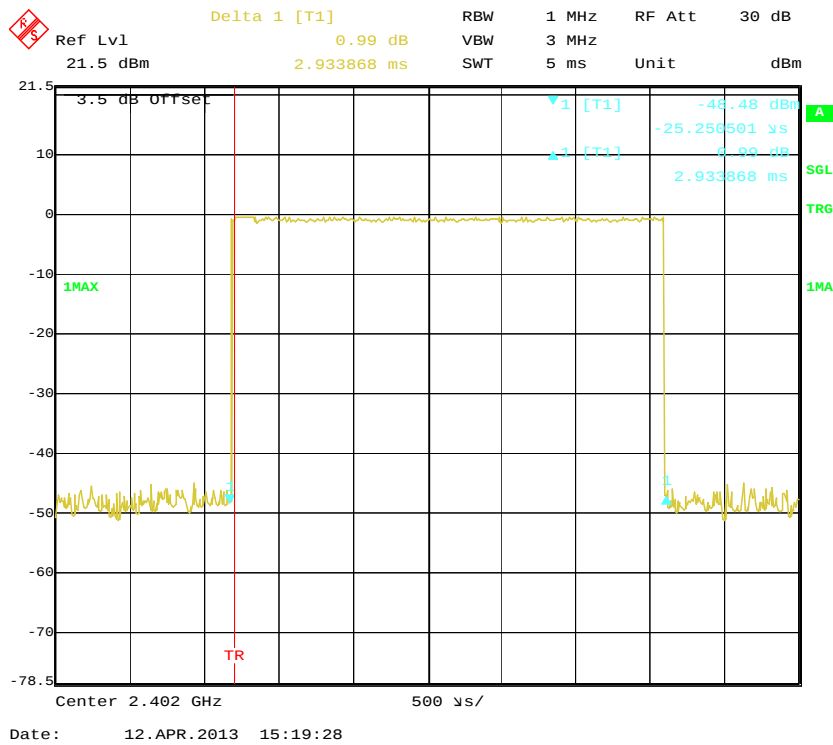

Pulse time, Middle Channel, DH5

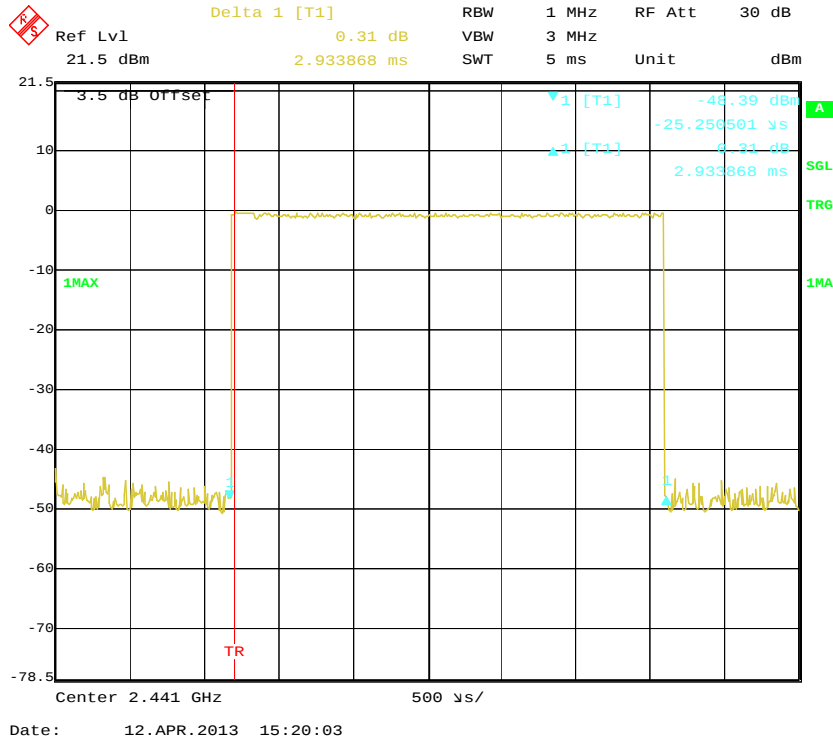


Pulse time, High Channel, DH5

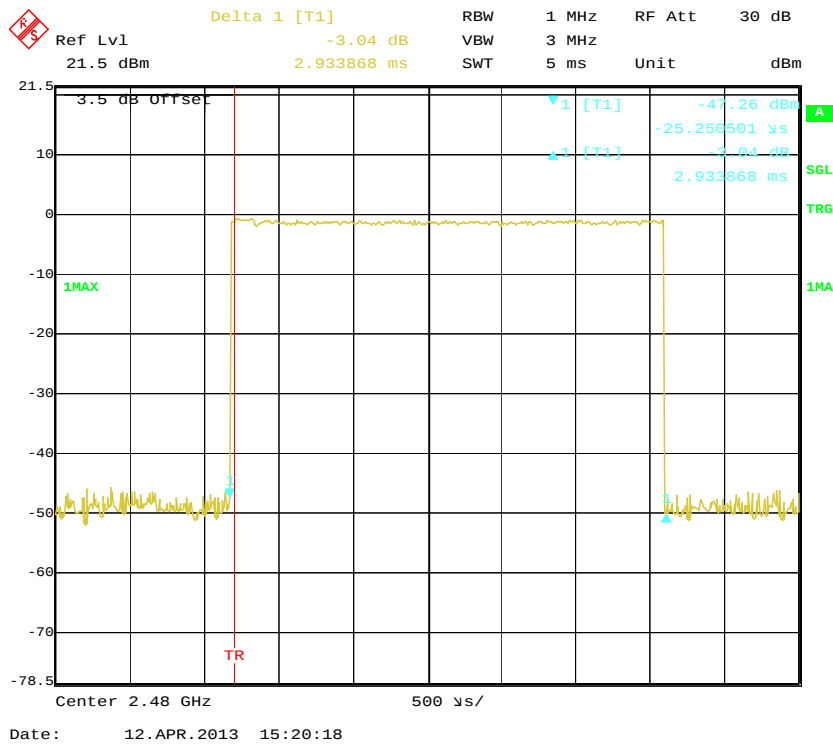


EDR (8DPSK):


Pulse time, Low Channel, DH1

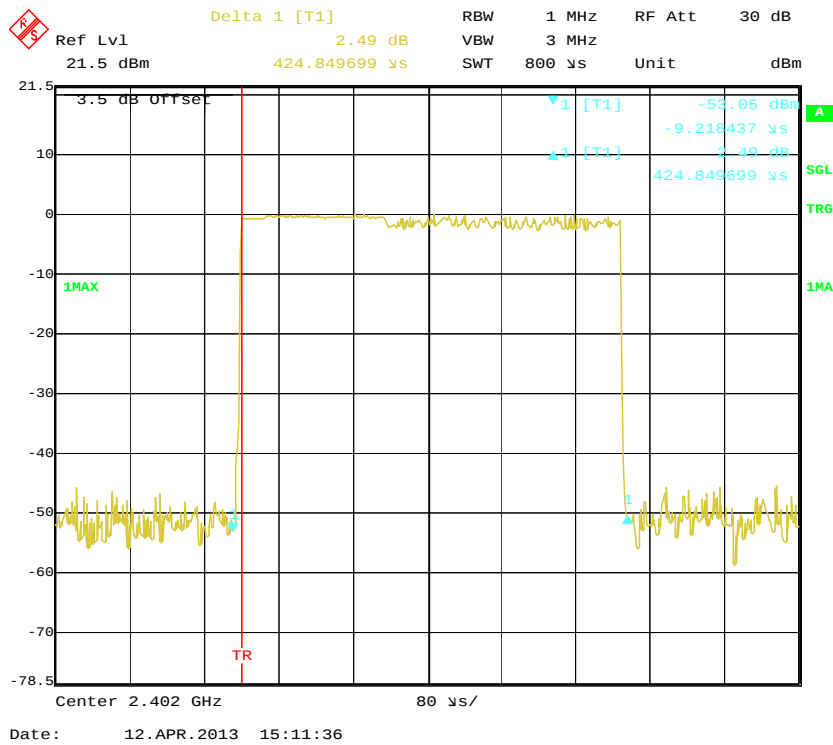


Pulse time, Middle Channel, DH1

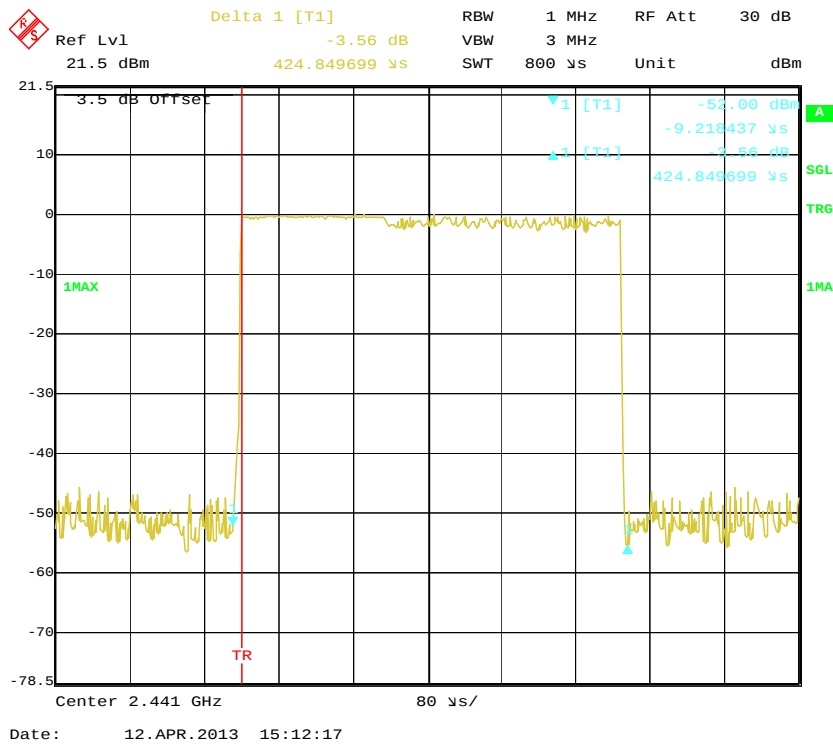


Pulse time, High Channel, DH1

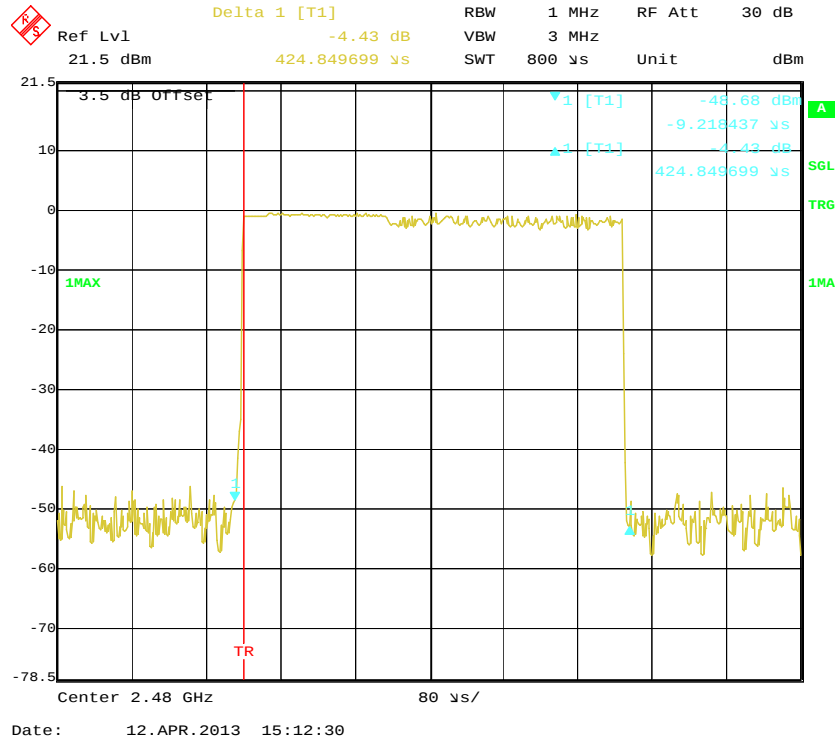


Pulse time, Low Channel, DH3

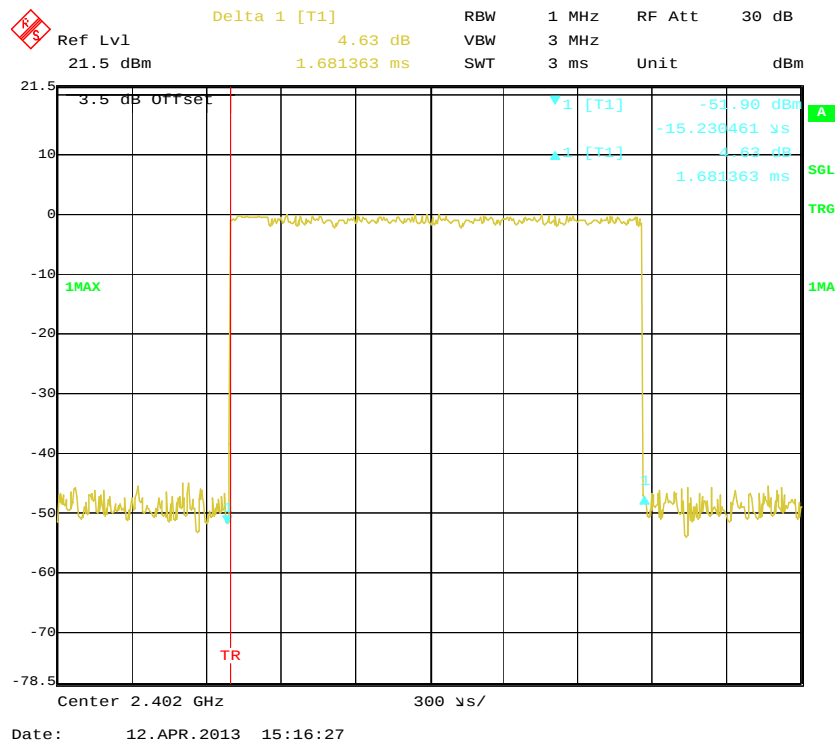


Pulse time, Middle Channel, DH3

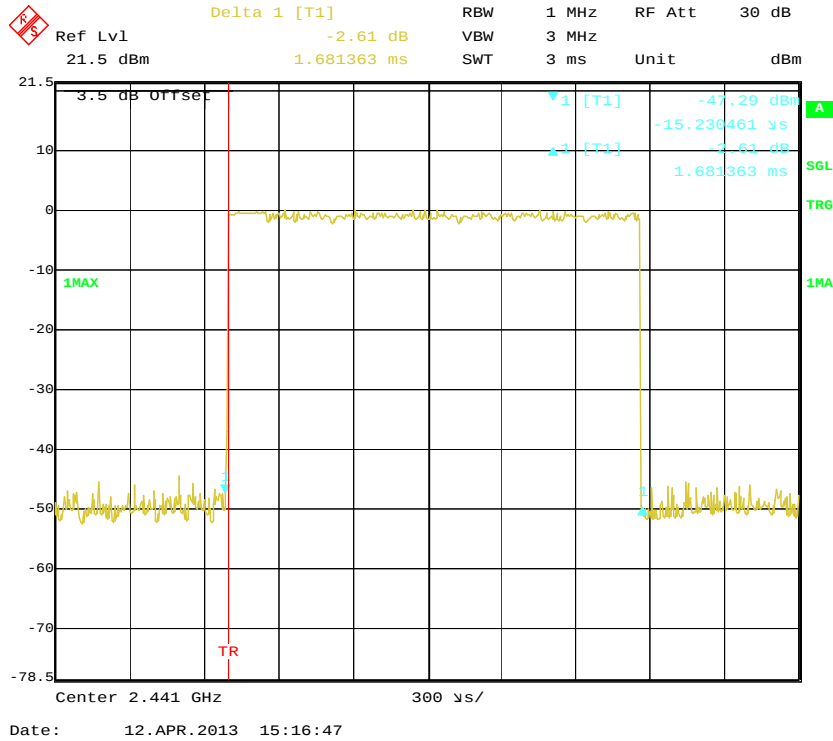


Pulse time, High Channel, DH3

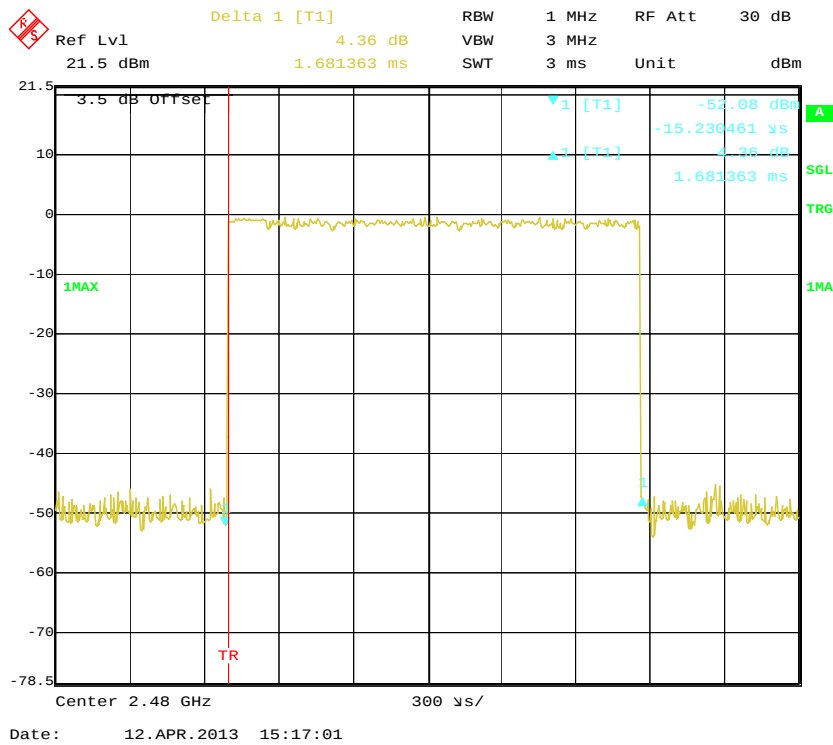


Pulse time, Low Channel, DH5

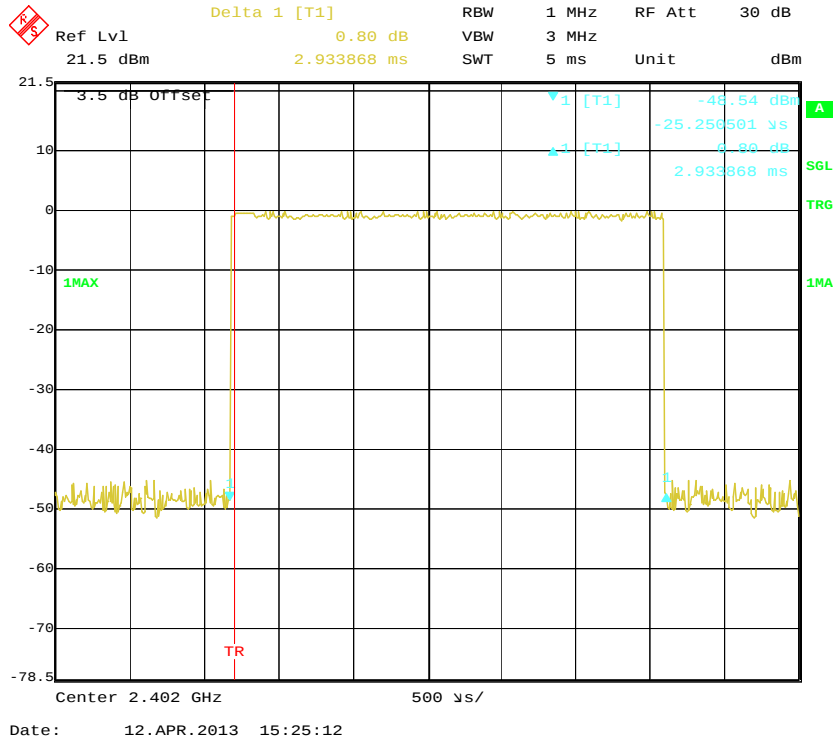

Pulse time, Middle Channel, DH5

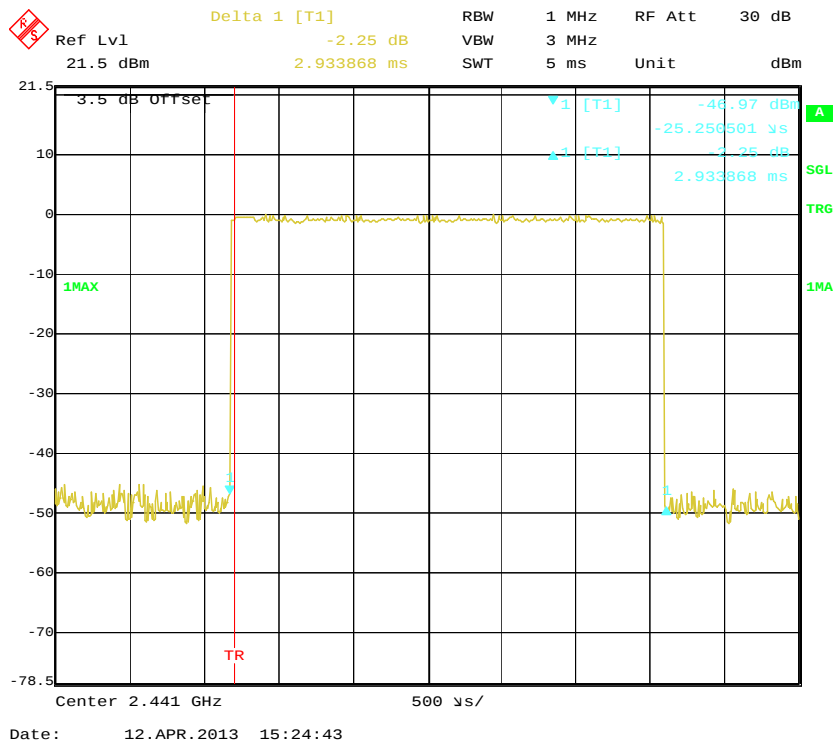

Pulse time, High Channel, DH5

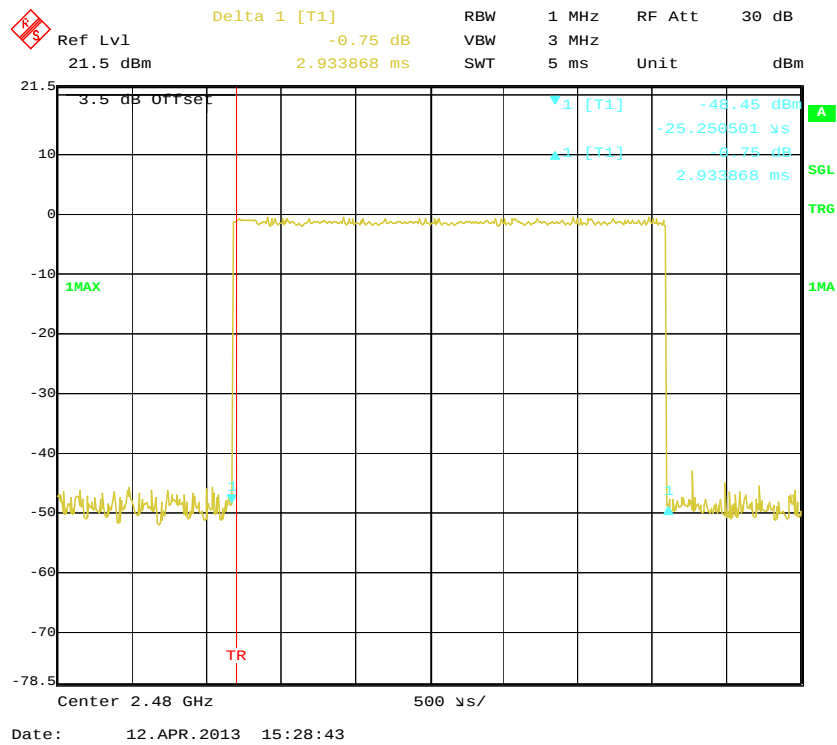


FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

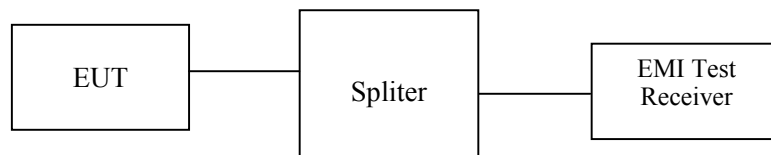

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Mick Yin on 2013-04-12.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	0.07	1.016	1000
	Middle	2441	-0.20	0.955	1000
	High	2480	-0.68	0.855	1000
EDR ($\pi/4$-DQPSK)	Low	2402	0.01	1.002	1000
	Middle	2441	0.01	1.002	1000
	High	2480	-0.54	0.883	1000
EDR (8DPSK)	Low	2402	0.31	1.074	1000
	Middle	2441	0.30	1.072	1000
	High	2480	-0.19	0.957	1000

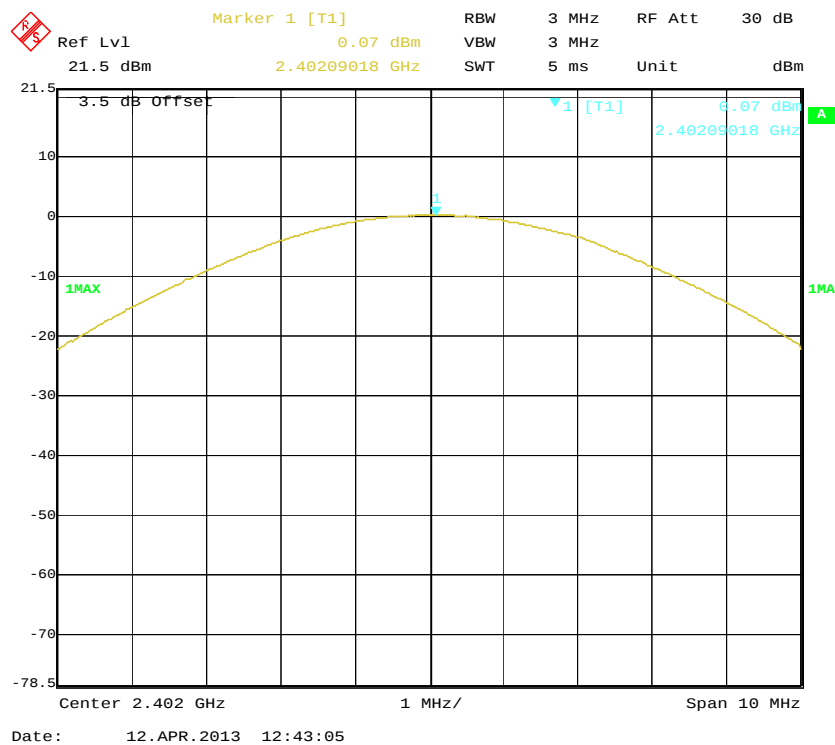BDR (GFSK): Low Channel


BDR (GFSK): Middle Channel

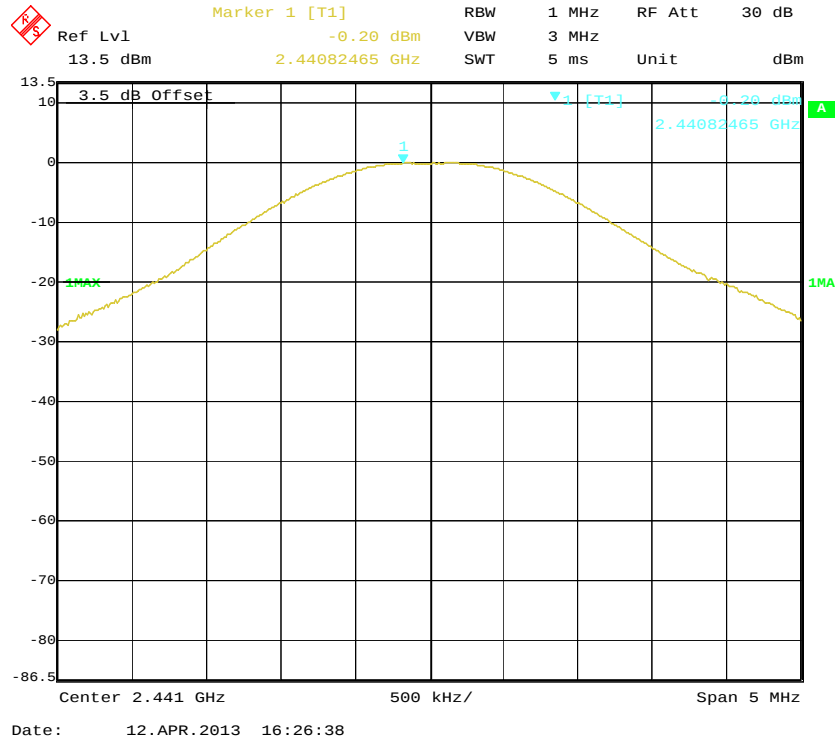


BDR (GFSK): High Channel

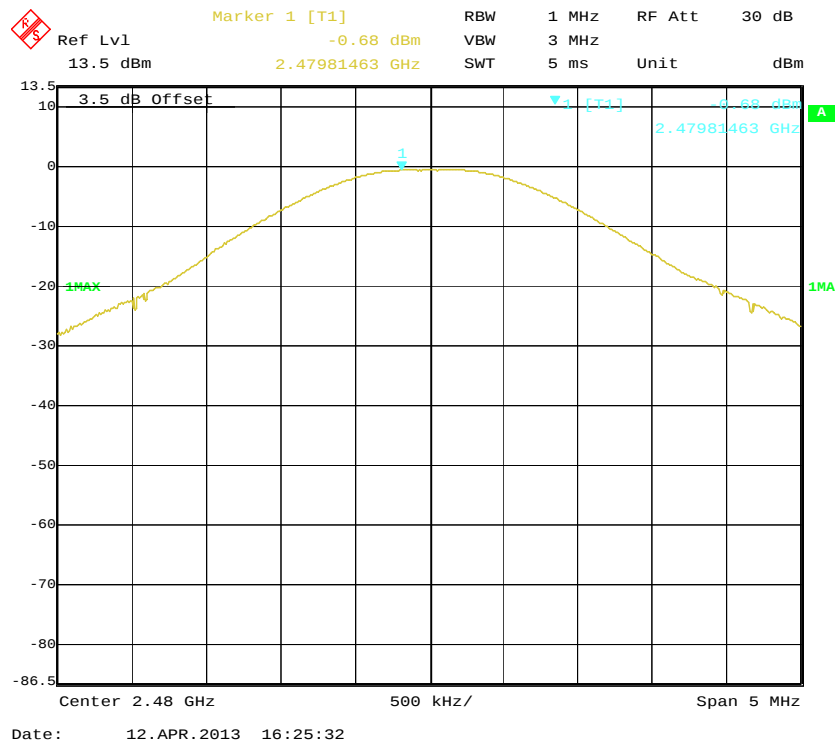


EDR($\pi/4$ -DQPSK): Low Channel

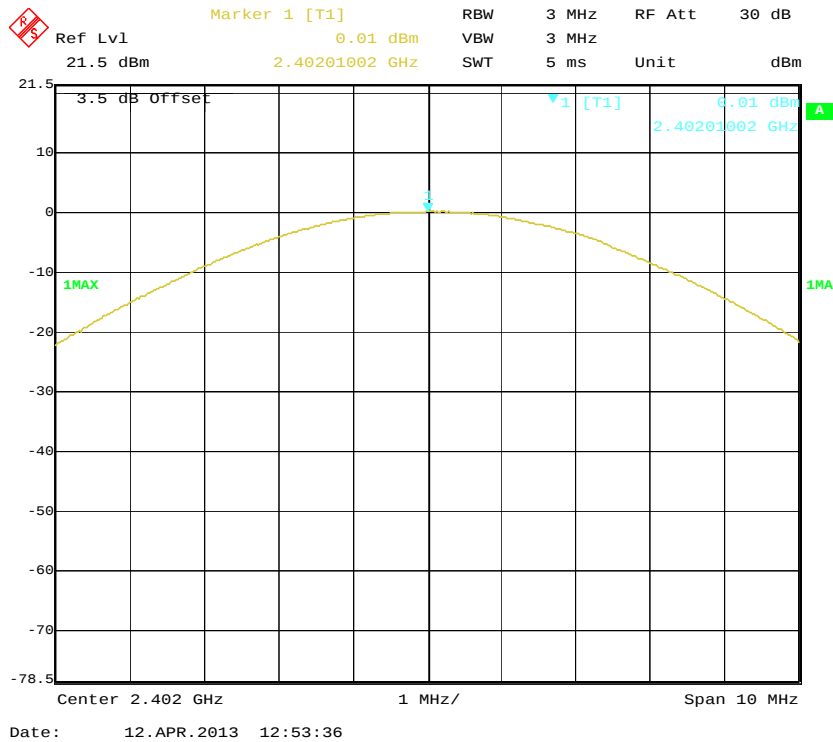


EDR($\pi/4$ -DQPSK): Middle Channel

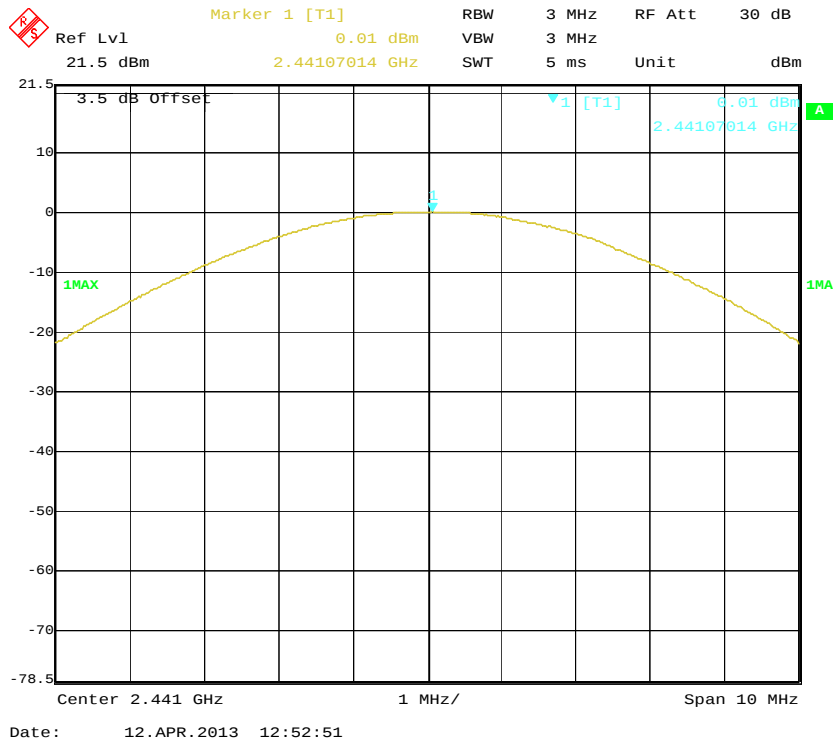


EDR($\pi/4$ -DQPSK): High Chanel

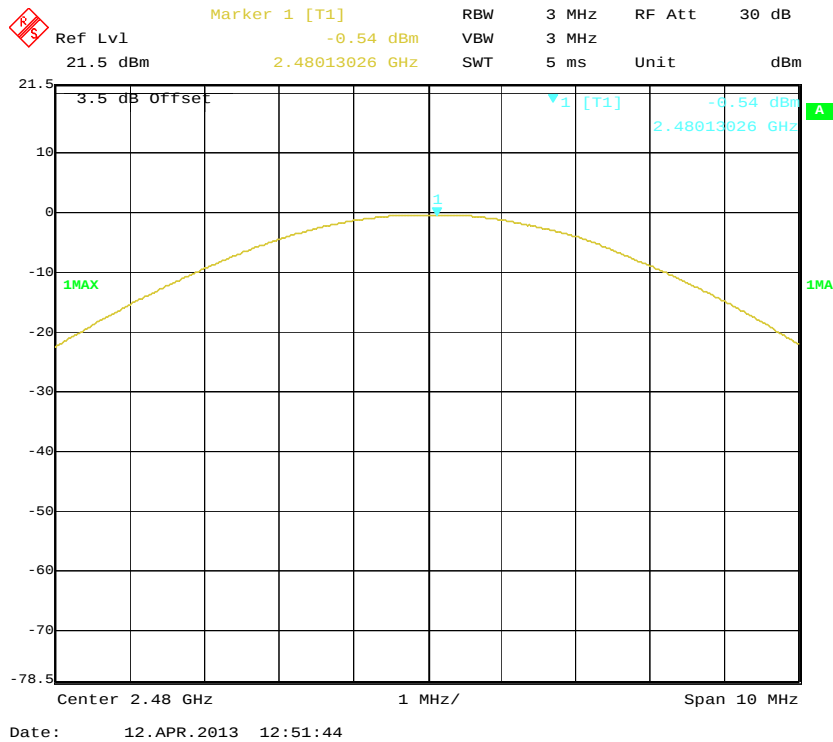


EDR(8DPSK): Low Channel

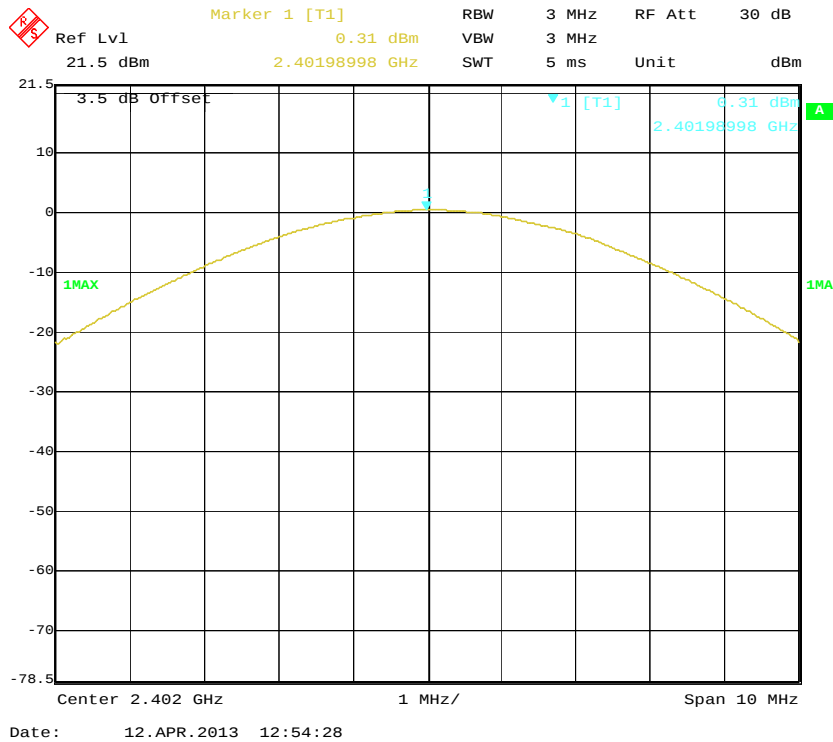

EDR(8DPSK): Middle Channel

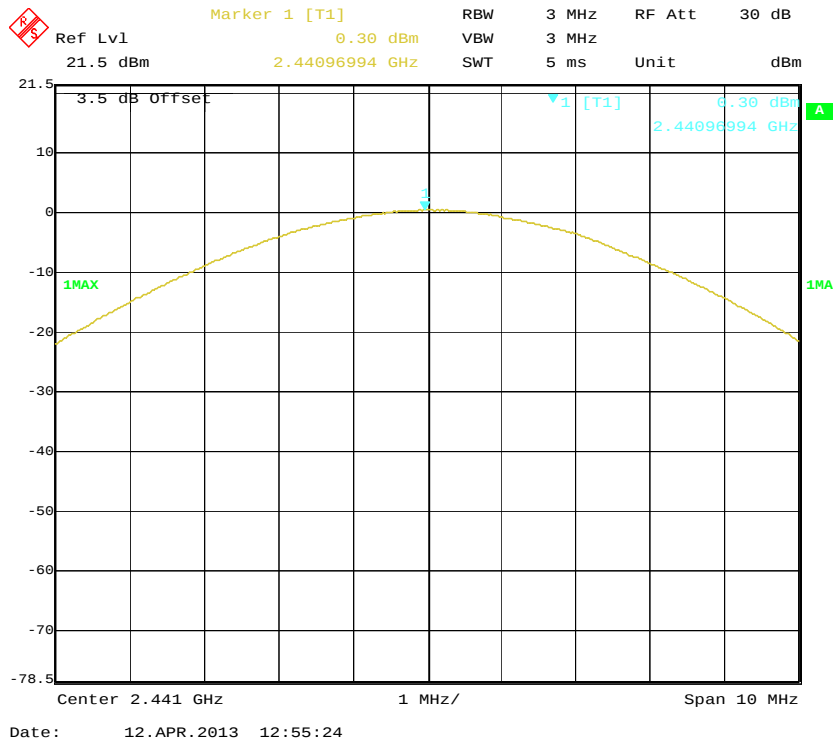

EDR(8DPSK): High Channel

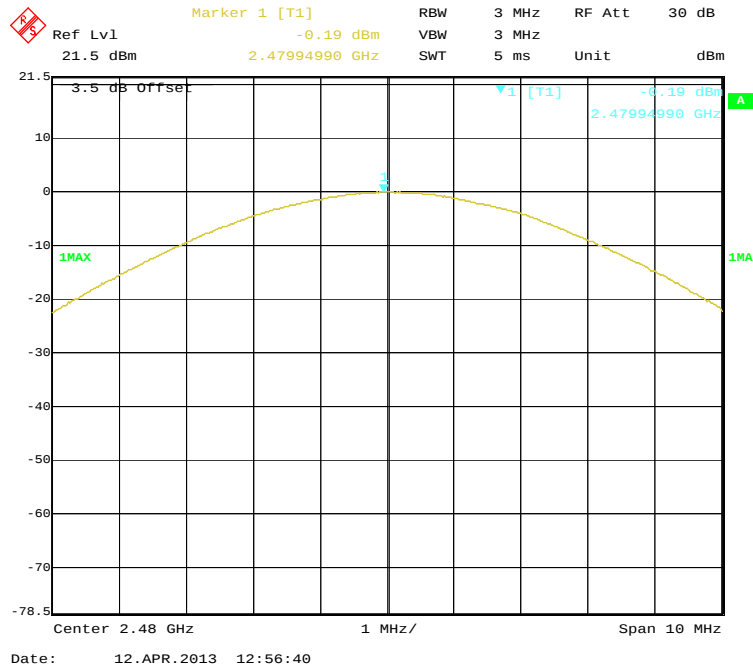

FCC §15.247(d) - BAND EDGES

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to FCC public notice DA 00-705 released on March 30, 2000.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 300 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BIZI	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Mick Yin on 2013-03-29.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

Frequency Band	Delta Peak to band emission (dBc)	$\geq$ Limit (dBc)	Result
BDR mode (GFSK)			
Left band	46.20	20	Pass
Right band	49.21	20	Pass
EDR Mode ($\pi/4$ -DQPSK)			
Left band	46.94	20	Pass
Right band	48.67	20	Pass
EDR Mode (8 DPSK)			
Left band	47.81	20	Pass
Right band	49.15	20	Pass


BDR (GFSK): Band Edge-Left Side

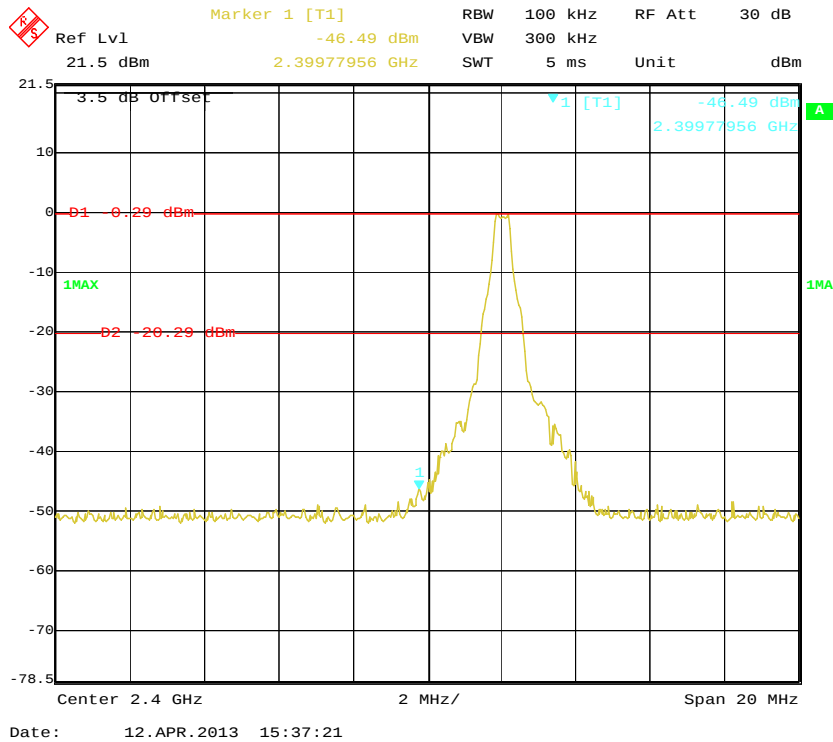


BDR (GFSK): Band Edge-Right Side

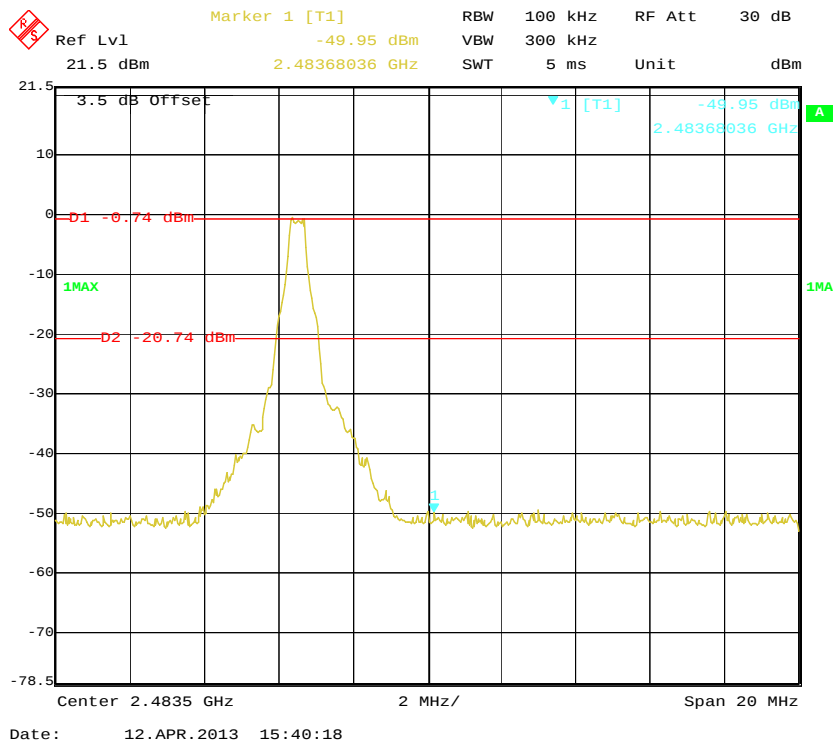


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

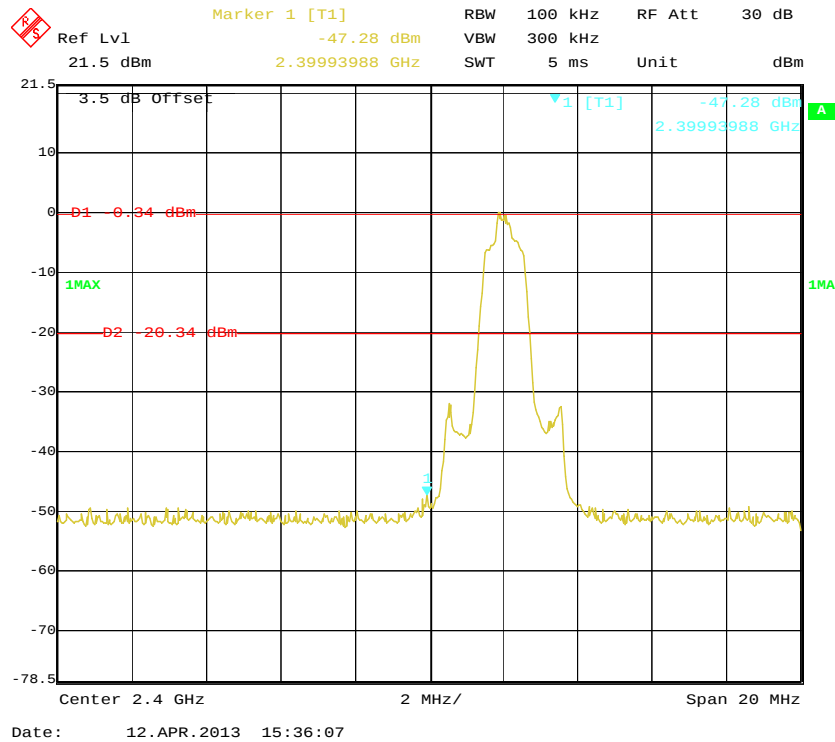


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

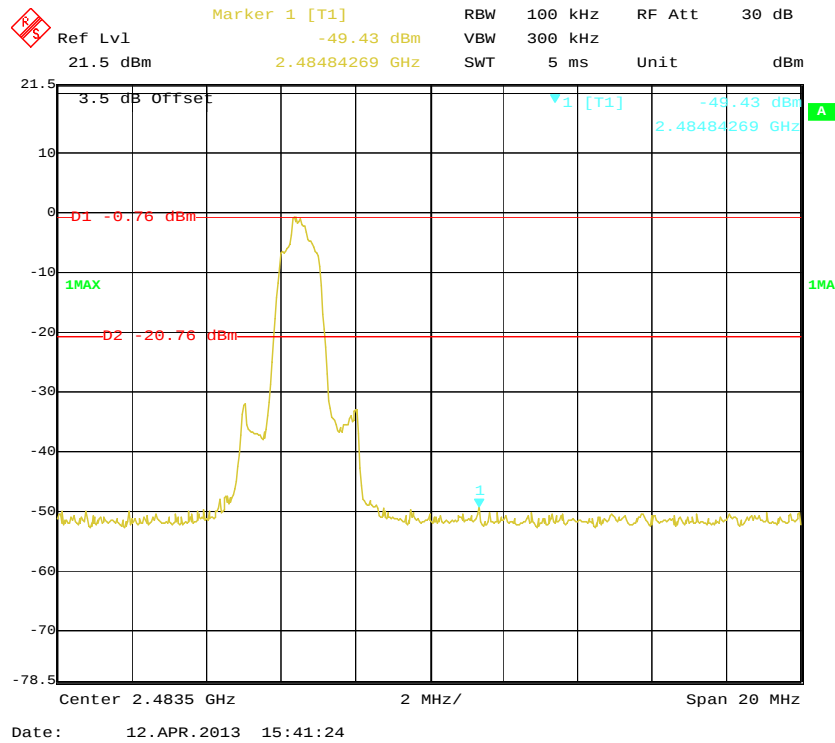

EDR (8DPSK): Band Edge-Left Side

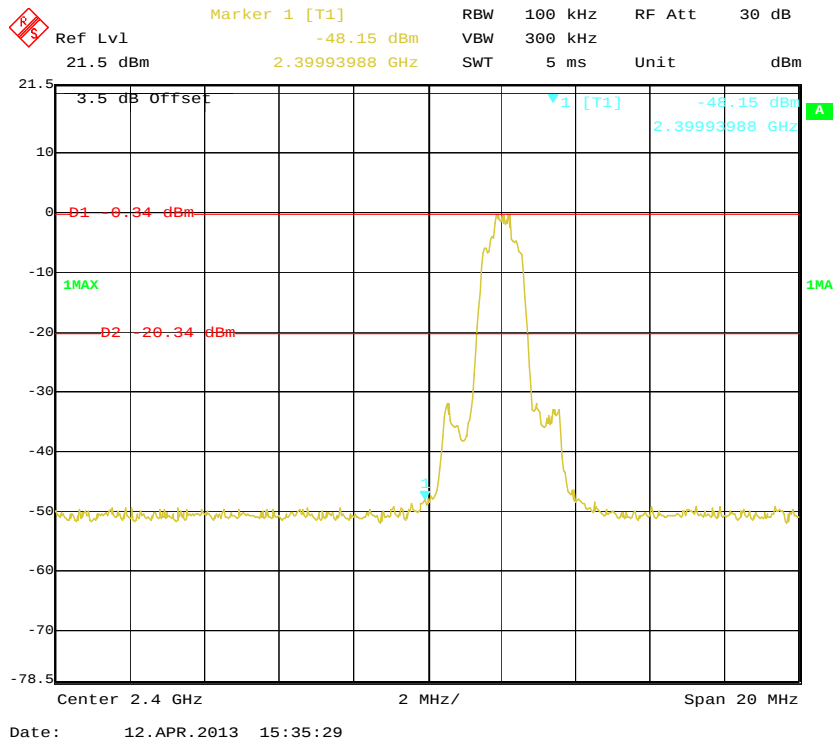

BDR (8DPSK): Band Edge-Right Side

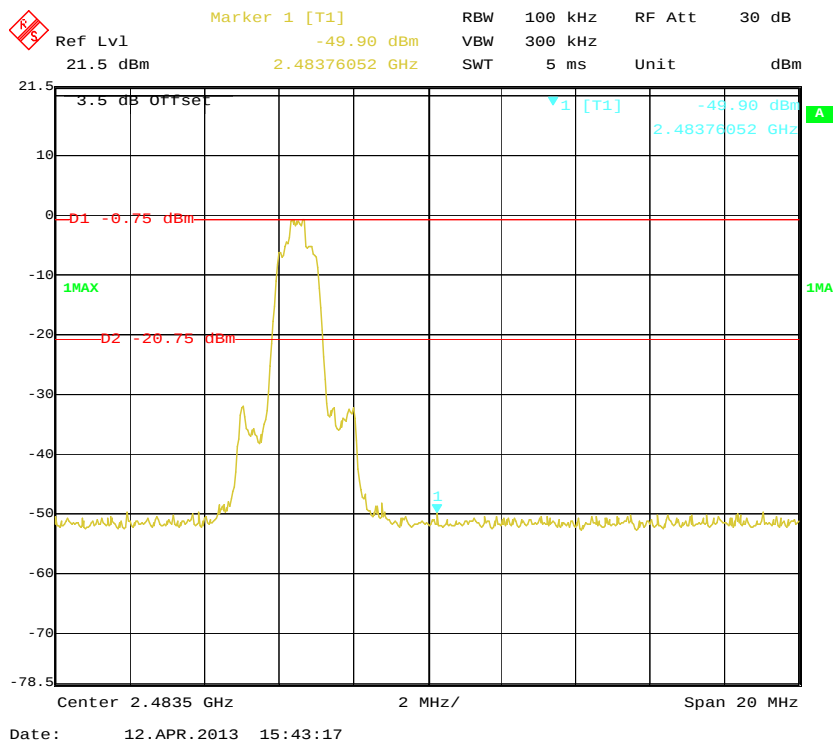

PRODUCT SIMILARITY DECLARATION LETTER



Company: Reality Robotics Limited
Add: 501 Silverside Rd, STE 105, #3100 Wilmington, DE, USA
Tel: 302 482 8186

DECLARATION OF SIMILARITY

April 25, 2013

To:
Bay Area Compliance Laboratories Corp. (ShenZhen)
6/F, the 3rd Phase of Wan Li Industrial Building, Shihua Road,
FuTian Free Trade Zone, Shenzhen, Guangdong, P.R.China

Dear Sir or Madam:

We Reality Robotics Limited hereby declare that product: BERO – Be The Robot, model numbers starting with 128XX, where XX is from 01 to 10 all share the same body PCB and vary just in the color of the plastic injection parts and have identical electronic functions, The model 12801 was tested by BACL, the results of which are featured in BACL project: RSZ130325831 .

Please contact me should there be need for any additional clarification or information.

Best Regards,

Signature:

A handwritten signature in black ink, appearing to read "Michael Trzeciecki".

Michael Trzeciecki

President

***** END OF REPORT *****