

# TEST REPORT

**Reference No.**..... : WTS16S0755374E  
**FCC ID** ..... : SW9-GQ3028  
**Applicant**..... : SHENZHEN GOTRON ELECTRONIC CO.,LTD.  
**Address**..... : Rm 24B, Block C of Electronic &Technology Building, 2070  
ShenNan Middle Road, Shenzhen, China  
**Manufacturer** ..... : SHENZHEN GOTRON ELECTRONIC CO.,LTD.  
**Address**..... : 518, 5F, R&D building, Tsinghua Hi-Tech park(North) Nanshan  
district, Shenzhen 518057 P.R.China  
**Product Name**..... : Mobile Phone  
**Model No.** ..... : GQ3028  
**Brand**..... : ulefone  
**Standards** ..... : FCC PART15 SUBPART B: 2015  
**Date of Receipt sample** .... : Jul. 11, 2016  
**Date of Test** ..... : Jul. 12 – Aug. 06, 2016  
**Date of Issue**..... : Aug. 08, 2016  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen,  
Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:

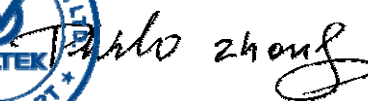

Philo Zhong / Manager

## 1 Test Summary

Test Item	Test Requirement	Class	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B: 2015	Class B	ANSI C63.4: 2014	Pass
Radiated Emission 30MHz to 1GHz)	FCC PART 15, SUBPART B: 2015	Class B	ANSI C63.4: 2014	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B: 2015	Class B	ANSI C63.4: 2014	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

## 2 Contents

	Page
<b>COVER PAGE</b> .....	<b>1</b>
<b>1 TEST SUMMARY</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 REPORT REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 STANDARDS APPLICABLE FOR TESTING .....	5
4.4 TEST FACILITY .....	6
4.5 SUBCONTRACTED .....	6
4.6 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
5.1 EQUIPMENT LIST .....	7
5.2 DESCRIPTION OF SUPPORT UNITS .....	8
5.3 MEASUREMENT UNCERTAINTY .....	8
<b>6 EMISSION TEST RESULTS</b> .....	<b>9</b>
6.1 POWER LINE CONDUCTED EMISSION, 150KHZ TO 30MHZ .....	9
6.2 RADIATION EMISSION, 30MHZ TO 1000MHZ .....	12
6.3 RADIATION EMISSION, ABOVE 1000MHZ .....	15
<b>7 PHOTOGRAPHS – TEST SETUP</b> .....	<b>18</b>
7.1 PHOTOGRAPH –POWER LINE CONDUCTED EMISSION TEST SETUP AT TEST SITE 1# .....	18
7.2 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR 30~1000MHZ AT TEST SITE 2# .....	18
7.3 PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR ABOVE 1GHZ AT TEST SITE 1# .....	19

### 3 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S0755374E	NONE	Original	Aug. 08, 2016

## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: GQ3028
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band II/IV
LTE Bnad(s)	: LTE Band 2/4/7/17
Wi-Fi Specification	: 2.4G: 802.11b/g/n HT20 HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: KZ_F5B_MB_V3.0_151111
Software Version	: F5C_GQ3028AF3_13E_20160705
Storage Location	: Internal Storage

### 4.2 Details of E.U.T.

Technical Data	: Battery DC 3.8V, 3250mAh DC 5V, 1.5A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.4A)
Adapter	: Manufacture: Shenzhen Hengchangshengding Electronics Co.,LTD. Model No.: HCSD-1685015

### 4.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC PART 15, SUBPART B: Electronic Code of Federal Regulations- Unintentional Radiators 2015

#### 4.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

#### 4.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab:      N/A

Lab address: N/A

Test items:      N/A

#### 4.6 Abnormalities from Standard Conditions

None.

## 5 Equipment Used during Test

### 5.1 Equipment List

<b>Conducted Emissions Test Site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2015	Sep.14,2016
2.	LISN	R&S	ENV216	101215	Sep.15,2015	Sep.14,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2015	Sep.14,2016
<b>Conducted Emissions Test Site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2016	Apr.18,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2016	Apr.18,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2016	Apr.18,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.19,2016	Apr.18,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2016	Apr.09,2017
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
<b>Item</b>	<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No</b>	<b>Last Calibration Date</b>	<b>Calibration Due Date</b>
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016

4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016
<b>RF Conducted Testing</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

## 5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
MacBook Air	APPLE	A1465	C17KTQDNF5N7

## 5.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±3.64dB	(1)
Radiation Emission	30MHz~1000MHz	±5.03dB	(1)
	1GHz~18GHz	±5.47dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## 6 Emission Test Results

### 6.1 Power Line Conducted Emission, 150kHz to 30MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4 2014  
 Test Result ..... : Pass  
 Frequency Range ..... : 150kHz to 30MHz  
 Class ..... : Class B  
 Limit ..... :

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	60
5 to 30	60	50

#### 6.1.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 23°C  
 Humidity ..... : 53.6%RH  
 Atmospheric Pressure ..... : 101kPa

EUT Operation:

Input Voltage ..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting mode, Earphone mode, Adapter mode  
 Remark ..... : The worse case Data transmitting mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 6.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the ANSI C63.4 2014.

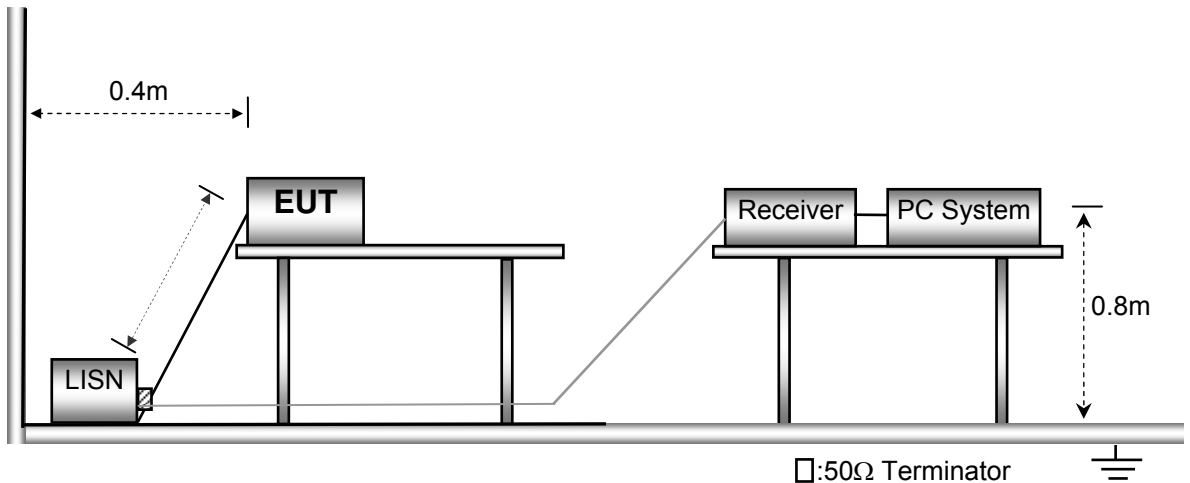


### 6.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line. According to the data in below section 6.1.4, the EUT complied with the FCC PART 15, SUBPART B standards.


### 6.1.4 Power Line Conducted Emission Test Data

Live Line:

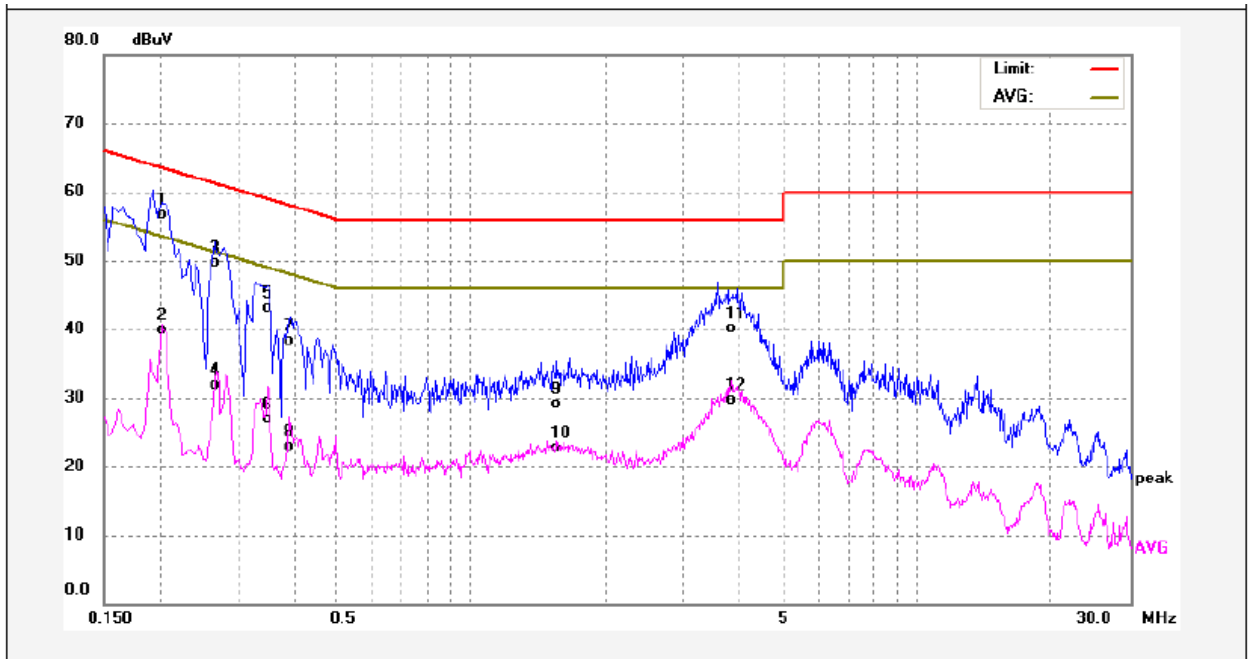

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.2020	46.53	10.26	56.79	63.52	-6.73	QP	
2	0.2020	29.57	10.26	39.83	53.52	-13.69	AVG	
3	0.2700	39.49	10.27	49.76	61.12	-11.36	QP	
4	0.2700	21.55	10.27	31.82	51.12	-19.30	AVG	
5	0.3500	32.81	10.29	43.10	58.96	-15.86	QP	
6	0.3500	16.61	10.29	26.90	48.96	-22.06	AVG	
7	0.3899	28.13	10.27	38.40	58.06	-19.66	QP	
8	0.3899	12.72	10.27	22.99	48.06	-25.07	AVG	
9	1.5540	18.76	10.43	29.19	56.00	-26.81	QP	
10	1.5540	12.18	10.43	22.61	46.00	-23.39	AVG	
11	3.8380	29.67	10.51	40.18	56.00	-15.82	QP	
12	3.8380	19.25	10.51	29.76	46.00	-16.24	AVG	

Neutral Line:

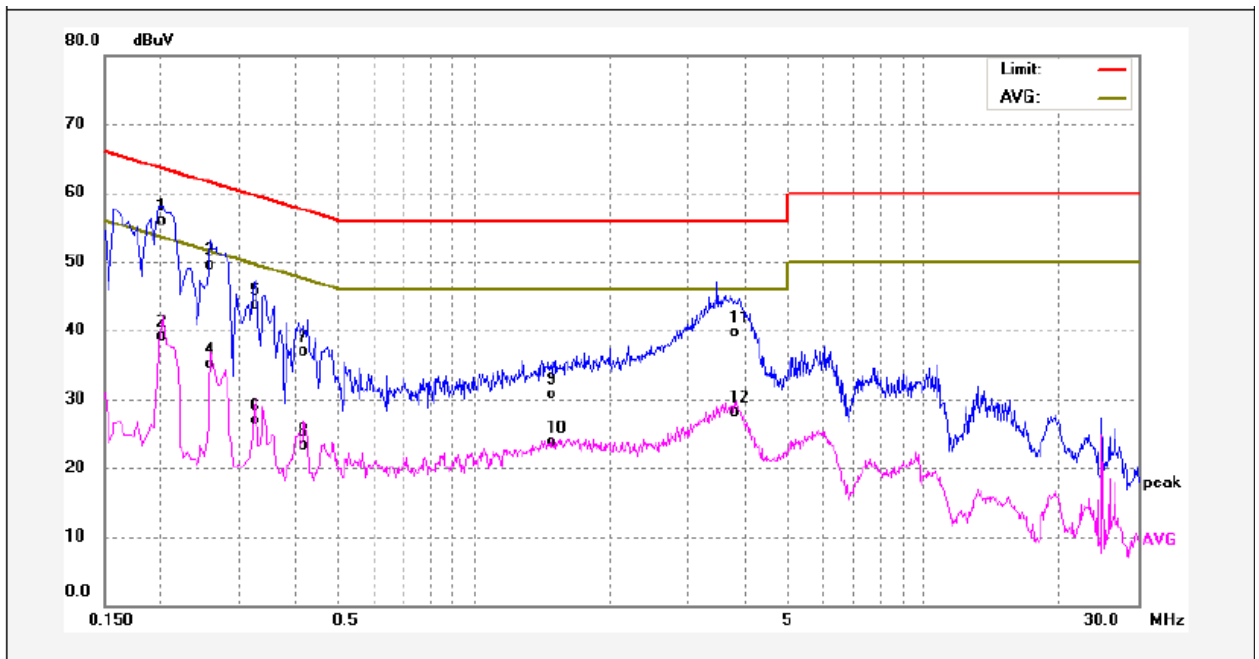

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.2020	45.68	10.26	55.94	63.52	-7.58	QP	
2	0.2020	28.90	10.26	39.16	53.52	-14.36	AVG	
3	0.2580	39.29	10.26	49.55	61.49	-11.94	QP	
4	0.2580	24.94	10.26	35.20	51.49	-16.29	AVG	
5	0.3260	33.36	10.28	43.64	59.55	-15.91	QP	
6	0.3260	16.65	10.28	26.93	49.55	-22.62	AVG	
7	0.4180	26.62	10.27	36.89	57.49	-20.60	QP	
8	0.4180	13.02	10.27	23.29	47.49	-24.20	AVG	
9	1.4860	20.30	10.43	30.73	56.00	-25.27	QP	
10	1.4860	13.24	10.43	23.67	46.00	-22.33	AVG	
11	3.8260	29.15	10.51	39.66	56.00	-16.34	QP	
12	3.8260	17.69	10.51	28.20	46.00	-17.80	AVG	

## 6.2 Radiation Emission, 30MHz to 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4 2014  
 Test Result ..... : Pass  
 Frequency Range ..... : 30MHz to 1000MHz  
 Class. : Class B  
 Limit..... :

Frequency (MHz)	Distance (Meter)	Limit (dB $\mu$ V/m)
		Quas -peak
30 to 88	3	40
88 to 216	3	43.5
216 to 960	3	46
960 to 1000	3	54

### 6.2.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.5°C  
 Humidity ..... : 52.6%RH  
 Atmospheric Pressure ..... : 101.2kPa

EUT Operation:

Input Voltage ..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting with PC mode, Earphone mode  
 Remark ..... : The worse case Data transmitting with PC mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

### 6.2.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

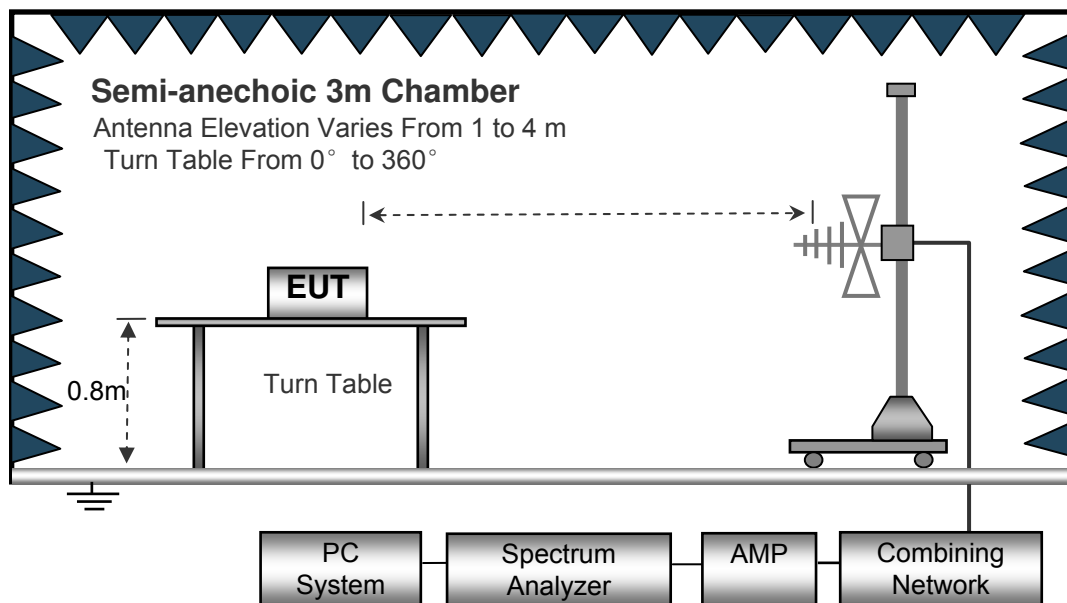


### 6.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Quasi-peak measurements were performed if peak emissions were within 6dB of the Quasi-peak limit line.

### 6.2.4 Radiated Emission Test Data, 30MHz to 1000MHz


Antenna Polarization: Vertical

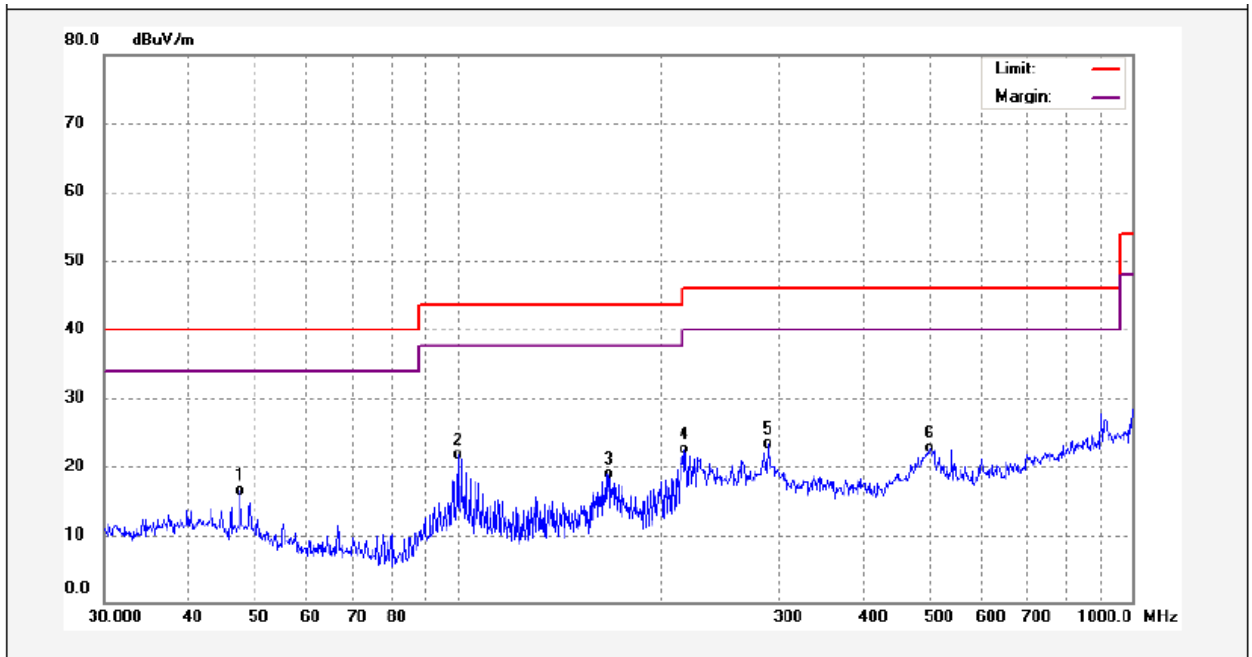

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.8260	32.83	-16.40	16.43	40.00	-23.57	QP	
2	100.2286	39.83	-18.17	21.66	43.50	-21.84	QP	
3	167.8243	37.71	-18.77	18.94	43.50	-24.56	QP	
4	216.7828	39.55	-17.14	22.41	46.00	-23.59	QP	
5	289.0021	38.46	-15.24	23.22	46.00	-22.78	QP	
6	501.1790	33.18	-10.43	22.75	46.00	-23.25	QP	

Factor= antenna factor + cable loss - preamplifier factor

Antenna Polarization: Horizontal

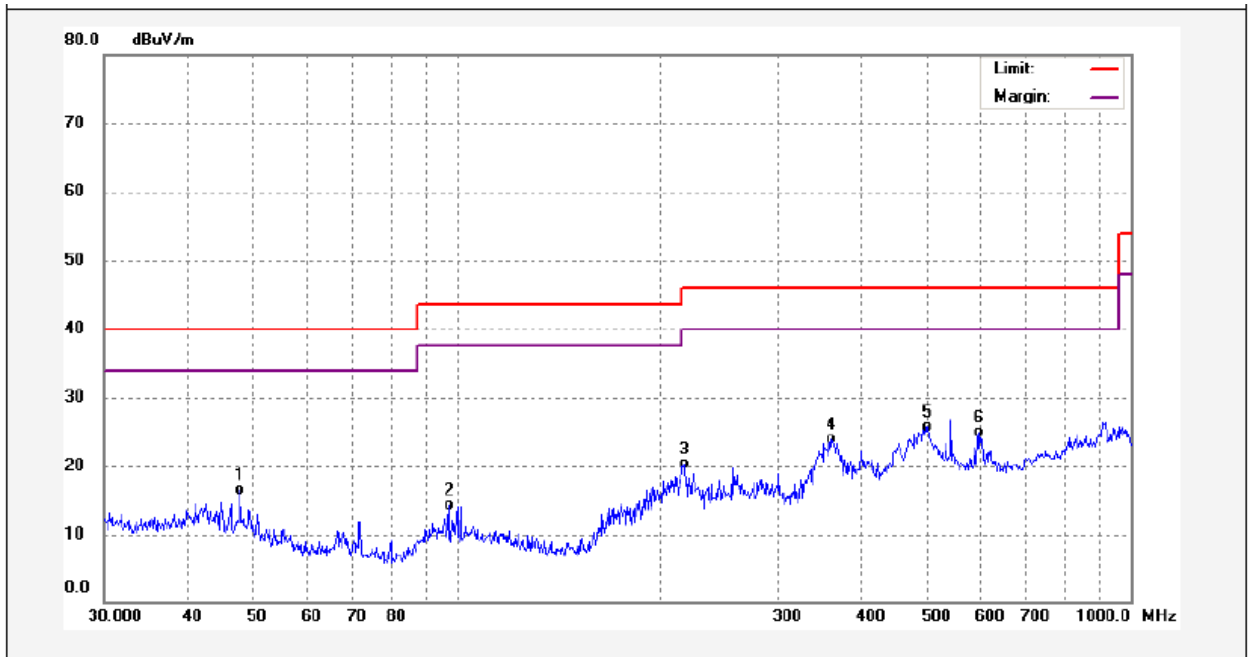

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	47.8260	32.83	-16.40	16.43	40.00	-23.57	QP	
2	97.4560	32.40	-18.02	14.38	43.50	-29.12	QP	
3	218.3085	37.42	-17.20	20.22	46.00	-25.78	QP	
4	359.1860	37.72	-13.90	23.82	46.00	-22.18	QP	
5	499.4247	36.12	-10.42	25.70	46.00	-20.30	QP	
6	595.1329	34.89	-10.04	24.85	46.00	-21.15	QP	

Factor= antenna factor + cable loss - preamplifier factor

### 6.3 Radiation Emission, Above 1000MHz

Test Requirement .....	:	FCC PART 15, SUBPART B
Test Method .....	:	ANSI C63.4 2014
Test Result .....	:	Pass
Frequency Range .....	:	1GHz~18GHz
Class.	:	Class B
Limit. ....	:	

Frequency Range (MHz)	Distance (Meter)	Average Limit dB(uV/m)	Peak Limit (dBuV/m)
Above 1GHz	3	54	74

#### 6.3.1 E.U.T. Operation

Operating Environment:


Temperature .....	:	22.4°C
Humidity .....	:	52.3%RH
Atmospheric Pressure .....	:	101.3kPa

EUT Operation:

Input Voltage .....	:	DC 5V by Adapter Input AC 120V/60Hz
Operating Mode .....	:	Data transmitting with PC mode, Earphone mode
Remark .....	:	The worse case Data transmitting mode is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 6.3.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

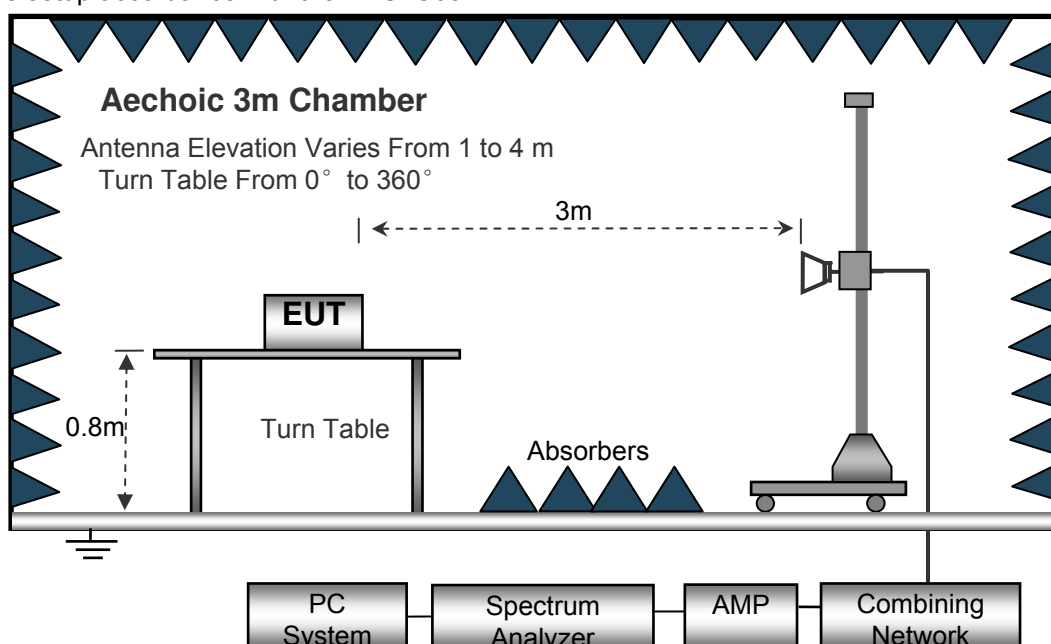


### 6.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Average measurements were performed if peak emissions were within 6dB of the average limit line

### 6.3.4 Radiated Emission Test Data, Above 1000MHz

Antenna Polarization: Vertical

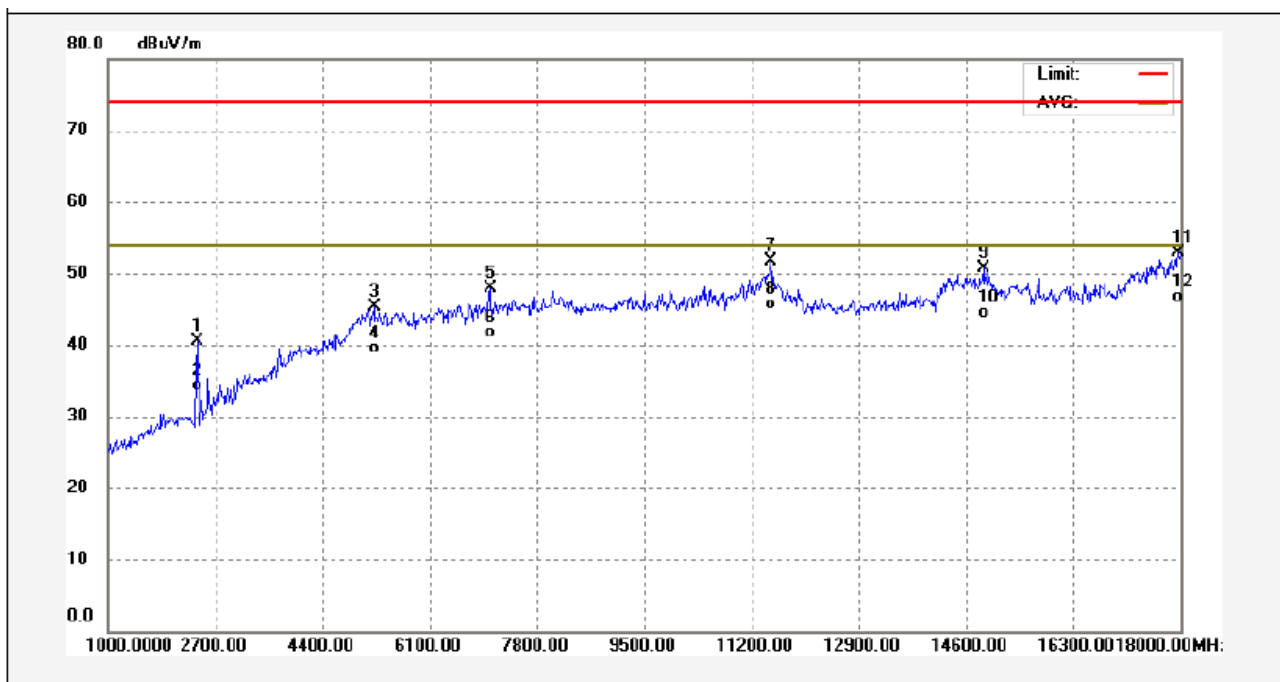


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2411.000	55.72	-15.26	40.46	74.00	-33.54	peak	
2	2411.000	49.58	-15.26	34.32	54.00	-19.68	AVG	
3	5216.000	46.85	-1.63	45.22	74.00	-28.78	peak	
4	5216.000	41.09	-1.63	39.46	54.00	-14.54	AVG	
5	7052.000	46.68	1.14	47.82	74.00	-26.18	peak	
6	7052.000	40.54	1.14	41.68	54.00	-12.32	AVG	
7	11506.000	44.67	7.06	51.73	74.00	-22.27	peak	
8	11506.000	38.60	7.06	45.66	54.00	-8.34	AVG	
9	14872.000	40.38	10.30	50.68	74.00	-23.32	peak	
10	14872.000	34.22	10.30	44.52	54.00	-9.48	AVG	
11	17966.000	37.82	15.04	52.86	74.00	-21.14	peak	
12	17966.000	31.73	15.04	46.77	54.00	-7.23	AVG	

Factor= antenna factor + cable loss - preamplifier factor



Antenna Polarization: Horizontal

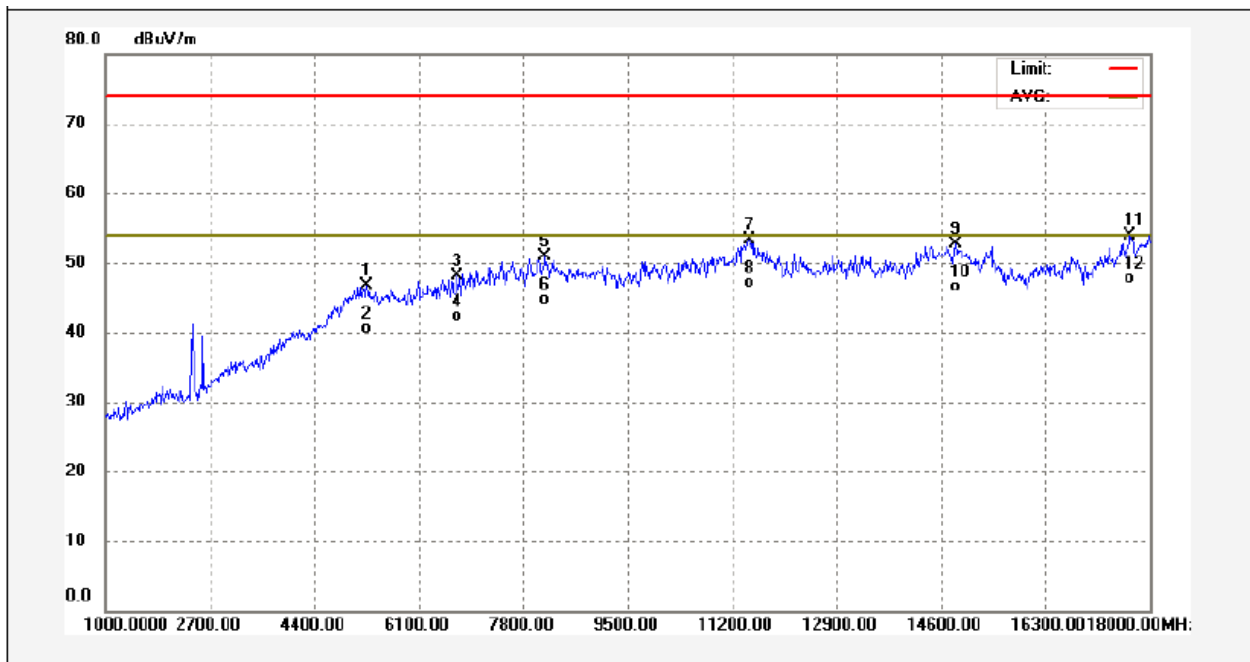

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5250.000	48.47	-1.74	46.73	74.00	-27.27	peak	
2	5250.000	42.31	-1.74	40.57	54.00	-13.43	AVG	
3	6729.000	47.74	0.37	48.11	74.00	-25.89	peak	
4	6729.000	41.86	0.37	42.23	54.00	-11.77	AVG	
5	8157.000	49.50	1.34	50.84	74.00	-23.16	peak	
6	8157.000	43.28	1.34	44.62	54.00	-9.38	AVG	
7	11489.000	46.25	7.05	53.30	74.00	-20.70	peak	
8	11489.000	40.07	7.05	47.12	54.00	-6.88	AVG	
9	14838.000	42.42	10.31	52.73	74.00	-21.27	peak	
10	14838.000	36.27	10.31	46.58	54.00	-7.42	AVG	
11	17677.000	39.83	14.05	53.88	74.00	-20.12	peak	
12	17677.000	33.62	14.05	47.67	54.00	-6.33	AVG	


Factor= antenna factor + cable loss - preamplifier factor

## 7 Photographs – Test Setup

### 7.1 Photograph –Power Line Conducted Emission Test Setup at Test Site 1#



### 7.2 Photograph – Radiated Emission Test Setup for 30~1000MHz at Test Site 2#

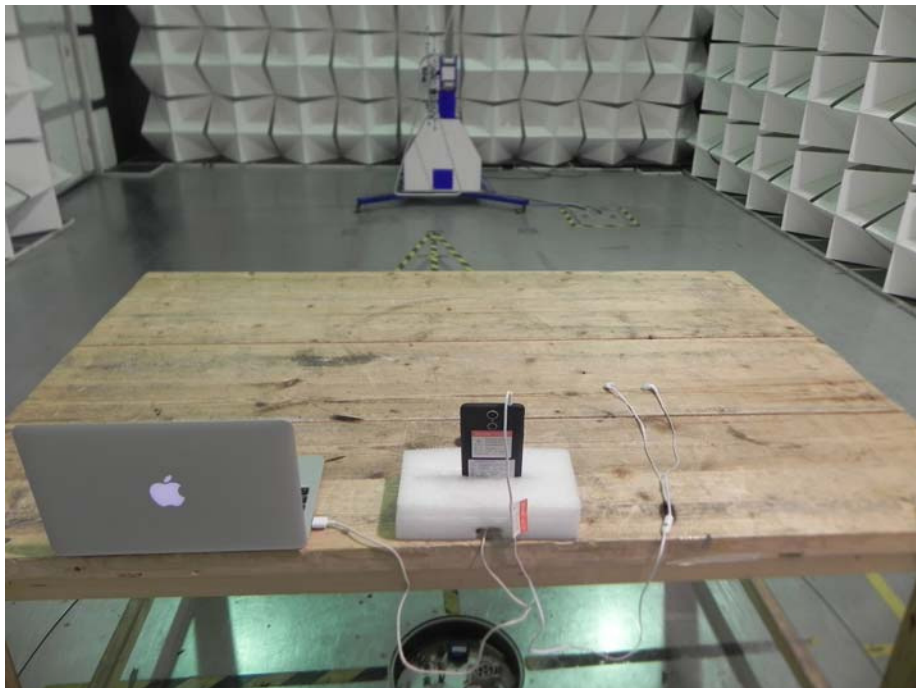

### 7.3 Photograph – Radiated Emission Test Setup for Above 1GHz at Test Site 1#



====End of Report====