

## FCC EVALUATION REPORT FOR CERTIFICATION

*KOREA Standard Technology*

*Test report No.: KST-FCC0545*

**Applicant's Name :** SUNGJIN NEOTECH Co.,Ltd.

**Applicant's Address :** 106, Suntechcity B/D, 513-15 Sangdaewon-Dong,  
Jungwon-Gu, Seongnam City, Kyonggi-Do, Korea

**Manufacturer's Name :** SUNGJIN NEOTECH Co.,Ltd.

**Manufacturer's Address :** 106, Suntechcity B/D, 513-15 Sangdaewon-Dong,  
Jungwon-Gu, Seongnam City, Kyonggi-Do, Korea

**EUT's:**

**FCC ID** : SWMMV190F

**Product Name** : TFT LCD MONITOR

**Model Number(s)** : MV190F

**Product Options** : N/A

**Category** : FCC Part 15 subpart B

Class B Computing Digital Device

### Supplementary Information


The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Test Date : September 23, 2005**

**Issued Date : October 10, 2005**

**Tested by:**

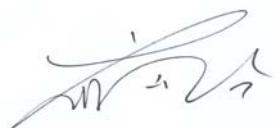

Choi, Jae-Rak

**Approved by:**



Lee, Weon-Woo



# EMI TEST REPORT

Report reference No: KST-FCC0545



## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics



# EMI TEST REPORT

Report reference No: KST-FCC0545



## 1. Description of Device

1) Kind of equipment: TFT LCD MONITOR  
2) FCC ID: SWMMV190F  
3) Model Name: MV190F  
4) Serial No.: None  
5) Type of Sample Tested: Pre-production  
6) High Frequency Used: 24.576MHz, 12.000MHz  
7) Adapter Model name : LSE0107A1240  
Manufacturer : LI SHIN INTERNATIONAL  
ENTERPRISE CORP.  
Serial no : A30531205845  
INPUT: 100-240 V, 50/60 Hz, 1.0 A  
OUTPUT: 12.0 V, 3.33 A  
1phase AC120 V, 60 Hz  
9) Power :  
10) Tested Power supply:  
11) Date of Manufacture: September , 2005  
12) Manufacture: SUNGJIN NEOTECH Co., Ltd.  
13) Description of Operating: Scroll All "H" Character  
Resolution 1024\*768  
Vertical Frequency: 75Hz  
14) Dates of Test: September 23, 2005  
15) Place of Tests: Korea Standard Technology EMC site  
16) Test Report No: KST-FCC0545



# EMI TEST REPORT

Report reference No: KST-FCC0545



## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office & Test Lab :

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

**MIC**(Ministry of Information and Communication) Number: **KR0041**

**FCC** Filing Number. : **525762**

**VCCI** Membership Number : **2005**

**VCCI** Registration Number : **R-1657 / C-1763**

KOSTEC Co.,Ltd.

180-254,Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 4 of 21  
October 10, 2005




# EMI TEST REPORT

Report reference No: KST-FCC0545




## 3. Route Map of Measurement Facility

Korea

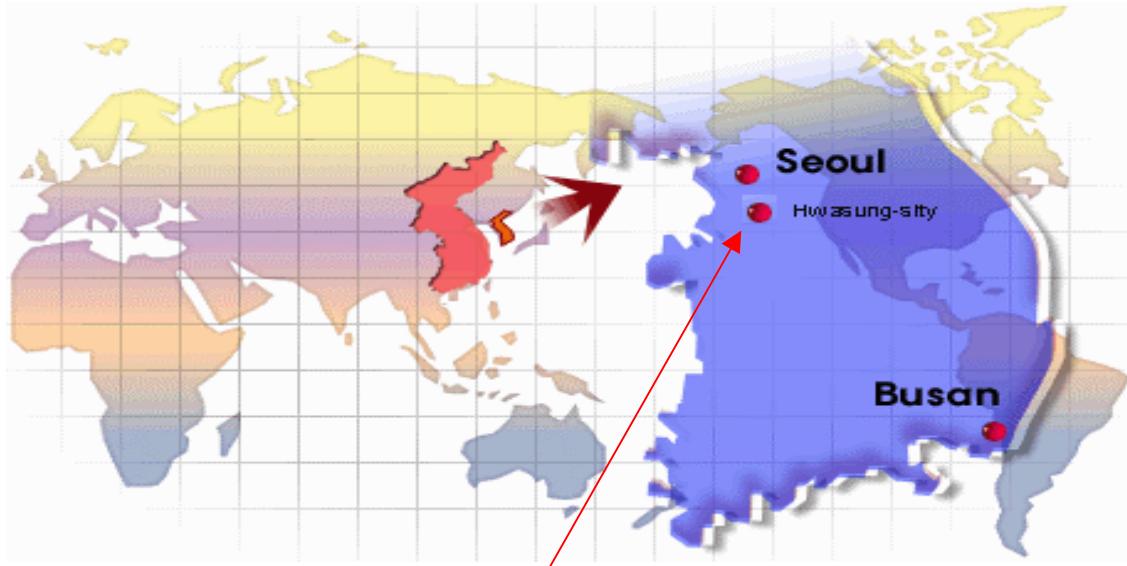

Hwasung-shi (open area test site)

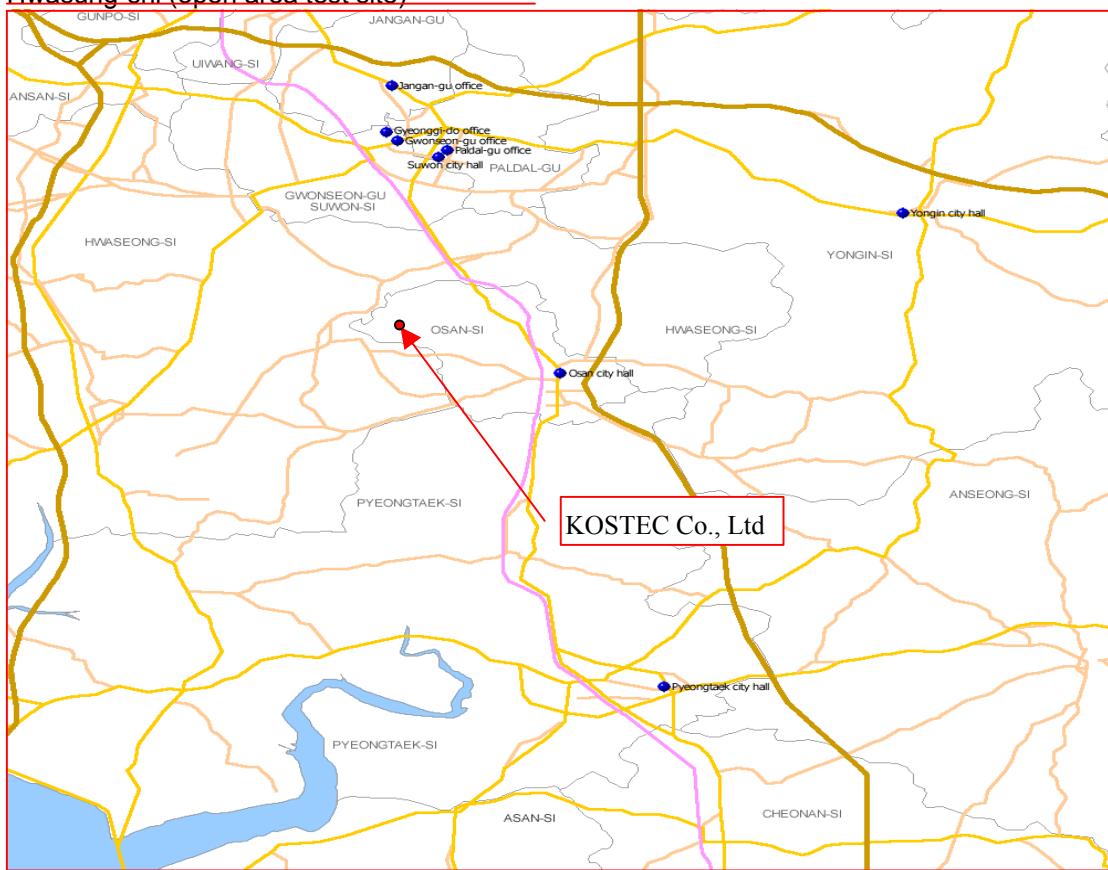

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 5 of 21  
October 10, 2005



# EMI TEST REPORT

Report reference No: KST-FCC0545



## 4. Test System Configuration

### Operation Environment

	<u>Temperature</u> ( °C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
10 m Open Area site	27	42	1010
Shielded room:	24	50	1010

### Test site

These testing were performed following locations :

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80, 81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 6 of 21  
October 10, 2005



# EMI TEST REPORT

Report reference No: KST-FCC0545



## 5. Description of E.U.T.

### Product Description

Manufactured By:	SUNGJIN NEOTECH Co.,Ltd.
Address:	106, Suntechcity B/D, 513-15 Sangdaewon-Dong, Jungwon-Gu, Seongnam City, Kyonggi-Do, Korea
Model:	MV190F
Serial Number:	None

### Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	BoEhydis	HT190E01-100	9BQA0585611000173
AD Board	SUNGJIN NEOTECH Co.,Ltd.	None	2002052613
Inverter Board	None	None	None
OSD Board	SUNGJIN NEOTECH Co.,Ltd.	None	None
USB HUB Board	SUNGJIN NEOTECH Co.,Ltd.	050701	2005052926

### EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.2	-	DC INLET	Ac/dc adapter	Main power source
VGA In	Yes	1.5	Y	D-sub	EUT	PC
Audio(IN)	Yes	1.5	-	Jack	EUT	PC
Audio(OUT)	Yes	1.0	-	Jack	EUT	Earphone
PS/2	Yes	1.2	-	Din	PC	Keyboard
PS/2	Yes	1.5	-	Din	PC	Mouse
Parallel	Yes	1.5	Y	D-sub	PC	Printer
USB	Yes	1.5	Y	USB	EUT	PC
USB	-	-	-	USB	USB Memory	EUT

### Operating conditions

The operating mode/system were as follows in details:

Operating: . After Connected from personal computer to E.U.T by RGB cable(D-sub 15 pin). And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 7 of 21  
October 10, 2005



# EMI TEST REPORT

Report reference No: KST-FCC0545



## 7. TEST RESULTS

### 7.1 Conducted emission

Measurement procedure

#### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2006.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2006.4.23	●
	ESH3-Z5	100147	R&S	2006.8.12	●

Measurement uncertainty

Conducted Emission measurement :  $\pm$  2.4 (K=2)

Test data

< Class B >

FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE POL	LOSS (dB)	LIMIT(dB $\mu$ V)		MARGIN(dB)	
	QP	AV			QP	AV	QP	AV
0.206	49.30	40.58	L	0.29	63.37	53.37	14.36	13.08
0.278	40.34	32.40	L	0.29	60.88	50.88	20.83	18.77
0.550	37.70	35.71	N	0.90	56.00	46.00	19.20	11.19
4.526	41.13	24.88	N	0.68	56.00	46.00	15.55	21.80
9.114	35.50	27.32	N	1.28	60.00	50.00	25.78	23.96
11.550	36.75	27.65	N	1.43	60.00	50.00	24.68	23.78
17.154	36.60	26.73	N	1.77	60.00	50.00	25.17	25.04

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 9 of 21  
October 10, 2005




# EMI TEST REPORT

Report reference No: KST-FCC0545




## Conducted emission test graph

### Line. Live

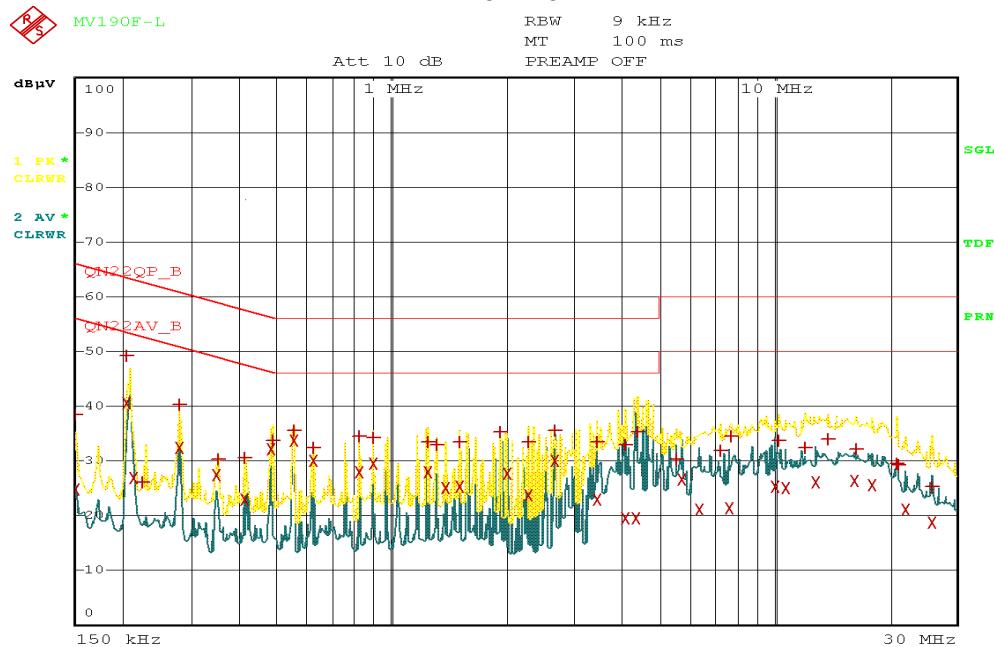

Date: 23.SEP.2005 13:45:12

### Line. Neutral

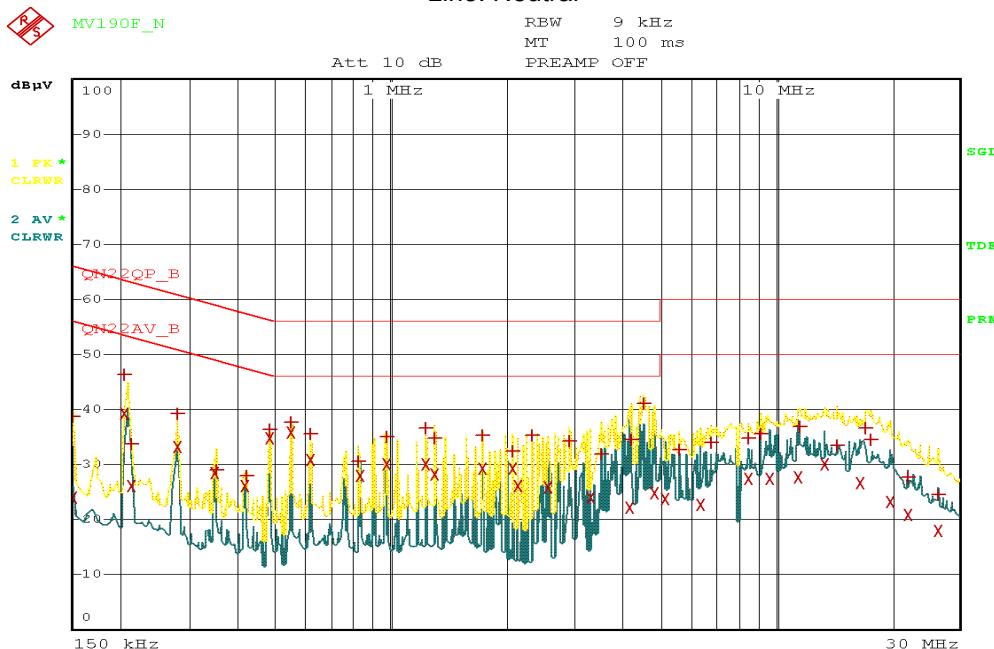

Date: 23.SEP.2005 13:52:00

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 10 of 21  
October 10, 2005



# EMI TEST REPORT



Report reference No: KST-FCC0545

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector.

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2006.3.17
Ultra broadband antenna	HL562	100075	R&S	2006.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10 m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-

### Measurement uncertainty

#### Radiated Emission measurement :

30-300 MHz +3.96 dB / -4.04 dB

300-1000 MHz +3.04 dB / -3.00 dB

### Test data

#### < Class B >

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
70.93	16.10	V	1.50	180	6.50	3.10	25.70	40.0	14.30
110.38	19.40	V	1.50	180	9.20	3.80	32.40	43.5	11.10
135.53	21.70	H	2.40	90	8.30	4.10	34.10	43.5	9.40
168.79	22.26	H	2.40	110	7.40	4.34	34.00	46.0	12.00
279.17	16.85	H	2.00	110	10.36	6.19	33.40	46.0	12.60
324.67	20.54	V	1.80	180	11.72	6.74	39.00	46.0	7.00
415.55	7.90	H	1.80	90	13.85	7.55	29.30	46.0	16.70
572.73	7.16	H	1.60	110	16.64	9.20	33.00	46.0	13.00

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3m Open area site

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 21  
October 10, 2005

