

## FCC EVALUATION REPORT FOR CERIFICATION

*KOREA Standard Technology*

*Test report No.: KST-FCC0549*

**Applicant's Name** : SNC Co., Ltd.

**Applicant's Address** : Rm. 401, Anyang-Megavalley, 799, Gwanyang-dong, Dongan-gu, anyang-si, Gyeonggi-do, Korea

**Manufacturer's Name** : SNC Co., Ltd.

**Manufacturer's Address** : Rm. 401, Anyang-Megavalley, 799, Gwanyang-dong, Dongan-gu, anyang-si, Gyeonggi-do, Korea

**EUT's:**

**FCC ID** : SWMMV190T

**Product Name** : LCD TV & MONITOR

**Model Number(s)** : MV190T

**Product Options** : N/A

**Category** : FCC Part 15 subpart B

Class B Computing Digital Device

### Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**Test Date : December 6, 2005**

**Issued Date : December 8, 2005**

**Tested by:**



Choi, Jae-Rak

**Approved by:**



Lee, Weon-Woo



# EMI TEST REPORT

Report reference No: KST-FCC0549



## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Test system configuration
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Schematics



# EMI TEST REPORT

Report reference No: KST-FCC0549



## 1. Description of Device

1) Kind of equipment: LCD TV & MONITOR  
2) FCC ID: SWMMV190T  
3) Model Name: MV190T  
4) Serial No.: None  
5) Type of Sample Tested: Pre-production  
6) High Frequency Used: 24.576 MHz, 12.000 MHz, 27.000 MHz  
7) Adapter Model name : 043-124000-I3  
Manufacturer : Xlang Fa Electronics Co, Ltd.  
Serial no : 5Y053089B  
9) Power : INPUT: 100-240 V, 50/60 Hz, 1.5 A  
OUTPUT: 12.0 V, 4.0 A  
9) Tested Power supply: 1phase AC120 V, 60 Hz  
  
12) Date of Manufacture: December, 2005  
13) Manufacture: SNC Co., Ltd.  
  
14) Description of Operating: Scroll All "H" Character  
Resolution 1024\*768  
Vertical Frequency: 75Hz  
15) Dates of Test: December 6, 2005  
16) Place of Tests: Korea Standard Technology EMC site  
17) Test Report No: KST-FCC0549



# EMI TEST REPORT

Report reference No: KST-FCC0549



## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office & Test Lab ;

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Gyeonggi-do, Korea

Telephone Number : 82-31-222-4251

Facsimile Number: 82-31-222-4252

**MIC**(Ministry of Information and Communication) Number: **KR0041**

**FCC** Filing Number. : **525762**

**VCCI** Membership Number : **2005**

**VCCI** Registration Number : **R-1657 / C-1763**




# EMI TEST REPORT

Report reference No: KST-FCC0549




## 3. Route Map of Measurement Facility

Korea

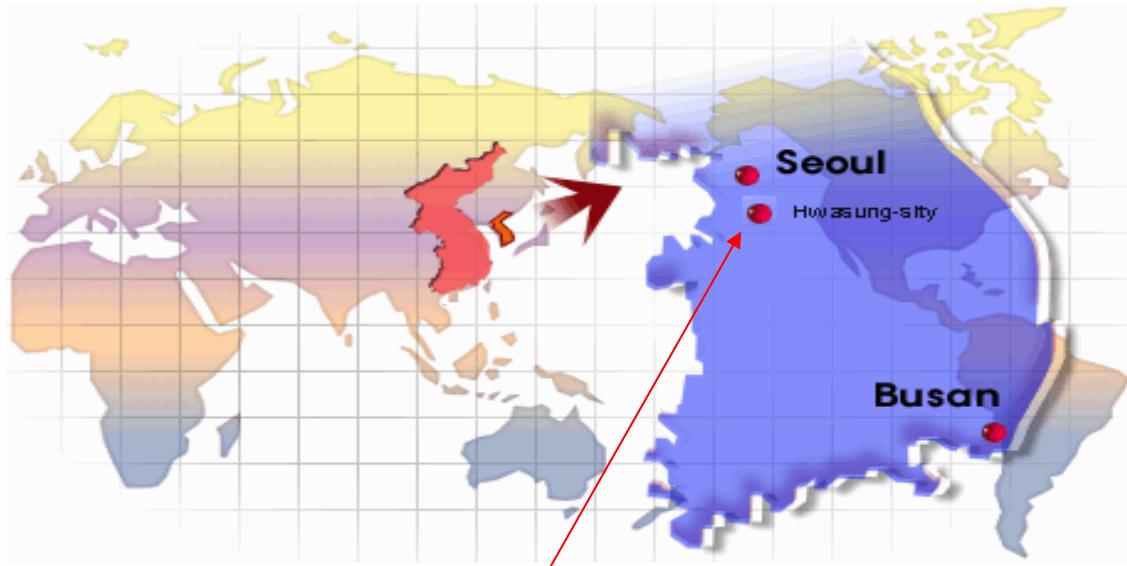

Hwasung-shi (open area test site)

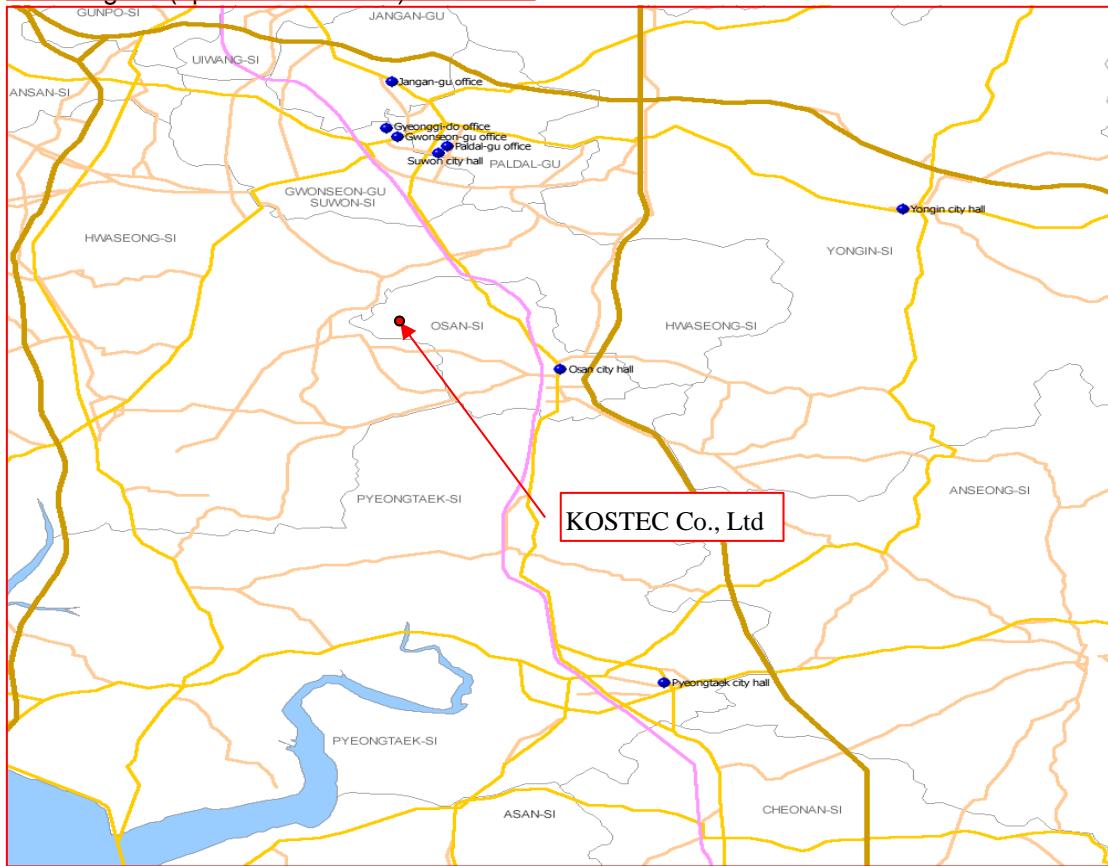

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 5 of 22  
December 8, 2005



# EMI TEST REPORT

Report reference No: KST-FCC0549



## 4. Test System Configuration

### Operation Environment

Ambient	<u>Temperature</u> ( °C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
10 m Open Area site	10	42	1018
Shielded room:	18	37	1018

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10 m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, site imperfection, mismatch, and system repeatability.

Based on NIS 80, 81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30 dB, LISN Factor 1 dB, CL 1 dB

The result (MR) is

$$30 + 1 + 1 = 32 \text{ dBuV}$$

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 6 of 22  
December 8, 2005



# EMI TEST REPORT



Report reference No: KST-FCC0549

## 5. Description of E.U.T.

### Product Description

Manufactured By:	SNC Co.,Ltd.
Address:	Rm. 401, Anyang-Megavalley, 799, Gwanyang-dong, Dongan-gu, anyang-si, Gyeonggi-do, Korea
Model:	MV190T
Serial Number:	None

### Configuration of EUT

Description	Manufacturer	Model/Part #	Serial Number
LCD Panel	BoEhydis	HT190E01-100	9BQA058561100017A
AD Board	SNC Co., Ltd.	MV-A0-14L2-BO	None
Inverter Board	None	None	None
OSD Board	SNC Co., Ltd.	None	None
USB HUB Board	SNC Co., Ltd.	050701	2005052845

### EUT Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	1.2	-	DC INLET	Ac/dc adapter	Main power source
VGA In	Yes	1.5	Y	D-sub	EUT	PC
Audio(IN)	Yes	1.5	-	Jack	EUT	PC
Audio(OUT)	Yes	0.2	-	Jack	EUT	EUT
PS/2	Yes	1.2	-	Din	PC	Keyboard
PS/2	Yes	1.5	-	Din	PC	Mouse
Parallel	Yes	1.5	Y	D-sub	PC	Printer
USB	Yes	1.5	Y	USB	EUT	PC
USB	-	-	-	USB	USB Memory	EUT
Antenna	-	-	-	NTSC	EUT Ant	75Ω terminated

### Operating conditions

The operating mode/system were as follows in details:

Operating: . After Connected from personal computer to E.U.T by RGB cable(D-sub 15 pin). And then use to "H" pattern program for data transmission and continuously 'H' pattern displayed on the LCD Monitor.



# EMI TEST REPORT

Report reference No: KST-FCC0549



## 7. TEST RESULTS

### 7.1 Conducted emission

#### Measurement procedure

##### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4 m above the reference ground plane. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

#### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2006.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2006.4.23	●
	ESH3-Z5	100147	R&S	2006.8.12	●

#### Measurement uncertainty

Conducted Emission measurement :  $\pm$  2.4 (K=2)

#### Test data

##### < Class B >

FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE POL	Loss (dB)	LIMIT(dB $\mu$ V)		MARGIN(dB)	
	QP	AV			QP	AV	QP	AV
0.166	45.74	22.44	L	0.29	65.16	55.16	19.71	33.01
0.446	40.37	39.28	L	0.29	56.95	46.95	16.87	7.96
1.650	41.38	39.52	N	0.44	56.00	46.00	15.06	6.92
3.490	41.56	37.84	N	0.62	56.00	46.00	15.06	8.78
5.142	39.49	34.23	N	0.75	60.00	50.00	21.26	16.52
6.158	39.90	33.67	N	0.97	60.00	50.00	21.07	17.30
7.362	38.76	30.23	N	1.20	60.00	50.00	22.44	20.97

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 9 of 22  
December 8, 2005




# EMI TEST REPORT

Report reference No: KST-FCC0549




## Conducted emission test graph

### Line. Live

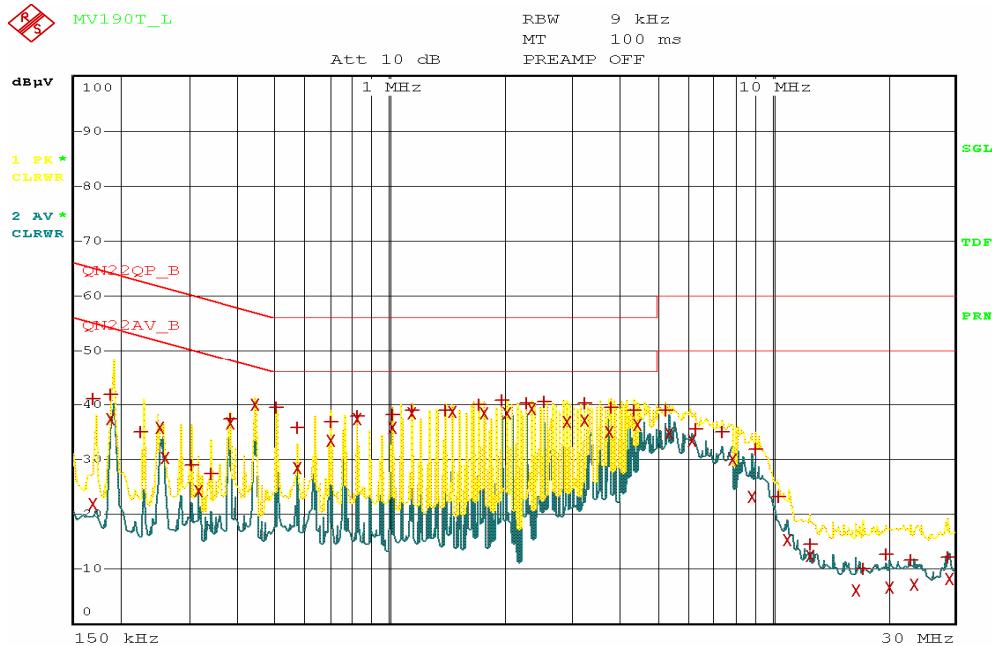

Date: 6.DEC.2005 14:36:14

### Line. Neutral

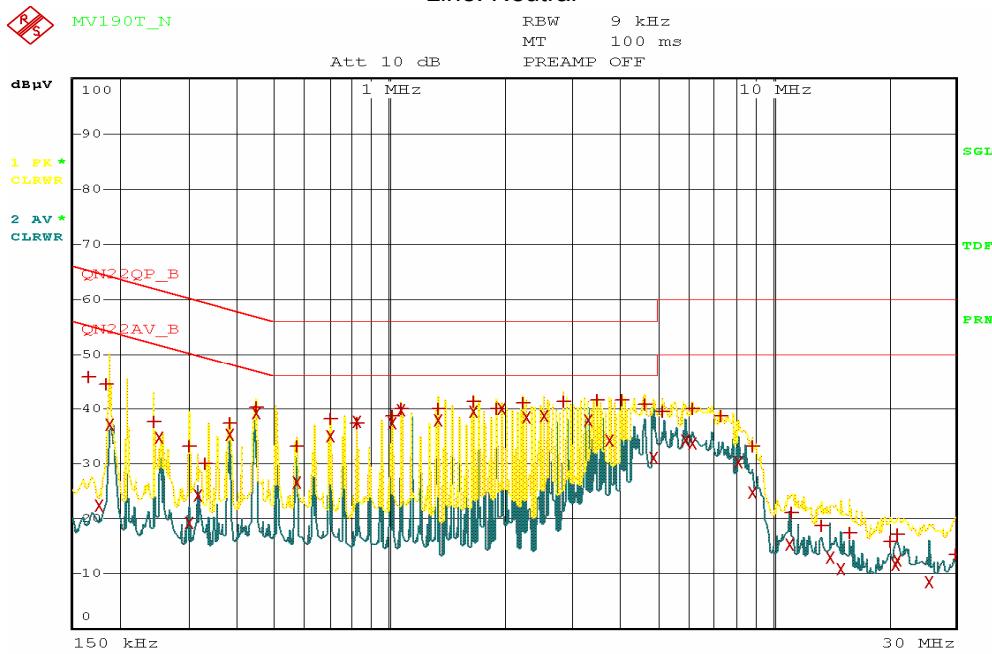

Date: 6.DEC.2005 14:32:01

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
 Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 10 of 22  
 December 8, 2005



# EMI TEST REPORT



Report reference No: KST-FCC0549

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3 m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10 m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2006.3.17
Ultra broadband antenna	HL562	100075	R&S	2006.3.16
Matching network	RAM	358.5414.02	R&S	-
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10 m Open area site	none	none	KOSTEC Lab	-
chamber(3 m)	none	none	FRANCONIA	-

### Measurement uncertainty

Radiated Emission measurement :

30-300 MHz +3.96 dB / -4.04 dB

300-1000 MHz +3.04 dB / -3.00 dB

### Test data

#### < Class B >

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
72.00	22.04	V	1.50	180	7.00	3.06	32.10	40.0	7.90
149.42	14.47	V	1.70	180	7.54	4.19	26.20	43.5	17.30
164.27	12.26	H	3.70	110	7.42	4.42	24.10	43.5	19.40
194.91	17.04	H	3.70	110	7.20	4.86	29.10	43.5	14.40
239.72	19.95	H	3.20	130	9.06	5.19	34.20	46.0	11.80
361.12	12.24	H	2.80	130	12.61	7.15	32.00	46.0	14.00
431.51	10.36	H	2.70	130	14.13	7.71	32.20	46.0	13.80
623.29	13.39	H	2.40	110	17.33	9.38	40.10	46.0	5.90

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical / \* Test site: 3m Open area site

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea

Tel : +82-31-222-4251 Fax: +82-31-222-4252

<http://www.kosteclab.com>

Page : 11 of 22  
December 8, 2005

