

Report No.: KSCR211200028001 Page: 1 of 41

FCC SAR TEST REPORT

Application No.:	KSCR2112000280AT	
Applicant:	Dogtra Co., Ltd.	
Address of Applicant:	#715-2(146BL-3L) Gojan-dong, , Namdong-gu, Incheon, South Korea	
Manufacturer:	Dogtra Co., Ltd	
Address of Manufacturer:	#715-2(146BL-3L) Gojan-dong, , Namdong-gu, Incheon, South Korea	
Factory:	Dogtra Co., Ltd	
Address of Factory:	#715-2(146BL-3L) Gojan-dong, , Namdong-gu, Incheon, South Korea	
Product Name:	PATHFINDER2	
Model No.(EUT):	PT20U	
FCC ID:	SWN-PT20U	
Standard(s) :	FCC 47CFR §2.1093	
Date of Receipt:	2021-12-01	
Date of Test:	2021-12-15 to 2021-12-15	
Date of Issue:	2021-12-22	
Test Result:	Pass*	
* In the configuration tested, the EUT complied with the standards specified above.		

Enin fri

Eric Lin Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limitation Collegations under the transaction droument does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@aspx.com">Contact us at telephone: (86-755) 83071443, or email: CN.Doccheck@aspx.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR211200028001 Page: 2 of 41

REVISION HISTORY

Revision Record				
Version	Description	Date	Remark	
00	Original	2021-12-22	/	

Authorized for issue by:		
	Richard. Kong	
	Richard.Kong/ Project Engineer	
	Eni fri	
	Eric.Lin/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format document, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (168-512)57370818 www.sgsgroup.com.cn no.10 www.sgsgroup.com.cn to the \$\scitex thereff and \$\



Report No.: KSCR211200028001 Page: 3 of 41

TEST SUMMARY

		Test Summary			
Frequency Band	Test position	Test mode	Max Reported SAR1g (W/kg)	SAR limit (W/kg)	Verdict
(150MHz)	Limbs	MURS	0.84	4.0	PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 www.sgsgroup.com.cn no.10 wiley Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 4 of 41

CONTENTS

1	GENERAL INFORMATION	6
	1.1 GENERAL DESCRIPTION OF EUT	6
	1.1.1 DUT Antenna Locations	7
	1.2 TEST SPECIFICATION	8
	1.3 RF EXPOSURE LIMITS	9
	1.4 TEST LOCATION	
	1.5 TEST FACILITY	
2	LABORATORY ENVIRONMENT	11
3	SAR MEASUREMENTS SYSTEM CONFIGURATION	12
	3.1 THE SAR MEASUREMENT SYSTEM	
	3.2 ISOTROPIC E-FIELD PROBE EX3DV4	
	3.3 DATA ACQUISITION ELECTRONICS (DAE)	
	3.4 SAM TWIN PHANTOM	
	3.5 ELI PHANTOM	
	3.6 Device Holder for Transmitters	17
	3.7 MEASUREMENT PROCEDURE	
	3.7.1 Scanning procedure	
	3.7.2 Data Storage	
	3.7.3 Data Evaluation by SEMCAD	
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	22
	4.1 SAR MEASUREMENT VARIABILITY	22
	4.2 SAR MEASUREMENT UNCERTAINTY	23
5	DESCRIPTION OF TEST POSITION	24
	5.1 EXTREMITY EXPOSURE CONDITIONS	24
6	SAR SYSTEM VERIFICATION PROCEDURE	25
	6.1 TISSUE SIMULATE LIQUID	
	6.1.1 Recipes for Tissue Simulate Liquid	
	6.1.2 Test Liquids Confirmation	
	6.1.3 Measurement for Tissue Simulate Liquid	
	6.2 SAR SYSTEM CHECK	
	6.2.1 Justification for Extended SAR Dipole Calibrations	
	6.2.2 Summary System Check Result(s)	
	6.2.3 Detailed System Check Results	
7	TEST CONFIGURATION	31
	7.1 OPERATION CONFIGURATIONS	
	7.1.1 Test Configuration	
8	TEST RESULT	32
	8.1 MEASUREMENT OF RF CONDUCTED POWER	
	8.1.1 Conducted Power Of 150MHz	
	8.1.2 Conducted Power of BT	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of is intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention to check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn (186-512)57355888 f(86-512)57370818 sgs.china@gsgs.com



Report No.: KSCR211200028001 Page: 5 of 41

8.2 8.3 8.4	THE EUT SIDES SAR TEST SAR RESULT OF MURS 150MHz EQUIPMENT LIST	
9 CA	ALIBRATION CERTIFICATE	
10 PH	IOTOGRAPHS	
APPEN	DIX A: DETAILED SYSTEM CHECK RESULTS	37
APPEN	DIX B: DETAILED TEST RESULTS	
APPEN	DIX C: CALIBRATION CERTIFICATE	41
APPEN	DIX D: PHOTOGRAPHS	41



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format document, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (168-512)57370818 www.sgsgroup.com.cn no.10 www.sgsgroup.com.cn to the \$\scitex thereff and \$\



Report No.: KSCR211200028001 Page: 6 of 41

1 General Information

1.1 General Description of EUT

Device Type :	Portable device				
Exposure Category:	Uncontrolled envi	Uncontrolled environment / General population			
Product Phase:	Production unit				
SN:	XXXXXX				
Hardware Version:	1.0				
Software Version:	3.0.05				
Antenna Type:	MURS: Inseparab BT: PIFA Antenna		cal Antenna		
Device Operating Configurati	ons :				
Modulation Mode:	MURS: FM B	MURS: FM BT: GFSK			
	Band		Tx (MHz)	Rx (MHz)	
Frequency Bands:	150MHz		151.82~154.60	151.82~154.60	
	Bluetooth		2402~2480	2402~2480	
	Model:	AE6	54050P		
Power Supply:	Normal Voltage:	3.7V	3.7V		
	Rated capacity:	2400mAh			
	Manufacturer:	ENERGY			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sggroup.com.cn mail: CN_Doccheck@sas.com No.10, The appearance of the sign fraction of the sequence of the sequen


Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)



Report No.: KSCR211200028001 Page: 7 of 41

1.1.1 DUT Antenna Locations

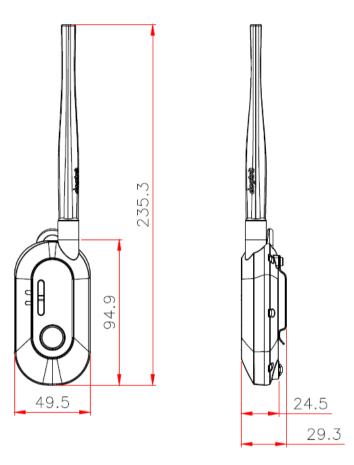



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@sags.com</u> n. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 8 of 41

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEEE Std C95.1 – 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations





Report No.: KSCR211200028001 Page: 9 of 41

1.3 RF exposure limits

	Uncontrolled Environment	Controlled Environment	
Human Exposure	General Population	Occupational	
Spatial Peak SAR*	1.60 W/ka	8.00 W/ka	
(Brain*Trunk)	1.60 W/kg	8.00 W/kg	
Spatial Average SAR**		0.40 \\///ka	
(Whole Body)	0.08 W/kg	0.40 W/kg	
Spatial Peak SAR***	4.00 \W//kg		
(Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg	

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 10 of 41

1.4 Test Location

Company:	Compliance Certification Services (Kunshan) Inc.
Address:	No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China
Post code:	215300
Telephone:	86-512-57355888
Fax:	86-512-57370818

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC –Designation Number: CN1172

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory

CAB Identifier: CN0072.

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.





Report No.: KSCR211200028001 Page: 11 of 41

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C	
Relative humidity	Min. = 30%, Max. = 70%	
Ground system resistance	< 0.5 Ω	
Ambient noise is checked and found very low and in compliance with requirement of standards.		
Reflection of surrounding objects is minimized a	and in compliance with requirement of standards.	

Table 1: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sggroup.com.cn mail: CN_Doccheck@sas.com No.10, The appearance of the sign fraction of the sequence of the sequen



Report No.: KSCR211200028001 Page: 12 of 41

SAR Measurements System Configuration 3

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.


The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn f(86-512)57370818 sgs.china@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888

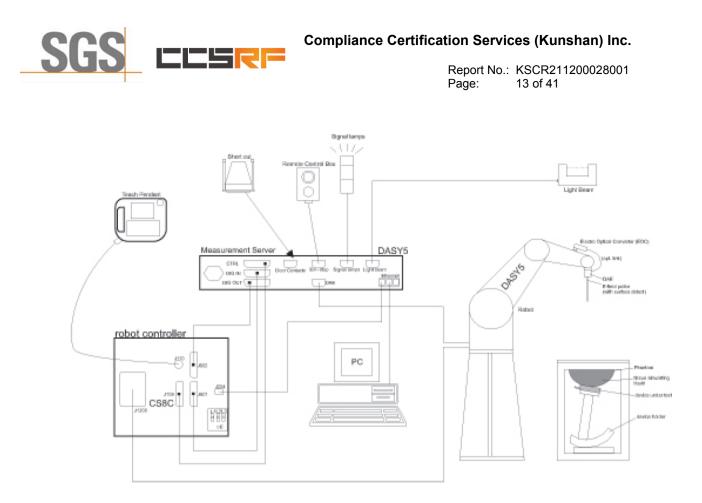

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validat the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. Attention To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn No.10, Weig Road, Innovation Park, Kunshan, Jiangsu, China 215300 tested and such samples (86-512)57370818 www.sgsgroup.com.cn witsen systems and states and sole samples) are related for 30 days only.



Report No.: KSCR211200028001 Page: 14 of 41

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 www.sgsgroup.com.cn no.10 wiley Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 15 of 41

3.3 Data Acquisition Electronics (DAE)

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	- A
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	K-
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE- GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	-
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report accertificate, please contact us at telephone: (86-575) 8307 1443, or email: CN_Doccheck@sgs.com

 No.10, Weipe Road, Innovation Park, Kunshan, Jiangsu, China 215300
 (86-512)573088
 (86-512)573088
 www.sgsgroup.com.cn.

 was .tx if a click the authenticity of testing images 215300
 1(86-512)5737081
 www.sgsgroup.com.cn.



Report No.: KSCR211200028001 Page: 16 of 41

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57370818 www.sgsgroup.com.cn (86-512)57370818 sys.china@sgs.com



Report No.: KSCR211200028001 Page: 17 of 41

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-end-Cond No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn f(86-512)57370818 sgs.china@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

t(86-512)57355888



Report No.: KSCR211200028001 Page: 18 of 41

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of $30mm^*30mm^*30mm$ (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points ($\leq 2GHz$) and 7x7x7 points ($\geq 2GHz$). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.





Report No.: KSCR211200028001 Page: 19 of 41

			\leq 3 GHz	> 3 GHz	
Maximum distance from (geometric center of pr		•	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$	
Maximum probe angle surface normal at the n		-	30°±1°	20°±1°	
			≤ 2 GHz: ≤ 15 mm 2 - 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
Maximum area scan sp	atial resolu	ution: Δx _{Area} , Δy _{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan s	patial reso	lution: Δx _{Zoom} , Δy _{Zoom}	$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ 2 - 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: ≤ 5 mm [*] 4 – 6 GHz: ≤ 4 mm [*]	
	uniform	grid: Δz _{Zoom} (n)	\leq 5 mm	$\begin{array}{l} 3-4 \text{ GHz:} \leq 4 \text{ mm} \\ 4-5 \text{ GHz:} \leq 3 \text{ mm} \\ 5-6 \text{ GHz:} \leq 2 \text{ mm} \end{array}$	
Maximum zoom scan spatial resolution, normal to phantom surface	graded	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	\leq 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm	
	grid	Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz	Zoom(n-1)	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
P1528-2011 for d * When zoom scan is KDB 447498 is ≤ 1.4	letails. required ar 4 W/kg, ≤ 3	d the <u>reported</u> SAR fro	I incidence to the tissue mediu om the <i>area scan based 1-g SAI</i> mm zoom scan resolution may z.	<i>Restimation</i> procedures of	

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %





Report No.: KSCR211200028001 Page: 20 of 41

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE3". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitiv	Normi, ai0, ai1, ai2	
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters: - Freque	ncy	f
- Crest factor	cf	
Media parameters: - Conduc	ctivity	3
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$V_i = U_i + U_i^2 \cdot c f / d c p_i$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)



Unless otherwise agreed in writing, this document is issued by the Company overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-
subject">http://www.sgs.com/en/Terms-and- subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-
advised that information contained hereon reflects the Company">http://www.sgs.com/en/Terms-and- advised that information contained hereon reflects the Company's findings at t Client's instructions, if any. The Company's sole responsibility is to its Client transaction from exercising all their rights and obligations under the transacti except in full, without prior written approval of the Company. Any unauthorize appearance of this document is unlawful and offenders may be prosecuted to th results shown in this test report refer only to the sample(s) lested and such sampl Attention: To check the authenticity of testing /inspection report & certificat or email: CN.Doccheck@sos.com	d-Conditions.aspx om/en/Terms-and- issues defined the he time of its inte t and this docume ion documents. Ti ad alteration, forg e fullest extent of e(s) are retained fi	and, for electroni Conditions/Term prein. Any holder rvention only an ent does not ex- his document ca ery or falsificati the law. Unless or 30 days only.	ic format documents, <u>s-e-Document.aspx</u> . of this document is d within the limits of onerate parties to a innot be reproduced on of the content or otherwise stated the
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 21 of 41

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_{i} = (V_{i})^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^{2})/f$$

With Vi = compensated signal of channel i (i = x, y, z)Normi = sensor sensitivity of channel I (i = x, y, z)[mV/(V/m)2] for E-field Probes ConvF = sensitivity enhancement in solution aij = sensor sensitivity factors for H-field probes f = carrier frequency [GHz]

Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$

The primary field data are used to calculate the derived field units.

$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$

With SAR = local specific absorption rate in mW/g Etot = total field strength in V/m σ = conductivity in [mho/m] or [Siemens/m] ϵ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$P_{pwe} = E_{tot}^2 2 / 3770$ or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with Ppwe = equivalent power density of a plane wave in mW/cm2

Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company Sindings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document cannot be reproduced and such sample(s) are retained for 30 days only. Attention is check@sgs.com No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 www.sgsgroup.com.cn No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 sys.china@sgs.com



Report No.: KSCR211200028001 Page: 22 of 41

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com (86-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

f(86-512)57370818 sgs.china@sgs.com

t(86-512)57355888



Report No.: KSCR211200028001 Page: 23 of 41

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (86-512)5730818 www.sggroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 24 of 41

5 Description of Test Position

5.1 Extremity exposure conditions

Devices that are designed or intended for use on extremities, or mainly operated in extremity only exposure conditions, i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 25 of 41

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients	Frequency (MHz)										
(% by weight)	450		83	835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2	
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04	
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0	
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0	
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0	
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7	
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5	
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78	
HSL5GHz is compos	ed of the	following	ingredier	nts:							
Water: 50-65%											
Mineral oil: 10-30%											
Emulsifiers: 8-25%											
Sodium salt: 0-1.5%											
MSL5GHz is compos	ed of the	following	ingredie	nts:							
Water: 64-78%	Water: 64-78%										
Mineral oil: 11-18%	Mineral oil: 11-18%										
Emulsifiers: 9-15%	Emulsifiers: 9-15%										
Sodium salt: 2-3%											

Table 2: Recipe of Tissue Simulate Liquid





Report No.: KSCR211200028001 Page: 26 of 41

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	Не	ad	Body		
(MHz)	ε _r	σ (S/m)	ε _r	σ (S/m)	
150	52.3	0.76	61.9	0.80	
300	45.3	0.87	58.2	0.92	
450	43.5	0.87	56.7	0.94	
835	41.5	0.90	55.2	0.97	
900	41.5	0.97	55.0	1.05	
915	41.5	0.98	55.0	1.06	
1450	40.5	1.20	54.0	1.30	
1610	40.3	1.29	53.8	1.40	
1800-2000	40.0	1.40	53.3	1.52	
2450	39.2	1.80	52.7	1.95	
3000	38.5	2.40	52.0	2.73	
5800	35.3	5.27	48.2	6.00	

(ε_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)





Report No.: KSCR211200028001 Page: 27 of 41

6.1.3 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured Frequency (MHz)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Liquid Temp. (℃)	Date
150 Head	150	0.758	51.525	0.76	52.30	-0.26	-1.48	±5	22	2021/12/15




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format document, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN.obccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn (86-512)5737081 sys.china@sgs.com



Report No.: KSCR211200028001 Page: 28 of 41

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

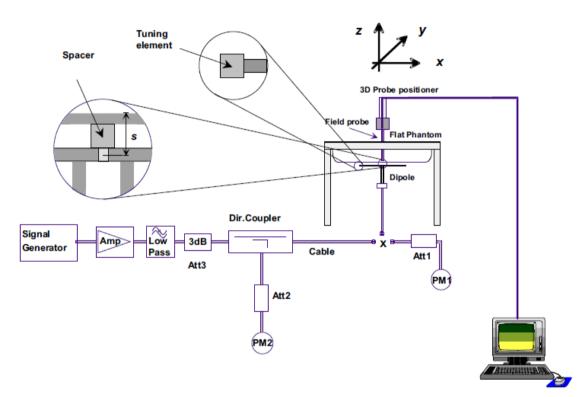

F-3. the microwave circuit arrangement used for SAR system verification



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or resputs shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Report No.: KSCR211200028001 Page: 29 of 41

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limitato Collegations under the transaction droument does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: CN Doccheck/@sss.com No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Report No.: KSCR211200028001 Page: 30 of 41

6.2.2 Summary System Check Result(s)

Validatio	on Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (℃)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
CLA150	Head	0.381	0.256	3.81	2.56	3.9 (3.51~4.29)	2.6 (2.34~2.86)	22	2021/12/15

6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemrification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer rough to the sample(s) tested and such sample(s) are relained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sgs.com

 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 (i@6-512)5737081
 www.sgsgroup.com.cn.

 mail • .TX苏 • 昆山市留学生创业园伟业路10G
 邮貨 215300
 (i@6-512)5737081
 sys.china@sgs.com



Report No.: KSCR211200028001 Page: 31 of 41

7 Test Configuration

7.1 Operation Configurations

7.1.1 Test Configuration

For the MURS SAR tests, a communication link is set up with the test mode software for MURS mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated one channel in the case of 150 MHz during the test at the test frequency channel. The EUT is operated at the RF continuous emission mode. The channel should be tested at the 100% duty cycle.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn net is '江苏 · 昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)5737081 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 32 of 41

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power Of 150MHz

Frequency	Test mode	Average Power(dBm)	Tune-up
151.82	MURS	30.86	31
151.88	MURS	30.77	31
151.94	MURS	30.79	31
154.57	MURS	30.26	31
154.60	MURS	30.31	31

8.1.2 Conducted Power of BT

	BLE_1Mbp	Average			
Modulation	Channel	Frequency(MHz)	Conducted Power (dBm)	Tune up (dBm)	
	0	2402	2.16	3	
GFSK	19	2440	2.22	3	
	39	2480	2.01	3	

8.2 The EUT Sides SAR Test

The following SAR test exclusion Thresholds based on KDB 447498 D01 General RF Exposure Guidance v06) 4.3.1)

Freq.Band	Frequency (MHz)	Position	Max Power (dBm)	Max Power (mW)	Antenna to user (mm)	SAR exclusion threshold	Exclusion Threshold	Exclusion (Yes/No)
	154.6	Front side	31	1258.9	2.5	198.0	7.5	No
	154.6	Back side	31	1258.9	8.3	59.6	7.5	No
150MHz	154.6	Left side	31	1258.9	28	17.7	7.5	No
	154.6	Right side	31	1258.9	7.5	66.0	7.5	No
	154.6	Bottom side	31	1258.9	94.9	5.2	7.5	Yes
	2480	Front side	3	2.0	2.5	1.3	7.5	Yes
	2480	Back side	3	2.0	8.3	0.4	7.5	Yes
BLE	2480	Left side	3	2.0	28	0.1	7.5	Yes
	2480	Right side	3	2.0	7.5	0.4	7.5	Yes
	2480	Bottom side	3	2.0	94.9	0.0	7.5	Yes

Note:

- 1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- 2. Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related for 30 days only. Attention To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn No.10, Weig Road, Innovation Park, Kunshan, Jiangsu, China 215300 tested and such samples (86-512)57370818 www.sgsgroup.com.cn witsen systems and states and sole samples) are related for 30 days only.



Report No.: KSCR211200028001 Page: 33 of 41

3. Per KDB 447498 D01, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold

4. Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for

1-g SAR and ≤ 7.5 for 10-g extremity SAR

- □ f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- □ The result is rounded to one decimal place for comparison

 \Box For < 50 mm distance, we just calculate mW of the exclusion threshold value (3.0) to do compare.

This formula is [3.0] / $[\sqrt{f(GHz)}]$ ·[(min. test separation distance, mm)] = exclusion threshold of mW.

5. Per KDB 447498 D01, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following

a) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·(f(MHz)/150)] mW, at 100 MHz to 1500 MHz

b) [Threshold at 50 mm in step 1) + (test separation distance - 50 mm)·10] mW at > 1500 MHz and ≤ 6 GHz

6. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions, aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemrification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company so le responsibility is to its Client and this document document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> .

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

f(86-512)57370818 sgs.china@sgs.com

t(86-512)57355888



Report No.: KSCR211200028001 Page: 34 of 41

8.3 SAR Result Of MURS 150MHz

Test position	Test mode	Test ch./Freq.	Duty cycle	Duty cycle scaled factor		SAR (W/kg) 10-g	Power	Condu cted Power (dBm)	up Limit	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp .(℃)	SAR 10-g limit (W/kg)
	Limbs Test data (0mm)												
Front side	MURS	1/151.82	100%	1.000	0.438	0.233	-0.02	30.86	31	1.033	0.241	22.0	4.0
Back side	MURS	1/151.82	100%	1.000	1.050	0.330	-0.09	30.86	31	1.033	0.341	22.0	4.0
Left side	MURS	1/151.82	100%	1.000	1.500	0.813	-0.01	30.86	31	1.033	0.840	22.0	4.0
Right side	MURS	1/151.82	100%	1.000	0.431	0.260	-0.06	30.86	31	1.033	0.269	22.0	4.0
Bottom side	MURS	1/151.82	100%	1.000	0.215	0.101	-0.02	30.86	31	1.033	0.104	22.0	4.0
									• ·			-	

Note:

1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B

2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is \leq 2 W/kg then testing at the other channels is not required for such test configuration(s).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: CN_Doccheck@ags.com

 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 t(86-512)5730818
 www.sgsgroup.com.cn.

 中国 · 江苏 · 昆山市留学生创业园伟业路10号
 邮编 215300
 t(86-512)5730818
 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 35 of 41

8.4 Equipment list

Test Platform SPEAG DASY5 Professional								
	Location Compliance Certification Services (Kunshan) Inc.							
So	Software Reference DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)							
	Hardware Reference							
EquipmentManufacturerModelSerial NumberCalibration DateDu ca								
\square	РC	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A		
\square	Signal Generator	Agilent	E8257C	MY43321570	2021/09/24	2022/09/23		
	S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	2021/02/01	2022/01/31		
\square	DAK-3.5 probe	SPEAG	DAK-3.5	1102	N/A	N/A		
\square	Power meter	Anritsu	ML2495A	1445010	2021/04/15	2022/04/14		
\square	Power sensor	Anritsu	MA2411B	1339220	2021/04/15	2022/04/14		
\square	DAE	SPEAG	DAE4	1245	2021/05/19	2022/05/18		
\square	E-field PROBE	SPEAG	EX3DV4	3798	2021/05/31	2022/05/30		
\square	Dipole	SPEAG	CLA150	4025	2021/04/26	2024/04/20		
	Electro Thermometer	DTM	DTM3000	3030	2021/10/17	2022/10/16		
\square	Amplifier	Mini-circuits	ZVE-8G	110405	N/A	N/A		
\square	Amplifier	Mini-circuits	ZHL-42	QA1331003	N/A	N/A		
\square	3db ATTENUATOR	R MINI	MCL BW-S3W5	0533	N/A	N/A		
\square	DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A		
\square	Dual Directional Coupler	Woken	20W couple	DOM2BHW1A1	N/A	N/A		
	SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A		
\square	Twin SAM Phantor	n SPEAG	QD000P40CD	1609	N/A	N/A		
\square	ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A		
\boxtimes	ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A		
	LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A		

Note: All the equipments are within the valid period when the tests are performed.

All measurement facilities used to collect the measurement data are located at

No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.



Unless otherwise agreed in writing, this document is issued by the Company overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-subject to the limitation of liability, indemnification and jurisdiction is advised that information contained hereon reflects the Company's findings at the Cilent's instructions, if any. The Company's sole responsibility is to its Client transaction from exercising all their rights and obligations under the transactio except in full, without prior written approval of the Company. Any unauthorized appearance of this document is unlawful and offenders may be prosecuted to the results shown in this test report refor only to the sample(s) tested and such sample Attention: To check the authenticity of testing /inspection report & certificate or email:	-Conditions.aspx m/en/Terms-and- sues defined the e time of its inte and this docume n documents. Ti d alteration, forg fullest extent of (s) are retained f	and, for electroni Conditions/Terms rein. Any holder rvention only and ent does not exc his document ca ery or falsification the law. Unless of r 30 days only.	c format documents, <u>s-e-Document.aspx</u> . of this document is d within the limits of onerate parties to a noto be reproduced on of the content or otherwise stated the
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 36 of 41

9 Calibration certificate

Please see the Appendix C

10 Photographs

Please see the Appendix D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 www.sgsgroup.com.cn no.1 avery Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5737081 sys.china@sgs.com



Report No.: KSCR211200028001 Page: 37 of 41

Appendix A: Detailed System Check Results

The plots are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch_Doccheck@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 38 of 41

Date: 2021/12/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

SystemPerformanceCheck

DUT: CLA-150; Type: CLA-150; Serial: 4025

Communication System: UID 0, 150MHz (0); Frequency: 150 MHz;Duty Cycle: 1:1 Medium parameters used: f = 150 MHz; σ = 0.758 S/m; ϵ_r = 51.525; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(10.97, 10.97, 10.97); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2021/05/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies Low 1 GHz/Pin=100 mW, dist=0 mm (EX-Probe)/Area Scan (161x161x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm


Maximum value of SAR (interpolated) = 0.471 W/kg

System Performance Check at Frequencies Low 1 GHz/Pin=100 mW, dist=0 mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 24.52 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.256 W/kg

Maximum value of SAR (measured) = 0.472 W/kg

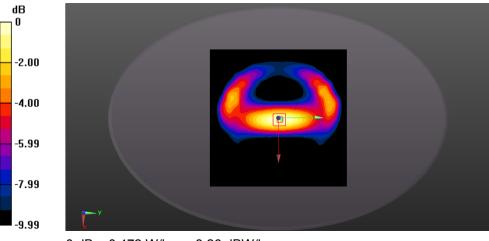

0 dB = 0.472 W/kg = -3.26 dBW/kg



Unless otherwise agreed in writing, this document is issued by the Company s overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-</u> subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com</u> Attention is drawn to the limitation of liability, indemnification and jurisdiction iss advised that information contained hereon reflects the Company's findings at the Cilent's instructions, if any. The Company's sole responsibility is to its Cilent transaction from exercising all their rights and obligations under the transaction except in full, without prior written approval of the Company. Any unauthorized appearance of this document is unlawful and offenders may be prosecuted to the results shown in this test report refer only to the sample(s) tested and such sample(<u>Conditions.aspx</u> <u>n/en/Terms-and-</u> sues defined the a time of its inter and this docume n documents. The alteration, forge fullest extent of s) are retained for	and, for electronic Conditions/Terms rein. Any holder vvention only and int does not exco his document can ery or falsificatio the law. Unless co r 30 days only.	c format documents, s-e-Document.aspx. of this document is I within the limits of nerate parties to a not be reproduced in of the content or therwise stated the
or email: <u>CN.Doccheck@sgs.com</u>			
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 39 of 41

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemrification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: <u>Ch.Doccheck@sgs.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)5730818 www.sgsgroup.com.cn (86-512)5730818 sgs.china@sgs.com

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)





Report No.: KSCR211200028001 Page: 40 of 41

Date: 2021/12/15

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

MURS150MHz FM Left side 0mm

DUT: PATHFINDER2; Type: PT20U


Communication System: UID 0, 150MHz (0); Frequency: 151.82 MHz;Duty Cycle: 1:1 Medium parameters used: f = 152 MHz; σ = 0.76 S/m; ϵ_r = 51.442; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(10.97, 10.97, 10.97); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2021/05/19
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (51x211x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm Maximum value of SAR (interpolated) = 2.41 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 53.14 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 4.26 W/kg SAR(1 g) = 1.5 W/kg; SAR(10 g) = 0.813 W/kg Maximum value of SAR (measured) = 2.70 W/kg

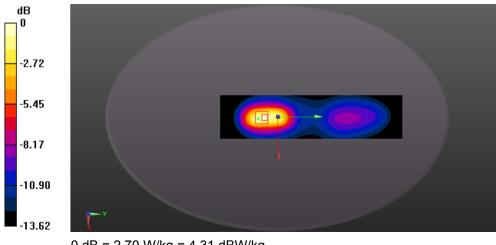

0 dB = 2.70 W/kg = 4.31 dBW/kg



Unless otherwise agreed in writing, this document is issued by the Compar overleaf, available on request or accessible at http://www.sgs.com/en/Terms-as subject to Terms and Conditions for Electronic Documents at http://www.sgs. Attention is drawn to the limitation of liability, indemnification and jurisdiction advised that information contained hereon reflects the Company's findings at Client's instructions, if any. The Company's sole responsibility is to its Clie transaction from exercising all their rights and obligations under the transare except in full, without prior written approval of the Company. Any unauthorit appearance of this document is unlawfui and offenders may be prosecuted to results shown in this test report refer only to the sample(s) tested and such sam Attention: To check the authenticity of testing /inspection report & certifica	nd-Conditions.aspx com/en/Terms-and- i issues defined the the time of its inter the time of its inter tion documents. Ti zed alteration, forg the fullest extent of ple(s) are retained fi	and, for electroni <u>Conditions/Term</u> rein. Any holder rvention only an- nt does not exo nis document ca ery or falsification the law. Unless or 30 days only.	c format documents, <u>s-e-Document.aspx</u> . of this document is d within the limits of onerate parties to a noto be reproduced on of the content or otherwise stated the
or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSCR211200028001 Page: 41 of 41

Appendix C: Calibration certificate

Appendix D: Photographs

---END----



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5737081 www.sggroup.com.cn mail: CN_Doccheck@sas.com No.10, The appearance of the sign fraction of the sequence of the sequen