

TEST REPORT

of

FCC Part 95 Subpart C
IC RSS-210 Issue 10 and RSS-Gen Issue 5

FCC ID: SWN-TD33UT
IC Certification: 12166A-TD33UT

Equipment Under Test : DOG TRAINING DEVICE
Model Name : TD33UT
Variant Model Name(s) : Refer to the page 4
Applicant : Dogtra Co., Ltd.
Manufacturer : Dogtra Co., Ltd.
Date of Receipt : 2024.07.15
Date of Test(s) : 2024.07.15 ~ 2024.08.29
Date of Issue : 2024.09.10

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.
- 3) This test report cannot be reproduced, except in full, without prior written permission of the Company.
- 4) The data marked ※ in this report was provided by the customer and may affect the validity of the test results.

We are responsible for all the information of this test report except for the data(※) provided by the customer

Tested by:



Hahyun Sung

Technical
Manager:



Jinhyoung Cho

SGS Korea Co., Ltd. Gunpo Laboratory

INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Output Power -----	8
3. Occupied Bandwidth -----	10
4. Emission Mask -----	12
5. Transmitter Unwanted Emissions -----	14
6. Frequency Accuracy -----	19

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

1.2. Details of Applicant

Applicant : Dogtra Co., Ltd.

Address : 35, Namdongdong-ro 33beon-gil, Namdong-gu, Incheon, South Korea, 21694

Contact Person : Chae, Yong-Byeong

Phone No. : +82 32 812 2445

1.3. Details of Manufacturer

Company : Same as Applicant

Address : Same as Applicant

1.4. Description of EUT

Kind of Product	DOG TRAINING DEVICE
Model Name	TD33UT
Variant Model Name(s)	1900X 1-DOG UNIT 1900X 2-DOG UNIT 1900X 1902X 1903X ARC-X 1900X HANDSFREE 1-DOG UNIT 1900X HANDSFREE 2-DOG UNIT 1900X HANDSFREE 1902X HANDSFREE 1903X HANDSFREE ARC-X HANDSFREE X2 ADDITIONAL TRANSMITTER 1900X WETLANDS
Serial Number	Conducted: 001 Radiated: 002
Power Supply	DC 7.4 V
Frequency Range	27.195 MHz
Modulation Type	FSK
Number of Channel	1
Antenna Type	Helical Antenna
Antenna Gain*	-27.5 dB i
H/W Version	Rev1.0
S/W Version	Ver2.0
FVIN	N/A

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval	Cal. Due
Signal Generator	R&S	SMBV100A	255834	Dec. 01, 2023	Annual	Dec. 01, 2024
Spectrum Analyzer	R&S	FSW8	101660	May 23, 2024	Annual	May 23, 2025
DC Power Supply	R&S	HMP2020	022802107	Oct. 31, 2023	Annual	Oct. 31, 2024
Attenuator	AEROFLEX / INMET	40AH2W-10	40G-1	Jun. 19, 2024	Annual	Jun. 19, 2025
Preamplifier	H.P.	8447F	2944A03909	Aug. 09, 2024	Annual	Aug. 09, 2025
Loop Antenna	Schwarzbeck Mess-Elektronik	FMZB 1519	1519-039	Aug. 21, 2023	Biennial	Aug. 21, 2025
Bilog Antenna	Schwarzbeck Mess-Elektronik	VULB 9163	9163-396	Apr. 02, 2024	Biennial	Apr. 02, 2026
Test Receiver	R&S	ESU26	100109	Jan. 16, 2024	Annual	Jan. 16, 2025
Turn Table	Innco systems GmbH	DS 1200 S	N/A	N.C.R.	N/A	N.C.R.
Controller	Innco systems GmbH	CONTROLLER CO3000-4P	CO3000/963/38 330516/L	N.C.R.	N/A	N.C.R.
Antenna Mast	Innco systems GmbH	MA4640-XP-ET	MA4640/536/38 330516/L	N.C.R.	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N/A	N.C.R.	N/A	N.C.R.
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-5 m	TPC240219000 4	Apr. 03, 2024	Semi-Annual	Oct. 03, 2024
Coaxial Cable	SENSORVIEW	NMST-13A26-NMST-10 m	TPC240219000 1	Apr. 03, 2024	Semi-Annual	Oct. 03, 2024
Coaxial Cable	RFONE	PL360P-292M292M-1.5M-A	20200324002	Apr. 12, 2024	Semi-Annual	Oct. 12, 2024

Note;

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 95 Subpart C, RSS-210 Issue 10 and RSS-Gen Issue 5			
Section in FCC	Section in IC	Test Item(s)	Result
95.767 (b)	RSS-210 Issue 10 Annex A.2.1(c)	RF Output Power	Complied
95.773	RSS-210 Issue 10 Annex A.2.1(e)	Occupied Bandwidth	Complied
95.779 (a)(1)(2)	RSS-210 Issue 10 Annex A.2.1(g)	Emission Mask	Complied
95.779 (a)(3)	RSS-210 Issue 10 Annex A.2.1(g)	Unwanted Emissions	Complied
95.765 (b)	RSS-210 Issue 10 Annex A.2.1(f)	Frequency Accuracy	Complied

1.7. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty	
RF Output Power	0.34 dB	
Occupied Bandwidth	0.02 kHz	
Conducted Spurious Emission	0.80 dB	
Frequency Accuracy	0.11 kHz	
Radiated Emission, 9 kHz to 30 MHz	H	3.60 dB
	V	3.60 dB
Radiated Emission, below 1 GHz	H	4.60 dB
	V	4.90 dB

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.

1.8. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL005426	2024.09.10	Initial

1.9. Description of Variant model(s)

Model	Description
TD33UT	- Basic model - It includes one Tx and One Rx
1900X 1-DOG UNIT 1900X ARC-X	- It includes one Tx and One Rx
1900X 2-DOG UNIT 1902X	- It includes one Tx and Two Rx
1903X	- It includes one Tx and Three Rx
1900X HANDSFREE 1-DOG UNIT 1900X HANDSFREE ARC-X HANDSFREE	- It includes one Tx and One Rx - Titanium comfort pad
1900X HANDSFREE 2-DOG UNIT 1902X HANDSFREE	- It includes one Tx and Two Rx - Titanium comfort pad
1903X HANDSFREE	- It includes one Tx and Three Rx - Titanium comfort pad
X2 ADDITIONAL TRANSMITTER	- It includes only one Tx
1900X WETLANDS	- It includes one Tx and One Rx - Different color

2. RF Output Power

2.1. Test Setup



2.2. Limit

2.2.1. FCC

According to §95.767 (b), 26-28 MHz frequency band. For an RCRS transmitter operating on 26.995, 27.045, 27.095, 27.145, or **27.195** MHz, the mean transmitter output power must not exceed 4 Watts.

2.2.2. IC

According to RSS-210 Issue 10 Annex A.2.1(c), For double sideband (DSB), digital or frequency modulation (FM), the transmitter unmodulated carrier power shall not exceed 4 W.

2.3. Test Procedures

2.3.1. Mean Transmitter Output Power

1. The equipment under test is connected to the spectrum analyzer.
2. The spectrum analyzer is set to the as follow;
 - RBW: 1 % to 5 % of the OBW
 - VBW: 3 x RBW
 - Detector: RMS
 - Trace Average at least 100 traces in power averaging mode.
3. Using the instrument's channel power measurement function.

2.3.2. Unmodulated Carrier Power

1. The equipment under test is connected to the spectrum analyzer.
2. The spectrum analyzer is set to the as follow;
 - RBW: 10 kHz
 - VBW: 3 x RBW
 - Detector function: Peak
 - Trace: Max hold
3. The output power of fundamental frequency was measured and recorded.


2.4. Test Result

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


Frequency (MHz)	Mean Transmitter Output Power		Unmodulated Carrier Power		Limit (W)
	(dB m)	(W)	(dB m)	(W)	
27.195	19.22	0.084	19.81	0.096	4

- Test plots

Mean transmitter
output power

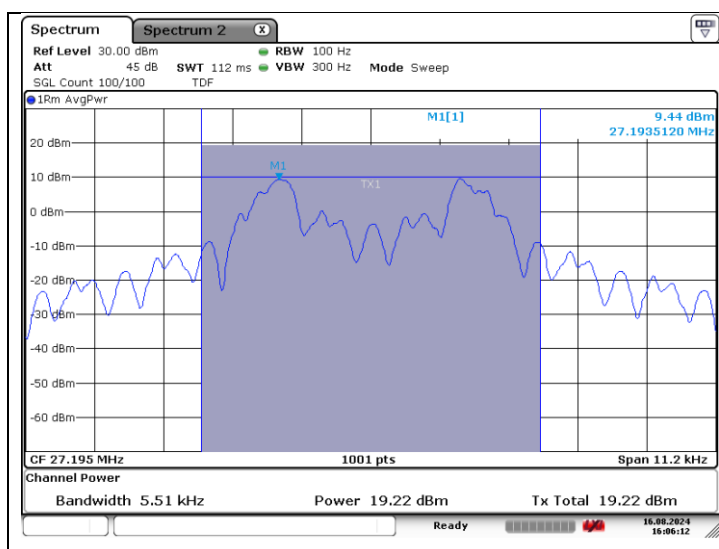

Unmodulated carrier
power

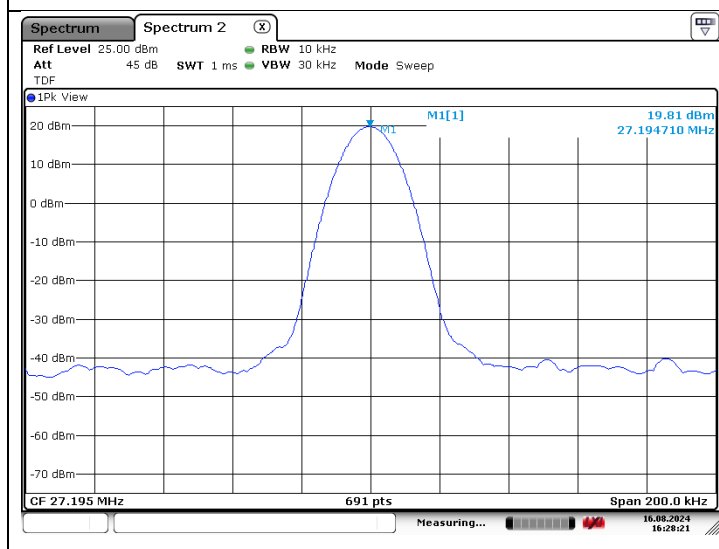

3. Occupied Bandwidth

3.1. Test Setup



3.2. Limit

3.2.1 FCC

According to §95.773, Each RCRS transmitter type must be designed such that the occupied bandwidth does not exceed 8 kHz for any emission type.

3.2.2 IC

According to RSS-210 Issue 10 Annex A.2.1(e), The authorized bandwidth is 8 kHz for DSB, digital or FM, and 4 kHz for SSB modulations. For SSB modulations, either upper or lower sideband may be used.

3.3. Test Procedure


1. The equipment under test is connected to the spectrum analyzer.
2. The spectrum analyzer is set to the as follow;
 - RBW: 1 ~ 5 % of 99 % Occupied bandwidth
 - VBW: 3 x RBW
 - Detector function: Peak
 - Trace: Max hold
3. The 99%occupied bandwidth of fundamental frequency was measured and recorded.

3.4. Test Result

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.


Frequency (MHz)	99 % Occupied Bandwidth (kHz)	Limit (kHz)	Test result
27.195	5.445	8	Compliance

- Test plot

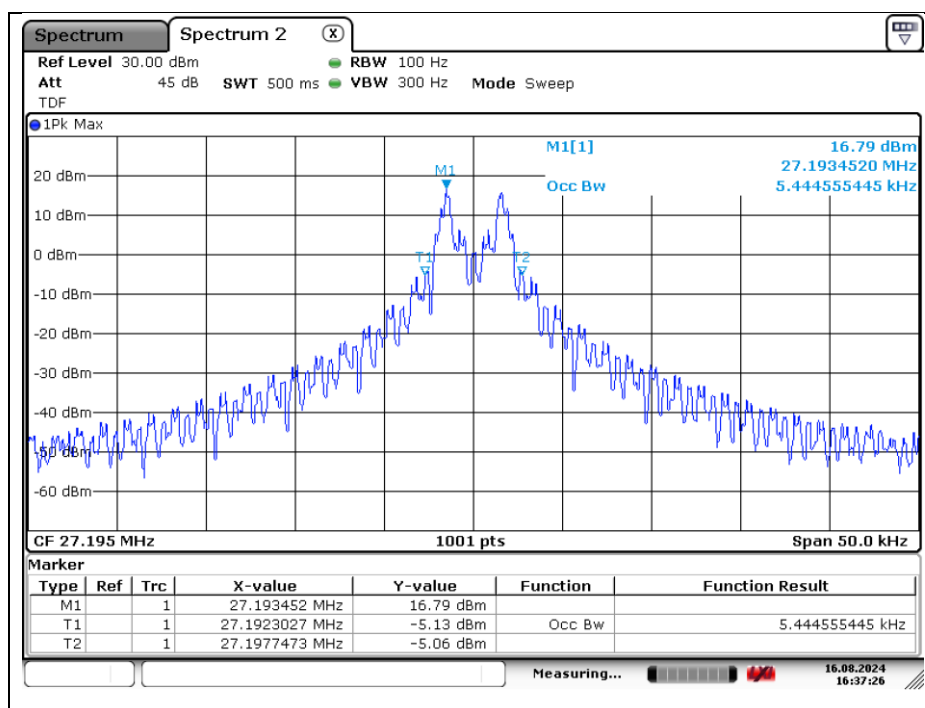

4. Emission Mask

4.1. Test Setup

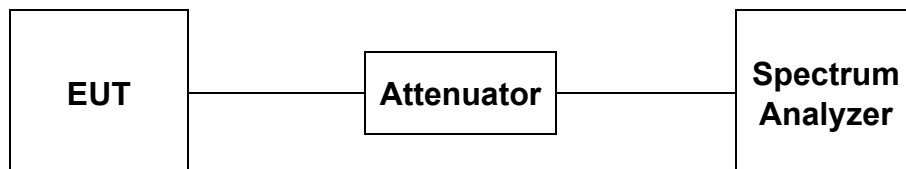

4.2. Limit

4.2.1 FCC

According to §95.779(a), 26 – 28 MHz frequency band. For an RCRS transmitter operating in the 26-28 MHz frequency band, the power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 4 kHz to 8 kHz removed from the channel center frequency;
- (2) 35 dB in the frequency band 8 kHz to 20 kHz removed from the channel center frequency;

4.2.2 IC

According to RSS-210 Issue 10 Annex A.2.1(g), The average power of unwanted emissions, measured with a resolution bandwidth of 300 Hz for (i) and (ii), and 3 kHz for (iii), shall be less than the mean transmitter power, P_{mean} (dB W), by at least:

- (i) 25 dB on any frequency removed from the centre of the authorized bandwidth by more than 50%, up to and including 100% of the authorized bandwidth.
- (ii) 35 dB on any frequency removed from the centre of the authorized bandwidth by more than 100%, up to and including 250% of the authorized bandwidth.


4.3. Test Procedure

1. The equipment under test is connected to the spectrum analyzer.
2. The spectrum analyzer is set to the as follow;
 - Span: 40 kHz
 - RBW: 300 Hz
 - VBW: 1 kHz
 - Detector function: Peak
 - Trace: Max hold
3. The fundamental frequency was measured and recorded.

4.4. Test Result

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

- Test plot

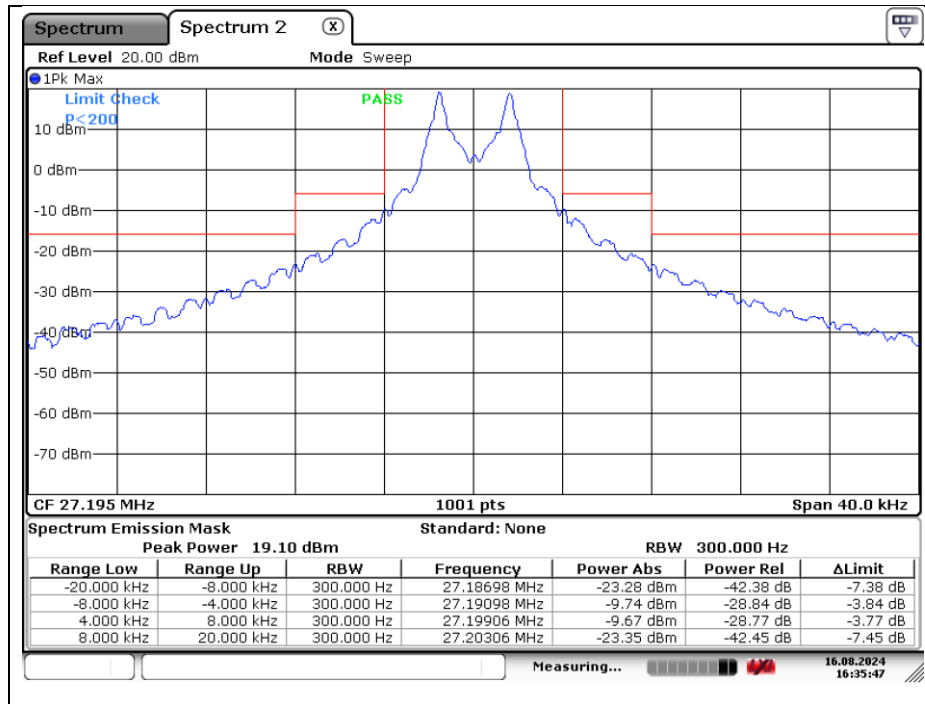


5. Transmitter Unwanted Emissions


5.1. Test Setup

5.1.1. Radiated

The diagram below shows the test setup that is utilized to make the measurements for emission below 30 MHz.

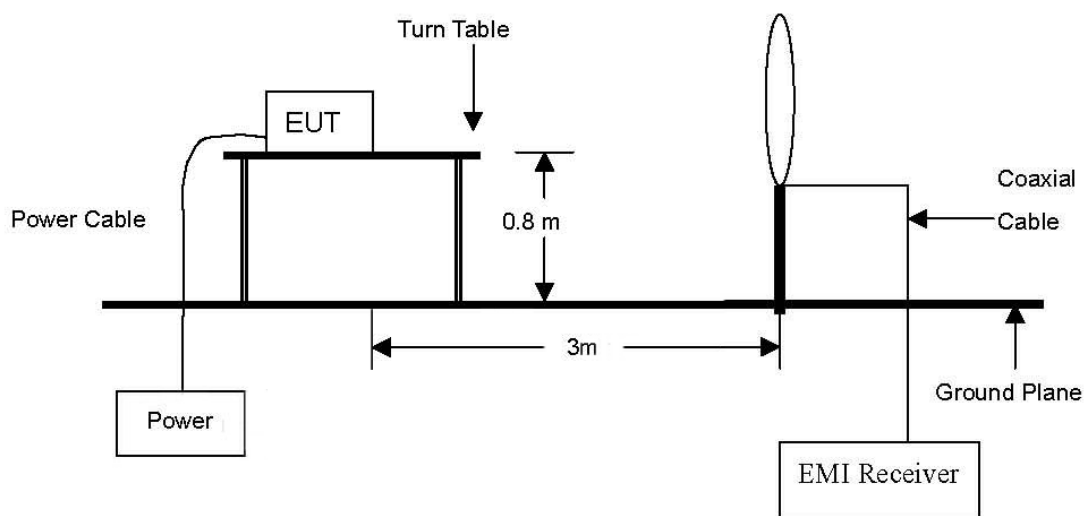

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz.

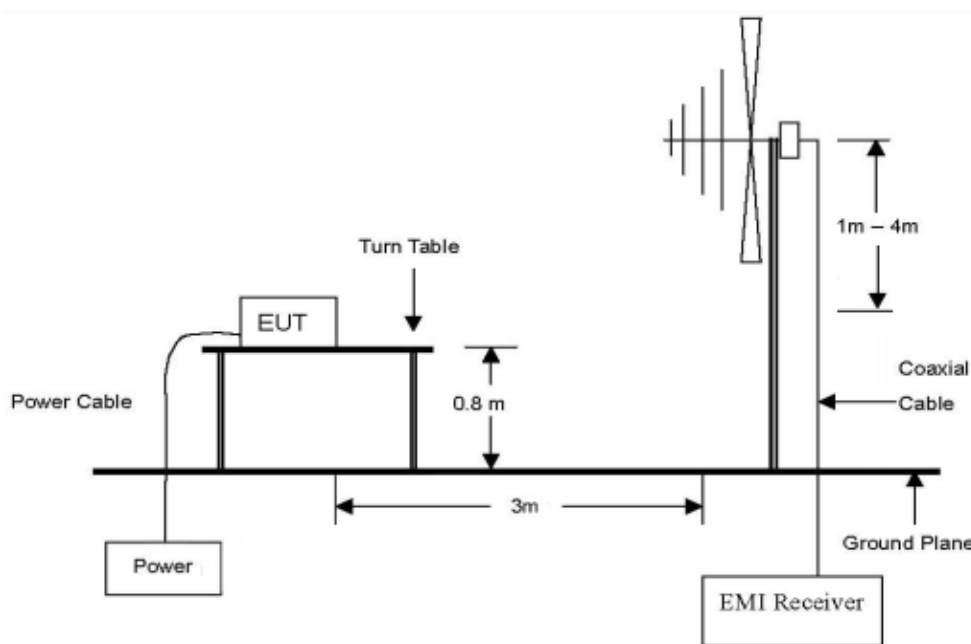

5.1.2. Conducted



5.2. Limit

5.2.1 FCC

According to §95.779(a), 26 – 28 MHz frequency band. For an RCRS transmitter operating in the 26-28 MHz frequency band, the power of unwanted emissions must be attenuated below the transmitter output power in Watts (P) by at least:

- (3) $43 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 20 kHz.

5.2.2 IC

According to RSS-210 Issue 10 Annex A.2.1(g), The average power of unwanted emissions, measured with a resolution bandwidth of 300 Hz for (i) and (ii), and 3 kHz for (iii), shall be less than the mean transmitter power, P_{mean} (dB W), by at least:

- (iii) $43 + 10 \log_{10} P_{\text{mean}}$ (watts) dB or to the general field strength limits specified in RSS-Gen, whichever is less stringent, on any frequency removed from the centre of the authorized bandwidth by more than 250% of the authorized bandwidth.

5.3. Test Procedure

5.3.1. Radiated

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.10-2013.

5.3.1.1. Test Procedures for emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.3.2.1. Test Procedures for emission from 30 MHz to 271.95 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

5.3.2. Conducted

1. The equipment under test is connected to the spectrum analyzer.
2. The spectrum analyzer is set to the as follow;
RBW: 100 kHz
VBW: 300 kHz
Detector function: Peak
Trace: Max hold
3. The trace was measured and recorded.


5.4. Test Result

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

▪ Conducted

Frequency (MHz)	Level (dB m)	Limit (dB m)	Margin (dB)
54.395	-26.45	-13	13.45
81.581	-28.43	-13	15.43

- Test plot

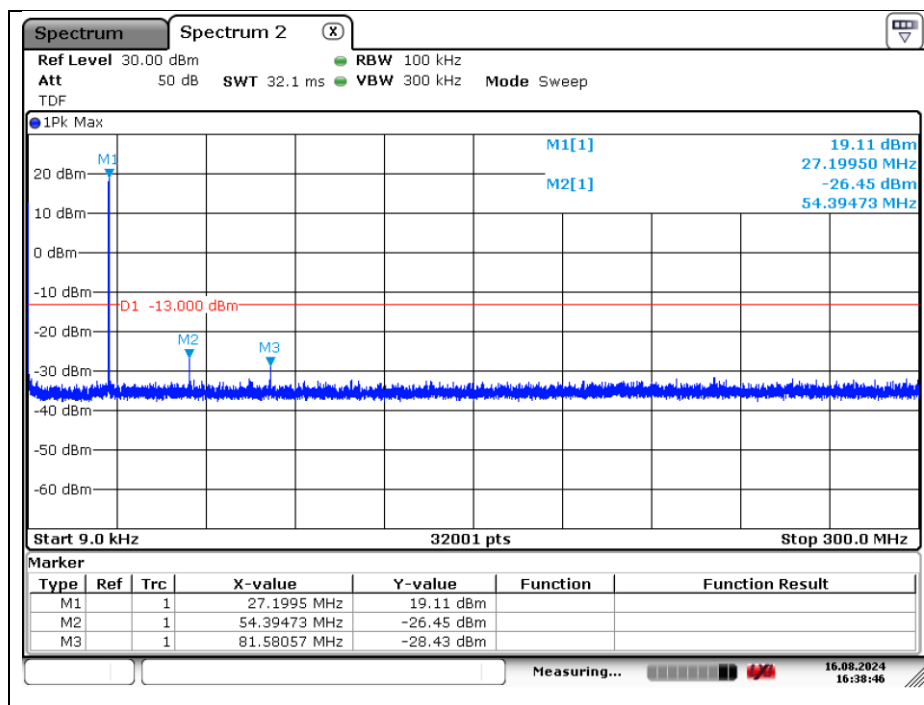

▪ Radiated
Below 30 MHz

Radiated Emissions			Ant	Correction Factors		Total			Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
0.034	38.90	Average	H	18.39	0.05	57.34	-97.41	-40.07	-13.00	27.07
1.633	34.90	Quasi - Peak	H	18.53	0.51	53.94	-97.41	-43.47	-13.00	30.47
2.754	15.40	Quasi - Peak	H	18.75	0.49	34.64	-97.41	-62.77	-13.00	34.64
4.652	7.10	Quasi - Peak	H	18.97	0.17	26.24	-97.41	-71.17	-13.00	26.24

Above 30 MHz


Radiated Emissions			Ant	Correction (dB/m)	Total			Limit	
Frequency (MHz)	Reading (dB μ V)	Detect Mode	Pol.		Actual (dB μ V/m)	CF (dB)	E.R.P. (dB m)	Limit (dB m)	Margin (dB)
32.46	31.72	Quasi - Peak	V	-11.78	19.94	-97.41	-79.62	-13.00	66.62
50.63	22.86	Quasi - Peak	H	-7.84	15.02	-97.41	-84.54	-13.00	71.54
108.76	22.80	Quasi - Peak	H	-10.15	12.65	-97.41	-86.91	-13.00	73.91
111.48	22.78	Quasi - Peak	H	-10.36	12.42	-97.41	-87.14	-13.00	74.14
272.92	22.49	Quasi - Peak	V	-7.89	14.60	-97.41	-84.96	-13.00	71.96
610.67	23.90	Quasi - Peak	V	-0.60	23.30	-97.41	-76.26	-13.00	63.26

Remark;

1. AF = Antenna Factor, CL = Cable Loss, CF = Conversion Factor
2. Actual (dB μ V/m) = Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB).
3. E.I.R.P. (dB m) = Actual (dB μ V/m) + CF (dB).
4. E.R.P. (dB m) = Actual (dB μ V/m) + CF (dB) - 2.15 (dB); where E.R.P. and E.I.R.P. are expressed in consistent units.
5. Test from 30 MHz to 271.95 MHz was performed using the software of ELEKTRA(V5.02) from Rohde & Schwarz GmbH & Co. KG.
6. Correction = Antenna Factor (dB/m) + AMP Factor (dB) + Cable Loss (dB).
7. CF (dB) = 20 log D - 104.8; where D is the measurement distance in meters, According to ANSI C63.26-2015
8. The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

6. Frequency Accuracy

6.1. Test Setup

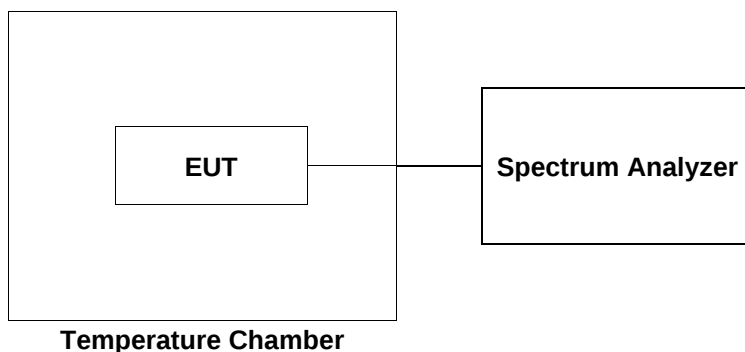

6.2. Limit

6.2.1 FCC

According to §95.765(b), Except as allowed under paragraph (c) of this section, each RCRS transmitter type capable of transmitting in the 26-28 MHz frequency band must be designed such that the carrier frequencies remain within ± 50 ppm of the channel center frequencies listed in § 95.763(a) during normal operating conditions.

6.2.2 IC

According to RSS-210 Issue 10 Annex A.2.1(f), The carrier frequency stability shall be maintained to ± 50 ppm. However, devices with output powers of 2.5 W or less can have a frequency stability of ± 100 ppm.

6.3. Test Procedure

1. The equipment under test is connected to a spectrum analyzer
2. The EUT is placed inside the temperature chamber.
3. After the temperature stabilized for approximately 20 minutes, the frequency accuracy was recorded.

6.4. Test Results

Ambient temperature : (23 ± 1) °C
Relative humidity : 47 % R.H.

Reference Frequency: 27.195 MHz			
Frequency Stability versus Temperature			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
50	7.40	587	4.676
40		592	4.854
30		590	4.782
20(Ref.)		460	-
10		515	2.022
0		125	-12.326
-10		435	-0.921
-20		415	-1.657
-30		650	6.990
Frequency Stability versus Power Supply			
Environment Temperature (°C)	Power Supplied (V)	Frequency Measure with Time Elapse	
		Frequency Error (Hz)	ppm
20	8.51 (115 %)	159	-11.081
	6.29 (85 %)	373	-3.194

- End of the Test Report -