



EMC TEST REPORT

Report No.: SET2019-16084

Product Name: Handheld Data Terminal

FCC ID: SWSDT40

Trade name: UROVO

Model No. : DT40, DT40S , DT40T

Applicant: UROVO TECHNOLOGY CO., LTD.

Address: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road, Nanshan District, Shenzhen, Guangdong, China

Received Date: 2019.11.08

Test Data: 2019-11.08-2020.03.17

Issued by: CCIC Southern Testing Co., Ltd.

Electronic Testing Building, No. 43 Shahe Road Xili Street, Nanshan

Lab Location: District, Shenzhen, Guangdong 518055, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **25** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name.....: Handheld Data Terminal

Model No.: DT40, DT40S , DT40T

Trade name: UROVO

Applicant.....: UROVO TECHNOLOGY CO., LTD.

Applicant Address.....: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,
Nanshan District, Shenzhen, Guangdong, China

Manufacturer: UROVO TECHNOLOGY CO., LTD.

Manufacturer Address: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,
Nanshan District, Shenzhen, Guangdong, China

Test Standards.....: 47 CFR Part 15 Subpart B: Radio Frequency Devices

Test Result: PASS

Tested by: Yun Lei Fang
Yun Lei Fang Test Engineer 2020.03.17

Reviewed by: Chris You
Chris You Senior Engineer 2020.03.17

Approved by: Shuangwen Zhang
2020.03.17
Shuangwen Zhang, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List.....8**
- 2.3.1 Conducted Emission.....8
- 2.3.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
- 3.1.1 Requirement 11
- 3.1.2 Test Description 11
- 3.1.3 Test Result 11
- 3.2 Radiated Emission16**
- 3.2.1 Requirement16
- 3.2.2 Test Description 17
- 3.2.3 Test Result 17

Change History		
Issue	Date	Reason for change
1.0	2020.03.17	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Handheld Data Terminal
Trade Name..... : UROVO
Brand Name..... : UROVO
Hardware Version..... : SQ45S_MB_V01
Software Version..... : SQ45S_EN_XX_WE_DS_R01_D_191031_01
Power supply : Battery
Model No.: HBLDT40
Capacitance:4500mAh
Rated Voltage:3.85V
Charge Limit:4.4V
Manufacturer : ShenZhen Tianmao Battery CO.,Ltd..

Ancillary Equipment : AC Adapter
Model No.: KP10D-050200EU
I/p: 100-240V~50/60Hz ,500mA
O/p:5.0V=== 2A
Manufacturer: Strong Power Electronics Technology Co.,Ltd
AC Adapter
Model No.: KP24A-120200HU
I/p: 100-240V~50/60Hz ,700mA
O/p:12.0V=== 2000mA
Manufacturer:Strong Power Electronics Technology Co.,Ltd

Note 1: The EUT is a Handheld Data Terminal;

Note 2: or a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN5031

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2020.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until December 31, 2020.

NVLAP Lab Code: 201008

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)

2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

Support Cable:

Description	Shield Type	Ferrite Core	Length
USB Cable	shielding	Yes	1.2m
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup 1: EUT + Notebook PC + Mouse+(Data Link)

Setup 2: EUT + Charging stand+adapter


Setup 3: EUT WWAN Traffic+ +adapter

Setup 4: EUT+ Adapter

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

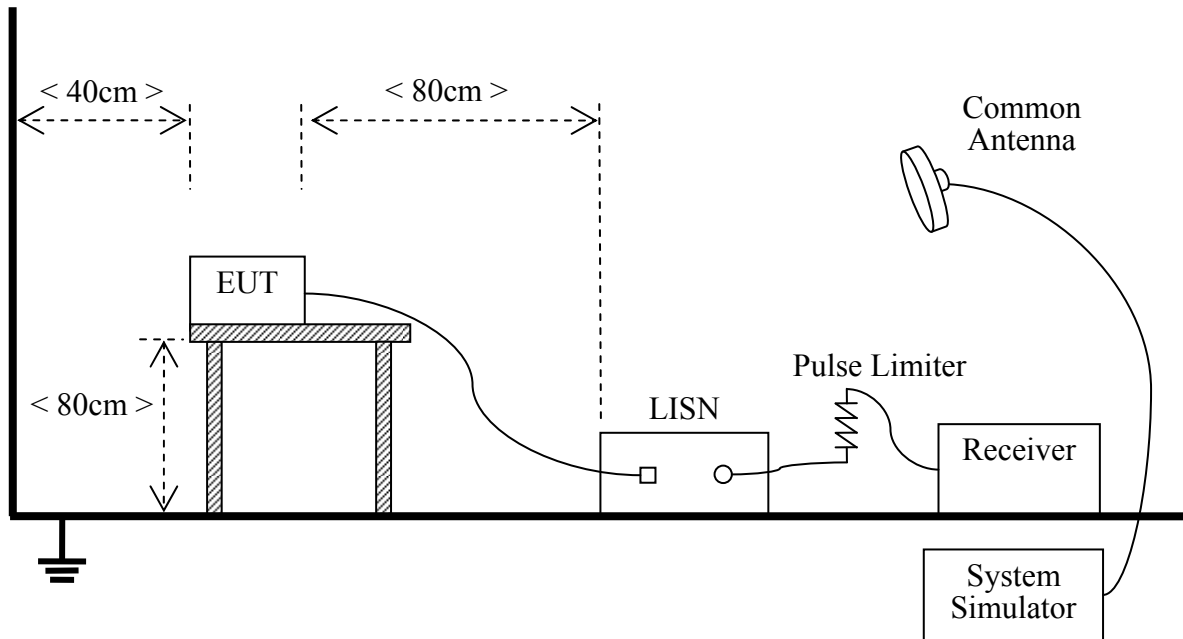

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2019.11.21	2020.11.21
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2019.11.21	2020.11.21
Cable	MATCHING PAD	W7	/	2019.08.02	2020.08.01


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

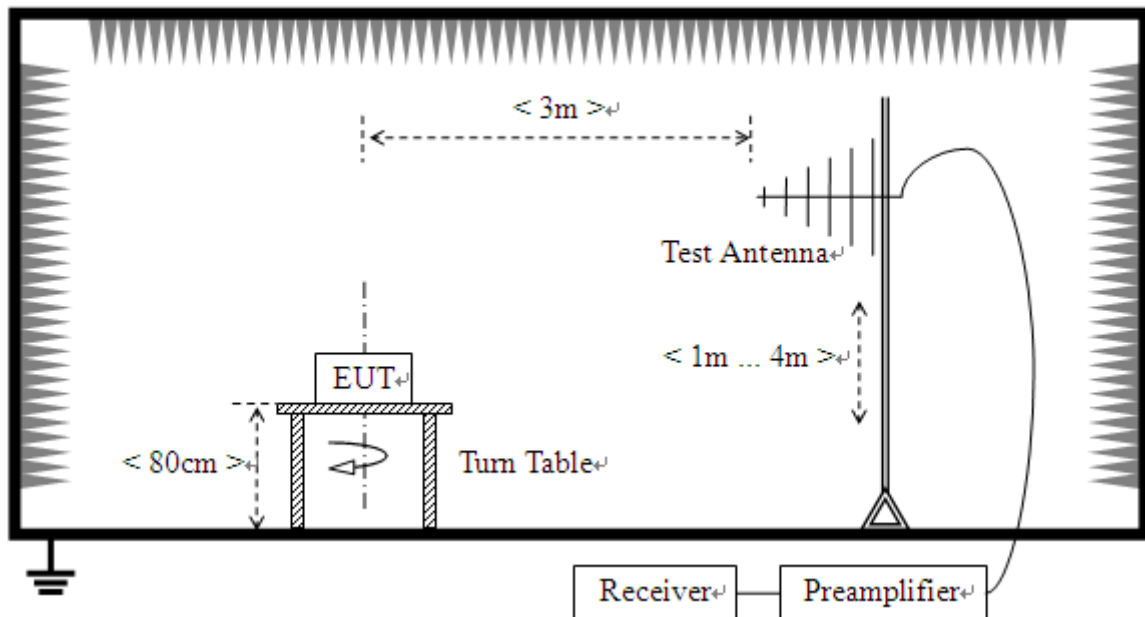

2) For radiated emissions above 1GHz

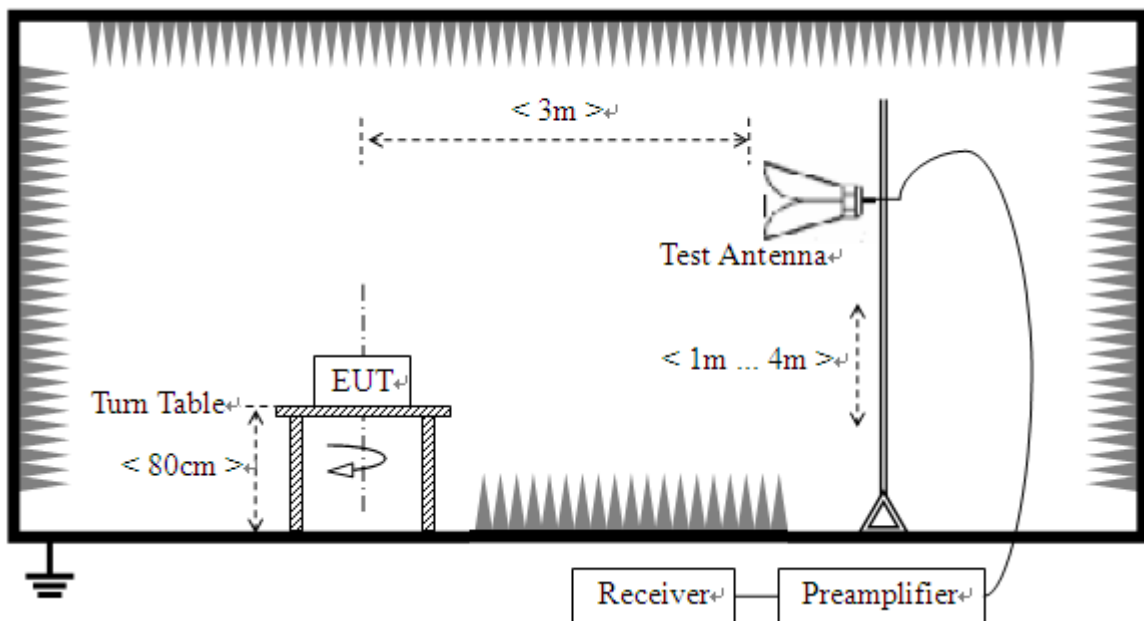

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2019.11.21	2020.11.21
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2019.11.21	2020.11.21
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2019.07.30	2020.07.29
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2019.10.22	2020.10.21
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Test voltage and frequency (120V AC,60Hz)

A. Mains terminal disturbance voltage,(Setup 1) L phase

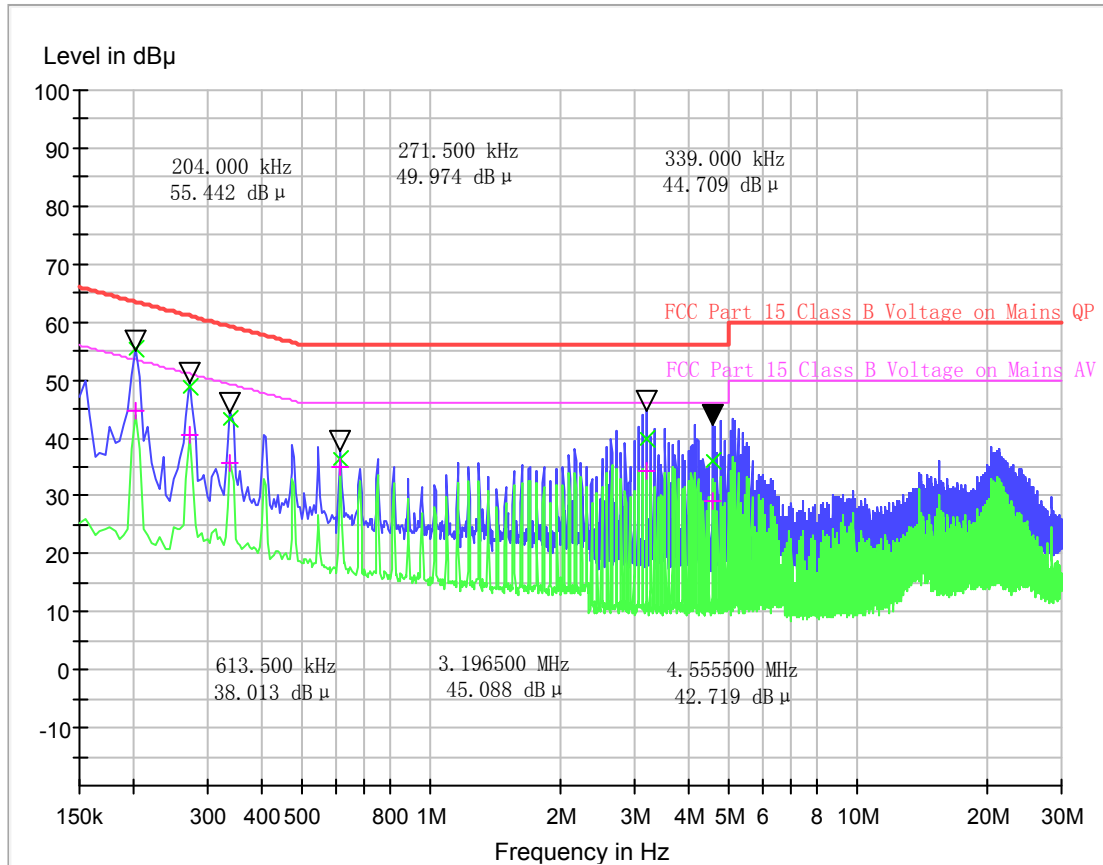


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.204000	55.26	44.75	0.1	20.1	8.19	63.4	8.70	53.4
0.271500	48.98	40.38	0.1	20.1	12.09	61.1	10.69	51.1
0.339000	43.38	35.84	0.1	20.2	15.85	59.2	13.39	49.2
0.613500	36.37	34.99	0.1	20.3	19.63	56.0	11.01	46.0
3.196500	39.97	34.18	0.1	20.6	16.03	56.0	11.82	46.0
4.555500	36.18	29.05	0.2	20.6	19.82	56.0	16.95	46.0

Note: Correction factor=Cabel loss+ attenuation factor
attenuation factor=10dB




B. Mains terminal disturbance voltage, (Setup 1) N phase

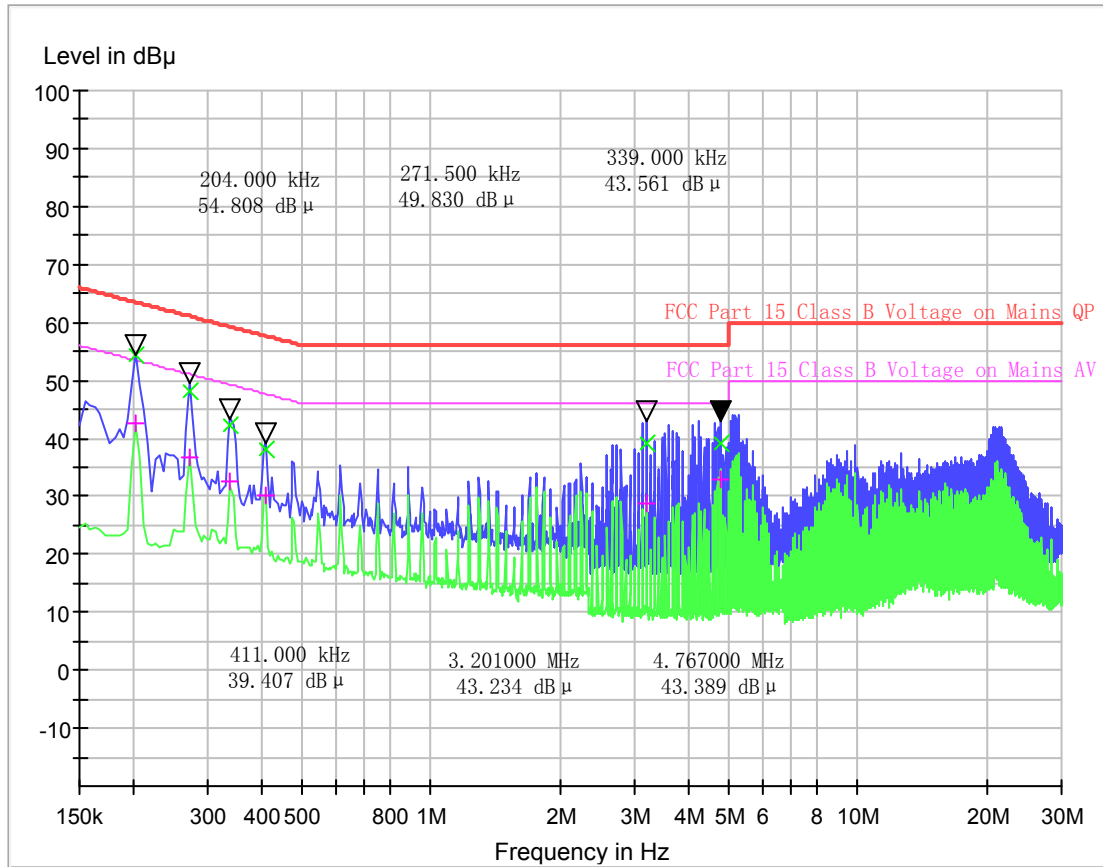

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.204000	54.34	42.52	0.1	20.0	9.11	63.4	10.93	53.4
0.271500	48.00	36.74	0.1	20.0	13.07	61.1	14.33	51.1
0.339000	42.13	32.60	0.1	20.1	17.10	59.2	16.63	49.2
0.411000	38.12	30.17	0.1	20.2	19.51	57.6	17.46	47.6
3.201000	39.13	28.66	0.1	20.2	16.87	56.0	17.34	46.0
4.767000	39.12	32.85	0.2	20.2	16.88	56.0	13.15	46.0

C. Mains terminal disturbance voltage,(Setup 2) L phase

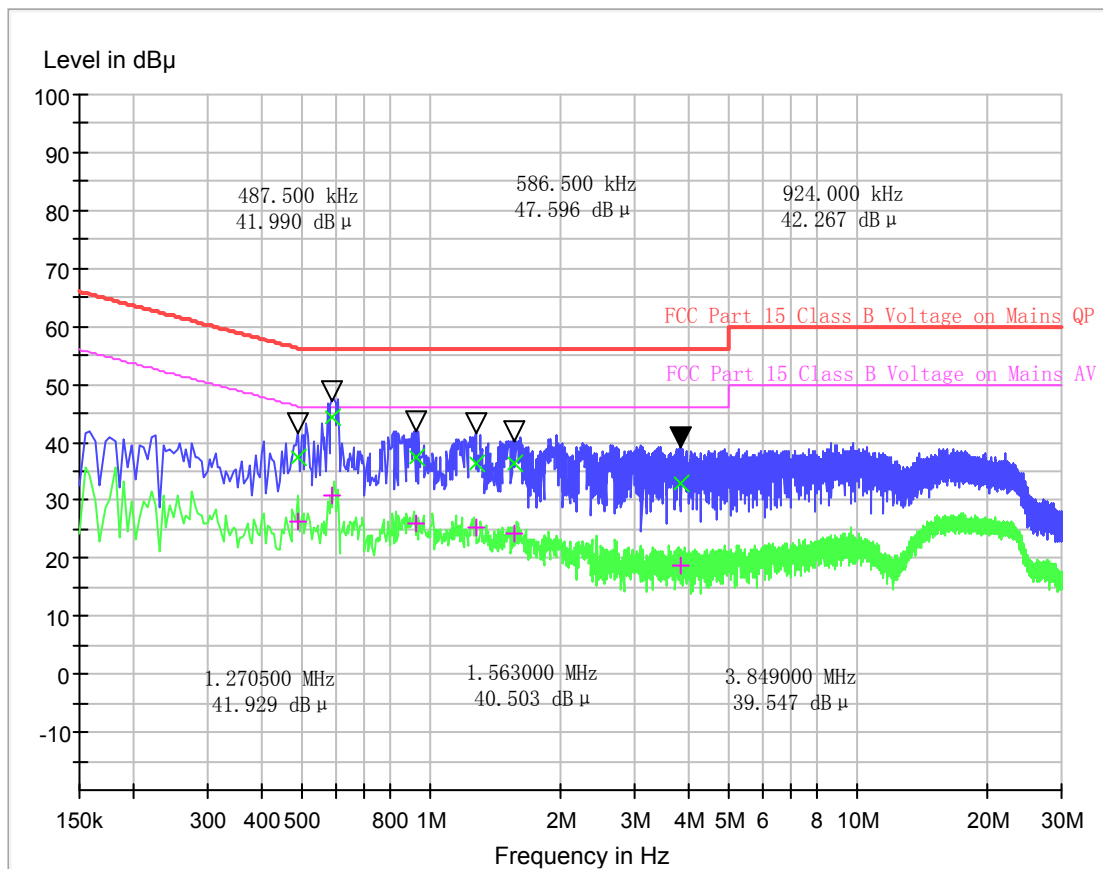


(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.487500	37.43	26.42	0.1	20.1	18.78	56.2	19.79	46.2
0.586500	44.38	31.00	0.1	20.1	11.62	56.0	15.00	46.0
0.924000	37.30	25.97	0.1	20.3	18.70	56.0	20.03	46.0
1.270500	36.26	25.18	0.1	20.4	19.74	56.0	20.82	46.0
1.563000	36.38	24.25	0.1	20.5	19.62	56.0	21.75	46.0
3.849000	32.77	18.84	0.2	20.6	23.23	56.0	27.16	46.0

Note: Correction factor=Cabel loss+ attenuation factor
attenuation factor=10dB

D. Mains terminal disturbance voltage, (Setup 2) N phase

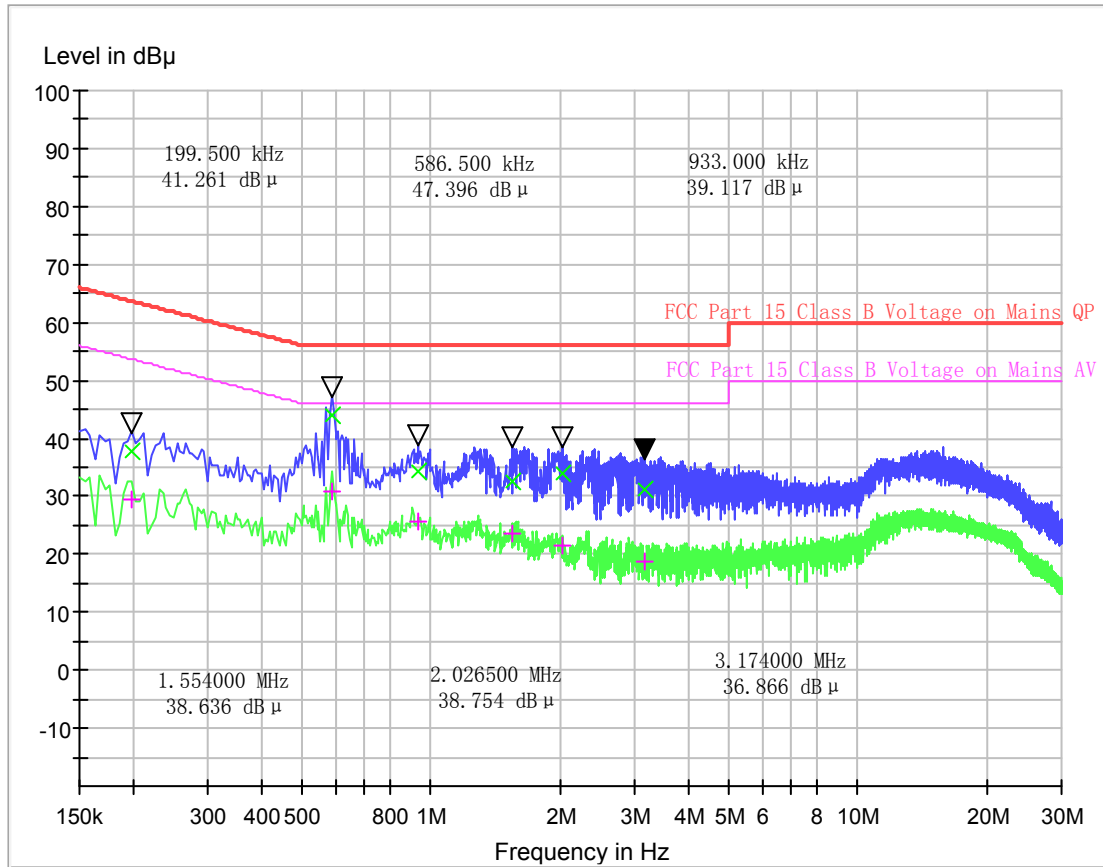

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB µ V)
0.199500	37.69	29.34	0.1	20.0	25.94	63.6	24.29	53.6
0.586500	43.84	30.99	0.1	20.1	12.16	56.0	15.01	46.0
0.933000	34.18	25.71	0.1	20.2	21.82	56.0	20.29	46.0
1.554000	32.56	23.47	0.1	20.2	23.44	56.0	22.53	46.0
2.026500	34.02	21.61	0.1	20.2	21.98	56.0	24.39	46.0
3.174000	31.22	18.82	0.2	20.2	24.78	56.0	27.18	46.0

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$



3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.



A.Radiation disturbances, antenna polarization: (Setup 1)Vertical

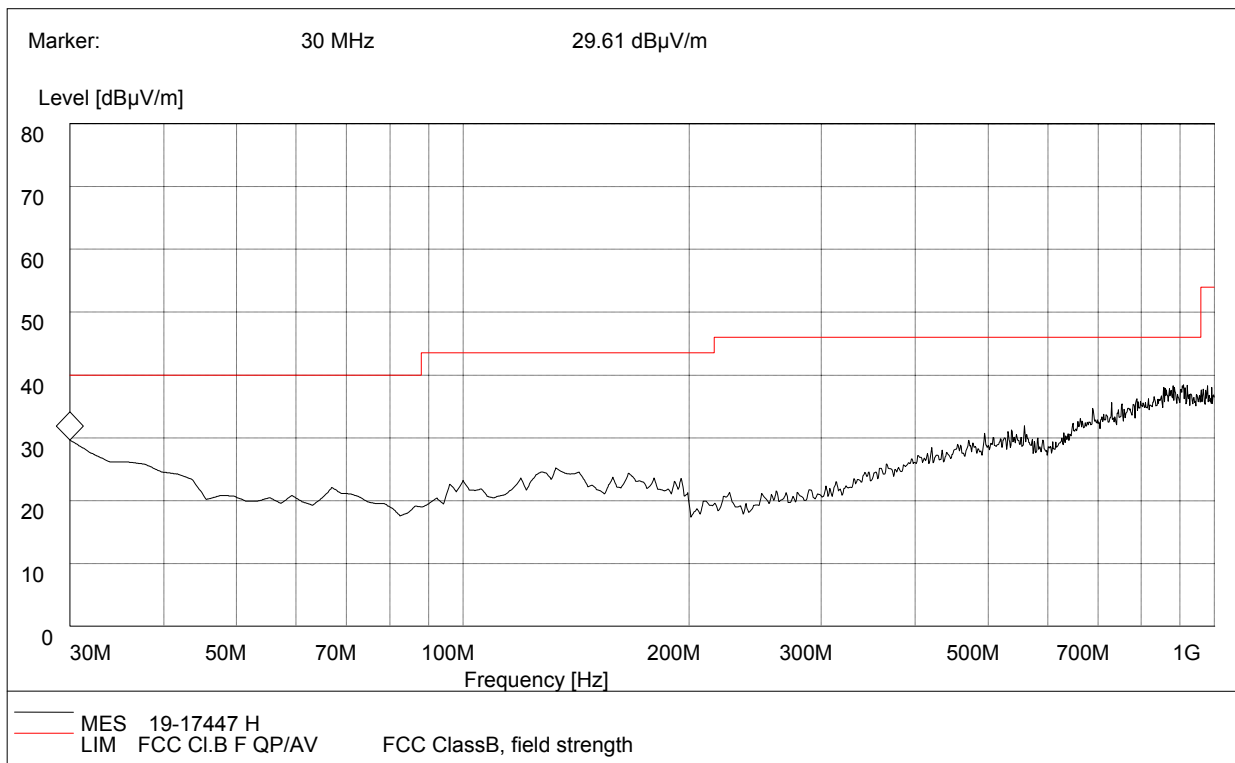


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.02	29.16	120.000	208.0	40.00	10.84	Vertical	0.5	26.3	Pass
45.59	24.17	120.000	129.0	40.00	15.83	Vertical	0.5	26.3	Pass
65.12	22.01	120.000	147.0	40.00	17.99	Vertical	0.5	26.3	Pass
158.75	22.67	120.000	169.0	43.50	20.83	Vertical	0.6	29.0	Pass
412.95	26.57	120.000	207.0	46.00	19.43	Vertical	0.6	29.0	Pass
551.47	30.26	120.000	207.0	46.00	15.74	Vertical	1.2	28.9	Pass



B.Radiation disturbances, antenna polarization: (Setup 1) Horizontal

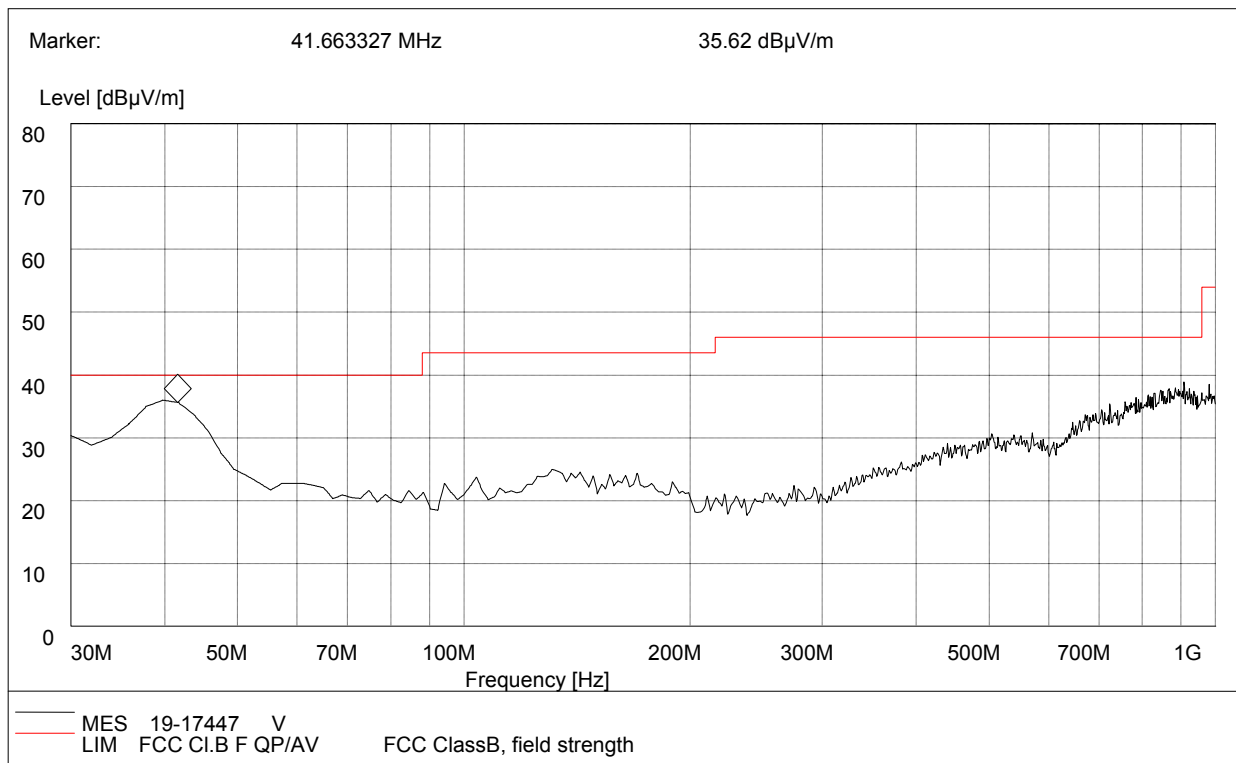


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.16	30.49	120.000	223.0	40.00	9.51	Vertical	0.5	26.3	Pass
41.66	32.06	120.000	209.0	40.00	7.94	Vertical	0.5	26.3	Pass
154.95	23.02	120.000	126.0	43.50	20.48	Vertical	0.6	29.0	Pass
187.49	23.06	120.000	268.0	43.5	20.44	Vertical	0.6	29.0	Pass
450.12	26.75	120.000	214.0	46.00	19.25	Vertical	0.6	29.0	Pass
513.08	30.05	120.000	364.0	46.00	15.95	Vertical	1.2	28.9	Pass



C.Radiation disturbances, antenna polarization: (Setup 2)Vertical

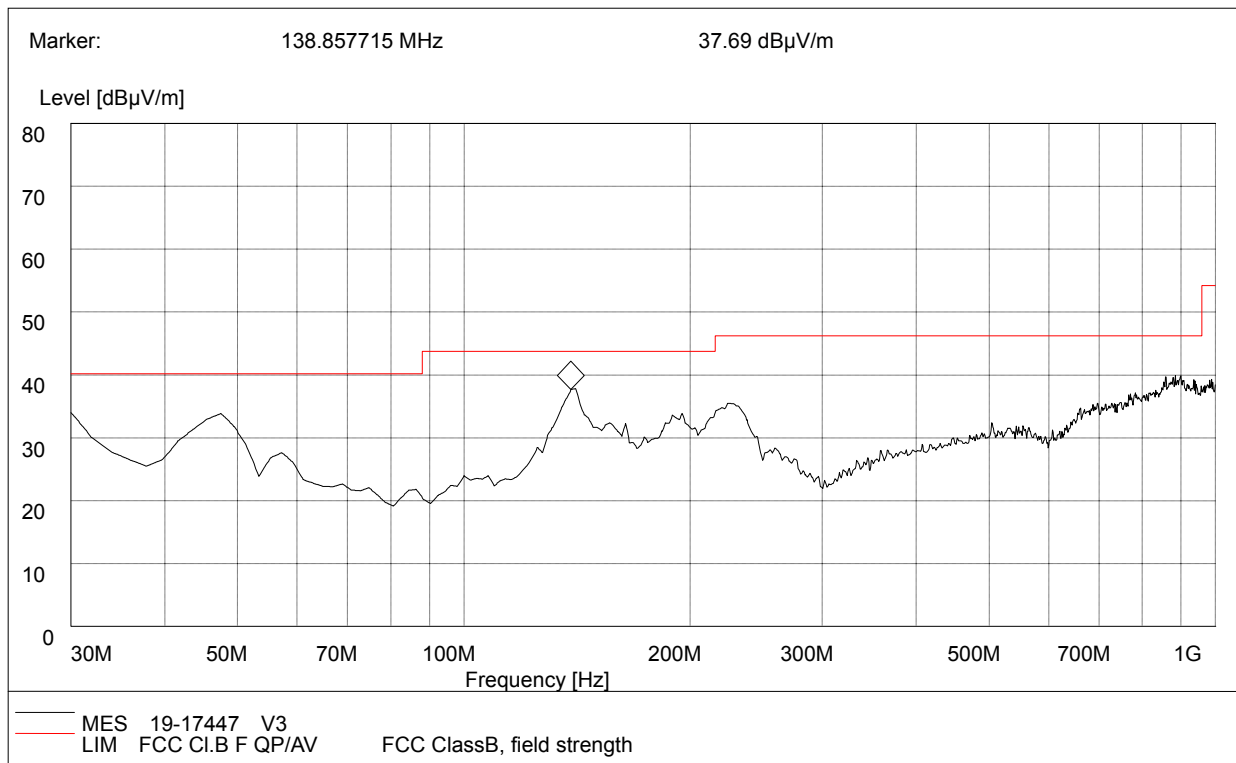


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
31.45	33.25	120.000	208.0	40.00	6.75	Vertical	0.5	26.3	Pass
47.64	34.65	120.000	129.0	40.00	5.35	Vertical	0.5	26.3	Pass
138.4	36.40	120.000	147.0	43.50	7.10	Vertical	0.5	26.3	Pass
192.16	33.64	120.000	169.0	43.50	9.86	Vertical	0.6	29.0	Pass
224.66	35.07	120.000	207.0	46.00	10.93	Vertical	0.6	29.0	Pass
861.30	38.13	120.000	207.0	46.00	7.87	Vertical	1.2	28.9	Pass




D.Radiation disturbances, antenna polarization: (Setup 2) Horizontal

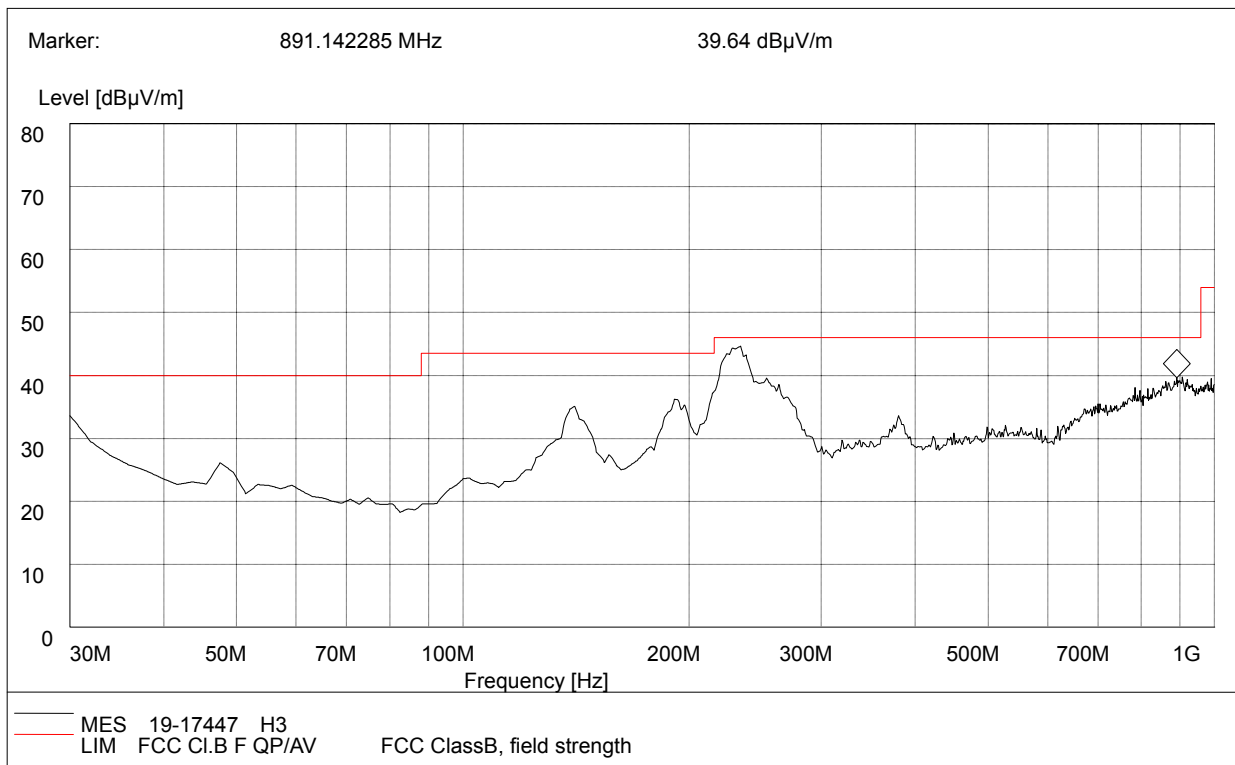

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	32.50	120.000	223.0	40.00	7.50	Vertical	0.5	26.3	Pass
148.52	32.60	120.000	209.0	43.50	10.90	Vertical	0.5	26.3	Pass
181.20	33.31	120.000	126.0	43.50	10.19	Vertical	0.6	29.0	Pass
229.0	39.42	120.000	268.0	46.00	6.58	Vertical	0.6	29.0	Pass
476.33	31.02	120.000	214.0	46.00	14.98	Vertical	0.6	29.0	Pass
891.30	37.80	120.000	364.0	46.00	8.20	Vertical	1.2	28.9	Pass


Test Result: PASS

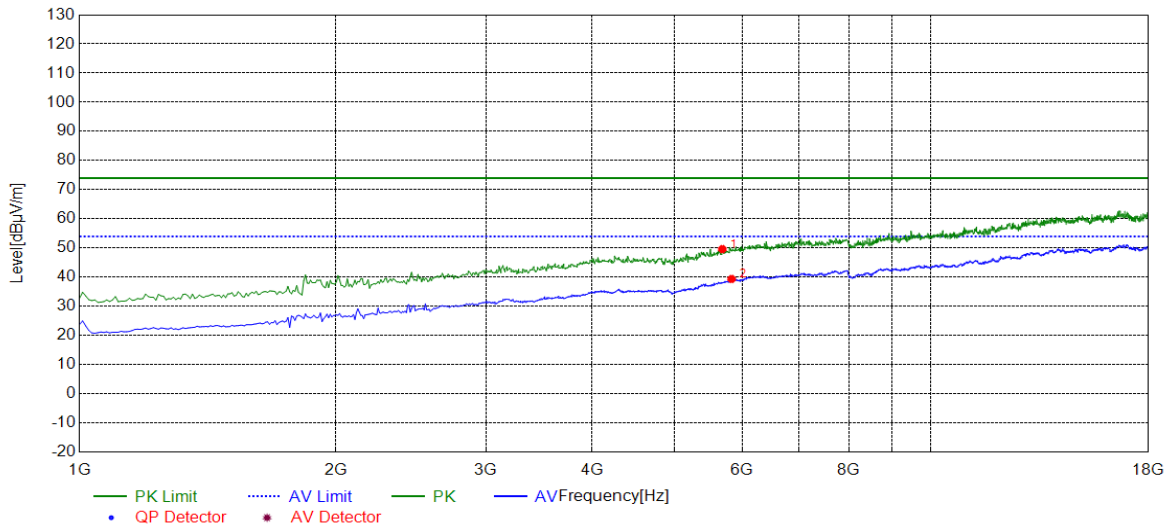A.Radiation disturbances, antenna polarization: (Setup 1) Horizontal


(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)
1	5685.842	49.61	74.00	24.39	100	330	6.40	30.40	31.40
2	5830.415	39.38	54.00	14.62	100	110	7.40	30.40	31.40


B.Radiation disturbances, antenna polarization: (Setup 1) Vertical

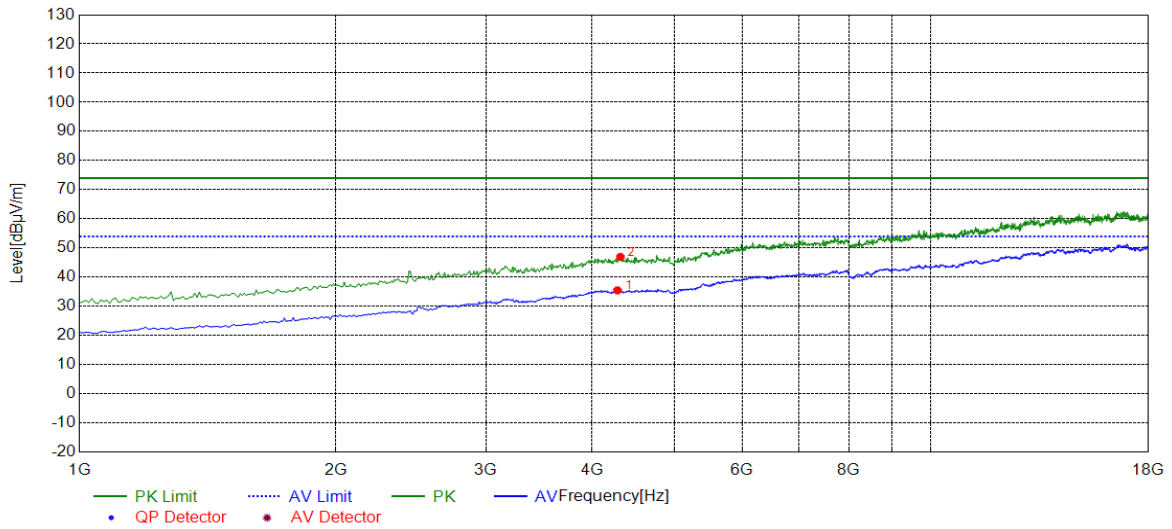

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)
1	4282.641	35.46	54.00	18.54	100	160	7.40	30.40	31.40
2	4316.658	46.95	74.00	27.05	100	120	7.40	30.40	31.40


B.Radiation disturbances, antenna polarization: (Setup 2) Horizontal

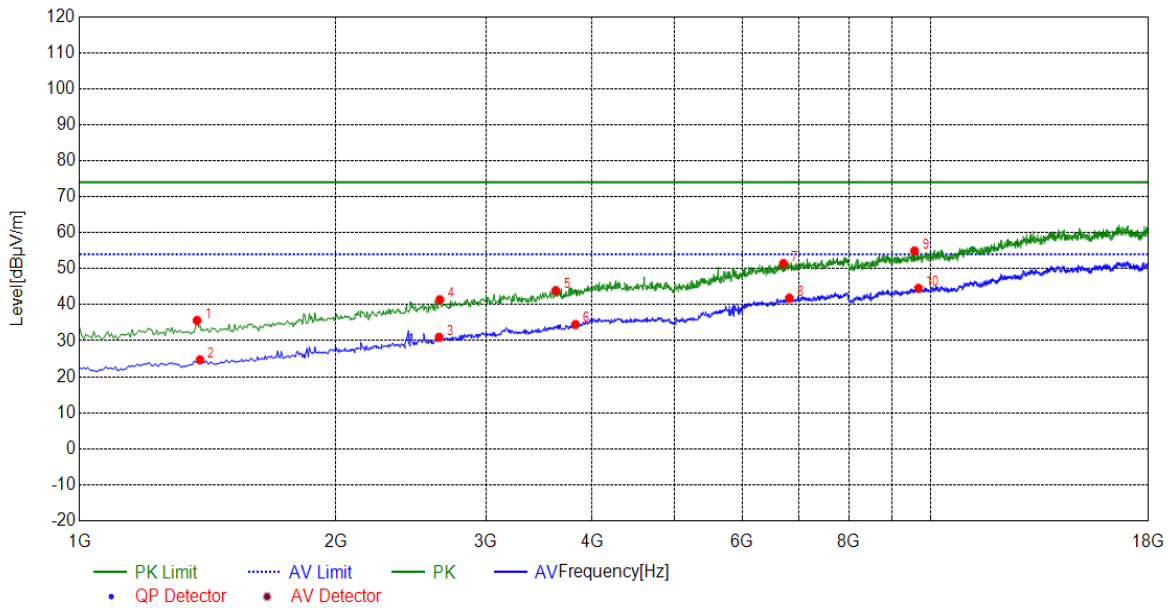

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)
1	9559.519	54.95	74.00	19.05	100	330	6.40	30.40	31.40
2	9661.553	44.57	54.00	9.43	100	110	7.40	30.40	31.40

D.Radiation disturbances, antenna polarization: (Setup 2) Vertical

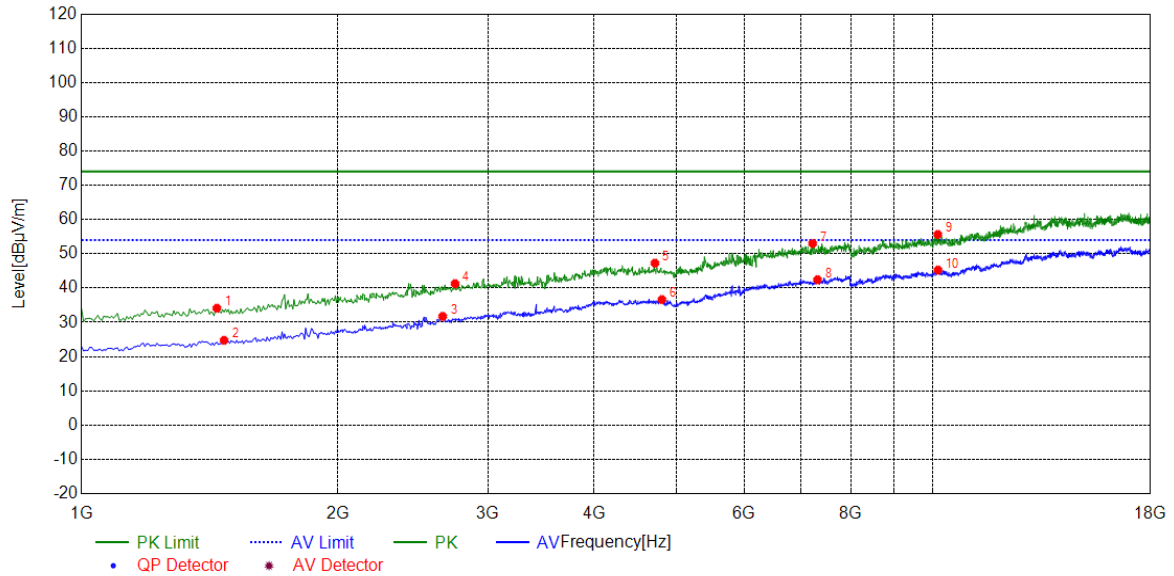

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)
1	10126.37	55.65	74.00	18.35	100	160	7.16	30.40	31.40
2	10132.04	45.28	54.00	8.72	100	120	7.48	30.40	31.40

-----End of Report-----