



EMC TEST REPORT

Report No.: SET2019-13940

Product: Handheld Data Terminal

FCC ID: SWSDT50

Trade name: UROVO

Model No. : DT50、DT50C、DT51

Applicant: UROVO TECHNOLOGY CO., LTD.

Received Date: 2019.09.25

Test Date: 2019.09.25-2019.10.24

Issued by: CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.
Building 28/29, East of Shigu Xili Industrial Zone, Nanshan District

Lab Location: Shenzhen, Guangdong 518055, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **20** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name.....: Handheld Data Terminal

Model No.: DT50、DT50C、DT51

Trade name UROVO

Applicant.....: UROVO TECHNOLOGY CO., LTD.

Applicant Address.....: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,
Nanshan District, Shenzhen, Guangdong, China

Manufacturer: UROVO TECHNOLOGY CO., LTD.

Manufacturer Address: 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,
Nanshan District, Shenzhen, Guangdong, China

Test Standards.....: 47 CFR Part 15 Subpart B

Test Result: PASS

Tested by: Yun Lei Fang
Yun Lei Fang Test Engineer 2019.10.24

Reviewed by: Chris You
Chris You Senior Engineer 2019.10.24

Approved by: Shuangwen Zhang
2019.10.24
Shuangwen Zhang, Manager



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING.....7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- 2.3 Test Setup and Equipments List.....8**
- 2.3.1 Conducted Emission.....8
- 2.3.2 Radiated Emission.....8
- 3. 47 CFR PART 15B REQUIREMENTS 11**
- 3.1 Conducted Emission 11**
- 3.1.1 Requirement 11
- 3.1.2 Test Description 11
- 3.1.3 Test Result 11
- 3.2 Radiated Emission15**
- 3.2.1 Requirement 15
- 3.2.2 Test Description 15
- 3.2.3 Test Result 15

Change History		
Issue	Date	Reason for change
1.0	2019.10.24	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Handheld Data Terminal

Model No. : DT50、DT50C、DT51

FCC ID : SWSDT50

Trade Name..... : UROVO

Brand Name..... : UROVO

Hardware Version..... : N/A

Software Version : N/A

*Note 1:*The EUT is a Handheld Data Terminal;

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity
1	47 CFR Part 15 Subpart B

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN5031

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2019.

ISED Registration: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until December 31, 2019.

NVLAP Lab Code: 201008-0

CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup 1: EUT + Notebook PC


Setup 2: EUT + Adapter (Charger)+ WWAN Traffic

Setup 3: EUT + Adapter (Charger)+ WLAN Traffic

2.3 Test Setup and Equipments List

2.3.1 Conducted Emission

A. Test Setup:

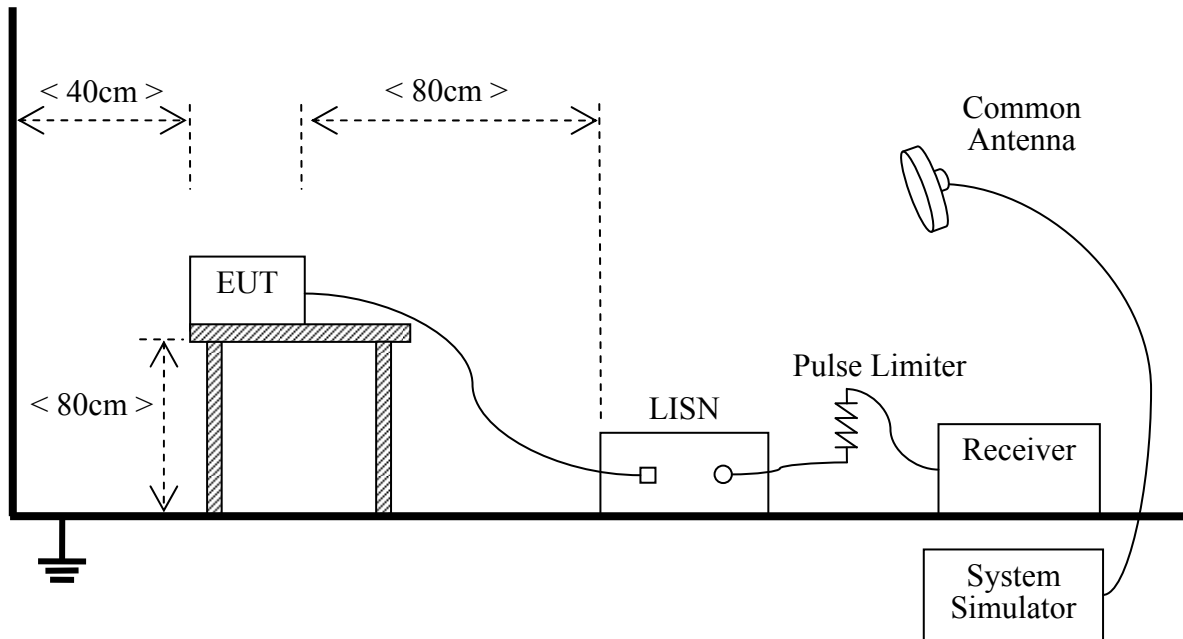

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2018.12.10	2019.12.10
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2018.12.10	2019.12.10
Cable	MATCHING PAD	W7	/	2019.08.02	2020.08.01


2.3.2 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

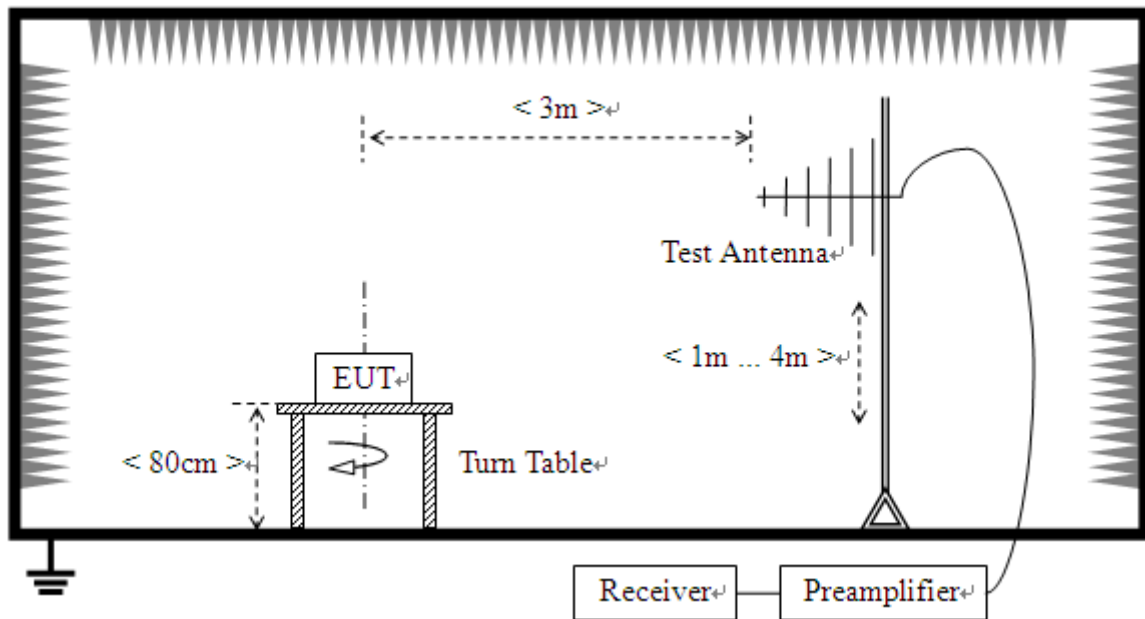

2) For radiated emissions above 1GHz

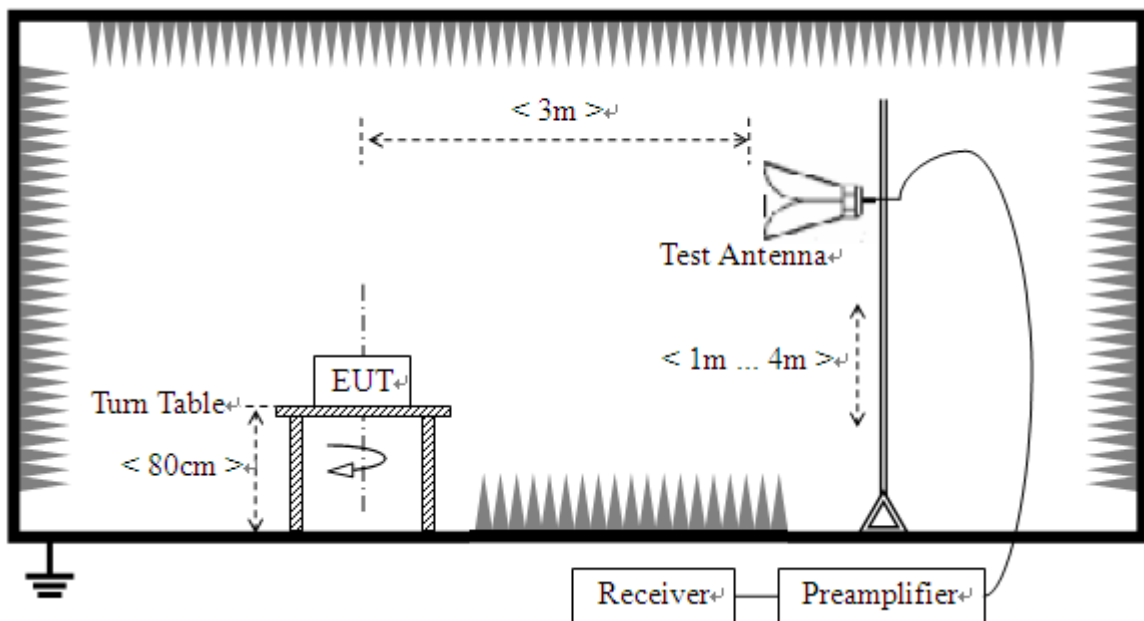

B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2018.12.10	2019.12.10
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2018.12.10	2019.12.10
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2019.07.30	2020.07.29
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2018.11.01	2019.10.31
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17



3. 47 CFR PART 15B REQUIREMENTS

3.1 Conducted Emission

3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2 Test Description

See section 2.3.1 of this report.

3.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

Note:

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.



REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor
2. Correction Factor(dB) = Attenuator (dB)+ Cable loss(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission Level

Note: Correction factor=Cabel loss+ attenuation factor
attenuation factor=10dB

Note: the test plots show the PK value

Test voltage and frequency (120V AC,60Hz)


A. Mains terminal disturbance voltage, L phase

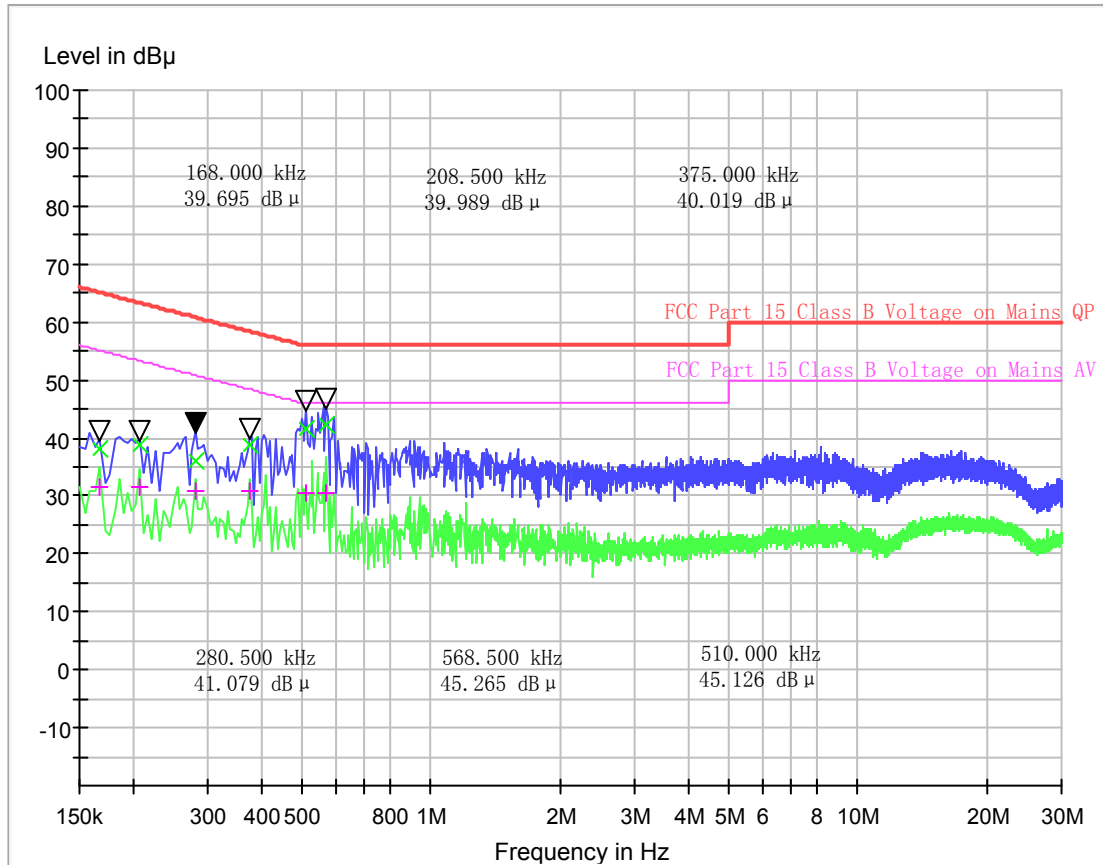

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss(dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV
0.1680	38.01	31.66	0.1	10.1	27.05	65.10	23.40	55.10
0.2085	38.96	31.64	0.1	10.1	24.30	63.30	21.62	53.30
0.2805	35.91	30.80	0.1	10.1	24.89	60.80	20.00	60.80
0.3750	38.71	30.88	0.1	10.1	19.68	58.40	17.51	48.40
0.5100	41.66	30.43	0.1	10.1	14.34	56.00	15.57	46.00
0.5685	42.21	30.64	0.1	10.1	13.79	56.00	15.36	46.00

B. Mains terminal disturbance voltage, N phase

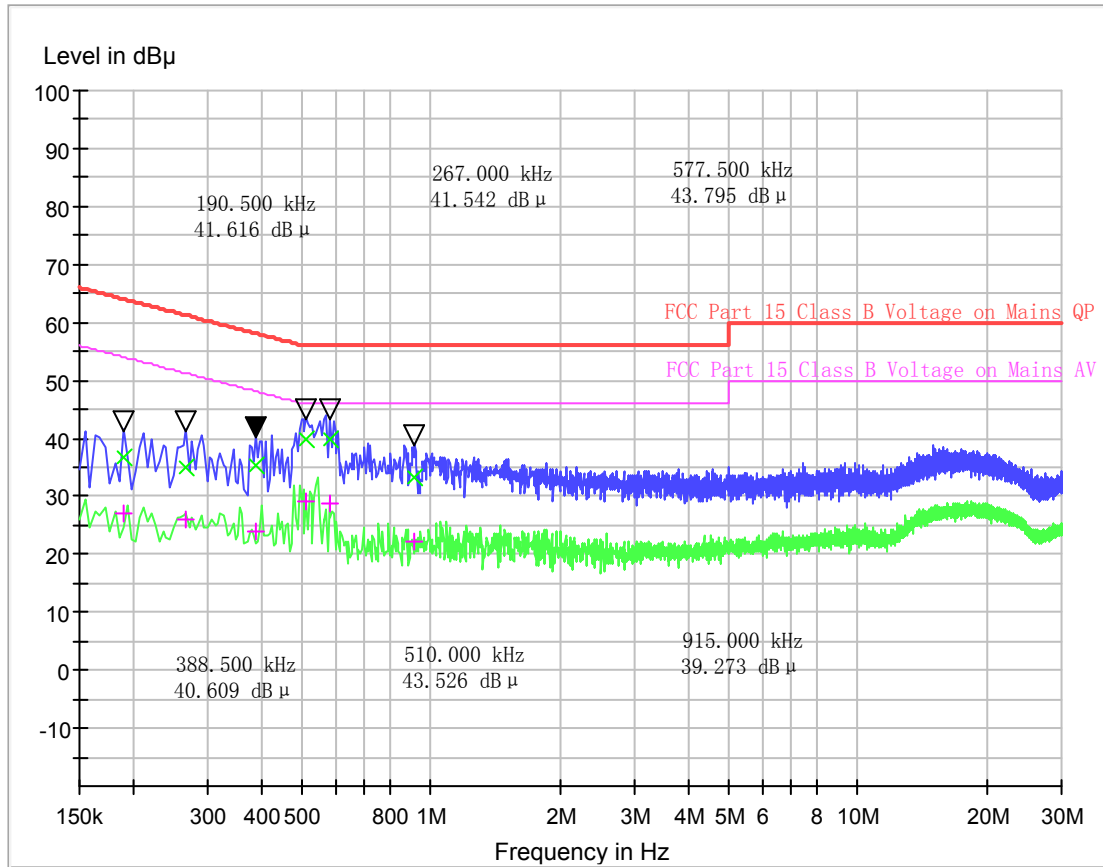

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB µ V)	CAverage (dB µ V)	Cabel Loss(dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV
0.1905	36.55	27.20	0.1	10.1	27.46	64.00	26.81	54.00
0.2670	35.08	26.02	0.1	10.1	26.13	61.20	25.19	51.20
0.3885	35.42	23.97	0.1	10.1	22.68	58.10	24.13	48.10
0.5100	39.88	29.05	0.1	10.1	16.12	56.00	16.95	46.00
0.5775	39.66	28.59	0.1	10.1	16.34	56.00	17.41	46.00
0.9150	33.23	22.21	0.1	10.1	22.77	56.00	23.79	46.00

3.2 Radiated Emission

3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level($\mu\text{V/m}$).

3.2.2 Test Description

See section 2.3.2 of this report.

3.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to



perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
3. Margin value = Limit value - Emission Level




A.Radiation disturbances, antenna polarization:Vertical

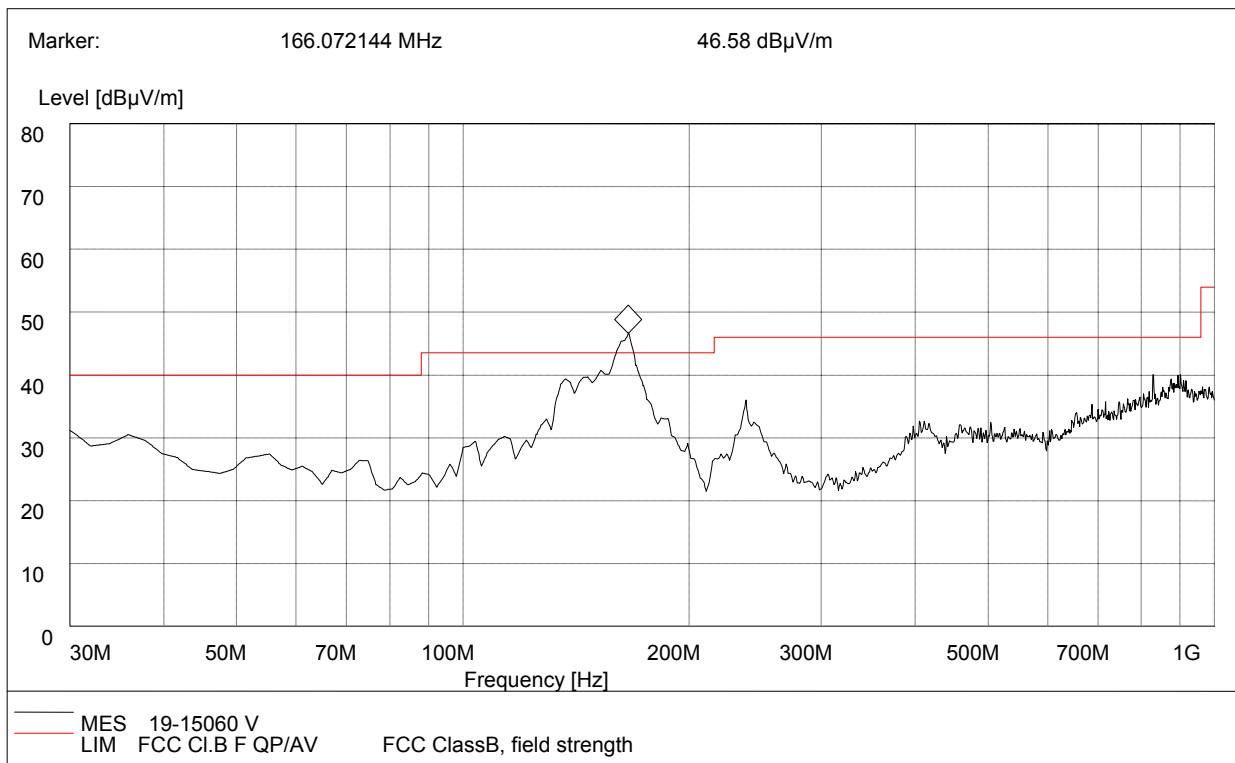

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Correction Factor(dB)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Verdict
30.12	29.69	25.9	120.000	208.0	40.00	10.31	Vertical	Pass
45.28	27.01	25.9	120.000	129.0	40.00	12.99	Vertical	Pass
64.54	25.03	25.9	120.000	147.0	40.00	14.97	Vertical	Pass
164.75	43.24	25.9	120.000	169.0	43.50	0.30	Vertical	Pass
245.66	33.51	25.9	120.000	207.0	46.00	12.49	Vertical	Pass
403.23	31.12	25.2	120.000	207.0	46.00	14.88	Vertical	Pass

B.Radiation disturbances, antenna polarization: Horizontal

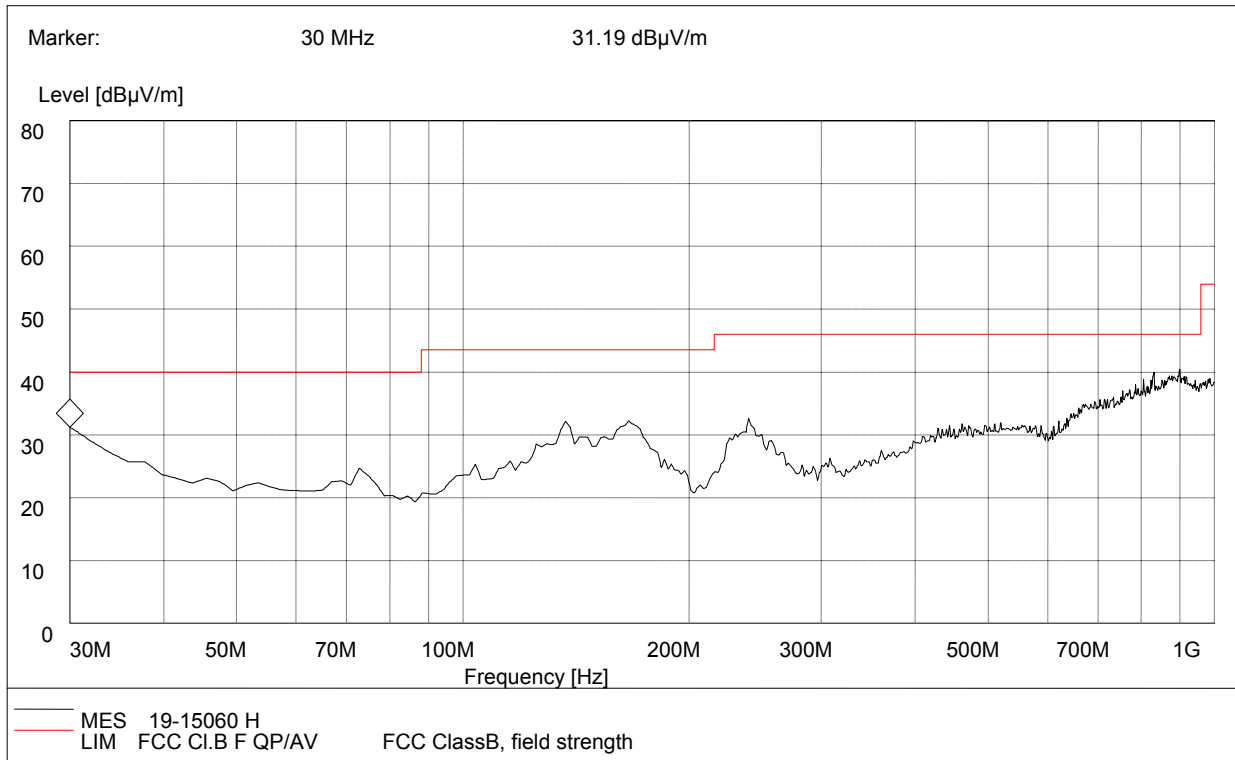


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB µ V/m)	Correction Factor(dB)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB µ V/m)	Margin (dB)	Antenna	Verdict
30.00	29.61	25.9	120.000	223.0	40.00	12.43	Horizontal	Pass
38.15	24.13	25.9	120.000	209.0	40.00	15.87	Horizontal	Pass
73.56	29.02	25.9	120.000	126.0	43.50	14.48	Horizontal	Pass
158.74	31.44	25.9	120.000	268.0	43.50	12.06	Horizontal	Pass
244.39	30.75	25.9	120.000	214.0	46.00	15.25	Horizontal	Pass
451.94	30.77	25.2	120.000	364.0	46.00	15.23	Horizontal	Pass

Test Result: PASS

A.Radiation disturbances, antenna polarization: Horizontal

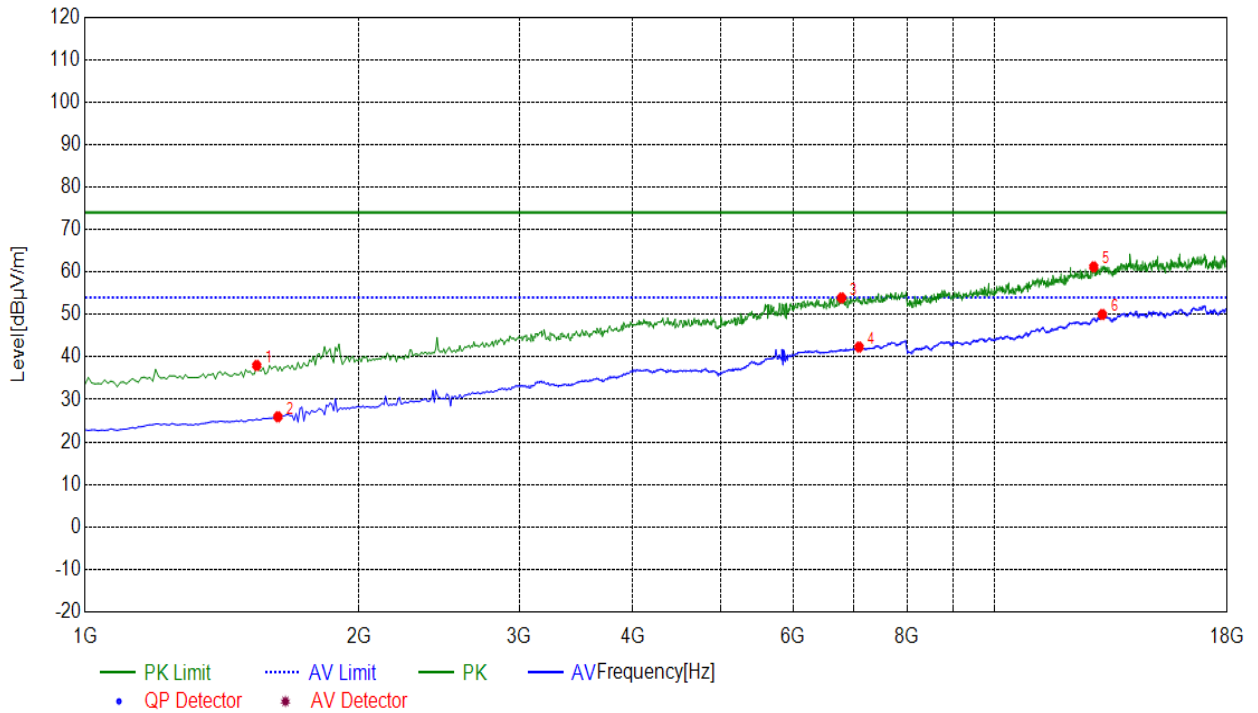


(Plot M: Test Antenna Horizontal 1G – 18G)

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1544.272	38.03	74.00	35.97	100	270	Horizontal
2	1629.314	25.94	54.00	28.06	100	240	Horizontal
3	6782.891	53.92	74.00	20.08	100	180	Horizontal
4	7089.044	42.36	54.00	11.64	100	130	Horizontal
5	12837.91	61.22	74.00	12.78	100	50	Horizontal
6	13118.55	50.02	54.00	3.98	100	300	Horizontal

B.Radiation disturbances, antenna polarization: Vertical

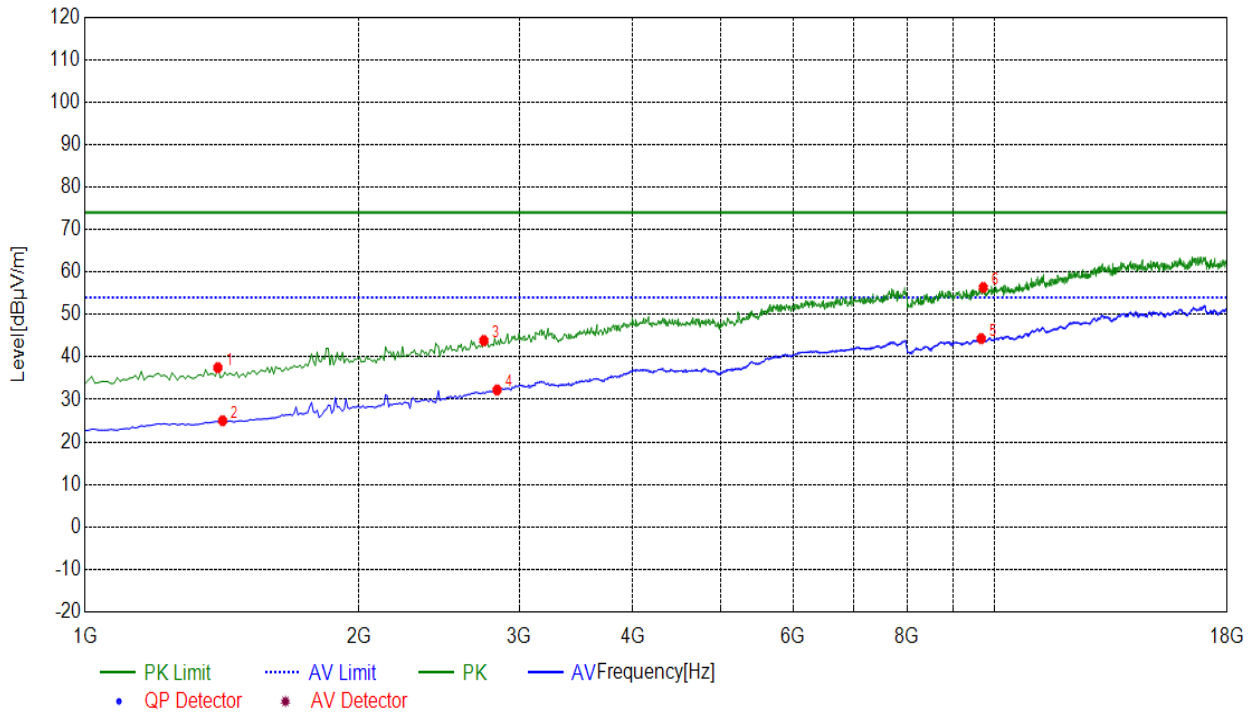

(Plot N: Test Antenna Vertical 1G – 18G)

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1399.699	37.50	74.00	36.50	100	210	Vertical
2	1416.708	25.01	54.00	28.99	100	280	Vertical
3	2743.371	43.88	74.00	30.12	100	350	Vertical
4	2836.918	32.25	54.00	21.75	100	60	Vertical
5	9657.328	44.33	54.00	9.67	100	290	Vertical
6	9708.354	56.37	74.00	17.63	100	70	Vertical

-----End of Report-----