

Appendix B. MEASUREMENT SCANS

Date: 2016.04.06.

i6200S GSM850 Head Right Cheek Mid

Medium: HSL900

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.0$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(9.86, 9.86, 9.86); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

GSM 850_Right Cheek/Mid/Area Scan (51x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 6.954 V/m; Power Drift = 0.16 dB

Fast SAR: SAR(1 g) = 0.192 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (interpolated) = 0.204 W/kg


GSM 850_Right Cheek/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.954 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.262 mW/g

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.204 W/kg

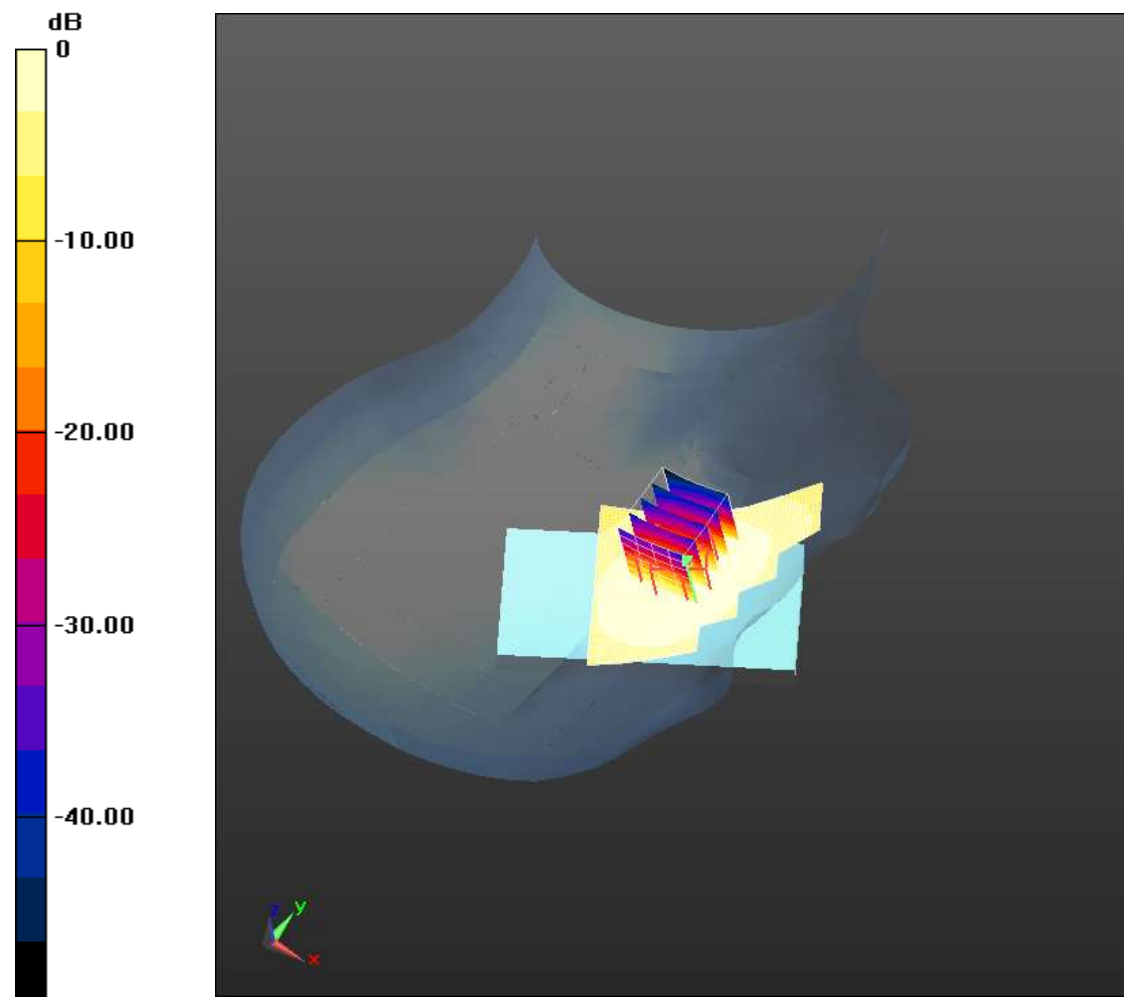

0 dB = 0.204 W/kg = -13.79 dB W/kg

Date: 2016.04.06.

i6200S GSM850 Body Worn Back Side Mid

Medium: MSL900

Communication System: Generic GSM; Communication System Band: GSM 850 (824.0 - 849.0 MHz);

Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(9.66, 9.66, 9.66); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

GSM 850_Back /Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 12.524 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 0.152 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (interpolated) = 0.161 W/kg


GSM 850_Back/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.524 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.196 mW/g

SAR(1 g) = 0.151 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (measured) = 0.160 W/kg

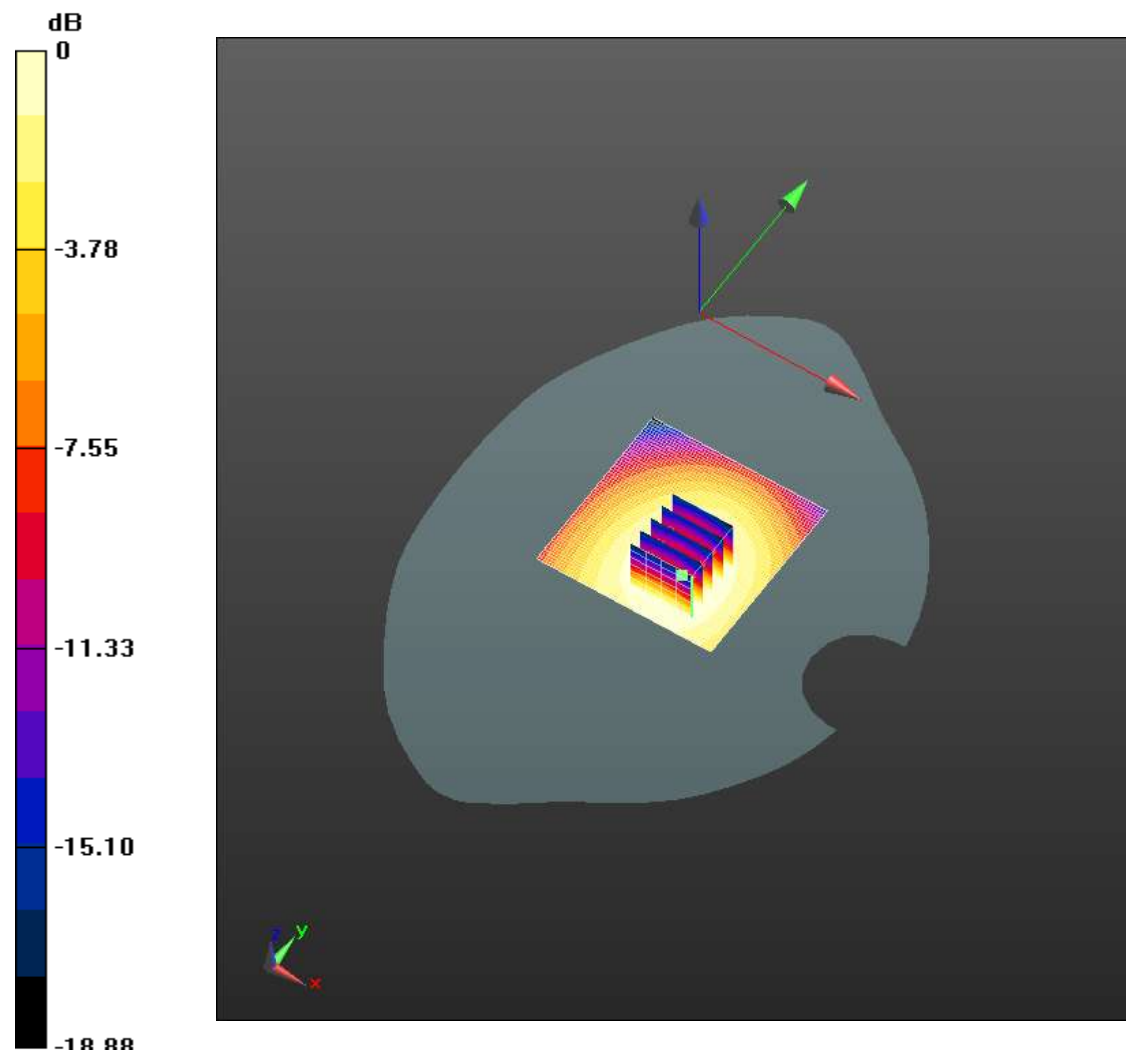

0 dB = 0.161 W/kg = -15.88 dB W/kg

Date: 2016.04.06.

i6200S GSM850 Body Hotspot Back Side Mid

Medium: MSL900

Communication System: GPRS 3 Tx slots; Communication System Band: GSM 850 (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:2.77

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(9.66, 9.66, 9.66); Calibrated: 2015.11.26.;
Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

GSM 850_Back /Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 13.190 V/m; Power Drift = 0.01 dB

Fast SAR: SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (interpolated) = 0.179 W/kg


GSM 850_Back 15mm/Mid10,mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.190 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.216 mW/g

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.177 W/kg

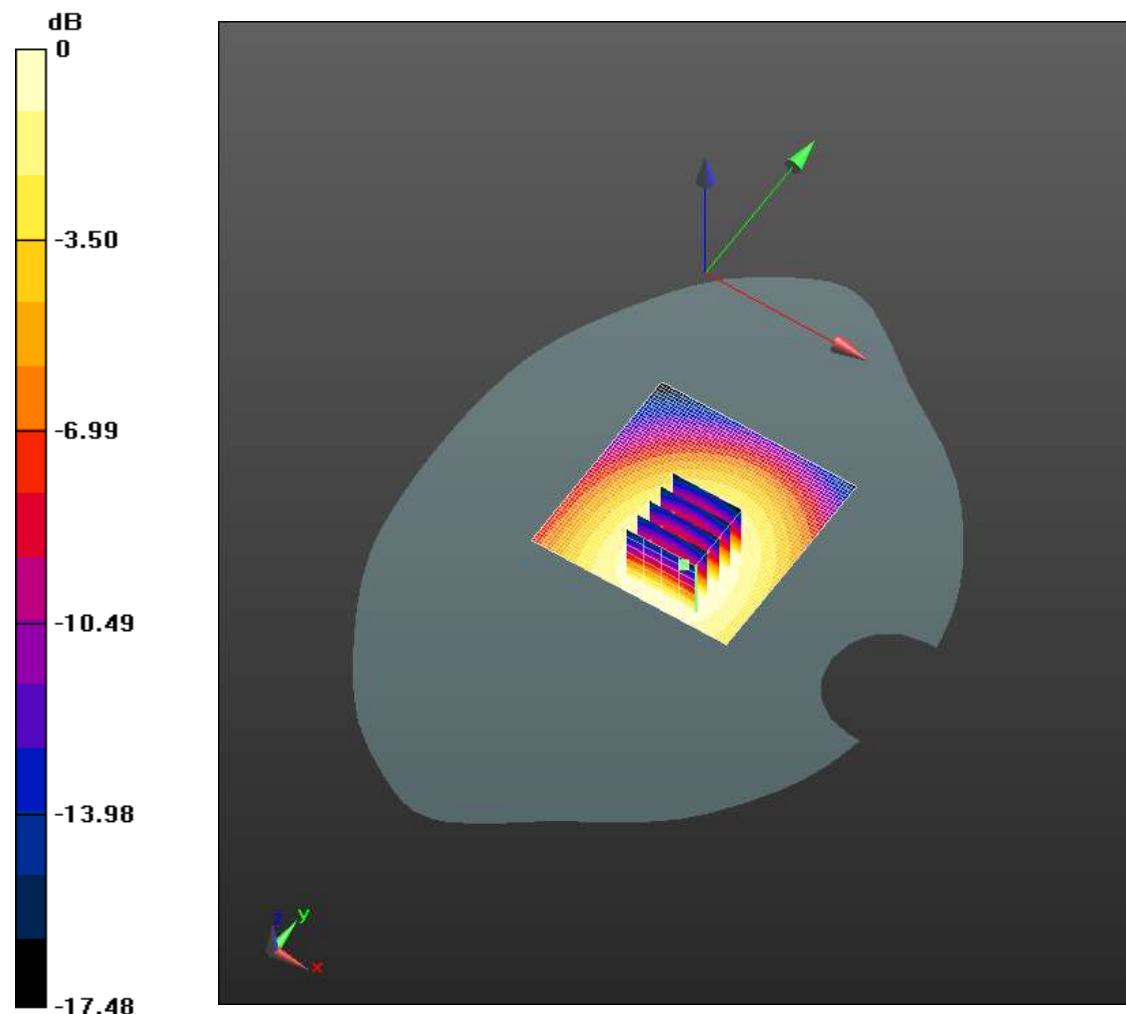

0 dB = 0.179 W/kg = -14.95 dB W/kg

Date: 2016.04.07.

i6200S GSM1900 Head Right Cheek Mid

Medium: HSL1900

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.96, 7.96, 7.96); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

1900_Right GSM Head/1900 GSM Cheek-Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 1.868 V/m; Power Drift = 0.01 dB

Fast SAR: SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (interpolated) = 0.121 W/kg

1900_Right GSM Head/1900 GSM Cheek-Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.868 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.172 mW/g

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.115 W/kg

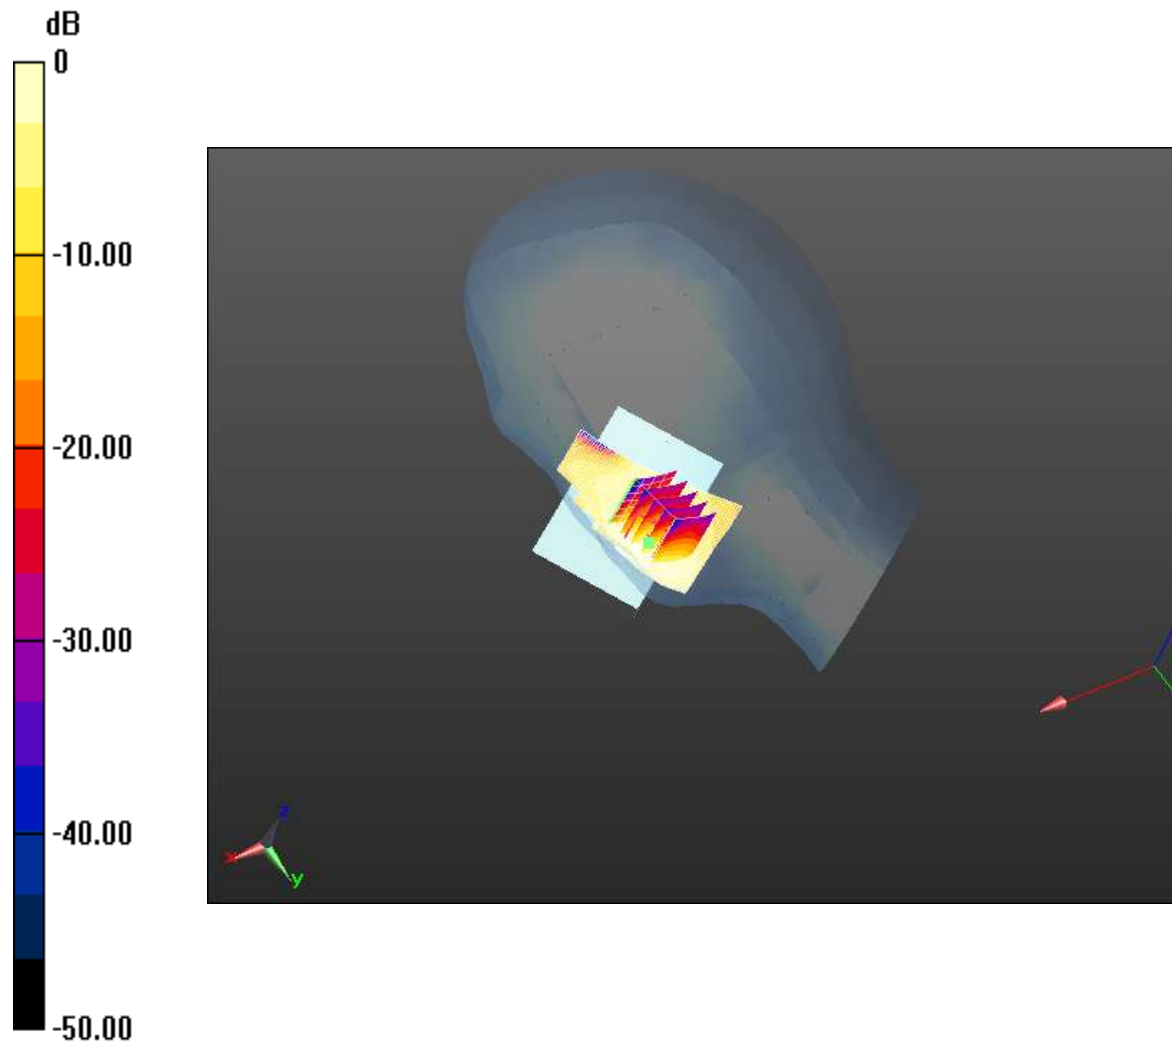

0 dB = 0.121 W/kg = -18.36 dB W/kg

Date: 2016.04.07.

i6200S GSM1900 Body Worn Back Side Mid

Medium: MSL1900

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.6, 7.6, 7.6); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

1900_GSM/GSM1900 Facedown-Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.072 V/m; Power Drift = -0.00 dB

Fast SAR: SAR(1 g) = 0.123 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (interpolated) = 0.136 W/kg


1900_GSM/GSM1900 Facedown-Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.072 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.337 mW/g

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.142 W/kg

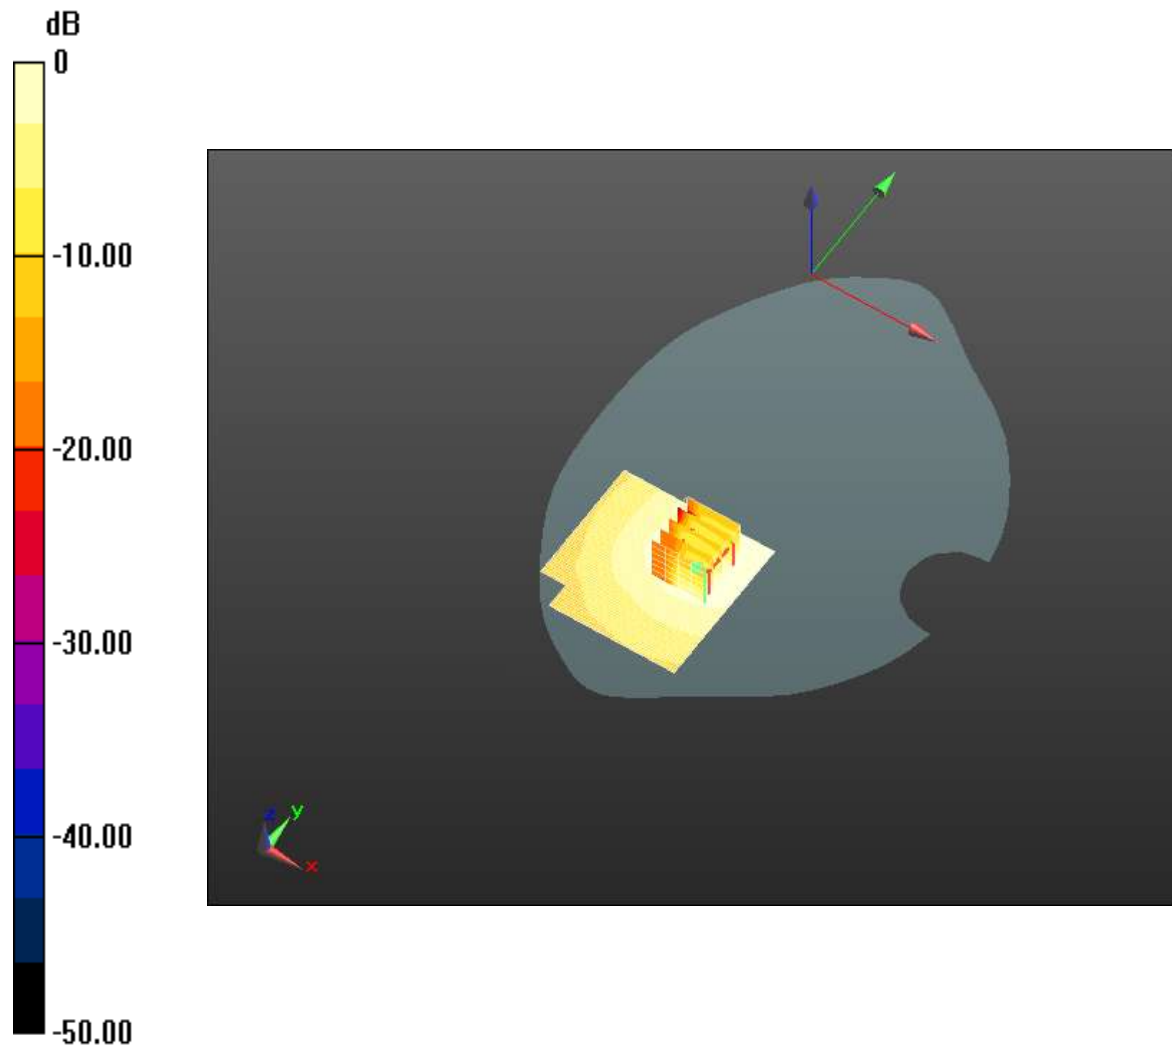

0 dB = 0.136 W/kg = -17.34 dB W/kg

Date: 2016.04.07.

i6200S GSM1900 Body Hotspot Back Side Mid

Medium: MSL1900

Communication System: GPRS 3 Tx slots; Communication System Band: PCS 1900 (1850.0 - 1910.0 MHz); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.6, 7.6, 7.6); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

1900_GPRS/GPRS1900 Facedown-Mid/Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Reference Value = 5.918 V/m; Power Drift = 0.08 dB

Fast SAR: SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.111 mW/g

Maximum value of SAR (interpolated) = 0.213 W/kg


1900_GPRS/GPRS1900 Facedown-Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.918 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.330 mW/g

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.119 mW/g

Maximum value of SAR (measured) = 0.222 W/kg

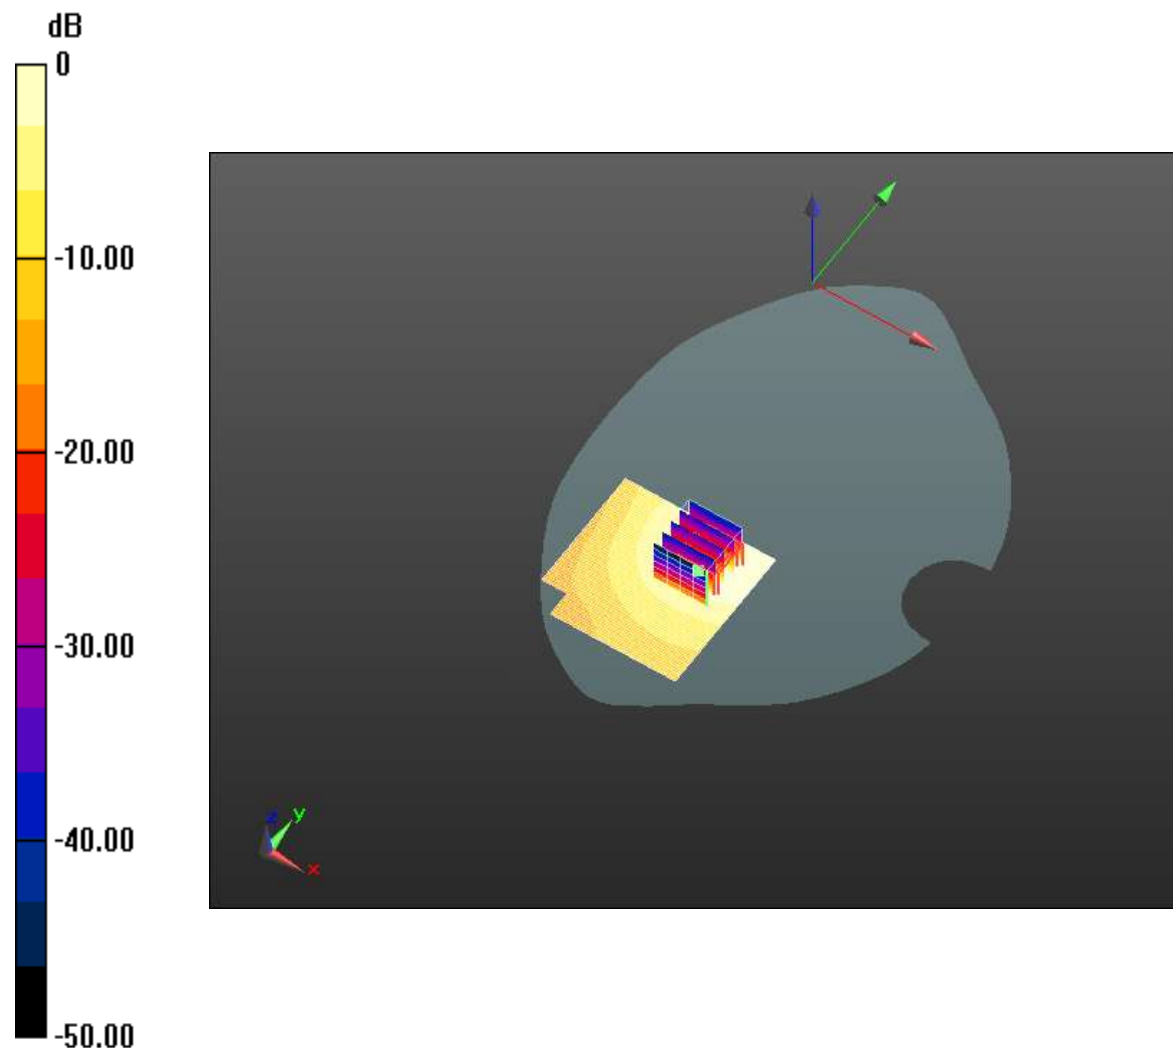

0 dB = 0.213 W/kg = -13.43 dB W/kg

Date: 2016.04.07.

i6200S WCDMA Band II Head Right Cheek Mid

Medium: HSL1900

Communication System: UMTS-FDD; Communication System Band: Band 2, UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.39$ mho/m; $\epsilon_r = 40.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.96, 7.96, 7.96); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 2_ right head cheek/Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 3.711 V/m; Power Drift = 0.02 dB

Fast SAR: SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.145 mW/g

Maximum value of SAR (interpolated) = 0.286 W/kg


UMTS Band 2_ right head cheek/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.711 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.409 mW/g

SAR(1 g) = 0.264 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.282 W/kg

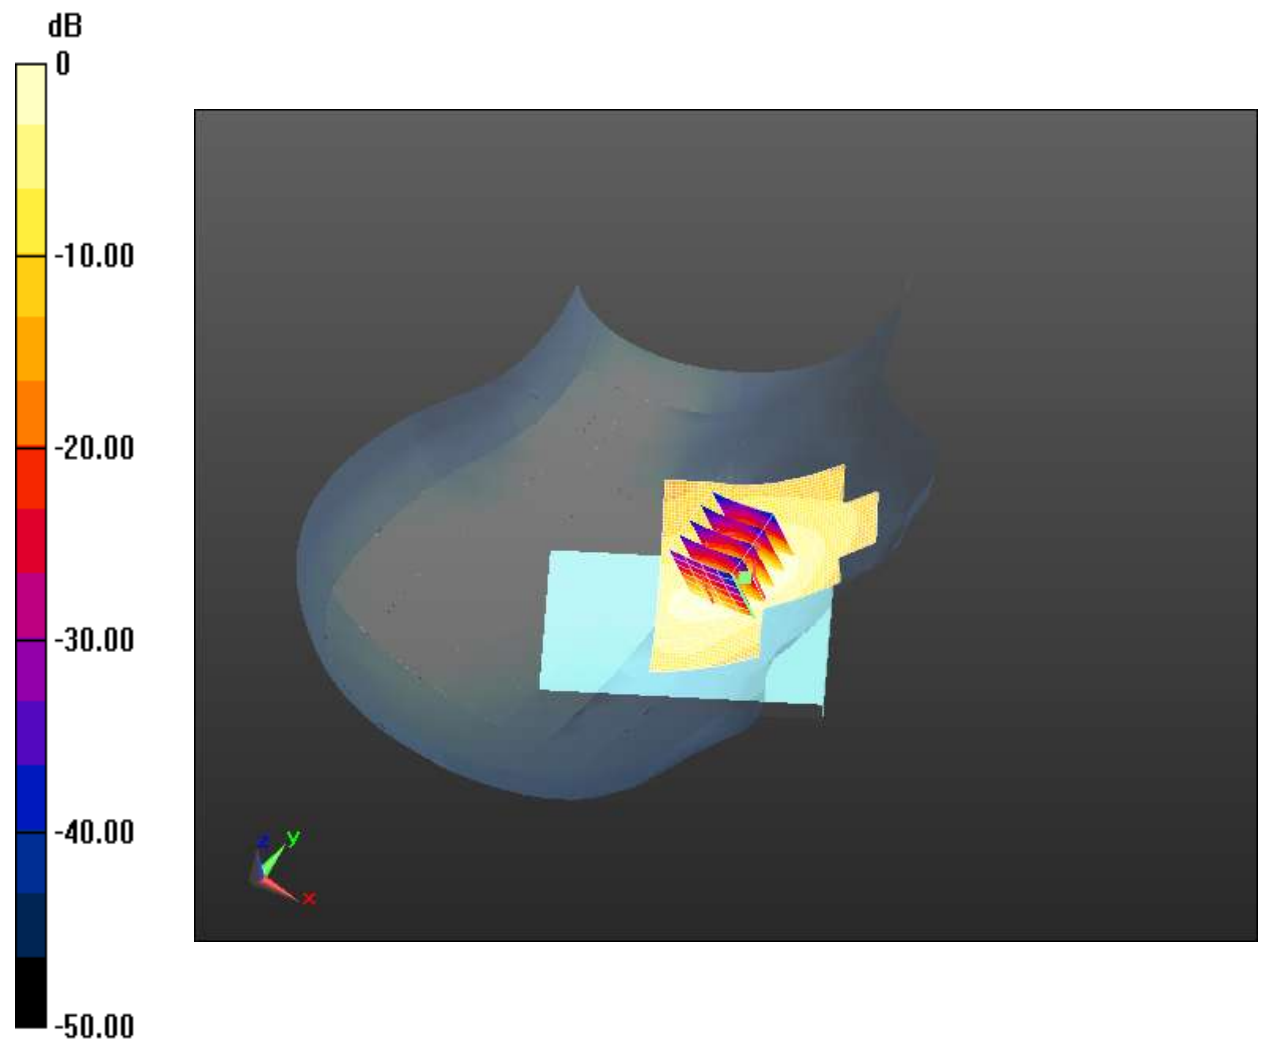

0 dB = 0.286 W/kg = -10.87 dB W/kg

Date: 2016.04.07.

i6200S WCDMA Band II Body Worn Back Side Mid

Medium: MSL1900

Communication System: UMTS-FDD; Communication System Band: Band 2, UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.6, 7.6, 7.6); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 2_Back/Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.709 V/m; Power Drift = 0.16 dB

Fast SAR: SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.179 mW/g

Maximum value of SAR (interpolated) = 0.334 W/kg


UMTS Band 2_Back/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.709 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.484 mW/g

SAR(1 g) = 0.304 mW/g; SAR(10 g) = 0.184 mW/g

Maximum value of SAR (measured) = 0.328 W/kg

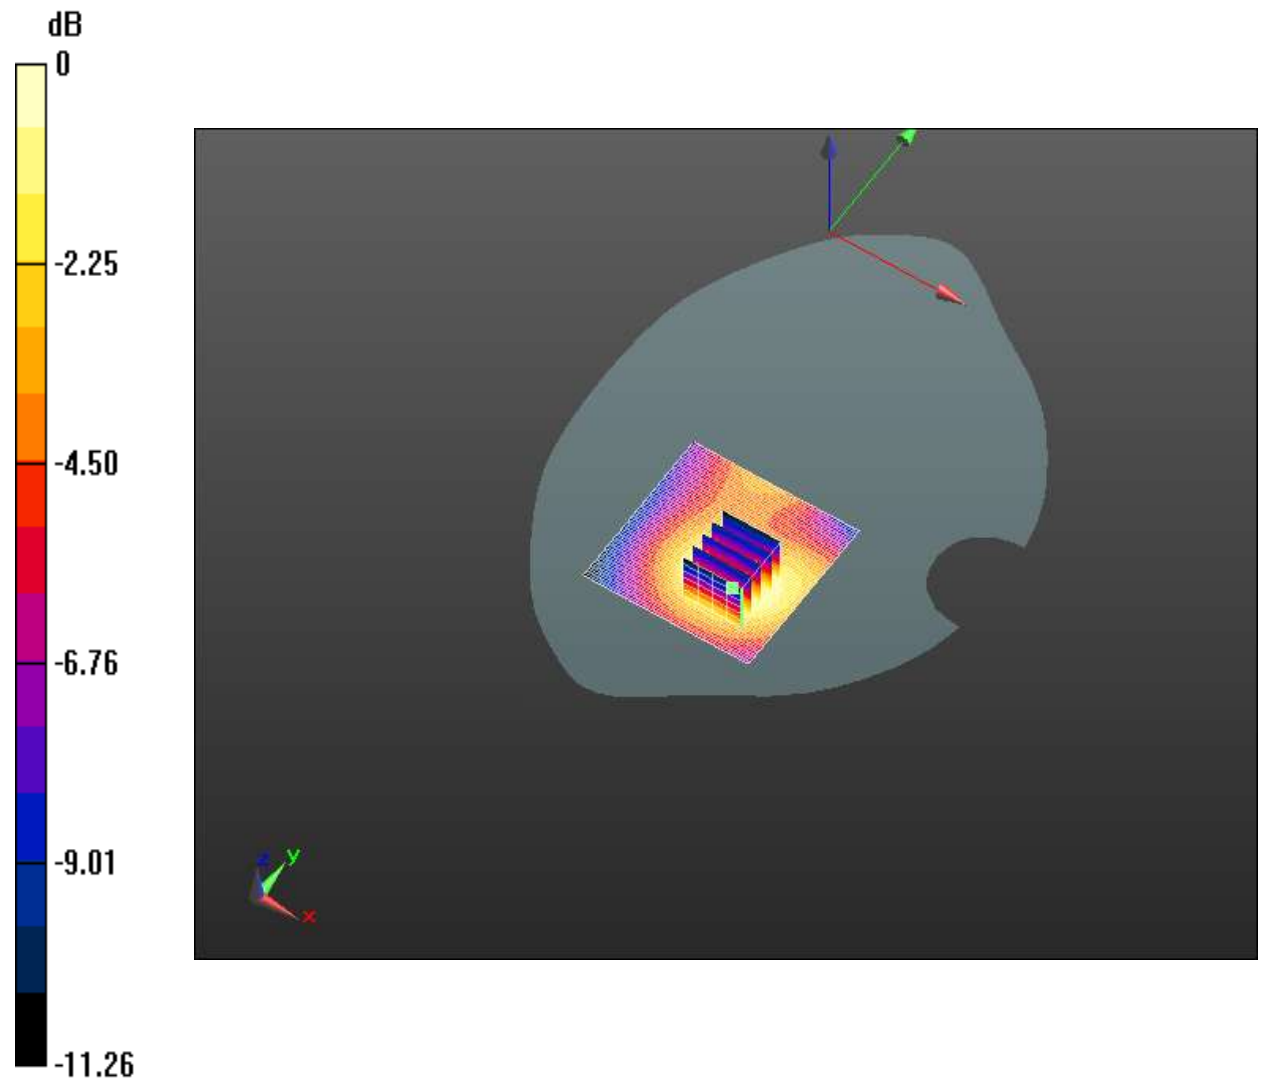

Date: 2016.04.07.

i6200S WCDMA Band II Body Hotspot Back Side Mid

Medium: MSL1900

Communication System: UMTS-FDD; Communication System Band: Band 2, UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.50$ mho/m; $\epsilon_r = 54.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.6, 7.6, 7.6); Calibrated: 2015.07.24.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 2_Back/Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 11.397 V/m; Power Drift = -0.06 dB

Fast SAR: SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.248 mW/g

Maximum value of SAR (interpolated) = 0.441 W/kg


UMTS Band 2_Back/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.397 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.695 mW/g

SAR(1 g) = 0.436 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 0.464 W/kg

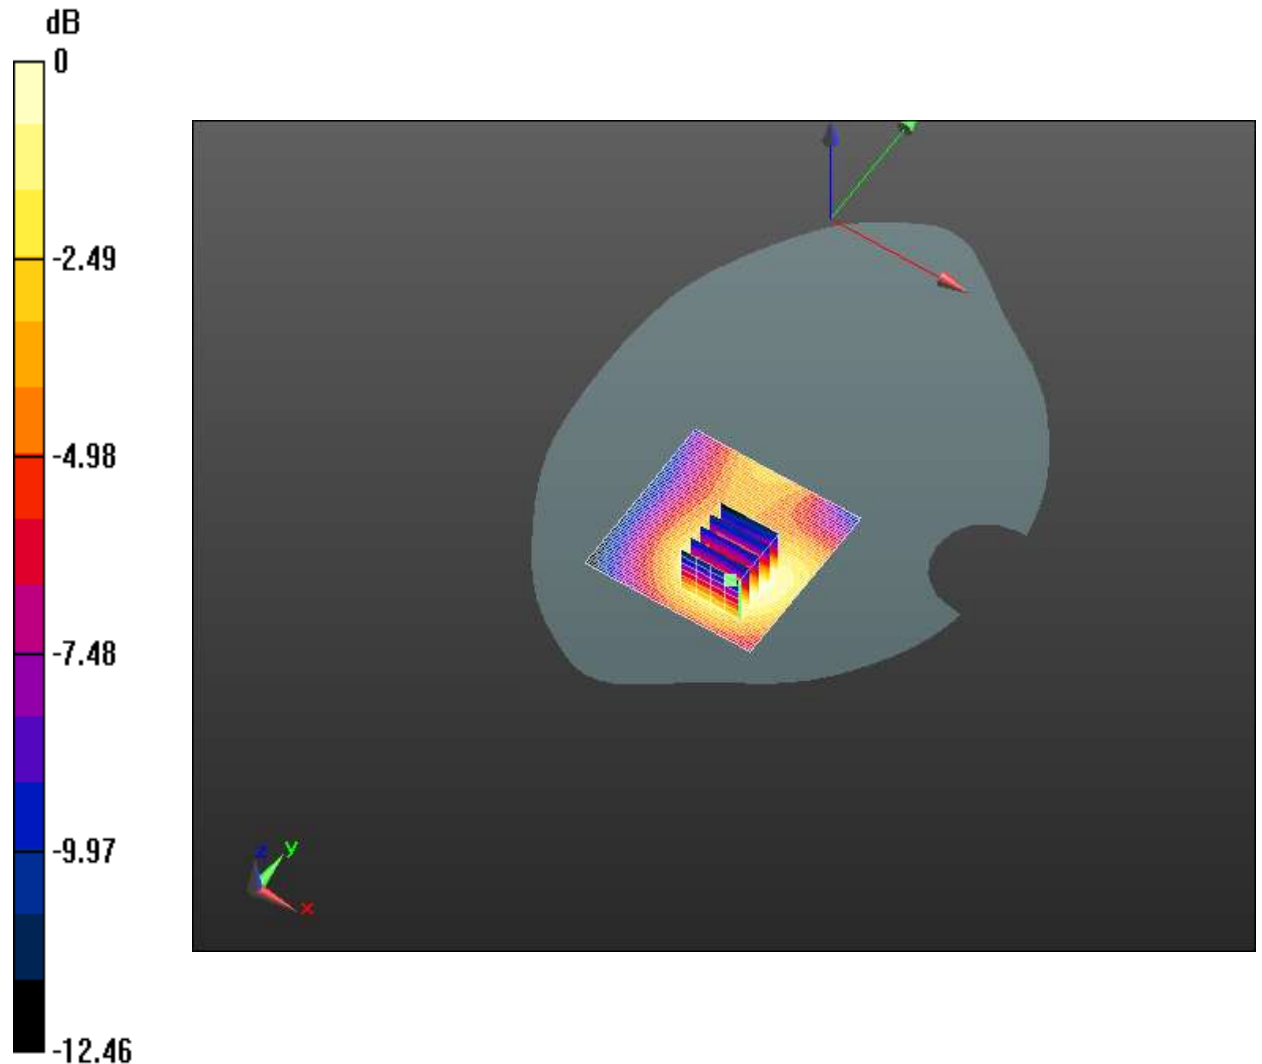

0 dB = 0.441 W/kg = -7.12 dB W/kg

Date: 2016.04.06.

i6200S WCDMA Band V Head Right Cheek Mid

Medium: HSL900

Communication System: UMTS-FDD; Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 42.0$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(9.86, 9.86, 9.86); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 5_right head cheek/Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 9.612 V/m; Power Drift = 0.06 dB

Fast SAR: SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.135 mW/g

Maximum value of SAR (interpolated) = 0.206 W/kg


UMTS Band 5_right head cheek/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.612 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.248 mW/g

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.148 mW/g

Maximum value of SAR (measured) = 0.212 W/kg

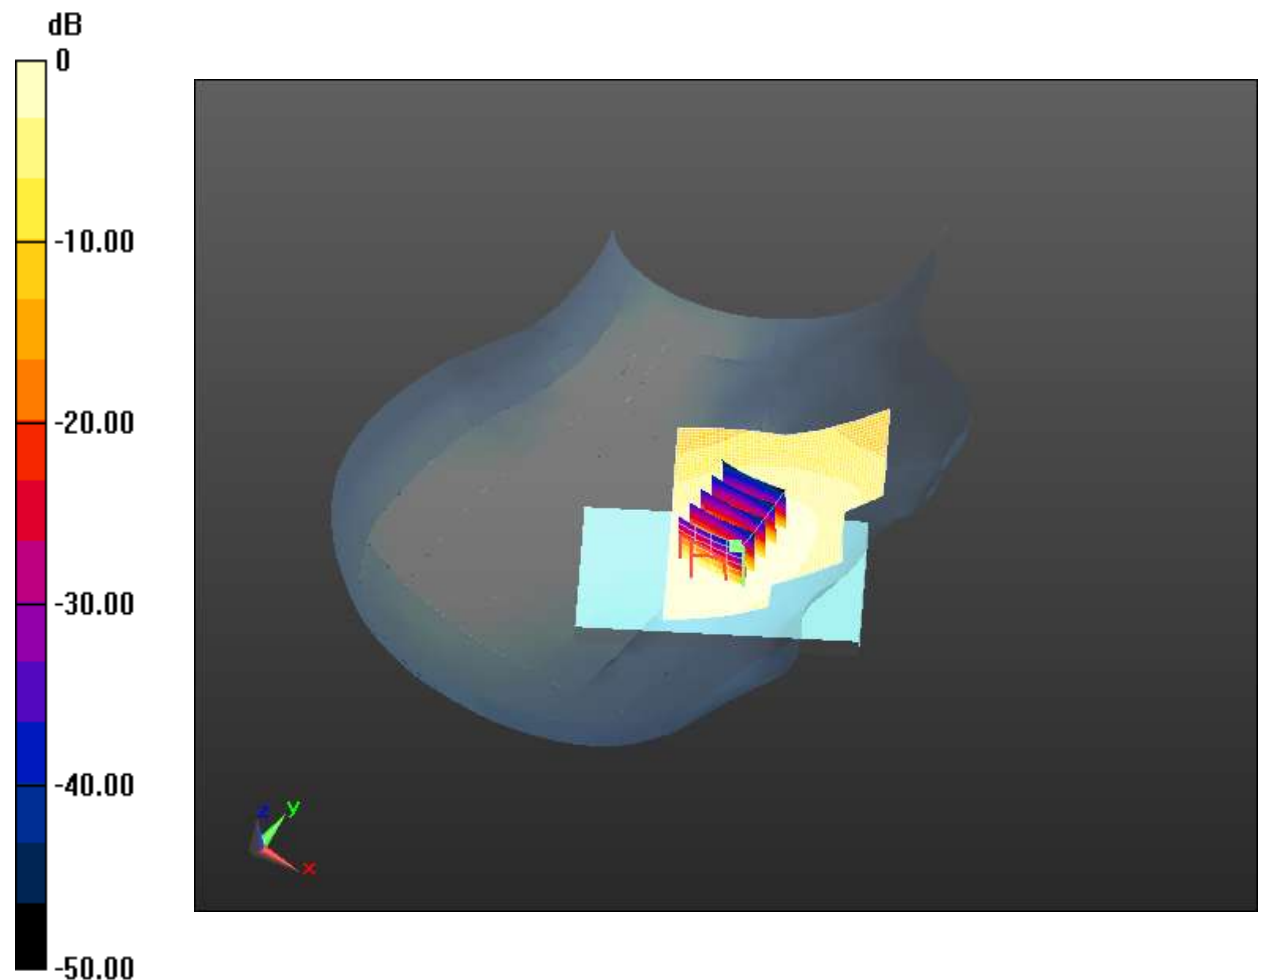

0 dB = 0.206 W/kg = -13.73 dB W/kg

Date: 2016.04.06.

i6200S WCDMA Band V Body Worn Back Side Mid

Medium: MSL900

Communication System: UMTS-FDD; Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(9.66, 9.66, 9.66); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 5_body Back/Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 13.635 V/m; Power Drift = -0.05 dB

Fast SAR: SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.128 mW/g

Maximum value of SAR (interpolated) = 0.191 W/kg


UMTS Band 5_body Back/Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.635 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.238 mW/g

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.190 W/kg

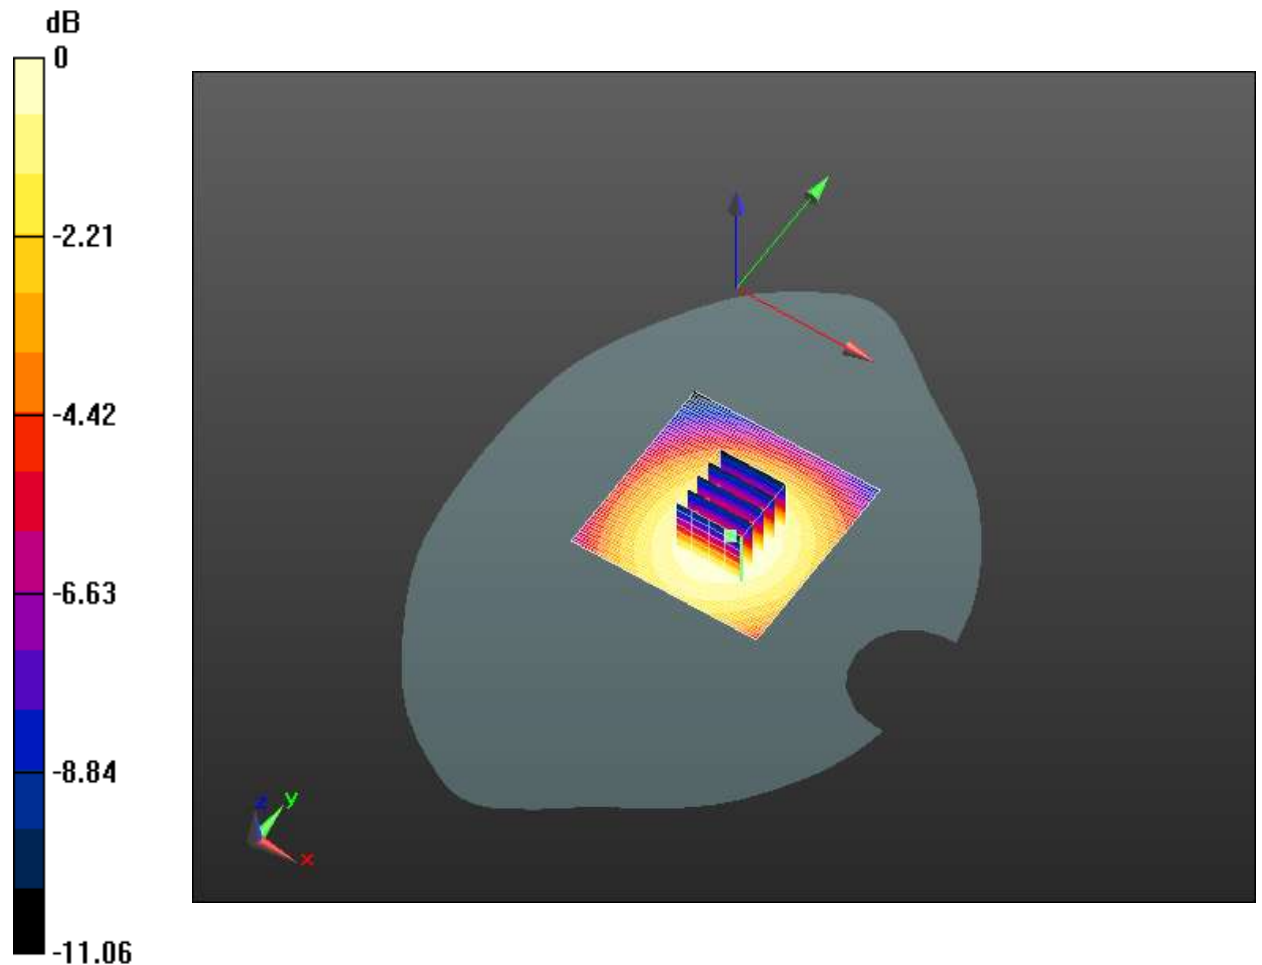

0 dB = 0.191 W/kg = -14.36 dB W/kg

Date: 2016.04.06.

i6200S WCDMA Band V Body Hotspot Back Side Mid

Medium: MSL900

Communication System: UMTS-FDD; Communication System Band: Band 5, UTRA/FDD (824.0 - 849.0 MHz); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASYS Configuration: Probe: EX3DV4 - SN3881; ConvF(9.66, 9.66, 9.66); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

UMTS Band 5_body Back/Mid /Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 16.794 V/m; Power Drift = -0.01 dB

Fast SAR: SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (interpolated) = 0.291 W/kg


UMTS Band 5_body Back/Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.794 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.360 mW/g

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.286 W/kg

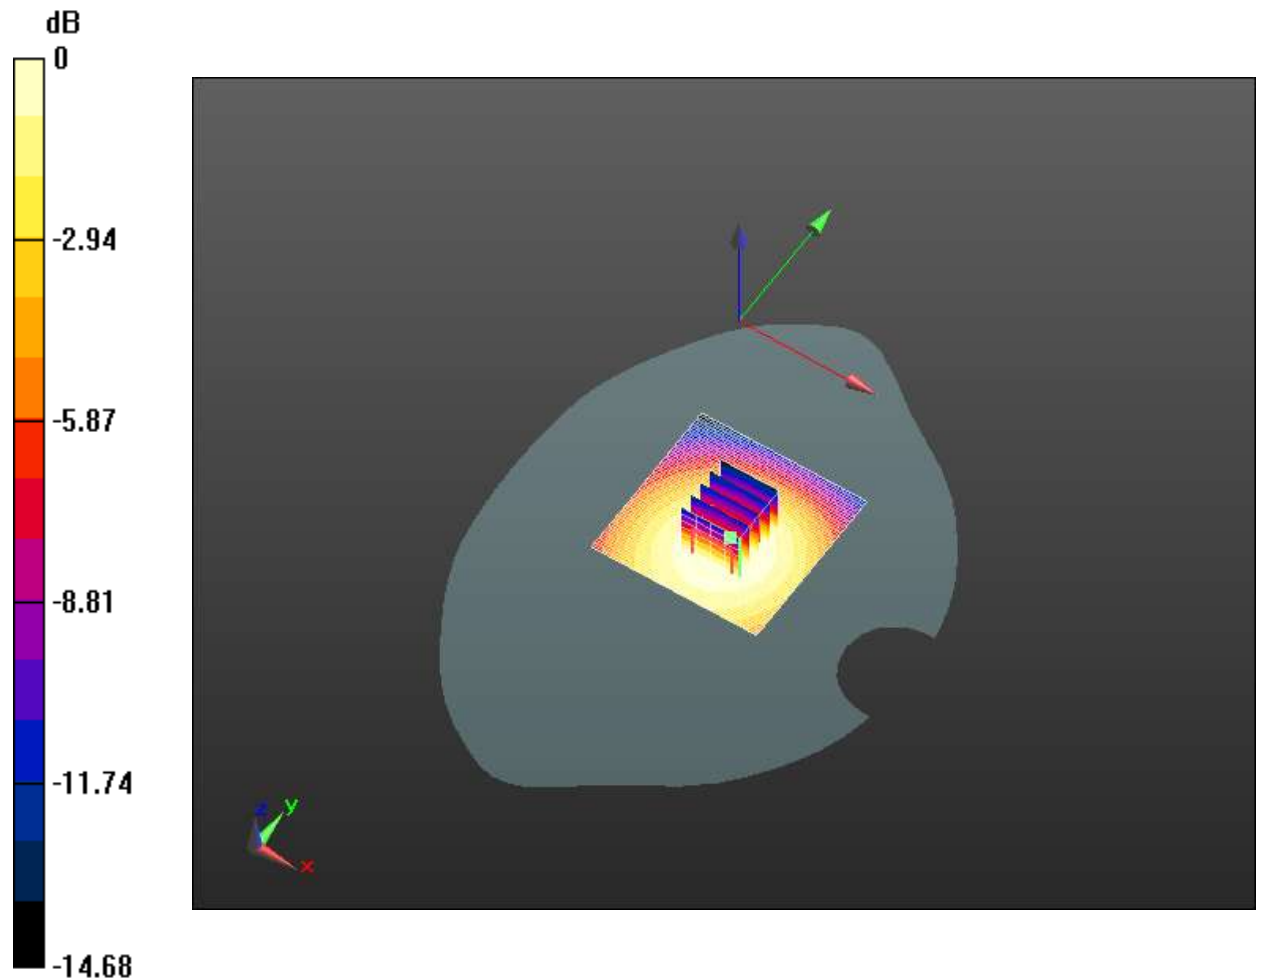

0 dB = 0.291 W/kg = -10.71 dB W/kg

Date: 2016.04.08.

i6200S Wi-Fi 802.11b Head Right Cheek Mid

Medium: HSL2450

Communication System: 802.11b/g/n; Communication System Band: 802.11b; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.80$ mho/m; $\epsilon_r = 39.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.07, 7.07, 7.07); Calibrated: 2015.11.26.;

Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

802.11b-rightHead/right Cheek-Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 11.933 V/m; Power Drift = 0.03 dB

Fast SAR: SAR(1 g) = 0.777 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (interpolated) = 0.989 W/kg


802.11b-rightHead/right Cheek-Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.933 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.982 mW/g

SAR(1 g) = 0.808 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.920 W/kg

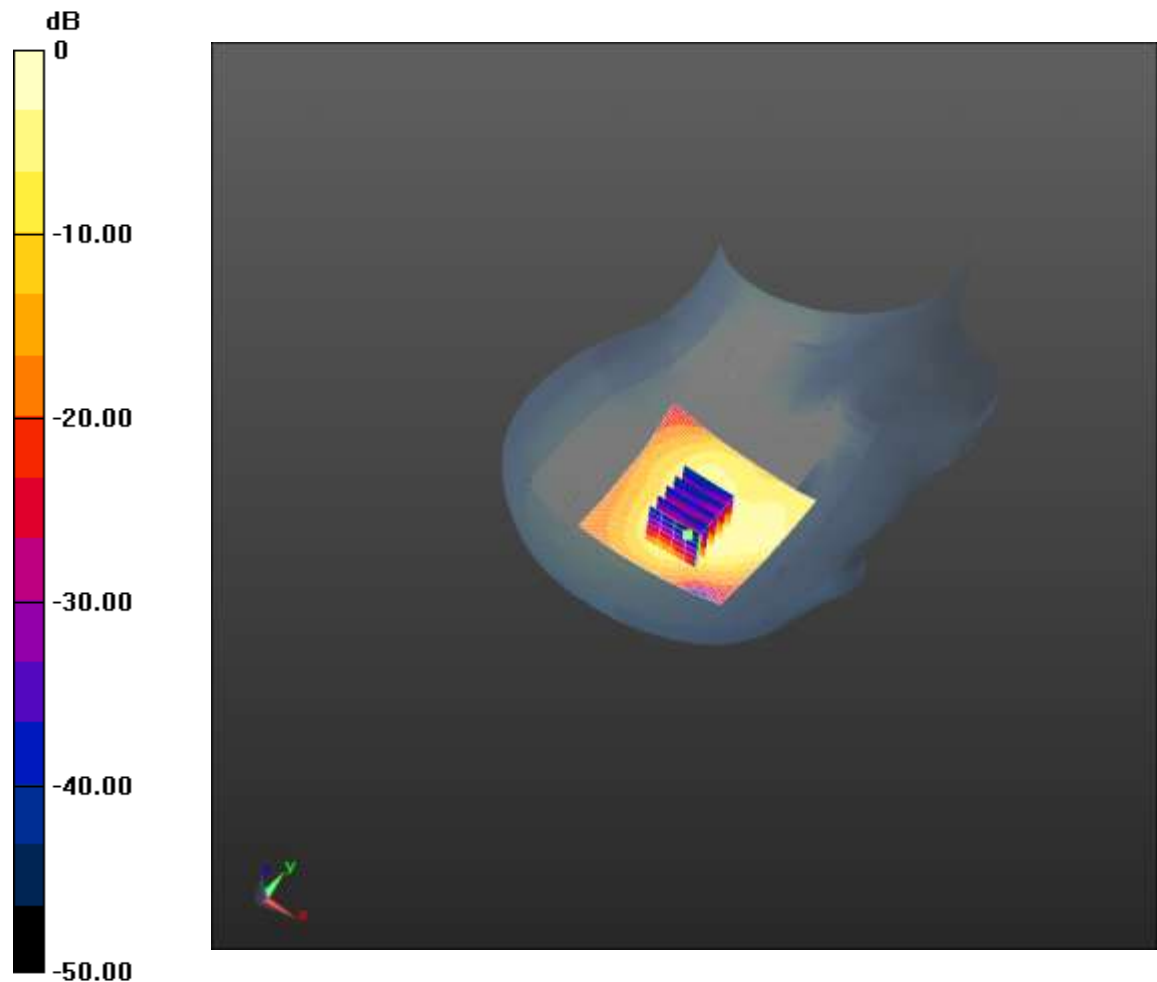

0 dB = 0.989 W/kg = -0.09 dB W/kg

Date: 2016.04.08.

i6200S Wi-Fi 802.11b Body Worn Back Side Mid

Medium: MSL2450

Communication System: 802.11b/g/n; Communication System Band: 802.11b; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.07, 7.07, 7.07); Calibrated: 2015.11.26.;
Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

802.11b-/Facedown-Mid/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 4.841 V/m; Power Drift = -0.03 dB

Fast SAR: SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (interpolated) = 0.0873 W/kg


802.11b/Facedown-Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.841 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.152 mW/g

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.0870 W/kg

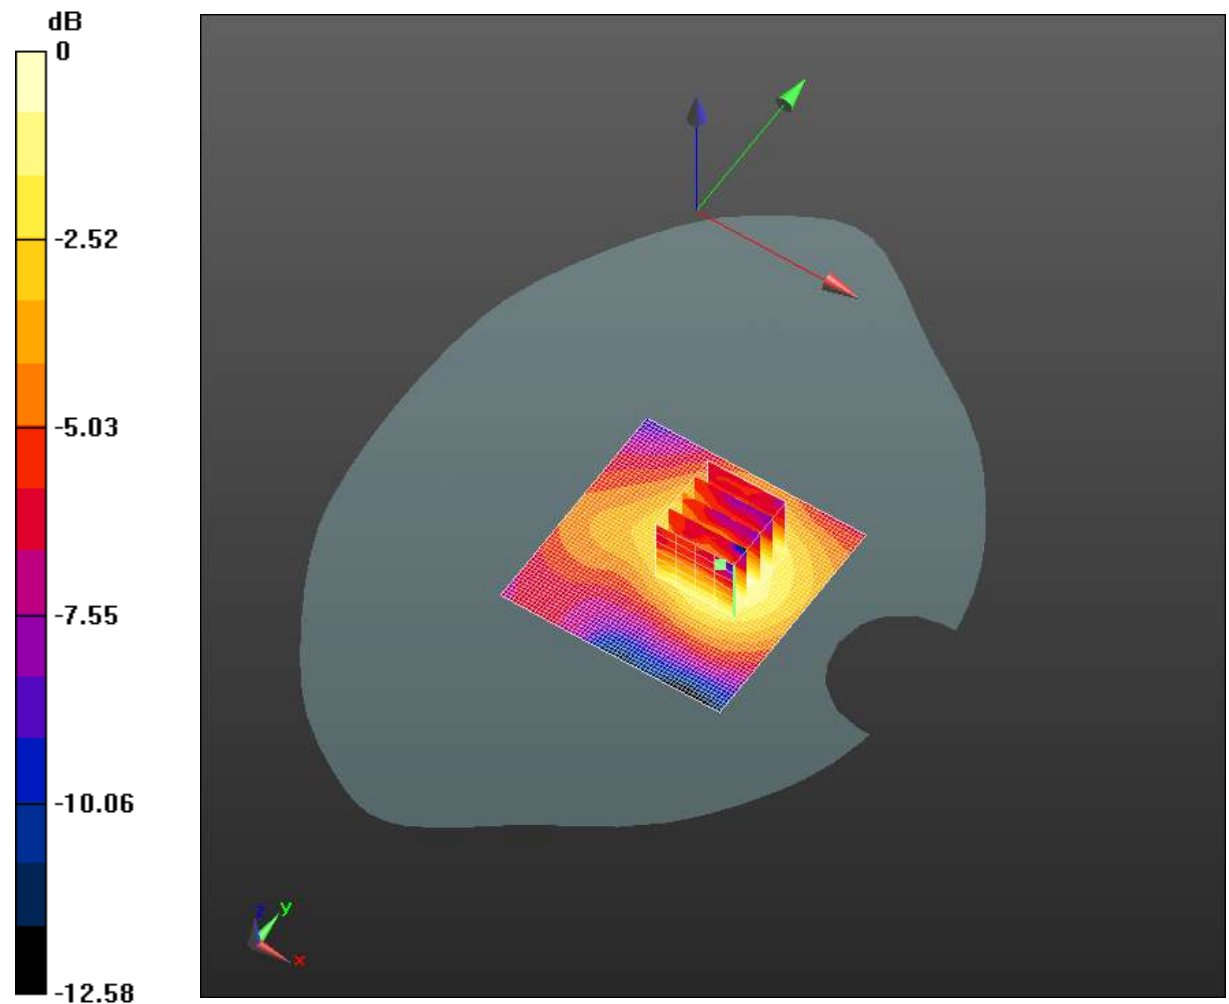

0 dB = 0.0873 W/kg = -21.18 dB W/kg

Date: 2016.04.08.

i6200S Wi-Fi 802.11b Body Hotspot Back Side Mid

Medium: MSL2450

Communication System: 802.11b/g/n; Communication System Band: 802.11b; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2442$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration: Probe: EX3DV4 - SN3881; ConvF(7.07, 7.07, 7.07); Calibrated: 2015.11.26.;
Electronics: DAE4 Sn876; Calibrated: 2016.03.02.

802.11b-/Facedown-Mid /Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Reference Value = 5.517 V/m; Power Drift = -0.02 dB

Fast SAR: SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (interpolated) = 0.129 W/kg


802.11b-/Facedown-Mid /Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.517 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.231 mW/g

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.123 W/kg

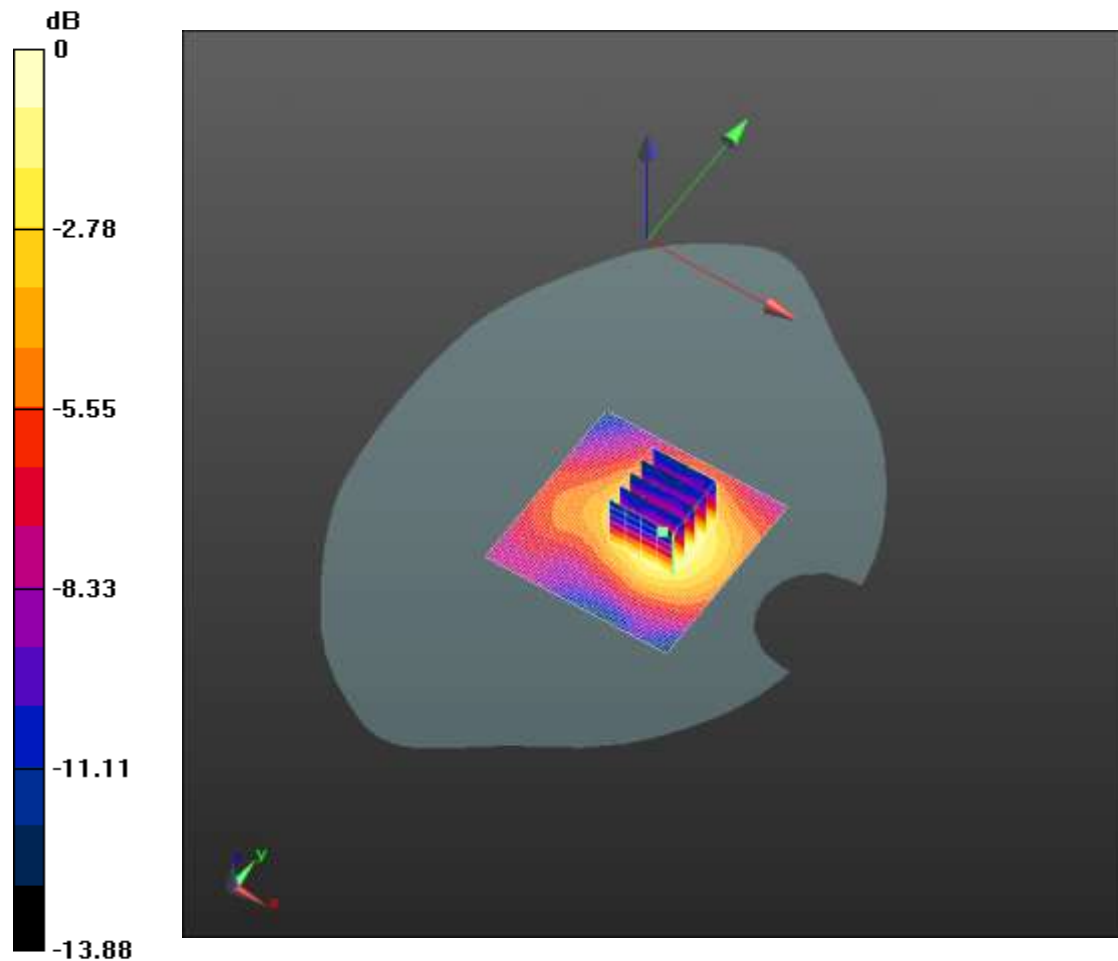

0 dB = 0.129 W/kg = -17.78 dB W/kg