

SAR TEST REPORT

For

Handheld Data Terminal Model Number:

**SQ47,SQ47D,SQ47P,RT40,MDT1-0400,SQ47C,SQ47CP,RT40P,
RT40C**

FCC ID: SWSSQ47

Report Number:WT218000794

Test Laboratory : Shenzhen Academy of Metrology and Quality
Inspection
National Digital Electronic Product Testing Center

Site Location : NETC Building, No.4 Tongfa Road, Xili Town, Nanshan
District, Shenzhen, Guangdong, China

Tel : 0086-755-86928965

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn

Email : emcrf@smq.com.cn

Test report declaration

Applicant : UROVO TECHNOLOGY CO.,LTD.
Address : 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,Nanshan district,Shenzhen,Guangdong,China
Manufacturer : UROVO TECHNOLOGY CO.,LTD
Address : 36F,High-Tech Zone Union Tower,No.63,Xuefu Road,Nanshan district,Shenzhen,Guangdong,China
EUT Description : Handheld Data Terminal
Model No : SQ47,SQ47D,SQ47P,RT40,MDT1-0400,SQ47C,SQ47CP,RT40P,RT40C
Trade mark : UROVO
FCC ID : SWSSQ47

Test Standards:


IEEE Std 1528-2013, KDB941225 D01, KDB941225 D05, KDB941225 D06, KDB447498 D01,KDB648474 D04,KDB248227 D01,KDB 865664 D01,KDB865664 D02,KDB690783 D01

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the compliance of the applicable standards stated above. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The results documented in this report only apply to the tested sample, under the conditions and modes of operation as described herein.

The test report shall not be reproduced in part without written approval of the laboratory.

Project Engineer:



(He Tianbo)

Date: Sep.28,2021


Checked by:



(Shi Chang Da)

Date: Sep.28,2021

Approved by:



(Lin Yixiang)

Date: Sep.28,2021

TABLE OF CONTENTS

1.	REPORTED SAR SUMMARY	5
1.1.	Statement of Compliance.....	5
1.3	Ratings and System Details	7
1.4	Product Function and Intended Use	9
1.5	Test specification(s).....	9
1.6	List of Test and Measurement Instruments.....	10
2.	GENERAL INFORMATION	12
2.1.	Report information.....	12
2.2.	Laboratory Accreditation and Relationship to Customer	12
3.	SAR MEASUREMENT SYSTEM CONFIGURATION.....	13
3.1.	SAR Measurement Set-up	13
3.2.	Probe description.....	15
3.3.	Phantom description	17
3.4.	Device holder description.....	18
4.	SAR MEASUREMENT PROCEDURE	18
4.1.	Scanning procedure	18
5.	SYSTEM VERIFICATION PROCEDURE	23
5.1.	Tissue Verification	23
6.	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	27
6.1.	SAR measurement variability	27
6.2.	SAR measurement uncertainty	27
7.	TEST CONFIGURATION.....	27
8.	TUNE-UP LIMIT.....	38
9.	MEASUREMENT RESULTS.....	42
9.1.	Conducted Power	42
9.2.	SAR measurement Results	77
9.3.	GSM 850 SAR results.....	79
9.4.	PCS 1900 SAR results	80
9.5.	UMTS Band II SAR results	81
9.6.	UMTS Band IV SAR results.....	82
9.7.	UMTS Band V SAR results	83
9.8.	LTE Band 2 SAR results	84
9.9.	LTE Band 4 SAR results	85

9.10.	LTE Band 5 SAR results	86
9.11.	LTE Band 7 SAR results	87
9.12.	LTE Band 12 SAR results	88
9.13.	LTE Band 17 SAR results	89
9.15.	LTE Band 26 SAR results	90
9.16.	LTE Band 38 SAR results	91
9.17.	LTE Band 41 SAR results	92
9.18.	LTE Band 66 SAR results	93
9.19.	Wi-Fi 2.4G SAR results	94
9.20.	WiFi 5G SAR results	95
9.21.	BT SAR results.	97
9.22.	Repeated SAR results	98
10.	EXPOSURE POSITIONS CONSIDERATION	99
10.1.	Multiple Transmitter Evaluation.....	99
10.2.	Simultaneous Transmission Possibilities	100
10.3.	SAR Summation Scenario	101
10.4.	Simultaneous Transmission Conclusion.....	103
11.	PHOTOGRAPH: LIQUID DEPTH& MEASUREMENT SYSTEM.....	104
12.	APPENDIX	105

1. REPORTED SAR SUMMARY

1.1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

Band	Max Reported SAR(W/kg)	Max Reported SAR(W/kg)	Max Reported SAR(W/kg)
	1-g head	1-g Hotspot Body(10mm)	1-g Body Worn(15mm)
GSM850	0.103	0.225	0.203
GSM1900	0.033	0.350	0.154
WCDMA Band 2	0.037	0.320	0.158
WCDMA Band 4	0.042	0.354	0.172
WCDMA Band 5	0.155	0.170	0.139
LTE Band 2	0.017	0.339	0.230
LTE Band 4	0.032	0.226	0.258
LTE Band 5	0.137	0.150	0.112
LTE Band 7	0.124	0.418	0.296
LTE Band 12	0.122	0.178	0.111
LTE Band 17	0.115	0.155	0.101
LTE Band 26	0.135	0.149	0.118
LTE Band 38	0.089	0.361	0.162
LTE Band 41	0.097	0.308	0.178
LTE Band 66	0.043	0.398	0.279
Wi-Fi 2.4G	0.247	0.266	0.091
Wi-Fi 5G	0.045	0.069	0.062
BT	0.038	0.037	0.010

Table 1: Summary of test result

Note:

*For body-worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 110mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/ uncontrolled exposure limits according to the FCC rule 2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/ Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013& IEEE Std 1528a-2005.

RF exposure limits (ICNIRP Guidelines)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR*(Brain/Body)	1.60mW/g	8.00mW/g
Spatial Average SAR** (Whole Body)	0.08mW/g	0.40mW/g
Spatial Peak SAR***(Limbs)	4.00mW/g	20.00mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 1 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time. Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

1.3 Ratings and System Details

EUT Description	Handheld Data Terminal	
Model No	SQ47,SQ47D,SQ47P,RT40,MDT1-0400,SQ47C,SQ47CP,RT40P, RT40C	
Trade mark	UROVO	
Exposure category:	Uncontrolled environment / General population	
Test Device Production information	Production Unit	
Operating Mode(s)	GSM850/1900,UMTS Band II/IV/V,LTE Band 2/4/5/7/12/17/19/26/38/41/66,WiFi2.4G, BT, WiFi5.2G, WiFi5.3G, WiFi5.6G, WiFi5.8G	
Test modulation	GSM/GPRS(GMSK),EDGE(8PSK),UMTS(QPSK), LTE(QPSK,16QAM),Wi-Fi(OFDM/DSSS)	
HSDPA Category	24	
HSUPA Category	7	
DC-HSDPA Category	24	
LTE Category	4	
Operating Frequency	Transmitter Frequency Range	Receiver Frequency Range
GSM850 (tested):	824.2-848.8 MHz	869.2-893.8 MHz
GSM1900 (tested):	1850.2-1909.8 MHz	1930.2-1989.8 MHz
UMTS Band II (tested):	1852.5-1907.6 MHz	1932.5-1987.6MHz
UMTS Band IV (tested):	1712.4-1752.6 MHz	2112.4-2152.6 MHz
UMTS Band V (tested):	826.4-846.6 MHz	871.4-891.6 MHz
LTE Band 2(tested)	1850-1910 MHz	1930-1990 MHz
LTE Band 4(tested)	1710-1755 MHz	2110-2155 MHz
LTE Band 5(tested)	824-849 MHz	869-894MHz
LTE Band 7(tested)	2500-2570 MHz	2620-2690 MHz
LTE Band 12(tested)	699-716 MHz	729-746 MHz
LTE Band 17(tested)	704-716 MHz	734-746 MHz
LTE Band 26(tested)	814-849 MHz	859-894 MHz
LTE Band 38(tested)	2570-2620 MHz	2570-2620 MHz
LTE Band 41(tested)	2496-2690 MHz	2496-2690 MHz
LTE Band 66(tested)	1710-1780 MHz	2110-2200 MHz
BT	2402MHz to 2480MHz	2402 – 2480
Wi-Fi(tested):	2400-2483.5 MHz	

	5180-5825 MHz	
Power Class :	4, tested with power level 5(GSM850)	
	1, tested with power level 0(GSM1900)	
	3, tested with power control "all 1"(UMTS Band II)	
	3, tested with power control "all 1"(UMTS Band IV)	
	3, tested with power control "all 1"(UMTS Band V)	
	3 tested with power control all Max(LTE Band 2/4/5/7/12/17/19/26/38/41/66)	
Hardware version :	SQ47_MB_V03	
Software version :	SQ47_CN_XX_WE_DS_R01_D210126_01	
Antenna type :	PIFA	
Battery options :	ZHONGSHAN TIANMAO BATTERY Co.,LTD.	ZHONGSHAN TIANMAO BATTERY Co.,LTD. Battery Model: HBLDT47 Rated capacity: Nominal Voltage: === 3.7~4.25V /5200mAh Charge Voltage: === +4.4V

Remark: SQ47P, SQ47D, RT40, MDT1-0400, SQ47C, SQ47CP, RT40P, RT40C compared with SQ47, only have different model name. All of the model's circuit theory, electrical design and Critical Components are the same. Unless otherwise specified, the model SQ47 was chosen as the representative model to perform all the tests.

1.4 Product Function and Intended Use

SQ47,SQ47D,SQ47P,RT40,MDT1-0400,SQ47C,SQ47CP,RT40P, RT40C is subscriber equipment in the WCDMA/GSM/LTE system.

The HSUPA/HSDPA/UMTS frequency band is Band II, Band IV and Band V. Band II, Band IV and Band V can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM1900, but only GSM850MHz and DCS1900MHz bands test data included in this report. The LTE frequency band is Band 2, Band 4, Band 5 and Band 7, all can be used in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSUPA/HSDPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video, MMS service, GPS, AGPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and Micro USIM card interface.

1.5 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz-300GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate(SAR) in the Human head from Wireless Communications Devices: Measurement Techniques Amendment1: CAD File for Human Head Model(SAM Phantom)
KDB941225 D01 SAR test for 3Gdevices v03r01	3G SAR MEAUREMENT PROCEDURES
KDB941225 D05 SAR for LTE Devices v02r05	SAR Evaluation Considerations for LTE Devices
KDB941225 D06 Hotspot Mode v02r01	SAR Evaluation Procedures for portable Devices with Wireless Router Capabilities
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB 648474 D04 Handset SAR v01r03	SAR Evaluation Considerations for Wireless Handsets.
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations
KDB 690783 D01 SAR Listings on Grants v01r03	SAR Listings on Equipment Authorization Grants

1.6 List of Test and Measurement Instruments

	Equipment	Model No.	Serial No.	Manufacturer	Last Calibration Date	Period
<input checked="" type="checkbox"/>	SAR test system	TX60L	F08/5AY8A1/A/01+F08/	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Electronic Data Transmitter	DAE4	1636	SPEAG	2020.11.17	1year
<input checked="" type="checkbox"/>	SAR Probe	EX3DV4	7623	SPEAG	2020.11.06	1year
<input checked="" type="checkbox"/>	Software	85070	--	Agilent	--	--
<input checked="" type="checkbox"/>	Software	DASY5	--	SPEAG	--	--
<input checked="" type="checkbox"/>	System Validation Dipole,750MHz	D750V3	1103	SPEAG	2020.01.06	3year
<input checked="" type="checkbox"/>	System Validation Dipole,835MHz	D835V2	4d141	SPEAG	2018.09.06	3year
<input checked="" type="checkbox"/>	System Validation Dipole,900MHz	D900V2	1d077	SPEAG	2018.09.07	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1800MHz	D1800V2	2d171	SPEAG	2018.09.12	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1900MHz	D1900V2	5d162	SPEAG	2018.09.11	3year
<input checked="" type="checkbox"/>	System Validation Dipole,2300MHz	D2300V2	1034	SPEAG	2020.01.02	3year
<input checked="" type="checkbox"/>	System Validation Dipole,2450MHz	D2450V2	818	SPEAG	2018.08.31	3year
<input checked="" type="checkbox"/>	System Validation Dipole,2600MHz	D2600V2	1074	SPEAG	2020.01.02	3year
<input checked="" type="checkbox"/>	System Validation Dipole,1750MHz	D1750V2	1108	SPEAG	2020.01.03	3year
<input checked="" type="checkbox"/>	System Validation Dipole,5GHz	D5GzV2	1185	SPEAG	2019.12.31	3year
<input checked="" type="checkbox"/>	Dielectric Probe Kit	85070E	MY44300455	Agilent	NCR	NCR
<input checked="" type="checkbox"/>	Dual-directional coupler,0.10-2.0GHz	778D	MY48220198	Agilent	NCR	NCR
<input checked="" type="checkbox"/>	Dual-directional coupler,2.00-18GHz	772D	MY46151160	Agilent	NCR	NCR
<input checked="" type="checkbox"/>	Power Amplifier	ZVE-8G	SC280800926	MINI-CIRCUITS	NCR	NCR
<input checked="" type="checkbox"/>	Power Amplifier	ZHL42W	81709	MINI-CIRCUITS	NCR	NCR
<input checked="" type="checkbox"/>	Signal Generator	SMR20	100047	R&S	2021.02.19	1year
<input checked="" type="checkbox"/>	Power Sensor	NRP-Z21	102626	R&S	2021.06.04	1year
<input checked="" type="checkbox"/>	Power Sensor	NRP-Z21	102627	R&S	2021.06.04	1year
<input checked="" type="checkbox"/>	Call Tester	CMU 200	100110	R&S	2021.05.18	1year
<input checked="" type="checkbox"/>	Network Analyzer	E5071C	MY46109550	Agilent	2021.02.19	1Year
<input checked="" type="checkbox"/>	Flat Phantom	ELI4.0	TP-1904	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SAM	TP-1504	SPEAG	NCR	NCR
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	CMW500	125469	R&S	2021.05.18	1Year

☒	Precision Thermometer	--	--	--	2020.08.07	1Year
---	--------------------------	----	----	----	------------	-------

Table 3: List of Test and Measurement Equipment

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:


China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A.

3. SAR MEASUREMENT SYSTEM CONFIGURATION

3.1. SAR Measurement Set-up

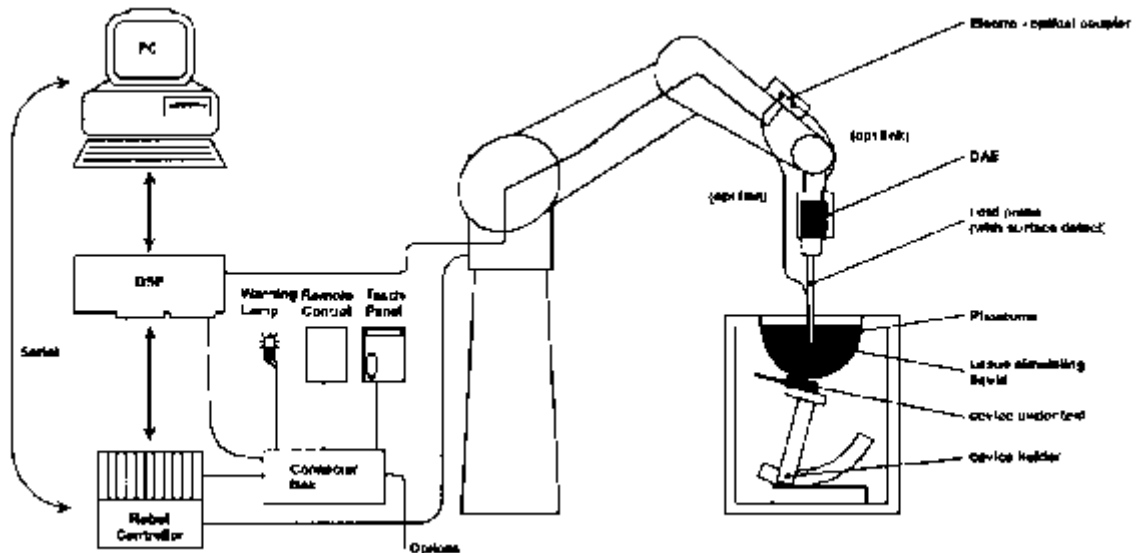

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing,
- AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
- A computer operating Windows 10.
- DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System checks dipoles allowing validating the proper functioning of the system.
- Test environment
- The DASY5 measurement system is placed at the head end of a room with dimensions: 4.5 x 4 x 3 m³, the SAM phantom is placed in a distance of 1.3 m from the side walls and 1.1m from the rear wall.



Picture 1 of the photo documentation shows a complete view of the test environment.

3.2. Probe description

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20mm) Tip length: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	


Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

3.3. Phantom description

The used SAM Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.

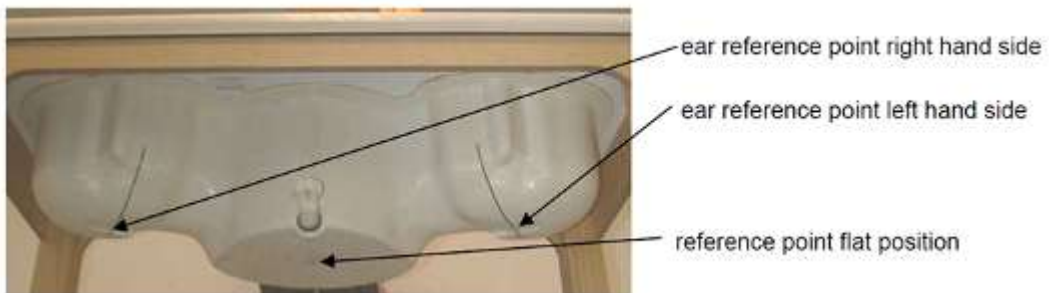

ELI4 Phantom:



Shell Thickness	2mm+/- 0.2mm
Filling Volume	Approximately 30 liters
Measurement Areas	Flat phantom
The ELI4 phantom is in intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.	

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity ≤ 5 and a loss tangent ≤ 0.05 .

3.4. Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

4. SAR MEASUREMENT PROCEDURE

4.1. Scanning procedure

- The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The reference and drift measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The surface check measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The area scan measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y-

dimension(4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation.

Results of this coarse scan are shown in Appendix B.

- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom} , $\Delta y_{zoom} \leq 2\text{GHz} \leq 8\text{ mm}$, $2\text{-}4\text{GHz} - \leq 5\text{ mm}$ and $4\text{-}6\text{ GHz} - \leq 4\text{ mm}$; $\Delta z_{zoom} \leq 3\text{GHz} - \leq 5\text{ mm}$, $3\text{-}4\text{ GHz} - \leq 4\text{ mm}$ and $4\text{-}6\text{GHz} - \leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY5 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. Test results relevant for the specified standard (see chapter 1.5.) are shown in table form in chapter 3.2.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can – depending in the field strength- also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximum Area Scan resolution (Δx_{area} , Δy_{area})	Maximum Zoom Scan spatial resolution(Δx_{zoom} Δy_{zoom})	Maximum Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{zoom}(n)$	$\Delta z_{zoom}(1)$	$\Delta z_{zoom}(n>1)$	
$\leq 2\text{GHz}$	$\leq 110\text{mm}$	$\leq 8\text{mm}$	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 30\text{mm}$
2-3GHz	$\leq 12\text{mm}$	$\leq 10\text{mm}$	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 30\text{mm}$
3-4GHz	$\leq 10\text{mm}$	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 28\text{mm}$
4-5GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 3\text{mm}$	$\leq 2.10\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 210\text{mm}$
5-6GHz	$\leq 10\text{mm}$	$\leq 4\text{mm}$	$\leq 2\text{mm}$	$\leq 2\text{mm}$	$\leq 1.5 * \Delta z_{zoom}(n-1)$	$\geq 22\text{mm}$

Spatial Peak SAR Evaluation

- The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The bases of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points (with 8mm horizontal resolution) or 7 x 7 x 7

points (with 10mm horizontal resolution).

- The algorithm that finds the maximal averaged volume is separated into three different stages.
- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.
- Extrapolation
- The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

- The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].
- Volume Averaging
- At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.
- Advanced Extrapolation
- DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

4.1.1.Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension DAE4. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a

measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	σ
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcpi$$

with V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Normi \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i ($i = x, y, z$)

Norm $_i$ = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5. SYSTEM VERIFICATION PROCEDURE

5.1. Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials

Ingredients(% of weight)	Body Tissue				
	835	1750	1900	2450	2600
Frequency Band(MHz)					
Water	52.4	69.7	69.91	73.2	75.3
Salt(NaCl)	1.40	0.13	0.13	0.04	0.03
Sugar	45.0	0.0	0.0	0.0	0.0
HEC	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	29.71	29.96	26.7	24.5

Table 4 : Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity

HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol] Triton X-100(ultra pure): Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Body Tissue-equivalent liquid measurements:

Used Target Frequency	Target Tissue		Measured Tissue		Liquid Temp	Test Date
	ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
750MHz	41.9 (39.81~44.00)	0.89 (0.85~0.93)	41.93	0.89	22°C	2021.06.01
835MHz	55.2 (52.44~57.96)	0.97 (0.92~1.02)	54.8	0.95	22°C	2021.06.01
900MHz	41.5 (39.43~43.58)	0.97 (0.92~1.02)	41.02	1.01	22°C	2021.06.01
1750 MHz	53.4 (50.77~56.11)	1.49 (1.42~1.56)	55.33	1.52	22°C	2021.06.02
1800 MHz	40.0 (38.00~42.00)	1.40 (1.33~1.47)	40.29	1.42	22°C	2021.06.02
1900MHz	53.3 (50.64~55.97)	1.52 (1.44~1.60)	54.12	1.53	22°C	2021.06.02
2300MHz	39.5 (37.53~41.48)	1.67 (1.59~1.75)	40.28	1.64	22°C	2021.06.03
2450MHz	52.7 (50.07~55.34)	1.95 (1.85~2.05)	52.13	1.92	22°C	2021.06.03
2600MHz	52.5 (49.88~55.14)	2.16 (2.05~2.27)	53.64	2.22	22°C	2021.06.03
5.25GHz	48.9 (46.57~51.47)	5.36 (5.03~5.55)	49.58	5.22	22°C	2021.06.04
5.6GHz	48.5 (46.06~50.9)	5.77 (4.52~5.0)	49.31	4.84	22°C	2021.06.04
5.75GHz	48.3 (45.79~50.61)	5.94 (5.7~6.3)	49.22	5.84	22°C	2021.06.07


ϵ_r = Relative permittivity, σ = Conductivity

System checking, Body Tissue-equivalent liquid:

System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/kg)	10-g (W/kg)	1-g (W/kg)	10-g (W/kg)		
D750V3	8.66 (7.79~8.66)	5.83 (5.25~6.41)	8.56	5.76	22°C	2021.06.01
D835V2	9.74 (8.77~10.71)	6.54 (5.89~7.19)	9.24	5.68	22°C	2021.06.01
D900V2	10.88 (9.79~11.97)	6.96 (6.26~7.66)	10.40	6.76	22°C	2021.06.01
1750MHz	37.2 (33.75~41.25)	20.0 (18.09~22.11)	39.52	20.52	22°C	2021.06.02
D1800V2	38.28 (34.45~42.11)	19.76 (17.78~21.74)	38.40	19.92	22°C	2021.06.02
D1900V2	40.3 (36.27~44.33)	21.7 (19.53~23.87)	40.88	21.32	22°C	2021.06.02
D2300V2	47.5 (42.75~47.50)	22.4 (20.16~24.64)	47.40	22.32	22°C	2021.06.03
D2450V2	51.5 (46.35~56.65)	24.4 (21.96~26.84)	51.32	22.48	22°C	2021.06.03
D2600V3	56.8 (51.12~62.48)	25.3 (22.79~27.85)	54.80	23.64	22°C	2021.06.03
5.25GHz	74.0 (66.87~81.73)	20.8 (18.81~22.99)	74.30	22.30	22°C	2021.06.04
5.6GHz	79.3 (71.46~87.34)	22.1 (19.89~24.31)	74.90	22.60	22°C	2021.06.04
5.75GHz	75.2 (67.68~82.72)	21.1 (18.99~23.21)	76.50	22.20	22°C	2021.06.07

System Checking

The manufacturer calibrates the probes annually. A system check measurement was made following the determination of the dielectric parameters of the tissue-equivalent liquid, using the dipole validation kit. A power level of 250mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom.

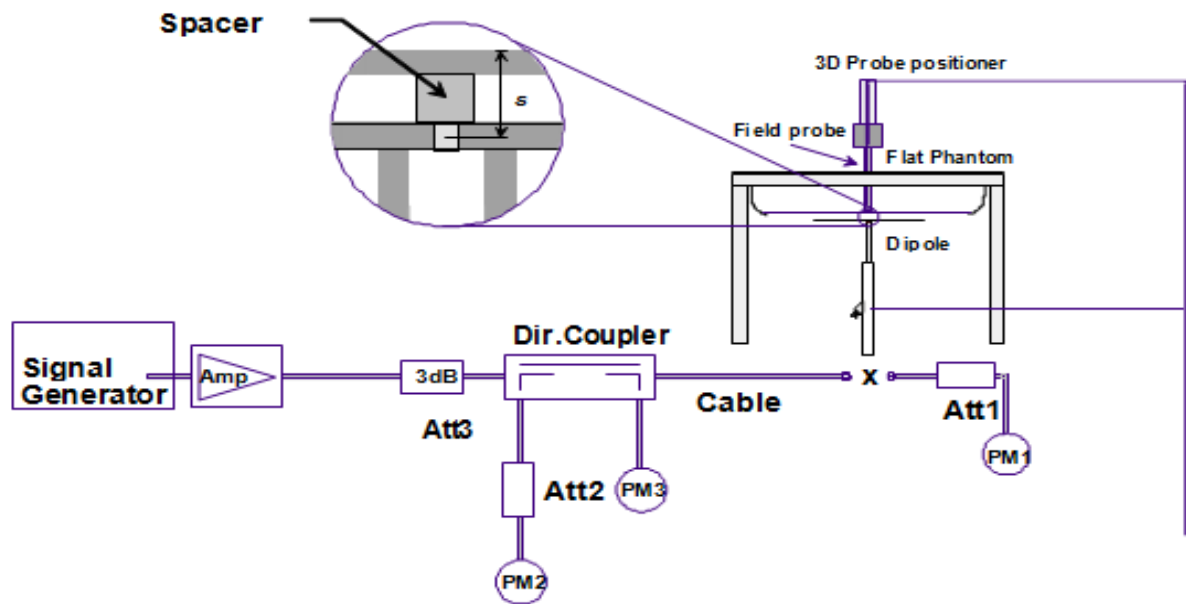

The system checking results (dielectric parameters and SAR values) are given in the table below.

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).

6. SAR MEASUREMENT VARIABILITY AND UNCERTAINTY

6.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100MHz to 6GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurement requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.80 W/kg; step2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 W/kg , repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is >1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

6.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100MHz to 6GHz v01r03, when the highest measured 1-g SAR within a frequency band is <1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval. The equivalent ratio(1.5/1.6) is applied to extremity and occupational exposure conditions.

7. Test Configuration

The DUT is tested using a CMU 200 or E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.

Test positions as described in the tables above are in accordance with the specified test standard.

GSM Test Configurations

SAR tests for GSM 850 and PCS 1900, a communication link is set up with a System Simulator (SS) by air link. Using CMU 200 or E5515C the power level is set to “5” for GSM 850, set to “0” for PCS 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslots is 5.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power

reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Output power of reductions:

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

UMTS Test Configurations

3G SAR Test Reduction Procedure

In the following procedures, the mode tested for SAR is referred to as the primary mode. The

equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.³ This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Output power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH,

DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

Body-Worn Accessory SAR

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits

configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the "Release 5 HSDPA Data Devices" section of this document, for the highest reported SAR body-worn accessory exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

HSDPA should be configured according to the UE category of a test device. The number of HSDSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below.

The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ $\Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1,TF1) to $\beta_c=11/15$ and $\beta_d=15/15$.

HSUPA Test Configuration

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn accessory configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices” section of this document, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn accessory measurements is tested for next to the ear head exposure.

Due to inner loop power control requirements in HSPA, a communication test set is required for

output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in Table 2 and other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Devices’ sections of this document

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ $\Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.
Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?
NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)						

HSPA, HSPA+ and DC-HSDPA Test Configuration

measurement is required for HSPA, HSPA+ or DC-HSDPA, a KDB inquiry is required to confirm that the wireless mode configurations in the test setup have remained stable throughout the SAR measurements.³⁵ Without prior KDB confirmation to determine the SAR results are acceptable, a PBA is required for TCB approval. SAR test exclusion for HSPA, HSPA+ and DC-HSDPA is determined according to the following:

1) The HSPA procedures are applied to configure 3GPP Rel. 6 HSPA devices in the required

sub-test mode(s) to determine SAR test exclusion.

2) SAR is required for Rel. 7 HSPA+ when SAR is required for Rel. 6 HSPA; otherwise, the 3G SAR test reduction procedure is applied to (uplink) HSPA+ with 12.2 kbps RMC as the primary mode.³⁶ Power is measured for HSPA+ that supports uplink 16 QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

3) SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

4) Regardless of whether a PBA is required, the following information must be verified and included in the SAR report for devices supporting HSPA, HSPA+ or DC-HSDPA: a) The output power measurement results and applicable release version(s) of 3GPP TS 34.121.

i) Power measurement difficulties due to test equipment setup or availability must be resolved

between the grantee and its test lab.

b) The power measurement results are in agreement with the individual device implementation and specifications. When Enhanced MPR (E-MPR) applies, the normal MPR targets may be modified according to the Cubic Metric (CM) measured by the device, which must be taken into consideration.

c) The UE category, operating parameters, such as the β and Δ values used to configure the device for testing, power setback procedures described in 3GPP TS 34.121 for the power measurements, and HSPA/HSPA+ channel conditions (active and stable) for the entire duration of the measurement according to the required E-TFCI and AG index values.

5) When SAR measurement is required, the test configurations, procedures and power measurement results must be clearly described to confirm that the required test parameters are used, including

E-TFCI and AG index stability and output power conditions.

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK	Not applicable (dual cell operation not supported)	
Category 12	5	1	3630	28800	QPSK, 16QAM, 64QAM		
Category 13	15	1	35280	259200	QPSK, 16QAM		
Category 14	15	1	42192	259200	QPSK, 16QAM		
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600	QPSK, 16QAM		
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM		-
			23370	345600	-		QPSK, 16QAM
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM		-
			27952	345600	-		QPSK, 16QAM
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400	QPSK, 16QAM, 64QAM		
Category 21	15	1	23370	345600	-	-	QPSK, 16QAM
Category 22	15	1	27952	345600			
Category 23	15	1	35280	518400			
Category 24	15	1	42192	518400			

LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02r05. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames (Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

Maximum Power Reduction(MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth(N_{RB})						MPR(dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	>5	>4	>8	>12	>16	>18	≤ 2

Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 T_S$	$2192 T_S$	$2560 T_S$	$7680 T_S$	$2192 T_S$	$2560 T_S$
1	$19760 T_S$			$20480 T_S$		
2	$21952 T_S$			$23040 T_S$		
3	$24144 T_S$			$25600 T_S$		
4	$26336 T_S$			$7680 T_S$		
5	$6592 T_S$	$4384 T_S$	$5120 T_S$	$20480 T_S$	$4384 T_S$	$5120 T_S$
6	$19760 T_S$			$23040 T_S$		
7	$21952 T_S$			$12800 T_S$		
8	$24144 T_S$			-		
9	$13168 T_S$			-		

Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = 5120 x [1/(15000 x 2048)] x 2 + 6 ms = 63.33%

Where Ts = 1/(15000 x 2048) seconds

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of "NS_01" on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is $\leq 0.8\text{W/kg}$, testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is $> 1.45\text{ W/kg}$, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are $\leq 0.8\text{ W/kg}$. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is $> 1.45\text{ W/kg}$, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

WiFi Test Configurations

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set according to tune up procedure for 802.11 b mode by software. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode.

8. TUNE-UP LIMIT

GSM/GPRS850 (GMSK) :

1TXslot:30.5dBm [-1.0dB~~+1.0dB]
2TXslots:28.5dBm [-1.0dB~~+1.0dB]
3TXslots: 26.5dBm [-1.0dB~~+1.0dB]
4TXslots:24.5dBm [-1.0dB~~+1.0dB]

EDGE850 (8PSK) :

1TXslot: 21.5dBm [-1.0dB~~+1.0dB]
2TXslots: 22.5dBm [-1.0dB~~+1.0dB]
3TXslots:22.0dBm [-1.0dB~~+1.0dB]
4TXslots:21.5dBm [-1.0dB~~+1.0dB]

PCS/GPRS 1900 (GMSK) :

1TXslot: 28.5dBm [-1.0dB~~+1.0dB]
2TXslots:26.5dBm [-1.0dB~~+1.0dB]
3TXslots: 24.5dBm [-1.0dB~~+1.0dB]
4Txslots: 22.5dBm [-1.0dB~~+1.0dB]

EDGE 1900 (8PSK) :

1TXslot: 19.5dBm [-1.0dB~~+1.0dB]
2TXslots:19.5dBm [-1.0dB~~+1.0dB]
3TXslots:20.5dBm [-1.0dB~~+1.0dB]
4TXslots: 19.5dBm [-1.0dB~~+1.0dB]

The UMTS Band II power adjust procedure

WCDMA: 23.0dBm [-2.0dB~~+0.5dB]

HSDPA:

HSDPA Subtest 1: 22.5dBm [-1.0dB~~+1.0dB]
HSDPA Subtest 2: 22.0dBm [-1.0dB~~+1.0dB]
HSDPA Subtest 3: 21.0dBm [-1.0dB~~+1.0dB]
HSDPA Subtest 4: 21.0dBm [-1.0dB~~+1.0dB]

HSUPA:

HSUPA Subtest 1: 21.5dBm[-1.0dB~~+1.0dB]
HSUPA Subtest 2: 19.5dBm[-1.0dB~~+1.0dB]
HSUPA Subtest 3: 20.5dBm[-1.0dB~~+1.0dB]
HSUPA Subtest 4: 20.0dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 5: 21.5dBm[-1.0dB~~+1.0dB]

The UMTS Band IV power adjust procedure

WCDMA: 22.5dBm[-1.0dB~~+1.0dB]

HSDPA:

HSDPA Subtest 1: 22.5dBm [-1.0dB~~+1.0dB]

HSDPA Subtest 2: 22.0dBm[-1.0dB~~+1.0dB]

HSDPA Subtest 3: 21.5dBm[-1.0dB~~+1.0dB]

HSDPA Subtest 4: 21.0dBm[-1.0dB~~+1.0dB]

HSUPA:

HSUPA Subtest 1: 22.0dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 2: 20.0dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 3: 20.5dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 4: 20.5dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 5: 22.0dBm [-1.0dB~~+1.0dB]

The UMTS Band V power adjust procedure

WCDMA: 23.8dBm[-1.0dB~~+1.0dB]

HSDPA:

HSDPA Subtest 1: 24.0dBm[-1.0dB~~+1.0dB]

HSDPA Subtest 2: 23.0dBm[-1.0dB~~+1.0dB]

HSDPA Subtest 3: 22.5dBm[-1.0dB~~+1.0dB]

HSDPA Subtest 4: 22.0dBm[-1.0dB~~+1.0dB]

HSUPA:

HSUPA Subtest 1: 23.0dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 2: 20.5dBm[-1.0dB~~+1.0dB]

HSUPA Subtest 3: 21.5dBm [-1.0dB~~+1.0dB]

HSUPA Subtest 4: 21.5dBm [-1.0dB~~+1.0dB]

HSUPA Subtest 5: 23.0dBm[-1.0dB~~+1.0dB]

The LTE Band 2 power adjust procedure

1.4 MHz QPSK/16QAM: 22.5dBm [-3.0dB~~+0.7dB]

3 MHz QPSK/16QAM: 22.5dBm [-3.0dB~~+0.7dB]

5 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]

10 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]

15 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]

20 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]

The LTE Band 4 power adjust procedure

- 1.4 MHz QPSK/16QAM: 24.0dBm [-3.0dB~~+0.5dB]
- 3 MHz QPSK/16QAM: 24.0dBm [-1.0dB~~+0.5dB]
- 5 MHz QPSK/16QAM: 24.0dBm [-1.0dB~~+0.5dB]
- 10 MHz QPSK/16QAM: 24.0dBm [-1.0dB~~+0.5dB]
- 15 MHz QPSK/16QAM: 24.0dBm [-1.0dB~~+0.5dB]
- 20 MHz QPSK/16QAM: 24.5dBm [-1.0dB~~+0.5dB]

The LTE Band 5 power adjust procedure

- 1.4 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 3 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 5 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 10 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]

The LTE Band 7 power adjust procedure

- 5 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.8dB]
- 10 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.8dB]
- 15 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.8dB]
- 20 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.8dB]

The LTE Band 12 power adjust procedure

- 1.4 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 3 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 5 MHz QPSK/16QAM: 25.5dBm [-2.0dB~~+0.7dB]
- 10 MHz QPSK/16QAM: 25.5dBm [-2.0dB~~+0.7dB]

The LTE Band 17 power adjust procedure

- 5 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]
- 10 MHz QPSK/16QAM: 25.0dBm [-2.0dB~~+0.7dB]

The LTE Band 26 power adjust procedure

- 1.4 MHz QPSK/16QAM: 22.0dBm [-2.0dB~~+0.7dB]
- 3 MHz QPSK/16QAM: 22.0dBm [-2.0dB~~+0.7dB]
- 5 MHz QPSK/16QAM: 22.0dBm [-2.0dB~~+0.7dB]
- 10 MHz QPSK/16QAM: 22.0dBm [-2.0dB~~+0.7dB]

The LTE Band 38 power adjust procedure

5 MHz QPSK/16QAM: 24.0dBm [-2.0dB~~+0.7dB]
10 MHz QPSK/16QAM: 24.0dBm [-2.0dB~~+0.7dB]
15 MHz QPSK/16QAM: 24.0dBm [-2.0dB~~+0.7dB]
20 MHz QPSK/16QAM: 24.5dBm [-2.0dB~~+0.7dB]

The LTE Band 41 power adjust procedure

5 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.7dB]
10 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.7dB]
15 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.7dB]
20 MHz QPSK/16QAM: 23.0dBm [-2.0dB~~+0.7dB]

The LTE Band 66 power adjust procedure

1.4 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]
3 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]
5 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]
10 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]
15 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]
20 MHz QPSK/16QAM: 22.5dBm [-2.0dB~~+0.7dB]

The Wi-Fi RF test procedure

Average Power:

11b: 16.0dBm [-2.0dB~~+2.0dB]
11g: 14.0dBm [-2.0dB~~+2.0dB]
11n: 12dBm [-2.0dB~~+2.0dB]
11a: 14.0dBm [-2.0dB~~+2.0dB]
11ac: 12.0dBm [-2.0dB~~+2.0dB]

BT Average Power:

BT: 16.0 dBm [-2.0dB~~+2.0dB]
BLE: -4.0 dBm [-1.0dB~~+1.0dB]

9. MEASUREMENT RESULTS

Result: Passed

Date of testing : 2020.6.1~2021.6.07
Ambient temperature : 20°C~22°C
Relative humidity : 50~68%

9.1. Conducted Power

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of Timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
Time based avg. power compared to slotted avg. power	-	-	-	-
	9.19dB	6.13dB	4.42dB	3.18dB

The signalling modes differ as follows:

Mode	Coding scheme	Modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

GSM Conducted Power Measurement Results

Band: GSM850	Burst Average Power (dBm)			Frame Average Power (dBm)		
	128	190	251	128	190	251
Channel	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (CS)	29.93	29.92	29.89	20.93	20.92	20.89
GPRS/EDGE (GMSK, 1 Tx slot)	29.87	29.87	29.88	20.87	20.87	20.88
GPRS/EDGE (GMSK, 2 Tx slots)	27.91	27.88	27.92	21.91	21.88	21.92
GPRS/EDGE (GMSK, 3 Tx slots)	25.84	25.87	25.92	21.58	21.61	21.66
GPRS/EDGE (GMSK, 4 Tx slots)	23.93	23.92	23.98	20.93	20.92	20.98
EDGE (8PSK, 1 Tx slot)	23.64	23.63	23.72	14.64	14.63	14.72
EDGE (8PSK, 2 Tx slots)	21.70	21.69	21.80	15.70	15.69	15.80
EDGE (8PSK, 3 Tx slots)	19.66	19.68	19.76	15.40	15.42	15.50
EDGE (8PSK, 4 Tx slots)	17.76	17.77	17.85	14.76	14.77	14.85

Remark:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, the bolded GPRS 2 Tx mode was selected as the primary mode for SAR testing according to the highest frame- averaged output power table.

Band: GSM1900	Burst Average Power (dBm)			Frame Average Power (dBm)		
	512	661	810	512	661	810
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
GSM (CS)	28.12	28.14	28.09	19.12	19.14	19.09
GPRS/EDGE (GMSK, 1 Tx slot)	28.06	28.08	28.06	19.06	19.08	19.06
GPRS/EDGE (GMSK, 2 Tx slots)	26.09	26.10	26.10	20.09	20.10	20.10
GPRS/EDGE (GMSK, 3 Tx slots)	24.08	24.07	24.06	19.82	19.81	19.80
GPRS/EDGE (GMSK, 4 Tx slots)	22.15	22.15	22.14	19.15	19.15	19.14
EGPRS (8PSK, 1 Tx slot)	21.89	21.89	21.87	12.89	12.89	12.87
EGPRS (8PSK, 2 Tx slots)	19.99	19.94	19.96	13.99	13.94	13.96
EGPRS (8PSK, 3 Tx slots)	17.97	17.92	17.93	13.71	13.66	13.67
EGPRS (8PSK, 4 Tx slots)	16.02	16.01	16.02	13.02	13.01	13.02

Remark:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

Per KDB941225 D01v03, the bolded GPRS 2 Tx mode was selected as the primary mode for SAR testing according to the highest frame- averaged output power table.

UMTS Conducted Power Measurement Results

UMTS Band II		Conducted Power (dBm)		
		9263CH	9400CH	9538CH
WCDMA	12.2kbps RMC	22.33	22.38	22.42
	64kbps RMC	22.12	22.29	22.38
	144kbps RMC	22.09	22.26	22.41
	384kbps RMC	22.07	22.30	22.38
HSDPA	Subtest 1	22.05	22.22	22.34
	Subtest 2	21.25	21.31	21.57
	Subtest 3	20.65	20.81	20.97
	Subtest 4	20.38	20.55	20.67
HSUPA	Subtest 1	21.03	21.18	21.36
	Subtest 2	18.97	19.18	19.38
	Subtest 3	19.84	20.06	20.20
	Subtest 4	19.26	19.59	19.75
	Subtest 5	21.13	21.25	21.40

Remark:

1) The conducted power of UMTS Band II is measured with RMS detector

2) Per KDB 941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

UMTS Band IV		Conducted Power (dBm)		
		1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	22.35	22.34	22.29
	64kbps RMC	22.28	22.29	22.24
	144kbps RMC	22.30	22.21	22.29
	384kbps RMC	22.33	22.33	22.29
HSDPA	Subtest 1	22.33	22.26	22.24
	Subtest 2	21.55	21.50	21.42
	Subtest 3	20.97	20.89	20.85
	Subtest 4	20.66	20.62	20.56
HSUPA	Subtest 1	21.38	21.31	21.24
	Subtest 2	19.30	19.25	19.19
	Subtest 3	20.23	20.18	20.14
	Subtest 4	20.02	19.95	19.94
	Subtest 5	21.47	21.44	21.36

Remark:

- 1) The conducted power of UMTS Band V is measured with RMS detector
- 2) Per KDB 941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.38	23.34	23.32
	64kbps RMC	23.31	23.29	23.27
	144kbps RMC	23.33	23.22	23.32
	384kbps RMC	23.37	23.33	23.32
HSDPA	Subtest 1	23.37	23.26	23.27
	Subtest 2	22.58	22.50	22.47
	Subtest 3	22.01	21.89	21.88
	Subtest 4	21.69	21.62	21.59
HSUPA	Subtest 1	22.41	22.32	22.27
	Subtest 2	20.31	20.25	20.22
	Subtest 3	21.26	21.16	21.17
	Subtest 4	21.06	20.95	20.97
	Subtest 5	22.53	22.50	22.40

Remark:

- 3) The conducted power of UMTS Band V is measured with RMS detector
- 4) Per KDB 941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Conducted power measurements of LTE Band 2

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18607	18900	19193
1.4MHz	QPSK	1	0	21.92	21.99	21.75
		1	13	21.95	21.86	22.02
		1	24	21.92	21.92	21.86
		12	0	20.84	20.93	20.69
		12	6	20.84	20.53	20.83
		12	13	20.93	20.69	20.77
		25	0	20.84	20.93	20.93
	16QAM	1	0	20.61	20.74	20.39
		1	13	20.29	20.55	20.55
		1	24	20.37	20.59	20.59
		12	0	19.81	20.03	20.16
		12	6	20.01	20.01	19.94
		12	13	19.76	19.94	19.68
		25	0	19.85	19.97	20.08

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18615	18900	19185
3MHz	QPSK	1	0	21.75	21.81	21.79
		1	7	21.92	21.90	21.89
		1	14	21.96	21.95	21.95
		8	0	20.73	20.84	20.62
		8	4	20.93	20.83	20.73
		8	7	20.77	20.85	20.83
		15	0	20.76	20.83	20.85
	16QAM	1	0	20.45	20.51	20.59
		1	7	20.51	20.45	20.59
		1	14	20.39	20.43	20.59
		8	0	19.85	19.85	19.81
		8	4	20.03	20.08	19.85
		8	7	19.66	19.94	19.89
		15	0	19.94	19.68	19.97

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	21.75	21.79	21.92
		1	12	21.85	21.89	21.96
		1	24	21.92	21.96	21.79
		12	0	20.77	20.70	20.84
		12	6	20.93	20.71	20.68
		12	13	20.77	20.90	20.93
		25	0	20.53	20.84	20.69
	16QAM	1	0	20.34	20.74	20.51
		1	13	20.59	20.29	20.74
		1	24	20.34	20.39	20.34
		12	0	19.81	20.01	19.46
		12	6	20.00	19.63	19.68
		12	13	19.76	19.89	20.16
		25	0	20.00	20.00	19.46

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	21.78	21.81	22.00
		1	24	22.01	21.91	21.78
		1	49	21.88	21.73	21.81
		25	0	20.58	20.74	20.75
		25	12	20.66	20.83	20.43
		25	25	20.61	20.75	20.60
		50	0	20.83	20.60	20.83
	16QAM	1	0	20.55	20.32	20.37
		1	24	20.50	20.63	20.34
		1	49	20.34	20.28	20.32
		25	0	19.79	19.68	19.64
		25	12	19.53	19.42	19.55
		25	25	19.95	19.64	19.53
		50	0	19.25	19.73	19.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	21.91	21.98	21.94
		1	37	21.73	21.85	22.01
		1	74	22.02	21.94	21.78
		37	0	20.61	20.80	20.61
		37	18	20.63	20.83	20.59
		37	38	20.74	20.75	20.63
		75	0	20.67	20.75	20.59
	16QAM	1	0	20.40	20.28	20.34
		1	37	20.40	20.48	20.05
		1	74	20.28	20.55	20.23
		37	0	19.47	19.95	20.01
		37	18	19.60	19.25	19.82
		37	38	19.60	19.68	19.64
		75	0	19.60	19.64	19.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	21.79	21.90	21.74
		1	49	22.14	22.14	22.14
		1	99	21.92	21.74	21.74
		50	0	20.83	20.85	20.73
		50	25	20.93	20.90	20.73
		50	50	20.85	20.84	20.93
		100	0	20.84	20.53	20.83
	16QAM	1	0	20.42	20.43	20.51
		1	49	20.29	20.29	20.59
		1	99	20.42	20.34	20.43
		50	0	19.63	19.74	19.76
		50	25	19.85	20.00	19.85
		50	50	19.85	20.03	19.85
		100	0	20.03	19.85	19.66

Conducted power measurements of LTE Band 4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19957	20175	20393
1.4MHz	QPSK	1	0	23.98	23.99	24.14
		1	3	24.11	24.05	24.14
		1	5	24.05	23.95	23.98
		3	0	23.03	22.92	22.95
		3	2	22.88	22.92	22.85
		3	3	22.75	22.80	22.79
		6	0	22.99	22.95	22.89
	16QAM	1	0	22.43	22.54	22.36
		1	3	22.67	22.53	22.36
		1	5	22.36	22.60	22.43
		3	0	21.78	21.74	22.11
		3	2	21.63	21.95	22.05
		3	3	22.05	21.70	22.37
		6	0	22.25	22.00	21.77

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19965	20175	20385
3MHz	QPSK	1	0	24.08	24.15	23.98
		1	7	23.86	24.11	23.91
		1	14	24.00	23.98	24.03
		8	0	22.87	22.98	22.67
		8	4	22.75	22.97	22.95
		8	7	22.92	22.95	22.83
		15	0	22.92	22.95	22.91
	16QAM	1	0	22.61	22.69	22.69
		1	7	22.60	22.56	22.62
		1	14	22.61	22.45	22.60
		8	0	22.37	21.91	22.02
		8	4	22.37	22.01	21.76
		8	7	21.76	22.05	21.78
		15	0	21.95	22.05	22.37

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	24.11	23.99	24.05
		1	12	24.00	23.95	24.08
		1	24	23.88	23.95	24.00
		12	0	22.80	23.00	22.87
		12	6	22.95	22.89	23.00
		12	13	22.79	22.98	22.89
		25	0	22.89	22.83	22.88
	16QAM	1	0	22.67	22.56	22.69
		1	13	22.65	22.61	22.54
		1	24	22.46	22.79	22.42
		12	0	21.91	21.68	22.24
		12	6	22.11	21.68	22.04
		12	13	21.76	22.02	22.19
		25	0	21.78	21.68	21.95

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	23.94	23.85	23.96
		1	24	23.94	23.97	23.89
		1	49	24.13	24.02	23.94
		25	0	22.82	22.82	22.90
		25	12	22.70	22.90	22.90
		25	25	22.73	22.73	22.73
		50	0	22.82	22.70	22.73
	16QAM	1	0	22.56	22.66	22.66
		1	24	22.56	22.48	22.42
		1	49	22.45	22.20	22.43
		25	0	21.97	21.49	21.98
		25	12	21.63	21.74	21.98
		25	25	21.98	21.55	21.56
		50	0	21.47	22.03	21.90

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	23.94	24.08	23.94
		1	37	23.87	23.89	23.85
		1	74	23.99	24.07	24.02
		37	0	22.70	22.57	22.89
		37	18	22.90	22.75	22.82
		37	38	22.87	22.70	22.78
		75	0	22.89	22.79	22.77
	16QAM	1	0	22.56	22.56	22.79
		1	37	22.56	22.42	22.43
		1	74	22.54	22.50	22.31
		37	0	21.63	21.82	21.74
		37	18	21.47	21.42	21.81
		37	38	21.79	21.90	21.98
		75	0	22.02	21.79	21.49

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0	23.95	23.95	23.90
		1	49	24.29	24.27	24.25
		1	99	23.99	24.13	23.95
		50	0	22.71	23.03	22.80
		50	25	22.80	23.00	22.99
		50	50	22.92	22.79	22.91
		100	0	22.85	22.75	22.98
	16QAM	1	0	22.46	22.67	22.79
		1	49	22.65	22.61	22.77
		1	99	22.46	22.71	22.71
		50	0	22.00	21.77	21.63
		50	25	22.04	21.84	21.84
		50	50	21.68	21.63	22.00
		100	0	21.76	21.77	22.00

Conducted power measurements of LTE Band 5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20407	20525	20643
1.4MHz	QPSK	1	0	24.50	24.50	24.38
		1	3	24.50	24.28	24.44
		1	5	24.50	24.39	24.52
		3	0	23.42	23.34	23.44
		3	2	23.24	23.43	23.28
		3	3	23.26	23.24	23.34
		6	0	23.24	23.40	23.30
	16QAM	1	0	22.94	22.88	22.89
		1	3	22.73	22.73	23.03
		1	5	23.06	23.11	23.02
		3	0	22.32	22.32	22.32
		3	2	22.41	22.29	22.35
		3	3	22.54	22.43	22.49
		6	0	22.29	22.27	22.25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20415	20525	20635
3MHz	QPSK	1	0	24.48	24.28	24.47
		1	7	24.31	24.47	24.41
		1	14	24.50	24.28	24.28
		8	0	23.20	23.21	23.34
		8	4	23.31	23.31	23.23
		8	7	23.40	23.21	23.34
		15	0	23.28	23.25	23.31
	16QAM	1	0	22.94	23.14	22.73
		1	7	22.96	23.03	23.02
		1	14	23.13	23.00	23.01
		8	0	22.29	22.37	22.49
		8	4	22.61	22.72	22.26
		8	7	22.65	22.72	22.29
		15	0	22.35	22.67	22.25

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20600
5MHz	QPSK	1	0	24.38	24.38	24.41
		1	12	24.71	24.72	24.68
		1	24	24.52	24.41	24.52
		12	0	23.47	23.25	23.34
		12	6	23.43	23.18	23.43
		12	13	23.42	23.24	23.34
		25	0	23.30	23.18	23.21
	16QAM	1	0	22.96	23.06	22.96
		1	12	23.00	22.96	23.20
		1	24	23.13	23.13	22.96
		12	0	22.67	22.37	22.41
		12	6	22.49	22.49	22.72
		12	13	22.53	22.41	22.61
		25	0	22.43	22.40	22.05

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	24.49	24.47	24.49
		1	24	24.40	24.33	24.34
		1	49	24.35	24.48	24.51
		25	0	23.21	23.24	23.21
		25	12	23.24	23.30	23.16
		25	25	23.24	23.10	23.18
		50	0	23.30	23.11	23.24
	16QAM	1	0	22.93	22.90	23.09
		1	24	22.78	22.90	22.89
		1	49	22.85	22.91	22.95
		25	0	22.20	22.11	22.11
		25	12	22.32	22.16	22.21
		25	25	22.05	22.32	22.20
		50	0	22.08	22.11	22.08

Conducted power measurements of LTE Band 7

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20775	21100	21425
5MHz	QPSK	1	0	22.37	22.31	22.30
		1	12	22.31	22.43	22.27
		1	24	22.29	22.31	22.40
		12	0	21.27	21.38	21.27
		12	6	21.19	21.35	21.35
		12	13	21.25	21.25	21.40
		25	0	21.24	21.17	21.38
	16QAM	1	0	20.88	21.04	20.79
		1	13	21.15	21.01	21.15
		1	24	20.94	20.97	21.17
		12	0	20.25	20.45	20.11
		12	6	20.18	20.62	20.22
		12	13	20.51	20.32	20.25
		25	0	20.48	20.22	20.45

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20800	21100	21400
10MHz	QPSK	1	0	22.39	22.16	22.46
		1	24	22.35	22.45	22.28
		1	49	22.45	22.36	22.42
		25	0	20.95	21.09	21.29
		25	12	21.09	21.11	21.22
		25	25	21.26	21.03	21.29
		50	0	21.04	21.00	21.03
	16QAM	1	0	20.81	20.76	20.91
		1	24	20.75	20.61	21.11
		1	49	20.81	20.91	21.11
		25	0	20.03	19.94	20.04
		25	12	20.41	20.04	20.08
		25	25	20.00	20.04	19.95
		50	0	20.20	20.04	20.04

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20825	21100	21375
15MHz	QPSK	1	0	22.17	22.42	22.42
		1	37	22.45	22.17	22.34
		1	74	22.23	22.25	22.16
		37	0	21.00	21.03	21.17
		37	18	21.18	21.21	21.00
		37	38	21.26	21.04	20.95
		75	0	21.11	21.24	21.12
	16QAM	1	0	20.63	20.61	20.62
		1	37	20.79	20.63	20.74
		1	74	20.91	20.81	20.96
		37	0	20.05	20.04	20.03
		37	18	20.17	20.30	20.41
		37	38	20.48	19.85	20.04
		75	0	20.48	20.50	20.01

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20850	21100	21350
20MHz	QPSK	1	0	22.30	22.43	22.46
		1	49	22.57	22.62	22.58
		1	99	22.21	22.24	22.17
		50	0	21.17	21.14	21.31
		50	25	21.43	21.10	21.05
		50	50	21.21	21.11	21.39
		100	0	21.34	21.36	21.13
	16QAM	1	0	21.22	20.92	20.92
		1	49	21.22	21.02	21.07
		1	99	20.84	21.21	20.92
		50	0	20.53	20.16	20.22
		50	25	20.25	20.24	20.51
		50	50	20.41	20.53	20.29
		100	0	20.15	20.16	20.41

Conducted power measurements of LTE Band 12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23017	23095	23173
1.4MHz	QPSK	1	0	25.04	24.89	25.00
		1	3	24.96	25.03	25.04
		1	5	25.00	24.91	24.78
		3	0	23.80	23.77	23.78
		3	2	23.71	23.65	23.84
		3	3	23.85	23.91	23.80
		6	0	23.64	23.65	23.92
	16QAM	1	0	23.55	23.59	23.48
		1	3	23.52	23.80	23.55
		1	5	23.80	23.63	23.29
		3	0	23.00	22.82	23.27
		3	2	22.96	23.00	22.74
		3	3	22.87	23.11	23.12
		6	0	23.16	23.07	22.91

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23025	23095	23165
3MHz	QPSK	1	0	24.83	24.92	24.93
		1	7	24.99	24.93	24.83
		1	14	25.00	24.92	24.92
		8	0	23.88	23.80	23.88
		8	4	23.91	23.77	23.68
		8	7	23.76	23.64	23.60
		15	0	23.88	24.02	23.91
	16QAM	1	0	23.36	23.53	23.72
		1	7	23.59	23.37	23.26
		1	14	23.68	23.48	23.54
		8	0	22.96	22.87	22.96
		8	4	23.11	23.12	22.96
		8	7	22.91	23.27	22.87
		15	0	22.91	23.12	22.60

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23035	23095	23155
5MHz	QPSK	1	0	24.83	25.00	24.83
		1	12	25.16	25.19	25.17
		1	24	24.89	24.89	24.91
		12	0	23.71	23.68	23.76
		12	6	23.80	23.64	23.84
		12	13	23.68	23.71	23.76
		25	0	23.73	23.80	23.96
	16QAM	1	0	23.55	23.35	23.68
		1	12	23.50	23.29	23.29
		1	24	23.48	23.75	23.80
		12	0	23.02	22.92	22.62
		12	6	23.11	22.90	22.91
		12	13	22.82	23.17	22.82
		25	0	23.12	22.87	22.92

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23060	23095	23130
10MHz	QPSK	1	0	24.77	24.85	24.91
		1	24	24.99	24.89	24.92
		1	49	24.76	24.98	24.77
		25	0	23.66	23.54	23.70
		25	12	23.82	23.75	23.70
		25	25	23.92	23.78	23.75
		50	0	23.82	23.66	23.92
	16QAM	1	0	23.25	23.57	23.39
		1	24	23.68	23.35	23.37
		1	49	23.69	23.39	23.41
		25	0	22.86	22.95	22.81
		25	12	22.69	22.46	22.95
		25	25	22.46	22.46	22.47
		50	0	22.79	22.53	22.39

Conducted power measurements of LTE Band 17

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23755	23790	23825
5MHz	QPSK	1	0	24.52	24.47	24.53
		1	12	24.26	24.21	24.30
		1	24	24.57	24.76	24.66
		12	0	23.49	23.55	23.53
		12	6	23.69	23.69	23.58
		12	13	23.36	23.49	23.53
		25	0	23.58	23.53	23.55
	16QAM	1	0	23.20	23.28	23.30
		1	12	23.39	23.22	23.13
		1	24	23.40	23.39	23.45
		12	0	22.64	22.46	22.63
		12	6	22.68	22.31	22.73
		12	13	22.59	22.46	22.63
		25	0	22.34	22.37	22.51

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				23780	23790	23800
10MHz	QPSK	1	0	24.70	24.75	24.62
		1	24	24.65	24.67	24.67
		1	49	24.67	24.62	24.70
		25	0	23.26	23.43	23.43
		25	12	23.24	23.48	23.43
		25	25	23.26	23.59	23.52
		50	0	23.39	23.26	23.30
	16QAM	1	0	22.82	22.82	23.02
		1	24	23.19	23.17	23.31
		1	49	23.11	22.96	22.92
		25	0	22.56	22.25	22.13
		25	12	22.71	22.21	22.42
		25	25	22.42	22.71	22.38
		50	0	22.29	22.46	22.42

Conducted power measurements of LTE Band 26

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26697	26865	27033
1.4MHz	QPSK	1	0	21.59	21.39	21.46
		1	13	21.46	21.55	21.51
		1	24	21.45	21.52	21.42
		12	0	20.31	20.36	20.34
		12	6	20.31	20.33	20.54
		12	13	20.21	20.21	20.56
		25	0	20.53	20.21	20.54
	16QAM	1	0	19.87	19.87	20.13
		1	13	19.85	20.37	20.37
		1	24	20.34	20.35	20.05
		12	0	19.21	19.19	19.83
		12	6	19.80	19.30	19.33
		12	13	19.61	19.85	19.33
		25	0	19.80	19.33	19.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26705	26865	27025
3MHz	QPSK	1	0	21.48	21.48	21.39
		1	7	21.31	21.59	21.58
		1	14	21.44	21.32	21.39
		8	0	20.36	20.29	20.23
		8	4	20.16	20.27	20.26
		8	7	20.38	20.34	20.54
		15	0	20.34	20.31	20.54
	16QAM	1	0	19.86	19.87	20.14
		1	7	19.90	19.87	20.34
		1	14	20.31	19.99	19.99
		8	0	19.30	19.85	19.41
		8	4	19.55	19.61	19.59
		8	7	19.59	19.41	19.83
		15	0	19.31	19.83	19.79

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26715	26865	27015
5MHz	QPSK	1	0	21.46	21.46	21.39
		1	12	21.73	21.73	21.71
		1	24	21.58	21.33	21.59
		12	0	20.16	20.34	20.27
		12	6	20.28	20.16	20.16
		12	13	20.29	20.29	20.31
		25	0	20.23	20.44	20.31
	16QAM	1	0	19.95	19.89	20.30
		1	13	19.90	19.99	20.37
		1	24	19.85	19.90	19.96
		12	0	19.18	19.77	19.31
		12	6	19.85	19.62	19.35
		12	13	19.21	19.79	19.22
		25	0	19.76	19.17	19.80

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				26740	26865	26990
10MHz	QPSK	1	0	21.43	21.30	21.38
		1	24	21.45	21.41	21.46
		1	49	21.47	21.45	21.41
		25	0	20.11	20.23	20.11
		25	12	20.43	20.40	20.45
		25	25	20.46	20.46	20.17
		50	0	20.43	20.06	20.43
	16QAM	1	0	19.71	19.93	20.15
		1	24	20.19	20.20	19.99
		1	49	19.84	20.24	20.15
		25	0	19.64	19.59	19.62
		25	12	19.01	19.12	19.34
		25	25	19.29	19.41	19.03
		50	0	19.03	19.64	19.10

Conducted power measurements of LTE Band 38

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37775	38000	38225
5MHz	QPSK	1	0	24.14	24.08	24.15
		1	12	24.03	23.90	24.15
		1	24	24.10	24.04	24.02
		12	0	22.90	22.88	22.99
		12	6	22.97	22.89	22.99
		12	13	23.05	22.85	22.97
		25	0	22.86	23.00	22.89
	16QAM	1	0	22.76	22.90	22.85
		1	13	22.82	22.76	22.65
		1	24	22.60	22.50	22.54
		12	0	22.02	22.31	21.97
		12	6	22.12	22.26	22.04
		12	13	22.33	21.93	21.97
		25	0	22.15	22.02	21.93

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37800	38000	38200
10MHz	QPSK	1	0	24.02	23.95	24.02
		1	24	24.10	24.04	24.02
		1	49	24.14	23.91	24.04
		25	0	22.86	22.90	22.85
		25	12	23.03	22.91	22.74
		25	25	23.01	22.76	22.85
		50	0	22.75	22.74	22.74
	16QAM	1	0	22.74	22.65	22.74
		1	24	22.52	22.41	22.72
		1	49	22.50	22.53	22.71
		25	0	21.73	21.79	21.79
		25	12	21.72	21.93	21.80
		25	25	21.83	21.62	21.76
		50	0	21.94	21.72	22.02

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37825	38000	38175
15MHz	QPSK	1	0	23.95	24.00	24.05
		1	37	24.00	24.10	24.09
		1	74	24.03	24.03	24.02
		37	0	23.03	22.72	22.92
		37	18	22.72	23.03	22.74
		37	38	22.91	22.74	22.90
		75	0	22.89	22.92	22.75
	16QAM	1	0	22.79	22.61	22.46
		1	37	22.71	22.43	22.53
		1	74	22.83	22.74	22.71
		37	0	21.62	22.12	22.05
		37	18	21.95	21.83	21.81
		37	38	21.72	21.94	21.95
		75	0	22.23	22.05	22.12

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				37850	38000	38150
20MHz	QPSK	1	0	24.02	23.96	24.05
		1	49	24.34	24.30	24.30
		1	99	24.15	24.15	24.03
		50	0	22.99	23.11	23.13
		50	25	23.05	22.90	23.05
		50	50	22.91	22.99	22.96
		100	0	23.02	23.05	22.82
	16QAM	1	0	22.73	22.90	22.50
		1	49	22.54	22.61	22.73
		1	99	22.94	22.59	22.52
		50	0	21.83	21.89	22.12
		50	25	22.15	22.44	22.31
		50	50	21.89	21.92	22.44
		100	0	22.37	22.04	21.92

Conducted power measurements of LTE Band 41

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39675	40620	41565
5MHz	QPSK	1	0	22.41	22.17	22.12
		1	12	22.18	22.32	22.41
		1	24	22.22	22.17	22.17
		12	0	21.29	21.13	21.15
		12	6	21.30	21.25	21.08
		12	13	21.04	21.02	21.04
		25	0	21.30	20.97	21.29
	16QAM	1	0	21.02	21.10	20.77
		1	13	20.60	21.10	21.02
		1	24	20.65	20.92	20.81
		12	0	20.12	20.43	20.19
		12	6	20.43	20.01	20.08
		12	13	19.93	20.43	20.59
		25	0	20.43	20.44	20.01

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39700	40620	41540
10MHz	QPSK	1	0	22.28	22.11	22.16
		1	24	22.16	22.10	22.25
		1	49	22.17	22.17	22.34
		25	0	21.12	21.15	21.05
		25	12	21.09	21.19	20.98
		25	25	20.90	21.12	20.98
		50	0	21.19	20.92	21.12
	16QAM	1	0	20.62	20.52	20.70
		1	24	20.87	20.49	20.63
		1	49	20.62	20.92	20.62
		25	0	20.37	19.91	20.23
		25	12	19.91	20.01	19.87
		25	25	19.72	19.94	20.38
		50	0	19.87	19.94	19.94

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39725	40620	41515
15MHz	QPSK	1	0	22.10	22.31	22.16
		1	37	22.11	22.34	22.25
		1	74	22.31	22.31	22.12
		37	0	21.20	21.14	21.20
		37	18	20.91	21.14	20.84
		37	38	20.87	21.08	21.14
		75	0	21.03	20.92	21.03
	16QAM	1	0	20.95	20.49	20.55
		1	37	20.81	20.99	20.99
		1	74	20.87	20.92	20.95
		37	0	19.94	19.93	19.98
		37	18	20.18	19.79	20.18
		37	38	19.91	20.30	20.01
		75	0	20.23	20.18	19.91

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				39750	21100	41490
20MHz	QPSK	1	0	22.38	22.41	22.18
		1	49	22.55	22.52	22.51
		1	99	22.38	22.11	22.35
		50	0	21.30	21.08	21.01
		50	25	21.08	21.29	21.19
		50	50	21.04	21.01	21.25
		100	0	21.02	21.13	21.02
	16QAM	1	0	21.06	21.10	20.73
		1	49	20.86	20.92	20.88
		1	99	21.02	20.77	21.02
		50	0	19.95	20.38	20.44
		50	25	20.38	20.12	20.33
		50	50	20.43	20.08	20.24
		100	0	19.95	20.46	19.95

Conducted power measurements of LTE Band 66

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131799	132322	132665
1.4MHz	QPSK	1	0	22.03	21.98	21.88
		1	13	21.93	21.98	21.89
		1	24	22.07	21.93	22.07
		12	0	20.95	20.96	21.02
		12	6	20.95	20.71	20.97
		12	13	20.97	20.91	20.68
		25	0	20.79	20.82	20.71
	16QAM	1	0	20.36	20.60	20.67
		1	13	20.70	20.41	20.36
		1	24	20.39	20.36	20.39
		12	0	19.61	20.13	19.78
		12	6	19.88	20.19	19.97
		12	13	19.68	19.74	20.28
		25	0	20.18	19.61	19.97

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131987	132322	132657
3MHz	QPSK	1	0	21.89	21.87	21.88
		1	7	21.98	21.90	21.96
		1	14	21.80	21.92	21.90
		8	0	20.73	20.76	20.89
		8	4	20.97	21.02	20.91
		8	7	20.78	20.90	20.91
		15	0	20.96	20.91	20.82
	16QAM	1	0	20.69	20.68	20.51
		1	7	20.78	20.51	20.67
		1	14	20.67	20.45	20.45
		8	0	19.78	19.97	20.28
		8	4	19.83	19.61	19.61
		8	7	19.78	19.70	19.94
		15	0	20.00	20.12	19.68

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				131997	132322	132647
5MHz	QPSK	1	0	21.89	21.98	21.80
		1	12	22.07	21.90	21.93
		1	24	21.92	21.99	22.05
		12	0	20.73	20.76	20.68
		12	6	20.78	20.91	20.72
		12	13	20.89	20.72	20.90
		25	0	20.97	20.90	20.97
	16QAM	1	0	20.39	20.68	20.39
		1	13	20.78	20.39	20.67
		1	24	20.73	20.39	20.67
		12	0	19.88	20.28	19.67
		12	6	19.88	19.73	20.00
		12	13	20.00	19.88	20.28
		25	0	19.73	19.61	19.83

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132022	132322	132622
10MHz	QPSK	1	0	21.99	21.91	21.95
		1	24	21.90	22.05	21.89
		1	49	21.95	21.88	21.88
		25	0	20.58	20.68	20.80
		25	12	20.62	20.92	20.58
		25	25	20.72	20.68	20.83
		50	0	20.72	20.86	20.81
	16QAM	1	0	20.28	20.56	20.25
		1	24	20.40	20.70	20.58
		1	49	20.34	20.50	20.70
		25	0	19.40	19.97	19.53
		25	12	19.67	19.86	19.79
		25	25	19.53	19.97	19.73
		50	0	19.93	19.47	19.52

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132047	132322	132597
15MHz	QPSK	1	0	21.88	21.89	22.06
		1	37	21.79	21.91	21.92
		1	74	22.04	21.90	21.99
		37	0	20.80	20.72	20.87
		37	18	20.69	20.83	20.62
		37	38	20.92	20.65	20.92
		75	0	20.86	20.62	20.72
	16QAM	1	0	20.30	20.58	20.25
		1	37	20.47	20.28	20.63
		1	74	20.50	20.40	20.28
		37	0	19.70	19.47	19.52
		37	18	20.07	19.98	19.91
		37	38	19.82	19.52	19.97
		75	0	19.52	19.76	19.52

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				132072	132322	132572
20MHz	QPSK	1	0	22.05	21.92	21.99
		1	49	22.18	22.21	22.18
		1	99	21.80	21.99	21.88
		50	0	20.68	21.02	20.97
		50	25	20.95	20.71	20.72
		50	50	20.93	20.96	21.02
		100	0	21.02	20.68	20.76
	16QAM	1	0	20.74	20.51	20.69
		1	49	20.51	20.60	20.39
		1	99	20.41	20.39	20.61
		50	0	19.70	20.14	20.07
		50	25	20.18	20.19	19.67
		50	50	20.07	19.97	20.10
		100	0	19.78	19.78	20.19

WLAN 2.4GHz Band Conducted Power

Wi-Fi 2450MHz	Channel	Average Power (dBm) for Data Rates (Mbps)								Sar test (Yes or NO)
		1	2	5.5	11	/	/	/	/	
802.11b 2.4G(DSS S)	1(2412)	15.54	15.42	15.37	15.26	/	/	/	/	Yes Initial Test Configurati on
	6(2437)	15.93	15.59	15.56	15.62	/	/	/	/	
	11(2462)	15.49	15.19	14.85	14.83	/	/	/	/	
802.11g 2.4G(OFD M)	Channel	6	9	12	18	24	36	48	54	Yes Subsequen t Test Configurati on
	1(2412)	13.88	13.13	13.18	13.10	13.02	12.90	12.68	12.56	
	6(2437)	13.96	13.77	13.74	13.80	13.85	13.52	13.24	13.09	
	11(2462)	13.82	13.65	13.60	13.40	13.45	13.35	12.97	12.83	
802.11n- HT20 2.4G(OFD M)	Channel	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	Yes Subsequen t Test Configurati on
	1(2412)	11.83	11.10	11.07	11.01	10.88	10.66	10.54	10.18	
	6(2437)	11.91	11.79	11.80	11.64	11.54	11.18	11.09	10.90	
	11(2462)	11.85	11.64	11.41	11.53	11.40	11.07	10.85	10.48	
802.11n- HT40 2.4G(OFD M)	Channel	MCS 0	MCS 1	MCS 2	MCS 3	MCS 4	MCS 5	MCS 6	MCS 7	Yes Subsequen t Test Configurati on
	3(2422)	11.81	11.76	11.33	11.14	10.30	9.75	9.40	9.15	
	6(2437)	11.83	11.79	11.52	11.37	10.53	10.06	9.74	9.46	
	9(2452)	11.82	11.83	11.59	11.00	10.23	9.68	9.39	9.25	

Remark:

Output Power Measurement Considerations for Wi-Fi 2.4 GHz band

1. 2.4 GHz 802.11b DSSS:

- Output power measurement is not required:
 - o When SAR Test Exclusion according to KDB 447498 D01 applies.
 - o When other power measurement reduction applies.
- Otherwise, output power measurement is required on:
 - o Channels 1, 6, and 11, when the output power specified for other channels is no higher than the abovementioned channels.
 - o The closest adjacent channels to the aforementioned channels, when the output power specified for these adjacent channels is higher.
- For ease of identification, 802.11b DSSS is identified as the Initial Test Configuration for the 2.4 GHz band.

2. 2.4 GHz 802.11g/n OFDM

- Output power measurement is not required:
 - o When SAR Test Exclusion according to KDB 447498 D01 applies.
 - o When SAR Test Exclusion procedures for 2.4 GHz 802.11g/n OFDM applies, according to the SAR measurement results from 802.11b DSSS; see Section 11 of the report for details.
- Otherwise, output power measurement is required for 2.4 GHz 802.11g/n OFDM, with the following considerations:
 - o If 40 MHz bandwidth configurations are supported, measure power for either Channel 6 or the highest specified output power channel.
 - o Output power measurement requirements for smaller bandwidth configurations are dependent on the SAR measurement results from the 40 MHz bandwidth configurations.
 - o If no 40 MHz bandwidth configurations are supported, then a channel selection process similar to 802.11b DSSS is applied.
- The output power measurement is required for 2.4 GHz 802.11g/n OFDM as a result of 802.11b DSSS reported SAR results, the required test configurations in 2.4 GHz 802.11g/n OFDM are identified as Subsequent Test Configurations with respect to the Initial Test Configuration status assigned to 802.11b DSSS.
- If, for a particular antenna or transmit diversity condition supported by the device, no 802.11b DSSS configurations are available, output power should also be measured as a default for 802.11g/n OFDM when SAR Test Exclusion according to KDB 447498 D01 does not apply; these 802.11g/n OFDM configurations are considered the Initial Test Configurations for the respective antenna/transmit diversity condition.

Initial Test Position SAR Test Reduction

For both DSSS and OFDM wireless modes, when an Initial Test Configuration is found to

require SAR measurements, an Initial Test Position is established for each applicable exposure configuration (Head, Body, etc.) using either:

- Design implementation details from the manufacturer, or
- Investigative results by the test lab, obtained by performing area scans on the Initial Test Configuration for all applicable test positions and identifying the highest measured SAR from the area scan-only measurements.

Complete SAR scans are then performed on the established Initial Test Position on each exposure configuration, using the Initial Test Configuration. When the reported SAR for this Initial Test Position is: - ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in the exposure configuration and wireless mode combination within the frequency band or aggregated band. - > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closest/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.

- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, measure the SAR for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required test channels are considered.

Band (GHz)	Mode	Data Rate	CH#	Freq (MHz)	EIRP (dBm)
5.2	802.11a	6Mbps	36	5180	13.69
			40	5200	13.79
			44	5220	13.71
			48	5240	13.73
	802.11n (HT20)	MCS0	36	5180	11.66
			40	5200	11.76
			48	5240	11.73
	802.11n (HT40)	MCS0	38	5190	11.32
			46	5230	11.21
	802.11ac (HT20)	MCS0	36	5180	11.18
			40	5200	11.07
			48	5240	11.01
	802.11ac (HT40)	MCS0	38	5190	11.04
			46	5230	10.71
5.3	802.11a	6Mbps	52	5260	13.61
			56	5280	13.97
			60	5300	13.87
			64	5320	13.25
	802.11n (HT20)	MCS0	52	5260	11.81
			60	5300	11.91
			64	5320	11.84
	802.11n (HT40)	MCS0	54	5270	11.66
			62	5310	11.72
	802.11ac (HT20)	MCS0	52	5260	11.54
			60	5300	11.39
			64	5320	11.22
	802.11ac (HT40)	MCS0	54	5270	11.19
			62	5310	11.67
5.6G	802.11a	6Mbps	100	5500	13.62
			104	5520	13.54
			108	5540	13.39
			112	5560	13.18
			116	5580	13.85
			120	5600	13.91
			124	5620	13.86
			128	5640	13.57
			132	5660	13.44
			136	5680	13.33
	140	5700	13.70		
	802.11n (HT20)	MCS0	100	5500	11.29
			116	5580	11.49
			120	5600	11.31
			136	5680	11.25
			140	5700	11.10
	802.11n (HT40)	MCS0	102	5510	11.41
			110	5550	11.64
			118	5590	11.53
			122	5610	11.68
			126	5630	11.60
			134	5670	11.47
	802.11ac (HT20)	MCS0	100	5500	11.32
			116	5580	11.71

			120	5600	11.81		
			136	5680	11.67		
			144	5720	11.76		
			802.11ac (HT40)	MCS0	102	5510	11.45
					110	5550	11.24
					126	5630	11.64
					142	5710	11.74
5.8G	802.11n (HT20)	MCS0	149	5725	11.56		
			157	5785	11.88		
			161	5805	11.61		
	802.11n (HT40)	MCS0	151	5755	11.64		
			159	5795	11.38		
	802.11ac (HT20)	MCS0	149	5725	11.45		
			157	5785	11.51		
			165	5825	11.27		
	802.11ac (HT40)	MCS0	151	5755	11.02		
			159	5795	11.06		

Note(s):

1. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is $< \frac{1}{4}$ dB higher than those measured at the lowest data rate.
2. SAR evaluation for 802.11ac is required based on the highest 802.11a configuration per April 2013 TCB Workshop.

Power measurements to determine worst-case data rates

Average Power (dBm)													
Band	Mode	CH#	Freq (MHz)	Data Rate (bps)									
				6M	9M	12M	18M	24M	36M	48M	54M		
5.2G	802.11a	40	5200	13.79	13.60	13.57	13.63	13.68	13.35	13.07	12.92		
Average Power (dBm)													
Band	Mode	CH#	Freq (MHz)	Data Rate (bps)									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
5.2G	802.11n (HT20)	40	5200	11.93	11.81	11.82	11.66	11.56	11.20	11.11	10.92		
Average Power (dBm)													
Band	Mode	CH#	Freq (MHz)	Data Rate (bps)									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7		
5.2G	802.11n (HT40)	42	5210	11.85	11.81	11.54	11.39	10.55	10.08	9.76	9.48		
Average Power (dBm)													
Band	Mode	CH #	Freq (MHz)	Data Rate (bps)									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
5.2G	802.11ac (HT20)	40	5200	11.88	11.00	11.77	11.61	11.51	11.15	11.06	10.87	11.88	11.00
Average Power (dBm)													
Band	Mode	CH#	Freq (MHz)	Data Rate (bps)									
				MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
5.2G	802.11ac (HT40)	42	5210	9.01	8.89	8.9	8.74	8.64	8.28	8.19	8	8.89	8.9

Bluetooth 2.4GHz Band Conducted Power

BT	Average Conducted Power (dBm)		
	0CH	39CH	78CH
DH1	14.88	14.96	14.45
DH3	14.69	14.79	14.78
DH5	14.68	14.81	14.55
3DH1	14.54	14.67	14.88
3DH3	14.53	14.87	14.67
3DH5	14.52	14.56	14.78

BLE	Average Conducted Power (dBm)		
	0CH	20CH	39CH
	-3.26	-3.92	-3.66

9.2. SAR measurement Results

General Notes:

- 1) Per KDB447498 D01v06, all measurement SAR results are scaled to the maximum tune-up tolerance limit to demonstrate compliant.
- 2) Per KDB447498 D01v06, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz. When the maximum output power variation across the required test channels is $> 1/2$ dB, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measure SAR is ≥ 0.8 W/kg; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
- 4) Per KDB 941225 D06 Hotspot Mode SAR v02:r01, the DUT dimension is bigger than 9cm*5cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04v01r03, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is ≤ 1.2 W/kg, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02v01r02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; plots are also required when the measured SAR is > 1.5 W/kg, or > 7.0 W/kg for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan plots-processing (refer to appendix B for details).

GSM Notes:

Per KDB941225 D01v03r01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

UMTS Notes:

Per KDB 941225 D01v03r01, when maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode..

Per KDB941225 D01v03, SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to

the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

WLAN Notes

Per KDB 248227 D01v02r02, for all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Per KDB 248227 D01v02r02, for 802.11g/n SAR testing is required. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is > 1.2 W/kg.

Per KDB 248227 D01v02r02, for OFDM transmission configurations in the 2.4 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11g/n mode is used for SAR measurement, on the highest measured output power channel for each frequency band.

9.3. GSM 850 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	190	836.6	29.92	30.5	1.143	0.073	0.083
GSM(CS)	Left Tilted	190	836.6	29.92	30.5	1.143	0.055	0.063
GSM(CS)	Right Cheek	190	836.6	29.92	30.5	1.143	0.090	0.103
GSM(CS)	Right Tilted	190	836.6	29.92	30.5	1.143	0.064	0.073

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	190	836.6	27.88	28.5	1.153	0.138	0.159
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	27.88	28.5	1.153	0.195	0.225
GPRS (GMSK, 2 Tx slots)	Left Side	190	836.6	27.88	28.5	1.153	0.167	0.193
GPRS (GMSK, 2 Tx slots)	Top Side	190	836.6	27.88	28.5	1.153	0.177	0.204
GPRS (GMSK, 2 Tx slots)	Top Side	190	836.6	27.88	28.5	1.153	0.008	0.009
GPRS (GMSK, 2 Tx slots)	Bottom Side	190	836.6	27.88	28.5	1.153	0.242	0.279

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	190	836.6	27.88	28.5	1.153	0.097	0.112
GPRS (GMSK, 2 Tx slots)	Back Side	190	836.6	27.88	28.5	1.153	0.176	0.203

9.4.PCS 1900 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	661	1880	28.14	28.5	1.086	0.030	0.033
GSM(CS)	Left Tilted	661	1880	28.14	28.5	1.086	0.007	0.008
GSM(CS)	Right Cheek	661	1880	28.14	28.5	1.086	0.008	0.009
GSM(CS)	Right Tilted	661	1880	28.14	28.5	1.086	0.009	0.010

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	661	1880	26.1	26.5	1.096	0.319	0.350
GPRS (GMSK, 2 Tx slots)	Back Side	661	1880	26.1	26.5	1.096	0.140	0.154
GPRS (GMSK, 2 Tx slots)	Left Side	661	1880	26.1	26.5	1.096	0.165	0.181
GPRS (GMSK, 2 Tx slots)	Right Side	661	1880	26.1	26.5	1.096	0.024	0.026
GPRS (GMSK, 2 Tx slots)	Top Side	661	1880	26.1	26.5	1.096	0.009	0.010
GPRS (GMSK, 2 Tx slots)	Bottom Side	661	1880	26.1	26.5	1.096	0.184	0.202

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GPRS (GMSK, 2 Tx slots)	Front Side	661	1880	26.1	26.5	1.096	0.140	0.154
GPRS (GMSK, 2 Tx slots)	Back Side	661	1880	26.1	26.5	1.096	0.100	0.110

9.5. UMTS Band II SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GSM(CS)	Left Cheek	9400	1880	22.38	23.0	1.153	0.032	0.037
GSM(CS)	Left Tilted	9400	1880	22.38	23.0	1.153	0.024	0.028
GSM(CS)	Right Cheek	9400	1880	22.38	23.0	1.153	0.02	0.023
GSM(CS)	Right Tilted	9400	1880	22.38	23.0	1.153	0.010	0.012

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	9400	1880.0	22.38	23.0	1.153	0.257	0.296
RMC	Back Side	9400	1880.0	22.38	23.0	1.153	0.135	0.156
RMC	Left Side	9400	1880.0	22.38	23.0	1.153	0.124	0.143
RMC	Right Side	9400	1880.0	22.38	23.0	1.153	0.011	0.013
RMC	Top Side	9400	1880.0	22.38	23.0	1.153	0.010	0.012
RMC	Bottom Side	9400	1880.0	22.38	23.0	1.153	0.277	0.320

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	9400	1880	22.38	23.0	1.153	0.137	0.158
RMC	Back Side	9400	1880	22.38	23.0	1.153	0.094	0.108

9.6. UMTS Band IV SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Left Cheek	1513	1752.6	22.34	22.5	1.038	0.040	0.042
RMC	Left Tilted	1513	1752.6	22.34	22.5	1.038	0.010	0.010
RMC	Right Cheek	1513	1752.6	22.34	22.5	1.038	0.020	0.021
RMC	Right Tilted	1513	1752.6	22.34	22.5	1.038	0.010	0.010

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	1513	1752.6	22.34	22.5	1.038	0.150	0.156
RMC	Back Side	1513	1752.6	22.34	22.5	1.038	0.341	0.354
RMC	Left Side	1513	1752.6	22.34	22.5	1.038	0.098	0.102
RMC	Right Side	1513	1752.6	22.34	22.5	1.038	0.060	0.062
RMC	Top Side	1513	1752.6	22.34	22.5	1.038	0.010	0.010
RMC	Bottom Side	1513	1752.6	22.34	22.5	1.038	0.284	0.295

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	1513	1752.6	22.34	22.5	1.038	0.098	0.102
RMC	Back Side	1513	1752.6	22.34	22.5	1.038	0.166	0.172

9.7. UMTS Band V SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Left Cheek	4182	836.4	23.34	23.8	1.112	0.068	0.076
RMC	Left Tilted	4182	836.4	23.34	23.8	1.112	0.051	0.057
RMC	Right Cheek	4182	836.4	23.34	23.8	1.112	0.139	0.155
RMC	Right Tilted	4182	836.4	23.34	23.8	1.112	0.050	0.056

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	4182	836.4	23.34	23.8	1.112	0.074	0.082
RMC	Back Side	4182	836.4	23.34	23.8	1.112	0.153	0.170
RMC	Left Side	4182	836.4	23.34	23.8	1.112	0.098	0.109
RMC	Right Side	4182	836.4	23.34	23.8	1.112	0.105	0.117
RMC	Top Side	4182	836.4	23.34	23.8	1.112	0.010	0.011
RMC	Bottom Side	4182	836.4	23.34	23.8	1.112	0.117	0.130

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
RMC	Front Side	4182	836.4	23.34	23.8	1.112	0.018	0.020
RMC	Back Side	4182	836.4	23.34	23.8	1.112	0.125	0.139

9.8. LTE Band 2 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Left Cheek	18900	1880	22.14	22.5	1.086	0.009	0.010
20M QPSK (1#49)	Left Tilted	18900	1880	22.14	22.5	1.086	0.008	0.009
20M QPSK (1#49)	Right Cheek	18900	1880	22.14	22.5	1.086	0.016	0.017
20M QPSK (1#49)	Right Tilted	18900	1880	22.14	22.5	1.086	0.012	0.013

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Front Side	18900	1880.0	22.14	22.5	1.086	0.262	0.285
20M QPSK (1#49)	Back Side	18900	1880.0	22.14	22.5	1.086	0.134	0.146
20M QPSK (1#49)	Left Side	18900	1880.0	22.14	22.5	1.086	0.117	0.127
20M QPSK (1#49)	Right Side	18900	1880.0	22.14	22.5	1.086	0.048	0.052
20M QPSK (1#49)	Top Side	18900	1880.0	22.14	22.5	1.086	0.010	0.011
20M QPSK (1#49)	Bottom Side	18900	1880.0	22.14	22.5	1.086	0.312	0.339

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Front Side	18900	1880.0	22.14	22.5	1.086	0.212	0.230
20M QPSK (1#25)	Back Side	18900	1880.0	22.14	22.5	1.086	0.111	0.121

9.9. LTE Band 4 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Left Cheek	20175	1732.5	24.27	24.5	1.054	0.019	0.020
20M QPSK (1#49)	Left Tilted	20175	1732.5	24.27	24.5	1.054	0.009	0.009
20M QPSK (1#49)	Right Cheek	20175	1732.5	24.27	24.5	1.054	0.032	0.034
20M QPSK (1#49)	Right Tilted	20175	1732.5	24.27	24.5	1.054	0.010	0.011

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Front Side	20175	20175	24.27	24.5	1.054	0.146	0.154
20M QPSK (1#49)	Back Side	20175	20175	24.27	24.5	1.054	0.210	0.221
20M QPSK (1#49)	Left Side	20175	20175	24.27	24.5	1.054	0.097	0.102
20M QPSK (1#49)	Right Side	20175	20175	24.27	24.5	1.054	0.069	0.073
20M QPSK (1#49)	Top Side	20175	20175	24.27	24.5	1.054	0.008	0.008
20M QPSK (1#49)	Bottom Side	20175	20175	24.27	24.5	1.054	0.214	0.226

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Front Side	20175	1732.5	24.27	24.5	1.054	0.092	0.097
20M QPSK (1#49)	Back Side	20175	1732.5	24.27	24.5	1.054	0.245	0.258

9.10.LTE Band 5 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#25)	Left Cheek	20525	836.5	22.47	23.0	1.130	0.121	0.137
20M QPSK (1#25)	Left Tilted	20525	836.5	22.47	23.0	1.130	0.075	0.085
20M QPSK (1#25)	Right Cheek	20525	836.5	22.47	23.0	1.130	0.105	0.119
20M QPSK (1#25)	Right Tilted	20525	836.5	22.47	23.0	1.130	0.070	0.079

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#0)	Front Side	20450	829.0	22.47	23.0	1.130	0.072	0.081
10M QPSK (1#0)	Back Side	20450	829.0	22.47	23.0	1.130	0.133	0.150
10M QPSK (1#0)	Left Side	20450	829.0	22.47	23.0	1.130	0.103	0.116
10M QPSK (1#0)	Left Side	20450	829.0	22.47	23.0	1.130	0.095	0.107
10M QPSK (1#0)	Top Side	20450	829.0	22.47	23.0	1.130	0.010	0.011
10M QPSK (1#0)	Bottom Side	20450	829.0	22.47	23.0	1.130	0.121	0.137

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#0)	Front Side	20525	836.5	22.47	23.0	1.130	0.058	0.066
10M QPSK (1#0)	Back Side	20525	836.5	22.47	23.0	1.130	0.099	0.112

9.11.LTE Band 7 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Left Cheek	21100	2535	22.62	23.0	1.091	0.076	0.083
20M QPSK (1#49)	Left Tilted	21100	2535	22.62	23.0	1.091	0.009	0.010
20M QPSK (1#49)	Right Cheek	21100	2535	22.62	23.0	1.091	0.114	0.124
20M QPSK (1#49)	Right Tilted	21100	2535	22.62	23.0	1.091	0.020	0.022

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK (1#49)	Front Side	21100	2535	22.62	23.0	1.091	0.186	0.203
20M QPSK (1#49)	Back Side	21100	2535	22.62	23.0	1.091	0.315	0.344
20M QPSK (1#49)	Left Side	21100	2535	22.62	23.0	1.091	0.230	0.251
20M QPSK (1#49)	Right Side	21100	2535	22.62	23.0	1.091	0.114	0.124
20M QPSK (1#49)	Top Side	21100	2535	22.62	23.0	1.091	0.010	0.011
20M QPSK (1#49)	Bottom Side	21100	2535	22.62	23.0	1.091	0.383	0.418

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#24)	Front Side	21100	2535	22.62	23.0	1.091	0.127	0.139
10M QPSK (1#24)	Back Side	21100	2535	22.62	23.0	1.091	0.271	0.296

9.12.LTE Band 12 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Left Cheek	23095	707.5	25.19	25.5	1.074	0.114	0.122
5M QPSK (1#12)	Left Tilted	23095	707.5	25.19	25.5	1.074	0.064	0.069
5M QPSK (1#12)	Right Cheek	23095	707.5	25.19	25.5	1.074	0.099	0.106
5M QPSK (1#12)	Right Tilted	23095	707.5	25.19	25.5	1.074	0.058	0.062

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Front Side	23095	707.5	25.19	25.5	1.074	0.087	0.093
5M QPSK (1#12)	Back Side	23095	707.5	25.19	25.5	1.074	0.166	0.178
5M QPSK (1#12)	Left Side	23095	707.5	25.19	25.5	1.074	0.132	0.142
5M QPSK (1#12)	Right Side	23095	707.5	25.19	25.5	1.074	0.134	0.144
5M QPSK (1#12)	Top Side	23095	707.5	25.19	25.5	1.074	0.009	0.010
5M QPSK (1#12)	Bottom Side	23095	707.5	25.19	25.5	1.074	0.083	0.089

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK (1#12)	Front Side	23095	707.5	25.19	25.5	1.074	0.088	0.095
5M QPSK (1#12)	Back Side	23095	707.5	25.19	25.5	1.074	0.111	0.119

9.13.LTE Band 17 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#0)	Left Cheek	23790	710	24.75	25.0	1.059	0.109	0.115
10M QPSK (1#0)	Left Tilted	23790	710	24.75	25.0	1.059	0.060	0.064
10M QPSK (1#0)	Right Cheek	23790	710	24.75	25.0	1.059	0.095	0.101
10M QPSK (1#0)	Right Tilted	23790	710	24.75	25.0	1.059	0.058	0.061

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#0)	Front Side	23790	710	24.75	25.0	1.059	0.087	0.092
10M QPSK (1#0)	Back Side	23790	710	24.75	25.0	1.059	0.146	0.155
10M QPSK (1#0)	Left Side	23790	710	24.75	25.0	1.059	0.138	0.146
10M QPSK (1#0)	Right Side	23790	710	24.75	25.0	1.059	0.138	0.146
10M QPSK (1#0)	Top Side	23790	710	24.75	25.0	1.059	0.020	0.021
10M QPSK (1#0)	Bottom Side	23790	710	24.75	25.0	1.059	0.086	0.091

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
10M QPSK (1#0)	Front Side	23790	710	24.75	25.0	1.059	0.086	0.091
10M QPSK (1#0)	Back Side	23790	710	24.75	25.0	1.059	0.095	0.101

9.15.LTE Band 26 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK(1#42)	Left Cheek	26865	831.5	21.73	22.0	1.064	0.127	0.135
5M QPSK(1#42)	Left Tilted	26865	831.5	21.73	22.0	1.064	0.020	0.021
5M QPSK(1#42)	Right Cheek	26865	831.5	21.73	22.0	1.064	0.108	0.115
5M QPSK(1#42)	Right Tilted	26865	831.5	21.73	22.0	1.064	0.012	0.013

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK(1#42)	Front Side	26865	831.5	21.73	22.0	1.064	0.075	0.080
5M QPSK(1#42)	Back Side	26865	831.5	21.73	22.0	1.064	0.140	0.149
5M QPSK(1#42)	Left Side	26865	831.5	21.73	22.0	1.064	0.111	0.118
5M QPSK(1#42)	Right Side	26865	831.5	21.73	22.0	1.064	0.101	0.107
5M QPSK(1#42)	Top Side	26865	831.5	21.73	22.0	1.064	0.021	0.022
5M QPSK(1#42)	Bottom Side	26865	831.5	21.73	22.0	1.064	0.122	0.130

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
5M QPSK(1#42)	Front Side	26865	831.5	21.73	22.0	1.064	0.063	0.067
5M QPSK(1#42)	Back Side	26865	831.5	21.73	22.0	1.064	0.111	0.118

9.16.LTE Band 38 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Left Cheek	38000	2595	24.3	24.5	1.047	0.041	0.043
20M QPSK(1#49)	Left Tilted	38000	2595	24.3	24.5	1.047	0.011	0.012
20M QPSK(1#49)	RightCheek	38000	2595	24.3	24.5	1.047	0.085	0.089
20M QPSK(1#49)	Right Tilted	38000	2595	24.3	24.5	1.047	0.010	0.010

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	38000	2595	24.3	24.5	1.047	0.138	0.145
20M QPSK(1#49)	Back Side	38000	2595	24.3	24.5	1.047	0.184	0.193
20M QPSK(1#49)	Left Side	38000	2595	24.3	24.5	1.047	0.111	0.116
20M QPSK(1#49)	Right Side	38000	2595	24.3	24.5	1.047	0.077	0.081
20M QPSK(1#49)	Top Side	38000	2595	24.3	24.5	1.047	0.022	0.023
20M QPSK(1#49)	Bottom Side	38000	2595	24.3	24.5	1.047	0.345	0.361

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	38000	2595	24.3	24.5	1.047	0.093	0.097
20M QPSK(1#49)	Back Side	38000	2595	24.3	24.5	1.047	0.155	0.162

9.17.LTE Band 41 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Left Cheek	40620	2593.0	22.52	23.0	1.117	0.042	0.047
20M QPSK(1#49)	Left Tilted	40620	2593.0	22.52	23.0	1.117	0.009	0.010
20M QPSK(1#49)	Right Cheek	40620	2593.0	22.52	23.0	1.117	0.087	0.097
20M QPSK(1#49)	Right Tilted	40620	2593.0	22.52	23.0	1.117	0.011	0.012

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	40620	2593.0	22.52	23.0	1.117	0.135	0.151
20M QPSK(1#49)	Back Side	40620	2593.0	22.52	23.0	1.117	0.187	0.209
20M QPSK(1#49)	Left Side	40620	2593.0	22.52	23.0	1.117	0.115	0.128
20M QPSK(1#49)	Right Side	40620	2593.0	22.52	23.0	1.117	0.079	0.088
20M QPSK(1#49)	Top Side	40620	2593.0	22.52	23.0	1.117	0.012	0.013
20M QPSK(1#49)	Bottom Side	40620	2593.0	22.52	23.0	1.117	0.276	0.308

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	40620	2593.0	22.52	23.0	1.117	0.099	0.111
20M QPSK(1#49)	Back Side	40620	2593.0	22.52	23.0	1.117	0.159	0.178

9.18.LTE Band 66 SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Left Cheek	132322	1745	22.21	22.5	1.069	0.030	0.032
20M QPSK(1#49)	Left Tilted	132322	1745	22.21	22.5	1.069	0.008	0.009
20M QPSK(1#49)	Right Cheek	132322	1745	22.21	22.5	1.069	0.040	0.043
20M QPSK(1#49)	Right Tilted	132322	1745	22.21	22.5	1.069	0.009	0.010

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	132322	1745	22.21	22.5	1.069	0.175	0.187
20M QPSK(1#49)	Back Side	132322	1745	22.21	22.5	1.069	0.372	0.398
20M QPSK(1#49)	Left Side	132322	1745	22.21	22.5	1.069	0.114	0.122
20M QPSK(1#49)	Right Side	132322	1745	22.21	22.5	1.069	0.078	0.083
20M QPSK(1#49)	Top Side	132322	1745	22.21	22.5	1.069	0.01	0.011
20M QPSK(1#49)	Bottom Side	132322	1745	22.21	22.5	1.069	0.238	0.254

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
20M QPSK(1#49)	Front Side	132322	1745	22.21	22.5	1.069	0.114	0.122
20M QPSK(1#49)	Back Side	132322	1745	22.21	22.5	1.069	0.261	0.279

9.19.Wi-Fi 2.4G SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Left Cheek	6	2437	15.93	16	1.016	0.243	0.247
802.11b	Left Tilted	6	2437	15.93	16	1.016	0.159	0.162
802.11b	Right Cheek	6	2437	15.93	16	1.016	0.117	0.119
802.11b	Right Tilted	6	2437	15.93	16	1.016	0.063	0.064

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Front Side	6	2437	15.93	16	1.016	0.090	0.091
802.11b	Back Side	6	2437	15.93	16	1.016	0.119	0.121
802.11b	Left Side	6	2437	15.93	16	1.016	0.052	0.053
802.11b	Right Side	6	2437	15.93	16	1.016	0.262	0.266
802.11b	Top Side	6	2437	15.93	16	1.016	0.169	0.172
802.11b	Bottom Side	6	2437	15.93	16	1.016	0.019	0.019

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11b	Front Side	6	2437	15.93	16	1.016	0.056	0.057
802.11b	Back Side	6	2437	15.93	16	1.016	0.090	0.091

9.20.WiFi 5G SAR results

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11a	Left Cheek	40	5200	13.79	14.0	1.050	0.043	0.045
802.11a	Left Tilted	40	5200	13.79	14.0	1.050	0.010	0.010
802.11a	Right Cheek	40	5200	13.79	14.0	1.050	0.020	0.021
802.11a	Right Tilted	40	5200	13.79	14.0	1.050	0.009	0.009
802.11a	Left Cheek	56	5280	13.97	14.0	1.007	0.033	0.033
802.11a	Left Tilted	56	5280	13.97	14.0	1.007	0.008	0.008
802.11a	Right Cheek	56	5280	13.97	14.0	1.007	0.020	0.020
802.11a	Right Tilted	56	5280	13.97	14.0	1.007	0.008	0.008
802.11n	Left Cheek	122	5610	11.91	12.0	1.021	0.043	0.044
802.11n	Left Tilted	122	5610	11.91	12.0	1.021	0.010	0.010
802.11n	Right Cheek	122	5610	11.91	12.0	1.021	0.020	0.020
802.11n	Right Tilted	122	5610	11.91	12.0	1.021	0.009	0.009
802.11n	Left Cheek	151	5755	11.88	12.0	1.028	0.033	0.034
802.11n	Left Tilted	151	5755	11.88	12.0	1.028	0.008	0.008
802.11n	Right Cheek	151	5755	11.88	12.0	1.028	0.02	0.021
802.11n	Right Tilted	151	5755	11.88	12.0	1.028	0.008	0.008

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11a	Front Side	40	5200	13.79	14.0	1.050	0.065	0.068
802.11a	Back Side	40	5200	13.79	14.0	1.050	0.044	0.046
802.11a	Left Side	40	5200	13.79	14.0	1.050	0.038	0.040
802.11a	Right Side	40	5200	13.79	14.0	1.050	0.047	0.049
802.11a	Top Side	40	5200	13.79	14.0	1.050	0.050	0.052
802.11a	Bottom Side	40	5200	13.79	14.0	1.050	0.044	0.046
802.11a	Front Side	56	5280	13.97	14.0	1.007	0.045	0.045
802.11a	Back Side	56	5280	13.97	14.0	1.007	0.043	0.043
802.11a	Left Side	56	5280	13.97	14.0	1.007	0.029	0.029
802.11a	Right Side	56	5280	13.97	14.0	1.007	0.039	0.039
802.11a	Top Side	56	5280	13.97	14.0	1.007	0.047	0.047
802.11a	Bottom Side	56	5280	13.97	14.0	1.007	0.036	0.036
802.11n	Front Side	122	5610	11.91	12.0	1.021	0.062	0.063
802.11n	Back Side	122	5610	11.91	12.0	1.021	0.068	0.069
802.11n	Left Side	122	5610	11.91	12.0	1.021	0.061	0.062
802.11n	Right Side	122	5610	11.91	12.0	1.021	0.041	0.042
802.11n	Top Side	122	5610	11.91	12.0	1.021	0.037	0.038
802.11n	Bottom Side	122	5610	11.91	12.0	1.021	0.038	0.039
802.11n	Front Side	151	5755	11.88	12.0	1.028	0.049	0.050
802.11n	Back Side	151	5755	11.88	12.0	1.028	0.048	0.049
802.11n	Left Side	151	5755	11.88	12.0	1.028	0.050	0.051
802.11n	Right Side	151	5755	11.88	12.0	1.028	0.053	0.054
802.11n	Top Side	151	5755	11.88	12.0	1.028	0.055	0.057
802.11n	Bottom Side	151	5755	11.88	12.0	1.028	0.040	0.041

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
802.11a	Front Side	40	5200	13.79	14	1.050	0.028	0.029
802.11a	Back Side	40	5200	13.79	14	1.050	0.036	0.038
802.11a	Front Side	56	5280	13.97	14	1.007	0.035	0.035
802.11a	Back Side	56	5280	13.97	14	1.007	0.051	0.051
802.11n	Front Side	122	5610	11.91	12	1.021	0.033	0.034
802.11n	Back Side	122	5610	11.91	12	1.021	0.058	0.059
802.11n	Front Side	151	5755	11.88	12	1.028	0.06	0.062
802.11n	Back Side	151	5755	11.88	12	1.028	0.032	0.033

9.21.BT SAR results.

Head Exposure Condition (Separation Distance is 0 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Left Cheek	39	2440	15.56	16.0	1.107	0.038	0.042
GFSK	Left Tilted	39	2440	15.56	16.0	1.107	0.008	0.009
GFSK	Right Cheek	39	2440	15.56	16.0	1.107	0.020	0.022
GFSK	Right Tilted	39	2440	15.56	16.0	1.107	0.007	0.008

Body Hotspot Exposure Condition (Separation Distance is 10 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Front Side	39	2440	15.56	16.0	1.107	0.010	0.011
GFSK	Back Side	39	2440	15.56	16.0	1.107	0.037	0.041
GFSK	Left Side	39	2440	15.56	16.0	1.107	0.011	0.012
GFSK	Right Side	39	2440	15.56	16.0	1.107	0.008	0.009
GFSK	Top Side	39	2440	15.56	16.0	1.107	0.007	0.008
GFSK	Bottom Side	39	2440	15.56	16.0	1.107	0.005	0.006

Body worn Exposure Condition (Separation Distance is 15 mm)

Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Measured SAR (W/kg)	Reported SAR (W/kg)
GFSK	Front Side	39	2440	15.56	16.0	1.107	0.011	0.012
GFSK	Back Side	39	2440	15.56	16.0	1.107	0.014	0.015

9.22.Repeated SAR results

Remark:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated measured SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

10. EXPOSURE POSITIONS CONSIDERATION

10.1. Multiple Transmitter Evaluation

Mode	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main Antenna	YES	YES	YES	YES	YES	YES
Wi-Fi 2.4G	YES	YES	YES	YES	YES	YES

10.2.Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Hotspot
1	GSM(voice)+ WiFi2.4G	N/A
2	GPRS/EDGE(DATA)+ WiFi2.4G	Yes
3	GPRS/EDGE(DATA)+ WiFi5G	Yes
4	GPRS/EDGE(DATA)+ BT	Yes
5	UMTS(Voice)+ WiFi2.4G	N/A
6	UMTS(DATA)+ WiFi2.4G	Yes
7	UMTS(DATA)+ WiFi5G	Yes
8	UMTS(DATA)+ BT	N/A
9	LTE(DATA)+WiFi2.4G	Yes
10	LTE(DATA)+WiFi5G	Yes
11	LTE(DATA)+BT	N/A

Table 5: Simultaneous Transmission Possibilities

Note:

- 1) Wi-Fi 2.4G and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) 2G&3G&4G can't transmit simultaneously.
- 3) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

10.3.SAR Summation Scenario

Test Position		Left Cheek	Left Tilted	Right Cheek	Right Tilted
MAX 1-g SAR (W/kg)	GSM 850	0.083	0.063	0.103	0.073
	PCS 1900	0.033	0.008	0.009	0.010
	WCDMA Band II	0.037	0.028	0.023	0.012
	WCDMA Band IV	0.042	0.010	0.021	0.010
	WCDMA Band V	0.076	0.056	0.155	0.056
	LTE Band 2	0.010	0.009	0.017	0.013
	LTE Band 4	0.019	0.009	0.032	0.010
	LTE Band 5	0.137	0.085	0.119	0.079
	LTE Band 7	0.083	0.040	0.124	0.022
	LTE Band 12	0.122	0.069	0.106	0.062
	LTE Band 17	0.115	0.064	0.101	0.061
	LTE Band 26	0.135	0.021	0.115	0.013
	LTE Band 38	0.043	0.012	0.089	0.010
	LTE Band 41	0.047	0.010	0.097	0.012
	LTE Band 66	0.032	0.009	0.043	0.010
	2.4G Wi-Fi	0.247	0.162	0.119	0.064
	5G Wi-Fi	0.045	0.010	0.021	0.009
	BT	0.039	0.008	0.010	0.008
Σ 1-g SAR(W/kg)		0.382	0.247	0.274	0.143



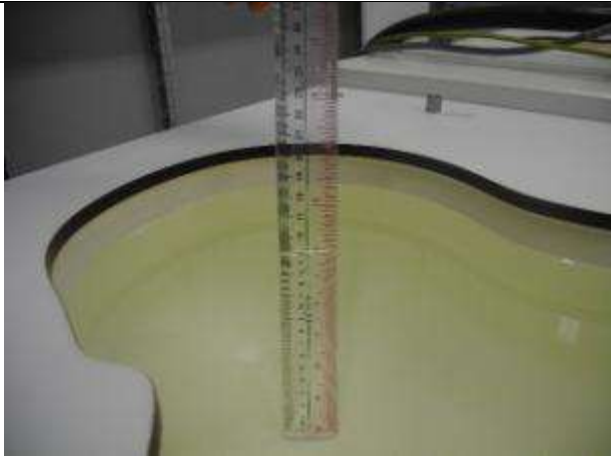

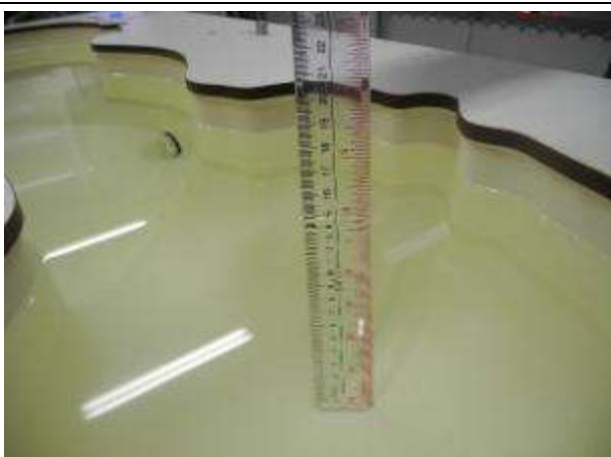

Test Position		Front Side (10mm)	Back Side (10mm)	Left Side (10mm)	Right Side (10mm)	Top Side (10mm)	Bottom Side (10mm)
MAX 1-g SAR (W/kg)	GSM 850	0.159	0.225	0.193	0.204	0.009	0.279
	PCS 1900	0.350	0.154	0.181	0.026	0.010	0.202
	WCDMA Band II	0.296	0.156	0.143	0.013	0.013	0.320
	WCDMA Band IV	0.156	0.354	0.102	0.062	0.010	0.295
	WCDMA Band V	0.082	0.170	0.109	0.117	0.011	0.130
	LTE Band 2	0.285	0.146	0.127	0.052	0.011	0.339
	LTE Band 4	0.146	0.210	0.103	0.073	0.008	0.226
	LTE Band 5	0.081	0.150	0.116	0.107	0.011	0.137
	LTE Band 7	0.203	0.344	0.251	0.124	0.011	0.418
	LTE Band 12	0.093	0.178	0.142	0.144	0.010	0.089
	LTE Band 17	0.092	0.155	0.146	0.146	0.021	0.091
	LTE Band 26	0.080	0.149	0.118	0.107	0.022	0.130
	LTE Band 38	0.145	0.193	0.116	0.081	0.023	0.361
	LTE Band 41	0.151	0.209	0.128	0.088	0.013	0.308
	LTE Band 66	0.187	0.398	0.122	0.083	0.011	0.254
	2.4G Wi-Fi	0.091	0.121	0.053	0.266	0.172	0.019
	5G Wi-Fi	0.068	0.069	0.062	0.051	0.057	0.046
BT	0.021	0.037	0.013	0.014	0.008	0.009	
Σ 1-g SAR(W/kg)		0.441	0.475	0.313	0.470	0.195	0.464

Test Position		Front Side (15mm)	Back Side (15mm)
MAX 1-g SAR (W/kg)	GSM 850	0.112	0.203
	PCS 1900	0.154	0.110
	WCDMA Band II	0.158	0.108
	WCDMA Band IV	0.102	0.172
	WCDMA Band V	0.020	0.139
	LTE Band 2	0.230	0.121
	LTE Band 4	0.097	0.258
	LTE Band 5	0.066	0.112
	LTE Band 7	0.139	0.296
	LTE Band 12	0.088	0.111
	LTE Band 17	0.091	0.101
	LTE Band 26	0.067	0.118
	LTE Band 38	0.097	0.162
	LTE Band 41	0.111	0.178
	LTE Band 66	0.122	0.279
	2.4G Wi-Fi	0.057	0.091
	5G Wi-Fi	0.062	0.059
	BT	0.007	0.008
Σ 1-g SAR(W/kg)		0.292	0.387

10.4.Simultaneous Transmission Conclusion

The above numeral summed SAR results and SPLSR analysis is sufficient to determine that simultaneous cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scan is not required per KDB 447498 D01v06

11. PHOTOGRAPH: LIQUID DEPTH& MEASUREMENT SYSTEM

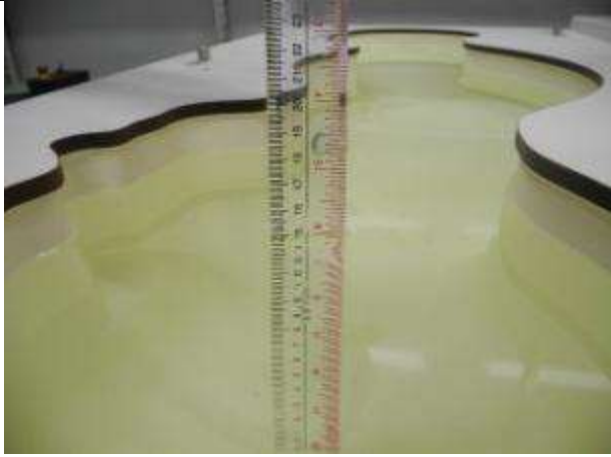Photo 1: Body 900 Depth (15.0cm)	Photo 2: Body1900 Depth (15.0cm)
	
Photo 3: Body2450 Depth (15.0cm)	Photo4: Body1750 Depth(15.0cm)
	
Photo 4: Body 5G Depth(15.0cm)	Photo6: Measurement System DASY5
	

12. APPENDIX

Appendix A. System Check Plots

(Pls see Appendix A)

Appendix B. MEASUREMENT SCANS

(Pls see Appendix B)

AppendixC RELEVANT PAGES FROM PROBE CALIBRATION REPORT(S)

(Pls see Appendix C)

Appendix D. RELEVANT PAGES FROM DAE&DIPOLE VALIDATION KIT REPORT(S)

(Pls see Appendix D)