


FCC CERTIFICATION TEST REPORT

Project Number : EA2205C-022
Test Report Number : TR-W2206-005
Type of Equipment : Smart Card Reader
Model Name : DE-ABM7
FCC ID : SWUDEABM7
Multiple Model Name : N/A
Applicant : DUALi Inc.
Address : 1-309 Innoplex, 552 Woncheon-dong, Yeongtong-gu, Suwon,
Gyeonggi-do, Korea
Manufacturer : DUALi Inc.
Address : 1-309 Innoplex, 552 Woncheon-dong, Yeongtong-gu, Suwon,
Gyeonggi-do, Korea
Regulation : FCC Part 15 Subpart C Section 15.225
Total page of Report : 27 Pages
Date of Receipt : 2022-05-16
Date of Issue : 2022-06-14
Test Result : PASS

This test report only contains the result of a single test of the sample supplied for the examination.
It is not a generally valid assessment of the features of the respective products of the mass-production.


Prepared by Kim, Do-heon / Senior Engineer


Signature

2022-06-14

Date

Reviewed by Choi, Yeong-min / Technical Manager


Signature

2022-06-14

Date

CONTENTS

Page

1. TEST SUMMARY	4
1.1 REGULATIONS AND RESULTS	4
1.2 PURPOSE OF THE TEST	4
1.3 TEST METHODOLOGY	4
1.4 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS	4
2. EUT (EQUIPMENT UNDER TEST) INFORMATION	6
2.1 GENERAL DESCRIPTION	6
2.2 ADDITIONAL MODEL	6
3. TEST CONDITION	7
3.1 EQUIPMENT USED DURING TEST	7
3.2 CABLE DESCRIPTION	7
3.3 MODE OF OPERATION DURING THE TEST	7
3.4 PRELIMINARY TESTING FOR WORST CASE CONFIGURATION	7
3.5 TEST SETUP DRAWING	8
3.6 EUT MODIFICATIONS	9
4. ANTENNA REQUIREMENT	10
4.1 CONCLUSION	10
5. TEST RESULT	11
5.1 RADIATED EMISSIONS	11
5.2 20 DB BANDWIDTH	19
5.3 FREQUENCY TOLERANCE OF CARRIER SIGNAL	21
5.4 AC POWER LINE CONDUCTED EMISSION	22
APPENDIX I – TEST INSTRUMENTATION	27

Release Control Record

Issue Report No.	Issued Date	Details/Revisions
TR-W2206-005	2022-06-14	Initial Release
-	-	-

1. TEST SUMMARY

1.1 Regulations and results

The sample submitted for evaluation (Referred to below as the EUT) has been tested in accordance with the following regulations or standards.

FCC Reference Section	Description	Result			
		P	F	N.T.	Note
15.205, 15.209(a) & 15.225(d)	Radiated Spurious Emissions	P			
15.207	AC Power-line Conducted Emissions	P			
15.225(a)	Field strength within the band (13.553-13.567) MHz	P			
15.225(b) & 15.225(c)	Field strength within the band (13.410-13.553) MHz and (13.567-13.710) MHz, (13.110-13.410) MHz and (13.710-14.010) MHz	P			
15.225(e)	Frequency Tolerance of Carrier Signal	P			
15.215	20 dB Bandwidth	P			
Remark: P means Passed F means Failed N.T. means Not Tested					

1.2 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC Part 15 Subpart C Section 15.225.

1.3 Test Methodology








The tests mentioned in clause 1.1 in this test report were performed according to FCC CFR 47 Part 2, CFR 47 Part 15, ANSI C63.10-2013.

1.4 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

1.5 Test Facility

The measurement facilities are located at 135-60 Gyeongchung-daero, Gonjam-eup, Gwangju-si, Gyeonggi-do 12813, Korea. Our test facilities are accredited as a Conformity Assessment Body (CAB) by the FCC and ISED Canada, designated by the RRA (National Radio Research Agency), and accredited by KOLAS (Korea Laboratory Accreditation Scheme) in Korea and approved by TUV Rheinland, TUV SÜD and Korean Register of Shipping according to the requirement of ISO/IEC 17025.

Laboratory Qualification	Registration No.	Mark
FCC	KR0160	
ISED Canada	12721A	
RRA	KR0160	 National Radio Research Agency
TUV Rheinland	UA 50314109-0002	
TUV SÜD	CARAT 094465 0004 Rev.00	
Korean Agency for Technology and Standards	KT733	
KOREAN REGISTER OF SHIPPING	PCT40841-TL001	

Remark. This report is not related to KOLAS accreditation and relevant regulation.

2. EUT (Equipment Under Test) INFORMATION

2.1 General Description

The DUALi Inc., Model DE-ABM7 (referred to as the EUT in this report) is a Smart Card Reader. The EUT is a device for transferring RFID (13.56 MHz) signal to an RFID TAG through wireless communication.

The product specification described herein was obtained from product data sheet or user's manual.

Kind of Class	DXC- Part 15 Low Power Communication Device Transmitter
Operating Frequency	RFID: 13.56 MHz
Modulation Types	ASK
Generated or used Freq. in EUT	13.56 MHz, 48 MHz
Type of Antenna	<input checked="" type="checkbox"/> Integrated Type <input type="checkbox"/> Dedicated Type
	PCB Pattern Antenna
Normal Test Voltage	DC 5.0 V
Electrical Rating	DC 5.0 V
Communication Interface	RS-232 (38,400 baud)
Credential Type	Contactless (ISO-14443 Type A / B)
Test SW Version	DualCardDII Ver.2.0.0
Software Version	1.00
Hardware Version	1.00

2.2 Additional Model

None

3. TEST CONDITION

3.1 Equipment Used During Test

The following peripheral devices and/or interface cables were connected during the measurement:

Description	Model No.	Serial No.	Manufacturer.
Smart Card Reader (EUT)	DE-ABM7	N/A	DUALi Inc.
RFID Card	ISO-14443 Card Type A, B	N/A	N/A
RS232 to USB Conversion cable	N/A	N/A	N/A
Notebook PC	15s-du0069TU	CND9503W22	HP
Notebook PC Adapter	TPN-CA14	HU10436-18165	Chicony Power Technology (Chongqing) Co., Ltd.

3.2 Cable Description

Description	Ports Name	Shielded (Y/N)	Ferrite Core (Y/N)	Length (m)	Connected to
EUT	Serial	N	Y	0.5	Notebook PC (USB)
	Serial	N	N	0.5	RS232 to USB Conversion cable
RS232 to USB Conversion cable	RS232	N	N	1.0	Notebook PC (USB)
Notebook PC	DC IN	Y	N	1.2	Adapter
Adapter	AC IN	N	N	1.5	AC Mains

3.3 Mode of operation during the test

For continuous transmitting un-modulation signal, just input the DC voltage in EUT according to the manufacturer's guidance.


For continuous transmitting modulated signal, input the DC voltage in EUT and then contacts RFID tag card, according to the manufacturer's guidance. The used modulation type for the testing is ASK (13.56 MHz)

3.4 Preliminary Testing for Worst case configuration


For finding worst case configuration and operating mode, preliminary testing was performed and radiated emission and conducted emission tests were performed with the EUT set to transmit and receive at the channel with the highest output power as worst case scenario. All spurious emission tests were performed in X, Y and Z axis direction. And the following worst test condition was recorded in this test report.

Test Channel	ISO-14443 Card type	Frequency band	Worst configuration
Center (13.56 MHz)	Type A	9 kHz to 30 MHz	Y-axis
		30 MHz to 1 GHz	Z-axis
	Type B	9 kHz to 30 MHz	Z-axis
		30 MHz to 1 GHz	X-axis


3.5 Test Setup Drawing

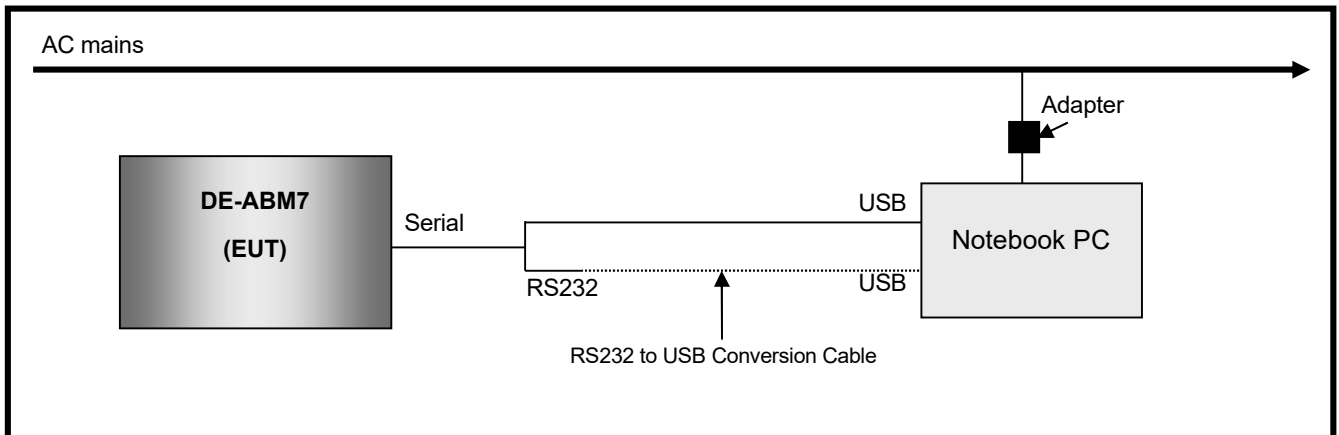


(Radiated Test below 30 MHz)

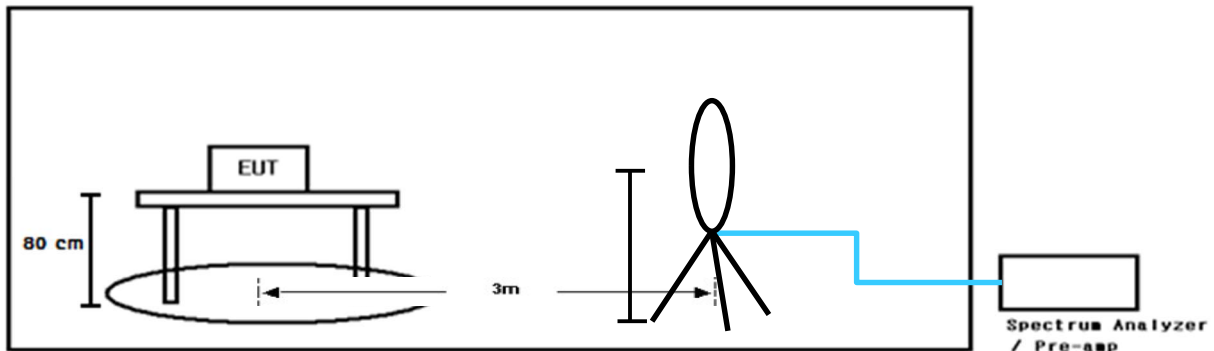

(Radiated Test below 1 GHz)

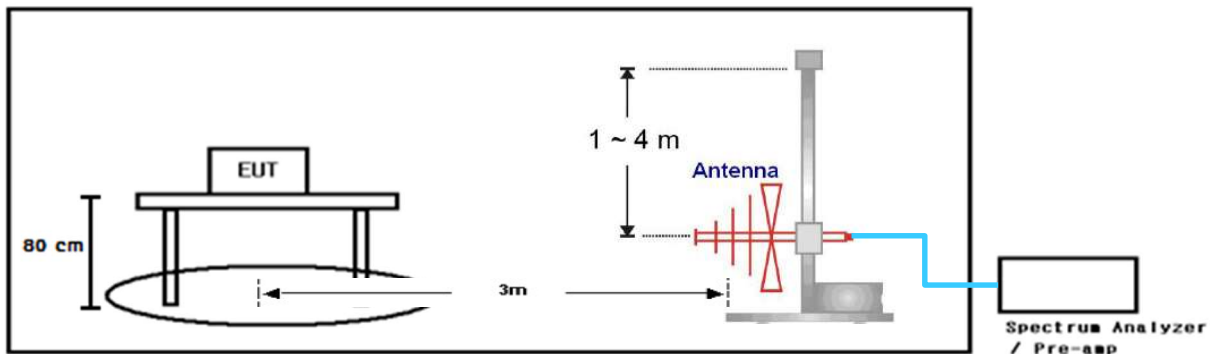

(Frequency Tolerance of Carrier Signal Test)

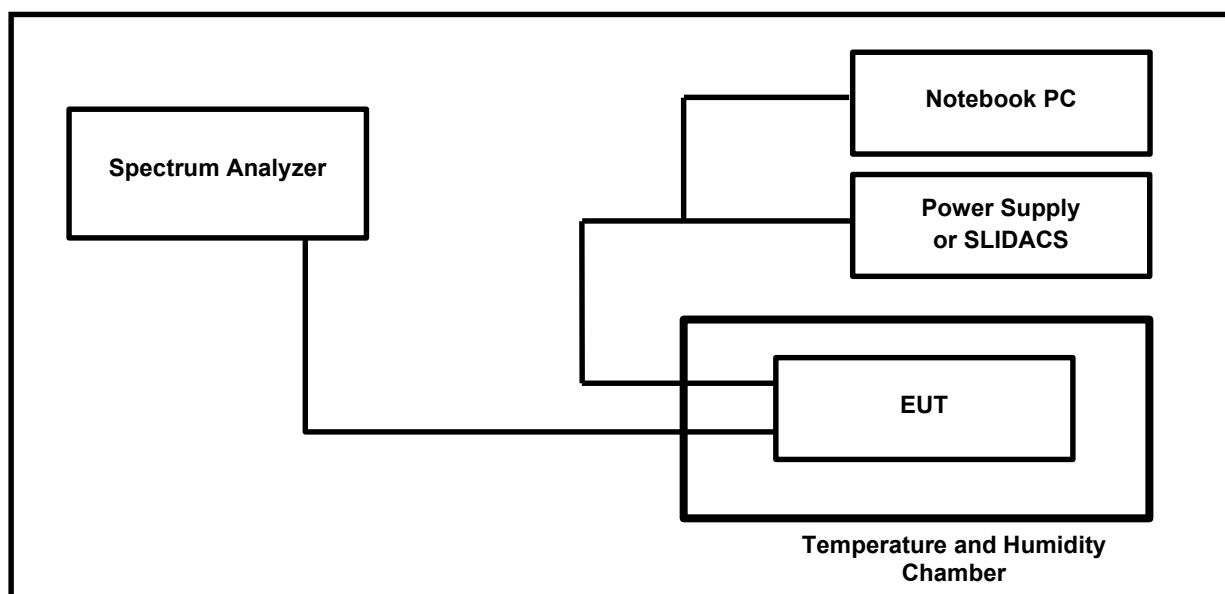

3.6 EUT Modifications

- No EMC Relevant Modifications were performed by this test laboratory.

4. ANTENNA REQUIREMENT

According to FCC CFR 47 Part 15 section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provision of this section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4.1 Conclusion

The EUT has an integral PCB loop antenna, so there is no consideration of replacement by the user.

5. TEST RESULT

5.1 Radiated emissions

5.1.1 Regulation

Acc. to section 15.225, and 15.209, following table shall be applied.

Frequency (MHz)	Field strength limit ($\mu\text{V/m}$) @ 30 m	Field strength limit (dB $\mu\text{V/m}$) @ 30 m	Field strength limit (dB $\mu\text{V/m}$) @ 3 m
13.110 – 13.410	106	40.5	80.5
13.410 – 13.553	334	50.5	90.5
13.553 – 13.567	15,848	84.0	124.0
13.567 – 13.710	334	50.5	90.5
13.710 – 14.010	106	40.5	80.5

Frequency (MHz)	Field strength limit ($\mu\text{V/m}$)	Field strength limit (dB $\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	2400/F (kHz) = 266.7 – 4.9	48.5 – 13.8	300
0.490 – 1.705	24000/F (kHz) = 49.0 – 14.1	33.8 – 23.0	30
1.705 – 30.0	30	29.5	30
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

Note: The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands (9 – 90) kHz, (110 – 490) kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

5.1.2 Method of Measurement

The preliminary radiated emission test was performed using the procedure in ANSI C63.10 2013 to determine the worse operating conditions. The radiated emissions measurements were performed on the 10 m Semi Anechoic Chamber

Radiated Emissions Test, 9 kHz to 30 MHz (Magnetic Field Test)

For frequencies from 150 kHz to 30 MHz measurements were made of the magnetic H field. The EUT was placed on the top of the 0.8-meter height, 1 × 1.5 meter non-metallic table. The measuring antenna is an electrically screened loop antenna. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.

Radiated Emissions Test, below 1 000 MHz

The frequency spectrum from 30 MHz to 1 000 MHz was scanned and maximum emission levels maximized at each frequency recorded. The system rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna. The EUT is situated in three orthogonal planes (if appropriate).

5.1.3 Test Site Requirement for KDB 414788 D01

Acc. to KDB 414788 D01 Radiated Test Site v01r01, Semi Anechoic Chamber (SAC) shall be verified test results below 30 MHz with Open Area Test Site (OATS), so we compared test results between the measurements from our SAC and an OATS and found test results almost same, so we **declare test result for below 30 MHz from our SAC is valid and met the requirement acc. to KDB 414788 D01 Radiated Test Site v01r01.**

5.1.4 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty	Frequency Range	Uncertainty
9 kHz ~ 30 MHz	± 2.07 dB	30 MHz ~ 1 GHz	± 4.64 dB

5.1.5 Sample Calculated Example

At 80 MHz

Limit = 40.0 dBuV/m


Result(dBuV/m) = Receiver Reading (dBuV) + Antenna Factor (dB/m) - Corr. Factor (dB) = 30

Where, Corr. Factor (dB) = Pre-amplifier (dB) – Cable loss (dB)


Margin = Limit – Result = 40 – 30 = 10

so the EUT has 10.0 dB margin at 80 MHz


5.1.6 Test Data

Date of Test	2022-05-16 ~	Temperature		(21.4 ± 1.8) °C	
	2022-05-19	Relative humidity		(43.9 ± 1.6) % R.H.	
Measurement Frequency Range		9 kHz ~ 1 GHz			
Test Result	PASS	Tested By		Do-heon Kim	
Frequency range	Detector Mode	Resolution BW	Video BW	Video Filtering	Measurement distance
Below 30 MHz	Peak or Q.P.	9 kHz	30 kHz	-	3 m
30 MHz ~ 1 000 MHz	Peak or Q.P.	100 kHz	300 kHz	-	3 m

5.1.6.1 Test Data below 30 MHz

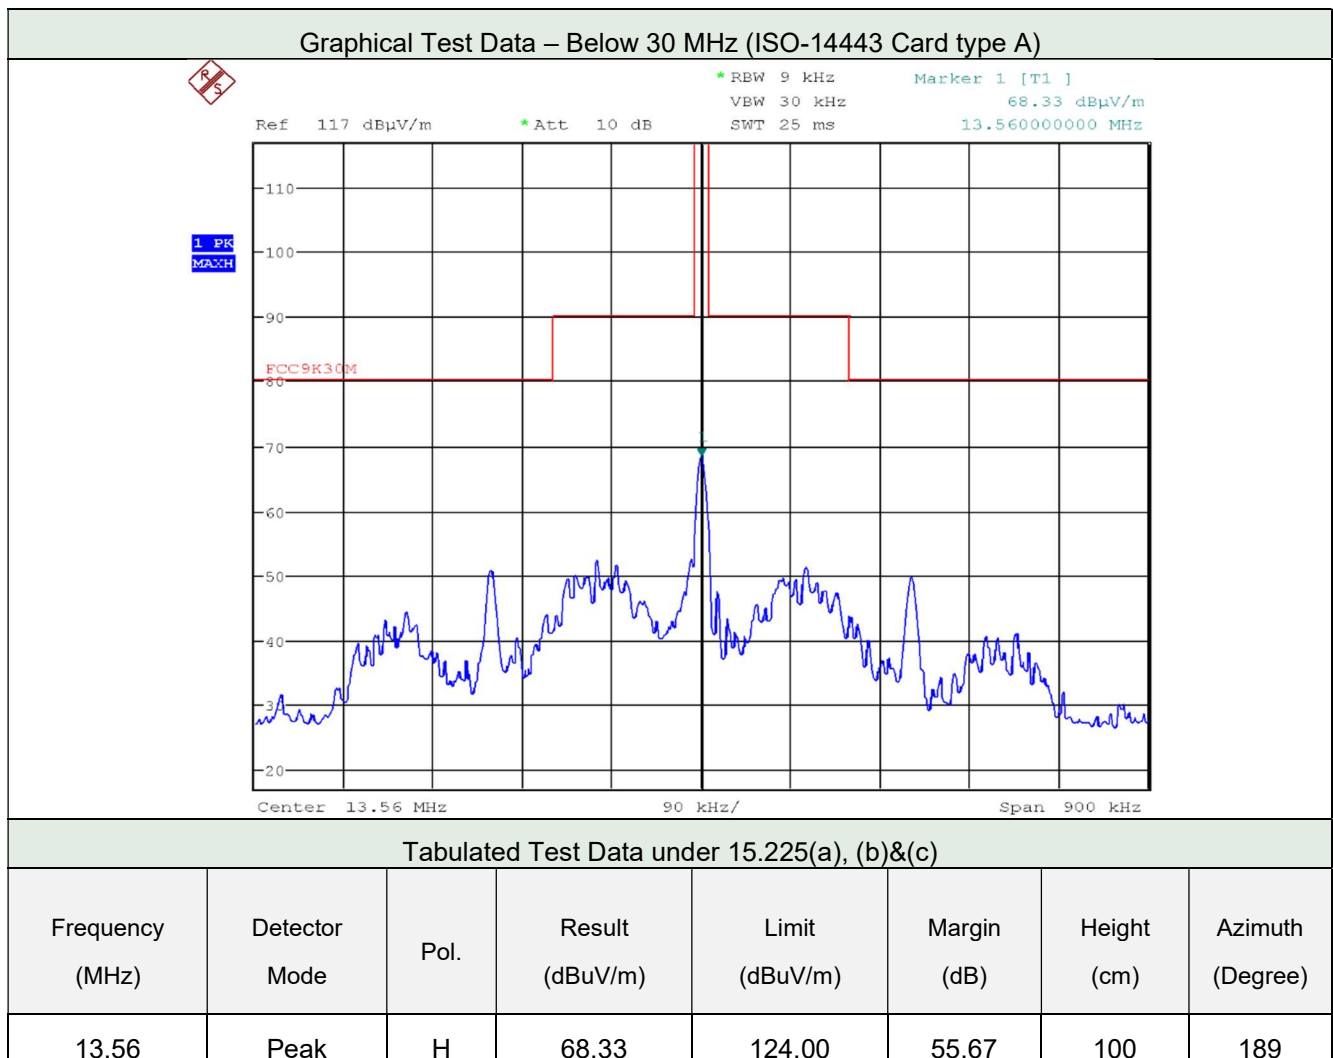


Graphical Test Data – Below 30 MHz (ISO-14443 Card type B)

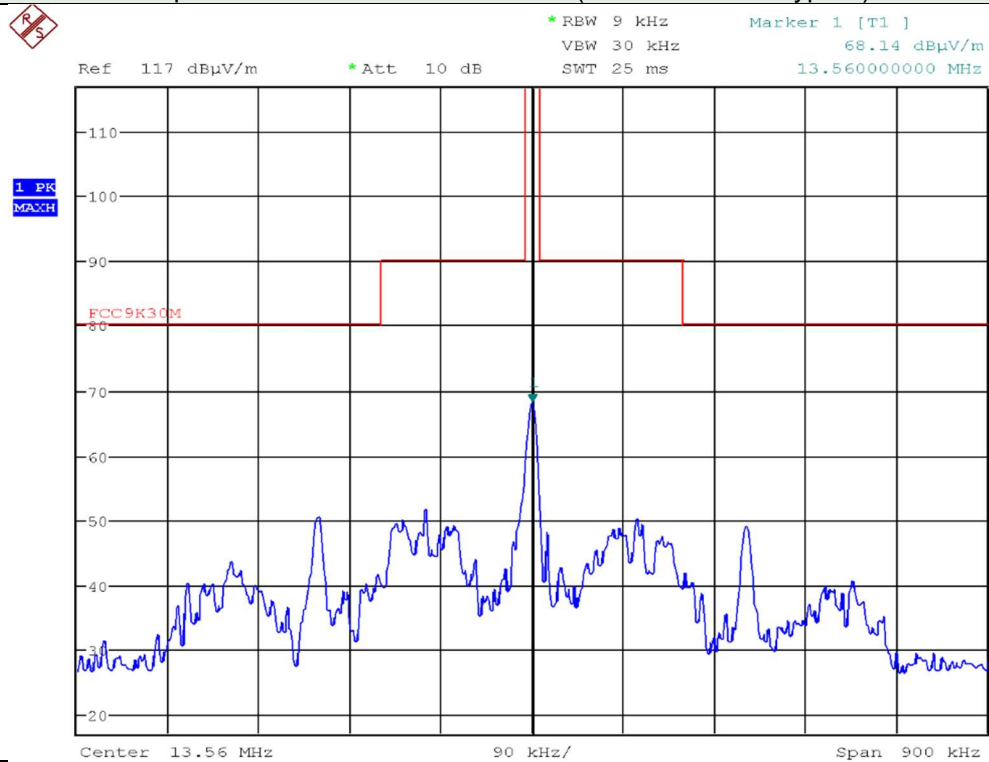

Tabulated Test Data under 15.225(a), (b)&(c)

Frequency (MHz)	Detector Mode	Pol.	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
13.56	Peak	H	68.14	124.00	55.86	100	189

Graphical Test Data – Below 30 MHz (ISO-14443 Card Type A)

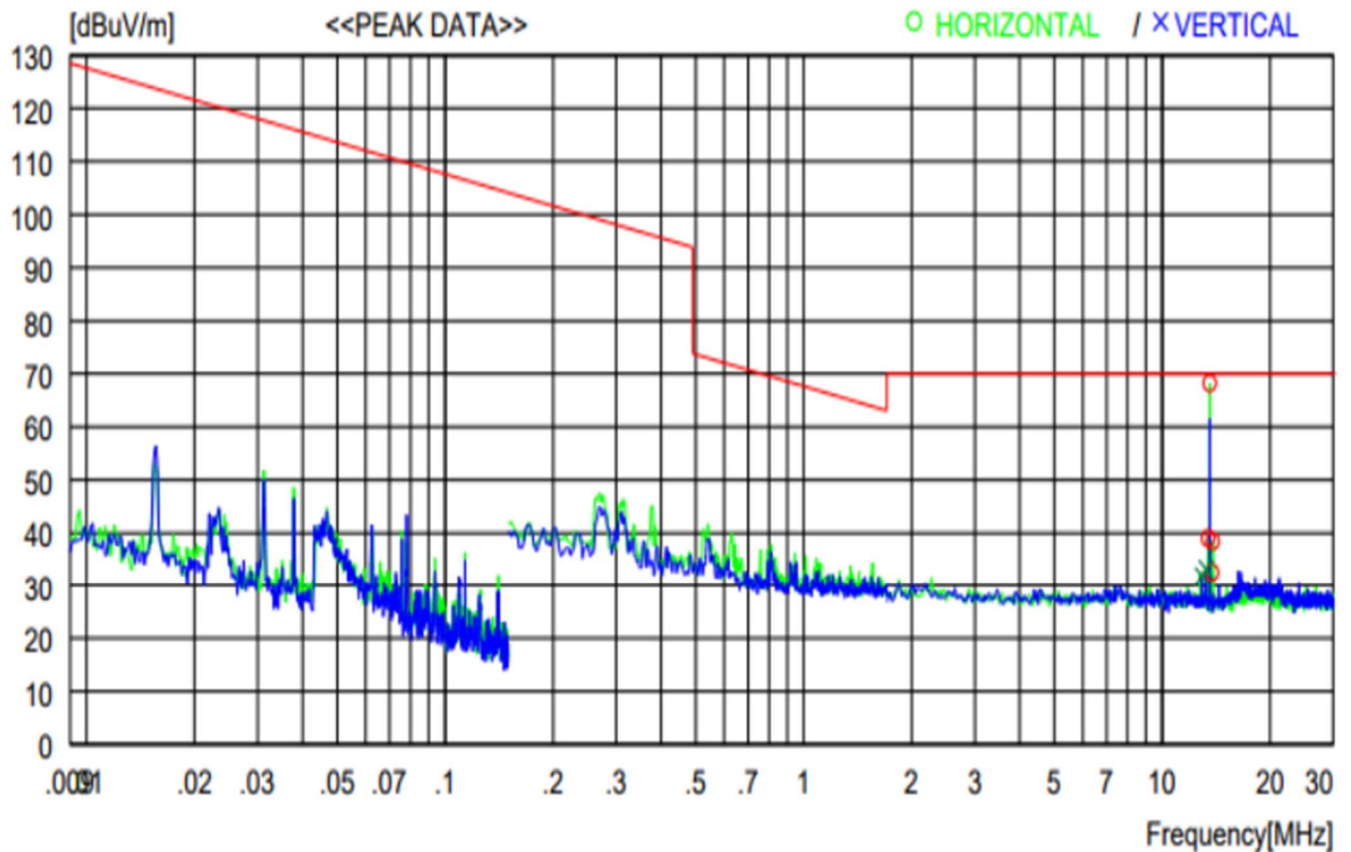


Tabulated Test Data under 15.225(d), 15.209

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
--------------------	-------------------------------	------------------	------	--------------------------	---------------------	--------------------	-------------------	----------------	----------------	---------------------

* Spurious emissions that 20 dB below the limits didn't be recorded.

Graphical Test Data – Below 30 MHz (ISO-14443 Card Type B)

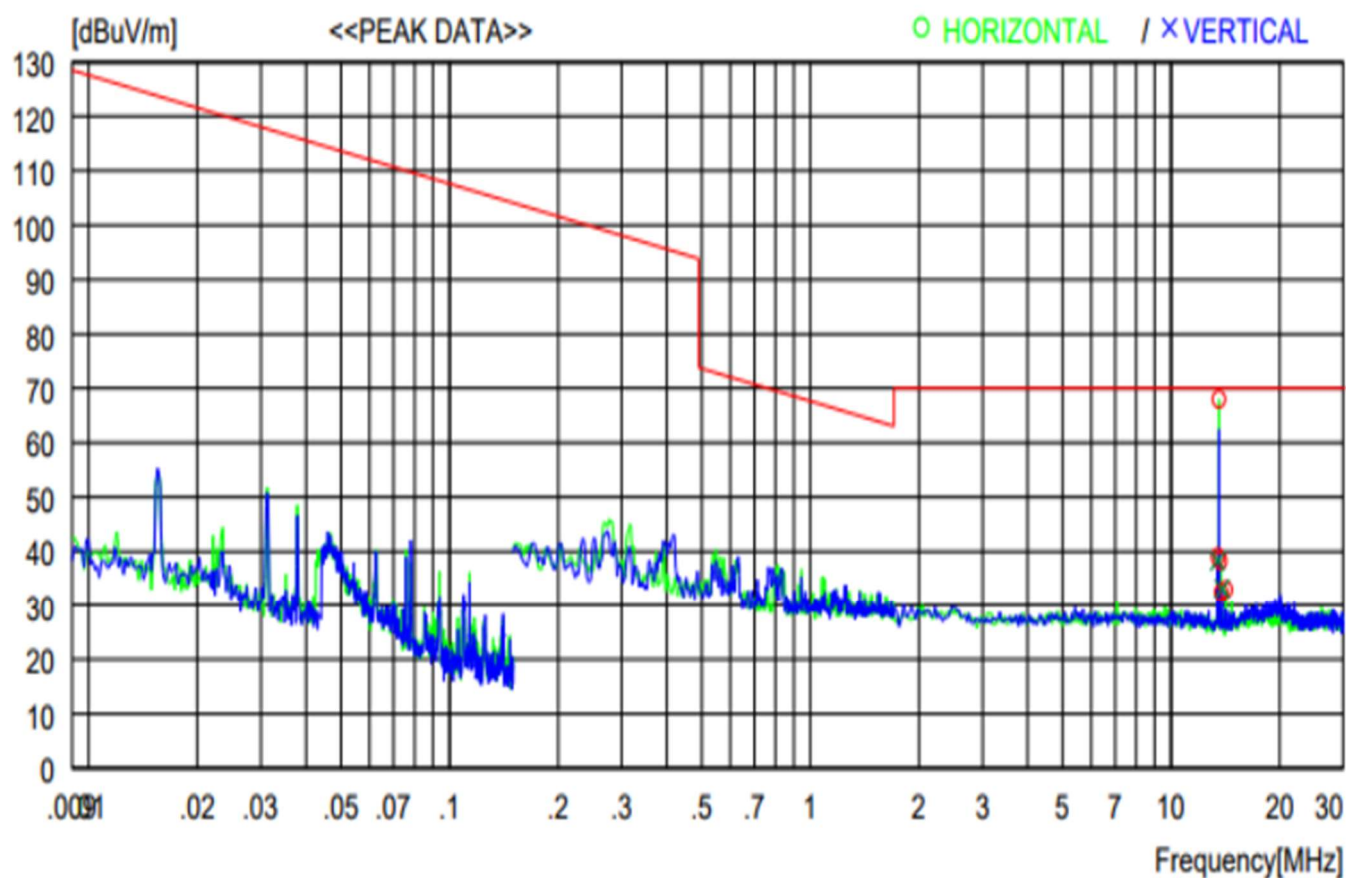


Tabulated Test Data under 15.225(d), 15.209

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
-----------------	-------------------------	---------------	------	--------------------	-------------------	-----------------	----------------	-------------	-------------	------------------

* Spurious emissions that 20 dB below the limits didn't be recorded

5.1.6.2 Test Data from 30 MHz to 1 GHz

Graphical Test Data – Below 1 000 MHz (ISO-14443 Card Type A)

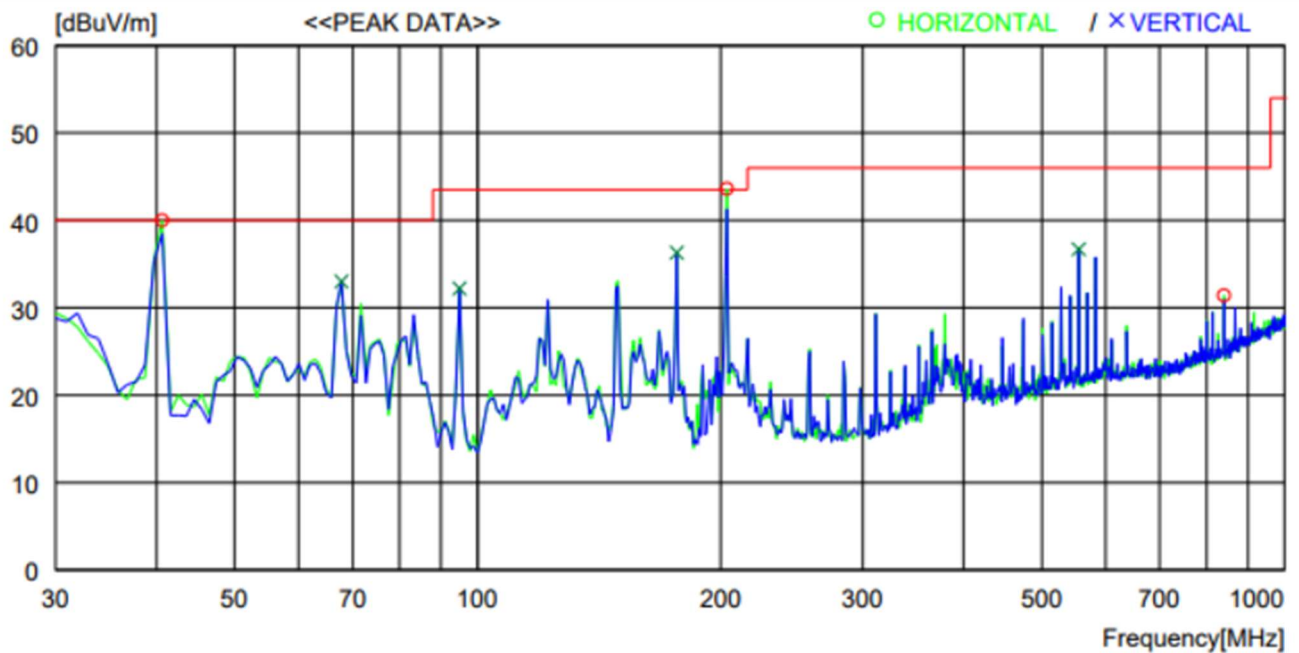


Tabulated Test Data under 15.205(a), 15.209

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
40.670	51.2	Q.P.	H	13.4	26.1	38.5	40.0	1.5	100	359
67.830	48.3	Peak	V	10.5	25.8	33.0	40.0	7.0	100	253
94.990	47.0	Peak	V	10.8	25.6	32.2	43.5	11.3	100	0
176.470	51.7	Peak	V	9.2	24.6	36.3	43.5	7.2	100	214
203.630	55.2	Q.P.	H	11.3	24.3	42.2	43.5	1.3	100	359
555.739	41.0	Peak	V	18.3	22.6	36.7	46.0	9.3	100	241
840.911	32.2	Peak	H	21.5	22.3	31.4	46.0	14.6	100	186

Note: “H” means Horizontal polarity, “V” means Vertical polarity

Graphical Test Data – Below 1 000 MHz (ISO-14443 Card Type B)

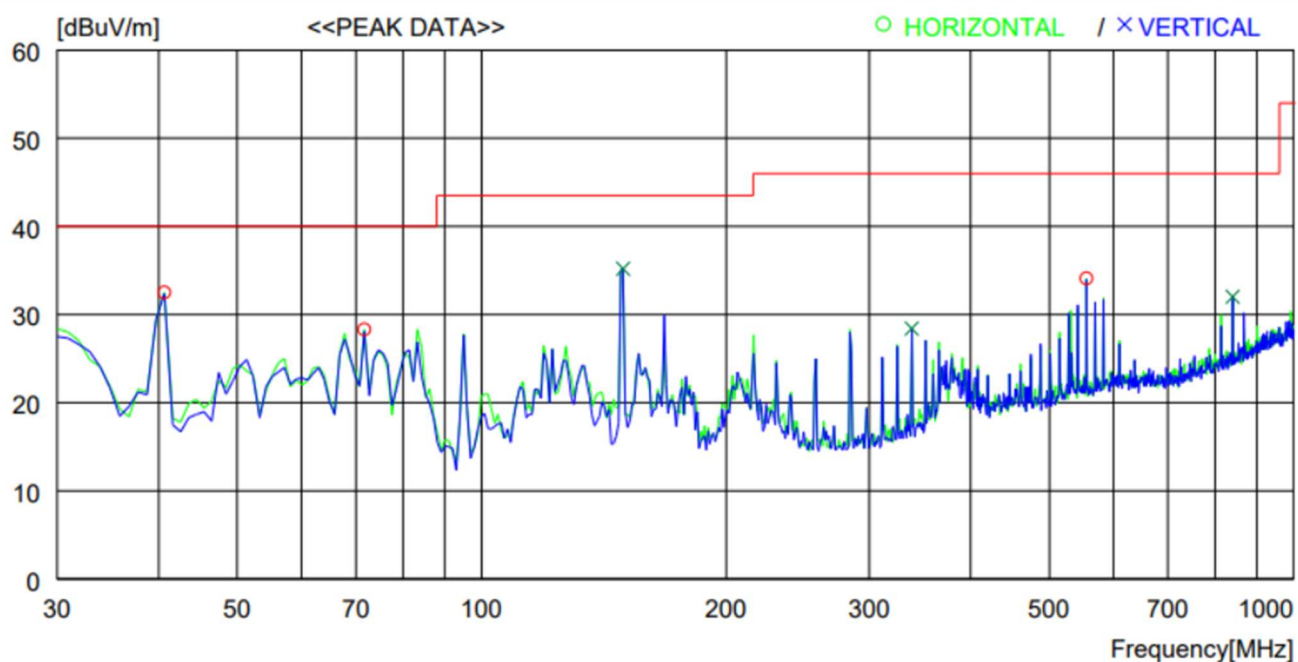

Tabulated Test Data under 15.205(a), 15.209

Frequency (MHz)	Receiver Reading (dBuV)	Detector Mode	Pol.	Ant. Factor (dB/m)	Corr. Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Azimuth (Degree)
40.670	45.2	Peak	H	13.4	26.1	32.5	40.0	7.5	100	231
71.710	44.8	Peak	H	9.3	25.8	28.3	40.0	11.7	100	11
149.310	51.7	Peak	V	8.3	24.8	35.2	43.5	8.3	100	251
338.460	37.4	Peak	V	14.1	23.1	28.4	46.0	17.6	100	180
555.739	38.4	Peak	H	18.3	22.6	34.1	46.0	11.9	100	0
840.911	32.8	Peak	V	21.5	22.3	32.0	46.0	14.0	100	0


Note: “H” means Horizontal polarity, “V” means Vertical polarity

5.2 20 dB bandwidth

5.2.1 Method of Measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution is set to 30 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.


5.2.2 Test Data

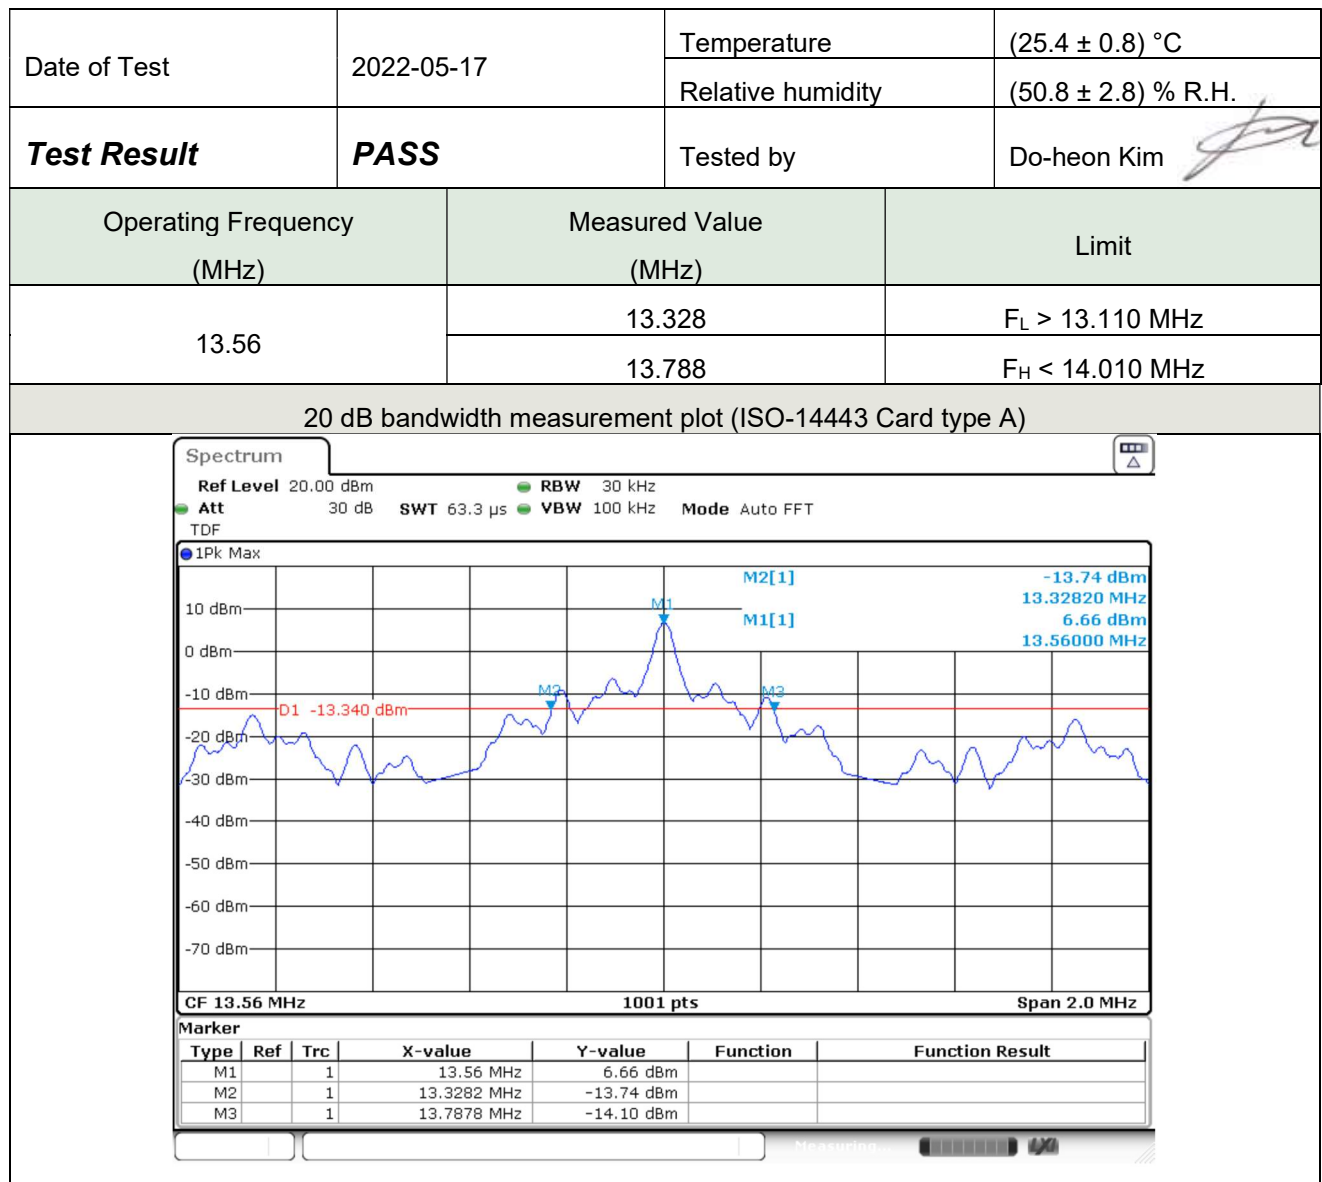

Note: F_L : Lowest frequency at 20 dB bandwidth
 F_H : Highest frequency at 20 dB bandwidth

Operating Frequency (MHz)	Measured Value (MHz)	Limit
13.56	13.330	$F_L > 13.110 \text{ MHz}$
	13.788	$F_H < 14.010 \text{ MHz}$

20 dB bandwidth measurement plot (ISO-14443 Card type B)

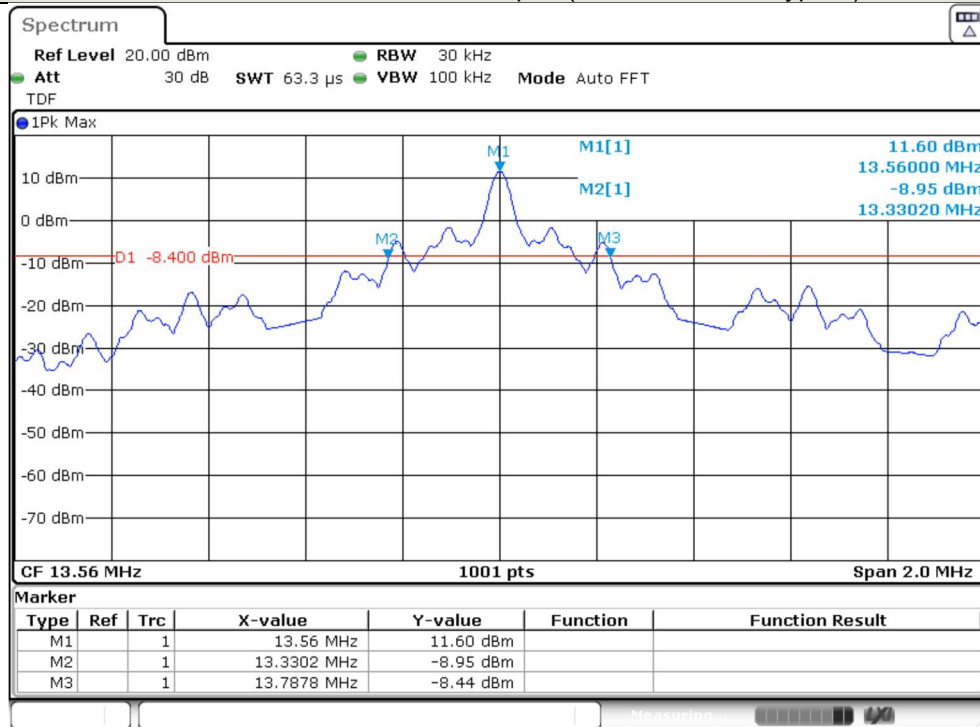

Note: F_L : Lowest frequency at 20 dB bandwidth
 F_H : Highest frequency at 20 dB bandwidth

5.3 Frequency tolerance of carrier signal


5.3.1 Regulation

Acc. to section 15.225 (e), the frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery-operated equipment, the equipment tests shall be performed using a new battery.

5.3.2 Method of Measurement

The EUT output was connected to the spectrum analyzer through an attenuator. Turn EUT off and set chamber temperature to -20 °C and then allow sufficient time (approximately 20 to 30 minutes after chamber reach the assigned temperature) for EUT to stabilize. Turn on EUT and measured EUT operating frequency and turn off the EUT after the measurement. The temperature was raised 10 °C step from -20 °C to $+50$ °C. Repeat above method for frequency measurement every 10 °C step and then record all measured frequencies on each temperature step. An external DC power supply was connected to the input of the EUT. The voltage of EUT set to 115 % of the nominal value and then was reduced to 85 % of nominal voltage. The output frequency was recorded at each step.

5.3.3 Test Data

Date of Test		2022-05-17				Temperature		(25.40 ± 0.81) °C	
						Relative humidity		(50.80 ± 2.83) % R.H.	
Test Result		PASS				Tested by		Do-heon Kim 	
Carrier Frequency: 13.560 000 MHz, LIMIT: within ± 1 356 Hz									
Temp. (°C)	Volt. (V)	Carrier Frequency Measured with Time Elapsed							
		Start Up		2 minutes		5 minutes		10 minutes	
		(MHz)	Dif* (Hz)	(MHz)	Dif* (Hz)	(MHz)	Dif* (Hz)	(MHz)	Dif* (Hz)
+50	5.00	13.559 981	-19	13.559 984	-16	13.559 985	-15	13.559 985	-15
+40	5.00	13.559 987	-13	13.559 984	-16	13.559 983	-17	13.559 983	-17
+30	5.00	13.560 001	1	13.559 995	-5	13.559 994	-6	13.559 994	-6
+20	5.75	13.560 010	10	13.560 008	8	13.560 008	8	13.560 008	8
	5.00	13.560 015	15	13.560 010	10	13.560 010	9	13.560 009	9
	4.25	13.560 009	9	13.560 010	10	13.560 010	10	13.560 010	10
+10	5.00	13.560 021	21	13.560 021	21	13.560 020	20	13.560 020	20
0	5.00	13.560 009	9	13.560 018	18	13.560 018	18	13.560 019	19
-10	5.00	13.559 973	-27	13.559 972	-28	13.559 997	-4	13.559 997	-3
-20	5.00	13.559 917	-83	13.559 941	-59	13.559 943	-57	13.559 945	-55

* Dif means difference.

5.4 AC Power Line Conducted Emission

5.4.1 Limit

Acc. to section 15.207 (a), following table shall be applied.

Frequency Range (MHz)	Quasi-Peak (dBuV)	Average (dBuV)
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 -30	60	50

5.4.2 Method of Measurement

The EUT was placed on a wooden table, 0.8 m height above the horizontal ground plane and 40 cm from the vertical ground plane. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

The test was performed for both Neutral and Hot lines.

5.4.3 Measurement Uncertainty

Measurement uncertainties were not taken into account and following uncertainty levels have been estimated for tests performed on the apparatus. The measurement uncertainties are given with at least 95 % confidence.

Frequency Range	Uncertainty
150 kHz ~ 30 MHz	\pm 2.21 dB

5.4.4 Sample Calculated Example

At 5.31 MHz

QP Limit = 60.0 dBuV

Correction Factor (C. Factor) of LISN, Pulse Limiter and cable loss at 5.31 MHz = 9.7 dB


Q.P Reading from the Test receiver = 20.8 dBuV

(Calculated value for system losses by software EMC32 manufactured by Rohde & Schwarz)


Therefore Q.P Margin = 60 - 20.8 = 39.2

so the EUT has 39.2 dB margin at 5.31 MHz

5.4.5 Test Data

Date of Test	2022-05-17	Temperature	(22.9 ± 2.6) °C
		Relative humidity	(43.2 ± 1.2) % R.H.
Measurement Frequency Range		150 kHz ~ 30MHz	
Test Result	PASS	Tested By	Do-heon Kim 


Hot Line (ISO-14443 Card Type A)

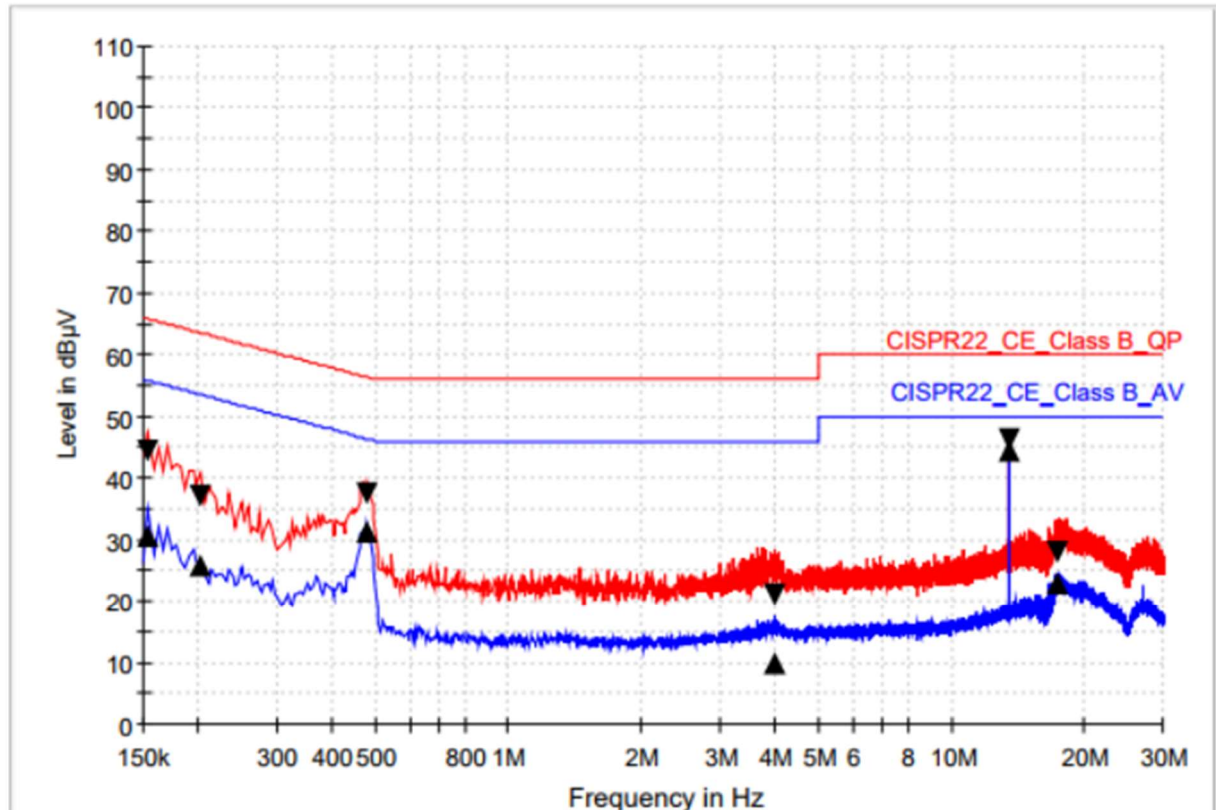

Limit and Margin1

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)	Margin - CAV (dB)	Limit - CAV (dBµV)
0.154000	44.3	30.7	9.000	L1	9.6	21.5	65.8	25.1	55.8
0.202000	37.0	25.9	9.000	L1	9.6	26.6	63.5	27.6	53.5
0.482000	37.5	31.3	9.000	L1	9.6	18.8	56.3	15.1	46.3
3.994000	21.1	9.9	9.000	L1	9.7	34.9	56.0	36.1	46.0
13.562000	46.4	44.4	9.000	L1	10.0	13.6	60.0	5.6	50.0
17.362000	28.0	23.1	9.000	L1	10.1	32.0	60.0	26.9	50.0


Neutral Line (ISO-14443 Card Type A)

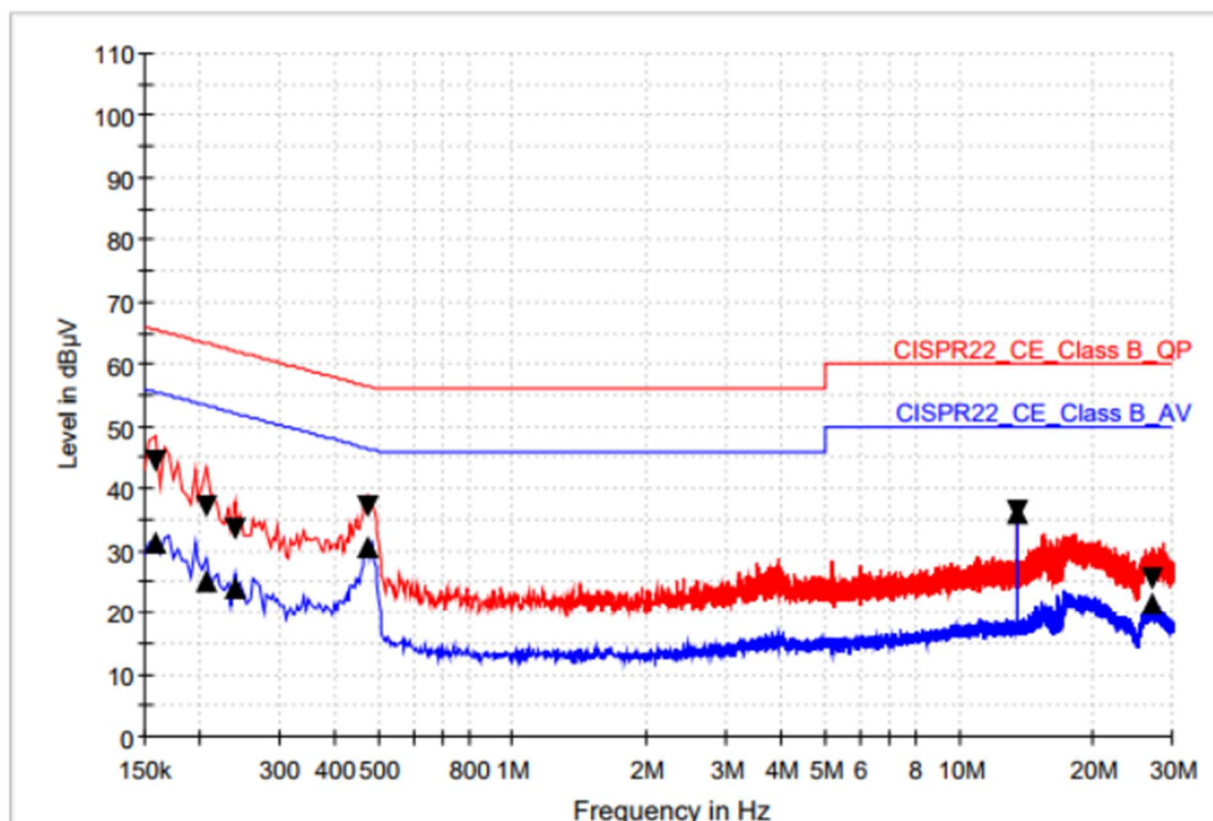

Limit and Margin1

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBµV)	Margin - CAV (dB)	Limit - CAV (dBµV)
0.158000	44.6	31.2	9.000	N	9.6	21.0	65.6	24.4	55.6
0.206000	37.0	25.2	9.000	N	9.6	26.3	63.4	28.2	53.4
0.238000	33.5	23.9	9.000	N	9.6	28.6	62.2	28.3	52.2
0.474000	37.1	30.5	9.000	N	9.6	19.3	56.4	16.0	46.4
13.558000	36.6	35.9	9.000	N	10.0	23.4	60.0	14.1	50.0
27.118000	25.6	21.6	9.000	N	10.2	34.4	60.0	28.4	50.0


Hot Line (ISO-14443 Card Type B)

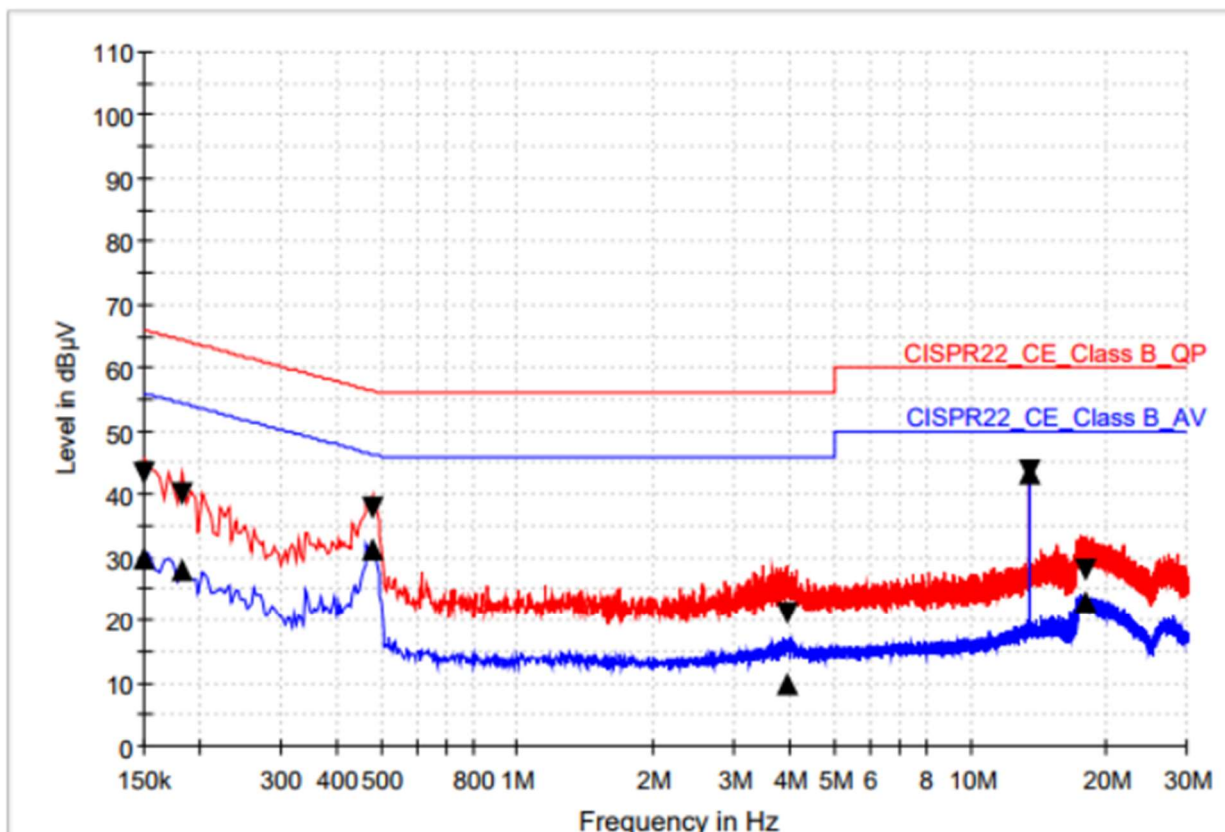

Limit and Margin1

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)	Margin - CAV (dB)	Limit - CAV (dBμV)
0.150000	43.5	29.9	9.000	L1	9.6	22.5	66.0	26.1	56.0
0.182000	40.0	28.1	9.000	L1	9.6	24.4	64.4	26.3	54.4
0.478000	37.7	31.3	9.000	L1	9.6	18.6	56.4	15.1	46.4
3.958000	21.3	10.0	9.000	L1	9.7	34.7	56.0	36.0	46.0
13.558000	43.8	43.5	9.000	L1	10.0	16.2	60.0	6.5	50.0
17.922000	28.1	23.0	9.000	L1	10.1	31.9	60.0	27.0	50.0

Neutral Line (ISO-14443 Card Type B)

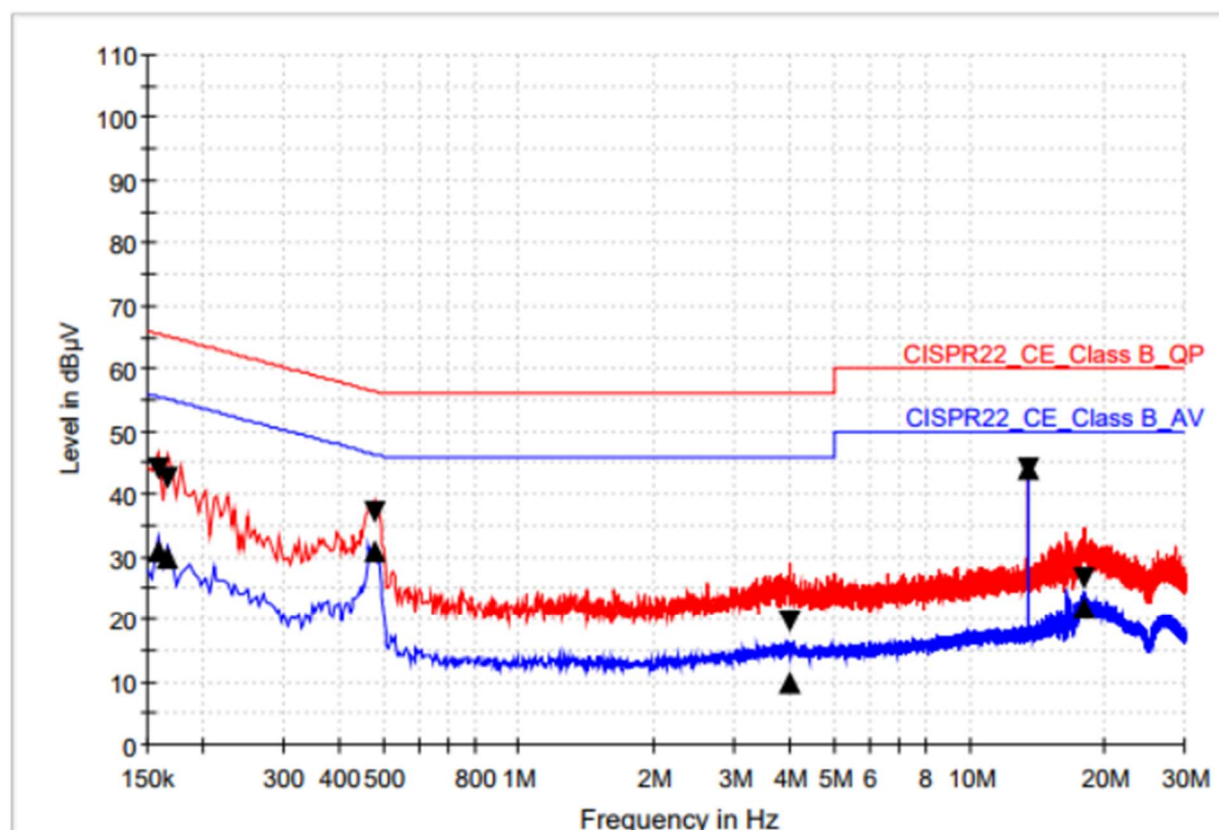

Limit and Margin1

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBμV)	Margin - CAV (dB)	Limit - CAV (dBμV)
0.158000	44.1	31.1	9.000	N	9.6	21.5	65.6	24.5	55.6
0.166000	42.6	30.0	9.000	N	9.6	22.6	65.2	25.2	55.2
0.478000	37.3	30.9	9.000	N	9.6	19.1	56.4	15.5	46.4
3.982000	19.6	9.7	9.000	N	9.7	36.4	56.0	36.3	46.0
13.562000	44.2	44.1	9.000	N	10.0	15.8	60.0	5.9	50.0
17.906000	26.7	21.9	9.000	N	10.1	33.3	60.0	28.1	50.0

Appendix I – Test Instrumentation

Description	Model No.	Serial No.	Manufacturer.	Due for Cal. Date	Cal. Interval
Signal Analyzer	FSV 13	101243	Rohde & Schwarz	2023-01-14	1 Y
Signal Generator	SMF100A	101441	Rohde & Schwarz	2023-01-13	1 Y
Attenuator	10dB	ENG-2	Rohde & Schwarz	2023-01-14	1 Y
DC Power Supply	E3610A	MY40005644	AGILENT	2023-04-19	1 Y
Temperature & Humidity Chamber	SH-241	92012087	Espec	2023-01-15	1 Y
Test Receiver	ESU 26	100303	Rohde & Schwarz	2023-01-14	1 Y
Loop Antenna	HFH2-Z2	100341	Rohde & Schwarz	2023-05-14	2 Y
TRILOG Broadband Antenna	VULB9163	9163.799	Schwarzbeck	2023-09-28	2 Y
Attenuator	6dB	272.4110.50	Rohde & Schwarz	2023-01-14	1 Y
Pre-Amplifier	310N	344015	Sonoma Instrument	2023-01-14	1 Y
Turn Table	DT3000-3t	1310814	INNCO SYSTEM	N/A	N/A
Antenna Master	MA4000-EP	4600814	INNCO SYSTEM	N/A	N/A
Camera Controller	HDCon4102	6531445048	PONTIS	N/A	N/A
EMI Test Receiver	ESCI 7	100722	Rohde & Schwarz	2023-01-14	1 Y
LISN	ENV216	100110	Rohde & Schwarz	2023-01-13	1 Y

The measuring equipment utilized to perform the tests documented in this test report has been calibrated in accordance with manufacturer's recommendations, and is traceable to recognized national standards.