



427 West 12800 South  
 Draper, UT 84020

## Test Report Certification

<b>FCC ID</b>	SWX-AF60XR
<b>ISED ID</b>	6545A-AF60XR
<b>Equipment Under Test</b>	AF60-XR
<b>Test Report Serial Number</b>	TR6834_05
<b>Date of Test</b>	17-19 August; 17-18 September 2021; 19-20 January 2022
<b>Report Issue Date</b>	24 January 2022

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

---

## Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

<b>Applicant</b>	Ubiquiti Inc.
<b>Manufacturer</b>	Ubiquiti Inc.
<b>Brand Name</b>	airFiber
<b>Model Number</b>	AF60-XR
<b>FCC ID</b>	SWX-AF60XR
<b>ISED ID</b>	6545A-AF60XR


On this 24<sup>th</sup> day of January 2022, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory



Written By: Kimberly Rodriguez



Reviewed By: Richard L. Winter

---

<b>Revision History</b>		
<b>Revision</b>	<b>Description</b>	<b>Date</b>
01	Original Report Release	24 January 2022
02	Modify Section 5.7 with DFS Test Data	21 November 2022
03	Amend Section 3.5 with MRA Test Site Number	29 November 2022
04	Modify Section 5.7 DFS Antenna Gain	14 December 2022
05	Include worst-case spot check data and reference statement Sections 5.2 and 5.5	17 February 2023

## Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT .....	6
2.2	Description of EUT .....	6
2.3	EUT and Support Equipment.....	7
2.4	Interface Ports on EUT .....	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	8
2.7	EUT Exercise Software.....	8
2.8	Block Diagram of Test Configuration .....	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	9
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	10
3.5	Test Location .....	10
4	Test Equipment .....	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions.....	12
4.4	DFS Testing .....	13
4.5	Equipment Calibration .....	14
4.6	Measurement Uncertainty .....	14
5	Test Results .....	15
5.1	§15.203 Antenna Requirements.....	15
5.2	Conducted Emissions at Mains Ports Data .....	15
5.3	§15.403(i) 26 dB Emissions Bandwidth .....	17
5.4	§15.407(a)(2) Maximum Average Output Power .....	19
5.5	§15.407(b) Spurious Emissions .....	21
5.6	§15.407(a) Maximum Power Spectral Density.....	27
5.7	DFS Requirement.....	29

# 1 Client Information

## 1.1 Applicant

<b>Company</b>	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
<b>Contact Name</b>	Mark Feil
<b>Title</b>	Compliance Manager

## 1.2 Manufacturer

<b>Company</b>	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
<b>Contact Name</b>	Mark Feil
<b>Title</b>	Compliance Manager

## 2 Equipment Under Test (EUT)

### 2.1 Identification of EUT

<b>Brand Name</b>	airFiber
<b>Model Number</b>	AF60-XR
<b>Serial Number</b>	FCECDAFFE77E
<b>Dimensions (cm)</b>	79.9 x 66.4 x 38.2

### 2.2 Description of EUT

The AF60-XR is a 60 GHz point-to-point wireless bridge which provides 2.5+ Gbps throughput connectivity over long distances. The AF60-XR provides an integrated high-gain dish antenna for high speed, long-range point-to-point links. The AF60-XR provides a 5 GHz 2x2 radio with cross polarized elements as a backup radio for operation redundancies. The AF60-XR also includes a Bluetooth management radio for setup and configuration. The AF60-XR is powered from a 48 Volt PoE Power Adapter.

Band	Modulation Bandwidth	Frequency (MHz)
UNII-2A	20 MHz	5260, 5265, 5270, 5275, 5280, 5285, 5290, 5295, 5300, 5305, 5310, 5315, 5320
	40 MHz	5270, 5275, 5280, 5285, 5290, 5295, 5300, 5305, 5310
	80 MHz	5290
	160 MHz	5250
UNII-2C	20 MHz	5500, 5505, 5510, 5515, 5520, 5525, 5530, 5535, 5540, 5545, 5550, 5555, 5560, 5565, 5570, 5575, 5580, 5585, 5590, 5595, 5600, 5605*, 5610*, 5615*, 5620*, 5625*, 5630*, 5635*, 5640*, 5645*, 5650, 5655, 5660, 5665, 5670, 5675, 5680, 5685, 5690, 5695, 5700, 5705, 5710, 5715, 5720
	40 MHz	5510, 5515, 5520, 5525, 5530, 5535, 5540, 5545, 5550, 5555, 5560, 5565, 5570, 5575, 5580, 5585, 5590, 5595, 5600, 5605*, 5610*, 5615*, 5620*, 5625*, 5630*, 5635*, 5640*, 5645*, 5650, 5655, 5660, 5665, 5670, 5675, 5680, 5685, 5690, 5695, 5700, 5705, 5710
	80 MHz	5530, 5535, 5540, 5545, 5550, 5555, 5560, 5565, 5570, 5575, 5580, 5585, 5590, 5595, 5600, 5605*, 5610*, 5615*, 5620*, 5625*, 5630*, 5635*, 5640*, 5645*, 5650, 5655, 5660, 5665, 5670, 5675, 5680, 5685, 5690
	160 MHz	5570
* Frequency not applicable in Canada		

Table 1: UNII-2A and UNII-2C Channel Settings

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

## 2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

<b>Brand Name Model Number Serial Number</b>	<b>Description</b>	<b>Name of Interface Ports / Interface Cables</b>
BN: AirFiber MN: AF60-XR (Note 1) SN: FCECDAFFE77E	Wireless Access Point	See Section 2.4
BN: Ubiquiti Inc. MN: UPOE-at SN: N/A	PoE Injector Power Supply	Shielded or Un-shielded Cat 5e cable/1 meter
BN: Dell MN: XPS 13 SN: N/A	Laptop Personal Computer	Shielded or Un-shielded Cat 5e cable/1 meter

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

## 2.4 Interface Ports on EUT

<b>Name of Ports</b>	<b>No. of Ports Fitted to EUT</b>	<b>Cable Description/Length</b>
AC	1	3 conductor power cord/80cm
PoE	1	Shielded/Un-Shielded Cat 5e cable/1-meter
LAN	1	Shielded/Un-Shielded Cat 5e cable/1-meter

## 2.5 Operating Environment

<b>Power Supply</b>	120 Vac to 48 Volts PoE Power
<b>AC Mains Frequency</b>	60 Hz
<b>Temperature</b>	22.2-24.5 °C
<b>Humidity</b>	21.9-48.7 %
<b>Barometric Pressure</b>	1028.8 mBar

## 2.6 Operating Modes

The AF60-XR was tested using test software to enable to constant transmission. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11 a/n/ac were investigated. All measurements are reported with the worst-case mode (802.11ax) unless otherwise stated.

## 2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

## 2.8 Block Diagram of Test Configuration

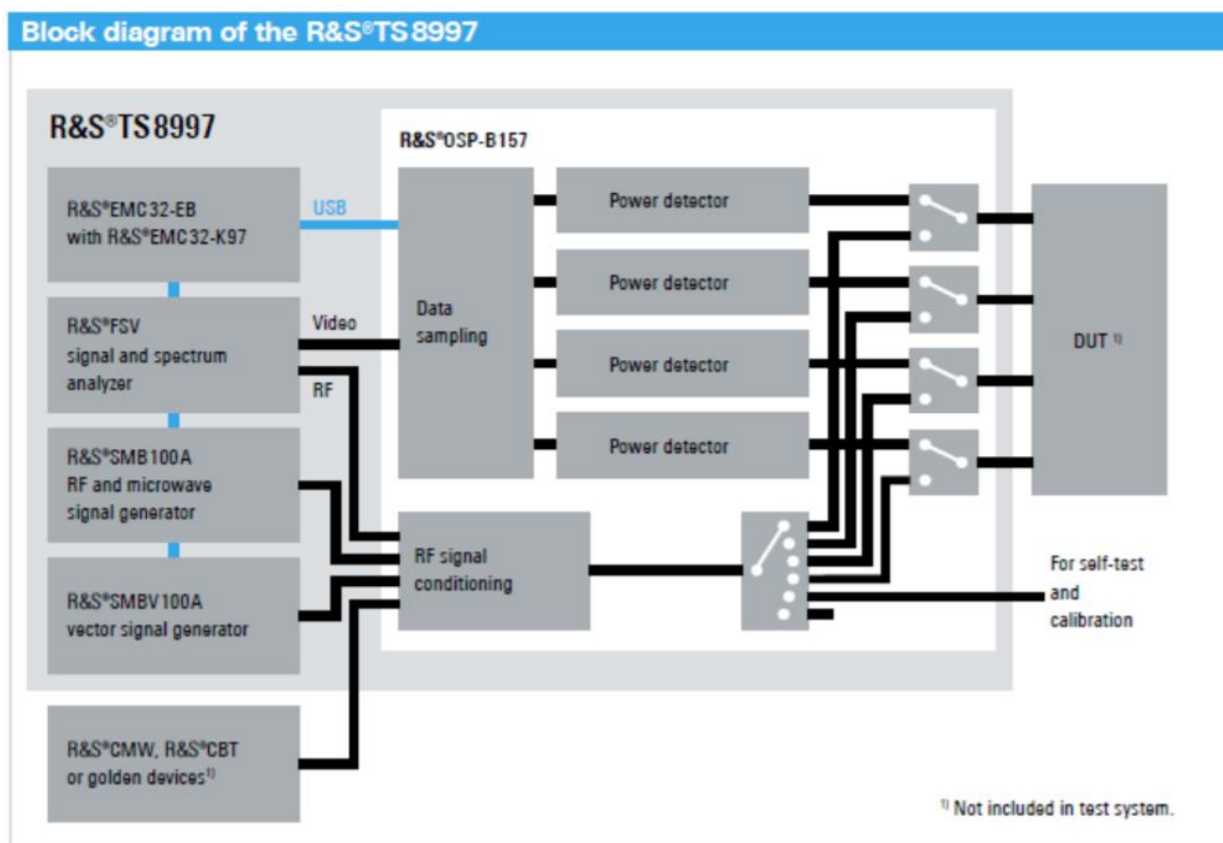


Diagram 1: Test Configuration Block Diagram

## 2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.



## 2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

## 3 Test Specification, Method and Procedures

### 3.1 Test Specification

<b>Title</b>	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
<b>Purpose of Test</b>	The tests were performed to demonstrate initial compliance

### 3.2 Methods & Procedures

#### 3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

### 3.3 FCC Part 15, Subpart E

#### 3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.407(a)	N/A	Antenna requirements	Structural Requirement	Compliant
15.407(b)	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Bandwidth Requirement	5260 to 5575	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Peak Output Power	5260 to 5575	Compliant
15.407(b)	RSS-247 §6.2.2, §6.2.3	Antenna Conducted Spurious Emissions	0.009 to 40000	Compliant
15.407(b)	RSS-247 §6.2.2, §6.2.3	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(a)	RSS-247 §6.2.2, §6.2.3	Peak Power Spectral Density	5260 to 5575	Compliant
15.407(h)	RSS-247 §6.3	DFS Requirements	5260 to 5570	Compliant

The testing was performed according to the procedures in ANSI C63.10-2013, KDB 558074 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.

### **3.4 Results**

In the configuration tested, the EUT complied with the requirements of the specification.

### **3.5 Test Location**

Testing was performed at the Unified Compliance Laboratory 3-meter and 10-meter chamber located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2023. MRA test site number US5037. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2023. Unified Compliance Laboratory has been assigned Conformity Assessment Number US0223 by ISED.

## 4 Test Equipment

### 4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-6754	12/8/2021	12/8/2022
LISN	AFJ	LS16C/10	UCL-6749	12/6/2021	12/6/2023
Cat6 ISN	Teseq	ISN T8-Cat6	UCL-2971	5/18/2020	5/18/2022
ISN	Teseq	ISN T800	UCL-2974	6/4/2021	6/4/2022
LISN	Com-Power	LIN-120C	UCL-2612	1/6/2022	1/6/2023
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 2: List of equipment used for Conducted Emissions Testing at Mains Port

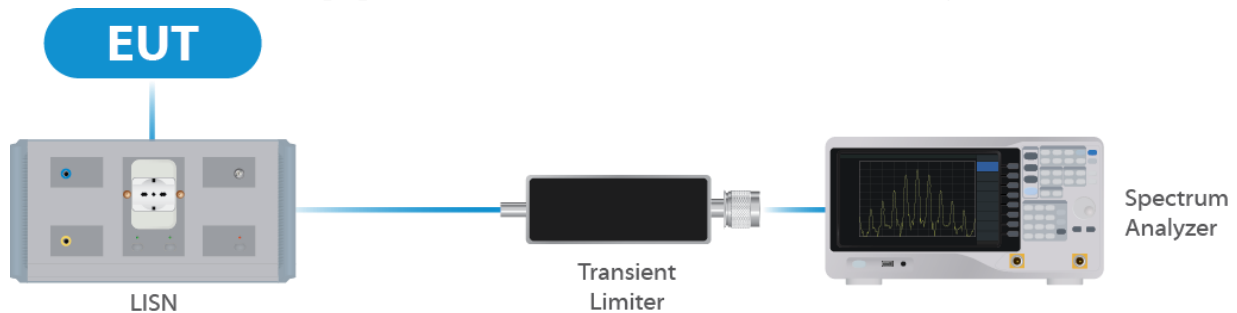
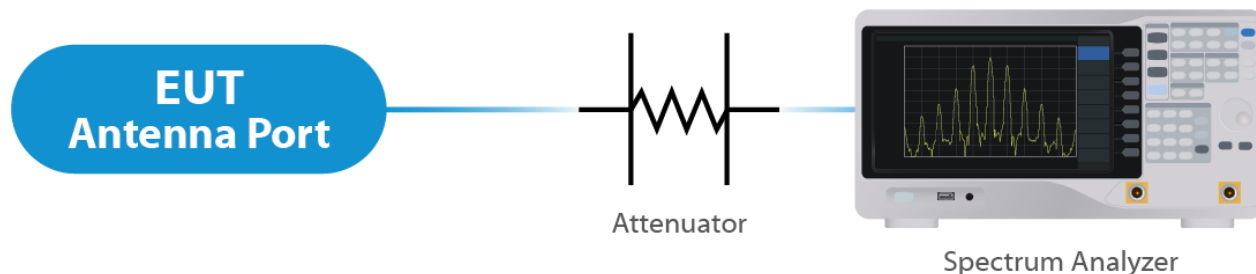


Figure 1: Conducted Emissions Test

### 4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	1/03/2022	1/03/2023
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	1/03/2022	1/03/2023
Switch Extension	R&S	OSP-150W	UCL-2870	1/03/2022	1/03/2023

Table 3: List of equipment used for Direct Connect at the Antenna Port



**Figure 2: Direct Connect at the Antenna Port Test**



**Figure 3: Output Power Measurement**

### 4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	6/21/2021	6/21/2022
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	10/7/2021	10/7/2022
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3062	8/28/2020	8/27/2022
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3071	5/19/2020	5/19/2022
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	7/8/2021	7/8/2022
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	11/16/2020	11/16/2022
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	5/21/2020	5/21/2022
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	10/7/2021	10/7/2022
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

**Table 4: List of equipment used for Radiated Emissions**

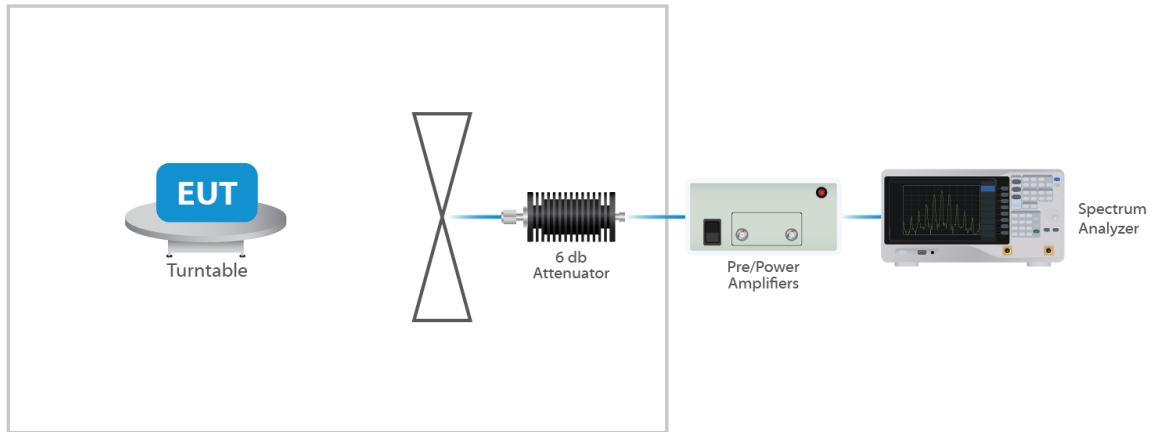


Figure 4: Radiated Emissions Test

## 4.4 DFS Testing

### 4.4.1 Master Test Set Up

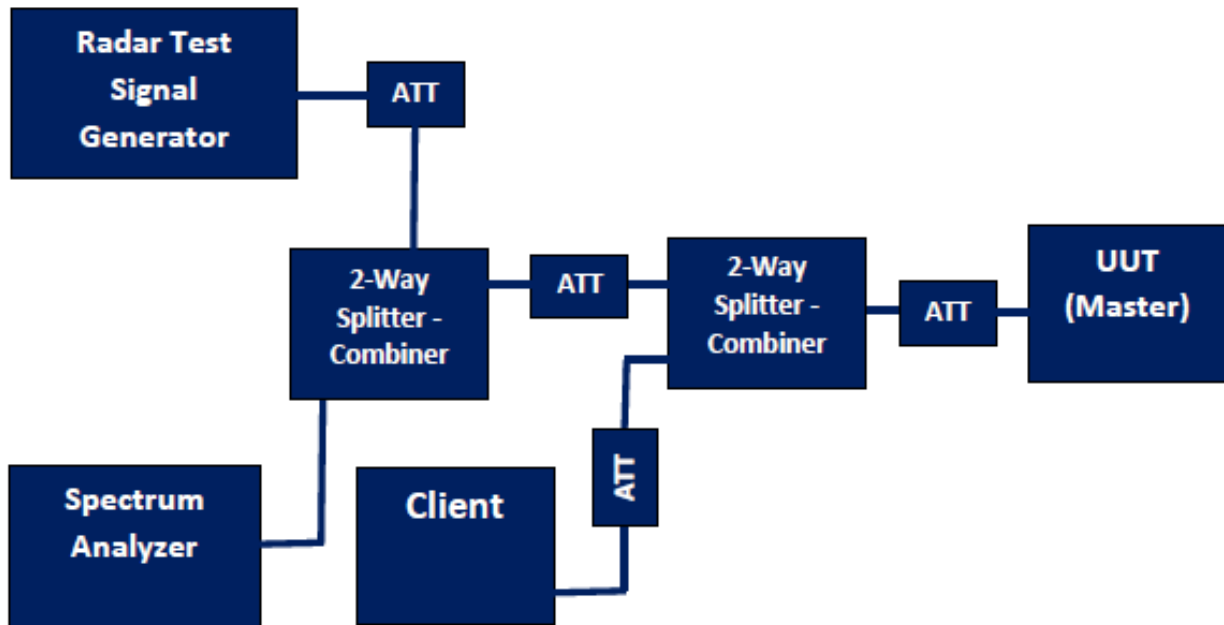


Figure 5: DFS Test Set Up – Master

## 4.5 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

## 4.6 Measurement Uncertainty

Test	Uncertainty ( $\pm$ dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
<b>Direct Connect Tests</b>	<b>K Factor</b>	<b>Value</b>
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

## 5 Test Results

### 5.1 §15.203 Antenna Requirements

The EUT uses a dish antenna structure. The maximum gain of the antenna 26 dBi. This is an 802.11 device and utilizes CDD as described in KDB 662911 D01. The antenna is not user replaceable. The EUT has a 2x2 transmitter and the chains are cross polarized.


#### Results

The EUT complied with the specification

### 5.2 Conducted Emissions at Mains Ports Data


Test Personnel	Joe Jackson
Test Date	May 6, 2021

#### 5.2.1 Line

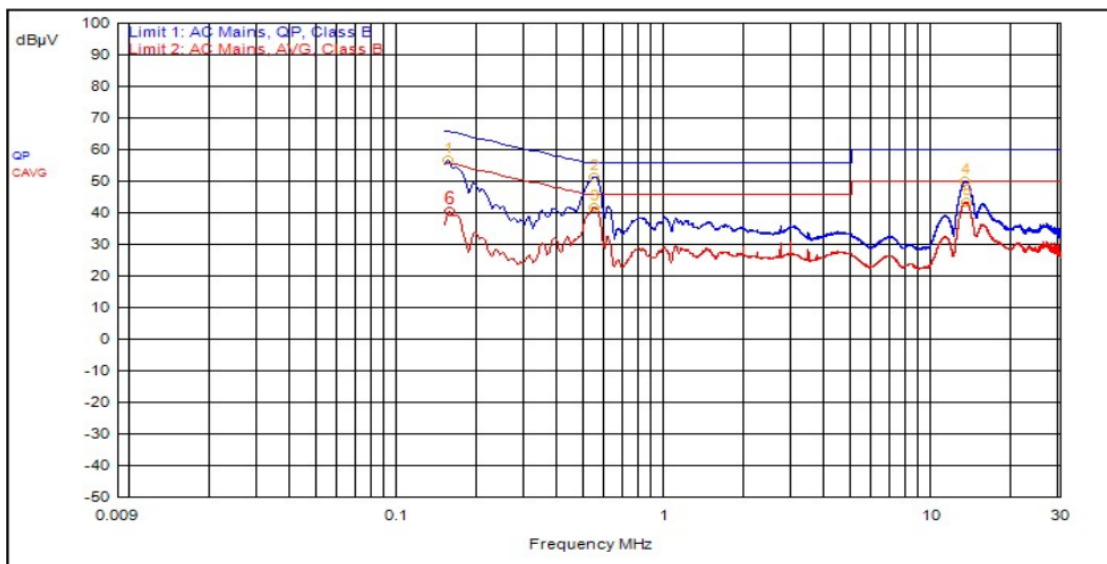

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
3	543.000kHz	12.4	0.0		C_AVG	29.4	41.8	46.0	-4.2
2	543.000kHz	12.4	0.0		QPeak	39.0	51.4	56.0	-4.6
5	13.260MHz	12.4	0.2		C_AVG	30.8	43.4	50.0	-6.6
1	153.000kHz	12.4	0.0		QPeak	44.4	56.8	65.8	-9.1
4	13.218MHz	12.4	0.2		QPeak	37.4	50.0	60.0	-10.0
6	156.000kHz	12.4	0.0		C_AVG	28.2	40.6	55.7	-15.1

**5.2.2 Neutral**

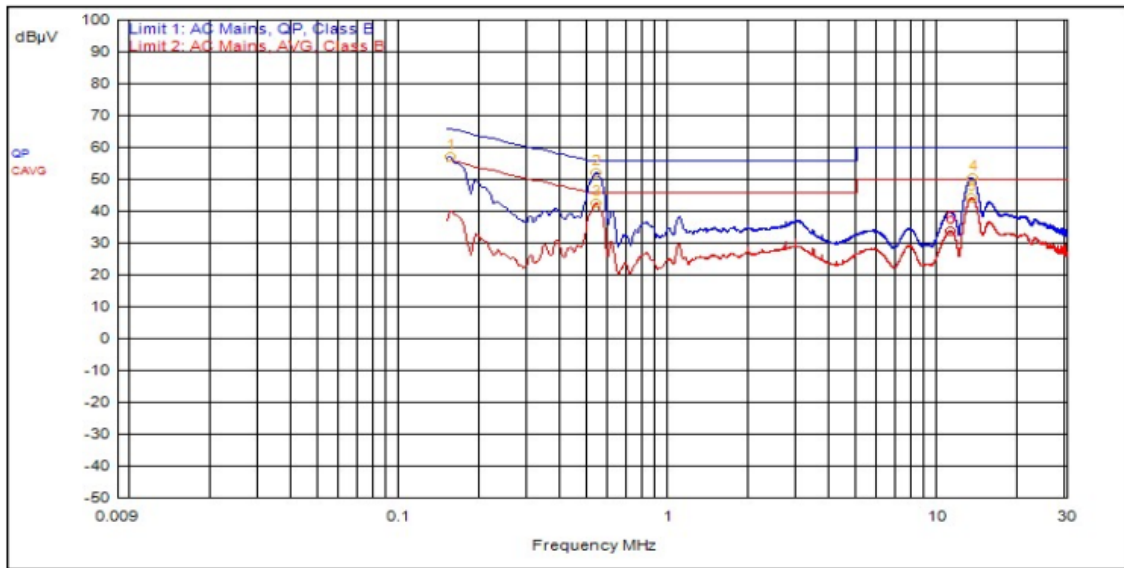

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit	Limit Dist.
3	534.000kHz	12.4	0.0		C_AVG	29.9	42.3	46.0	-3.7
2	534.000kHz	12.4	0.0		QPeak	39.4	51.9	56.0	-4.1
5	13.236MHz	12.4	0.2		C_AVG	31.6	44.2	50.0	-5.8
1	153.000kHz	12.4	0.0		QPeak	44.5	56.9	65.8	-8.9
4	13.320MHz	12.4	0.2		QPeak	37.9	50.5	60.0	-9.5
6	10.968MHz	12.3	0.2		C_AVG	21.1	33.7	50.0	-16.3

**Result**

The EUT complied with the specification limit.



### 5.3 §15.403(i) 26 dB Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 66291 D01. Please see associated annex for details on instrument settings.

Test Personnel	Tyler Parry
Test Date	September 2, 2021

#### 5.3.1 UNII-2A

Bandwidth	Frequency (MHz)	99% Bandwidth (MHz)	Emissions 26 dB Bandwidth (MHz)
OFDM 20	5260	16.50	20.80
OFDM 20	5280	16.60	20.80
OFDM 20	5320	16.50	21.10
VHT 20	5260	17.70	21.80
VHT 20	5280	17.80	22.30
VHT 20	5320	17.70	21.80
VHT 40	5270	37.00	42.60
VHT 40	5310	37.25	43.50
VHT 80	5290	76.50	84.00
HT 20	5260	17.70	21.70
HT 20	5280	17.70	21.40
HT 20	5320	17.80	21.80
HT 40	5270	37.00	42.00
HT 40	5310	37.00	42.00

**5.3.2 UNII-2C**

<b>Bandwidth</b>	<b>Frequency (MHz)</b>	<b>99% Bandwidth (MHz)</b>	<b>Emissions 26 dB Bandwidth (MHz)</b>
OFDM 20	5500	16.60	20.90
OFDM 20	5600	16.60	20.90
OFDM 20	5720	16.60	21.10
VHT 20	5500	17.80	22.60
VHT 20	5600	17.80	21.70
VHT 20	5720	17.80	21.30
VHT 40	5510	36.75	43.35
VHT 40	5590	36.75	43.35
VHT 40	5710	36.25	42.50
VHT 80	5530	76.50	85.50
VHT 80	5610	76.50	87.00
VHT 80	5690	76.00	87.50
HT 20	5500	17.80	21.60
HT 20	5600	17.80	22.10
HT 20	5720	17.70	21.60
HT 40	5510	36.50	43.95
HT 40	5590	36.50	42.75
HT 40	5710	36.75	42.15

**Result**

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

## 5.4 §15.407(a)(2) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 789033 Section II. E.2. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average RF conducted output power measured for this device was 3.97 dBm or 2.49 mW. The limit is 14 dBm or 25.12 mW when using antennas with 26 dBi gain. The antenna has a maximum gain of 26 dBi.

Test Personnel	Tyler Parry
Test Date	September 2, 2021

### 5.4.1 UNII-2A

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power*	Measured EIRP	Measured PSD
OFDM 20	5260	Mcs0	24	3.72	29.72	-10.97
OFDM 20	5280	Mcs0	23	3.85	29.85	-11.1
OFDM 20	5320	Mcs0	21	3.87	29.87	-11.02
HT 20	5260	Mcs0	24	3.66	29.66	-11.28
HT 20	5280	Mcs0	23	3.74	29.74	-11.46
HT 20	5320	Mcs0	21	3.8	29.8	-11.31
HT 40	5270	Mcs0	24	3.61	29.61	-14.52
HT 40	5310	Mcs0	22	3.67	29.67	-14.6
HT 40	5260	Mcs0	24	3.64	29.64	-11.45
VHT 20	5280	Mcs0	23	3.79	29.79	-11.31
VHT 20	5320	Mcs0	21	3.79	29.79	-11.29
VHT 20	5270	Mcs0	24	3.64	29.64	-14.61
VHT 80	5310	Mcs0	22	3.69	29.69	-14.71

**5.4.2 UNII-2C**

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power*	Measured EIRP	Measured PSD
OFDM 20	5500	Mcs0	19	3.52	29.52	-11.06
OFDM 20	5600	Mcs0	21	3.96	29.96	-10.54
OFDM 20	5720	Mcs0	23	3.7	29.7	-10.76
HT 20	5500	Mcs0	19	3.49	29.49	-11.31
HT 20	5600	Mcs0	21	3.91	29.91	-10.61
HT 20	5720	Mcs0	23	3.64	29.64	-11.45
HT 40	5510	Mcs0	20	3.62	29.62	-14.43
HT 40	5590	Mcs0	21	3.63	29.63	-13.93
HT 40	5710	Mcs0	24	3.8	29.8	-14.46
VHT 20	5500	Mcs0	20	3.97	29.97	-10.63
VHT 20	5600	Mcs0	21	3.9	29.9	-10.28
VHT 20	5720	Mcs0	23	3.59	29.59	-11.33
VHT 40	5510	Mcs0	20	3.59	29.59	-14.3
VHT 40	5590	Mcs0	21	3.58	29.58	-13.9
VHT 40	5710	Mcs0	24	3.83	29.83	-14.16
VHT 80	5530	Mcs0	21	3.79	29.79	-17.84

**Result**

In the configuration tested, the maximum average RF output power was less than 1 watt; therefore, the EUT complied with the requirements of the specification.

## 5.5 §15.407(b) Spurious Emissions


### 5.5.1 Radiated Spurious Emissions in the Restricted Bands of § 15.205

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emissions was investigated to measure any radiated emissions in the restricted bands. For frequencies above 18.0 GHz. The emissions in the restricted bands must meet the limits specified in § 15.209. Conducted measurement results are included in the Annex. Radiated data with the EUT transmitting into a load is included below. All emissions between the required frequencies were investigated, the following plots represent the worst case. The “fail” is the transmitted signal exceeding the spurious limit.

Correction Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain, and is added to the Receiver reading.


Test Personnel	Kimberly Rodriguez
Test Date	November 14, 2021 - January 21, 2022

### 5.5.2 UNII-2A

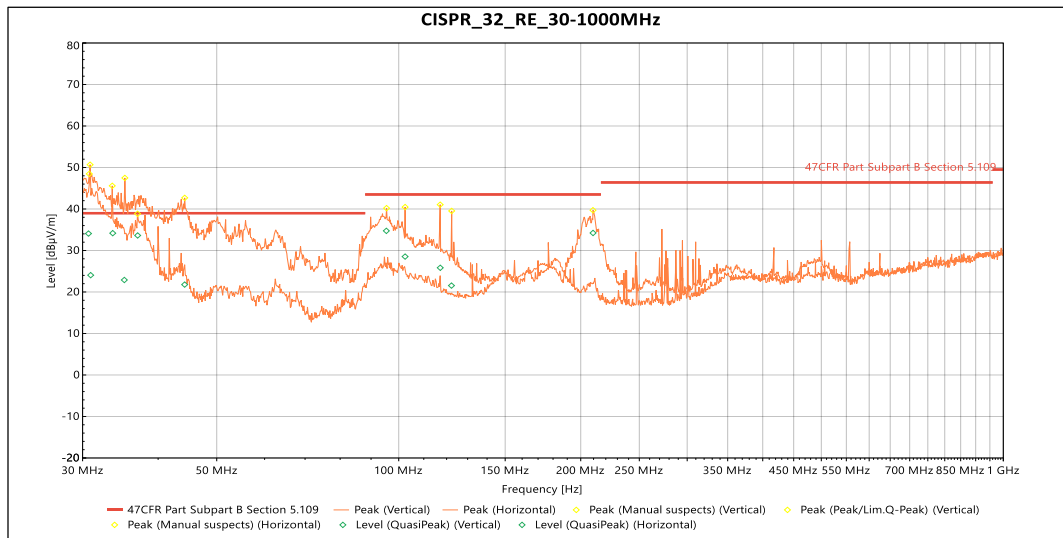


Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.682 MHz	34.082	39	-4.918	281	1	Vertical	-11.878
35.17 MHz	22.886	39	-16.114	154	1.143	Vertical	-11.597
44.253 MHz	21.783	39	-17.217	264	1.328	Vertical	-11.282
95.4 MHz	34.729	43.5	-8.771	174	1.863	Vertical	-13.881
102.46 MHz	28.529	43.5	-14.971	160	1.368	Vertical	-13.344
117.14 MHz	25.831	43.5	-17.669	269	1.147	Vertical	-15.468
122.25 MHz	21.541	43.5	-21.959	167	1.143	Vertical	-16.151
209.6 MHz	34.217	43.5	-9.283	221	1.143	Vertical	-14.786
30.938 MHz	24.047	39	-14.953	74	3.126	Horizontal	-11.808
33.65 MHz	34.171	39	-4.829	310	2.416	Horizontal	-11.807
36.999 MHz	33.62	39	-5.38	292	2.406	Horizontal	-11.745

Graph 1: Radiated Emissions in 30 MHz – 1 GHz

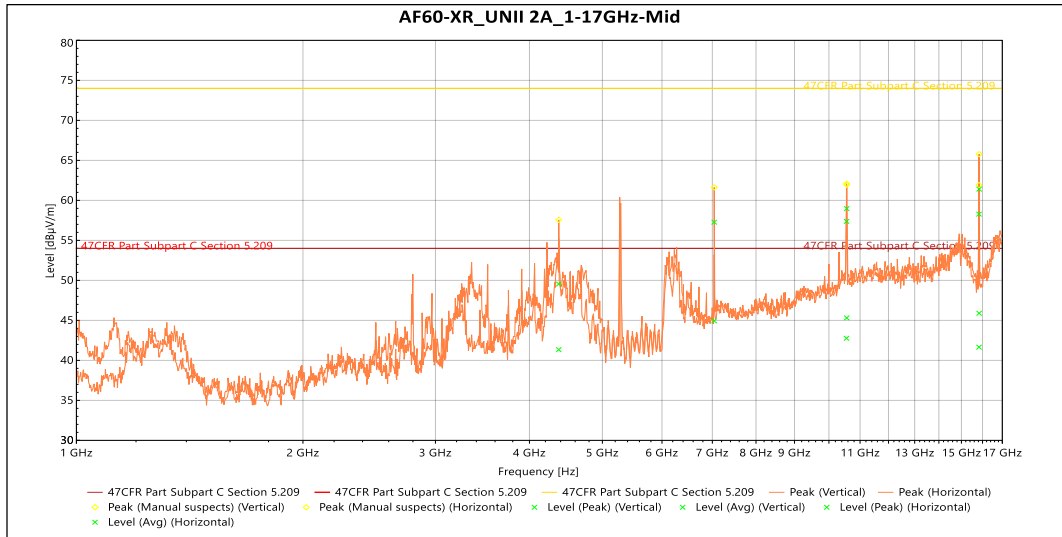

Frequency	SR #	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.04 GHz	Peak	57.271	74	-16.729	90	1.643	Vertical	-3.478
10.56 GHz	Peak	58.974	74	-15.026	92	1.647	Vertical	4.732
15.83 GHz	Peak	58.28	74	-15.72	89	2.15	Vertical	5.189
7.04 GHz	AVG	44.944	54	-9.056	90	1.643	Vertical	-3.478
10.56 GHz	AVG	45.305	54	-8.695	92	1.647	Vertical	4.732
15.83 GHz	AVG	41.647	54	-12.353	89	2.15	Vertical	5.189
4.375 GHz	Peak	49.54	74	-24.46	90	1.829	Horizontal	-9.856
10.554 GHz	Peak	57.369	74	-16.631	98	1.647	Horizontal	4.859
15.836 GHz	Peak	61.403	74	-12.597	89	1.643	Horizontal	4.956
4.375 GHz	AVG	41.341	54	-12.659	90	1.829	Horizontal	-9.856
10.554 GHz	AVG	42.758	54	-11.242	98	1.647	Horizontal	4.859
15.836 GHz	AVG	45.889	54	-8.111	89	1.643	Horizontal	4.956


**Graph 2: Radiated Emissions in 1-17GHz**

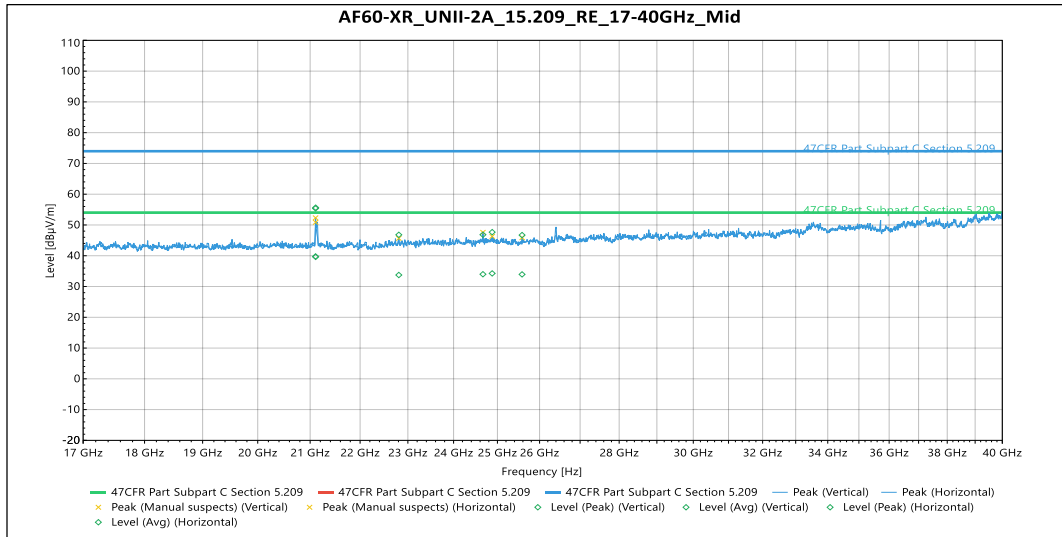

Frequency	SR #	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
21.108 GHz	Peak	55.633	74	-18.367	86	Vertical	-5.66
24.878 GHz	Peak	47.667	74	-26.333	95	Vertical	-5.375
25.58 GHz	Peak	46.712	74	-27.288	81	Vertical	-5.528
21.108 GHz	AVG	39.635	54	-14.365	86	Vertical	-5.66
24.878 GHz	AVG	34.259	54	-19.741	95	Vertical	-5.375
25.58 GHz	AVG	33.935	54	-20.065	81	Vertical	-5.528
21.106 GHz	Peak	55.392	74	-18.608	83	Horizontal	-5.699
22.807 GHz	Peak	46.8	74	-27.2	316	Horizontal	-4.985
24.665 GHz	Peak	46.838	74	-27.162	156	Horizontal	-5.246
21.106 GHz	AVG	39.777	54	-14.223	83	Horizontal	-5.699
22.807 GHz	AVG	33.741	54	-20.259	316	Horizontal	-4.985
24.665 GHz	AVG	33.989	54	-20.011	156	Horizontal	-5.246

**Graph 3: Radiated Emissions in 17-40GHz**


**5.5.3 UNII-2C**

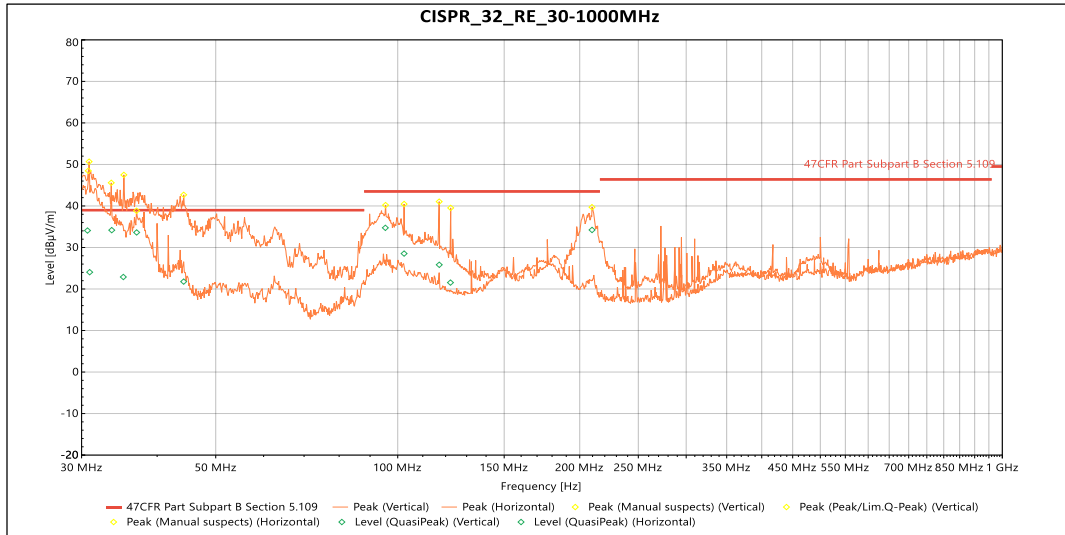

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.682 MHz	34.082	39	-4.918	281	1	Vertical	-11.878
35.17 MHz	22.886	39	-16.114	154	1.143	Vertical	-11.597
44.253 MHz	21.783	39	-17.217	264	1.328	Vertical	-11.282
95.4 MHz	34.729	43.5	-8.771	174	1.863	Vertical	-13.881
102.46 MHz	28.529	43.5	-14.971	160	1.368	Vertical	-13.344
117.14 MHz	25.831	43.5	-17.669	269	1.147	Vertical	-15.468
122.25 MHz	21.541	43.5	-21.959	167	1.143	Vertical	-16.151
209.6 MHz	34.217	43.5	-9.283	221	1.143	Vertical	-14.786
30.938 MHz	24.047	39	-14.953	74	3.126	Horizontal	-11.808
33.65 MHz	34.171	39	-4.829	310	2.416	Horizontal	-11.807
36.999 MHz	33.62	39	-5.38	292	2.406	Horizontal	-11.745


**Graph 4: Radiated Emissions in 30 MHz – 1 GHz**



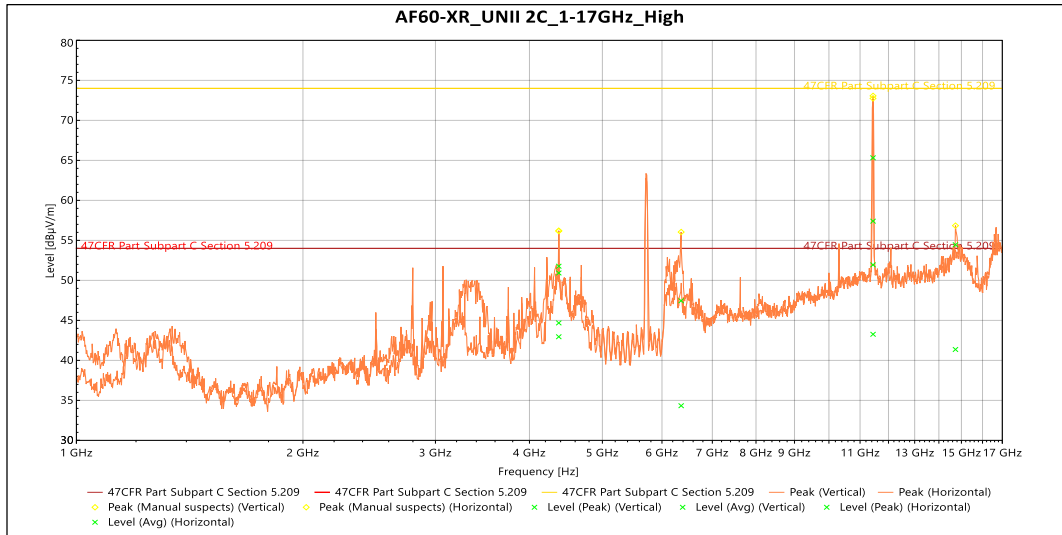

Frequency	SR #	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
4.3752 GHz	Peak	50.922	74	-23.078	79	3.798	Vertical	-9.855
6.3628 GHz	Peak	47.451	74	-26.549	69	1.83	Vertical	-6.377
11.446 GHz	Peak	57.4	74	-16.6	101	1.647	Vertical	5.361
4.3752 GHz	AVG	42.95	54	-11.05	79	3.798	Vertical	-9.855
6.3628 GHz	AVG	34.327	54	-19.673	69	1.83	Vertical	-6.377
11.446 GHz	AVG	43.259	54	-10.741	101	1.647	Vertical	5.361
4.3752 GHz	Peak	51.771	74	-22.229	68	3.798	Horizontal	-9.855
11.445 GHz	Peak	65.322	74	-8.678	109	1.5	Horizontal	5.318
14.729 GHz	Peak	54.449	74	-19.551	153	4	Horizontal	8.327
4.3752 GHz	AVG	44.681	54	-9.319	68	3.798	Horizontal	-9.855
11.445 GHz	AVG	51.941	54	-2.059	109	1.5	Horizontal	5.318
14.729 GHz	AVG	41.36	54	-12.64	153	4	Horizontal	8.327

**Graph 5: Radiated Emissions in 1-17GHz**

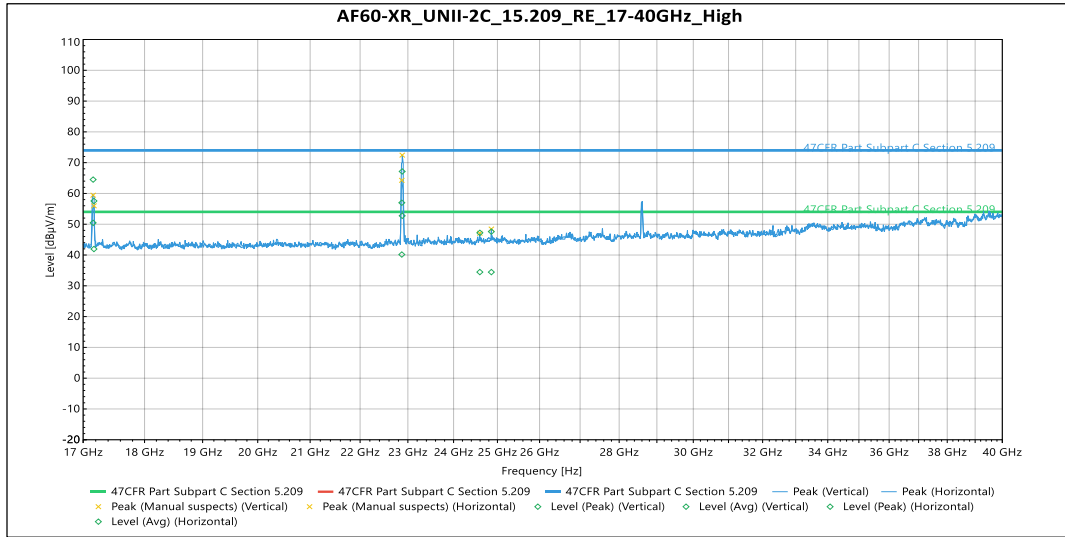

Frequency	SR #	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
17.172 GHz	1	57.557	74	-16.443	88	Vertical	-5.38
22.871 GHz	1	56.982	74	-17.018	92	Vertical	-4.963
24.594 GHz	1	47.212	74	-26.788	227	Vertical	-5.116
17.172 GHz	1	41.953	54	-12.047	88	Vertical	-5.38
22.871 GHz	1	40.156	54	-13.844	92	Vertical	-4.963
24.594 GHz	1	34.464	54	-19.536	227	Vertical	-5.116
17.159 GHz	2	64.496	74	-9.504	83	Horizontal	-5.299
22.879 GHz	2	67.14	74	-6.86	86	Horizontal	-4.996
24.859 GHz	2	47.596	74	-26.404	174	Horizontal	-5.3
17.159 GHz	2	50.451	54	-3.549	83	Horizontal	-5.299
22.879 GHz	2	52.742	54	-1.258	86	Horizontal	-4.996
24.859 GHz	2	34.453	54	-19.547	174	Horizontal	-5.3

**Graph 6: Radaited Emissions in 17-40GHz on Mid Frequency (worst-case)**

## 5.6 §15.407(a) Maximum Power Spectral Density

All chains were measured and summed under the guidance of KDB 789033 Section II. F. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 11 dBm in any 1 MHz band during any time interval of continuous transmission.

Results of this testing are summarized. With a 26 dBi antenna, the conducted limit for power spectral density is 11 dBm. As per KDB 662911, When the EUT is using spatial-multiplexing in HT to HE modes, there is no additional array gain to accommodate.

Results of this testing are summarized.

Test Personnel	Tyler Parry
Test Date	September 2, 2021

### 5.6.1 UNII-2A

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power*	Measured EIRP	Measured PSD
OFDM 20	5260	Mcs0	24	3.72	29.72	-10.97
OFDM 20	5280	Mcs0	23	3.85	29.85	-11.1
OFDM 20	5320	Mcs0	21	3.87	29.87	-11.02
HT 20	5260	Mcs0	24	3.66	29.66	-11.28
HT 20	5280	Mcs0	23	3.74	29.74	-11.46
HT 20	5320	Mcs0	21	3.8	29.8	-11.31
HT 40	5270	Mcs0	24	3.61	29.61	-14.52
HT 40	5310	Mcs0	22	3.67	29.67	-14.6
HT 40	5260	Mcs0	24	3.64	29.64	-11.45
VHT 20	5280	Mcs0	23	3.79	29.79	-11.31
VHT 20	5320	Mcs0	21	3.79	29.79	-11.29
VHT 20	5270	Mcs0	24	3.64	29.64	-14.61
VHT 80	5310	Mcs0	22	3.69	29.69	-14.71

**5.6.2 UNII-2C**

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power*	Measured EIRP	Measured PSD
OFDM 20	5500	Mcs0	19	3.52	29.52	-11.06
OFDM 20	5600	Mcs0	21	3.96	29.96	-10.54
OFDM 20	5720	Mcs0	23	3.7	29.7	-10.76
HT 20	5500	Mcs0	19	3.49	29.49	-11.31
HT 20	5600	Mcs0	21	3.91	29.91	-10.61
HT 20	5720	Mcs0	23	3.64	29.64	-11.45
HT 40	5510	Mcs0	20	3.62	29.62	-14.43
HT 40	5590	Mcs0	21	3.63	29.63	-13.93
HT 40	5710	Mcs0	24	3.8	29.8	-14.46
VHT 20	5500	Mcs0	20	3.97	29.97	-10.63
VHT 20	5600	Mcs0	21	3.9	29.9	-10.28
VHT 20	5720	Mcs0	23	3.59	29.59	-11.33
VHT 40	5510	Mcs0	20	3.59	29.59	-14.3
VHT 40	5590	Mcs0	21	3.58	29.58	-13.9
VHT 40	5710	Mcs0	24	3.83	29.83	-14.16
VHT 80	5530	Mcs0	21	3.79	29.79	-17.84

**Result**

The maximum average power spectral density was less than the limit of 8 dBm; therefore, the EUT complies with the specification.


## 5.7 DFS Requirement

This product is a master with radar detection. The outcome of the required DFS tests is located in this section. DFS testing was performed following the test procedures as outlined in KDB 905462. The product passes all required DFS tests for a master with radar detection.


Information	Status
Test Personnel	Alan Kitchen
Test Date	January 1, 2022
Possible Antenna/s	Dish Antenna
Antenna used for test	Dish Antenna
Operating mode	Master
Port used for testing	J6 UMCC
DUT Antenna Gain considered for testing	26 dBi
EIRP range	> 200 milliwatts
Impedance of port	50 ohms
Channel loading technique	Data transfer was enacted to achieve a minimum channel loading of approximately 17%
Antenna measurement technique	See note 1
Time of power-on cycle	46.5s
Detection threshold level	-36 dBm

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not Required	Yes
<i>DFS Detection Threshold</i>	Yes	Not Required	Yes
<i>Channel Availability Check Time</i>	Yes	Not Required	Not Required
<i>U-NII Detection Bandwidth</i>	Yes	Not Required	Yes


Requirement	Operational Mode	
	Master or Client Client Without Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not Required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not Required

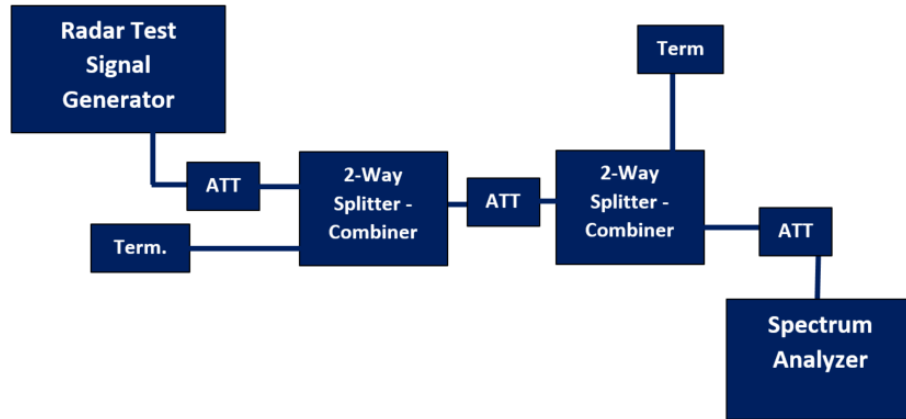


Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

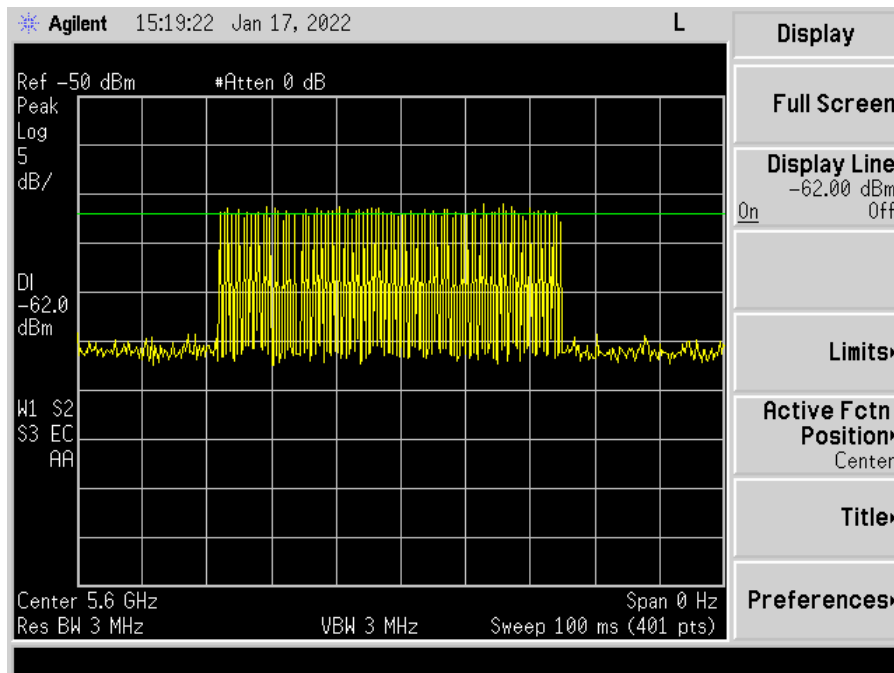


**Plot 1: Radar Level 1**

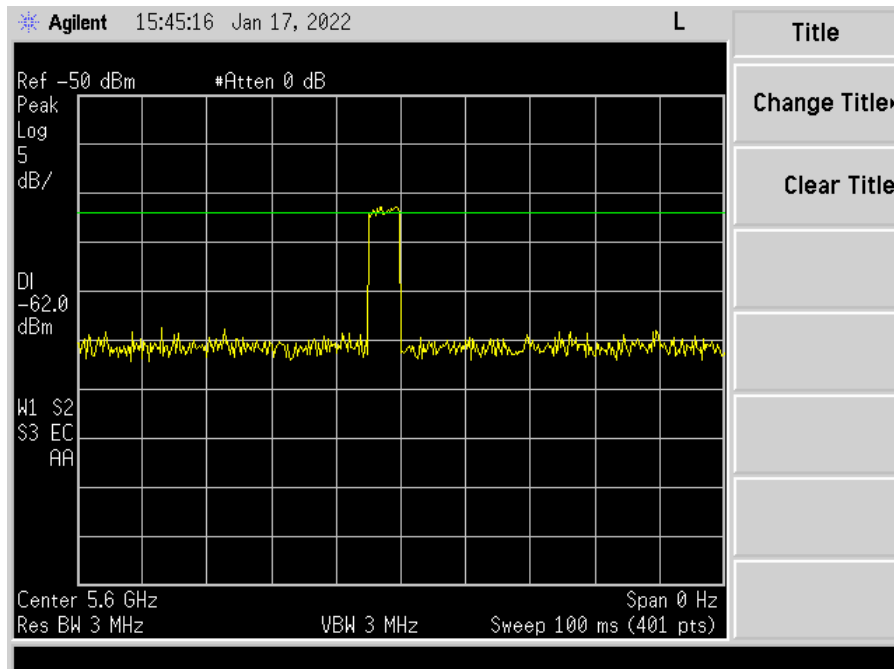

**Plot 2: Radar Level 2**

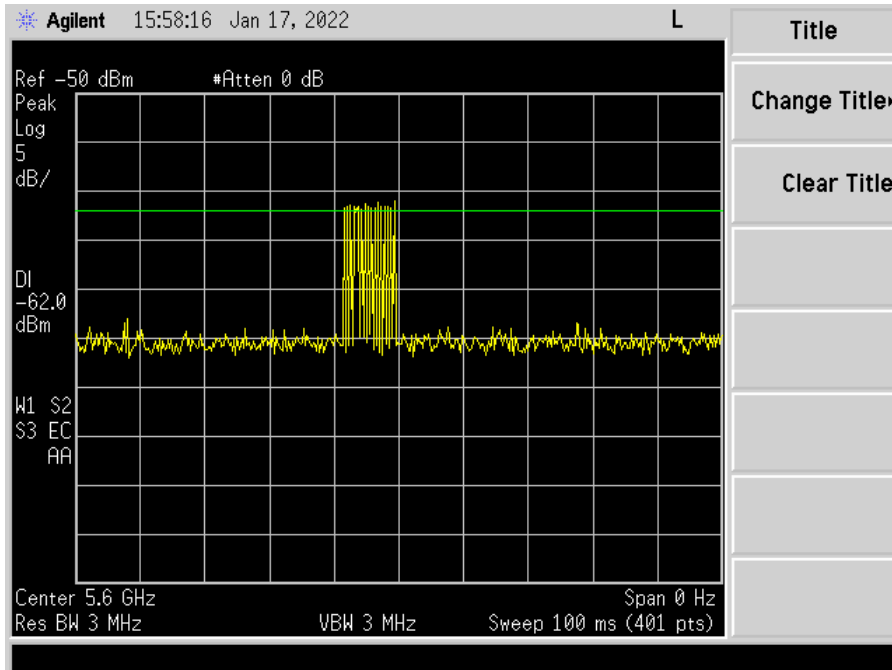


**Plot 3: Radar Level 3**

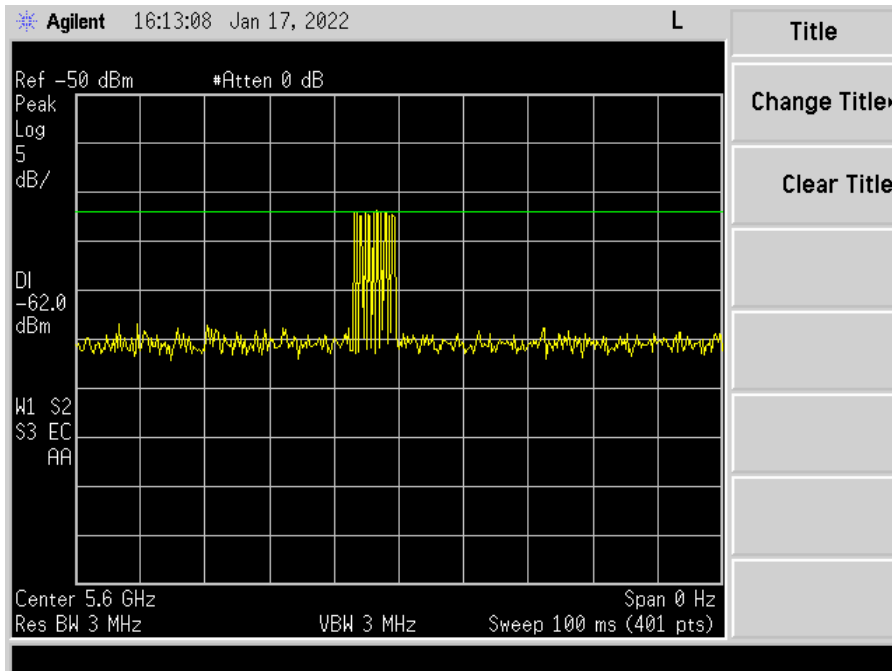


**Plot 4: Radar Level 4**



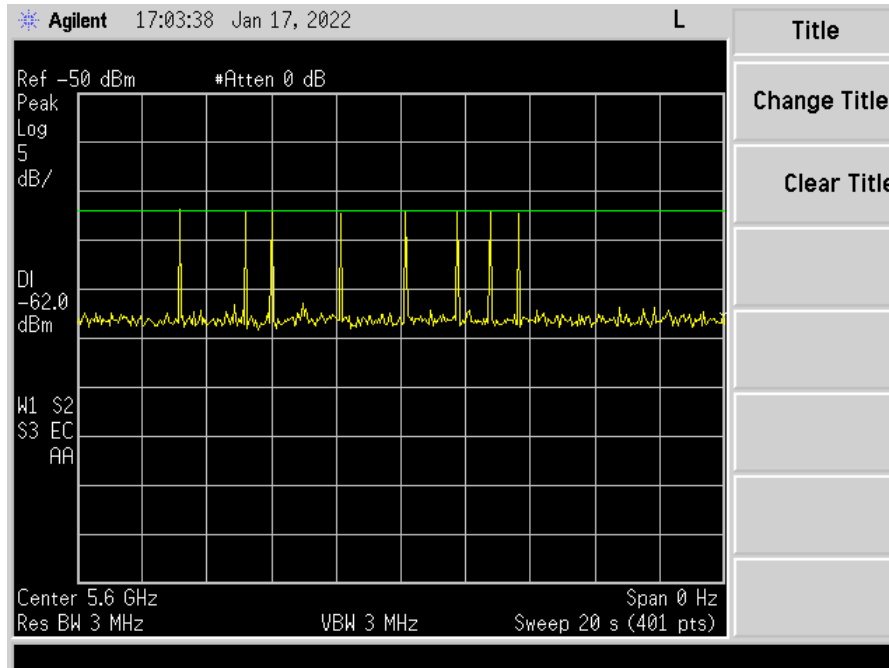

**Plot 5: Radar Level 5**

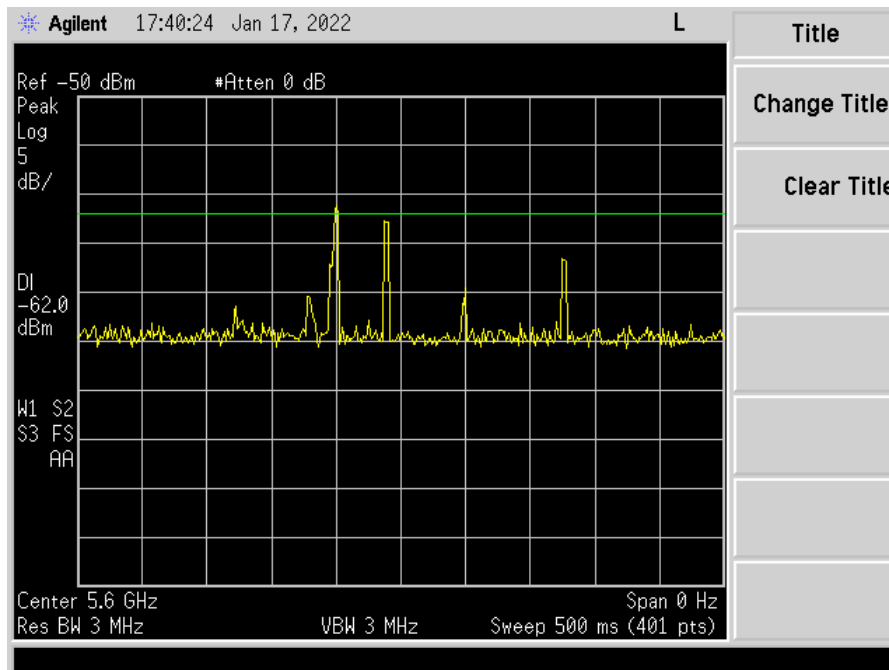

**Plot 6: Radar Level 6**


### **5.7.1 Channel Availability Check (CAC)**

The EUT shall perform a CAC to ensure that there is no radar operating on the channel. After the power-up sequence, at-least 1 minute shall be monitored on the intended operating frequency. For initial CAC, the EUT does not emit beacon, control, or data signals on the test channel until the power-up sequence has been completed and the UNII device checks for radar waveforms for one minute on the test channel. This test does not use any radar waveforms. The markers in the associated plots indicate initial beacons.


For radar burst at the beginning of the CAC. To verify successful radar detection on the selected channel during a period equal to the beginning of the CAC time, visual indication on the EUT of successful detection of the radar burst will be recorded and reported. Observation of the radar burst is show on the associated plot to be within the beginning of the CAC time. Emissions will continue to be monitored for the remaining 300 seconds.

For radar burst at the end of the CAC. To verify successful radar detection on the selected channel during a period equal to the end of the CAC time, visual indication on the EUT of successful detection of the radar burst will be recorded and reported. Observation of the radar burst is show on the associated plot to be within the end of the CAC time. Emissions will continue to be monitored for the remaining 300 seconds.


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the channel within the channel closing transmission time and channel move time, and does not transmit on a channel during the non-occupancy period after the detection and channel move.

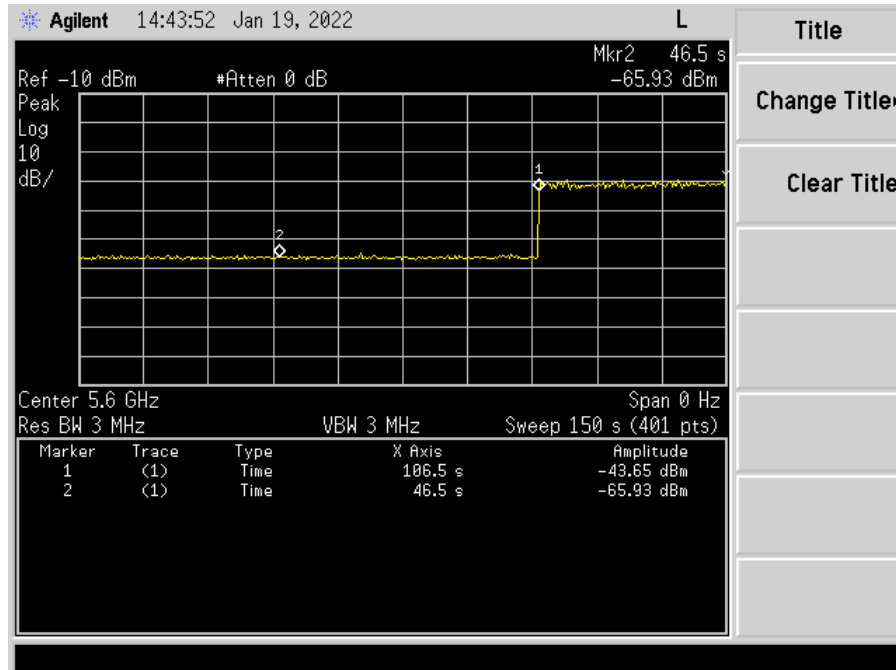

**Plot 7: DUT Turn On**

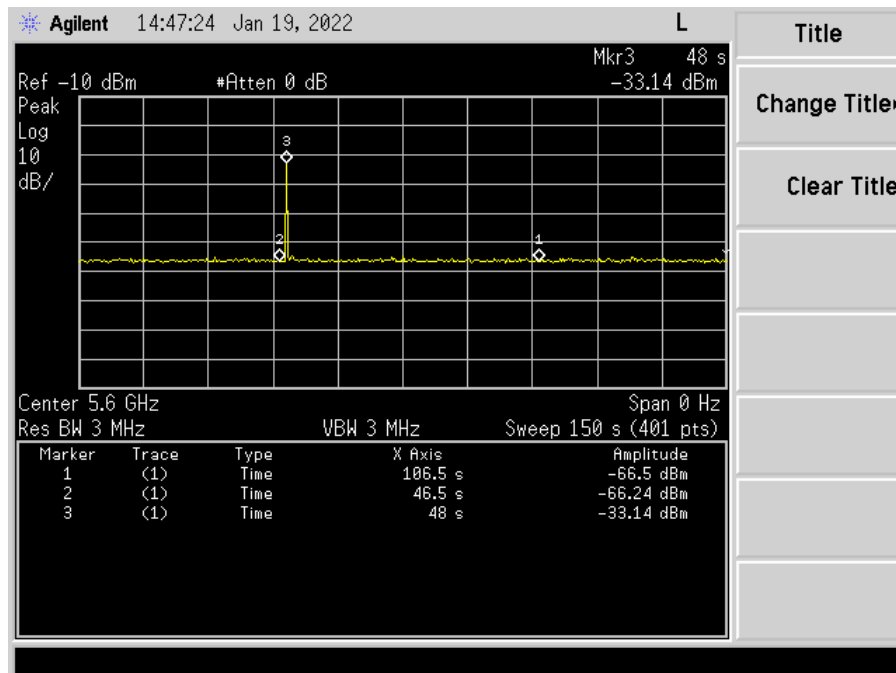

**Plot 8: CAC Beginning**

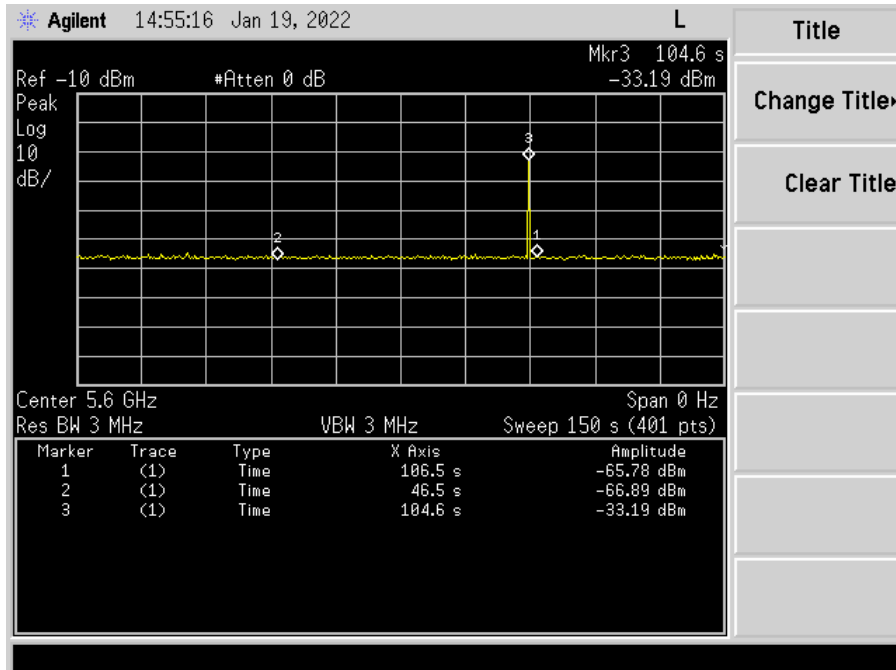

**Plot 9: CAC End**

### 5.7.2 In-service Monitoring


Channel Move Time	10 seconds
Channel Closing Transmission Time	200 ms + aggregate of 60 ms over remaining 10 second period
Non-occupancy period	Minimum 30 minutes

Verified during in-service monitoring: channel closing transmission time and channel move time. The transmissions were observed at the end of the radar burst on the operating channel for a duration of greater than 10 seconds. The transmissions were measured and recorded during the observation time. This was compared to the channel move time and channel closing time limits. One 12 second plot is reported for the short pulse radar type 0. A 60 ms plot is also provided to verify closing time for the aggregate transmission time starting from 200 ms after the end of the radar signal to the completion of the channel move.


During the 30 minutes observation time, the EUT did not make any transmissions on a channel after a radar signal was detected.

Please see plots below.


A spectrum analyzer is used as a monitor to verify that the EUT has vacated the channel within the channel closing transmission time and channel move time, and does not transmit on a channel during the non-occupancy period after the detection and channel move.

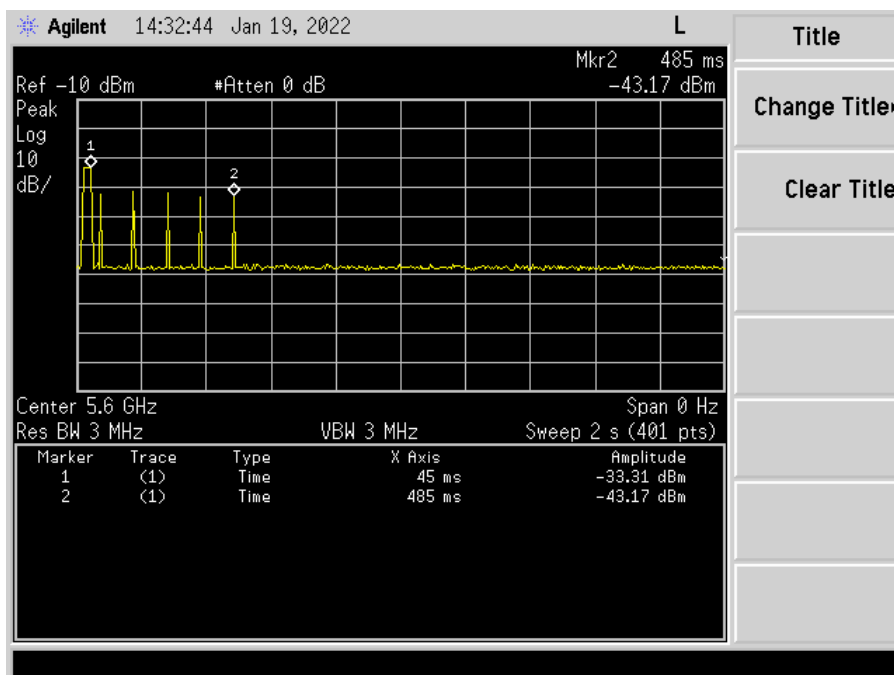

Plot 10: Channel Close (2 s)

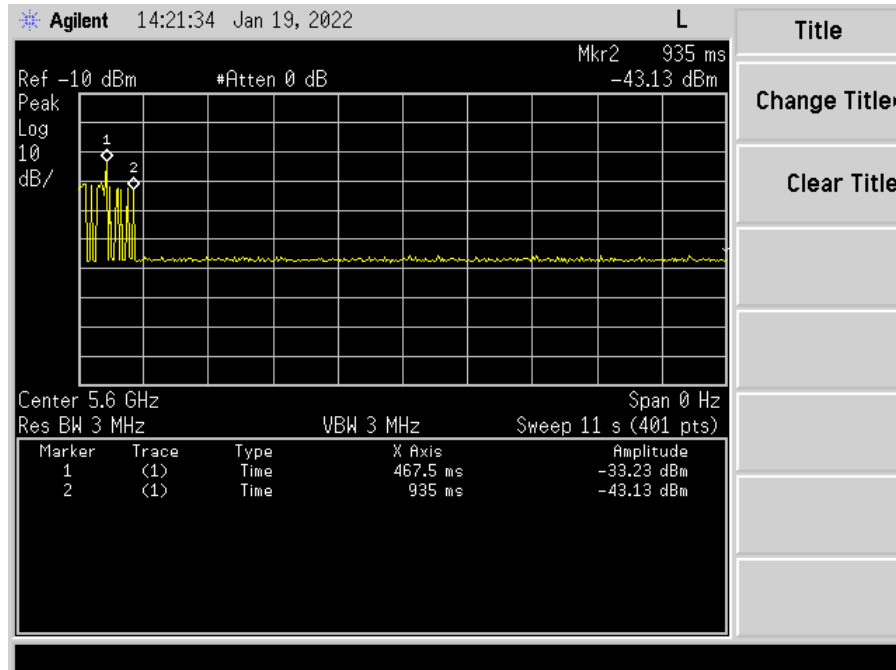

**Plot 11: Channel Move**

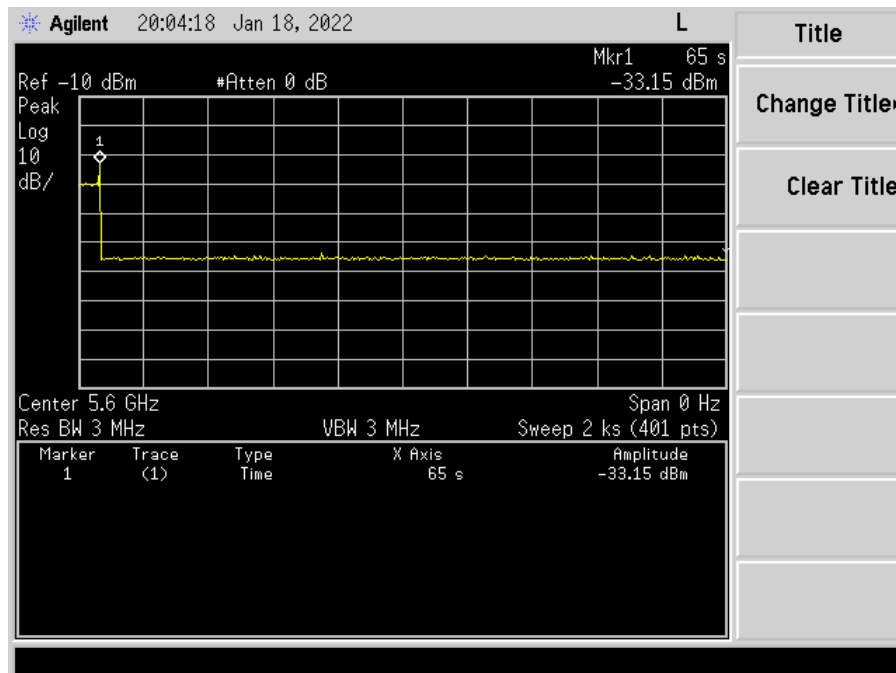

**Plot 12: Non-Occupancy Period**

**5.7.3 DFS Detection Bandwidth**
**20 MHz**

<b>EUT Frequency = 5600 MHz ; Bandwidth = 20 MHz</b>											
<b>Radar Frequency MHz</b>	<b>DFS Detection Trials (1 = Detection, 0 = No Detection)</b>										<b>Detection Rate %</b>
	<b>Trials</b>										
	1	2	3	4	5	6	7	8	9	10	
F_Low 5590	1	1	1	1	1	1	1	1	1	1	100
5591											
5592											
5593											
5594											
5595	1	1	1	1	1	1	1	1	1	1	100
5596											
5597											
5598											
5599											
5600	1	1	1	1	1	1	1	1	1	1	100
5601											
5602											
5603											
5604											
5605	1	1	1	1	1	1	1	1	1	1	100
5606											
5607											
5608											
5609											
F_High 5610	1	1	1	1	1	1	1	1	1	1	100
<b>Total Detection Percentage</b>											<b>100</b>
<b>Detection Bandwidth = FH-FL = 5590 MHz - 5610 MHz = 20 MHz</b>											
<b>99% Bandwidth = 19.8 MHz</b>											

**40 MHz**

EUT Frequency = 5590 MHz ; Bandwidth = 40 MHz											
Radar Frequency MHz	DFS Detection Trials (1 = Detection, 0 = No Detection)										Detection Rate %
	Trials										
	1	2	3	4	5	6	7	8	9	10	
F_Low 5570	1	1	1	1	1	1	1	1	1	1	100
5571											
5572											
5573											
5574											
5575	1	1	1	1	1	1	1	1	1	1	100
5576											
5577											
5578											
5579											
5580	1	1	1	1	1	1	1	1	1	1	100
5581											
5582											
5583											
5584											
5585	1	1	1	1	1	1	1	1	1	1	100
5586											
5587											
5588											
5589											
5590	1	1	1	1	1	1	1	1	1	1	100
5591											
5592											
5593											
5594											
5595	1	1	1	1	1	1	1	1	1	1	100
5596											
5597											
5598											
5599											
5600	1	1	1	1	1	1	1	1	1	1	100
5601											
5602											
5603											
5604											
5605	1	1	1	1	1	1	1	1	1	1	100
5606											
5607											
5608											
5609											
F_High 5610	1	1	1	1	1	1	1	1	1	1	100
Total Detection Percentage											100
Detection Bandwidth = FH-FL = 5570 MHz - 5610 MHz = 40 MHz											
99% Bandwidth = 39.6 MHz											



**80 MHz**

EUT Frequency = 5610 MHz ; Bandwidth = 80 MHz											
Radar Frequency MHz	DFS Detection Trials (1 = Detection, 0 = No Detection)										Detection Rate %
	Trials										
	1	2	3	4	5	6	7	8	9	10	
F_Low 5570	1	1	1	1	1	1	1	1	1	1	100
5571											
5572											
5573											
5574											
5575	1	1	1	1	1	1	1	1	1	1	100
5576											
5577											
5578											
5579											
5580	1	1	1	1	1	1	1	1	1	1	100
5581											
5582											
5583											
5584											
5585	1	1	1	1	1	1	1	1	1	1	100
5586											
5587											
5588											
5589											
5590	1	1	1	1	1	1	1	1	1	1	100
5591											
5592											
5593											
5594											
5595	1	1	1	1	1	1	1	1	1	1	100
5596											
5597											
5598											
5599											
5600	1	1	1	1	1	1	1	1	1	1	100
5601											
5602											
5603											
5604											
5605	1	1	1	1	1	1	1	1	1	1	100
5606											
5607											
5608											

5609												
5610	1	1	1	1	1	1	1	1	1	1	100	
5611												
5612												
5613												
5614												
5615	1	1	1	1	1	1	1	1	1	1	100	
5616												
5617												
5618												
5619												
5620	1	1	1	1	1	1	1	1	1	1	100	
5621												
5622												
5623												
5624												
5625	1	1	1	1	1	1	1	1	1	1	100	
5626												
5627												
5628												
5629												
5630	1	1	1	1	1	1	1	1	1	1	100	
5631												
5632												
5633												
5634												
5635	1	1	1	1	1	1	1	1	1	1	100	
5636												
5637												
5638												
5639												
5640	1	1	1	1	1	1	1	1	1	1	100	
5641												
5642												
5643												
5644												
5645	1	1	1	1	1	1	1	1	1	1	100	
5646												
5647												
5648												
5649												
F_High 5650	1	1	1	1	1	1	1	1	1	1	100	
Total Detection Percentage											100	
Detection Bandwidth = FH-FL = 5570 MHz - 5650 MHz = 80 MHz												
99% Bandwidth = 79.2 MHz												

### 5.7.4 Detection Probability

For statistical performance check. Demonstrating a minimum channel loading of approximately 17% or greater of the test. Observe the transmissions of the EUT at the end of the burst on the operating channel for duration greater than 10 seconds for short pulse radar type 1-4 and 6 to ensure detection occurs. Then observe the transmissions of the EUT at the end of the burst on the operating channel for duration greater than 22 seconds for long pulse radar type 5 to ensure detection occurs. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

Please see data below.

<b>Radar Type</b>	<b>Min successful detection (%)</b>	<b>Minimum Trials</b>
1	60	30
2	60	30
3	60	30
4	60	30
Types 1 - 4	80	120
5	80	30
6	70	30

**20 MHz**

RADAR TYPE 1				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	83	1	638	y
2	59	1	898	y
3	102	1	518	y
4	70	1	758	y
5	67	1	798	y
6	61	1	878	y
7	95	1	558	y
8	18	1	3066	n
9	65	1	818	y
10	89	1	598	y
11	81	1	658	y
12	57	1	938	y
13	68	1	778	n
14	74	1	718	y
15	72	1	738	y
16	79	1	674	y
17	92	1	575	y
18	75	1	712	y
19	26	1	2104	y
20	26	1	2055	y
21	20	1	2747	y
22	19	1	2899	y
23	85	1	620	y
24	32	1	1699	n
25	26	1	2053	y
26	60	1	882	n
27	44	1	1198	y
28	51	1	1052	y
29	46	1	1156	y
30	44	1	1201	y
				26/30: 86.7%

RADAR TYPE 2				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	28	2.6	178	y
2	27	2.3	226	y
3	26	1.5	223	y
4	25	1.6	176	y
5	26	4.7	190	y
6	29	3.1	184	y
7	28	4.9	171	y
8	24	3.5	189	y
9	28	1.5	196	y
10	29	4.3	192	y
11	26	3.6	181	y
12	24	1.6	210	y
13	28	4.2	156	y
14	29	1.5	197	y
15	26	3.7	226	y
16	27	2	218	y
17	24	1.6	153	y
18	26	1.6	226	y
19	29	2.9	174	y
20	26	3	192	y
21	26	2.1	203	y
22	23	2.8	172	y
23	24	3.4	223	y
24	24	4.2	169	y
25	26	1.8	190	y
26	28	3.4	209	y
27	28	3.7	157	y
28	28	3.4	195	y
29	25	3	185	y
30	25	1.6	223	y
				30/30: 100%

RADAR TYPE 3				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	17	6.4	490	y
2	17	6.4	296	y
3	17	7.6	499	y
4	18	6.1	466	y
5	17	8.6	206	y
6	17	9.1	299	y
7	16	7.8	440	y
8	18	7.8	276	y
9	17	8.5	420	y
10	17	9.8	440	y
11	16	9.6	316	y
12	18	8.9	419	y
13	18	8.5	206	y
14	17	9.1	286	y
15	17	7.4	404	y
16	18	7.9	389	y
17	16	7.5	426	y
18	18	8.8	397	y
19	16	7.6	352	y
20	16	6.1	263	y
21	18	7.4	475	y
22	18	6	493	y
23	17	7.9	306	y
24	16	7.2	315	y
25	17	7.4	339	y
26	17	7.5	225	y
27	17	8.1	381	y
28	18	8.4	264	y
29	18	7.8	396	y
30	17	8.8	229	y
				30/30: 100%

RADAR TYPE 4				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width ( $\mu$ sec)	PRI ( $\mu$ s)	Detection (yes/no)
1	16	13.6	416	y
2	12	19.8	494	y
3	12	11.7	354	y
4	16	12	410	y
5	13	15.9	379	y
6	15	13.3	339	y
7	13	17.7	283	y
8	14	16.8	413	y
9	15	18.2	318	y
10	12	16.3	234	y
11	15	16.9	207	y
12	13	12.6	207	y
13	16	17.4	446	y
14	14	16.2	499	y
15	12	19.1	319	y
16	13	18	337	y
17	14	13.3	432	y
18	12	14.7	439	y
19	14	14.1	463	y
20	14	13	351	y
21	13	19.9	377	y
22	16	14.7	352	y
23	16	15	428	y
24	15	15.7	296	y
25	14	11.3	383	y
26	16	11.5	393	y
27	14	15.5	409	y
28	16	11.1	300	y
29	13	17.3	358	y
30	14	17.1	298	y
				30/30: 100%

TYPE 5		Rohde & Schwarz K350 Pulse Sequencer DFS			
Trial #	Detection (yes/no)	Chirp Width (MHz)	Subset	Fc	
1	y	10	1	5500	
2	y	14	1	5500	
3	y	7	1	5500	
4	y	19	1	5500	
5	y	7	1	5500	
6	y	12	1	5500	
7	n	15	1	5500	
8	y	13	1	5500	
9	y	12	1	5500	
10	y	13	1	5500	
11	y	17	2	5497.8	
12	y	11	2	5495.4	
13	n	10	2	5495	
14	y	10	2	5495	
15	y	15	2	5497	
16	y	16	2	5497.4	
17	y	19	2	5498.6	
18	y	13	2	5496.2	
19	y	18	2	5498.2	
20	y	12	2	5495.8	
21	y	12	3	5504.2	
22	y	17	3	5502.2	
23	y	12	3	5504.2	
24	y	18	3	5501.8	
25	n	19	3	5501.4	
26	y	18	3	5501.8	
27	y	6	3	5506.6	
28	n	17	3	5502.2	
29	y	14	3	5503.4	
30	y	11	3	5504.6	
		26/30: 86.7%			



TYPE 6 S		Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Detection (yes/no)	
1	y	
2	n	
3	y	
4	y	
5	y	
6	n	
7	n	
8	y	
9	n	
10	y	
11	y	
12	y	
13	y	
14	y	
15	y	
16	y	
17	y	
18	y	
19	y	
20	y	
21	y	
22	n	
23	n	
24	y	
25	n	
26	y	
27	y	
28	y	
29	y	
30	n	
	22/30: 73.3%	

**40 MHz**

RADAR TYPE 1				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	95	1	556	y
2	25	1	2166	y
3	18	1	3023	y
4	23	1	2326	y
5	67	1	790	y
6	31	1	1709	n
7	39	1	1364	y
8	38	1	1420	y
9	53	1	1006	y
10	32	1	1688	y
11	60	1	891	y
12	18	1	3005	y
13	83	1	640	y
14	80	1	663	y
15	51	1	1050	y
16	21	1	2571	y
17	43	1	1254	y
18	35	1	1549	n
19	42	1	1265	y
20	38	1	1392	y
21	25	1	2159	y
22	18	1	2934	y
23	23	1	2298	y
24	29	1	1875	y
25	59	1	902	y
26	43	1	1253	y
27	25	1	2110	y
28	33	1	1621	n
29	73	1	729	y
30	25	1	2142	y
				27/30: 90%

RADAR TYPE 2				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	25	1.6	229	y
2	26	4	222	y
3	27	2.4	204	y
4	28	1.2	189	y
5	29	4.7	167	y
6	25	1.8	218	y
7	27	3.6	175	y
8	25	3.8	185	n
9	24	4	185	y
10	26	4.8	196	y
11	28	2.9	198	y
12	27	3.4	156	y
13	28	3.9	194	y
14	27	3.2	173	y
15	26	3.6	209	y
16	23	4.5	211	y
17	23	3.4	195	y
18	25	3.5	172	y
19	28	2.1	229	y
20	27	1.4	202	y
21	25	1.5	154	y
22	24	3.6	190	n
23	28	4	156	y
24	26	1.6	150	n
25	28	2.1	163	y
26	26	2.6	215	y
27	28	4.1	211	y
28	23	1.4	226	y
29	26	2.7	170	y
30	28	1.8	217	y
				27/30: 90%

RADAR TYPE 3				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	18	6.2	426	y
2	17	6.2	259	y
3	16	7.8	398	y
4	17	9.7	331	y
5	18	8.6	450	n
6	18	8.5	215	y
7	17	9.4	381	y
8	16	9.7	323	y
9	16	7.1	453	y
10	17	9.7	413	y
11	17	6.3	381	y
12	17	7.3	231	n
13	16	9.7	274	y
14	18	7.7	492	y
15	16	9.4	384	y
16	17	6.4	377	y
17	17	8.2	270	y
18	16	9.7	207	y
19	18	9.5	345	y
20	17	7.1	371	y
21	17	8.9	372	y
22	16	6	495	n
23	18	7.3	238	y
24	18	9.5	218	y
25	18	6.4	220	y
26	18	6.8	317	y
27	17	8.8	365	y
28	18	6.1	262	y
29	17	7.3	361	y
30	16	7.5	498	y
				27/30: 90%

RADAR TYPE 4				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	15	16.6	375	y
2	13	19.8	460	y
3	14	11	243	y
4	15	18.5	343	y
5	15	15	252	y
6	14	13.8	269	y
7	13	13.3	404	n
8	13	12.7	467	n
9	13	13.4	405	y
10	15	14.8	443	y
11	12	12.1	202	y
12	15	19	301	y
13	14	15.1	256	y
14	15	12.6	360	y
15	13	14	279	n
16	12	18.3	236	y
17	15	16.2	332	y
18	13	11.2	422	y
19	12	18.2	346	y
20	16	18.6	419	y
21	16	15.8	347	y
22	14	12.7	388	y
23	15	19.5	438	y
24	13	16.3	200	n
25	14	16.3	490	y
26	15	15.6	322	n
27	13	13.2	223	y
28	12	16.3	326	y
29	12	15.8	344	y
30	14	18.1	252	n
				24/30: 80%

TYPE 5		Rohde & Schwarz K350 Pulse Sequencer DFS			
Trial #	Detection (yes/no)	Chirp Width (MHz)	Subset	Fc	
1	y	10	1	5500	
2	y	11	1	5500	
3	y	9	1	5500	
4	y	19	1	5500	
5	y	13	1	5500	
6	y	15	1	5500	
7	y	5	1	5500	
8	n	7	1	5500	
9	y	16	1	5500	
10	y	12	1	5500	
11	y	14	2	5496.6	
12	y	7	2	5493.8	
13	y	7	2	5493.8	
14	y	17	2	5497.8	
15	y	16	2	5497.4	
16	y	17	2	5497.8	
17	y	10	2	5495	
18	y	7	2	5493.8	
19	y	11	2	5495.4	
20	y	17	2	5497.8	
21	n	14	3	5503.4	
22	y	15	3	5503	
23	y	15	3	5503	
24	y	14	3	5503.4	
25	y	9	3	5505.4	
26	y	9	3	5505.4	
27	y	10	3	5505	
28	y	10	3	5505	
29	y	6	3	5506.6	
30	y	10	3	5505	
		28/30: 93.3%			

TYPE 6 S		Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Detection (yes/no)	
1	y	
2	n	
3	y	
4	y	
5	y	
6	y	
7	y	
8	n	
9	y	
10	y	
11	y	
12	y	
13	y	
14	y	
15	n	
16	y	
17	y	
18	y	
19	n	
20	y	
21	y	
22	n	
23	y	
24	y	
25	y	
26	n	
27	y	
28	n	
29	y	
30	y	
	23/30: 76.7%	

**80 MHz**

RADAR TYPE 1				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	39	1	1355	y
2	44	1	1206	y
3	60	1	885	y
4	66	1	805	y
5	37	1	1454	y
6	58	1	922	y
7	49	1	1084	y
8	45	1	1186	y
9	25	1	2190	n
10	23	1	2382	y
11	45	1	1176	y
12	21	1	2531	y
13	67	1	787	y
14	19	1	2889	y
15	40	1	1326	y
16	51	1	1043	y
17	22	1	2493	y
18	32	1	1686	y
19	64	1	835	n
20	38	1	1423	y
21	52	1	1018	y
22	23	1	2340	y
23	33	1	1632	y
24	64	1	833	y
25	20	1	2674	n
26	42	1	1271	y
27	29	1	1876	y
28	35	1	1540	n
29	29	1	1840	y
30	58	1	909	y
				26/30: 86.7%



RADAR TYPE 2				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	27	3.5	164	y
2	27	3.2	203	y
3	24	3.3	183	y
4	27	4.3	202	y
5	25	3.4	153	y
6	24	1.9	198	y
7	25	3.9	170	y
8	25	4.8	165	y
9	28	1.7	188	y
10	29	4.6	226	y
11	25	1.3	222	y
12	24	2	157	y
13	26	4.5	156	y
14	25	1	169	n
15	28	4.8	226	y
16	24	2.7	201	y
17	26	3	228	y
18	27	2.7	201	y
19	28	4.9	185	y
20	25	3.5	194	y
21	29	1.5	183	y
22	24	4.3	174	y
23	28	4.9	208	y
24	23	4	214	y
25	26	4.7	219	y
26	25	2.8	175	y
27	28	2.9	217	y
28	29	2	216	y
29	24	1.3	216	n
30	25	4.7	193	y
				28/30: 93.3%

RADAR TYPE 3				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	17	9.7	224	y
2	18	8.4	232	y
3	16	9.7	464	y
4	17	9.7	287	y
5	18	8.9	461	y
6	18	8.7	307	y
7	17	6.9	283	y
8	17	8.9	346	y
9	16	6.5	457	y
10	17	7	486	y
11	17	9	283	n
12	17	7.9	299	y
13	17	9.1	284	y
14	17	7.4	324	y
15	17	7.5	228	y
16	18	9.8	205	n
17	16	6.6	275	n
18	17	9	430	y
19	16	9.7	376	y
20	17	8.1	247	y
21	16	8.8	434	n
22	16	7	281	y
23	16	9	416	n
24	17	6.1	279	y
25	16	6	453	y
26	18	7.6	376	y
27	18	7	219	y
28	18	7.2	415	y
29	17	9.2	359	y
30	17	9.5	248	y
				25/30: 83.3%

RADAR TYPE 4				Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Number of Pulses per Burst	Pulse Width (µsec)	PRI (µs)	Detection (yes/no)
1	14	17	344	y
2	12	19.3	338	y
3	13	11.4	393	y
4	14	14.3	440	y
5	14	16.1	461	y
6	13	13.1	347	y
7	13	12.1	227	y
8	16	11.3	422	y
9	14	18.9	362	y
10	14	15.7	260	y
11	14	11.4	379	y
12	16	14.2	380	y
13	16	17.9	455	y
14	15	13.9	427	y
15	14	18.2	437	y
16	13	15.7	357	y
17	13	16.7	274	y
18	14	13.9	218	y
19	14	14.5	497	n
20	14	13.6	261	y
21	13	12	337	y
22	16	13.1	290	y
23	13	11	424	y
24	15	14.5	334	y
25	16	12.2	476	y
26	14	11.6	282	y
27	13	18.7	477	y
28	13	13	343	n
29	14	16.8	293	y
30	13	16.1	431	y
				28/30: 93.3%

TYPE 5		Rohde & Schwarz K350 Pulse Sequencer DFS			
Trial #	Detection (yes/no)	Chirp Width (MHz)	Subset	Fc	
1	y	5	1	5500	
2	y	10	1	5500	
3	y	5	1	5500	
4	y	18	1	5500	
5	y	8	1	5500	
6	y	10	1	5500	
7	y	7	1	5500	
8	y	7	1	5500	
9	y	5	1	5500	
10	y	16	1	5500	
11	y	15	2	5497	
12	y	15	2	5497	
13	y	12	2	5495.8	
14	y	6	2	5493.4	
15	y	10	2	5495	
16	n	19	2	5498.6	
17	y	15	2	5497	
18	y	5	2	5493	
19	y	5	2	5493	
20	y	16	2	5497.4	
21	y	12	3	5504.2	
22	y	18	3	5501.8	
23	y	6	3	5506.6	
24	y	15	3	5503	
25	y	9	3	5505.4	
26	n	17	3	5502.2	
27	y	17	3	5502.2	
28	y	14	3	5503.4	
29	y	5	3	5507	
30	y	9	3	5505.4	
		28/30: 93.3%			

TYPE 6 S		Rohde & Schwarz K350 Pulse Sequencer DFS
Trial #	Detection (yes/no)	
1	y	
2	y	
3	y	
4	y	
5	y	
6	y	
7	y	
8	y	
9	y	
10	y	
11	y	
12	y	
13	y	
14	y	
15	y	
16	y	
17	y	
18	y	
19	y	
20	n	
21	y	
22	y	
23	n	
24	y	
25	y	
26	y	
27	y	
28	y	
29	y	
30	y	
		28/30: 93.3%

**-- End of Test Report --**