



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Ubiquiti Networks, Inc.
Applicant Address	685 Third Avenue, 27th Floor New York, New York 10017 USA
FCC ID	SWX-M445GL
Manufacturer's company	Ubiquiti Networks, Inc.
Manufacturer Address	685 Third Avenue, 27th Floor New York, New York 10017 USA

Product Name	WiFi 5G Module
Brand Name	UBIQUITI
Model No.	4x4-5GL
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5350MHz
Received Date	Jun. 21, 2016
Final Test Date	Aug. 30, 2016
Submission Type	Original Equipment

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01r04, KDB662911 D01 v02r01, KDB644545 D03 v01, ET Docket No. 13-49; FCC 16-24.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	8
3.3. Table for Filed Antenna.....	9
3.4. Table for Carrier Frequencies .....	10
3.5. Table for 80+80 MHz Mode.....	10
3.6. Table for Test Modes.....	11
3.7. Table for Testing Locations.....	16
3.8. Table for Supporting Units .....	17
3.9. Table for Parameters of Test Software Setting .....	18
3.10. EUT Operation during Test .....	23
3.11. Duty Cycle.....	24
3.12. Test Configurations .....	25
<b>4. TEST RESULT</b> .....	<b>28</b>
4.1. AC Power Line Conducted Emissions Measurement.....	28
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	33
4.3. Maximum Conducted Output Power Measurement.....	74
4.4. Power Spectral Density Measurement .....	85
4.5. Radiated Emissions Measurement .....	118
4.6. Band Edge Emissions Measurement .....	157
4.7. Frequency Stability Measurement .....	193
4.8. Antenna Requirements .....	201
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>202</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>204</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A4</b>
<b>APPENDIX B. MAXIMUM E.I.R.P AT ANY ELEVATION ANGLE ABOVE 30 DEGREES</b> .....	<b>B1 ~ B2</b>
<b>PHOTOGRAPHS OF EUT V01</b>	



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR661623-12	Rev. 01	Initial issue of report	Sep. 07, 2017



## 1. VERIFICATION OF COMPLIANCE

Product Name : WIFI 5G Module  
Brand Name : UBIQUITI  
Model No. : 4x4-5GL  
Applicant : Ubiquiti Networks, Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jun. 21, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Sam Chen", is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies
4.3	15.407(a)	Maximum Conducted Output Power	Complies
4.4	15.407(a)	Power Spectral Density	Complies
4.5	15.407(b)	Radiated Emissions	Complies
4.6	15.407(b)	Band Edge Emissions	Complies
4.7	15.407(g)	Frequency Stability	Complies
4.8	15.203	Antenna Requirements	Complies

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5350MHz
Channel Number	8 for 20MHz bandwidth ; 4 for 40MHz bandwidth 2 for 80MHz bandwidth
Channel Bandwidth (99%)	<p><b>For non-beamforming mode</b></p> <p><b>For indoor use master B1 and indoor, outdoor use B2</b></p> <p>U-NII-1:</p> <p>IEEE 802.11a: 15.72 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 16.50 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 35.89 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 75.54 MHz</p> <p>U-NII-2A:</p> <p>IEEE 802.11a: 15.54 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 16.50 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.18 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 74.39 MHz</p> <p><b>For indoor use slave without radar detection B1</b></p> <p>U-NII-1:</p> <p>IEEE 802.11a: 15.46 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 16.41 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 35.89 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 75.54 MHz</p> <p><b>For outdoor use master B1</b></p> <p>U-NII-1:</p> <p>IEEE 802.11a: 15.54 MHz</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 16.32 MHz</p>

	<p>IEEE 802.11ac MCS0/Nss1 (VHT40): 36.03 MHz  IEEE 802.11ac MCS0/Nss1 (VHT80): 75.54 MHz</p> <p><b>For indoor use master</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p>U-NII-2A:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p><b>For indoor use slave without radar detection</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p>U-NII-2A:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99MHz</p> <p><b>For outdoor use master</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p>U-NII-2A:  IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p><b>For beamforming mode</b></p> <p><b>For indoor use master B1 and indoor, outdoor use B2</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz  IEEE 802.11ac MCS0/Nss1 (VHT40): 37.05 MHz  IEEE 802.11ac MCS0/Nss1 (VHT80): 76.12 MHz</p> <p>U-NII-2A:  IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz  IEEE 802.11ac MCS0/Nss1 (VHT40): 37.19 MHz  IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz</p> <p><b>For indoor use slave without radar detection B1</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz  IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz  IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz</p> <p><b>For outdoor use master B1</b></p> <p>U-NII-1:  IEEE 802.11ac MCS0/Nss1 (VHT20): 17.97 MHz  IEEE 802.11ac MCS0/Nss1 (VHT40): 36.90 MHz  IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz</p>
--	---

	<p><b>For indoor use master</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p><b>For indoor use slave without radar detection</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.99 MHz</p> <p><b>For outdoor use master</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.56 MHz</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 154.56 MHz</p>
<p>Maximum Conducted Output Power</p>	<p><b>For Non-beamforming mode</b></p> <p><b>For indoor use master B1 and indoor, outdoor use B2</b></p> <p>U-NII-1: IEEE 802.11a: 24.32 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 24.14 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 26.15 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 20.57 dBm</p> <p>U-NII-2A: IEEE 802.11a: 18.36 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 18.18 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 21.18 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 20.69 dBm</p> <p><b>For indoor use slave without radar detection B1</b></p> <p>U-NII-1: IEEE 802.11a: 18.35 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 18.24 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 21.20 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 20.57 dBm</p> <p><b>For outdoor use master B1</b></p> <p>U-NII-1: IEEE 802.11a: 14.98 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 14.75 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 14.78 dBm</p>



	<p>IEEE 802.11ac MCS0/Nss1 (VHT80): 14.76 dBm</p> <p><b>For indoor use master</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 16.90 dBm</p> <p>U-NII-2A:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 16.88 dBm</p> <p><b>For indoor use slave without radar detection</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 16.90 dBm</p> <p>U-NII-2A:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 16.88 dBm</p> <p><b>For outdoor use master</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 14.72 dBm</p> <p>U-NII-2A:</p> <p>IEEE 802.11ac MCS0/Nss2 (VHT80+80): 14.39 dBm</p> <p><b>For beamforming mode</b></p> <p><b>For indoor use master B1 and indoor, outdoor use B2</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 23.74 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 23.82 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 22.36 dBm</p> <p>U-NII-2A:</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.75 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 17.88 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 17.47 dBm</p> <p><b>For indoor use slave without radar detection B1</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 17.54 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 17.71 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 17.36 dBm</p> <p><b>For outdoor use master B1</b></p> <p>U-NII-1:</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT20): 8.65 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT40): 8.46 dBm</p> <p>IEEE 802.11ac MCS0/Nss1 (VHT80): 8.33 dBm</p>
--	---

	<p><b>For indoor use master</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 18.52 dBm</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 18.31 dBm</p> <p><b>For indoor use slave without radar detection</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 18.52 dBm</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 18.31 dBm</p> <p><b>For outdoor use master</b></p> <p>U-NII-1: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 11.75 dBm</p> <p>U-NII-2A: IEEE 802.11ac MCS0/Nss2 (VHT80+80): 11.31 dBm</p>
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming

Note: The EUT has beamforming function for 802.11n/ac.

### Antenna and Bandwidth

Antenna	Four (TX)		
	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4
802.11ac (VHT80)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	-	-	PIFA Antenna	N/A	6
2	-	-	PIFA Antenna	N/A	6
3	-	-	PIFA Antenna	N/A	6
4	-	-	PIFA Antenna	N/A	6

Note: Ant. 1~Ant. 4 Connect to chain 1~chain 4.

**For IEEE 802.11a/n/ac mode (4TX/4RX):**

Chain 1, Chain 2, Chain 3 and Chain 4 can be used as transmitting/receiving antenna.

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 52, 56, 60, 64.

For 40MHz bandwidth systems, use Channel 38, 46, 54, 62.

For 80MHz bandwidth systems, use Channel 42, 58.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz U-NII-1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-
5250~5350 MHz U-NII-2A	52	5260 MHz	60	5300 MHz
	54	5270 MHz	62	5310 MHz
	56	5280 MHz	64	5320 MHz
	58	5290 MHz	-	-

### 3.5. Table for 80+80 MHz Mode

Type	Channel No.	Frequency
1	42+58	5210+5290 MHz

### 3.6. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain	
AC Power Conducted Emission	CTX	-	-	-	
Max. Conducted Output Power	<b>For non-beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use</b>				
	11a/BPSK	U-NII-1 U-NII-2A	6Mbps	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11a/BPSK	U-NII-1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4
	<b>For beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use master</b>				
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4

Power Spectral Density	<b>For non-beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use</b>				
	11a/BPSK	U-NII-1 U-NII-2A	6Mbps	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11a/BPSK	U-NII-1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4
	<b>For beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use master</b>				
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4

26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement	<b>For non-beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use</b>				
	11a/BPSK	U-NII-1 U-NII-2A	6Mbps	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11a/BPSK	U-NII-1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4
	<b>For beamforming mode</b>				
	<b>For B1 indoor use master and B2 indoor, outdoor use master</b>				
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For B1 indoor use slave without radar detection, B1 outdoor use master</b>				
	11ac VHT20	U-NII-1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	U-NII-1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	U-NII-1	MCS0/Nss1	42	1+2+3+4



Radiated Emission Below 1GHz	CTX	-	-	-	
Radiated Emission Above 1GHz	<b>For non-beamforming mode</b>				
	11a/BPSK	U-NII-1 U-NII-2A	6Mbps	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4
	<b>For beamforming mode</b>				
	11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4
	11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4
	11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4

Band Edge Emission	For non-beamforming mode				
	11a/BPSK	U-NII-1 U-NII-2A	6Mbps	36/40/48/52/60/ 64	1+2+3+4
11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4	
11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4	
11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4	
For beamforming mode					
11ac VHT20	U-NII-1 U-NII-2A	MCS0/Nss1	36/40/48/52/60/ 64	1+2+3+4	
11ac VHT40	U-NII-1 U-NII-2A	MCS0/Nss1	38/46/54/62	1+2+3+4	
11ac VHT80	U-NII-1 U-NII-2A	MCS0/Nss1	42/58	1+2+3+4	
Frequency Stability	20 MHz	U-NII-1 U-NII-2A	-	40/60	1
	40 MHz	U-NII-1 U-NII-2A	-	38/62	1
	80 MHz	U-NII-1 U-NII-2A	-	42/58	1

Note 1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

Note 2: There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode for 802.11n/ac. All test results were recorded in the report.

**802.11ac MCS0/Nss2 VHT80+80**

Test Items	Mode		Data Rate	Type	Channel	Chain	
Max. Conducted Output Power	11ac	U-NII-1	MCS0/Nss2	For indoor use master			
Power Spectral Density	VHT80+80	U-NII-2A		1	42	1+2	
26dB Spectrum Bandwidth & 99% Occupied Bandwidth Measurement					58	3+4	
Radiated Emission Above 1GHz				For indoor use slave without radar detection, outdoor use master B1			
Band Edge Emission				1	42	1+2	
					58	3+4	

Note: The test mode as above, the rest type of slave without radar detection and outdoor master has been covered by indoor master.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. CTX

**For Radiated Emission test (Below 1GHz):**

Mode 1. CTX at Z-axis

Mode 2. CTX at Y-axis

Mode 2 generated the worst test result, so it was recorded in this report.

**For Radiated Emission test (Above 1GHz):**

The EUT can be placed in Y-axis and Z-axis. After evaluating, The worst case was found at Z-axis, so it's recorded in this report.

Mode 1. CTX at Z-axis

**3.7. Table for Testing Locations**

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB

<For below 1GHz test and above 1GHz test non-beamforming mode>

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
PoE	UBIQUITI	GP-D480-050G	DoC
Fixture	UBIQUITI	UAP-AC-HD_REV03	N/A

<For above 1GHz test beamforming mode>

Support Unit	Brand	Model	FCC ID
Notebook*2	DELL	E4300	DoC
PoE	UBIQUITI	GP-D480-050G	DoC
RX Device	UBIQUITI	4x4-5G	SWX-M445G
Fixture	UBIQUITI	UAP-AC-HD_REV03	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC
PoE	UBIQUITI	GP-D480-050G	DoC
Test Fixture	UBIQUITI	UAP-AC-HD_REV03	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
PoE	UBIQUITI	GP-D480-050G	DoC
Fixture	UBIQUITI	UAP-AC-HD_REV03	N/A

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For non-beamforming mode**

**For indoor use master B1 and indoor, outdoor use B2**

Test Software Version	QCA						
Mode	Test Frequency (MHz)						
	NCB: 20MHz						
	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz	
802.11a	16.5	16.5	16.5	10.5	10.5	10.5	
802.11ac MCS0/Nss1 VHT20	16.5	16.5	16.5	10.5	10.5	10.5	
Mode	NCB: 40MHz						
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz		5270 MHz		5310 MHz
	15.5		18.5		13.5		13.5
Mode	NCB: 80MHz						
802.11ac MCS0/Nss1 VHT80	5210 MHz			5290 MHz			
	11.5			13			

**For indoor use slave without radar detection B1**

Test Software Version	QCA		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	10.5	10.5	10.5
802.11ac MCS0/Nss1 VHT20	10.5	10.5	10.5
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz
	13.5		13.5
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	11.5		

**For outdoor use master B1**

Test Software Version	QCA		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	6.5	6.5	6.5
802.11ac MCS0/Nss1 VHT20	6.5	6.5	6.5
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz
	6.5		6.5
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	6.5		

**802.11ac MCS0/Nss2 VHT80+80**

Test Software Version	QCARCT V3.0.197.0
Mode	NCB: 80MHz+80MHz
802.11ac MCS0/Nss2 VHT80+80	Type 1
	5210+5290 MHz
	12

**For outdoor use master B1**

Test Software Version	QCA
Mode	NCB: 80MHz+80MHz
802.11ac MCS0/Nss2 VHT80+80	Type 1
	5210+5290 MHz
	9.5

**For beamforming mode**
**For indoor use master B1 and indoor, outdoor use B2**

Test Software Version	QCA v3.0.197.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz					
	5180 MHz	5200 MHz	5240 MHz	5260 MHz	5300 MHz	5320 MHz
802.11ac MCS0/Nss1 VHT20	22	22	22	16.5	16.5	16.5
Mode	NCB: 40MHz					
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz		5270 MHz	
	22		22		16.5	
Mode	NCB: 80MHz					
802.11ac MCS0/Nss1 VHT80	5210 MHz			5290 MHz		
	21.5			16.5		

**For indoor use slave without radar detection B1**

Test Software Version	QCA v3.0.197.0		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11ac MCS0/Nss1 VHT20	16.5	16.5	16.5
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz		5230 MHz
	16.5		16.5
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	16.5		



## For outdoor use master B1

Test Software Version	QCA		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11ac MCS0/Nss1 VHT20	7	7	7
Mode	NCB: 40MHz		
	5190 MHz	5230 MHz	
802.11ac MCS0/Nss1 VHT40	7.5	7.5	
Mode	NCB: 80MHz		
	5210 MHz		
802.11ac MCS0/Nss1 VHT80	7.5		

**802.11ac MCS0/Nss2 VHT80+80**

Test Software Version	QCA
Mode	NCB: 80MHz+80MHz
802.11ac MCS0/Nss2 VHT80+80	Type 1
	5210+5290 MHz
	21

**For outdoor use master B1**

Test Software Version	QCA
Mode	NCB: 80MHz+80MHz
802.11ac MCS0/Nss2 VHT80+80	Type 1
	5210+5290 MHz
	14

**3.10. EUT Operation during Test**

For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN 7 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under Telnet.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by RX Deviec and transmit duty cycle no less 98%

### 3.11. Duty Cycle

For non-beamforming mode:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Min. VBW (kHz)
802.11a	2.020	2.140	94.39	0.25	0.50
802.11ac MCS0/Nss1 VHT20	5.000	5.100	98.04	0.09	0.01
802.11ac MCS0/Nss1 VHT40	2.320	2.540	91.34	0.39	0.43
802.11ac MCS0/Nss1 VHT80	1.136	1.224	92.81	0.32	0.88
802.11ac MCS0/Nss2 VHT80+80	2.210	2.310	95.67	0.19	0.45

For beamforming mode:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Min. VBW (kHz)
802.11ac MCS0/Nss1 VHT20	1.751	1.925	90.96	0.41	0.57
802.11ac MCS0/Nss1 VHT40	1.664	1.854	89.75	0.47	0.60
802.11ac MCS0/Nss1 VHT80	1.915	2.105	90.97	0.41	0.52
802.11ac MCS0/Nss2 VHT80+80	1.764	1.944	90.74	0.42	0.57

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

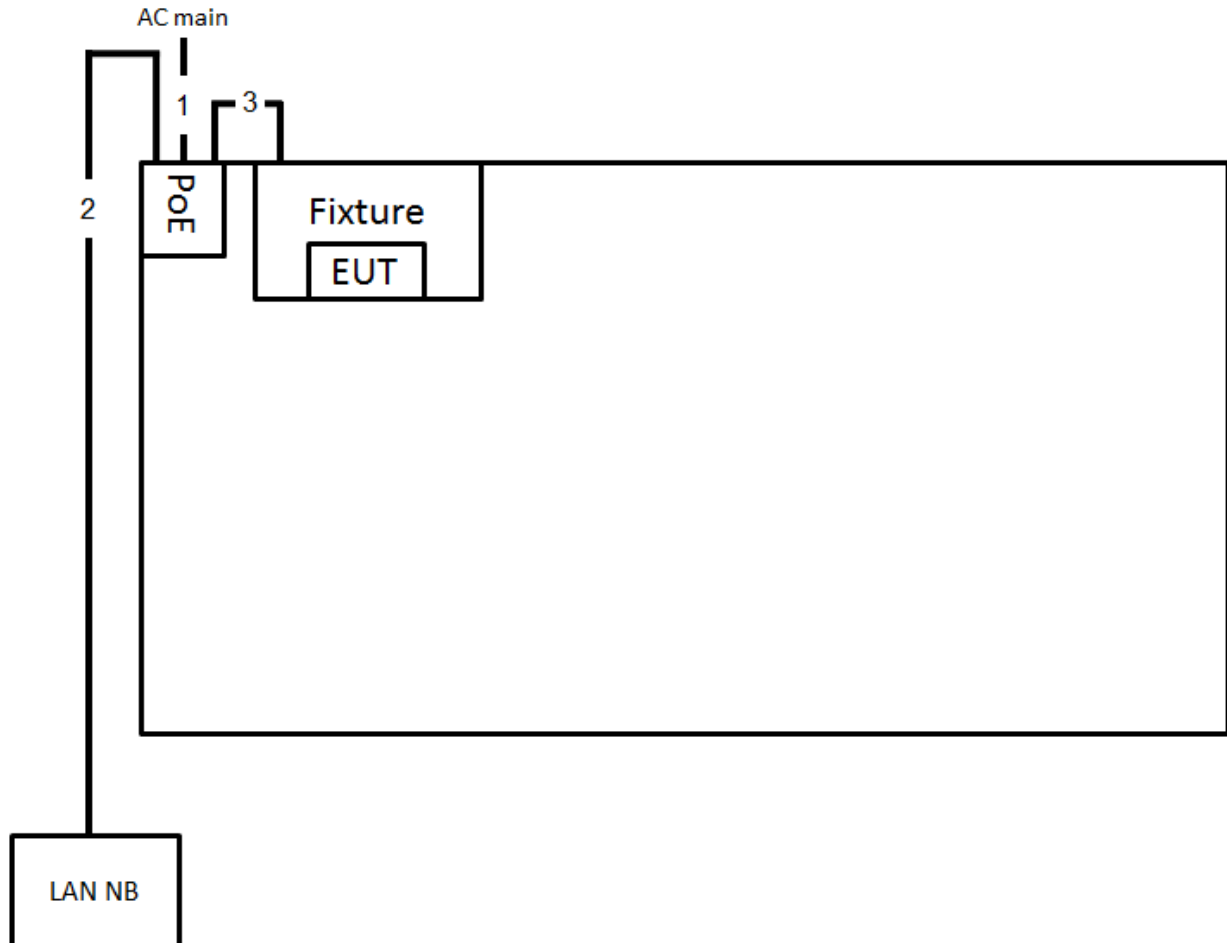

Item	Connection	Shielded	Length
1	Power cable	No	0.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m


### 3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz and above 1GHz test non-beamforming mode

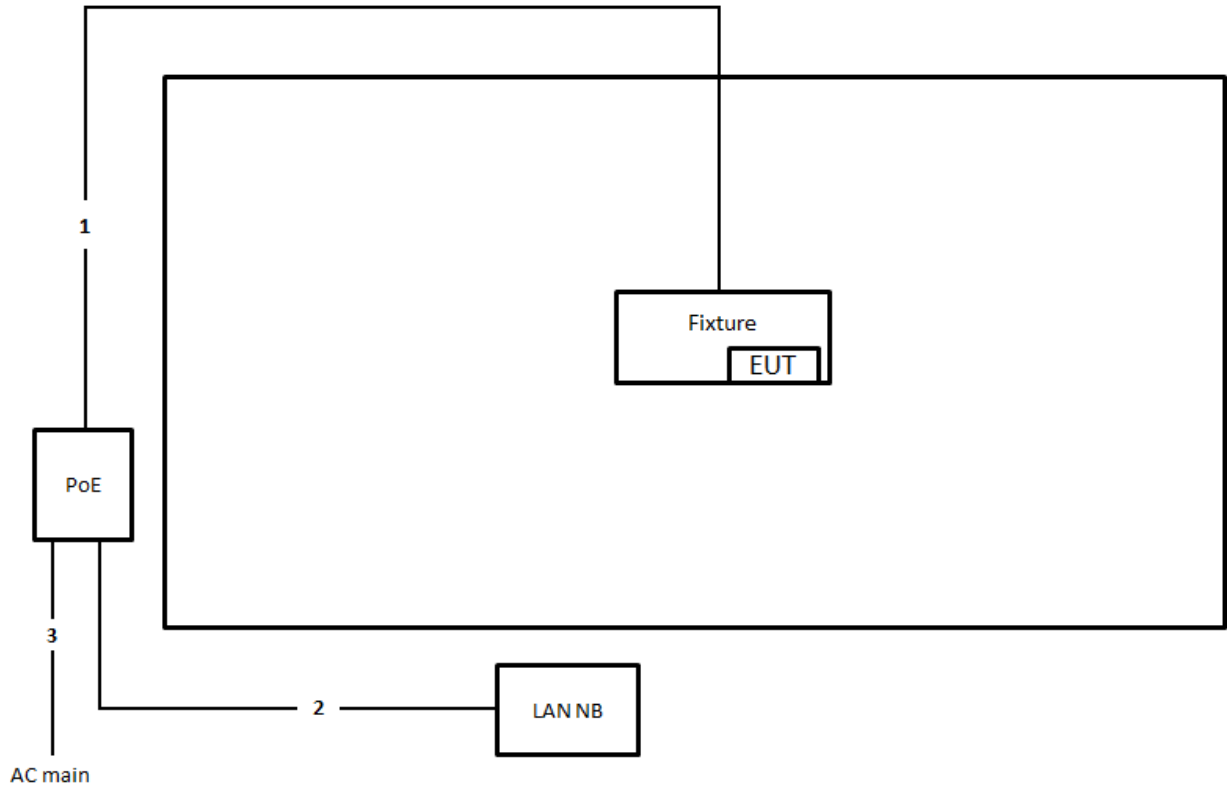

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	0.5m

Test Configuration: above 1GHz beamforming mode

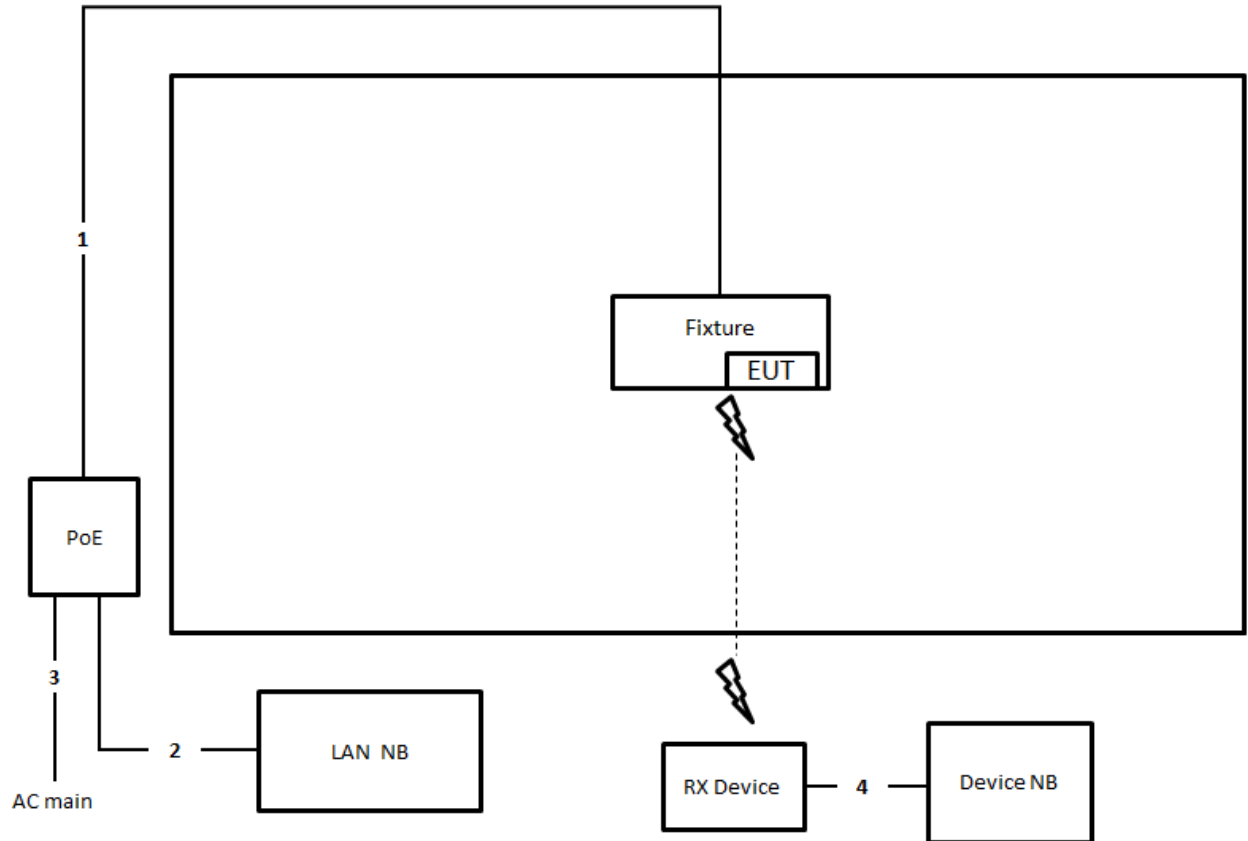

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	Power cable	No	0.5m
4	RJ-45 cable	No	1.5m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

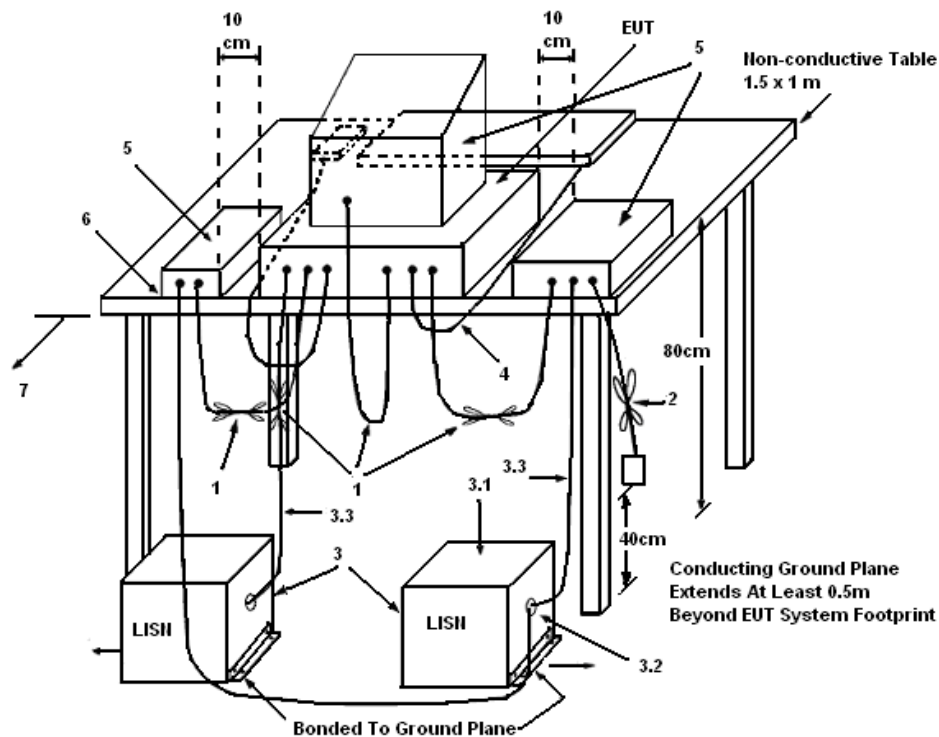

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.


#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.




4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	22°C	Humidity	52%
Test Engineer	GN Hou	Phase	Line
Configuration	CTX		

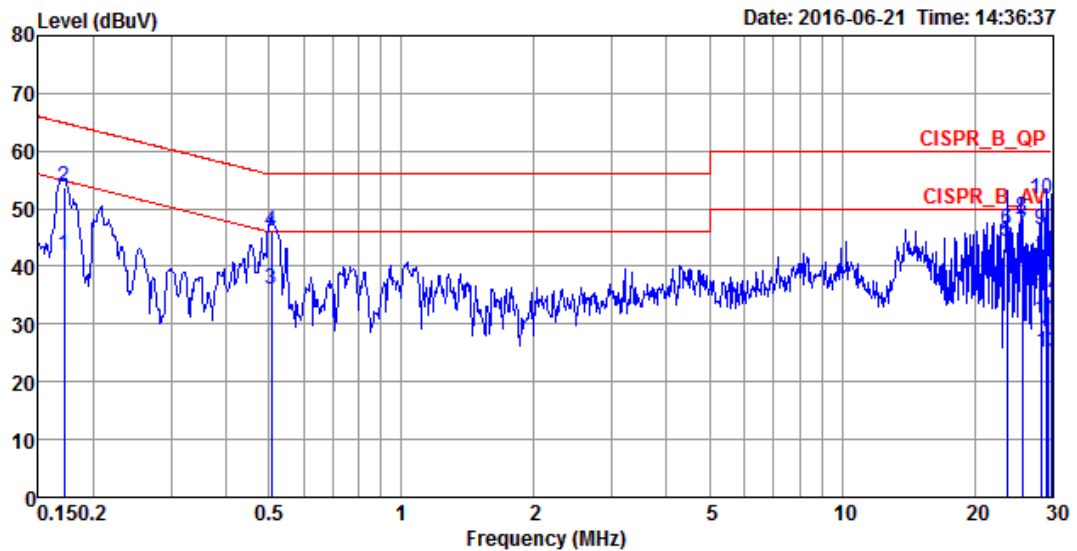

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1712	42.06	-12.84	54.90	31.87	10.02	0.17	LINE	Average
2	0.1712	53.62	-11.28	64.90	43.43	10.02	0.17	LINE	QP
3	0.5074	36.16	-9.84	46.00	26.04	9.92	0.20	LINE	Average
4	0.5074	46.01	-9.99	56.00	35.89	9.92	0.20	LINE	QP
5	23.6269	44.25	-5.75	50.00	33.59	10.40	0.26	LINE	Average
6	23.6269	46.25	-13.75	60.00	35.59	10.40	0.26	LINE	QP
7	25.5944	45.88	-4.12	50.00	35.15	10.46	0.27	LINE	Average
8	25.5944	48.50	-11.50	60.00	37.77	10.46	0.27	LINE	QP
9	28.3031	46.35	-3.65	50.00	35.52	10.53	0.30	LINE	Average
10	28.3031	51.71	-8.29	60.00	40.88	10.53	0.30	LINE	QP
11	29.0613	30.59	-19.41	50.00	19.73	10.55	0.31	LINE	Average
12	29.0613	41.49	-18.51	60.00	30.63	10.55	0.31	LINE	QP
13	29.3707	24.99	-25.01	50.00	14.13	10.55	0.31	LINE	Average
14	29.3707	34.95	-25.05	60.00	24.09	10.55	0.31	LINE	QP
15	29.8107	27.56	-22.44	50.00	16.67	10.57	0.32	LINE	Average
16	29.8107	37.89	-22.11	60.00	27.00	10.57	0.32	LINE	QP

Temperature	22°C	Humidity	52%
Test Engineer	GN Hou	Phase	Neutral
Configuration	CTX		

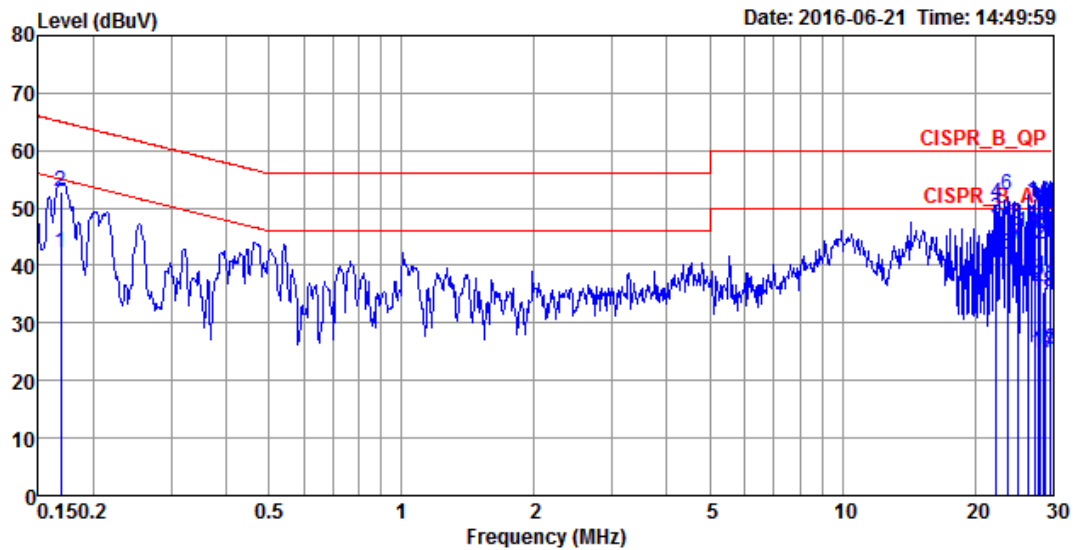

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1685	42.13	-12.90	55.03	31.94	10.02	0.17	NEUTRAL	Average
2	0.1685	52.97	-12.06	65.03	42.78	10.02	0.17	NEUTRAL	QP
3	22.3975	48.21	-1.79	50.00	37.59	10.37	0.25	NEUTRAL	Average
4	22.3975	50.85	-9.15	60.00	40.23	10.37	0.25	NEUTRAL	QP
5	23.6361	41.79	-8.21	50.00	31.13	10.40	0.26	NEUTRAL	Average
6	23.6361	52.36	-7.64	60.00	41.70	10.40	0.26	NEUTRAL	QP
7	24.9221	43.76	-6.24	50.00	33.05	10.44	0.27	NEUTRAL	Average
8	24.9221	47.25	-12.75	60.00	36.54	10.44	0.27	NEUTRAL	QP
9	26.4178	38.02	-11.98	50.00	27.26	10.48	0.28	NEUTRAL	Average
10	26.4178	45.65	-14.35	60.00	34.89	10.48	0.28	NEUTRAL	QP
11	27.4160	37.94	-12.06	50.00	27.14	10.50	0.30	NEUTRAL	Average
12	27.4160	43.67	-16.33	60.00	32.87	10.50	0.30	NEUTRAL	QP
13	27.8550	46.88	-3.12	50.00	36.07	10.51	0.30	NEUTRAL	Average
14	27.8550	51.13	-8.87	60.00	40.32	10.51	0.30	NEUTRAL	QP
15	28.1520	45.85	-4.15	50.00	35.03	10.52	0.30	NEUTRAL	Average
16	28.1520	50.77	-9.23	60.00	39.95	10.52	0.30	NEUTRAL	QP
17	28.6030	24.71	-25.29	50.00	13.87	10.53	0.31	NEUTRAL	Average



	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
18	28.6030	35.28	-24.72	60.00	24.44	10.53	0.31	NEUTRAL	QP
19	28.9077	25.52	-24.48	50.00	14.67	10.54	0.31	NEUTRAL	Average
20	28.9077	36.39	-23.61	60.00	25.54	10.54	0.31	NEUTRAL	QP
21	29.5399	45.52	-4.48	50.00	34.64	10.56	0.32	NEUTRAL	Average
22	29.5399	49.68	-10.32	60.00	38.80	10.56	0.32	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu		

For non-beamforming mode

For indoor use master B1 and indoor, outdoor use B2

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	17.22	15.72
	5200 MHz	17.22	15.11
	5240 MHz	17.04	14.94
	5260 MHz	17.04	15.11
	5300 MHz	17.48	15.54
	5320 MHz	17.48	15.54
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.52	16.50
	5200 MHz	18.44	16.15
	5240 MHz	18.35	15.80
	5260 MHz	18.35	15.89
	5300 MHz	18.44	16.50
	5320 MHz	18.44	16.50
802.11ac MCS0/Nss1 VHT40	5190 MHz	39.28	35.75
	5230 MHz	38.84	35.89
	5270 MHz	39.42	36.18
	5310 MHz	39.42	35.89
802.11ac MCS0/Nss1 VHT80	5210 MHz	79.13	75.54
	5290 MHz	79.13	74.39

**For indoor use slave without radar detection B1**

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	17.30	15.46
	5200 MHz	17.39	15.37
	5240 MHz	17.13	15.20
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.44	16.41
	5200 MHz	18.44	16.24
	5240 MHz	18.35	15.89
802.11ac MCS0/Nss1 VHT40	5190 MHz	38.70	35.60
	5230 MHz	39.13	35.89
802.11ac MCS0/Nss1 VHT80	5210 MHz	79.13	75.54

**For outdoor use master B1**

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	17.48	15.54
	5200 MHz	17.39	15.37
	5240 MHz	17.04	15.02
802.11ac MCS0/Nss1 VHT20	5180 MHz	18.26	16.32
	5200 MHz	18.43	16.15
	5240 MHz	18.26	15.63
802.11ac MCS0/Nss1 VHT40	5190 MHz	38.99	35.75
	5230 MHz	39.13	36.03
802.11ac MCS0/Nss1 VHT80	5210 MHz	79.42	75.54

**802.11ac MCS0/Nss2 VHT80+80**

For indoor use master and slave without radar detection

Type	Frequency	26dB BW (MHz)	99% OBW (MHz)	26dB BW F1 (MHz)	99% OBW T1 (MHz)	UNII 1 or UNII 2C 26dB BW (MHz)	UNII 2A or UNII 3 26dB BW (MHz)	UNII 1 or UNII 2C 99% BW (MHz)	UNII 2A or UNII 3 99% BW (MHz)	26dB Total BW (MHz)
1	5210 MHz	159.57	154.99							-
	5290 MHz									

For outdoor use master B1

Type	Frequency	26dB BW (MHz)	99% OBW (MHz)	26dB BW F1 (MHz)	99% OBW T1 (MHz)	UNII 1 or UNII 2C 26dB BW (MHz)	UNII 2A or UNII 3 26dB BW (MHz)	UNII 1 or UNII 2C 99% BW (MHz)	UNII 2A or UNII 3 99% BW (MHz)	26dB Total BW (MHz)
1	5210 MHz	159.13	154.99							-
	5290 MHz									

**For beamforming mode**
**For indoor use master B1 and indoor, outdoor use B2**

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.78	18.06
	5200 MHz	23.13	17.97
	5240 MHz	21.74	17.89
	5260 MHz	23.13	17.89
	5300 MHz	22.17	18.06
	5320 MHz	21.91	17.97
802.11ac MCS0/Nss1 VHT40	5190 MHz	45.94	37.05
	5230 MHz	45.51	36.76
	5270 MHz	45.07	37.19
	5310 MHz	44.64	37.05
802.11ac MCS0/Nss1 VHT80	5210 MHz	100.87	76.12
	5290 MHz	87.54	76.41

**For indoor use slave without radar detection B1**

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.83	17.89
	5200 MHz	21.22	17.97
	5240 MHz	21.65	17.89
802.11ac MCS0/Nss1 VHT40	5190 MHz	44.78	36.90
	5230 MHz	45.07	36.90
802.11ac MCS0/Nss1 VHT80	5210 MHz	85.80	76.41

**For outdoor use master B1**

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.26	17.97
	5200 MHz	21.57	17.89
	5240 MHz	21.74	17.89
802.11ac MCS0/Nss1 VHT40	5190 MHz	44.93	36.90
	5230 MHz	44.93	36.76
802.11ac MCS0/Nss1 VHT80	5210 MHz	84.93	76.41



**802.11ac MCS0/Nss2 VHT80+80**
**For indoor use master and slave without radar detection**

Type	Frequency	26dB BW (MHz)	99% OBW (MHz)	26dB BW F1 (MHz)	99% OBW T1 (MHz)	UNII 1 or UNII 2C 26dB BW (MHz)	UNII 2A or UNII 3 26dB BW (MHz)	UNII 1 or UNII 2C 99% BW (MHz)	UNII 2A or UNII 3 99% BW (MHz)	26dB Total BW (MHz)
1	5210 MHz	160.00	154.99							-
	5290 MHz									


**For outdoor use master B1**

Type	Frequency	26dB BW (MHz)	99% OBW (MHz)	26dB BW F1 (MHz)	99% OBW T1 (MHz)	UNII 1 or UNII 2C 26dB BW (MHz)	UNII 2A or UNII 3 26dB BW (MHz)	UNII 1 or UNII 2C 99% BW (MHz)	UNII 2A or UNII 3 99% BW (MHz)	26dB Total BW (MHz)
1	5210 MHz	160.00	154.56							-
	5290 MHz									

For non-beamforming mode


For indoor use master B1 and indoor, outdoor use B2

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

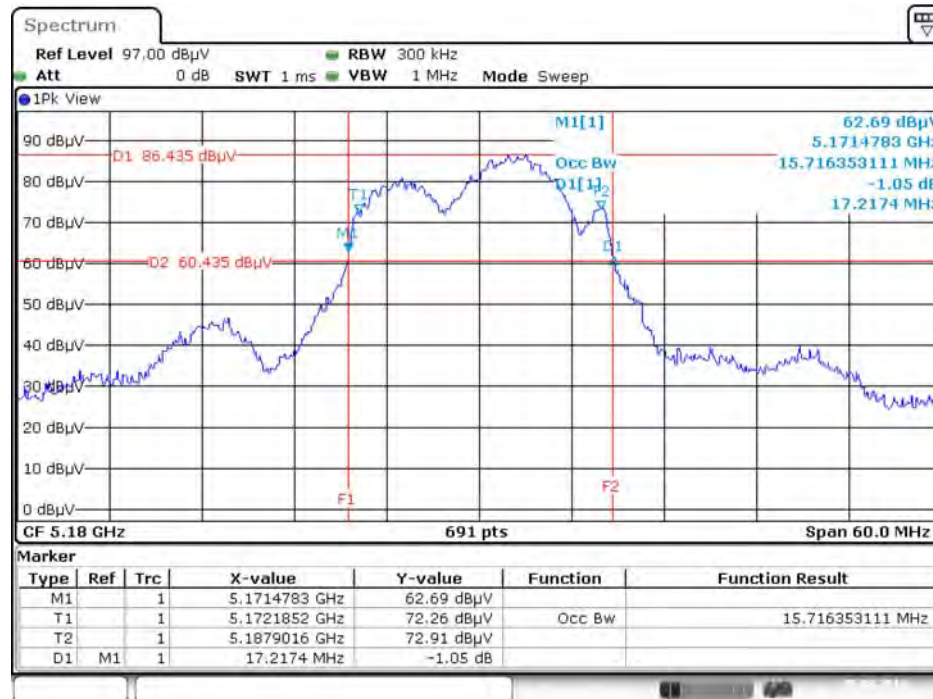


Date: 5.AUG.2016 11:20:05

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

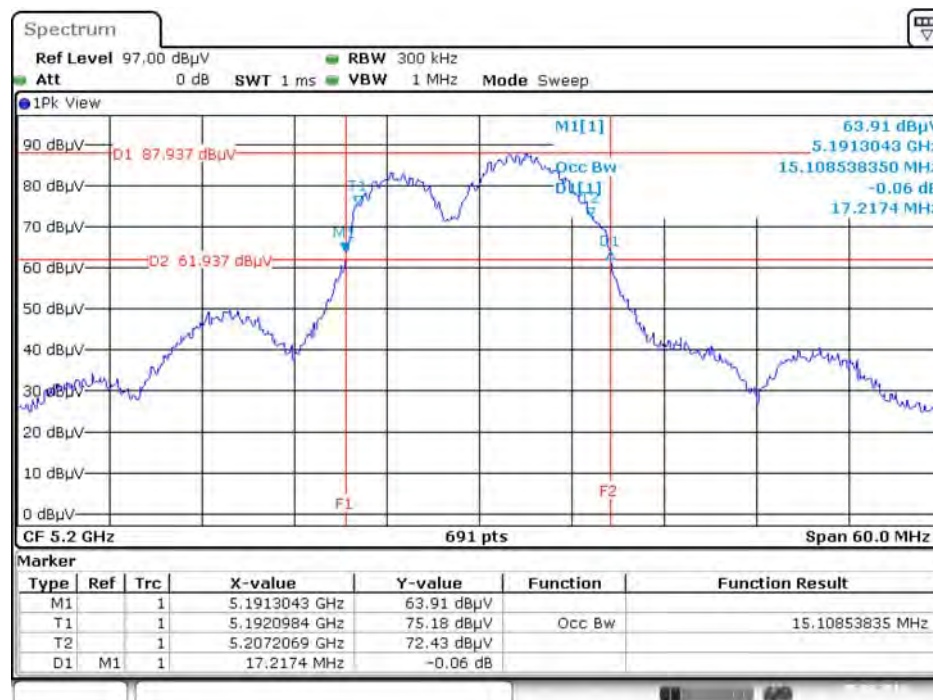


Date: 5.AUG.2016 11:35:05

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

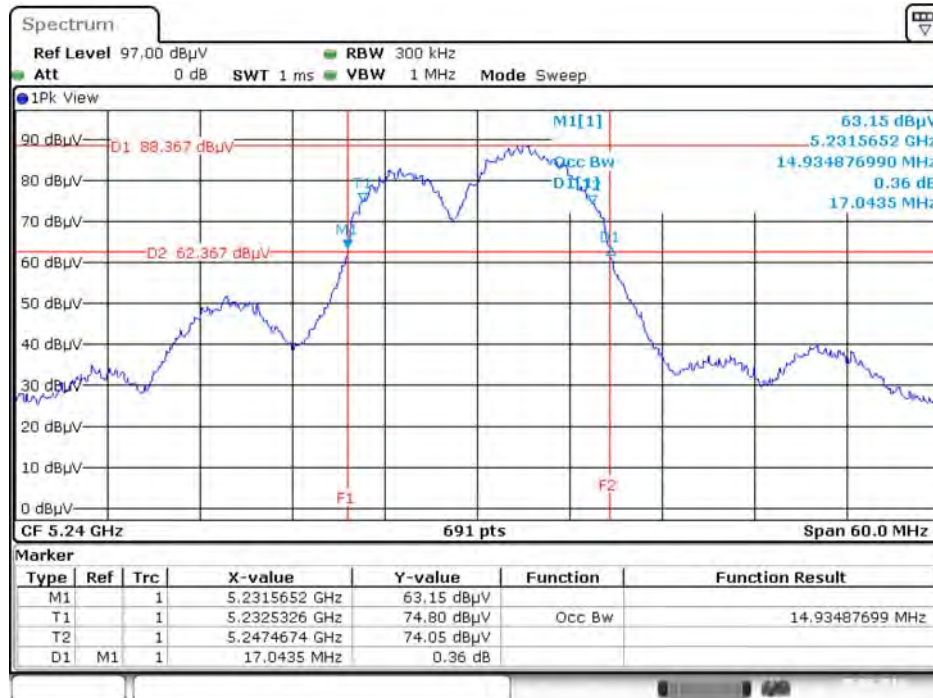


Date: 5.AUG.2016 11:44:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz**

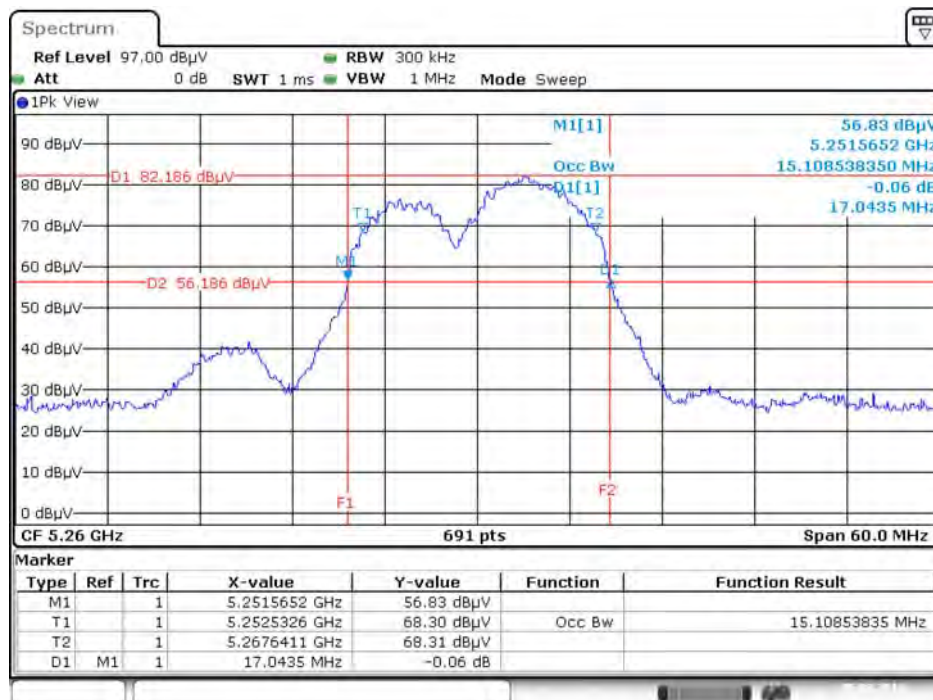


Date: 5.AUG.2016 11:45:15

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

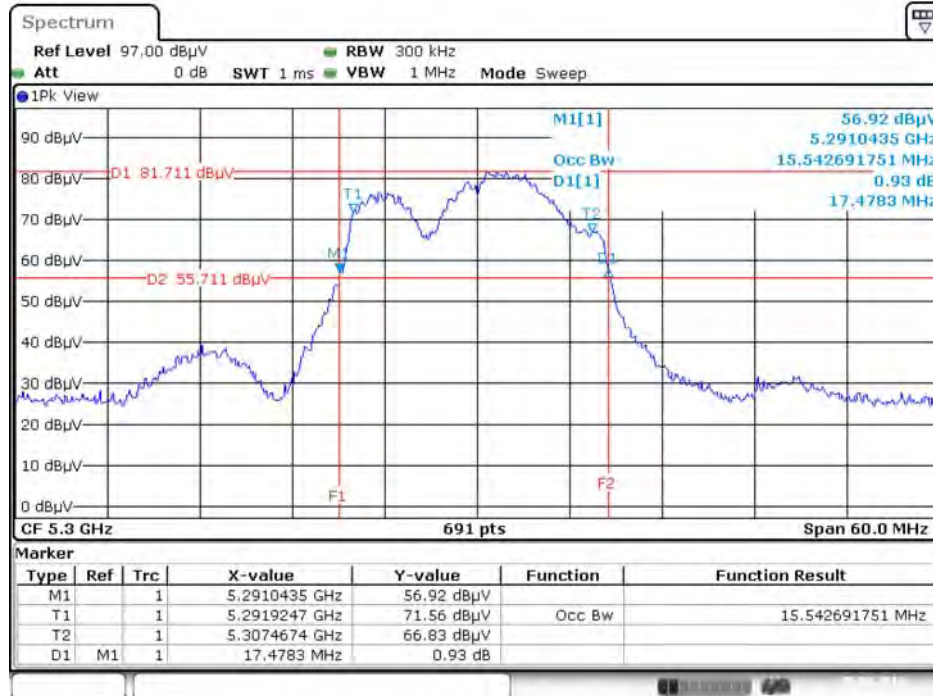


Date: 5.AUG.2016 11:46:01

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

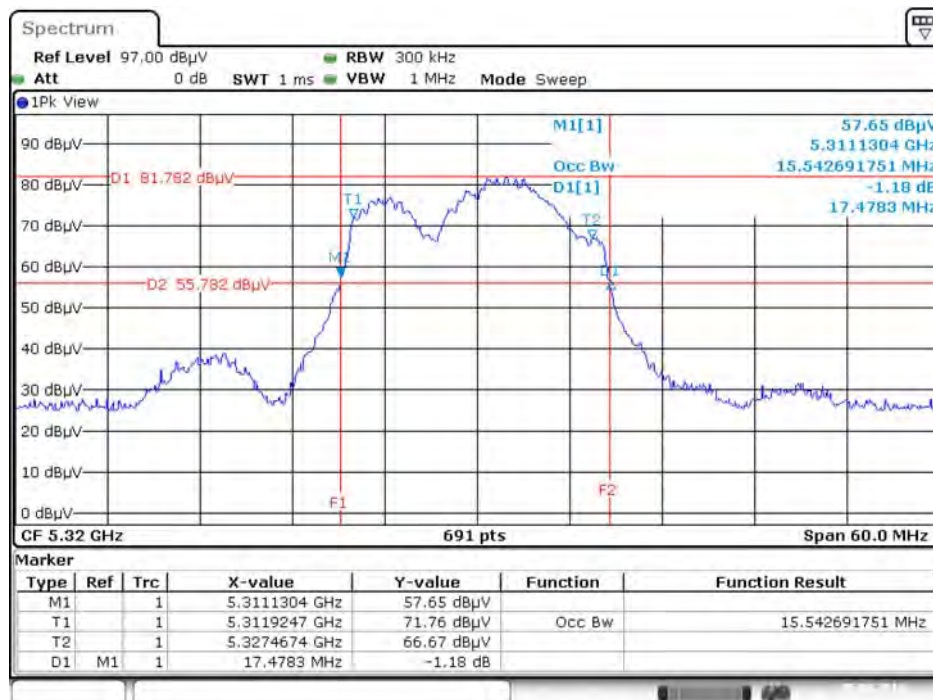


Date: 5.AUG.2016 11:46:19

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

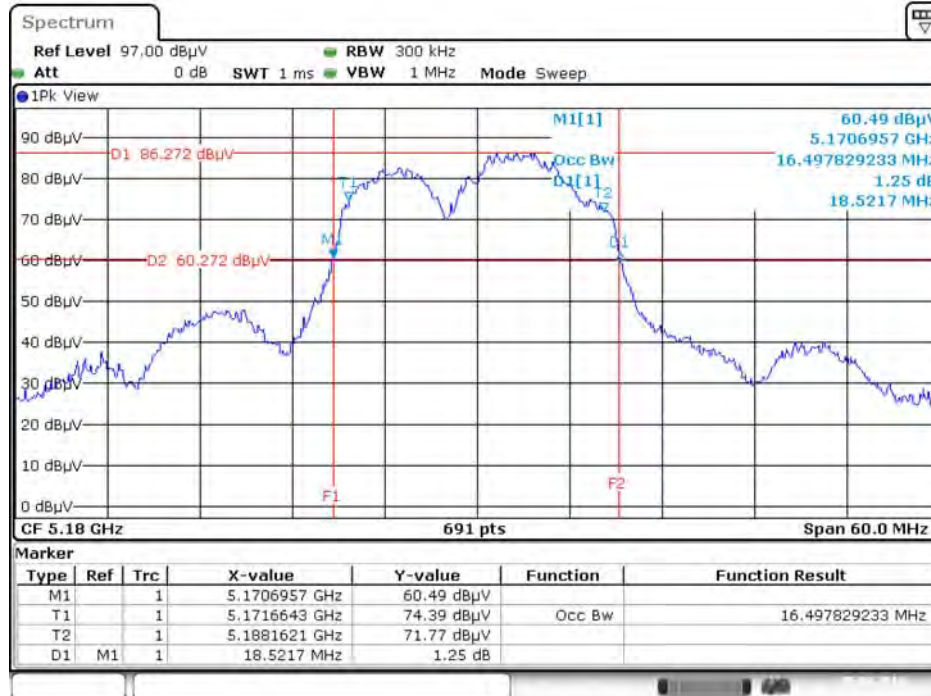


Date: 5.AUG.2016 11:50:12

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

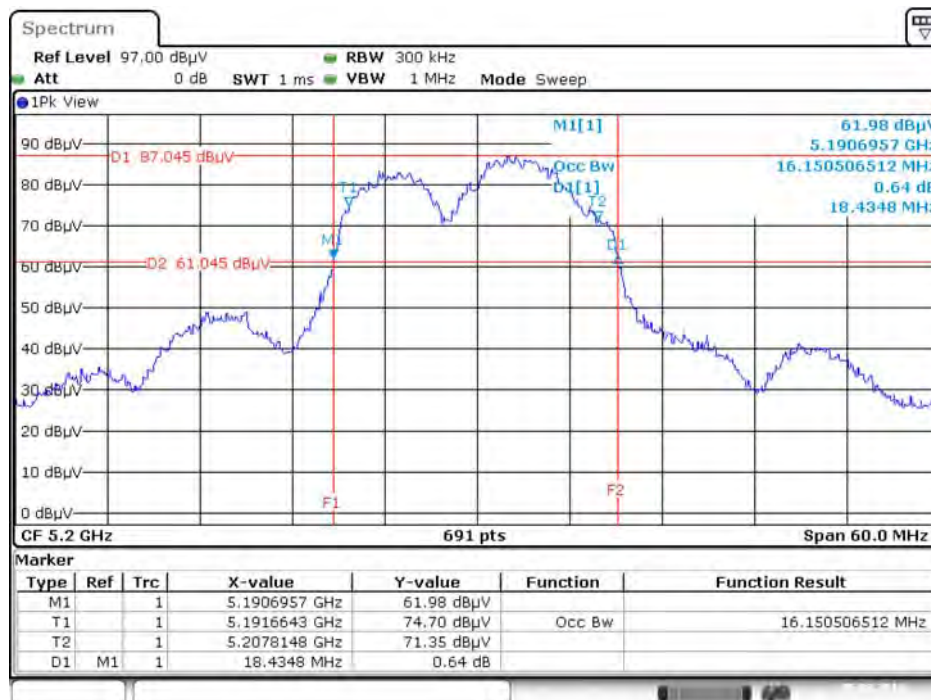


Date: 5.AUG.2016 11:50:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

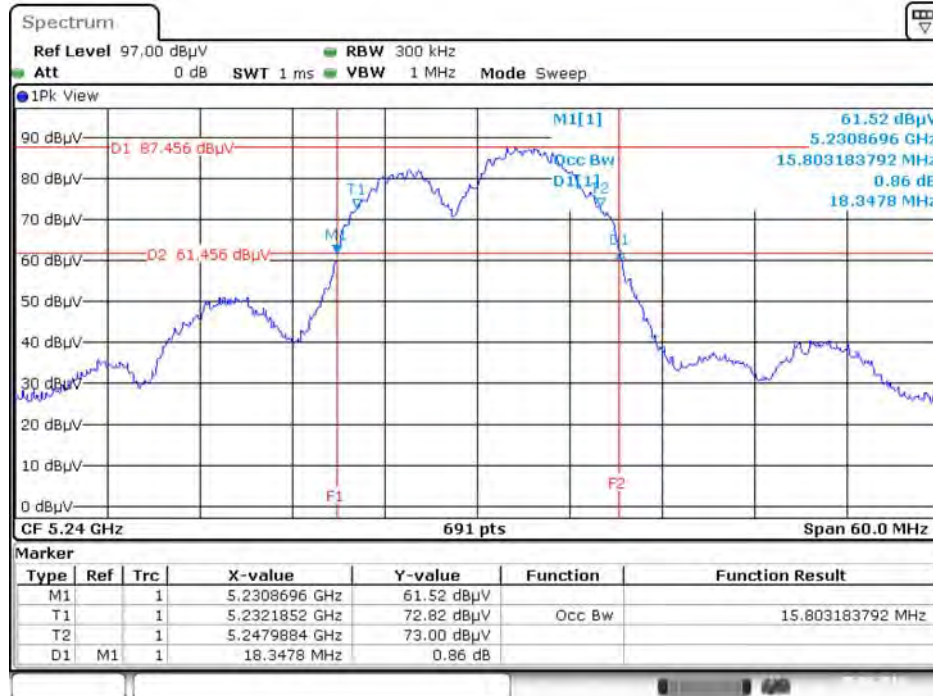


Date: 5.AUG.2016 11:51:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

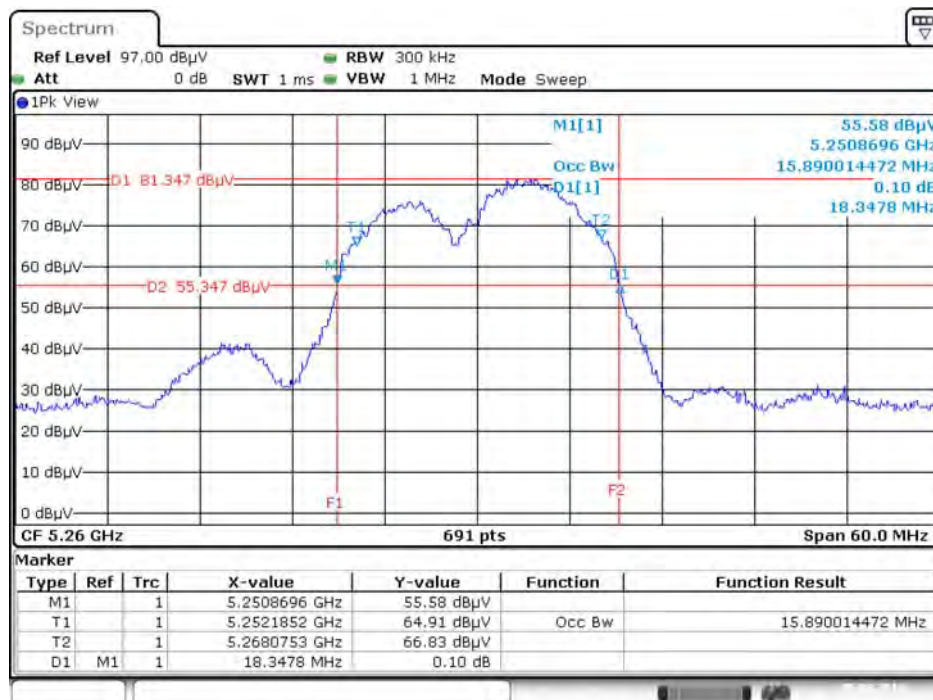


Date: 5.AUG.2016 11:52:45

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

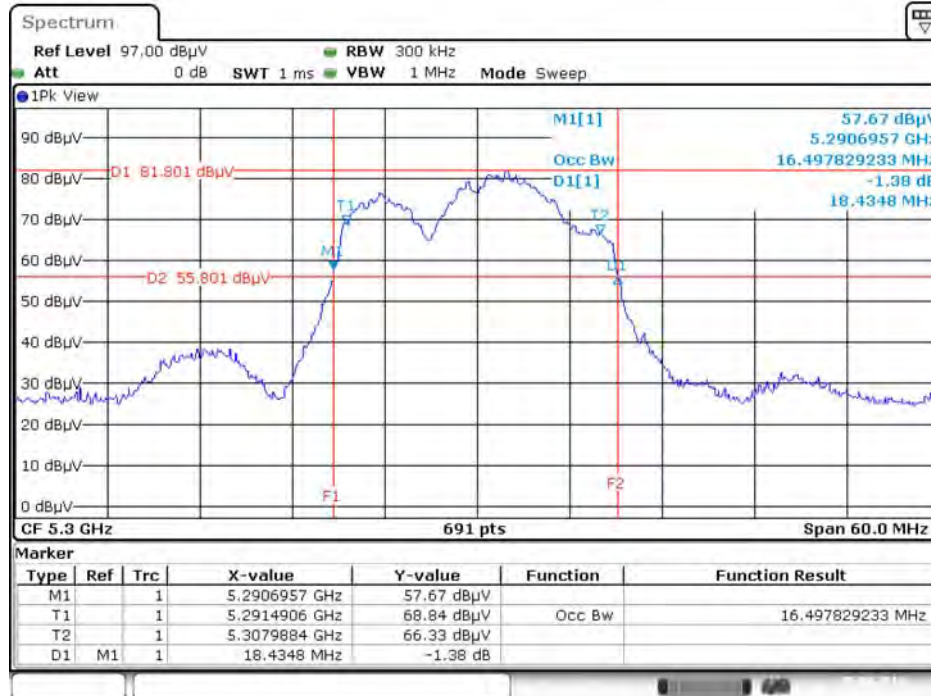


Date: 5.AUG.2016 11:53:08

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

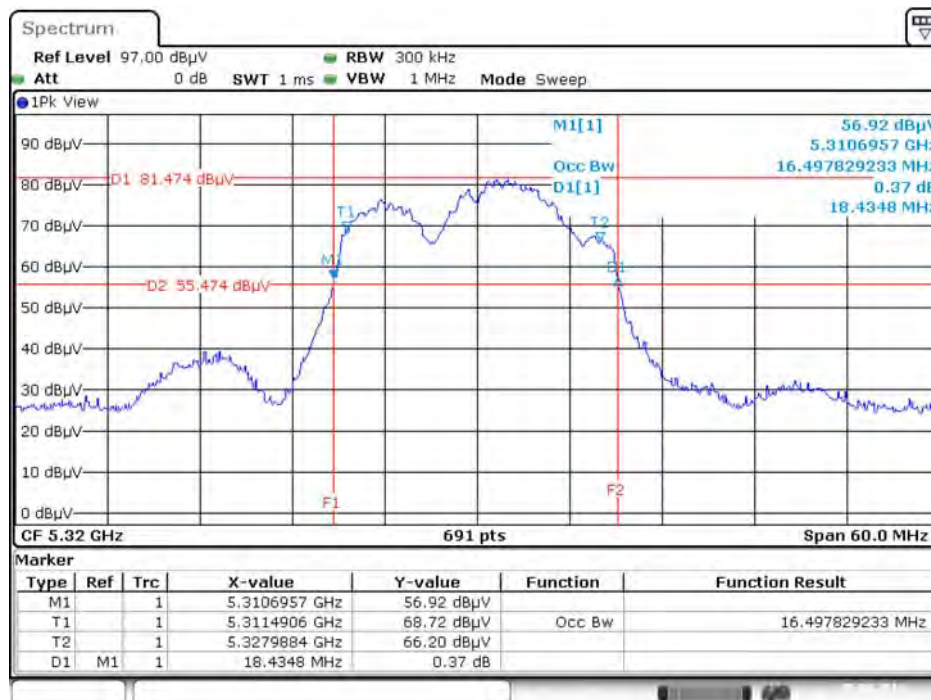


Date: 5.AUG.2016 11:53:41

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz**

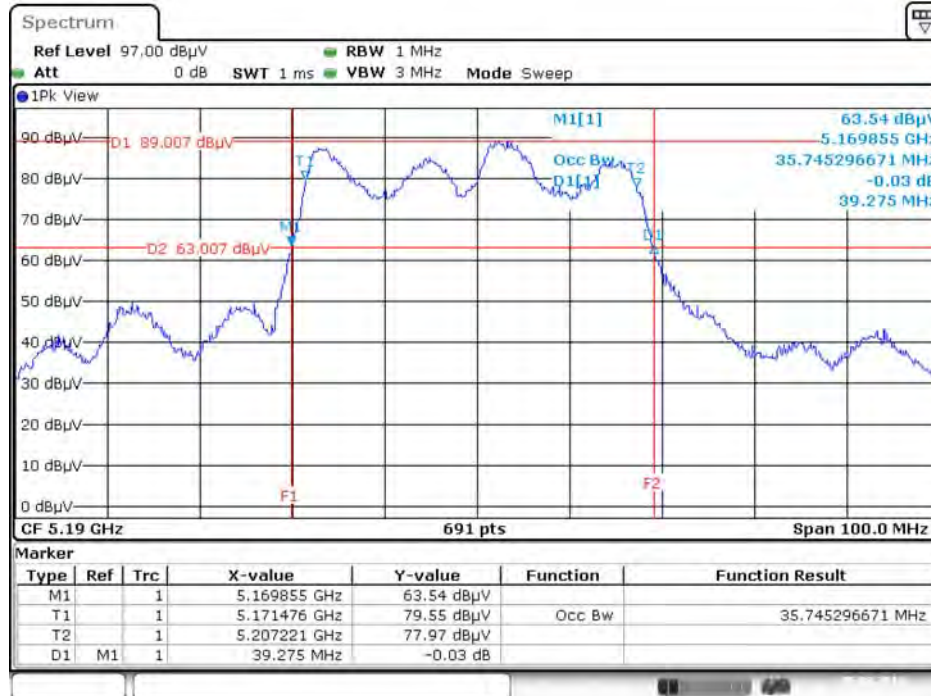

Date: 5.AUG.2016 11:57:42


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz**

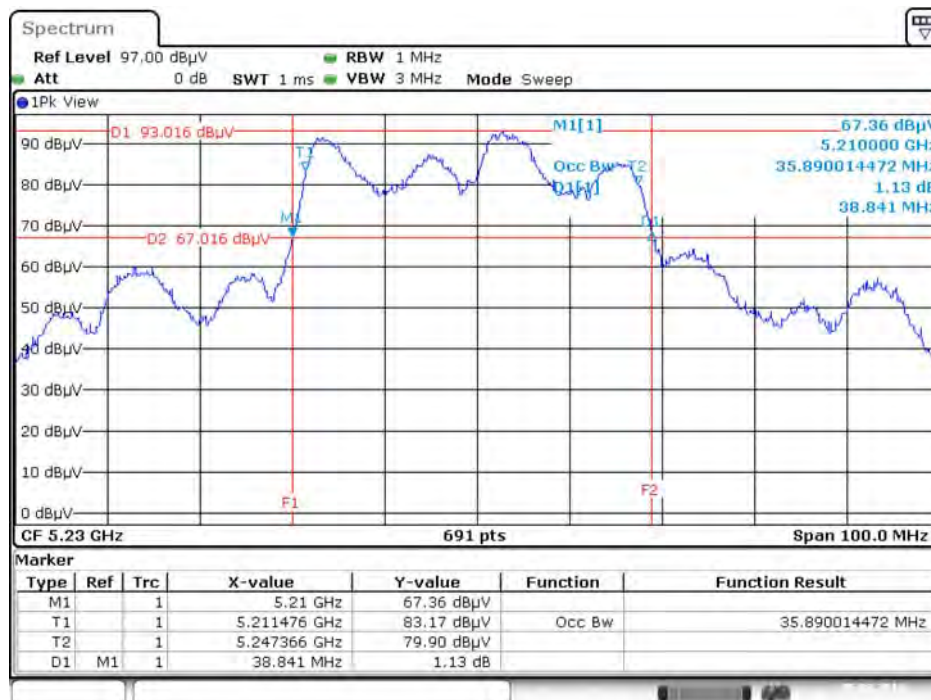

Date: 5.AUG.2016 11:58:02




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

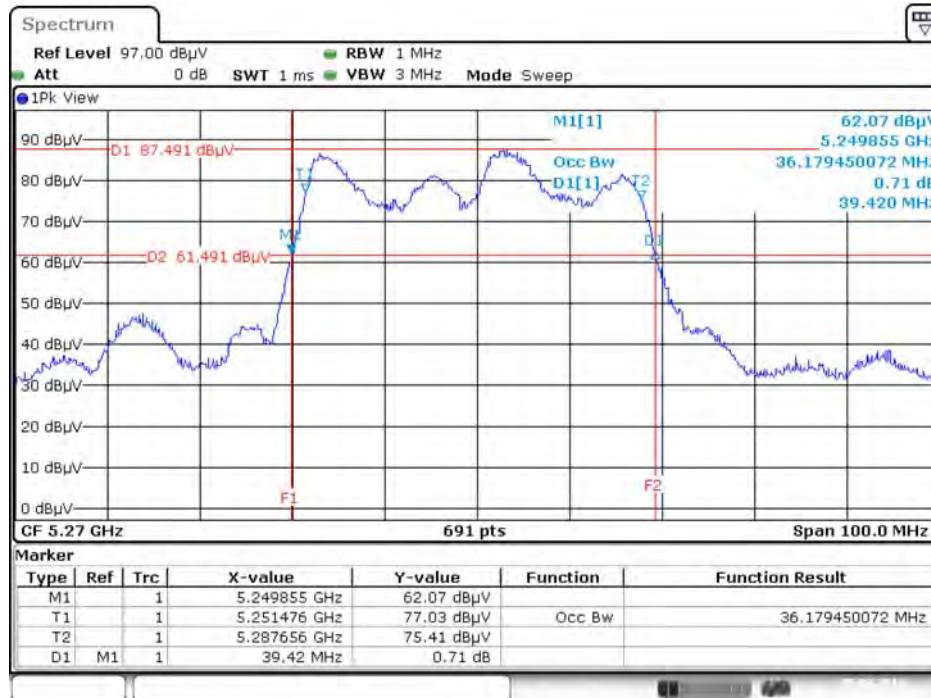


Date: 5.AUG.2016 11:59:38

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5310 MHz

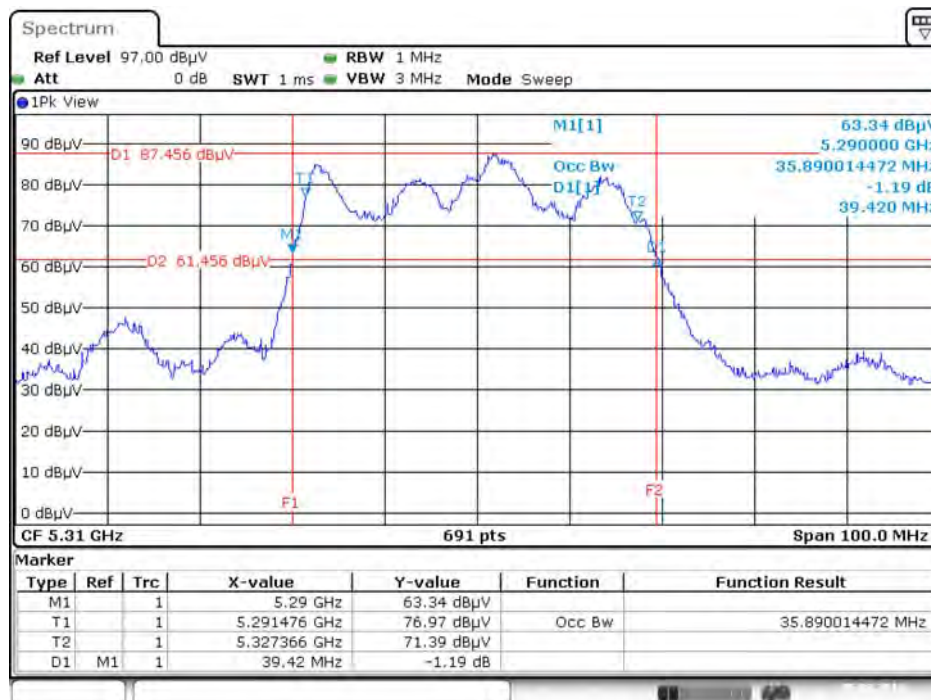


Date: 5.AUG.2016 12:00:05

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz**

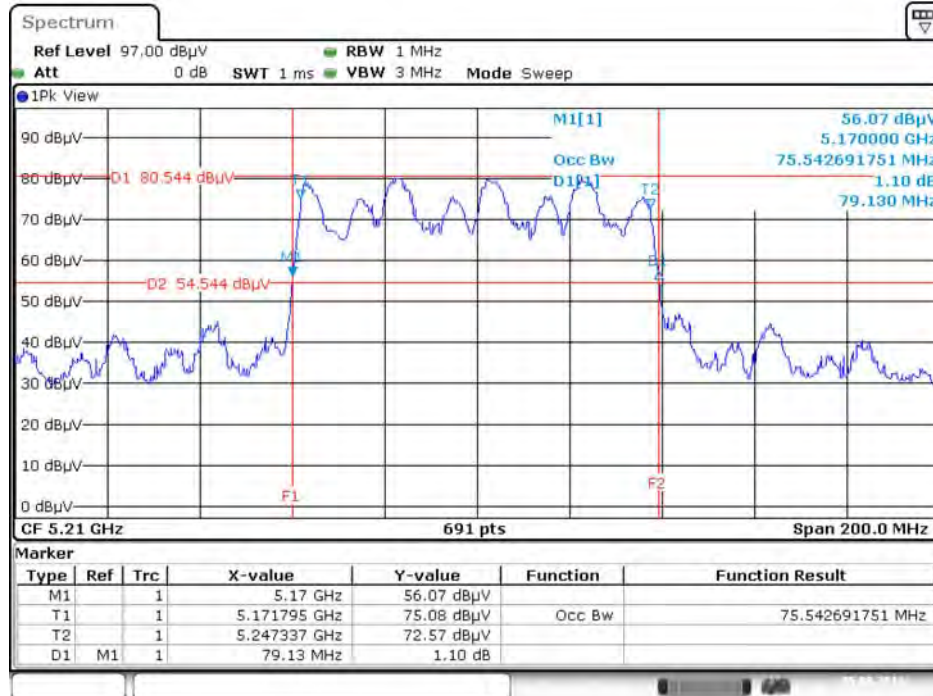

Date: 5.AUG.2016 12:03:56


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz**

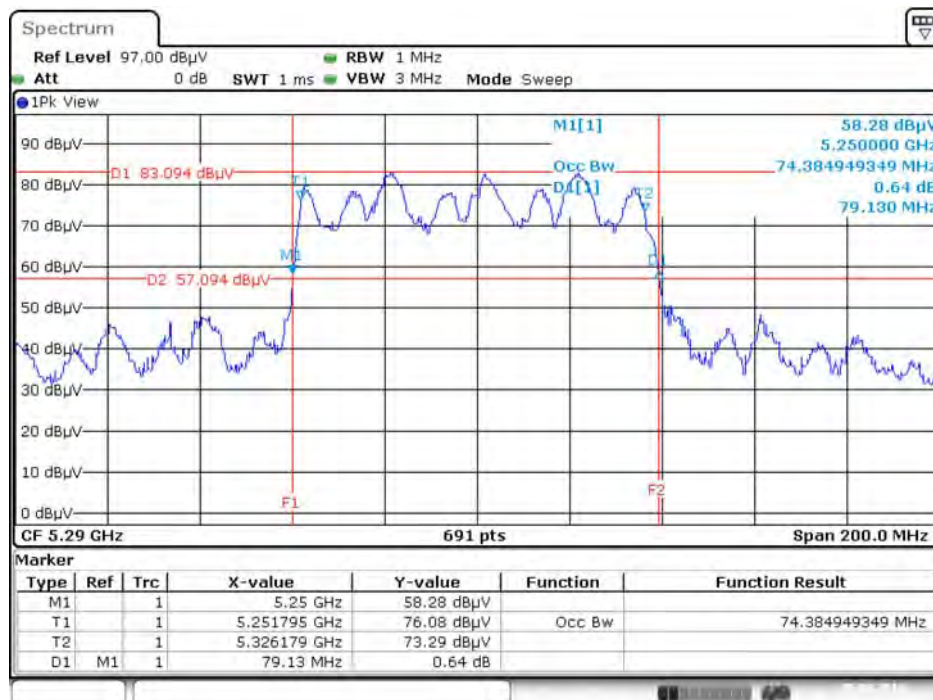

Date: 5.AUG.2016 12:04:24


**For indoor use slave without radar detection B1**

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz**

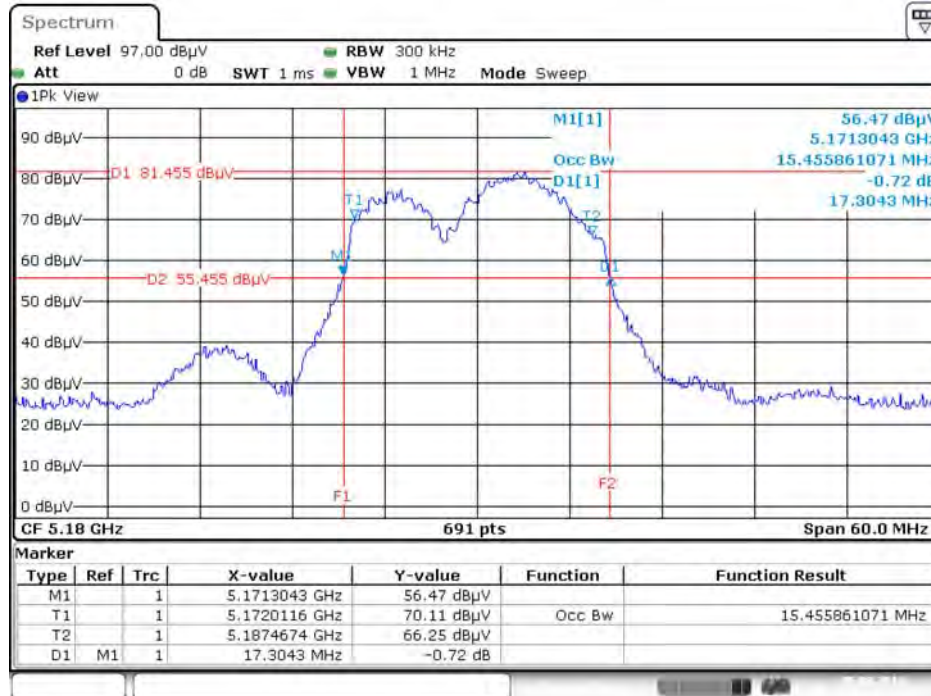


Date: 5.AUG.2016 16:32:38

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz**

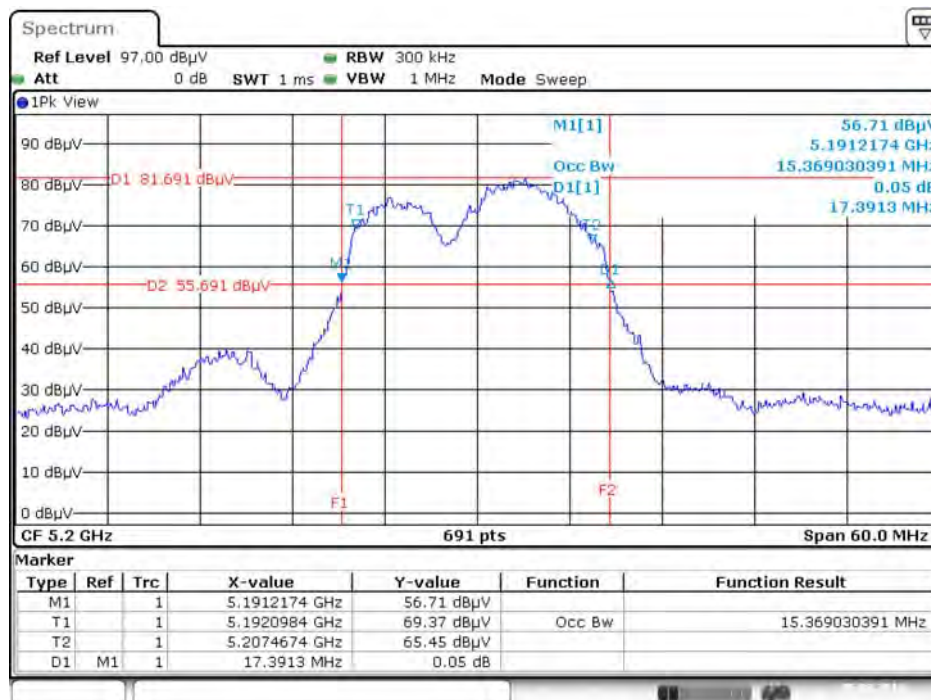

Date: 5.AUG.2016 16:33:07

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

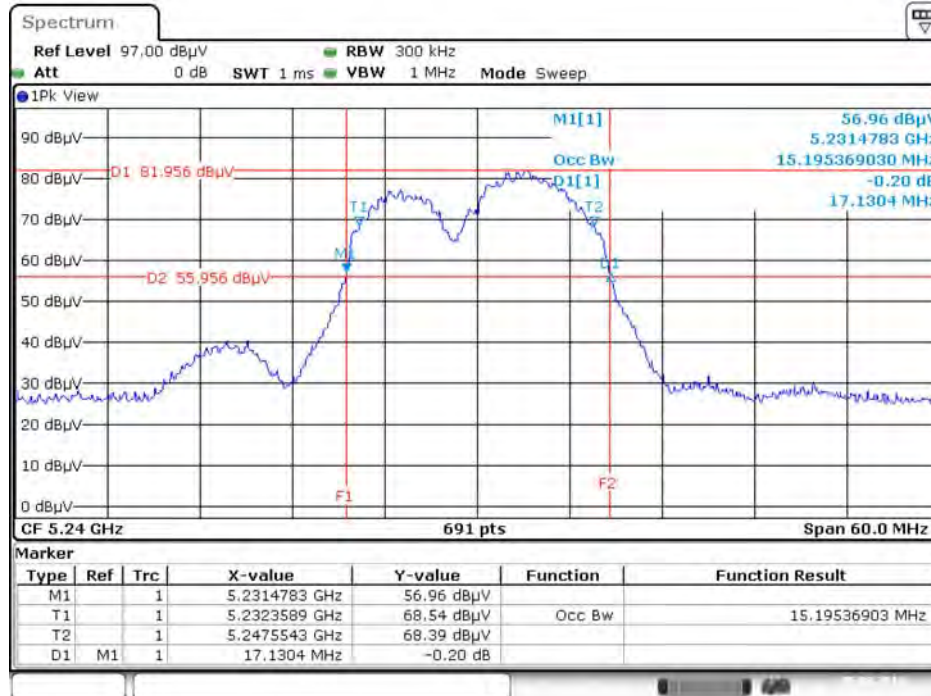


Date: 5.AUG.2016 16:34:35

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz**




Date: 5.AUG.2016 16:35:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

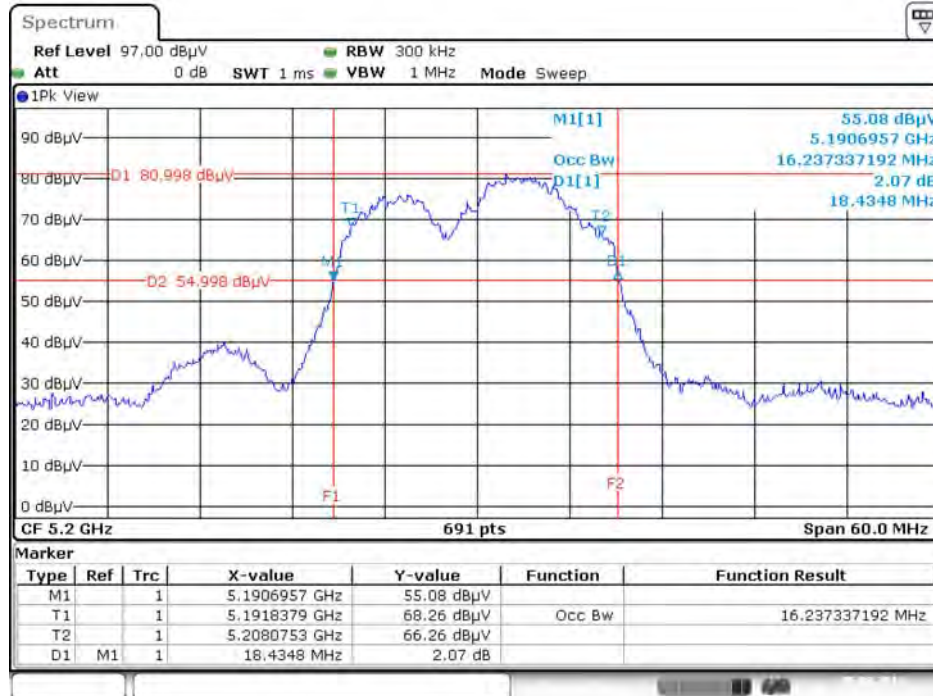


Date: 5.AUG.2016 16:35:58

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

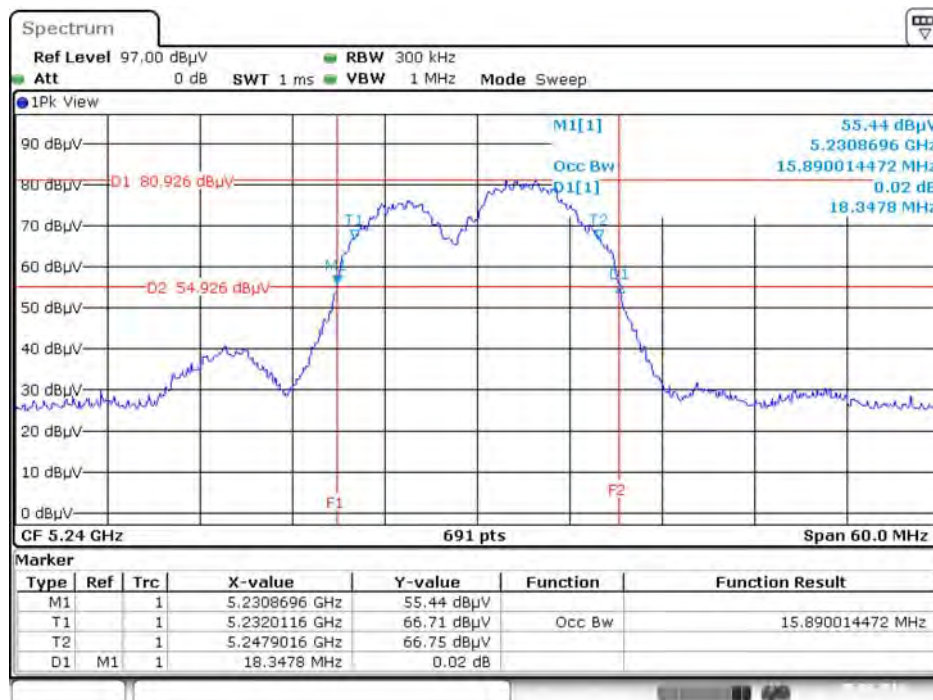


Date: 5.AUG.2016 16:33:48

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

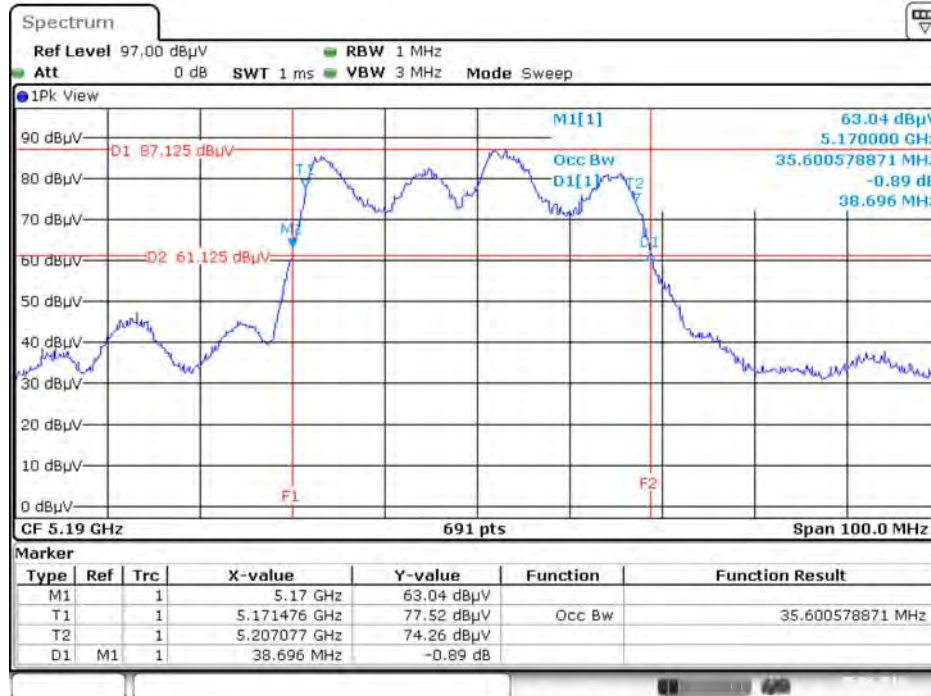


Date: 5.AUG.2016 16:37:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

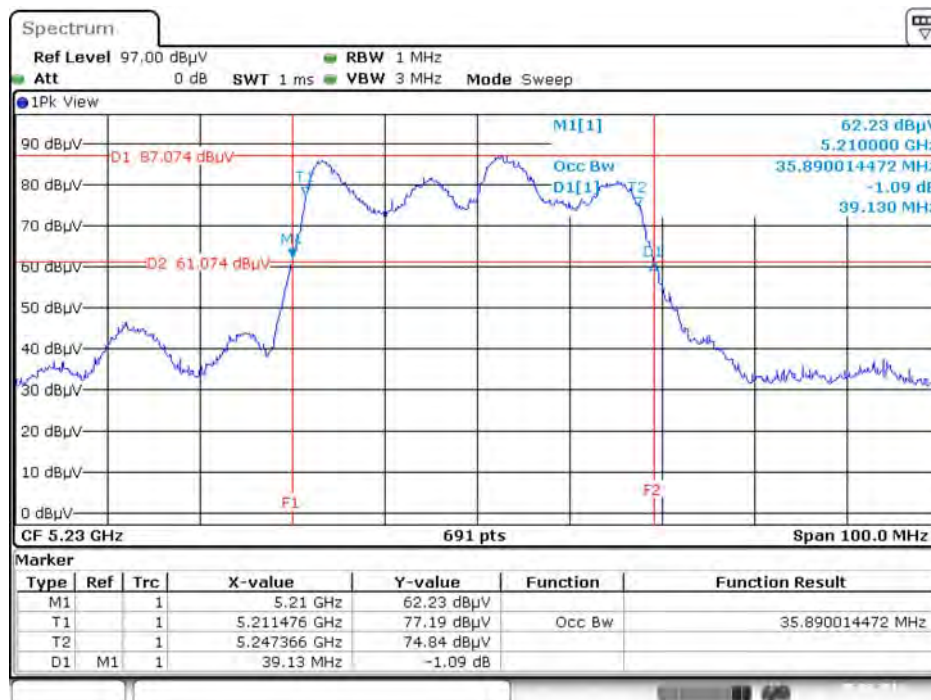

Date: 5.AUG.2016 16:37:31


**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz**

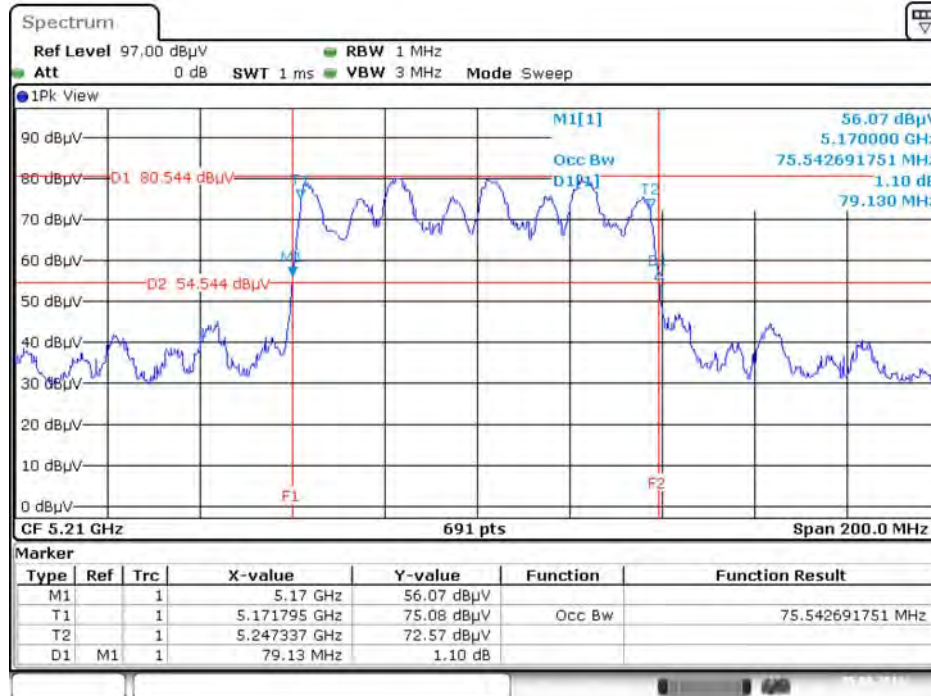

Date: 5.AUG.2016 12:03:56


For outdoor use master B1

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

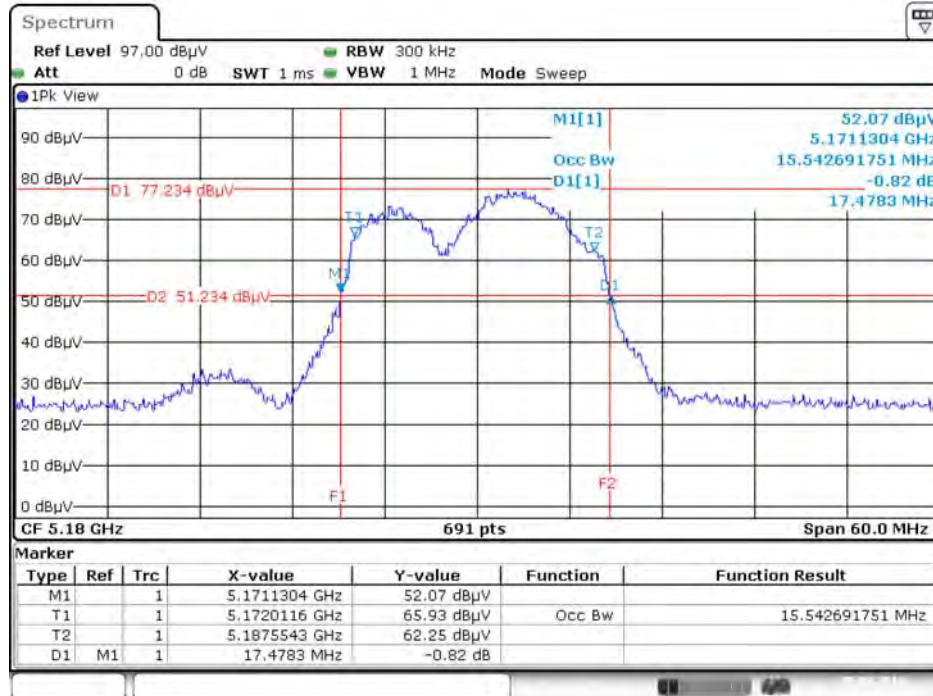

Date: 5.AUG.2016 19:34:59


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

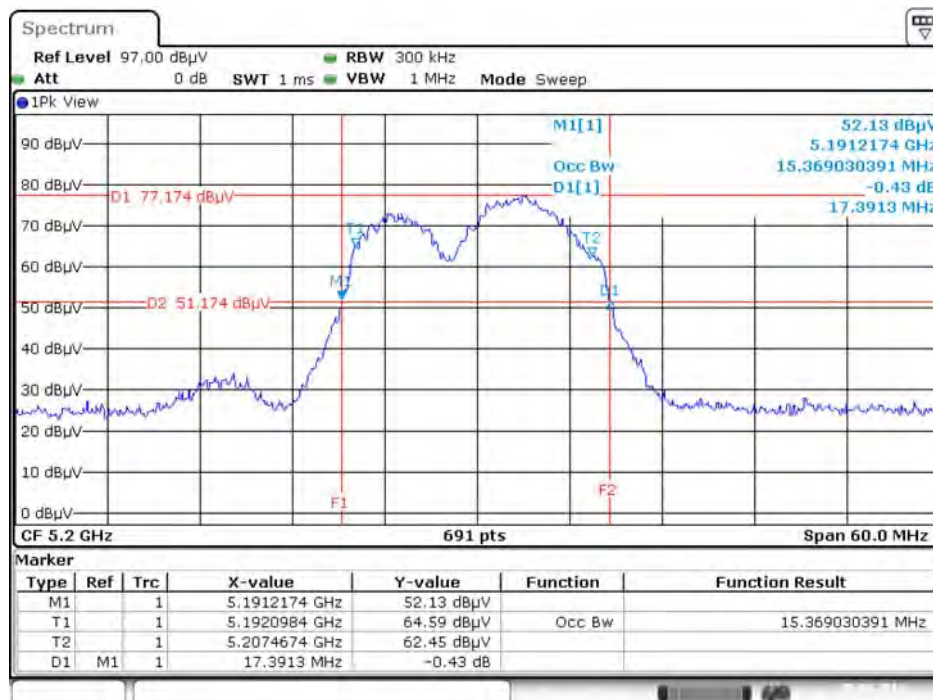

Date: 5.AUG.2016 19:36:47




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

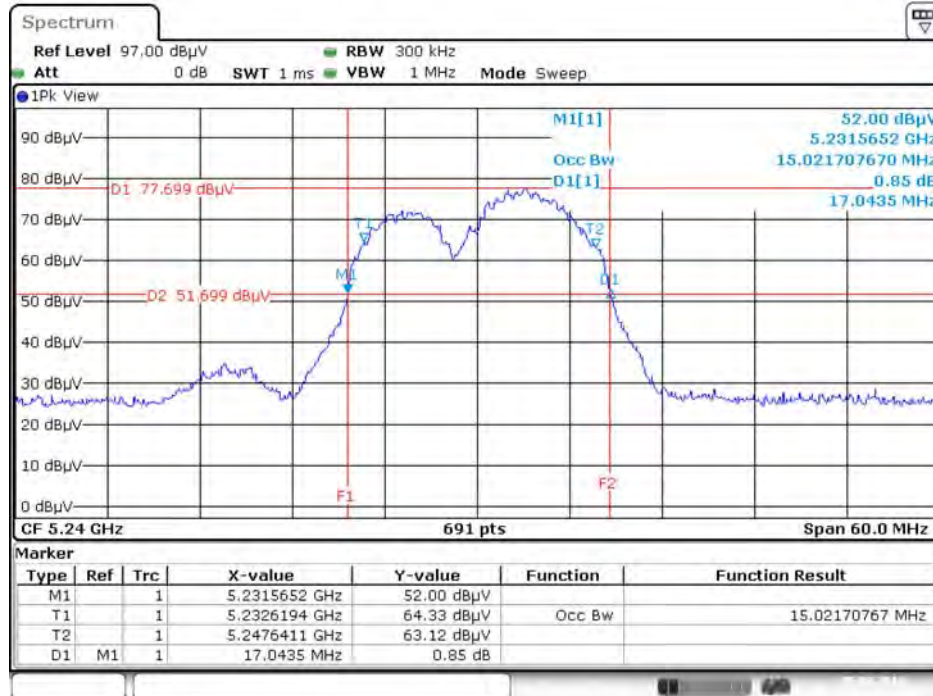


Date: 5.AUG.2016 19:38:24

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

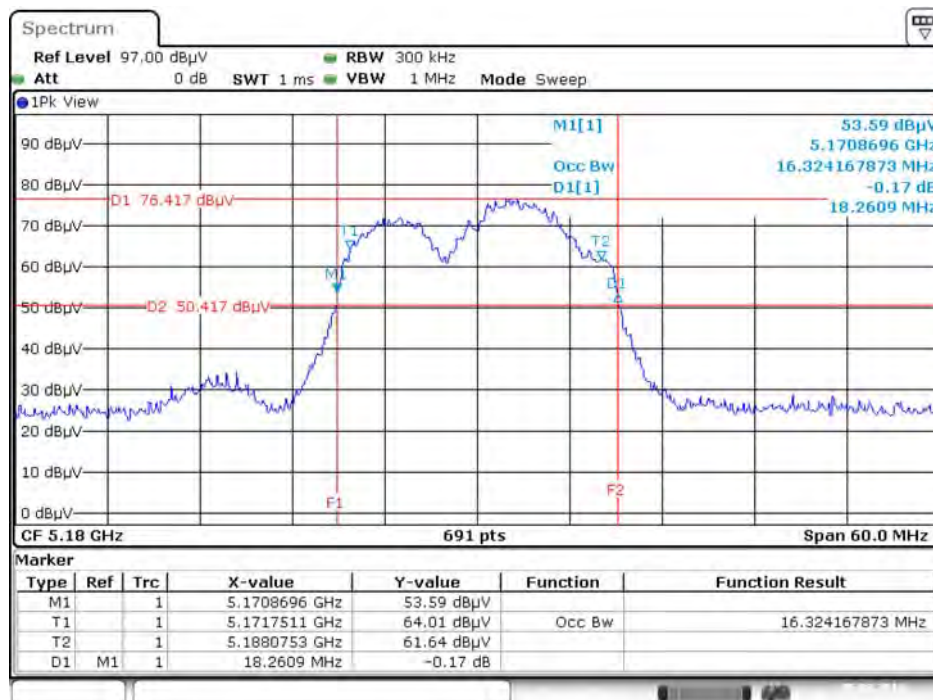


Date: 5.AUG.2016 19:41:52

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz**

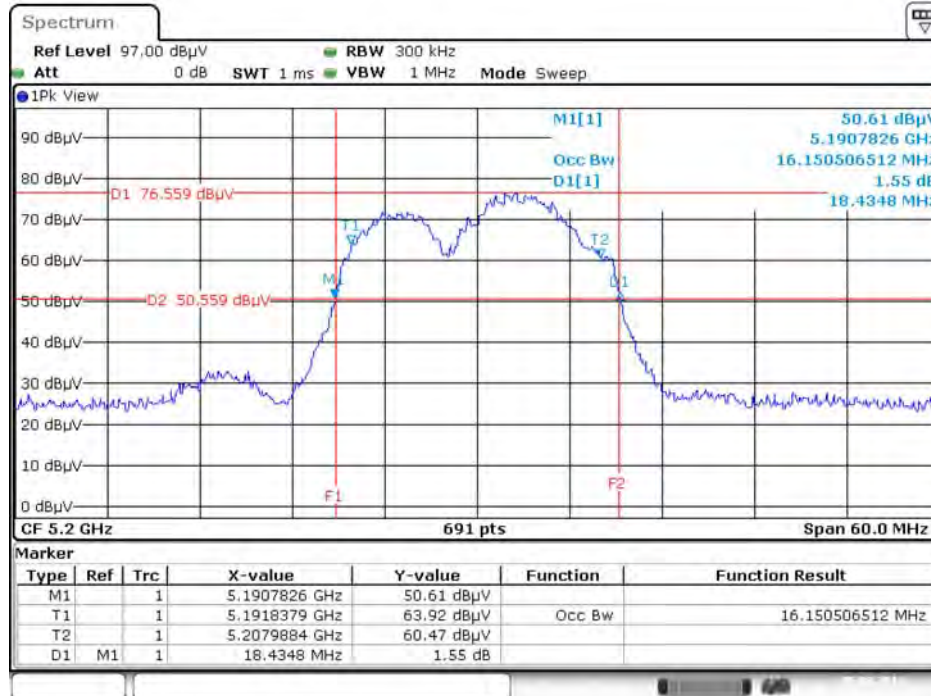


Date: 5.AUG.2016 19:48:54

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

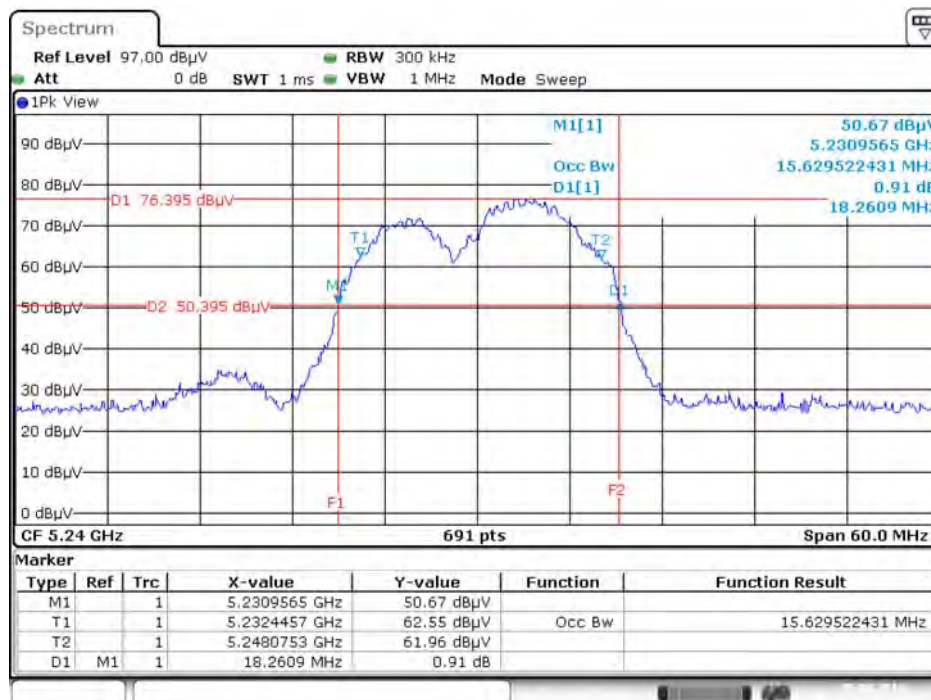


Date: 5.AUG.2016 19:52:03

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

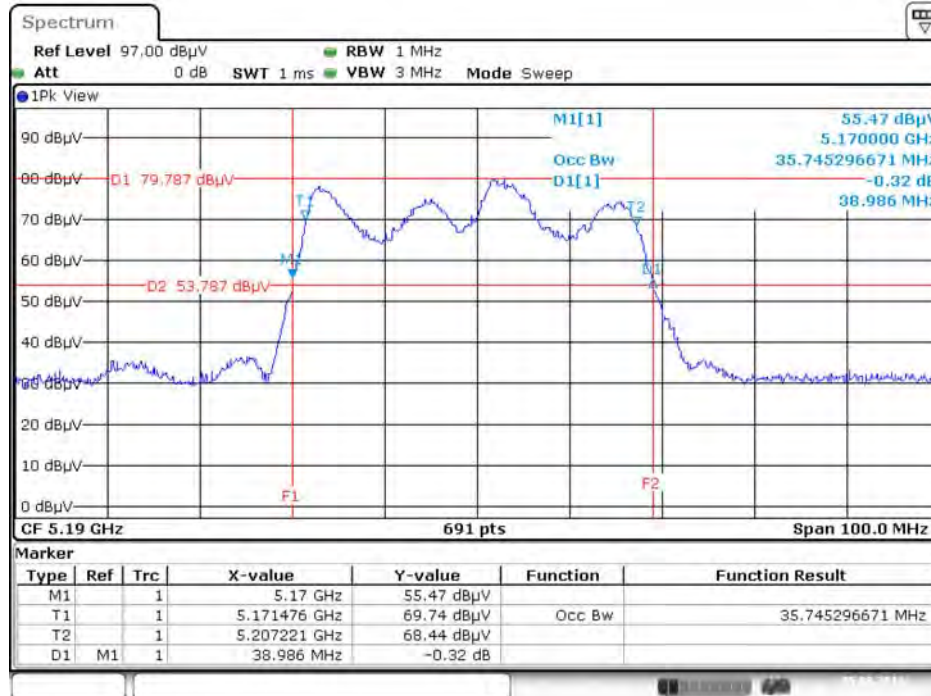


Date: 5.AUG.2016 19:55:47

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

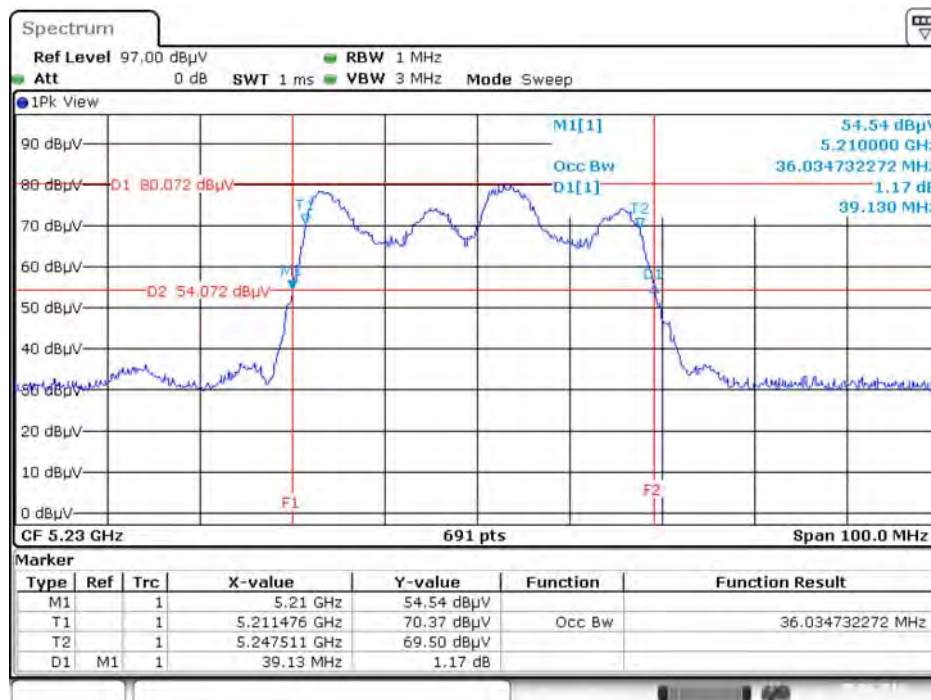

Date: 5.AUG.2016 19:58:12

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz**

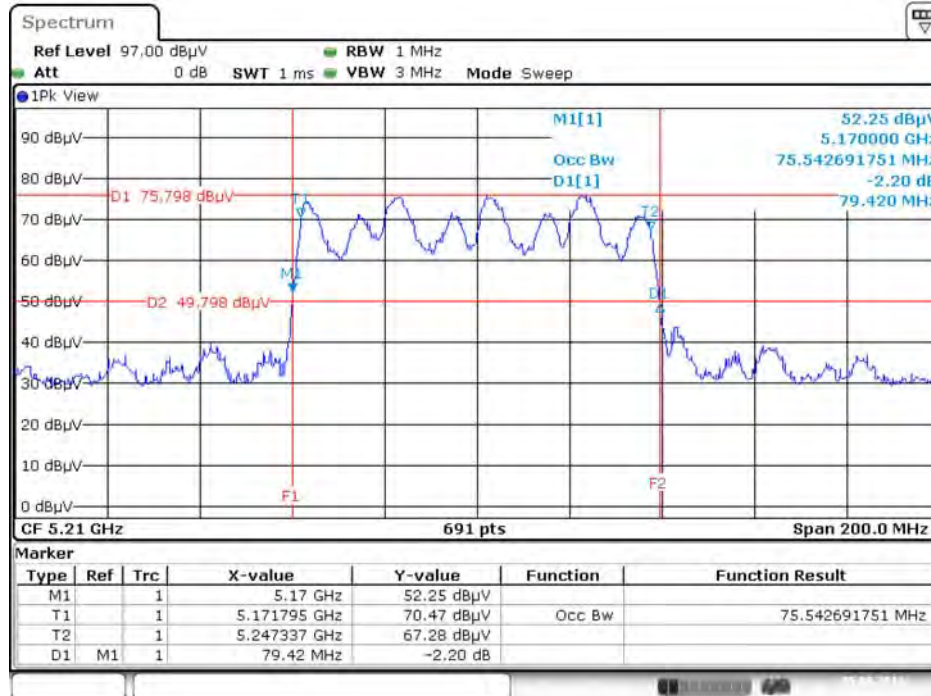


Date: 5.AUG.2016 20:01:01

802.11ac MCS0/Nss2 VHT80+80

For indoor use master and slave without radar detection

Type 1

26dB Bandwidth and 99% Occupied Bandwidth Plot on Chain 1 + Chain 2 + Chain 3 + Chain 4 /  
5210 MHz+5290 MHz

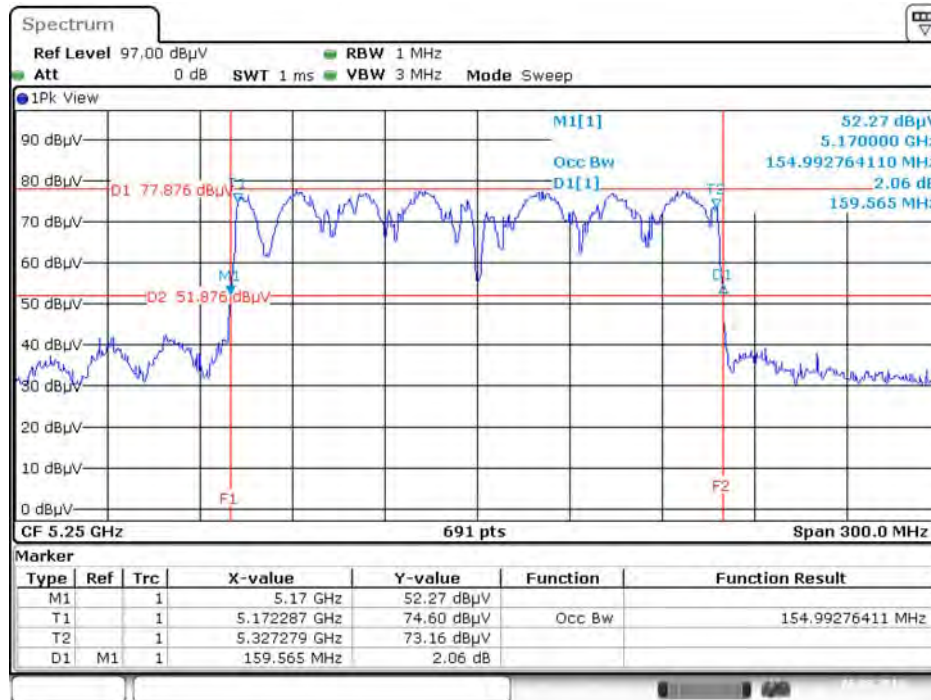


Date: 6.AUG.2016 14:13:30

For outdoor use master B1

Type 1

26dB Bandwidth and 99% Occupied Bandwidth Plot on Chain 1 + Chain 2 + Chain 3 + Chain 4 /  
5210 MHz+5290 MHz

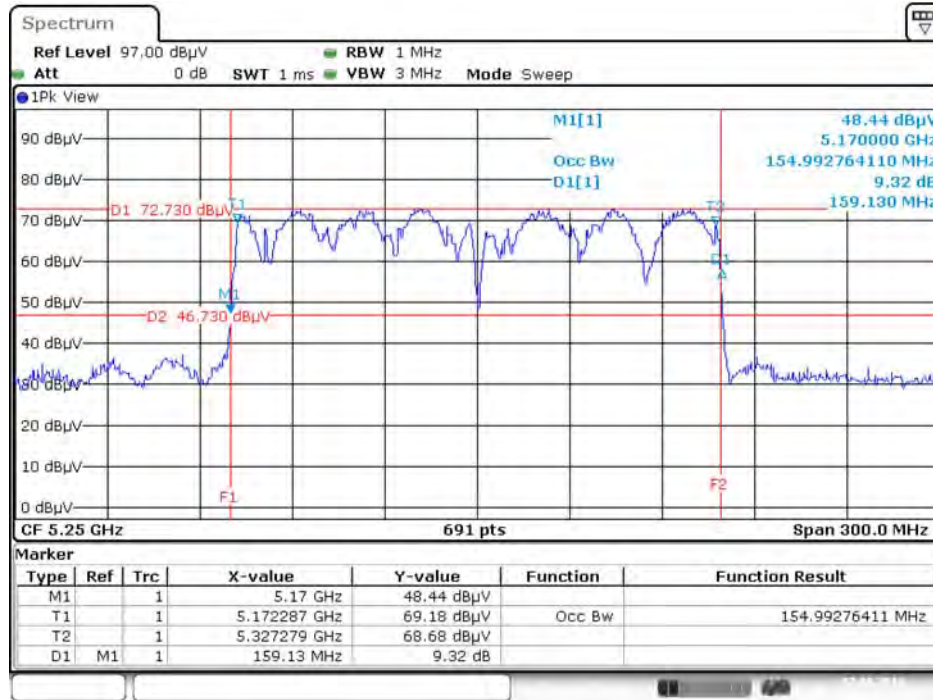


Date: 7.AUG.2016 11:52:47

For beamforming mode


For indoor use master B1 and indoor, outdoor use B2

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

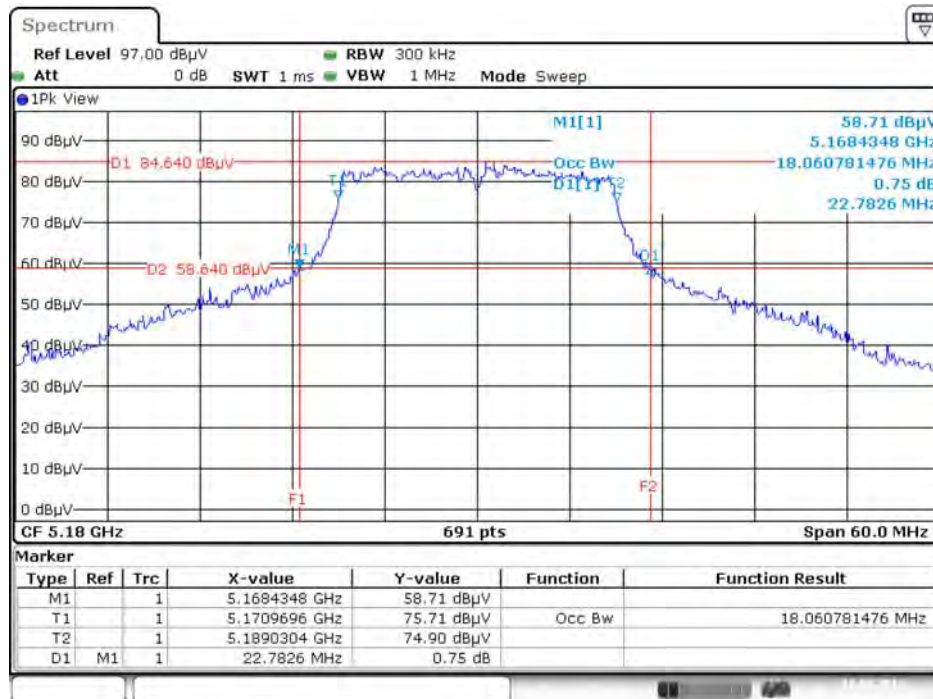


Date: 10.AUG.2016 00:06:04

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

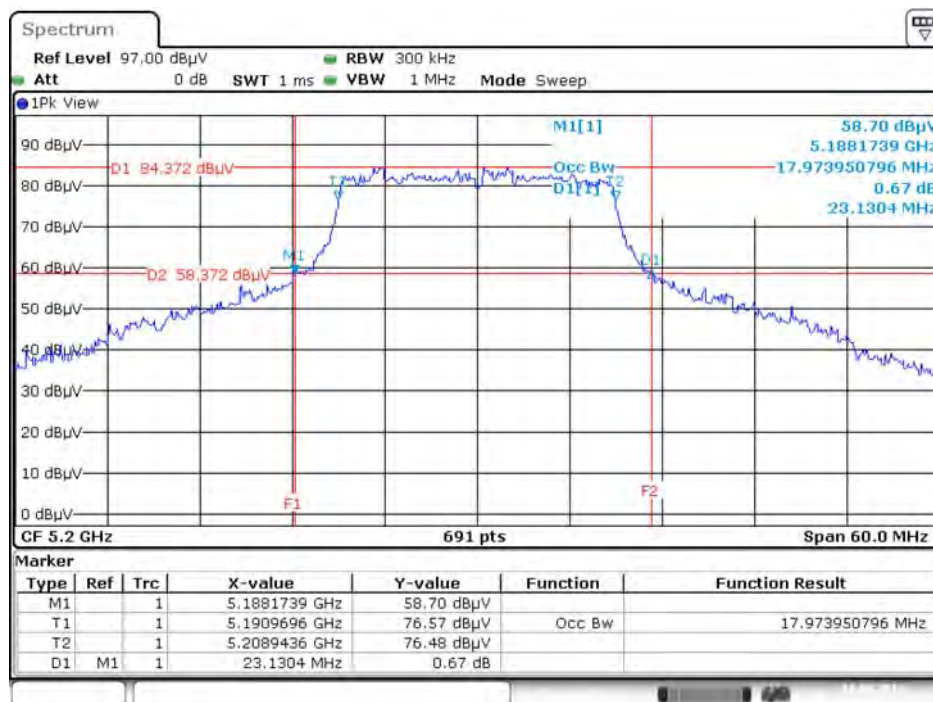


Date: 10.AUG.2016 00:07:40

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

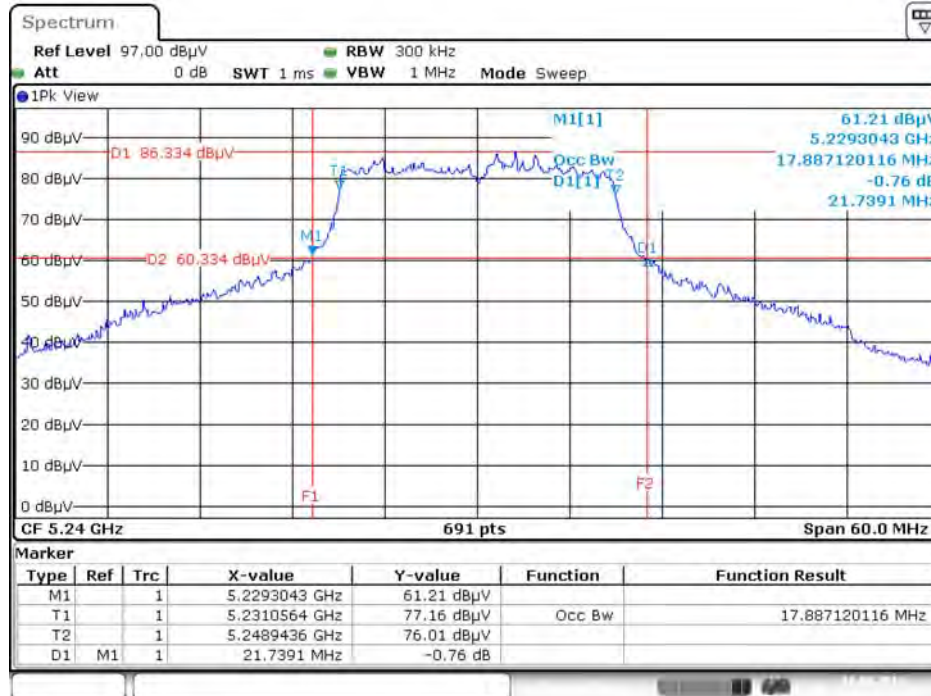

Date: 10.AUG.2016 00:12:11


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

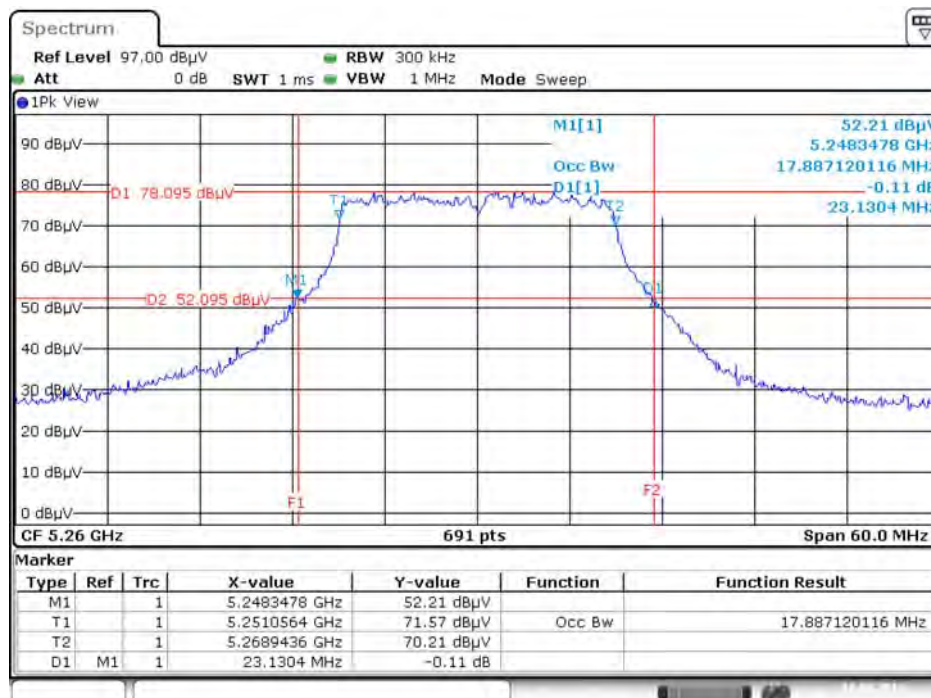

Date: 10.AUG.2016 00:14:14




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

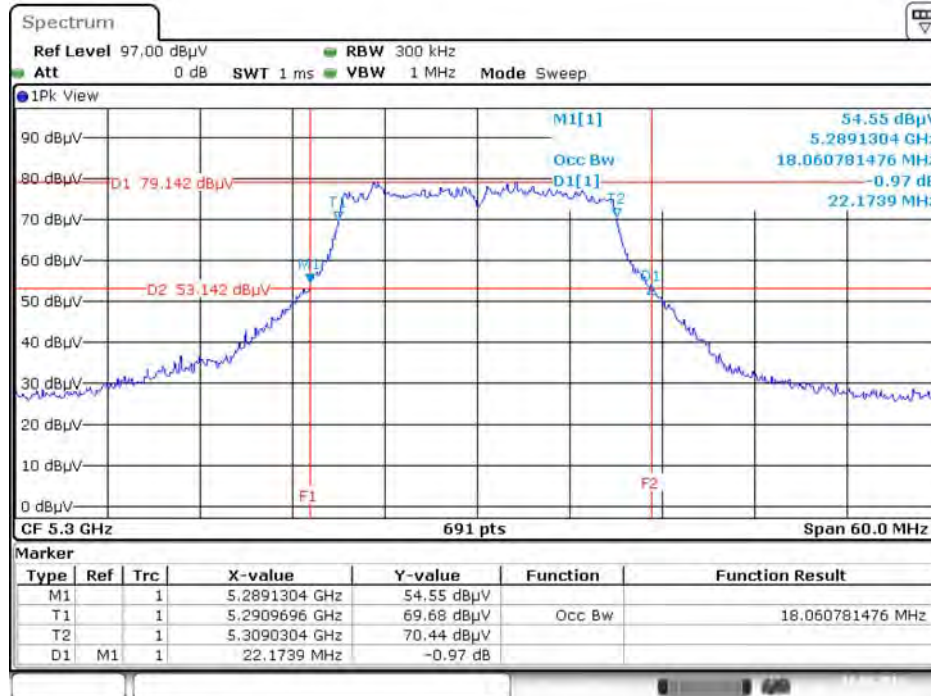


Date: 10.AUG.2016 00:15:46

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5320 MHz

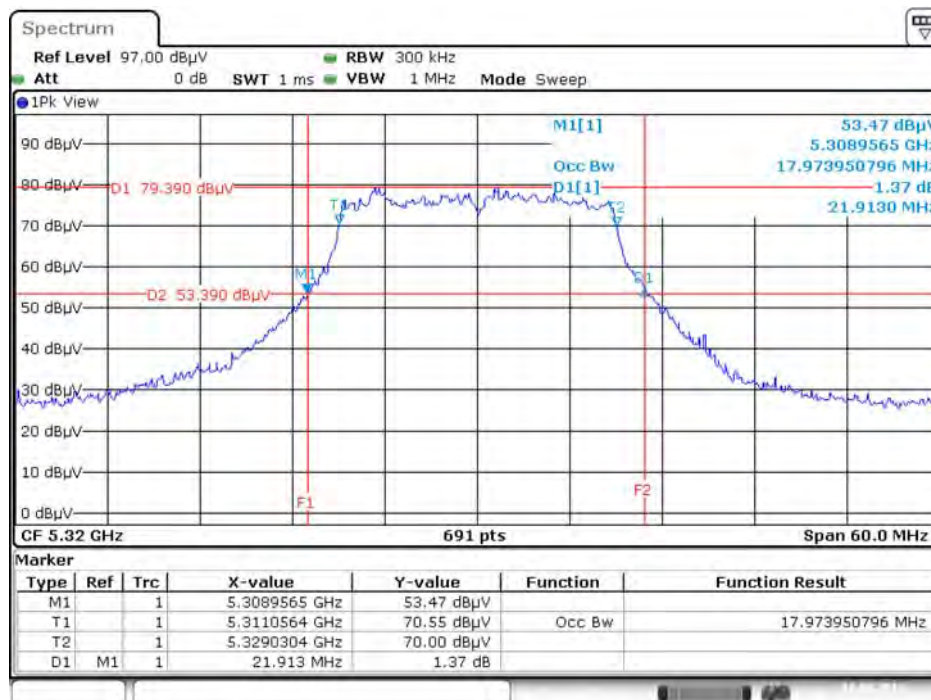


Date: 10.AUG.2016 00:17:00

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz**

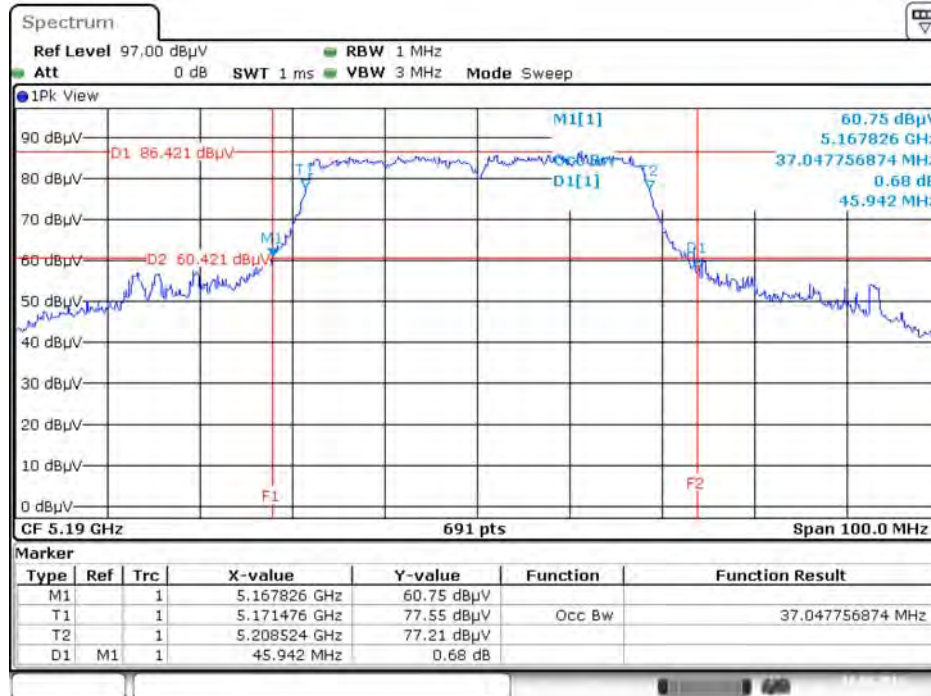


Date: 10.AUG.2016 01:08:46

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz**

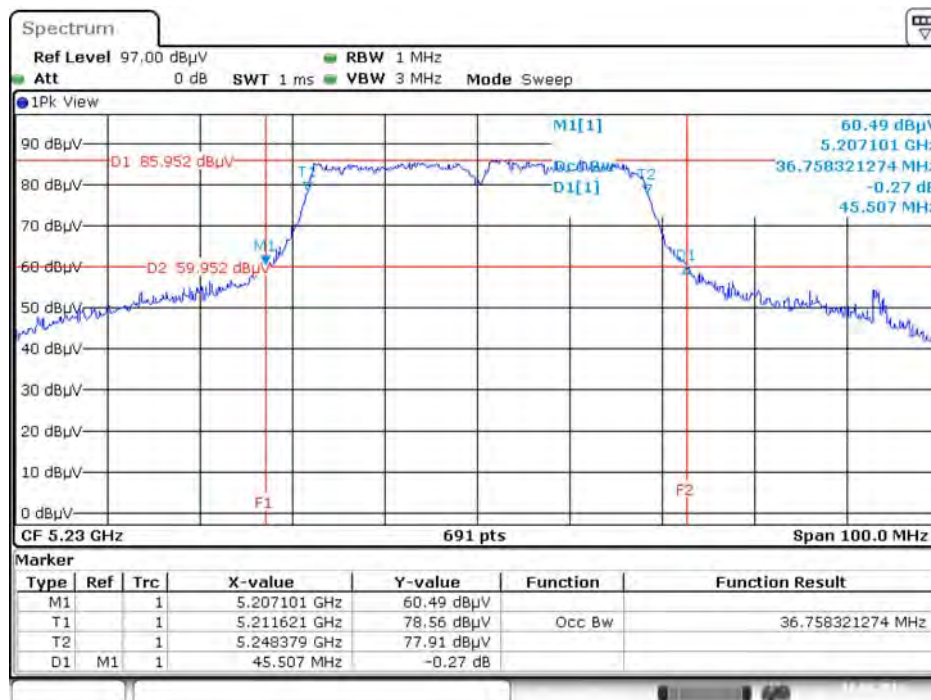


Date: 10.AUG.2016 01:09:52

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5270 MHz

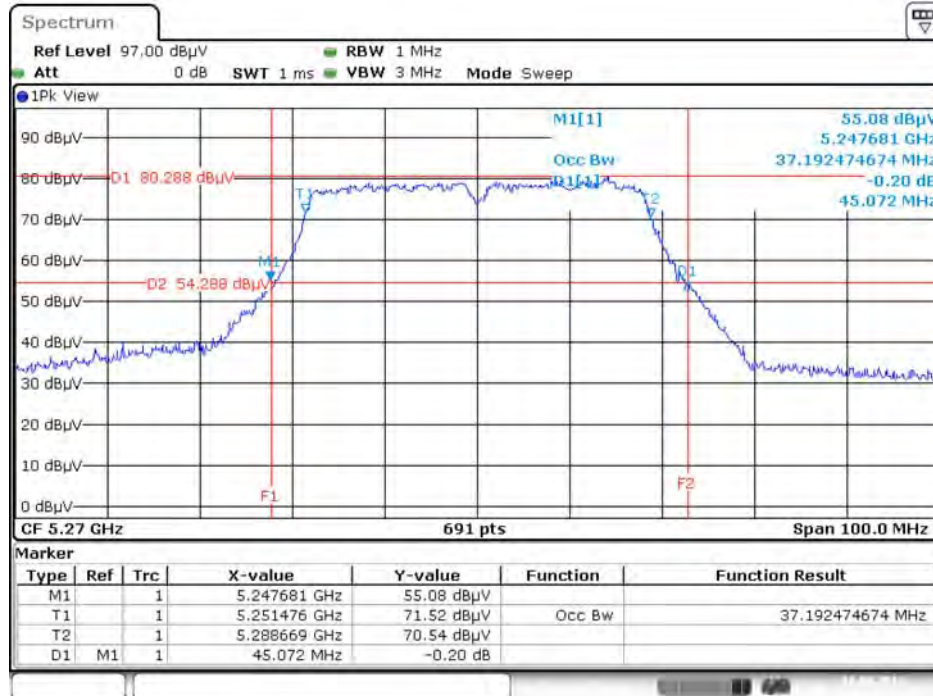


Date: 10.AUG.2016 01:11:09

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5310 MHz

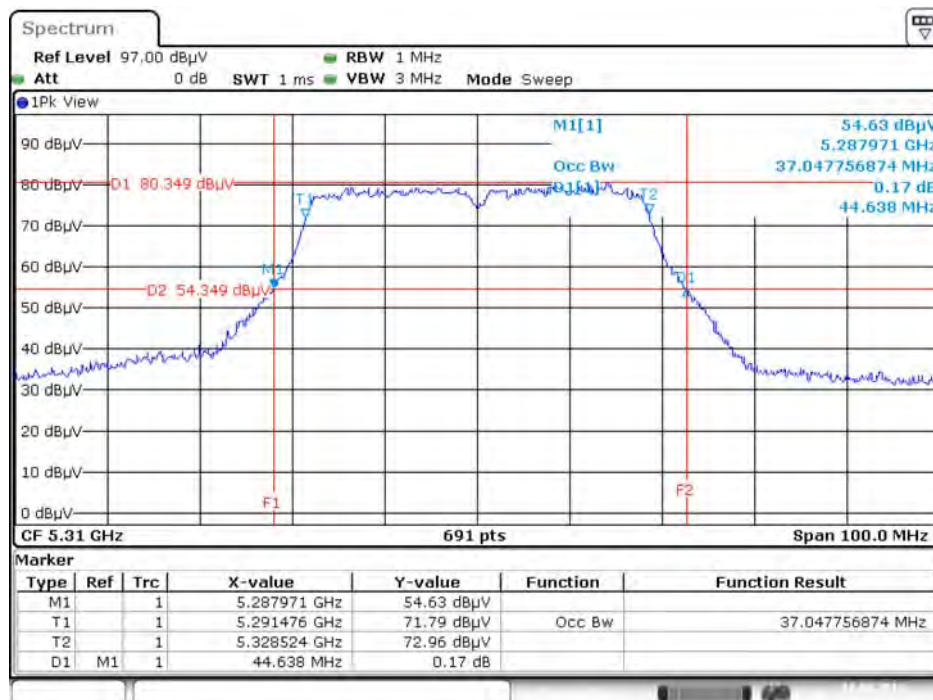


Date: 10.AUG.2016 01:12:34

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

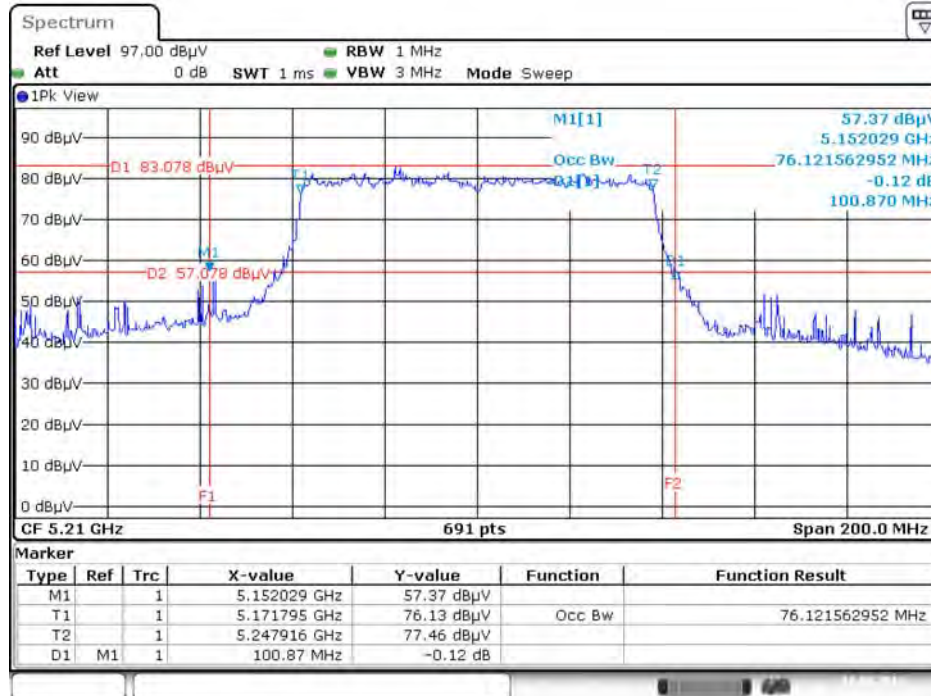

Date: 10.AUG.2016 01:25:18


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

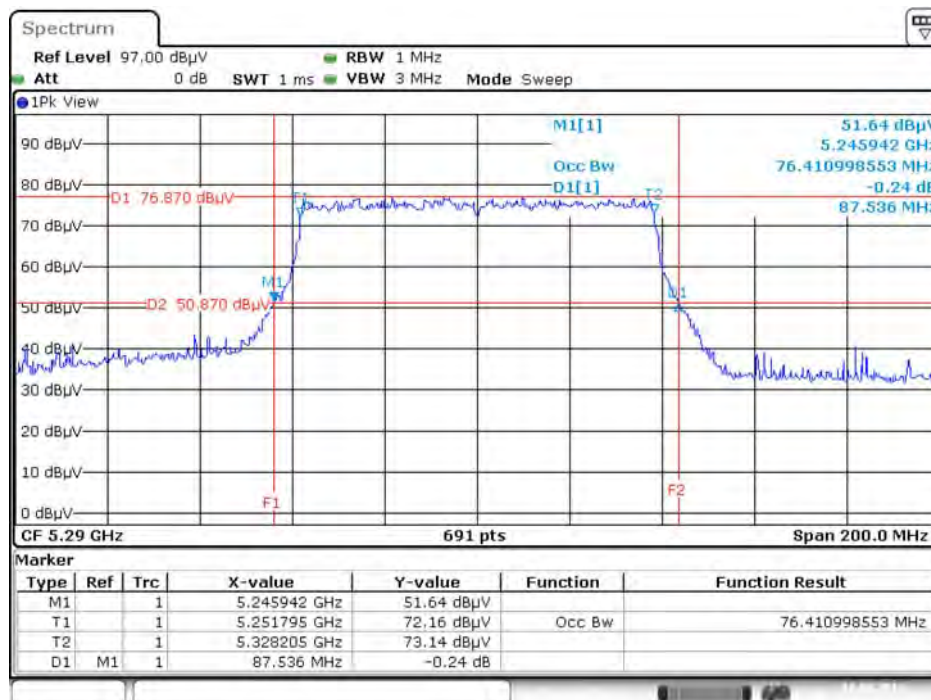

Date: 10.AUG.2016 01:27:19


**For indoor use slave without radar detection B1**

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz**

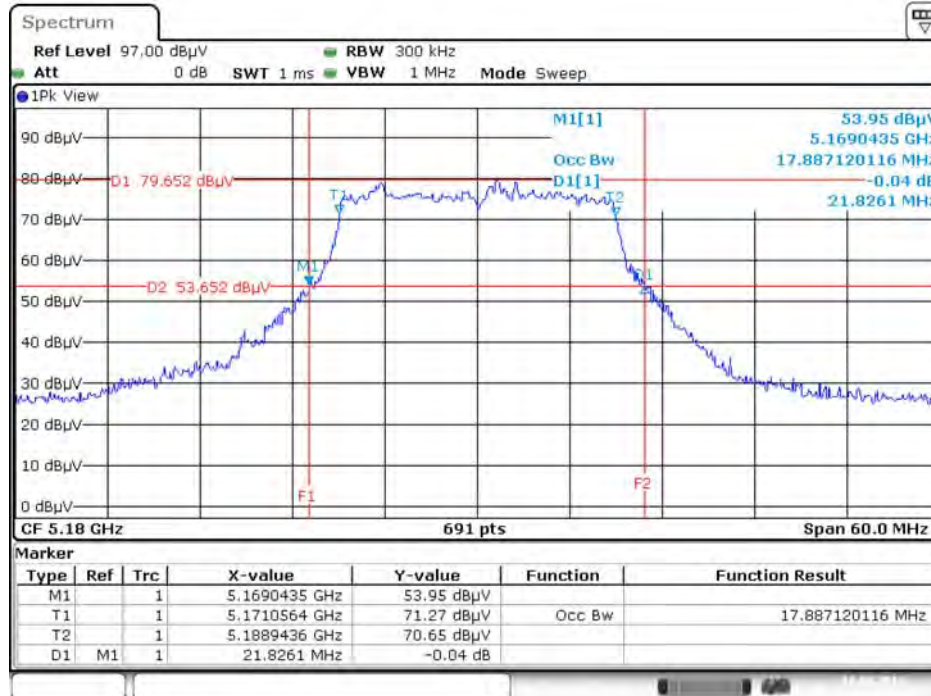


Date: 10.AUG.2016 02:06:57

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz**

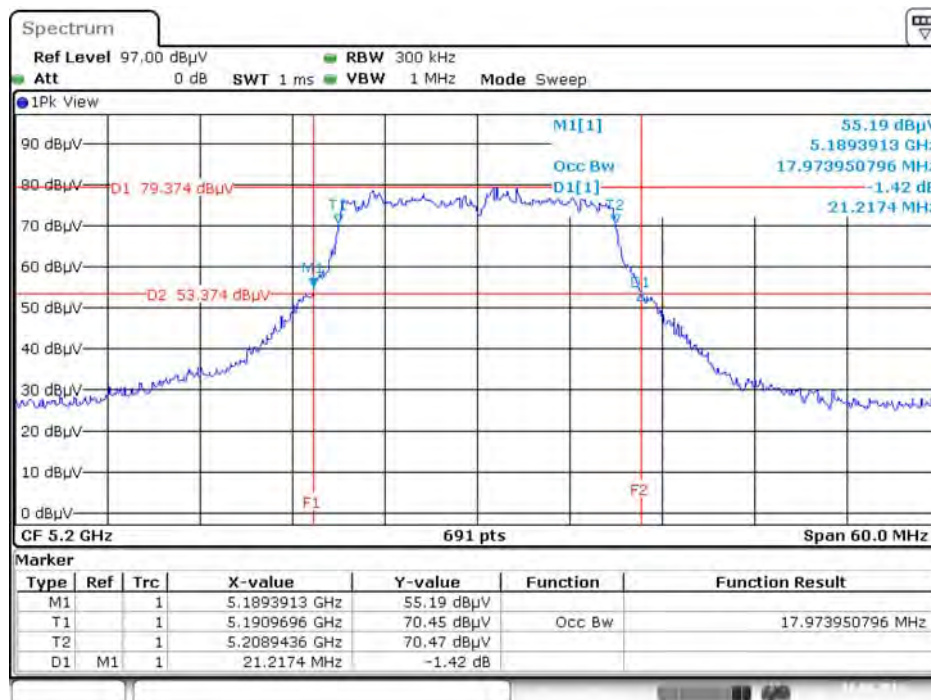


Date: 10.AUG.2016 02:08:45

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz**

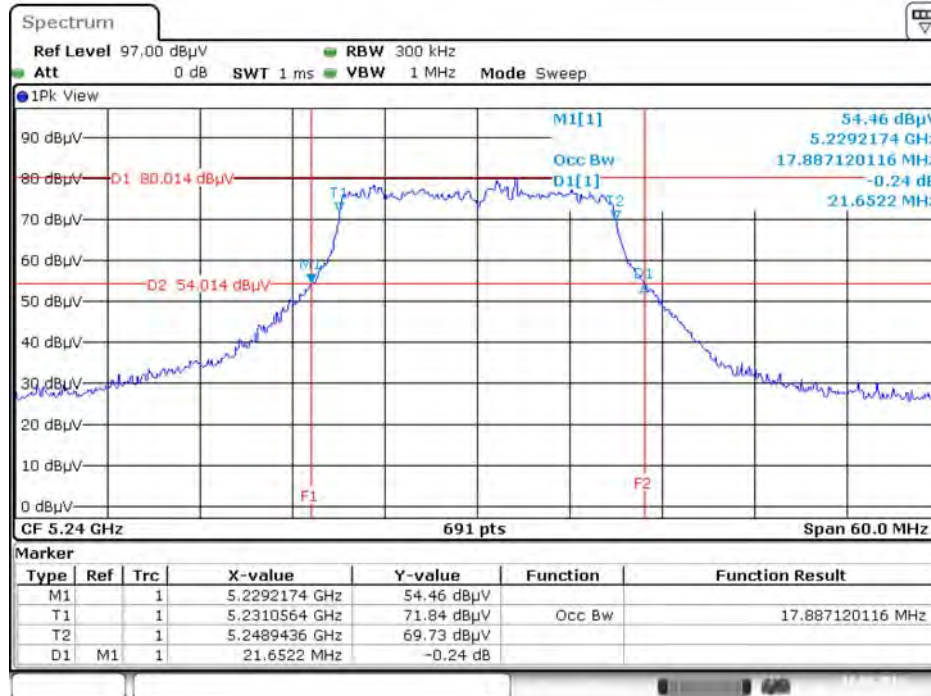


Date: 10.AUG.2016 02:10:56

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz**

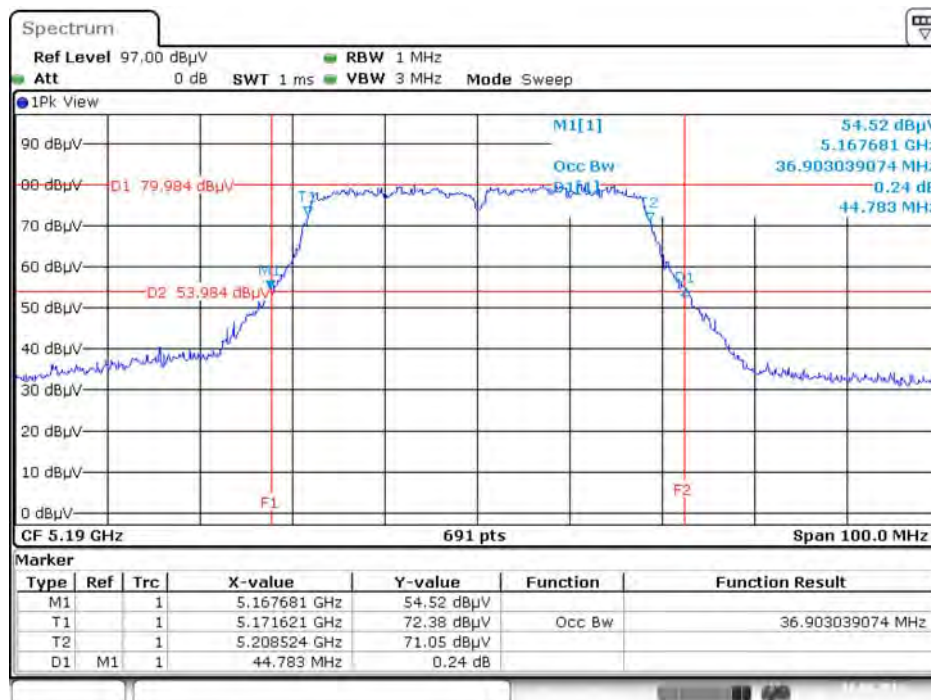


Date: 10.AUG.2016 02:17:44

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

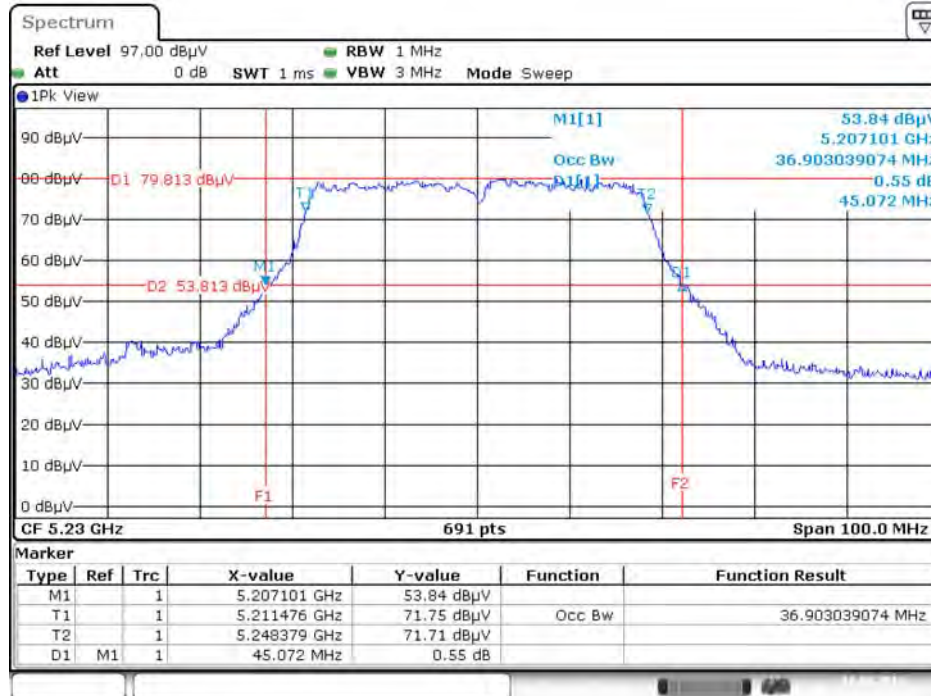

Date: 10.AUG.2016 02:19:22


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

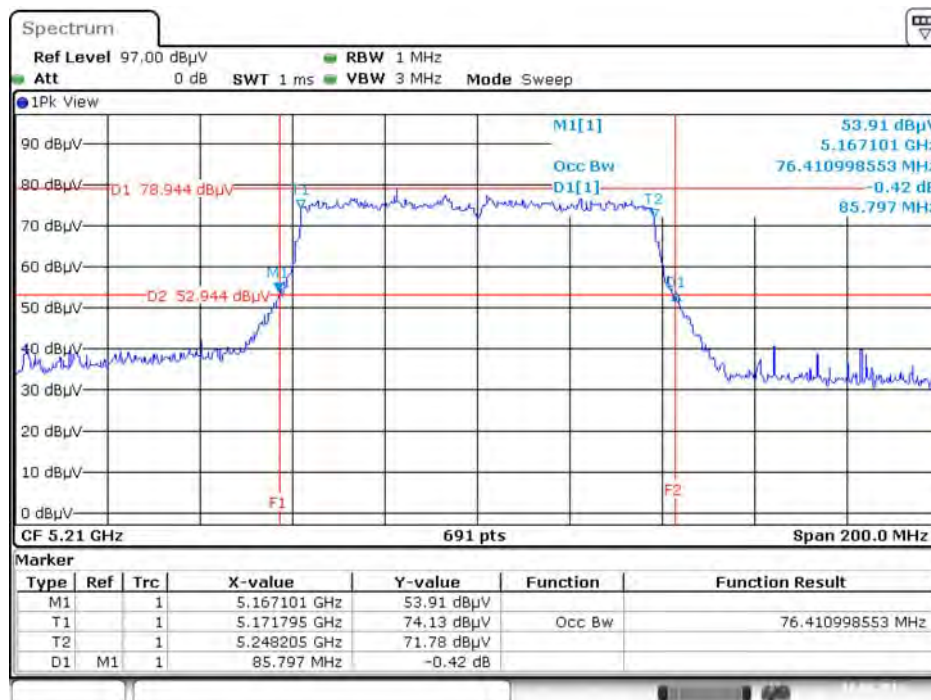

Date: 10.AUG.2016 02:22:03


For outdoor use master B1

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

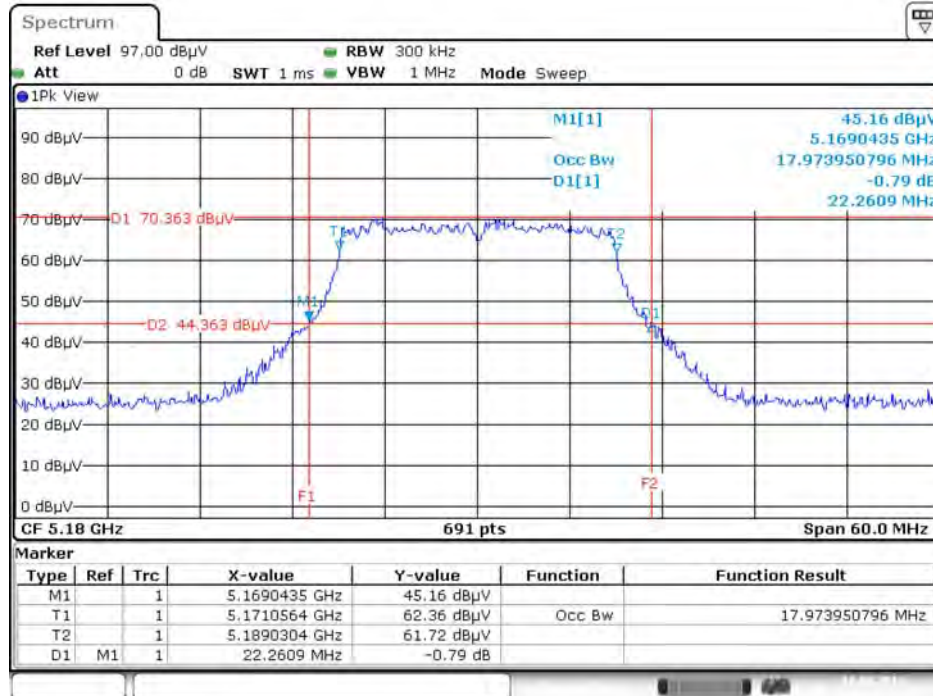

Date: 10.AUG.2016 02:29:39


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

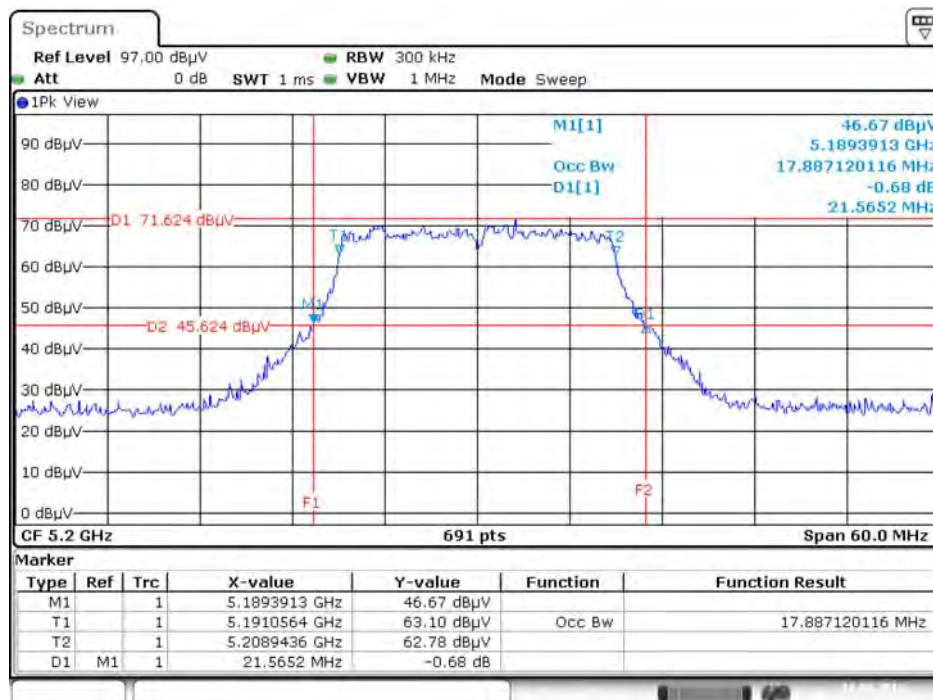

Date: 10.AUG.2016 02:30:52




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

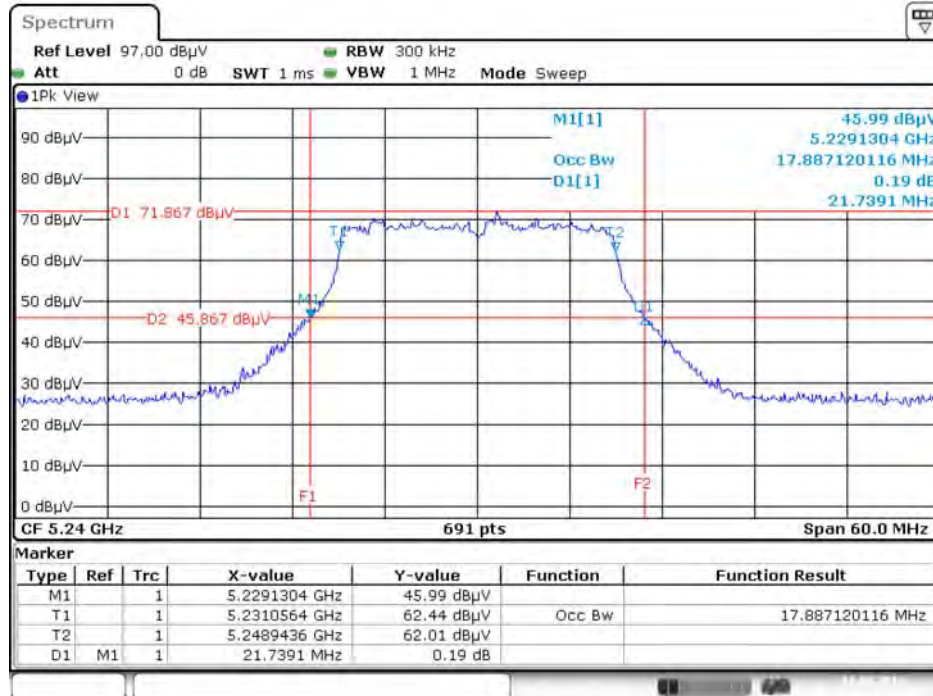


Date: 10.AUG.2016 02:33:14

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

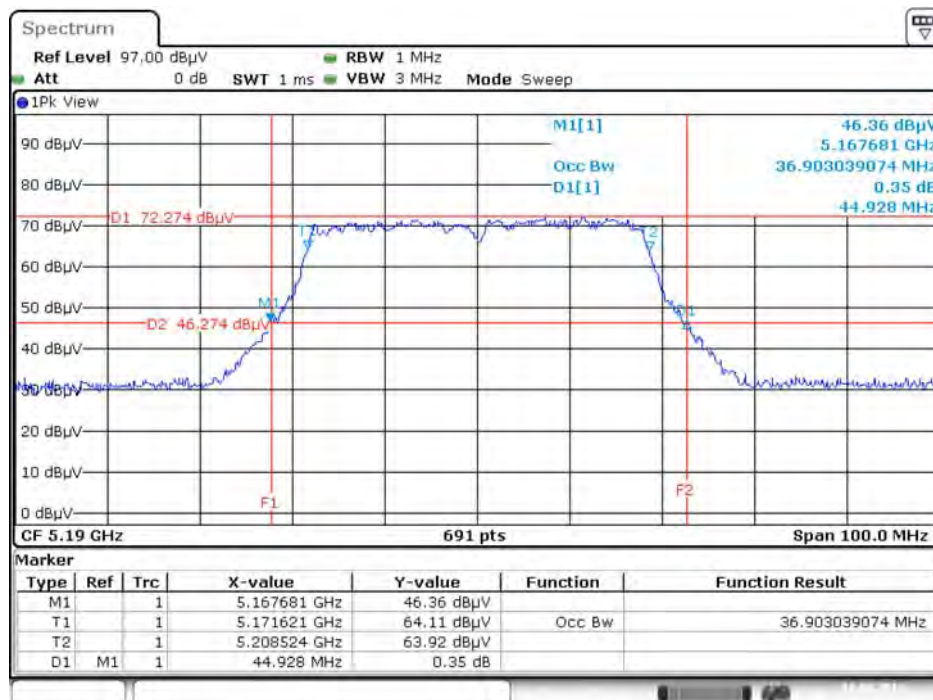


Date: 10.AUG.2016 02:36:14

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz**

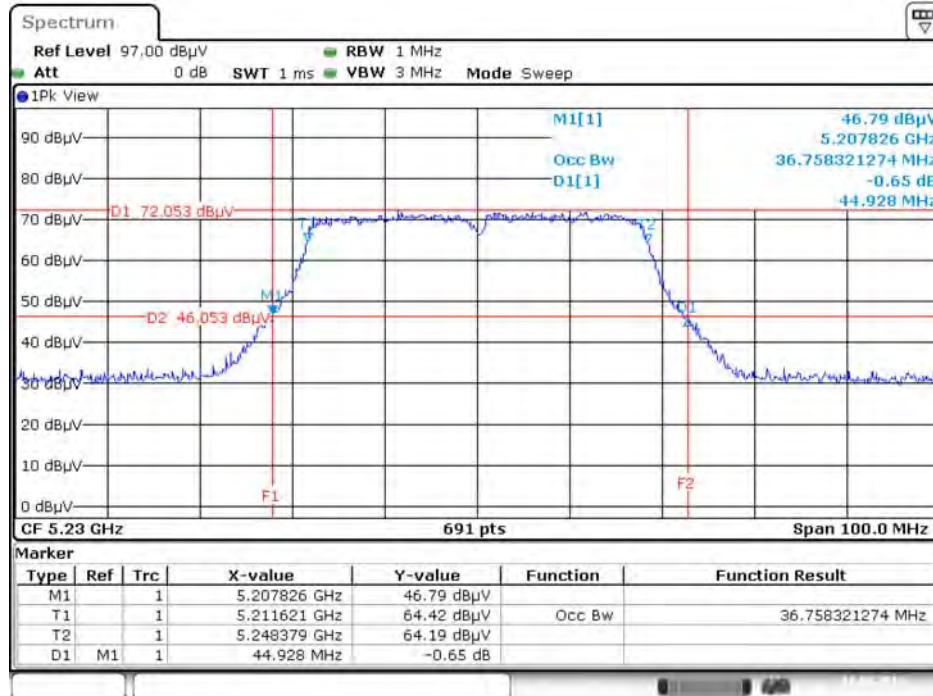

Date: 10.AUG.2016 02:37:54

**26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz**

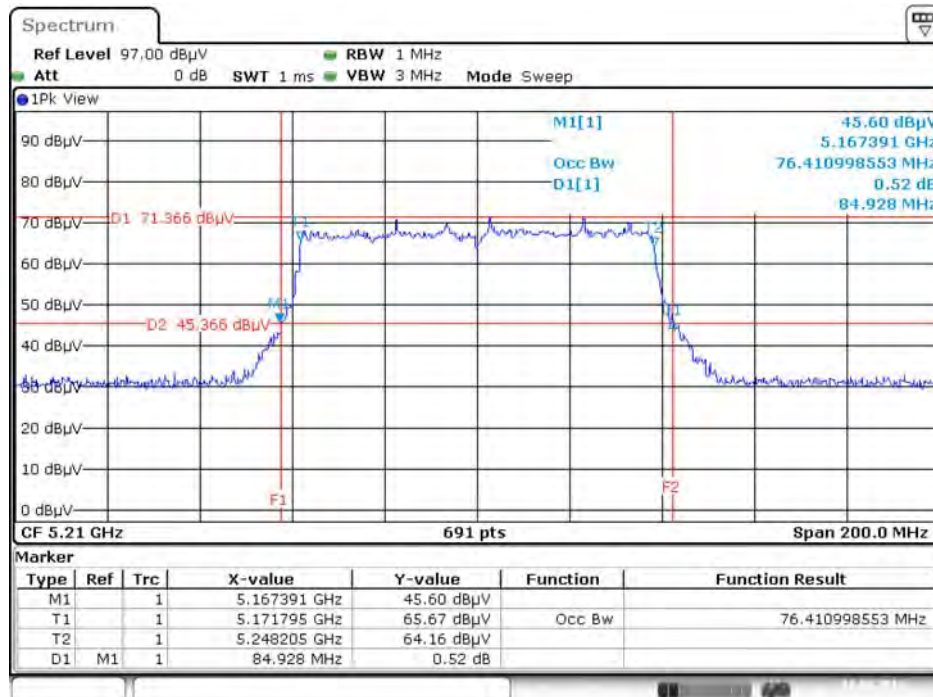


Date: 10.AUG.2016 02:40:29

**802.11ac MCS0/Nss2 VHT80+80**

For indoor use master and slave without radar detection

**Type 1**

26dB Bandwidth and 99% Occupied Bandwidth Plot on Chain 1 + Chain 2 + Chain 3 + Chain 4 /  
5210 MHz+5290 MHz

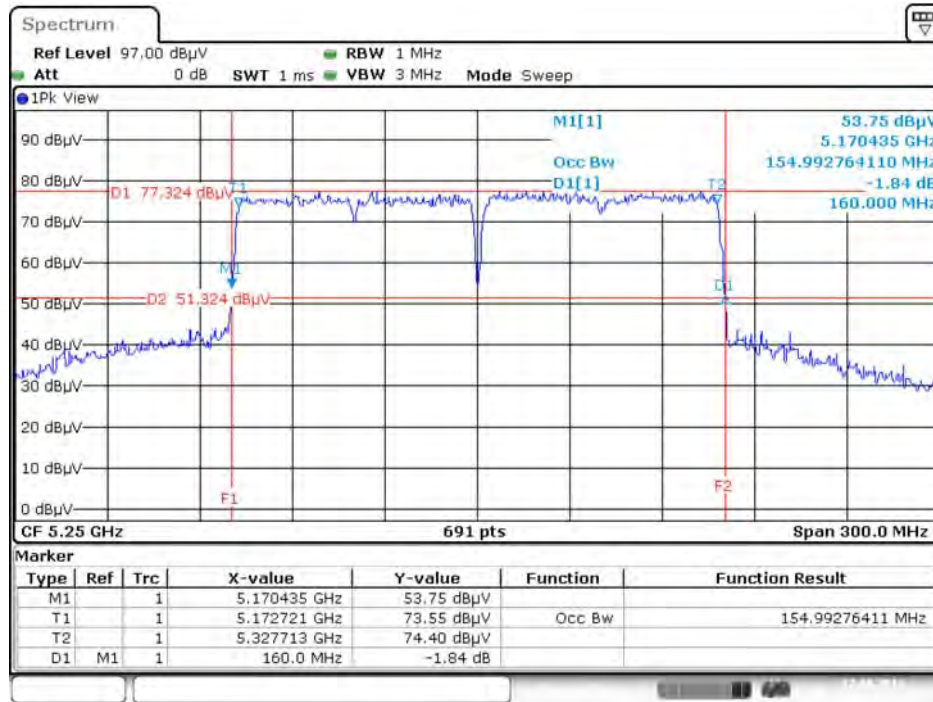


Date: 17.AUG.2016 11:25:22

For outdoor use master B1

Type 1

26dB Bandwidth and 99% Occupied Bandwidth Plot on Chain 1 + Chain 2 + Chain 3 + Chain 4 /  
5210 MHz+5290 MHz

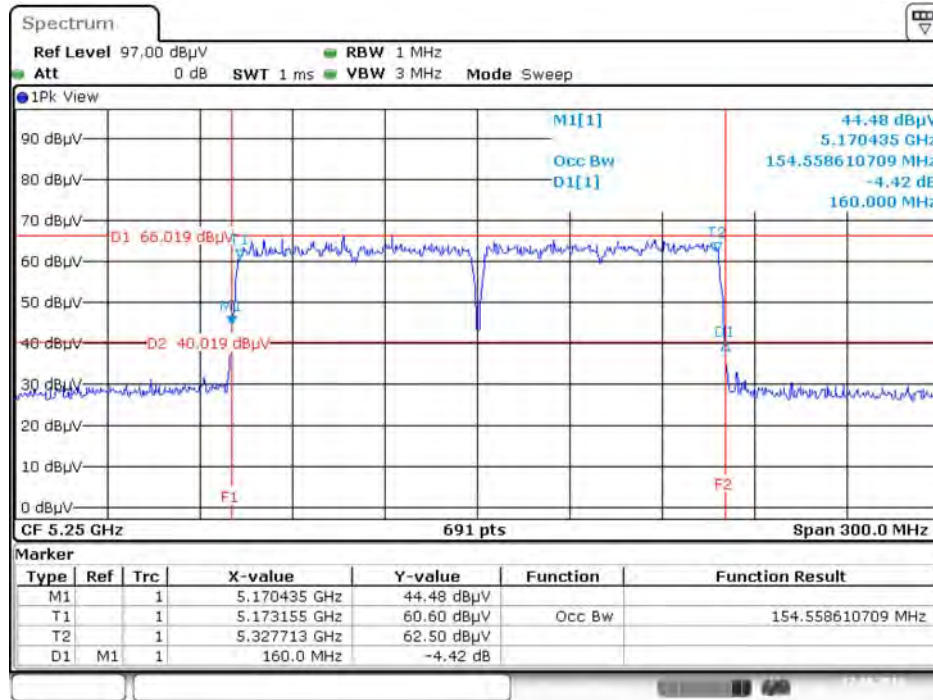

Date: 17.AUG.2016 18:02:17

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input checked="" type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input checked="" type="checkbox"/>	Client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

<input checked="" type="checkbox"/>	5.25-5.35 GHz	The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	5.470-5.725 GHz	
<input type="checkbox"/>	5.725~5.85 GHz	

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01r04 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout

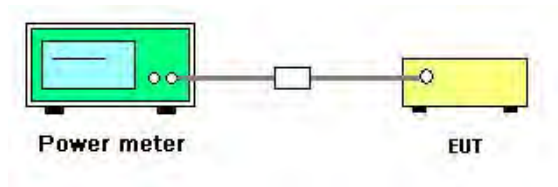

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu		

For non-beamforming mode

For indoor use master B1 and indoor, outdoor use B2

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	18.25	18.39	18.03	18.41	24.29	30.00	Complies
	5200 MHz	18.28	18.34	18.16	18.43	24.32	30.00	Complies
	5240 MHz	18.32	18.45	18.15	18.28	24.32	30.00	Complies
	5260 MHz	12.35	12.42	12.24	12.31	18.35	23.32	Complies
	5300 MHz	12.34	12.38	12.28	12.35	18.36	23.42	Complies
	5320 MHz	12.31	12.14	12.27	12.39	18.30	23.42	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	17.88	18.27	18.16	17.92	24.08	30.00	Complies
	5200 MHz	17.82	18.19	18.11	17.93	24.04	30.00	Complies
	5240 MHz	17.94	18.32	18.17	18.02	24.14	30.00	Complies
	5260 MHz	12.01	12.22	12.06	12.09	18.12	23.64	Complies
	5300 MHz	12.18	12.25	12.07	12.15	18.18	23.66	Complies
	5320 MHz	11.87	11.93	12.18	12.06	18.03	23.66	Complies



Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT40	5190 MHz	16.93	17.16	17.07	17.04	23.07	30.00	Complies
	5230 MHz	20.01	20.27	20.15	20.08	26.15	30.00	Complies
	5270 MHz	15.13	15.24	15.07	15.19	21.18	23.98	Complies
	5310 MHz	15.29	15.11	15.06	15.15	21.17	23.98	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	14.26	14.81	14.46	14.63	20.57	30.00	Complies
	5290 MHz	14.61	14.74	14.59	14.72	20.69	23.98	Complies

Note:

For 802.11a:

5260 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(17.04) - (6-6) = 23.32\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.32dBm.

5300 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(17.48) - (6-6) = 23.42\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.42dBm.

5320 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(17.48) - (6-6) = 23.42\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.42dBm.

For 802.11ac VHT20:

5260 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(18.35) - (6-6) = 23.64\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.64dBm.

5300 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(18.44) - (6-6) = 23.66\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.66dBm.

5320 MHz Power limit=23.98dBm or  $11 + 10\log(B)$ ;  $11 + 10\log(18.44) - (6-6) = 23.66\text{dBm} < 23.98\text{dBm}$ , so  
limit=23.66dBm.

**For indoor use slave without radar detection B1**

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	12.22	12.41	12.16	12.36	18.31	23.98	Complies
	5200 MHz	12.24	12.42	12.25	12.37	18.34	23.98	Complies
	5240 MHz	12.25	12.38	12.41	12.26	18.35	23.98	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	11.86	12.29	12.03	12.12	18.10	23.98	Complies
	5200 MHz	11.77	12.24	12.07	12.05	18.06	23.98	Complies
	5240 MHz	12.08	12.45	12.14	12.21	18.24	23.98	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	15.02	15.21	15.09	15.04	21.11	23.98	Complies
	5230 MHz	15.07	15.28	15.22	15.13	21.20	23.98	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	14.26	14.81	14.46	14.63	20.57	23.98	Complies

**For outdoor use master B1**

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5180 MHz	8.86	8.72	9.02	8.99	14.92	30.00	Complies
	5200 MHz	8.9	8.86	9.09	9	14.98	30.00	Complies
	5240 MHz	8.71	8.66	8.81	9.02	14.82	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	8.76	8.82	8.64	8.71	14.75	30.00	Complies
	5200 MHz	8.78	8.83	8.53	8.61	14.71	30.00	Complies
	5240 MHz	8.82	8.53	8.69	8.88	14.75	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	8.84	8.56	8.76	8.78	14.76	30.00	Complies
	5230 MHz	8.64	8.63	8.91	8.85	14.78	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	8.64	8.67	8.89	8.76	14.76	30.00	Complies

**802.11ac MCS0/Nss2 VHT80+80**
**For indoor use master**

Type	Frequency	Conducted Power (dBm)						Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total	Band Total		
1	5210 MHz	13.64	14.13	-	-	16.90	-	30.00	Complies
	5290 MHz	-	-	13.98	13.76	16.88	-	23.98	Complies

**For indoor use slave without radar detection B1**

Type	Frequency	Conducted Power (dBm)						Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total	Band Total		
1	5210 MHz	13.64	14.13	-	-	16.90	-	23.98	Complies
	5290 MHz	-	-	13.98	13.76	16.88	-	23.98	Complies

**For outdoor use master B1**

Type	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
1	5210 MHz	11.72	11.69	-	-	14.72	30.00	Complies
	5290 MHz	-	-	11.55	11.21	14.39	23.98	Complies

**For beamforming mode**
**For indoor use master B1 and indoor, outdoor use B2**

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	17.51	17.85	17.52	17.87	23.71	23.98	Complies
	5200 MHz	17.57	17.84	17.49	17.95	23.74	23.98	Complies
	5240 MHz	17.64	17.86	17.56	17.61	23.69	23.98	Complies
	5260 MHz	11.58	11.96	11.59	11.65	17.72	17.96	Complies
	5300 MHz	11.83	11.71	11.67	11.72	17.75	17.96	Complies
	5320 MHz	11.43	11.55	11.48	11.77	17.58	17.96	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	17.63	17.98	17.66	17.72	23.77	23.98	Complies
	5230 MHz	17.65	18.01	17.85	17.67	23.82	23.98	Complies
	5270 MHz	12.03	11.72	11.55	11.46	17.72	17.96	Complies
	5310 MHz	12.22	11.81	11.76	11.61	17.88	17.96	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	16.24	16.62	16.44	16.03	22.36	23.98	Complies
	5290 MHz	11.71	11.53	11.13	11.41	17.47	17.96	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi} > 6\text{dBi}$ , so B1 limit =  $30 - (12.02 - 6) = 23.98\text{dBm}$ .

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi} > 6\text{dBi}$ , so B2 limit =  $23.98 - (12.02 - 6) = 17.96\text{dBm}$ .

## For indoor use slave without radar detection B1

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	11.21	11.88	11.45	11.33	17.50	17.96	Complies
	5200 MHz	11.63	11.29	11.48	11.43	17.48	17.96	Complies
	5240 MHz	11.79	11.44	11.51	11.31	17.54	17.96	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	11.89	11.93	11.45	11.48	17.71	17.96	Complies
	5230 MHz	11.96	11.38	11.56	11.39	17.60	17.96	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	11.24	11.62	11.44	11.03	17.36	17.96	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi} > 6\text{dBi}$ , so limit =  $23.98 - (12.02 - 6) = 17.96\text{dBm}$ .

## For outdoor use master B1

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	2.53	2.61	2.72	2.66	8.65	23.98	Complies
	5200 MHz	2.45	2.64	2.55	2.69	8.60	23.98	Complies
	5240 MHz	2.58	2.68	2.75	2.52	8.65	23.98	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	1.96	2.23	2.09	2.37	8.19	23.98	Complies
	5230 MHz	2.68	2.41	2.52	2.12	8.46	23.98	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	2.09	2.62	2.21	2.29	8.33	23.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi} > 6\text{dBi}$ , so limit =  $30 - (12.02 - 6) = 23.98\text{dBm}$ .

**802.11ac MCS0/Nss2 VHT80+80**
**For indoor use master**

Type	Frequency	Conducted Power (dBm)						Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total	Band Total		
1	5210 MHz	15.72	15.29	-	-	18.52	-	26.99	Complies
	5290 MHz	-	-	15.54	15.05	18.31	-	20.97	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi} > 6 \text{ dBi}$ , so limit = 23.98 - (9.01 - 6) = 20.97 dBm.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi} > 6 \text{ dBi}$ , so limit = 30 - (9.01 - 6) = 26.99 dBm.

**For indoor use slave without radar detection B1**

Type	Frequency	Conducted Power (dBm)						Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total	Band Total		
1	5210 MHz	15.72	15.29	-	-	18.52	-	20.97	Complies
	5290 MHz	-	-	15.54	15.05	18.31	-	20.97	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi} > 6 \text{ dBi}$ , so limit = 23.98 - (9.01 - 6) = 20.97 dBm.

## For outdoor use master B1

Type	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
1	5210 MHz	8.82	8.66	-	-	11.75	26.99	Complies
	5290 MHz	-	-	8.54	8.05	11.31	20.97	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi} > 6 \text{ dBi}$ , so limit = 23.98 - (9.01 - 6) = 20.97 dBm.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi} > 6 \text{ dBi}$ , so limit = 30 - (9.01 - 6) = 26.99 dBm.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
<input checked="" type="checkbox"/>	5.15~5.25 GHz	
	Operating Mode	
<input checked="" type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input checked="" type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz
<input checked="" type="checkbox"/>	5.25-5.35 GHz	11 dBm/MHz
<input type="checkbox"/>	5.470-5.725 GHz	11 dBm/MHz
<input type="checkbox"/>	5.725~5.85 GHz	30 dBm/500kHz

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.	



#### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01r04 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements and sum the spectra across the outputs.
4. For 5.725~5.85 GHz, the measured result of PSD level must add  $10\log(500\text{kHz}/\text{RBW})$  and the final result should  $\leq 30$  dBm.

#### 4.4.4. Test Setup Layout

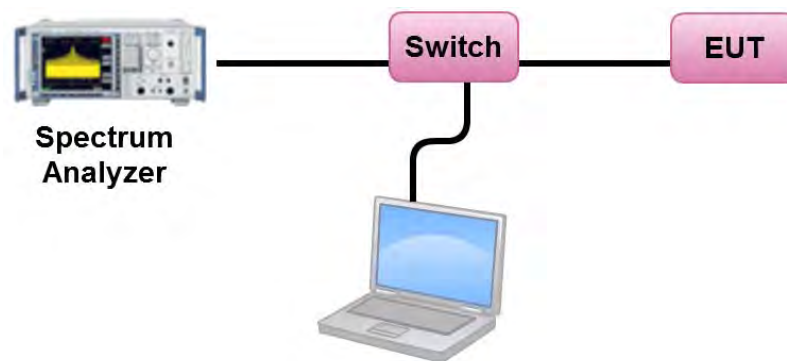

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu		

For non-beamforming mode

For indoor use master B1 and indoor, outdoor use B2

Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.92	10.98	Complies
40	5200 MHz	10.92	10.98	Complies
48	5240 MHz	10.96	10.98	Complies
52	5260 MHz	4.92	4.98	Complies
60	5300 MHz	4.91	4.98	Complies
64	5320 MHz	4.88	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

## Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.87	10.98	Complies
40	5200 MHz	10.89	10.98	Complies
48	5240 MHz	10.80	10.98	Complies
52	5260 MHz	4.76	4.98	Complies
60	5300 MHz	4.82	4.98	Complies
64	5320 MHz	4.81	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

## Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	6.88	10.98	Complies
46	5230 MHz	9.94	10.98	Complies
54	5270 MHz	4.87	4.98	Complies
62	5310 MHz	4.93	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-1.39	10.98	Complies
58	5290 MHz	1.41	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

**For indoor use slave without radar detection B1**
**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.97	4.98	Complies
40	5200 MHz	4.86	4.98	Complies
48	5240 MHz	4.90	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.69	4.98	Complies
40	5200 MHz	4.64	4.98	Complies
48	5240 MHz	4.77	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	4.91	4.98	Complies
46	5230 MHz	4.83	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-1.39	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**For outdoor use master B1**
**Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.69	10.98	Complies
40	5200 MHz	1.76	10.98	Complies
48	5240 MHz	1.59	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	1.53	10.98	Complies
40	5200 MHz	1.46	10.98	Complies
48	5240 MHz	1.51	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-1.50	10.98	Complies
46	5230 MHz	-1.47	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-4.34	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

**802.11ac MCS0/Nss2 VHT80+80**
**For indoor use master**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-2.34		-		13.99	Complies
	5290 MHz	-2.26				7.99	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi}$ , so limit = 17 - (9.01 - 6) = 13.99 dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi}$ , so limit = 11 - (9.01 - 6) = 7.99 dBm/MHz.

**For indoor use slave without radar detection B1**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-2.34		-		7.99	Complies
	5290 MHz	-2.26				-	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi}$ , so limit = 11 - (9.01 - 6) = 7.99 dBm/MHz.

**For outdoor use master B1**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-4.43		-		13.99	Complies
	5290 MHz	-4.71				7.99	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi}$ , so limit = 17 - (9.01 - 6) = 13.99 dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi}$ , so limit = 11 - (9.01 - 6) = 7.99 dBm/MHz.



For beamforming mode

For indoor use master B1 and indoor, outdoor use B2

Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	10.36	10.98	Complies
40	5200 MHz	10.41	10.98	Complies
48	5240 MHz	10.31	10.98	Complies
52	5260 MHz	4.37	4.98	Complies
60	5300 MHz	4.42	4.98	Complies
64	5320 MHz	4.25	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{CS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)= 10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{CS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	7.46	10.98	Complies
46	5230 MHz	7.54	10.98	Complies
54	5270 MHz	1.43	4.98	Complies
62	5310 MHz	1.57	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{CS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B1 limit = 17-(12.02-6)= 10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{CS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

## Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	5.25	10.98	Complies
58	5290 MHz	-1.73	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02 \text{dBi}$ , so B1 limit = 17-(12.02-6)=10.98dBm/MHz.

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02 \text{dBi}$ , so B2 limit = 11-(12.02-6)=4.98dBm/MHz.

**For indoor use slave without radar detection B1**
**Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	4.13	4.98	Complies
40	5200 MHz	4.10	4.98	Complies
48	5240 MHz	4.20	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	1.42	4.98	Complies
46	5230 MHz	1.34	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-1.79	4.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit =  $11 - (12.02 - 6) = 4.98\text{dBm/MHz}$ .

**For outdoor use master B1**
**Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180 MHz	-4.52	10.98	Complies
40	5200 MHz	-4.55	10.98	Complies
48	5240 MHz	-4.52	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit = 17-(12.02-6)=10.98dBm/MHz.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190 MHz	-7.94	10.98	Complies
46	5230 MHz	-7.74	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit = 17-(12.02-6)=10.98dBm/MHz.

**Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4**

Channel	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210 MHz	-10.77	10.98	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.02\text{dBi}$ , so limit = 17-(12.02-6)=10.98dBm/MHz.

**802.11ac MCS0/Nss2 VHT80+80**

**For indoor use master**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-0.89		-		13.99	Complies
	5290 MHz	-0.72				7.99	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi, so limit} = 17 - (9.01 - 6) = 13.99 \text{ dBm/MHz.}$

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi, so limit} = 11 - (9.01 - 6) = 7.99 \text{ dBm/MHz.}$

**For indoor use slave without radar detection B1**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-0.89		-		7.99	Complies
	5290 MHz	-0.72				-	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi, so limit} = 11 - (9.01 - 6) = 7.99 \text{ dBm/MHz.}$

**For outdoor use master B1**

Type	Frequency	Power Density (dBm/MHz)	10log(500kHz/RBW) Factor (dB)	Power Density (dBm/500kHz)	Power Density Limit (dBm/500kHz)	Max. Limit (dBm/MHz)	Result
1	5210 MHz	-7.59		-		13.99	Complies
	5290 MHz	-8.01				7.99	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi, so limit} = 17 - (9.01 - 6) = 13.99 \text{ dBm/MHz.}$

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 9.01 \text{ dBi, so limit} = 11 - (9.01 - 6) = 7.99 \text{ dBm/MHz.}$


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


For non-beamforming mode

For indoor use master B1 and indoor, outdoor use B2


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

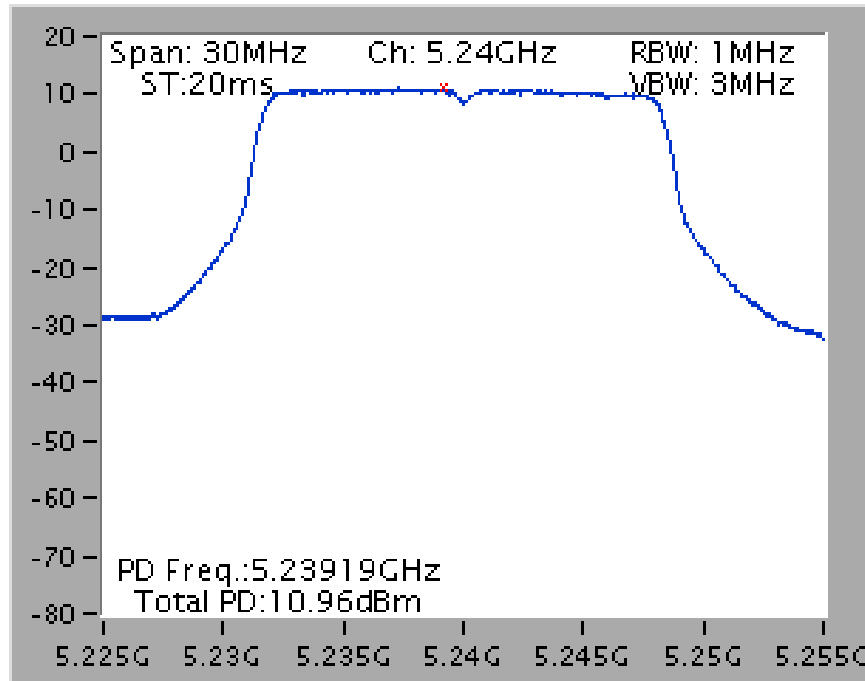


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5260 MHz

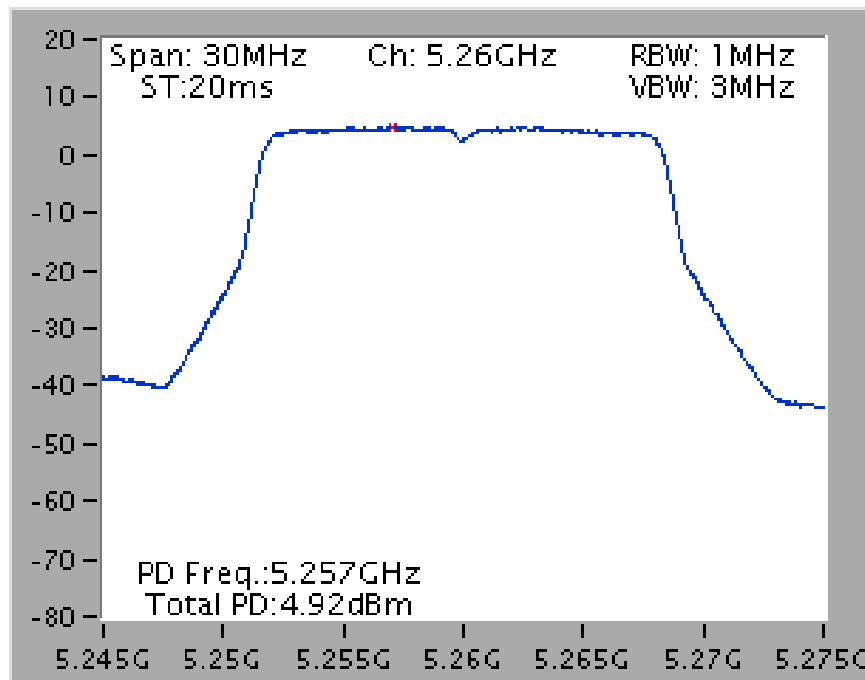


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

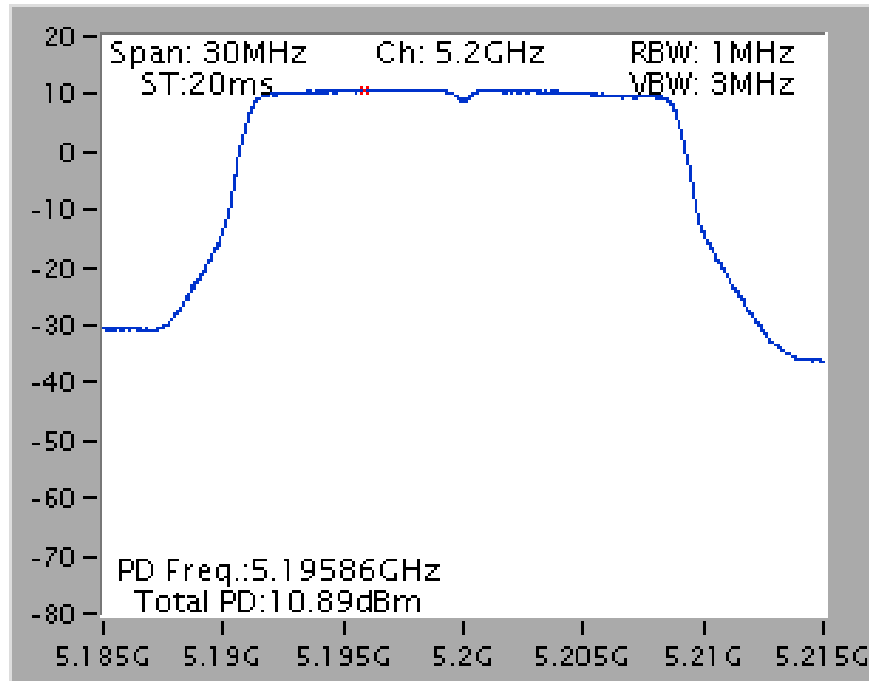


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

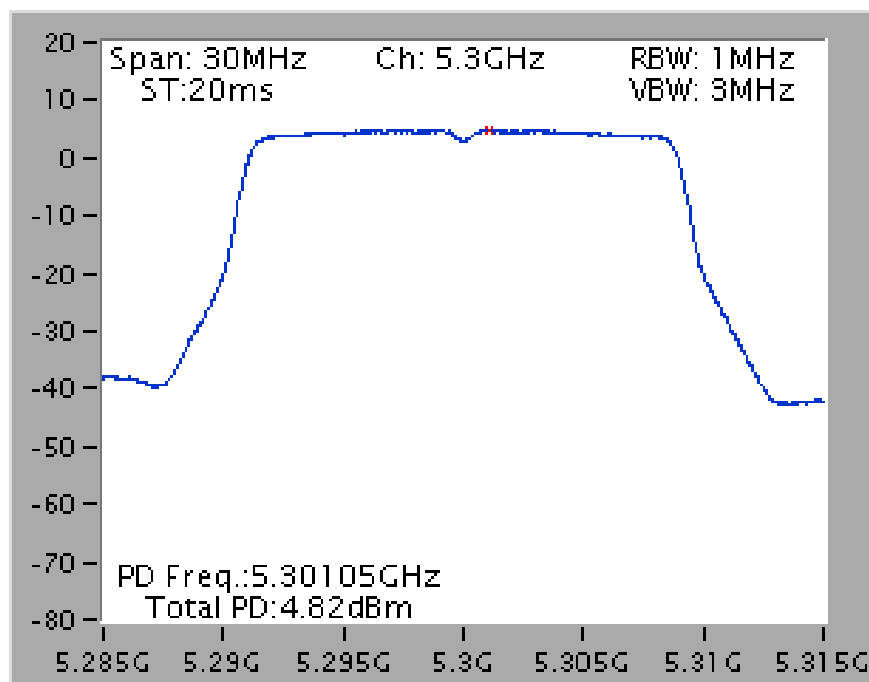

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

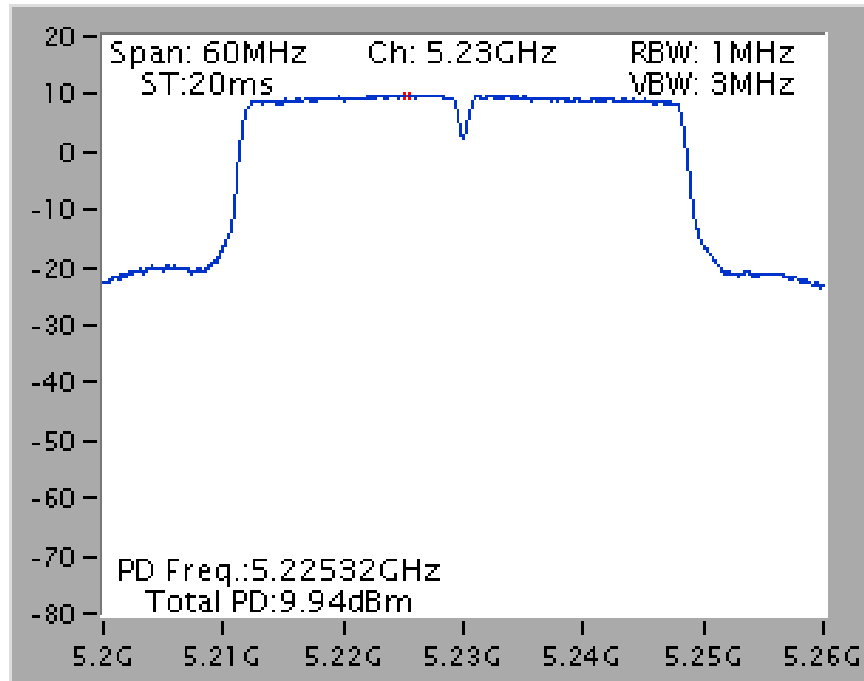


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5310 MHz

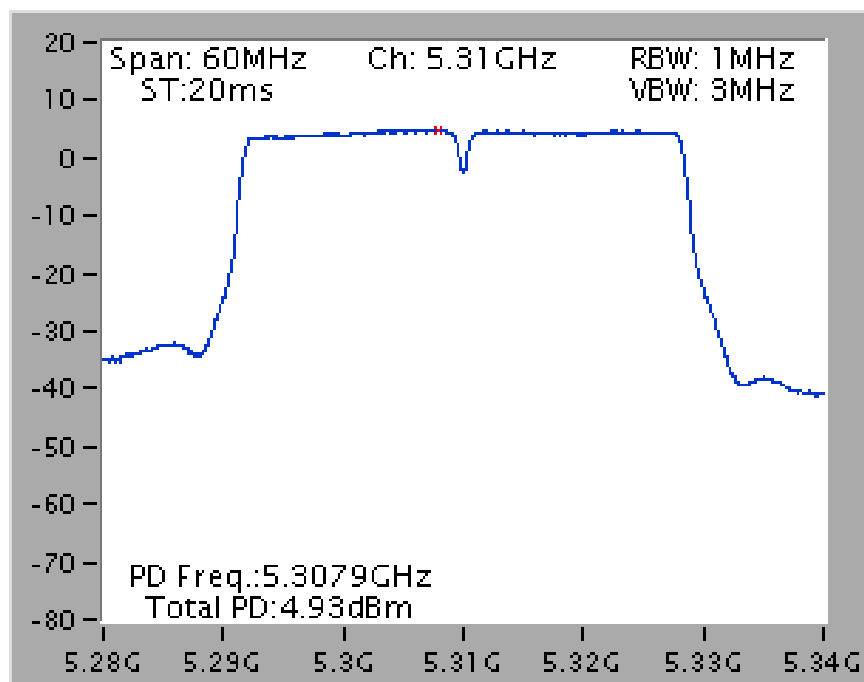




Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

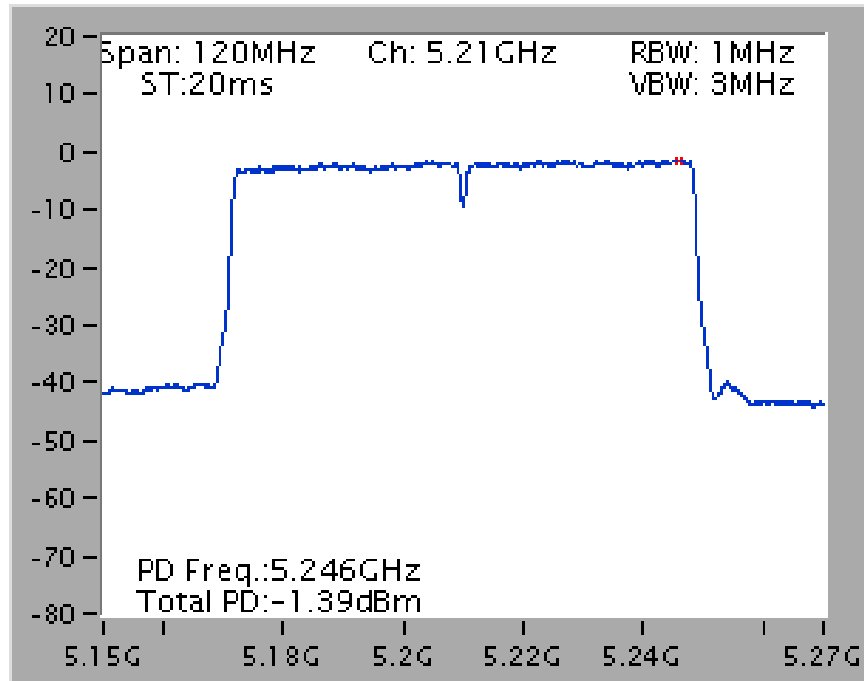


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

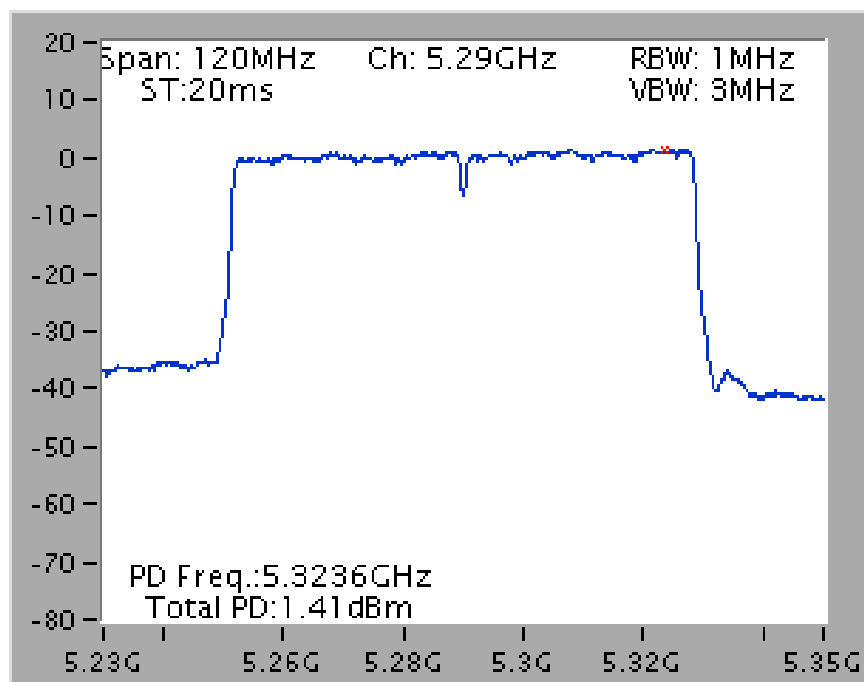


For indoor use slave without radar detection B1


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

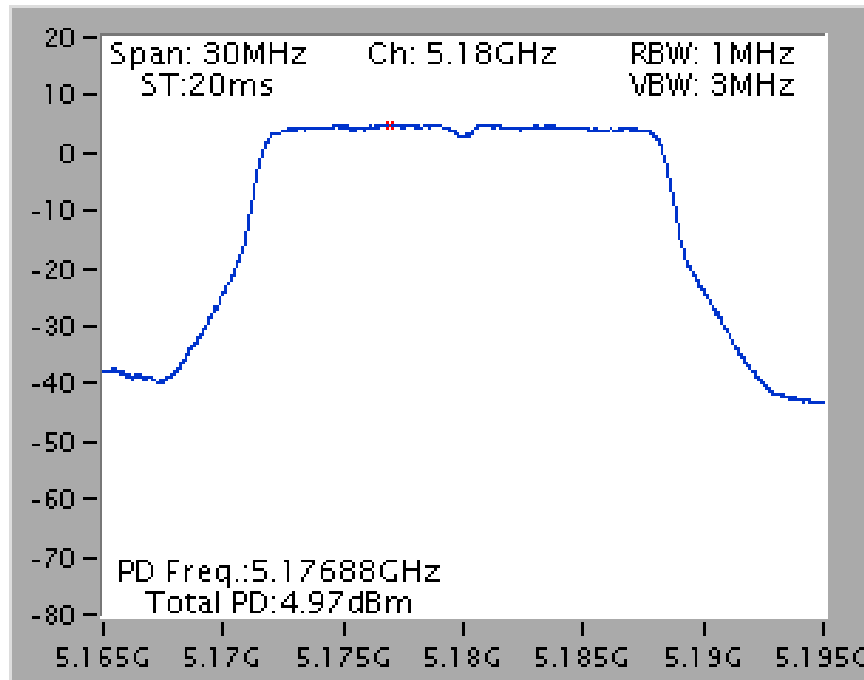


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

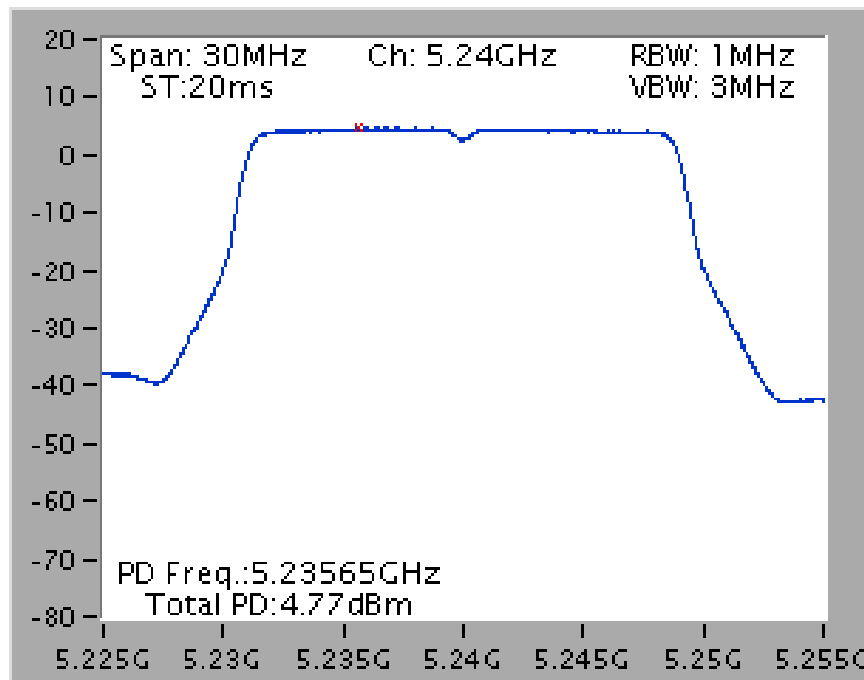

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

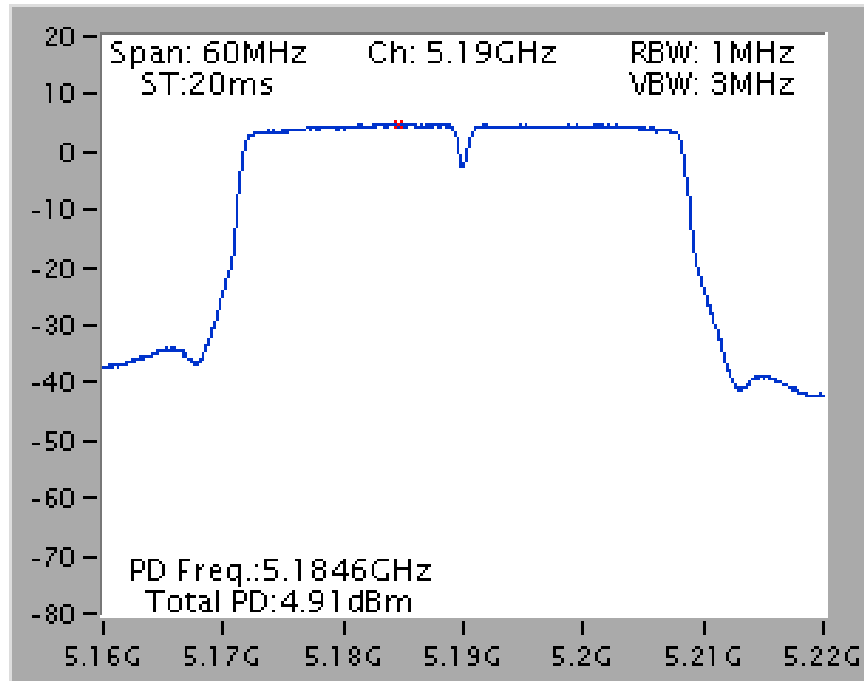


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

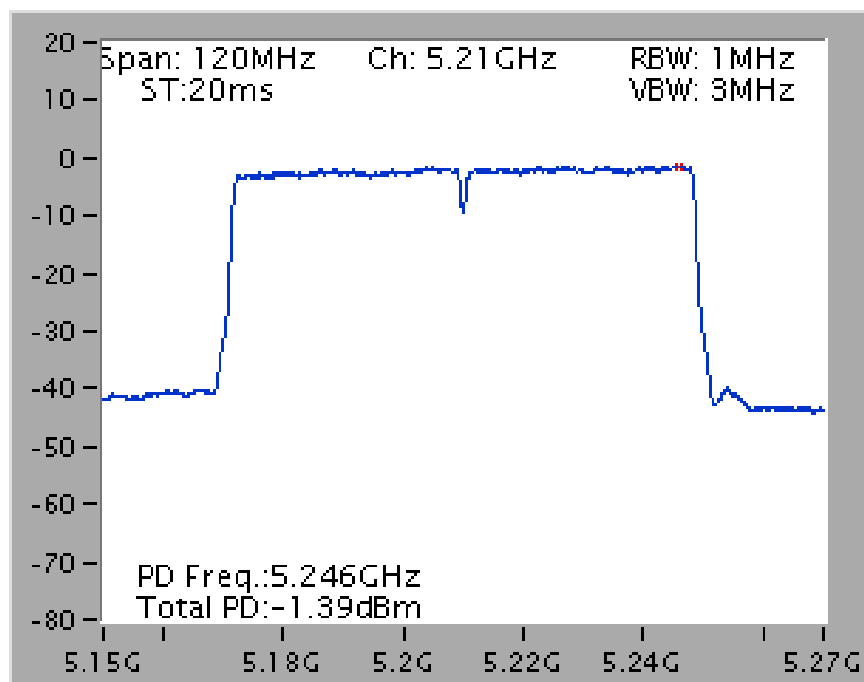


For outdoor use master B1


Power Density Plot on Configuration IEEE 802.11a / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

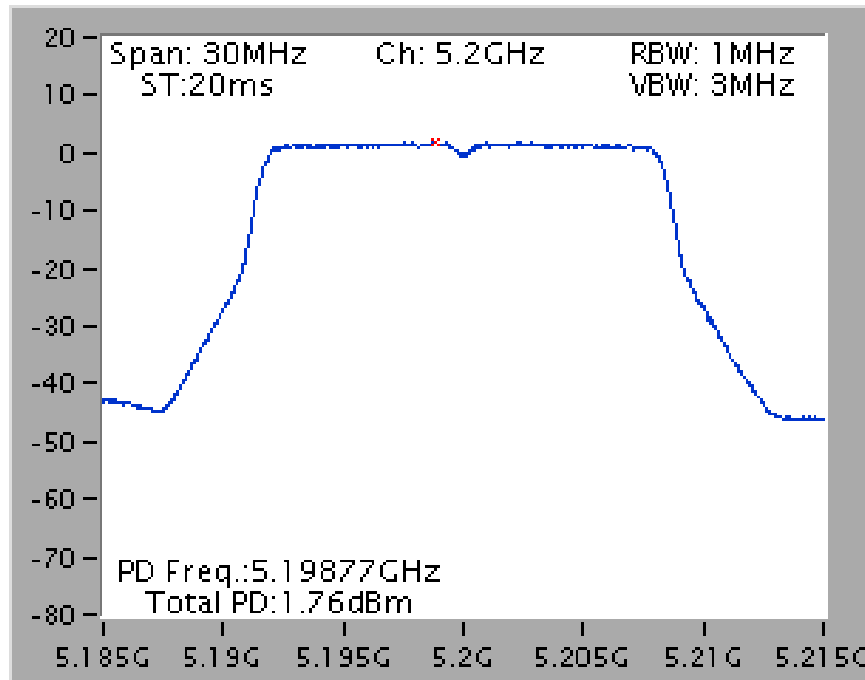


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

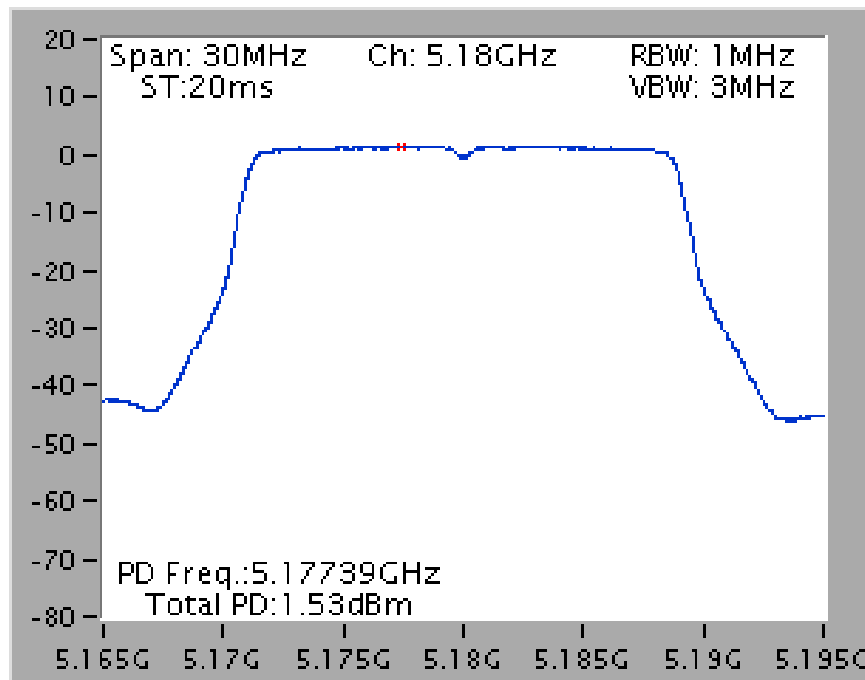

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

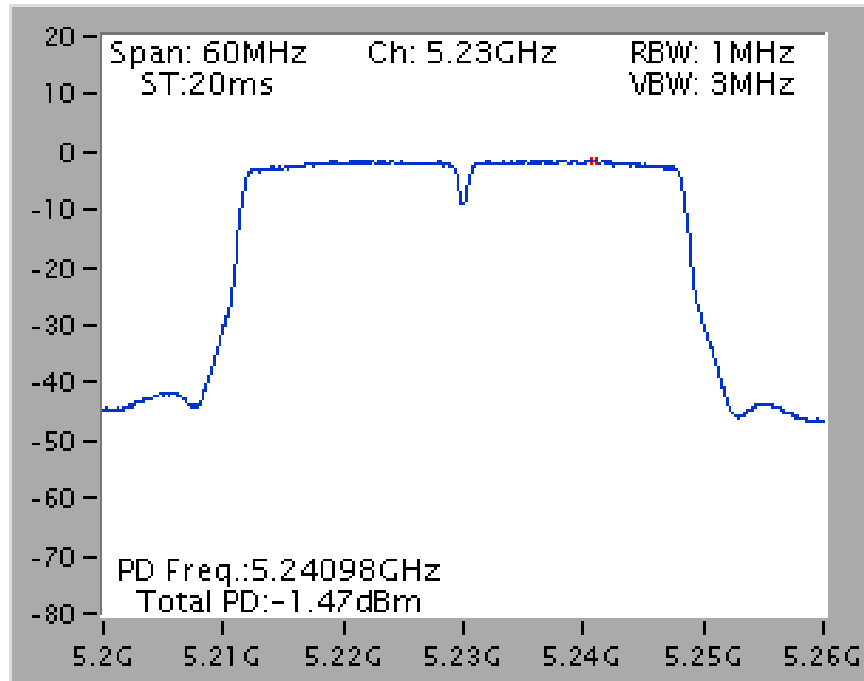


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

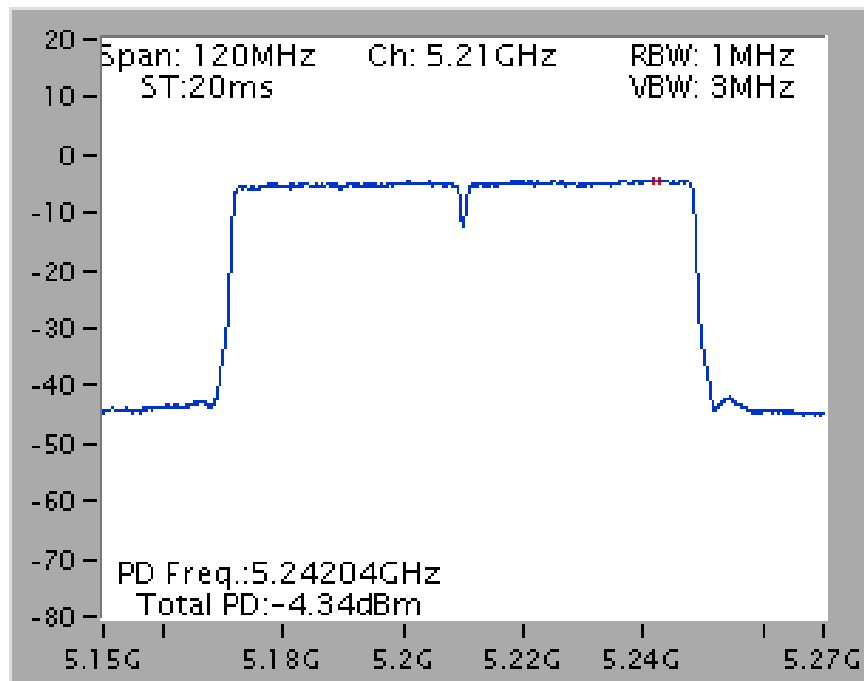


## 802.11ac MCS0/Nss2 VHT80+80

## Type 11

## Power Density Plot on Chain 1 + Chain 2 / 5210 MHz

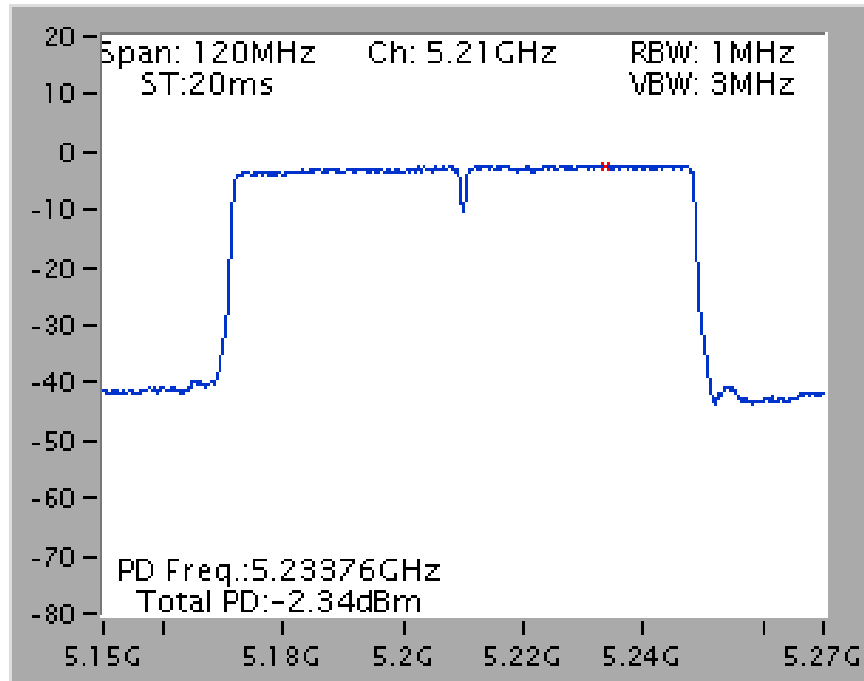


## Power Density Plot on Chain 3 + Chain 4 / 5290 MHz

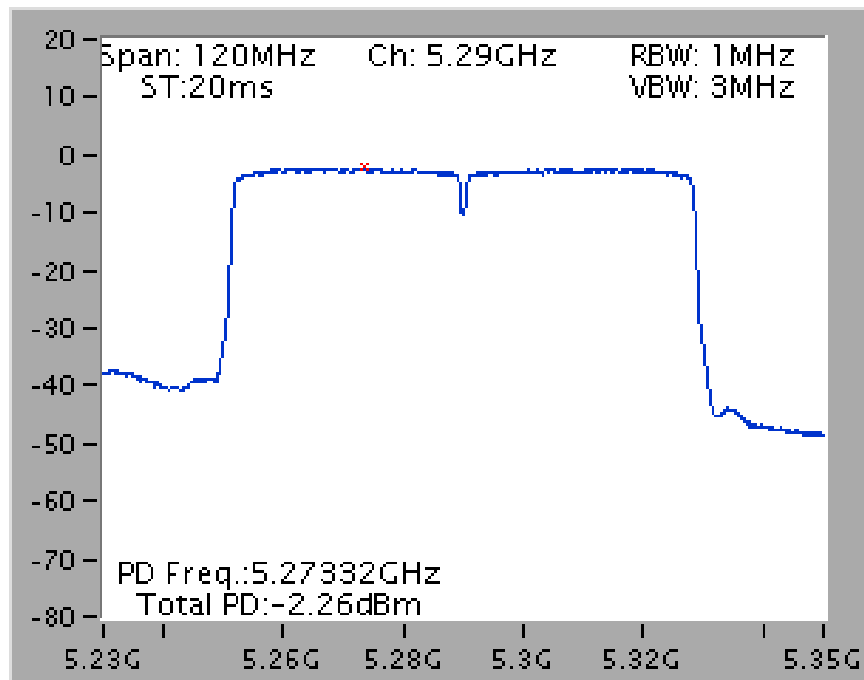


For outdoor use master B1

Type 1

Power Density Plot on Chain 1 + Chain 2 / 5210 MHz

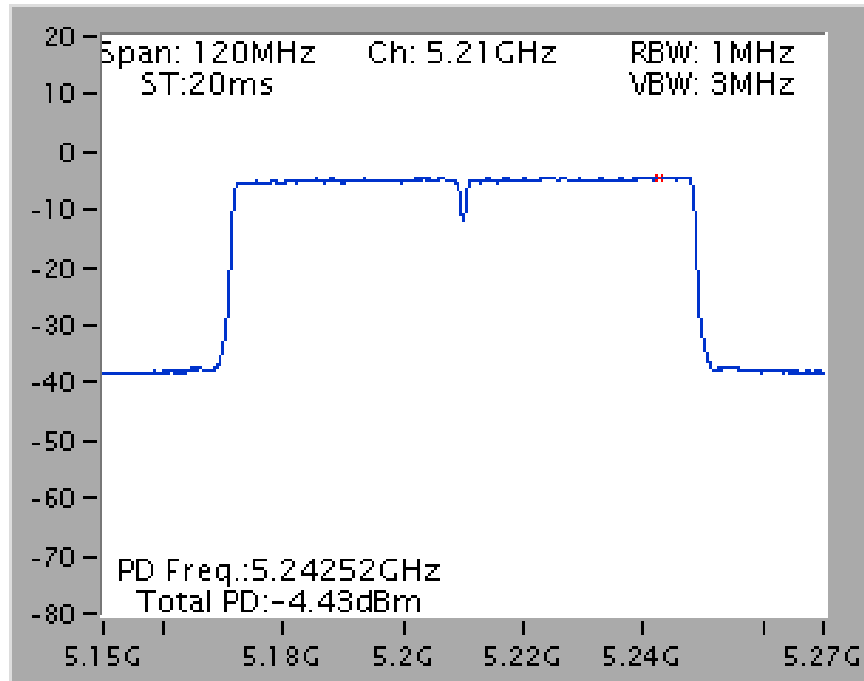


Power Density Plot on Chain 3 + Chain 4 / 5290 MHz

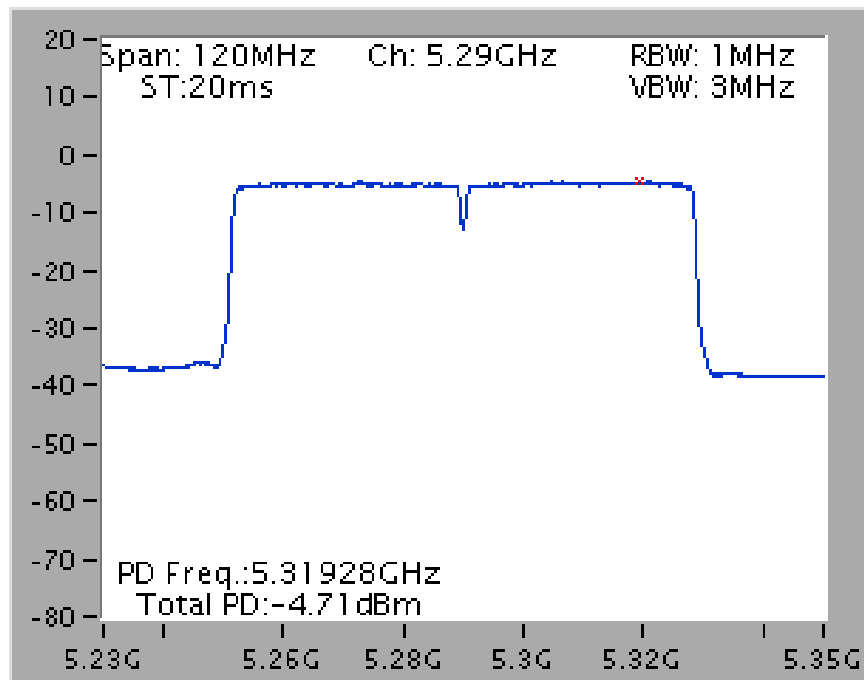


For beamforming mode

For indoor use master B1 and indoor, outdoor use B2

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5200 MHz

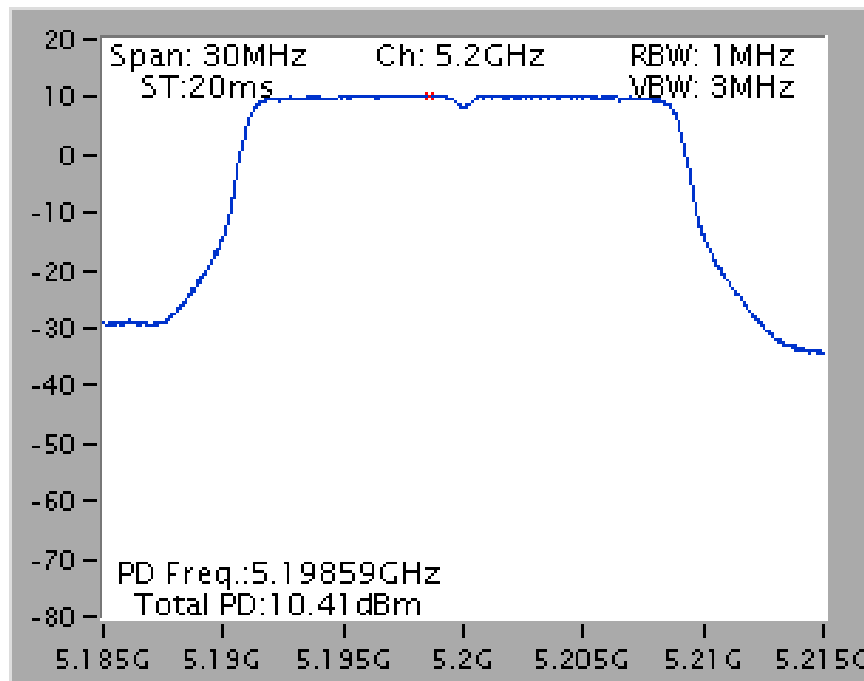


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5300 MHz

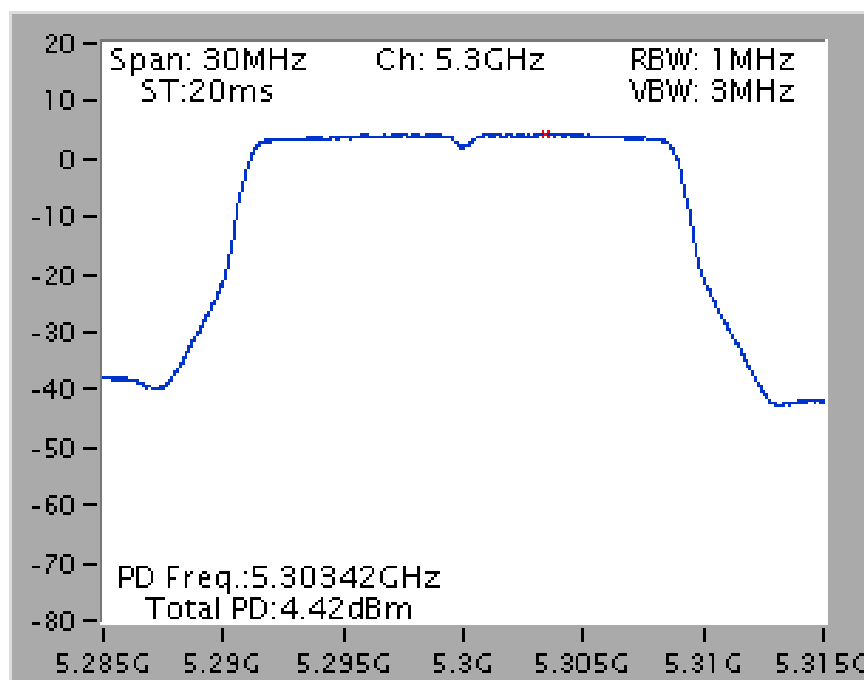





Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

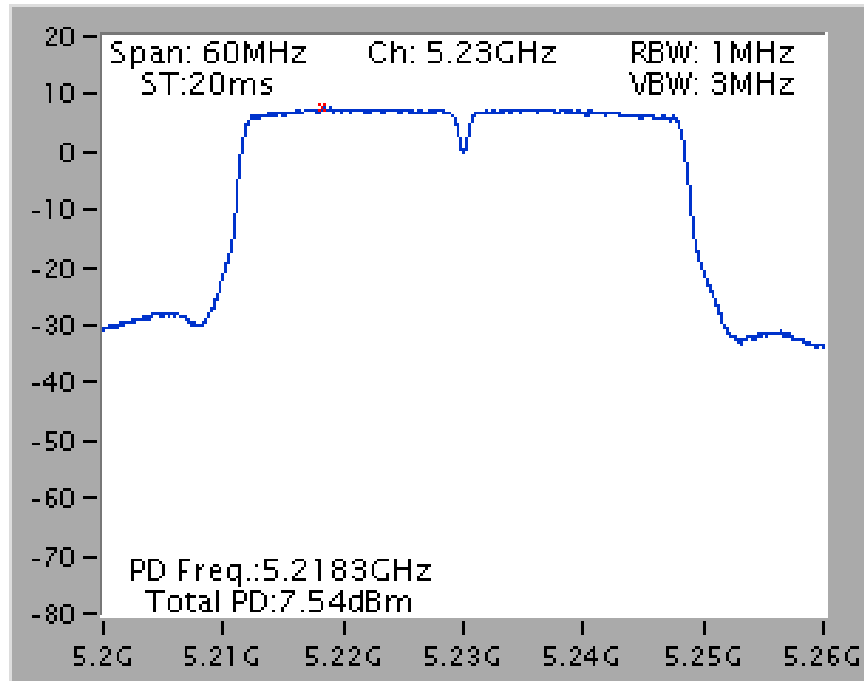


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5310 MHz

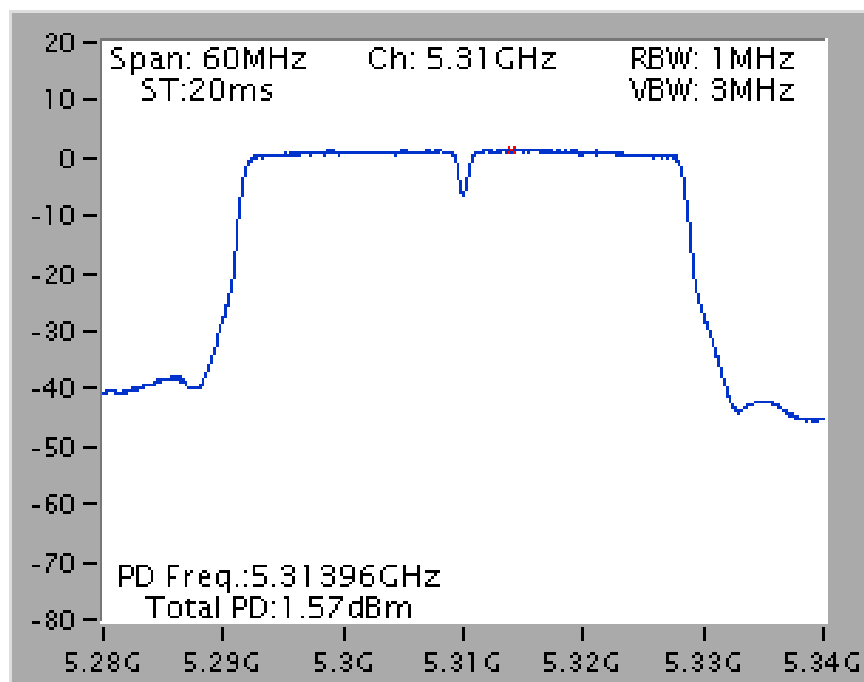

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

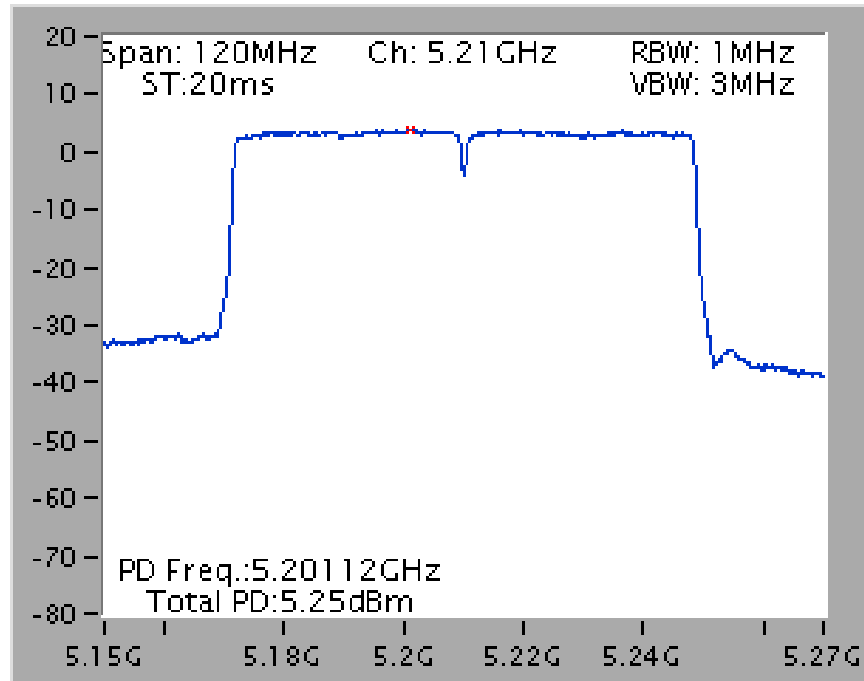


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5290 MHz

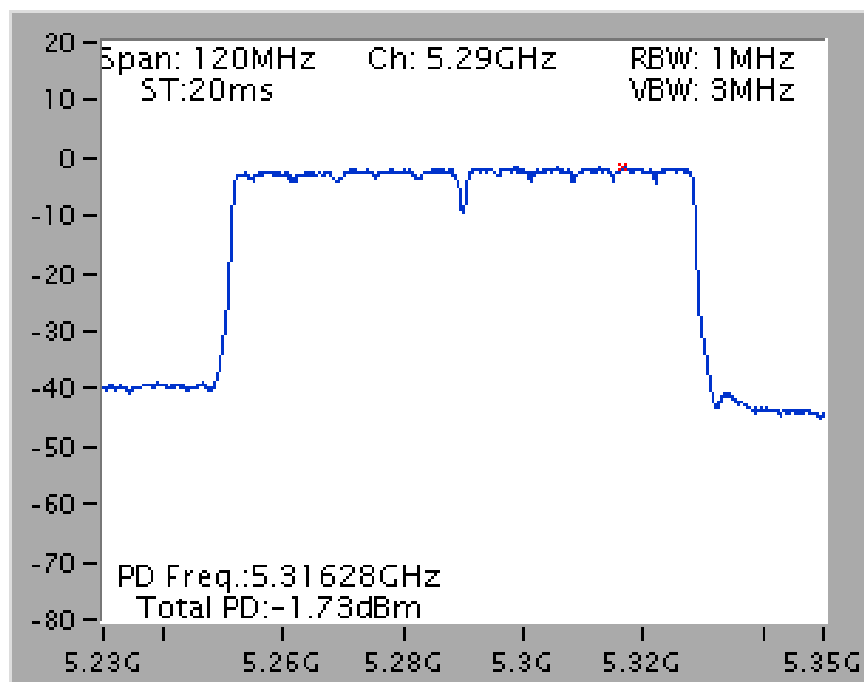


For indoor use slave without radar detection B1


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5240 MHz

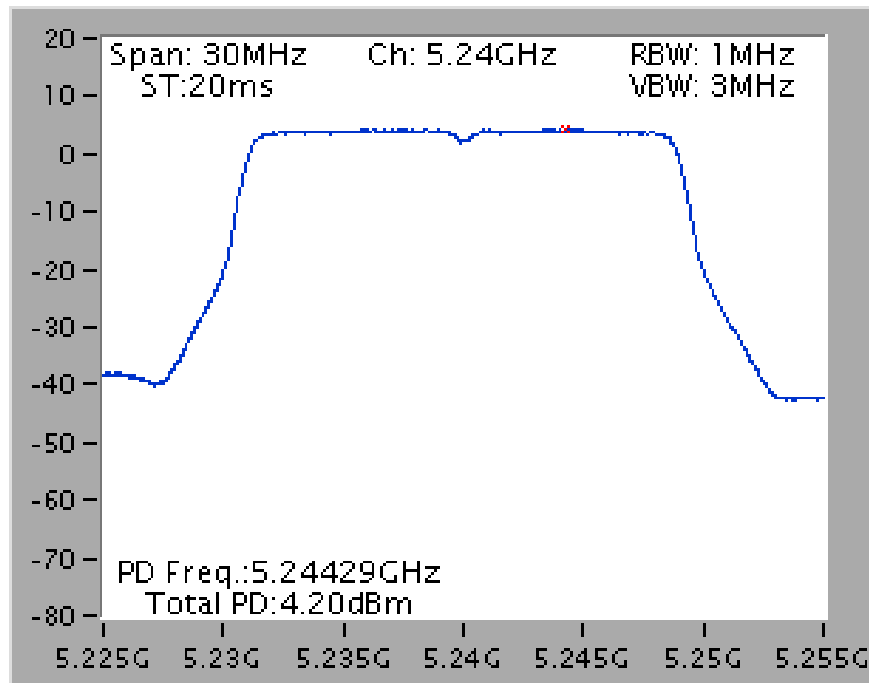

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5190 MHz

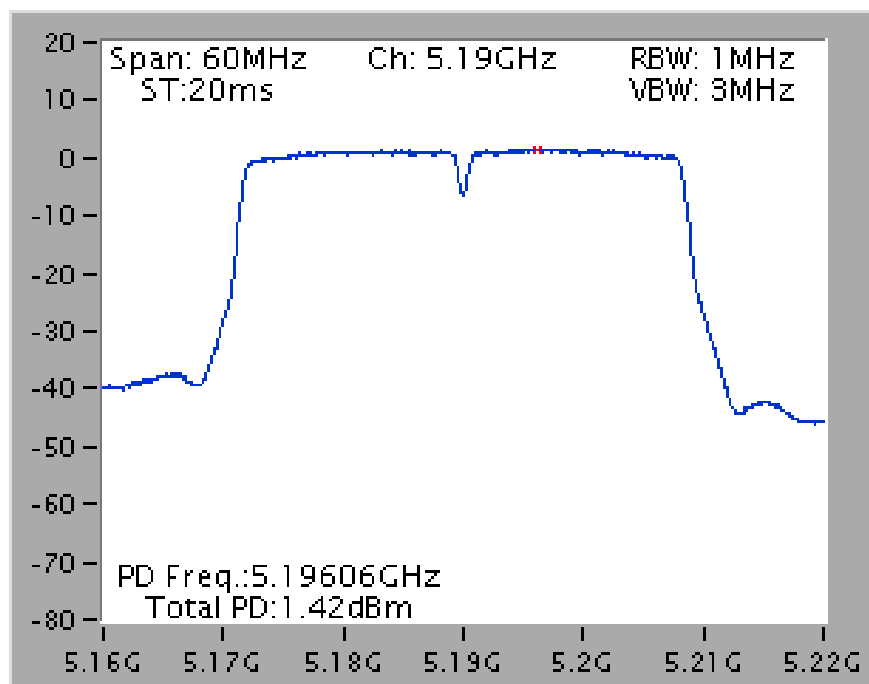


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

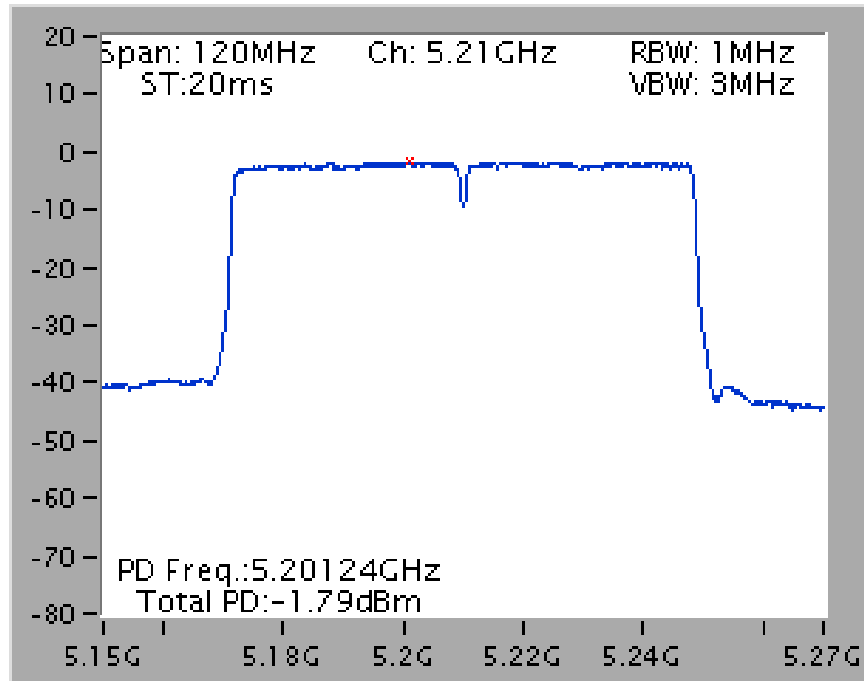


For outdoor use master B1


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5180 MHz

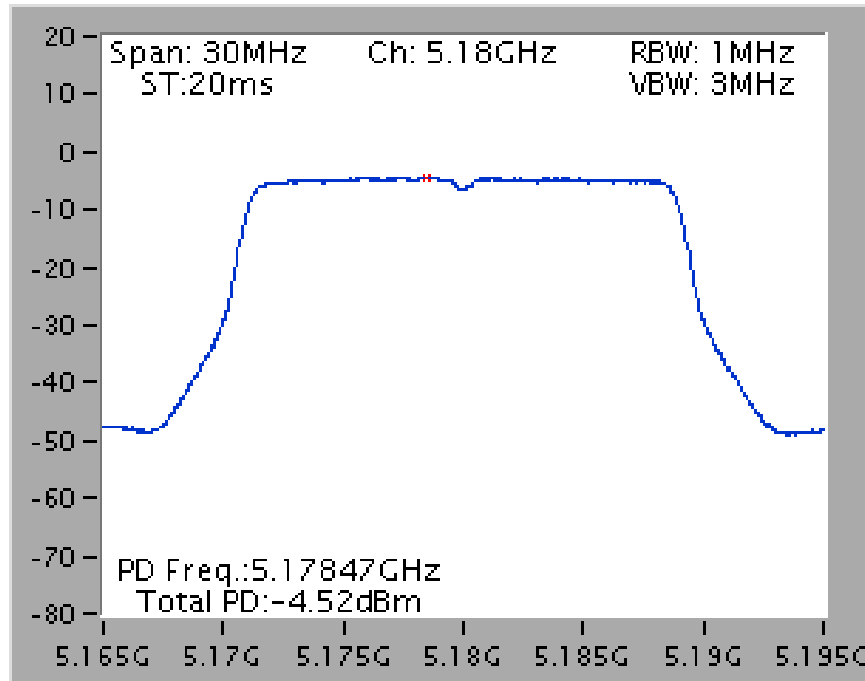

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5230 MHz

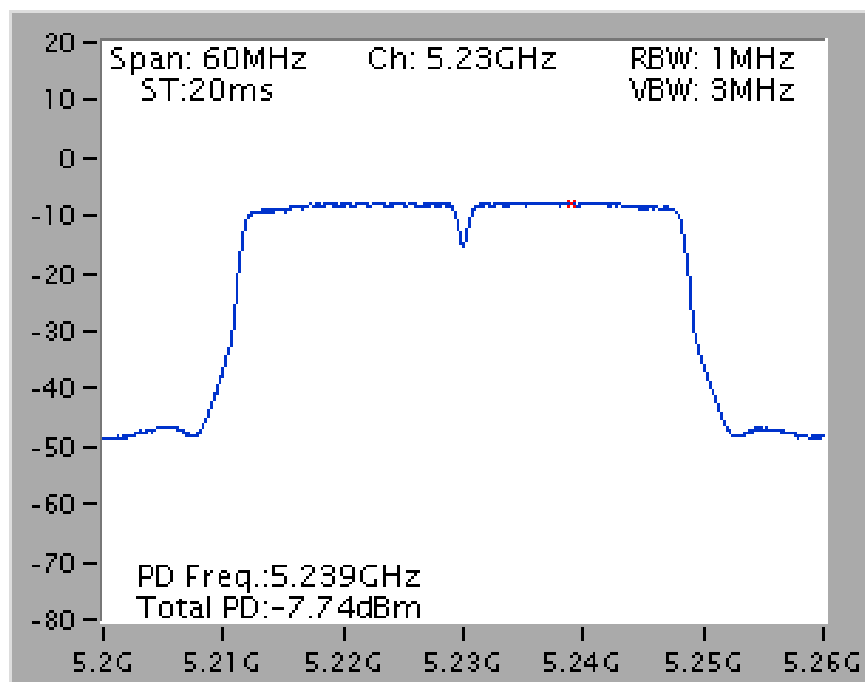


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Chain 1 + Chain 2 + Chain 3 + Chain 4 / 5210 MHz

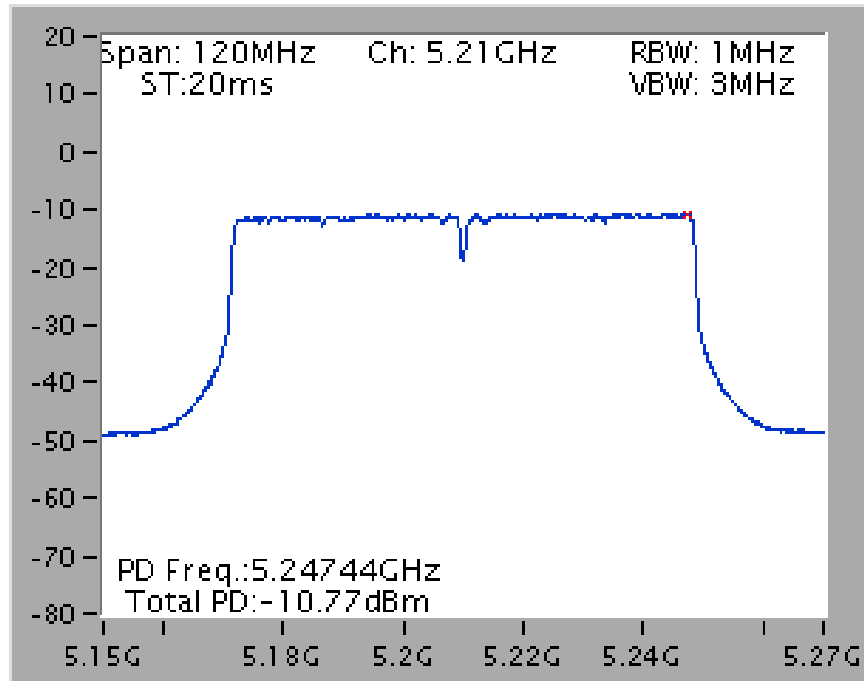


802.11ac MCS0/Nss2 VHT80+80

Type 1

Power Density Plot on Chain 1 + Chain 2 / 5210 MHz

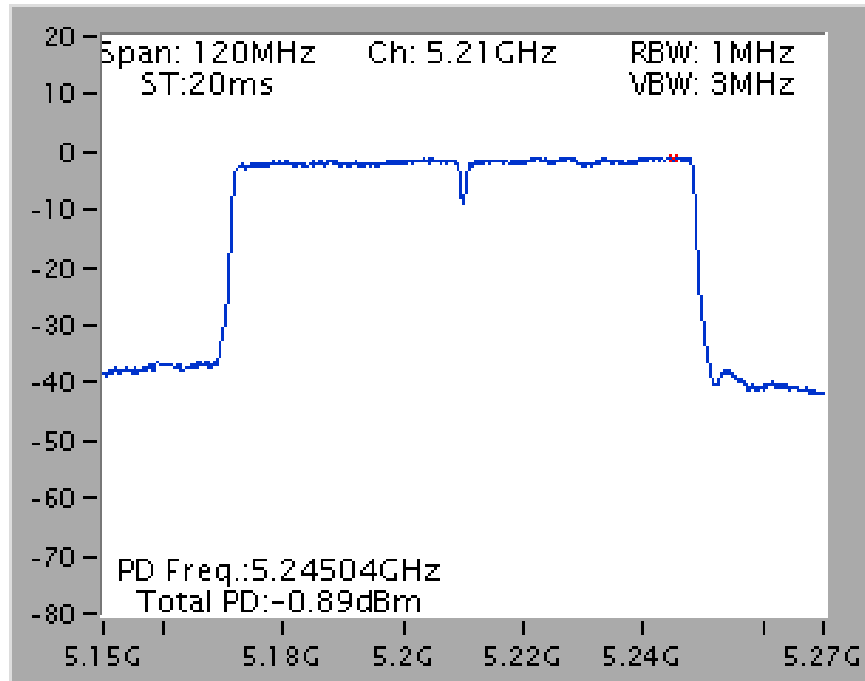


Power Density Plot on Chain 3 + Chain 4 / 5290 MHz

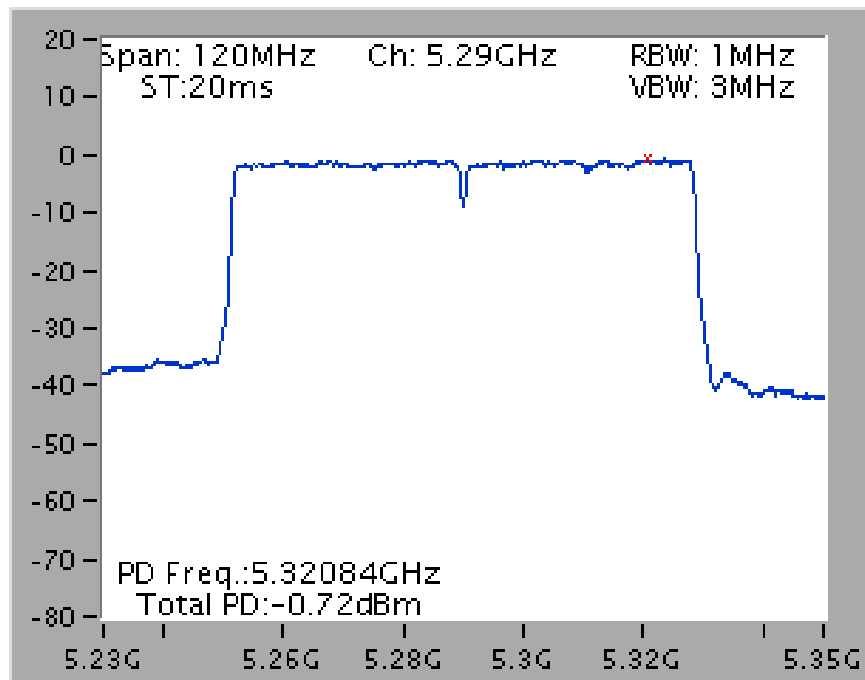


For outdoor use master B1

Type 1

Power Density Plot on Chain 1 + Chain 2 / 5210 MHz

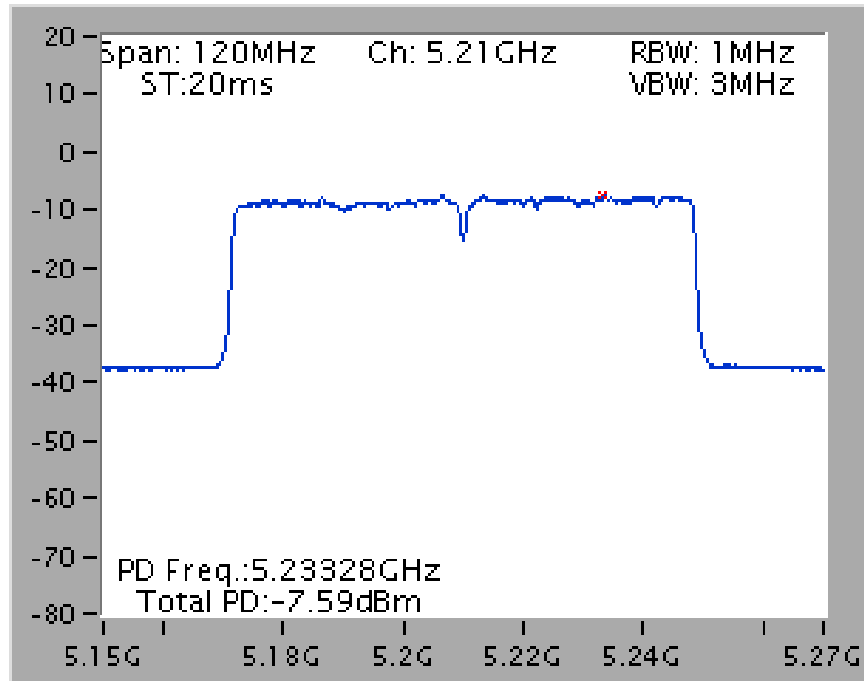

Power Density Plot on Chain 3 + Chain 4 / 5290 MHz

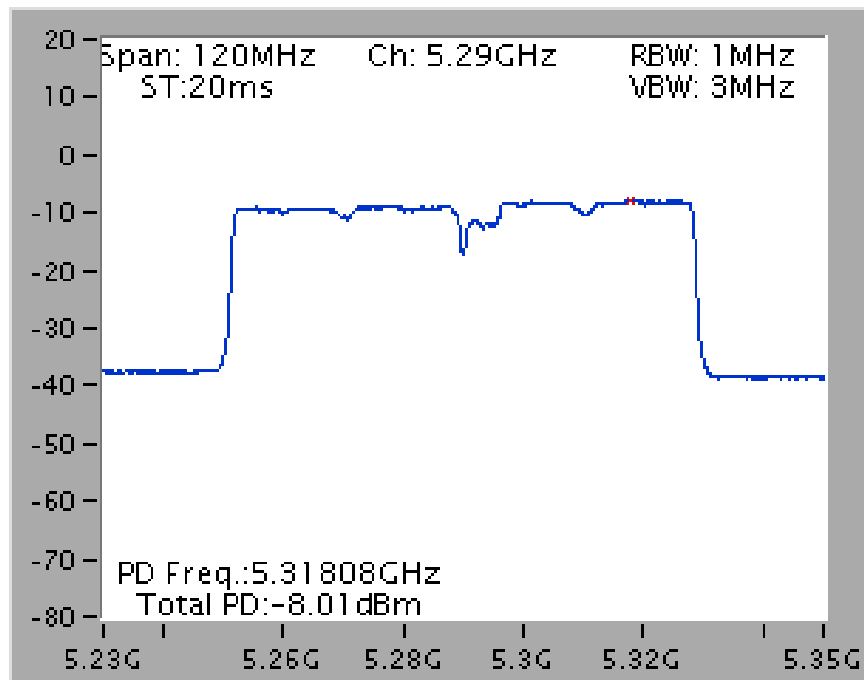



## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

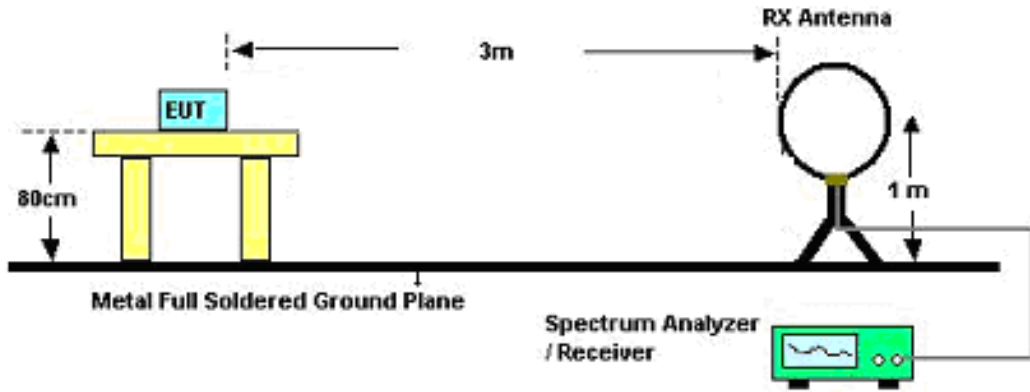

For Radiated Emissions: 30MHz~1GHz

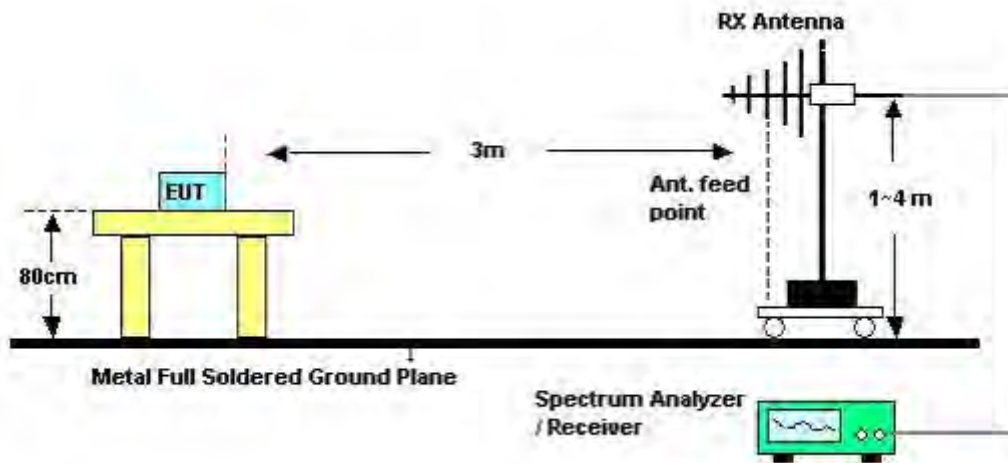

### For Radiated Emissions: Above 1GHz

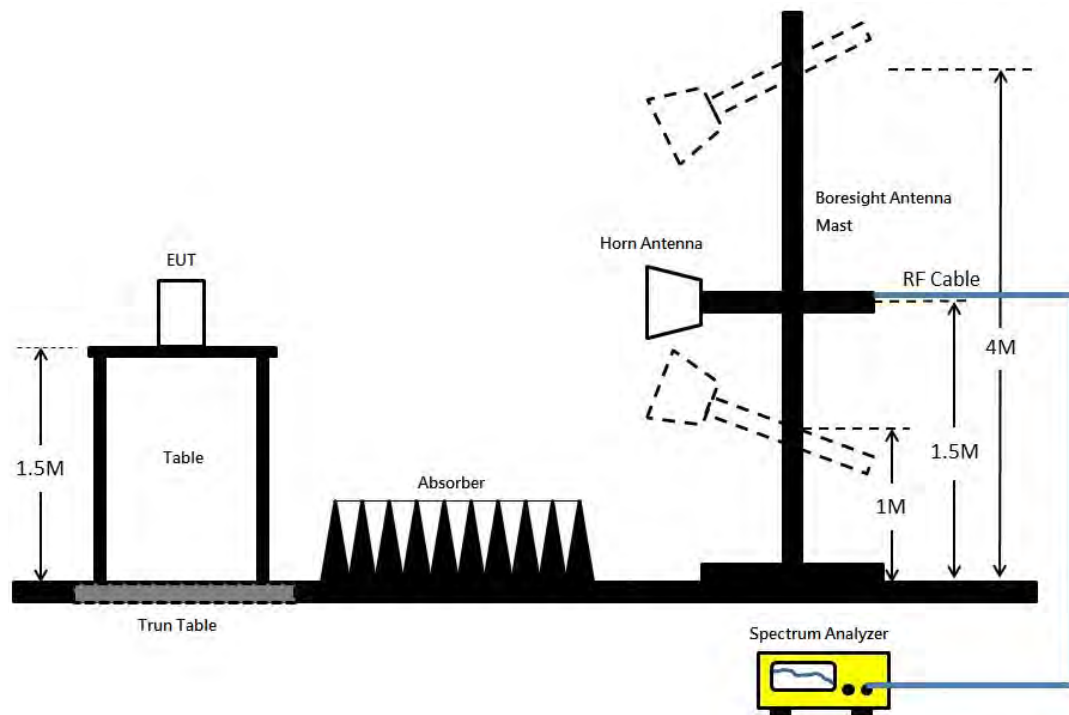

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Nyle Chang & Eason Chen	<b>Configurations</b>	CTX
<b>Test Date</b>	Aug. 16, 2016	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	54%
Test Engineer	Nyle Chang & Eason Chen	Configurations	CTX
Test Mode	Mode 2		

Horizontal

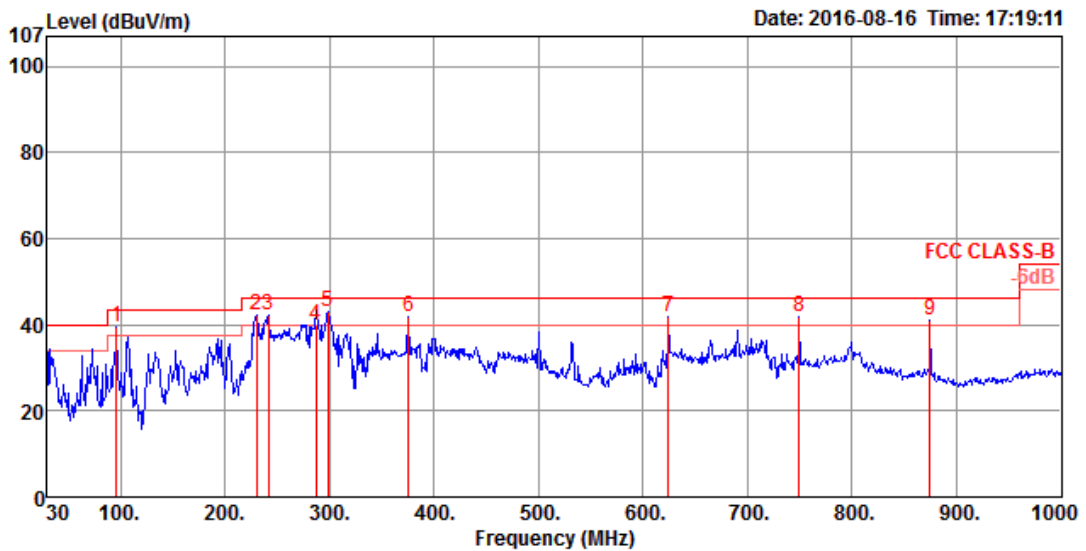

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	95.96	39.48	43.50	-4.02	54.16	0.87	16.30	31.85	200	322 Peak	HORIZONTAL
2	229.82	42.40	46.00	-3.60	56.17	1.21	17.00	31.98	125	74 Peak	HORIZONTAL
3	241.46	42.40	46.00	-3.60	55.00	1.23	18.12	31.95	150	235 Peak	HORIZONTAL
4	287.05	39.77	46.00	-6.23	51.10	1.34	19.37	32.04	125	236 QP	HORIZONTAL
5	298.69	42.95	46.00	-3.05	54.03	1.37	19.56	32.01	125	260 Peak	HORIZONTAL
6	375.32	41.75	46.00	-4.25	50.64	1.50	21.73	32.12	100	98 Peak	HORIZONTAL
7	624.61	41.74	46.00	-4.26	47.06	1.97	25.16	32.45	125	125 Peak	HORIZONTAL
8	749.74	41.68	46.00	-4.32	46.07	2.19	26.00	32.58	150	241 Peak	HORIZONTAL
9	874.87	41.08	46.00	-4.92	44.04	2.38	27.15	32.49	100	46 Peak	HORIZONTAL

**Vertical**

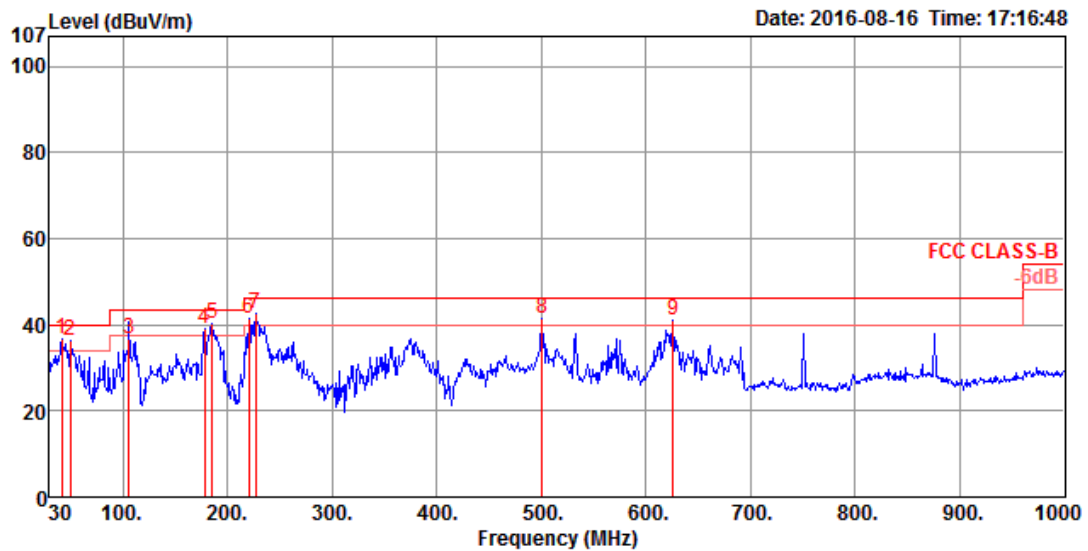

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	41.64	36.86	40.00	-3.14	49.26	0.56	18.71	31.67	100	229 Peak	VERTICAL
2	49.40	36.31	40.00	-3.69	52.37	0.61	15.08	31.75	125	196 Peak	VERTICAL
3	105.66	36.90	43.50	-6.60	50.20	0.87	17.69	31.86	100	295 QP	VERTICAL
4	178.41	39.19	43.50	-4.31	54.53	1.06	15.54	31.94	100	132 Peak	VERTICAL
5	185.20	40.17	43.50	-3.33	55.60	1.08	15.45	31.96	100	147 Peak	VERTICAL
6	220.12	41.51	46.00	-4.49	55.98	1.18	16.30	31.95	200	310 Peak	VERTICAL
7	226.91	42.75	46.00	-3.25	56.74	1.20	16.78	31.97	200	270 Peak	VERTICAL
8	500.45	41.30	46.00	-4.70	48.13	1.76	23.73	32.32	100	144 Peak	VERTICAL
9	625.58	40.99	46.00	-5.01	46.31	1.97	25.16	32.45	100	40 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15530.36	47.81	54.00	-6.19	31.11	12.06	38.13	33.49	164	180	Average	HORIZONTAL
2	15534.84	61.18	74.00	-12.82	44.48	12.06	38.13	33.49	164	180	Peak	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15530.00	47.99	54.00	-6.01	31.29	12.06	38.13	33.49	149	109	Average	VERTICAL
2	15542.68	61.98	74.00	-12.02	45.28	12.06	38.13	33.49	149	109	Peak	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10397.40	64.04	68.20	-4.16	49.53	9.54	38.54	33.57	213	118 Peak	HORIZONTAL
2	15592.30	60.51	74.00	-13.49	43.90	12.09	38.05	33.53	256	207 Peak	HORIZONTAL
3	15623.90	47.75	54.00	-6.25	31.24	12.11	37.98	33.58	256	207 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10396.40	68.07	68.20	-0.13	53.58	9.54	38.54	33.59	235	361 Peak	VERTICAL
2	15589.30	60.68	74.00	-13.32	44.07	12.09	38.05	33.53	194	213 Peak	VERTICAL
3	15596.00	48.13	54.00	-5.87	31.52	12.09	38.05	33.53	194	213 Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15723.80	61.17	74.00	-12.83	44.85	12.15	37.84	33.67	233	281 Peak	HORIZONTAL
2	15733.50	48.46	54.00	-5.54	32.14	12.15	37.84	33.67	233	281 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15718.20	48.51	54.00	-5.49	32.19	12.15	37.84	33.67	234	45 Average	VERTICAL
2	15743.00	61.27	74.00	-12.73	45.00	12.18	37.76	33.67	234	45 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 52 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10519.20	61.56	68.20	-6.64	47.08	9.60	38.40	33.52	228	76 Peak	HORIZONTAL
2	15767.40	47.83	54.00	-6.17	31.61	12.18	37.76	33.72	129	123 Average	HORIZONTAL
3	15791.40	60.37	74.00	-13.63	44.20	12.20	37.69	33.72	129	123 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10518.20	63.56	68.20	-4.64	49.08	9.60	38.40	33.52	100	29 Peak	VERTICAL
2	15768.00	48.07	54.00	-5.93	31.85	12.18	37.76	33.72	224	279 Average	VERTICAL
3	15781.20	60.12	74.00	-13.88	43.90	12.18	37.76	33.72	224	279 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 60 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15892.20	60.46	74.00	-13.54	44.48	12.24	37.55	33.81	179	101 Peak	HORIZONTAL
2	15925.00	47.44	54.00	-6.56	31.55	12.27	37.47	33.85	179	101 Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15878.70	60.20	74.00	-13.80	44.22	12.24	37.55	33.81	266	308 Peak	VERTICAL
2	15921.30	47.56	54.00	-6.44	31.67	12.27	37.47	33.85	266	308 Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15974.90	60.60	74.00	-13.40	44.81	12.29	37.40	33.90	164	250	Peak	HORIZONTAL
2	15977.70	48.02	54.00	-5.98	32.23	12.29	37.40	33.90	164	250	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15953.30	48.03	54.00	-5.97	32.14	12.27	37.47	33.85	182	116	Average	VERTICAL
2	15957.60	61.59	74.00	-12.41	45.70	12.27	37.47	33.85	182	116	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15540.64	61.27	74.00	-12.73	44.57	12.06	38.13	33.49	182	262	Peak	HORIZONTAL
2	15546.52	47.95	54.00	-6.05	31.25	12.06	38.13	33.49	182	262	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15530.00	61.24	74.00	-12.76	44.54	12.06	38.13	33.49	146	78	Peak	VERTICAL
2	15530.12	47.94	54.00	-6.06	31.24	12.06	38.13	33.49	146	78	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10396.80	64.34	68.20	-3.86	49.85	9.54	38.54	33.59	224	116	Peak	HORIZONTAL
2	15617.60	47.24	54.00	-6.76	30.73	12.11	37.98	33.58	191	290	Average	HORIZONTAL
3	15621.90	59.74	74.00	-14.26	43.23	12.11	37.98	33.58	191	290	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10398.16	67.82	68.20	-0.38	53.31	9.54	38.54	33.57	103	289	Peak	VERTICAL
2	15595.10	47.46	54.00	-6.54	30.85	12.09	38.05	33.53	185	18	Average	VERTICAL
3	15621.00	60.45	74.00	-13.55	43.94	12.11	37.98	33.58	185	18	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15709.60	60.21	74.00	-13.79	43.84	12.15	37.84	33.62	232	279 Peak	HORIZONTAL
2	15712.80	47.68	54.00	-6.32	31.36	12.15	37.84	33.67	232	279 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15709.90	47.86	54.00	-6.14	31.49	12.15	37.84	33.62	261	48 Average	VERTICAL
2	15729.00	60.39	74.00	-13.61	44.07	12.15	37.84	33.67	261	48 Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10523.90	57.65	68.20	-10.55	43.17	9.60	38.40	33.52	191	53 Peak	HORIZONTAL
2	15755.10	47.34	54.00	-6.66	31.07	12.18	37.76	33.67	205	63 Average	HORIZONTAL
3	15764.70	60.69	74.00	-13.31	44.47	12.18	37.76	33.72	205	63 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10518.60	64.54	68.20	-3.66	50.06	9.60	38.40	33.52	100	29 Peak	VERTICAL
2	15755.10	47.51	54.00	-6.49	31.24	12.18	37.76	33.67	154	286 Average	VERTICAL
3	15761.90	59.94	74.00	-14.06	43.67	12.18	37.76	33.67	154	286 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15896.20	59.02	74.00	-14.98	43.04	12.24	37.55	33.81	224	274	Peak	HORIZONTAL
2	15925.00	46.45	54.00	-7.55	30.56	12.27	37.47	33.85	224	274	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15891.20	59.22	74.00	-14.78	43.24	12.24	37.55	33.81	292	98	Peak	VERTICAL
2	15919.30	46.81	54.00	-7.19	30.88	12.27	37.47	33.81	292	98	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15949.90	46.81	54.00	-7.19	30.92	12.27	37.47	33.85	132	47 Average	HORIZONTAL
2	15982.80	59.99	74.00	-14.01	44.20	12.29	37.40	33.90	132	47 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15954.60	46.97	54.00	-7.03	31.08	12.27	37.47	33.85	114	316 Average	VERTICAL
2	15966.90	59.77	74.00	-14.23	43.93	12.29	37.40	33.85	114	316 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15561.52	46.95	54.00	-7.05	30.34	12.09	38.05	33.53	256	155	Average	HORIZONTAL
2	15578.24	59.74	74.00	-14.26	43.13	12.09	38.05	33.53	256	155	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15565.76	60.04	74.00	-13.96	43.43	12.09	38.05	33.53	191	233	Peak	VERTICAL
2	15570.44	47.02	54.00	-6.98	30.41	12.09	38.05	33.53	191	233	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15684.64	47.22	54.00	-6.78	30.80	12.13	37.91	33.62	199	282	Average	HORIZONTAL
2	15696.52	60.01	74.00	-13.99	43.64	12.15	37.84	33.62	199	282	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15686.12	61.06	74.00	-12.94	44.64	12.13	37.91	33.62	151	108	Peak	VERTICAL
2	15689.76	47.45	54.00	-6.55	31.03	12.13	37.91	33.62	151	108	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15800.44	46.37	54.00	-7.63	30.20	12.20	37.69	33.72	209	127	Average	HORIZONTAL
2	15800.52	59.65	74.00	-14.35	43.48	12.20	37.69	33.72	209	127	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15800.00	46.49	54.00	-7.51	30.32	12.20	37.69	33.72	125	267	Average	VERTICAL
2	15805.48	59.55	74.00	-14.45	43.38	12.20	37.69	33.72	125	267	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10612.80	42.50	54.00	-11.50	27.90	9.65	38.40	33.45	160	73 Average	HORIZONTAL
2	10622.44	54.92	74.00	-19.08	40.30	9.67	38.40	33.45	160	73 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	10610.00	42.77	54.00	-11.23	28.17	9.65	38.40	33.45	248	118 Average	VERTICAL
2	10615.08	56.16	74.00	-17.84	41.56	9.65	38.40	33.45	248	118 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Aug. 22, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15633.03	59.57	74.00	-14.43	43.06	12.11	37.98	33.58	143	211 Peak	HORIZONTAL
2	15634.20	45.47	54.00	-8.53	28.96	12.11	37.98	33.58	143	211 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15631.28	45.50	54.00	-8.50	28.99	12.11	37.98	33.58	203	91 Average	VERTICAL
2	15633.24	59.45	74.00	-14.55	42.94	12.11	37.98	33.58	203	91 Peak	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 17, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15865.52	59.25	74.00	-14.75	43.17	12.22	37.62	33.76	238	105 Peak	HORIZONTAL
2	15874.12	46.05	54.00	-7.95	30.07	12.24	37.55	33.81	238	105 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15869.80	46.29	54.00	-7.71	30.26	12.22	37.62	33.81	237	236 Average	VERTICAL
2	15876.00	58.82	74.00	-15.18	42.84	12.24	37.55	33.81	237	236 Peak	VERTICAL

**802.11ac MCS0/Nss2 VHT80+80**

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss2 VHT80+80 Type 1 / CH 42+58 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 30, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15629.62	46.53	54.00	-7.47	30.00	13.38	38.34	35.19	173	93	Average	HORIZONTAL
2	15631.20	59.18	74.00	-14.82	42.65	13.38	38.34	35.19	173	93	Peak	HORIZONTAL
3	15869.28	46.83	54.00	-7.17	30.69	13.39	38.06	35.31	178	336	Average	HORIZONTAL
4	15871.70	60.12	74.00	-13.88	43.98	13.39	38.06	35.31	178	336	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15625.52	59.80	74.00	-14.20	43.27	13.38	38.34	35.19	183	127	Peak	VERTICAL
2	15632.70	46.61	54.00	-7.39	30.08	13.38	38.34	35.19	183	127	Average	VERTICAL
3	15871.92	46.59	54.00	-7.41	30.45	13.39	38.06	35.31	179	190	Average	VERTICAL
4	15874.22	59.10	74.00	-14.90	43.04	13.39	38.01	35.34	179	190	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## For beamforming mode

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15536.10	47.74	54.00	-6.26	31.05	13.38	38.45	35.14	216	203	Average	HORIZONTAL
2	15540.22	61.46	74.00	-12.54	44.77	13.38	38.45	35.14	216	203	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15535.54	47.78	54.00	-6.22	31.09	13.38	38.45	35.14	218	130	Average	VERTICAL
2	15535.78	60.44	74.00	-13.56	43.75	13.38	38.45	35.14	218	130	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15598.56	49.15	54.00	-4.85	32.54	13.38	38.39	35.16	135	169	Average	HORIZONTAL
2	15603.94	62.41	74.00	-11.59	45.88	13.38	38.34	35.19	135	169	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15602.68	60.30	74.00	-13.70	43.77	13.38	38.34	35.19	141	213	Peak	VERTICAL
2	15602.76	47.55	54.00	-6.45	31.02	13.38	38.34	35.19	141	213	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15715.64	46.99	54.00	-7.01	30.61	13.39	38.23	35.24	142	298	Average	HORIZONTAL
2	15723.22	59.98	74.00	-14.02	43.60	13.39	38.23	35.24	142	298	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15715.02	47.28	54.00	-6.72	30.90	13.39	38.23	35.24	138	263	Average	VERTICAL
2	15723.34	59.18	74.00	-14.82	42.80	13.39	38.23	35.24	138	263	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15778.90	60.24	74.00	-13.76	43.94	13.39	38.17	35.26	155	89	Peak	HORIZONTAL
2	15783.94	47.10	54.00	-6.90	30.88	13.39	38.12	35.29	155	89	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15776.86	60.17	74.00	-13.83	43.87	13.39	38.17	35.26	155	36	Peak	VERTICAL
2	15780.54	47.24	54.00	-6.76	30.94	13.39	38.17	35.26	155	36	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 60 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10597.68	42.52	54.00	-11.48	27.85	10.59	38.94	34.86	156	242	Average	HORIZONTAL
2	10602.74	55.75	74.00	-18.25	41.08	10.59	38.94	34.86	156	242	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10595.02	42.66	54.00	-11.34	27.99	10.59	38.94	34.86	158	54	Average	VERTICAL
2	10602.00	55.60	74.00	-18.40	40.93	10.59	38.94	34.86	158	54	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10637.34	42.58	54.00	-11.42	27.87	10.60	38.95	34.84	152	316	Average	HORIZONTAL
2	10640.00	55.53	74.00	-18.47	40.82	10.60	38.95	34.84	152	316	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10636.92	42.41	54.00	-11.59	27.70	10.60	38.95	34.84	141	201	Average	VERTICAL
2	10639.26	55.88	74.00	-18.12	41.17	10.60	38.95	34.84	141	201	Peak	VERTICAL





<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15566.04	47.19	54.00	-6.81	30.58	13.38	38.39	35.16	141	86	Average	HORIZONTAL
2	15572.26	60.49	74.00	-13.51	43.88	13.38	38.39	35.16	141	86	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15570.16	59.69	74.00	-14.31	43.08	13.38	38.39	35.16	140	158	Peak	VERTICAL
2	15573.82	46.91	54.00	-7.09	30.30	13.38	38.39	35.16	140	158	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15685.04	59.53	74.00	-14.47	43.07	13.39	38.28	35.21	137	284	Peak	HORIZONTAL
2	15691.24	46.95	54.00	-7.05	30.57	13.39	38.23	35.24	137	284	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15690.46	46.98	54.00	-7.02	30.52	13.39	38.28	35.21	139	333	Average	VERTICAL
2	15691.60	59.49	74.00	-14.51	43.11	13.39	38.23	35.24	139	333	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15807.30	47.32	54.00	-6.68	31.10	13.39	38.12	35.29	134	239 Average	HORIZONTAL
2	15811.40	59.56	74.00	-14.44	43.34	13.39	38.12	35.29	134	239 Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15807.28	47.22	54.00	-6.78	31.00	13.39	38.12	35.29	137	181 Average	VERTICAL
2	15812.90	60.40	74.00	-13.60	44.18	13.39	38.12	35.29	137	181 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 62 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10621.00	42.67	54.00	-11.33	28.00	10.59	38.94	34.86	132	6	Average	HORIZONTAL
2	10624.90	55.49	74.00	-18.51	40.78	10.60	38.95	34.84	132	6	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10623.28	42.51	54.00	-11.49	27.80	10.60	38.95	34.84	132	132	Average	VERTICAL
2	10623.94	54.93	74.00	-19.07	40.22	10.60	38.95	34.84	132	132	Peak	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Aug. 22, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15630.03	47.42	54.00	-6.58	30.91	12.11	37.98	33.58	197	118	Average	HORIZONTAL
2	15630.69	60.11	74.00	-13.89	43.60	12.11	37.98	33.58	197	118	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15627.77	60.10	74.00	-13.90	43.59	12.11	37.98	33.58	153	231	Peak	VERTICAL
2	15630.72	47.43	54.00	-6.57	30.92	12.11	37.98	33.58	153	231	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 58 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Jul. 31, 2016		

**Horizontal**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15865.28	47.32	54.00	-6.68	31.18	13.39	38.06	35.31	186	326	Average	HORIZONTAL
2	15868.26	60.34	74.00	-13.66	44.20	13.39	38.06	35.31	186	326	Peak	HORIZONTAL

**Vertical**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	15872.40	59.89	74.00	-14.11	43.75	13.39	38.06	35.31	188	254	Peak	VERTICAL
2	15873.90	47.23	54.00	-6.77	31.17	13.39	38.01	35.34	188	254	Average	VERTICAL

**802.11ac MCS0/Nss2 VHT80+80**

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss2 VHT80+80 Type 1 / CH 42+58 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Aug. 12, 2016		

**Horizontal**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15629.00	59.29	74.00	-14.71	42.76	13.38	38.34	35.19	145	147 Peak	HORIZONTAL
2	15630.28	46.35	54.00	-7.65	29.82	13.38	38.34	35.19	145	147 Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15629.95	46.30	54.00	-7.70	29.77	13.38	38.34	35.19	182	346 Average	VERTICAL
2	15630.18	59.34	74.00	-14.66	42.81	13.38	38.34	35.19	182	346 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.



#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:


The EUT was programmed to be in beamforming transmitting mode.

### 4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode

Temperature	22°C	Humidity	54%
Test Engineer	Zero Chen & Stim Sung & Steven Liang	Configurations	IEEE 802.11a CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel 36

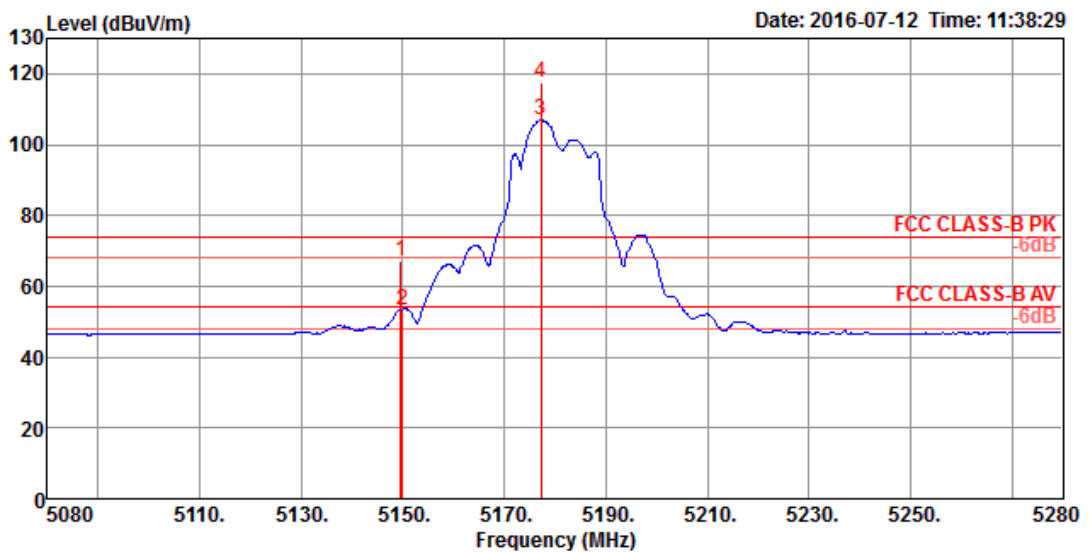

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	PoI/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5149.60	67.03	74.00	-6.97	59.81	7.34	31.52	31.64	291	330	Peak	VERTICAL
2	5150.00	53.40	54.00	-0.60	46.18	7.34	31.52	31.64	291	330	Average	VERTICAL
3	5177.20	106.78			99.50	7.37	31.55	31.64	291	330	Average	VERTICAL
4	5177.20	117.46			110.18	7.37	31.55	31.64	291	330	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.


Channel 40

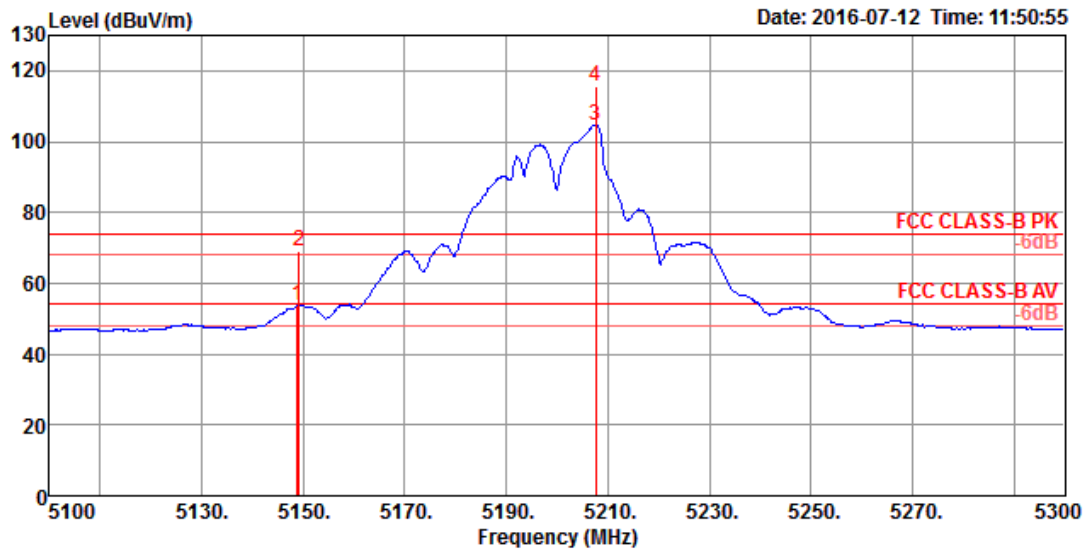

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5148.80	53.52	54.00	-0.48	46.30	7.34	31.52	31.64	264	110 Average	HORIZONTAL
2	5149.20	69.31	74.00	-4.69	62.09	7.34	31.52	31.64	264	110 Peak	HORIZONTAL
3 0	5207.60	104.58			97.24	7.41	31.57	31.64	264	110 Average	HORIZONTAL
4 0	5207.60	115.74			108.40	7.41	31.57	31.64	264	110 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

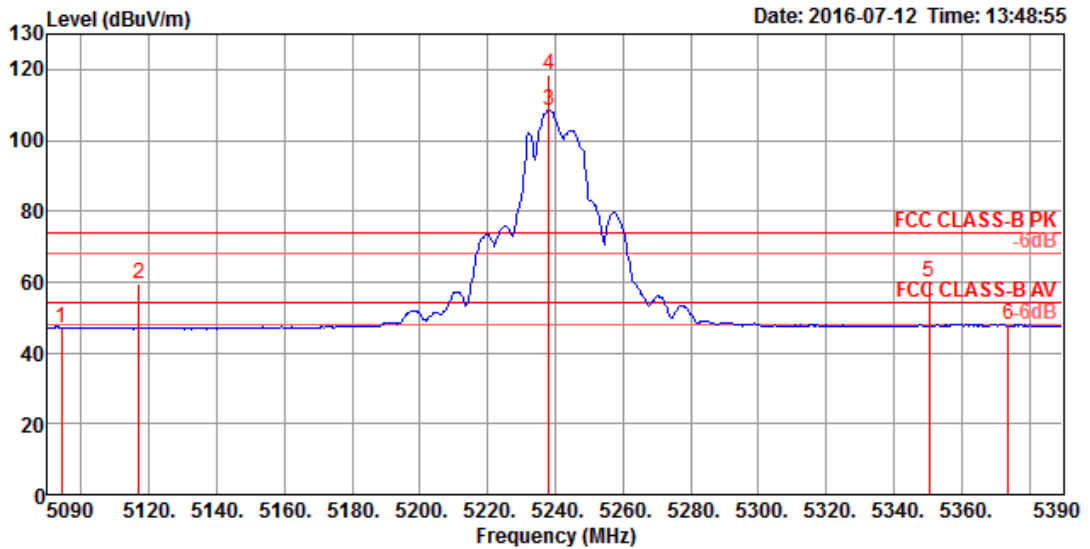


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5094.20	46.83	54.00	-7.17	39.74	7.27	31.47	31.65	283	332 Average	VERTICAL
2	5117.00	59.40	74.00	-14.60	52.25	7.30	31.50	31.65	283	332 Peak	VERTICAL
3	5238.20	108.28			100.88	7.45	31.59	31.64	283	332 Average	VERTICAL
4	5238.20	118.61			111.21	7.45	31.59	31.64	283	332 Peak	VERTICAL
5	5350.40	59.92	74.00	-14.08	52.26	7.60	31.68	31.62	283	332 Peak	VERTICAL
6	5373.80	47.92	54.00	-6.08	40.20	7.64	31.70	31.62	283	332 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11a CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 52**

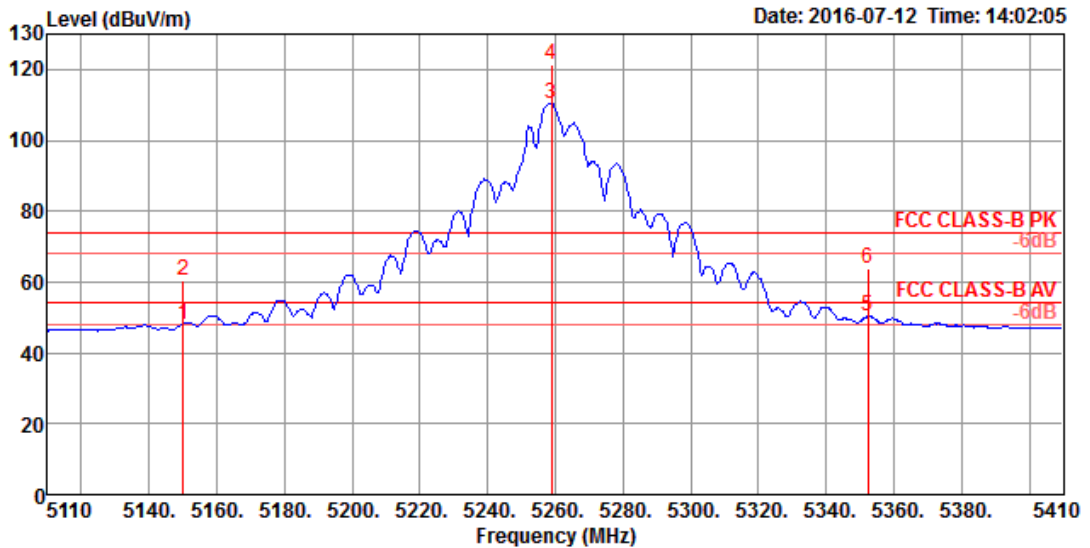

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	48.20	54.00	-5.80	40.98	7.34	31.52	31.64	275	332	Average	VERTICAL
2	5150.00	60.44	74.00	-13.56	53.22	7.34	31.52	31.64	275	332	Peak	VERTICAL
3	5258.80	110.26			102.81	7.47	31.61	31.63	275	332	Average	VERTICAL
4	5258.80	121.51			114.06	7.47	31.61	31.63	275	332	Peak	VERTICAL
5	5352.40	50.32	54.00	-3.68	42.66	7.60	31.68	31.62	275	332	Average	VERTICAL
6	5352.40	63.77	74.00	-10.23	56.11	7.60	31.68	31.62	275	332	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.


Channel 60

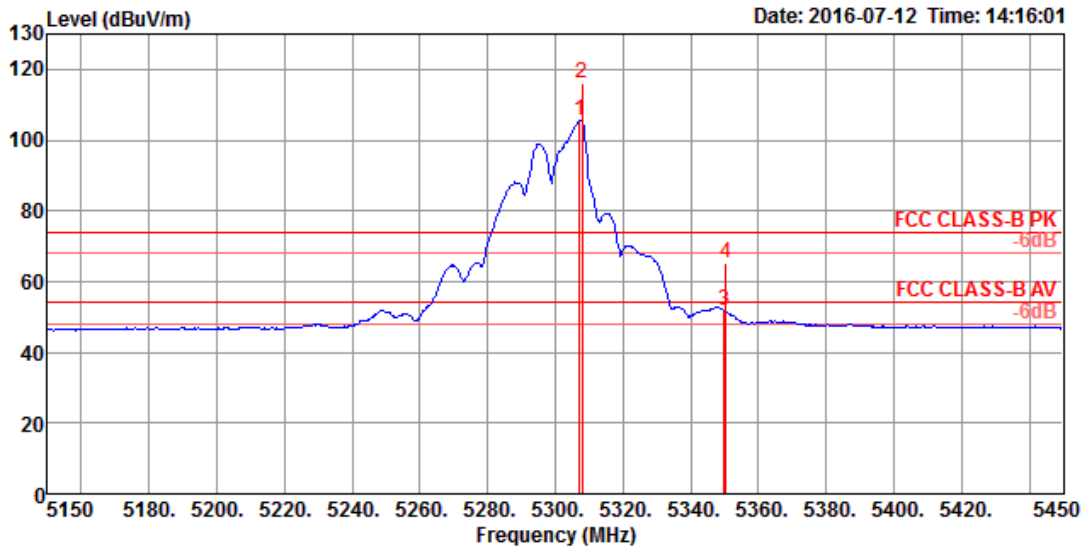

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	0	5307.20	105.45		97.90	7.54	31.64	31.63	294	114 Average	HORIZONTAL	
2	0	5307.80	116.10		108.55	7.54	31.64	31.63	294	114 Peak	HORIZONTAL	
3		5350.00	51.91	54.00	-2.09	44.25	7.60	31.68	31.62	294	114 Average	HORIZONTAL
4		5350.40	65.26	74.00	-8.74	57.60	7.60	31.68	31.62	294	114 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

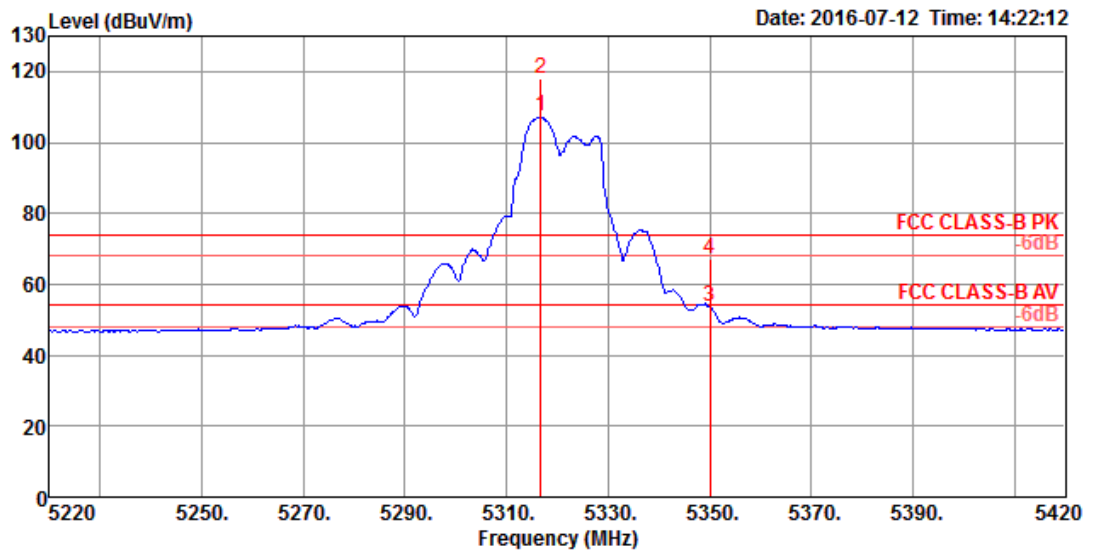


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	0	5316.80	107.27		99.69	7.56	31.65	31.63	276	332 Average	VERTICAL	
2	0	5316.80	117.86		110.28	7.56	31.65	31.63	276	332 Peak	VERTICAL	
3	0	5350.00	53.60	54.00	-0.40	45.94	7.60	31.68	31.62	276	332 Average	VERTICAL
4	0	5350.00	67.24	74.00	-6.76	59.58	7.60	31.68	31.62	276	332 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4

**Channel 36**

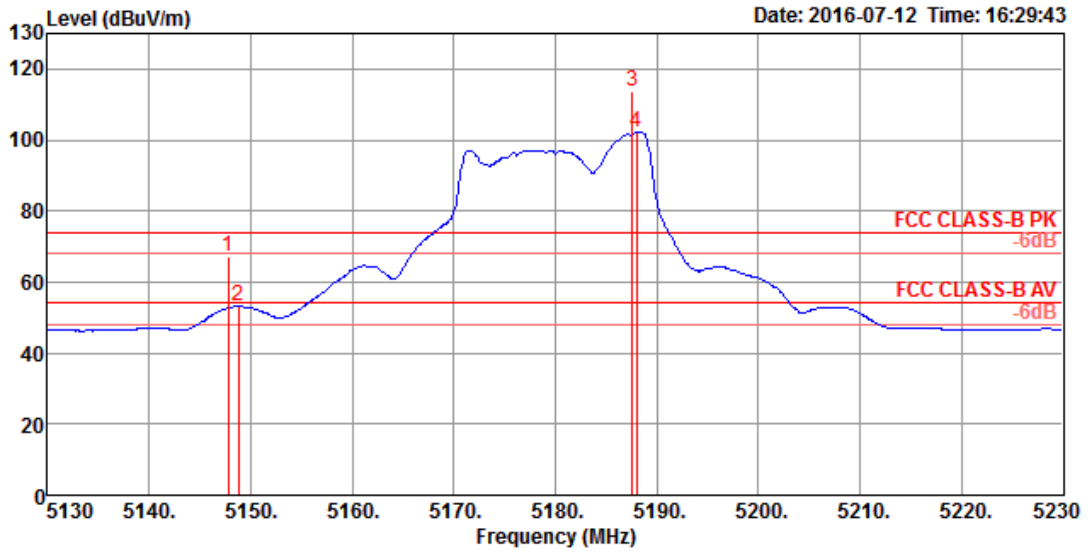


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5147.80	67.19	74.00	-6.81	59.97	7.34	31.52	31.64	204	38 Peak	VERTICAL
2	5148.80	53.25	54.00	-0.75	46.03	7.34	31.52	31.64	204	38 Average	VERTICAL
3 0	5187.60	113.88			106.57	7.39	31.56	31.64	204	38 Peak	VERTICAL
4 0	5188.00	102.31			95.00	7.39	31.56	31.64	204	38 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.




Channel 40

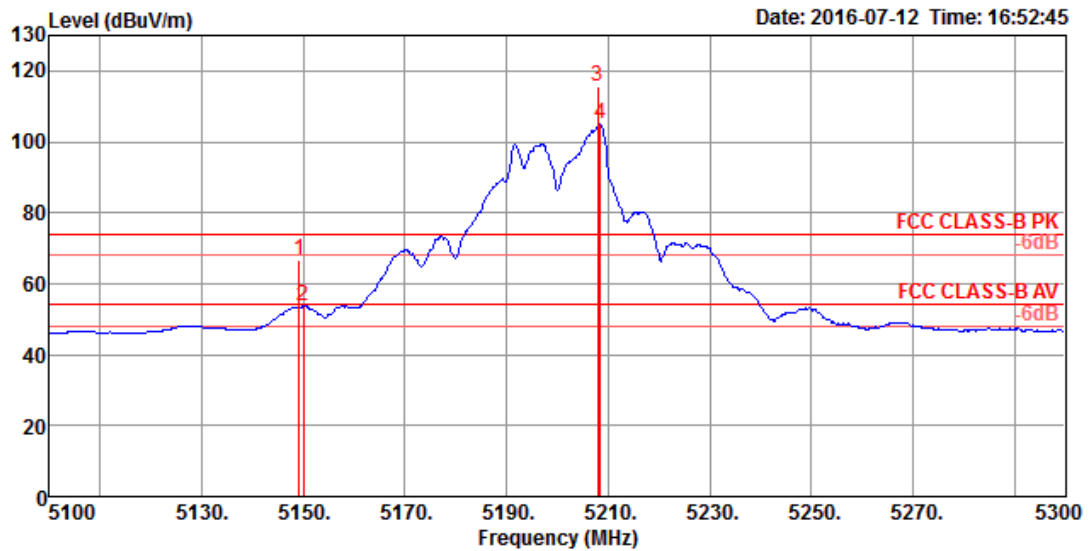

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.20	66.56	74.00	-7.44	59.34	7.34	31.52	31.64	272	115 Peak	HORIZONTAL
2	5150.00	53.67	54.00	-0.33	46.45	7.34	31.52	31.64	272	115 Average	HORIZONTAL
3 0	5208.00	115.63			108.29	7.41	31.57	31.64	272	115 Peak	HORIZONTAL
4 0	5208.40	104.88			97.54	7.41	31.57	31.64	272	115 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

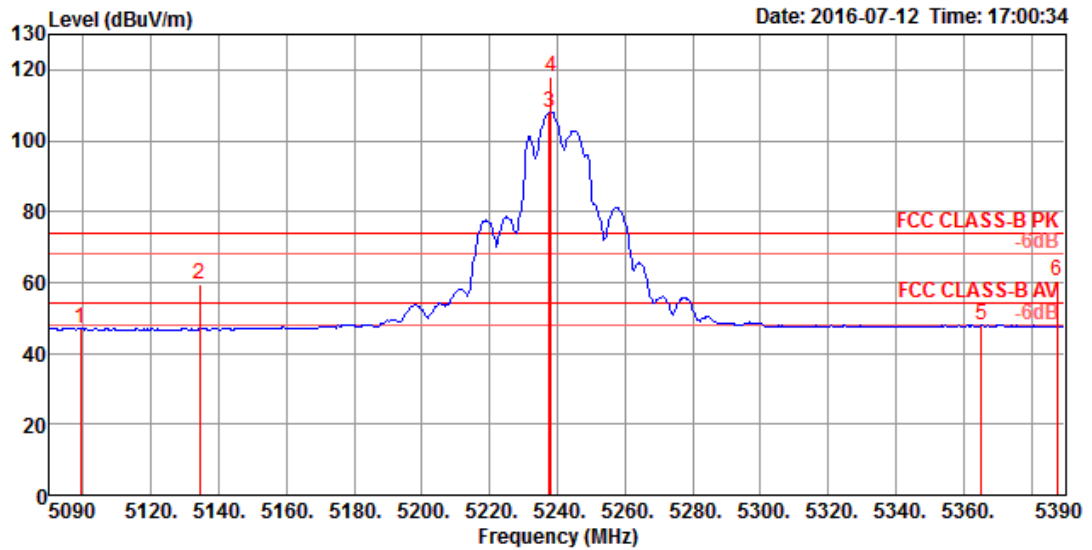


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5099.00	47.21	54.00	-6.79	40.10	7.28	31.48	31.65	300	325 Average	VERTICAL
2	5134.40	59.63	74.00	-14.37	52.45	7.32	31.51	31.65	300	325 Peak	VERTICAL
3	5237.60	108.15			100.75	7.45	31.59	31.64	300	325 Average	VERTICAL
4	5238.20	117.97			110.57	7.45	31.59	31.64	300	325 Peak	VERTICAL
5	5365.40	48.02	54.00	-5.98	40.33	7.62	31.69	31.62	300	325 Average	VERTICAL
6	5387.60	60.21	74.00	-13.79	52.45	7.66	31.72	31.62	300	325 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 52**

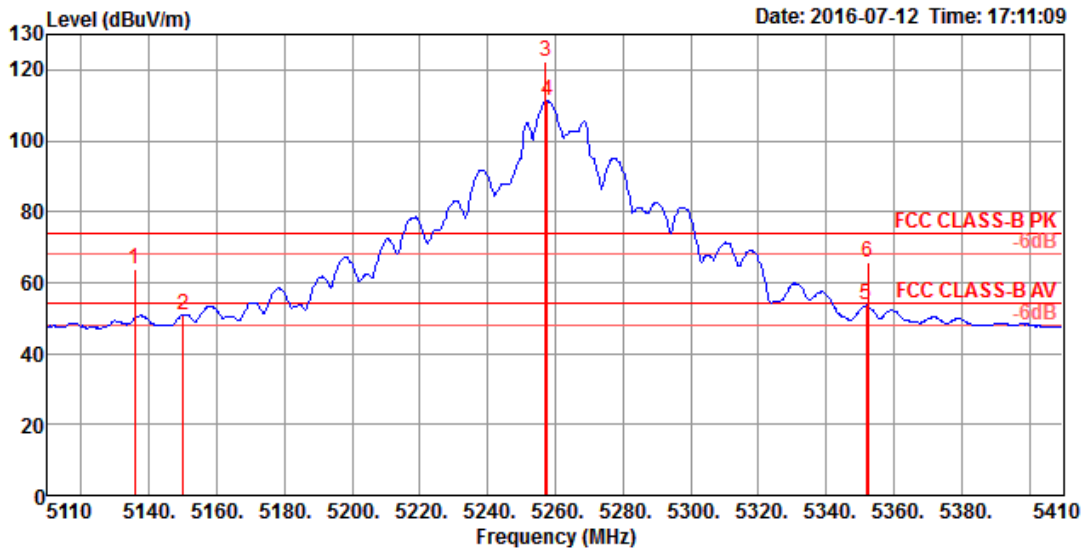

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5135.80	63.81	74.00	-10.19	56.63	7.32	31.51	31.65	222	328 Peak	VERTICAL
2	5150.00	50.71	54.00	-3.29	43.49	7.34	31.52	31.64	222	328 Average	VERTICAL
3 0	5257.00	122.34			114.89	7.47	31.61	31.63	222	328 Peak	VERTICAL
4 0	5257.60	111.31			103.86	7.47	31.61	31.63	222	328 Average	VERTICAL
5	5351.80	53.49	54.00	-0.51	45.83	7.60	31.68	31.62	222	328 Average	VERTICAL
6	5352.40	65.65	74.00	-8.35	57.99	7.60	31.68	31.62	222	328 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.


Channel 60

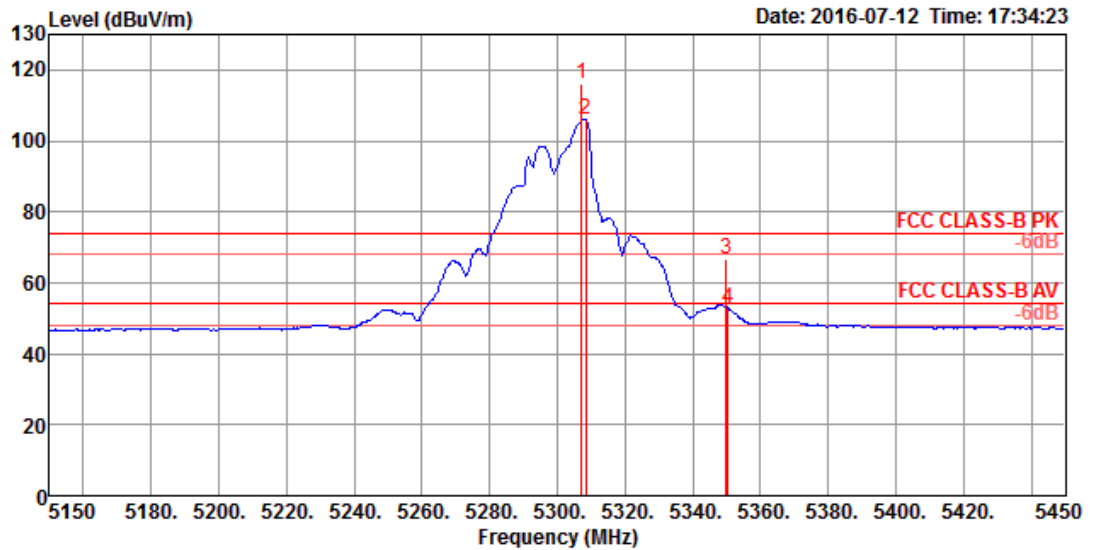

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	0	5307.20	115.96		108.41	7.54	31.64	31.63	300	118 Peak	HORIZONTAL	
2	0	5308.40	106.06		98.48	7.56	31.65	31.63	300	118 Average	HORIZONTAL	
3		5350.00	66.62	74.00	-7.38	58.96	7.60	31.68	31.62	300	118 Peak	HORIZONTAL
4		5350.40	52.63	54.00	-1.37	44.97	7.60	31.68	31.62	300	118 Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

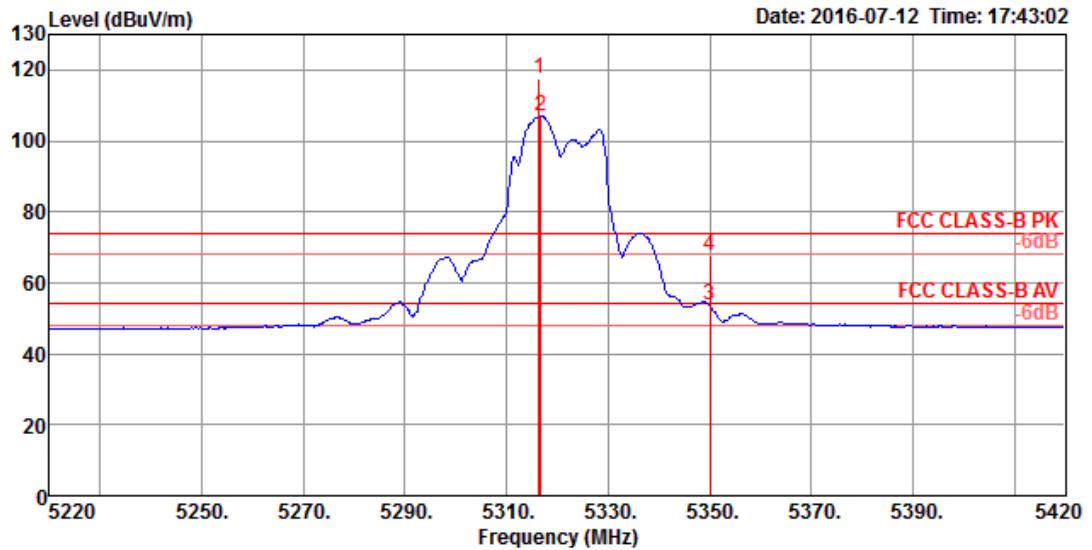


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	0	5316.40	117.50		109.92	7.56	31.65	31.63	241	332 Peak	VERTICAL	
2	0	5316.80	106.95		99.37	7.56	31.65	31.63	241	332 Average	VERTICAL	
3		5350.00	53.52	54.00	-0.48	45.86	7.60	31.68	31.62	241	332 Average	VERTICAL
4		5350.00	67.85	74.00	-6.15	60.19	7.60	31.68	31.62	241	332 Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 38**

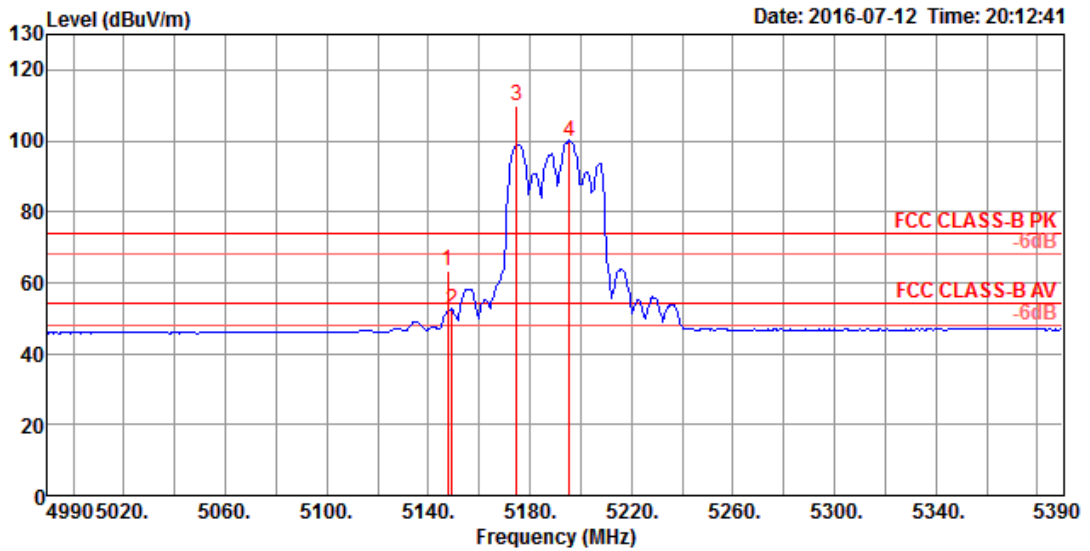

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5147.60	63.29	74.00	-10.71	56.07	7.34	31.52	31.64	300	164 Peak	VERTICAL
2	5149.20	52.52	54.00	-1.48	45.30	7.34	31.52	31.64	300	164 Average	VERTICAL
3 0	5174.80	109.86			102.58	7.37	31.55	31.64	300	164 Peak	VERTICAL
4 0	5195.60	100.01			92.70	7.39	31.56	31.64	300	164 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

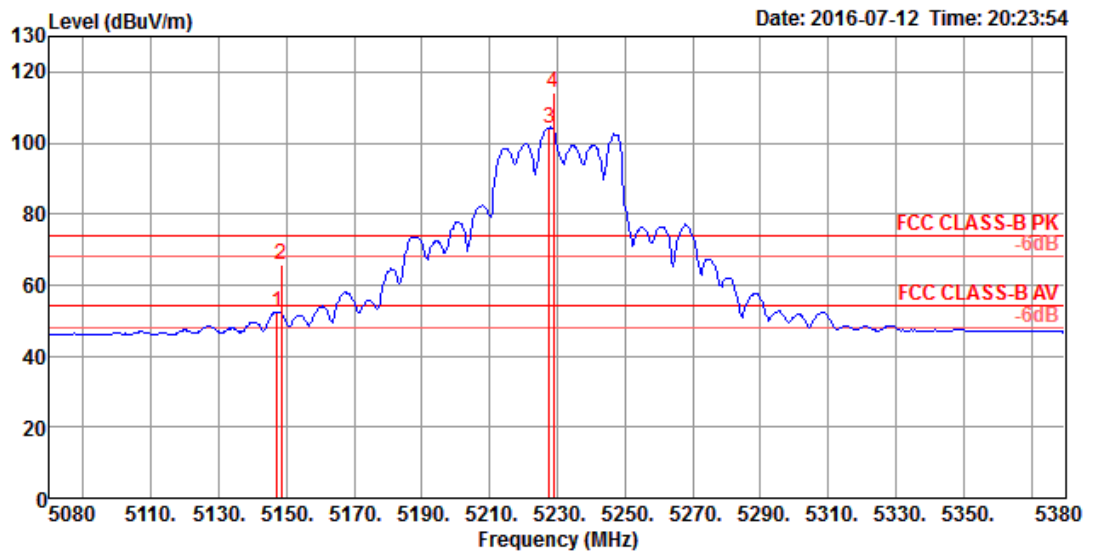


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5147.20	52.31	54.00	-1.69	45.09	7.34	31.52	31.64	300	328 Average	VERTICAL
2	5148.40	65.76	74.00	-8.24	58.54	7.34	31.52	31.64	300	328 Peak	VERTICAL
3 0	5227.60	104.30			96.93	7.43	31.58	31.64	300	328 Average	VERTICAL
4 0	5228.80	114.15			106.78	7.43	31.58	31.64	300	328 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3 + Chain 4

**Channel 54**

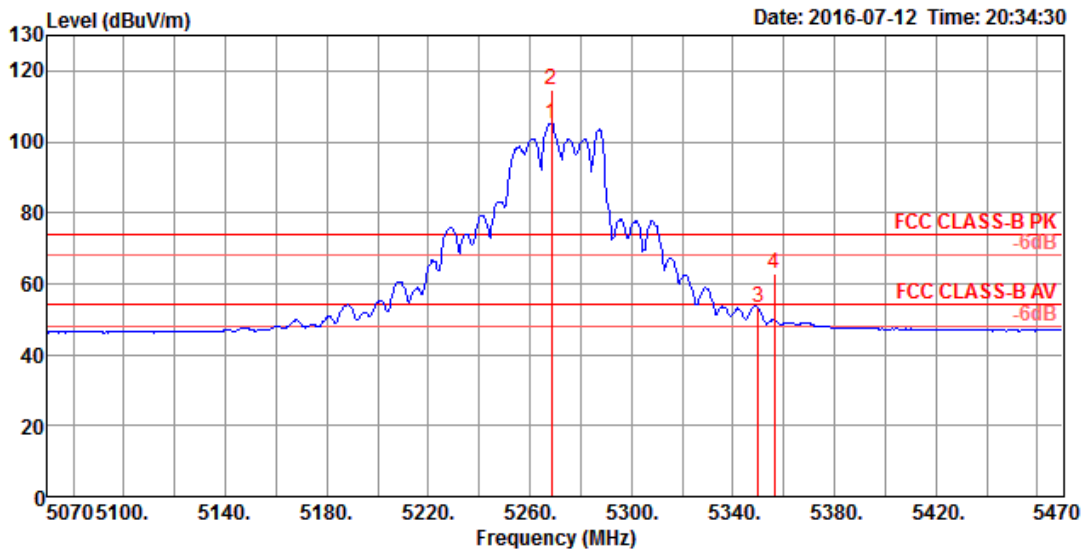


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	0	5268.40	105.22		97.74	7.49	31.62	31.63	300	330	Average	VERTICAL	
2	0	5268.40	114.75		107.27	7.49	31.62	31.63	300	330	Peak	VERTICAL	
3		5350.00	53.19	54.00	-0.81	45.53	7.60	31.68	31.62	300	330	Average	VERTICAL
4		5356.40	62.71	74.00	-11.29	55.02	7.62	31.69	31.62	300	330	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.



Channel 62

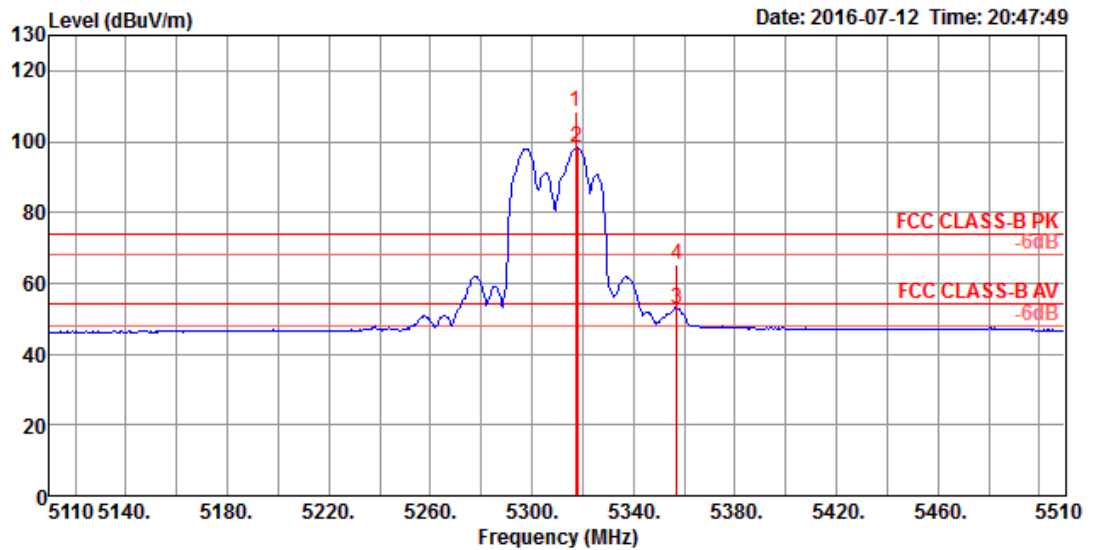


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	0	5317.20	108.23		100.65	7.56	31.65	31.63	300	116 Peak	HORIZONTAL	
2	0	5318.00	98.13		90.55	7.56	31.65	31.63	300	116 Average	HORIZONTAL	
3		5357.20	52.98	54.00	-1.02	45.29	7.62	31.69	31.62	300	116 Average	HORIZONTAL
4		5357.20	65.27	74.00	-8.73	57.58	7.62	31.69	31.62	300	116 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 58 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 42**

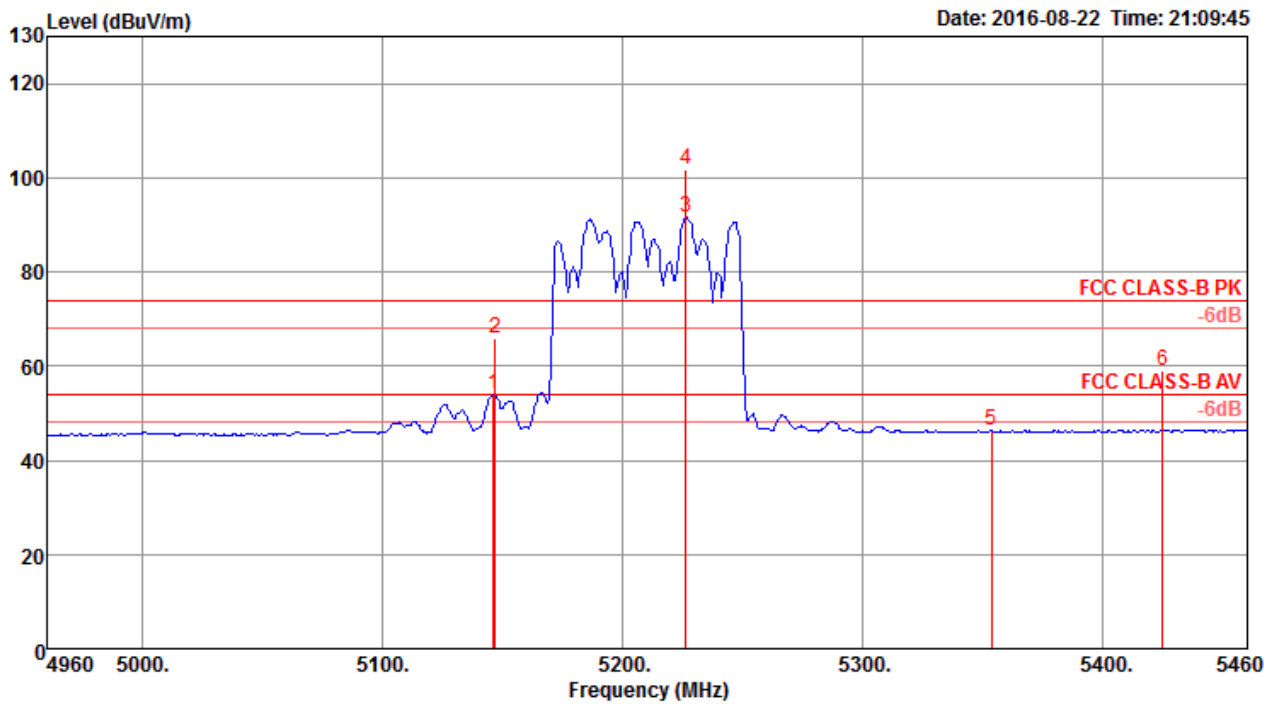

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	PoI/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5145.90	53.88	54.00	-0.12	46.62	6.44	33.74	32.92	257	358 Average	VERTICAL
2	5146.70	65.78	74.00	-8.22	58.52	6.44	33.74	32.92	257	358 Peak	VERTICAL
3	5226.03	91.60			84.15	6.51	33.86	32.92	257	358 Average	VERTICAL
4	5226.03	101.73			94.28	6.51	33.86	32.92	257	358 Peak	VERTICAL
5	5353.43	46.44	54.00	-7.56	38.69	6.61	34.06	32.92	257	358 Average	VERTICAL
6	5424.74	59.08	74.00	-14.92	51.16	6.67	34.18	32.93	257	358 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 58

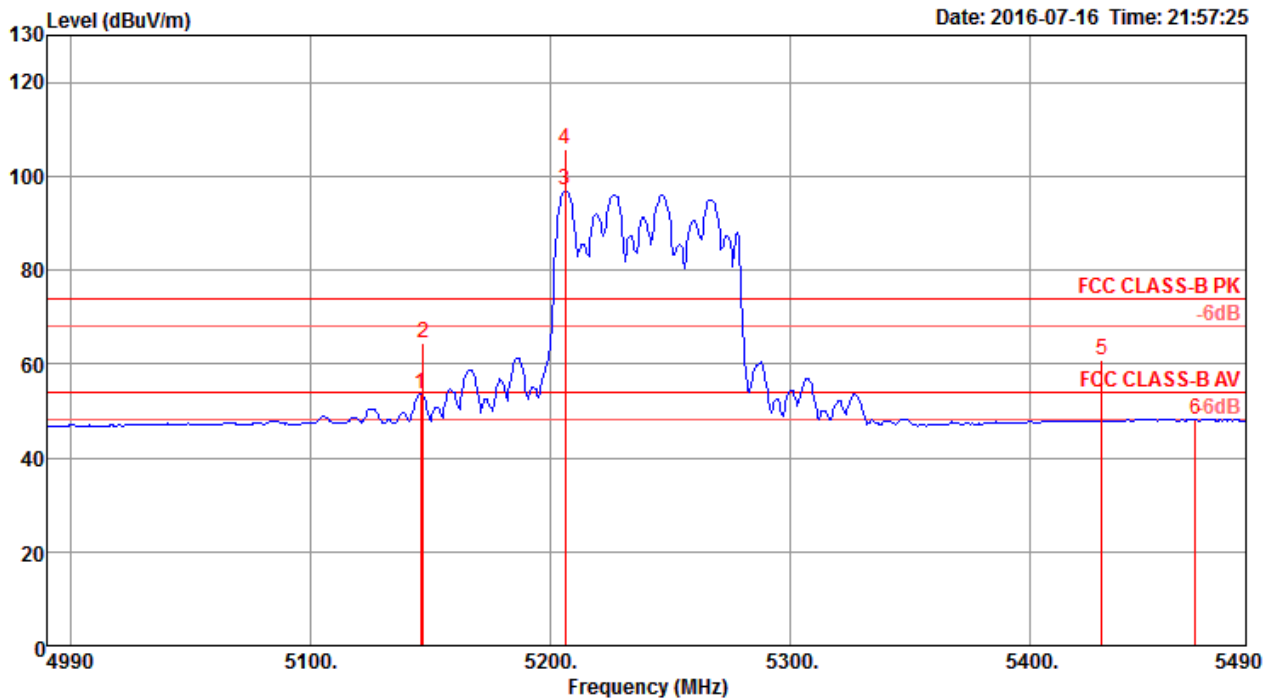


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5146.00	53.76	54.00	-0.24	46.50	6.44	33.74	32.92	238	167 Average	VERTICAL
2	5147.00	64.55	74.00	-9.45	57.29	6.44	33.74	32.92	238	167 Peak	VERTICAL
3	5206.00	96.98			89.57	6.49	33.84	32.92	238	167 Average	VERTICAL
4	5206.00	105.83			98.42	6.49	33.84	32.92	238	167 Peak	VERTICAL
5	5430.00	60.96	74.00	-13.04	53.04	6.67	34.18	32.93	238	167 Peak	VERTICAL
6	5469.00	48.28	54.00	-5.72	40.27	6.69	34.25	32.93	238	167 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

802.11ac MCS0/Nss2 VHT80+80

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss2 VHT80+80 Type 1 / CH 42+58 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel 42

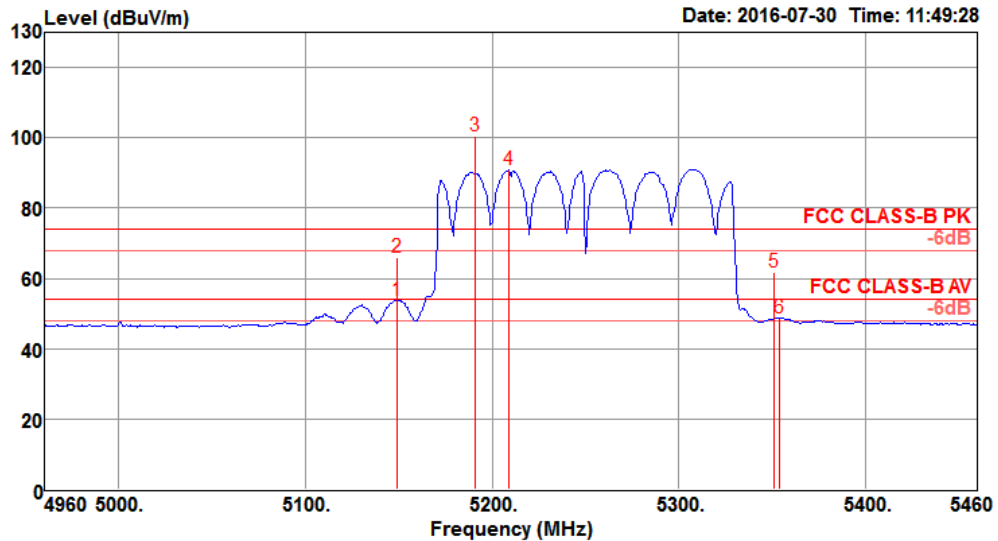

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB	dB/m	dB	cm	deg	
1	5149.00	53.68	54.00	-0.32	46.26	7.48	34.85	34.91	275	169 Average	VERTICAL
2	5149.00	65.95	74.00	-8.05	58.53	7.48	34.85	34.91	275	169 Peak	VERTICAL
3	5191.00	100.47			93.00	7.48	34.90	34.91	275	169 Peak	VERTICAL
4	5209.00	90.74			83.25	7.49	34.91	34.91	275	169 Average	VERTICAL
5	5351.00	61.76	74.00	-12.24	54.06	7.56	35.05	34.91	275	169 Peak	VERTICAL
6	5354.00	48.76	54.00	-5.24	41.06	7.56	35.05	34.91	275	169 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 58

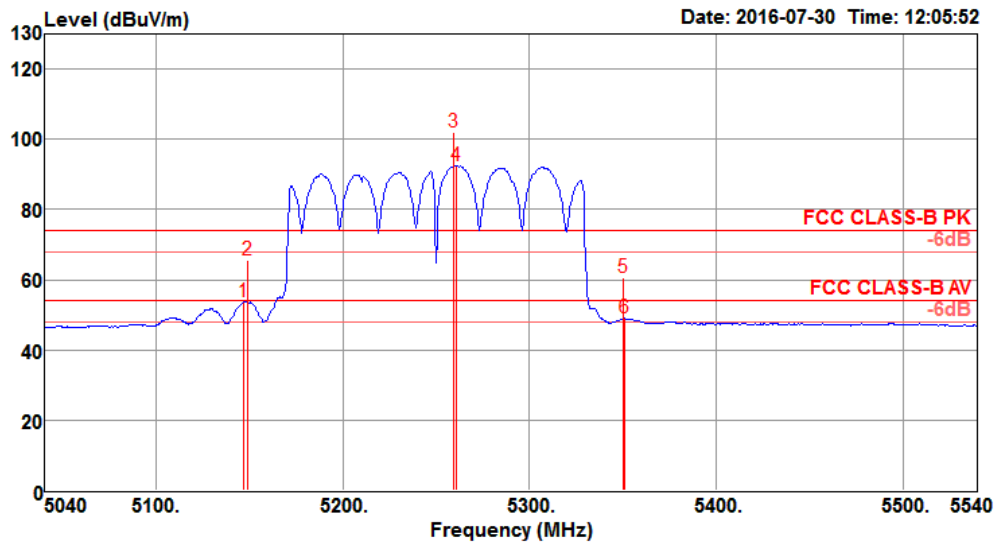


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5147.00	53.72	54.00	-0.28	46.30	7.48	34.85	34.91	285	176	Average	VERTICAL
2	5149.00	65.55	74.00	-8.45	58.13	7.48	34.85	34.91	285	176	Peak	VERTICAL
3	5259.00	101.84			94.28	7.51	34.96	34.91	285	176	Peak	VERTICAL
4	5261.00	92.33			84.77	7.51	34.96	34.91	285	176	Average	VERTICAL
5	5350.00	60.50	74.00	-13.50	52.80	7.56	35.05	34.91	285	176	Peak	VERTICAL
6	5351.00	48.99	54.00	-5.01	41.29	7.56	35.05	34.91	285	176	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

For beamforming mode

Temperature	22°C	Humidity	54%
Test Engineer	Zero Chen & Stim Sung & Steven Liang	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel 36

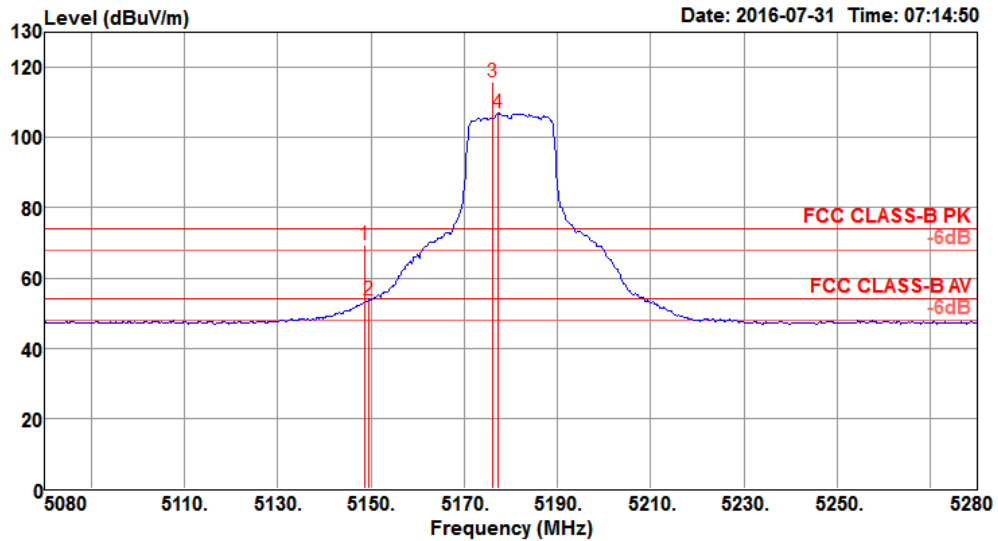

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5148.80	69.26	74.00	-4.74	61.84	7.48	34.85	34.91	270	219	Peak	VERTICAL
2	5149.60	53.89	54.00	-0.11	46.47	7.48	34.85	34.91	270	219	Average	VERTICAL
3	5176.00	115.67			108.22	7.48	34.88	34.91	270	219	Peak	VERTICAL
4	5177.20	106.86			99.41	7.48	34.88	34.91	270	219	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.


Channel 40

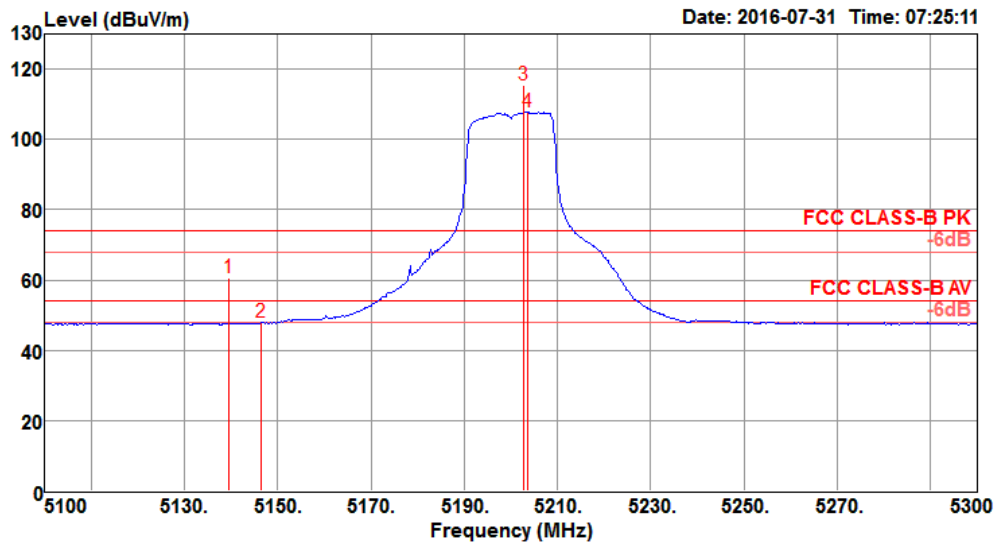

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5139.60	60.51	74.00	-13.49	53.10	7.48	34.84	34.91	279	164	Peak	VERTICAL
2	5146.40	47.79	54.00	-6.21	40.37	7.48	34.85	34.91	279	164	Average	VERTICAL
3	5202.80	115.63			108.14	7.49	34.91	34.91	279	164	Peak	VERTICAL
4	5203.60	107.68			100.19	7.49	34.91	34.91	279	164	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

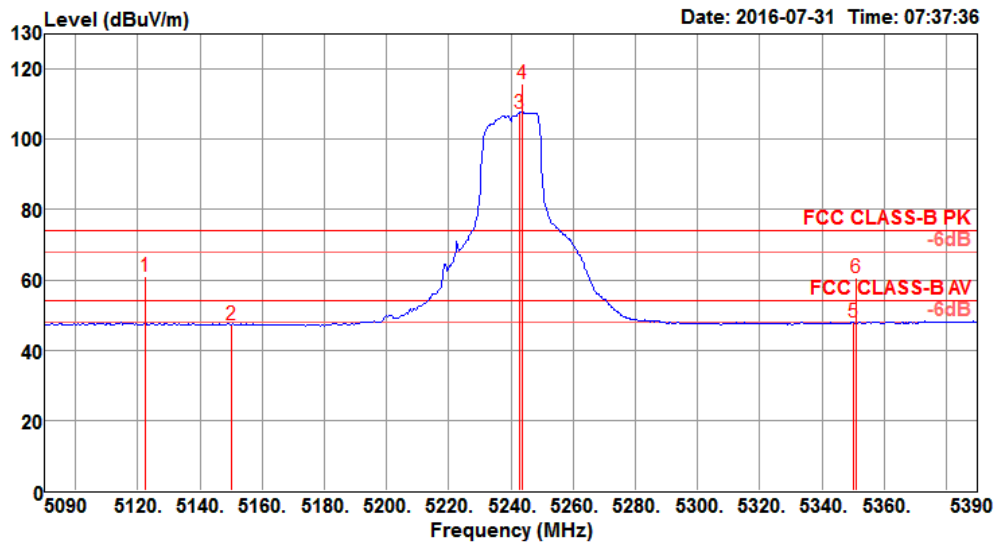


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5122.40	61.06	74.00	-12.94	53.66	7.48	34.82	34.90	282	165	Peak	VERTICAL
2	5150.00	47.11	54.00	-6.89	39.69	7.48	34.85	34.91	282	165	Average	VERTICAL
3	5243.00	107.51			99.98	7.50	34.94	34.91	282	165	Average	VERTICAL
4	5243.60	115.72			108.19	7.50	34.94	34.91	282	165	Peak	VERTICAL
5	5350.00	48.02	54.00	-5.98	40.32	7.56	35.05	34.91	282	165	Average	VERTICAL
6	5351.00	60.73	74.00	-13.27	53.03	7.56	35.05	34.91	282	165	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 52, 60, 64 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 52**

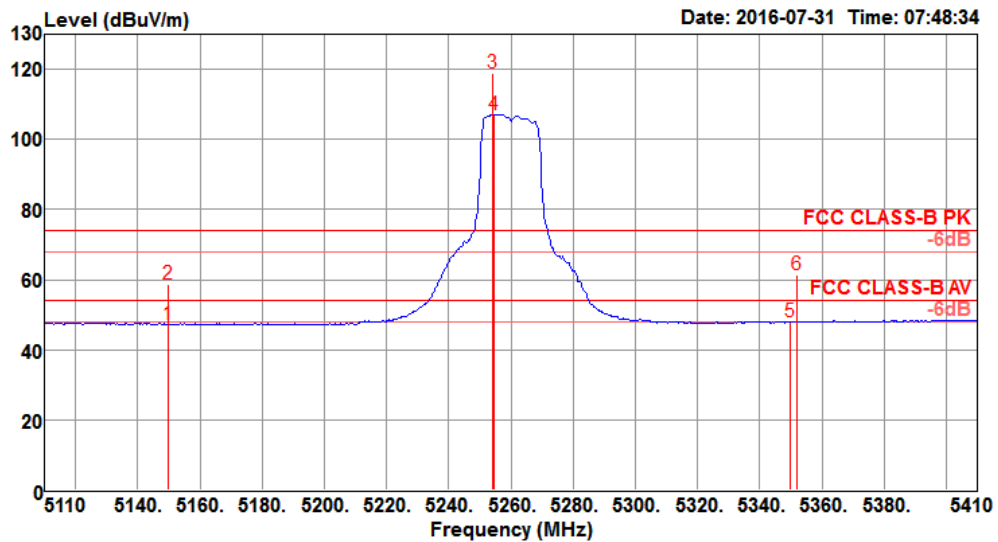

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	47.22	54.00	-6.78	39.80	7.48	34.85	34.91	291	182	Average	VERTICAL
2	5150.00	58.81	74.00	-15.19	51.39	7.48	34.85	34.91	291	182	Peak	VERTICAL
3	5254.00	118.75			111.19	7.51	34.96	34.91	291	182	Peak	VERTICAL
4	5254.60	107.15			99.59	7.51	34.96	34.91	291	182	Average	VERTICAL
5	5350.00	47.77	54.00	-6.23	40.07	7.56	35.05	34.91	291	182	Average	VERTICAL
6	5351.80	61.35	74.00	-12.65	53.65	7.56	35.05	34.91	291	182	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5260 MHz.


Channel 60

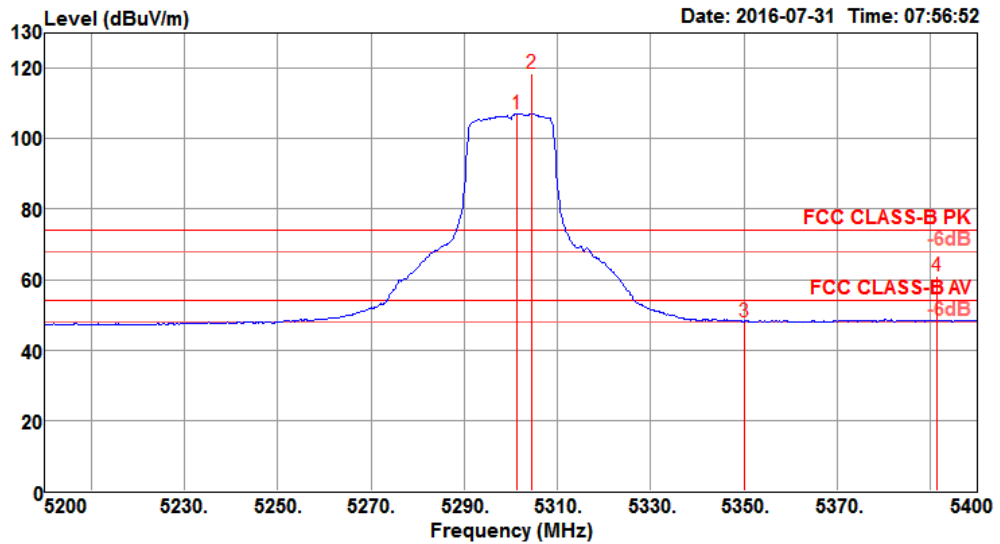

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5301.20	107.00			99.38	7.53	35.00	34.91	299	182	Average	VERTICAL
2	5304.40	118.35			110.73	7.53	35.00	34.91	299	182	Peak	VERTICAL
3	5350.00	48.04	54.00	-5.96	40.34	7.56	35.05	34.91	299	182	Average	VERTICAL
4	5391.20	60.85	74.00	-13.15	53.10	7.58	35.09	34.92	299	182	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5300 MHz.

Channel 64

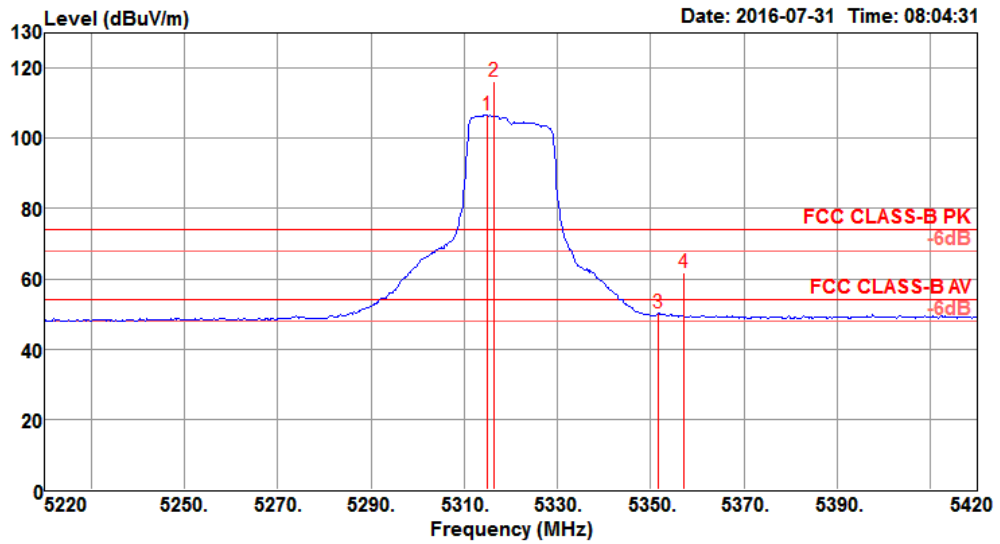


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5314.80	106.64			98.99	7.54	35.02	34.91	274	229	Average	VERTICAL
2	5316.40	116.40			108.75	7.54	35.02	34.91	274	229	Peak	VERTICAL
3	5351.60	50.15	54.00	-3.85	42.45	7.56	35.05	34.91	274	229	Average	VERTICAL
4	5357.20	61.72	74.00	-12.28	54.01	7.56	35.06	34.91	274	229	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 38**

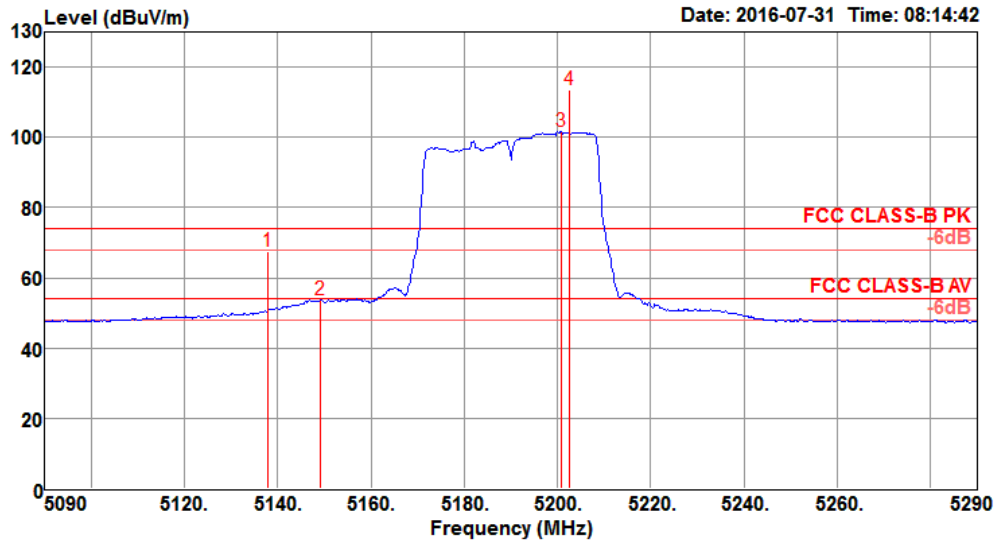

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5138.00	67.70	74.00	-6.30	60.29	7.48	34.84	34.91	273	170	Peak	VERTICAL
2	5149.20	53.56	54.00	-0.44	46.14	7.48	34.85	34.91	273	170	Average	VERTICAL
3	5200.80	101.51			94.04	7.48	34.90	34.91	273	170	Average	VERTICAL
4	5202.40	113.37			105.88	7.49	34.91	34.91	273	170	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Channel 46

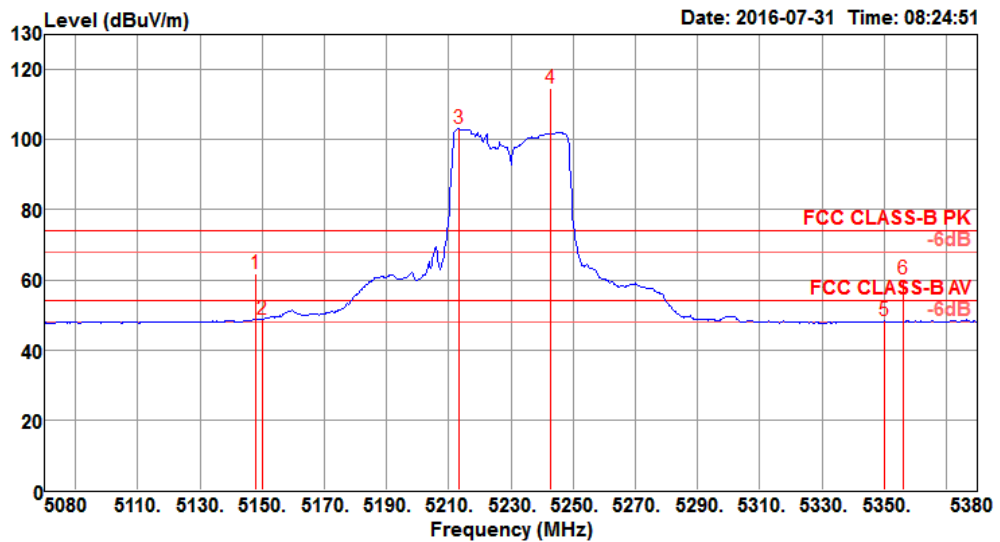


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5147.80	61.62	74.00	-12.38	54.20	7.48	34.85	34.91	276	169 Peak	VERTICAL
2	5150.00	48.74	54.00	-5.26	41.32	7.48	34.85	34.91	276	169 Average	VERTICAL
3	5213.20	103.19			95.70	7.49	34.91	34.91	276	169 Average	VERTICAL
4	5242.60	114.73			107.20	7.50	34.94	34.91	276	169 Peak	VERTICAL
5	5350.00	48.33	54.00	-5.67	40.63	7.56	35.05	34.91	276	169 Average	VERTICAL
6	5356.00	60.38	74.00	-13.62	52.67	7.56	35.06	34.91	276	169 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 54, 62 / Chain 1 + Chain 2 + Chain 3 + Chain 4


**Channel 54**

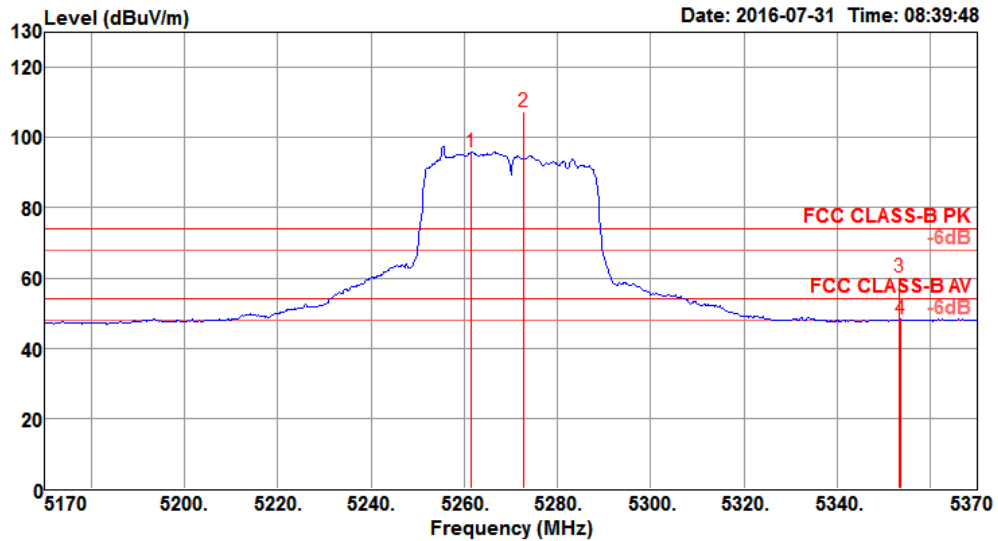

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5261.60	95.86			88.30	7.51	34.96	34.91	275	56	Average	HORIZONTAL
2	5272.80	107.31			99.73	7.52	34.97	34.91	275	56	Peak	HORIZONTAL
3	5353.20	60.40	74.00	-13.60	52.70	7.56	35.05	34.91	275	56	Peak	HORIZONTAL
4	5353.60	48.28	54.00	-5.72	40.58	7.56	35.05	34.91	275	56	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

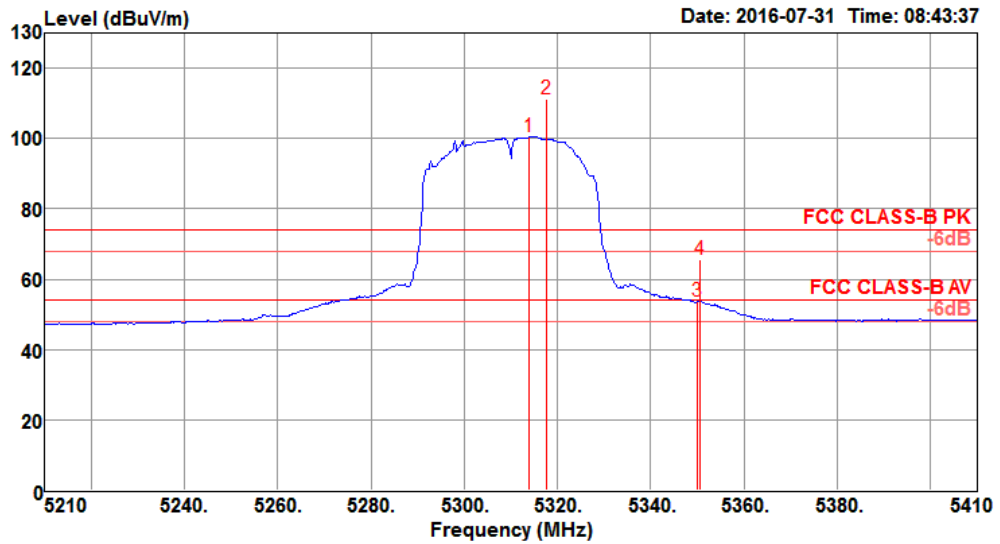


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5314.00	100.47			92.82	7.54	35.02	34.91	274	294	Average	VERTICAL
2	5317.60	111.31			103.66	7.54	35.02	34.91	274	294	Peak	VERTICAL
3	5350.00	53.70	54.00	-0.30	46.00	7.56	35.05	34.91	274	294	Average	VERTICAL
4	5350.40	65.53	74.00	-8.47	57.83	7.56	35.05	34.91	274	294	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42, 58 / Chain 1 + Chain 2 + Chain 3 + Chain 4

**Channel 42**

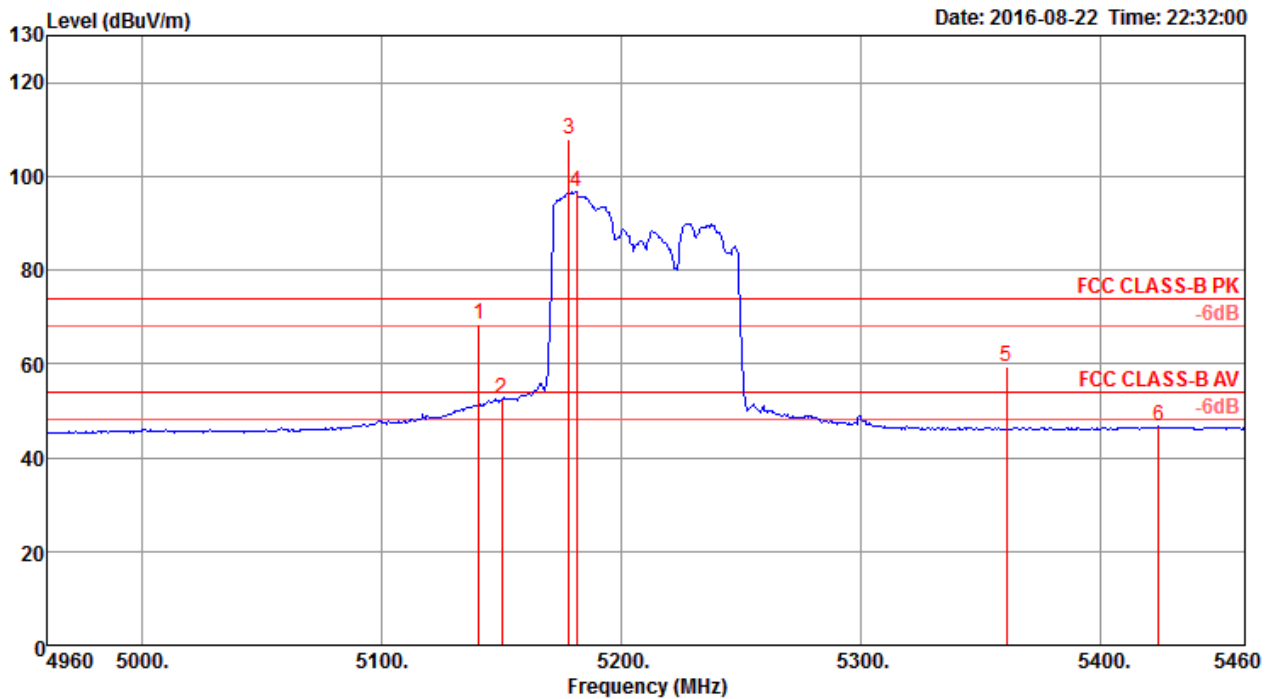


	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5140.29	68.27	74.00	-5.73	61.04	6.43	33.72	32.92	222	348 Peak	VERTICAL
2	5150.00	52.55	54.00	-1.45	45.29	6.44	33.74	32.92	222	348 Average	VERTICAL
3	5177.95	107.91			100.57	6.47	33.79	32.92	222	348 Peak	VERTICAL
4	5181.15	96.57			89.23	6.47	33.79	32.92	222	348 Average	VERTICAL
5	5360.64	59.32	74.00	-14.68	51.54	6.62	34.08	32.92	222	348 Peak	VERTICAL
6	5423.94	46.57	54.00	-7.43	38.65	6.67	34.18	32.93	222	348 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.



Channel 58

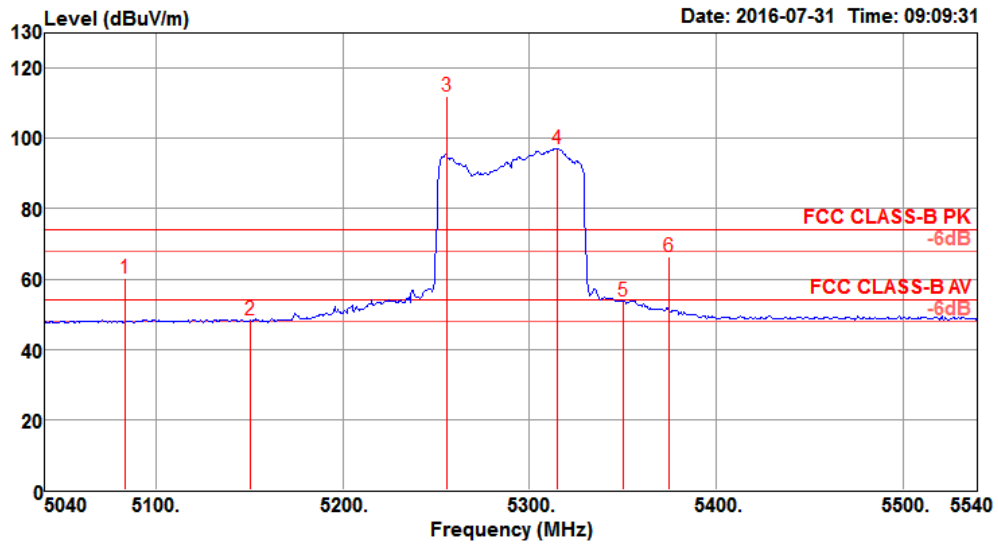


	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBUV/m	dBUV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5083.00	60.13	74.00	-13.87	52.76	7.48	34.79	34.90	288	235 Peak	VERTICAL
2	5150.00	48.35	54.00	-5.65	40.93	7.48	34.85	34.91	288	235 Average	VERTICAL
3	5256.00	112.17			104.61	7.51	34.96	34.91	288	235 Peak	VERTICAL
4	5315.00	97.16			89.51	7.54	35.02	34.91	288	235 Average	VERTICAL
5	5350.00	53.86	54.00	-0.14	46.16	7.56	35.05	34.91	288	235 Average	VERTICAL
6	5375.00	66.34	74.00	-7.66	58.61	7.57	35.08	34.92	288	235 Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

802.11ac MCS0/Nss2 VHT80+80

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Zero Chen & Stim Sung & Steven Liang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss2 VHT80+80 Type 1 / CH 42+58 / Chain 1 + Chain 2 + Chain 3 + Chain 4


Channel 42

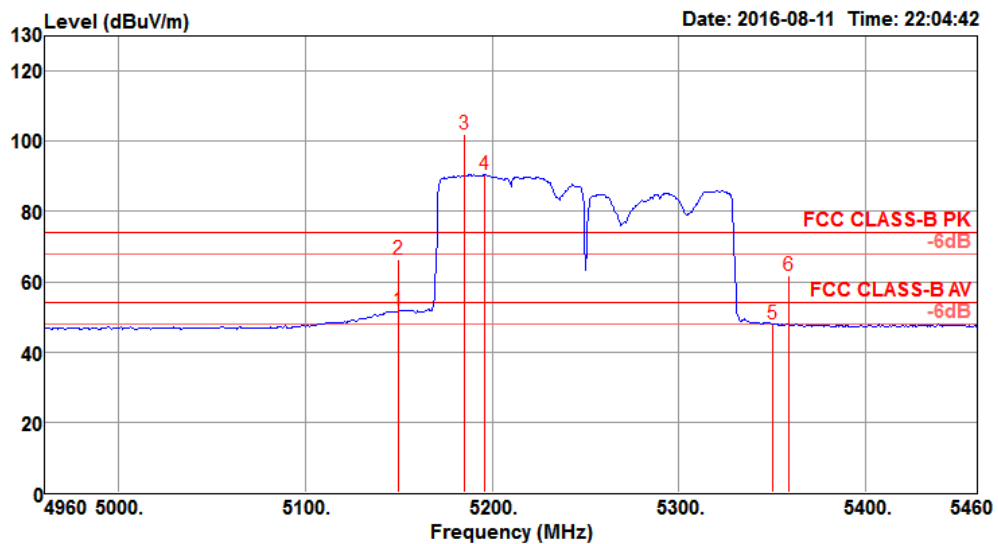

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5150.00	51.90	54.00	-2.10	44.48	7.48	34.85	34.91	300	360	Average	VERTICAL
2	5150.00	66.50	74.00	-7.50	59.08	7.48	34.85	34.91	300	360	Peak	VERTICAL
3	5185.00	101.87			94.42	7.48	34.88	34.91	300	360	Peak	VERTICAL
4	5196.00	90.59			83.12	7.48	34.90	34.91	300	360	Average	VERTICAL
5	5350.00	48.00	54.00	-6.00	40.30	7.56	35.05	34.91	300	360	Average	VERTICAL
6	5359.00	61.66	74.00	-12.34	53.95	7.56	35.06	34.91	300	360	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Channel 58

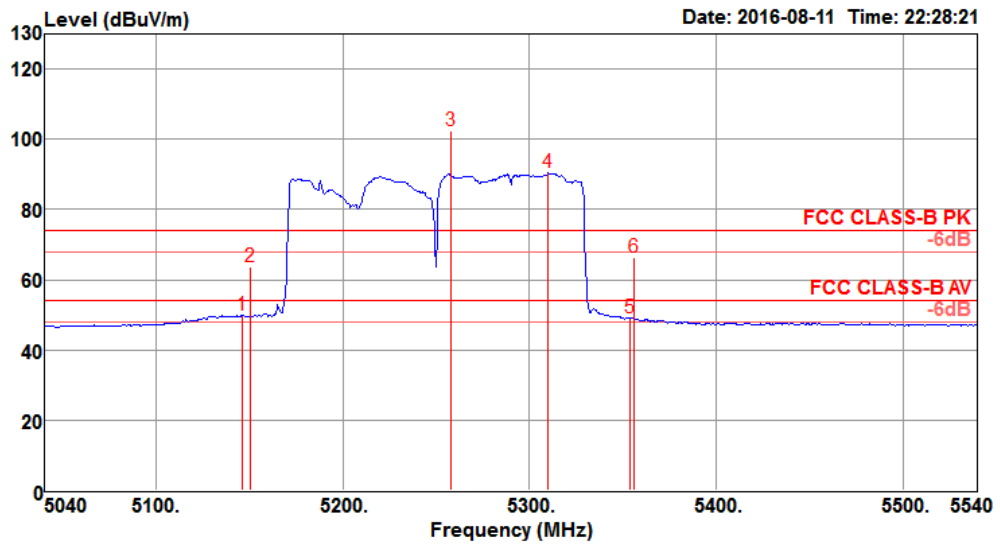

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	5146.00	49.96	54.00	-4.04	42.54	7.48	34.85	34.91	300	228	Average	VERTICAL
2	5150.00	63.73	74.00	-10.27	56.31	7.48	34.85	34.91	300	228	Peak	VERTICAL
3	5258.00	102.32			94.76	7.51	34.96	34.91	300	228	Peak	VERTICAL
4	5310.00	90.38			82.73	7.54	35.02	34.91	300	228	Average	VERTICAL
5	5354.00	49.16	54.00	-4.84	41.46	7.56	35.05	34.91	300	228	Average	VERTICAL
6	5356.00	66.41	74.00	-7.59	58.70	7.56	35.06	34.91	300	228	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 5290 MHz.

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c-f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$ ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $-30^{\circ}\text{C} \sim 70^{\circ}\text{C}$ .

### 4.7.4. Test Setup Layout

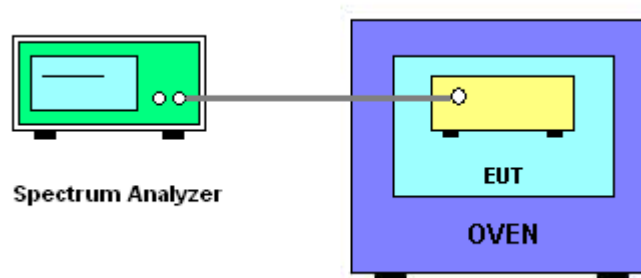

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Test Date	Aug. 05, 2016

Mode: 20 MHz / Chain 1

##### Voltage vs. Frequency Stability

Voltage (V)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9823	5199.9818	5199.9810	5199.9809
110.00	5199.9822	5199.9817	5199.9812	5199.9809
93.50	5199.9812	5199.9806	5199.9804	5199.9799
Max. Deviation (MHz)	0.0188	0.0194	0.0196	0.0201
Max. Deviation (ppm)	3.62	3.73	3.77	3.87
Result	Complies			

##### Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)			
	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5199.9846	5199.9840	5199.9830	5199.9822
-20	5199.9839	5199.9835	5199.9831	5199.9823
-10	5199.9834	5199.9831	5199.9826	5199.9817
0	5199.9830	5199.9827	5199.9820	5199.9810
10	5199.9824	5199.9822	5199.9819	5199.9813
20	5199.9822	5199.9812	5199.9805	5199.9798
30	5199.9813	5199.9808	5199.9801	5199.9795
40	5199.9804	5199.9800	5199.9790	5199.9783
50	5199.9799	5199.9789	5199.9782	5199.9772
60	5199.9785	5199.9778	5199.9769	5199.9760
70	5199.9789	5199.9783	5199.9776	5199.9769
Max. Deviation (MHz)	0.0211	0.0217	0.0224	0.0231
Max. Deviation (ppm)	4.05	4.17	4.30	4.44
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5299.9825	5299.9822	5299.9813	5299.9810
110.00	5299.9822	5299.9821	5299.9815	5299.9809
93.50	5299.9814	5299.9806	5299.9799	5299.9792
Max. Deviation (MHz)	0.0186	0.0194	0.0201	0.0208
Max. Deviation (ppm)	3.51	3.66	3.79	3.92
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5300 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5299.9861	5299.9860	5299.9856	5299.9847
-20	5299.9843	5299.9837	5299.9831	5299.9824
-10	5299.9836	5299.9829	5299.9822	5299.9819
0	5299.9834	5299.9832	5299.9825	5299.9823
10	5299.9828	5299.9823	5299.9814	5299.9806
20	5299.9822	5299.9815	5299.9811	5299.9803
30	5299.9813	5299.9803	5299.9796	5299.9787
40	5299.9804	5299.9799	5299.9790	5299.9785
50	5299.9805	5299.9795	5299.9785	5299.9782
60	5299.9797	5299.9787	5299.9780	5299.9779
70	5299.9802	5299.9801	5299.9793	5299.9791
Max. Deviation (MHz)	0.0198	0.0201	0.0210	0.0215
Max. Deviation (ppm)	3.73	3.79	3.96	4.05
Result	Complies			

Mode: 40 MHz / Chain 1

## Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9832	5189.9831	5189.9828	5189.9823
110.00	5189.9822	5189.9812	5189.9806	5189.9803
93.50	5189.9820	5189.9817	5189.9816	5189.9814
Max. Deviation (MHz)	0.0180	0.0188	0.0194	0.0197
Max. Deviation (ppm)	3.47	3.62	3.74	3.80
Result	Complies			

## Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5189.9853	5189.9845	5189.9842	5189.9837
-20	5189.9850	5189.9844	5189.9841	5189.9833
-10	5189.9847	5189.9843	5189.9839	5189.9831
0	5189.9838	5189.9829	5189.9825	5189.9816
10	5189.9837	5189.9831	5189.9830	5189.9823
20	5189.9822	5189.9816	5189.9806	5189.9802
30	5189.9813	5189.9803	5189.9797	5189.9794
40	5189.9799	5189.9795	5189.9791	5189.9788
50	5189.9799	5189.9795	5189.9790	5189.9789
60	5189.9794	5189.9793	5189.9786	5189.9782
70	5189.9781	5189.9771	5189.9767	5189.9763
Max. Deviation (MHz)	0.0219	0.0229	0.0233	0.0237
Max. Deviation (ppm)	4.21	4.41	4.48	4.56
Result	Complies			



**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5309.9823	5309.9818	5309.9817	5309.9814
110.00	5309.9822	5309.9815	5309.9808	5309.9798
93.50	5309.9816	5309.9810	5309.9808	5309.9806
Max. Deviation (MHz)	0.0184	0.0190	0.0192	0.0202
Max. Deviation (ppm)	3.47	3.58	3.62	3.80
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5310 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5309.9877	5309.9867	5309.9862	5309.9860
-20	5309.9871	5309.9870	5309.9862	5309.9861
-10	5309.9864	5309.9859	5309.9850	5309.9849
0	5309.9851	5309.9847	5309.9838	5309.9836
10	5309.9836	5309.9831	5309.9824	5309.9816
20	5309.9822	5309.9819	5309.9811	5309.9810
30	5309.9813	5309.9810	5309.9805	5309.9802
40	5309.9803	5309.9800	5309.9796	5309.9788
50	5309.9798	5309.9794	5309.9788	5309.9780
60	5309.9799	5309.9791	5309.9784	5309.9776
70	5309.9795	5309.9788	5309.9785	5309.9784
Max. Deviation (MHz)	0.0205	0.0212	0.0215	0.0216
Max. Deviation (ppm)	3.85	3.99	4.04	4.06
Result	Complies			

Mode: 80 MHz / Chain 1

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9828	5209.9822	5209.9818	5209.9815
110.00	5209.9822	5209.9820	5209.9813	5209.9812
93.50	5209.9817	5209.9812	5209.9811	5209.9808
Max. Deviation (MHz)	0.0183	0.0188	0.0189	0.0192
Max. Deviation (ppm)	3.51	3.61	3.63	3.69
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5209.9849	5209.9844	5209.9836	5209.9835
-20	5209.9846	5209.9837	5209.9830	5209.9827
-10	5209.9833	5209.9832	5209.9825	5209.9815
0	5209.9828	5209.9824	5209.9822	5209.9816
10	5209.9824	5209.9818	5209.9808	5209.9806
20	5209.9822	5209.9816	5209.9810	5209.9800
30	5209.9813	5209.9804	5209.9803	5209.9802
40	5209.9800	5209.9793	5209.9792	5209.9789
50	5209.9805	5209.9802	5209.9797	5209.9793
60	5209.9805	5209.9797	5209.9794	5209.9790
70	5209.9780	5209.9775	5209.9765	5209.9763
Max. Deviation (MHz)	0.0220	0.0225	0.0235	0.0237
Max. Deviation (ppm)	4.22	4.31	4.50	4.54
Result	Complies			

**Voltage vs. Frequency Stability**

Voltage	Measurement Frequency (MHz)			
(V)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5289.9830	5289.9826	5289.9816	5289.9807
110.00	5289.9822	5289.9814	5289.9811	5289.9805
93.50	5289.9818	5289.9817	5289.9813	5289.9809
Max. Deviation (MHz)	0.0182	0.0186	0.0189	0.0195
Max. Deviation (ppm)	3.44	3.52	3.57	3.69
Result	Complies			

**Temperature vs. Frequency Stability**

Temperature	Measurement Frequency (MHz)			
(°C)	5290 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-30	5289.9867	5289.9857	5289.9856	5289.9853
-20	5289.9857	5289.9847	5289.9837	5289.9829
-10	5289.9845	5289.9836	5289.9826	5289.9821
0	5289.9839	5289.9829	5289.9828	5289.9823
10	5289.9835	5289.9831	5289.9824	5289.9816
20	5289.9822	5289.9812	5289.9802	5289.9796
30	5289.9813	5289.9808	5289.9803	5289.9794
40	5289.9807	5289.9804	5289.9801	5289.9791
50	5289.9812	5289.9810	5289.9804	5289.9794
60	5289.9804	5289.9800	5289.9790	5289.9781
70	5289.9791	5289.9786	5289.9784	5289.9777
Max. Deviation (MHz)	0.0209	0.0214	0.0216	0.0223
Max. Deviation (ppm)	3.95	4.04	4.08	4.21
Result	Complies			

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Bilog Antenna	SCHAFFNER	CBL 6112B	2888	30MHz ~ 1GHz	Nov. 17, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 25, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2016	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%

## Appendix B. Maximum e.i.r.p. at any elevation angle above 30 degrees



### 1. Maximum e.i.r.p. at any elevation angle above 30 degrees

Mode	Frequency	Modulation	Channel	Data Rate	Conducted Pass Setting	Chain1 (dBm)	Chain2 (dBm)	Chain3 (dBm)	Chain4 (dBm)	Total (dBm)	Elevation angle above 30° Max gain (dBi)	Elevation angle above 30° Max EIRP (dBm)	EIRP Power Limit (dBm)
Non BF	5180MHz	OFDM	Ch36	6Mbps	6.5	8.86	8.72	9.02	8.99	14.92	6.000	20.92	21
	5200MHz	OFDM	Ch40	6Mbps	6.5	8.9	8.86	9.09	9	14.98	6.000	20.98	21
	5240MHz	OFDM	Ch48	6Mbps	6.5	8.71	8.66	8.81	9.02	14.82	6.000	20.82	21
	5180MHz	VHT20	Ch36	MCS0-Nss1	6.5	8.76	8.82	8.64	8.71	14.75	6.000	20.75	21
	5200MHz	VHT20	Ch40	MCS0-Nss1	6.5	8.78	8.83	8.53	8.61	14.71	6.000	20.71	21
	5240MHz	VHT20	Ch48	MCS0-Nss1	6.5	8.82	8.53	8.69	8.88	14.75	6.000	20.75	21
	5190MHz	VHT40	Ch38	MCS0-Nss1	6.5	8.84	8.56	8.76	8.78	14.76	6.000	20.76	21
	5230MHz	VHT40	Ch46	MCS0-Nss1	6.5	8.64	8.63	8.91	8.85	14.78	6.000	20.78	21
	5210MHz	VHT80	Ch42	MCS0-Nss1	6.5	8.64	8.67	8.89	8.76	14.76	6.000	20.76	21
BF	5180MHz	VHT20	Ch36	MCS0-Nss1	7	2.53	2.61	2.72	2.66	8.65	12.021	20.67	21
	5200MHz	VHT20	Ch40	MCS0-Nss1	7	2.45	2.64	2.55	2.69	8.60	12.021	20.62	21
	5240MHz	VHT20	Ch48	MCS0-Nss1	7	2.58	2.68	2.75	2.52	8.65	12.021	20.67	21
	5190MHz	VHT40	Ch38	MCS0-Nss1	7.5	1.96	2.23	2.09	2.37	8.19	12.021	20.21	21
	5230MHz	VHT40	Ch46	MCS0-Nss1	7.5	2.68	2.41	2.52	2.12	8.46	12.021	20.48	21
	5210MHz	VHT80	Ch42	MCS0-Nss1	7.5	2.09	2.62	2.21	2.29	8.33	12.021	20.35	21
<b>Test Result</b>													Complies

Note: BF: Beamforming