



# Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

Prepared for: Ubiquiti Networks, Inc

Model: Bullet B-DB-AC  
& Bullet AC-IP67

Description: Dual Band Networking Device

Serial Number: N/A

FCC ID: SWX-BDBAC  
IC: 6545A-BDBAC

To

FCC Part 15.407 UNII-2

Date of Issue: February 13, 2019

On the behalf of the applicant:

Ubiquiti Networks, Inc  
2580 Orchard Parkway  
San Jose, CA 95131

Attention of:

Mark Feil, Engineer  
Ph: (408)942-3085  
E-mail: [mark.feil@ubnt.com](mailto:mark.feil@ubnt.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1790008

Poona Saber  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	Dec 6, 2017	Poona Saber	Original Document
2.0	September 10, 2018	Poona Saber	-Added the antenna gain units on page 7 -Revised Average table column on page 18 -Revised RF exposure section on page 18 and 19 - based on highest EIRP for all antennas -Added additional information on modes of testing on page 6 and all modes and bandwidths covered added on table on page 7 -Updated Annex A for power tables for UNII-2C 22 dBi antenna and UNII-2A 5205 MHz to 5305 MHz
3.0	October 30, 2018	Poona Saber	Revised channel bandwidths on page 6 and maximum power of the EUT on page 7
4.0	January 7, 2019	Poona Saber	Revised Annex A
5.0	February 12, 2019	Poona Saber	Update page 10 with antenna power limits and updated ANSI C63.4 and C63.10 versions throughout the report
6.0	June 6, 2019	Poona Saber	Added RSS requirements to table on page 9 Added Firmware and Software on page 6 Added Measurement uncertainty table
7.0	August 5, 2019	Poona Saber	Added note of offsets for conducted emissions plot per KDB 789033 on page 13
8.0	August 8, 2019	Poona Saber	Added Bullet AC-IP67 as the extra model with note on page 6
9.0	August 29, 2019	Poona Saber	Added info on page 10 regarding the addition of elevation requirements per RSS 247
10.0	September 6, 2019	Poona Saber	Fixed FCC ID on page 7



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices	6
Test Results Summary	9
Peak Output Power	10
Transmitter Power Spectral Density	11
Undesirable Emissions Conducted	12
Undesirable Emissions Radiated	14
Occupied Bandwidth	16
Frequency Stability	17
RF Exposure	18
A/C Powerline Conducted Emission	20
Test Equipment Utilized	21



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The applicant has been cautioned as to the following**

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



**Standard Test Conditions Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
25.4 – 26.6	21.4 – 22.5	976.7 – 980.9

**EUT Operation during Tests**

EUT is powered by POE (Power over Ethernet) Ethernet cable.

**EUT Description**

**Model:** B-DB-AC, Bullet & Bullet AC-IP67

**Description:** Dual Band Networking Device

**Firmware:** V8.6

**Software:** ART

**Serial Number:** N/A

**Additional Information:** The Bullet AC (Model: B-DB-AC) is a dual band networking device that is powered over ethernet (passive POE, 24V) and provides an N-type antenna connection. It features dual-band AC mode operation in 5GHz and 2.4GHz bands, and a dedicated 2.4 GHz WiFi management radio for convenient device setup.

For 5 GHz band the radio covers 802.11 a/n/ ac modes with 10,20,30,40,50,60 and 80 MHz bandwidth. It is evaluated that unit would represent worst case operation and highest power number with ac mode and only result of testing is represented for this mode.

Bullet AC-IP67 is electrically identical to B-DB-AC device and it incorporates an outdoor housing which is made of metal instead of plastic

**EUT Operation during Tests**

Radio testing has been done conducted and radiated with controlling the device for continuous modulation transmission on low, middle and high channels with client’s provided commands through telnet.



**EUT Specifications**

<b>Equipment Code</b>	NII	
<b>FCC ID</b>	SWX-BDBAC	
<b>Mode(s) Tested</b>	802.11 ac-VHT 20,40,80	
<b>Mode(s) Covered and Channels</b>	Modes	Channel bandwidths (MHz)
	802.11 a	10, 20, 30
	802.11n- HT20	10, 20, 30
	802.11n- HT40	40, 50 ,60
	802.11 ac- VHT20	10, 20 ,30
	802.11 ac- VHT40	40, 50 ,60
	802.11 ac- VHT80	80
<b>Maximum Output Power</b>	22.2 dBm	
<b>Frequency Ranges covered</b>	5250-5350 & 5470-5725 MHz	
<b>Bandwidths</b>	10/20/30/40/50/60/80 MHz	
<b>Data Rates</b>	MCS0	
<b>Modulations</b>	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	

**Antenna List**

No.	Model	Antenna Type	Peak Gain
1	UniFi Omni	Omni	4 dBi
1	AMO-5G13	Omni	13 dBi
1	AM-5AC22-45	Sector	22 dBi
1	RD-5G34	Dish	34 dBi

**15.203: Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply



**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Switching mode power supply/ POE	Ubiquiti	GP-A240-050	N/A

**Cables:**

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Ferrite Y/N
2	Ethernet cable	<3 meters	N	N	N

**Modifications:** None





**Test Results Summary**

Specification FCC	Specification ISED	Test Name	Pass, Fail, N/A	Comments
§15.203	-	Antenna Requirements	Pass	
§15.207 §15.407(b)(6)	RSS Gen 8.8	Line Conducted Emissions	Pass	
§15.407(a)(2)	RSS 247 6.2.2.1	Conducted Output Power	Pass	
§15.407(a)(2),(5)	RSS 247 6.2.2.1	Power Spectral Density	Pass	
§15.403(i) 15.407(a)(5)	RSS 247 6.2.2.1	26dB Occupied Bandwidth	Pass	
		99% Occupied Bandwidth		
§15.407(b)(2)(3)	RSS 247 6.2.2.2	Undesirable Emissions	Pass	
§15.205 §15.407(b)(2),(3),(5)(6)(7)	RSS Gen 8.10	General Field Strength Limits (Restricted Bands and Radiated Emission limits)	Pass	
§15.407(g)	RSS Gen 8.11	Frequency Stability	Pass	
§15.407(f)	RSS 102	RF Exposure	Pass	

References	Description
CFR47, Part 15, Subpart B	Unintentional Radiators
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed Nation Information Infrastructure Devices (U-NII)
ANSI C63.10-2013	American National standard for testing Unlicensed Wireless Devices
ANSI C63.4-2014	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ISO/IEC 17025:2005	General requirements for the Competence of Testing and Calibrations Laboratories
KDB 644545 D03	Guidance for IEEE 802 11ac New Rules
KDB 789033 D02	General U-NII Test Procedures New Rules V01
KDB 926956 D01	U-NII Transition Plan



**Peak Output Power**

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

**Test Requirements**

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

In addition to the above requirements, Per industry Canada RSS 247 devices shall comply with the following, where applicable:

Outdoor fixed devices with a maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where  $\theta$  is the angle above the local horizontal plane (of the Earth) as shown below:

- i. -13 dBW/MHz for  $0^\circ \leq \theta < 8^\circ$
- ii. -13 -0.716 ( $\theta-8$ ) dBW/MHz for  $8^\circ \leq \theta < 40^\circ$
- iii. -35.9 -1.22 ( $\theta-40$ ) dBW/MHz for  $40^\circ \leq \theta \leq 45^\circ$
- iv. -42 dBW/MHz for  $\theta > 45^\circ$

Note: Antenna pattern measurements have been done on all 4 antennas for both azimuth and elevation and the highest measured gain for all 4 different type antennas is 0 dBi. Hence the highest EIRP per power results in the Annex A below would be 22 dBm which is less than 200 mW hence, testing for different elevation is not required.


**Test Procedure**

The RF power was calculated using the spectrum analyzers' band power function per Method SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid, and high channels of the band.

**The Spectrum Analyzer was set to the following:**

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Sweep time = auto
- d. Detector = RMS
- e. 100 traces in power averaging mode

**Test Setup**



The Conducted power limit for each of the antennas used with the device are as following:

- 4 dBi** Antenna allows **24 dBm** power
- 13 dBi** Antenna allows **17dBm** power:  $13\text{dBi} - 6\text{dB} = 7\text{dB} \Rightarrow 24\text{dBm} - 7\text{dB} = 17\text{dBm}$
- 22 dBi** Antenna allows **8 dBm** power:  $22\text{dBi} - 6\text{dB} = 16\text{dB} \Rightarrow 24\text{dBm} - 16\text{dB} = 8\text{dBm}$
- 34 dBi** Antenna allow **-6 dBm** power:  $34\text{dBi} - 6\text{dB} = 28\text{dB} \Rightarrow 24\text{dBm} - 28\text{dB} = -4\text{dBm}$

**See Annex A for test results**



## Transmitter Power Spectral Density

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

### Test Requirements

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### Test Procedure

The Power Spectral Density was measured using the method per SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid, and high channels of the band. The maximum PSD was determined by finding the peak value across the carrier bandwidth.

#### The Spectrum Analyzer was set to the following:

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Span  $1.5 * BW$
- d. Sweep time = auto
- e. Detector = RMS
- f. 100 traces in power averaging mode

#### Test Setup



**See Annex A for test results**



## Undesirable Emissions Conducted

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

### Test Requirements

#### Unwanted Emissions that fall Outside Restricted Bands

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz maximum emission limit.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz

The provisions of §15.205 apply to intentional radiators operating under this section

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

#### For Conducted Unwanted Emissions in the Restricted Bands

For conducted measurements above 1000 MHz, EIRP was determined and then the field strength computed by the following:

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and d = 3m

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for d = 3 meters.

### Test Procedure

Per KDB 789033 D02 General U-NII Test Procedures New Rules v01 conducted RF port measurements were made in lieu of radiated. In addition, Cabinet Emissions measurements were performed in a semi-anechoic chamber with the antenna port terminated by a matching load. See additional section for Radiated Emissions.

The following criteria were addressed:

#### The Spectrum Analyzer was set to the following for emissions > 1000MHz:

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Detector = Peak.
- d. Sweep time = auto
- e. Trace mode = max hold
  1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. VBW  $\leq$  RBW/100 (i.e., 10 kHz) but not less than 10 Hz

#### For emissions below 1000MHz the Spectrum Analyzer settings were as follows:

- a. RBW = 100 kHz
- b. VBW  $\geq$  300 kHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold




Note: per KDB 789033 and ANSI C63.10 for conducted measurement in lieu of radiated following values have been added as an offset in the measurement plots :

- 1) For conducted measurements in restricted band the filed strength shall be computed and an additional 4.7 dB shall be added as an upper bound on the field strength that would be observed on a test site with a ground plane for frequencies between 30 MHz and 1000 MHz.
- 2) A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.
- 3) Since the maximum measured antenna gain in all bands is 0 dBi a value of maximum 2 dBi has been added to compare the conducted power measurements to an EIRP limit.

$$\text{EIRP} = \text{Power (conducted)} + \text{Gain}$$

- 4) When a conducted power measurement is used to compare with Electric field (dBuV/m) limit an offset of  $-11.8$  is added to measurement to compare conducted power (dBm) to electric field limit (dBuV/m) at 3 meters.

**Test Setup**



**Test Results:**            **See Annex B-1 and B-2: Undesirable Emissions Conducted**



**Undesirable Emissions Radiated**

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

**Test Requirements**

The provision of §15.209 were applied. In addition, the requirements of §15.205 were also applied.

**FCC Part 15 Subpart C Paragraph 15.209(a) Limits**

Frequency (MHz)	Frequency (microvolts/meter)	Frequency (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBµV/m) = 20 log E field strength (uV/m)

**Test Procedure**

The EUT was setup in accordance with ANSI C63.10. 2013 and tested per KDB 789033. The antenna was replaced with non-radiating matched load. The EUT is placed on non-conductive platform at a height of 0.8 meters above the ground plane of the semi-anechoic chambers. The EUT was rotated 360 degrees and the receive antenna raised and lowered to find the maximum emissions from 30MHz to the 10<sup>th</sup> harmonic of the fundamental. The EUT was set to the maximum power level allowed and the low, mid, and high channels were investigated for emissions.

**The Spectrum Analyzer was set to the following for emissions > 1000MHz:**


- a. (RBW = 1 MHz
- b. VBW ≥ 3 MHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold
  - 1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW ≤ RBW/100 (i.e., 10 kHz) but not less than 10Hz

**For emissions below 1000MHz the Spectrum Analyzer settings were as follows:**


- a. RBW = 100 kHz
- b. VBW ≥ 300 kHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold
  - 1. Note: A quasi peak detector was used for emissions where the peak exceeded that of the average 15.209 emission limits



**Test Setup below 1000MHz**



**Test Setup above 1000MHz**

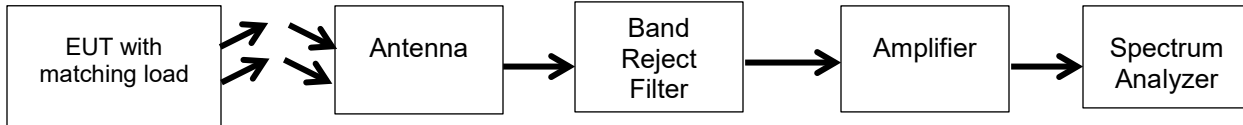

**Test Results:**            **See Annex C: Undesirable Emission Radiated**

**Note:** There was no emissions observed beyond noise floor after 18 GHz.



## Occupied Bandwidth

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

### Test Requirement


The emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement

### Test Procedure

**The Spectrum Analyzer was set to the following parameters:**

- a. RBW = approximately 1 to 5% of the emission bandwidth.
- b. VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.

### Test Setup



**Test Results:** See Annex D: Occupied Bandwidth





## Frequency Stability

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17


### Test Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### Test Procedure

- a. The EUT was placed into a temperature chamber and the temperature ranges were set to the manufacturer's specifications.
- b. The RF output of the EUT was connected to a spectrum analyzer
- c. The lowest and highest channels of the band were set to transmit
- d. The carrier plots were measured to ensure that the 26dB band width remained within the band over the prescribed temperature extremes.

### Test Setup

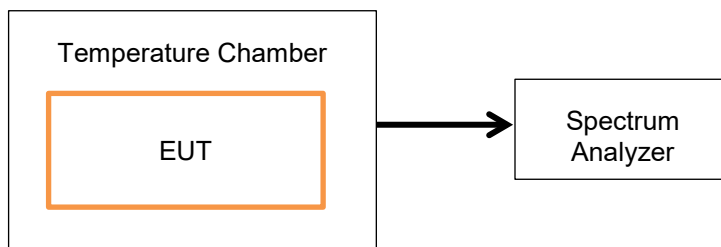

**Test Results:** See Annex E: Frequency Stability



**RF Exposure**

**Engineer:** Poona Saber

**Test Date:** 10/30/17-11/7/17

**Requirements**

U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. In addition, systems operating under the provisions of this section shall be operated in a manner that insures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

**Exposure Limits**

At operating frequencies less than or equal to 6 GHz, the limits for maximum permissible exposure (MPE) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Section 1.1307(b), except for portable devices as defined in §2.1093 as these evaluations shall be performed according to the SAR provisions in §2.1093 of this chapter.

**MPE Limit Calculations**

Exposure Limit 1mW/cm<sup>2</sup>

**Source Based Time Averaged Power Calculation**

**Average Power Calculations**

Average Power = Peak Power \* duty-cycle%

Tuned Frequency (MHz)	Conducted Peak Output Power (mW)	Duty Cycle (%)	Average Power (mW)
5600	33.11	100	33.11



**MPE Evaluation**

This is a **fixed/mobile** device used in uncontrolled /general population exposure environment.

<b>Limits Uncontrolled Exposure 47 CFR 1.1310 Table 1, (B)</b>	0.3-1.234 MHz	Limit [mW/cm <sup>2</sup> ] = 100
	1.34-30 MHz	Limit [mW/cm <sup>2</sup> ] = (180/f <sup>2</sup> )
	30-300 MHz	Limit [mW/cm <sup>2</sup> ] = 0.2
	300-1500 MHz	Limit [mW/cm <sup>2</sup> ] = f/1500
	1500-100,000 MHz	Limit [mW/cm <sup>2</sup> ] = 1.0

**Test Data**

Test Frequency, MHz	5600
Power, Conducted, mW (P)	33.11
Antenna Gain Isotropic	13 dBi
Antenna Gain Numeric (G)	19.95
Antenna Type	omni
Distance (R)	20

$S = \frac{P * G}{4\pi r^2}$			
Power Density (S) mw/cm <sup>2</sup>	Power mW (P)	Numeric Gain (G)	Distance (r <sup>2</sup> ) cm
	33.11	19.95	20

Power Density (S) = 0.131
Limit =(from above table) = 1



**A/C Powerline Conducted Emission**


**Engineer:** Poona Saber

**Test Date:** 12/12/2017

**Test Procedure**

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.

**Test Setup**



**Test Results:** See Annex F: A/C Powerline Conducted Emission



**Test Equipment Utilized**

Test Procedure	Uncertainty
Conducted RF Power	±.75dB
Conducted Emissions (AC Line)	±3.21dB
Radiated Emissions (Signal Line)	±4.5dB
Radiated Spurious Emissions	±4.82
Conducted Spurious Emissions	± 2.49 dB
Occupied Bandwidth	±5%
Power Spectral Density	±1.8dB
DTS Bandwidth	±3%
Frequency	±1Hz
Harmonic Currents	95%
Voltage Flicker	95%
AC Voltage	± 2.3 %
DC Voltage	± 0.12 %
Temperature	± 1.0 deg C
Humidity	± 4.32 %

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Temperature Chamber	Tenney	Tenney II Benchmaster	i00287	NCR	NCR
Preamplifier	HP	8447D	i00055	NCR	NCR
Harmonic Mixer 26.5-40GHz	HP	11970A	i00193	6/4/15	6/4/18
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Spectrum Analyzer	Agilent	E4407B	i00331	11/21/2017	11/21/2018
Bi-Log Antenna	Teseq	CBL 6111D	i00349	8/3/16	8/3/18
EMI Analyzer	Agilent	E7405A	i00379	2/22/2017	2/22/2018

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT