



FCC RF Test Report

APPLICANT : Ubiquiti Networks, Inc.
EQUIPMENT : EtherMagic Powerline
BRAND NAME : UBIQUITI
MODEL NAME : EM-S, EM-EP
FCC ID : SWX-EMS
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Aug. 13, 2016 and testing was completed on Sep. 29, 2016. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : SWX-EMS

Page Number : 1 of 43

Report Issued Date : Nov. 09, 2016

Report Version : Rev. 01

Report Template No.: BU5-FR15CBT4.0 Version 1.3



TABLE OF CONTENTS

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION..... 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 5

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 8

 2.1 Descriptions of Test Mode 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT 13

 3.1 6dB and 99% Bandwidth Measurement 13

 3.2 Peak Output Power Measurement 18

 3.3 Power Spectral Density Measurement 19

 3.4 Conducted Band Edges and Spurious Emission Measurement 24

 3.5 Radiated Band Edges and Spurious Emission Measurement 32

 3.6 AC Conducted Emission Measurement..... 36

 3.7 Antenna Requirements 40

4 LIST OF MEASURING EQUIPMENT..... 41

5 UNCERTAINTY OF EVALUATION..... 43

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. RADIATED SPURIOUS EMISSION PLOTS

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR681301	Rev. 01	Initial issue of report	Nov. 09, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 6.76 dB at 2488.940 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.40 dB at 0.4941 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Ubiquiti Networks, Inc.
2580 Orchard Parkway San Jose, CA 95131

1.2 Manufacturer

Ubiquiti Networks, Inc.
2580 Orchard Parkway San Jose CA USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	EtherMagic Powerline
Brand Name	UBIQUITI
Model Name	EM-S, EM-EP
FCC ID	SWX-EMS
EUT supports Radios application	Bluetooth LE
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	4.76 dBm (0.0030 W)
99% Occupied Bandwidth	1.140MHz
Antenna Type / Gain	Internal Antenna with gain 2.00 dBi
Type of Modulation	Bluetooth LE : GFSK



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH12-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C) TEL: +886-3-656-9065	
Test Site No.	Sporton Site No.	
	CO02-CB	03CH02-CB

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth – LE RF Output Power	
		Data Rate / Modulation	
		GFSK	
		1Mbps	
Ch00	2402MHz	4.66 dBm	
Ch19	2440MHz	4.73 dBm	
Ch39	2480MHz	4.76 dBm	

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (Z plane as worst plane for above 1GHz, Y plane as worst plane for below 1GHz) from all possible combinations.

- b. AC power line Conducted Emission was tested under maximum output power.




2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
AC Conducted Emission	Mode 1: Bluetooth 4.0 Tx + Adapter

2.3 Connection Diagram of Test System


<Bluetooth – LE Tx LF Mode>

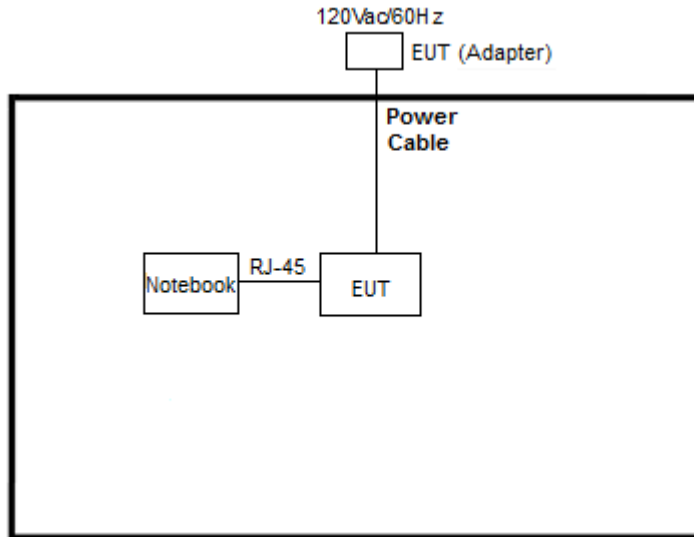

<Bluetooth – LE Tx HF Mode>

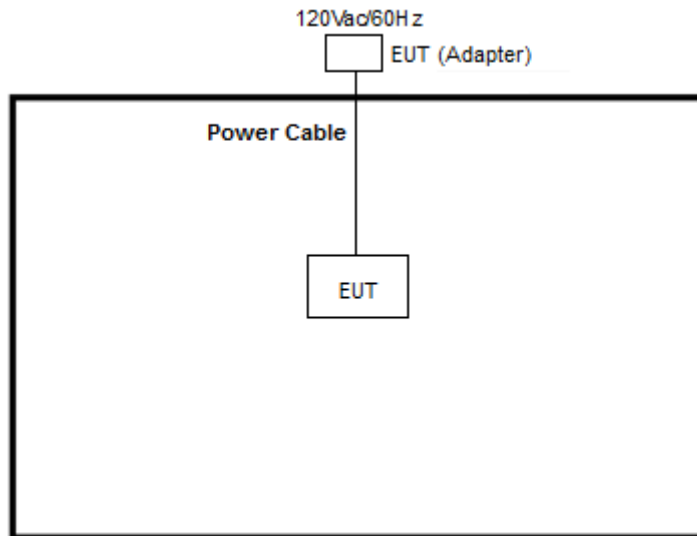

<AC Conducted Emission Mode>

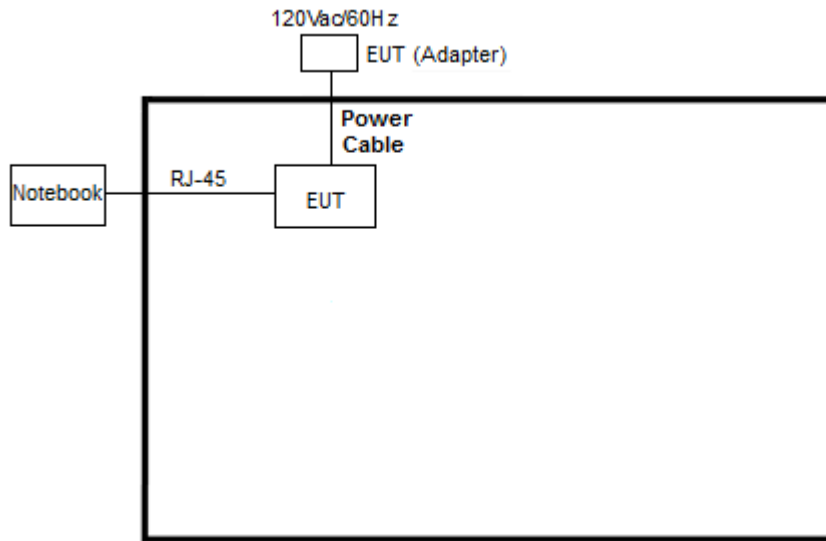

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	E4300	FCC DoC/	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

2.5 EUT Operation Test Setup

For Bluetooth function, the RF utility, "CMD" was installed in notebook which was programmed in order to make the EUT get into the engineering modes to contact with Bluetooth base station for continuous transmitting and receiving signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 00

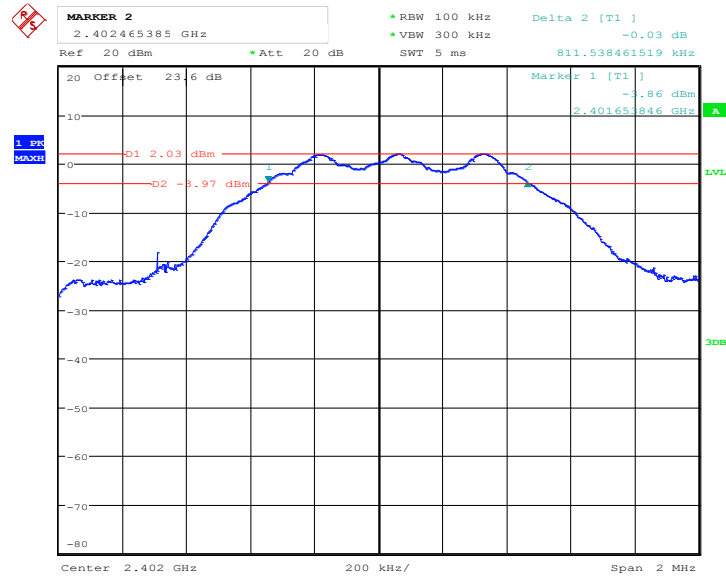

Date: 26.AUG.2016 22:44:11




6 dB Bandwidth Plot on Channel 19

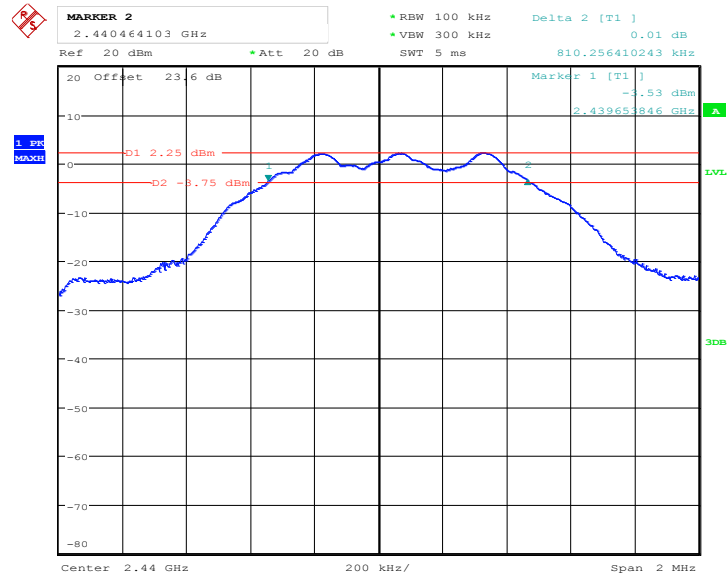

Date: 26.AUG.2016 22:28:24

6 dB Bandwidth Plot on Channel 39

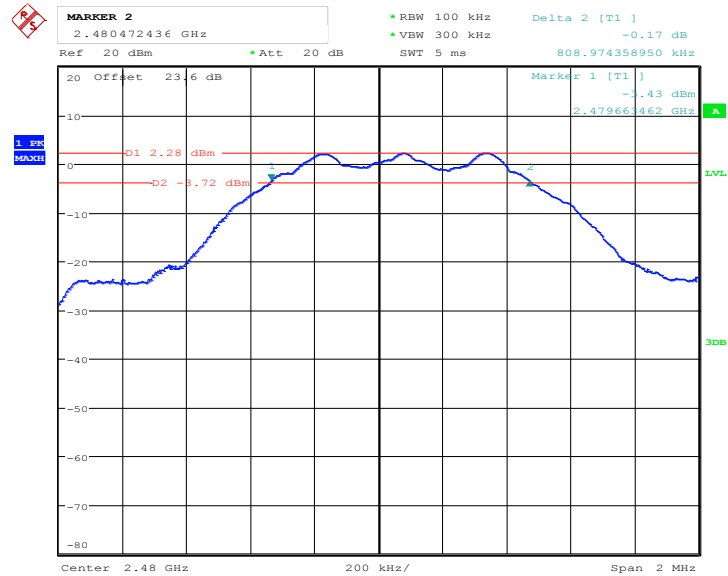


Date: 26.AUG.2016 22:23:15



3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 00

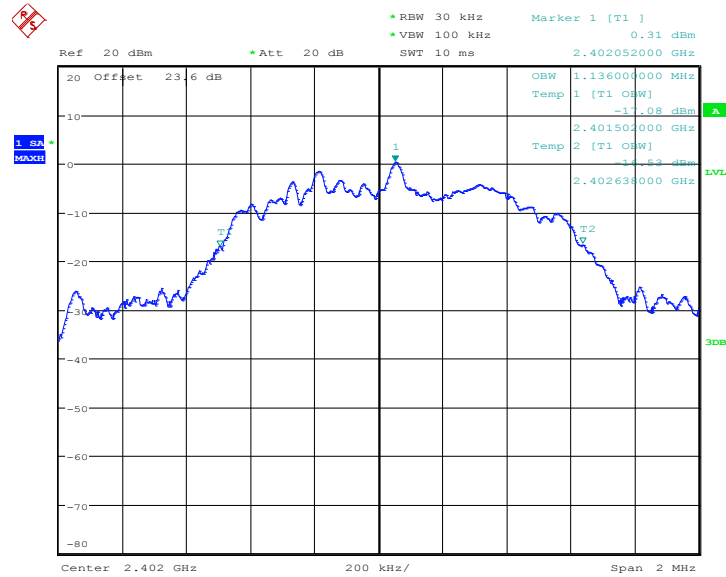

Date: 26.AUG.2016 22:46:11




99% Occupied Bandwidth Plot on Channel 19

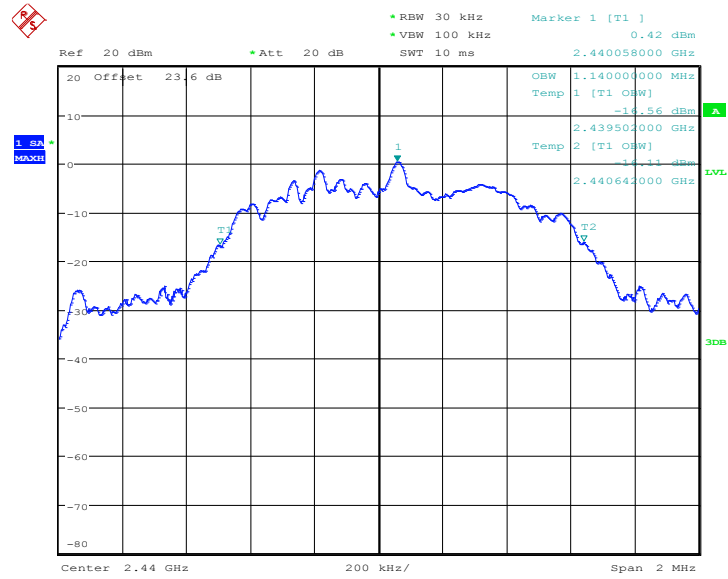

Date: 26.AUG.2016 22:31:35

99% Occupied Bandwidth Plot on Channel 39

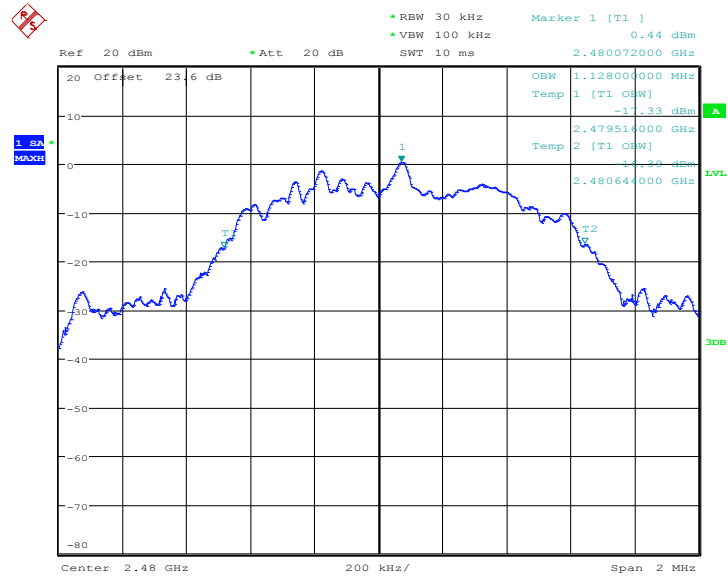

Date: 26.AUG.2016 22:26:38

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

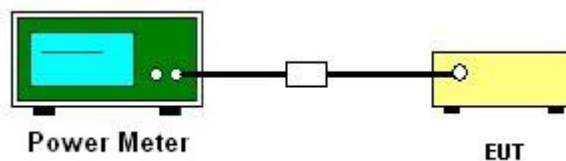

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

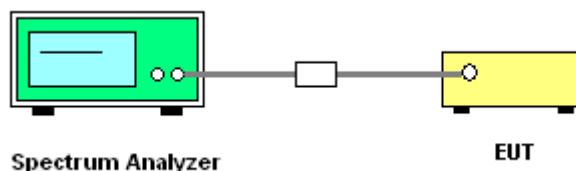




3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 00

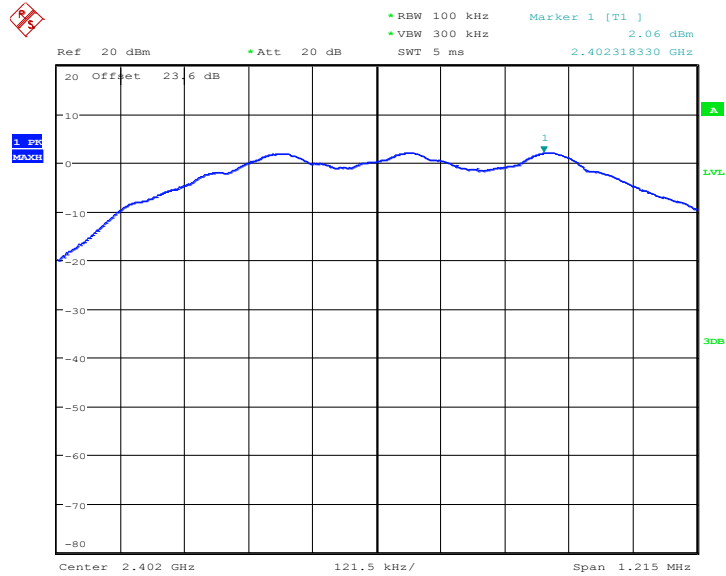

Date: 26.AUG.2016 22:45:13




PSD 100kHz Plot on Channel 19

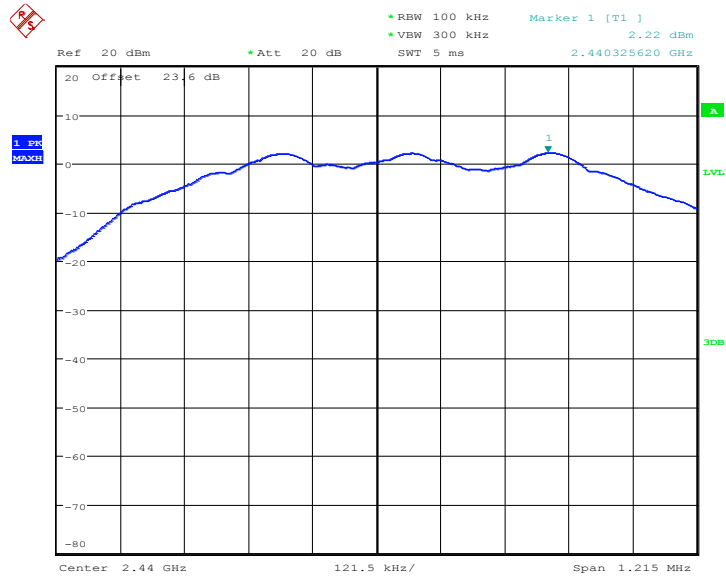

Date: 26.AUG.2016 22:29:32

PSD 100kHz Plot on Channel 39

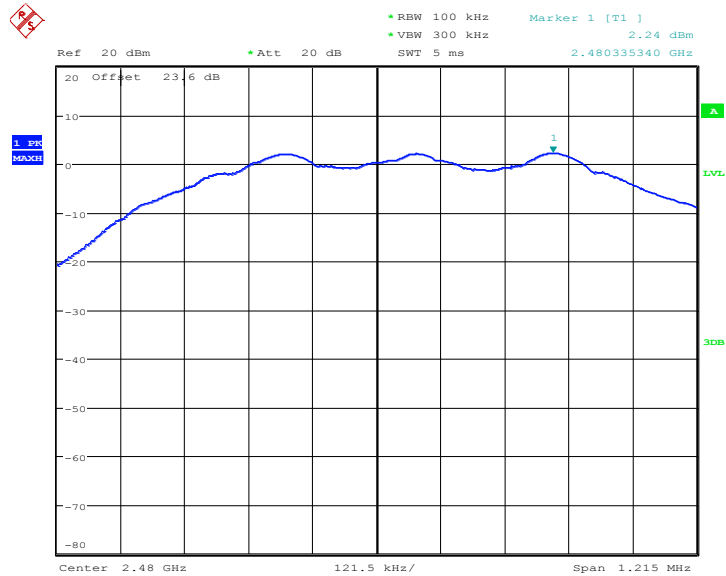


Date: 26.AUG.2016 22:24:59



3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

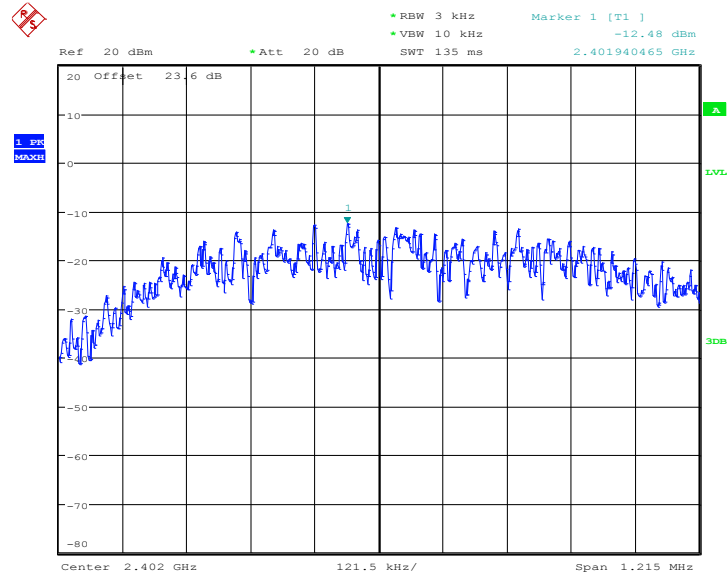

Date: 26.AUG.2016 22:44:52




PSD 3kHz Plot on Channel 19

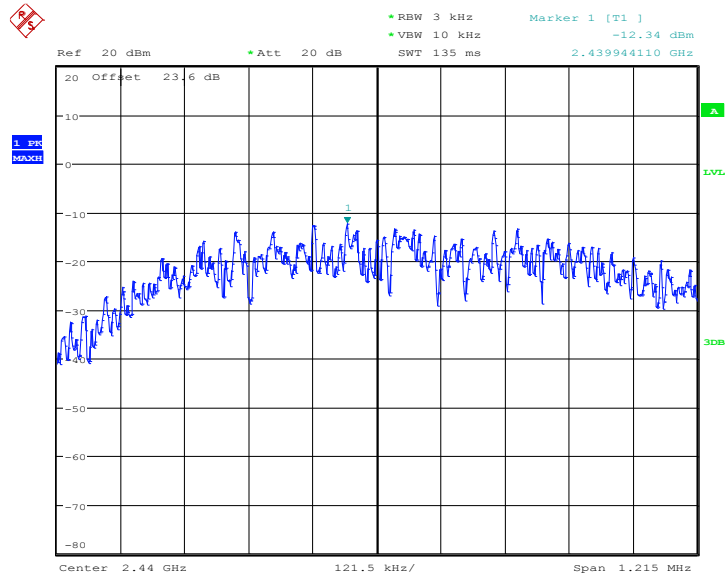

Date: 26.AUG.2016 22:29:05

PSD 3kHz Plot on Channel 39

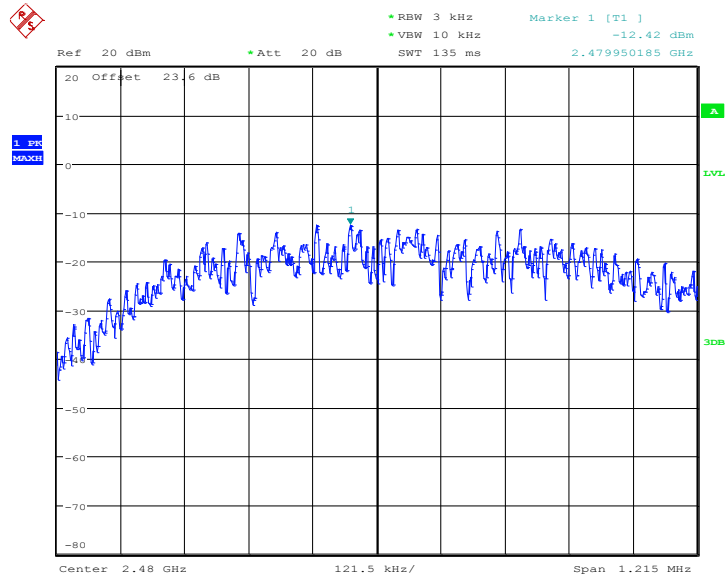

Date: 26.AUG.2016 22:24:40

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

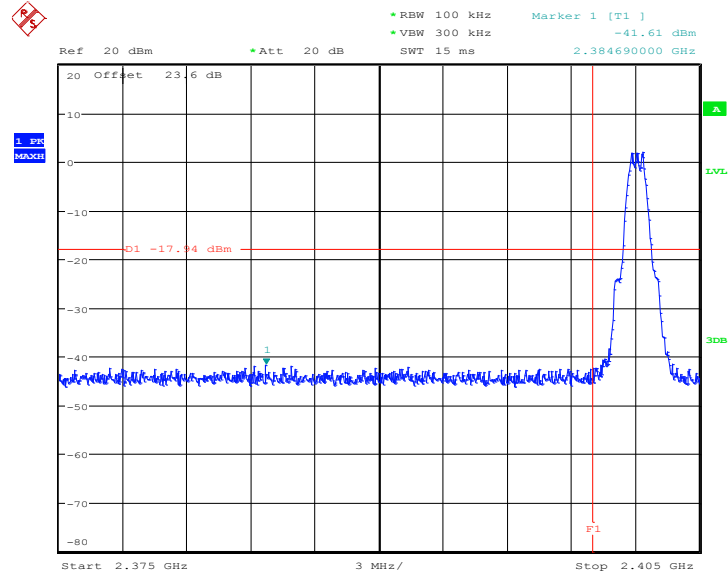

Date: 26.AUG.2016 22:45:27

High Band Edge Plot on Channel 39

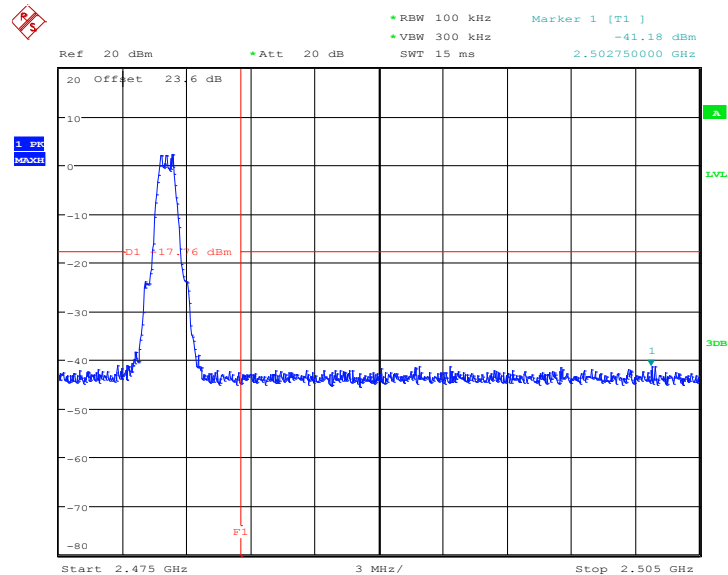


Date: 26.AUG.2016 22:25:35



3.4.6 Test Result of Conducted Spurious Emission Plots


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

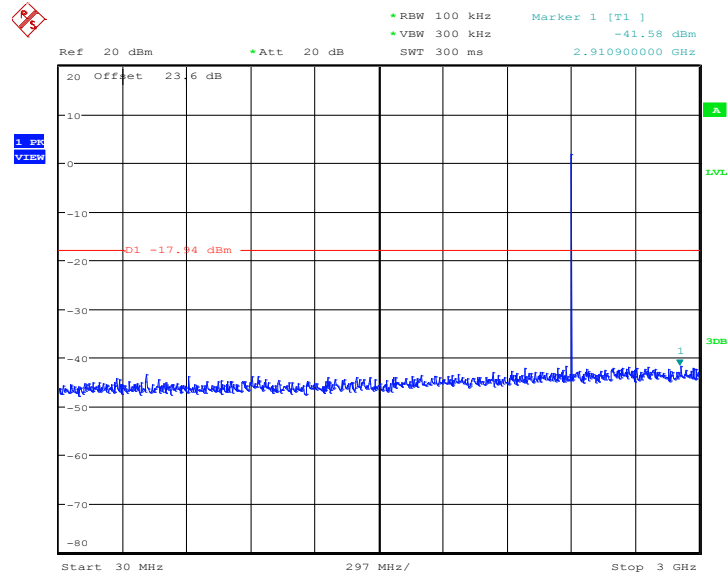

Date: 26.AUG.2016 22:45:42




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 00

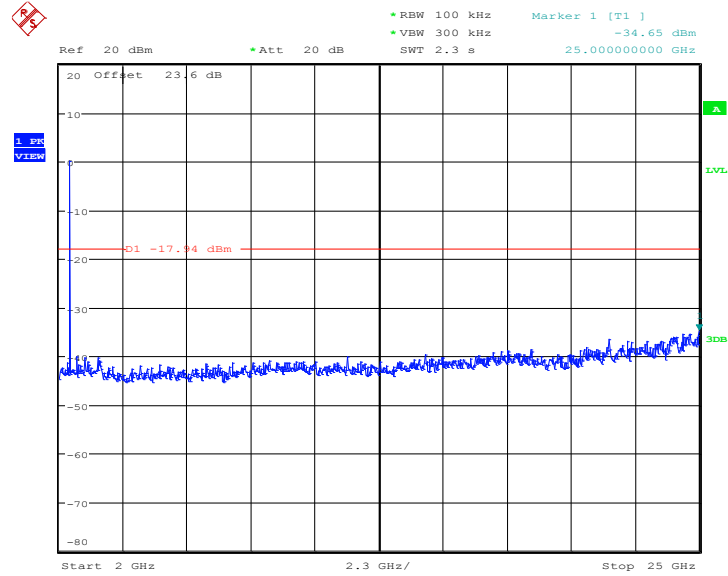

Date: 26.AUG.2016 22:45:49




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

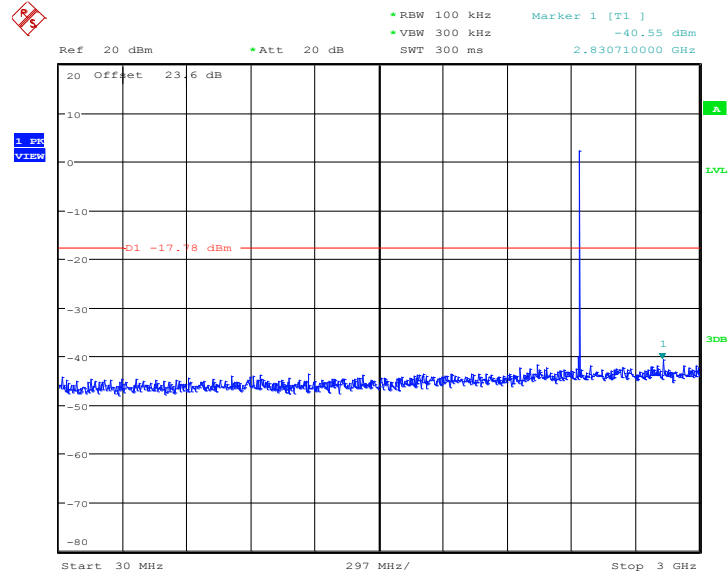

Date: 26.AUG.2016 22:30:18




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 19

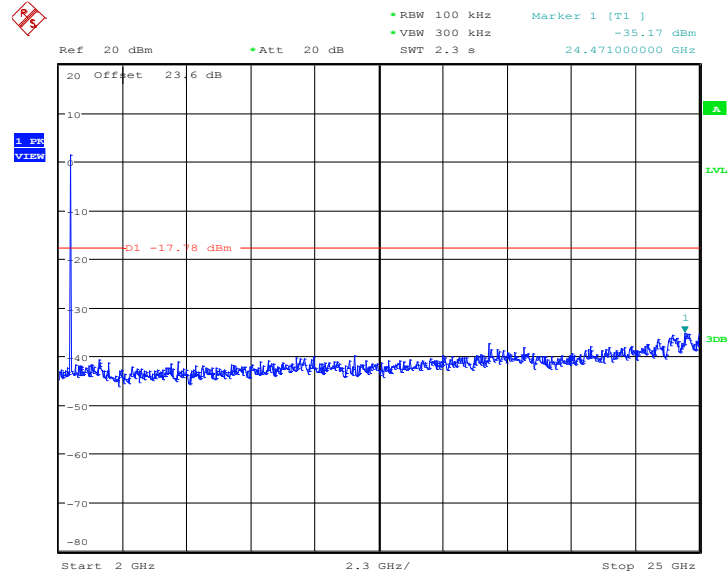

Date: 26.AUG.2016 22:30:26




Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

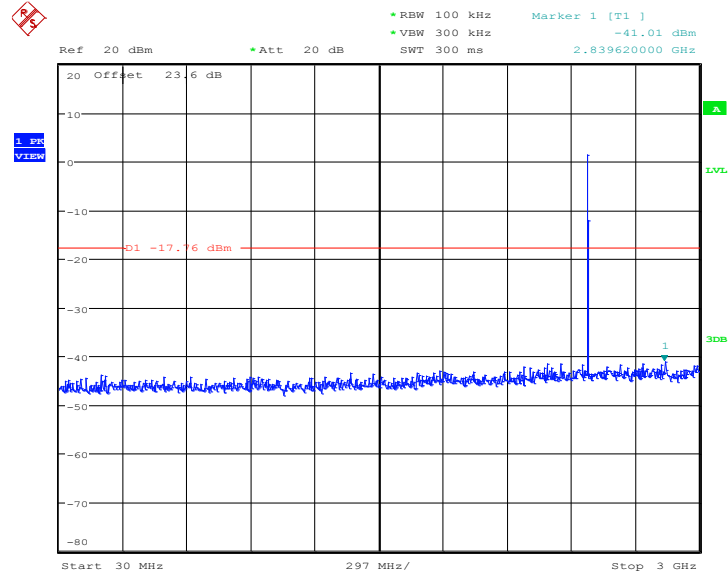

Date: 26.AUG.2016 22:25:48



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps
GFSK Channel 39

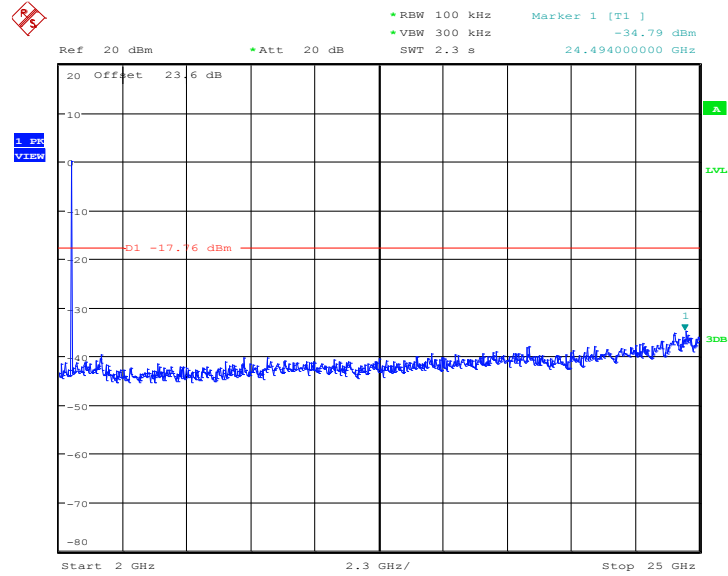

Date: 26.AUG.2016 22:25:56



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$; $\text{VBW} \geq \text{RBW}$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1 \text{ GHz}$ for peak measurement.
 For average measurement:
 - $\text{VBW} = 10 \text{ Hz}$, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth - LE	61.15	384.00	2.60	3kHz

3.5.4 Test Setup


For radiated emissions below 30MHz

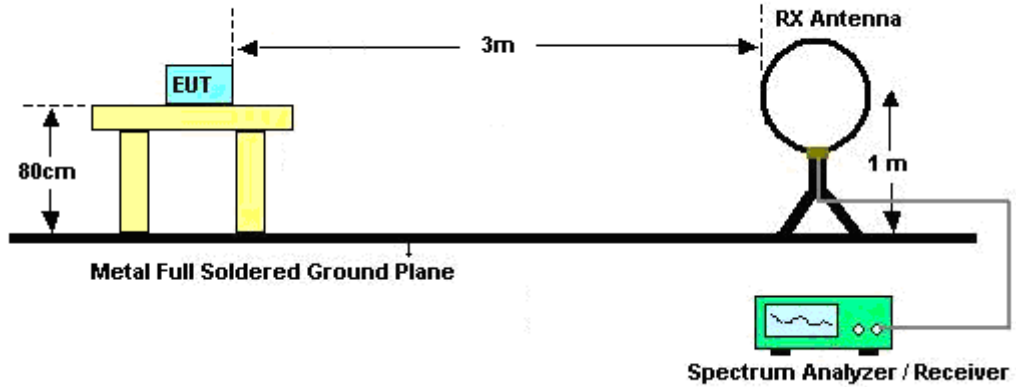

For radiated emissions from 30MHz to 1GHz

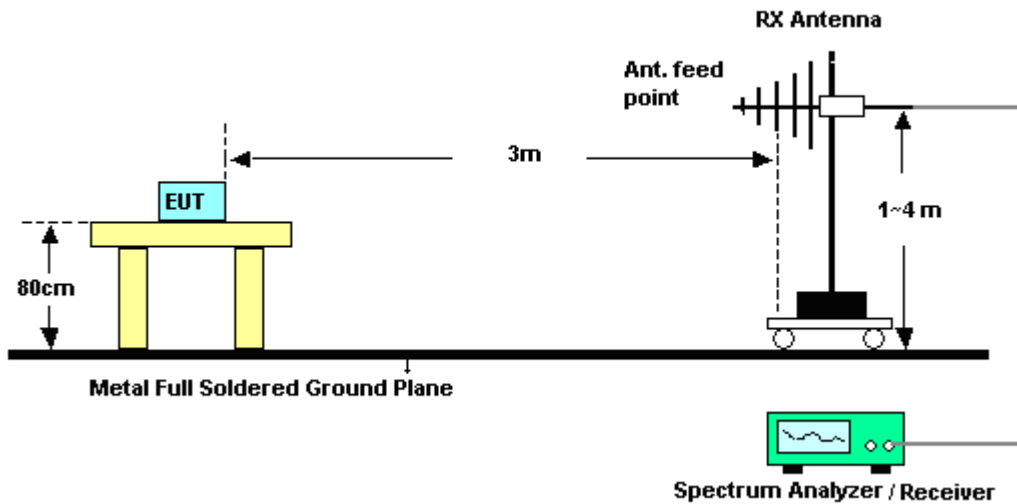

For radiated emissions above 1GHz

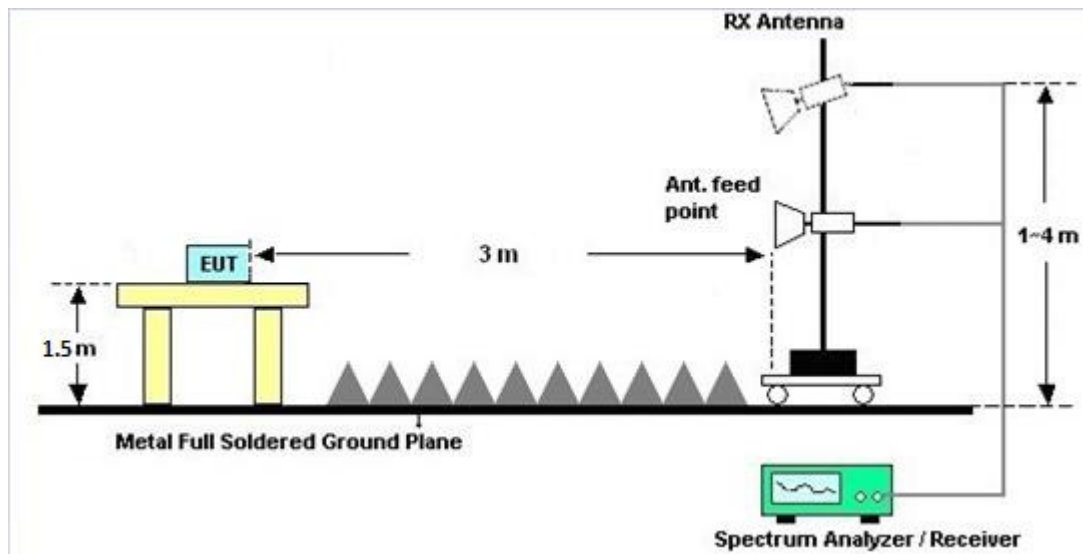

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.6.4 Test Setup

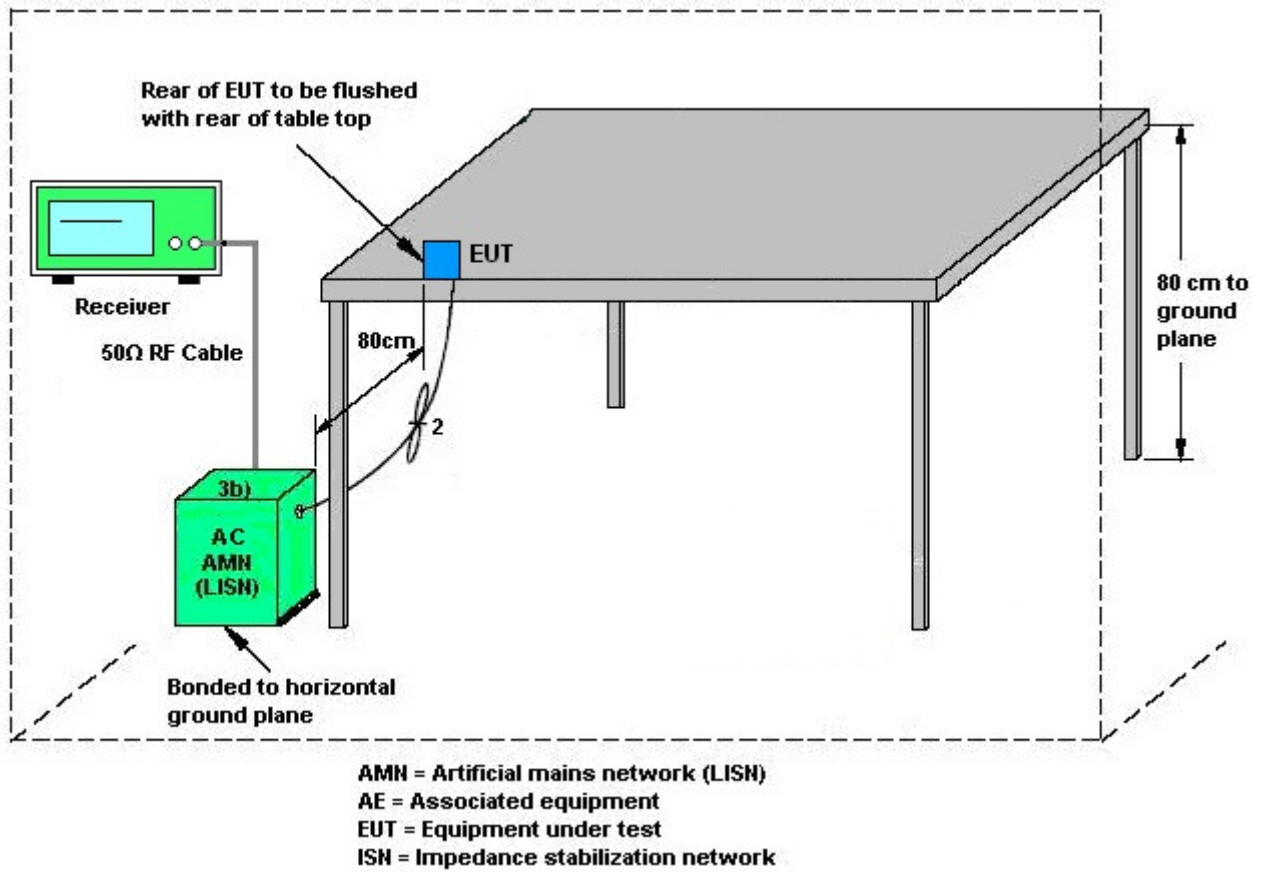



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	25~26°C
Test Engineer :	Hank Yang	Relative Humidity :	61~62%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	Mode 1:		

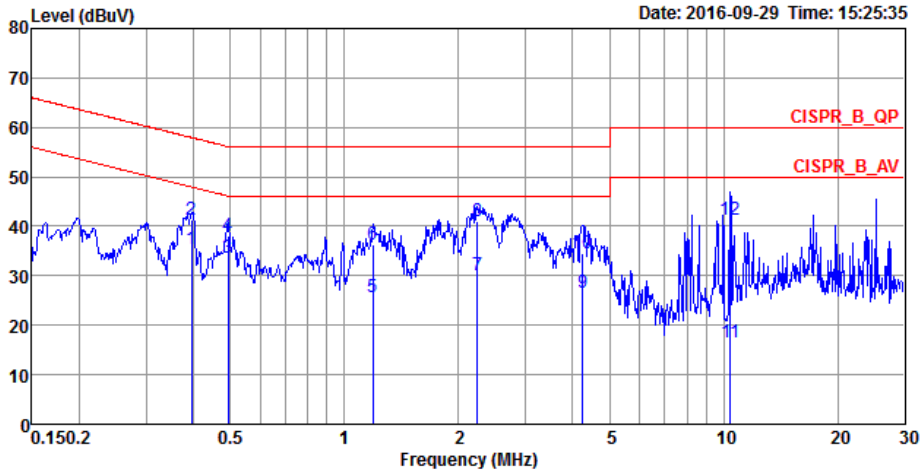


Site :
 Condition: CISPR_B_QP LISN+PULSE 201511 LINE
 Engineer : Hank
 EUT : EM-S & EM-EP
 Power : 120V

Memo : EUT: EM-EP

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.3956	35.45	-12.50	47.95	25.24	10.01	Average	LINE
2	0.3956	41.21	-16.74	57.95	31.00	10.01	QP	LINE
3	0.4941	33.70	-12.40	46.10	23.48	10.02	Average	LINE
4	0.4941	38.16	-17.94	56.10	27.94	10.02	QP	LINE
5	1.1907	25.61	-20.39	46.00	15.35	10.06	Average	LINE
6	1.1907	36.25	-19.75	56.00	25.99	10.06	QP	LINE
7	2.2400	29.99	-16.01	46.00	19.64	10.08	Average	LINE
8	2.2400	41.09	-14.91	56.00	30.74	10.08	QP	LINE
9	4.2466	26.50	-19.50	46.00	16.06	10.11	Average	LINE
10	4.2466	34.50	-21.50	56.00	24.06	10.11	QP	LINE
11	10.3972	16.50	-33.50	50.00	5.96	10.16	Average	LINE
12	10.3972	41.47	-18.53	60.00	30.93	10.16	QP	LINE



Test Mode :	Mode 1	Temperature :	25~26°C
Test Engineer :	Hank Yang	Relative Humidity :	61~62%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	Mode 1:		

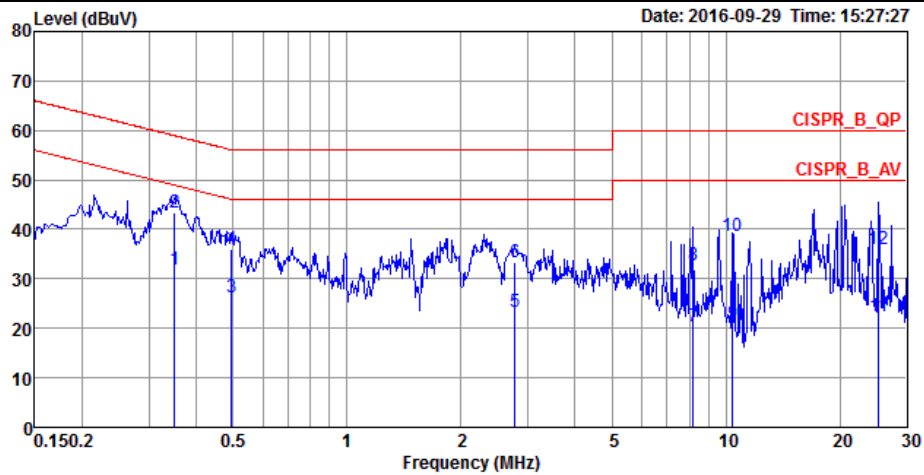

Site :
 Condition: CISPR_B_QP LISN+PULSE 201511 NEUTRAL
 Engineer : Hank
 EUT : EM-S & EM-EP
 Power : 120V

Memo : EUT: EM-EP

	Freq	Level	Over	Limit	Read	LISN	Remark	Pol/Phase
	MHz	dBuV	Limit	Line	Level	Factor		
			dB	dBuV	dBuV	dB		
1	0.3510	31.87	-17.09	48.96	21.71	9.97	Average	NEUTRAL
2	0.3510	43.48	-15.48	58.96	33.32	9.97	QP	NEUTRAL
3	0.4967	26.36	-19.69	46.05	16.19	9.97	Average	NEUTRAL
4	0.4967	35.99	-20.06	56.05	25.82	9.97	QP	NEUTRAL
5	2.7794	23.38	-22.62	46.00	13.09	10.00	Average	NEUTRAL
6	2.7794	33.25	-22.75	56.00	22.96	10.00	QP	NEUTRAL
7	8.1916	20.44	-29.56	50.00	9.95	10.12	Average	NEUTRAL
8	8.1916	32.69	-27.31	60.00	22.20	10.12	QP	NEUTRAL
9	10.3972	21.01	-28.99	50.00	10.47	10.16	Average	NEUTRAL
10	10.3972	38.57	-21.43	60.00	28.03	10.16	QP	NEUTRAL
11	25.3214	22.39	-27.61	50.00	11.55	10.32	Average	NEUTRAL
12	25.3214	36.05	-23.95	60.00	25.21	10.32	QP	NEUTRAL



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Anritsu	ML2495A	1132003	300MHz~40GHz	Aug. 04, 2016	Aug. 24, 2016 ~ Aug. 26, 2016	Aug. 03, 2017	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1126017	300MHz~40GHz	Aug. 04, 2016	Aug. 24, 2016 ~ Aug. 26, 2016	Aug. 03, 2017	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSQ	200578/02 6	20Hz~26.5GHz	May 20, 2016	Aug. 24, 2016 ~ Aug. 26, 2016	May 19, 2017	Conducted (TH05-HY)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 15, 2016	Sep. 29, 2016	Feb. 14, 2017	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Sep. 29, 2016	Nov. 15, 2016	Conduction (CO02-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Sep. 29, 2016	Nov. 12, 2016	Conduction (CO02-CB)
EMI Receiver	Agilent	N9038A	MY522601 40	9kHz ~ 8.4GHz	Jan. 18, 2016	Sep. 29, 2016	Jan. 17, 2017	Conduction (CO02-CB)
COND Cable	Woken	Cable	01	0.15MHz ~ 30MHz	Dec. 01, 2015	Sep. 29, 2016	Nov. 30, 2016	Conduction (CO02-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Sep. 29, 2016	N.C.R.	Conduction (CO02-CB)
BILOG ANTENNA	TESQ	CBL6112D	37880	20MHz ~ 2GHz	Aug. 30, 2016	Nov. 04, 2016	Aug. 29, 2017	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A109 91	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Nov. 04, 2016	Mar. 14, 2017	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A023 10	1GHz ~ 26.5GHz	Jan.. 18, 2016	Nov. 04, 2016	Jan.. 17, 2017	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Apr.. 21, 2016	Nov. 04, 2016	Apr.. 20, 2017	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	May. 16, 2016	Nov. 04, 2016	May. 15, 2017	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N/A	Nov. 04, 2016	N/A	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N/A	Nov. 04, 2016	N/A	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 21, 2015	Sep. 02, 2016 ~ Sep. 13, 2016	Dec. 20, 2016	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 02, 2015	Sep. 02, 2016 ~ Sep. 13, 2016	Nov. 01, 2016	Radiation (03CH12-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1815698	1GHz~18GHz	Dec. 14, 2015	Sep. 02, 2016 ~ Sep. 13, 2016	Dec. 13, 2016	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY53270148	1GHz~26.5GHz	Jan. 30, 2016	Sep. 02, 2016 ~ Sep. 13, 2016	Jan. 29, 2017	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Sep. 02, 2016 ~ Sep. 13, 2016	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Sep. 02, 2016 ~ Sep. 13, 2016	N/A	Radiation (03CH12-HY)
Preamplifier	MITEQ	JS44-180040 00-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	Sep. 02, 2016 ~ Sep. 13, 2016	Jun. 13, 2017	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Sep. 02, 2016 ~ Sep. 13, 2016	Nov. 01, 2016	Radiation (03CH12-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.2
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.6
---	-----

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7
---	-----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Aking Chang	Temperature:	21~25	°C
Test Date:	2016/8/24 ~ 2016/8/26	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.14	0.81	0.50	Pass
BLE	1Mbps	1	19	2440	1.14	0.81	0.50	Pass
BLE	1Mbps	1	39	2480	1.13	0.81	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	4.66	30.00	2.00	6.66	36.00	Pass
BLE	1Mbps	1	19	2440	4.73	30.00	2.00	6.73	36.00	Pass
BLE	1Mbps	1	39	2480	4.76	30.00	2.00	6.76	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.14	2.64
BLE	1Mbps	1	19	2440	2.14	2.68
BLE	1Mbps	1	39	2480	2.14	2.69

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	2.06	-12.48	2.00	8.00	Pass
BLE	1Mbps	1	19	2440	2.22	-12.34	2.00	8.00	Pass
BLE	1Mbps	1	39	2480	2.24	-12.42	2.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. Radiated Spurious Emission

Test Engineer :	Karl Hou, Nick Yu, Nyle, Citta Ke and Peter Chiu	Temperature :	21~24°C
		Relative Humidity :	52~56%

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	(H/V)	
					Line	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2382.975	57.99	-16.01	74	55.02	27.01	7.45	31.49	369	218	P	H	
		2381.19	47.22	-6.78	54	44.25	27.01	7.45	31.49	369	218	A	H	
	*	2402	94.72	-	-	91.71	27.05	7.45	31.49	369	218	P	H	
	*	2402	93.5	-	-	90.49	27.05	7.45	31.49	369	218	A	H	
													H	
														H
			2381.505	57.1	-16.9	74	54.13	27.01	7.45	31.49	183	173	P	V
			2365.755	47.06	-6.94	54	44.21	26.97	7.37	31.49	183	173	A	V
	*		2402	91.91	-	-	88.9	27.05	7.45	31.49	183	173	P	V
	*		2402	90.7	-	-	87.69	27.05	7.45	31.49	183	173	A	V
														V
														V
BLE CH 19 2440MHz		2383.22	57.49	-16.51	74	54.52	27.01	7.45	31.49	352	203	P	H	
		2378.32	47.13	-6.87	54	44.24	27.01	7.37	31.49	352	203	A	H	
	*	2442	94.8	-	-	91.6	27.18	7.49	31.47	352	203	P	H	
	*	2440	93.71	-	-	90.52	27.18	7.49	31.48	352	203	A	H	
			2488.17	57.34	-16.66	74	53.98	27.3	7.53	31.47	352	203	P	H
			2493.07	47.09	-6.91	54	43.72	27.3	7.53	31.46	352	203	A	H
			2384.9	56.93	-17.07	74	53.96	27.01	7.45	31.49	180	151	P	V
			2370.76	46.8	-7.2	54	43.91	27.01	7.37	31.49	180	151	A	V
	*		2442	93.5	-	-	90.3	27.18	7.49	31.47	180	151	P	V
	*		2440	91.92	-	-	88.73	27.18	7.49	31.48	180	151	A	V
			2497.97	57.89	-16.11	74	54.52	27.3	7.53	31.46	180	151	P	V
			2488.94	47.24	-6.76	54	43.88	27.3	7.53	31.47	180	151	A	V



BLE CH 39 2480MHz	*	2482	94.66	-	-	91.34	27.26	7.53	31.47	341	197	P	H
	*	2480	93.66	-	-	90.34	27.26	7.53	31.47	341	197	A	H
		2492.52	58.31	-15.69	74	54.94	27.3	7.53	31.46	341	197	P	H
		2490.32	47.16	-6.84	54	43.8	27.3	7.53	31.47	341	197	A	H
													H
													H
	*	2482	94.33	-	-	91.01	27.26	7.53	31.47	197	171	P	V
	*	2480	93.13	-	-	89.81	27.26	7.53	31.47	197	171	A	V
		2497.08	58.17	-15.83	74	54.8	27.3	7.53	31.46	197	171	P	V
		2495.16	47.11	-6.89	54	43.74	27.3	7.53	31.46	197	171	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		4806	47.99	-26.01	74	64.32	31.23	10.59	58.15	100	0	P	H	
													H	
													H	
													H	
		4806	47.16	-26.84	74	63.49	31.23	10.59	58.15	100	0	P	V	
														V
														V
BLE CH 19 2440MHz		4878	46.59	-27.41	74	62.47	31.33	10.89	58.1	100	0	P	H	
		7320	45.14	-28.86	74	53.94	36.12	14.18	59.1	100	0	P	H	
													H	
													H	
		4878	48.32	-25.68	74	64.2	31.33	10.89	58.1	100	0	P	V	
		7320	45.73	-28.27	74	54.53	36.12	14.18	59.1	100	0	P	V	
														V
BLE CH 39 2480MHz		4962	47.59	-26.41	74	62.98	31.45	11.19	58.03	100	0	P	H	
		7440	44.84	-29.16	74	53.23	36.46	14.32	59.17	100	0	P	H	
													H	
													H	
		4962	50.46	-23.54	74	65.85	31.45	11.19	58.03	100	0	P	V	
		7440	46.4	-27.6	74	54.79	36.46	14.32	59.17	100	0	P	V	
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
2412MHz													

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission

Test Engineer :	Karl Hou, Nick Yu, Nyle, Citta Ke and Peter Chiu	Temperature :	21~24°C
		Relative Humidity :	52~56%

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Date: 2016-09-03 PEAK_BE_74</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 1</p>	<p>Date: 2016-09-03 PEAK_74</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 1</p>
Avg.	<p>Date: 2016-09-03 AVG_BE_54</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 1</p>	<p>Date: 2016-09-03 AVG_54</p> <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 1</p>

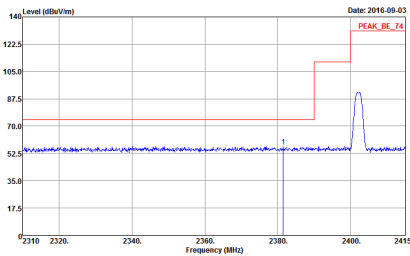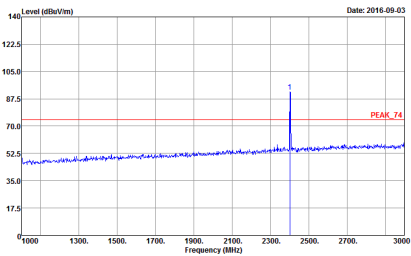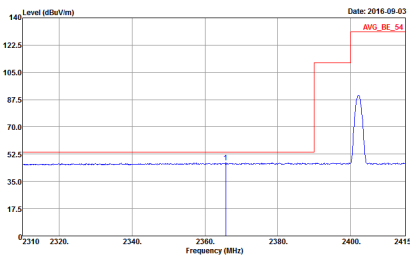
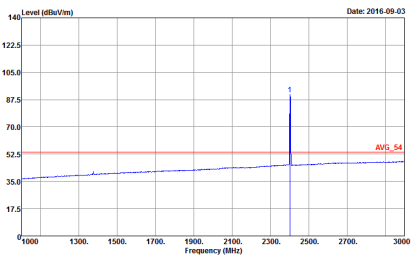


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	<p style="text-align: center;">Vertical</p>  <p style="text-align: center;">Peak</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 1</p>	<p style="text-align: center;">Fundamental</p>  <p style="text-align: center;">Peak</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 1</p>
Ave	 <p style="text-align: center;">Ave</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 1</p>	 <p style="text-align: center;">Ave</p> <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 1</p>

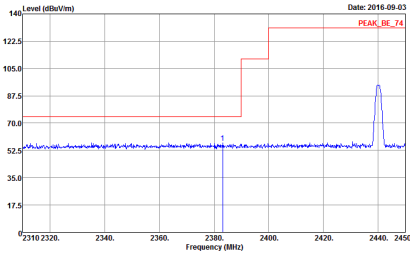
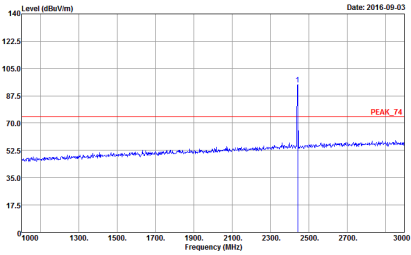
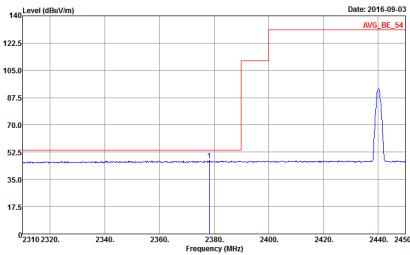
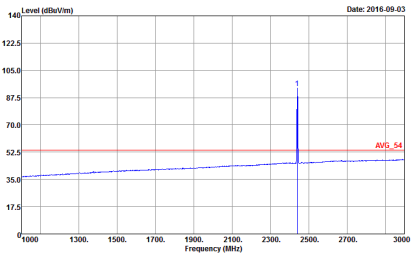


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-09-03 PEAK_BE_74</p> <p>Site Condition : 03CH12-HY PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL RESW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>	 <p>Date: 2016-09-03 PEAK_74</p> <p>Site Condition : 03CH12-HY PEAK_74 3m HORN_9120D_1328 HORIZONTAL RESW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>
Avg.	 <p>Date: 2016-09-03 AVG_BE_54</p> <p>Site Condition : 03CH12-HY AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL RESW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>	 <p>Date: 2016-09-03 AVG_54</p> <p>Site Condition : 03CH12-HY AVG_54 3m HORN_9120D_1328 HORIZONTAL RESW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>

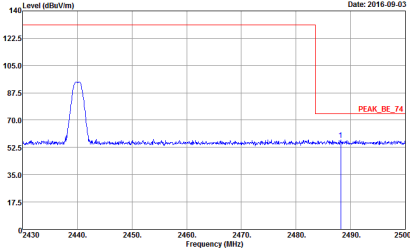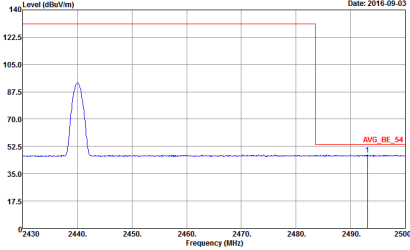

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Date: 2016-09-03</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN 9120D 1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 2</p>	Left blank
Avg.	 <p>Date: 2016-09-03</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN 9120D 1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 2</p>	Left blank

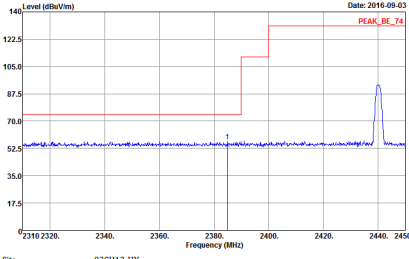
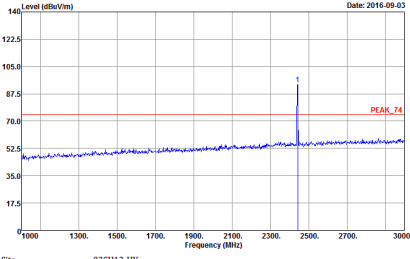
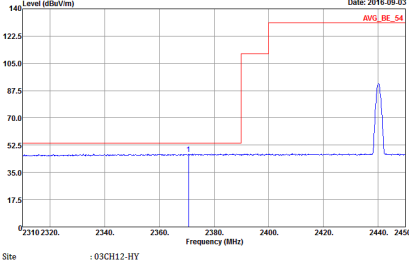
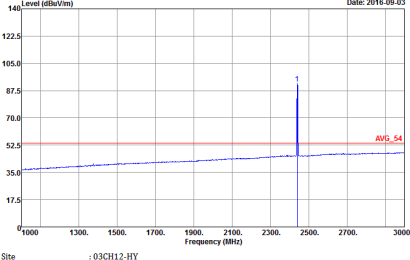


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	<p style="text-align: center;">Vertical</p>  <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>	<p style="text-align: center;">Fundamental</p>  <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>
Avg.	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_9120D_1328 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto Detector : Peak Project : 681301 Mode : 2</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
<p>Peak</p>		<p>Left blank</p>
<p>Avg.</p>		<p>Left blank</p>

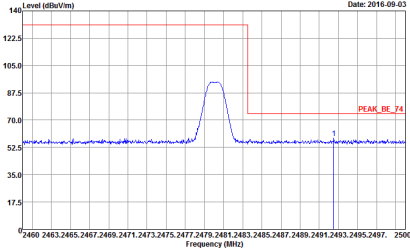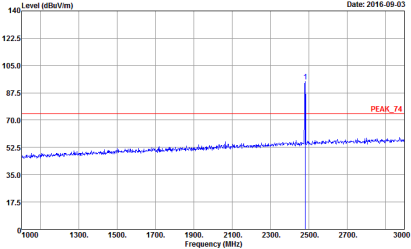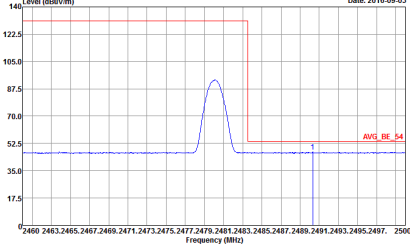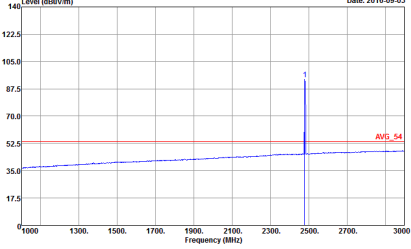

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	 <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 3</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 3</p>
Avg.	 <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 3</p>	 <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 3</p>

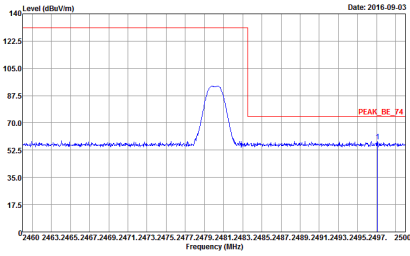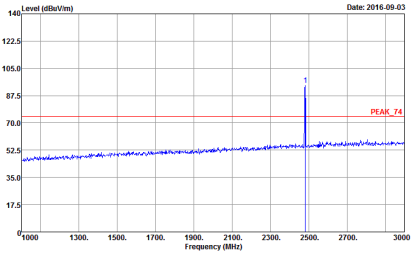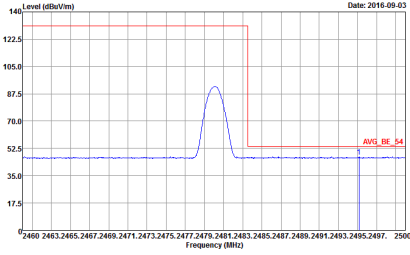
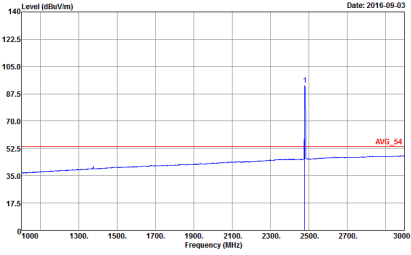


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	<p style="text-align: center;">Vertical</p>  <p style="text-align: center;">Peak</p> <p>Site : 03CH12-HY Condition : PEAK_BE_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 681301 Mode : 3</p>	<p style="text-align: center;">Fundamental</p>  <p style="text-align: center;">Peak</p> <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto Detector : Peak Project : 681301 Mode : 3</p>
	<p style="text-align: center;">Vertical</p>  <p style="text-align: center;">Avg.</p> <p>Site : 03CH12-HY Condition : AVG_BE_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:auto Detector : Peak Project : 681301 Mode : 3</p>	<p style="text-align: center;">Fundamental</p>  <p style="text-align: center;">Avg.</p> <p>Site : 03CH12-HY Condition : AVG_54 3m HORN_9120D_1328 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto Detector : Peak Project : 681301 Mode : 3</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

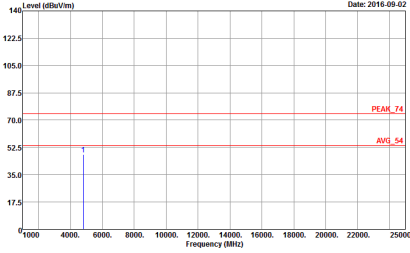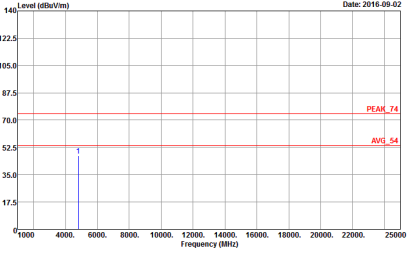BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 1</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 681301 Mode : 1</p>

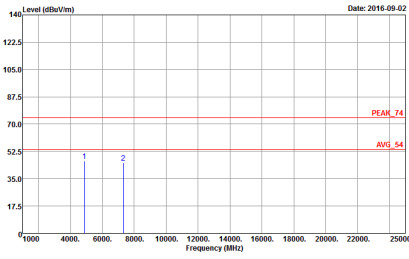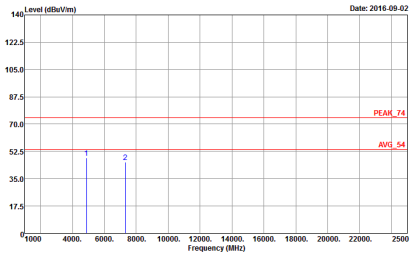

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 2</p>	 <p>Site : 03CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 681301 Mode : 2</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	<p>Site : 09CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 HORIZONTAL Detector : Peak Project : 681301 Mode : 3</p>	<p>Site : 09CH12-HY Condition : PEAK_74 3m HORN_9120D_1328 VERTICAL Detector : Peak Project : 681301 Mode : 3</p>




BLE	2.4GHz 2400~2483.5MHz LF@ 3m																																																																																																																																																																																																																
ANT	Below 1GHz																																																																																																																																																																																																																
1	Horizontal	Vertical																																																																																																																																																																																																															
<p>Peak</p> <p>Trace: (Discrete) Condition: FCC CLASS-B 3n 01 1G ANT-1511 HORIZONTAL Eut : PLC-T8D-CB Node : BT 4.0 Power : Default Memo-1-1 : EUT V FIX</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Cable</th> <th>Antenna</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>38.73</td><td>28.53</td><td>40.00</td><td>-11.47</td><td>37.25</td><td>0.64</td><td>20.21</td><td>29.57</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>2</td><td>116.33</td><td>29.01</td><td>43.50</td><td>-13.59</td><td>39.95</td><td>1.05</td><td>18.19</td><td>29.28</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>3</td><td>216.24</td><td>29.81</td><td>46.00</td><td>-16.19</td><td>41.07</td><td>1.43</td><td>16.24</td><td>28.93</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>4</td><td>336.52</td><td>33.62</td><td>46.00</td><td>-12.38</td><td>40.54</td><td>1.77</td><td>20.62</td><td>29.31</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>5</td><td>611.03</td><td>35.04</td><td>46.00</td><td>-10.96</td><td>36.71</td><td>2.41</td><td>25.10</td><td>29.18</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> <tr><td>6</td><td>875.84</td><td>38.00</td><td>46.00</td><td>-8.00</td><td>35.98</td><td>2.90</td><td>27.55</td><td>28.23</td><td>100</td><td>360</td><td>Peak</td><td>HORIZONTAL</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg			1	38.73	28.53	40.00	-11.47	37.25	0.64	20.21	29.57	100	360	Peak	HORIZONTAL	2	116.33	29.01	43.50	-13.59	39.95	1.05	18.19	29.28	100	360	Peak	HORIZONTAL	3	216.24	29.81	46.00	-16.19	41.07	1.43	16.24	28.93	100	360	Peak	HORIZONTAL	4	336.52	33.62	46.00	-12.38	40.54	1.77	20.62	29.31	100	360	Peak	HORIZONTAL	5	611.03	35.04	46.00	-10.96	36.71	2.41	25.10	29.18	100	360	Peak	HORIZONTAL	6	875.84	38.00	46.00	-8.00	35.98	2.90	27.55	28.23	100	360	Peak	HORIZONTAL	<p>Trace: (Discrete) Condition: FCC CLASS-B 3n 01 1G ANT-1511 VERTICAL Eut : PLC-T8D-CB Node : BT 4.0 Power : Default Memo-1-1 : EUT V FIX</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Cable</th> <th>Antenna</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phase</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>40.67</td><td>32.83</td><td>40.00</td><td>-7.17</td><td>42.65</td><td>0.65</td><td>19.00</td><td>29.56</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>2</td><td>112.45</td><td>25.24</td><td>43.50</td><td>-18.26</td><td>35.42</td><td>1.04</td><td>18.08</td><td>29.50</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>3</td><td>260.86</td><td>26.53</td><td>46.00</td><td>-19.67</td><td>34.37</td><td>1.56</td><td>19.58</td><td>29.18</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>4</td><td>384.05</td><td>33.43</td><td>46.00</td><td>-12.57</td><td>38.77</td><td>1.89</td><td>21.96</td><td>29.19</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>5</td><td>575.14</td><td>36.48</td><td>46.00</td><td>-9.52</td><td>38.62</td><td>2.33</td><td>24.80</td><td>29.27</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> <tr><td>6</td><td>672.14</td><td>33.32</td><td>46.00</td><td>-12.68</td><td>34.30</td><td>2.53</td><td>25.50</td><td>29.01</td><td>100</td><td>360</td><td>Peak</td><td>VERTICAL</td></tr> </tbody> </table>	Peak	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase		MHz	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg			1	40.67	32.83	40.00	-7.17	42.65	0.65	19.00	29.56	100	360	Peak	VERTICAL	2	112.45	25.24	43.50	-18.26	35.42	1.04	18.08	29.50	100	360	Peak	VERTICAL	3	260.86	26.53	46.00	-19.67	34.37	1.56	19.58	29.18	100	360	Peak	VERTICAL	4	384.05	33.43	46.00	-12.57	38.77	1.89	21.96	29.19	100	360	Peak	VERTICAL	5	575.14	36.48	46.00	-9.52	38.62	2.33	24.80	29.27	100	360	Peak	VERTICAL	6	672.14	33.32	46.00	-12.68	34.30	2.53	25.50	29.01	100	360	Peak	VERTICAL
Peak	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																																																																																																																					
	MHz	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	38.73	28.53	40.00	-11.47	37.25	0.64	20.21	29.57	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
2	116.33	29.01	43.50	-13.59	39.95	1.05	18.19	29.28	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
3	216.24	29.81	46.00	-16.19	41.07	1.43	16.24	28.93	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
4	336.52	33.62	46.00	-12.38	40.54	1.77	20.62	29.31	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
5	611.03	35.04	46.00	-10.96	36.71	2.41	25.10	29.18	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
6	875.84	38.00	46.00	-8.00	35.98	2.90	27.55	28.23	100	360	Peak	HORIZONTAL																																																																																																																																																																																																					
Peak	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase																																																																																																																																																																																																					
	MHz	dBuV/m	dB	dBuV	dB	dB/m	dB	dB	cm	deg																																																																																																																																																																																																							
1	40.67	32.83	40.00	-7.17	42.65	0.65	19.00	29.56	100	360	Peak	VERTICAL																																																																																																																																																																																																					
2	112.45	25.24	43.50	-18.26	35.42	1.04	18.08	29.50	100	360	Peak	VERTICAL																																																																																																																																																																																																					
3	260.86	26.53	46.00	-19.67	34.37	1.56	19.58	29.18	100	360	Peak	VERTICAL																																																																																																																																																																																																					
4	384.05	33.43	46.00	-12.57	38.77	1.89	21.96	29.19	100	360	Peak	VERTICAL																																																																																																																																																																																																					
5	575.14	36.48	46.00	-9.52	38.62	2.33	24.80	29.27	100	360	Peak	VERTICAL																																																																																																																																																																																																					
6	672.14	33.32	46.00	-12.68	34.30	2.53	25.50	29.01	100	360	Peak	VERTICAL																																																																																																																																																																																																					



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth 4.1 – LE	61.15	384.00	2.60	3kHz

Bluetooth 4.1 – LE

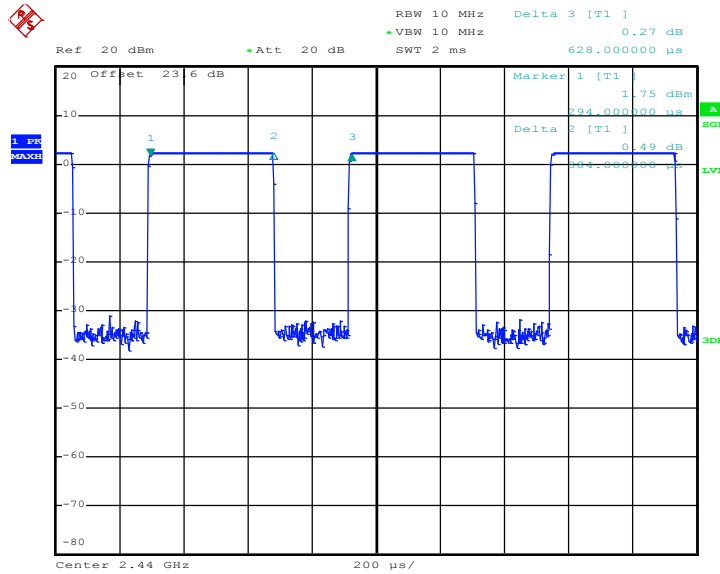

Date: 24.AUG.2016 15:01:42