



Radio Exposure Evaluation Report

FCC ID : SWX-LBE5ACLR
Equipment : LiteBeam AC LR
Brand Name : UBIQUITI
Model Name : LBE-5AC-LR
Applicant / Manufacturer : Ubiquiti Networks, Inc.
685 Third Avenue, 27th Floor New York,
New York 10017 USA
Standard : 47 CFR Part 2.1091

The product was received on Jul. 19, 2018, and testing was started from Jul. 23, 2018 and completed on Aug. 29, 2018. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
1 GENERAL DESCRIPTION	4
1.1 EUT General Information	4
1.2 Testing Location	4
2 MAXIMUM PERMISSIBLE EXPOSURE	5
2.1 Limit of Maximum Permissible Exposure	5
2.2 MPE Calculation Method	5
2.3 Calculated Result and Limit	6
2.4 MPE Measurement Method	7
2.5 Measurement Result and Limit	8
2.6 List of Measuring Equipments	46
Appendix A. Test Photos	
Photographs of EUT V01	



History of this test report

Report No.	Version	Description	Issued Date
FA871939-01	01	Initial issue of report	Sep. 20, 2018

Reviewed by: Jackson Tsai

Report Producer: Ann Hou

1 General Description

1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM)
5GHz WLAN	5150-5250 5250-5350 5470-5725 5725-5850	5180-5240 5260-5320 5500-5700 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2 Testing Location

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			

1.2.1 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR871939AN

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
UNII-2A and UNII-2C was added	NA

2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f ²)*	6
30-300	61.4	0.163	1.0	6
300-1500	-	-	F/300	6
1500-100,000	-	-	5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F/1500	30
1500-100,000	-	-	1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Method

The MPE was calculated at 103 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$



2.3 Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

WLAN 2.4GHz

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
2.4G;G1D	2.00	11.47	13.47	0.00	13.47	0.02223	103	0.00017	1.00000
2.4G;D1D	2.00	12.57	14.57	0.00	14.57	0.02864	103	0.00021	1.00000

WLAN 5GHz - P to M

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	26.00	-5.01	20.99	0.00	20.99	0.12560	103	0.00094	1.00000
5.3G;D1D	26.00	3.99	29.99	0.00	29.99	0.99770	103	0.00748	1.00000
5.6G;D1D	26.00	3.70	29.70	0.00	29.70	0.93325	103	0.00700	1.00000
5.8G;D1D	26.00	9.97	35.97	0.00	35.97	3.95367	103	0.02966	1.00000


WLAN 5GHz - P to P

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)
5.2G;D1D	26.00	25.23	51.23	0.00	51.23	132.73945	103	0.99567	1.00000
5.3G;D1D	26.00	3.99	29.99	0.00	29.99	0.99770	103	0.00748	1.00000
5.6G;D1D	26.00	3.70	29.70	0.00	29.70	0.93325	103	0.00700	1.00000
5.8G;D1D	26.00	18.41	44.41	0.00	44.41	27.60578	103	0.20707	1.00000

Co-TX WLAN 2.4GHz +WLAN 5GHz

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm ²)	S Limit (mW/cm ²)	Ratio (S/Limit)
2.4G;D1D	2.00	12.57	14.57	0.00	14.57	0.02864	103	0.00021	1.00000	0.00021
5.2G;D1D	26.00	25.23	51.23	0.00	51.23	132.73945	103	0.99567	1.00000	0.99567
-	-	-	-	-	-	-	-	-	Sum Ratio	0.99588
-	-	-	-	-	-	-	-	-	Ratio Limit	1

2.4 MPE Measurement Method

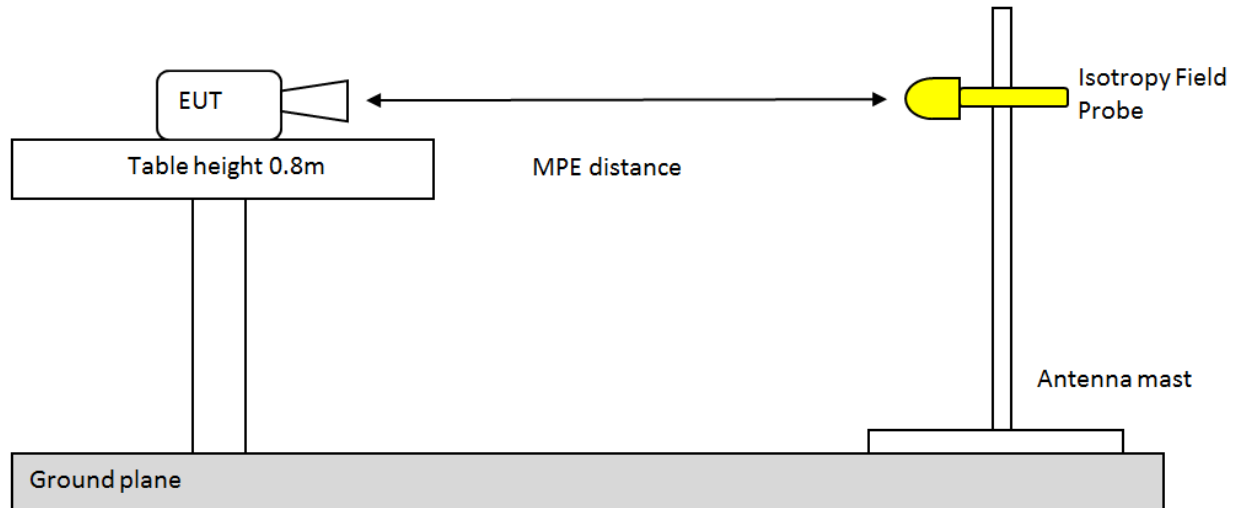

Horizontal Plane

1. Align Probe with antenna axis. Probe should same height as Antenna axis.
And take power density measurement with Probe.
2. Rotate table 45 degree (30 degree if MPE distance is more 60cm).
Take power density measurement again.
3. Repeat step 2, until complete 360 degree.
Each measured power density should be less than MPE limit.

Vertical Plane

1. Align Probe with antenna axis. Move probe to height of 10cm above ground plane.
Take power density measurement.
Then repeat measure with 10cm increment of probe height until 180 cm.
2. Rotate table 45 degree (30 degree if MPE distance is more 60cm).
Repeat the power density measure from 10cm to 180cm
3. Repeat step 2, until complete 360 degree.
Spatial Average of same vertical plane should be less then MPE limit.

For Probe or measurement equipment requirement, please see FCC OET Bulletin 65 97-01

Note:

Either peak or spatially averaged results may be applied to determine compliance; and with respect to plane-wave equivalent power density limits when ≥ 300 MHz, and electric and magnetic field strength limits when < 300 MHz.

2.5 Measurement Result and Limit

Test Mode	a	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	18		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
202.8	0.88316	0.31243	0.00512	0.00113	0.00143	0.00509	0.32248	0.87413	
Max PSD (mW/cm ²)	0.88316								
MPE Limit (mW/cm ²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	
10	0.00317	0.00237	0.00203	0.00280	0.00209	0.00200	0.00235	0.00319	
20	0.00639	0.00551	0.00277	0.00265	0.00274	0.00278	0.00552	0.00642	
30	0.00720	0.00559	0.00194	0.00310	0.00277	0.00791	0.00607	0.00720	
40	0.01634	0.00913	0.00304	0.00401	0.00321	0.00942	0.00855	0.01618	
50	0.05236	0.00525	0.00229	0.00362	0.00192	0.00304	0.01030	0.05351	
60	0.16496	0.01069	0.00321	0.00304	0.00202	0.00247	0.00730	0.16342	
70	0.30103	0.01032	0.00286	0.00301	0.00370	0.00315	0.01094	0.30354	
80	0.22457	0.00940	0.00235	0.00363	0.00262	0.00730	0.01172	0.21931	
90	0.14528	0.00946	0.00336	0.00278	0.00204	0.00329	0.00747	0.14450	
100	0.06488	0.00755	0.00413	0.00154	0.00229	0.00269	0.00694	0.06450	
110	0.02950	0.00795	0.00341	0.00169	0.00300	0.00309	0.00837	0.02906	
120	0.01235	0.00349	0.00201	0.00319	0.00223	0.00347	0.00731	0.01186	
130	0.00519	0.00296	0.00283	0.00263	0.00229	0.00278	0.00383	0.00578	
140	0.00403	0.00223	0.00181	0.00230	0.00235	0.00203	0.00371	0.00449	
150	0.00209	0.00305	0.00242	0.00254	0.00236	0.00270	0.00318	0.00353	
160	0.00168	0.00171	0.00208	0.00303	0.00160	0.00204	0.00239	0.00315	
170	0.00160	0.00214	0.00218	0.00278	0.00232	0.00157	0.00259	0.00220	
180	0.00268	0.00167	0.00197	0.00252	0.00171	0.00167	0.00265	0.00263	
Spatial Average (mW/cm ²)	0.05807	0.00558	0.00259	0.00283	0.00240	0.00352	0.00618	0.05803	
Max Spatial Average (mW/cm ²)	0.05807								
MPE Limit (mW/cm ²)	1								



Test Mode	a	Test Frequency (MHz)	5240	MPE Distance (cm)	103	Power Setting	25.5		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.9	0.91344	0.42430	0.00712	0.00336	0.00328	0.00708	0.41923	0.90968	
Max PSD (mW/cm²)	0.91344								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00313	0.00228	0.00199	0.00281	0.00208	0.00192	0.00222	0.00314	
20	0.00635	0.00542	0.00273	0.00266	0.00273	0.00270	0.00539	0.00637	
30	0.00716	0.00550	0.00190	0.00311	0.00276	0.00783	0.00594	0.00715	
40	0.01630	0.00904	0.00300	0.00402	0.00320	0.00934	0.00842	0.01613	
50	0.05232	0.00516	0.00225	0.00363	0.00191	0.00296	0.01017	0.05346	
60	0.16492	0.01060	0.00317	0.00305	0.00201	0.00239	0.00717	0.16337	
70	0.30099	0.01023	0.00282	0.00302	0.00369	0.00307	0.01081	0.30349	
80	0.22453	0.00931	0.00231	0.00364	0.00261	0.00722	0.01159	0.21926	
90	0.14524	0.00937	0.00332	0.00279	0.00203	0.00321	0.00734	0.14445	
100	0.06484	0.00746	0.00409	0.00155	0.00228	0.00261	0.00681	0.06445	
110	0.02946	0.00786	0.00337	0.00170	0.00299	0.00301	0.00824	0.02901	
120	0.01231	0.00340	0.00197	0.00320	0.00222	0.00339	0.00718	0.01181	
130	0.00515	0.00287	0.00279	0.00264	0.00228	0.00270	0.00370	0.00573	
140	0.00399	0.00214	0.00177	0.00231	0.00234	0.00195	0.00358	0.00444	
150	0.00205	0.00296	0.00238	0.00255	0.00235	0.00262	0.00305	0.00348	
160	0.00164	0.00162	0.00204	0.00304	0.00159	0.00196	0.00226	0.00310	
170	0.00156	0.00205	0.00214	0.00279	0.00231	0.00149	0.00246	0.00215	
180	0.00264	0.00158	0.00193	0.00253	0.00170	0.00159	0.00252	0.00258	
Spatial Average (mW/cm²)	0.05803	0.00549	0.00255	0.00284	0.00239	0.00344	0.00605	0.05798	
Max Spatial Average (mW/cm²)	0.05803								
MPE Limit (mW/cm²)	1								



Test Mode	a	Test Frequency (MHz)	5740	MPE Distance (cm)	103	Power Setting	21.5	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
203.5	0.59363	0.11426	0.00339	0.00116	0.00209	0.00343	0.11389	0.58446
Max PSD (mW/cm²)	0.59363							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00459	0.00375	0.00330	0.00398	0.00330	0.00326	0.00372	0.00463
20	0.00781	0.00689	0.00404	0.00383	0.00395	0.00404	0.00689	0.00786
30	0.00862	0.00697	0.00321	0.00428	0.00398	0.00917	0.00744	0.00864
40	0.01776	0.01051	0.00431	0.00519	0.00442	0.01068	0.00992	0.01762
50	0.05378	0.00663	0.00356	0.00480	0.00313	0.00430	0.01167	0.05495
60	0.16638	0.01207	0.00448	0.00422	0.00323	0.00373	0.00867	0.16486
70	0.30245	0.01170	0.00413	0.00419	0.00491	0.00441	0.01231	0.30498
80	0.22599	0.01078	0.00362	0.00481	0.00383	0.00856	0.01309	0.22075
90	0.14670	0.01084	0.00463	0.00396	0.00325	0.00455	0.00884	0.14594
100	0.06630	0.00893	0.00540	0.00272	0.00350	0.00395	0.00831	0.06594
110	0.03092	0.00933	0.00468	0.00287	0.00421	0.00435	0.00974	0.03050
120	0.01377	0.00487	0.00328	0.00437	0.00344	0.00473	0.00868	0.01330
130	0.00661	0.00434	0.00410	0.00381	0.00350	0.00404	0.00520	0.00722
140	0.00545	0.00361	0.00308	0.00348	0.00356	0.00329	0.00508	0.00593
150	0.00351	0.00443	0.00369	0.00372	0.00357	0.00396	0.00455	0.00497
160	0.00310	0.00309	0.00335	0.00421	0.00281	0.00330	0.00376	0.00459
170	0.00302	0.00352	0.00345	0.00396	0.00353	0.00283	0.00396	0.00364
180	0.00410	0.00305	0.00324	0.00370	0.00292	0.00293	0.00402	0.00407
Spatial Average (mW/cm²)	0.05949	0.00696	0.00386	0.00401	0.00361	0.00478	0.00755	0.05947
Max Spatial Average (mW/cm²)	0.05949							
MPE Limit (mW/cm²)	1							



Test Mode	a	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	25	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
202.3	0.64363	0.22426	0.00624	0.00336	0.00352	0.00675	0.25389	0.65113
Max PSD (mW/cm ²)	0.65113							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00441	0.00344	0.00312	0.00391	0.00317	0.00300	0.00336	0.00440
20	0.00763	0.00658	0.00386	0.00376	0.00382	0.00378	0.00653	0.00763
30	0.00844	0.00666	0.00303	0.00421	0.00385	0.00891	0.00708	0.00841
40	0.01758	0.01020	0.00413	0.00512	0.00429	0.01042	0.00956	0.01739
50	0.05360	0.00632	0.00338	0.00473	0.00300	0.00404	0.01131	0.05472
60	0.16620	0.01176	0.00430	0.00415	0.00310	0.00347	0.00831	0.16463
70	0.30227	0.01139	0.00395	0.00412	0.00478	0.00415	0.01195	0.30475
80	0.22581	0.01047	0.00344	0.00474	0.00370	0.00830	0.01273	0.22052
90	0.14652	0.01053	0.00445	0.00389	0.00312	0.00429	0.00848	0.14571
100	0.06612	0.00862	0.00522	0.00265	0.00337	0.00369	0.00795	0.06571
110	0.03074	0.00902	0.00450	0.00280	0.00408	0.00409	0.00938	0.03027
120	0.01359	0.00456	0.00310	0.00430	0.00331	0.00447	0.00832	0.01307
130	0.00643	0.00403	0.00392	0.00374	0.00337	0.00378	0.00484	0.00699
140	0.00527	0.00330	0.00290	0.00341	0.00343	0.00303	0.00472	0.00570
150	0.00333	0.00412	0.00351	0.00365	0.00344	0.00370	0.00419	0.00474
160	0.00292	0.00278	0.00317	0.00414	0.00268	0.00304	0.00340	0.00436
170	0.00284	0.00321	0.00327	0.00389	0.00340	0.00257	0.00360	0.00341
180	0.00392	0.00274	0.00306	0.00363	0.00279	0.00267	0.00366	0.00384
Spatial Average (mW/cm ²)	0.05931	0.00665	0.00368	0.00394	0.00348	0.00452	0.00719	0.05924
Max Spatial Average (mW/cm ²)	0.05931							
MPE Limit (mW/cm ²)	1							



Test Mode	a	Test Frequency (MHz)	5835	MPE Distance (cm)	103	Power Setting	23.5	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
203.2	0.61363	0.20426	0.00565	0.00224	0.00287	0.00573	0.21489	0.60712
Max PSD (mW/cm ²)	0.61363							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00449	0.00362	0.00320	0.00387	0.00319	0.00316	0.00362	0.00450
20	0.00771	0.00676	0.00394	0.00372	0.00384	0.00394	0.00679	0.00773
30	0.00852	0.00684	0.00311	0.00417	0.00387	0.00907	0.00734	0.00851
40	0.01766	0.01038	0.00421	0.00508	0.00431	0.01058	0.00982	0.01749
50	0.05368	0.00650	0.00346	0.00469	0.00302	0.00420	0.01157	0.05482
60	0.16628	0.01194	0.00438	0.00411	0.00312	0.00363	0.00857	0.16473
70	0.30235	0.01157	0.00403	0.00408	0.00480	0.00431	0.01221	0.30485
80	0.22589	0.01065	0.00352	0.00470	0.00372	0.00846	0.01299	0.22062
90	0.14660	0.01071	0.00453	0.00385	0.00314	0.00445	0.00874	0.14581
100	0.06620	0.00880	0.00530	0.00261	0.00339	0.00385	0.00821	0.06581
110	0.03082	0.00920	0.00458	0.00276	0.00410	0.00425	0.00964	0.03037
120	0.01367	0.00474	0.00318	0.00426	0.00333	0.00463	0.00858	0.01317
130	0.00651	0.00421	0.00400	0.00370	0.00339	0.00394	0.00510	0.00709
140	0.00535	0.00348	0.00298	0.00337	0.00345	0.00319	0.00498	0.00580
150	0.00341	0.00430	0.00359	0.00361	0.00346	0.00386	0.00445	0.00484
160	0.00300	0.00296	0.00325	0.00410	0.00270	0.00320	0.00366	0.00446
170	0.00292	0.00339	0.00335	0.00385	0.00342	0.00273	0.00386	0.00351
180	0.00400	0.00292	0.00314	0.00359	0.00281	0.00283	0.00392	0.00394
Spatial Average (mW/cm ²)	0.05939	0.00683	0.00376	0.00390	0.00350	0.00468	0.00745	0.05934
Max Spatial Average (mW/cm ²)	0.05939							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT10	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	25		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
203.1	0.89312	0.30636	0.00442	0.00058	0.00168	0.00343	0.36524	0.86413	
Max PSD (mW/cm²)	0.89312								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00313	0.00228	0.00199	0.00281	0.00208	0.00192	0.00222	0.00314	
20	0.00635	0.00542	0.00273	0.00266	0.00273	0.00270	0.00539	0.00637	
30	0.00716	0.00550	0.00190	0.00311	0.00276	0.00783	0.00594	0.00715	
40	0.01630	0.00904	0.00300	0.00402	0.00320	0.00934	0.00842	0.01613	
50	0.05232	0.00516	0.00225	0.00363	0.00191	0.00296	0.01017	0.05346	
60	0.16492	0.01060	0.00317	0.00305	0.00201	0.00239	0.00717	0.16337	
70	0.30099	0.01023	0.00282	0.00302	0.00369	0.00307	0.01081	0.30349	
80	0.22453	0.00931	0.00231	0.00364	0.00261	0.00722	0.01159	0.21926	
90	0.14524	0.00937	0.00332	0.00279	0.00203	0.00321	0.00734	0.14445	
100	0.06484	0.00746	0.00409	0.00155	0.00228	0.00261	0.00681	0.06445	
110	0.02946	0.00786	0.00337	0.00170	0.00299	0.00301	0.00824	0.02901	
120	0.01231	0.00340	0.00197	0.00320	0.00222	0.00339	0.00718	0.01181	
130	0.00515	0.00287	0.00279	0.00264	0.00228	0.00270	0.00370	0.00573	
140	0.00399	0.00214	0.00177	0.00231	0.00234	0.00195	0.00358	0.00444	
150	0.00205	0.00296	0.00238	0.00255	0.00235	0.00262	0.00305	0.00348	
160	0.00164	0.00162	0.00204	0.00304	0.00159	0.00196	0.00226	0.00310	
170	0.00156	0.00205	0.00214	0.00279	0.00231	0.00149	0.00246	0.00215	
180	0.00264	0.00158	0.00193	0.00253	0.00170	0.00159	0.00252	0.00258	
Spatial Average (mW/cm²)	0.05803	0.00549	0.00255	0.00284	0.00239	0.00344	0.00605	0.05798	
Max Spatial Average (mW/cm²)	0.05803								
MPE Limit (mW/cm²)	1								



Test Mode	VHT10	Test Frequency (MHz)	5245	MPE Distance (cm)	103	Power Setting	24		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.5	0.84325	0.31282	0.00343	0.00198	0.00079	0.00309	0.32486	0.87124	
Max PSD (mW/cm²)	0.87124								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00583	0.00482	0.00439	0.00510	0.00438	0.00426	0.00473	0.00584	
20	0.00905	0.00796	0.00513	0.00495	0.00503	0.00504	0.00790	0.00907	
30	0.00986	0.00804	0.00430	0.00540	0.00506	0.01017	0.00845	0.00985	
40	0.01900	0.01158	0.00540	0.00631	0.00550	0.01168	0.01093	0.01883	
50	0.05502	0.00770	0.00465	0.00592	0.00421	0.00530	0.01268	0.05616	
60	0.16762	0.01314	0.00557	0.00534	0.00431	0.00473	0.00968	0.16607	
70	0.30369	0.01277	0.00522	0.00531	0.00599	0.00541	0.01332	0.30619	
80	0.22723	0.01185	0.00471	0.00593	0.00491	0.00956	0.01410	0.22196	
90	0.14794	0.01191	0.00572	0.00508	0.00433	0.00555	0.00985	0.14715	
100	0.06754	0.01000	0.00649	0.00384	0.00458	0.00495	0.00932	0.06715	
110	0.03216	0.01040	0.00577	0.00399	0.00529	0.00535	0.01075	0.03171	
120	0.01501	0.00594	0.00437	0.00549	0.00452	0.00573	0.00969	0.01451	
130	0.00785	0.00541	0.00519	0.00493	0.00458	0.00504	0.00621	0.00843	
140	0.00669	0.00468	0.00417	0.00460	0.00464	0.00429	0.00609	0.00714	
150	0.00475	0.00550	0.00478	0.00484	0.00465	0.00496	0.00556	0.00618	
160	0.00434	0.00416	0.00444	0.00533	0.00389	0.00430	0.00477	0.00580	
170	0.00426	0.00459	0.00454	0.00508	0.00461	0.00383	0.00497	0.00485	
180	0.00534	0.00412	0.00433	0.00482	0.00400	0.00393	0.00503	0.00528	
Spatial Average (mW/cm²)	0.06073	0.00803	0.00495	0.00513	0.00469	0.00578	0.00856	0.06068	
Max Spatial Average (mW/cm²)	0.06073								
MPE Limit (mW/cm²)	1								



Test Mode	VHT10	Test Frequency (MHz)	5735	MPE Distance (cm)	103	Power Setting	21	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
202.8	0.54620	0.08624	0.00412	0.00117	0.00211	0.00434	0.08579	0.54412
Max PSD (mW/cm²)	0.54620							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00725	0.00620	0.00566	0.00629	0.00559	0.00552	0.00610	0.00728
20	0.01047	0.00934	0.00640	0.00614	0.00624	0.00630	0.00927	0.01051
30	0.01128	0.00942	0.00557	0.00659	0.00627	0.01143	0.00982	0.01129
40	0.02042	0.01296	0.00667	0.00750	0.00671	0.01294	0.01230	0.02027
50	0.05644	0.00908	0.00592	0.00711	0.00542	0.00656	0.01405	0.05760
60	0.16904	0.01452	0.00684	0.00653	0.00552	0.00599	0.01105	0.16751
70	0.30511	0.01415	0.00649	0.00650	0.00720	0.00667	0.01469	0.30763
80	0.22865	0.01323	0.00598	0.00712	0.00612	0.01082	0.01547	0.22340
90	0.14936	0.01329	0.00699	0.00627	0.00554	0.00681	0.01122	0.14859
100	0.06896	0.01138	0.00776	0.00503	0.00579	0.00621	0.01069	0.06859
110	0.03358	0.01178	0.00704	0.00518	0.00650	0.00661	0.01212	0.03315
120	0.01643	0.00732	0.00564	0.00668	0.00573	0.00699	0.01106	0.01595
130	0.00927	0.00679	0.00646	0.00612	0.00579	0.00630	0.00758	0.00987
140	0.00811	0.00606	0.00544	0.00579	0.00585	0.00555	0.00746	0.00858
150	0.00617	0.00688	0.00605	0.00603	0.00586	0.00622	0.00693	0.00762
160	0.00576	0.00554	0.00571	0.00652	0.00510	0.00556	0.00614	0.00724
170	0.00568	0.00597	0.00581	0.00627	0.00582	0.00509	0.00634	0.00629
180	0.00676	0.00550	0.00560	0.00601	0.00521	0.00519	0.00640	0.00672
Spatial Average (mW/cm²)	0.06215	0.00941	0.00622	0.00632	0.00590	0.00704	0.00993	0.06212
Max Spatial Average (mW/cm²)	0.06215							
MPE Limit (mW/cm²)	1							



Test Mode	VHT10	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	10		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
203.2	0.22354	0.01182	0.00252	0.00095	0.00103	0.00248	0.01246	0.22462	
Max PSD (mW/cm²)	0.22462								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00178	0.00162	0.00157	0.00129	0.00144	0.00106	0.00164	0.00182	
20	0.00486	0.00375	0.00198	0.00298	0.00184	0.00862	0.00454	0.00462	
30	0.00695	0.00493	0.00075	0.00322	0.00196	0.00632	0.00537	0.00581	
40	0.01534	0.00760	0.00183	0.00224	0.00259	0.00831	0.00817	0.01550	
50	0.05084	0.00406	0.00094	0.00178	0.00188	0.00071	0.00906	0.05192	
60	0.16418	0.01009	0.00097	0.00224	0.00196	0.00174	0.00573	0.16204	
70	0.30051	0.00815	0.00186	0.00151	0.00195	0.00135	0.00950	0.30261	
80	0.22418	0.00715	0.00129	0.00203	0.00168	0.00620	0.00980	0.21855	
90	0.14352	0.00789	0.00218	0.00143	0.00188	0.00225	0.00650	0.14269	
100	0.06388	0.00656	0.00247	0.00113	0.00126	0.00173	0.00587	0.06388	
110	0.02826	0.00665	0.00208	0.00150	0.00153	0.00228	0.00705	0.02806	
120	0.01052	0.00125	0.00072	0.00304	0.00128	0.00141	0.00574	0.00993	
130	0.00462	0.00195	0.00130	0.00188	0.00084	0.00187	0.00238	0.00373	
140	0.00344	0.00195	0.00079	0.00100	0.00119	0.00110	0.00312	0.00303	
150	0.00136	0.00202	0.00059	0.00087	0.00144	0.00086	0.00190	0.00198	
160	0.00031	0.00140	0.00164	0.00176	0.00089	0.00086	0.00143	0.00095	
170	0.00123	0.00082	0.00034	0.00096	0.00041	0.00056	0.00066	0.00085	
180	0.00086	0.00077	0.00098	0.00131	0.00064	0.00148	0.00082	0.00089	
Spatial Average (mW/cm²)	0.05704	0.00437	0.00135	0.00179	0.00148	0.00271	0.00496	0.05660	
Max Spatial Average (mW/cm²)	0.05704								
MPE Limit (mW/cm²)	1								



Test Mode	VHT10	Test Frequency (MHz)	5840	MPE Distance (cm)	103	Power Setting	23		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.9	0.42685	0.12482	0.00336	0.00108	0.00196	0.03290	0.13520	0.41865	
Max PSD (mW/cm²)	0.42685								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00313	0.00290	0.00250	0.00328	0.00186	0.00247	0.00287	0.00311	
20	0.00615	0.00573	0.00307	0.00400	0.00279	0.00316	0.00559	0.00657	
30	0.00811	0.00576	0.00272	0.00398	0.00338	0.00276	0.00567	0.00827	
40	0.01636	0.00864	0.00275	0.00440	0.00332	0.00310	0.00866	0.01624	
50	0.05276	0.00541	0.00213	0.00300	0.00226	0.00274	0.00953	0.05332	
60	0.16539	0.01093	0.00307	0.00265	0.00223	0.00202	0.00739	0.16409	
70	0.30187	0.00982	0.00313	0.00234	0.00274	0.00285	0.01017	0.30443	
80	0.22517	0.00858	0.00275	0.00370	0.00322	0.00736	0.01154	0.22342	
90	0.14564	0.00887	0.00341	0.00258	0.00206	0.00336	0.00752	0.14343	
100	0.06473	0.00756	0.00378	0.00161	0.00244	0.00361	0.00747	0.06458	
110	0.02967	0.00794	0.00351	0.00217	0.00296	0.00252	0.00837	0.02881	
120	0.01243	0.00278	0.00275	0.00375	0.00284	0.00342	0.00713	0.01227	
130	0.00526	0.00339	0.00227	0.00316	0.00266	0.00294	0.00366	0.00548	
140	0.00465	0.00308	0.00211	0.00225	0.00271	0.00291	0.00369	0.00436	
150	0.00186	0.00307	0.00218	0.00219	0.00184	0.00229	0.00250	0.00352	
160	0.00212	0.00188	0.00278	0.00313	0.00173	0.00192	0.00178	0.00252	
170	0.00276	0.00212	0.00237	0.00197	0.00222	0.00270	0.00186	0.00269	
180	0.00258	0.00168	0.00193	0.00168	0.00258	0.00184	0.00286	0.00259	
Spatial Average (mW/cm²)	0.05837	0.00556	0.00273	0.00288	0.00255	0.00300	0.00601	0.05832	
Max Spatial Average (mW/cm²)	0.05837								
MPE Limit (mW/cm²)	1								



Test Mode	VHT20	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	30		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
203.4	0.84915	0.29463	0.00277	0.00178	0.00308	0.00342	0.28669	0.85132	
Max PSD (mW/cm²)	0.85132								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00452	0.00425	0.00372	0.00444	0.00303	0.00371	0.00420	0.00449	
20	0.00754	0.00708	0.00429	0.00516	0.00396	0.00440	0.00692	0.00795	
30	0.00950	0.00711	0.00394	0.00514	0.00455	0.00400	0.00700	0.00965	
40	0.01775	0.00999	0.00397	0.00556	0.00449	0.00434	0.00999	0.01762	
50	0.05415	0.00676	0.00335	0.00416	0.00343	0.00398	0.01086	0.05470	
60	0.16678	0.01228	0.00429	0.00381	0.00340	0.00326	0.00872	0.16547	
70	0.30326	0.01117	0.00435	0.00350	0.00391	0.00409	0.01150	0.30581	
80	0.22656	0.00993	0.00397	0.00486	0.00439	0.00860	0.01287	0.22480	
90	0.14703	0.01022	0.00463	0.00374	0.00323	0.00460	0.00885	0.14481	
100	0.06612	0.00891	0.00500	0.00277	0.00361	0.00485	0.00880	0.06596	
110	0.03106	0.00929	0.00473	0.00333	0.00413	0.00376	0.00970	0.03019	
120	0.01382	0.00413	0.00397	0.00491	0.00401	0.00466	0.00846	0.01365	
130	0.00665	0.00474	0.00349	0.00432	0.00383	0.00418	0.00499	0.00686	
140	0.00604	0.00443	0.00333	0.00341	0.00388	0.00415	0.00502	0.00574	
150	0.00325	0.00442	0.00340	0.00335	0.00301	0.00353	0.00383	0.00490	
160	0.00351	0.00323	0.00400	0.00429	0.00290	0.00316	0.00311	0.00390	
170	0.00415	0.00347	0.00359	0.00313	0.00339	0.00394	0.00319	0.00407	
180	0.00397	0.00303	0.00315	0.00284	0.00375	0.00308	0.00419	0.00397	
Spatial Average (mW/cm²)	0.05976	0.00691	0.00395	0.00404	0.00372	0.00424	0.00734	0.05970	
Max Spatial Average (mW/cm²)	0.05976								
MPE Limit (mW/cm²)	1								



Test Mode	VHT20	Test Frequency (MHz)	5240	MPE Distance (cm)	103	Power Setting	26	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
201.1	0.87328	0.31458	0.00441	0.00112	0.00202	0.00457	0.31366	0.86995
Max PSD (mW/cm ²)	0.87328							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00584	0.00550	0.00489	0.00552	0.00413	0.00487	0.00547	0.00580
20	0.00886	0.00833	0.00546	0.00624	0.00506	0.00556	0.00819	0.00926
30	0.01082	0.00836	0.00511	0.00622	0.00565	0.00516	0.00827	0.01096
40	0.01907	0.01124	0.00514	0.00664	0.00559	0.00550	0.01126	0.01893
50	0.05547	0.00801	0.00452	0.00524	0.00453	0.00514	0.01213	0.05601
60	0.16810	0.01353	0.00546	0.00489	0.00450	0.00442	0.00999	0.16678
70	0.30458	0.01242	0.00552	0.00458	0.00501	0.00525	0.01277	0.30712
80	0.22788	0.01118	0.00514	0.00594	0.00549	0.00976	0.01414	0.22611
90	0.14835	0.01147	0.00580	0.00482	0.00433	0.00576	0.01012	0.14612
100	0.06744	0.01016	0.00617	0.00385	0.00471	0.00601	0.01007	0.06727
110	0.03238	0.01054	0.00590	0.00441	0.00523	0.00492	0.01097	0.03150
120	0.01514	0.00538	0.00514	0.00599	0.00511	0.00582	0.00973	0.01496
130	0.00797	0.00599	0.00466	0.00540	0.00493	0.00534	0.00626	0.00817
140	0.00736	0.00568	0.00450	0.00449	0.00498	0.00531	0.00629	0.00705
150	0.00457	0.00567	0.00457	0.00443	0.00411	0.00469	0.00510	0.00621
160	0.00483	0.00448	0.00517	0.00537	0.00400	0.00432	0.00438	0.00521
170	0.00547	0.00472	0.00476	0.00421	0.00449	0.00510	0.00446	0.00538
180	0.00529	0.00428	0.00432	0.00392	0.00485	0.00424	0.00546	0.00528
Spatial Average (mW/cm ²)	0.06108	0.00816	0.00512	0.00512	0.00482	0.00540	0.00861	0.06101
Max Spatial Average (mW/cm ²)	0.06108							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT20	Test Frequency (MHz)	5740	MPE Distance (cm)	103	Power Setting	27		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.2	0.57624	0.02245	0.00445	0.00227	0.00298	0.00452	0.02361	0.56428	
Max PSD (mW/cm²)	0.57624								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00318	0.00302	0.00279	0.00329	0.00216	0.00298	0.00301	0.00319	
20	0.00646	0.00508	0.00273	0.00325	0.00280	0.00298	0.00519	0.00560	
30	0.00717	0.00576	0.00176	0.00350	0.00354	0.00605	0.00642	0.00816	
40	0.01731	0.00957	0.00291	0.00368	0.00344	0.00452	0.00873	0.01687	
50	0.05272	0.00537	0.00260	0.00347	0.00267	0.00248	0.01000	0.05284	
60	0.16493	0.01115	0.00215	0.00264	0.00254	0.00270	0.00698	0.16399	
70	0.30116	0.00948	0.00252	0.00256	0.00332	0.00319	0.01039	0.30342	
80	0.22527	0.00930	0.00270	0.00276	0.00226	0.00764	0.01186	0.21986	
90	0.14533	0.00849	0.00257	0.00234	0.00200	0.00254	0.00708	0.14352	
100	0.06474	0.00667	0.00329	0.00212	0.00266	0.00287	0.00718	0.06460	
110	0.02971	0.00757	0.00385	0.00252	0.00248	0.00229	0.00753	0.02934	
120	0.01121	0.00333	0.00281	0.00325	0.00227	0.00348	0.00782	0.01214	
130	0.00581	0.00317	0.00255	0.00263	0.00218	0.00303	0.00295	0.00589	
140	0.00448	0.00258	0.00218	0.00169	0.00226	0.00247	0.00381	0.00385	
150	0.00268	0.00249	0.00259	0.00301	0.00172	0.00239	0.00262	0.00330	
160	0.00246	0.00237	0.00187	0.00310	0.00226	0.00257	0.00184	0.00303	
170	0.00258	0.00247	0.00169	0.00278	0.00170	0.00215	0.00253	0.00262	
180	0.00209	0.00190	0.00150	0.00198	0.00154	0.00171	0.00195	0.00205	
Spatial Average (mW/cm²)	0.05829	0.00554	0.00250	0.00281	0.00243	0.00322	0.00599	0.05802	
Max Spatial Average (mW/cm²)	0.05829								
MPE Limit (mW/cm²)	1								



Test Mode	VHT20	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	16		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202	0.29467	0.01148	0.00112	0.00079	0.00820	0.00142	0.00117	0.29543	
Max PSD (mW/cm²)	0.29543								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00446	0.00418	0.00392	0.00439	0.00325	0.00406	0.00415	0.00445	
20	0.00774	0.00624	0.00386	0.00435	0.00389	0.00406	0.00633	0.00686	
30	0.00845	0.00692	0.00289	0.00460	0.00463	0.00713	0.00756	0.00942	
40	0.01859	0.01073	0.00404	0.00478	0.00453	0.00560	0.00987	0.01813	
50	0.05400	0.00653	0.00373	0.00457	0.00376	0.00356	0.01114	0.05410	
60	0.16621	0.01231	0.00328	0.00374	0.00363	0.00378	0.00812	0.16525	
70	0.30244	0.01064	0.00365	0.00366	0.00441	0.00427	0.01153	0.30468	
80	0.22655	0.01046	0.00383	0.00386	0.00335	0.00872	0.01300	0.22112	
90	0.14661	0.00965	0.00370	0.00344	0.00309	0.00362	0.00822	0.14478	
100	0.06602	0.00783	0.00442	0.00322	0.00375	0.00395	0.00832	0.06586	
110	0.03099	0.00873	0.00498	0.00362	0.00357	0.00337	0.00867	0.03060	
120	0.01249	0.00449	0.00394	0.00435	0.00336	0.00456	0.00896	0.01340	
130	0.00709	0.00433	0.00368	0.00373	0.00327	0.00411	0.00409	0.00715	
140	0.00576	0.00374	0.00331	0.00279	0.00335	0.00355	0.00495	0.00511	
150	0.00396	0.00365	0.00372	0.00411	0.00281	0.00347	0.00376	0.00456	
160	0.00374	0.00353	0.00300	0.00420	0.00335	0.00365	0.00298	0.00429	
170	0.00386	0.00363	0.00282	0.00388	0.00279	0.00323	0.00367	0.00388	
180	0.00337	0.00306	0.00263	0.00308	0.00263	0.00279	0.00309	0.00331	
Spatial Average (mW/cm²)	0.05957	0.00670	0.00363	0.00391	0.00352	0.00430	0.00713	0.05928	
Max Spatial Average (mW/cm²)	0.05957								
MPE Limit (mW/cm²)	1								



Test Mode	VHT20	Test Frequency (MHz)	5835	MPE Distance (cm)	103	Power Setting	28	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
203.4	0.77280	0.04412	0.00516	0.00306	0.00322	0.00528	0.04386	0.76892
Max PSD (mW/cm²)	0.77280							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00315	0.00301	0.00273	0.00241	0.00181	0.00241	0.00285	0.00312
20	0.00587	0.00486	0.00237	0.00358	0.00212	0.00244	0.00465	0.00606
30	0.00723	0.00569	0.00181	0.00325	0.00356	0.00491	0.00653	0.00737
40	0.01702	0.00954	0.00288	0.00317	0.00404	0.00452	0.00910	0.01688
50	0.05276	0.00546	0.00185	0.00253	0.00246	0.00247	0.00560	0.05265
60	0.16478	0.01118	0.00264	0.00351	0.00242	0.00224	0.01025	0.16370
70	0.30201	0.01036	0.00218	0.00207	0.00305	0.00243	0.01121	0.30402
80	0.22495	0.00892	0.00265	0.00340	0.00265	0.00750	0.01211	0.22031
90	0.14550	0.00915	0.00325	0.00161	0.00252	0.00346	0.00734	0.14450
100	0.06443	0.00736	0.00422	0.00228	0.00278	0.00249	0.00751	0.06465
110	0.02995	0.00816	0.00352	0.00271	0.00317	0.00310	0.00755	0.02944
120	0.01233	0.00319	0.00239	0.00420	0.00245	0.00285	0.00748	0.01190
130	0.00606	0.00357	0.00296	0.00290	0.00195	0.00319	0.00313	0.00581
140	0.00472	0.00218	0.00210	0.00181	0.00236	0.00277	0.00356	0.00383
150	0.00252	0.00314	0.00188	0.00208	0.00174	0.00272	0.00238	0.00278
160	0.00226	0.00186	0.00236	0.00291	0.00284	0.00240	0.00262	0.00271
170	0.00259	0.00247	0.00191	0.00246	0.00262	0.00227	0.00210	0.00257
180	0.00231	0.00212	0.00163	0.00256	0.00240	0.00220	0.00203	0.00218
Spatial Average (mW/cm²)	0.05836	0.00568	0.00252	0.00275	0.00261	0.00313	0.00600	0.05803
Max Spatial Average (mW/cm²)	0.05836							
MPE Limit (mW/cm²)	1							



Test Mode	VHT30	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	31.5		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.9	0.84320	0.31480	0.00505	0.00161	0.00209	0.00568	0.26430	0.86320	
Max PSD (mW/cm²)	0.86320								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00292	0.00263	0.00242	0.00272	0.00199	0.00252	0.00272	0.00299	
20	0.00575	0.00468	0.00253	0.00423	0.00252	0.00363	0.00485	0.00624	
30	0.00774	0.00644	0.00299	0.00386	0.00307	0.00327	0.00578	0.00712	
40	0.01703	0.00874	0.00194	0.00370	0.00373	0.00886	0.00861	0.01626	
50	0.05282	0.00440	0.00167	0.00316	0.00294	0.00298	0.00502	0.05317	
60	0.16508	0.01050	0.00254	0.00311	0.00252	0.00182	0.00721	0.16363	
70	0.30142	0.00984	0.00220	0.00223	0.00283	0.00263	0.01024	0.30395	
80	0.22448	0.00852	0.00234	0.00267	0.00334	0.00828	0.01165	0.21939	
90	0.14440	0.00848	0.00261	0.00255	0.00311	0.00343	0.00730	0.14340	
100	0.06519	0.00778	0.00378	0.00180	0.00201	0.00263	0.00773	0.06529	
110	0.03005	0.00826	0.00356	0.00274	0.00298	0.00285	0.00737	0.02875	
120	0.01136	0.00252	0.00176	0.00353	0.00296	0.00287	0.00671	0.01106	
130	0.00593	0.00318	0.00196	0.00234	0.00177	0.00318	0.00381	0.00601	
140	0.00418	0.00255	0.00281	0.00242	0.00254	0.00270	0.00362	0.00398	
150	0.00209	0.00805	0.00215	0.00275	0.00179	0.00161	0.00189	0.00210	
160	0.00186	0.00184	0.00232	0.00237	0.00191	0.00227	0.00180	0.00258	
170	0.00231	0.00165	0.00235	0.00246	0.00164	0.00157	0.00198	0.00202	
180	0.00299	0.00273	0.00228	0.00250	0.00152	0.00220	0.00191	0.00283	
Spatial Average (mW/cm²)	0.05820	0.00571	0.00246	0.00284	0.00251	0.00329	0.00557	0.05782	
Max Spatial Average (mW/cm²)	0.05820								
MPE Limit (mW/cm²)	1								



Test Mode	VHT30	Test Frequency (MHz)	5235	MPE Distance (cm)	103	Power Setting	31.5		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
203.8	0.98640	0.04280	0.00342	0.00070	0.00064	0.00284	0.02886	0.92450	
Max PSD (mW/cm²)	0.98640								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00368	0.00330	0.00220	0.00264	0.00177	0.00261	0.00332	0.00372	
20	0.00641	0.00528	0.00232	0.00358	0.00214	0.00447	0.00548	0.00625	
30	0.00746	0.00596	0.00182	0.00323	0.00320	0.00464	0.00654	0.00781	
40	0.01663	0.00836	0.00298	0.00329	0.00361	0.00422	0.00820	0.01596	
50	0.05263	0.00429	0.00172	0.00305	0.00309	0.00288	0.00542	0.05329	
60	0.16460	0.01022	0.00257	0.00279	0.00185	0.00186	0.00992	0.16341	
70	0.30125	0.00941	0.00272	0.00246	0.00352	0.00297	0.00921	0.30356	
80	0.22549	0.00902	0.00245	0.00278	0.00224	0.00800	0.01189	0.22027	
90	0.14463	0.00838	0.00352	0.00205	0.00230	0.00335	0.00692	0.14417	
100	0.06480	0.00718	0.00327	0.00255	0.00194	0.00321	0.00738	0.06493	
110	0.02917	0.00813	0.00379	0.00197	0.00260	0.00267	0.00728	0.02861	
120	0.01154	0.00257	0.00235	0.00323	0.00295	0.00267	0.00701	0.01151	
130	0.00541	0.00389	0.00287	0.00253	0.00281	0.00213	0.00335	0.00497	
140	0.00472	0.00244	0.00234	0.00249	0.00277	0.00227	0.00433	0.00447	
150	0.00221	0.00314	0.00213	0.00199	0.00220	0.00157	0.00255	0.00281	
160	0.00235	0.00267	0.00285	0.00214	0.00216	0.00202	0.00208	0.00294	
170	0.00222	0.00190	0.00251	0.00198	0.00225	0.00245	0.00154	0.00189	
180	0.00220	0.00187	0.00186	0.00162	0.00254	0.00162	0.00174	0.00243	
Spatial Average (mW/cm²)	0.05819	0.00545	0.00257	0.00258	0.00255	0.00309	0.00579	0.05794	
Max Spatial Average (mW/cm²)	0.05819								
MPE Limit (mW/cm²)	1								



Test Mode	VHT30	Test Frequency (MHz)	5745	MPE Distance (cm)	103	Power Setting	27	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
203.5	0.79382	0.24351	0.00251	0.00092	0.00096	0.00204	0.37297	0.72383
Max PSD (mW/cm ²)	0.79382							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00274	0.00258	0.00242	0.00277	0.00179	0.00248	0.00264	0.00270
20	0.00641	0.00538	0.00317	0.00369	0.00192	0.00450	0.00566	0.00545
30	0.00819	0.00577	0.00264	0.00348	0.00275	0.00568	0.00633	0.00732
40	0.01731	0.00844	0.00224	0.00375	0.00316	0.00832	0.00958	0.01635
50	0.05236	0.00483	0.00268	0.00241	0.00208	0.00297	0.00334	0.05319
60	0.16500	0.01076	0.00299	0.00298	0.00275	0.00273	0.00701	0.16366
70	0.30202	0.00927	0.00197	0.00217	0.00299	0.00224	0.00945	0.30348
80	0.22519	0.00926	0.00185	0.00331	0.00341	0.00766	0.01190	0.21976
90	0.14476	0.00857	0.00273	0.00204	0.00300	0.00275	0.00752	0.14378
100	0.06498	0.00663	0.00374	0.00199	0.00248	0.00343	0.00792	0.06540
110	0.02936	0.00762	0.00303	0.00274	0.00229	0.00296	0.00754	0.02885
120	0.01215	0.00237	0.00220	0.00322	0.00262	0.00295	0.00713	0.01185
130	0.00609	0.00331	0.00270	0.00283	0.00285	0.00241	0.00322	0.00563
140	0.00408	0.00259	0.00279	0.00252	0.00208	0.00199	0.00350	0.00414
150	0.00193	0.00243	0.00225	0.00260	0.00185	0.00219	0.00319	0.00365
160	0.00217	0.00197	0.00287	0.00285	0.00242	0.00206	0.00251	0.00267
170	0.00313	0.00135	0.00209	0.00202	0.00227	0.00214	0.00233	0.00227
180	0.00274	0.00182	0.00148	0.00250	0.00238	0.00263	0.00170	0.00264
Spatial Average (mW/cm ²)	0.05837	0.00528	0.00255	0.00277	0.00251	0.00345	0.00569	0.05793
Max Spatial Average (mW/cm ²)	0.05837							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT30	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	16		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201	0.45362	0.12765	0.00114	0.00084	0.00137	0.00359	0.12482	0.45178	
Max PSD (mW/cm²)	0.45362								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00328	0.00306	0.00217	0.00240	0.00201	0.00293	0.00308	0.00329	
20	0.00613	0.00527	0.00227	0.00374	0.00274	0.00443	0.00473	0.00551	
30	0.00721	0.00602	0.00281	0.00355	0.00385	0.00477	0.00579	0.00822	
40	0.01706	0.00895	0.00252	0.00401	0.00351	0.00892	0.00918	0.01610	
50	0.05267	0.00548	0.00204	0.00265	0.00206	0.00302	0.01027	0.05270	
60	0.16512	0.01053	0.00287	0.00296	0.00274	0.00288	0.01017	0.16424	
70	0.30225	0.00935	0.00200	0.00258	0.00322	0.00253	0.01069	0.30418	
80	0.22456	0.00870	0.00283	0.00356	0.00335	0.00840	0.01200	0.22041	
90	0.14458	0.00950	0.00306	0.00166	0.00322	0.00338	0.00785	0.14400	
100	0.06478	0.00720	0.00408	0.00156	0.00201	0.00303	0.00788	0.06560	
110	0.02993	0.00779	0.00286	0.00226	0.00323	0.00268	0.00762	0.02980	
120	0.01237	0.00350	0.00275	0.00351	0.00278	0.00255	0.00702	0.01211	
130	0.00578	0.00335	0.00211	0.00244	0.00200	0.00315	0.00348	0.00561	
140	0.00471	0.00290	0.00290	0.00200	0.00229	0.00218	0.00454	0.00413	
150	0.00226	0.00238	0.00193	0.00247	0.00243	0.00257	0.00277	0.00344	
160	0.00163	0.00246	0.00198	0.00284	0.00249	0.00262	0.00274	0.00310	
170	0.00298	0.00244	0.00176	0.00273	0.00205	0.00228	0.00243	0.00222	
180	0.00269	0.00212	0.00181	0.00167	0.00186	0.00197	0.00265	0.00275	
Spatial Average (mW/cm²)	0.05833	0.00561	0.00249	0.00270	0.00266	0.00357	0.00638	0.05819	
Max Spatial Average (mW/cm²)	0.05833								
MPE Limit (mW/cm²)	1								



Test Mode	VHT30	Test Frequency (MHz)	5830	MPE Distance (cm)	103	Power Setting	28	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
202.8	0.55323	0.22316	0.00315	0.00113	0.00214	0.00376	0.21284	0.54968
Max PSD (mW/cm ²)	0.55323							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00321	0.00296	0.00212	0.00232	0.00194	0.00285	0.00302	0.00322
20	0.00606	0.00517	0.00222	0.00366	0.00267	0.00435	0.00467	0.00544
30	0.00714	0.00592	0.00276	0.00347	0.00378	0.00469	0.00573	0.00815
40	0.01699	0.00885	0.00247	0.00393	0.00344	0.00884	0.00912	0.01603
50	0.05260	0.00538	0.00199	0.00257	0.00199	0.00294	0.01021	0.05263
60	0.16505	0.01043	0.00282	0.00288	0.00267	0.00280	0.01011	0.16417
70	0.30218	0.00925	0.00195	0.00250	0.00315	0.00245	0.01063	0.30411
80	0.22449	0.00860	0.00278	0.00348	0.00328	0.00832	0.01194	0.22034
90	0.14451	0.00940	0.00301	0.00158	0.00315	0.00330	0.00779	0.14393
100	0.06471	0.00710	0.00403	0.00148	0.00194	0.00295	0.00782	0.06553
110	0.02986	0.00769	0.00281	0.00218	0.00316	0.00260	0.00756	0.02973
120	0.01230	0.00340	0.00270	0.00343	0.00271	0.00247	0.00696	0.01204
130	0.00571	0.00325	0.00206	0.00236	0.00193	0.00307	0.00342	0.00554
140	0.00464	0.00280	0.00285	0.00192	0.00222	0.00210	0.00448	0.00406
150	0.00219	0.00228	0.00188	0.00239	0.00236	0.00249	0.00271	0.00337
160	0.00156	0.00236	0.00193	0.00276	0.00242	0.00254	0.00268	0.00303
170	0.00291	0.00234	0.00171	0.00265	0.00198	0.00220	0.00237	0.00215
180	0.00262	0.00202	0.00176	0.00159	0.00179	0.00189	0.00259	0.00268
Spatial Average (mW/cm ²)	0.05826	0.00551	0.00244	0.00262	0.00259	0.00349	0.00632	0.05812
Max Spatial Average (mW/cm ²)	0.05826							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT40	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	13	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
201.8	0.48655	0.03326	0.00331	0.00112	0.00129	0.00323	0.03412	0.47965
Max PSD (mW/cm²)	0.48655							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00385	0.00601	0.00309	0.00316	0.00273	0.00305	0.00595	0.00392
20	0.00662	0.00572	0.00306	0.00416	0.00297	0.01054	0.00573	0.00656
30	0.00838	0.00669	0.00287	0.00419	0.00378	0.00804	0.00675	0.00822
40	0.01740	0.00949	0.00307	0.00425	0.00391	0.00984	0.00953	0.01719
50	0.05290	0.00547	0.00268	0.00349	0.00296	0.00292	0.01032	0.05367
60	0.16560	0.01146	0.00311	0.00342	0.00291	0.00278	0.00794	0.16457
70	0.30230	0.01034	0.00302	0.00288	0.00360	0.00318	0.01114	0.30457
80	0.22560	0.00942	0.00283	0.00352	0.00331	0.00836	0.01215	0.22057
90	0.14560	0.00952	0.00357	0.00264	0.00304	0.00336	0.00798	0.14457
100	0.06560	0.00776	0.00426	0.00254	0.00298	0.00348	0.00802	0.06567
110	0.03020	0.00849	0.00393	0.00260	0.00334	0.00331	0.00829	0.02977
120	0.01246	0.00352	0.00282	0.00406	0.00305	0.00337	0.00773	0.01221
130	0.00624	0.00393	0.00297	0.00330	0.00273	0.00307	0.00390	0.00628
140	0.00506	0.00323	0.00288	0.00276	0.00267	0.00289	0.00447	0.00504
150	0.00273	0.00327	0.00273	0.00296	0.00256	0.00259	0.00338	0.00385
160	0.00267	0.00278	0.00278	0.00299	0.00269	0.00248	0.00282	0.00326
170	0.00318	0.00277	0.00261	0.00266	0.00249	0.00263	0.00274	0.00314
180	0.00307	0.00272	0.00258	0.00260	0.00246	0.00260	0.00272	0.00305
Spatial Average (mW/cm²)	0.05886	0.00626	0.00305	0.00323	0.00301	0.00436	0.00675	0.05867
Max Spatial Average (mW/cm²)	0.05886							
MPE Limit (mW/cm²)	1							



Test Mode	VHT40	Test Frequency (MHz)	5230	MPE Distance (cm)	103	Power Setting	20.5	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
203.6	0.66712	0.22483	0.00512	0.00263	0.00316	0.00516	0.23124	0.65925
Max PSD (mW/cm²)	0.66712							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00129	0.00369	0.00083	0.00096	0.00055	0.00089	0.00367	0.00140
20	0.00406	0.00340	0.00080	0.00196	0.00079	0.00838	0.00345	0.00404
30	0.00582	0.00437	0.00061	0.00199	0.00160	0.00588	0.00447	0.00570
40	0.01484	0.00717	0.00081	0.00205	0.00173	0.00768	0.00725	0.01467
50	0.05034	0.00315	0.00042	0.00129	0.00078	0.00076	0.00804	0.05115
60	0.16304	0.00914	0.00085	0.00122	0.00073	0.00062	0.00566	0.16205
70	0.29974	0.00802	0.00076	0.00068	0.00142	0.00102	0.00886	0.30205
80	0.22304	0.00710	0.00057	0.00132	0.00113	0.00620	0.00987	0.21805
90	0.14304	0.00720	0.00131	0.00044	0.00086	0.00120	0.00570	0.14205
100	0.06304	0.00544	0.00200	0.00034	0.00080	0.00132	0.00574	0.06315
110	0.02764	0.00617	0.00167	0.00040	0.00116	0.00115	0.00601	0.02725
120	0.00990	0.00120	0.00056	0.00186	0.00087	0.00121	0.00545	0.00969
130	0.00368	0.00161	0.00071	0.00110	0.00055	0.00091	0.00162	0.00376
140	0.00250	0.00091	0.00062	0.00056	0.00049	0.00073	0.00219	0.00252
150	0.00017	0.00095	0.00047	0.00076	0.00038	0.00043	0.00110	0.00133
160	0.00011	0.00046	0.00052	0.00079	0.00051	0.00032	0.00054	0.00074
170	0.00062	0.00045	0.00035	0.00046	0.00031	0.00047	0.00046	0.00062
180	0.00051	0.00040	0.00032	0.00040	0.00028	0.00044	0.00044	0.00053
Spatial Average (mW/cm²)	0.05630	0.00394	0.00079	0.00103	0.00083	0.00220	0.00447	0.05615
Max Spatial Average (mW/cm²)	0.05630							
MPE Limit (mW/cm²)	1							



Test Mode	VHT40	Test Frequency (MHz)	5750	MPE Distance (cm)	103	Power Setting	29		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.5	0.55423	0.09846	0.00232	0.00098	0.00102	0.00249	0.00971	0.55136	
Max PSD (mW/cm²)	0.55423								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00322	0.00278	0.00252	0.00269	0.00241	0.00251	0.00278	0.00314	
20	0.00585	0.00550	0.00210	0.00408	0.00208	0.00427	0.00538	0.00618	
30	0.00764	0.00636	0.00289	0.00425	0.00384	0.00492	0.00654	0.00733	
40	0.01728	0.00825	0.00307	0.00436	0.00314	0.00550	0.00850	0.01708	
50	0.05234	0.00459	0.00264	0.00347	0.00188	0.00260	0.00508	0.05317	
60	0.16428	0.01078	0.00313	0.00336	0.00302	0.00197	0.00739	0.16439	
70	0.30110	0.00949	0.00203	0.00180	0.00351	0.00248	0.01094	0.30394	
80	0.22446	0.00895	0.00278	0.00330	0.00277	0.00747	0.01185	0.21989	
90	0.14489	0.00929	0.00341	0.00205	0.00270	0.00325	0.00751	0.14442	
100	0.06502	0.00653	0.00428	0.00232	0.00287	0.00247	0.00685	0.06491	
110	0.02907	0.00844	0.00336	0.00164	0.00253	0.00284	0.00764	0.02852	
120	0.01122	0.00312	0.00180	0.00324	0.00200	0.00283	0.00760	0.01156	
130	0.00560	0.00336	0.00196	0.00283	0.00227	0.00315	0.00313	0.00583	
140	0.00374	0.00257	0.00212	0.00235	0.00168	0.00209	0.00347	0.00382	
150	0.00186	0.00310	0.00170	0.00304	0.00162	0.00170	0.00311	0.00330	
160	0.00153	0.00256	0.00225	0.00200	0.00235	0.00176	0.00209	0.00277	
170	0.00236	0.00232	0.00155	0.00168	0.00144	0.00198	0.00256	0.00214	
180	0.00289	0.00171	0.00186	0.00267	0.00235	0.00170	0.00224	0.00290	
Spatial Average (mW/cm²)	0.05802	0.00554	0.00253	0.00284	0.00247	0.00308	0.00581	0.05807	
Max Spatial Average (mW/cm²)	0.05807								
MPE Limit (mW/cm²)	1								



Test Mode	VHT40	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	14		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.8	0.09782	0.00678	0.00112	0.00046	0.00054	0.00132	0.00686	0.09812	
Max PSD (mW/cm²)	0.09812								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00196	0.00158	0.00134	0.00184	0.00118	0.00121	0.00136	0.00143	
20	0.00498	0.00385	0.00183	0.00266	0.00122	0.00249	0.00394	0.00497	
30	0.00641	0.00477	0.00133	0.00244	0.00280	0.00323	0.00501	0.00579	
40	0.01546	0.00716	0.00197	0.00286	0.00266	0.00348	0.00747	0.01550	
50	0.05090	0.00386	0.00075	0.00231	0.00179	0.00117	0.00913	0.05208	
60	0.16332	0.00986	0.00174	0.00186	0.00082	0.00074	0.00665	0.16246	
70	0.29999	0.00851	0.00156	0.00106	0.00164	0.00164	0.00902	0.30220	
80	0.22310	0.00714	0.00069	0.00239	0.00174	0.00704	0.00976	0.21905	
90	0.14324	0.00820	0.00219	0.00095	0.00189	0.00197	0.00575	0.14254	
100	0.06370	0.00538	0.00265	0.00075	0.00114	0.00178	0.00631	0.06425	
110	0.02861	0.00629	0.00270	0.00096	0.00203	0.00161	0.00632	0.02759	
120	0.01111	0.00227	0.00155	0.00211	0.00089	0.00161	0.00583	0.01005	
130	0.00464	0.00222	0.00189	0.00128	0.00143	0.00187	0.00250	0.00463	
140	0.00334	0.00281	0.00159	0.00106	0.00148	0.00161	0.00298	0.00303	
150	0.00151	0.00126	0.00051	0.00146	0.00141	0.00132	0.00165	0.00159	
160	0.00130	0.00052	0.00146	0.00188	0.00108	0.00128	0.00131	0.00150	
170	0.00137	0.00126	0.00112	0.00069	0.00056	0.00062	0.00118	0.00139	
180	0.00106	0.00100	0.00088	0.00118	0.00089	0.00095	0.00098	0.00110	
Spatial Average (mW/cm²)	0.05700	0.00433	0.00154	0.00165	0.00148	0.00198	0.00484	0.05673	
Max Spatial Average (mW/cm²)	0.05700								
MPE Limit (mW/cm²)	1								



Test Mode	VHT40	Test Frequency (MHz)	5825	MPE Distance (cm)	103	Power Setting	21		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
230.1	0.52236	0.31286	0.00473	0.00226	0.00242	0.00468	0.32446	0.51893	
Max PSD (mW/cm²)	0.52236								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00324	0.00274	0.00247	0.00294	0.00227	0.00229	0.00250	0.00269	
20	0.00626	0.00501	0.00296	0.00376	0.00231	0.00357	0.00508	0.00623	
30	0.00769	0.00593	0.00246	0.00354	0.00389	0.00431	0.00615	0.00705	
40	0.01674	0.00832	0.00310	0.00396	0.00375	0.00456	0.00861	0.01676	
50	0.05218	0.00502	0.00188	0.00341	0.00288	0.00225	0.01027	0.05334	
60	0.16460	0.01102	0.00287	0.00296	0.00191	0.00182	0.00779	0.16372	
70	0.30127	0.00967	0.00269	0.00216	0.00273	0.00272	0.01016	0.30346	
80	0.22438	0.00830	0.00182	0.00349	0.00283	0.00812	0.01090	0.22031	
90	0.14452	0.00936	0.00332	0.00205	0.00298	0.00305	0.00689	0.14380	
100	0.06498	0.00654	0.00378	0.00185	0.00223	0.00286	0.00745	0.06551	
110	0.02989	0.00745	0.00383	0.00206	0.00312	0.00269	0.00746	0.02885	
120	0.01239	0.00343	0.00268	0.00321	0.00198	0.00269	0.00697	0.01131	
130	0.00592	0.00338	0.00302	0.00238	0.00252	0.00295	0.00364	0.00589	
140	0.00462	0.00397	0.00272	0.00216	0.00257	0.00269	0.00412	0.00429	
150	0.00279	0.00242	0.00164	0.00256	0.00250	0.00240	0.00279	0.00285	
160	0.00258	0.00168	0.00259	0.00298	0.00217	0.00236	0.00245	0.00276	
170	0.00265	0.00242	0.00225	0.00179	0.00165	0.00170	0.00232	0.00265	
180	0.00234	0.00216	0.00201	0.00228	0.00198	0.00203	0.00212	0.00236	
Spatial Average (mW/cm²)	0.05828	0.00549	0.00267	0.00275	0.00257	0.00306	0.00598	0.05799	
Max Spatial Average (mW/cm²)	0.05828								
MPE Limit (mW/cm²)	1								



Test Mode	VHT50	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	20	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
201.8	0.39281	0.11965	0.00445	0.00228	0.00312	0.00495	0.11848	0.38712
Max PSD (mW/cm²)	0.39281							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00162	0.00137	0.00128	0.00222	0.00114	0.00109	0.00135	0.00160
20	0.00416	0.00333	0.00107	0.00291	0.00081	0.00338	0.00400	0.00473
30	0.00692	0.00459	0.00091	0.00222	0.00218	0.00367	0.00453	0.00601
40	0.01543	0.00788	0.00089	0.00222	0.00269	0.00804	0.00809	0.01526
50	0.05106	0.00322	0.00045	0.00176	0.00171	0.00160	0.00811	0.05149
60	0.16343	0.00947	0.00163	0.00133	0.00071	0.00135	0.00655	0.16202
70	0.30010	0.00839	0.00104	0.00079	0.00236	0.00148	0.00921	0.30200
80	0.22362	0.00717	0.00168	0.00137	0.00164	0.00685	0.00998	0.21837
90	0.14395	0.00772	0.00246	0.00089	0.00170	0.00159	0.00559	0.14308
100	0.06358	0.00644	0.00281	0.00063	0.00197	0.00231	0.00673	0.06354
110	0.02862	0.00615	0.00244	0.00060	0.00195	0.00119	0.00645	0.02812
120	0.00989	0.00130	0.00116	0.00253	0.00136	0.00171	0.00591	0.00961
130	0.00473	0.00152	0.00185	0.00114	0.00145	0.00112	0.00157	0.00456
140	0.00295	0.00155	0.00073	0.00162	0.00114	0.00094	0.00220	0.00365
150	0.00182	0.00192	0.00149	0.00200	0.00052	0.00093	0.00170	0.00183
160	0.00108	0.00100	0.00103	0.00174	0.00064	0.00088	0.00085	0.00103
170	0.00154	0.00103	0.00101	0.00169	0.00037	0.00145	0.00110	0.00157
180	0.00094	0.00088	0.00084	0.00163	0.00120	0.00066	0.00076	0.00117
Spatial Average (mW/cm²)	0.05697	0.00416	0.00138	0.00163	0.00142	0.00224	0.00470	0.05665
Max Spatial Average (mW/cm²)	0.05697							
MPE Limit (mW/cm²)	1							



Test Mode	VHT50	Test Frequency (MHz)	5225	MPE Distance (cm)	103	Power Setting	28	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
202.7	0.68743	0.33816	0.00512	0.00364	0.00352	0.00604	0.34116	0.67193
Max PSD (mW/cm²)	0.68743							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00166	0.00146	0.00132	0.00220	0.00115	0.00117	0.00148	0.00165
20	0.00420	0.00342	0.00111	0.00289	0.00082	0.00346	0.00413	0.00478
30	0.00696	0.00468	0.00095	0.00220	0.00219	0.00375	0.00466	0.00606
40	0.01547	0.00797	0.00093	0.00220	0.00270	0.00812	0.00822	0.01531
50	0.05110	0.00331	0.00049	0.00174	0.00172	0.00168	0.00824	0.05154
60	0.16347	0.00956	0.00167	0.00131	0.00072	0.00143	0.00668	0.16207
70	0.30014	0.00848	0.00108	0.00077	0.00237	0.00156	0.00934	0.30205
80	0.22366	0.00726	0.00172	0.00135	0.00165	0.00693	0.01011	0.21842
90	0.14399	0.00781	0.00250	0.00087	0.00171	0.00167	0.00572	0.14313
100	0.06362	0.00653	0.00285	0.00061	0.00198	0.00239	0.00686	0.06359
110	0.02866	0.00624	0.00248	0.00058	0.00196	0.00127	0.00658	0.02817
120	0.00993	0.00139	0.00120	0.00251	0.00137	0.00179	0.00604	0.00966
130	0.00477	0.00161	0.00189	0.00112	0.00146	0.00120	0.00170	0.00461
140	0.00299	0.00164	0.00077	0.00160	0.00115	0.00102	0.00233	0.00370
150	0.00186	0.00201	0.00153	0.00198	0.00053	0.00101	0.00183	0.00188
160	0.00112	0.00109	0.00107	0.00172	0.00065	0.00096	0.00098	0.00108
170	0.00158	0.00112	0.00105	0.00167	0.00038	0.00153	0.00123	0.00162
180	0.00098	0.00097	0.00088	0.00161	0.00121	0.00074	0.00089	0.00122
Spatial Average (mW/cm²)	0.05701	0.00425	0.00142	0.00161	0.00143	0.00232	0.00483	0.05670
Max Spatial Average (mW/cm²)	0.05701							
MPE Limit (mW/cm²)	1							



Test Mode	VHT50	Test Frequency (MHz)	5755	MPE Distance (cm)	103	Power Setting	25		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
203.2	0.55482	0.11368	0.00335	0.00108	0.00122	0.00343	0.11412	0.56317	
Max PSD (mW/cm²)	0.56317								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00460	0.01846	0.00411	0.00466	0.00374	0.00397	0.00422	0.00460	
20	0.00711	0.00628	0.00370	0.00535	0.00331	0.00616	0.00693	0.00773	
30	0.00987	0.00754	0.00354	0.00466	0.00468	0.00615	0.00746	0.00901	
40	0.01838	0.01083	0.00352	0.00466	0.00519	0.01116	0.01102	0.01826	
50	0.05401	0.00617	0.00308	0.00420	0.00421	0.00428	0.01104	0.05449	
60	0.16638	0.01242	0.00426	0.00377	0.00321	0.00403	0.00948	0.16502	
70	0.30305	0.01134	0.00367	0.00323	0.00486	0.00416	0.01214	0.30500	
80	0.22657	0.01012	0.00431	0.00381	0.00414	0.00953	0.01291	0.22137	
90	0.14690	0.01067	0.00509	0.00333	0.00420	0.00427	0.00852	0.14608	
100	0.06653	0.00939	0.00544	0.00307	0.00447	0.00499	0.00966	0.06654	
110	0.03157	0.00910	0.00507	0.00304	0.00445	0.00387	0.00938	0.03112	
120	0.01284	0.00425	0.00379	0.00497	0.00386	0.00439	0.00884	0.01261	
130	0.00768	0.00447	0.00448	0.00358	0.00395	0.00380	0.00450	0.00756	
140	0.00590	0.00450	0.00336	0.00406	0.00364	0.00362	0.00513	0.00665	
150	0.00349	0.00487	0.00412	0.00444	0.00302	0.00361	0.00463	0.00483	
160	0.00304	0.00395	0.00366	0.00418	0.00314	0.00356	0.00378	0.00397	
170	0.00449	0.00354	0.00364	0.00413	0.00287	0.00413	0.00403	0.00353	
180	0.00416	0.00383	0.00345	0.00407	0.00305	0.00328	0.00369	0.00417	
Spatial Average (mW/cm²)	0.05981	0.00787	0.00402	0.00407	0.00389	0.00494	0.00763	0.05959	
Max Spatial Average (mW/cm²)	0.05981								
MPE Limit (mW/cm²)	1								



Test Mode	VHT50	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	14		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.7	0.21192	0.08846	0.00432	0.00084	0.00092	0.00429	0.08615	0.22136	
Max PSD (mW/cm²)	0.22136								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00326	0.00284	0.00237	0.00250	0.00292	0.00259	0.00288	0.00327	
20	0.00566	0.00507	0.00288	0.00398	0.00203	0.00339	0.00482	0.00661	
30	0.00745	0.00656	0.00190	0.00441	0.00396	0.00493	0.00602	0.00743	
40	0.01659	0.00907	0.00272	0.00433	0.00306	0.00413	0.00849	0.01635	
50	0.05178	0.00455	0.00273	0.00286	0.00267	0.00204	0.01031	0.05304	
60	0.16505	0.01147	0.00278	0.00270	0.00295	0.00257	0.00738	0.16402	
70	0.30200	0.00957	0.00239	0.00224	0.00308	0.00261	0.01041	0.30447	
80	0.22527	0.00877	0.00219	0.00326	0.00327	0.00744	0.01211	0.21955	
90	0.14475	0.00915	0.00333	0.00282	0.00213	0.00264	0.00732	0.14388	
100	0.06460	0.00696	0.00348	0.00210	0.00254	0.00351	0.00721	0.06475	
110	0.02922	0.00850	0.00311	0.00218	0.00290	0.00339	0.00797	0.02932	
120	0.01138	0.00297	0.00195	0.00314	0.00313	0.00321	0.00773	0.01105	
130	0.00560	0.00410	0.00310	0.00266	0.00235	0.00315	0.00355	0.00632	
140	0.00418	0.00319	0.00183	0.00237	0.00251	0.00308	0.00425	0.00492	
150	0.00194	0.00288	0.00201	0.00272	0.00168	0.00274	0.00287	0.00272	
160	0.00221	0.00245	0.00201	0.00286	0.00249	0.00183	0.00290	0.00267	
170	0.00227	0.00245	0.00156	0.00165	0.00231	0.00257	0.00174	0.00216	
180	0.00291	0.00234	0.00158	0.00233	0.00204	0.00249	0.00186	0.00201	
Spatial Average (mW/cm²)	0.05812	0.00572	0.00244	0.00284	0.00267	0.00324	0.00610	0.05803	
Max Spatial Average (mW/cm²)	0.05812								
MPE Limit (mW/cm²)	1								



Test Mode	VHT50	Test Frequency (MHz)	5820	MPE Distance (cm)	103	Power Setting	28	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
203.5	0.59482	0.22368	0.00548	0.00223	0.00246	0.00562	0.23142	0.57348
Max PSD (mW/cm ²)	0.59482							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00290	0.00271	0.00230	0.00218	0.00213	0.00240	0.00271	0.00296
20	0.00657	0.00453	0.00262	0.00370	0.00221	0.00367	0.00508	0.00555
30	0.00806	0.00626	0.00266	0.00430	0.00310	0.00514	0.00604	0.00781
40	0.01700	0.00923	0.00310	0.00403	0.00290	0.00783	0.00897	0.01593
50	0.05208	0.00486	0.00189	0.00297	0.00264	0.00307	0.01031	0.05246
60	0.16530	0.01054	0.00234	0.00258	0.00187	0.00254	0.00762	0.16411
70	0.30199	0.01033	0.00290	0.00223	0.00339	0.00304	0.01071	0.30391
80	0.22499	0.00941	0.00227	0.00355	0.00256	0.00746	0.01143	0.21932
90	0.14465	0.00883	0.00299	0.00155	0.00200	0.00245	0.00783	0.14345
100	0.06551	0.00668	0.00425	0.00155	0.00257	0.00348	0.00789	0.06471
110	0.02950	0.00784	0.00401	0.00263	0.00239	0.00296	0.00836	0.02895
120	0.01219	0.00238	0.00268	0.00364	0.00299	0.00259	0.00679	0.01178
130	0.00521	0.00306	0.00266	0.00252	0.00220	0.00319	0.00377	0.00578
140	0.00438	0.00275	0.00250	0.00168	0.00214	0.00282	0.00374	0.00379
150	0.00162	0.00225	0.00165	0.00201	0.00159	0.00211	0.00277	0.00324
160	0.00172	0.00192	0.00218	0.00267	0.00280	0.00147	0.00245	0.00237
170	0.00242	0.00188	0.00166	0.00234	0.00233	0.00205	0.00191	0.00301
180	0.00196	0.00244	0.00197	0.00236	0.00255	0.00269	0.00283	0.00224
Spatial Average (mW/cm ²)	0.05823	0.00544	0.00259	0.00269	0.00246	0.00339	0.00618	0.05785
Max Spatial Average (mW/cm ²)	0.05823							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT60	Test Frequency (MHz)	5200	MPE Distance (cm)	103	Power Setting	22	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
202.3	0.41624	0.11248	0.00563	0.00313	0.00309	0.00548	0.11356	0.42112
Max PSD (mW/cm ²)	0.42112							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00302	0.00261	0.00224	0.00264	0.00301	0.00322	0.00499	0.00331
20	0.00552	0.00576	0.00192	0.00331	0.00278	0.01085	0.00462	0.00680
30	0.00760	0.00635	0.00235	0.00421	0.00434	0.00843	0.00617	0.00829
40	0.01722	0.00912	0.00280	0.00390	0.00420	0.00981	0.00901	0.01646
50	0.05206	0.00533	0.00263	0.00312	0.00261	0.00328	0.01018	0.05381
60	0.16438	0.01072	0.00214	0.00247	0.00244	0.00303	0.00802	0.16467
70	0.30187	0.00959	0.00221	0.00236	0.00377	0.00293	0.01062	0.30385
80	0.22512	0.00841	0.00249	0.00245	0.00300	0.00863	0.01159	0.22034
90	0.14547	0.00854	0.00323	0.00204	0.00258	0.00372	0.00765	0.14442
100	0.06474	0.00730	0.00385	0.00152	0.00271	0.00414	0.00736	0.06538
110	0.02928	0.00743	0.00371	0.00216	0.00337	0.00385	0.00801	0.02956
120	0.01217	0.00273	0.00270	0.00411	0.00328	0.00345	0.00764	0.01162
130	0.00540	0.00391	0.00221	0.00330	0.00216	0.00300	0.00350	0.00539
140	0.00474	0.00319	0.00252	0.00223	0.00328	0.00270	0.00358	0.00508
150	0.00228	0.00337	0.00161	0.00223	0.00221	0.00215	0.00339	0.00350
160	0.00247	0.00165	0.00182	0.00219	0.00297	0.00256	0.00264	0.00238
170	0.00215	0.00222	0.00150	0.00232	0.00287	0.00247	0.00224	0.00214
180	0.00234	0.00229	0.00225	0.00217	0.00245	0.00305	0.00206	0.00253
Spatial Average (mW/cm ²)	0.05821	0.00558	0.00245	0.00271	0.00300	0.00452	0.00629	0.05831
Max Spatial Average (mW/cm ²)	0.05831							
MPE Limit (mW/cm ²)	1							



Test Mode	VHT60	Test Frequency (MHz)	5220	MPE Distance (cm)	103	Power Setting	30		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.8	0.46228	0.13248	0.00616	0.00347	0.00316	0.00632	0.14226	0.47112	
Max PSD (mW/cm²)	0.47112								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00434	0.00386	0.00341	0.00372	0.00411	0.00438	0.00626	0.00462	
20	0.00684	0.00701	0.00309	0.00439	0.00388	0.01201	0.00589	0.00811	
30	0.00892	0.00760	0.00352	0.00529	0.00544	0.00959	0.00744	0.00960	
40	0.01854	0.01037	0.00397	0.00498	0.00530	0.01097	0.01028	0.01777	
50	0.05338	0.00658	0.00380	0.00420	0.00371	0.00444	0.01145	0.05512	
60	0.16570	0.01197	0.00331	0.00355	0.00354	0.00419	0.00929	0.16598	
70	0.30319	0.01084	0.00338	0.00344	0.00487	0.00409	0.01189	0.30516	
80	0.22644	0.00966	0.00366	0.00353	0.00410	0.00979	0.01286	0.22165	
90	0.14679	0.00979	0.00440	0.00312	0.00368	0.00488	0.00892	0.14573	
100	0.06606	0.00855	0.00502	0.00260	0.00381	0.00530	0.00863	0.06669	
110	0.03060	0.00868	0.00488	0.00324	0.00447	0.00501	0.00928	0.03087	
120	0.01349	0.00398	0.00387	0.00519	0.00438	0.00461	0.00891	0.01293	
130	0.00672	0.00516	0.00338	0.00438	0.00326	0.00416	0.00477	0.00670	
140	0.00606	0.00444	0.00369	0.00331	0.00438	0.00386	0.00485	0.00639	
150	0.00360	0.00462	0.00278	0.00331	0.00331	0.00331	0.00466	0.00481	
160	0.00379	0.00290	0.00299	0.00327	0.00407	0.00372	0.00391	0.00369	
170	0.00347	0.00347	0.00267	0.00340	0.00397	0.00363	0.00351	0.00345	
180	0.00366	0.00354	0.00342	0.00325	0.00355	0.00421	0.00333	0.00384	
Spatial Average (mW/cm²)	0.05953	0.00683	0.00362	0.00379	0.00410	0.00568	0.00756	0.05962	
Max Spatial Average (mW/cm²)	0.05962								
MPE Limit (mW/cm²)	1								



Test Mode	VHT60	Test Frequency (MHz)	5760	MPE Distance (cm)	103	Power Setting	19.5		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.4	0.42265	0.00533	0.00198	0.00880	0.00102	0.00224	0.00546	0.41889	
Max PSD (mW/cm²)	0.42265								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00310	0.00259	0.00227	0.00268	0.00252	0.00260	0.00502	0.00305	
20	0.00560	0.00574	0.00195	0.00335	0.00229	0.01023	0.00465	0.00654	
30	0.00768	0.00633	0.00238	0.00425	0.00385	0.00781	0.00620	0.00803	
40	0.01730	0.00910	0.00283	0.00394	0.00371	0.00919	0.00904	0.01620	
50	0.05214	0.00531	0.00266	0.00316	0.00212	0.00266	0.01021	0.05355	
60	0.16446	0.01070	0.00217	0.00251	0.00195	0.00241	0.00805	0.16441	
70	0.30195	0.00957	0.00224	0.00240	0.00328	0.00231	0.01065	0.30359	
80	0.22520	0.00839	0.00252	0.00249	0.00251	0.00801	0.01162	0.22008	
90	0.14555	0.00852	0.00326	0.00208	0.00209	0.00310	0.00768	0.14416	
100	0.06482	0.00728	0.00388	0.00156	0.00222	0.00352	0.00739	0.06512	
110	0.02936	0.00741	0.00374	0.00220	0.00288	0.00323	0.00804	0.02930	
120	0.01225	0.00271	0.00273	0.00415	0.00279	0.00283	0.00767	0.01136	
130	0.00548	0.00389	0.00224	0.00334	0.00167	0.00238	0.00353	0.00513	
140	0.00482	0.00317	0.00255	0.00227	0.00279	0.00208	0.00361	0.00482	
150	0.00236	0.00335	0.00164	0.00227	0.00172	0.00153	0.00342	0.00324	
160	0.00255	0.00163	0.00185	0.00223	0.00248	0.00194	0.00267	0.00212	
170	0.00223	0.00220	0.00153	0.00236	0.00238	0.00185	0.00227	0.00188	
180	0.00242	0.00227	0.00228	0.00221	0.00196	0.00243	0.00209	0.00227	
Spatial Average (mW/cm²)	0.05829	0.00556	0.00248	0.00275	0.00251	0.00390	0.00632	0.05805	
Max Spatial Average (mW/cm²)	0.05829								
MPE Limit (mW/cm²)	1								



Test Mode	VHT60	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	14		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.8	0.22368	0.00942	0.00113	0.00069	0.00074	0.00134	0.00956	0.22276	
Max PSD (mW/cm²)	0.22368								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00201	0.00155	0.00094	0.00091	0.00071	0.00132	0.00149	0.00205	
20	0.00432	0.00434	0.00176	0.00300	0.00092	0.00374	0.00421	0.00414	
30	0.00579	0.00447	0.00070	0.00310	0.00165	0.00380	0.00482	0.00673	
40	0.01523	0.00806	0.00069	0.00302	0.00204	0.00441	0.00772	0.01486	
50	0.05024	0.00328	0.00029	0.00208	0.00136	0.00072	0.00818	0.05101	
60	0.16308	0.00937	0.00142	0.00233	0.00115	0.00065	0.00610	0.16275	
70	0.30068	0.00886	0.00066	0.00154	0.00163	0.00199	0.00920	0.30196	
80	0.22344	0.00701	0.00074	0.00208	0.00129	0.00650	0.00977	0.21869	
90	0.14350	0.00722	0.00226	0.00086	0.00131	0.00116	0.00587	0.14196	
100	0.06351	0.00554	0.00260	0.00047	0.00154	0.00139	0.00603	0.06322	
110	0.02752	0.00710	0.00170	0.00079	0.00165	0.00143	0.00688	0.02803	
120	0.01077	0.00178	0.00077	0.00208	0.00094	0.00206	0.00549	0.00980	
130	0.00387	0.00209	0.00117	0.00123	0.00129	0.00162	0.00210	0.00367	
140	0.00290	0.00088	0.00100	0.00083	0.00058	0.00113	0.00299	0.00333	
150	0.00003	0.00077	0.00053	0.00159	0.00135	0.00115	0.00158	0.00137	
160	0.00079	0.00102	0.00159	0.00158	0.00084	0.00019	0.00064	0.00073	
170	0.00144	0.00130	0.00027	0.00050	0.00068	0.00146	0.00069	0.00146	
180	0.00146	0.00052	0.00022	0.00087	0.00049	0.00061	0.00068	0.00139	
Spatial Average (mW/cm²)	0.05670	0.00418	0.00107	0.00160	0.00119	0.00196	0.00469	0.05651	
Max Spatial Average (mW/cm²)	0.05670								
MPE Limit (mW/cm²)	1								



Test Mode	VHT60	Test Frequency (MHz)	5815	MPE Distance (cm)	103	Power Setting	19.5	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
202.4	0.42346	0.00812	0.00416	0.00228	0.00304	0.00422	0.00833	0.43312
Max PSD (mW/cm²)	0.43312							
MPE Limit (mW/cm²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)
10	0.00269	0.00253	0.00217	0.00209	0.00186	0.00199	0.00246	0.00266
20	0.00538	0.00453	0.00214	0.00316	0.00254	0.00355	0.00479	0.00596
30	0.00764	0.00601	0.00255	0.00422	0.00350	0.00503	0.00589	0.00797
40	0.01723	0.00921	0.00313	0.00367	0.00330	0.00522	0.00839	0.01615
50	0.05219	0.00458	0.00208	0.00327	0.00274	0.00217	0.00911	0.05321
60	0.16445	0.01118	0.00268	0.00338	0.00258	0.00238	0.00738	0.16352
70	0.30182	0.00978	0.00201	0.00298	0.00251	0.00287	0.01017	0.30331
80	0.22531	0.00882	0.00179	0.00319	0.00323	0.00798	0.01125	0.22010
90	0.14544	0.00832	0.00279	0.00198	0.00260	0.00318	0.00695	0.14421
100	0.06441	0.00718	0.00418	0.00204	0.00297	0.00325	0.00691	0.06539
110	0.02962	0.00797	0.00379	0.00207	0.00262	0.00255	0.00749	0.02947
120	0.01165	0.00322	0.00277	0.00309	0.00287	0.00291	0.00768	0.01093
130	0.00585	0.00389	0.00235	0.00283	0.00182	0.00268	0.00265	0.00542
140	0.00418	0.00319	0.00269	0.00238	0.00224	0.00186	0.00382	0.00446
150	0.00167	0.00203	0.00173	0.00265	0.00163	0.00201	0.00316	0.00341
160	0.00183	0.00243	0.00198	0.00208	0.00170	0.00148	0.00232	0.00213
170	0.00242	0.00219	0.00165	0.00167	0.00201	0.00241	0.00272	0.00249
180	0.00292	0.00262	0.00227	0.00214	0.00174	0.00166	0.00166	0.00187
Spatial Average (mW/cm²)	0.05815	0.00554	0.00249	0.00272	0.00247	0.00307	0.00582	0.05793
Max Spatial Average (mW/cm²)	0.05815							
MPE Limit (mW/cm²)	1							



Test Mode	VHT80	Test Frequency (MHz)	5770	MPE Distance (cm)	103	Power Setting	28		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
202.8	0.38642	0.00642	0.00316	0.00168	0.00172	0.00324	0.00636	0.37712	
Max PSD (mW/cm²)	0.38642								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00339	0.00250	0.00235	0.00249	0.00261	0.00306	0.00315	0.00358	
20	0.00623	0.00511	0.00244	0.00360	0.00252	0.00406	0.00469	0.00543	
30	0.00712	0.00589	0.00477	0.00397	0.00377	0.00421	0.00619	0.00707	
40	0.01687	0.00899	0.00301	0.00408	0.00397	0.00558	0.00936	0.01642	
50	0.05189	0.00523	0.00184	0.00251	0.00271	0.00228	0.00975	0.05349	
60	0.16467	0.01027	0.00286	0.00293	0.00225	0.00174	0.00727	0.16328	
70	0.30111	0.00948	0.00246	0.00263	0.00350	0.00314	0.01091	0.30340	
80	0.22491	0.00853	0.00230	0.00305	0.00346	0.00795	0.01154	0.21971	
90	0.14544	0.00841	0.00331	0.00183	0.00260	0.00316	0.00714	0.14418	
100	0.06447	0.00719	0.00418	0.00226	0.00312	0.00304	0.00707	0.06499	
110	0.02934	0.00829	0.00380	0.00206	0.00290	0.00217	0.00796	0.02958	
120	0.01179	0.00255	0.00262	0.00412	0.00209	0.00295	0.00657	0.01117	
130	0.00574	0.00341	0.00188	0.00303	0.00193	0.00313	0.00386	0.00602	
140	0.00419	0.00268	0.00201	0.00241	0.00239	0.00262	0.00412	0.00495	
150	0.00246	0.00282	0.00192	0.00233	0.00203	0.00216	0.00313	0.00280	
160	0.00186	0.00226	0.00191	0.00236	0.00218	0.00220	0.00240	0.00211	
170	0.00227	0.00233	0.00218	0.00192	0.00149	0.00208	0.00233	0.00274	
180	0.00297	0.00154	0.00231	0.00220	0.00254	0.00182	0.00181	0.00269	
Spatial Average (mW/cm²)	0.05815	0.00542	0.00268	0.00277	0.00267	0.00319	0.00607	0.05798	
Max Spatial Average (mW/cm²)	0.05815								
MPE Limit (mW/cm²)	1								



Test Mode	VHT80	Test Frequency (MHz)	5790	MPE Distance (cm)	103	Power Setting	18.5		
EUT Plane	Horizontal								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
201.6	0.22862	0.00228	0.00094	0.00053	0.00059	0.00102	0.00243	0.22433	
Max PSD (mW/cm²)	0.22862								
MPE Limit (mW/cm²)	1								
EUT Plane	Vertical								
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°	
	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	Max PSD (mW/cm²)	
10	0.00186	0.00142	0.00136	0.00175	0.00068	0.00130	0.00171	0.00191	
20	0.00421	0.00422	0.00080	0.00264	0.00138	0.00203	0.00381	0.00412	
30	0.00587	0.00536	0.00147	0.00244	0.00205	0.00323	0.00462	0.00574	
40	0.01589	0.00735	0.00088	0.00330	0.00224	0.00369	0.00743	0.01567	
50	0.05066	0.00380	0.00038	0.00209	0.00115	0.00088	0.00838	0.05231	
60	0.16337	0.00946	0.00116	0.00236	0.00135	0.00092	0.00585	0.16267	
70	0.30086	0.00911	0.00166	0.00147	0.00154	0.00199	0.00970	0.30270	
80	0.22363	0.00822	0.00133	0.00190	0.00115	0.00644	0.00978	0.21806	
90	0.14336	0.00774	0.00200	0.00074	0.00202	0.00134	0.00605	0.14221	
100	0.06347	0.00543	0.00302	0.00060	0.00114	0.00216	0.00599	0.06400	
110	0.02879	0.00627	0.00185	0.00090	0.00212	0.00230	0.00618	0.02843	
120	0.00987	0.00195	0.00151	0.00244	0.00119	0.00163	0.00536	0.01059	
130	0.00393	0.00267	0.00115	0.00175	0.00118	0.00147	0.00239	0.00430	
140	0.00258	0.00148	0.00095	0.00162	0.00132	0.00119	0.00316	0.00306	
150	0.00120	0.00125	0.00082	0.00180	0.00041	0.00050	0.00215	0.00144	
160	0.00126	0.00142	0.00167	0.00204	0.00139	0.00090	0.00115	0.00089	
170	0.00177	0.00146	0.00053	0.00056	0.00143	0.00044	0.00129	0.00122	
180	0.00169	0.00075	0.00122	0.00087	0.00104	0.00073	0.00143	0.00065	
Spatial Average (mW/cm²)	0.05690	0.00441	0.00132	0.00174	0.00138	0.00184	0.00480	0.05667	
Max Spatial Average (mW/cm²)	0.05690								
MPE Limit (mW/cm²)	1								



Test Mode	VHT80	Test Frequency (MHz)	5805	MPE Distance (cm)	103	Power Setting	29	
EUT Plane	Horizontal							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
203.1	0.46622	0.00824	0.00356	0.00287	0.00303	0.00388	0.00836	0.46728
Max PSD (mW/cm ²)	0.46728							
MPE Limit (mW/cm ²)	1							
EUT Plane	Vertical							
Probe height (cm) \ Deg	0~45°	45~90°	90~135°	135~180°	180~225°	225~270°	270~315°	315~360°
	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)	Max PSD (mW/cm ²)
10	0.00311	0.00267	0.00253	0.00283	0.00178	0.00246	0.00298	0.00316
20	0.00563	0.00547	0.00197	0.00372	0.00248	0.00319	0.00508	0.00540
30	0.00819	0.00661	0.00264	0.00352	0.00315	0.00439	0.00589	0.00701
40	0.01721	0.00860	0.00205	0.00438	0.00334	0.00485	0.00870	0.01698
50	0.05198	0.00505	0.00155	0.00317	0.00225	0.00204	0.00965	0.05362
60	0.16469	0.01071	0.00233	0.00344	0.00245	0.00208	0.00712	0.16398
70	0.30218	0.01036	0.00283	0.00255	0.00264	0.00315	0.01097	0.30401
80	0.22495	0.00947	0.00250	0.00298	0.00225	0.00760	0.01105	0.21937
90	0.14468	0.00899	0.00317	0.00182	0.00312	0.00250	0.00732	0.14352
100	0.06479	0.00668	0.00419	0.00168	0.00224	0.00332	0.00726	0.06531
110	0.03011	0.00752	0.00302	0.00198	0.00322	0.00346	0.00745	0.02974
120	0.01119	0.00320	0.00268	0.00352	0.00229	0.00279	0.00663	0.01190
130	0.00525	0.00392	0.00232	0.00283	0.00228	0.00263	0.00366	0.00561
140	0.00390	0.00273	0.00212	0.00270	0.00242	0.00235	0.00443	0.00437
150	0.00252	0.00250	0.00199	0.00288	0.00151	0.00166	0.00342	0.00275
160	0.00258	0.00267	0.00284	0.00312	0.00249	0.00206	0.00242	0.00220
170	0.00309	0.00271	0.00170	0.00164	0.00253	0.00160	0.00256	0.00253
180	0.00301	0.00200	0.00239	0.00195	0.00214	0.00189	0.00270	0.00196
Spatial Average (mW/cm ²)	0.05828	0.00566	0.00249	0.00282	0.00248	0.00300	0.00607	0.05797
Max Spatial Average (mW/cm ²)	0.05828							
MPE Limit (mW/cm ²)	1							



2.6 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Probe	ETS-LINDGREN	HI-6005	00052473	0.1 MHz - 6 GHz	23/Apr/2018	22/Apr/2019