

---

# FCC 15.407

## Hardware Setup: WMS Measurements\TS8997 Hardware Setup

Spectrum Analyzer: SA FSV 40 (SA FSV 40) @ VISA (ADR  
TCPIP::192.168.48.100::inst0::instr), SN 1321.3008K40/101752,  
FW 3.50

Vector Generator: VG SMBV100A (VG SMBV100A) @ VISA (ADR  
TCPIP::192.168.48.120::inst0::instr), SN 262184, FW 3.1.19.15-  
3.50.082.47

Generator: SMB100A (SMB100A) @ VISA (ADR  
TCPIP::192.168.48.110::inst0::instr), SN 180599, FW 3.20.390.24 /  
Drv:Rev 2.21.0, 07/2016, CVI 2015

OSP: OSP-B157W (OSP-B157W) @ VISA (ADR  
TCPIP::192.168.48.157::inst0::instr), SN 1527.1144. /, FW  
1.24.0.10

## Summary

Test	Frequency (MHz)	Nominal Power (dBm)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5730.000	20.0	10.000000	PASS
RF output power	5730.000	20.0	10.000000	PASS
Power Spectral Density	5730.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5730.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5730.000	20.0	10.000000	PASS
Frequency stability	5730.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	10.000000	PASS
RF output power	5790.000	20.0	10.000000	PASS
Power Spectral Density	5790.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5845.000	20.0	10.000000	PASS
RF output power	5845.000	20.0	10.000000	PASS
Power Spectral Density	5845.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5845.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5845.000	20.0	10.000000	PASS
Frequency stability	5845.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5735.000	20.0	20.000000	PASS
RF output power	5735.000	20.0	20.000000	PASS
Power Spectral Density	5735.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5735.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5735.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	20.000000	PASS
RF output power	5790.000	20.0	20.000000	PASS
Power Spectral Density	5790.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5840.000	20.0	20.000000	PASS
RF output power	5840.000	20.0	20.000000	PASS
Power Spectral Density	5840.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5840.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5840.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5740.000	20.0	30.000000	PASS
RF output power	5740.000	20.0	30.000000	PASS
Power Spectral Density	5740.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5740.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5740.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	30.000000	PASS
RF output power	5790.000	20.0	30.000000	PASS
Power Spectral Density	5790.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5835.000	20.0	30.000000	PASS
RF output power	5835.000	20.0	30.000000	PASS
Power Spectral Density	5835.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5835.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5835.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5745.000	20.0	40.000000	PASS
RF output power	5745.000	20.0	40.000000	PASS
Power Spectral Density	5745.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5745.000	20.0	40.000000	PASS
Occupied Channel Bandwidth 99%	5745.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	40.000000	PASS
RF output power	5790.000	20.0	40.000000	PASS
Power Spectral Density	5790.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	40.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5830.000	20.0	40.000000	PASS
RF output power	5830.000	20.0	40.000000	PASS
Power Spectral Density	5830.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5830.000	20.0	40.000000	PASS

Test	Frequency (MHz)	Nominal Power (dBm)	Nominal Bandwidth (MHz)	Result
Occupied Channel Bandwidth 99%	5830.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5750.000	20.0	50.000000	PASS
RF output power	5750.000	20.0	50.000000	PASS
Power Spectral Density	5750.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5750.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5750.000	20.0	50.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	50.000000	PASS
RF output power	5790.000	20.0	50.000000	PASS
Power Spectral Density	5790.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	50.000000	PASS
Emission Bandwidth 26 dB	5825.000	20.0	50.000000	PASS
RF output power	5825.000	20.0	50.000000	PASS
Power Spectral Density	5825.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5825.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5825.000	20.0	50.000000	PASS

---

## RF output power (5730 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5730.000000	36.6	---	36.6	98.354	PASS

---

## Power Spectral Density (5730 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5730.000000	5730.594059	10.152	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.73500 GHz	5.73500 GHz
Span	10.000 MHz	10.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## Frequency stability (5730 MHz; 10 MHz)

Test according to FCC title 47 part 15 §15.407(g), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 A.3 and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 5ppm

### Result

DUT Frequency (MHz)	Frequency (MHz)	Difference (ppm)	Frequency Difference (kHz)	Limit Min (MHz)	Limit Max (MHz)	Result
5730.000000	5730.003500	0.611	3.500000	---	---	PASS

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.73500 GHz	5.73500 GHz
Span	10.000 MHz	10.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	10001	~ 10001
SweepTime	568.782 µs	AUTO
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	50	50
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	1.00 dB	1.00 dB
Run	15 / max. 150	max. 150
Stable	1 / 1	1
Max Stable Difference	0.47 dB	1.00 dB

---

## RF output power (5790 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5790.000000	36.4	---	36.4	98.353	PASS

---

## Power Spectral Density (5790 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5790.000000	5790.594059	9.904	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.78500 GHz	5.78500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	10.000 MHz	10.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off



---

## RF output power (5845 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5845.000000	34.9	---	34.9	98.354	PASS

---

## Power Spectral Density (5845 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5845.000000	5845.594059	9.220	24.9	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.84000 GHz	5.84000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	10.000 MHz	10.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 40
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## Frequency stability (5845 MHz; 10 MHz)

Test according to FCC title 47 part 15 §15.407(g), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 A.3 and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 5ppm

### Result

DUT Frequency (MHz)	Frequency (MHz)	Difference (ppm)	Frequency Difference (kHz)	Limit Min (MHz)	Limit Max (MHz)	Result
5845.000000	5845.002500	0.428	2.500000	---	---	PASS

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.84000 GHz	5.84000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	10.000 MHz	10.000 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	10001	~ 10001
SweepTime	568.782 µs	AUTO
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	50	50
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	1.00 dB	1.00 dB
Run	12 / max. 150	max. 150
Stable	1 / 1	1
Max Stable Difference	0.63 dB	1.00 dB

---

## RF output power (5735 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5735.000000	37.6	---	37.6	99.412	PASS

---

## Power Spectral Density (5735 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5735.000000	5735.792079	8.031	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.74500 GHz	5.74500 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5790 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5790.000000	37.4	---	37.4	99.412	PASS

---

## Power Spectral Density (5790 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5790.000000	5785.841584	7.763	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.78000 GHz	5.78000 GHz
Stop Frequency	5.80000 GHz	5.80000 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5840 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5840.000000	36.1	---	36.1	99.409	PASS



---

## Power Spectral Density (5840 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5840.000000	5841.188119	7.187	24.8	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.83000 GHz	5.83000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	20.000 MHz	20.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5740 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5740.000000	37.4	---	37.4	99.593	PASS

---

## Power Spectral Density (5740 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5740.000000	5741.125000	6.257	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	30.000 MHz	30.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	120	~ 120
SweepTime	2.400 ms	2.400 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5790 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5790.000000	37.4	---	37.4	99.594	PASS

---

## Power Spectral Density (5790 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5790.000000	5792.125000	5.986	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77500 GHz	5.77500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	30.000 MHz	30.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	120	~ 120
SweepTime	2.400 ms	2.400 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5835 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5835.000000	36.5	---	36.5	99.594	PASS

---

## Power Spectral Density (5835 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5835.000000	5828.625000	5.647	24.7	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.82000 GHz	5.82000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	30.000 MHz	30.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	120	~ 120
SweepTime	2.400 ms	2.400 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

---

## RF output power (5745 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5745.000000	37.3	---	37.3	99.480	PASS



---

## Power Spectral Density (5745 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5738.125000	6.968	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
SweepTime	3.200 ms	3.200 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

---

## RF output power (5790 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5790.000000	37.3	---	37.3	99.480	PASS

---

## Power Spectral Density (5790 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5790.000000	5782.125000	6.589	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77000 GHz	5.77000 GHz
Stop Frequency	5.81000 GHz	5.81000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
SweepTime	3.200 ms	3.200 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

---

## RF output power (5830 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5830.000000	36.5	---	36.5	99.481	PASS

---

## Power Spectral Density (5830 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5830.000000	5818.875000	6.358	24.6	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.81000 GHz	5.81000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	40.000 MHz	40.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	160	~ 160
SweepTime	3.200 ms	3.200 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

---

## RF output power (5750 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5750.000000	36.9	---	36.9	99.696	PASS

---

## Power Spectral Density (5750 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5750.000000	5748.125000	5.423	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.77500 GHz	5.77500 GHz
Span	50.000 MHz	50.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	200	~ 200
SweepTime	4.000 ms	4.000 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off

---

## RF output power (5790 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5790.000000	36.7	---	36.7	99.697	PASS



---

## Power Spectral Density (5790 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5790.000000	5791.875000	5.483	24.0	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.81500 GHz	5.81500 GHz
Span	50.000 MHz	50.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	200	~ 200
SweepTime	4.000 ms	4.000 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off

---

Setting	Instrument Value	Target Value
Sweep type	FFT	AUTO
Preamp	off	off

---

## RF output power (5825 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Combined Uncertainty of absolute Level Measurement (K=2) < 1 dB

### Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5825.000000	35.9	---	35.9	99.697	PASS

---

## Power Spectral Density (5825 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 1.3 dB

### Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5826.875000	5.207	24.5	PASS

### Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

### Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80000 GHz	5.80000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	50.000 MHz	50.000 MHz
RBW	500.000 kHz	<= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	200	~ 200
SweepTime	4.000 ms	4.000 ms
Reference Level	30.000 dBm	30.000 dBm
Attenuation	50.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

---

# FCC 15.407

## DUT Information

DUT Name: LTU-Lite  
SW Rev: v2  
HW Rev: v1

### Frequencies


5150 MHz (5150 MHz)	5155 MHz (5155 MHz)	5160 MHz (5160 MHz)
5165 MHz (5165 MHz)	5170 MHz (5170 MHz)	5175 MHz (5175 MHz)
5180 MHz (5180 MHz)	5185 MHz (5185 MHz)	5190 MHz (5190 MHz)
5195 MHz (5195 MHz)	5200 MHz (5200 MHz)	5205 MHz (5205 MHz)
5210 MHz (5210 MHz)	5215 MHz (5215 MHz)	5220 MHz (5220 MHz)
5225 MHz (5225 MHz)	5230 MHz (5230 MHz)	5235 MHz (5235 MHz)
5240 MHz (5240 MHz)	5245 MHz (5245 MHz)	5250 MHz (5250 MHz)
5255 MHz (5255 MHz)	5260 MHz (5260 MHz)	5265 MHz (5265 MHz)
5270 MHz (5270 MHz)	5275 MHz (5275 MHz)	5280 MHz (5280 MHz)
5285 MHz (5285 MHz)	5290 MHz (5290 MHz)	5295 MHz (5295 MHz)
5300 MHz (5300 MHz)	5305 MHz (5305 MHz)	5310 MHz (5310 MHz)
5315 MHz (5315 MHz)	5320 MHz (5320 MHz)	5325 MHz (5325 MHz)
5330 MHz (5330 MHz)	5335 MHz (5335 MHz)	5340 MHz (5340 MHz)
5345 MHz (5345 MHz)	5350 MHz (5350 MHz)	5470 MHz (5470 MHz)
5475 MHz (5475 MHz)	5480 MHz (5480 MHz)	5485 MHz (5485 MHz)
5490 MHz (5490 MHz)	5495 MHz (5495 MHz)	5500 MHz (5500 MHz)
5505 MHz (5505 MHz)	5510 MHz (5510 MHz)	5515 MHz (5515 MHz)
5520 MHz (5520 MHz)	5525 MHz (5525 MHz)	5530 MHz (5530 MHz)
5535 MHz (5535 MHz)	5540 MHz (5540 MHz)	5545 MHz (5545 MHz)
5550 MHz (5550 MHz)	5555 MHz (5555 MHz)	5560 MHz (5560 MHz)
5565 MHz (5565 MHz)	5570 MHz (5570 MHz)	5575 MHz (5575 MHz)
5580 MHz (5580 MHz)	5585 MHz (5585 MHz)	5590 MHz (5590 MHz)
5595 MHz (5595 MHz)	5600 MHz (5600 MHz)	5605 MHz (5605 MHz)
5610 MHz (5610 MHz)	5615 MHz (5615 MHz)	5620 MHz (5620 MHz)
5625 MHz (5625 MHz)	5630 MHz (5630 MHz)	5635 MHz (5635 MHz)
5640 MHz (5640 MHz)	5645 MHz (5645 MHz)	5650 MHz (5650 MHz)
5655 MHz (5655 MHz)	5660 MHz (5660 MHz)	5665 MHz (5665 MHz)
5670 MHz (5670 MHz)	5675 MHz (5675 MHz)	5680 MHz (5680 MHz)
5685 MHz (5685 MHz)	5690 MHz (5690 MHz)	5695 MHz (5695 MHz)
5700 MHz (5700 MHz)	5705 MHz (5705 MHz)	5710 MHz (5710 MHz)
5715 MHz (5715 MHz)	5720 MHz (5720 MHz)	5725 MHz (5725 MHz)
5730 MHz (5730 MHz)	5735 MHz (5735 MHz)	5740 MHz (5740 MHz)
5745 MHz (5745 MHz)	5750 MHz (5750 MHz)	5755 MHz (5755 MHz)
5760 MHz (5760 MHz)	5765 MHz (5765 MHz)	5770 MHz (5770 MHz)
5775 MHz (5775 MHz)	5780 MHz (5780 MHz)	5785 MHz (5785 MHz)
5790 MHz (5790 MHz)	5795 MHz (5795 MHz)	5800 MHz (5800 MHz)
5805 MHz (5805 MHz)	5810 MHz (5810 MHz)	5815 MHz (5815 MHz)
5820 MHz (5820 MHz)	5825 MHz (5825 MHz)	5830 MHz (5830 MHz)
5835 MHz (5835 MHz)	5840 MHz (5840 MHz)	5840 MHz (5845 MHz)

### Bandwidths

10 MHz (10 MHz)	20 MHz (20 MHz)	40 MHz (40 MHz)
30 MHz (30 MHz)	50 MHz (50 MHz)	

---

Beamforming Gain	12dBi;
Gain Tables	Port 1: 12dBi; Port 2: 12dBi;
No. of transmission chains	2
Equipment Type	Yes

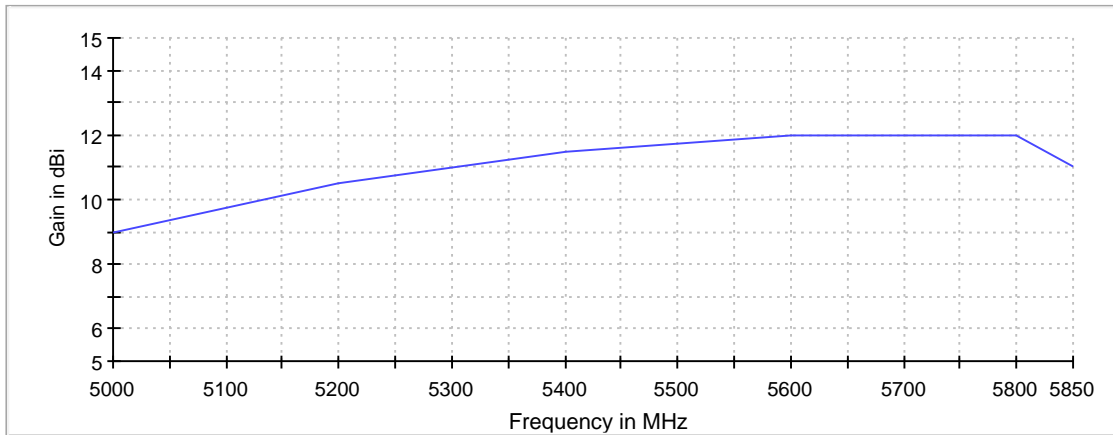

— Gaintable: 12dBi

## Hardware Setup: WMS Measurements\TS8997 Hardware Setup

Spectrum Analyzer:	SA FSV 40 (SA FSV 40) @ VISA (ADR TCPIP::192.168.48.100::inst0::instr), SN 1321.3008K40/101752, FW 3.50
Vector Generator:	VG SMBV100A (VG SMBV100A) @ VISA (ADR TCPIP::192.168.48.120::inst0::instr), SN 262184, FW 3.1.19.15- 3.50.082.47
Generator:	SMB100A (SMB100A) @ VISA (ADR TCPIP::192.168.48.110::inst0::instr), SN 180599, FW 3.20.390.24 / Drv:Rev 2.21.0, 07/2016, CVI 2015
OSP:	OSP-B157W (OSP-B157W) @ VISA (ADR TCPIP::192.168.48.157::inst0::instr), SN 1527.1144. /, FW 1.24.0.10

## Summary

Test	Frequency (MHz)	Nominal Power (dBm)	Nominal Bandwidth (MHz)	Result
Emission Bandwidth 26 dB	5730.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5730.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5730.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5845.000	20.0	10.000000	PASS
Minimum Emission Bandwidth 6 dB	5845.000	20.0	10.000000	PASS
Occupied Channel Bandwidth 99%	5845.000	20.0	10.000000	PASS
Emission Bandwidth 26 dB	5735.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5735.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5735.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5840.000	20.0	20.000000	PASS
Minimum Emission Bandwidth 6 dB	5840.000	20.0	20.000000	PASS
Occupied Channel Bandwidth 99%	5840.000	20.0	20.000000	PASS
Emission Bandwidth 26 dB	5740.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5740.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5740.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5835.000	20.0	30.000000	PASS
Minimum Emission Bandwidth 6 dB	5835.000	20.0	30.000000	PASS
Occupied Channel Bandwidth 99%	5835.000	20.0	30.000000	PASS
Emission Bandwidth 26 dB	5745.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5745.000	20.0	40.000000	PASS
Occupied Channel Bandwidth 99%	5745.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	40.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5830.000	20.0	40.000000	PASS
Minimum Emission Bandwidth 6 dB	5830.000	20.0	40.000000	PASS
Occupied Channel Bandwidth 99%	5830.000	20.0	40.000000	PASS
Emission Bandwidth 26 dB	5750.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5750.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5750.000	20.0	50.000000	PASS
Emission Bandwidth 26 dB	5790.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5790.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5790.000	20.0	50.000000	PASS
Emission Bandwidth 26 dB	5825.000	20.0	50.000000	PASS
Minimum Emission Bandwidth 6 dB	5825.000	20.0	50.000000	PASS
Occupied Channel Bandwidth 99%	5825.000	20.0	50.000000	PASS

# Emission Bandwidth 26 dB (5730 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5730.000000	17.500000	---	---	5721.025000	5738.525000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5730.000000	9.9	PASS

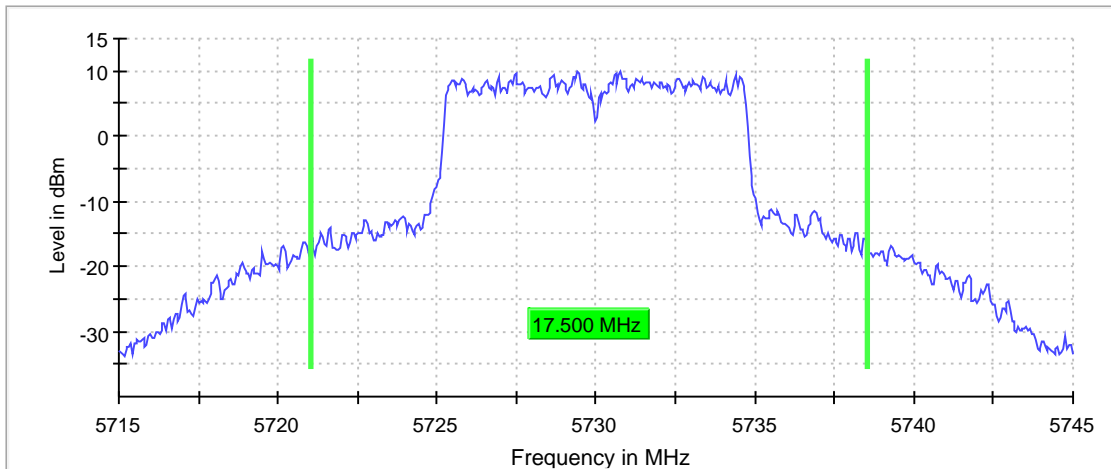

Bandwidth



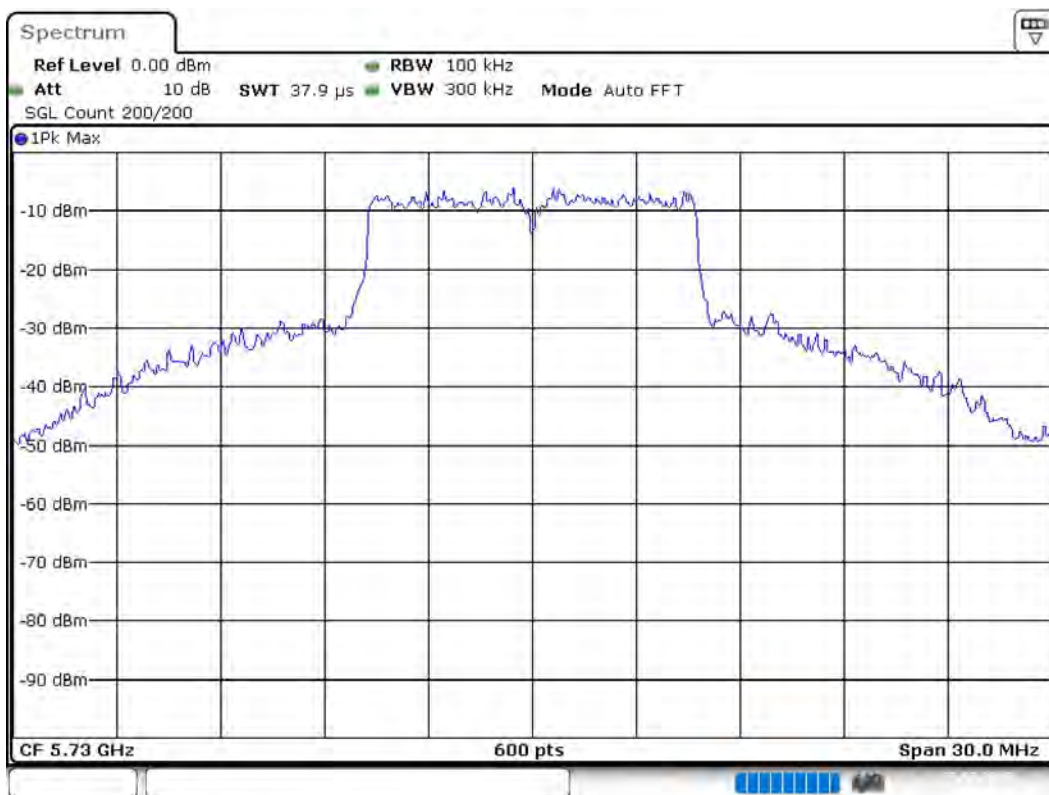

Date: 27.JUL.2019 20:49:57

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.74500 GHz	5.74500 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5730 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5730.000000	9.550000	0.500000	---	5725.225000	5734.775000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5730.000000	9.5	PASS

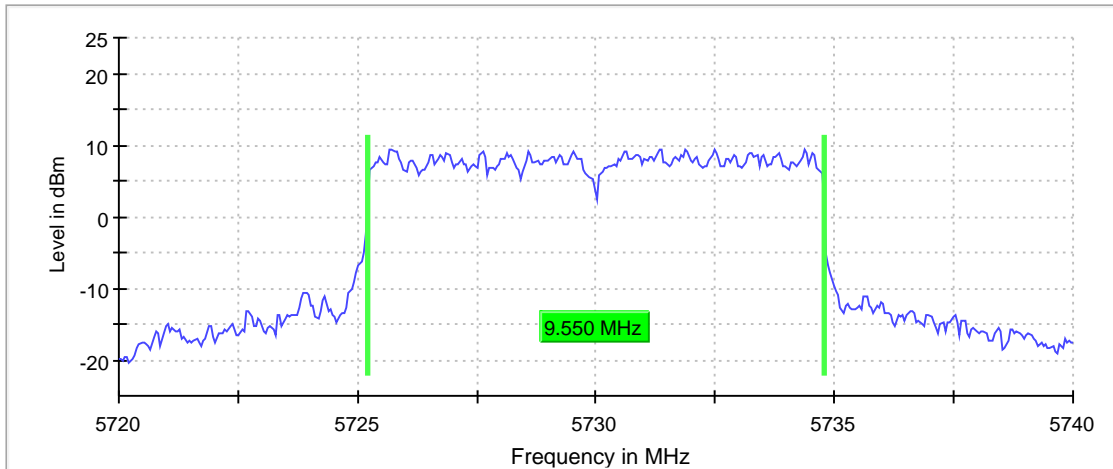

Bandwidth

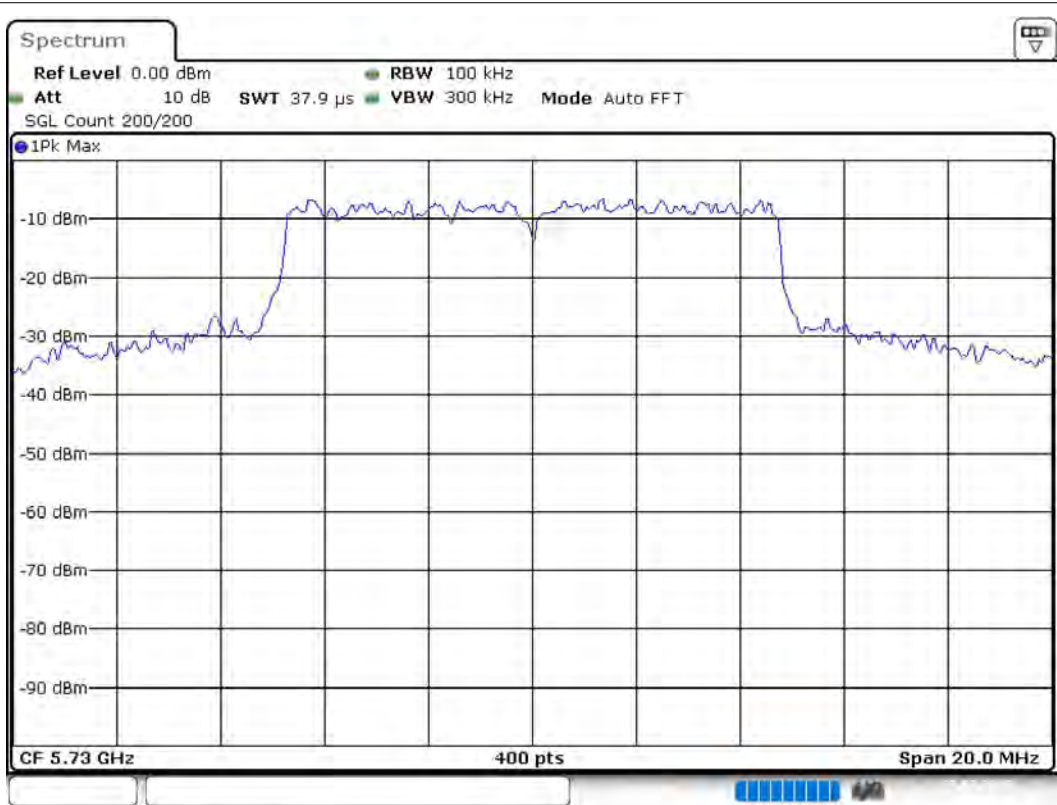

Date: 27.JUL.2019 20:50:04

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72000 GHz	5.72000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5730 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5730.000000	9.550000	---	---	5725.225000	5734.775000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5730.000000	PASS

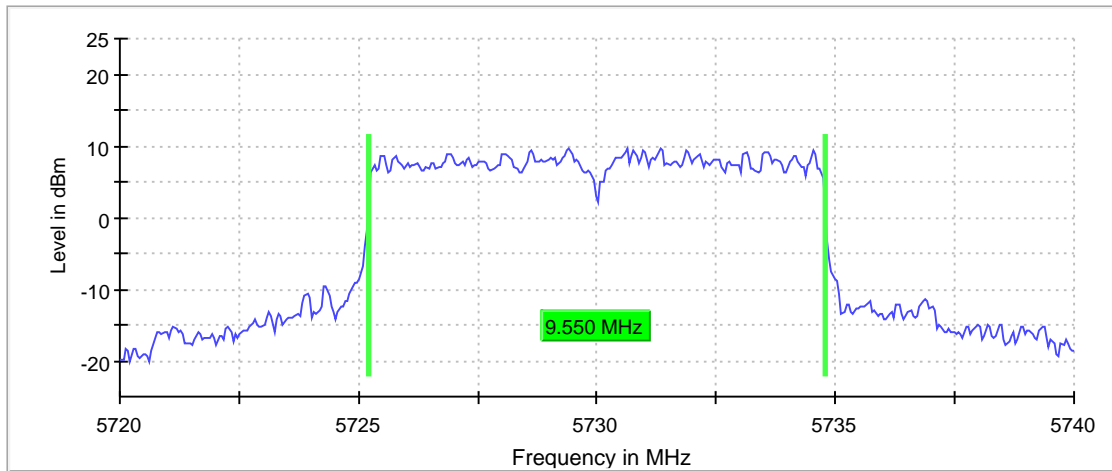

Bandwidth

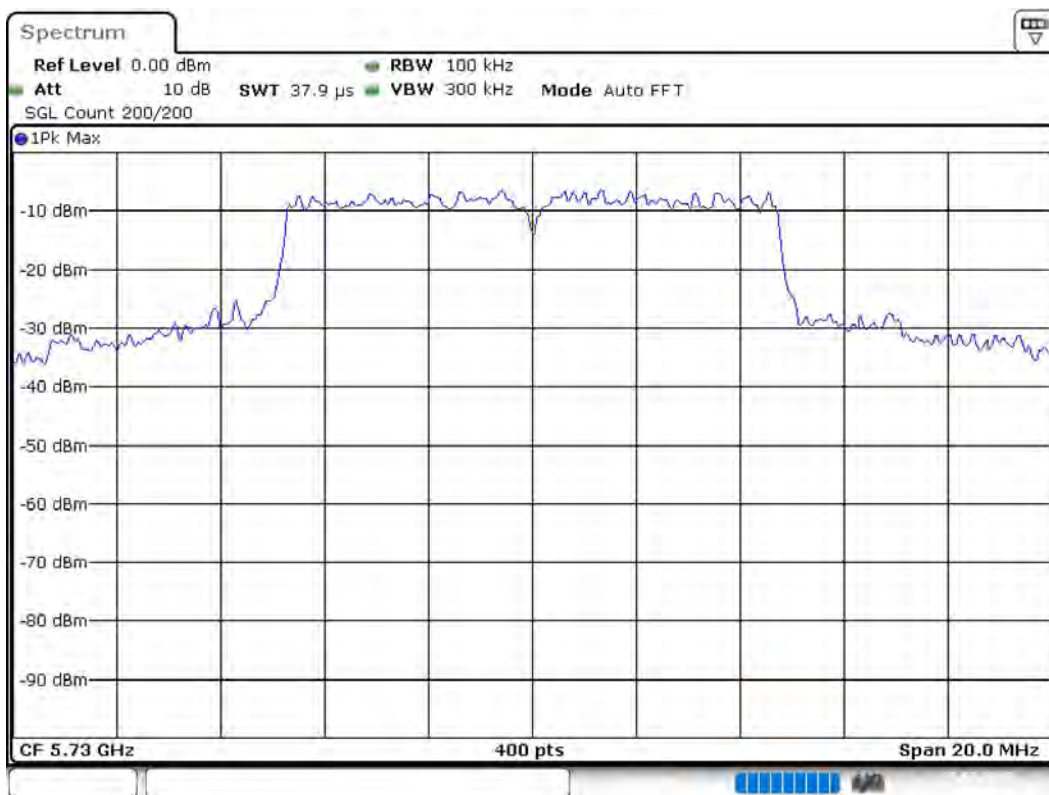

Date: 27.JUL.2019 20:50:10

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72000 GHz	5.72000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	>= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5790 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	15.900000	---	---	5781.875000	5797.775000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	8.8	PASS

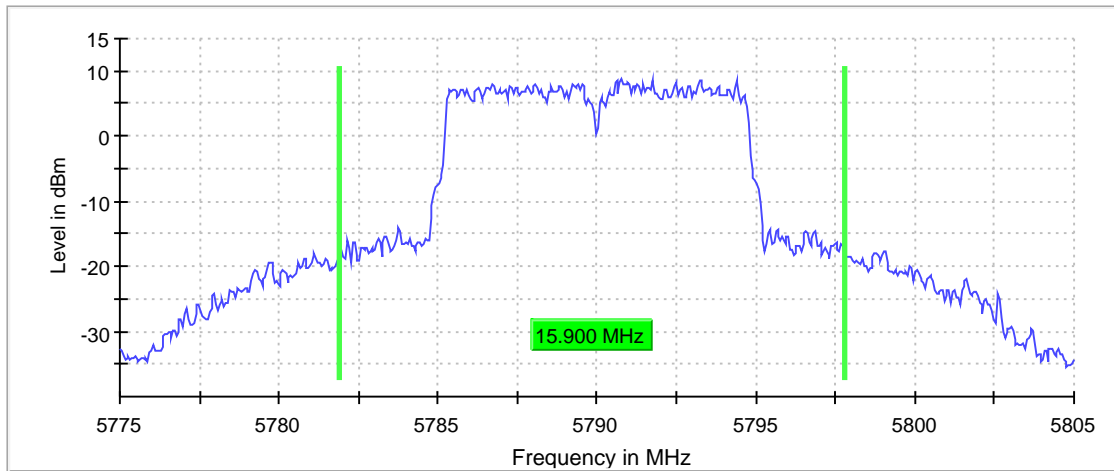

Bandwidth

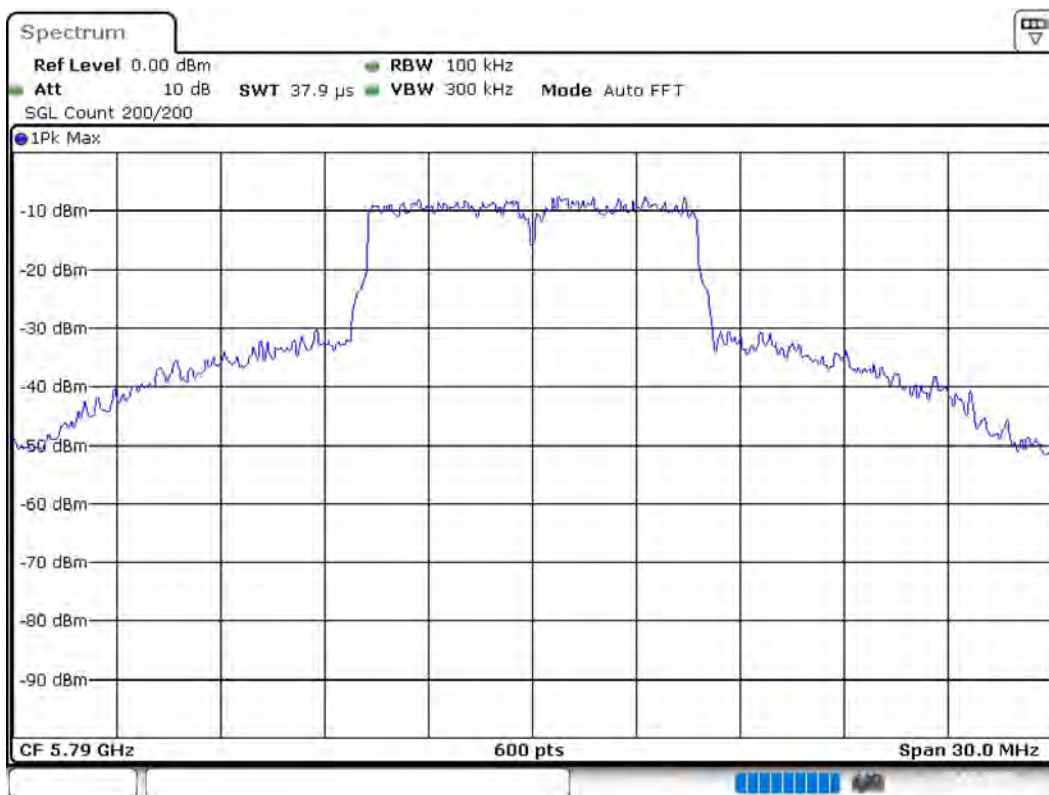

Date: 27.JUL.2019 20:50:57

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77500 GHz	5.77500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5790 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	9.550000	0.500000	---	5785.225000	5794.775000


(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	9.2	PASS

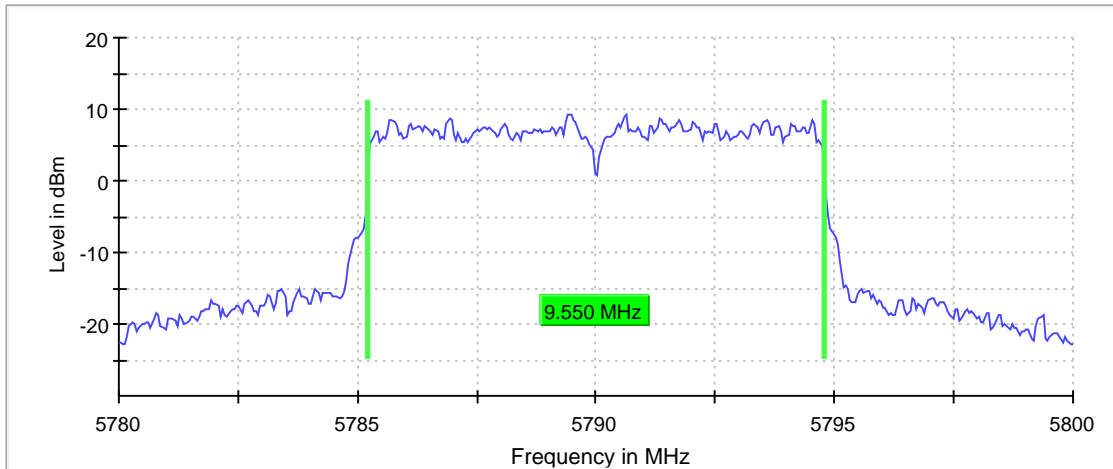

Bandwidth



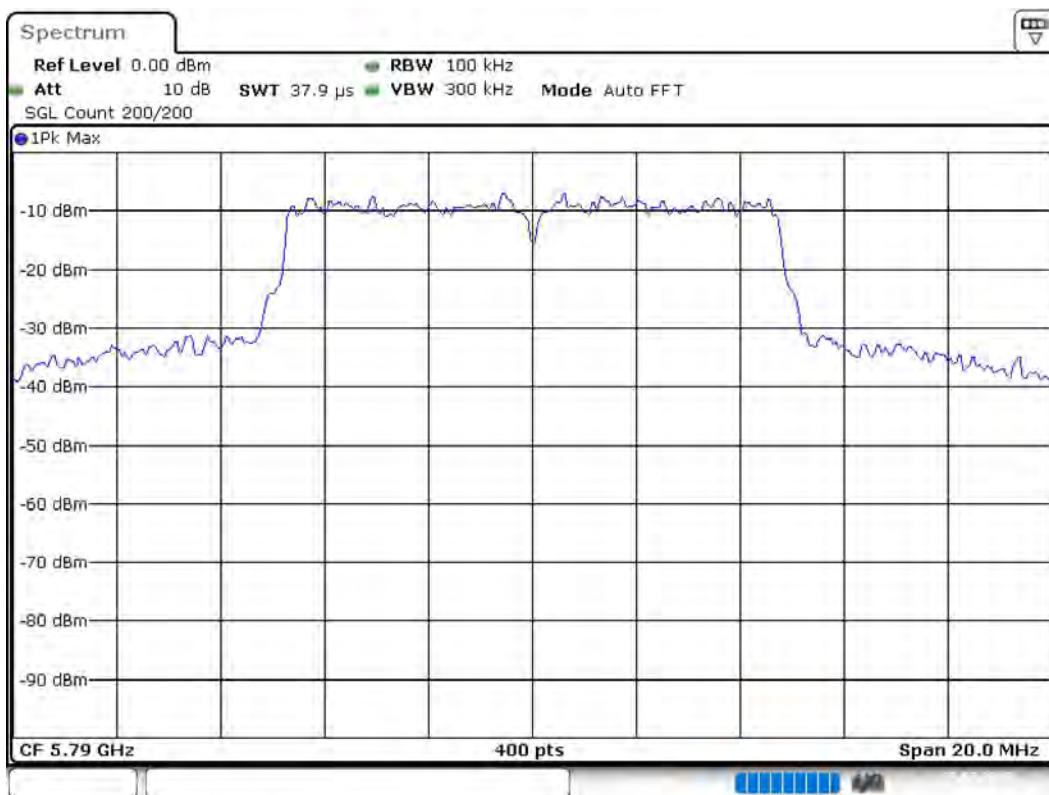

Date: 27.JUL.2019 20:51:04

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.78000 GHz	5.78000 GHz
Stop Frequency	5.80000 GHz	5.80000 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	37.891 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5790 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	9.500000	---	---	5785.225000	5794.725000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5790.000000	PASS

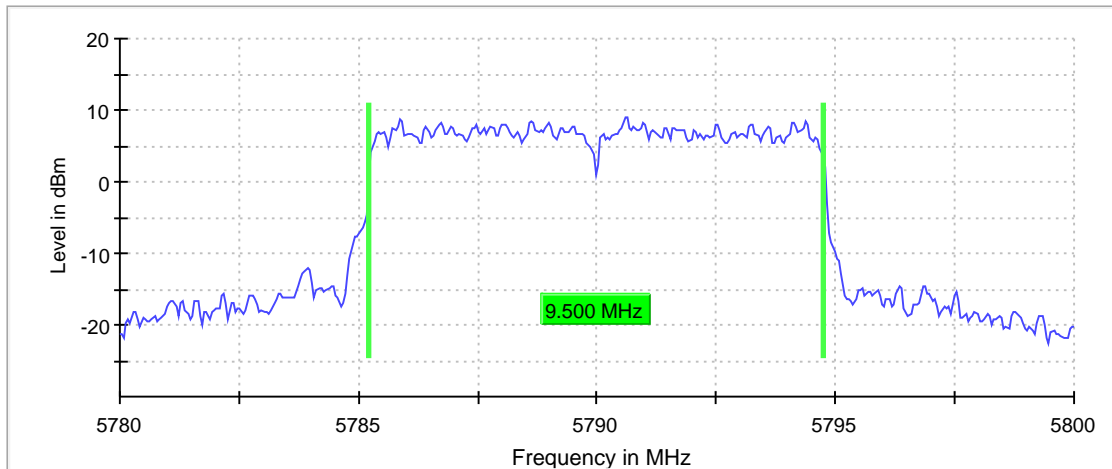

Bandwidth

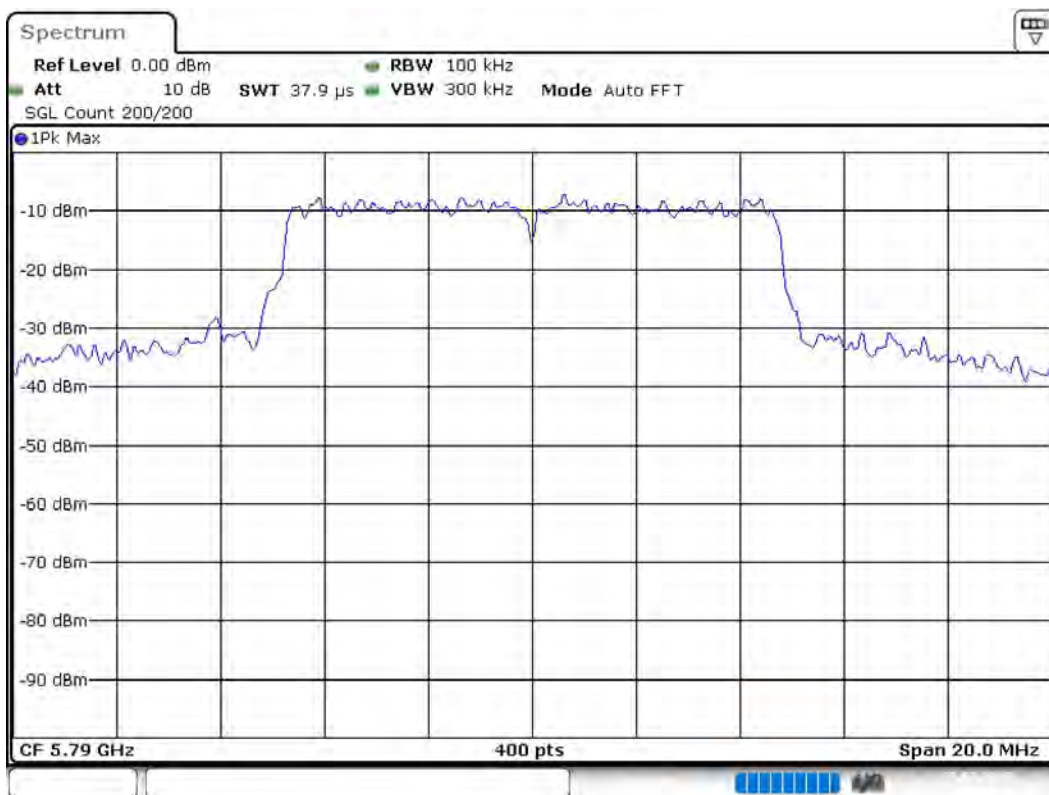

Date: 27.JUL.2019 20:51:11

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.78000 GHz	5.78000 GHz
Stop Frequency	5.80000 GHz	5.80000 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	>= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	400	~ 400
SweepTime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5845 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5845.000000	14.500000	---	---	5838.075000	5852.575000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5845.000000	8.0	PASS

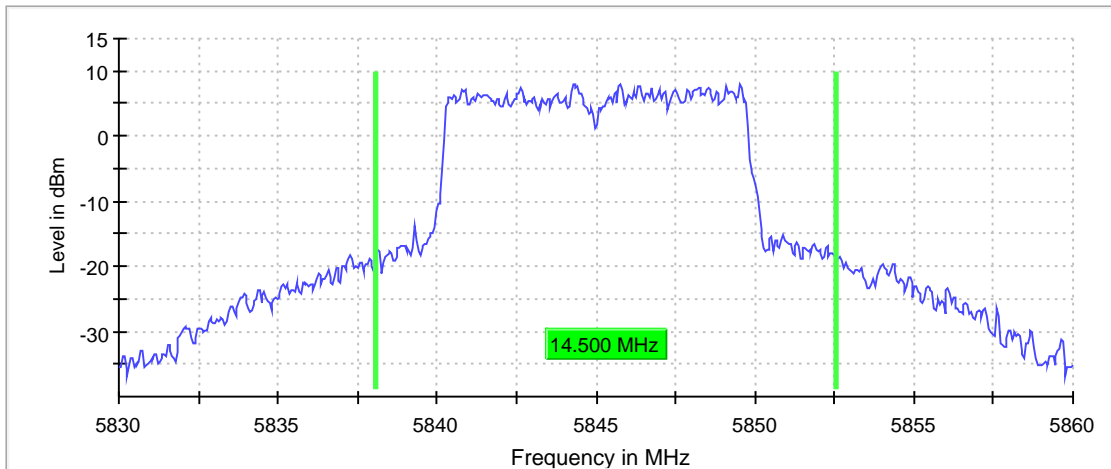

Bandwidth

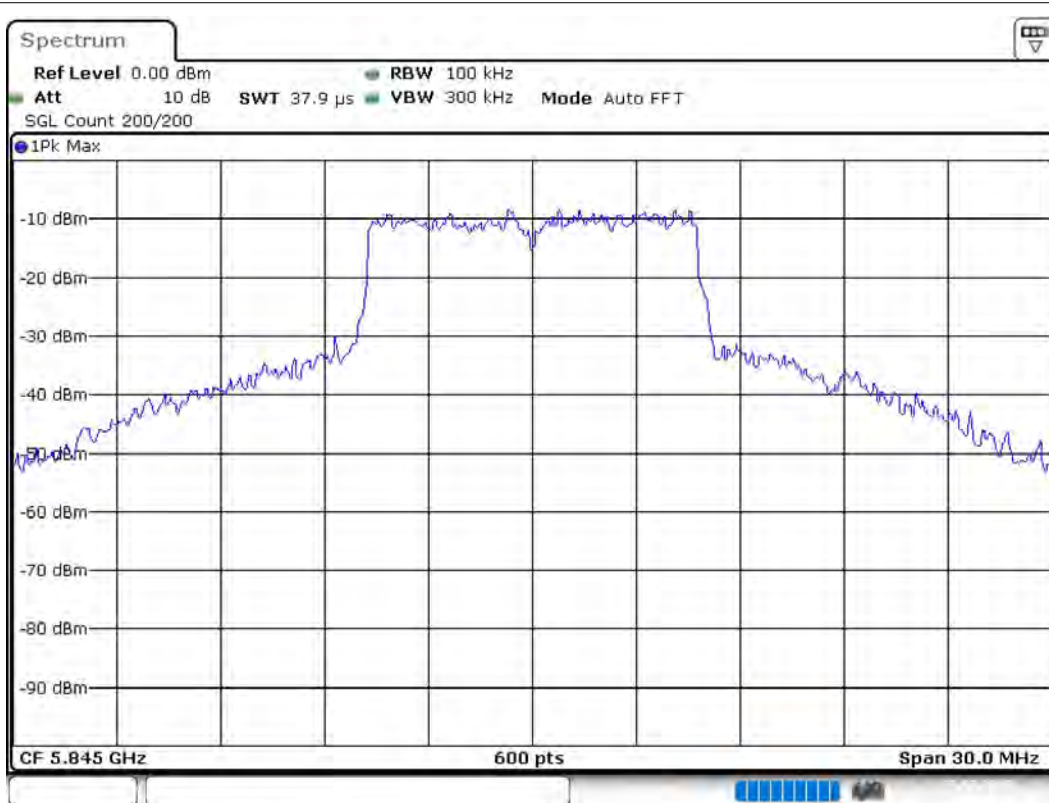

Date: 27.JUL.2019 20:51:53

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.83000 GHz	5.83000 GHz
Stop Frequency	5.86000 GHz	5.86000 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5845 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5845.000000	9.550000	0.500000	---	5840.225000	5849.775000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5845.000000	8.2	PASS

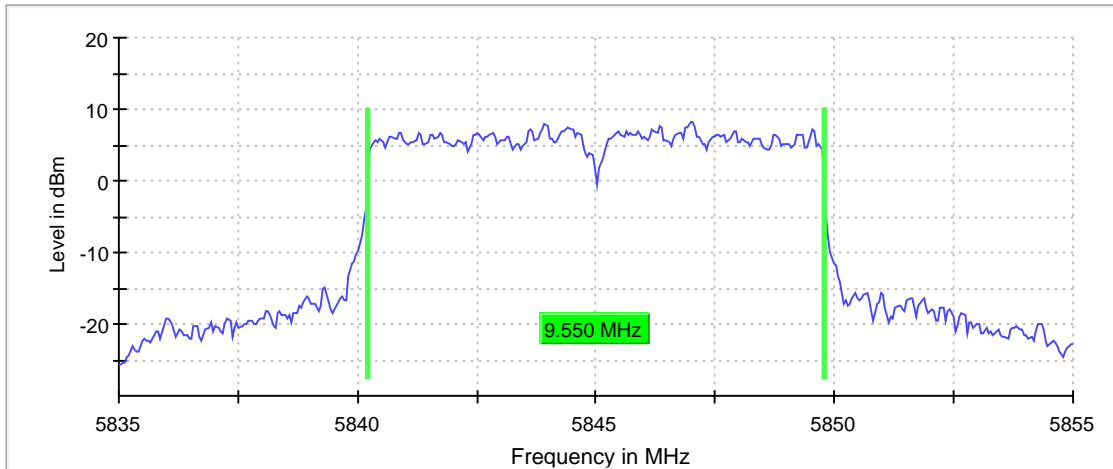

Bandwidth

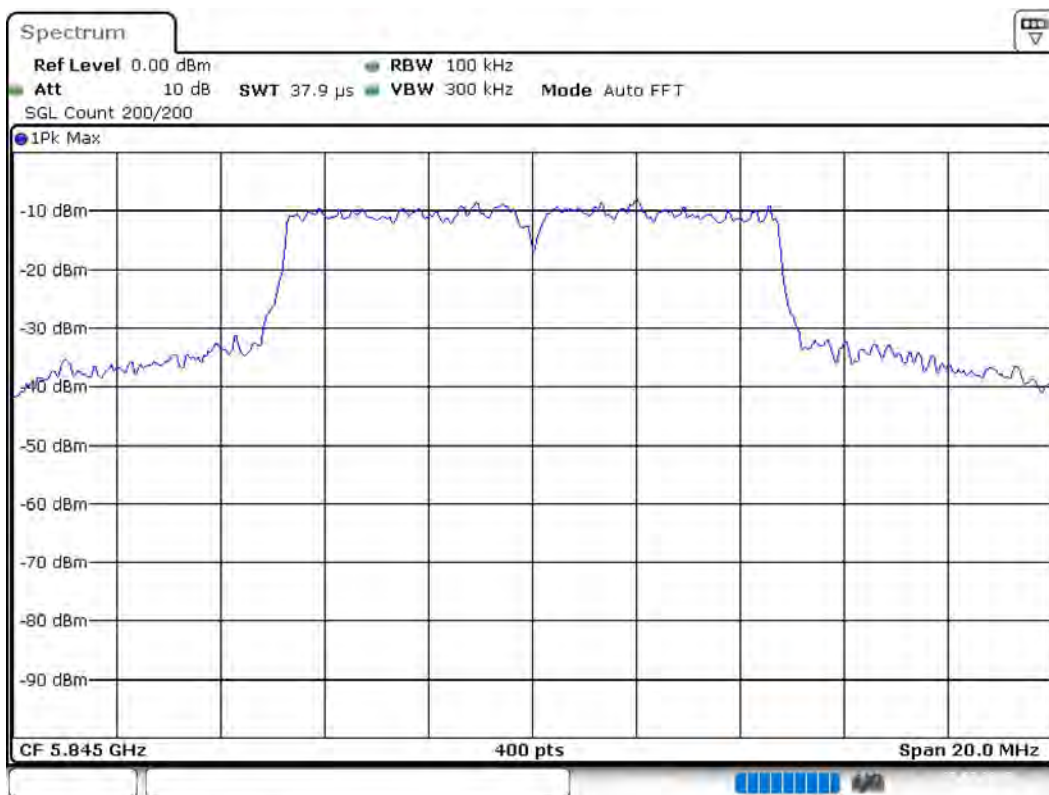

Date: 27.JUL.2019 20:52:01

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.83500 GHz	5.83500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5845 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5845.000000	9.450000	---	---	5840.275000	5849.725000


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5845.000000	PASS

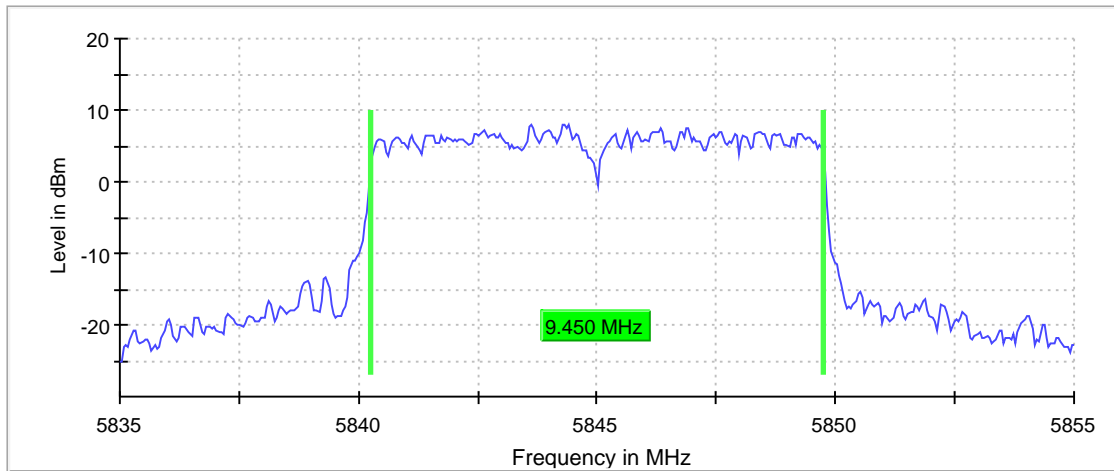

Bandwidth



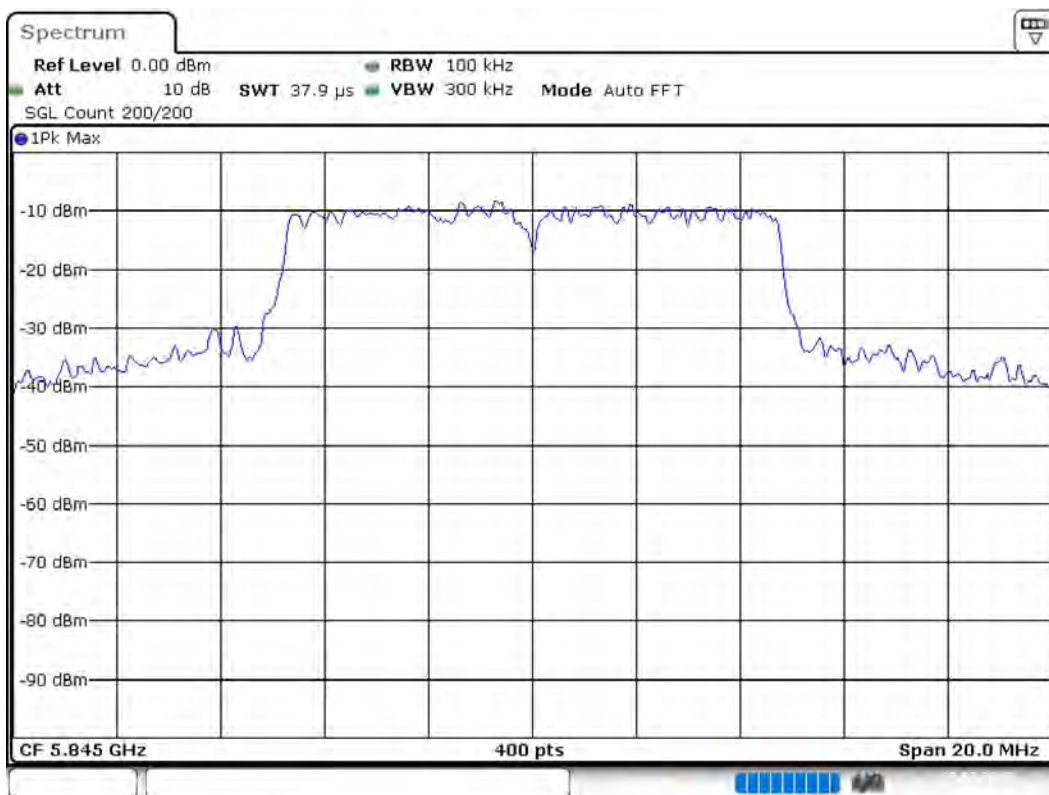

Date: 27.JUL.2019 20:52:08

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.83500 GHz	5.83500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	20.000 MHz	20.000 MHz
RBW	100.000 kHz	>= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	37.891 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5735 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5735.000000	43.100000	---	---	5713.850000	5756.950000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5735.000000	10.7	PASS

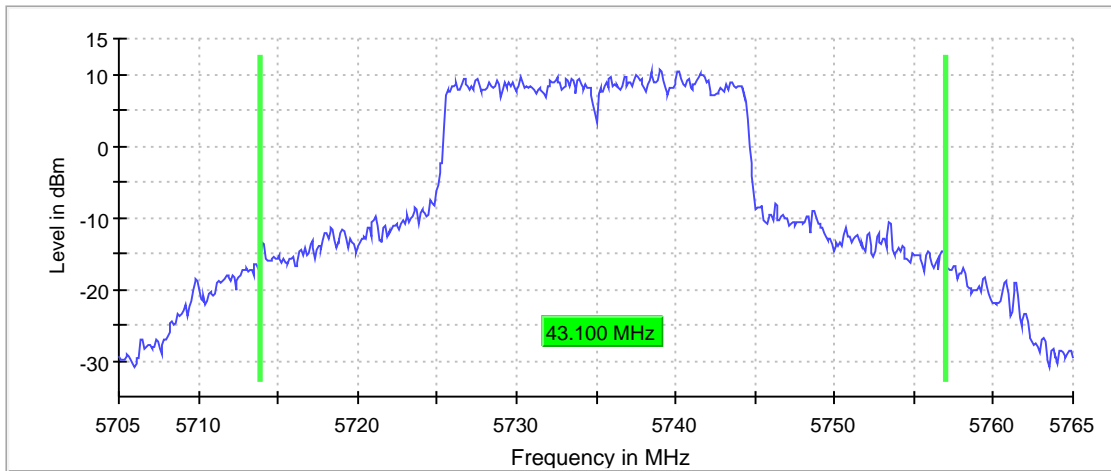

Bandwidth

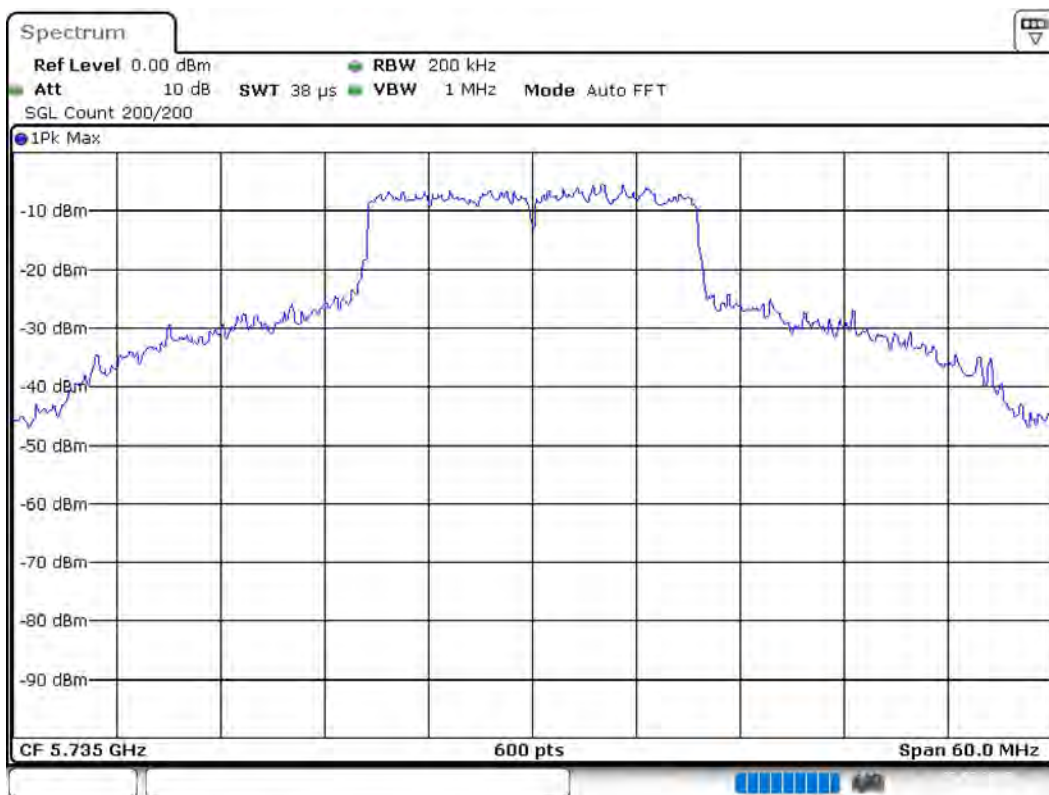

Date: 27.JUL.2019 20:52:46

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70500 GHz	5.70500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
SweepTime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5735 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5735.000000	19.050000	0.500000	---	5725.475000	5744.525000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5735.000000	7.2	PASS

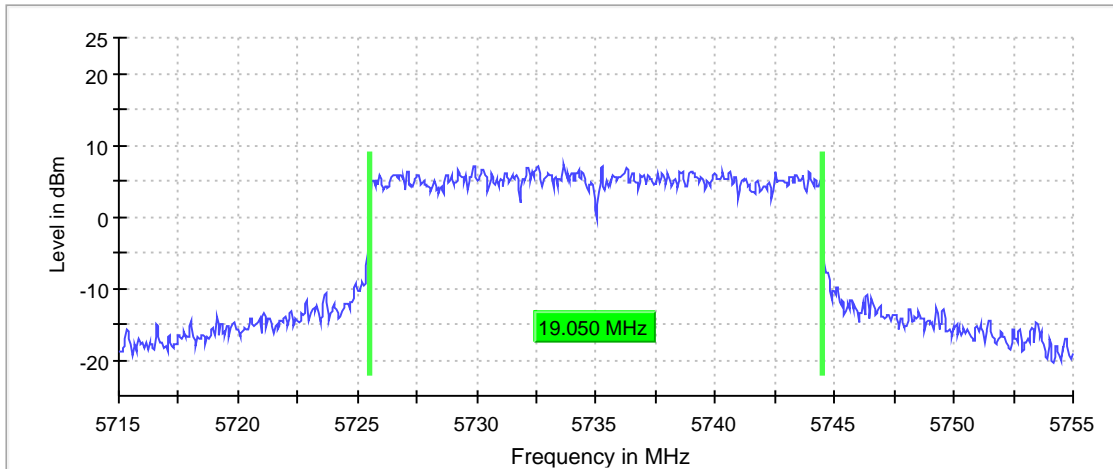

Bandwidth

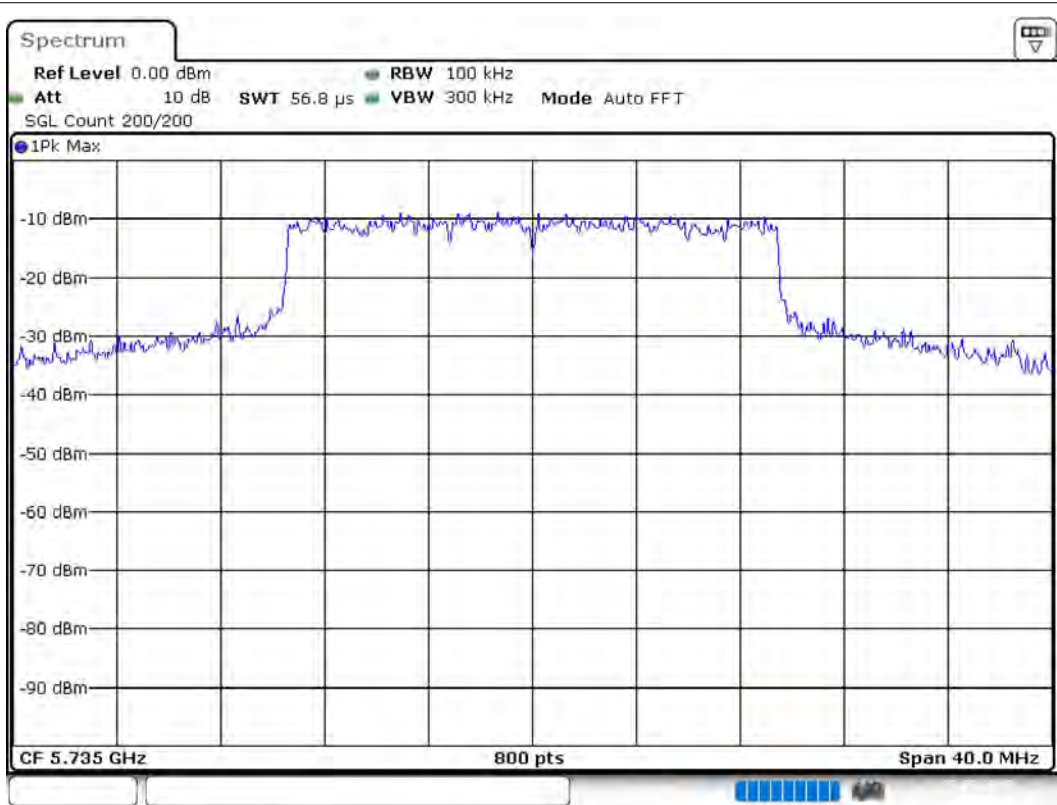

Date: 27.JUL.2019 20:52:55

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5735 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5735.000000	19.600000	---	---	5725.150000	5744.750000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5735.000000	PASS

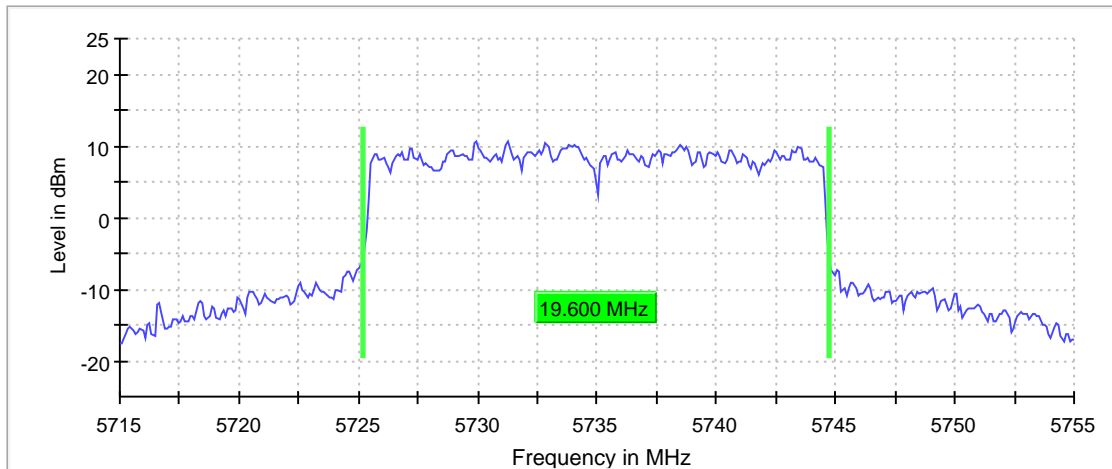

Bandwidth

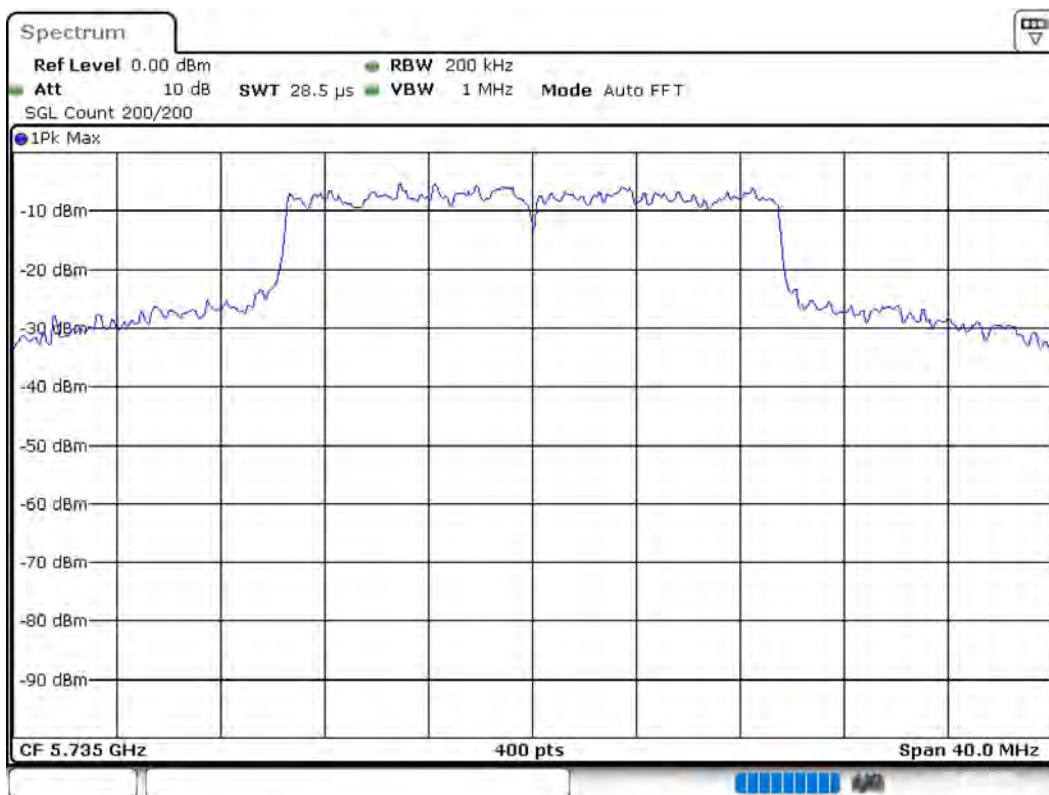

Date: 27.JUL.2019 20:53:02

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.75500 GHz	5.75500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5790 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	41.100000	---	---	5769.950000	5811.050000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	10.3	PASS

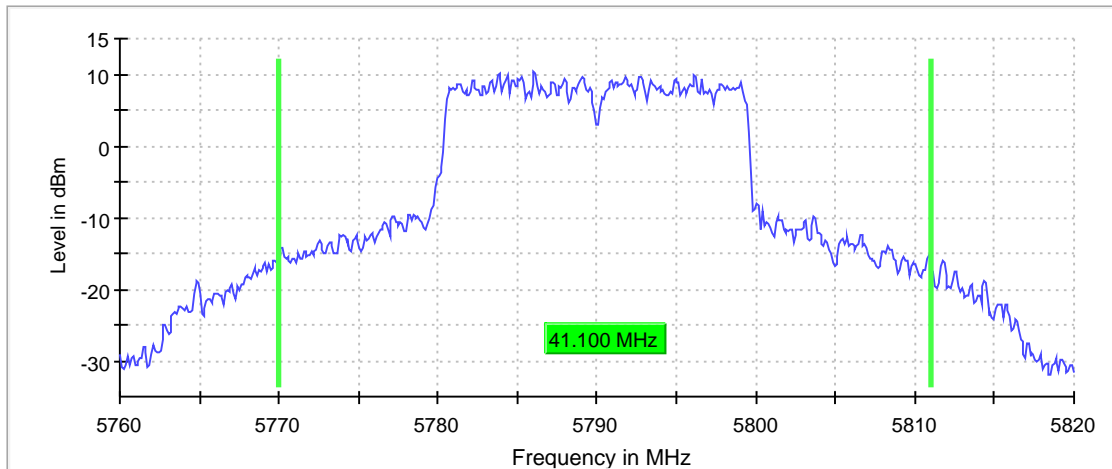

Bandwidth



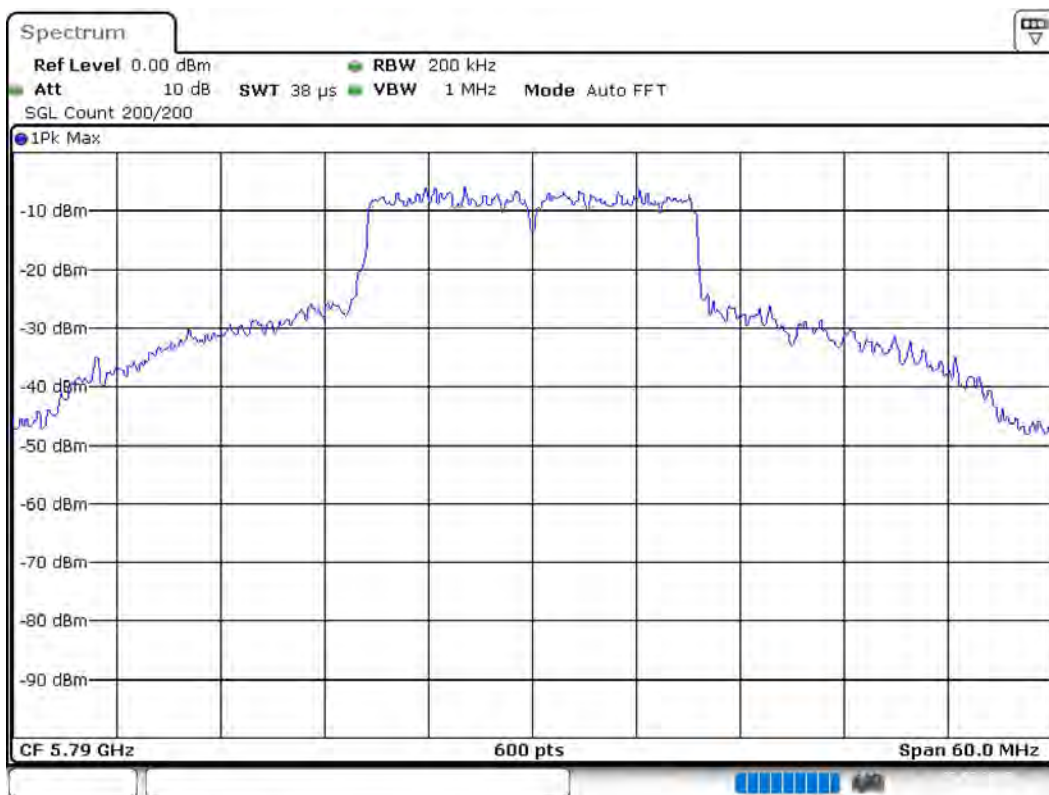

Date: 27.JUL.2019 20:53:41

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76000 GHz	5.76000 GHz
Stop Frequency	5.82000 GHz	5.82000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5790 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	19.050000	0.500000	---	5780.475000	5799.525000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	6.9	PASS

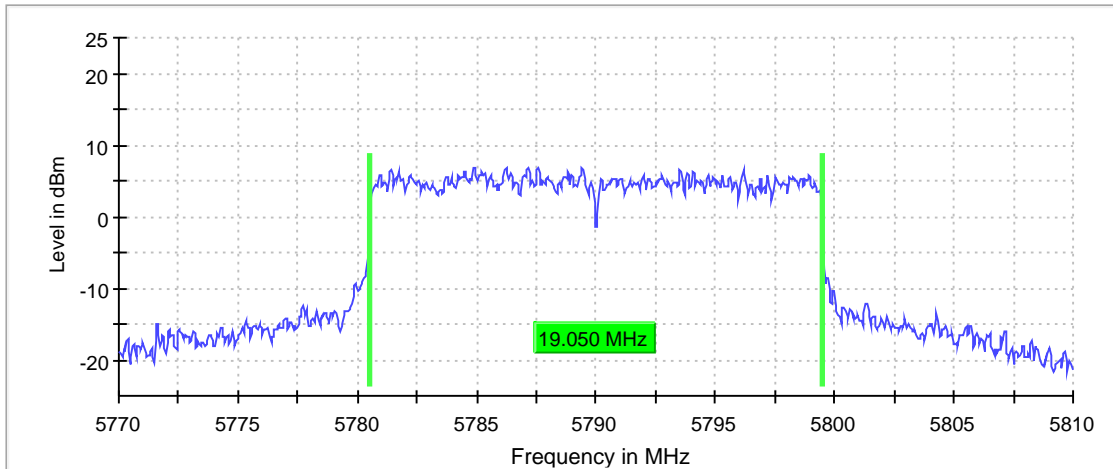

Bandwidth

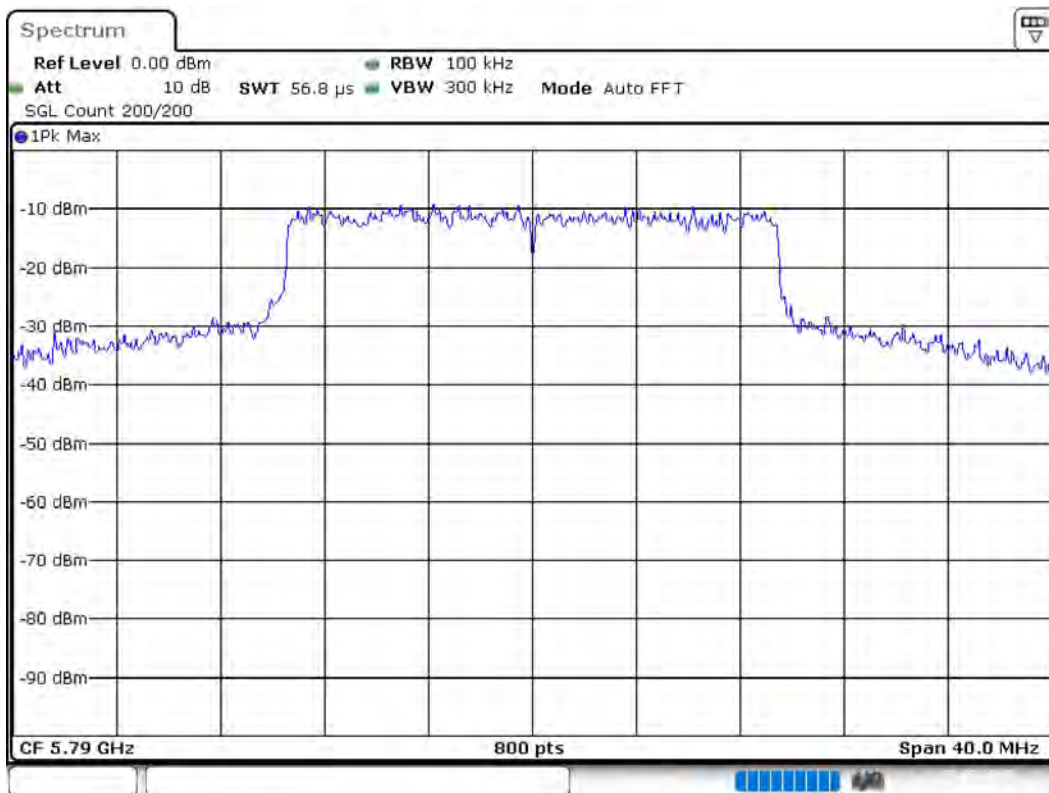

Date: 27.JUL.2019 20:53:49

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77000 GHz	5.77000 GHz
Stop Frequency	5.81000 GHz	5.81000 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5790 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	19.500000	---	---	5780.150000	5799.650000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5790.000000	PASS

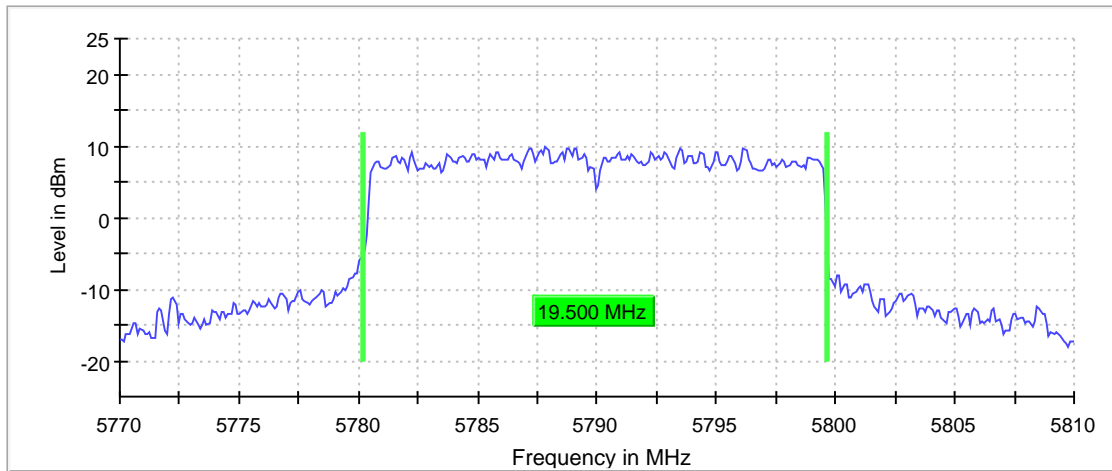

Bandwidth

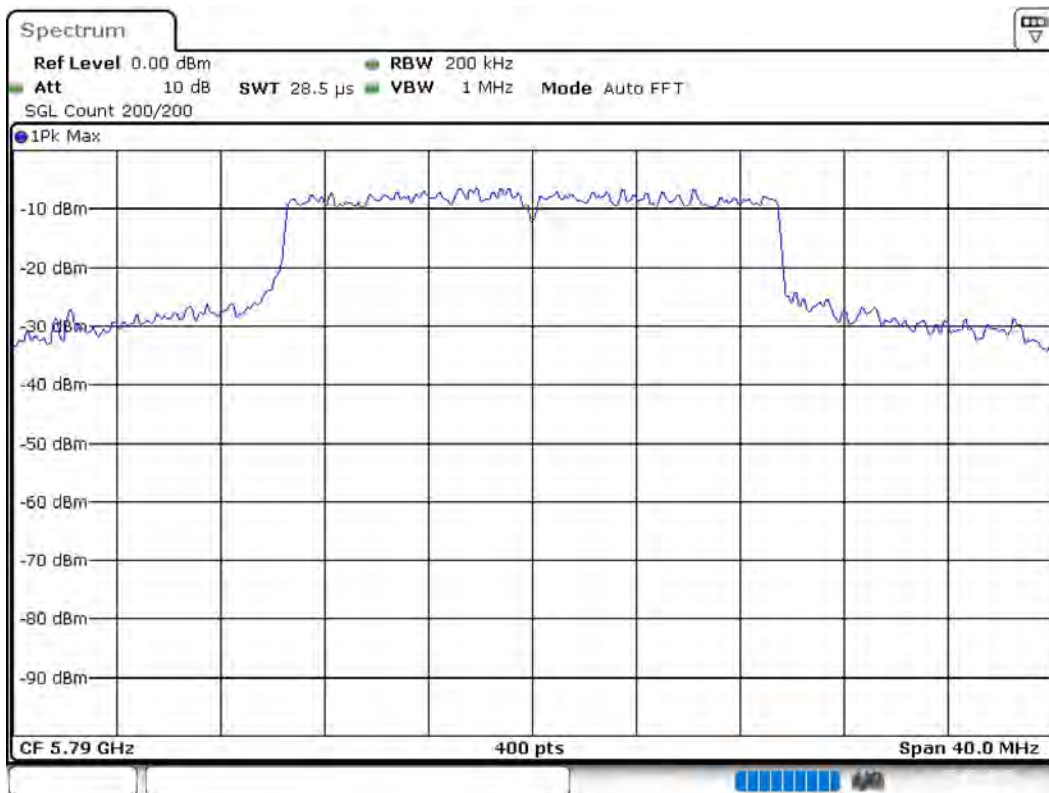

Date: 27.JUL.2019 20:53:56

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77000 GHz	5.77000 GHz
Stop Frequency	5.81000 GHz	5.81000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
SweepTime	28.477 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5840 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5840.000000	43.400000	---	---	5817.250000	5860.650000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5840.000000	9.1	PASS

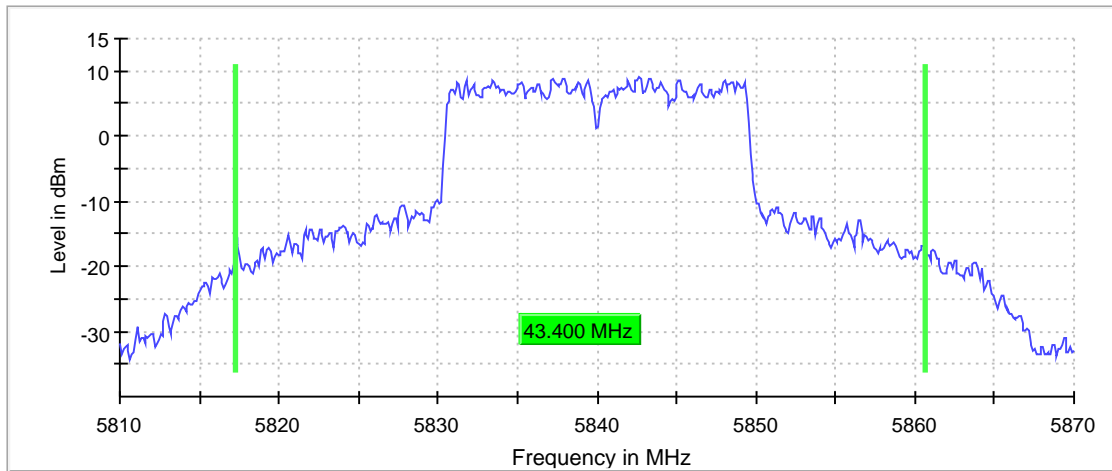

Bandwidth

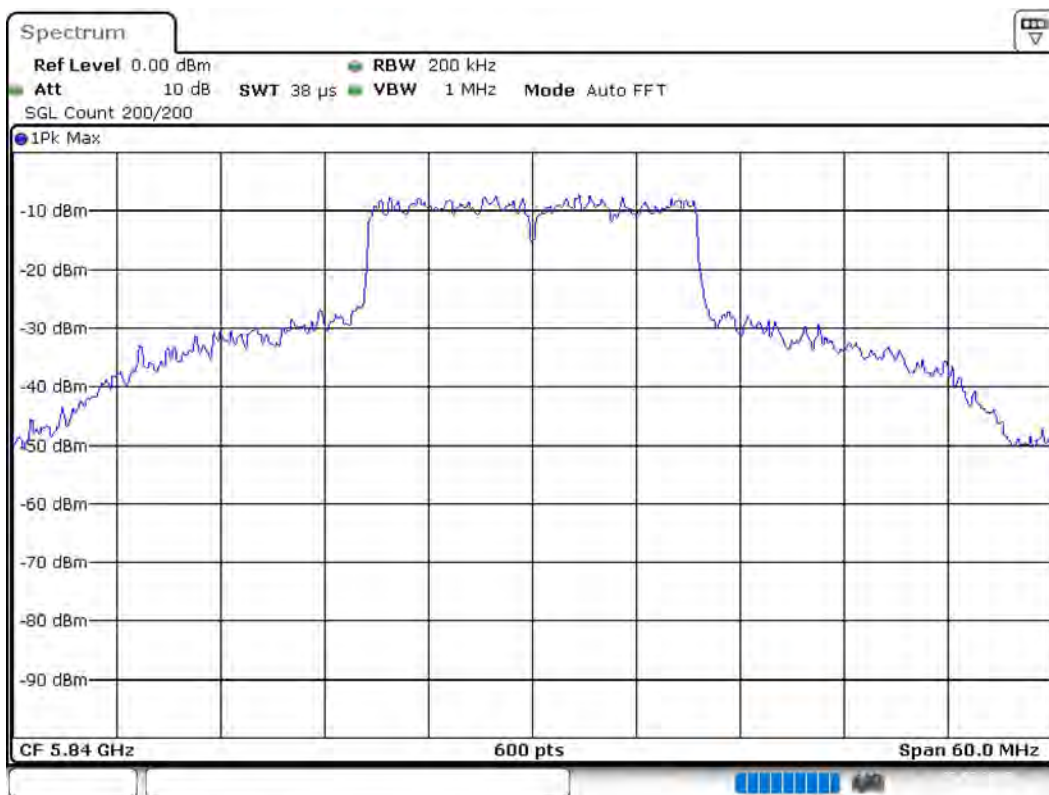

Date: 27.JUL.2019 20:54:36

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.81000 GHz	5.81000 GHz
Stop Frequency	5.87000 GHz	5.87000 GHz
Span	60.000 MHz	60.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	600	~ 600
SweepTime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5840 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5840.000000	19.050000	0.500000	---	5830.475000	5849.525000


(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5840.000000	6.2	PASS

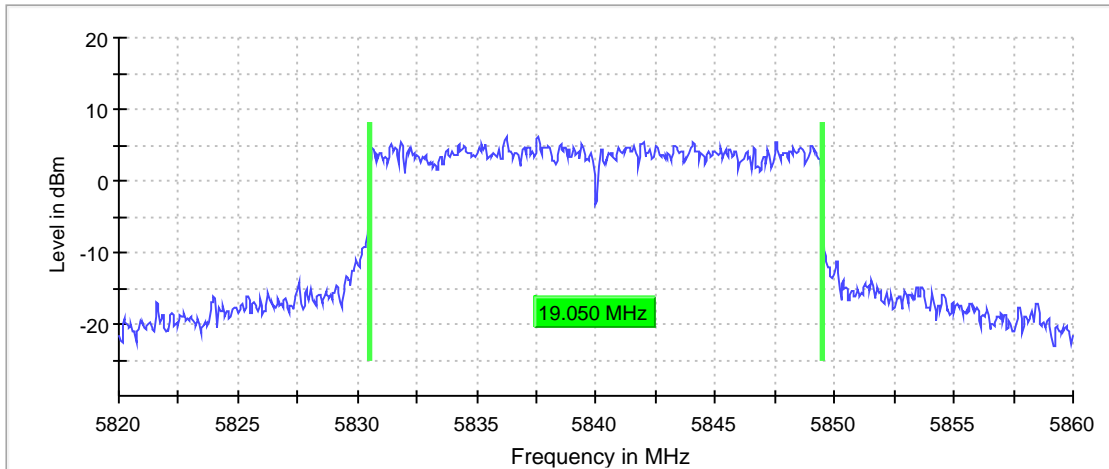

Bandwidth



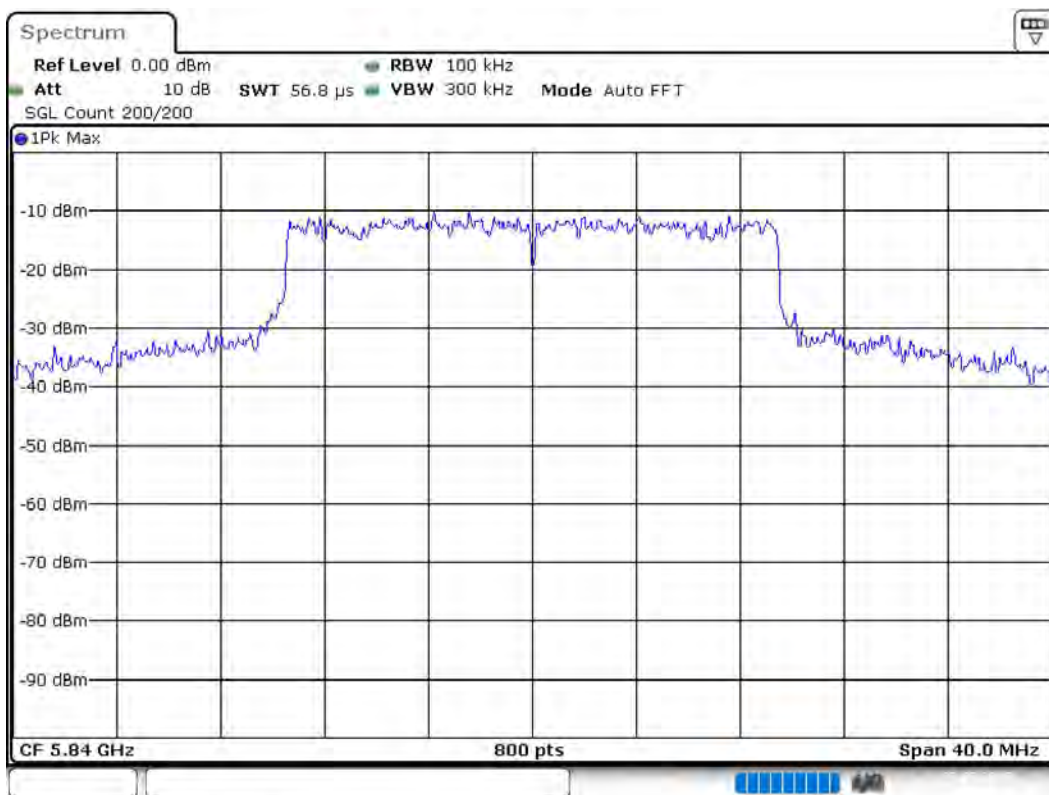

Date: 27.JUL.2019 20:54:44

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.82000 GHz	5.82000 GHz
Stop Frequency	5.86000 GHz	5.86000 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	56.836 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5840 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5840.000000	19.400000	---	---	5830.250000	5849.650000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5840.000000	PASS

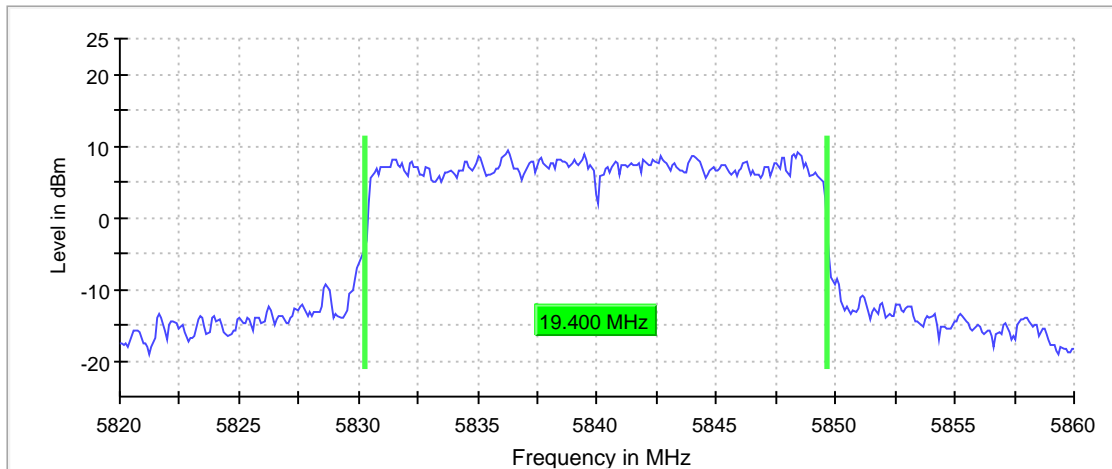

Bandwidth

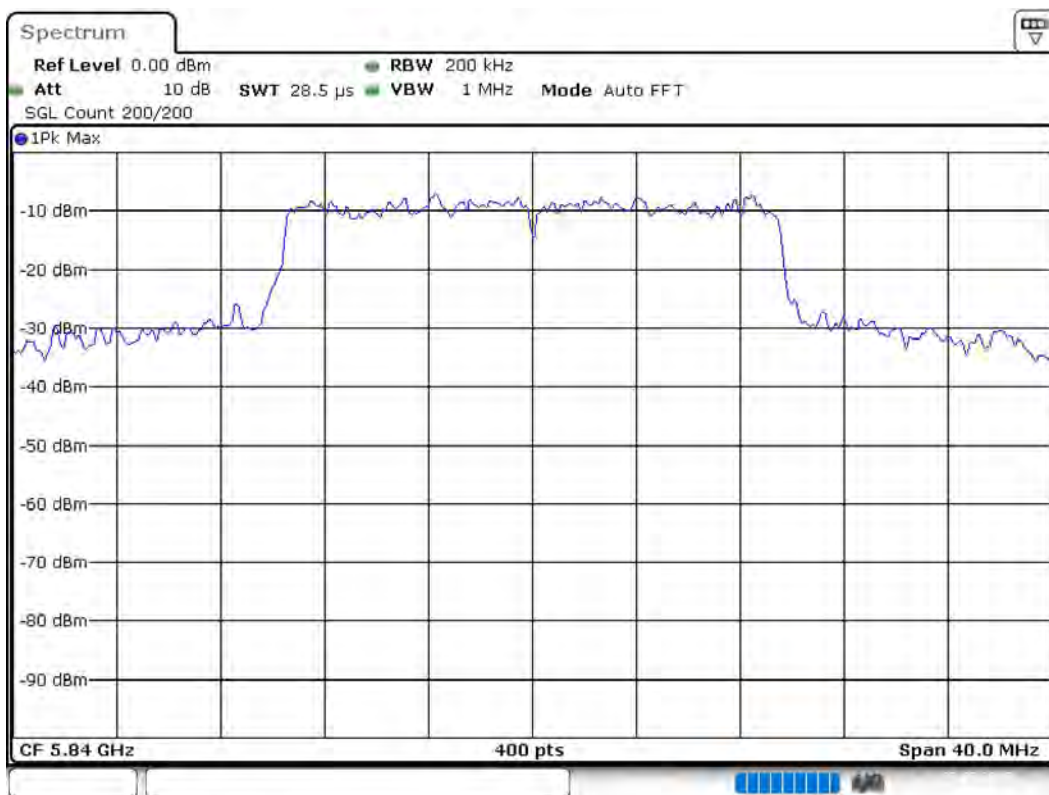

Date: 27.JUL.2019 20:54:51

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.82000 GHz	5.82000 GHz
Stop Frequency	5.86000 GHz	5.86000 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	>= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	400	~ 400
Sweeptime	28.477 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5740 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5740.000000	62.850000	---	---	5710.375000	5773.225000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5740.000000	10.9	PASS

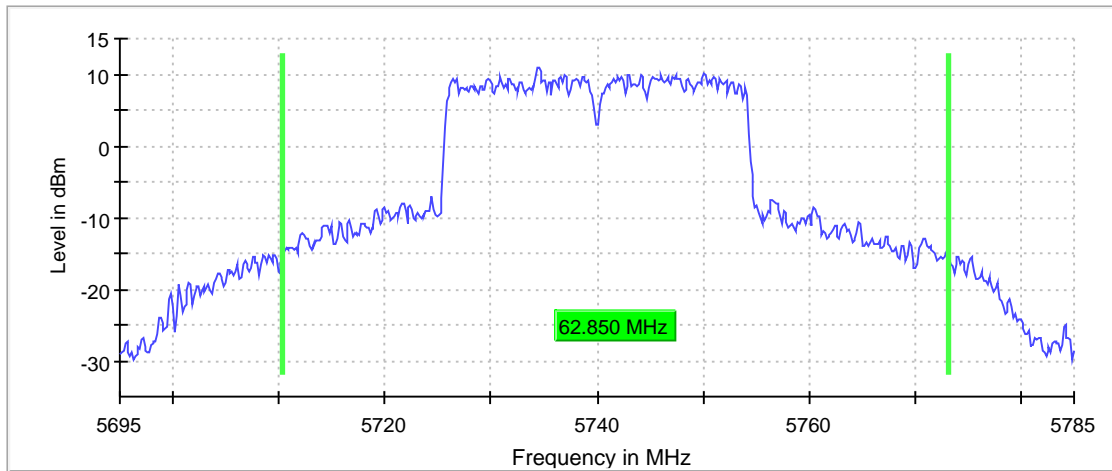

Bandwidth

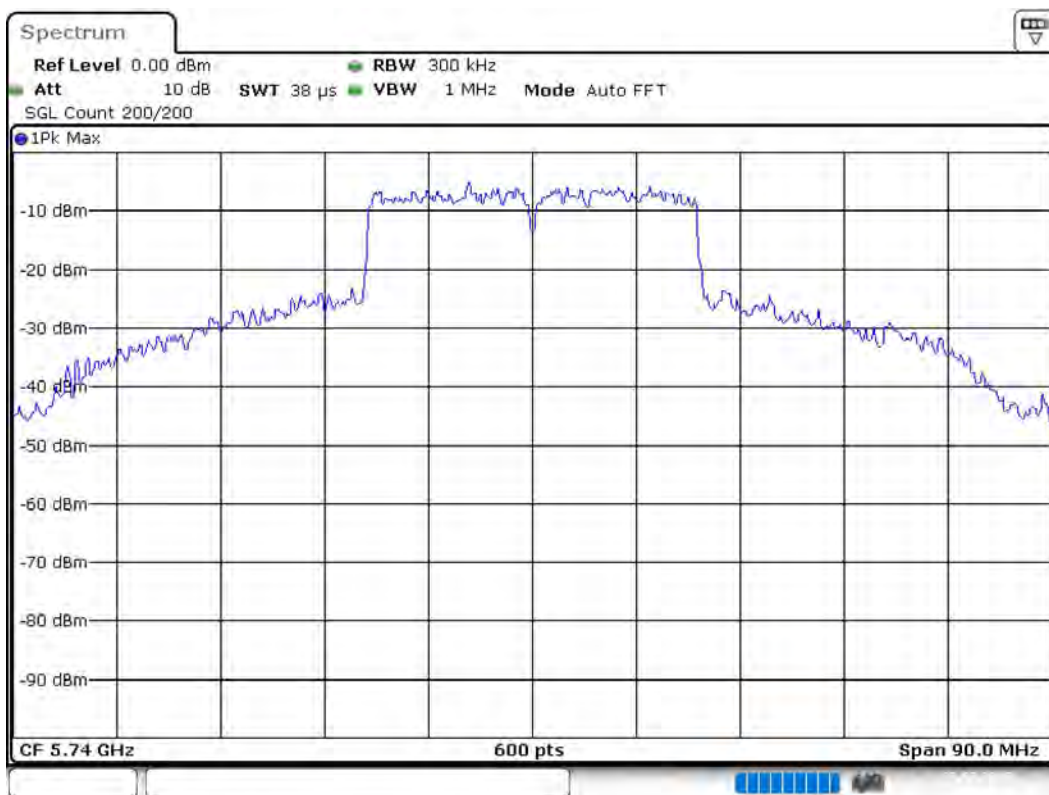

Date: 27.JUL.2019 20:55:37

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.78500 GHz	5.78500 GHz
Span	90.000 MHz	90.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	600	~ 600
SweepTime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5740 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5740.000000	28.450000	0.500000	---	5725.775000	5754.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5740.000000	5.6	PASS

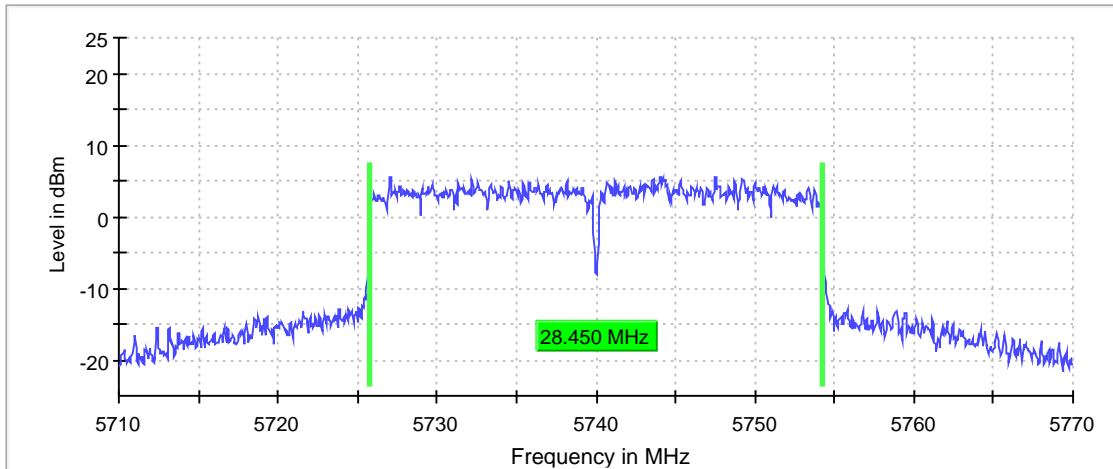

Bandwidth

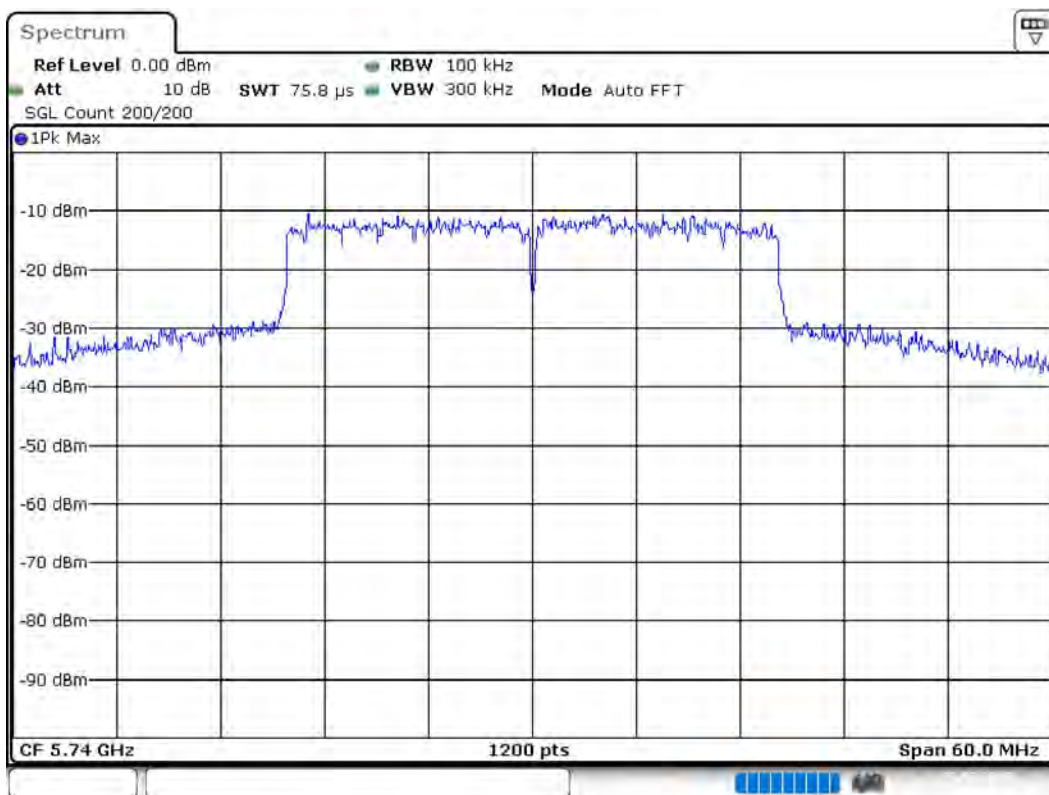

Date: 27.JUL.2019 20:55:46

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71000 GHz	5.71000 GHz
Stop Frequency	5.77000 GHz	5.77000 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1200	~ 1200
Sweeptime	75.781 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5740 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5740.000000	31.800000	---	---	5724.175000	5755.975000


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5740.000000	PASS

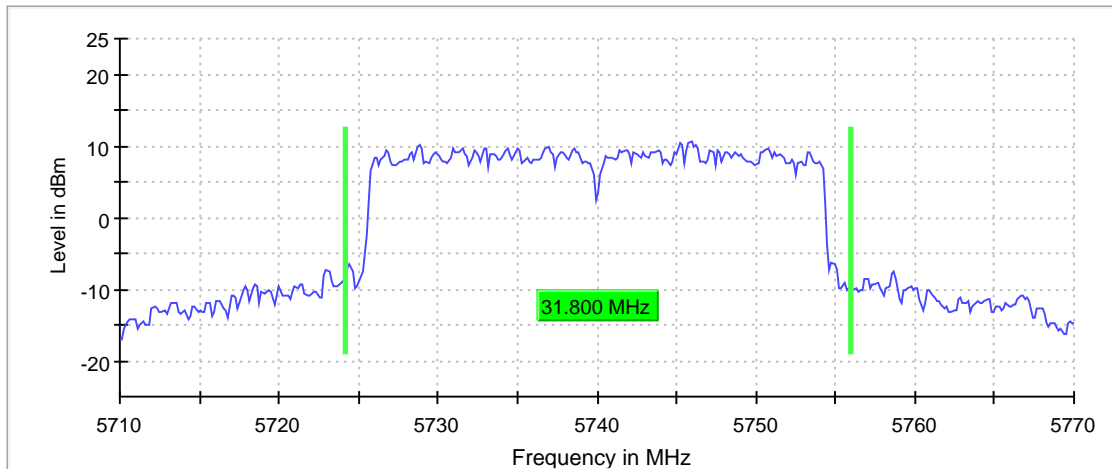

Bandwidth



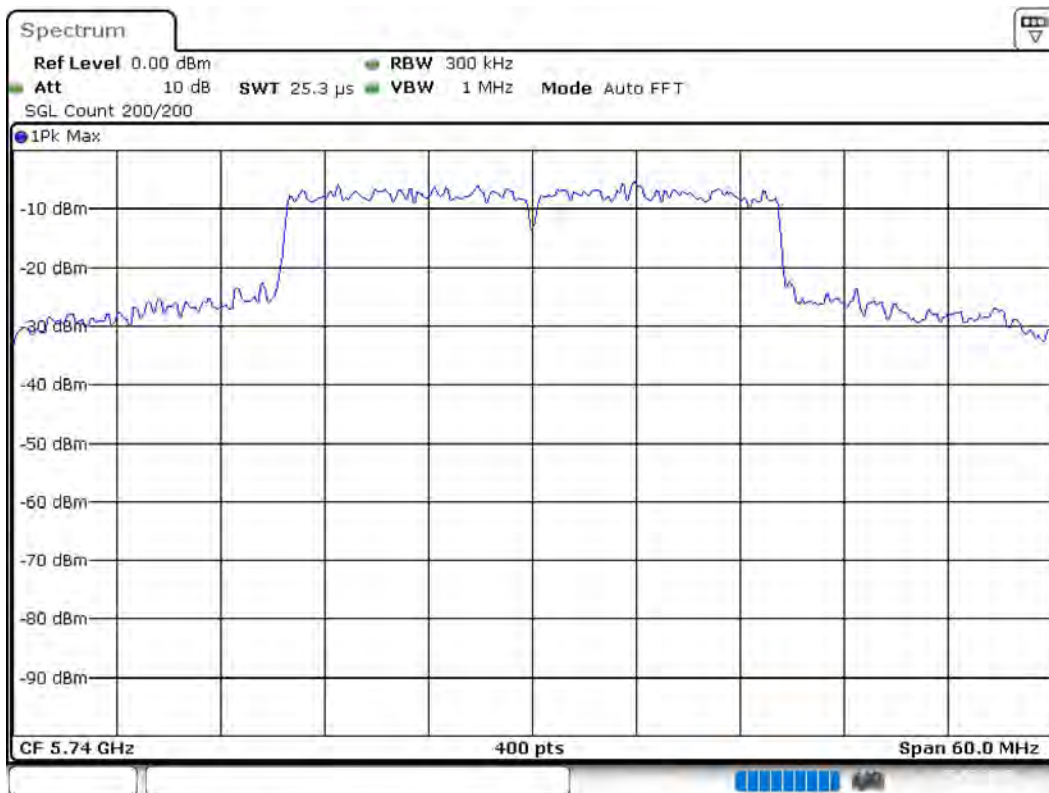

Date: 27.JUL.2019 20:55:55

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71000 GHz	5.71000 GHz
Stop Frequency	5.77000 GHz	5.77000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	>= 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5790 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	62.400000	---	---	5758.875000	5821.275000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	10.7	PASS

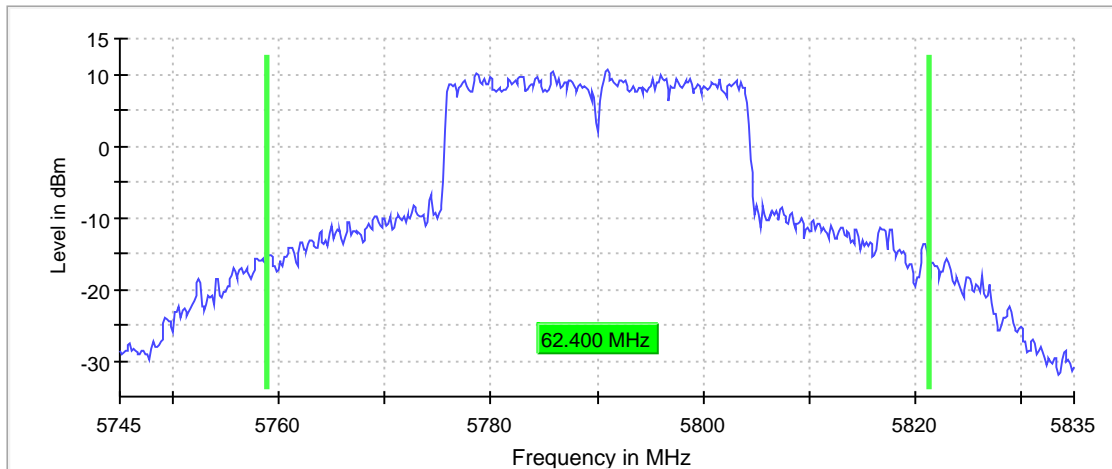

Bandwidth

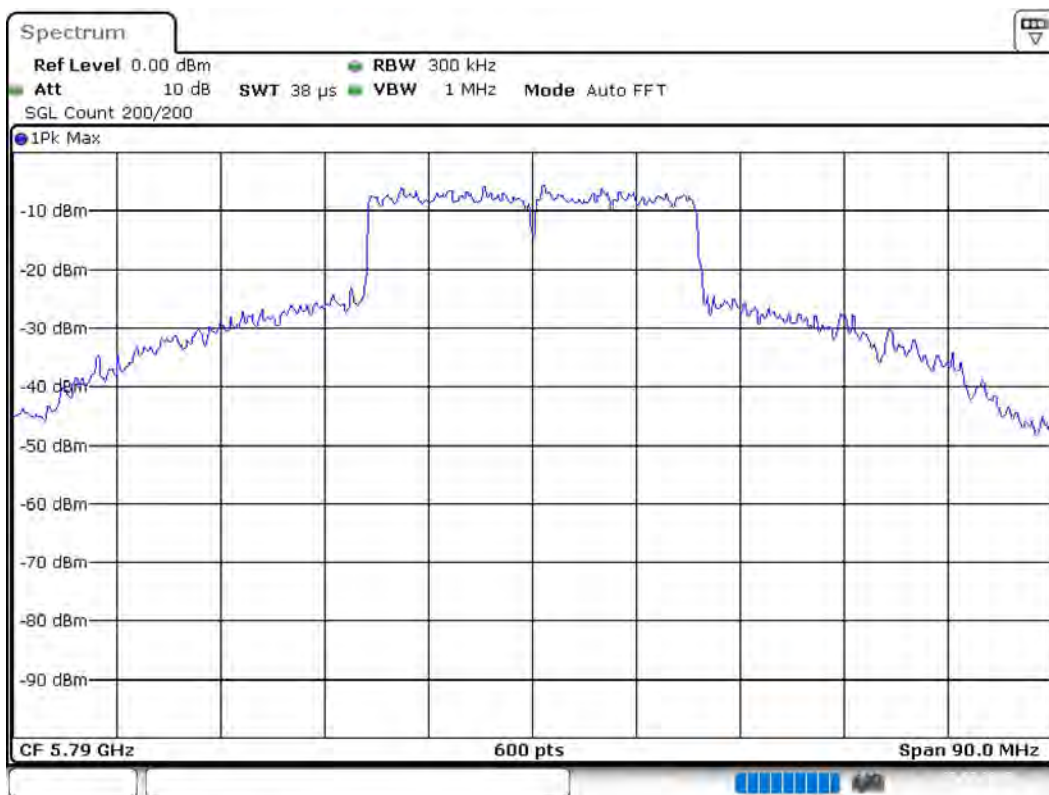

Date: 27.JUL.2019 20:56:43

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.74500 GHz	5.74500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	90.000 MHz	90.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	600	~ 600
SweepTime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5790 MHz; 30MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	28.450000	0.500000	---	5775.775000	5804.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	5.3	PASS

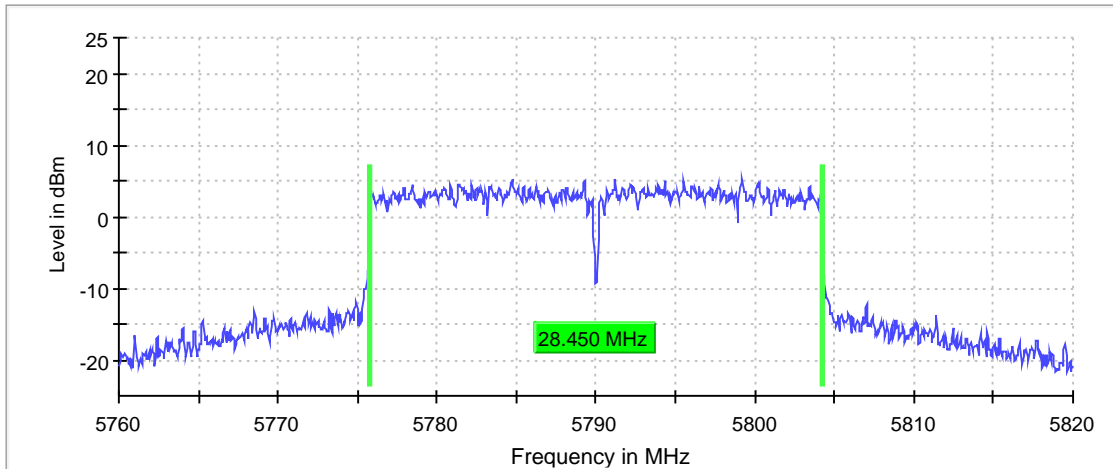

Bandwidth

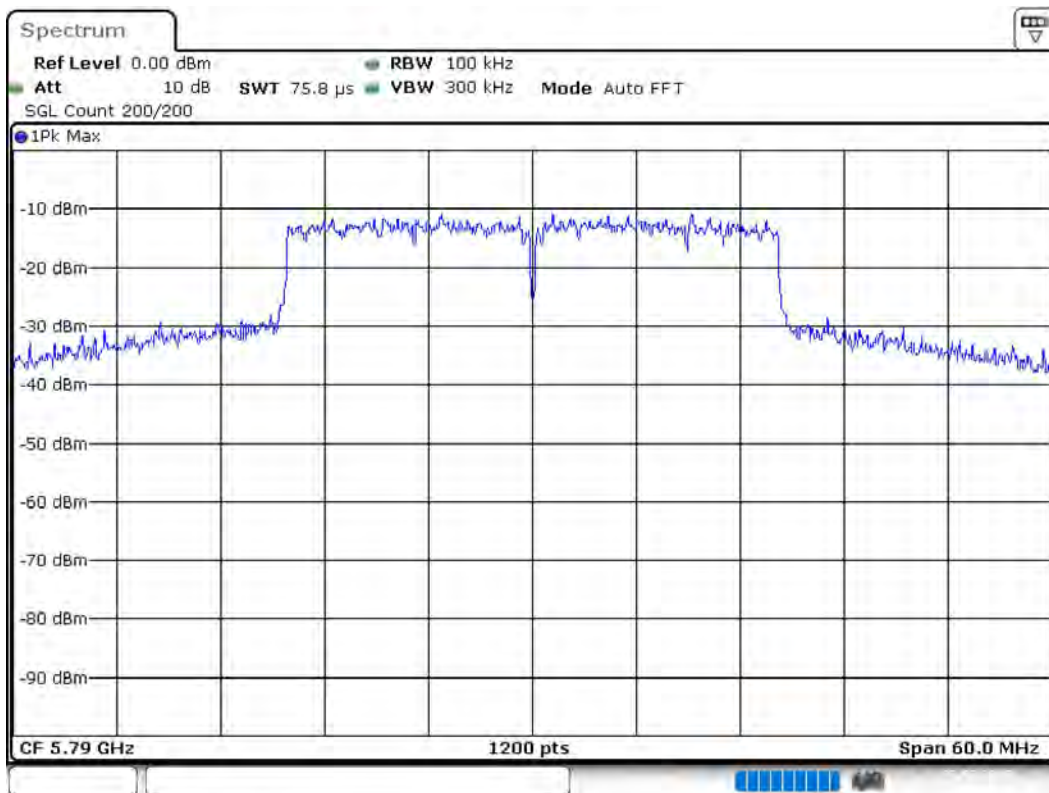

Date: 27.JUL.2019 20:56:51

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76000 GHz	5.76000 GHz
Stop Frequency	5.82000 GHz	5.82000 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1200	~ 1200
Sweeptime	75.781 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5790 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	30.600000	---	---	5774.325000	5804.925000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5790.000000	PASS

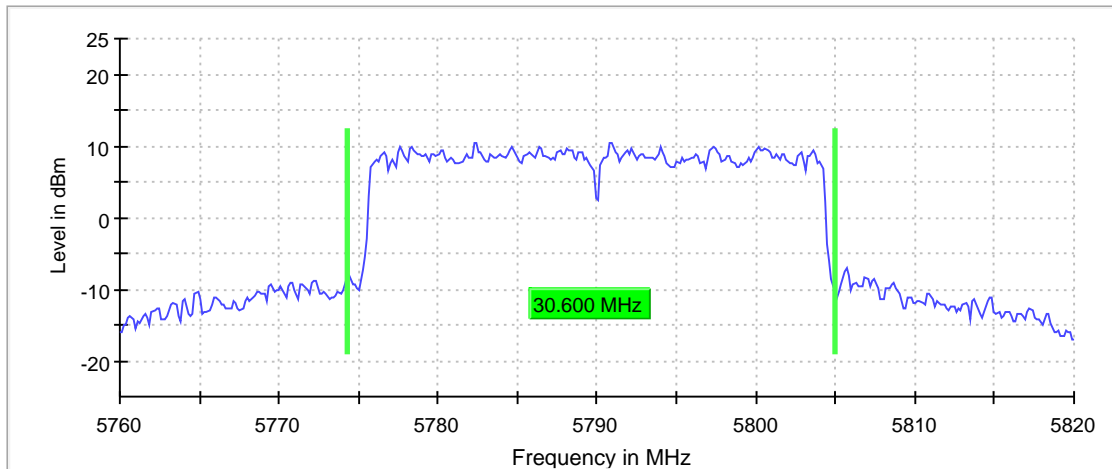

Bandwidth

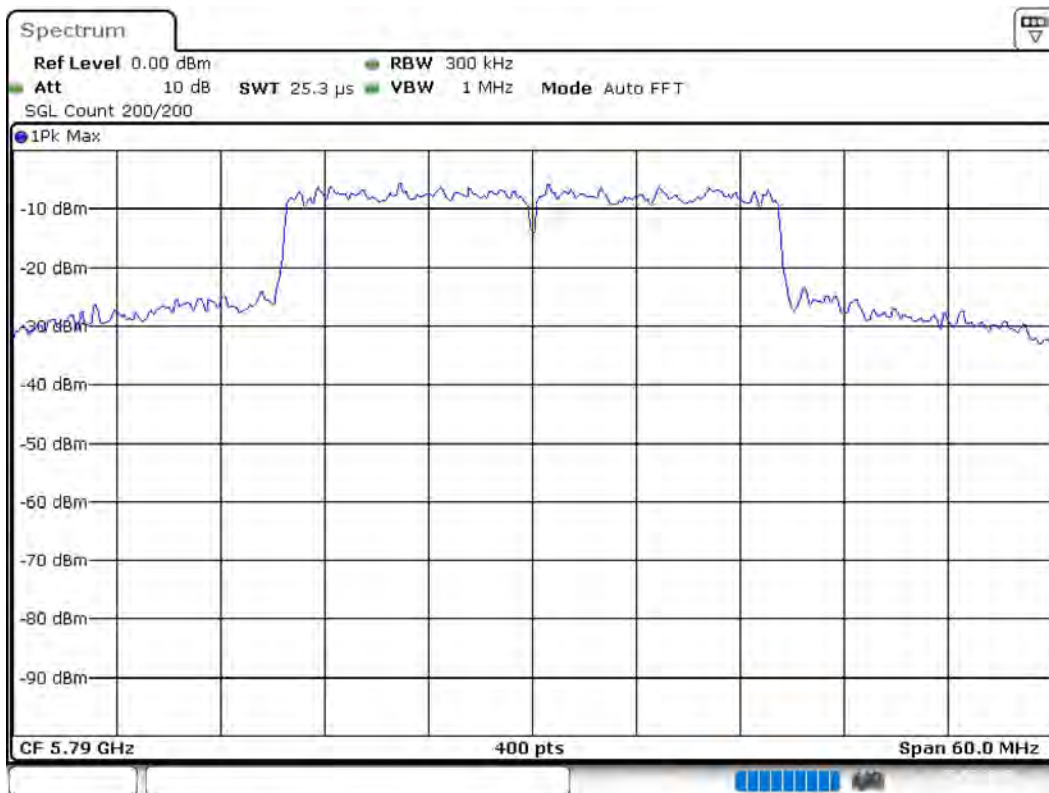

Date: 27.JUL.2019 20:56:59

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76000 GHz	5.76000 GHz
Stop Frequency	5.82000 GHz	5.82000 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	>= 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5835 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5835.000000	66.000000	---	---	5800.725000	5866.725000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5835.000000	10.2	PASS

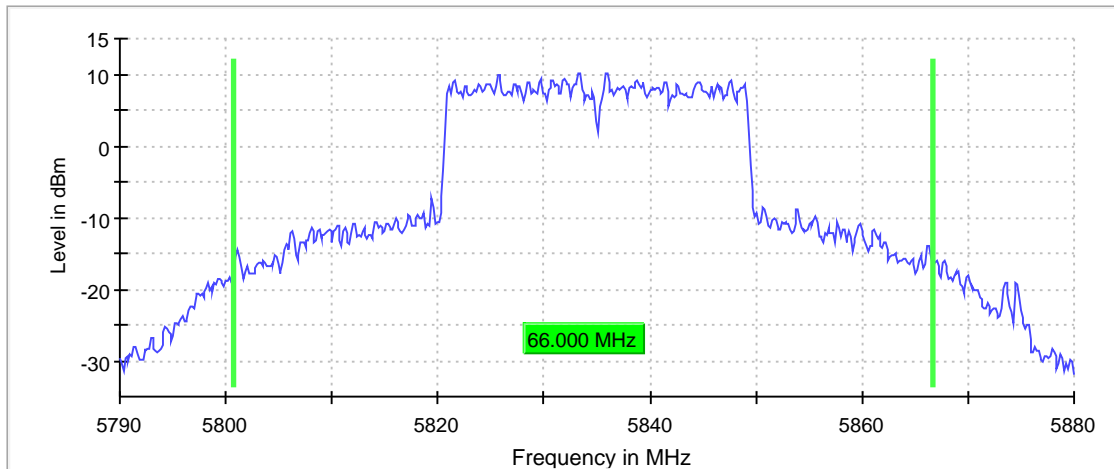

Bandwidth



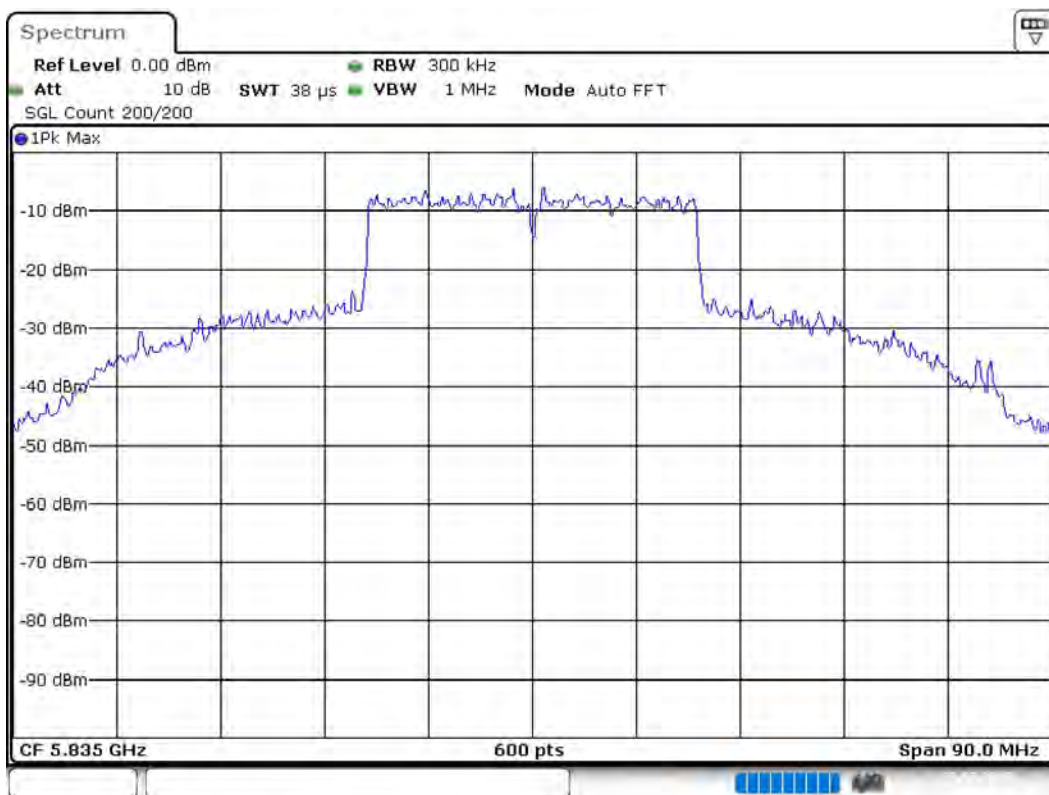

Date: 27.JUL.2019 20:57:41

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.79000 GHz	5.79000 GHz
Stop Frequency	5.88000 GHz	5.88000 GHz
Span	90.000 MHz	90.000 MHz
RBW	300.000 kHz	~ 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	600	~ 600
Sweeptime	37.969 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5835 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5835.000000	28.450000	0.500000	---	5820.775000	5849.225000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5835.000000	5.3	PASS

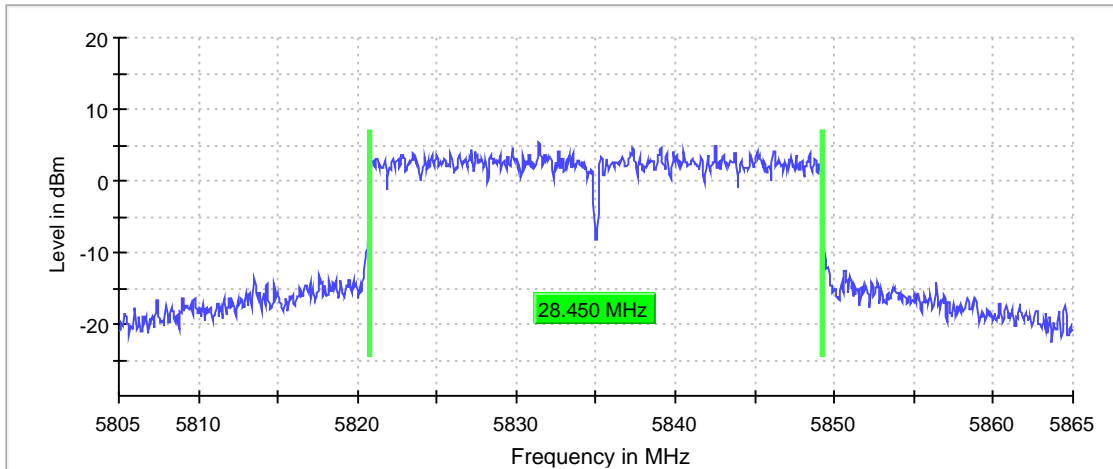

Bandwidth

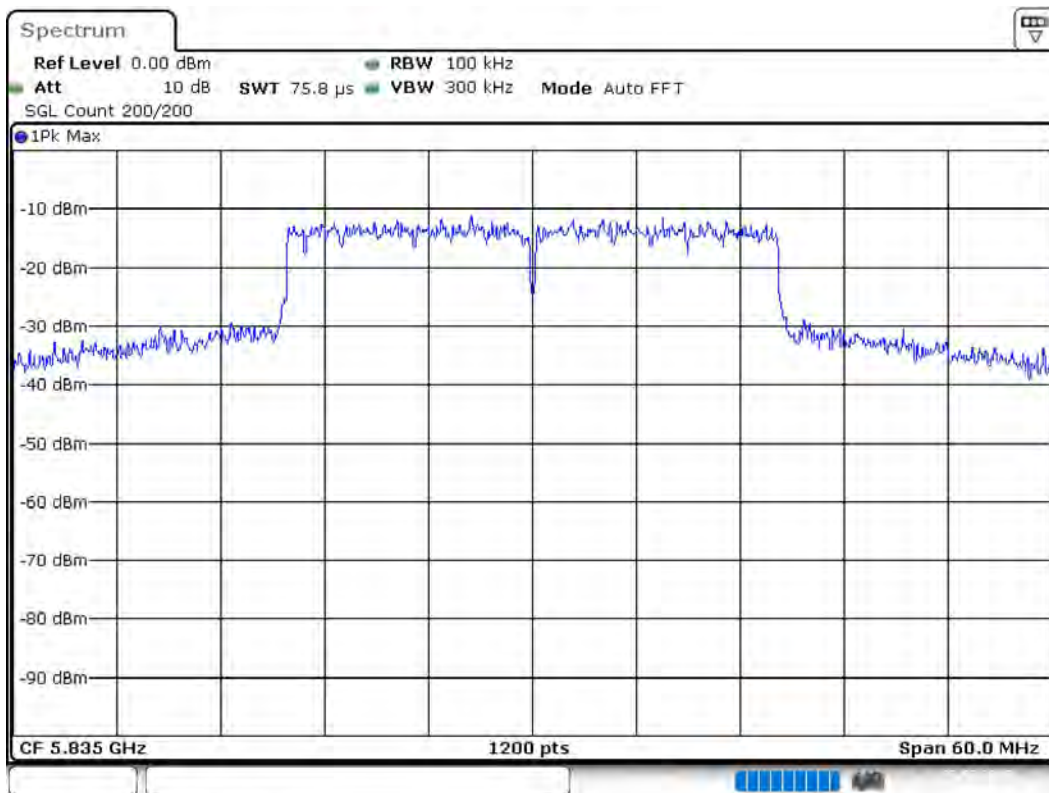

Date: 27.JUL.2019 20:57:59

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.86500 GHz	5.86500 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	75.781 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5835 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5835.000000	32.550000	---	---	5818.425000	5850.975000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5835.000000	PASS

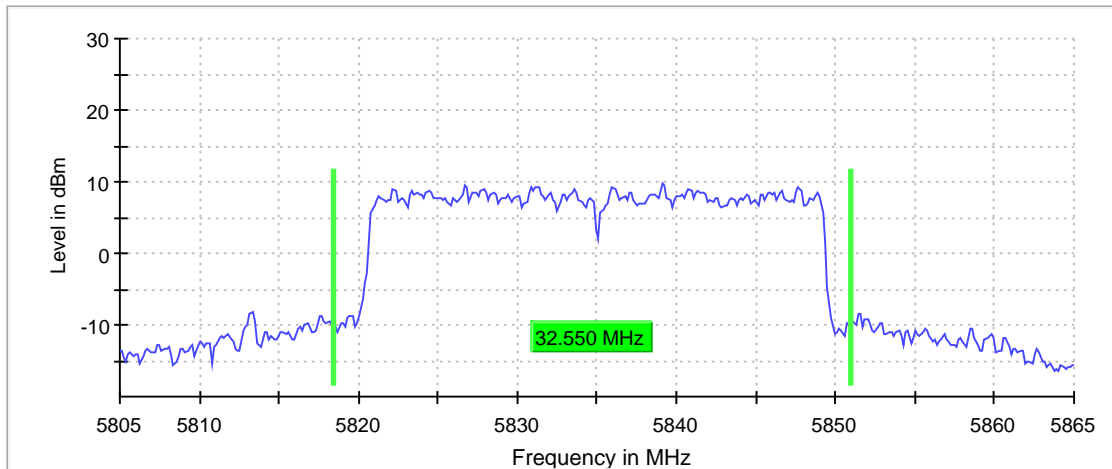

Bandwidth

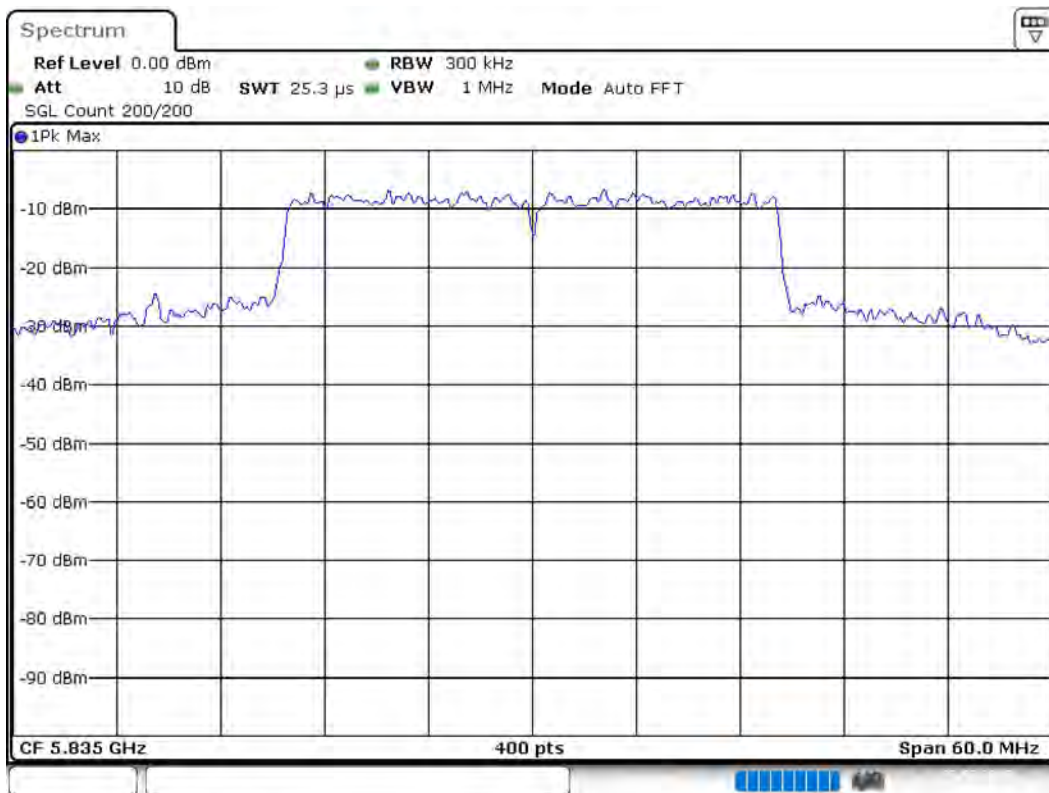

Date: 27.JUL.2019 20:57:58

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.86500 GHz	5.86500 GHz
Span	60.000 MHz	60.000 MHz
RBW	300.000 kHz	>= 300.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	400	~ 400
Sweeptime	25.313 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5745 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	83.850000	---	---	5702.925000	5786.775000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	9.3	PASS

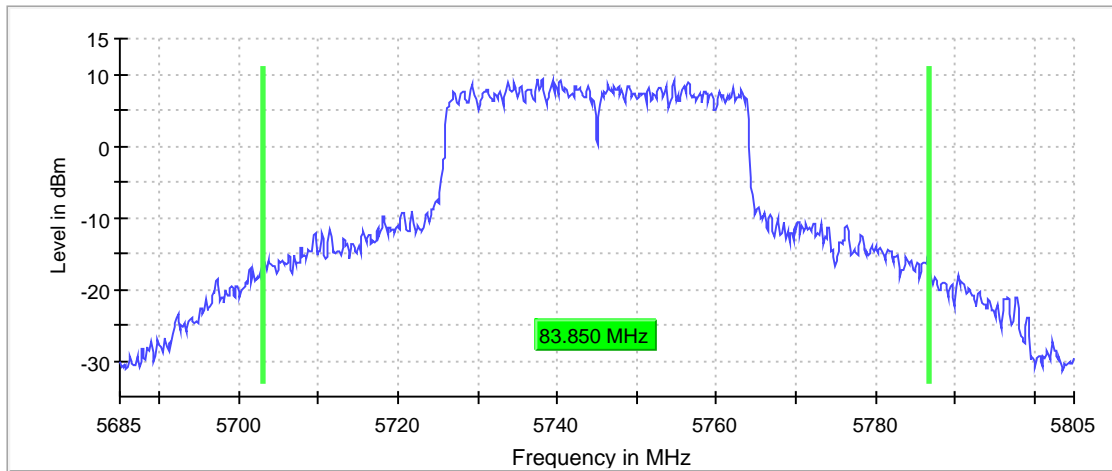

Bandwidth



Date: 27.JUL.2019 20:58:44

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.68500 GHz	5.68500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
SweepTime	50.625 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5745 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	37.900000	0.500000	---	5726.075000	5763.975000


(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5745.000000	5.3	PASS

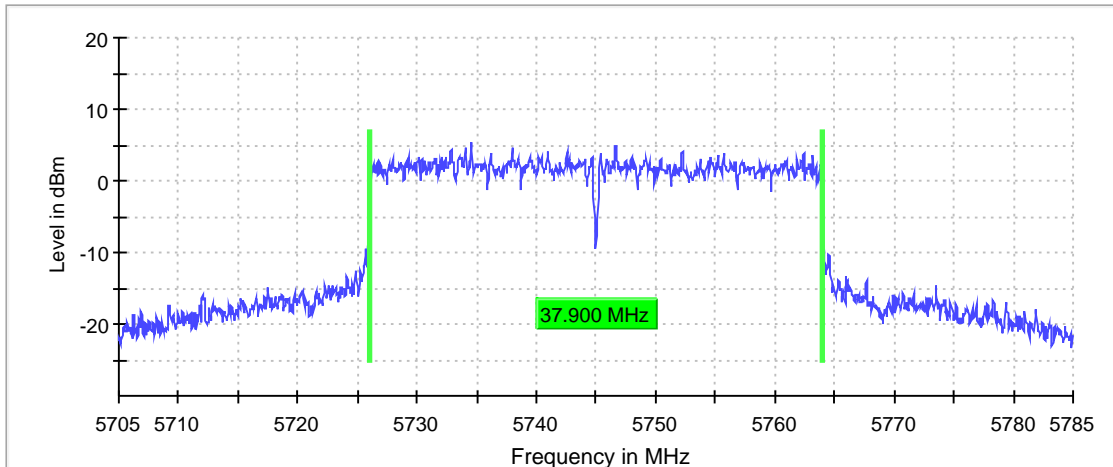

Bandwidth



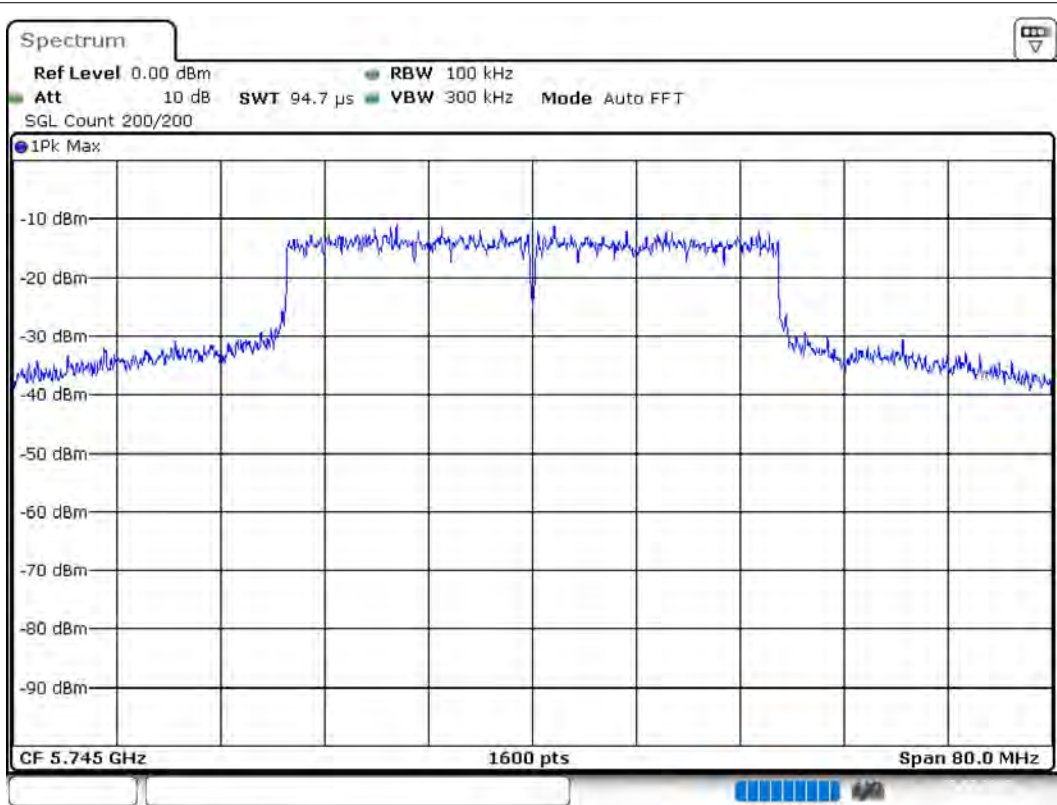

Date: 27 JUL 2019 20:58:53

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70500 GHz	5.70500 GHz
Stop Frequency	5.78500 GHz	5.78500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	94.727 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5745 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5745.000000	41.500000	---	---	5724.625000	5766.125000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5745.000000	PASS

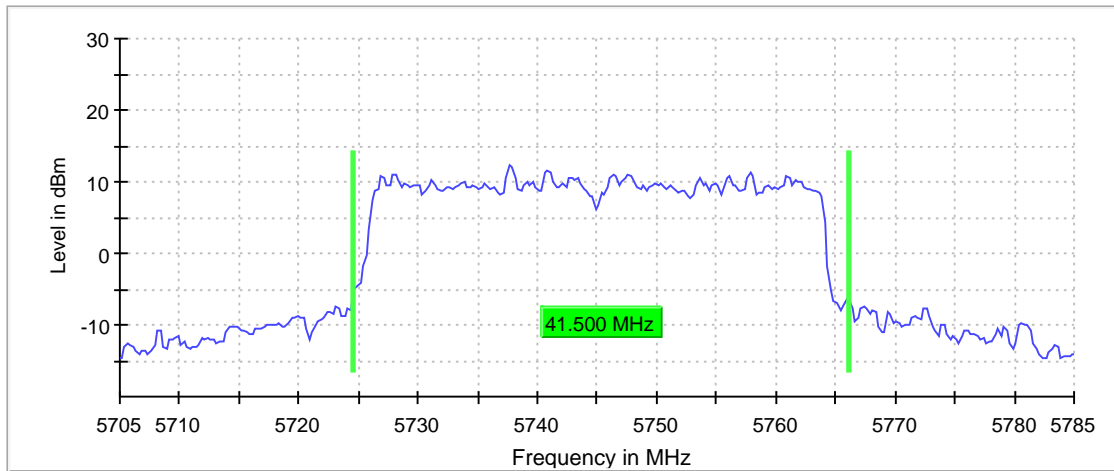

Bandwidth



Date: 27.JUL.2019 20:59:01

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70500 GHz	5.70500 GHz
Stop Frequency	5.78500 GHz	5.78500 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5790 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	86.400000	---	---	5746.125000	5832.525000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	9.1	PASS

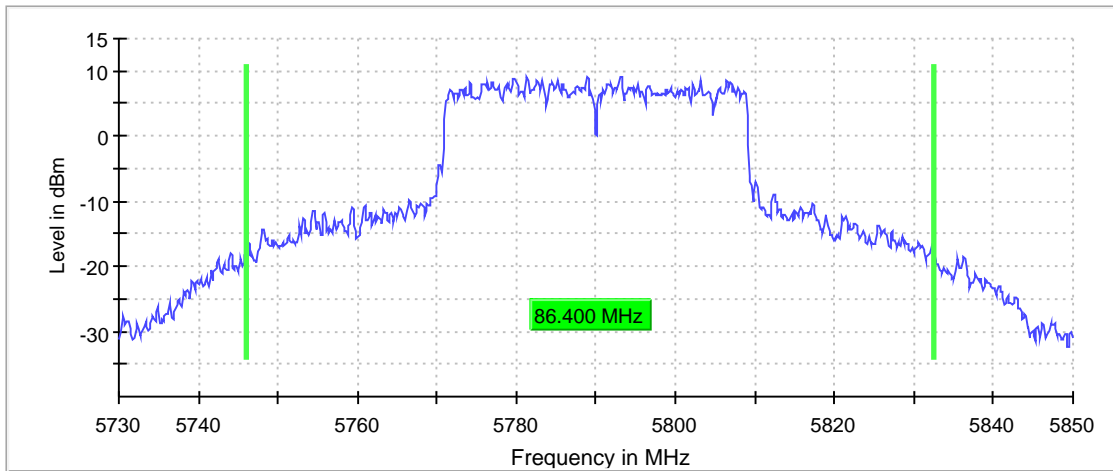

Bandwidth

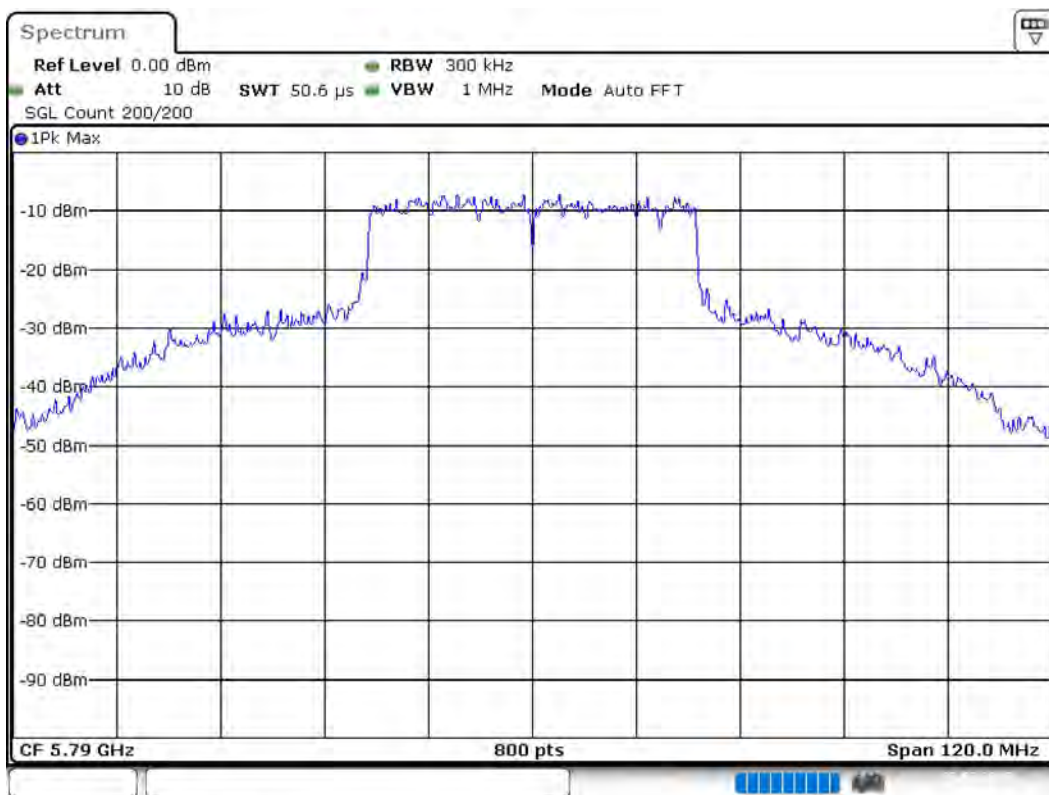

Date: 27.JUL.2019 20:59:46

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.73000 GHz	5.73000 GHz
Stop Frequency	5.85000 GHz	5.85000 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
Sweeptime	50.625 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5790 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	37.900000	0.500000	---	5771.075000	5808.975000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	4.4	PASS

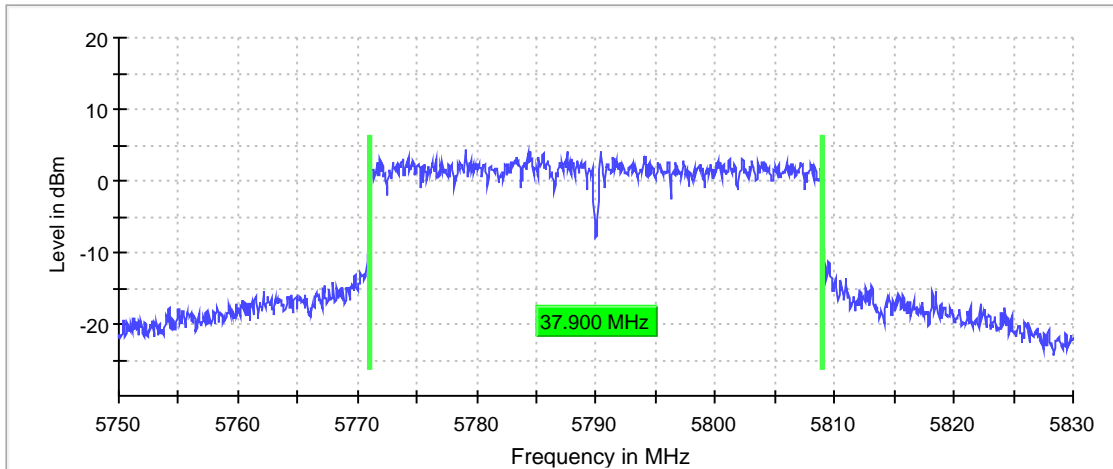

Bandwidth

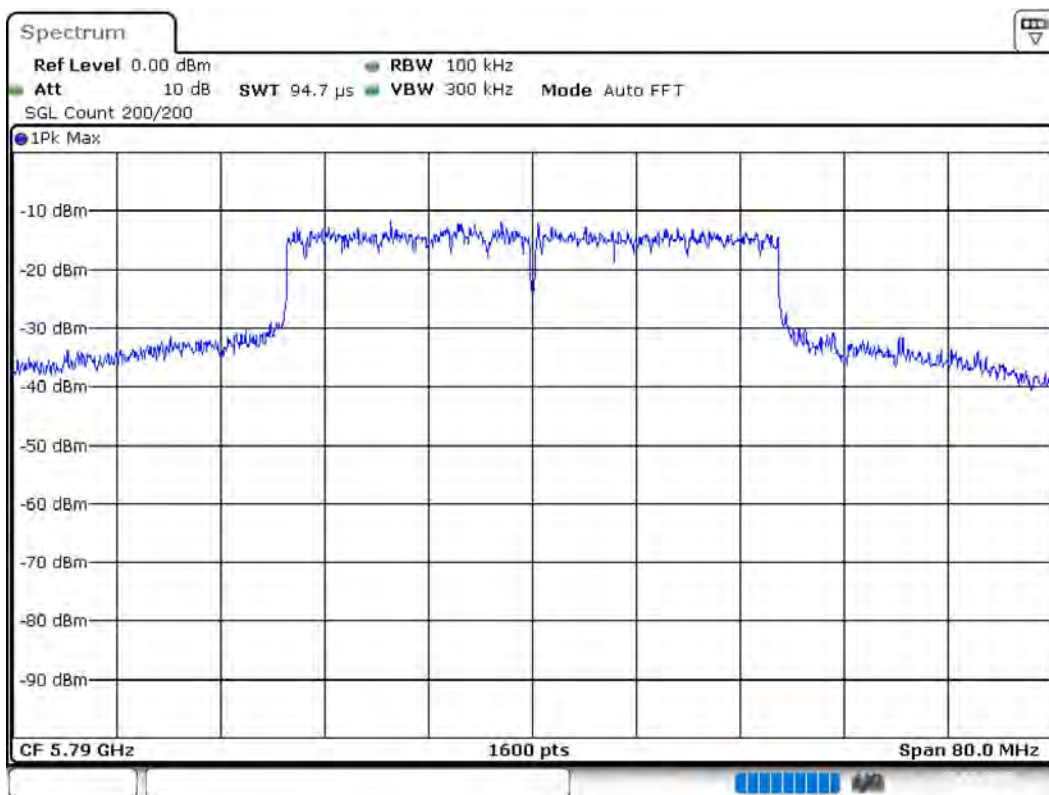

Date: 27.JUL.2019 20:59:56

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75000 GHz	5.75000 GHz
Stop Frequency	5.83000 GHz	5.83000 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	94.727 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5790 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	41.000000	---	---	5769.125000	5810.125000


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5790.000000	PASS

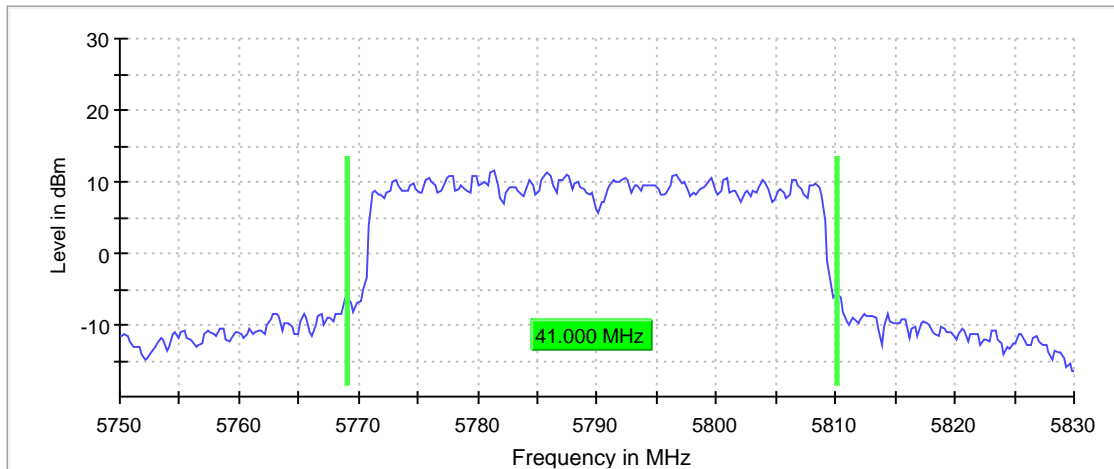

Bandwidth



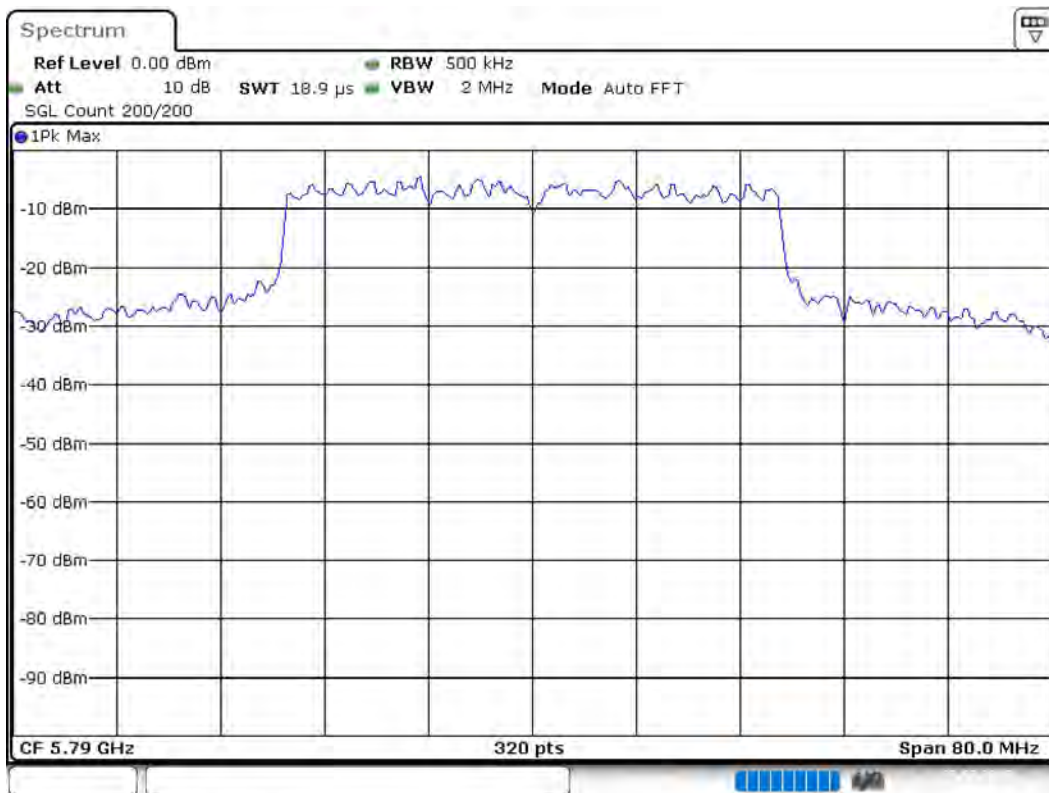

Date: 27.JUL.2019 21:00:04

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75000 GHz	5.75000 GHz
Stop Frequency	5.83000 GHz	5.83000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5830 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5830.000000	87.300000	---	---	5785.825000	5873.125000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5830.000000	8.7	PASS

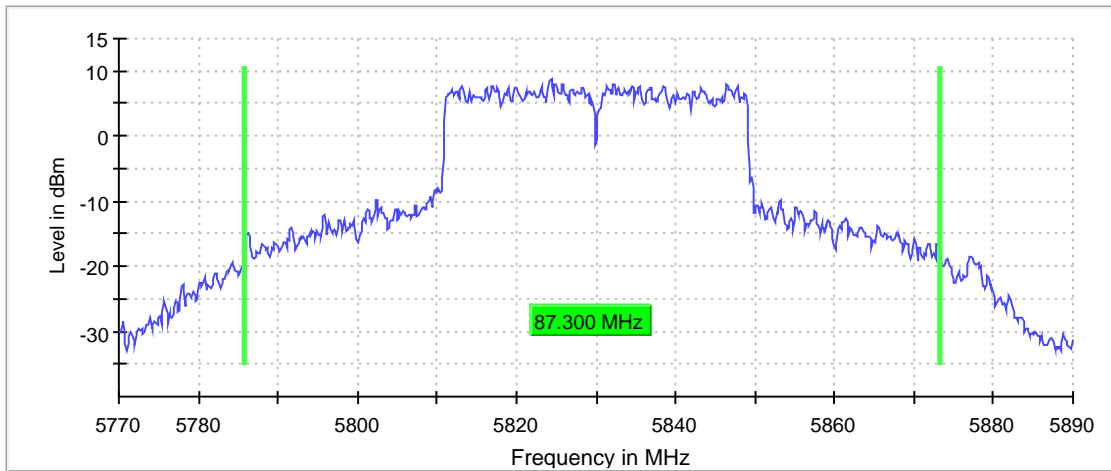

Bandwidth

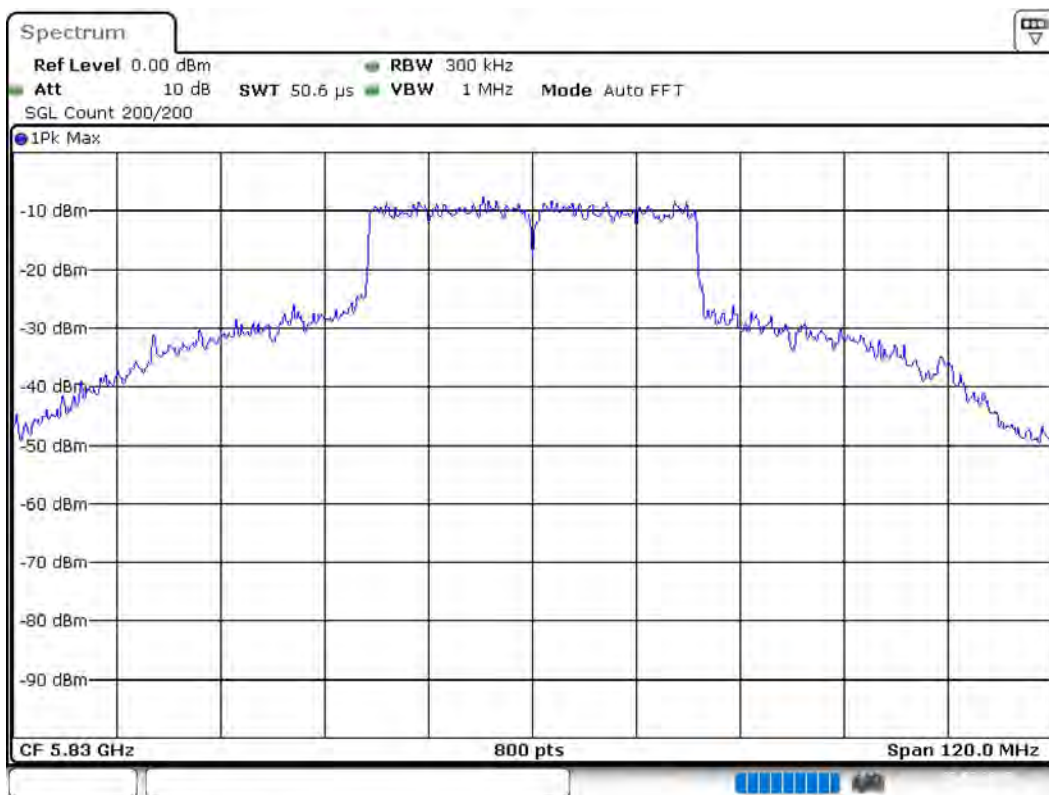

Date: 27.JUL.2019 21:01:07

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77000 GHz	5.77000 GHz
Stop Frequency	5.89000 GHz	5.89000 GHz
Span	120.000 MHz	120.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	800	~ 800
Sweeptime	50.625 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5830 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5830.000000	37.850000	0.500000	---	5811.075000	5848.925000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5830.000000	4.1	PASS

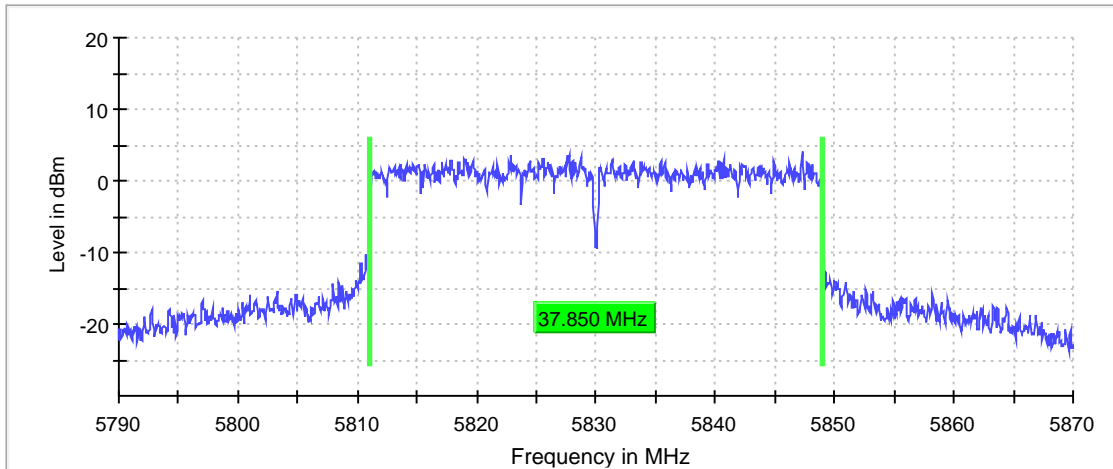

Bandwidth

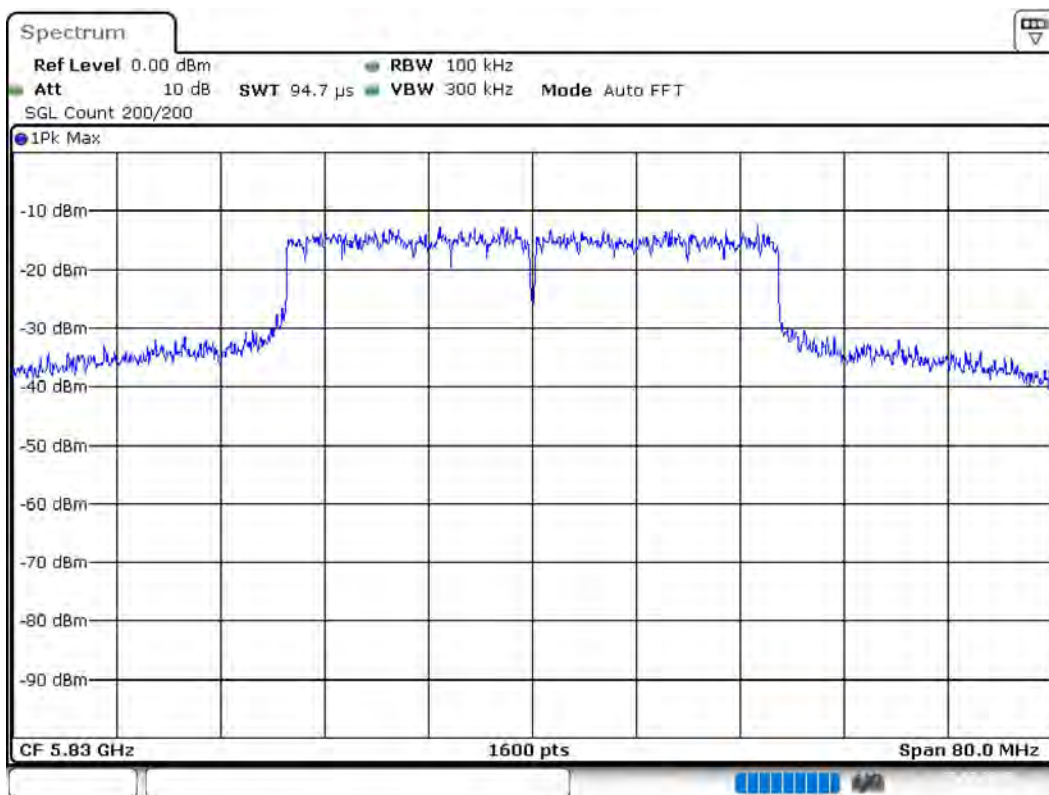

Date: 27.JUL.2019 21:01:16

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.79000 GHz	5.79000 GHz
Stop Frequency	5.87000 GHz	5.87000 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweeptime	94.727 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5830 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5830.000000	41.500000	---	---	5809.125000	5850.625000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5830.000000	PASS

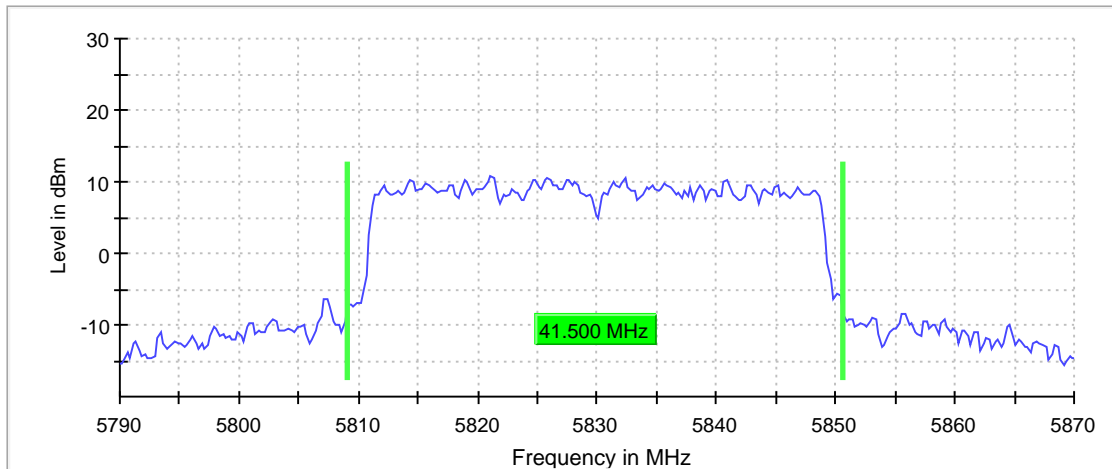

Bandwidth

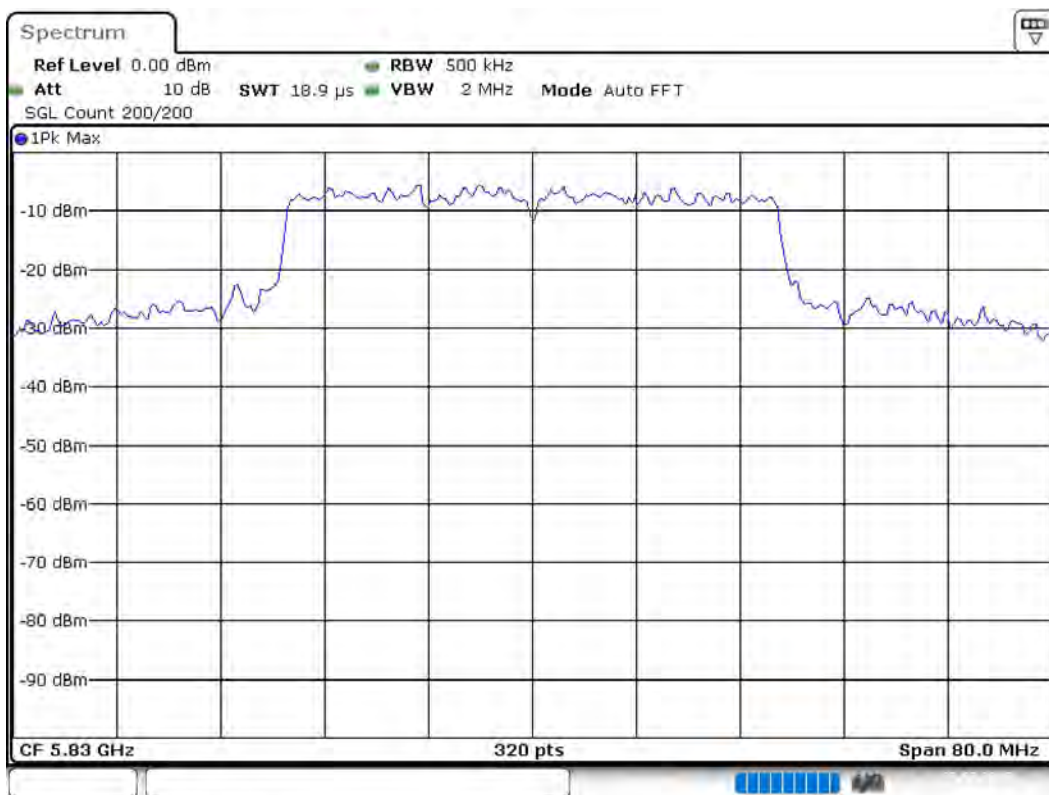

Date: 27.JUL.2019 21:01:24

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.79000 GHz	5.79000 GHz
Stop Frequency	5.87000 GHz	5.87000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5750 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5750.000000	90.750000	---	---	5705.875000	5796.625000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5750.000000	10.5	PASS

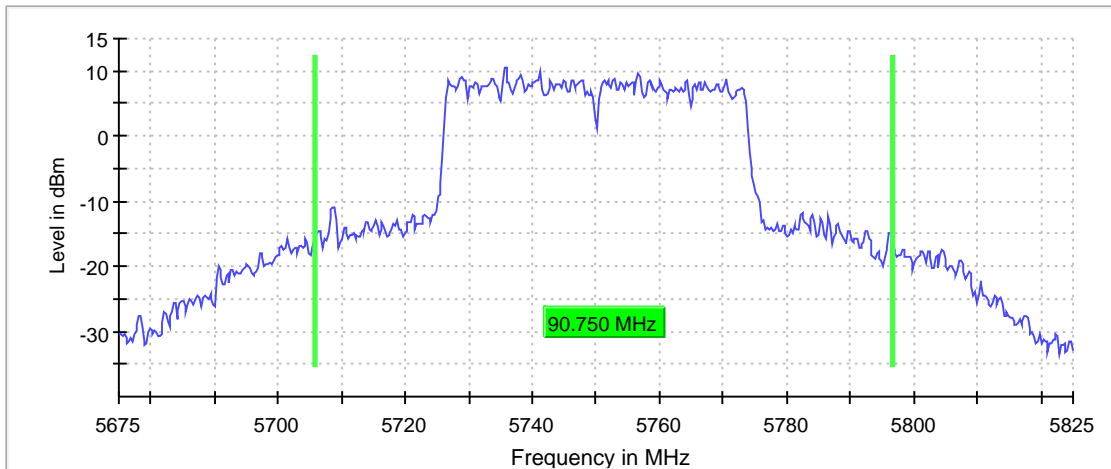

Bandwidth



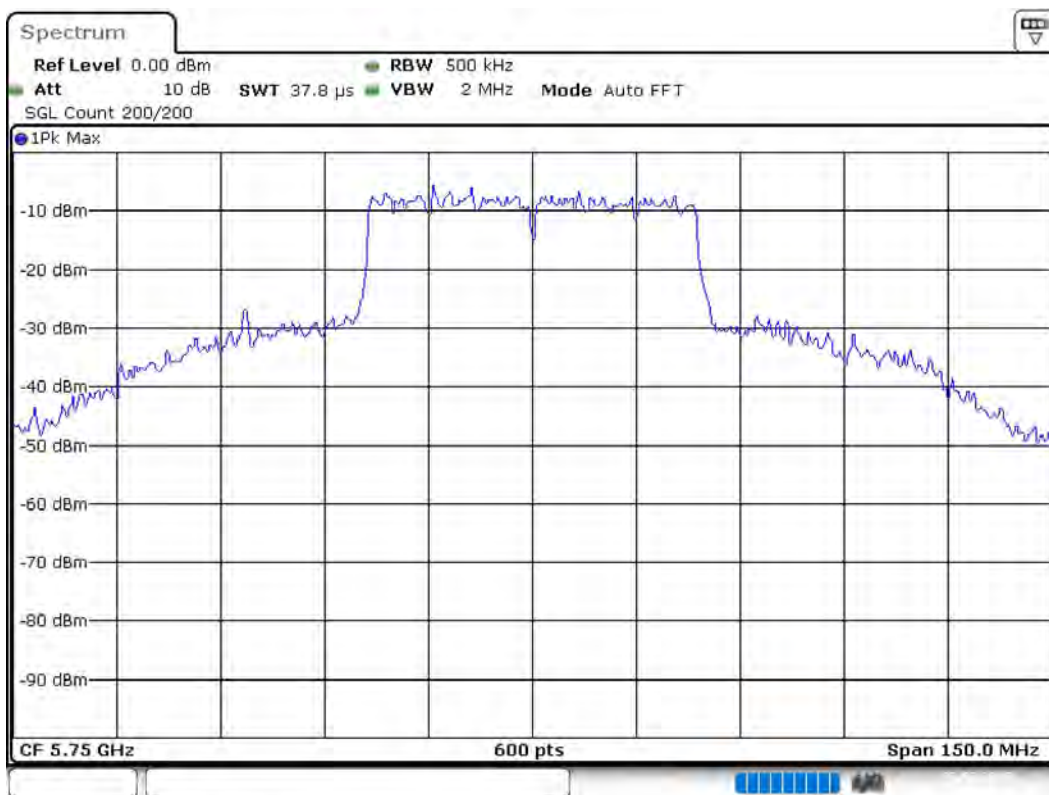

Date: 27.JUL.2019 21:02:25

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.67500 GHz	5.67500 GHz
Stop Frequency	5.82500 GHz	5.82500 GHz
Span	150.000 MHz	150.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	600	~ 600
Sweeptime	37.813 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5750 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5750.000000	47.350000	0.500000	---	5726.325000	5773.675000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5750.000000	3.1	PASS

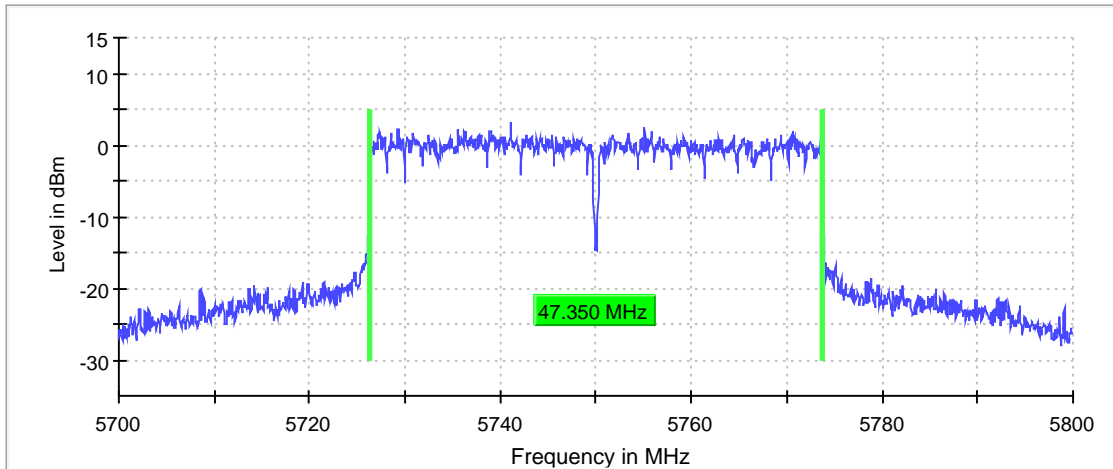

Bandwidth

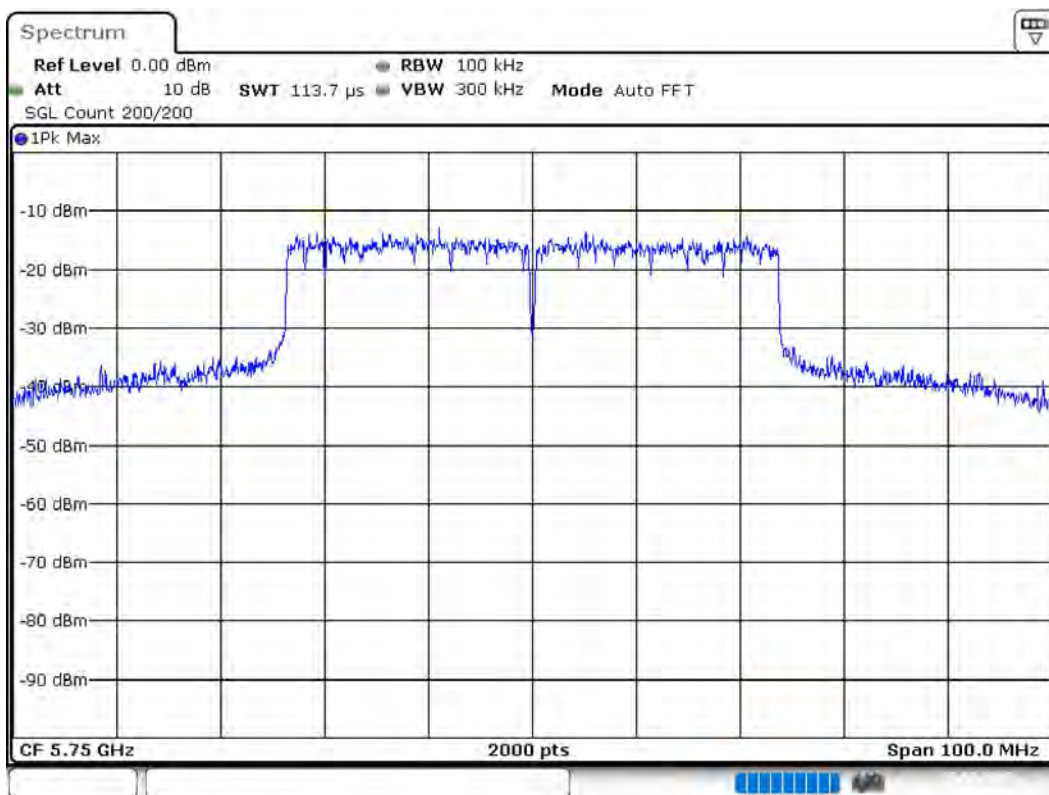

Date: 27.JUL.2019 21:02:34

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70000 GHz	5.70000 GHz
Stop Frequency	5.80000 GHz	5.80000 GHz
Span	100.000 MHz	100.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	2000	~ 2000
SweepTime	113.672 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5750 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5750.000000	47.750000	---	---	5726.125000	5773.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5750.000000	PASS

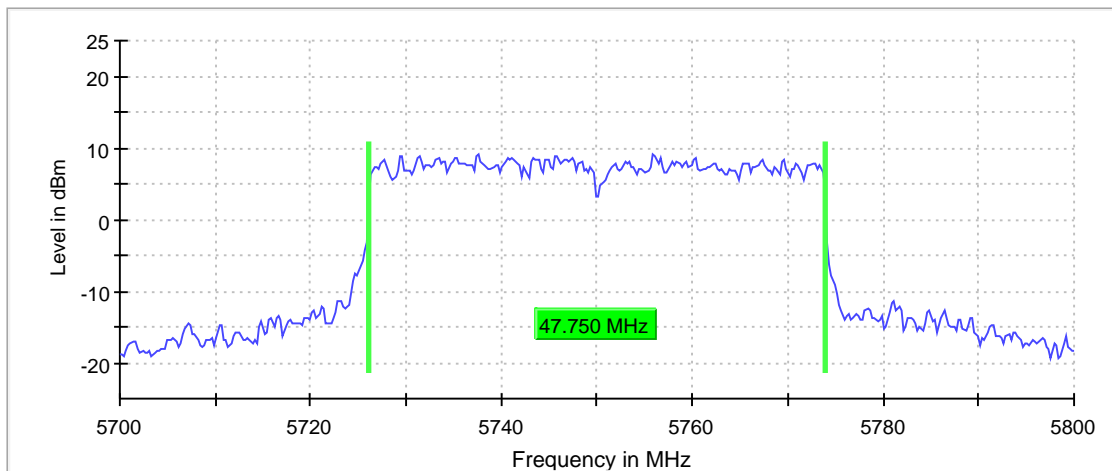

Bandwidth

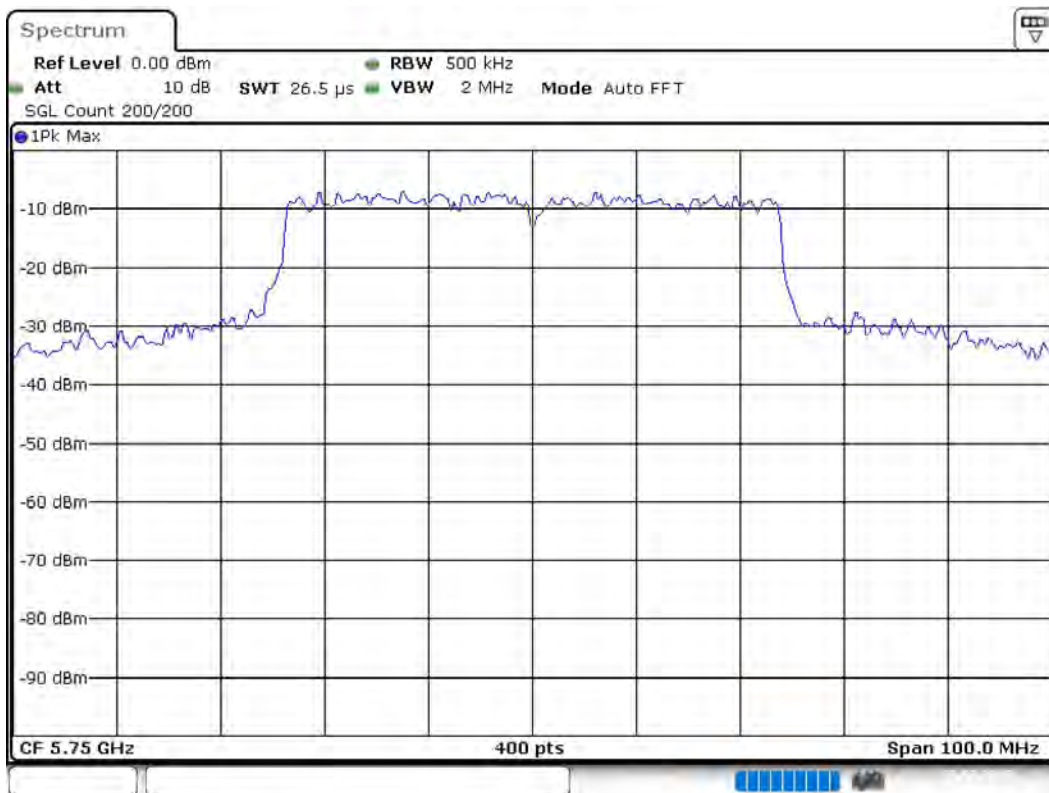

Date: 27.JUL.2019 21:02:43

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.70000 GHz	5.70000 GHz
Stop Frequency	5.80000 GHz	5.80000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	$\geq$ 500.000 kHz
VBW	2.000 MHz	$\geq$ 1.500 MHz
SweepPoints	400	$\sim$ 400
Sweeptime	26.469 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5790 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	80.750000	---	---	5745.875000	5826.625000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	9.6	PASS

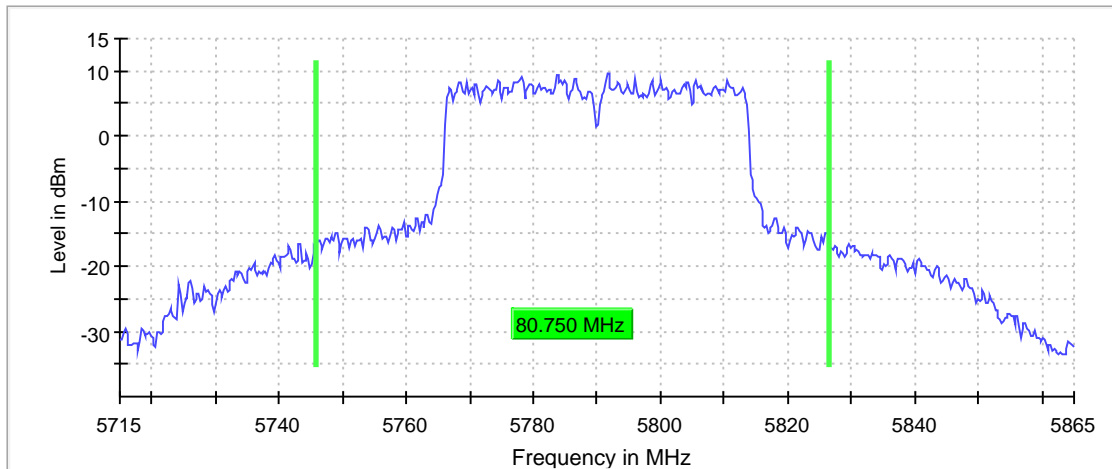

Bandwidth

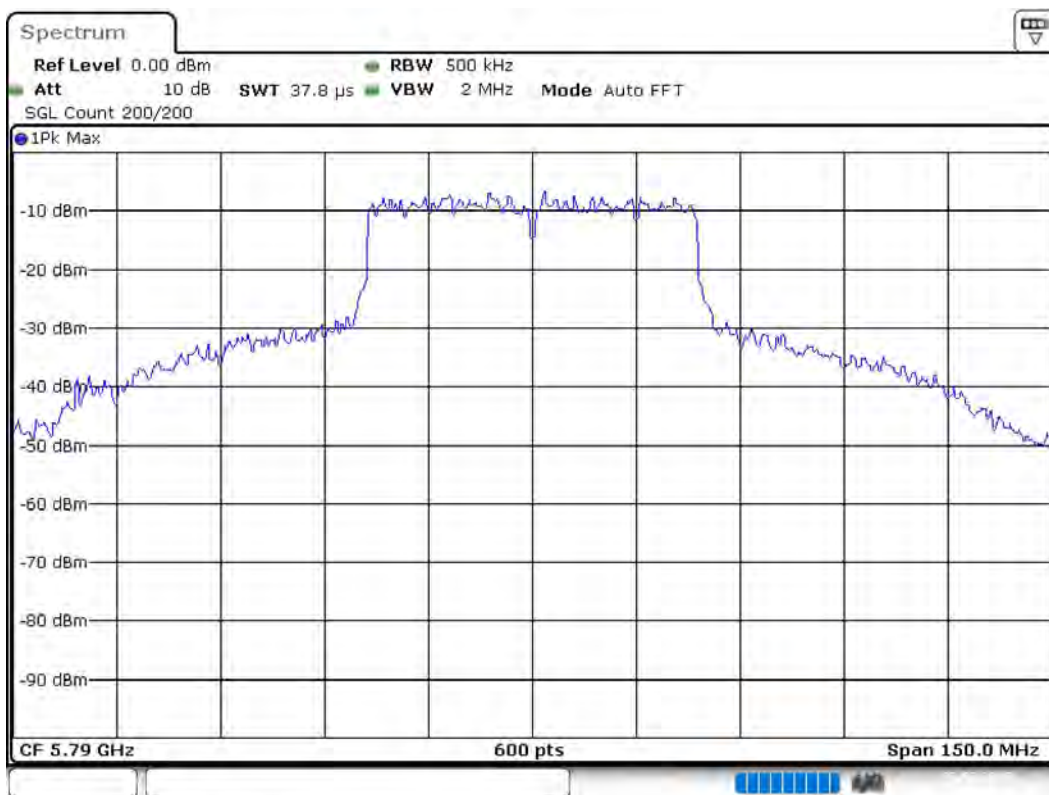

Date: 27.JUL.2019 21:03:26

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.86500 GHz	5.86500 GHz
Span	150.000 MHz	150.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	600	~ 600
Sweeptime	37.813 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

## Minimum Emission Bandwidth 6 dB (5790 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

### 6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	47.350000	0.500000	---	5766.325000	5813.675000


(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5790.000000	2.6	PASS

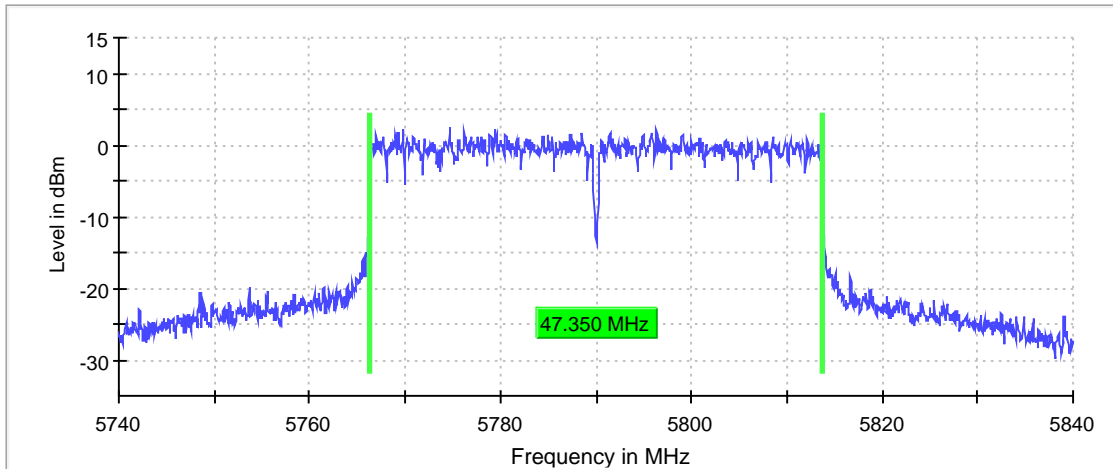

Bandwidth



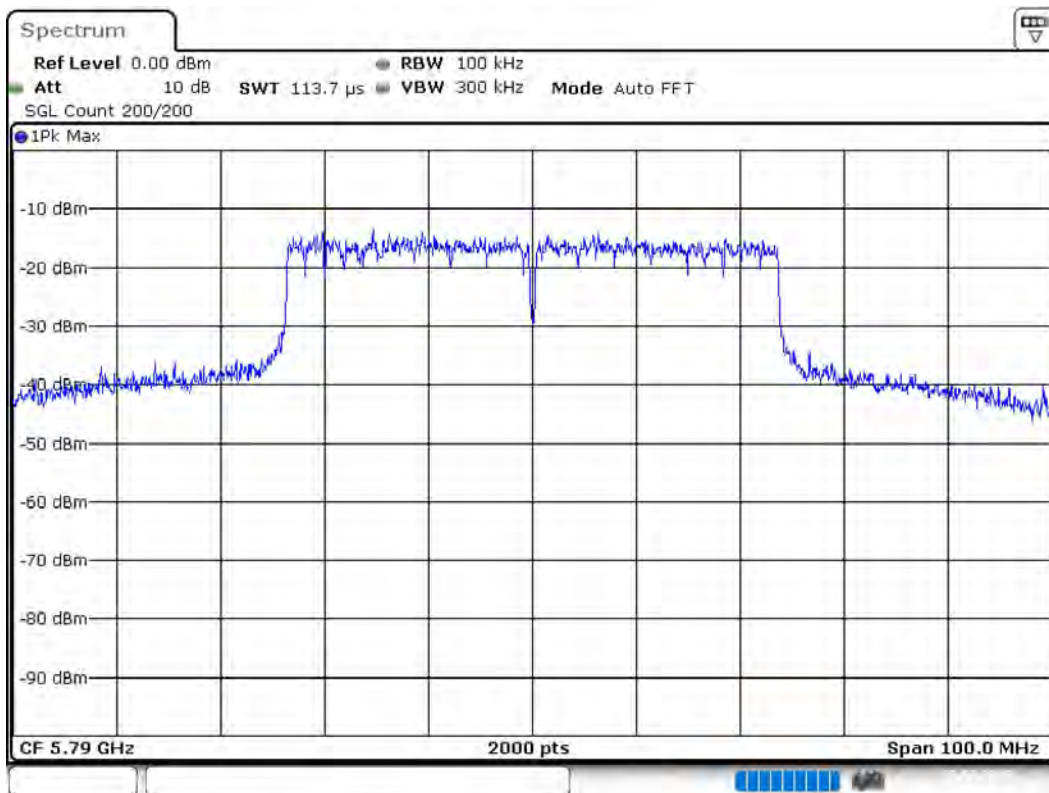

Date: 27.JUL.2019 21:03:36

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.74000 GHz	5.74000 GHz
Stop Frequency	5.84000 GHz	5.84000 GHz
Span	100.000 MHz	100.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	2000	~ 2000
SweepTime	113.672 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5790 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5790.000000	47.500000	---	---	5766.125000	5813.625000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5790.000000	PASS

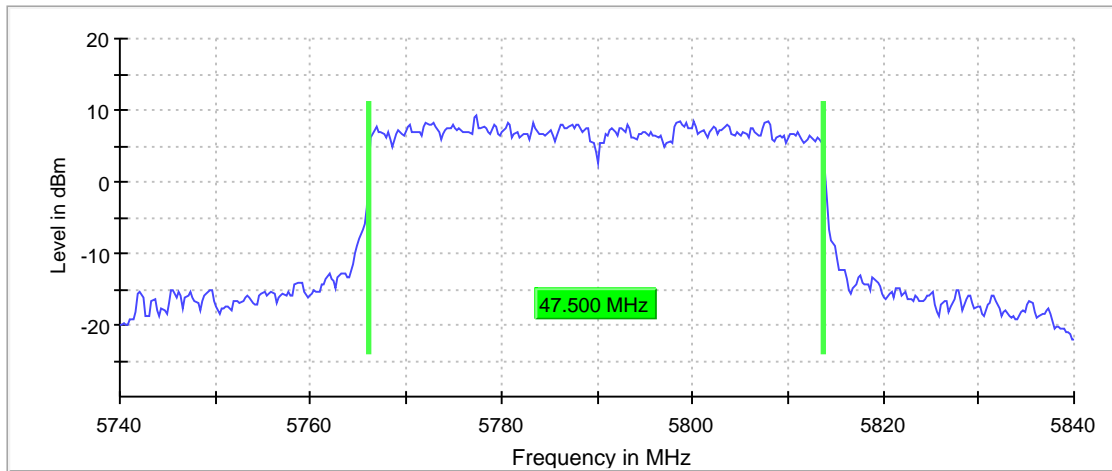

Bandwidth

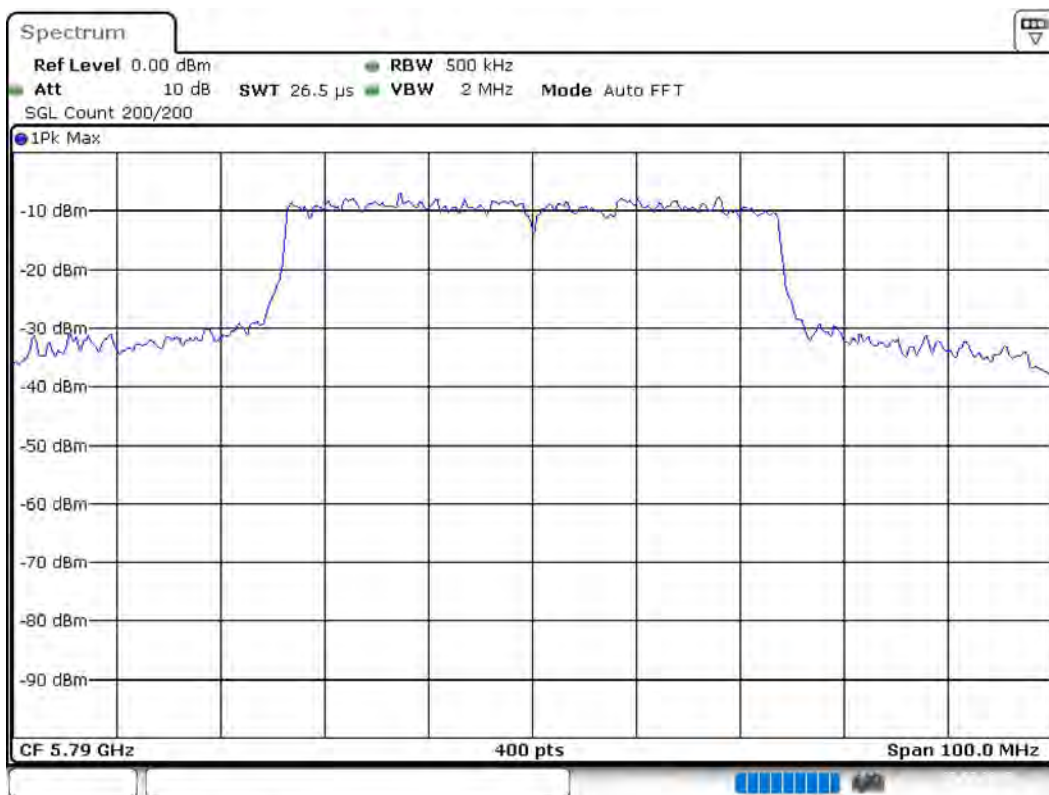

Date: 27.JUL.2019 21:03:45

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.74000 GHz	5.74000 GHz
Stop Frequency	5.84000 GHz	5.84000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	$\geq$ 500.000 kHz
VBW	2.000 MHz	$\geq$ 1.500 MHz
SweepPoints	400	$\sim$ 400
Sweeptime	26.469 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Emission Bandwidth 26 dB (5825 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 26 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	86.750000	---	---	5780.125000	5866.875000

(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	9.8	PASS

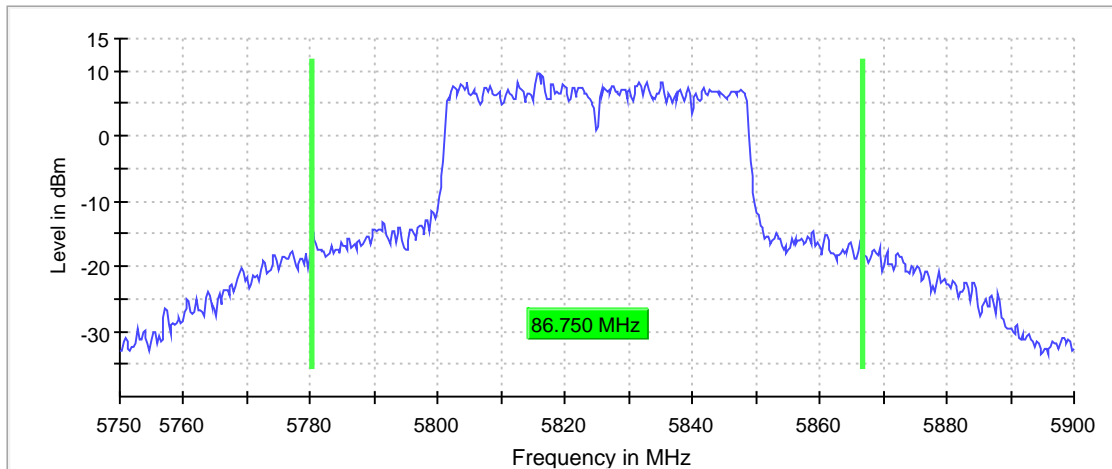

Bandwidth

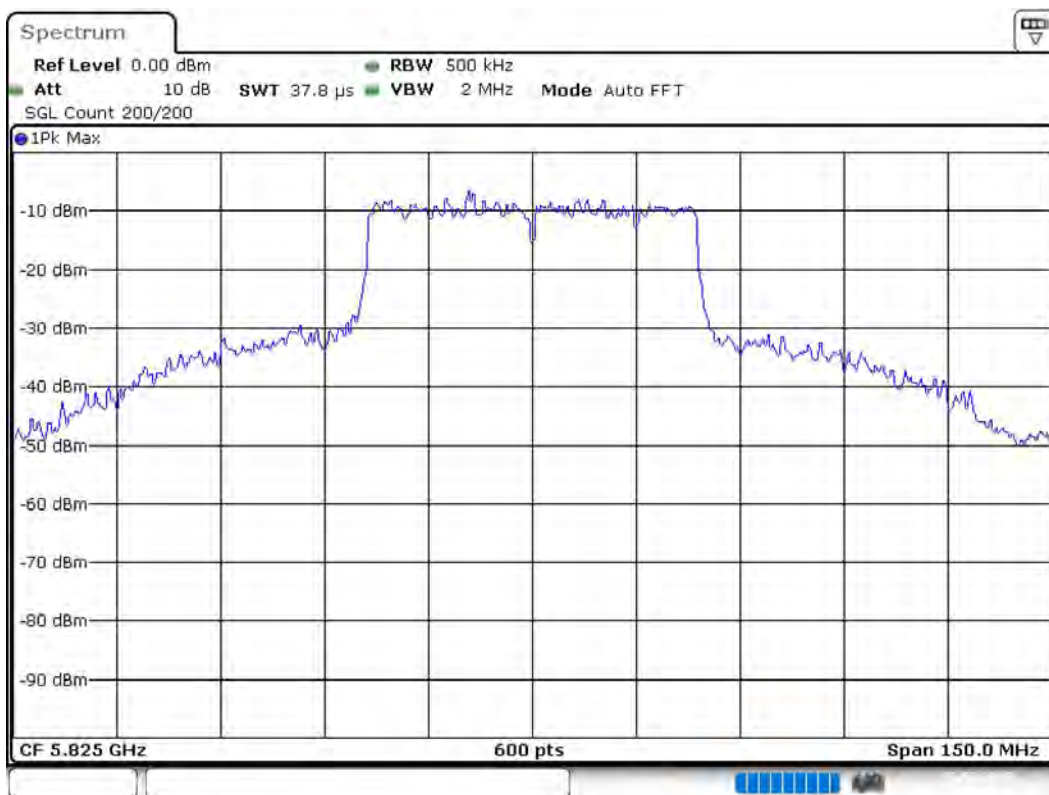

Date: 27.JUL.2019 21:04:23

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75000 GHz	5.75000 GHz
Stop Frequency	5.90000 GHz	5.90000 GHz
Span	150.000 MHz	150.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	600	~ 600
Sweeptime	37.813 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

# Minimum Emission Bandwidth 6 dB (5825 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 6 dB Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	47.350000	0.500000	---	5801.325000	5848.675000

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5825.000000	1.6	PASS

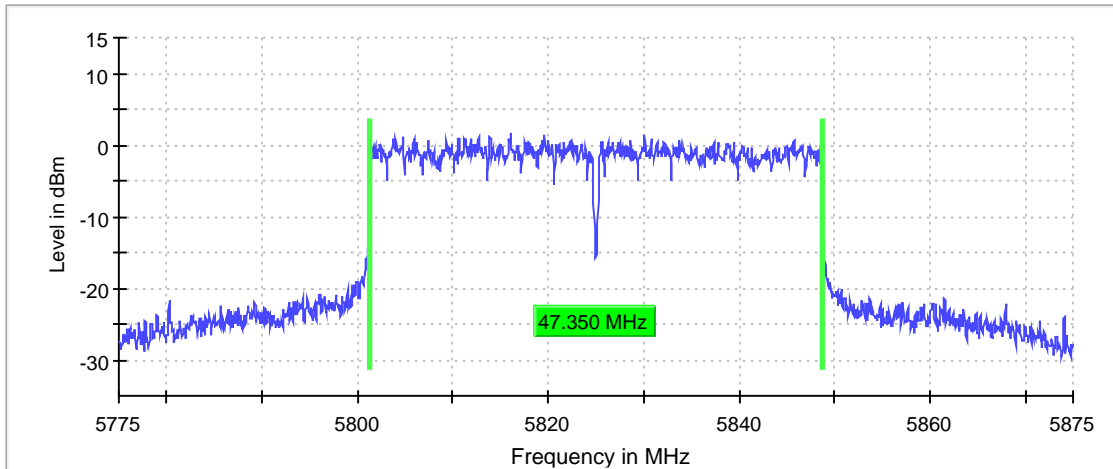

Bandwidth

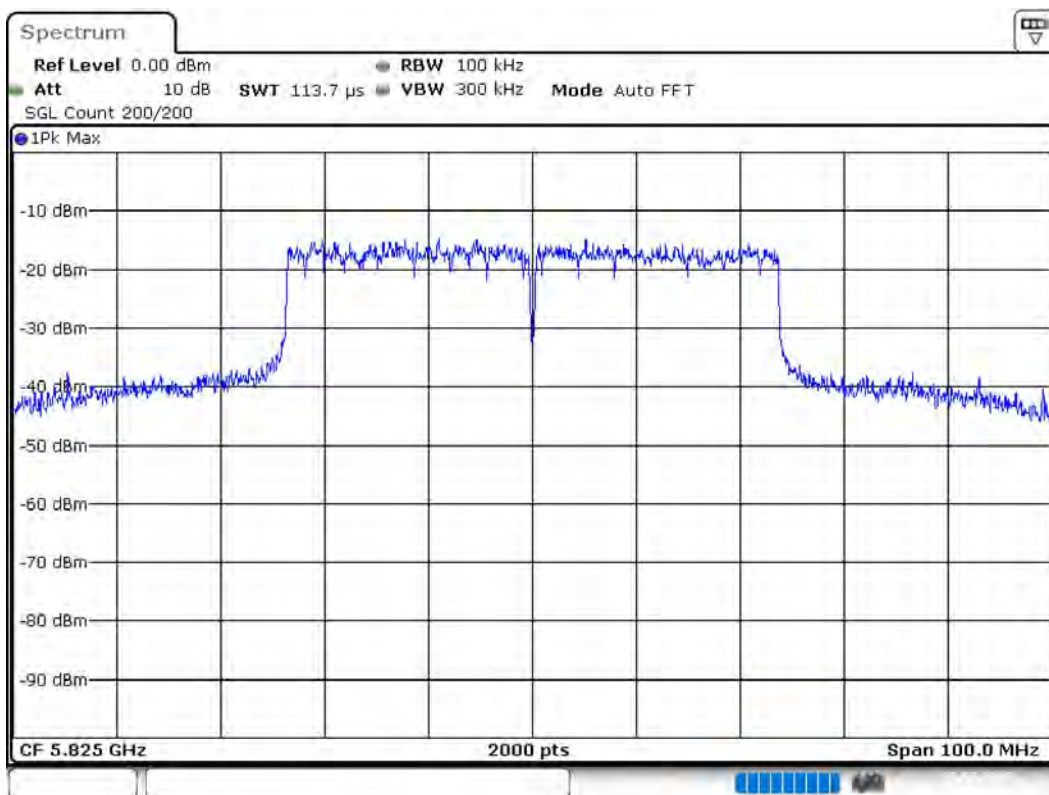

Date: 27 JUL 2019 21:04:33

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77500 GHz	5.77500 GHz
Stop Frequency	5.87500 GHz	5.87500 GHz
Span	100.000 MHz	100.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	2000	~ 2000
SweepTime	113.672 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

# Occupied Channel Bandwidth 99% (5825 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


Measurement uncertainty calculated in accordance with ETSI TR 100 028-1.  
Expanded Uncertainty (K=2) < 2%

## 99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5825.000000	47.250000	---	---	5801.375000	5848.625000


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5825.000000	PASS

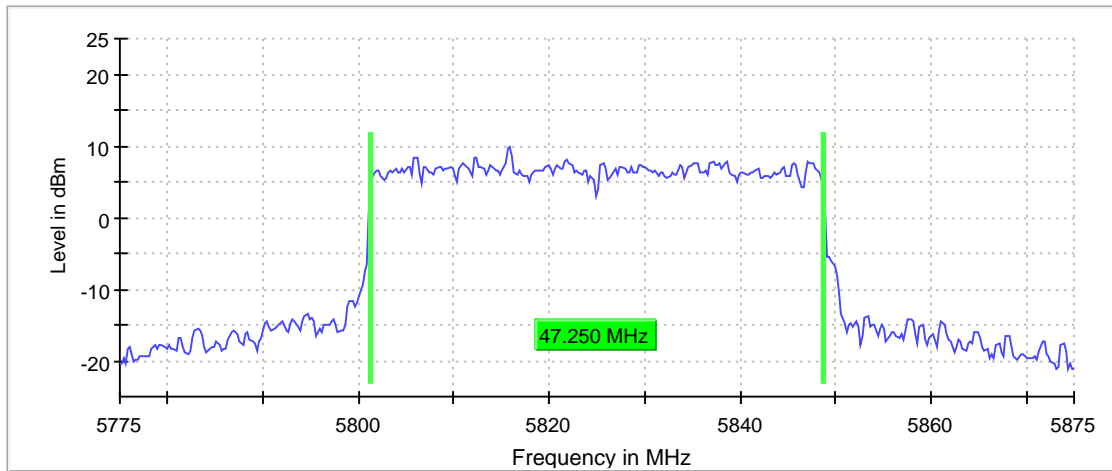

Bandwidth



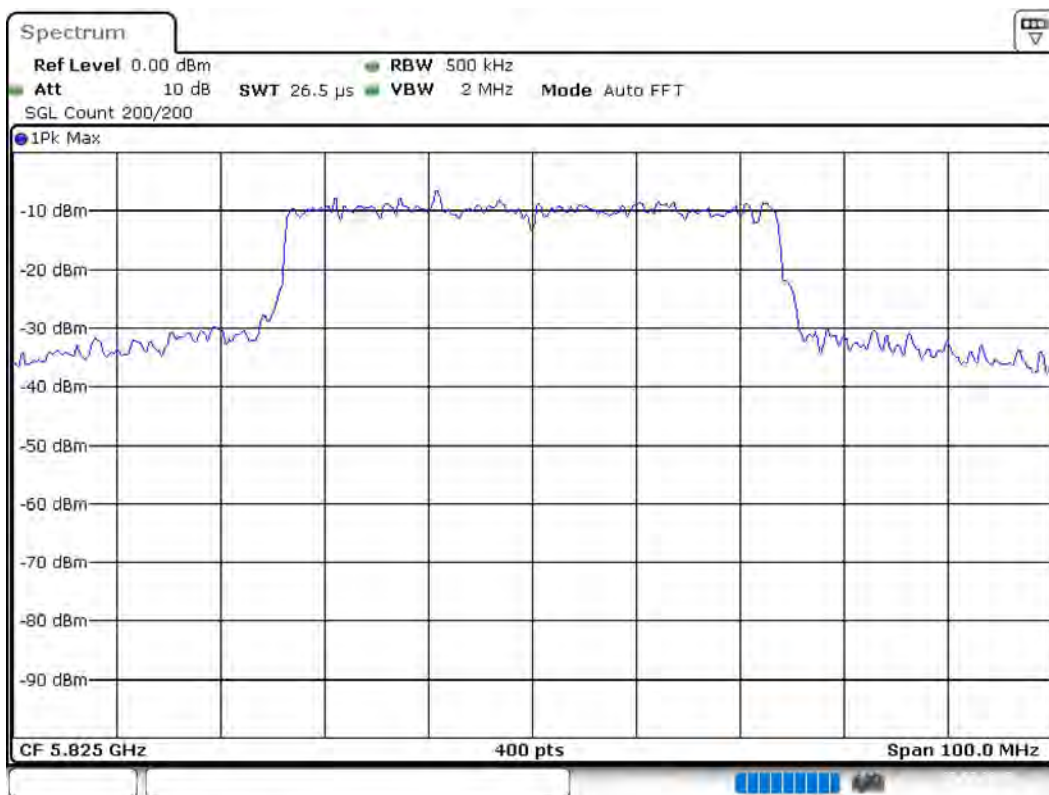

Date: 27.JUL.2019 21:04:43

## Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.77500 GHz	5.77500 GHz
Stop Frequency	5.87500 GHz	5.87500 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	$\geq$ 500.000 kHz
VBW	2.000 MHz	$\geq$ 1.500 MHz
SweepPoints	400	$\sim$ 400
Sweeptime	26.469 $\mu$ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off