




Spurious

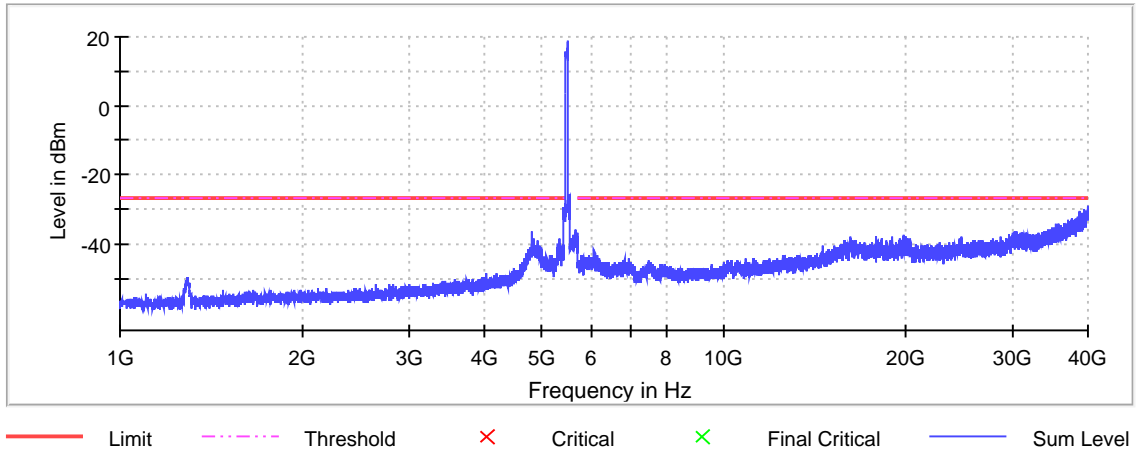

Gain

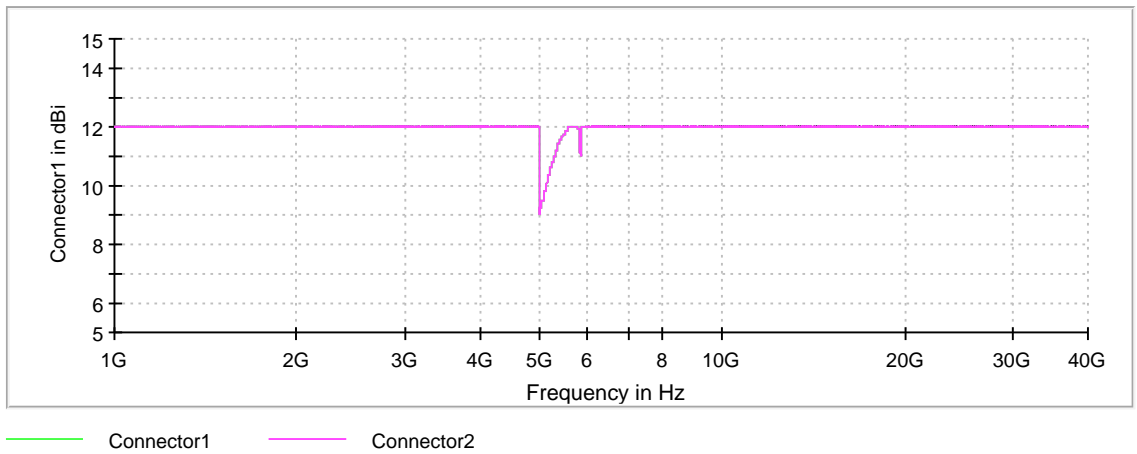

Attenuation

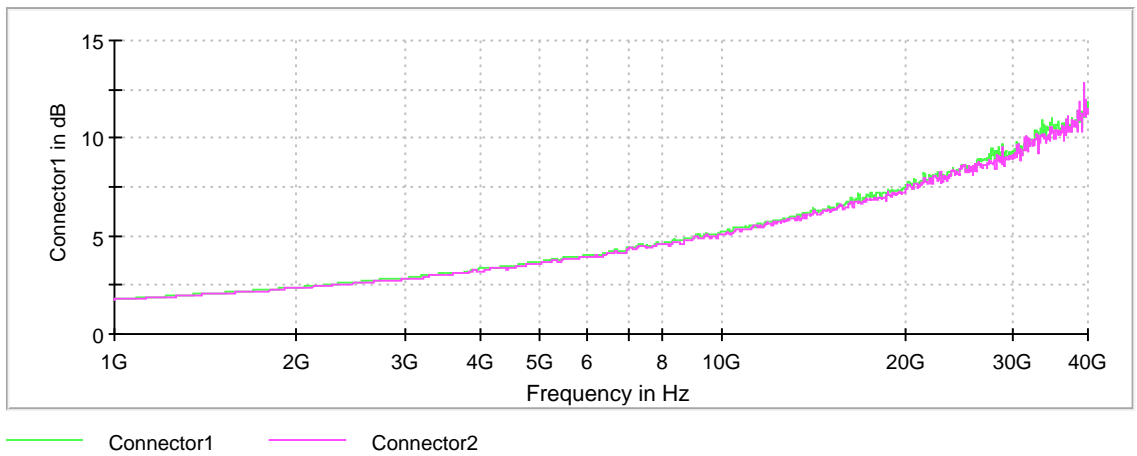

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5495.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5458.750000	-30.6	9.4	-21.2
5458.250000	-31.0	9.8	-21.2
5438.750000	-31.1	9.9	-21.2
5455.250000	-31.3	10.1	-21.2
5455.750000	-31.4	10.2	-21.2
5439.250000	-31.6	10.4	-21.2
5454.750000	-31.9	10.7	-21.2
5432.250000	-32.1	10.9	-21.2
5459.250000	-32.2	11.0	-21.2
5456.250000	-32.4	11.2	-21.2
5447.750000	-32.4	11.2	-21.2
5448.250000	-32.5	11.3	-21.2
5438.250000	-32.5	11.3	-21.2
5431.750000	-32.5	11.3	-21.2
5459.750000	-32.5	11.3	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

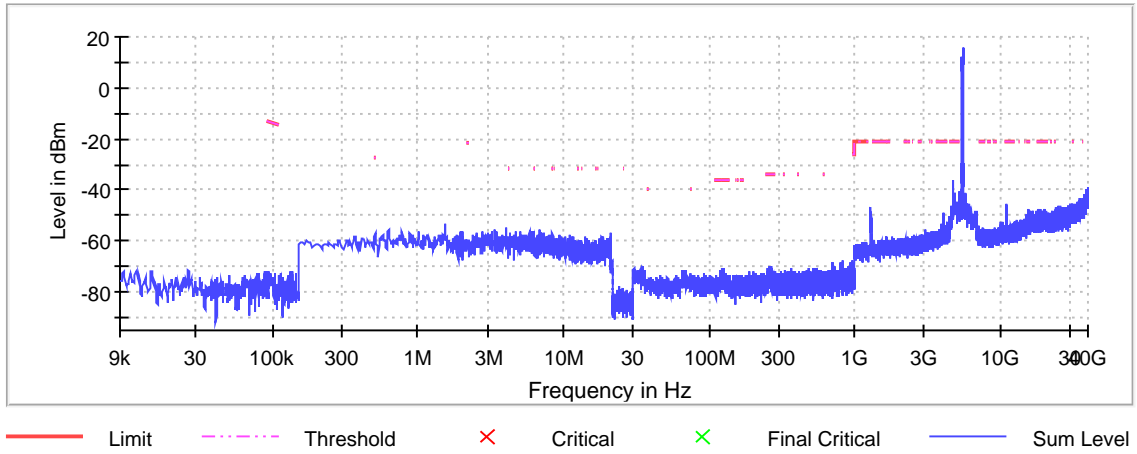

Gain

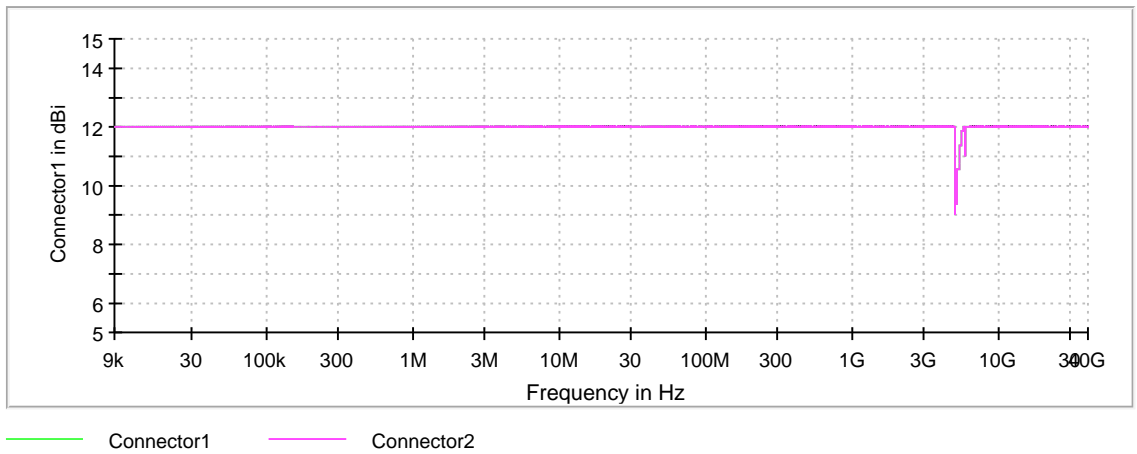

Attenuation

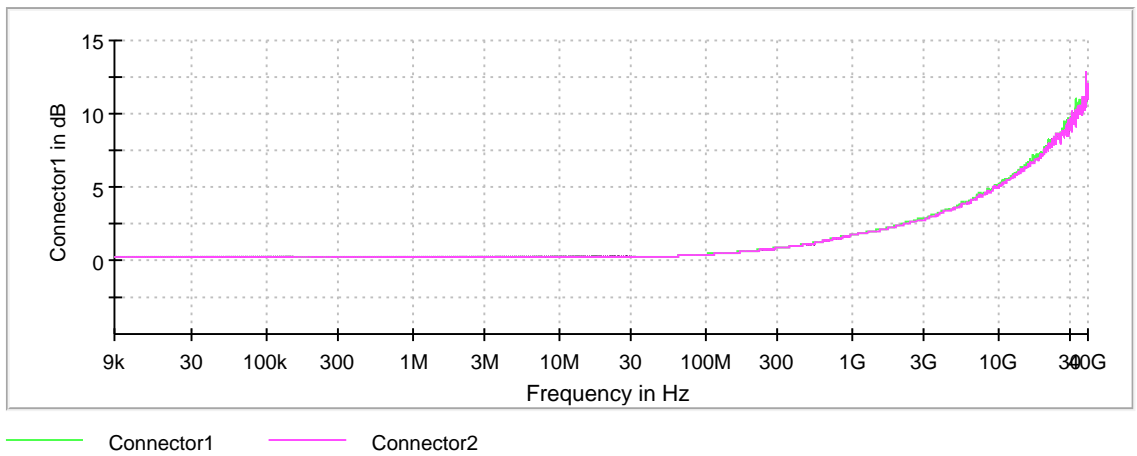

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	41.425892	---	---	5579.287054	5620.712946


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5600.000000	-0.6	PASS

26 dB Bandwidth

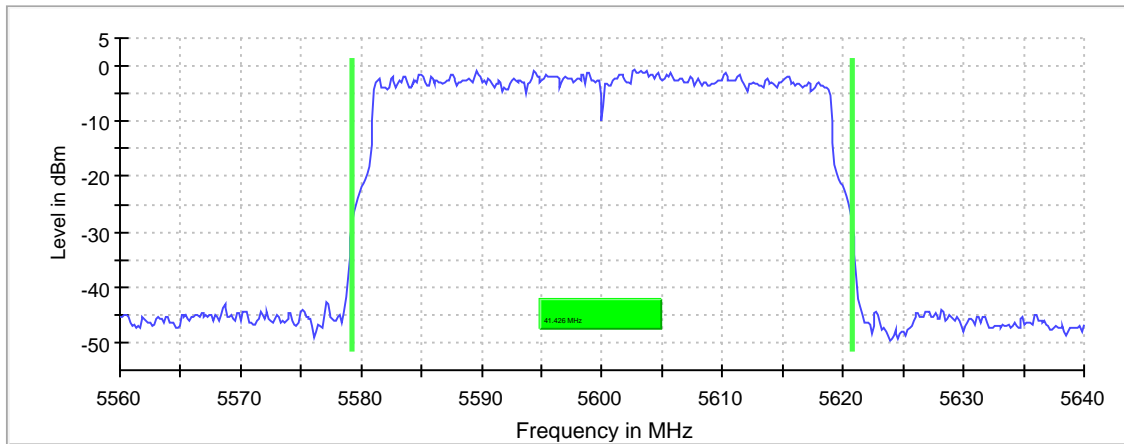

Bandwidth

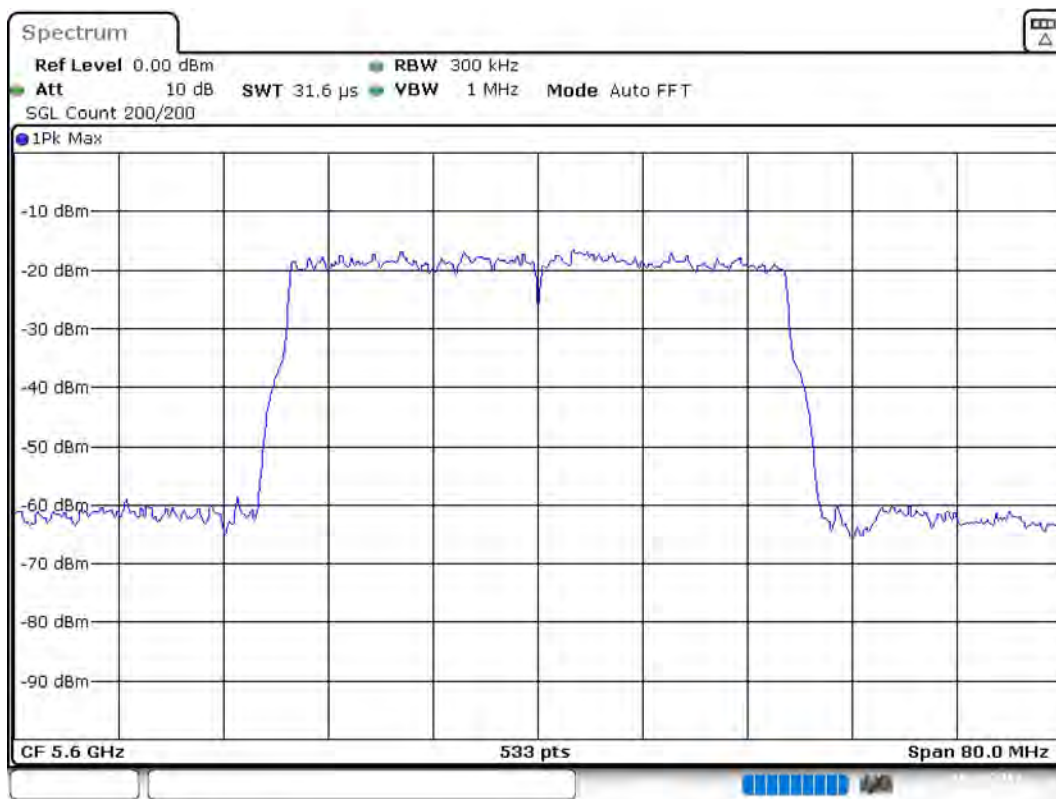

Date: 8.AUG.2019 15:02:19

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.56000 GHz	5.56000 GHz
Stop Frequency	5.64000 GHz	5.64000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	533	~ 533
SweepTime	31.621 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5600.000000	28.5	---	28.5	99.494	PASS

Power Spectral Density (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5600.000000	5612.673267	1.108	5.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.58000 GHz	5.58000 GHz
Stop Frequency	5.62000 GHz	5.62000 GHz
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5600 MHz; 40 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	37.750000	---	---	5581.125000	5618.875000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5600.000000	PASS

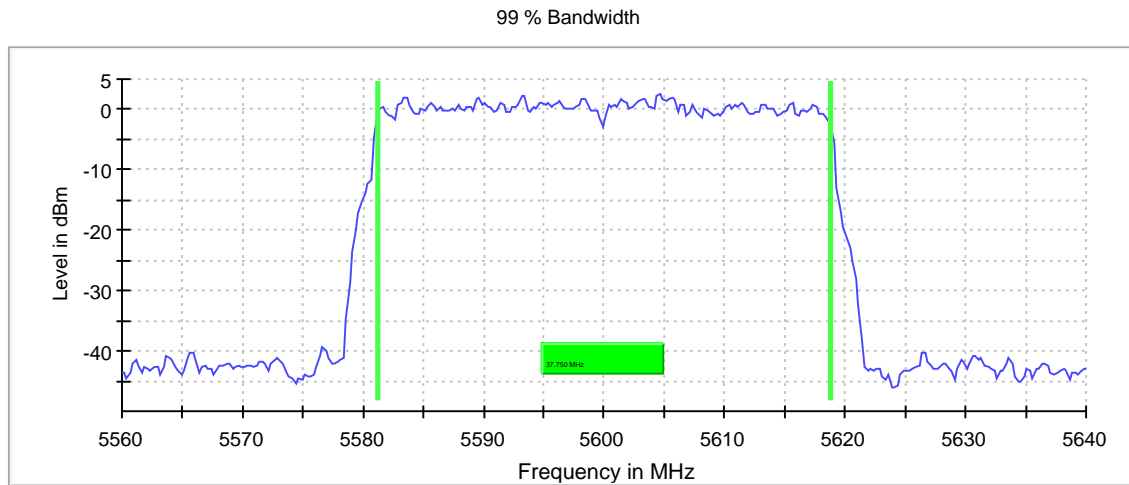

Bandwidth

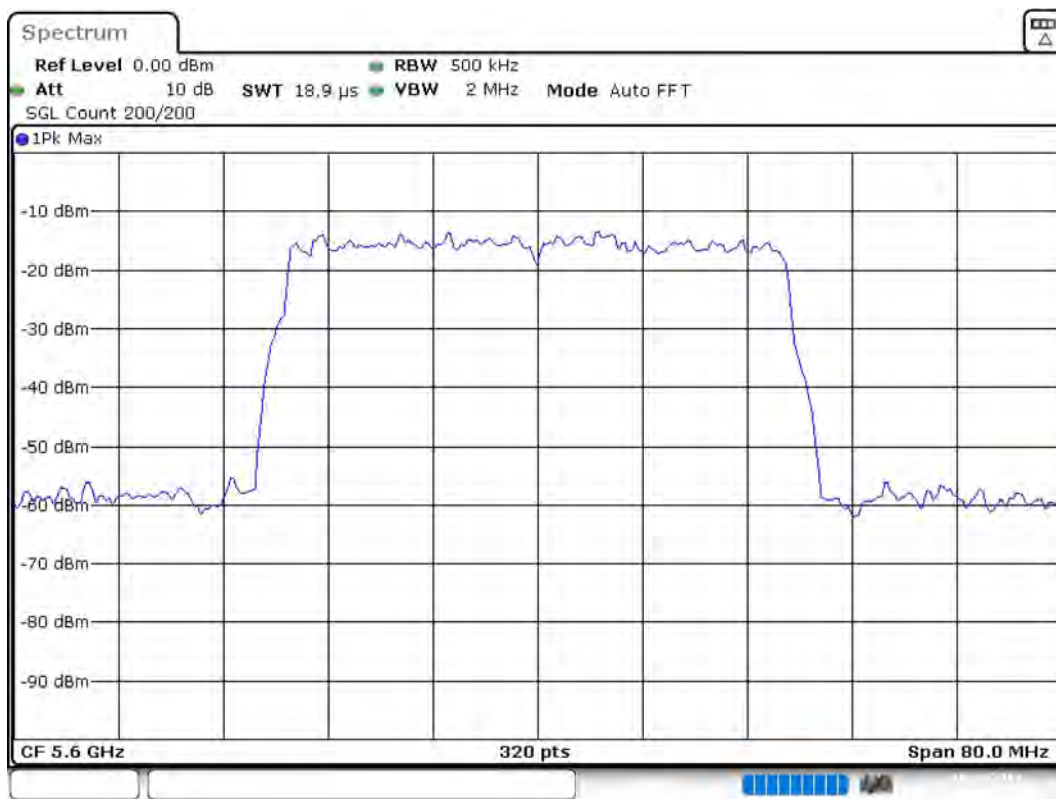

Date: 8.AUG.2019 15:03:11

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.56000 GHz	5.56000 GHz
Stop Frequency	5.64000 GHz	5.64000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures
New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
17897.750000	-37.7	16.5	-21.2
17910.250000	-37.7	16.5	-21.2
17864.750000	-37.9	16.7	-21.2
4800.250000	-38.0	16.8	-21.2
5437.750000	-38.3	17.1	-21.2
5438.250000	-38.5	17.3	-21.2
16175.250000	-38.5	17.3	-21.2
4855.750000	-38.6	17.4	-21.2
4794.750000	-38.6	17.4	-21.2
16155.250000	-38.6	17.4	-21.2
17922.750000	-38.7	17.5	-21.2
15924.250000	-38.7	17.5	-21.2
16174.750000	-38.8	17.6	-21.2
15939.750000	-38.9	17.7	-21.2
15856.250000	-38.9	17.7	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

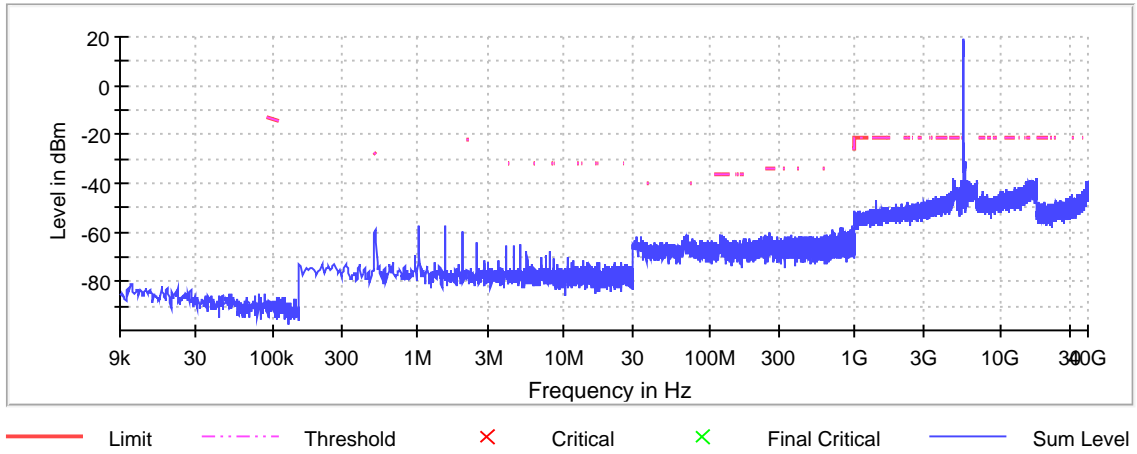

Gain

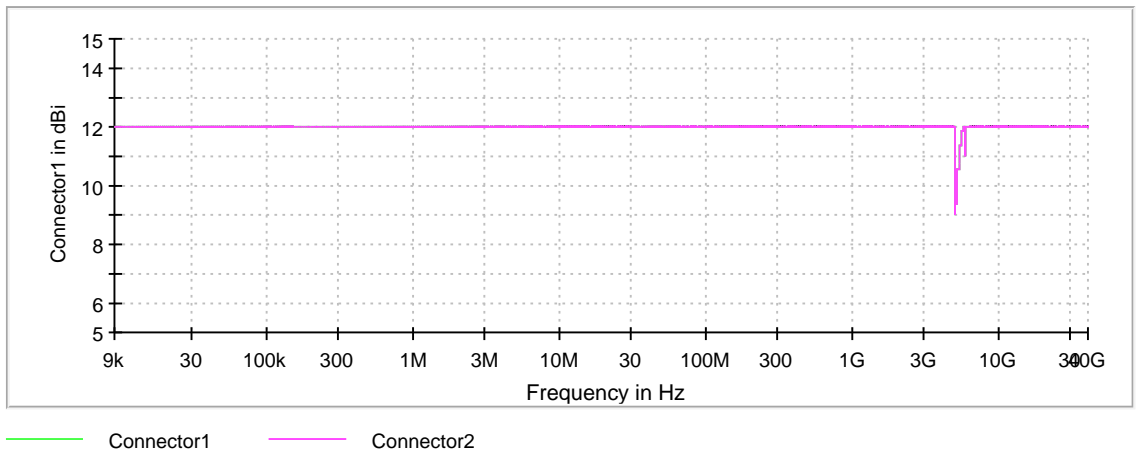

Attenuation

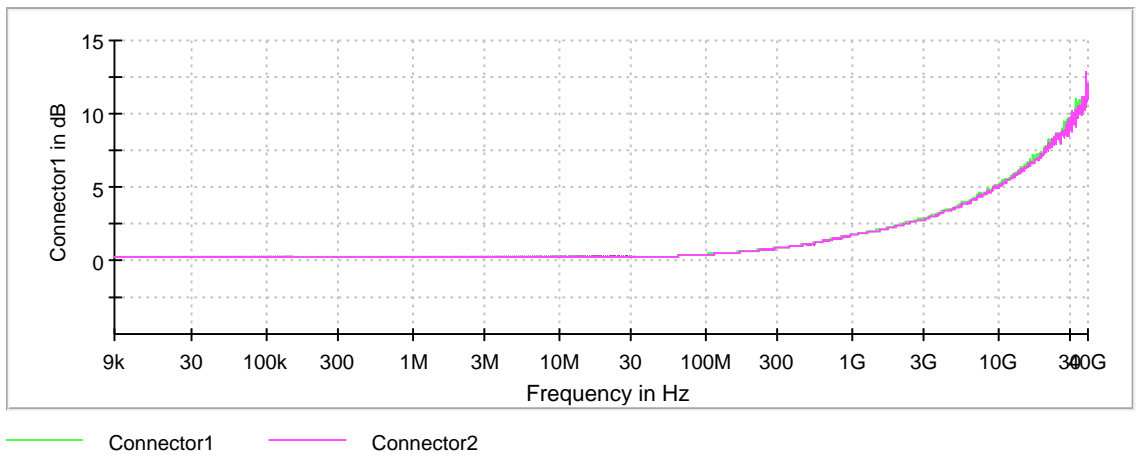

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5700.000000	41.275797	41.275797	0.000000	---	---


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5700.000000	5679.136961	5720.412758	-4.7	PASS

26 dB Bandwidth

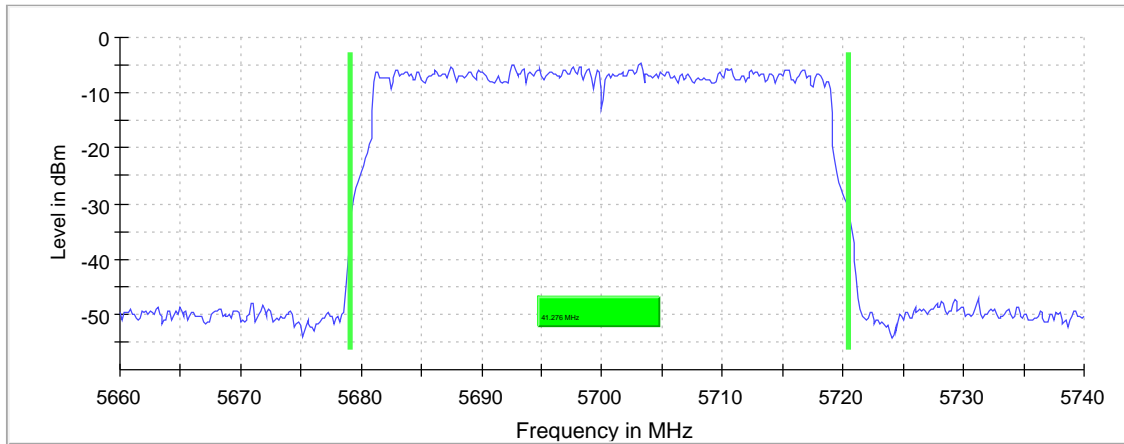

Bandwidth

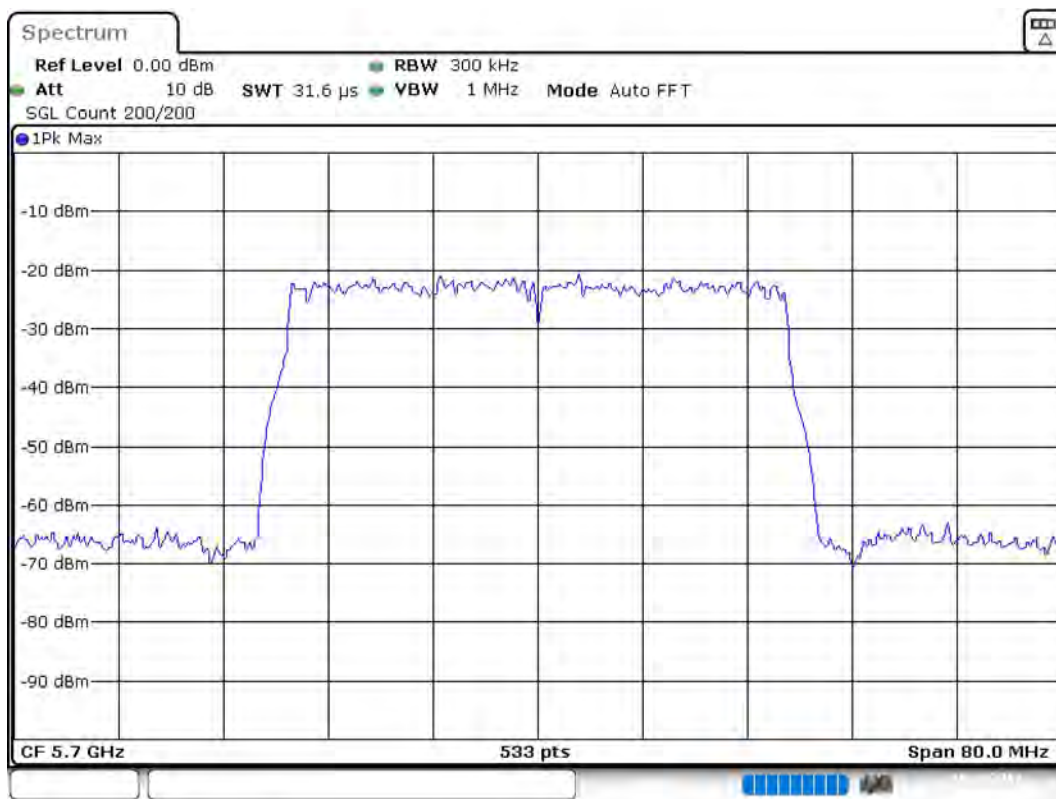

Date: 8.AUG.2019 15:14:49

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.66000 GHz	5.66000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	533	~ 533
Sweeptime	31.621 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5700.000000	24.6	---	24.6	99.495	PASS

Power Spectral Density (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5700.000000	5698.415842	-2.962	5.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.68000 GHz	5.68000 GHz
Stop Frequency	5.72000 GHz	5.72000 GHz
Span	40.000 MHz	40.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 80
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5700.000000	37.750000	37.750000	0.000000	---	---


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5700.000000	5681.125000	5718.875000	PASS

99 % Bandwidth

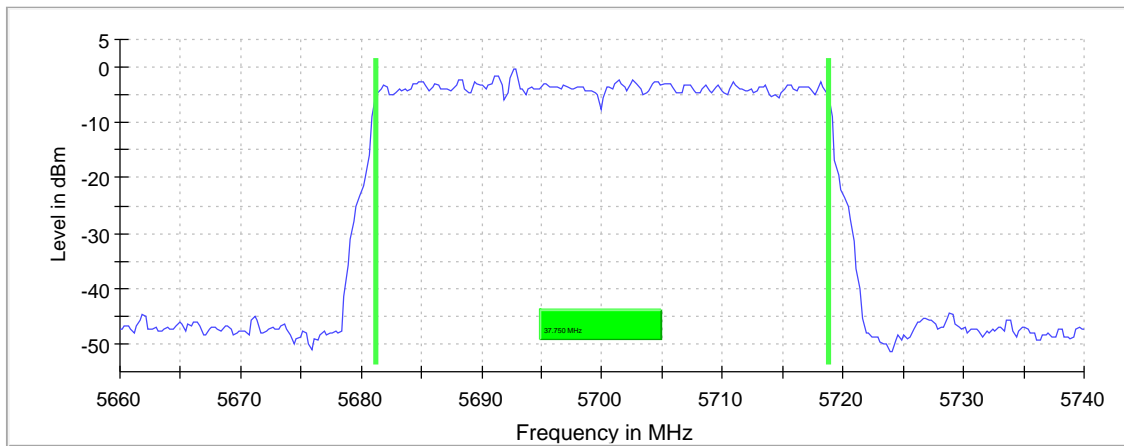

Bandwidth

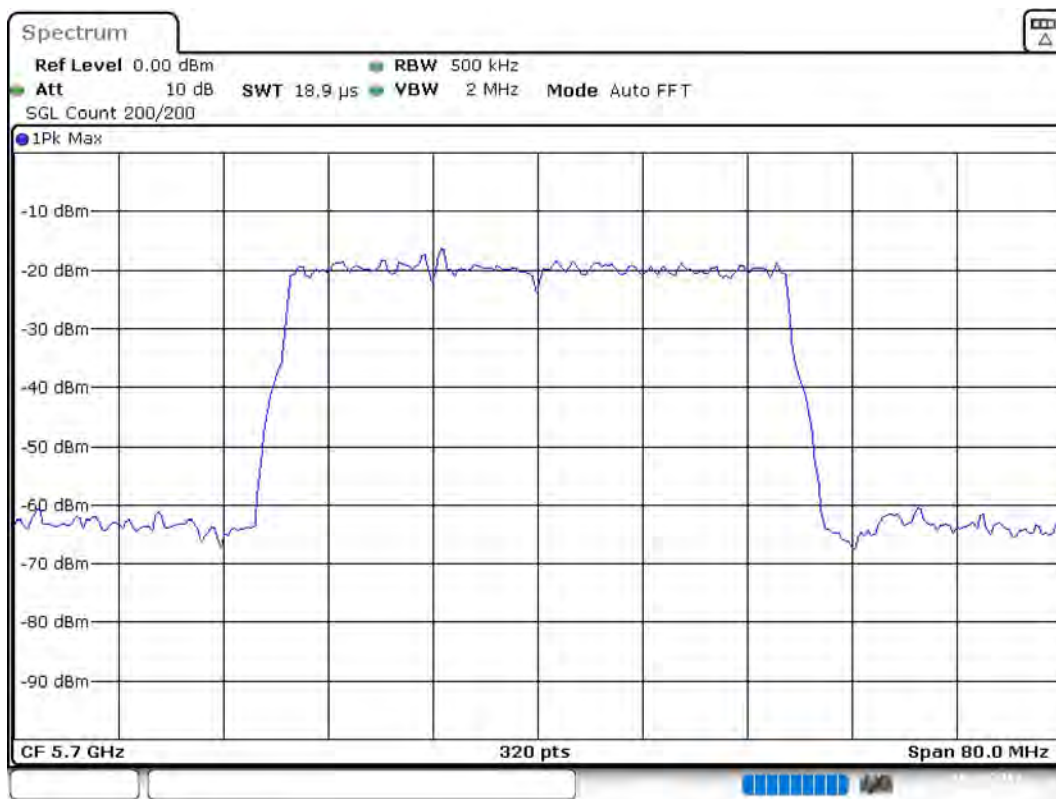

Date: 8.AUG.2019 15:15:40

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.66000 GHz	5.66000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	80.000 MHz	80.000 MHz
RBW	500.000 kHz	>= 400.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	18.906 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5700.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5726.250000	-27.1	0.1	-27.0
5726.750000	-27.1	0.1	-27.0
5732.250000	-27.6	0.6	-27.0
5732.750000	-28.1	1.1	-27.0
5729.250000	-28.3	1.3	-27.0
5728.750000	-28.5	1.5	-27.0
5725.750000	-28.5	1.5	-27.0
5731.750000	-28.6	1.6	-27.0
5727.250000	-28.8	1.8	-27.0
5725.250000	-29.0	2.0	-27.0
5727.750000	-29.1	2.1	-27.0
5728.250000	-29.5	2.5	-27.0
39911.250000	-29.5	2.5	-27.0
5729.750000	-29.7	2.7	-27.0
5737.750000	-29.7	2.7	-27.0


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2


Spurious

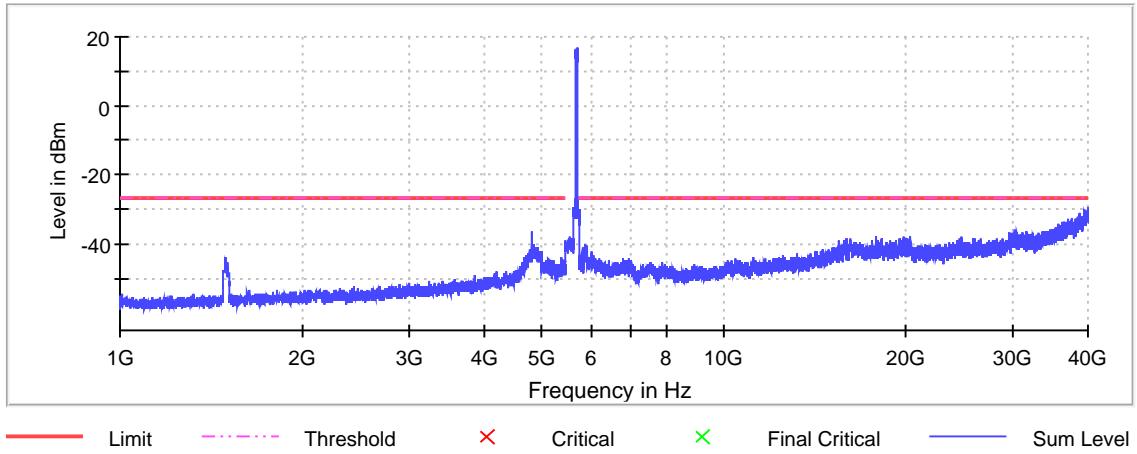

Gain

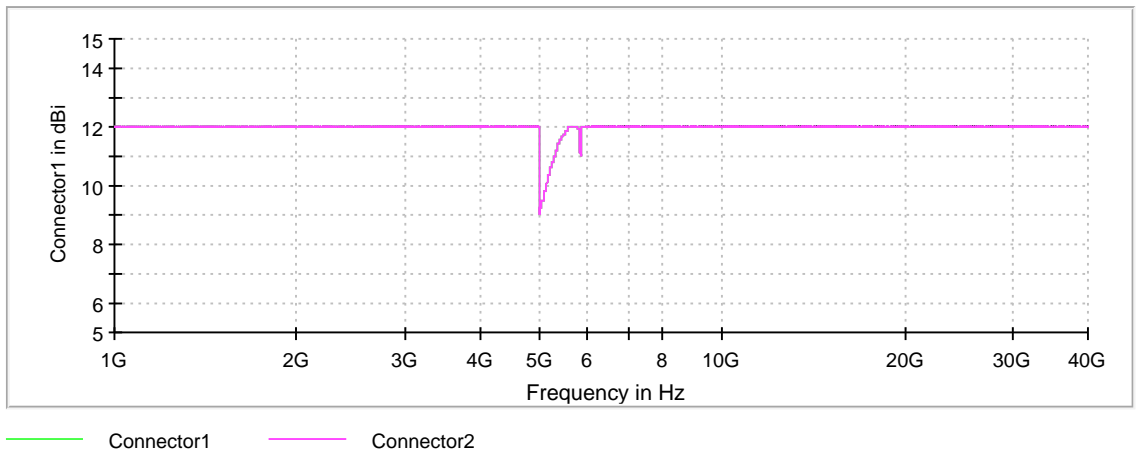

Attenuation

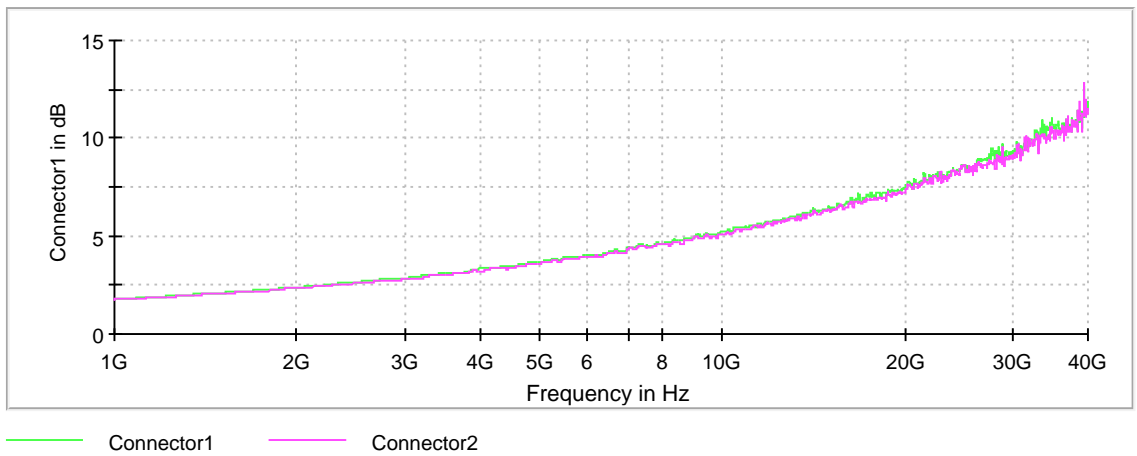

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5700.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
17876.750000	-38.6	17.4	-21.2
17864.750000	-39.0	17.8	-21.2
17864.250000	-39.1	17.9	-21.2
15882.250000	-39.2	18.0	-21.2
17904.250000	-39.7	18.5	-21.2
15853.750000	-39.8	18.6	-21.2
17851.750000	-40.0	18.8	-21.2
17876.250000	-40.3	19.1	-21.2
17874.250000	-40.9	19.7	-21.2
16173.750000	-40.9	19.7	-21.2
16184.250000	-40.9	19.7	-21.2
17870.250000	-40.9	19.7	-21.2
17777.250000	-41.0	19.8	-21.2
17910.250000	-41.0	19.8	-21.2
17888.250000	-41.0	19.8	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

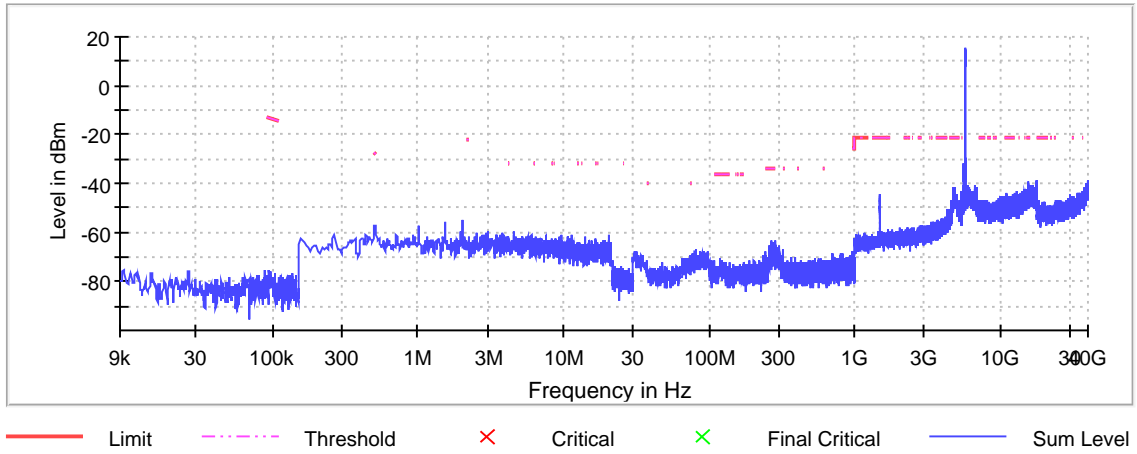

Gain

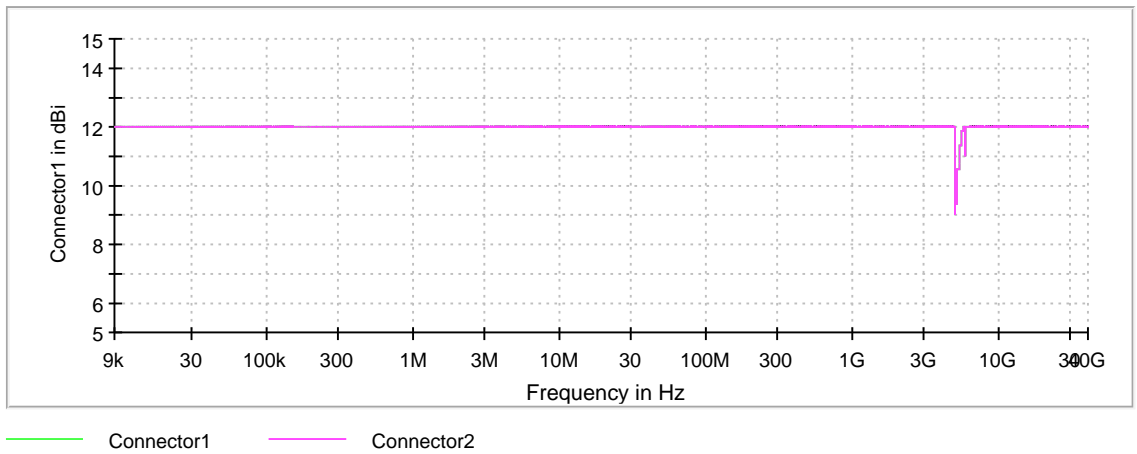

Attenuation

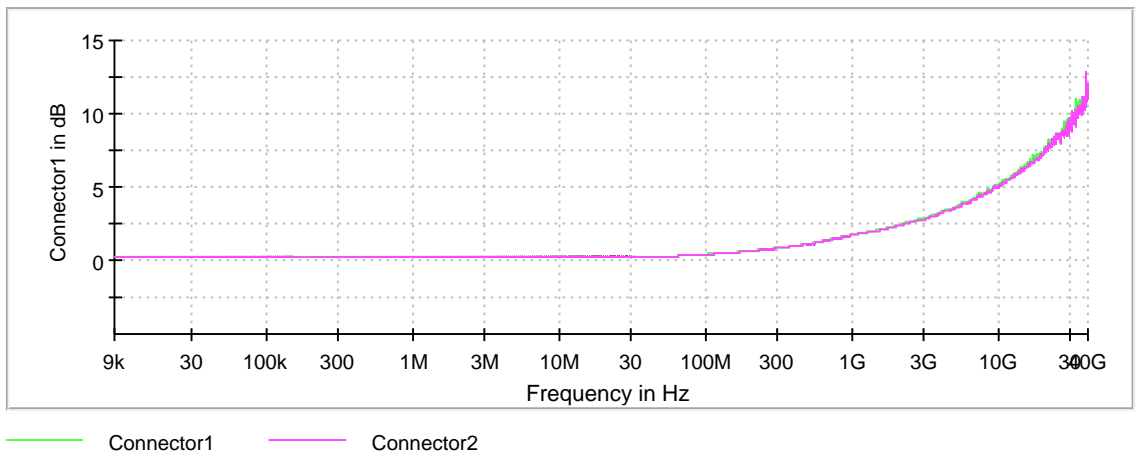

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	6.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5500 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	51.250000	---	---	5474.375000	5525.625000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5500.000000	-1.8	PASS

26 dB Bandwidth

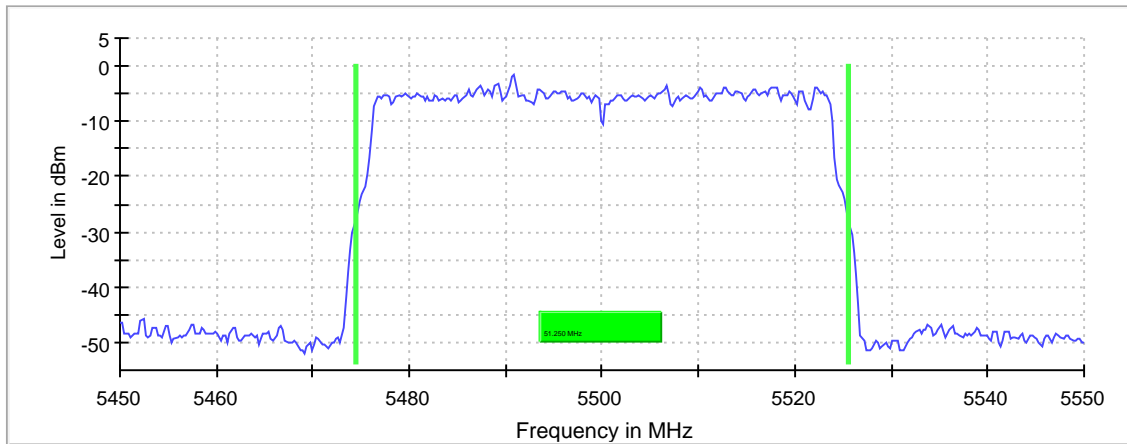

Bandwidth

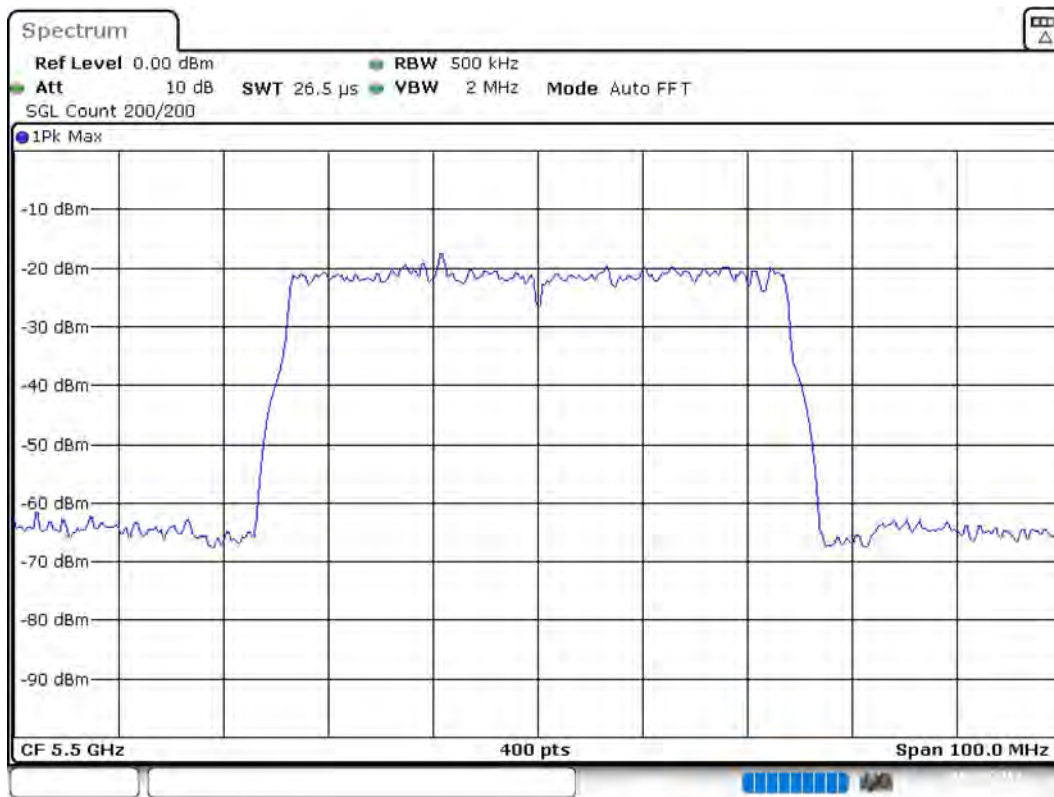

Date: 8.AUG.2019 16:05:37

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.45000 GHz	5.45000 GHz
Stop Frequency	5.55000 GHz	5.55000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	400	~ 400
Sweeptime	26.469 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5500 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5500.000000	24.4	---	24.4	99.715	PASS

Power Spectral Density (5500 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5500.000000	5490.099010	-3.796	5.3	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.47500 GHz	5.47500 GHz
Stop Frequency	5.52500 GHz	5.52500 GHz
Span	50.000 MHz	50.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 100
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5500 MHz; 50 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5500.000000	47.250000	---	---	5476.375000	5523.625000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5500.000000	PASS

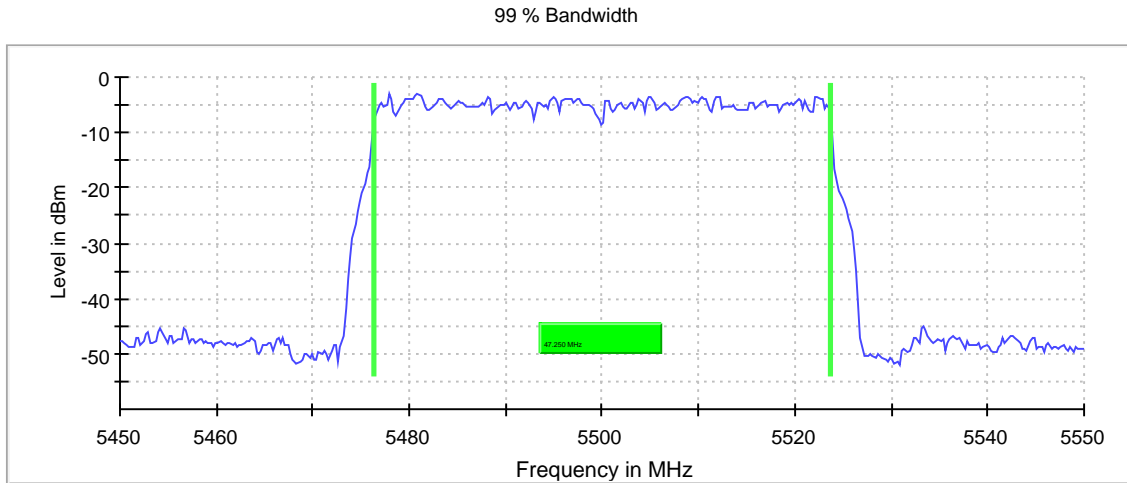

Bandwidth

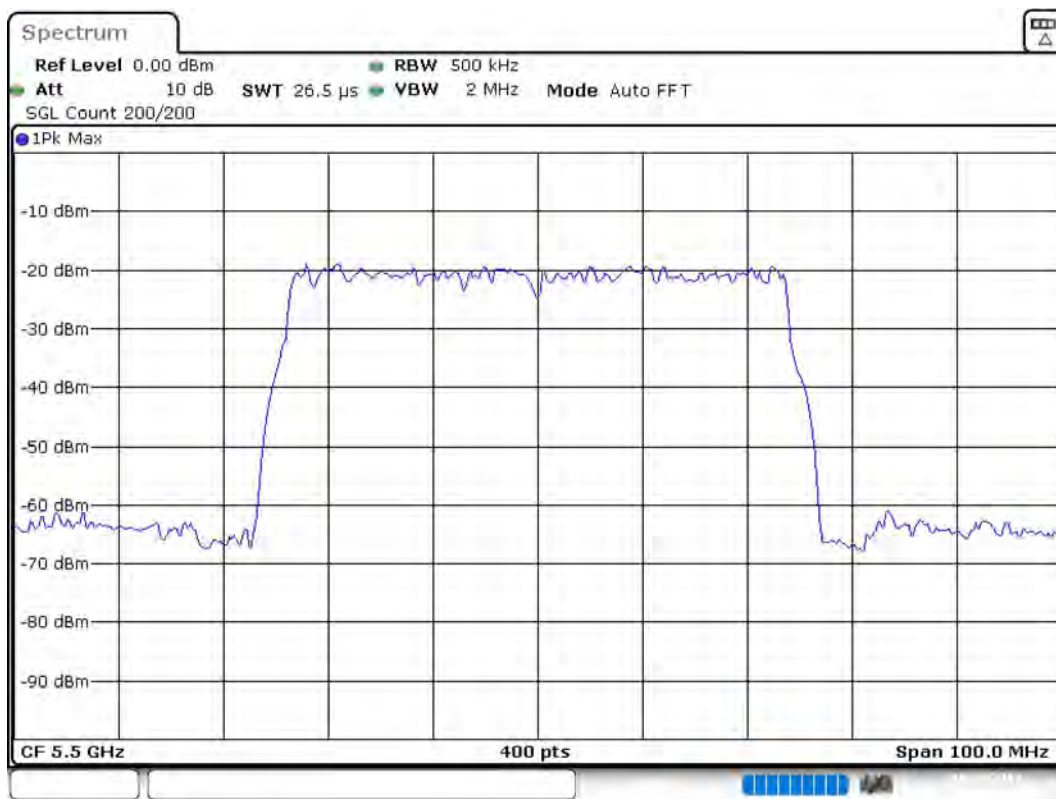

Date: 8.AUG.2019 16:06:30

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.45000 GHz	5.45000 GHz
Stop Frequency	5.55000 GHz	5.55000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	>= 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	400	~ 400
Sweeptime	26.469 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5500 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5500.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
39913.750000	-29.3	2.3	-27.0
5460.250000	-29.5	2.5	-27.0
5463.750000	-29.7	2.7	-27.0
5460.750000	-29.8	2.8	-27.0
5469.750000	-29.8	2.8	-27.0
5466.750000	-29.9	2.9	-27.0
5466.250000	-30.0	3.0	-27.0
5464.250000	-30.0	3.0	-27.0
39907.250000	-30.1	3.1	-27.0
39314.250000	-30.1	3.1	-27.0
39901.250000	-30.1	3.1	-27.0
5463.250000	-30.1	3.1	-27.0
39908.750000	-30.2	3.2	-27.0
39881.750000	-30.2	3.2	-27.0
5461.250000	-30.3	3.3	-27.0


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2


Spurious

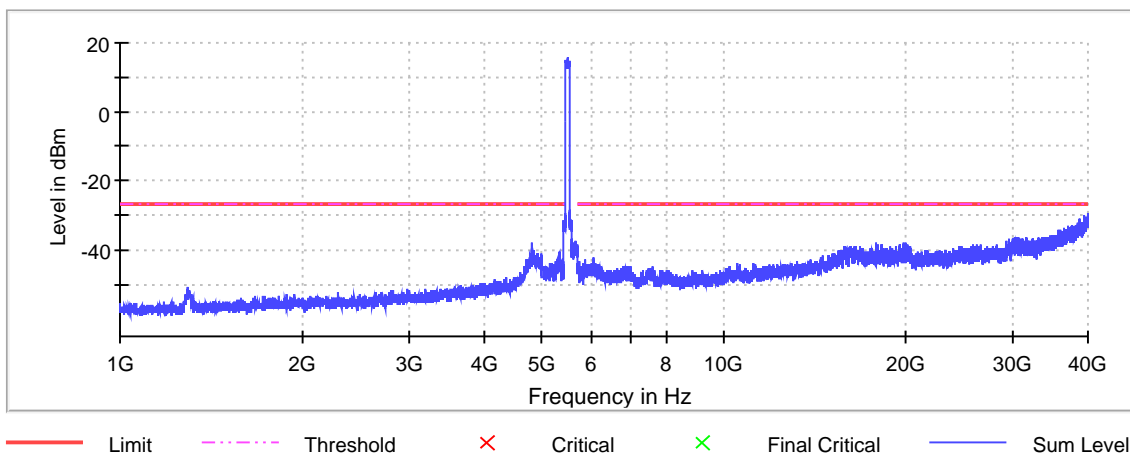

Gain

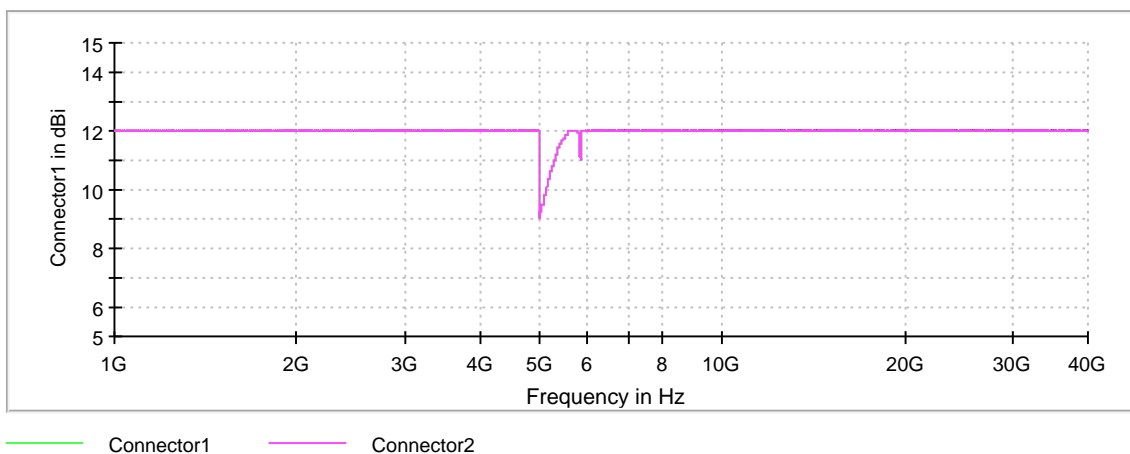

Attenuation

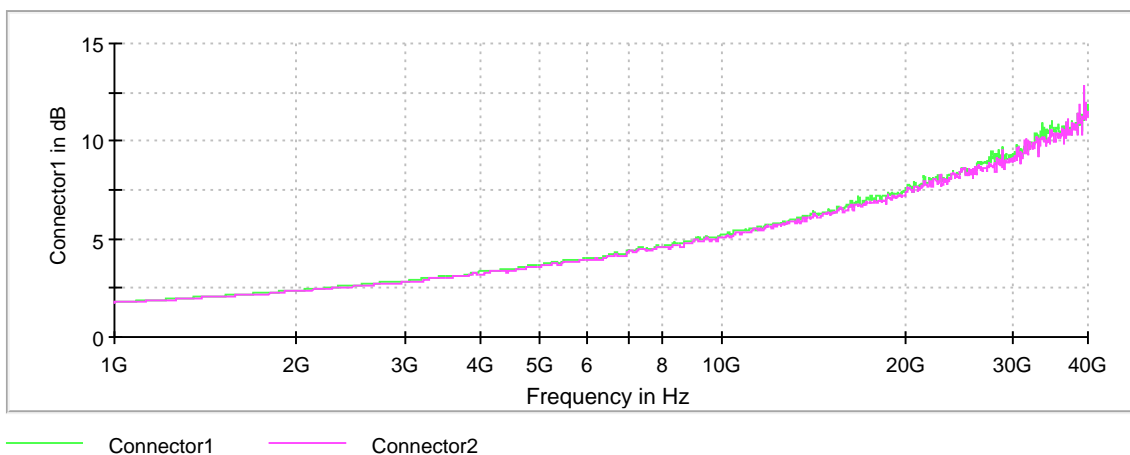

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5500 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5500.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5440.250000	-32.0	10.8	-21.2
5447.250000	-32.4	11.2	-21.2
5446.750000	-32.5	11.3	-21.2
5439.750000	-32.5	11.3	-21.2
5422.250000	-32.8	11.6	-21.2
5422.750000	-32.8	11.6	-21.2
5440.750000	-33.1	11.9	-21.2
5451.250000	-33.4	12.2	-21.2
5431.250000	-33.8	12.6	-21.2
5451.750000	-33.8	12.6	-21.2
5431.750000	-33.8	12.6	-21.2
5450.750000	-33.9	12.7	-21.2
5453.250000	-34.0	12.8	-21.2
5456.250000	-34.0	12.8	-21.2
5457.250000	-34.0	12.8	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

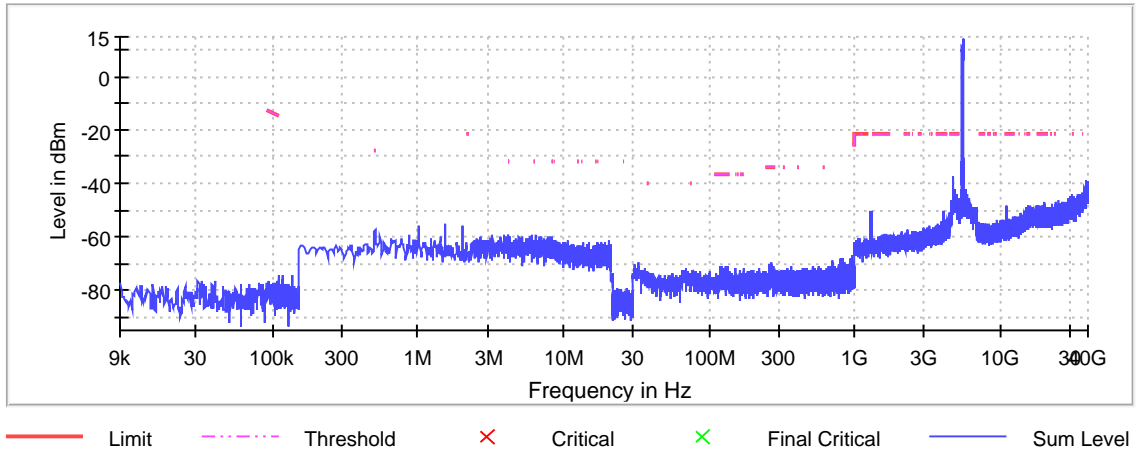

Gain

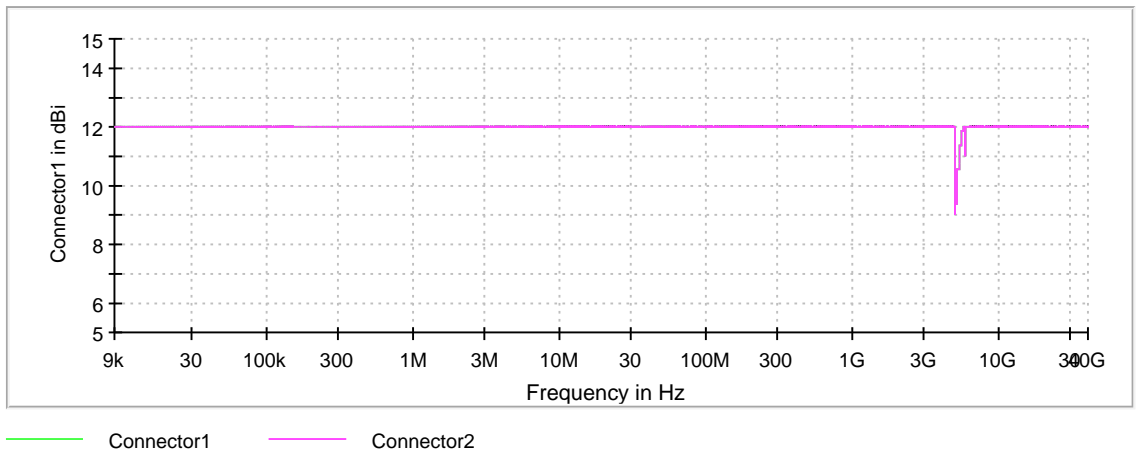

Attenuation

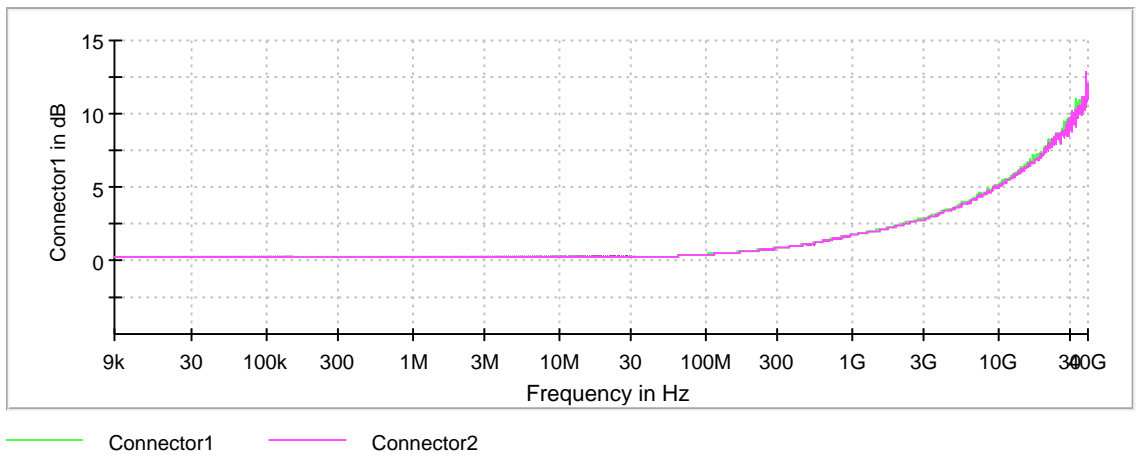

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5600 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	51.500000	---	---	5574.125000	5625.625000


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
5600.000000	0.9	PASS

26 dB Bandwidth

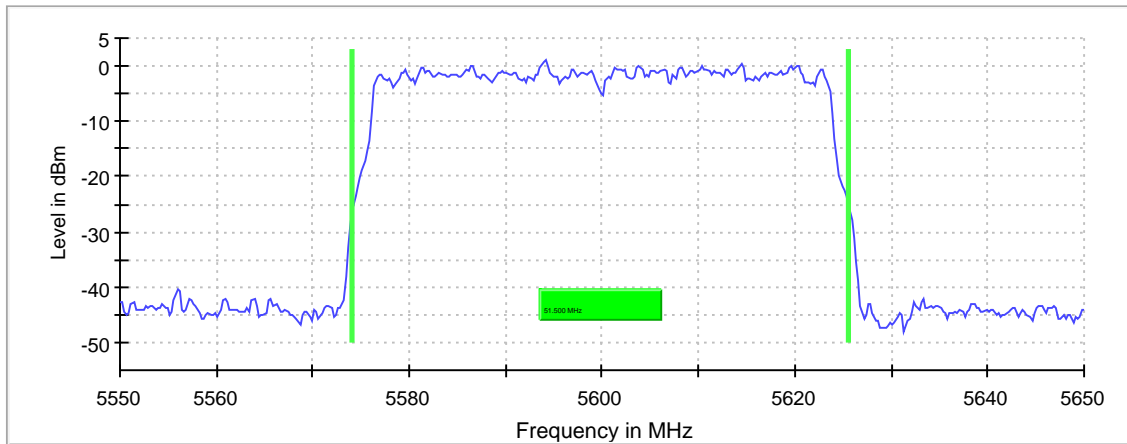

Bandwidth

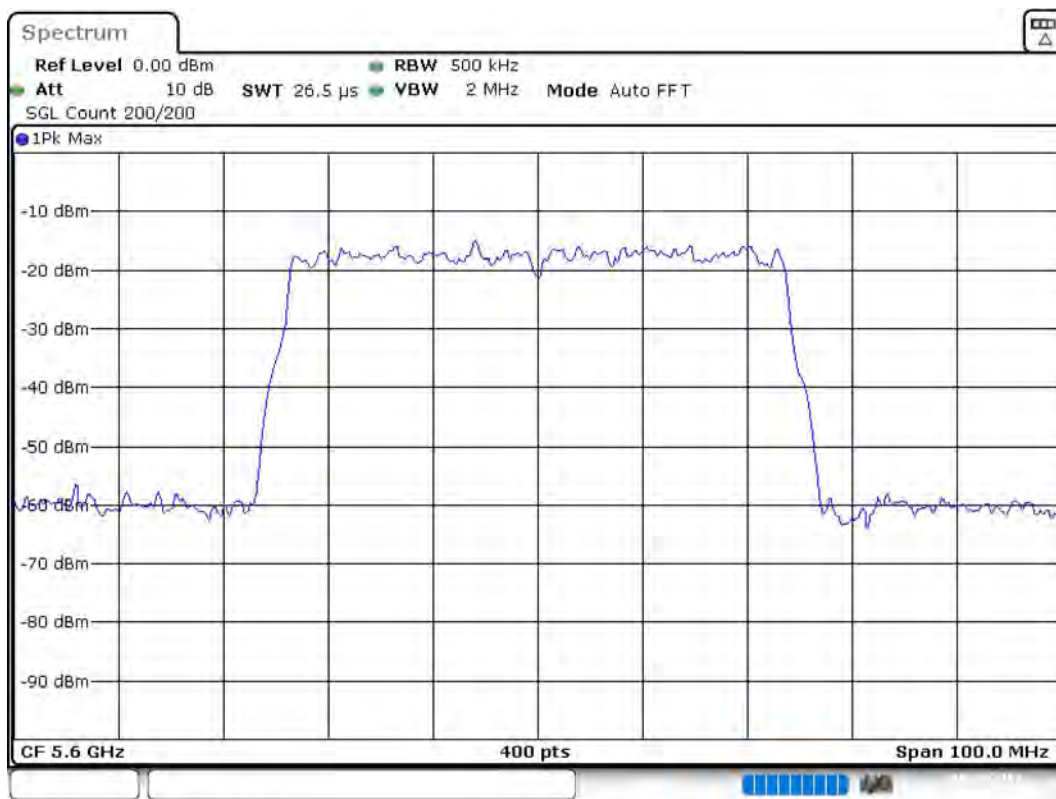

Date: 8.AUG.2019 16:40:32

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.55000 GHz	5.55000 GHz
Stop Frequency	5.65000 GHz	5.65000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	400	~ 400
SweepTime	26.469 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

RF output power (5600 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5600.000000	28.3	---	28.3	99.707	PASS

Power Spectral Density (5600 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5600.000000	5610.396040	-0.123	5.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.57500 GHz	5.57500 GHz
Stop Frequency	5.62500 GHz	5.62500 GHz
Span	50.000 MHz	50.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 100
SweepTime	2.020 ms	2.020 ms
Reference Level	20.000 dBm	20.000 dBm
Attenuation	40.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5600 MHz; 50 MHz)

Customized settings.


Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013

99 % Bandwidth


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
5600.000000	47.250000	---	---	5576.375000	5623.625000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
5600.000000	PASS

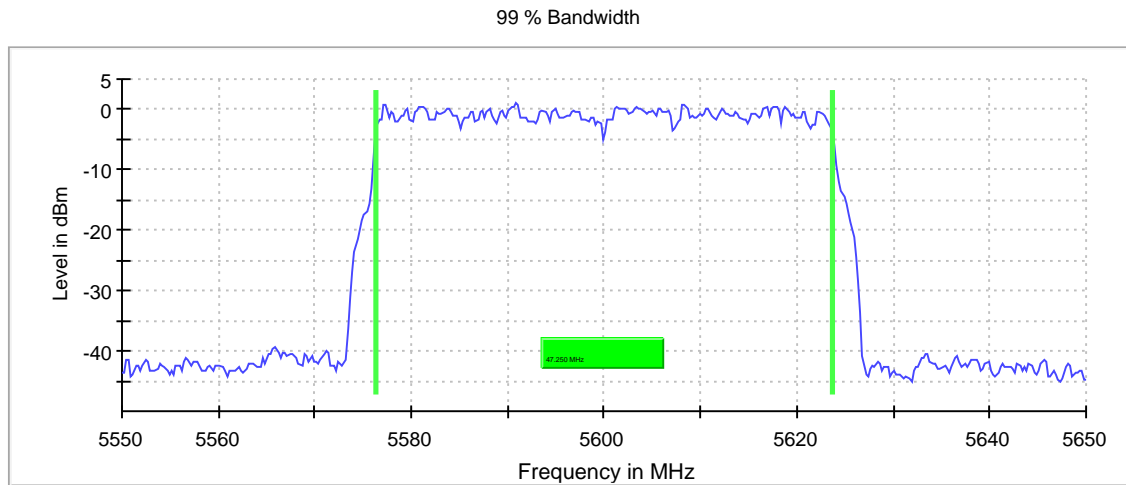

Bandwidth

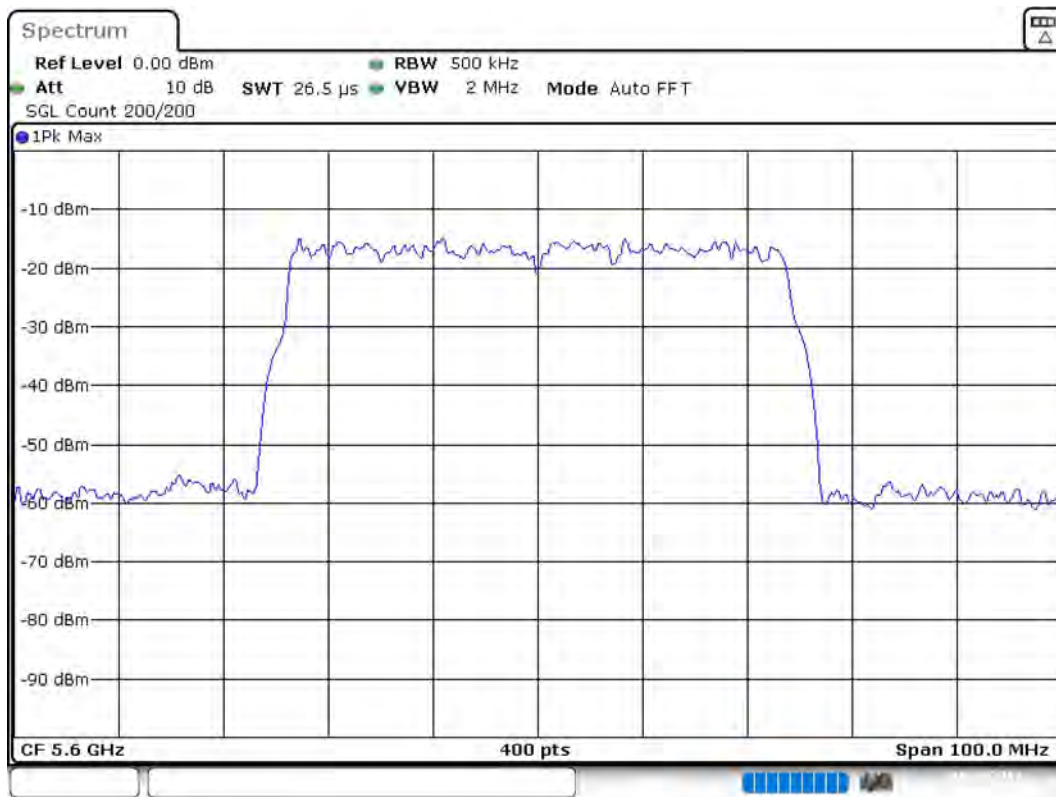

Date: 8.AUG.2019 16:41:24

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.55000 GHz	5.55000 GHz
Stop Frequency	5.65000 GHz	5.65000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	\geq 500.000 kHz
VBW	2.000 MHz	\geq 1.500 MHz
SweepPoints	400	\sim 400
SweepTime	26.469 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
17867.750000	-38.1	16.9	-21.2
17887.750000	-38.2	17.0	-21.2
4812.750000	-38.2	17.0	-21.2
4989.250000	-38.2	17.0	-21.2
17863.750000	-38.3	17.1	-21.2
17916.250000	-38.4	17.2	-21.2
15827.750000	-38.6	17.4	-21.2
15827.250000	-38.6	17.4	-21.2
15909.750000	-38.6	17.4	-21.2
17872.250000	-38.6	17.4	-21.2
17904.750000	-38.7	17.5	-21.2
17887.250000	-38.7	17.5	-21.2
17922.750000	-38.8	17.6	-21.2
17900.250000	-38.8	17.6	-21.2
15917.250000	-38.8	17.6	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

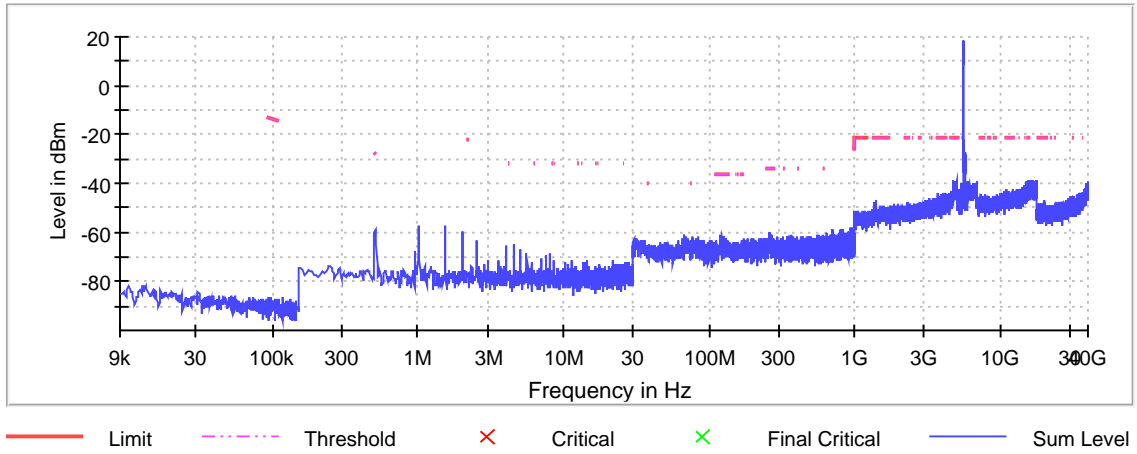

Gain

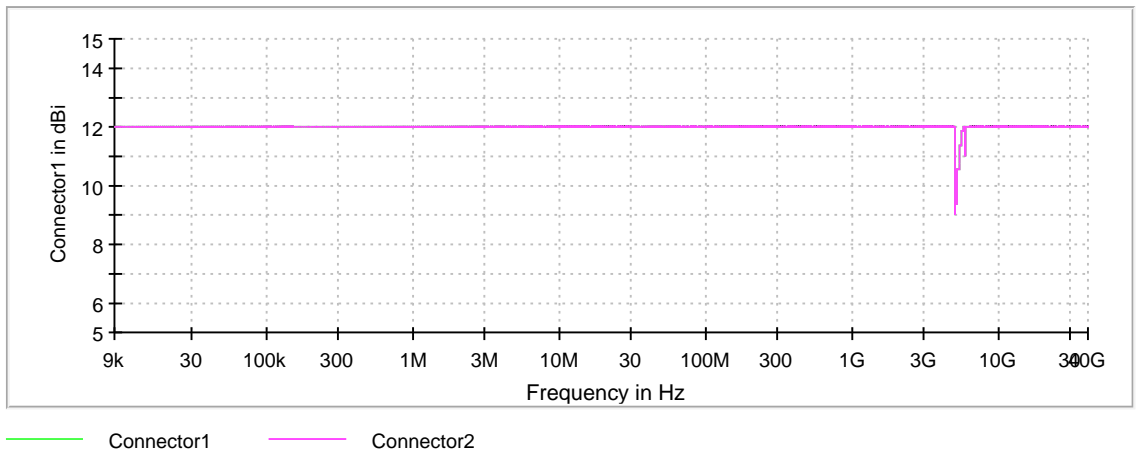

Attenuation

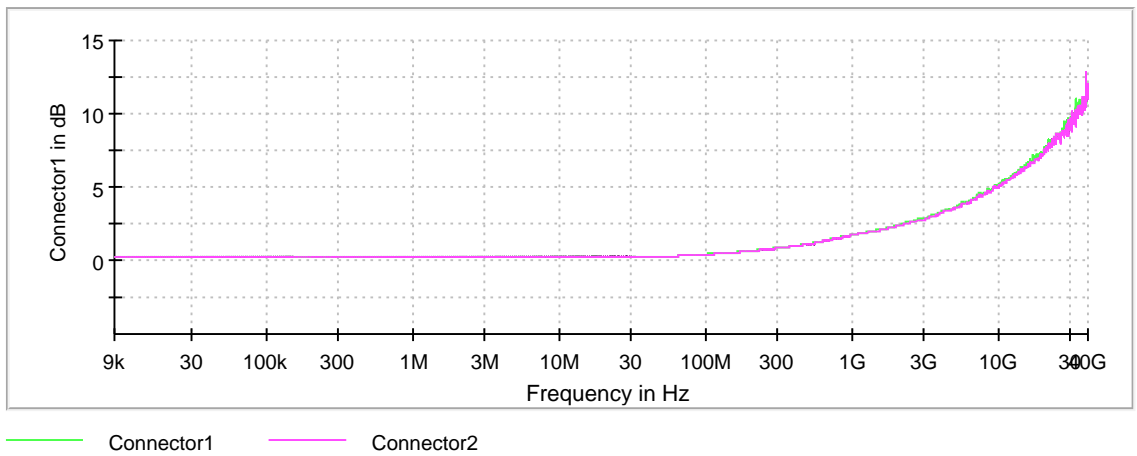

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emission Bandwidth 26 dB (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5690.000000	51.750000	51.750000	0.000000	---	---


(continuation of the "26 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5690.000000	5664.125000	5715.875000	-2.6	PASS

26 dB Bandwidth

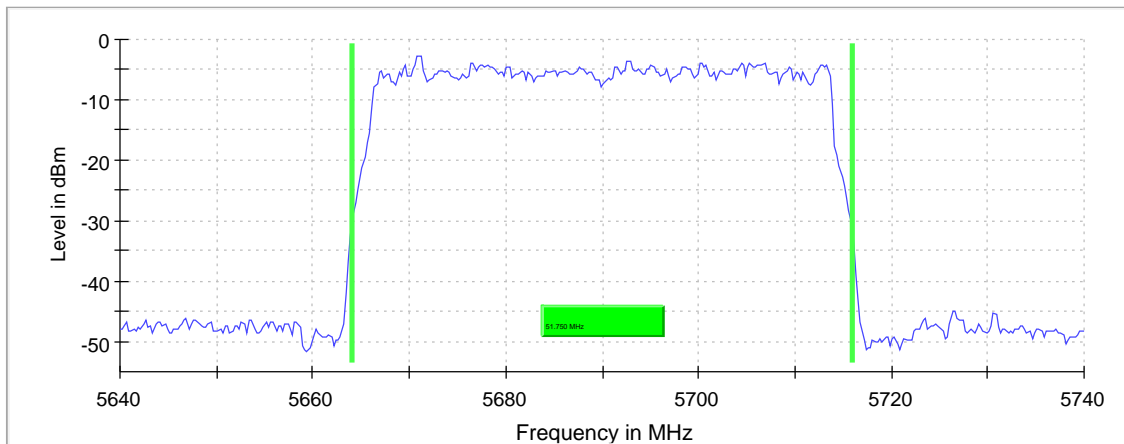

Bandwidth

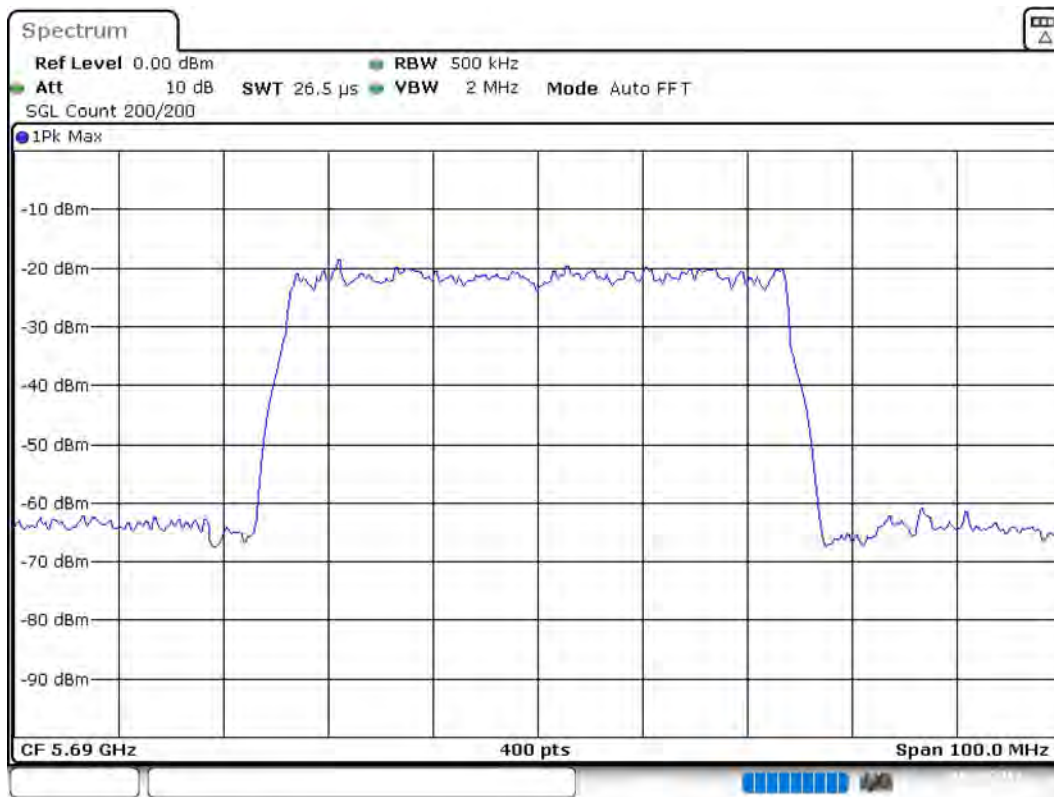

Date: 8.AUG.2019 17:05:11

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.64000 GHz	5.64000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	~ 500.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	400	~ 400
Sweeptime	26.469 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

RF output power (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.E and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
5690.000000	24.5	---	24.5	99.718	PASS

Power Spectral Density (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.F and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5690.000000	5700.891089	-4.048	5.0	PASS

Ports

Port	Duty Cycle (%)
1	0.000
2	0.000

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.66500 GHz	5.66500 GHz
Stop Frequency	5.71500 GHz	5.71500 GHz
Span	50.000 MHz	50.000 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 100
SweepTime	2.020 ms	2.020 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Occupied Channel Bandwidth 99% (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 D and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Bandwidth U-NII 2C (MHz)	Bandwidth U-NII 3 (MHz)	Limit Min (MHz)	Limit Max (MHz)
5690.000000	47.250000	47.250000	0.000000	---	---


(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5690.000000	5666.375000	5713.625000	PASS

99 % Bandwidth

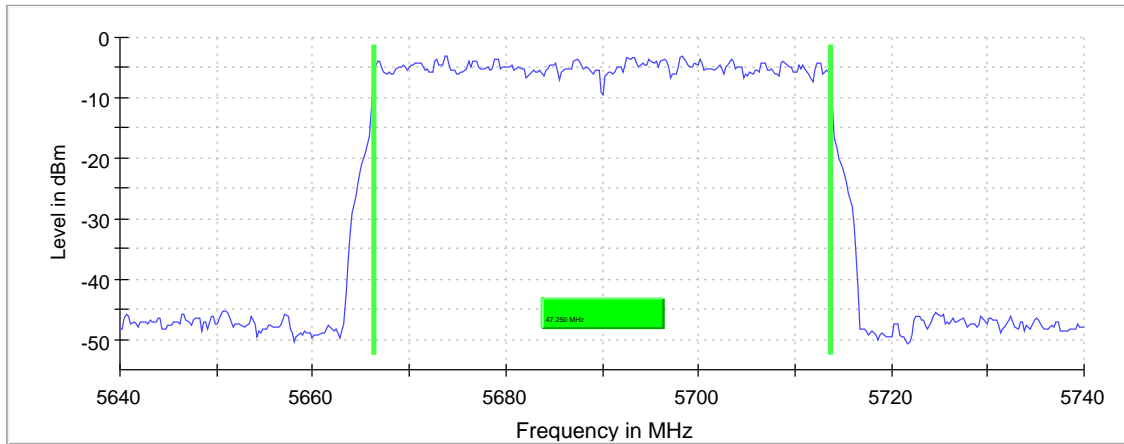

Bandwidth

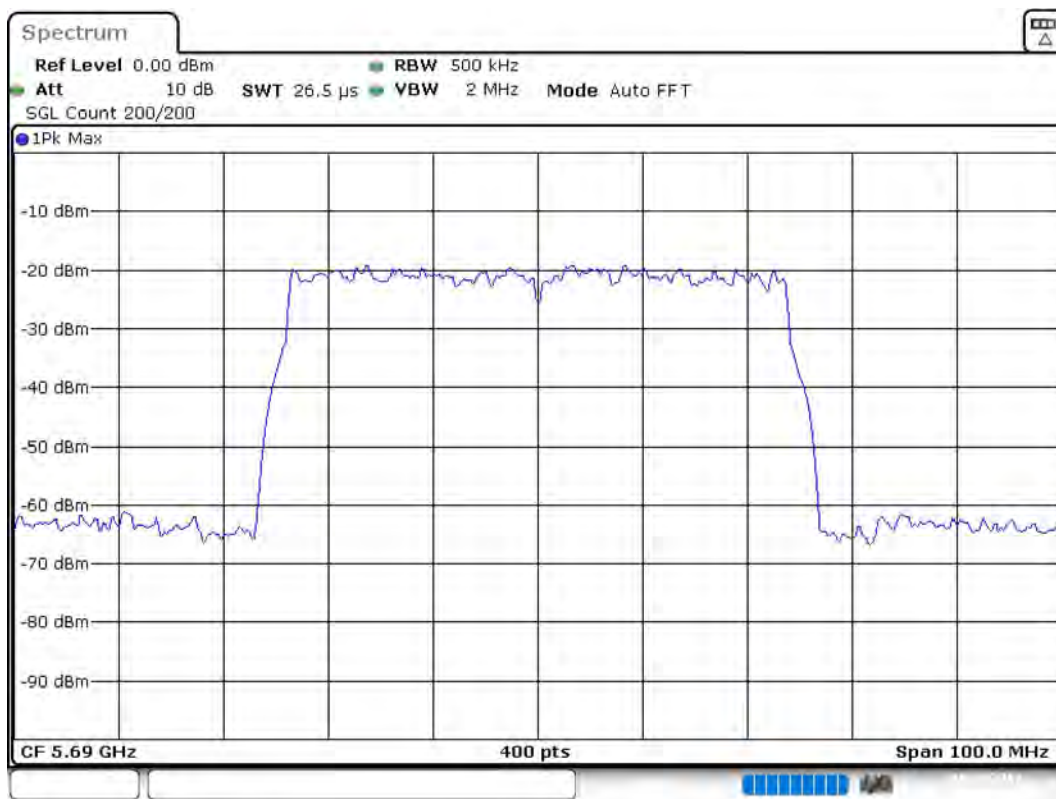

Date: 8.AUG.2019 17:06:04

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.64000 GHz	5.64000 GHz
Stop Frequency	5.74000 GHz	5.74000 GHz
Span	100.000 MHz	100.000 MHz
RBW	500.000 kHz	\geq 500.000 kHz
VBW	2.000 MHz	\geq 1.500 MHz
SweepPoints	400	\sim 400
Sweeptime	26.469 μ s	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Tx Spurious Emission (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.4&5 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5690.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5725.250000	-29.0	2.0	-27.0
5725.750000	-29.1	2.1	-27.0
5726.250000	-29.4	2.4	-27.0
39338.250000	-29.5	2.5	-27.0
5737.750000	-29.5	2.5	-27.0
5734.750000	-29.6	2.6	-27.0
5734.250000	-29.6	2.6	-27.0
5726.750000	-29.7	2.7	-27.0
5738.250000	-29.8	2.8	-27.0
5737.250000	-29.9	2.9	-27.0
39883.250000	-29.9	2.9	-27.0
39938.750000	-30.1	3.1	-27.0
39895.750000	-30.1	3.1	-27.0
5733.750000	-30.1	3.1	-27.0
39879.750000	-30.1	3.1	-27.0


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	18000.000000	2	2
18000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2


Spurious

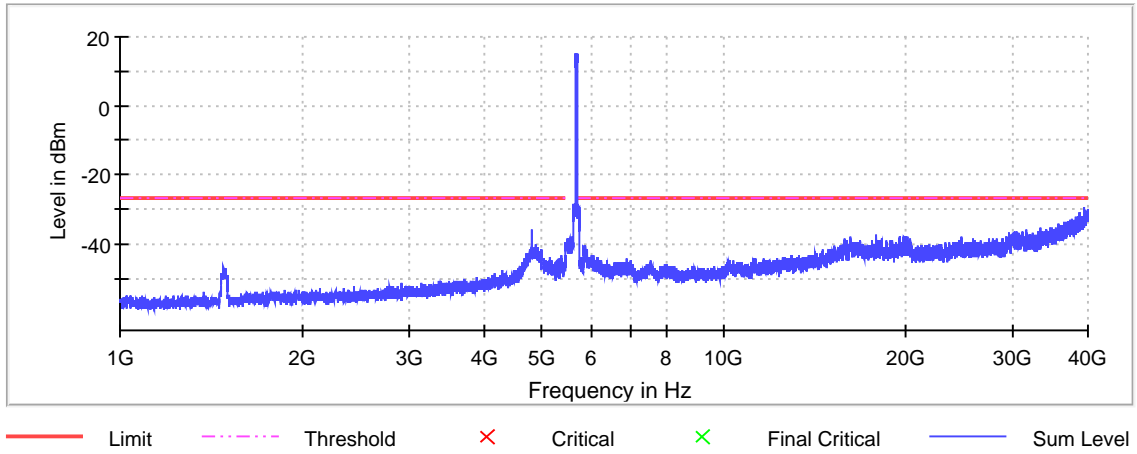

Gain

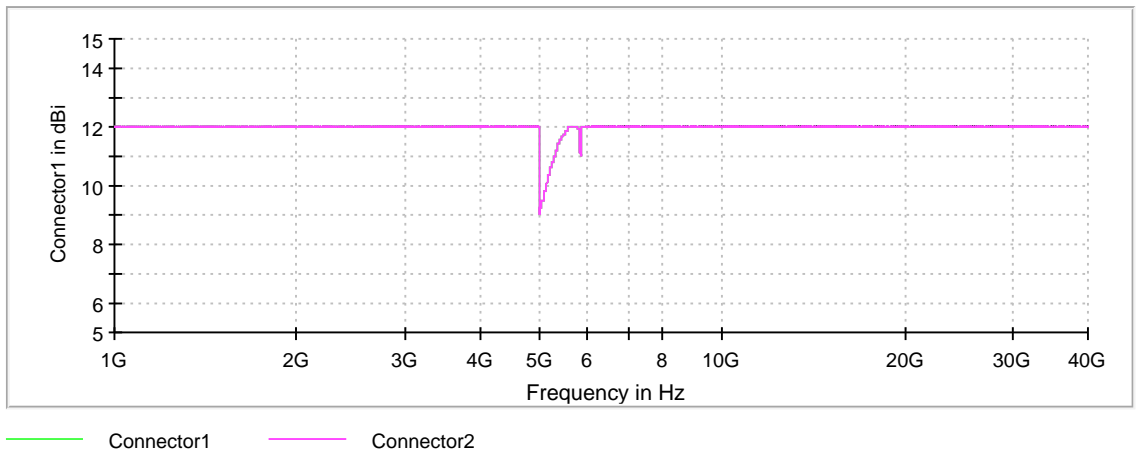

Attenuation

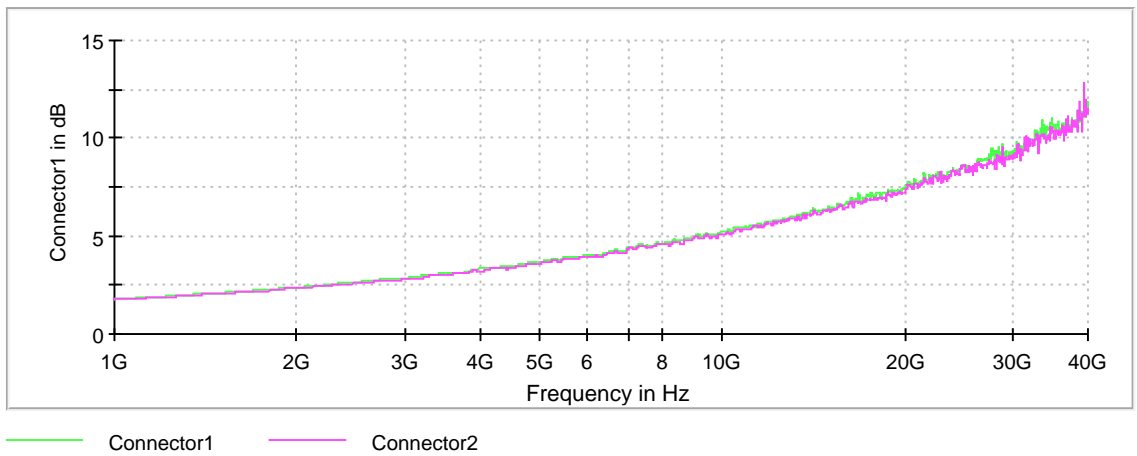

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	≤ 1.000 MHz
VBW	3.000 MHz	≥ 3.000 MHz
SweepPoints	8300	~ 8300
SweepTime	8.300 ms	AUTO
Reference Level	0.000 dBm	AUTO
Attenuation	10.000 dB	10.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5690 MHz; 50 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5690.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4799.750000	-39.4	18.2	-21.2
4800.250000	-40.8	19.6	-21.2
4920.250000	-41.0	19.8	-21.2
4920.750000	-41.2	20.0	-21.2
4991.750000	-42.0	20.8	-21.2
4800.750000	-42.1	20.9	-21.2
4871.250000	-42.4	21.2	-21.2
4859.750000	-42.5	21.3	-21.2
4901.250000	-42.6	21.4	-21.2
4792.750000	-42.7	21.5	-21.2
4847.250000	-42.8	21.6	-21.2
4873.250000	-42.9	21.7	-21.2
36431.750000	-43.0	21.8	-21.2
4779.250000	-43.2	22.0	-21.2
36431.250000	-43.3	22.1	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

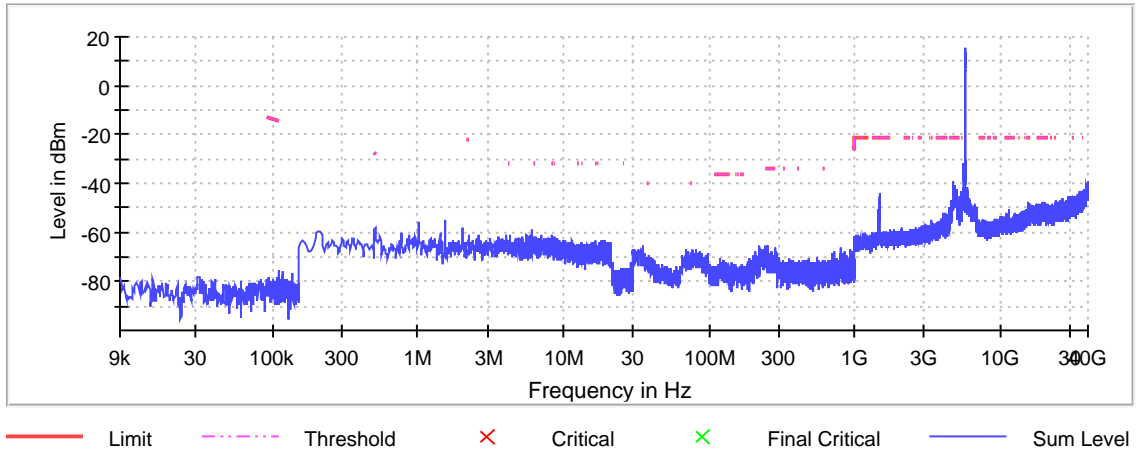

Gain

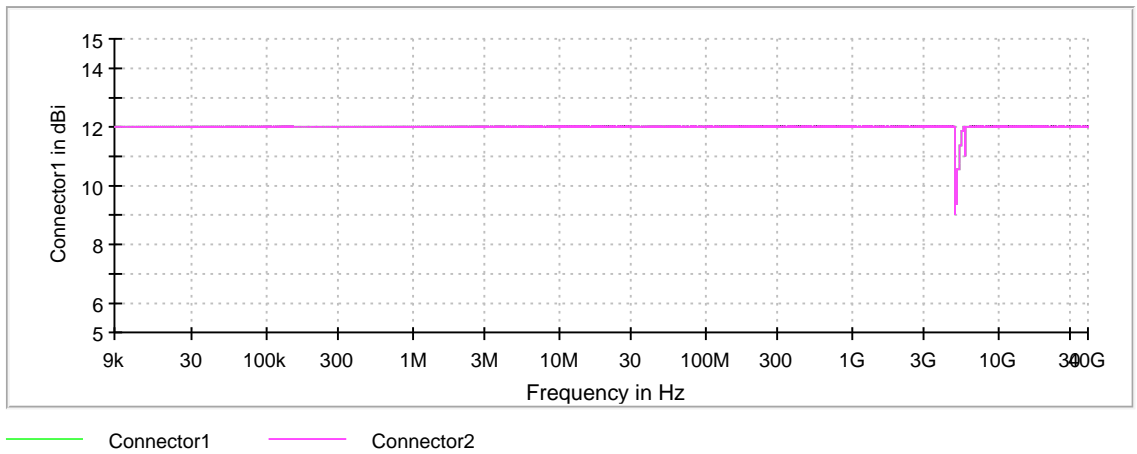

Attenuation

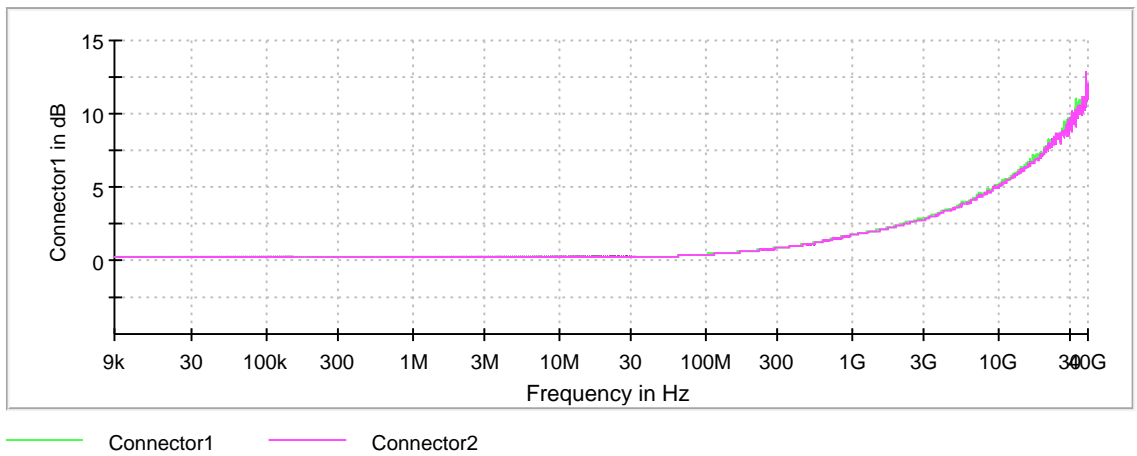

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5480 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5480.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
10961.250000	-41.4	0.2	-41.2
10959.750000	-41.4	0.2	-41.2
10959.250000	-41.6	0.4	-41.2
10961.750000	-42.1	0.9	-41.2
10958.250000	-42.2	1.0	-41.2
10956.750000	-42.3	1.1	-41.2
10955.750000	-42.3	1.1	-41.2
10960.250000	-42.6	1.4	-41.2
10962.250000	-42.7	1.5	-41.2
10957.750000	-42.7	1.5	-41.2
10956.250000	-42.8	1.6	-41.2
10958.750000	-42.9	1.7	-41.2
10962.750000	-43.1	1.9	-41.2
10963.250000	-43.1	1.9	-41.2
10960.750000	-43.2	2.0	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

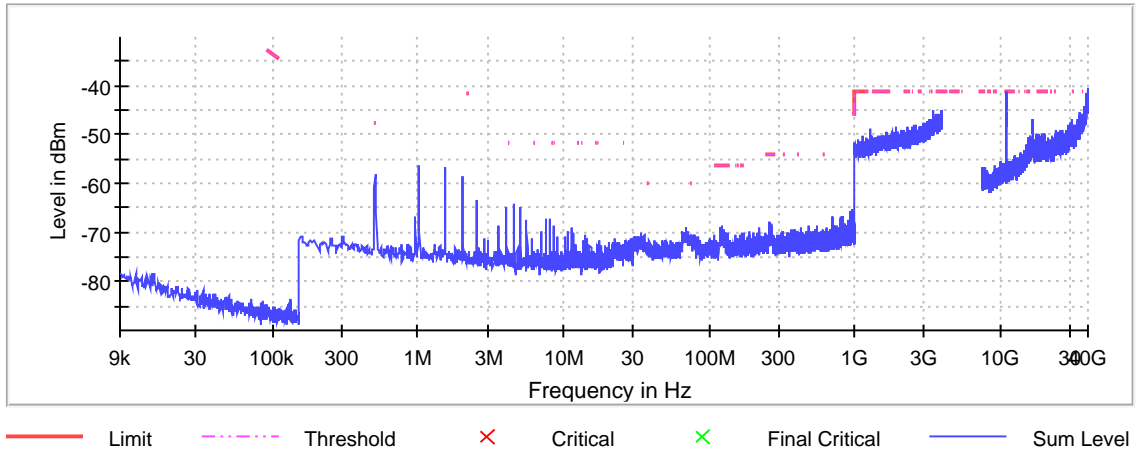

Gain

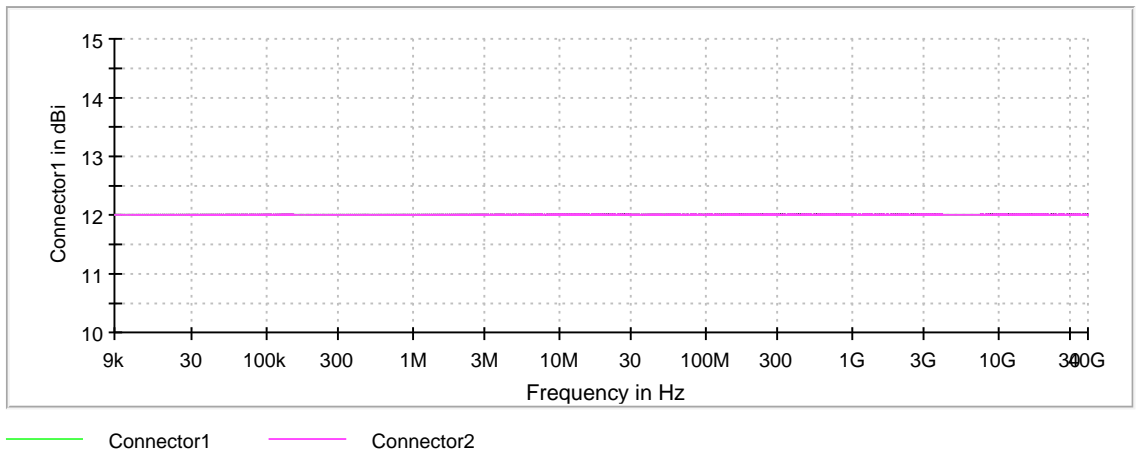

Attenuation

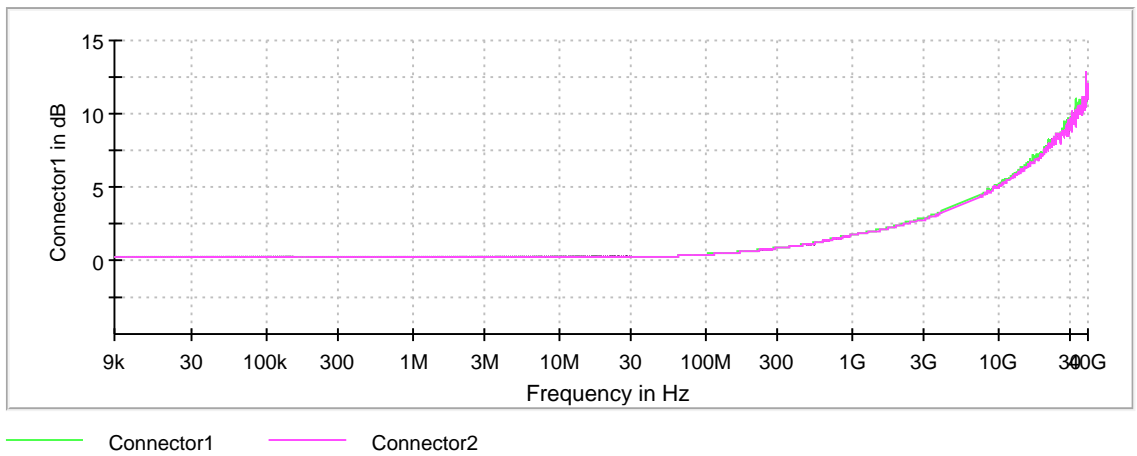

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Peak) (5600 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5441.750000	-36.8	15.6	-21.2
5444.250000	-37.5	16.3	-21.2
5441.250000	-37.5	16.3	-21.2
5437.750000	-38.2	17.0	-21.2
5442.250000	-38.2	17.0	-21.2
5416.250000	-38.2	17.0	-21.2
16187.750000	-38.2	17.0	-21.2
5437.250000	-38.2	17.0	-21.2
5443.750000	-38.4	17.2	-21.2
5444.750000	-38.4	17.2	-21.2
16196.750000	-38.5	17.3	-21.2
17865.250000	-38.6	17.4	-21.2
17882.750000	-38.6	17.4	-21.2
5417.250000	-38.6	17.4	-21.2
17879.750000	-38.6	17.4	-21.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.150000	1	1
0.150000	30.000000	1	1
30.000000	1000.000000	1	1
1000.000000	5150.000000	1	2
5150.000000	5350.000000	1	2
5350.000000	5470.000000	1	2
5470.000000	5850.000000	1	2
5850.000000	18000.000000	1	2
18000.000000	26000.000000	1	2
26000.000000	40000.000000	1	2


Restricted Band

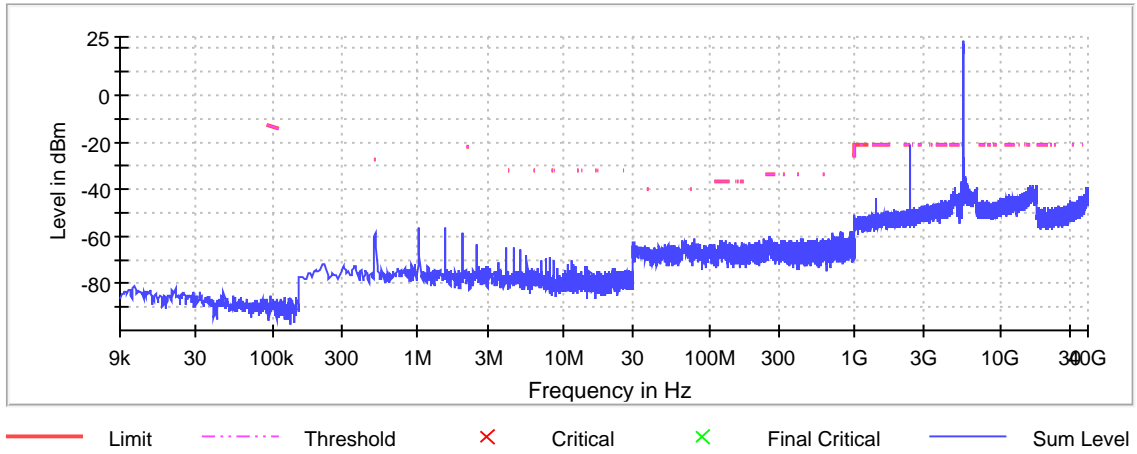

Gain

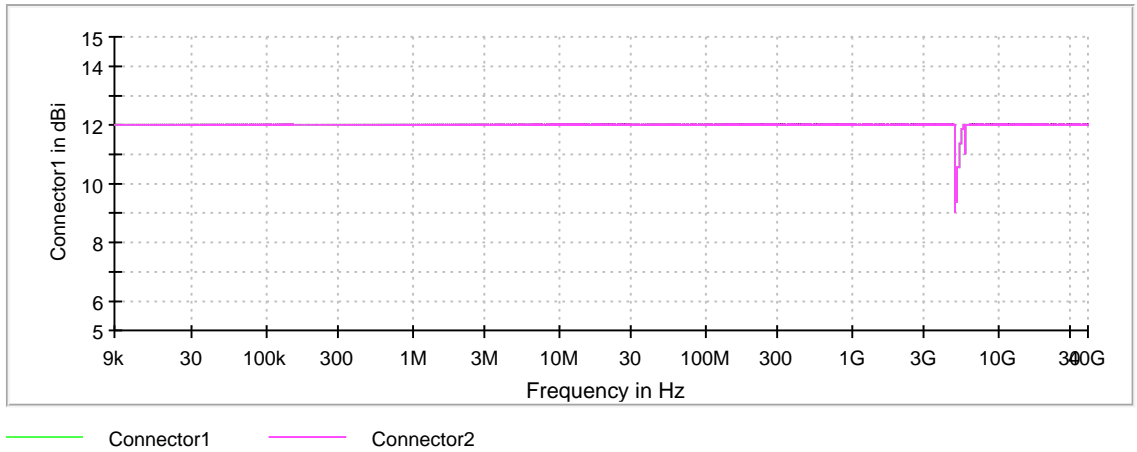

Attenuation

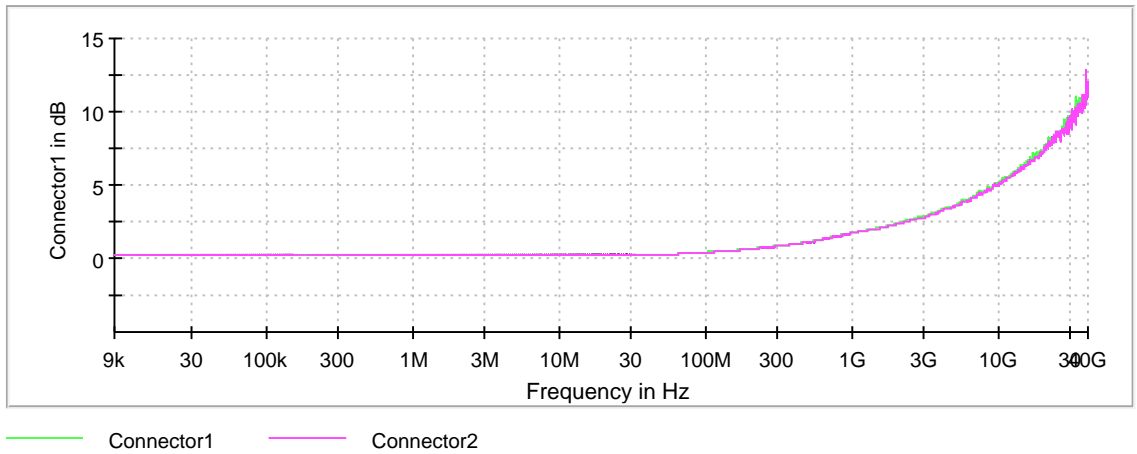

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	940	~ 940
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
11199.250000	-37.0	-44.9	-41.2	3.7	PASS


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
11199.250000	-37.0	-4.2	-41.2
11200.750000	-38.3	-2.9	-41.2
11198.250000	-38.3	-2.9	-41.2
11200.250000	-38.6	-2.6	-41.2
11201.250000	-38.7	-2.5	-41.2
11199.750000	-38.8	-2.4	-41.2
11198.750000	-39.1	-2.1	-41.2
11202.750000	-39.3	-1.9	-41.2
11201.750000	-39.4	-1.8	-41.2
11197.250000	-39.7	-1.5	-41.2
11194.750000	-39.7	-1.5	-41.2
11197.750000	-39.9	-1.3	-41.2
11203.250000	-40.0	-1.2	-41.2
11202.250000	-40.2	-1.0	-41.2
11196.750000	-40.4	-0.8	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

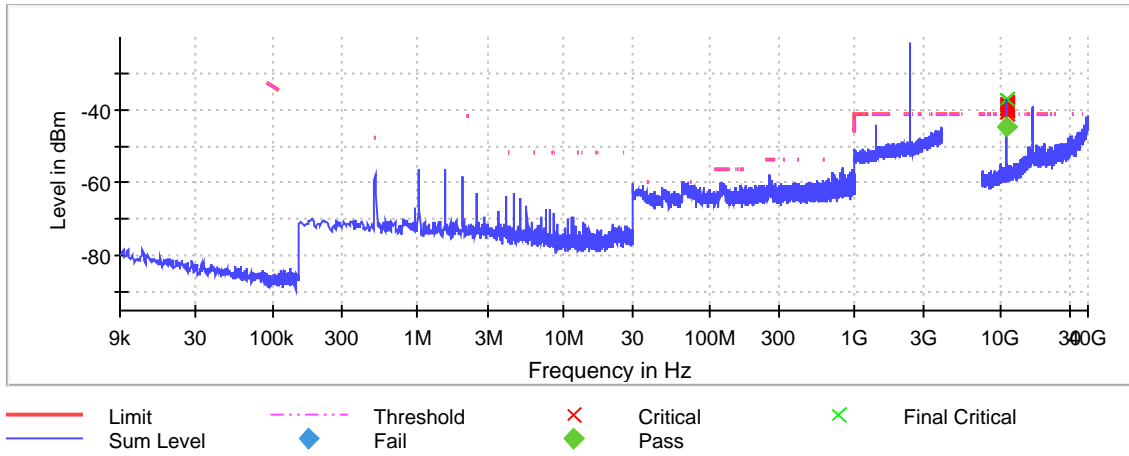

Gain

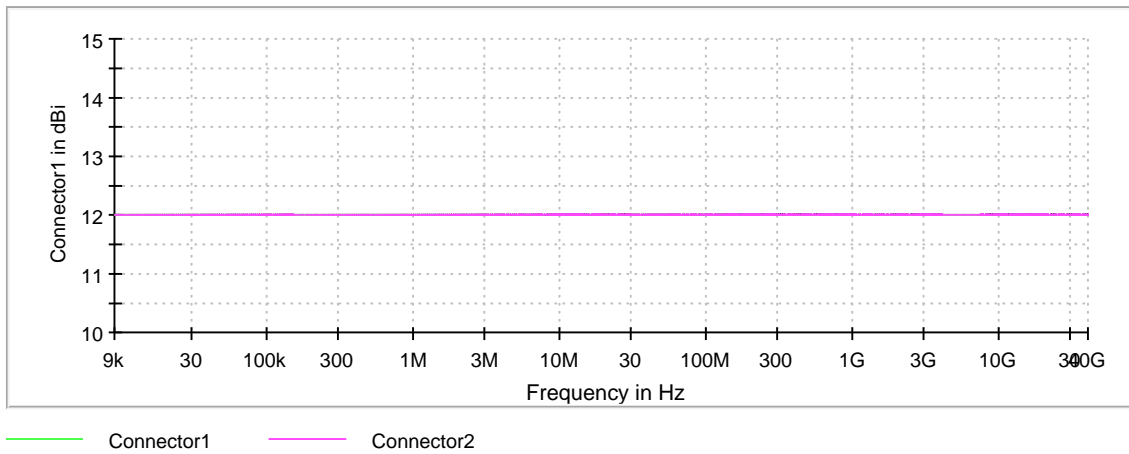

Attenuation

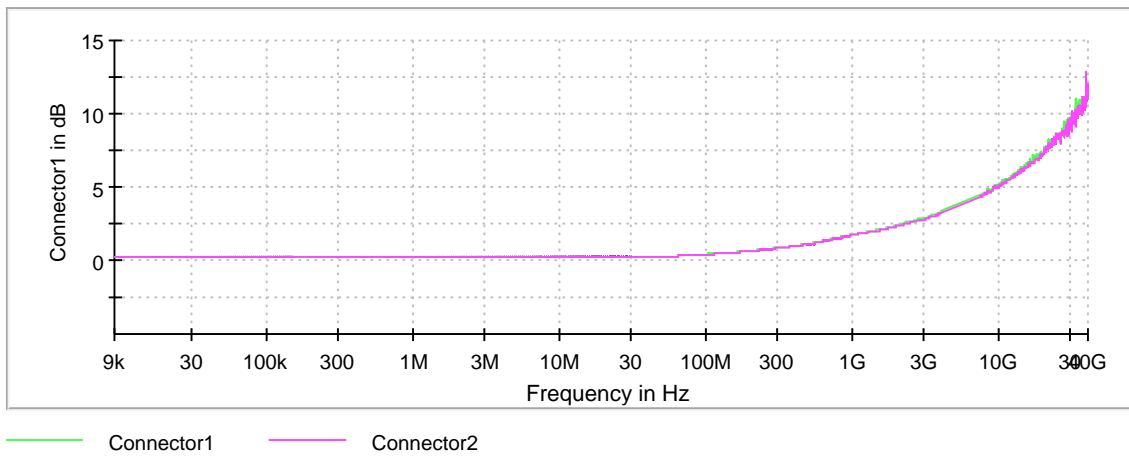

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Final Measurement 1

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	101	~ 101
SweepTime	100.000 ms	100.000 ms
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5715 MHz; 10 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5715.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1510.750000	-37.6	-44.5	-41.2	3.3	PASS


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1510.750000	-37.6	-3.6	-41.2
1507.250000	-38.7	-2.5	-41.2
1513.250000	-40.3	-0.9	-41.2
1508.750000	-40.3	-0.9	-41.2
1509.750000	-40.3	-0.9	-41.2
1510.250000	-40.8	-0.4	-41.2
1511.250000	-40.9	-0.3	-41.2
1509.250000	-41.4	0.2	-41.2
1512.250000	-41.4	0.2	-41.2
1511.750000	-41.7	0.5	-41.2
1508.250000	-41.9	0.7	-41.2
1506.750000	-42.1	0.9	-41.2
1507.750000	-42.7	1.5	-41.2
1512.750000	-43.0	1.8	-41.2
1513.750000	-43.6	2.4	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

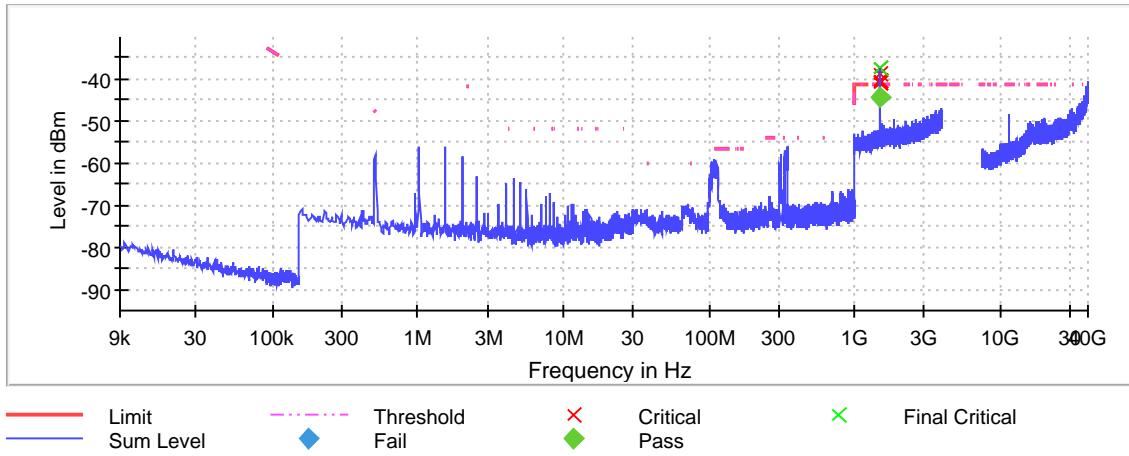

Gain

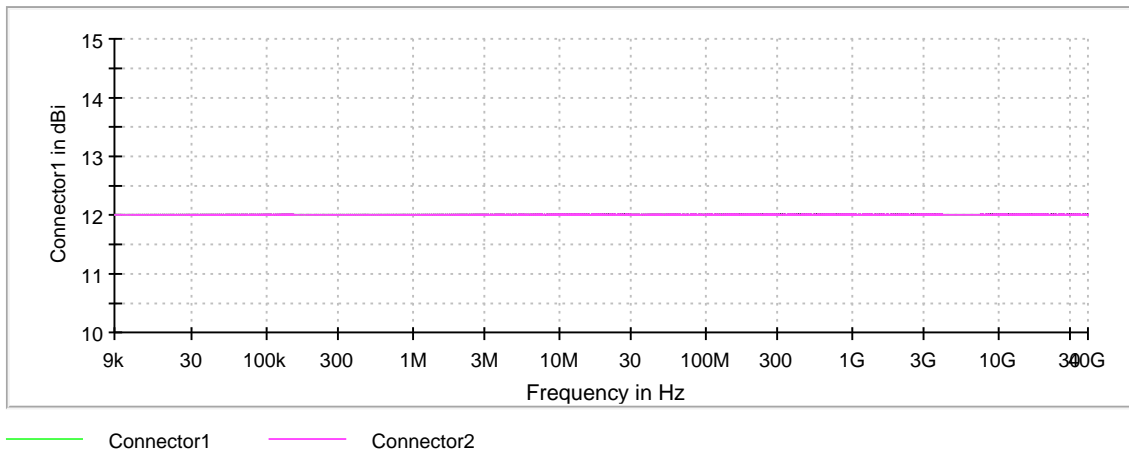

Attenuation

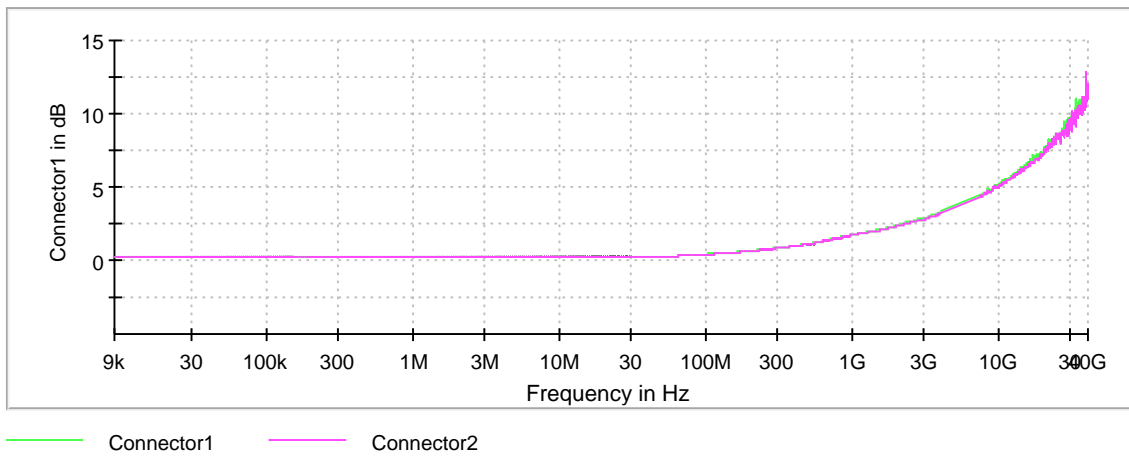

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Final Measurement 1

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	101	~ 101
SweepTime	100.000 ms	100.000 ms
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5485 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5485.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
10969.750000	-44.6	3.4	-41.2
10973.750000	-45.3	4.1	-41.2
10967.250000	-45.4	4.2	-41.2
10966.250000	-45.5	4.3	-41.2
10971.750000	-45.5	4.3	-41.2
10965.750000	-45.7	4.5	-41.2
10964.750000	-45.7	4.5	-41.2
10958.250000	-45.8	4.6	-41.2
36450.250000	-45.9	4.7	-41.2
10967.750000	-45.9	4.7	-41.2
10970.250000	-46.0	4.8	-41.2
36441.250000	-46.0	4.8	-41.2
36449.250000	-46.0	4.8	-41.2
10968.250000	-46.0	4.8	-41.2
10971.250000	-46.0	4.8	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

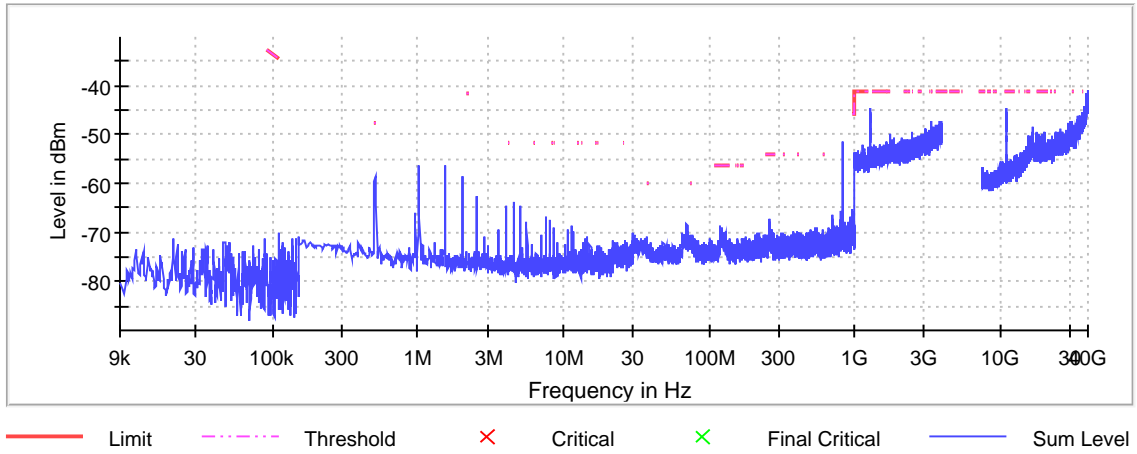

Gain

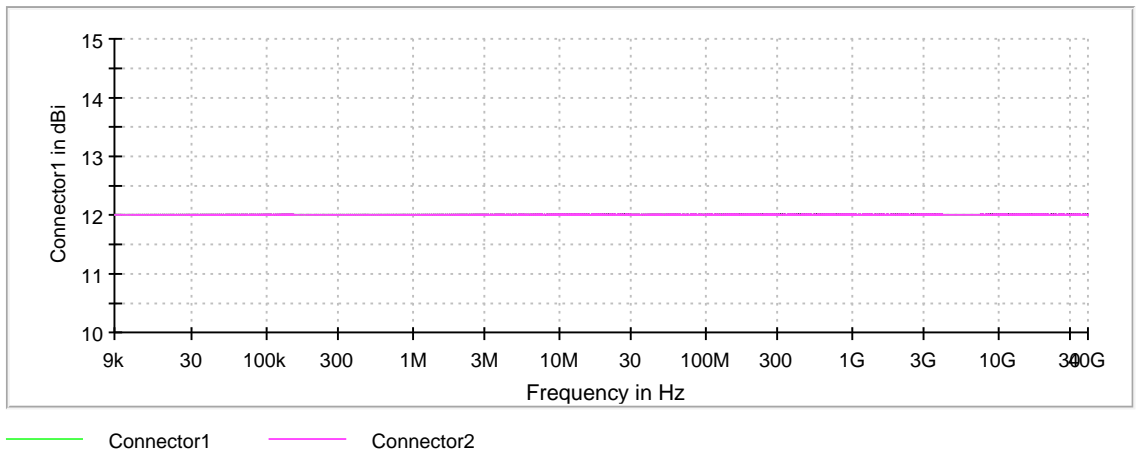

Attenuation

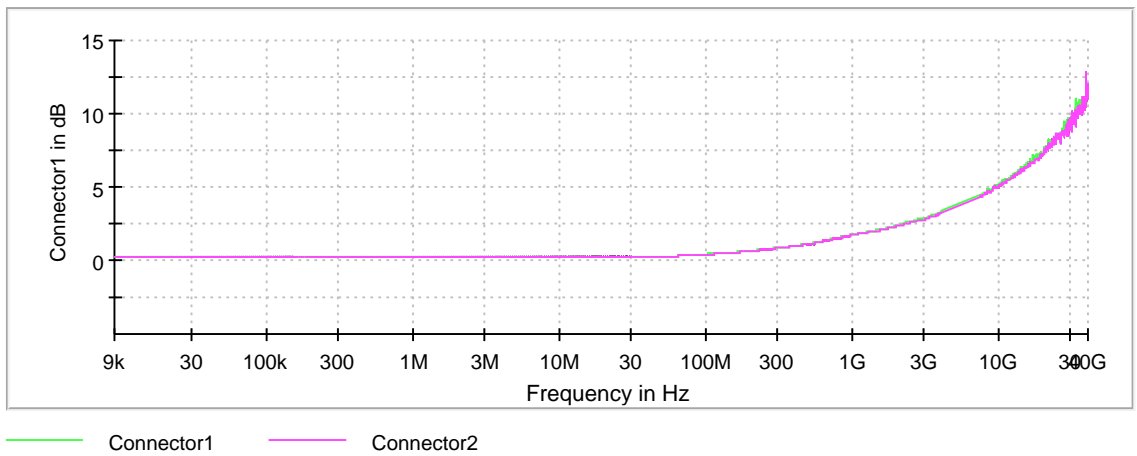

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
11200.250000	-38.9	-45.8	-41.2	4.6	PASS


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
11200.250000	-38.9	-2.3	-41.2
11198.750000	-40.3	-0.9	-41.2
11197.250000	-40.3	-0.9	-41.2
11198.250000	-40.3	-0.9	-41.2
11199.250000	-40.6	-0.6	-41.2
11207.250000	-40.7	-0.5	-41.2
11199.750000	-40.7	-0.5	-41.2
11200.750000	-40.7	-0.5	-41.2
11202.250000	-40.7	-0.5	-41.2
11196.750000	-40.8	-0.4	-41.2
11204.250000	-40.9	-0.3	-41.2
11195.750000	-40.9	-0.3	-41.2
11203.250000	-41.0	-0.2	-41.2
11196.250000	-41.0	-0.2	-41.2
11203.750000	-41.0	-0.2	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

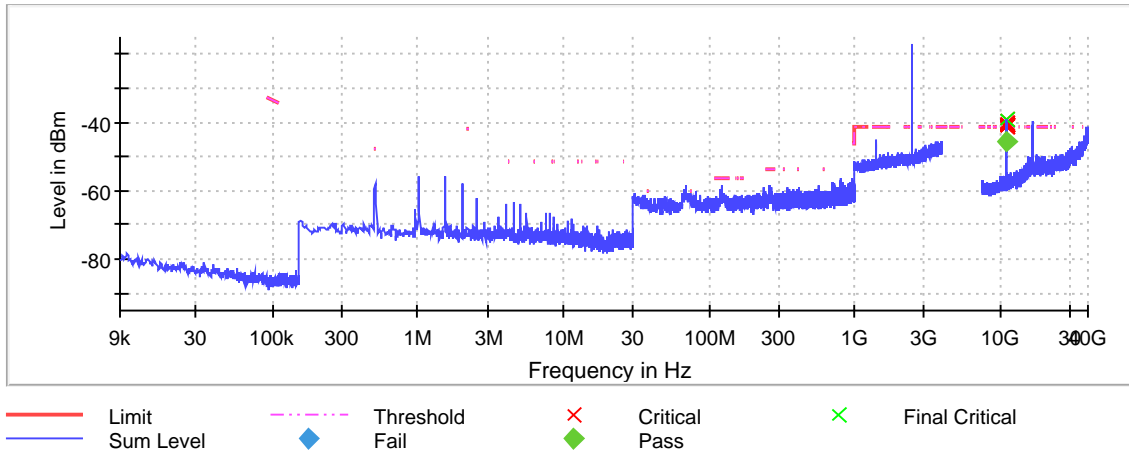

Gain

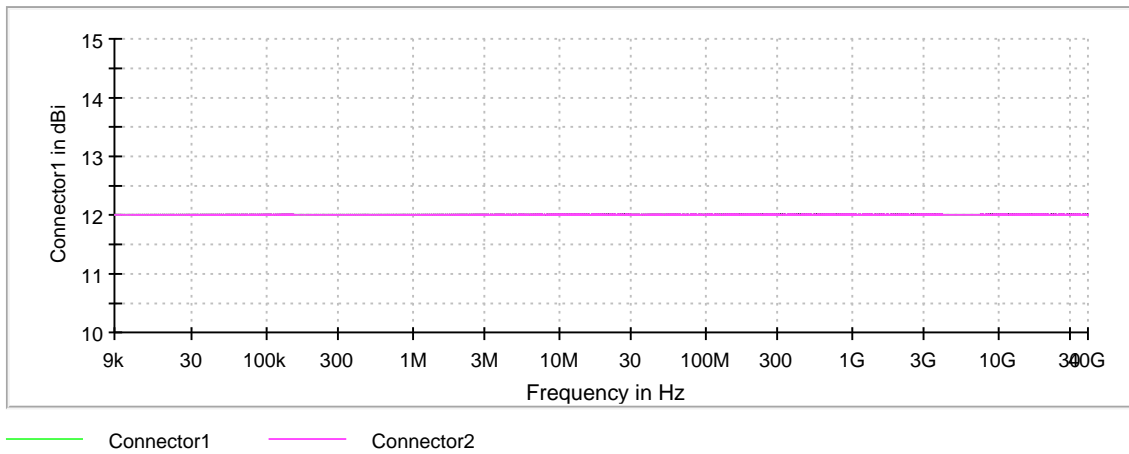

Attenuation

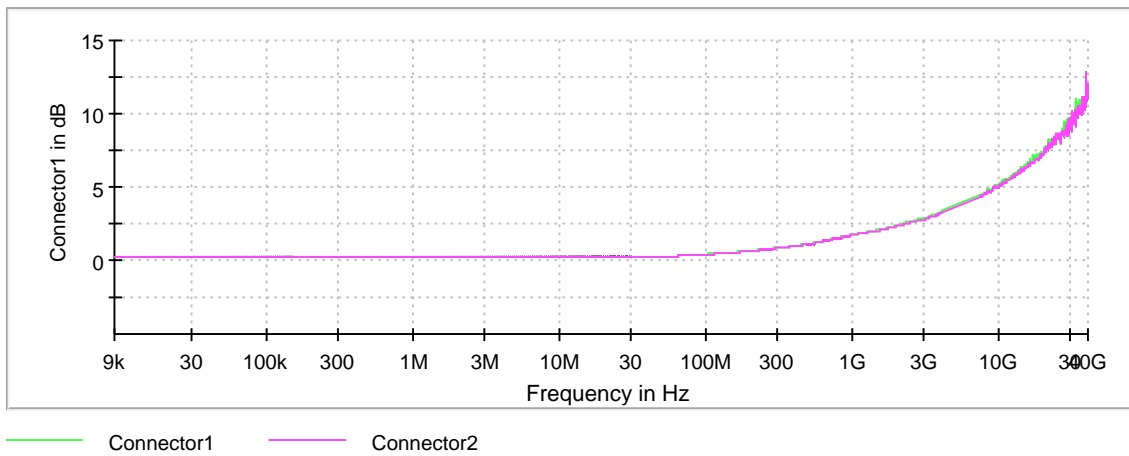

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
SweepTime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
SweepTime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Final Measurement 1

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	101	~ 101
SweepTime	100.000 ms	100.000 ms
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5710 MHz; 20 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5710.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1504.750000	-41.9	0.7	-41.2
1503.750000	-42.6	1.4	-41.2
1505.250000	-42.6	1.4	-41.2
1505.750000	-42.8	1.6	-41.2
1507.750000	-43.1	1.9	-41.2
1504.250000	-43.3	2.1	-41.2
1507.250000	-43.4	2.2	-41.2
1508.750000	-43.6	2.4	-41.2
1506.750000	-43.9	2.7	-41.2
1509.250000	-43.9	2.7	-41.2
1502.250000	-44.4	3.2	-41.2
1506.250000	-44.5	3.3	-41.2
1508.250000	-44.7	3.5	-41.2
1503.250000	-44.7	3.5	-41.2
1501.250000	-44.8	3.6	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

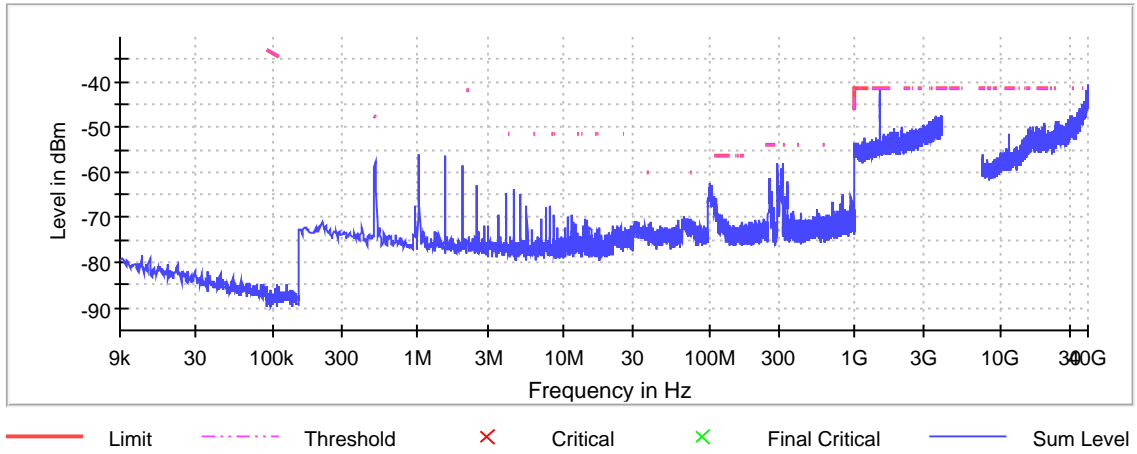

Gain

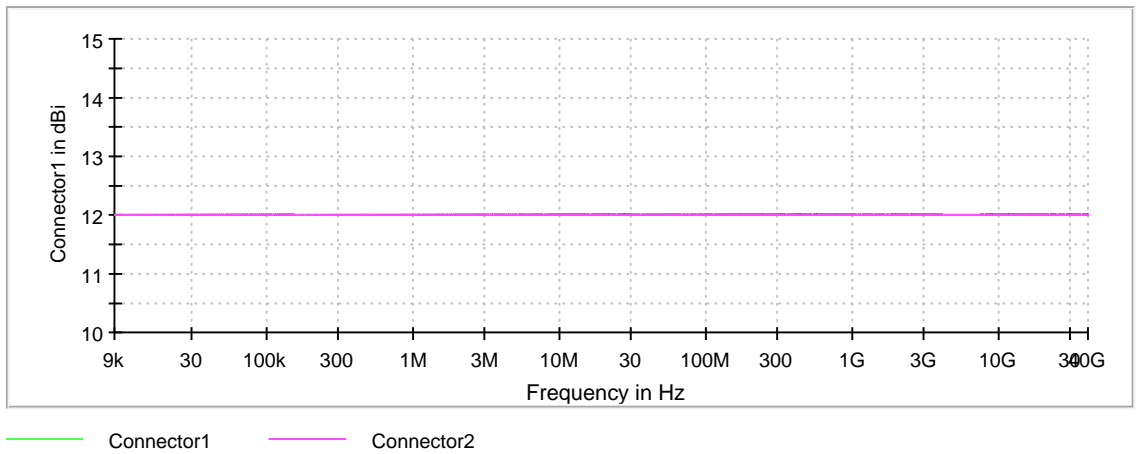

Attenuation

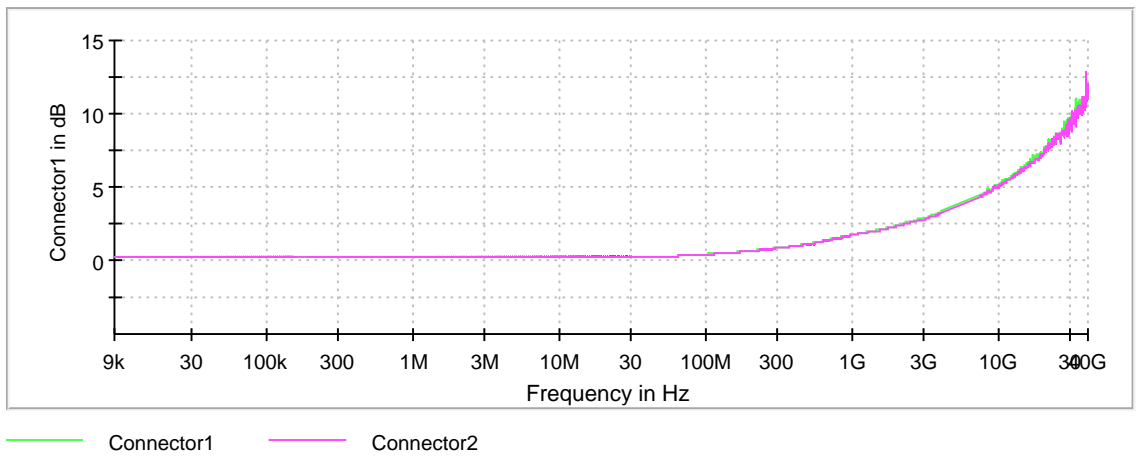

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5495 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5495.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
36487.250000	-45.9	4.7	-41.2
36499.250000	-46.0	4.8	-41.2
36449.750000	-46.1	4.9	-41.2
36454.250000	-46.1	4.9	-41.2
36462.250000	-46.2	5.0	-41.2
36465.250000	-46.3	5.1	-41.2
36472.250000	-46.3	5.1	-41.2
36485.250000	-46.4	5.2	-41.2
36434.750000	-46.4	5.2	-41.2
36455.250000	-46.4	5.2	-41.2
36469.750000	-46.4	5.2	-41.2
36470.250000	-46.5	5.3	-41.2
36491.250000	-46.5	5.3	-41.2
36477.250000	-46.5	5.3	-41.2
36485.750000	-46.5	5.3	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

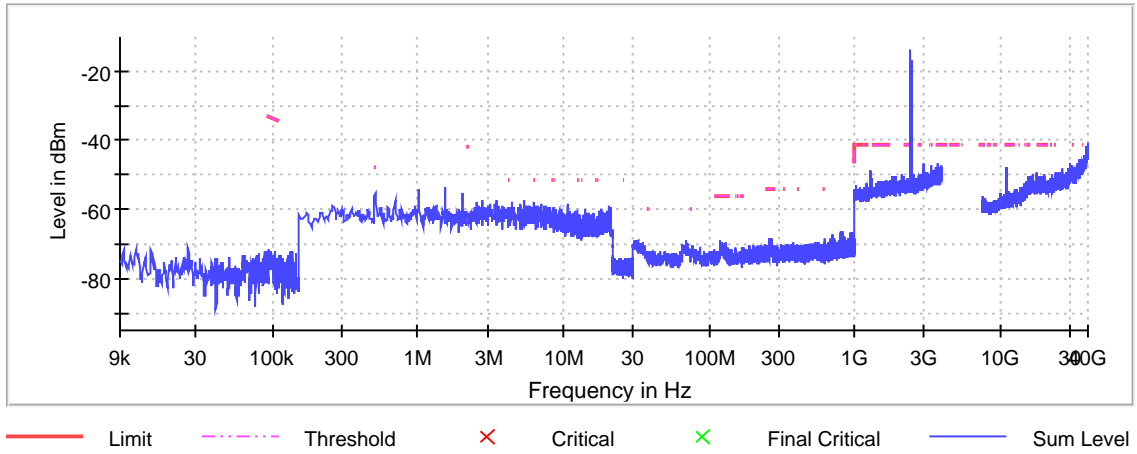

Gain

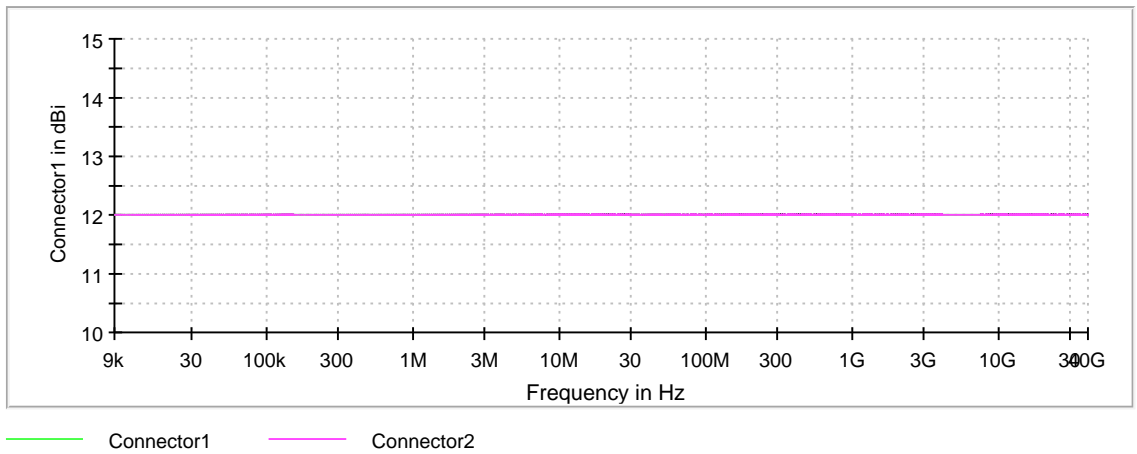

Attenuation

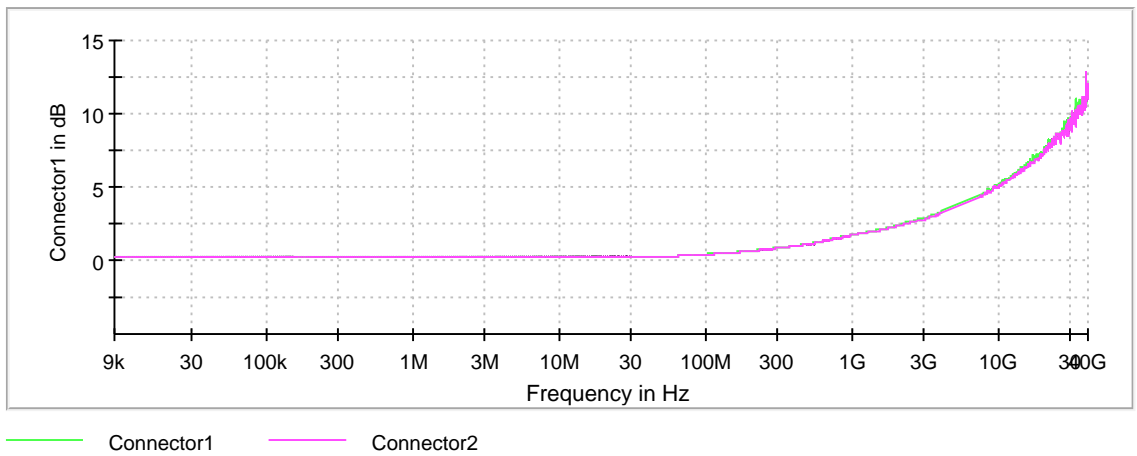

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements




Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
73.625000	-60.3	0.4	-59.9
73.575000	-60.3	0.4	-59.9
73.175000	-60.8	0.9	-59.9
73.525000	-61.0	1.1	-59.9
11197.250000	-42.3	1.1	-41.2
74.375000	-61.1	1.2	-59.9
73.025000	-61.2	1.3	-59.9
74.325000	-61.2	1.3	-59.9
73.725000	-61.4	1.5	-59.9
74.175000	-61.5	1.6	-59.9
73.125000	-61.5	1.6	-59.9
73.225000	-61.5	1.6	-59.9
74.275000	-61.8	1.9	-59.9
73.675000	-61.8	1.9	-59.9
74.225000	-61.9	2.0	-59.9

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1

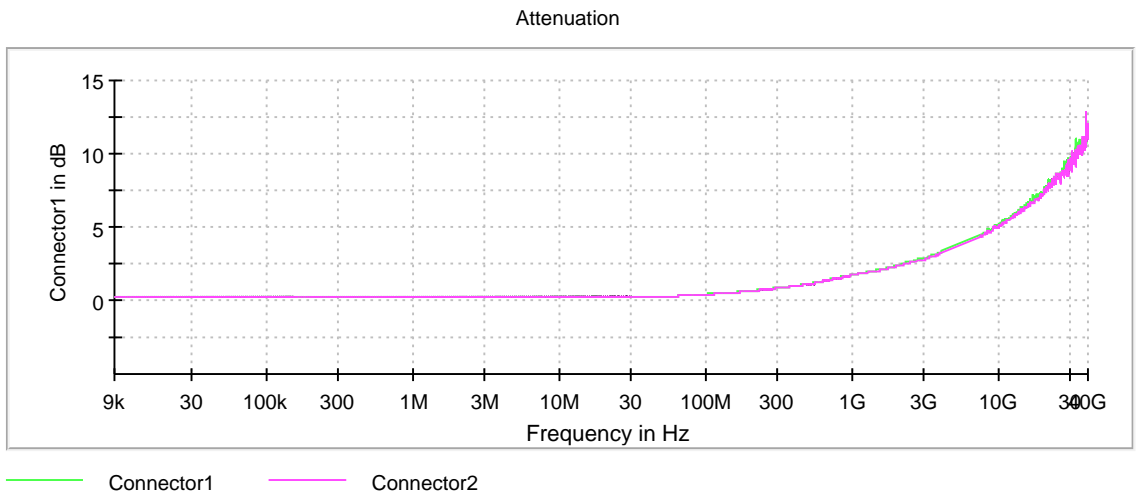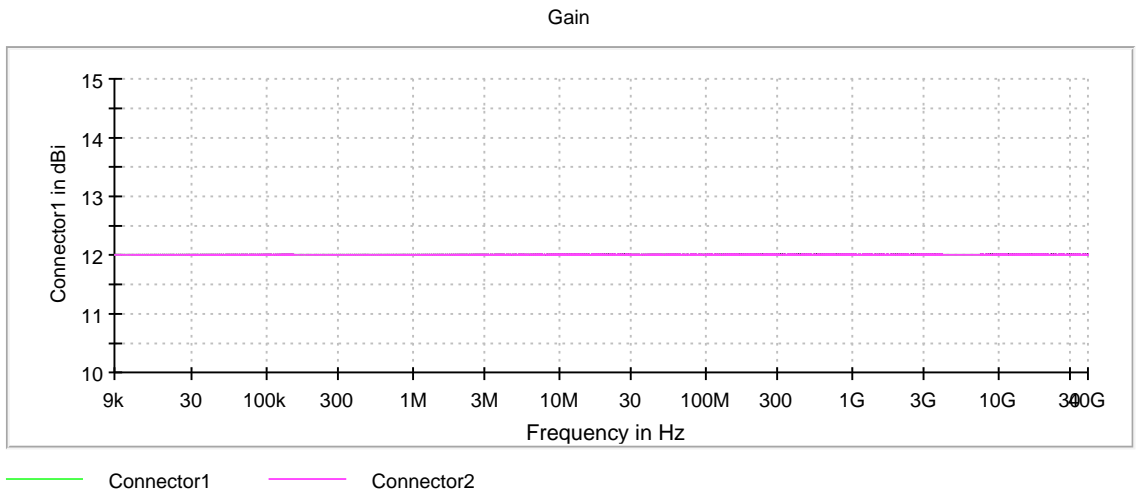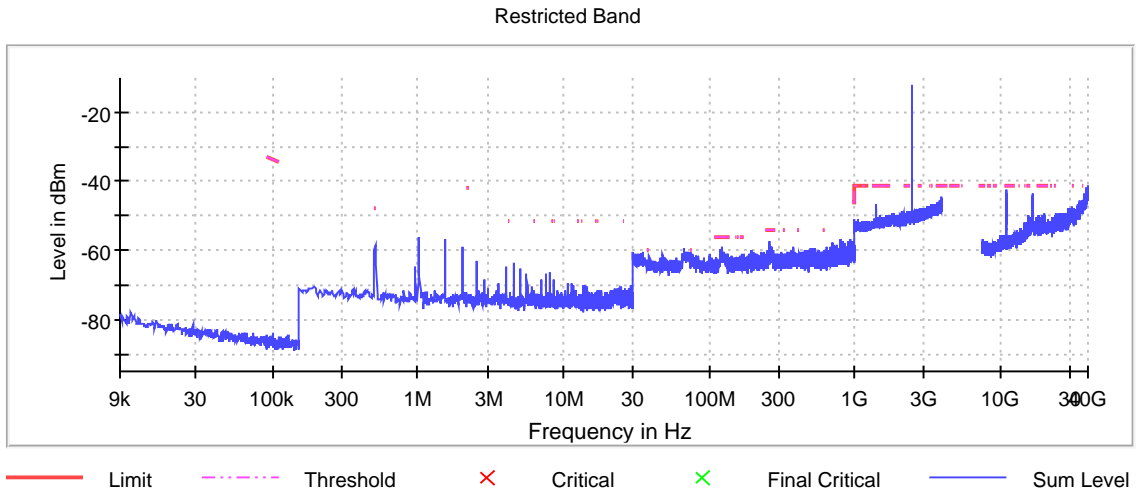

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	5.000 dBm	AUTO
Attenuation	15.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5700 MHz; 40 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5700.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1495.750000	-44.0	2.8	-41.2
1495.250000	-44.3	3.1	-41.2
1496.250000	-44.5	3.3	-41.2
1491.750000	-44.5	3.3	-41.2
1493.750000	-44.7	3.5	-41.2
1497.750000	-44.8	3.6	-41.2
1493.250000	-44.9	3.7	-41.2
1496.750000	-45.0	3.8	-41.2
1489.250000	-45.1	3.9	-41.2
1494.750000	-45.2	4.0	-41.2
1490.750000	-45.3	4.1	-41.2
1494.250000	-45.3	4.1	-41.2
1490.250000	-45.4	4.2	-41.2
1499.250000	-45.4	4.2	-41.2
1499.750000	-45.4	4.2	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

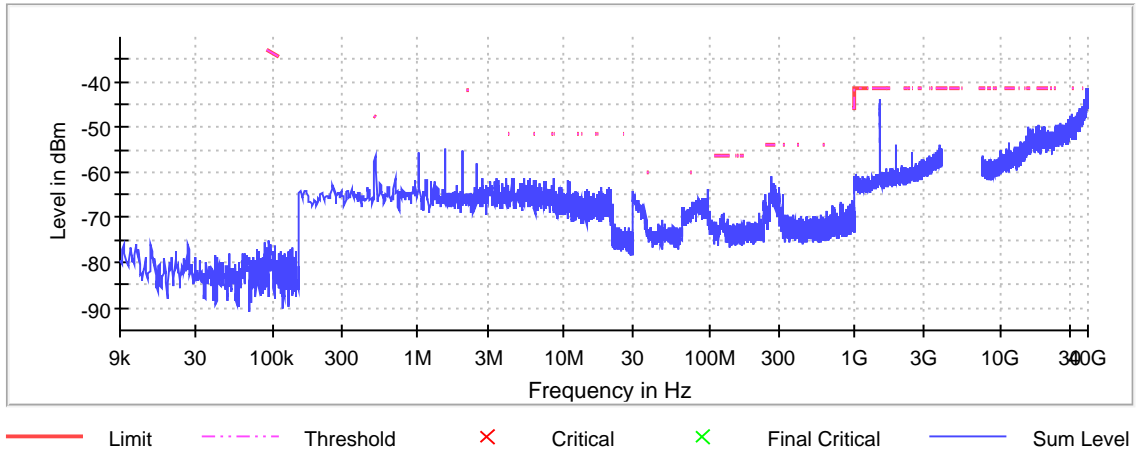

Gain

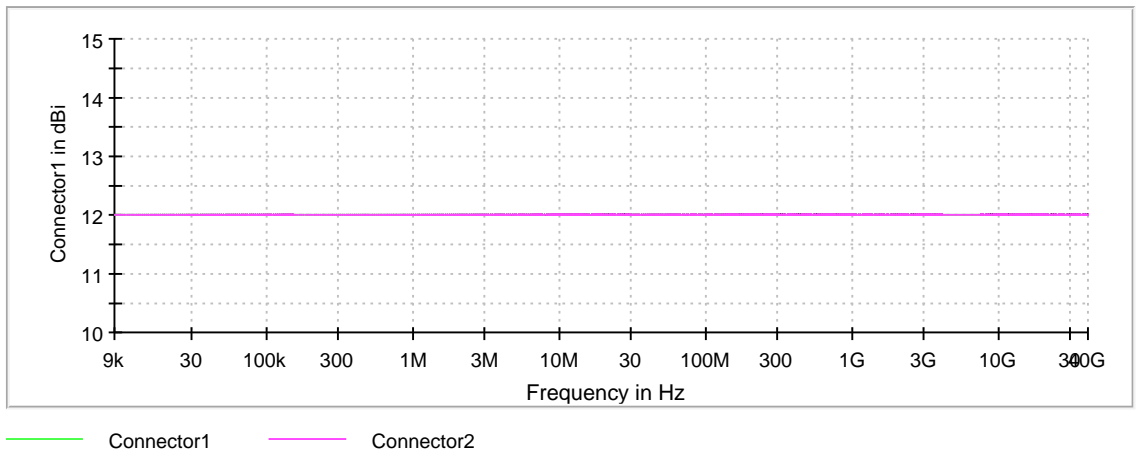

Attenuation

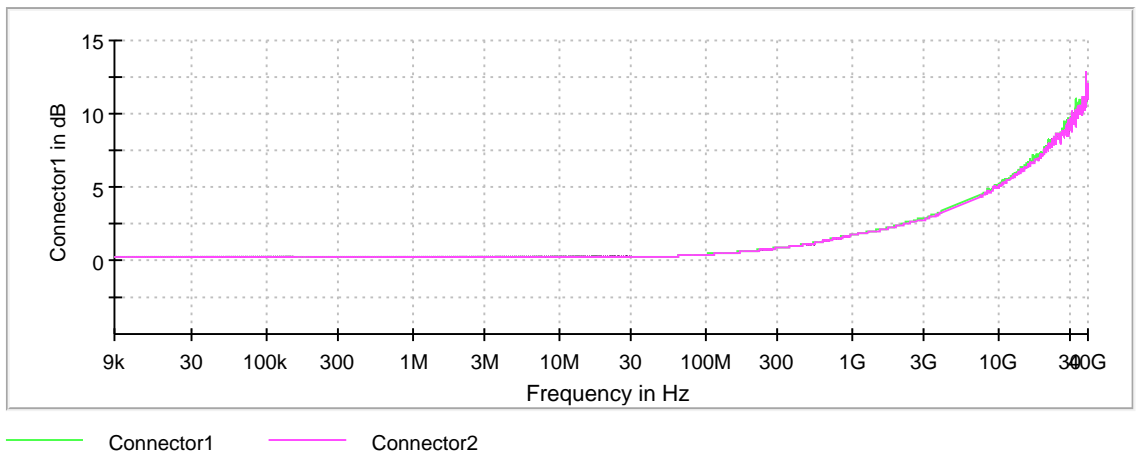

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5490 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5490.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
4.207500	-55.4	3.7	-51.7
36461.250000	-45.5	4.3	-41.2
36478.750000	-46.0	4.8	-41.2
36495.750000	-46.0	4.8	-41.2
36486.250000	-46.1	4.9	-41.2
36452.250000	-46.1	4.9	-41.2
36491.750000	-46.2	5.0	-41.2
36473.250000	-46.2	5.0	-41.2
36485.250000	-46.3	5.1	-41.2
36487.250000	-46.3	5.1	-41.2
36479.750000	-46.3	5.1	-41.2
36444.750000	-46.3	5.1	-41.2
36452.750000	-46.4	5.2	-41.2
8.377500	-56.9	5.2	-51.7
36496.750000	-46.4	5.2	-41.2


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1


Restricted Band

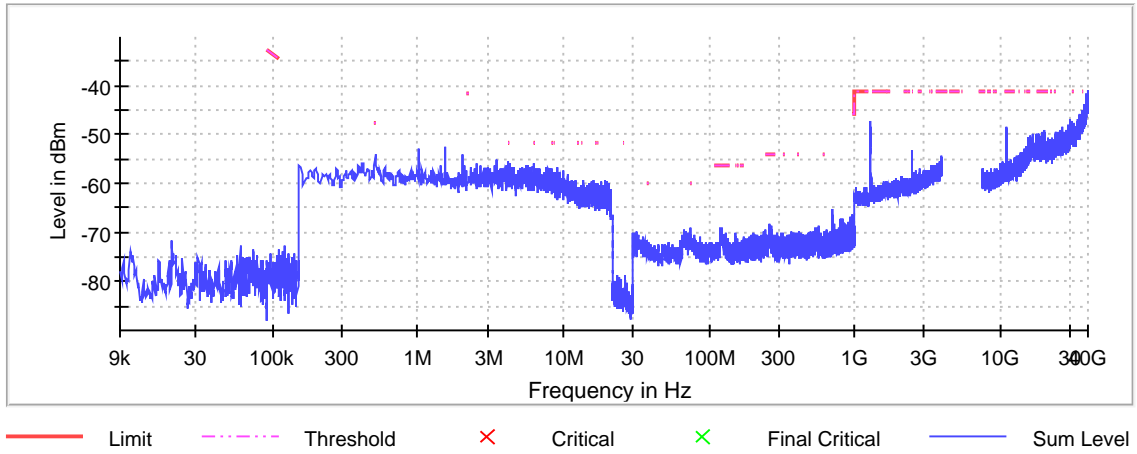

Gain

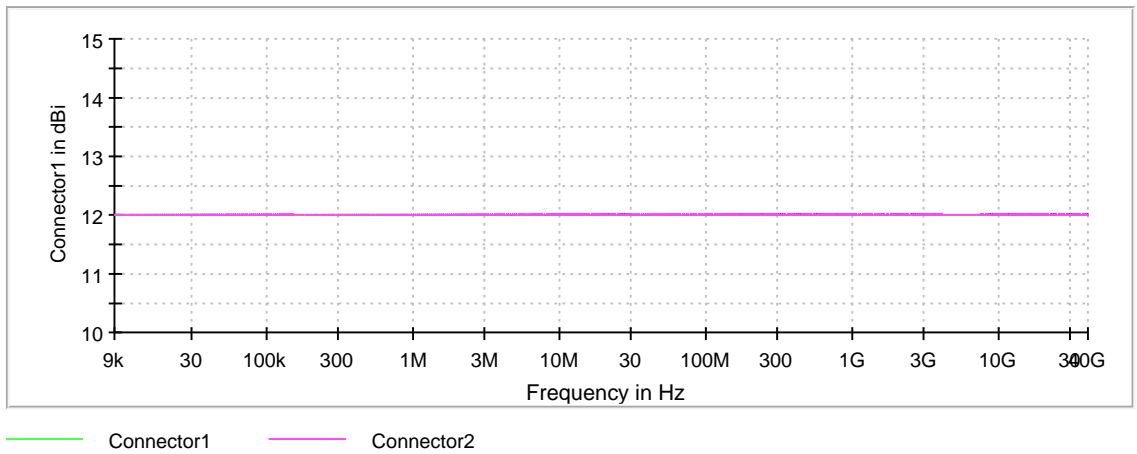

Attenuation

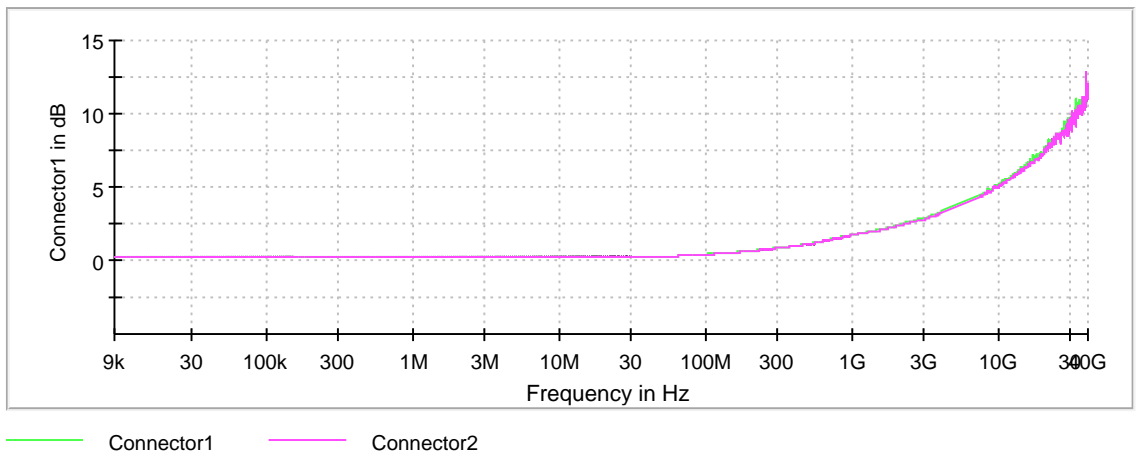

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	540	~ 540
Sweeptime	6.322 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	RMS	RMS
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Pre Measurement 2

Setting	Instrument Value	Target Value
RBW	300.000 Hz	<= 300.000 Hz
VBW	1.000 kHz	>= 900.000 Hz
SweepPoints	133	~ 133
Sweeptime	6.312 ms	AUTO
Reference Level	-5.000 dBm	AUTO
Attenuation	5.000 dB	5.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off

Emissions in restricted frequency bands (Average) (5600 MHz; 30 MHz)

Customized settings.

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 II.G.1 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
5600.000000	PASS

Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
11200.750000	-42.0	0.8	-41.2
11199.250000	-42.1	0.9	-41.2
11200.250000	-42.2	1.0	-41.2
11197.250000	-42.2	1.0	-41.2
11204.750000	-42.3	1.1	-41.2
11201.750000	-42.3	1.1	-41.2
73.125000	-61.0	1.1	-59.9
73.025000	-61.0	1.1	-59.9
74.975000	-61.3	1.4	-59.9
11203.250000	-42.6	1.4	-41.2
11195.750000	-42.7	1.5	-41.2
73.075000	-61.4	1.5	-59.9
75.025000	-61.5	1.6	-59.9
11202.750000	-42.8	1.6	-41.2
74.125000	-61.5	1.6	-59.9

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
0.009000	0.090000	1	1
0.090000	0.110000	2	2
0.110000	0.150000	1	1
0.150000	0.490000	1	1
0.490000	30.000000	2	2
30.000000	1000.000000	2	2
1000.000000	4000.000000	1	1
7500.000000	18000.000000	1	1
18000.000000	26000.000000	1	1
26000.000000	40000.000000	1	1