



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

May 11, 2010

Ubiquiti Networks
91 E. Tasman
San Jose, CA 95134

Dear Robert Pera,

Enclosed is the EMC Wireless test report for compliance testing of the Ubiquiti Networks, M2 USB as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 7, June 2007 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Sanchez
Documentation Department

Reference: (\Ubiquiti Networks\EMCS82105-FCC247_Rev1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

Electromagnetic Compatibility Criteria Test Report

for the

**Ubiquiti Networks
M2 USB**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMCS82105-FCC247_Rev1

May 11, 2010

Prepared For:

**Ubiquiti Networks
91 E. Tasman
San Jose, CA 95134**

Prepared By:
MET Laboratories, Inc.
3162 Belick St.
Santa Clara, CA 95054

Electromagnetic Compatibility Criteria Test Report

for the

Ubiquiti Networks M2 USB

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators



Anderson Sounghanya, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	May 5, 2010	Initial Issue.
1	May 11, 2010	Rev 1

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview	4
	B. References	5
	C. Test Site	5
	D. Description of Test Sample	6
	E. Equipment Configuration	8
	F. Support Equipment	8
	G. Ports and Cabling Information	8
	H. Mode of Operation	9
	I. Method of Monitoring EUT Operation	9
	J. Modifications	9
	a) Modifications to EUT	9
	b) Modifications to Test Standard	9
	K. Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	10
	§ 15.107(a) Conducted Emissions Limits	11
	§ 15.109(a) Radiated Emissions Limits	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators	21
	§ 15.203 Antenna Requirement	22
	§ 15.207(a) Conducted Emissions Limits	23
	§ 15.247(a) 6 dB and 99% Bandwidth	27
	§ 15.247(b) Peak Power Output and RF Exposure	33
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge	44
	RSS-GEN Receiver Spurious Emissions	69
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge	71
	§ 15.247(e) Peak Power Spectral Density	80
V.	Test Equipment	84
VI.	Certification & User's Manual Information	86
	A. Certification Information	87
	B. Label and User's Manual Information	91
VII.	ICES-003 Procedural & Labeling Requirements	93

List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information	8
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line.....	13
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits	16
Table 12. Radiated Emissions Limits, Test Results, Above 1 GHz, FCC Limits.....	17
Table 13. Radiated Emissions Limits, Test Results, ICES-003 Limits	18
Table 14. Antenna List.....	22
Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	23
Table 16. Conducted Emissions, 15.207, Phase Line, Test Results	24
Table 17. Conducted Emissions, 15.207, Neutral Line, Test Results.....	25
Table 18. Occupied Bandwidth 802.11g Mode Test Results	28
Table 19. Occupied Bandwidth 802.11n Mode Test Results	28
Table 20. Output Power Requirements from §15.247.....	33
Table 21. RF Output Power Test Results – 802.11g Mode	34
Table 22. RF Output Power Test Results – 802.11n Mode	34
Table 23. Restricted Bands of Operation.....	44
Table 24. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	45
Table 25. Radiated Harmonic Emissions – 802.11g mode.....	49
Table 26. Radiated Harmonic Emissions – 802.11n Mode	51
Table 27. Spurious Emission Limits for Receivers	69
Table 28. Spectral Density, 802.11g Mode Test Results.....	81
Table 29. Spectral Density, 802.11n Mode Test Results.....	81
Table 30. Test Equipment List	85

List of Plots

Plot 1. Conducted Emission, Phase Line Plot	12
Plot 2. Conducted Emission, Neutral Line Plot.....	13
Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits	16
Plot 4. Radiated Emissions, Above 1 GHz, FCC Limits	17
Plot 5. Radiated Emissions, ICES-003 Limits.....	18
Plot 6. 15.207 Conducted Emissions, Phase Line	24
Plot 7. 15.207 Conducted Emissions, Neutral Line.....	25
Plot 8. Occupied Band Width, 802.11g Mode, Low Channel, FCC, 6 dB	29
Plot 9. Occupied Band Width, 802.11g Mode, Mid Channel, FCC, 6 dB.....	29
Plot 10. Occupied Band Width, 802.11g Mode, High Channel, FCC, 6 dB.....	29
Plot 11. Occupied Band Width, 802.11g Mode, Low Channel, 99 % OBW.....	30
Plot 12. Occupied Band Width, 802.11g Mode, Mid Channel, 99% OBW	30
Plot 13. Occupied Band Width, 802.11g Mode, High Channel, 99 % OBW	30
Plot 14. Occupied Band Width, 802.11n Mode, Low Channel, FCC, 6 dB	31
Plot 15. Occupied Band Width, 802.11n Mode, Mid Channel, FCC, 6 dB.....	31
Plot 16. Occupied Band Width, 802.11n Mode, High Channel, FCC, 6 dB.....	31

Plot 17. Occupied Band Width, 802.11n Mode, Low Channel, 99 % OBW	32
Plot 18. Occupied Band Width, 802.11n Mode, Mid Channel, 99% OBW	32
Plot 19. Occupied Band Width, 802.11n Mode, High Channel, 99 % OBW	32
Plot 20. Peak Output Power, 802.11g Mode, Channel 1	35
Plot 21. Peak Output Power, 802.11g Mode, Channel 2	35
Plot 22. Peak Output Power, 802.11g Mode, Channel 3	36
Plot 23. Peak Output Power, 802.11g Mode, Channel 4	36
Plot 24. Peak Output Power, 802.11g Mode, Channel 6	37
Plot 25. Peak Output Power, 802.11g Mode, Channel 9	37
Plot 26. Peak Output Power, 802.11g Mode, Channel 10	38
Plot 27. Peak Output Power, 802.11g Mode, Channel 11	38
Plot 28. Peak Output Power, 802.11n Mode, Channel 1	39
Plot 29. Peak Output Power, 802.11n Mode, Channel 2	39
Plot 30. Peak Output Power, 802.11n Mode, Channel 3	40
Plot 31. Peak Output Power, 802.11n Mode, Channel 4	40
Plot 32. Peak Output Power, 802.11n Mode, Channel 6	41
Plot 33. Peak Output Power, 802.11n Mode, Channel 9	41
Plot 34. Peak Output Power, 802.11n Mode, Channel 10	42
Plot 35. Peak Output Power, 802.11n Mode, Channel 11	42
Plot 36. 15.209 Radiated Emissions 2412MHz Low Channel 802.11g (30MHz – 1GHz)	46
Plot 37. 15.209 Radiated Emissions 2437MHz Mid Channel 802.11g (30MHz – 1GHz)	46
Plot 38. 15.209 Radiated Emissions 2462MHz High Channel 802.11g (30MHz – 1GHz)	47
Plot 39. 15.209 Radiated Emissions 2412MHz Low Channel 802.11n (30MHz – 1GHz)	47
Plot 40. 15.209 Radiated Emissions 2437MHz Mid Channel 802.11n (30MHz – 1GHz)	48
Plot 41. 15.209 Radiated Emissions 2462MHz High Channel 802.11n (30MHz – 1GHz)	48
Plot 42. Radiated Spurious 2412MHz Low Channel 802.11g (1-18GHz)	50
Plot 43. Radiated Spurious 2437MHz Mid Channel 802.11g (1-18GHz)	50
Plot 44. Radiated Spurious 2462MHz High Channel 802.11g (1-18GHz)	50
Plot 45. Radiated Spurious 2437MHz Low Channel 802.11n (1-18GHz)	52
Plot 46. Radiated Spurious 2437MHz Mid Channel 802.11n (1-18GHz)	52
Plot 47. Radiated Spurious 2462MHz High Channel 802.11n (1-18GHz)	52
Plot 48. Radiated Band Edge 2412MHz Channel 1 802.11g (Average)	53
Plot 49. Radiated Band Edge 2412MHz Channel 1 802.11g (Peak)	53
Plot 50. Radiated Band Edge 2417MHz Channel 2 802.11g (Average)	54
Plot 51. Radiated Band Edge 2417MHz Channel 2 802.11g (Peak)	54
Plot 52. Radiated Band Edge 2422MHz Channel 3 802.11g (Average)	55
Plot 53. Radiated Band Edge 2422MHz Channel 3 802.11g (Peak)	55
Plot 54. Radiated Band Edge 2427MHz Channel 4 802.11g (Average)	56
Plot 55. Radiated Band Edge 2427MHz Channel 4 802.11g (Peak)	56
Plot 56. Radiated Band Edge 2462MHz Channel 9 802.11g (Average)	57
Plot 57. Radiated Band Edge 2462MHz Channel 9 802.11g (Peak)	57
Plot 58. Radiated Band Edge 2462MHz Channel 10 802.11g (Average)	58
Plot 59. Radiated Band Edge 2462MHz Channel 10 802.11g (Peak)	58
Plot 60. Radiated Band Edge 2462MHz Channel 11 802.11g (Average)	59
Plot 61. Radiated Band Edge 2462MHz Channel 11 802.11g (Peak)	59
Plot 62. Radiated Band Edge 2412MHz Channel 1 802.11n (Average)	60
Plot 63. Radiated Band Edge 2412MHz Channel 1 802.11n (Peak)	60
Plot 64. Radiated Band Edge 2417MHz Channel 2 802.11n (Average)	61
Plot 65. Radiated Band Edge 2417MHz Channel 2 802.11n (Peak)	61
Plot 66. Radiated Band Edge 2422MHz Channel 3 802.11n (Average)	62
Plot 67. Radiated Band Edge 2422MHz Channel 3 802.11n (Peak)	62
Plot 68. Radiated Band Edge 2427MHz Channel 4 802.11n (Average)	63
Plot 69. Radiated Band Edge 2427MHz Channel 4 802.11n (Peak)	63

Plot 70. Radiated Band Edge 2462MHz Channel 9 802.11n (Average)	64
Plot 71. Radiated Band Edge 2462MHz Channel 9 802.11n (Peak)	64
Plot 72. Radiated Band Edge 2462MHz Channel 10 802.11n (Average)	65
Plot 73. Radiated Band Edge 2462MHz Channel 10 802.11n (Peak)	65
Plot 74. Radiated Band Edge 2462MHz Channel 11 802.11n (Average)	66
Plot 75. Radiated Band Edge 2462MHz Channel 11 802.11n (Peak)	66
Plot 76. Receiver Spurious Emission, 30MHz – 1 GHz	70
Plot 77. Receiver Spurious Emission, 1 GHz – 10 GHz	70
Plot 78. Conducted Spurious 2412MHz Low Channel 802.11g (30MHz-1GHz)	72
Plot 79. Conducted Spurious 2412MHz Low Channel 802.11g (1-26GHz)	72
Plot 80. Conducted Spurious 2437MHz Mid Channel 802.11g (30MHz-1GHz)	73
Plot 81. Conducted Spurious 2437MHz Mid Channel 802.11g (1-26GHz)	73
Plot 82. Conducted Spurious 2462MHz High Channel 802.11g (30MHz-1GHz)	74
Plot 83. Conducted Spurious 2462MHz High Channel 802.11g (1-26GHz)	74
Plot 84. Conducted Spurious 2412MHz Low Channel 802.11n (30MHz-1GHz)	75
Plot 85. Conducted Spurious 2412MHz Low Channel 802.11n (1-26GHz)	75
Plot 86. Conducted Spurious 2437MHz Mid Channel 802.11n (30MHz-1GHz)	76
Plot 87. Conducted Spurious 2437MHz Mid Channel 802.11n (1-26GHz)	76
Plot 88. Conducted Spurious 2462MHz High Channel 802.11n (30MHz-1GHz)	77
Plot 89. Conducted Spurious 2462MHz High Channel 802.11n (1-26GHz)	77
Plot 90. Conducted Band Edge 2412MHz Low Channel 802.11g	78
Plot 91. Conducted Band Edge 2462MHz High Channel 802.11g	78
Plot 92. Conducted Band Edge 2412MHz Low Channel 802.11n	79
Plot 93. Conducted Band Edge 2462MHz High Channel 802.11n	79
Plot 94. Power Spectral Density 2412MHz Low Channel 802.11g	82
Plot 95. Power Spectral Density 2437MHz Mid Channel 802.11g	82
Plot 96. Power Spectral Density 2462MHz High Channel 802.11g	82
Plot 97. Power Spectral Density 2412MHz Low Channel 802.11n	83
Plot 98. Power Spectral Density 2437MHz Mid Channel 802.11n	83
Plot 99. Power Spectral Density 2462MHz High Channel 802.11n	83

List of Figures

Figure 1. Block Diagram of Test Configuration	7
Figure 2. Block Diagram, Occupied Bandwidth Test Setup	27
Figure 3. Peak Power Output Test Setup	33
Figure 4. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	69
Figure 5. Block Diagram, Conducted Spurious Emissions Test Setup	71
Figure 6. Block Diagram, Peak Power Spectral Density Test Setup	80

List of Photographs

Photograph 1. Ubiquiti Networks M2 USB	6
Photograph 2. Conducted Emissions, Test Setup	14
Photograph 3. Radiated Emission, Test Setup, 30MHz – 1GHz	19
Photograph 4. Radiated Emission, Test Setup, above 1GHz	20
Photograph 5. Conducted Emissions, 15.207, Test Setup	26
Photograph 6. Radiated Spurious Emissions, 3 meter Test Setup	67
Photograph 7. Radiated Harmonics Emissions, 1 meter Test Setup	68

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Ubiquiti Networks M2 USB, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the M2 USB. Ubiquiti Networks should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the M2 USB, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Ubiquiti Networks, purchase order number US090038. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-210 Issue 7: 2007	Description	Compliance
47 CFR Part 15.107 (a)	ICES-003 Issue 4 February 2004	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 4 February 2004	Radiated Emission Limits for a Class A Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Conducted Spurious Emissions	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Ubiquiti Networks to perform testing on the M2 USB, under Ubiquiti Networks's purchase order number US090038.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Ubiquiti Networks, M2 USB.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	M2 USB	
Model(s) Covered:	M2 USB	
EUT Specifications:	Primary Power: 5V DC, 0.5A	
	FCC ID: SWX-M2USB IC: 6545A-M2USB	
	Type of Modulations:	OFDM
	Equipment Code:	DTS
	Peak RF Output Power:	29.98dBm (0.995W)
EUT Frequency Ranges:	2412-2462MHz	
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Anderson Soungpanya	
Report Date(s):	May 11, 2010	

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 7, June 2007	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick St., Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 5 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Ubiquiti Networks M2 USB, Equipment Under Test (EUT), is an 802.11g/n radio.



Photograph 1. Ubiquiti Networks M2 USB

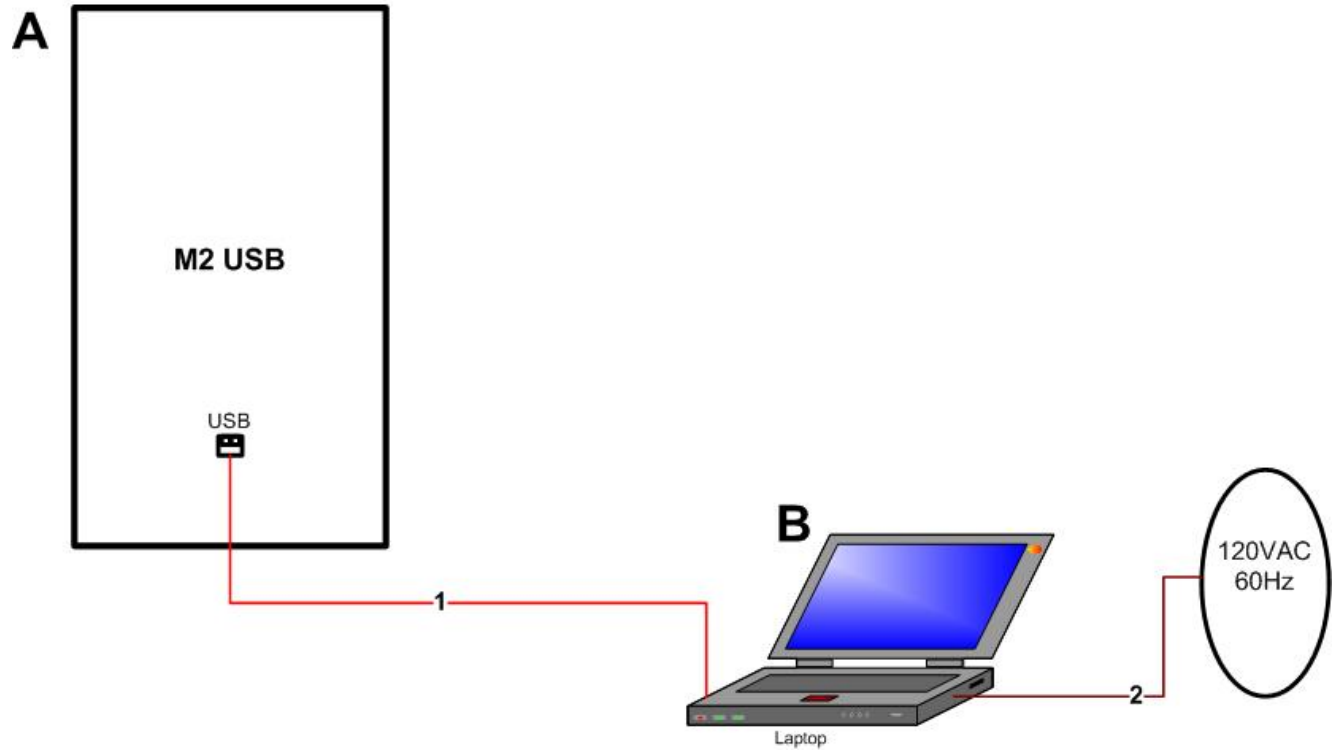


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
A	802.11 g/n Radio	M2 USB	4 & 13

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
B	Laptop	Dell	Vostro 1510

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port Name
1	A, USB	USB	1	1-5m	Y	B
2	B, DC Input	Power Cord	1	.5	N	100-240V AC power

Table 6. Ports and Cabling Information

H. Mode of Operation

Using Atheros Radio Test Software

I. Method of Monitoring EUT Operation

Ping Times out and doesn't return. Unit locks up requires power down is a fail.

J. Modifications

- a) **Modifications to EUT**
No modifications were made to the EUT.
- b) **Modifications to Test Standard**
No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Ubiquiti Networks upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.
 * -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Results: The EUT was compliant with the Class A requirement(s) of this section.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 02/09/10

Conducted Emissions - Voltage, AC Power, Phase Line (120VAC 60Hz)

Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
.201	44.14	79	-34.86	Pass	25.45	66	-40.55	Pass
.151	38.13	79	-40.87	Pass	17.74	66	-48.26	Pass
.286	33.77	79	-45.23	Pass	21.34	66	-44.66	Pass

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line

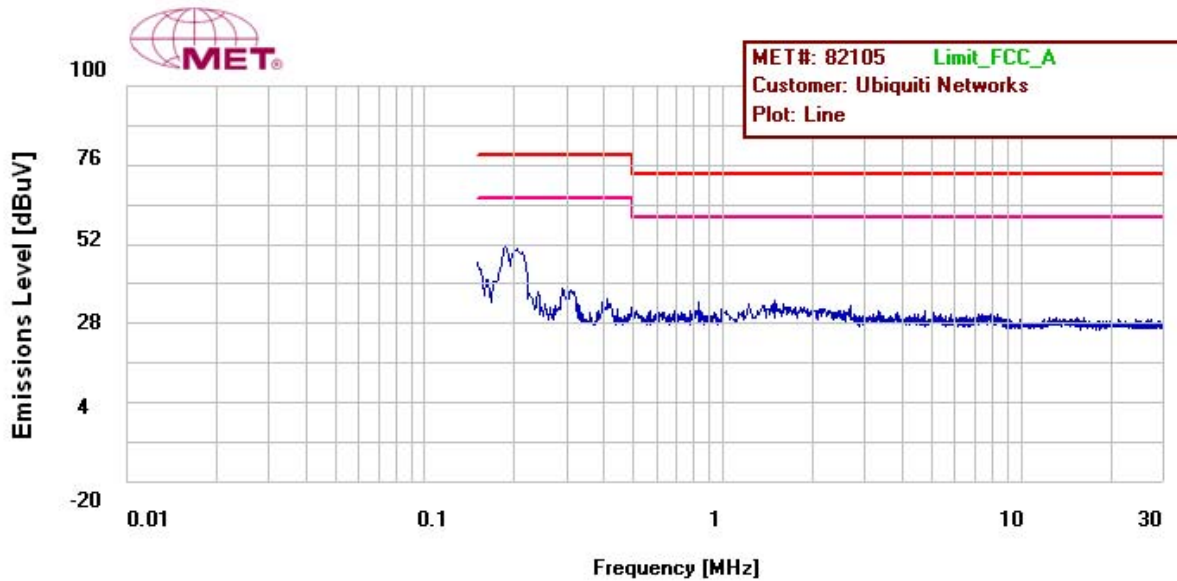


Plot 1. Conducted Emission, Phase Line Plot

Conducted Emissions - Voltage, AC Power, Neutral Line (120VAC 60Hz)

Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
.205	45.36	79	-33.64	Pass	31.36	66	-34.64	Pass
.297	30.42	79	-48.58	Pass	16.45	66	-49.55	Pass
.151	37.55	79	-41.45	Pass	15.57	66	-50.43	Pass

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line

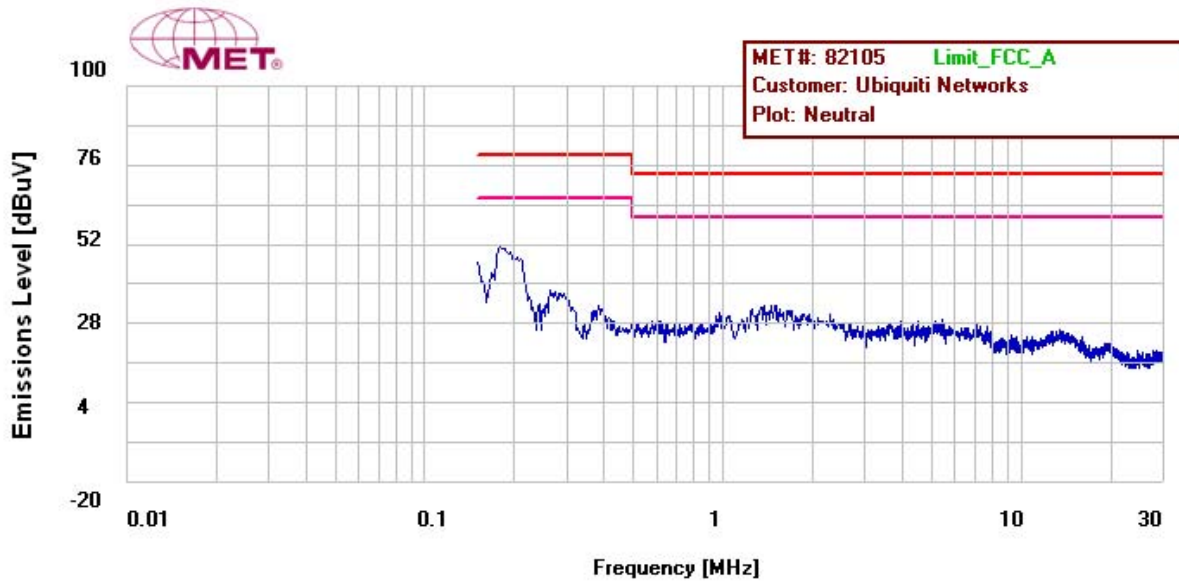

Plot 2. Conducted Emission, Neutral Line Plot

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions, Test Setup

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class A requirement(s) of this section.

Test Engineer(s): Anderson Soungpanya


Test Date(s): 02/09/10

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBμV)	ACF (dB/m)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBμV)	Limit (dBμV)	Margin (dB)
367.58	H	257	100	23.654	15.548	3.962	-10.46	32.704	46.4	-13.696
220.54	H	249	100	20.54	10.443	3.84	-10.46	24.363	46.4	-22.037
294.1	H	255	100	16.93	13.682	3.59	-10.46	23.742	46.4	-22.658
219.78	V	196	165	15.49	10.687	3.843	-10.46	19.56	46.4	-26.84
294.1	V	0	165	14.54	13.2	3.59	-10.46	20.87	46.4	-25.53
367.61	V	330	125	24.55	15.352	3.962	-10.46	33.404	46.4	-12.996

Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits

Note 1: The EUT was tested at 3 m.

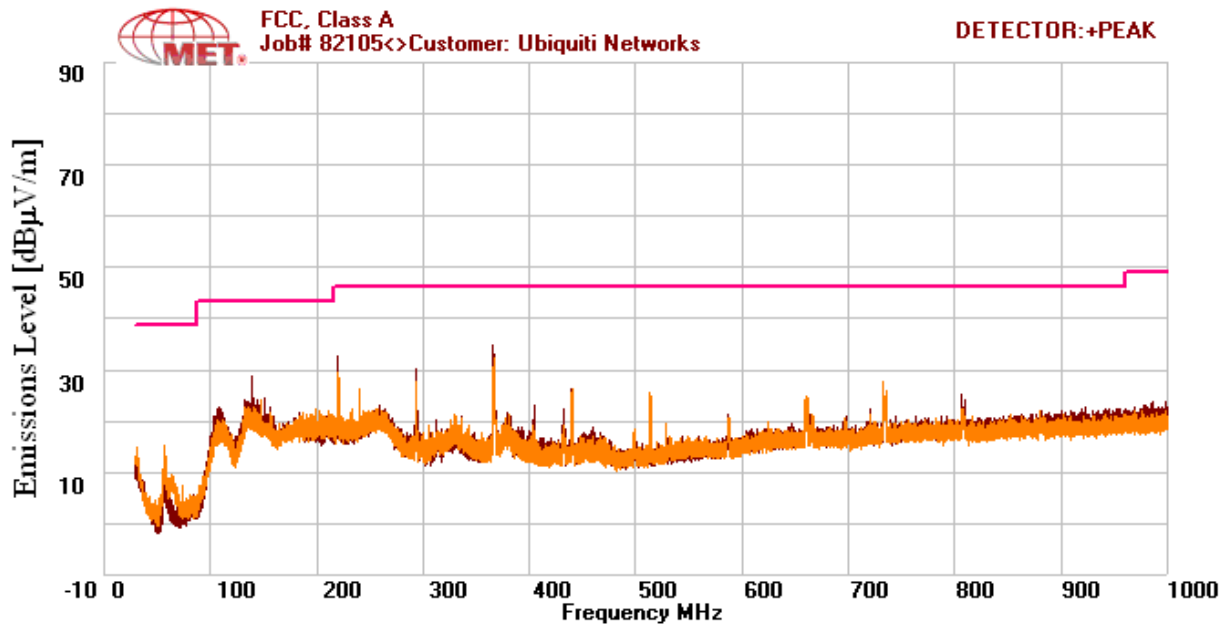


Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBμV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBμV)	Limit (dBμV)	Margin (dB)
1759	V	105	100	65.52	29.689	75.564	9.755	-10.46	18.94	49.5	-30.56
1331	V	169	100	68.15	27.929	76.336	8.513	-10.46	17.796	49.5	-31.704

Table 12. Radiated Emissions Limits, Test Results, Above 1 GHz, FCC Limits

Note 2: The EUT was tested at 3 m.

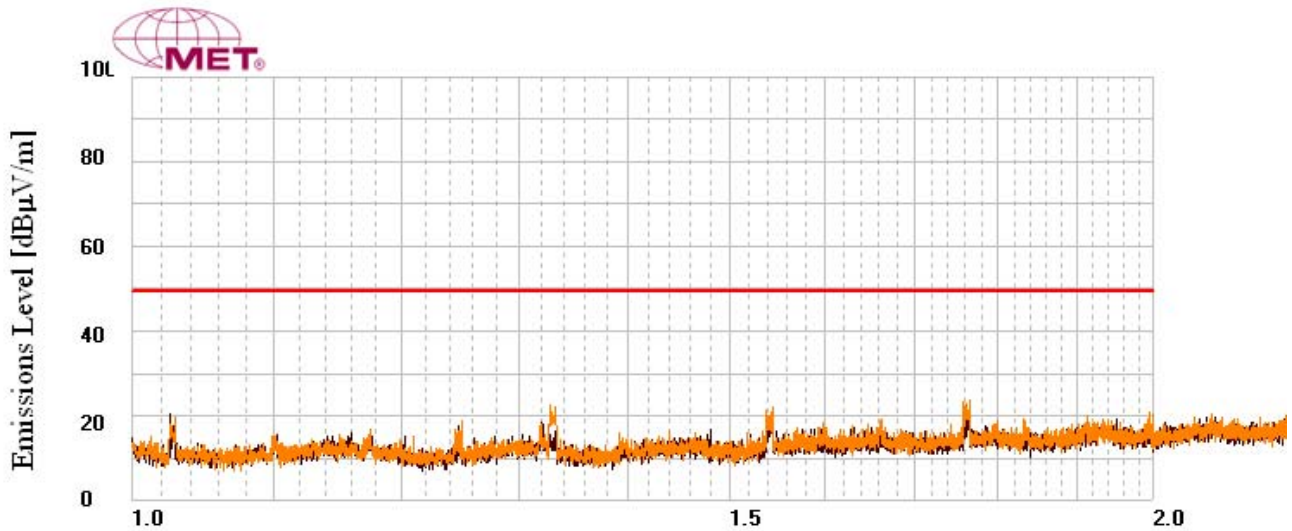


Plot 4. Radiated Emissions, Above 1 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dB μ V)	ACF (dB/m)	CBL (dB)	DCF (dB)	Corrected Amplitude (dB μ V)	Limit (dB μ V)	Margin (dB)
367.58	H	257	100	23.654	15.548	3.962	-10.46	32.704	47	-14.296
220.54	H	249	100	20.54	10.443	3.84	-10.46	24.363	40	-15.637
294.1	H	255	100	16.93	13.682	3.59	-10.46	23.742	47	-23.258
219.78	V	196	165	15.49	10.687	3.843	-10.46	19.56	40	-20.44
294.1	V	0	165	14.54	13.2	3.59	-10.46	20.87	47	-26.13
367.61	V	330	125	24.55	15.352	3.962	-10.46	33.404	47	-13.596


Table 13. Radiated Emissions Limits, Test Results, ICES-003 Limits

Note 1: The EUT was tested at 3 m.

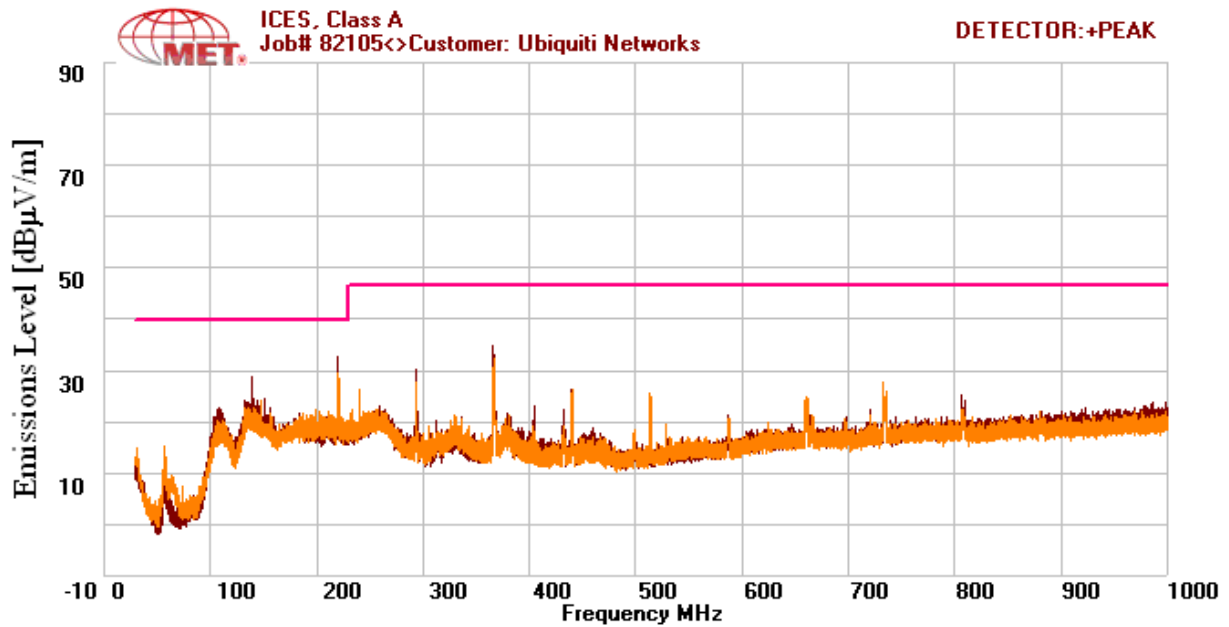

Plot 5. Radiated Emissions, ICES-003 Limits

Radiated Emission Limits Test Setup

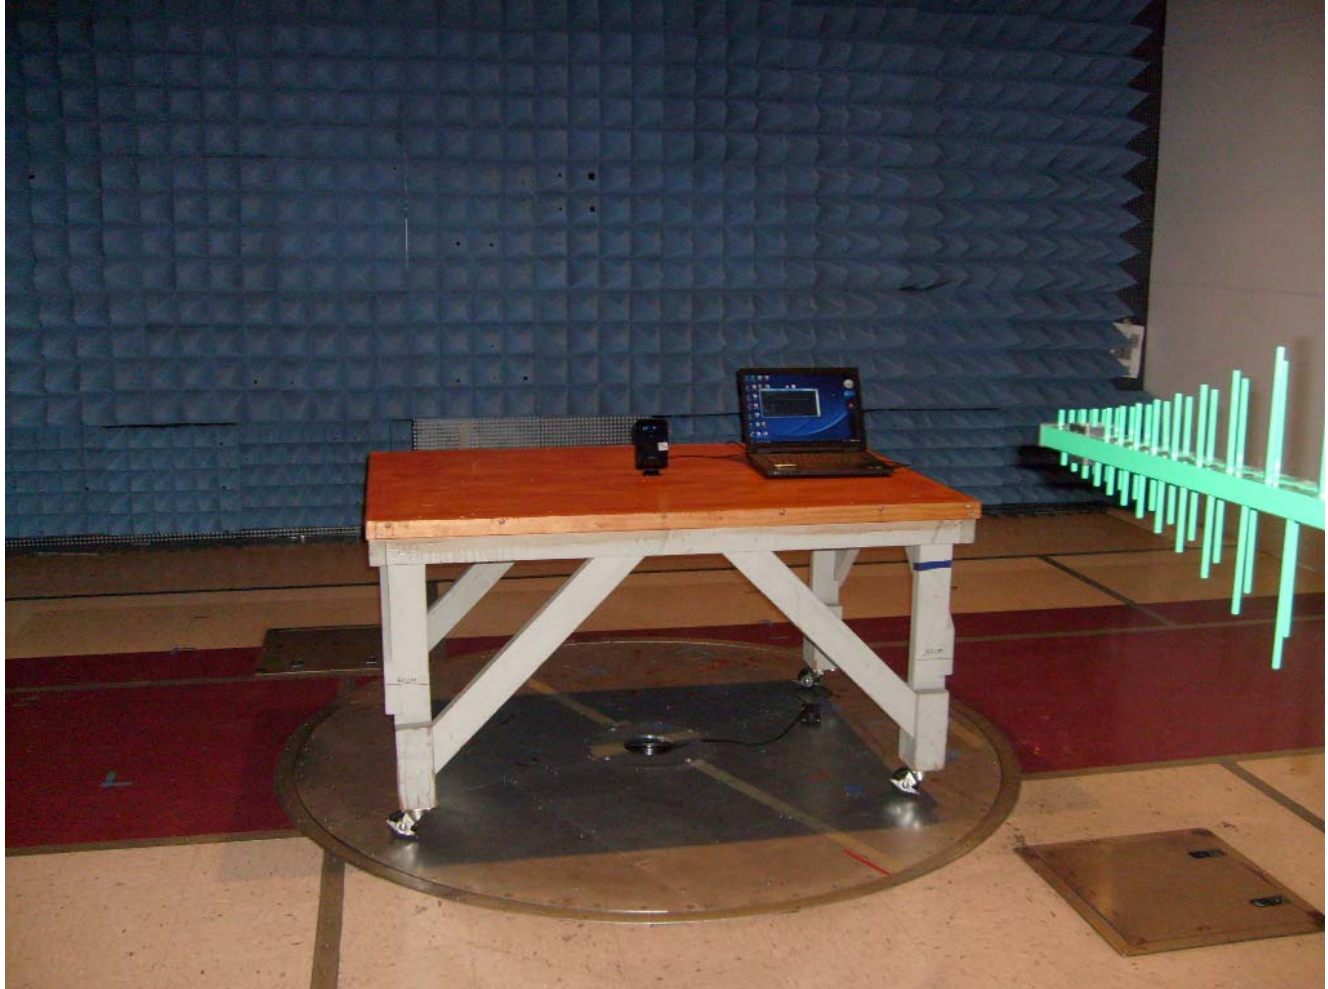

Photograph 3. Radiated Emission, Test Setup, 30MHz – 1GHz

Radiated Emission Limits Test Setup



Photograph 4. Radiated Emission, Test Setup, above 1GHz

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant by virtue of criteria a.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 02/04/10

Gain	Type	Manufacturer
6dBi	Integral	Ubiquiti Networks

Table 14. Antenna List

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 15. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results: The EUT was compliant with this requirement.


Test Engineer(s): Anderson Soungpanya

Test Date(s): 02/09/10

15.207 Conducted Emissions Test Results (120VAC 60Hz)

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
.162	24.55	65.363	-40.813	Pass	12.89	55.363	-42.473	Pass
1.79	20.65	56	-35.35	Pass	13.34	46	-32.66	Pass
15.32	19.31	60	-40.69	Pass	14.23	50	-35.77	Pass

Table 16. Conducted Emissions, 15.207, Phase Line, Test Results

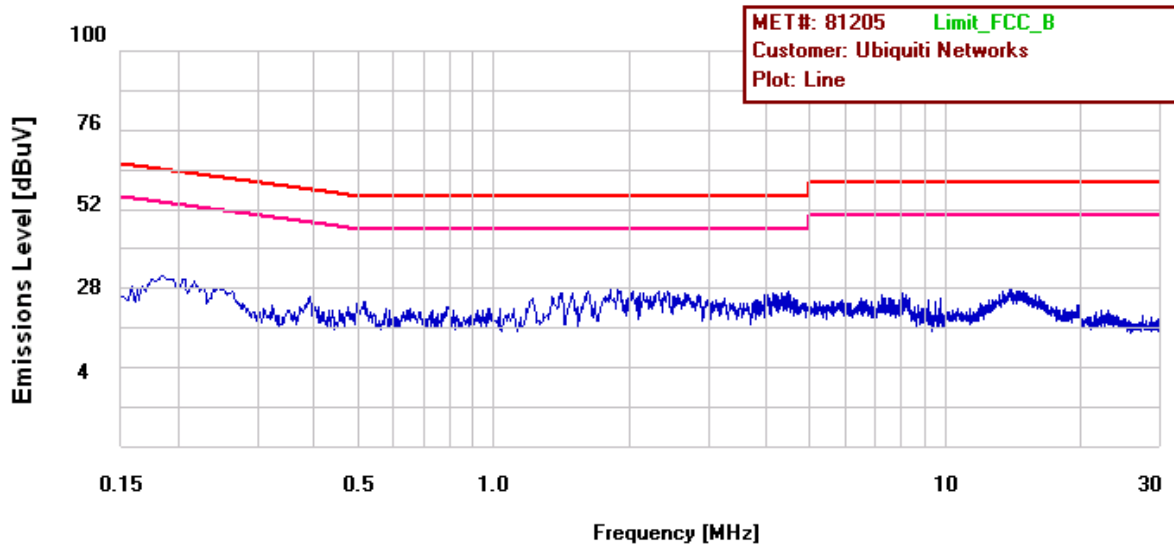


Plot 6. 15.207 Conducted Emissions, Phase Line

15.207 Conducted Emissions Test Results (120VAC 60Hz)

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
1.87	25.23	56	-30.77	Pass	13.94	46	-32.06	Pass
1.53	21.38	56	-34.62	Pass	13.48	46	-32.52	Pass
14.87	19.12	60	-40.88	Pass	14.08	50	-35.92	Pass

Table 17. Conducted Emissions, 15.207, Neutral Line, Test Results

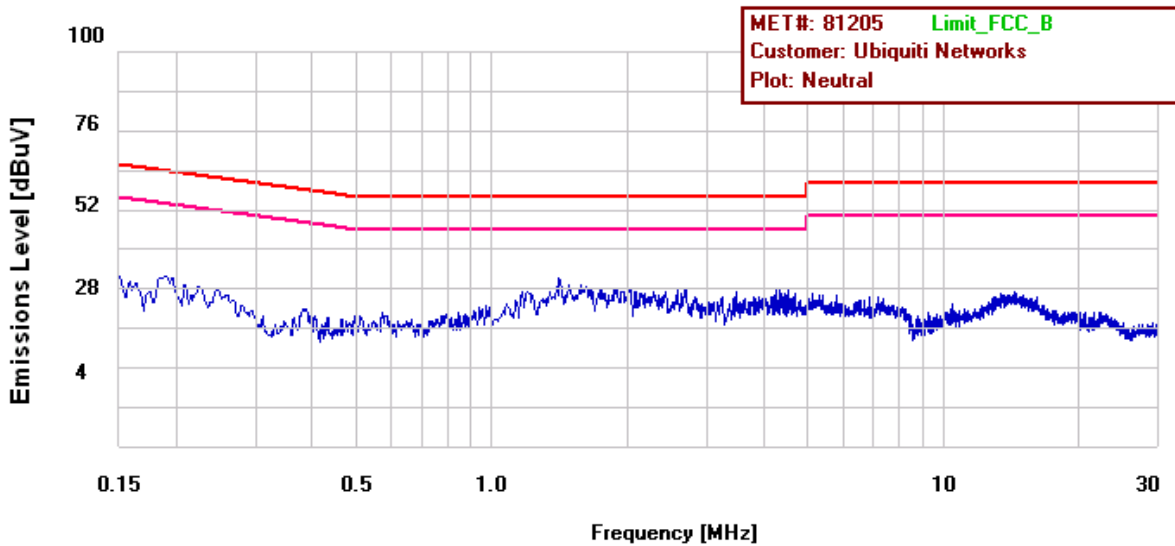

Plot 7. 15.207 Conducted Emissions, Neutral Line

15.207 Conducted Emissions Test Setup Photo



Photograph 5. Conducted Emissions, 15.207, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a).

The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Anderson Sounghpanya

Test Date(s): 03/31/2010




Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Occupied Bandwidth Test Results


Occupied Bandwidth			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	16.58	16.50
Mid	2437	16.39	16.75
High	2462	16.46	16.62

Table 18. Occupied Bandwidth 802.11g Mode Test Results


Occupied Bandwidth			
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	2412	17.65	17.72
Mid	2437	17.66	17.99
High	2462	17.39	18.02

Table 19. Occupied Bandwidth 802.11n Mode Test Results


Occupied Bandwidth Test Results – 802.11g Mode

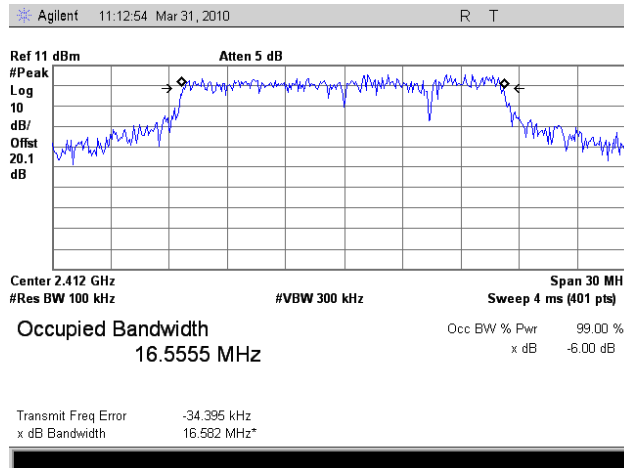

Plot 8. Occupied Band Width, 802.11g Mode, Low Channel, FCC, 6 dB

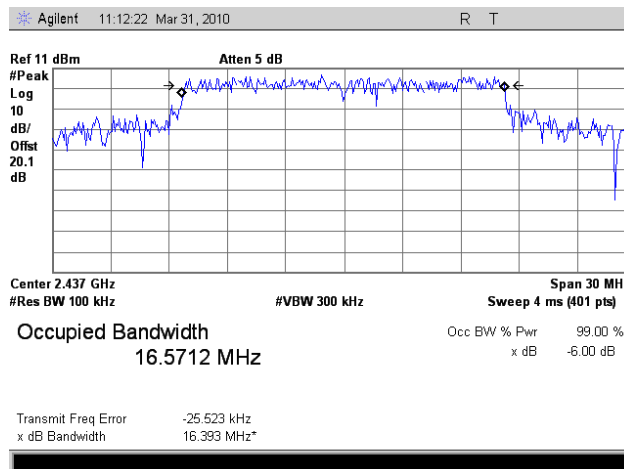


Plot 9. Occupied Band Width, 802.11g Mode, Mid Channel, FCC, 6 dB

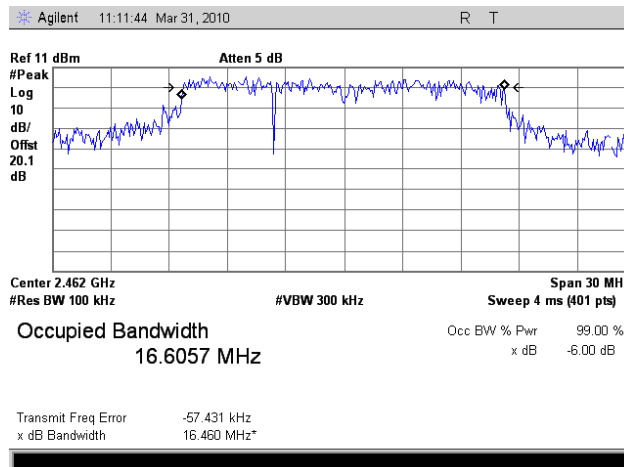


Plot 10. Occupied Band Width, 802.11g Mode, High Channel, FCC, 6 dB


Occupied Bandwidth Test Results – 802.11g Mode

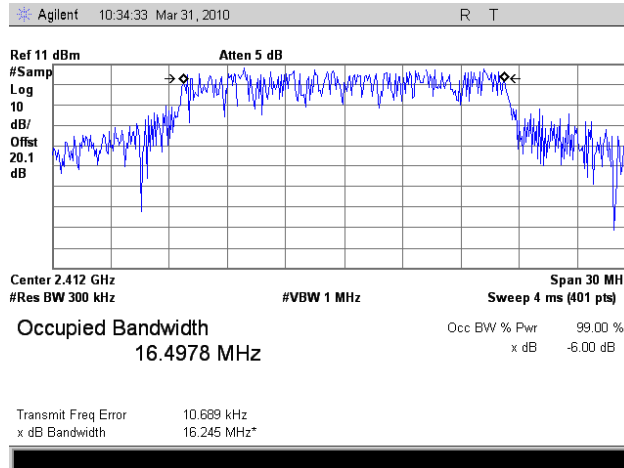

Plot 11. Occupied Band Width, 802.11g Mode, Low Channel, 99 % OBW

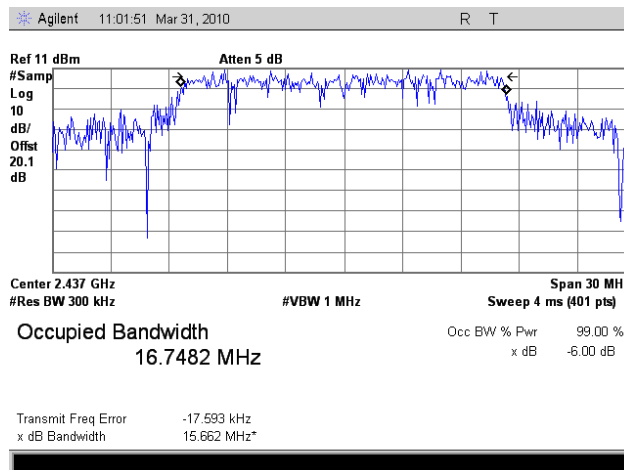


Plot 12. Occupied Band Width, 802.11g Mode, Mid Channel, 99% OBW

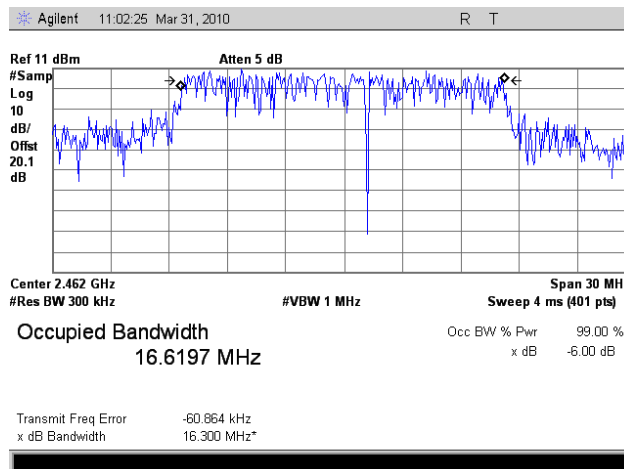


Plot 13. Occupied Band Width, 802.11g Mode, High Channel, 99 % OBW


Occupied Bandwidth Test Results – 802.11n Mode

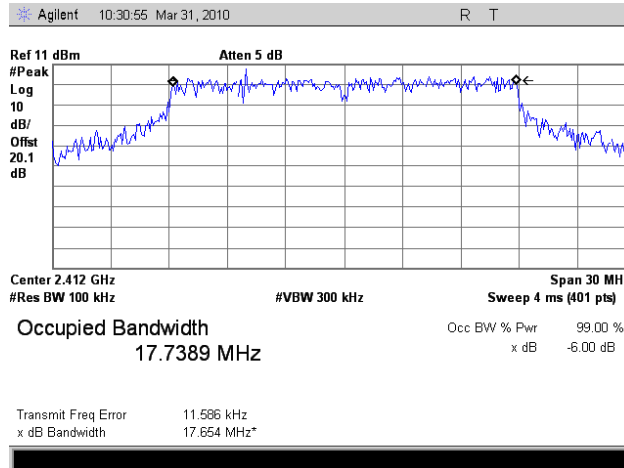

Plot 14. Occupied Band Width, 802.11n Mode, Low Channel, FCC, 6 dB

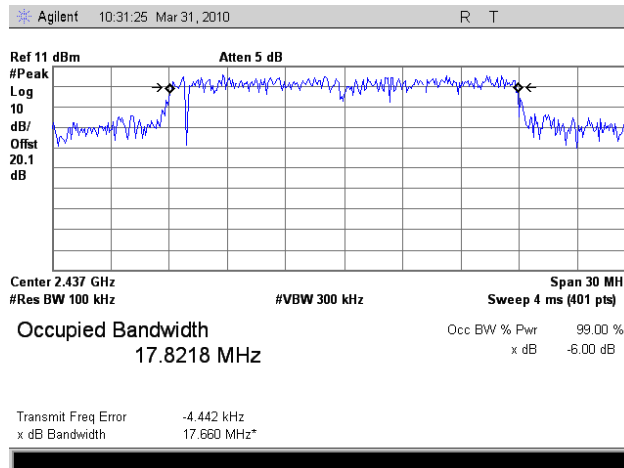


Plot 15. Occupied Band Width, 802.11n Mode, Mid Channel, FCC, 6 dB

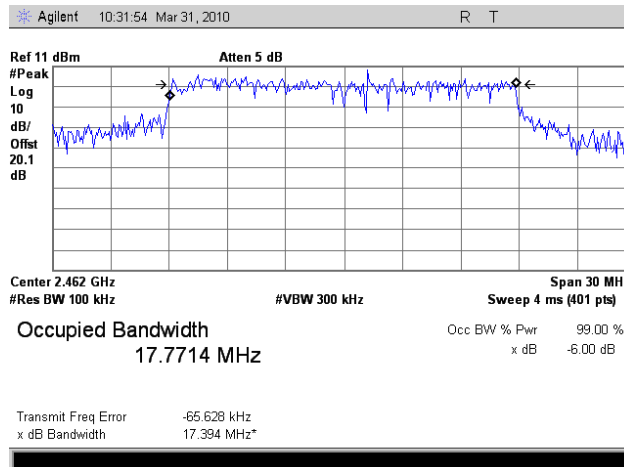


Plot 16. Occupied Band Width, 802.11n Mode, High Channel, FCC, 6 dB


Occupied Bandwidth Test Results – 802.11n Mode

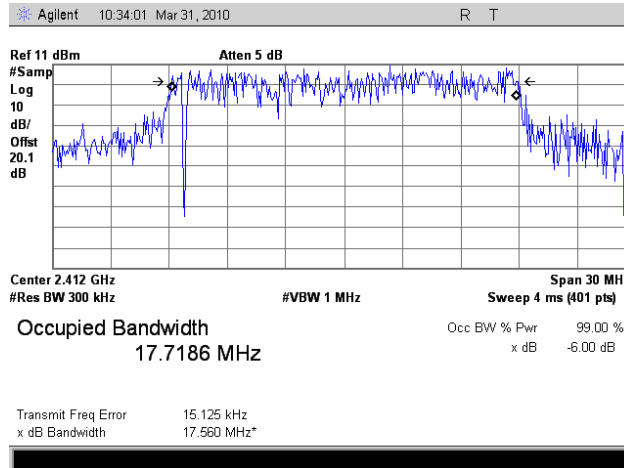

Plot 17. Occupied Band Width, 802.11n Mode, Low Channel, 99 % OBW

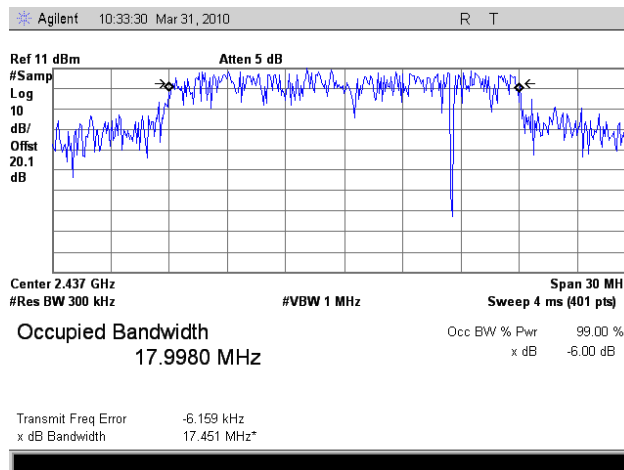

Plot 18. Occupied Band Width, 802.11n Mode, Mid Channel, 99% OBW

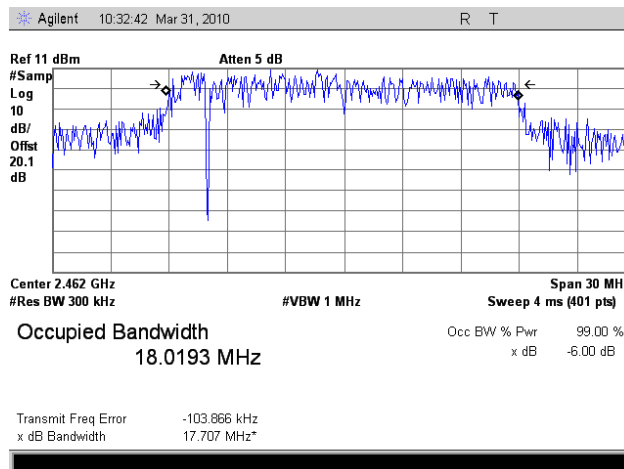

Plot 19. Occupied Band Width, 802.11n Mode, High Channel, 99 % OBW

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 20. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 20, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level. Since the EUT is deploying a point to point system with a 7 dBi Integral Antenna, the peak output power limit is in accordance to §15.247(c) set to 30 dBm.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b).

Test Engineer(s): Anderson Sounghanya

Test Date(s): 03/31/2010




Figure 3. Peak Power Output Test Setup

RF Power Output Test Results


Peak Conducted Output Power			
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm	Measured Peak Output Power Watts
1	2412	15.62	0.036
2	2417	21.55	0.142
3	2422	23.70	0.234
4	2427	29.78	0.950
6	2437	29.89	0.974
9	2452	26.66	0.463
10	2457	23.28	0.212
11	2462	21.36	0.136

Table 21. RF Output Power Test Results – 802.11g Mode


Peak Conducted Output Power			
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm	Measured Peak Output Power Watts
1	2412	15.64	0.036
2	2417	19.84	0.096
3	2422	23.76	0.237
4	2427	29.81	0.957
6	2437	29.98	0.995
9	2452	29.97	0.993
10	2457	24.88	0.307
11	2462	21.74	0.148

Table 22. RF Output Power Test Results – 802.11n Mode

RF Output Power Test Results – 802.11g Mode

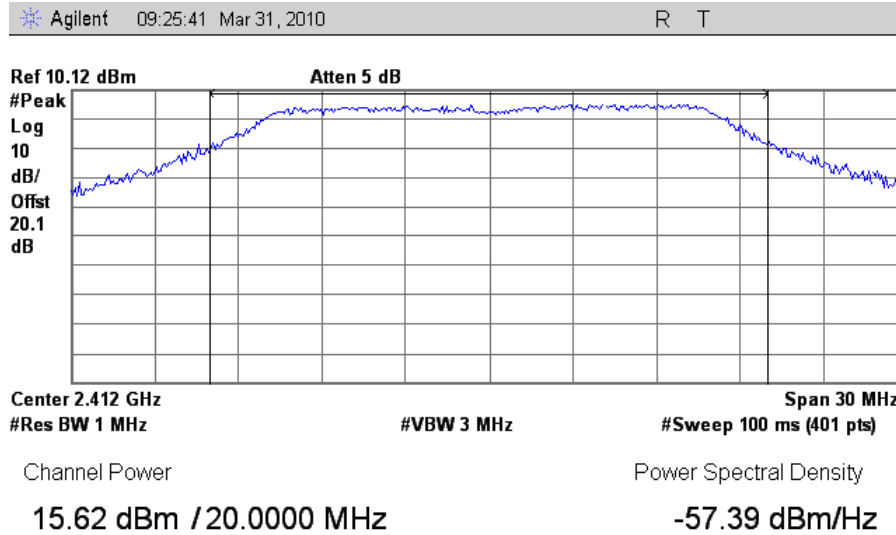


Plot 20. Peak Output Power, 802.11g Mode, Channel 1

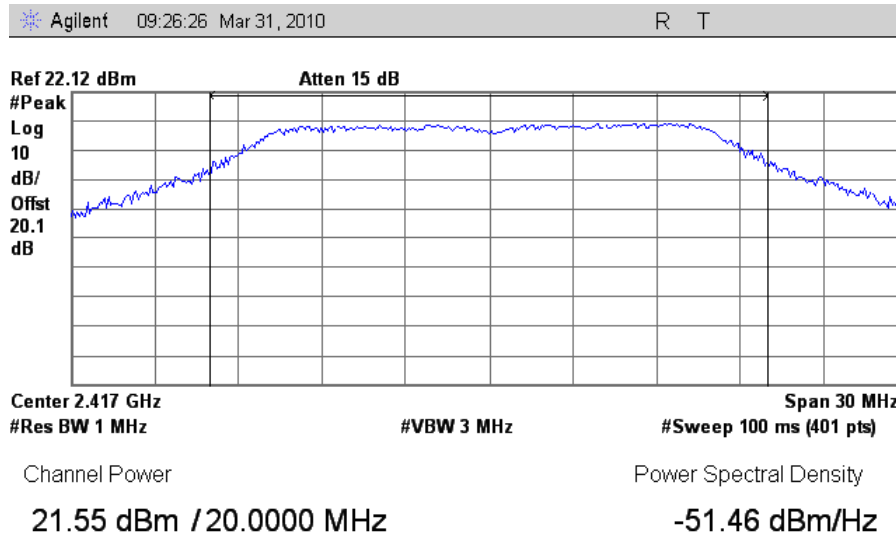


Plot 21. Peak Output Power, 802.11g Mode, Channel 2

RF Output Power Test Results – 802.11g Mode

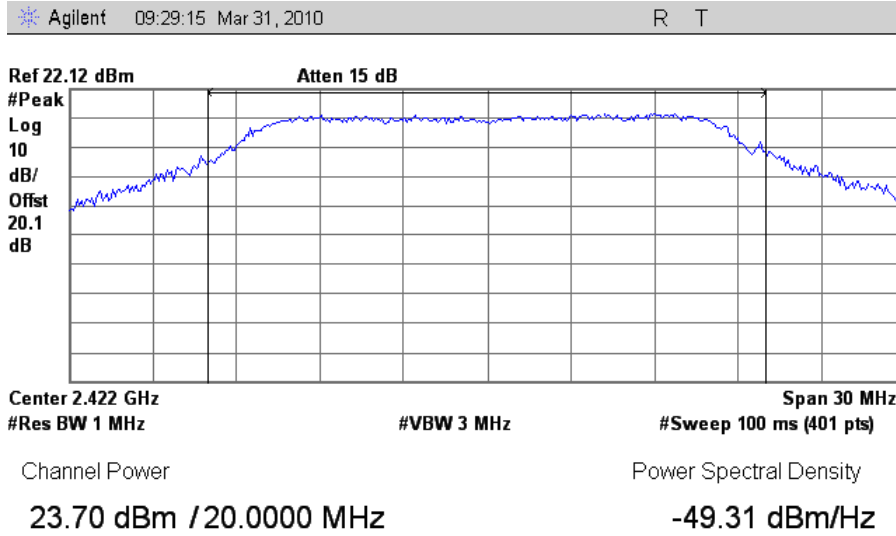


Plot 22. Peak Output Power, 802.11g Mode, Channel 3

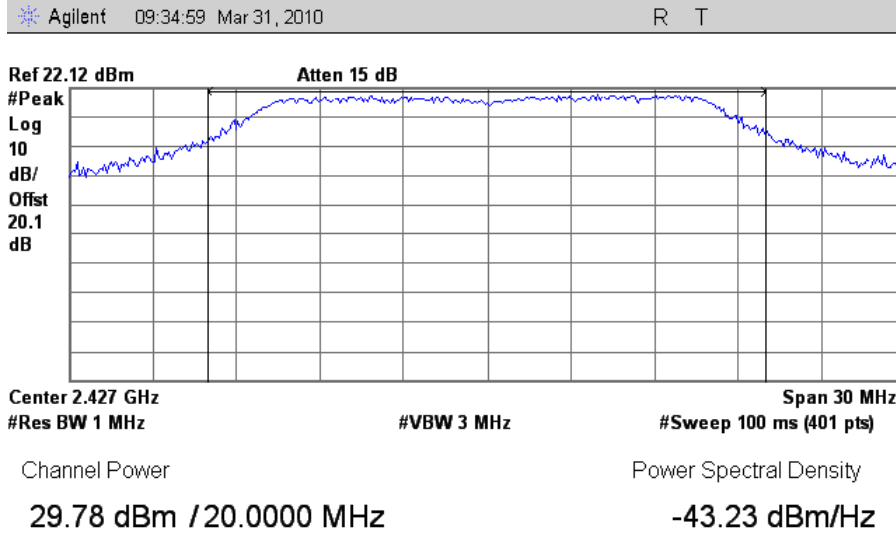


Plot 23. Peak Output Power, 802.11g Mode, Channel 4

RF Output Power Test Results – 802.11g Mode

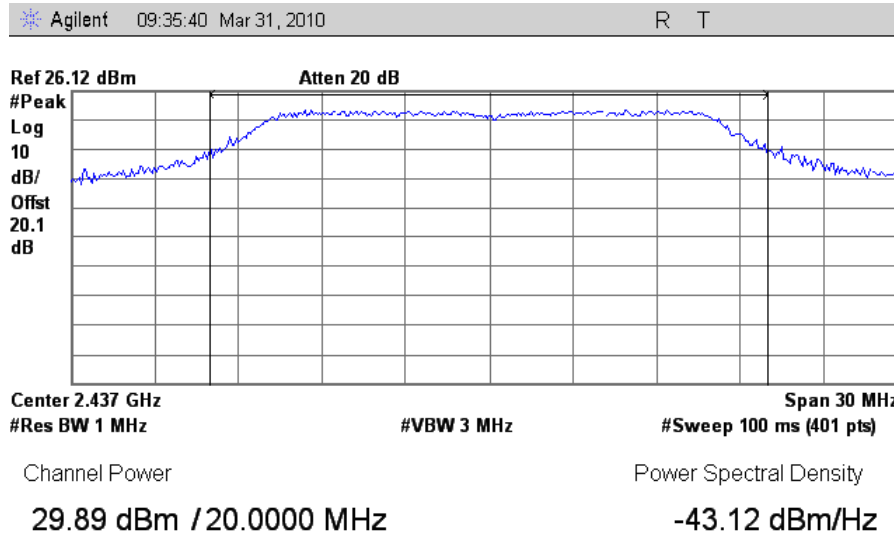


Plot 24. Peak Output Power, 802.11g Mode, Channel 6

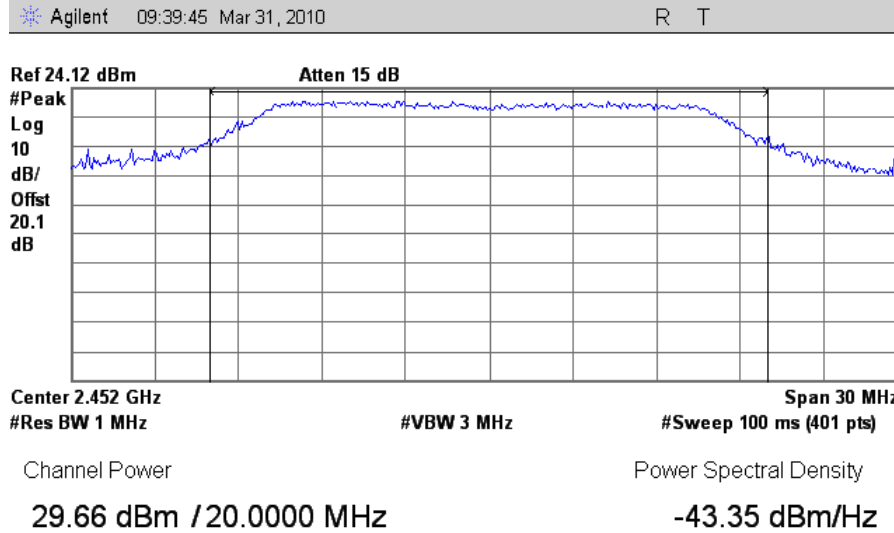

Plot 25. Peak Output Power, 802.11g Mode, Channel 9


RF Output Power Test Results – 802.11g Mode

Agilent 09:38:55 Mar 31, 2010 R T

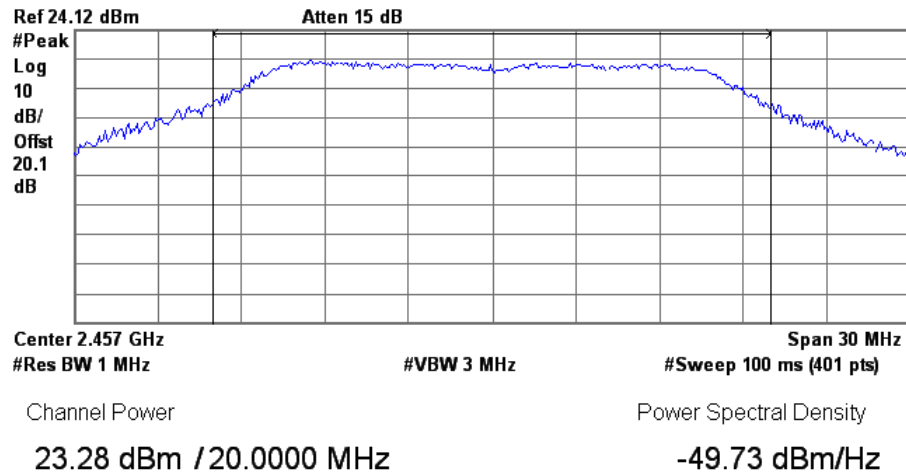


Plot 26. Peak Output Power, 802.11g Mode, Channel 10

Agilent 09:37:30 Mar 31, 2010 R T

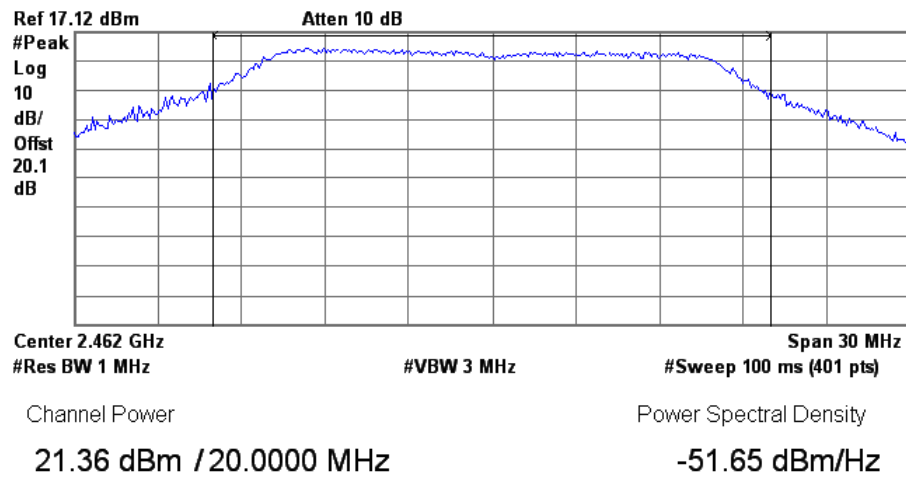


Plot 27. Peak Output Power, 802.11g Mode, Channel 11

RF Output Power Test Results – 802.11n Mode

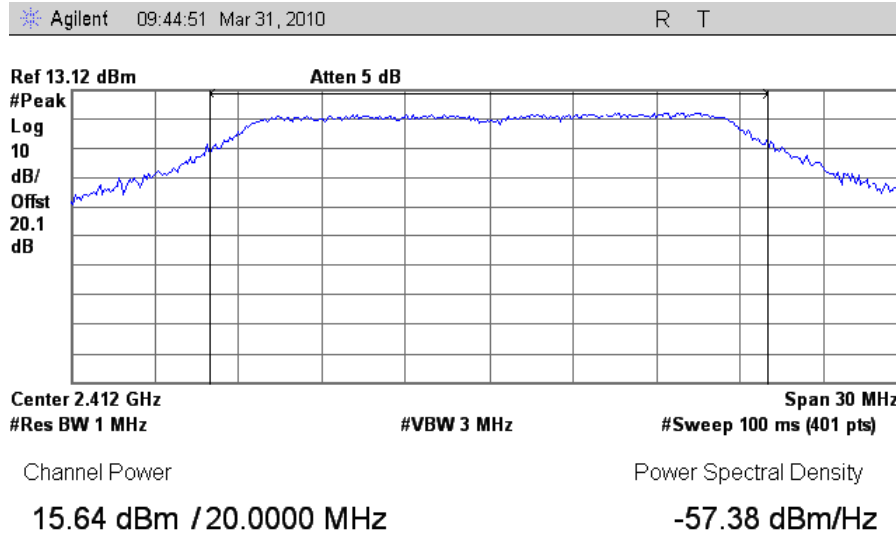


Plot 28. Peak Output Power, 802.11n Mode, Channel 1

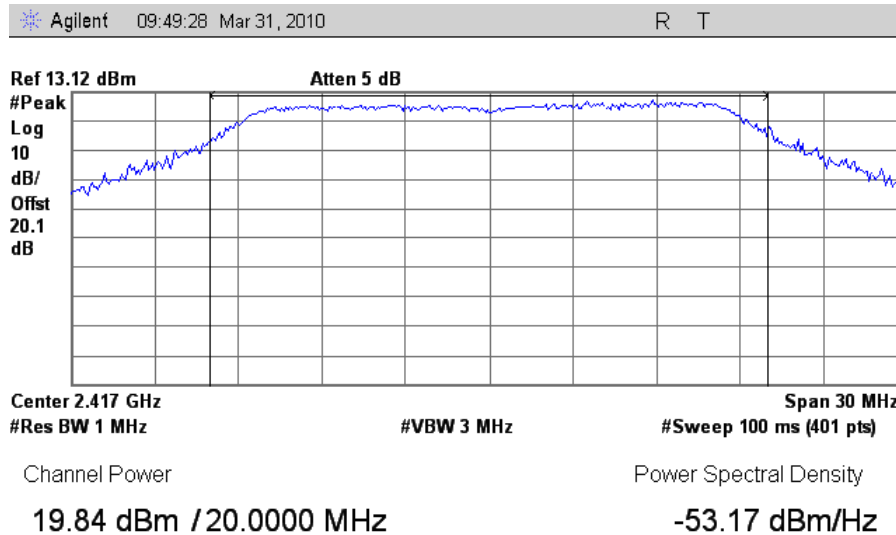


Plot 29. Peak Output Power, 802.11n Mode, Channel 2

RF Output Power Test Results – 802.11n Mode

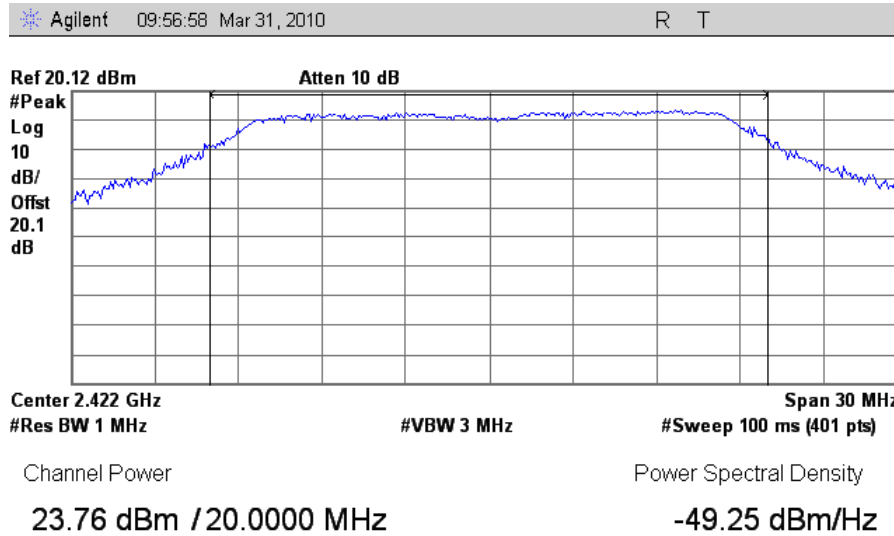


Plot 30. Peak Output Power, 802.11n Mode, Channel 3

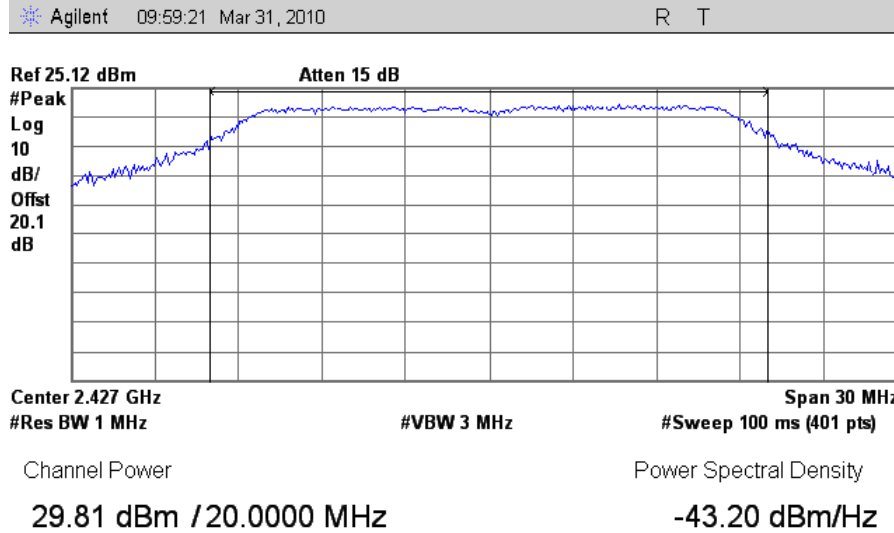

Plot 31. Peak Output Power, 802.11n Mode, Channel 4


RF Output Power Test Results – 802.11n Mode

Agilent 09:59:45 Mar 31, 2010 R T

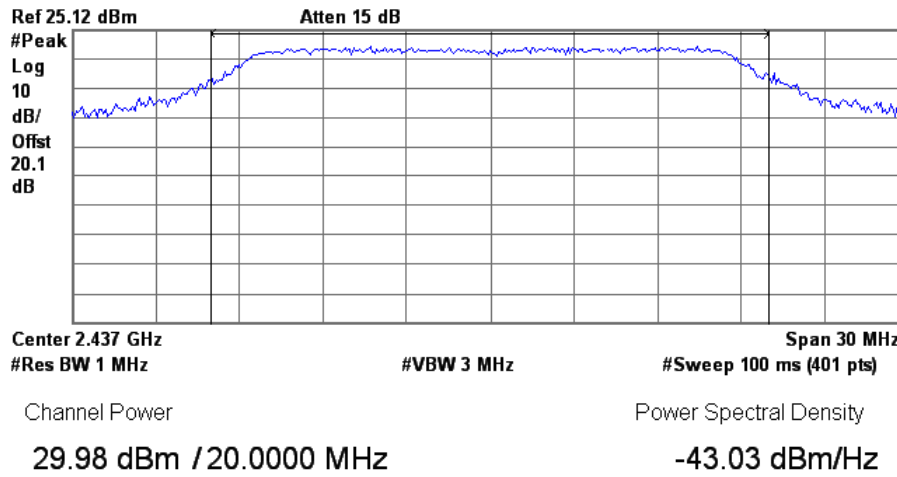


Plot 32. Peak Output Power, 802.11n Mode, Channel 6

Agilent 10:04:59 Mar 31, 2010 R T

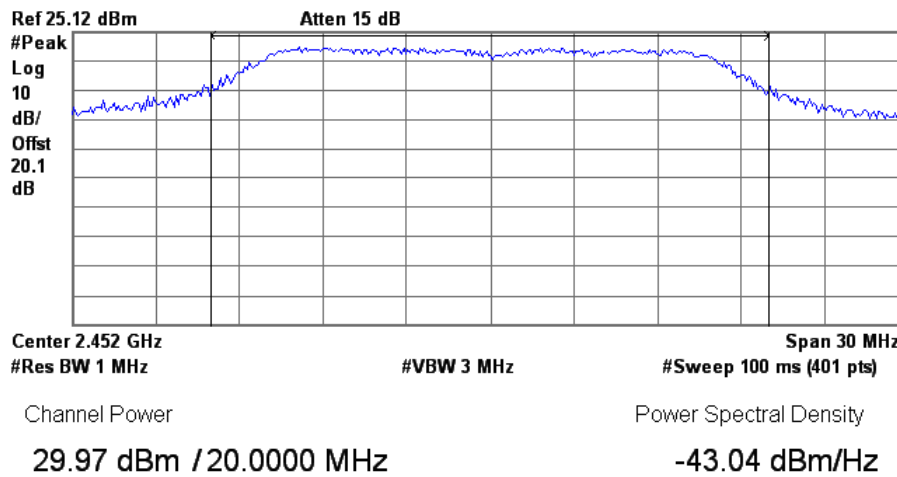


Plot 33. Peak Output Power, 802.11n Mode, Channel 9

RF Output Power Test Results – 802.11n Mode

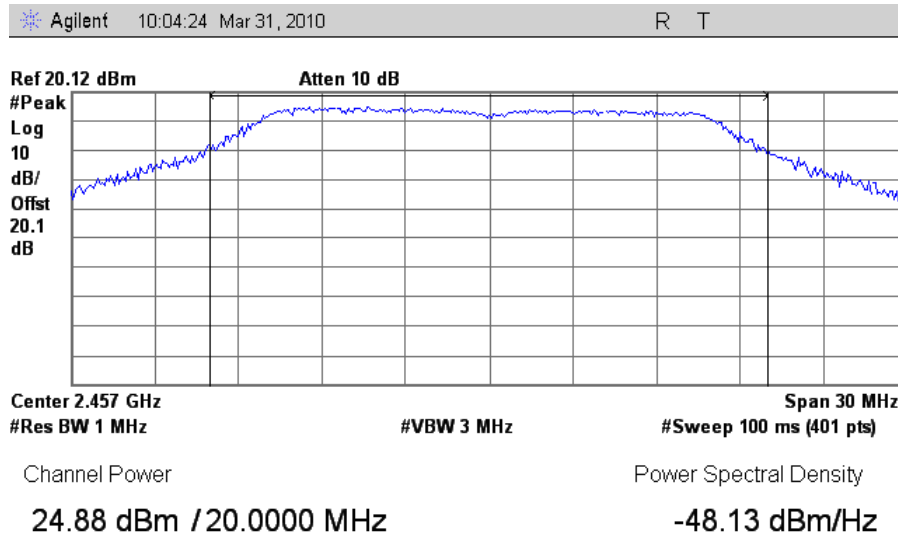

Plot 34. Peak Output Power, 802.11n Mode, Channel 10

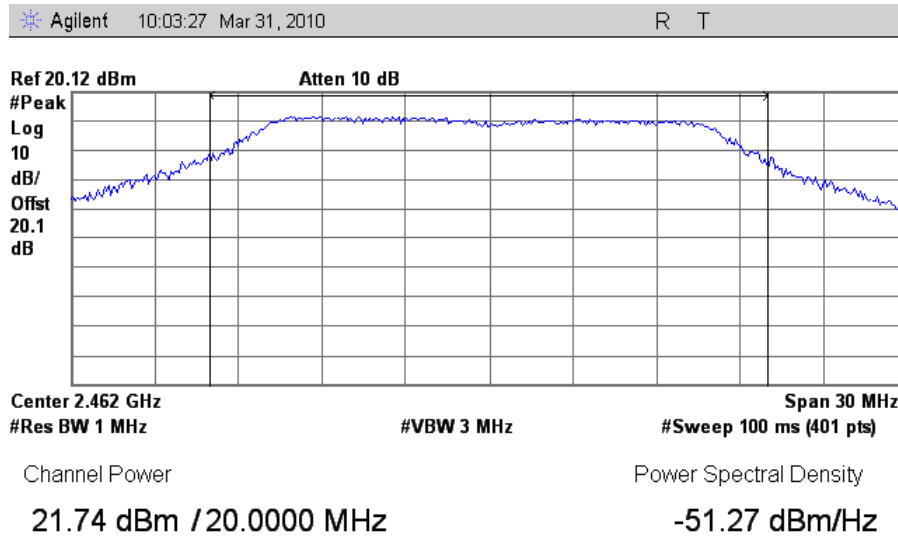

Plot 35. Peak Output Power, 802.11n Mode, Channel 11

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2412 MHz; highest conducted power = 29.98dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **6dBi. Integral**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (995.4054mW)
G = Antenna Gain (3.98numeric)

$$S = (995.4 * 3.98 / 4 * 3.14 * 20.0^2) = (3962.78 / 5024) = \mathbf{0.788mW/cm^2} @ 20cm separation$$

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 23. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 24.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 24. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)


Test Procedures: The transmitter was turned on. Measurements were performed on the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance correction factor and compared to the 3 m limit. Only noise floor was measured above 18 GHz.

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).


Test Engineer(s): Anderson Soungpanya

Test Date(s): 02/04/10 & 03/29/10

15.209 Radiated Emissions Limits Test Results

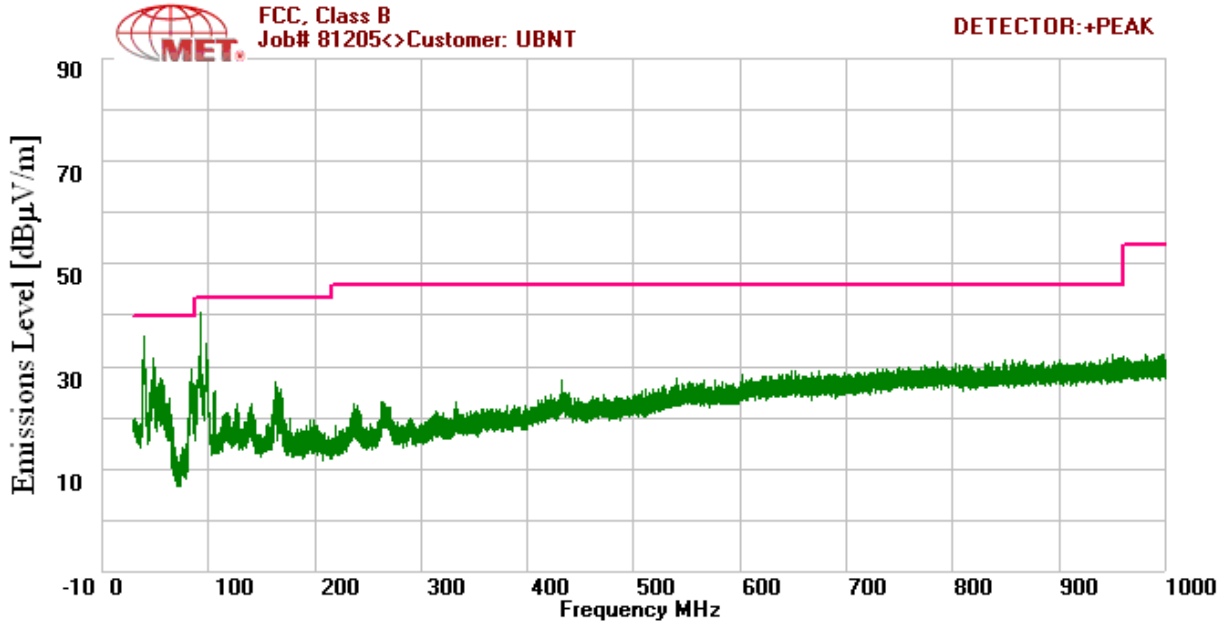


Plot 36. 15.209 Radiated Emissions 2412MHz Low Channel 802.11g (30MHz – 1GHz)

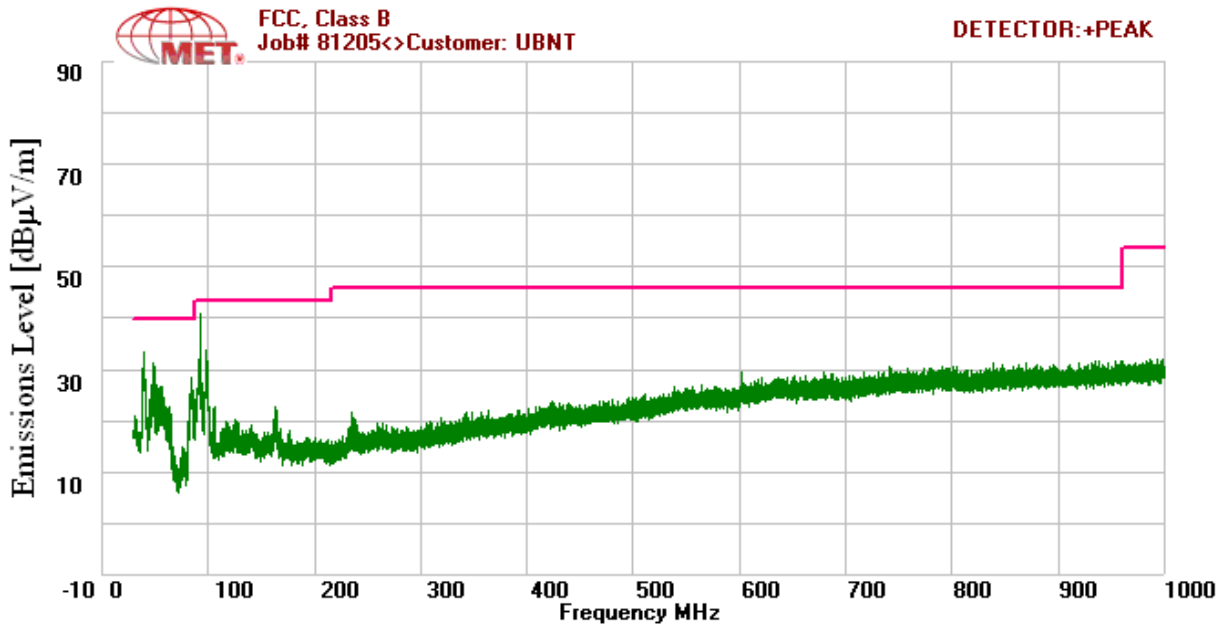


Plot 37. 15.209 Radiated Emissions 2437MHz Mid Channel 802.11g (30MHz – 1GHz)

15.209 Radiated Emissions Limits Test Results

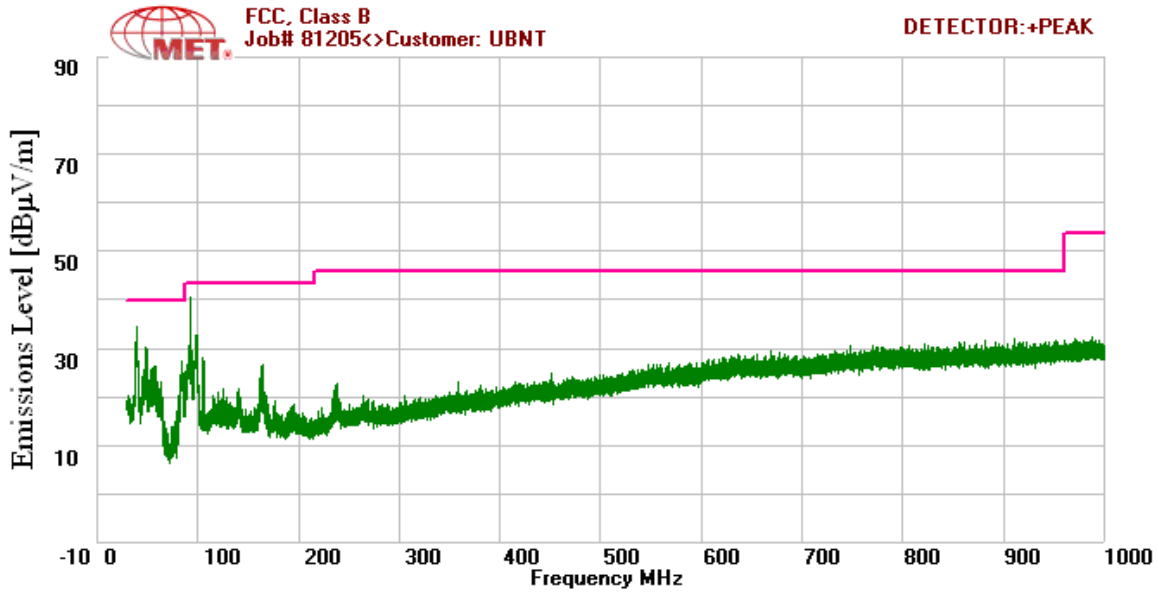


Plot 38. 15.209 Radiated Emissions 2462MHz High Channel 802.11g (30MHz – 1GHz)

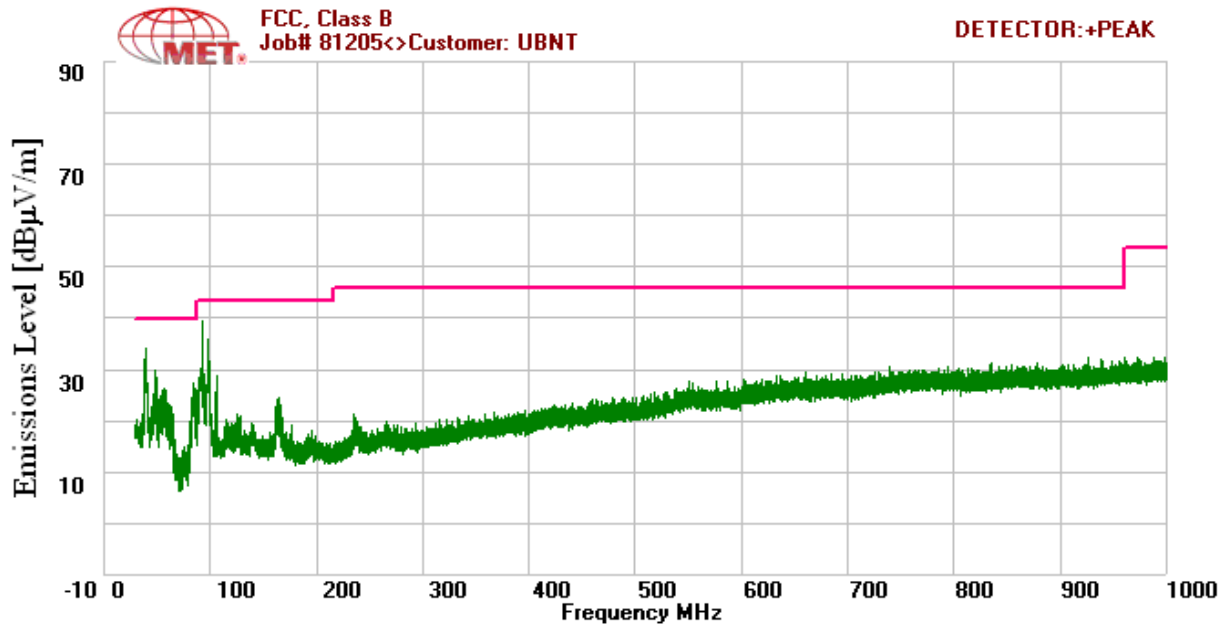


Plot 39. 15.209 Radiated Emissions 2412MHz Low Channel 802.11n (30MHz – 1GHz)

15.209 Radiated Emissions Limits Test Results

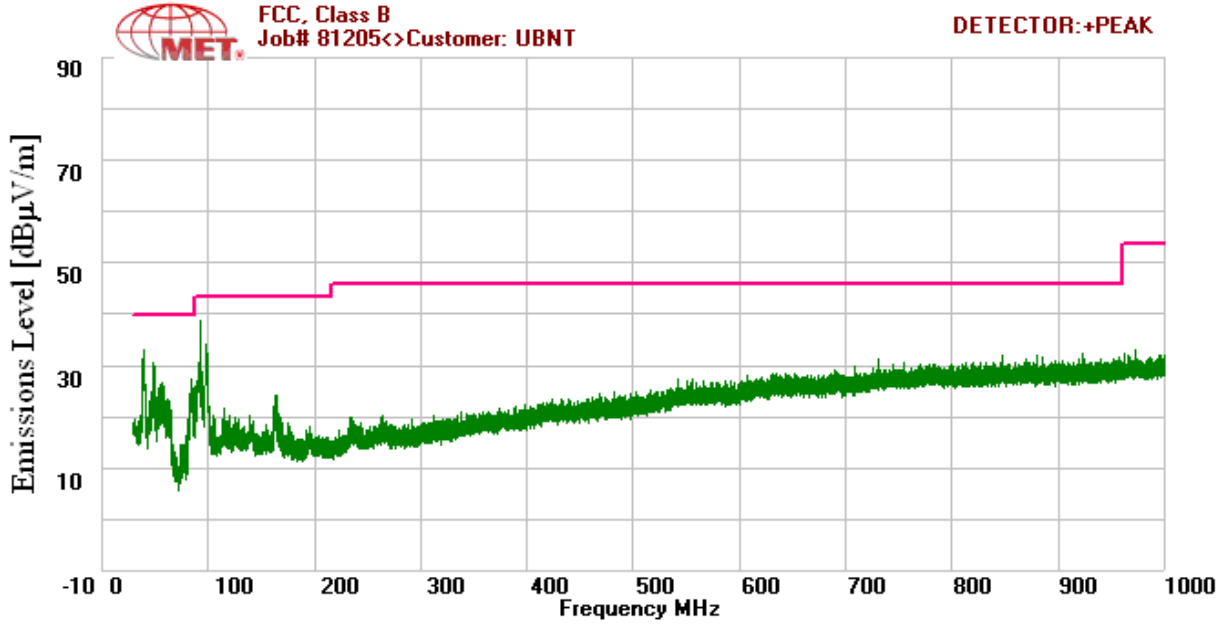

Plot 40. 15.209 Radiated Emissions 2437MHz Mid Channel 802.11n (30MHz – 1GHz)

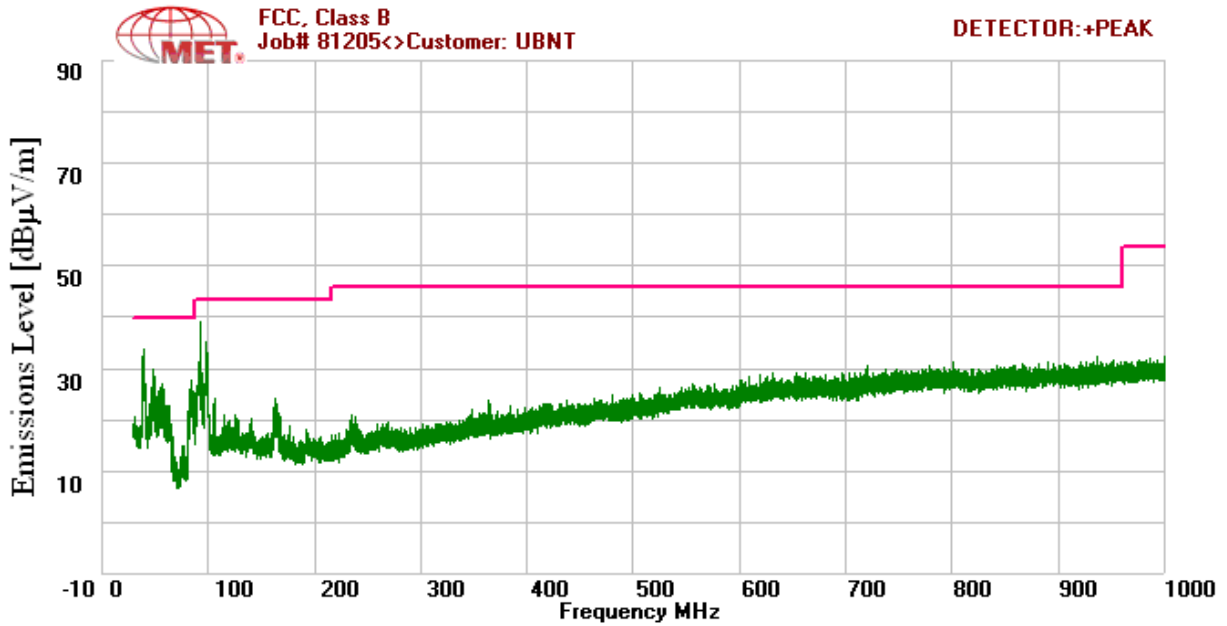

Plot 41. 15.209 Radiated Emissions 2462MHz High Channel 802.11n (30MHz – 1GHz)


Harmonic Emissions Requirements – Radiated (802.11g Mode)

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3 m (dB μ V/m)	Delta (dB)
4.824	V	62.17	34.76	33.95	4.37	65.73	Peak	74	-8.27
4.824	V	47.41	34.76	33.95	4.37	50.97	Avg	54	-3.03
7.236	V	49.06	35.01	35.62	5.59	55.26	Peak	74	-18.74
7.236	V	35.32	35.01	35.62	5.59	41.52	Avg	54	-12.48
9.648	V	48.24	35.58	36.61	6.25	55.53	Peak	74	-18.47
9.648	V	34.01	35.58	36.61	6.25	41.30	Avg	54	-12.70
12.06	V	45.22	35.00	38.76	6.60	55.57	Peak	74	-18.43
12.06	V	31.28	35.00	38.76	6.60	41.63	Avg	54	-12.37
Low Channel 2412MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3 m (dB μ V/m)	Delta (dB)
4.874	V	60.61	34.74	33.94	4.41	64.22	Peak	74	-9.78
4.874	V	45.94	34.74	33.94	4.41	49.55	Avg	54	-4.45
7.311	V	51.97	35.02	35.64	5.93	58.52	Peak	74	-15.48
7.311	V	37.88	35.02	35.64	5.93	44.43	Avg	54	-9.57
9.748	V	51.48	35.55	36.75	6.29	58.97	Peak	74	-15.03
9.748	V	35.66	35.55	36.75	6.29	43.15	Avg	54	-10.85
12.185	V	45.21	34.94	38.83	6.89	55.99	Peak	74	-18.01
12.185	V	31.48	34.94	38.83	6.89	42.26	Avg	54	-11.74
Mid Channel 2437MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit Detector Peak / Avg	Limit @ 3 m (dB μ V/m)	Delta (dB)
4.924	V	60.45	34.73	33.94	4.46	64.12	Peak	74	-9.88
4.924	V	45.21	34.73	33.94	4.46	48.88	Avg	54	-5.12
7.386	V	49.76	35.05	35.65	6.24	56.60	Peak	74	-17.40
7.386	V	34.05	35.05	35.65	6.24	40.89	Avg	54	-13.11
9.848	V	49.73	35.54	36.89	6.33	57.41	Peak	74	-16.59
9.848	V	34.28	35.54	36.89	6.33	41.96	Avg	54	-12.04
12.31	V	46.33	34.83	38.89	7.31	57.70	Peak	74	-16.30
12.31	V	31.87	34.83	38.89	7.31	43.24	Avg	54	-10.76
High Channel 2462MHz									


Table 25. Radiated Harmonic Emissions – 802.11g mode

Note 1: All other emissions were measured at the noise floor of the spectrum analyzer.


Radiated Spurious Emissions Test Results

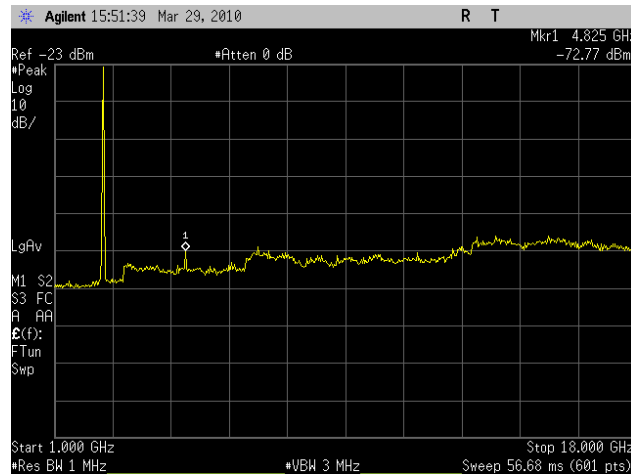

Plot 42. Radiated Spurious 2412MHz Low Channel 802.11g (1-18GHz)

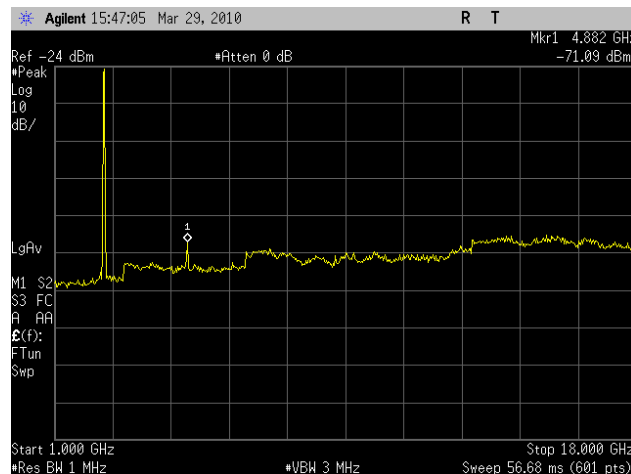

Plot 43. Radiated Spurious 2437MHz Mid Channel 802.11g (1-18GHz)

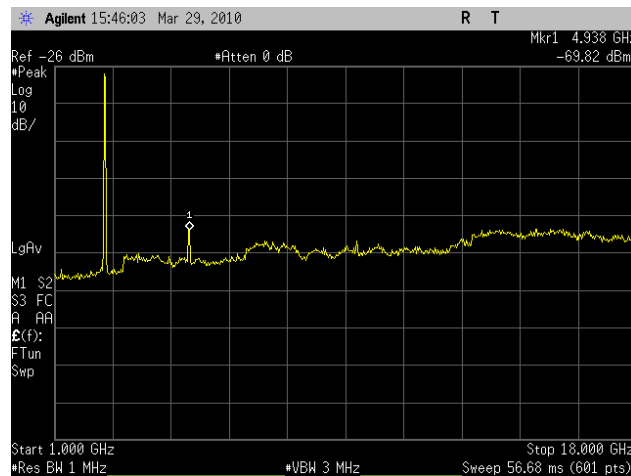

Plot 44. Radiated Spurious 2462MHz High Channel 802.11g (1-18GHz)


Harmonic Emissions Requirements – Radiated (802.11n Mode)

Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBµV/m)	Limit Detector Peak / Avg	Limit @ 3 m (dBµV/m)	Delta (dB)
4.824	V	60.35	34.76	33.95	4.37	63.91	Peak	74	-10.09
4.824	V	46.5	34.76	33.95	4.37	50.06	Avg	54	-3.94
7.236	V	48.93	35.01	35.62	5.59	55.13	Peak	74	-18.87
7.236	V	34.53	35.01	35.62	5.59	40.73	Avg	54	-13.27
9.648	V	47.24	35.58	36.61	6.25	54.53	Peak	74	-19.47
9.648	V	33.36	35.58	36.61	6.25	40.65	Avg	54	-13.35
12.06	V	44.33	35.00	38.76	6.60	54.68	Peak	74	-19.32
12.06	V	30.84	35.00	38.76	6.60	41.19	Avg	54	-12.81
Low Channel 2412MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBµV/m)	Limit Detector Peak / Avg	Limit @ 3 m (dBµV/m)	Delta (dB)
4.874	V	59.94	34.74	33.94	4.41	63.55	Peak	74	-10.45
4.874	V	45.38	34.74	33.94	4.41	48.99	Avg	54	-5.01
7.311	V	51.5	35.02	35.64	5.93	58.05	Peak	74	-15.95
7.311	V	37.35	35.02	35.64	5.93	43.90	Avg	54	-10.10
9.748	V	49.45	35.55	36.75	6.29	56.94	Peak	74	-17.06
9.748	V	35.02	35.55	36.75	6.29	42.51	Avg	54	-11.49
12.185	V	44.81	34.94	38.83	6.89	55.59	Peak	74	-18.41
12.185	V	30.56	34.94	38.83	6.89	41.34	Avg	54	-12.66
Mid Channel 2437MHz									
Freq. (GHz)	Antenna Polarity (H/V)	Raw Amp. @ 3 m (Peak) / (Avg)	P.Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBµV/m)	Limit Detector Peak / Avg	Limit @ 3 m (dBµV/m)	Delta (dB)
4.924	V	64.75	34.73	33.94	4.46	68.42	Peak	74	-5.58
4.924	V	49.25	34.73	33.94	4.46	52.92	Avg	54	-1.08
7.386	V	52.23	35.05	35.65	6.24	59.07	Peak	74	-14.93
7.386	V	38.28	35.05	35.65	6.24	45.12	Avg	54	-8.88
9.848	V	51.23	35.54	36.89	6.33	58.91	Peak	74	-15.09
9.848	V	36.19	35.54	36.89	6.33	43.87	Avg	54	-10.13
12.31	V	45.21	34.83	38.89	7.31	56.58	Peak	74	-17.42
12.31	V	30.58	34.83	38.89	7.31	41.95	Avg	54	-12.05
High Channel 2462MHz									


Table 26. Radiated Harmonic Emissions – 802.11n Mode

Note 1: All other emissions were measured at the noise floor of the spectrum analyzer.


Radiated Spurious Emissions Test Results

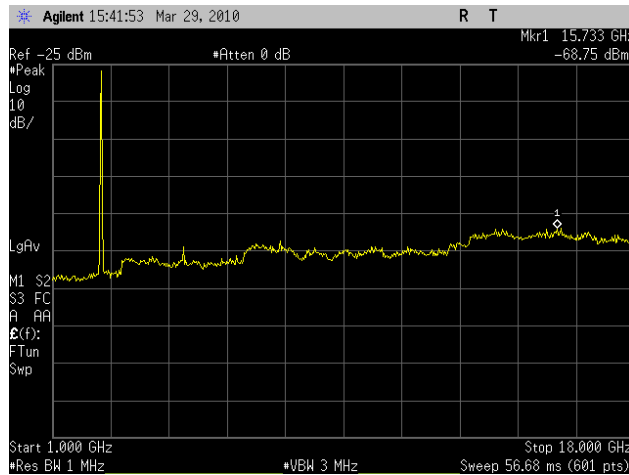

Plot 45. Radiated Spurious 2437MHz Low Channel 802.11n (1-18GHz)

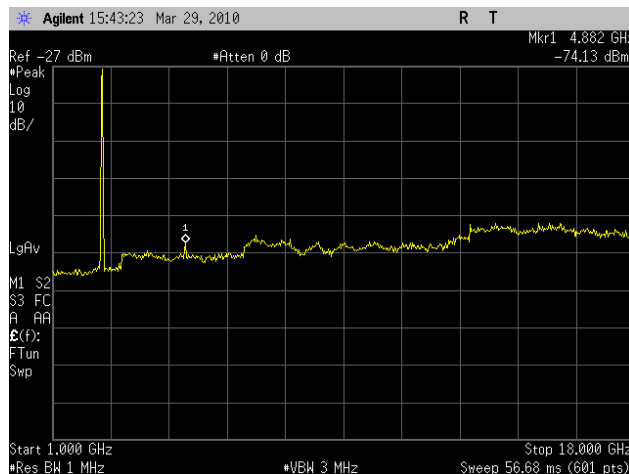


Plot 46. Radiated Spurious 2437MHz Mid Channel 802.11n (1-18GHz)

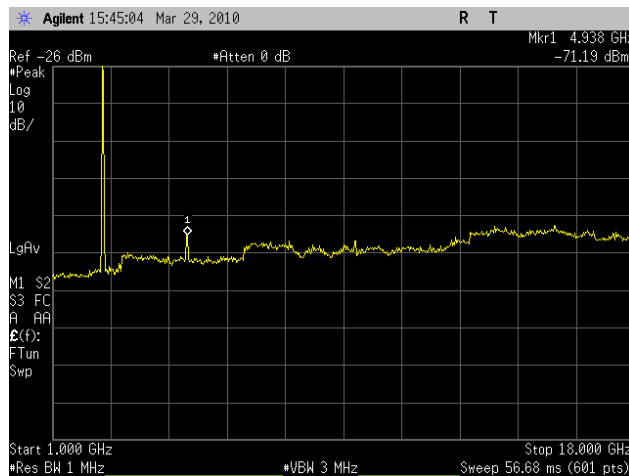


Plot 47. Radiated Spurious 2462MHz High Channel 802.11n (1-18GHz)

Radiated Band Edge Measurements

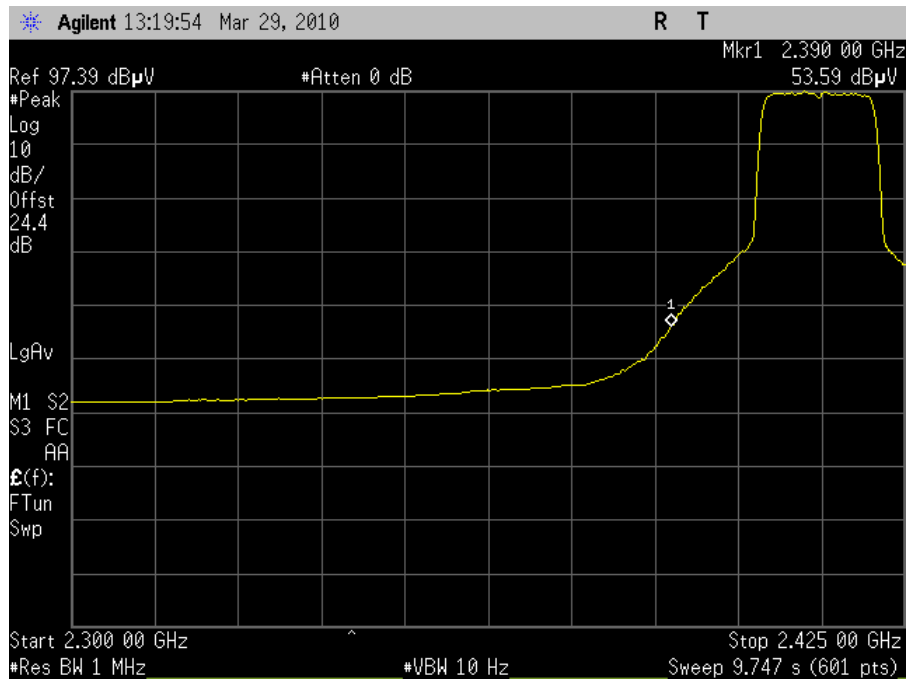


Plot 48. Radiated Band Edge 2412MHz Channel 1 802.11g (Average)

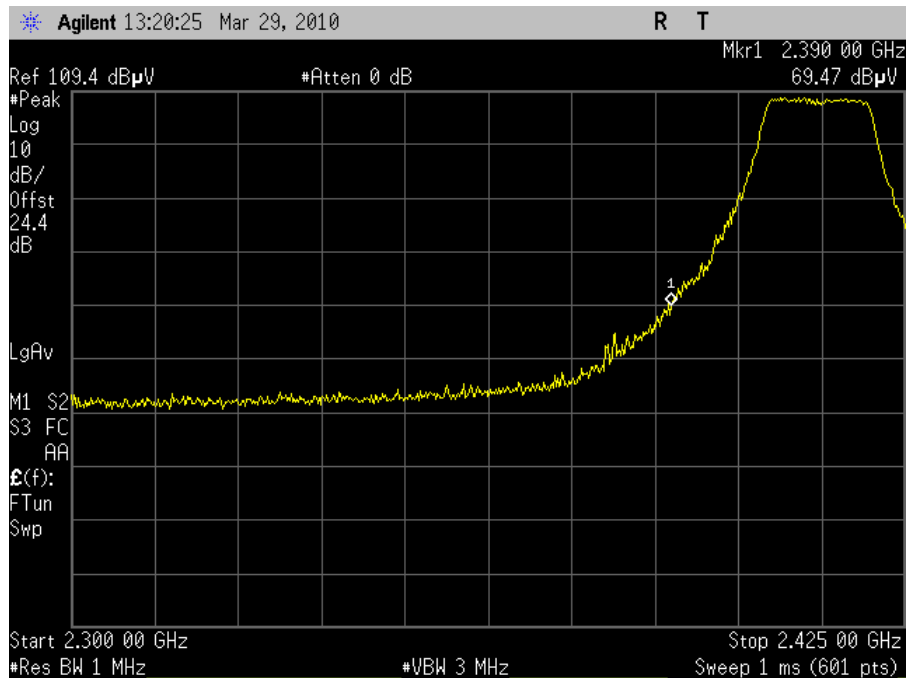


Plot 49. Radiated Band Edge 2412MHz Channel 1 802.11g (Peak)

Radiated Band Edge Measurements

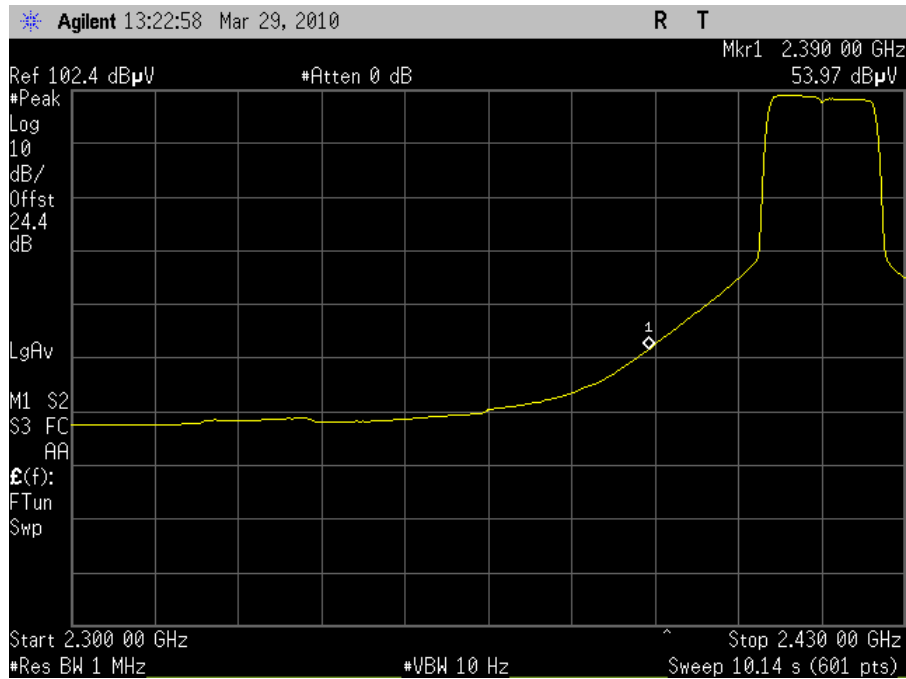


Plot 50. Radiated Band Edge 2417MHz Channel 2 802.11g (Average)

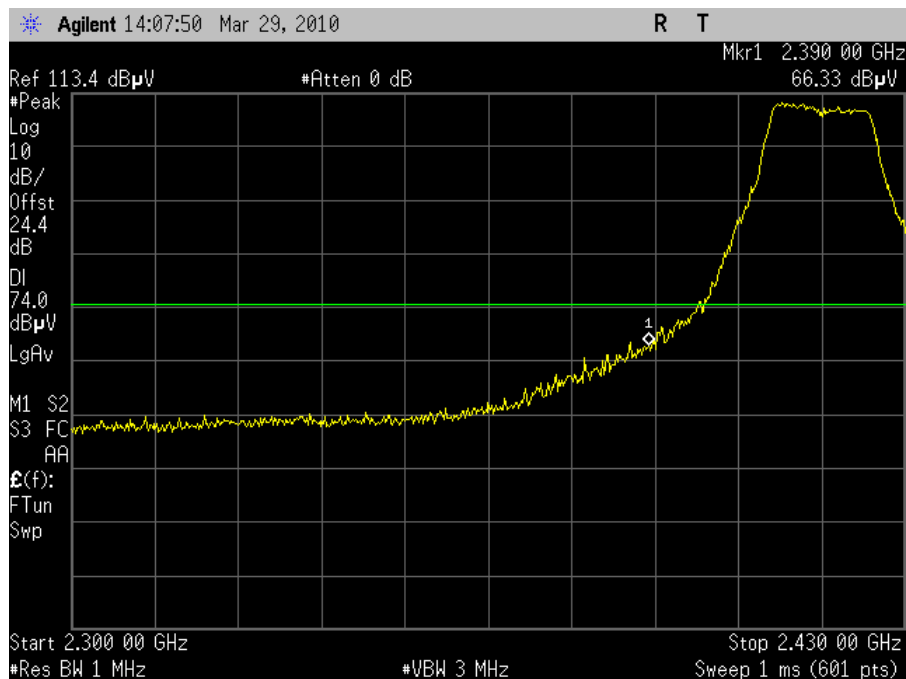

Plot 51. Radiated Band Edge 2417MHz Channel 2 802.11g (Peak)

Radiated Band Edge Measurements

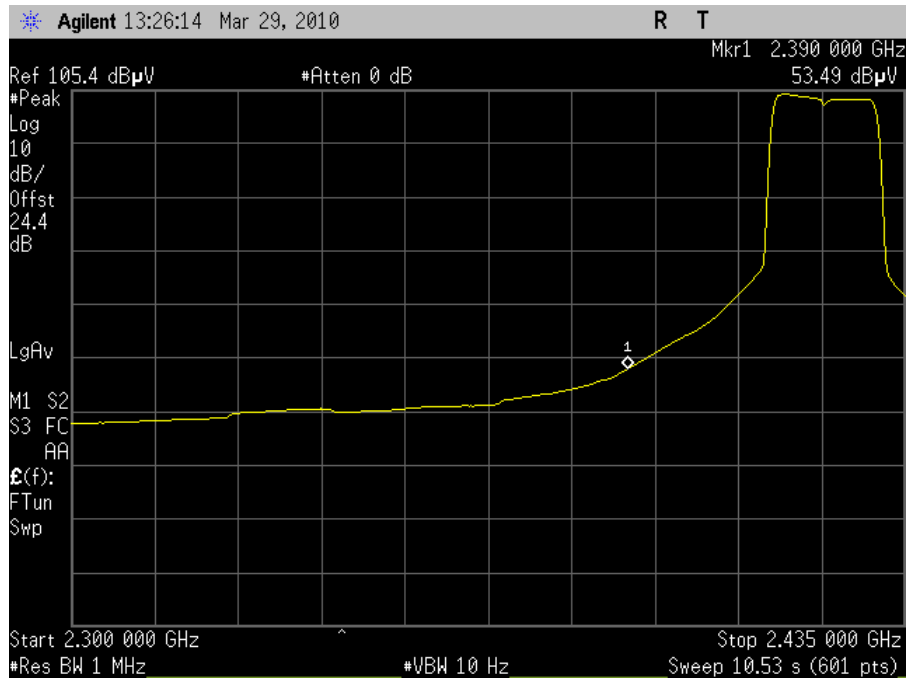


Plot 52. Radiated Band Edge 2422MHz Channel 3 802.11g (Average)




Plot 53. Radiated Band Edge 2422MHz Channel 3 802.11g (Peak)

Radiated Band Edge Measurements

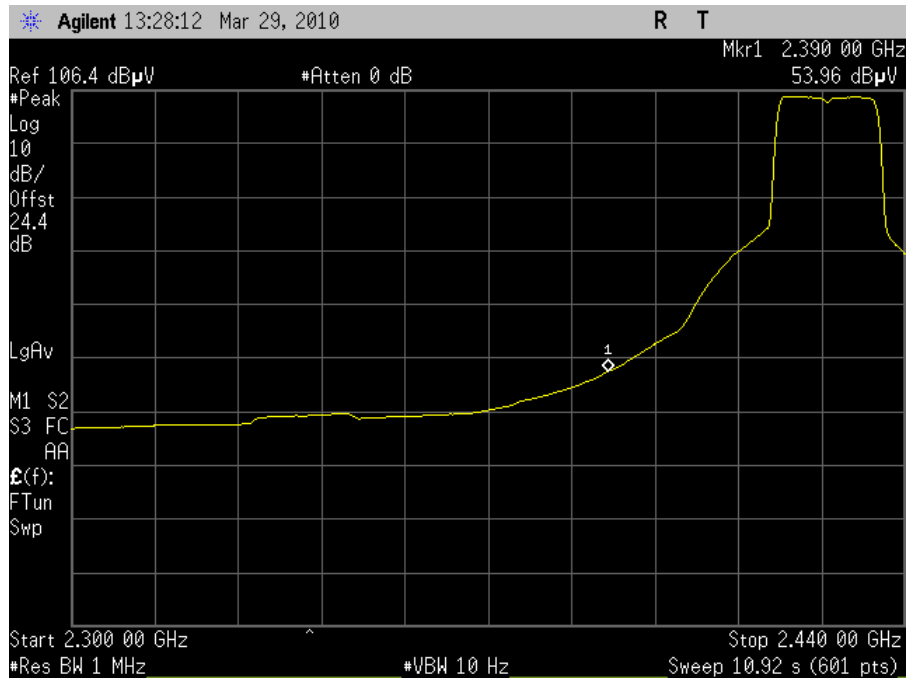


Plot 54. Radiated Band Edge 2427MHz Channel 4 802.11g (Average)

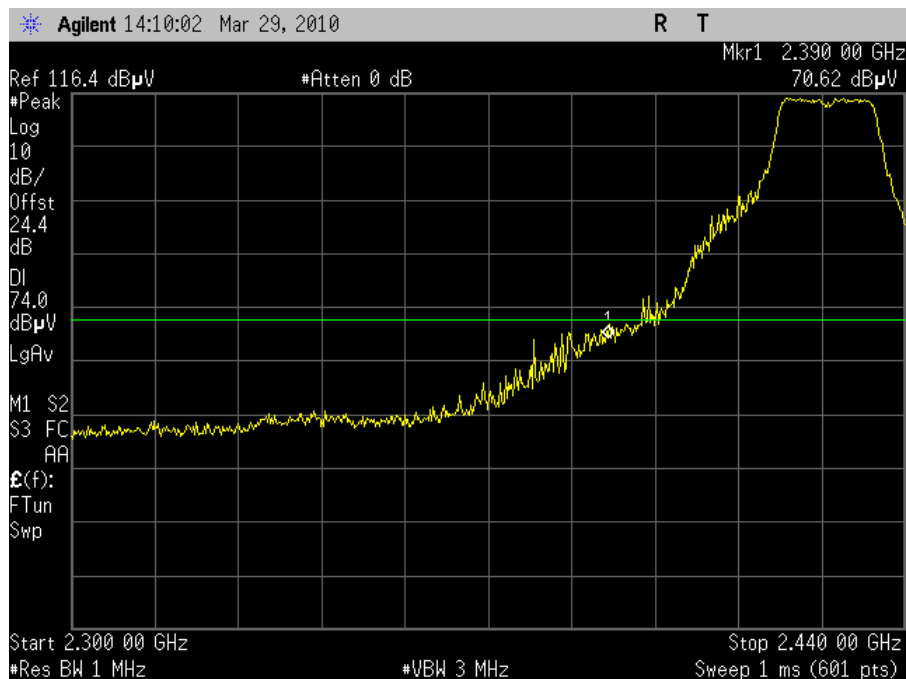


Plot 55. Radiated Band Edge 2427MHz Channel 4 802.11g (Peak)

Radiated Band Edge Measurements

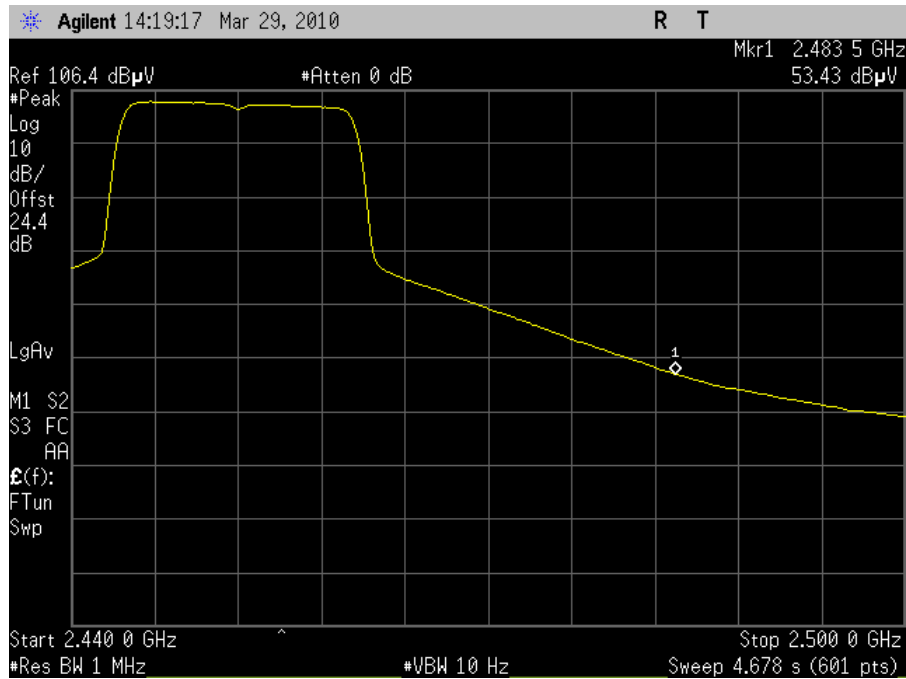


Plot 56. Radiated Band Edge 2462MHz Channel 9 802.11g (Average)

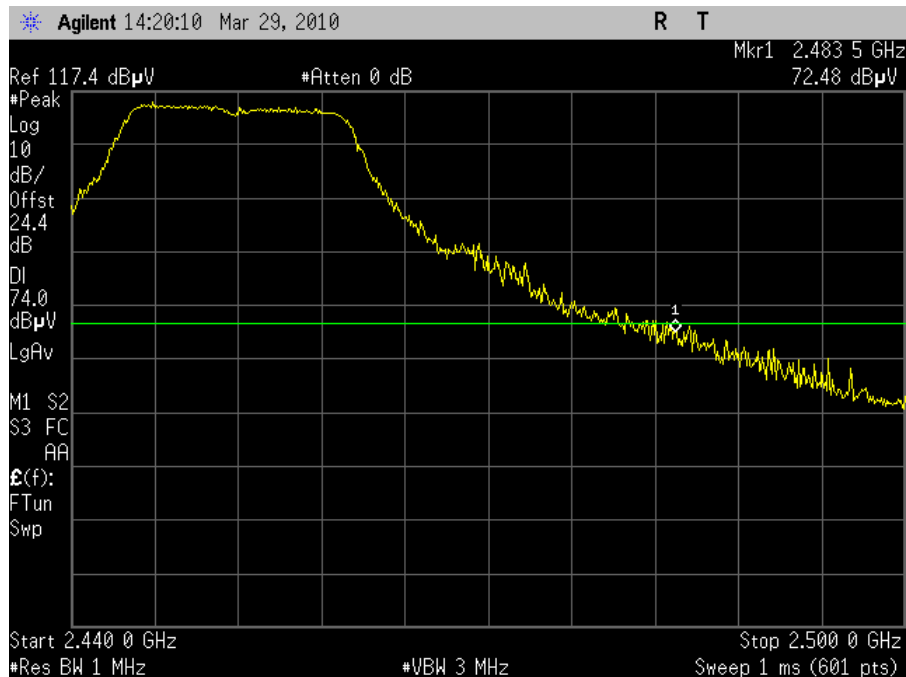


Plot 57. Radiated Band Edge 2462MHz Channel 9 802.11g (Peak)

Radiated Band Edge Measurements

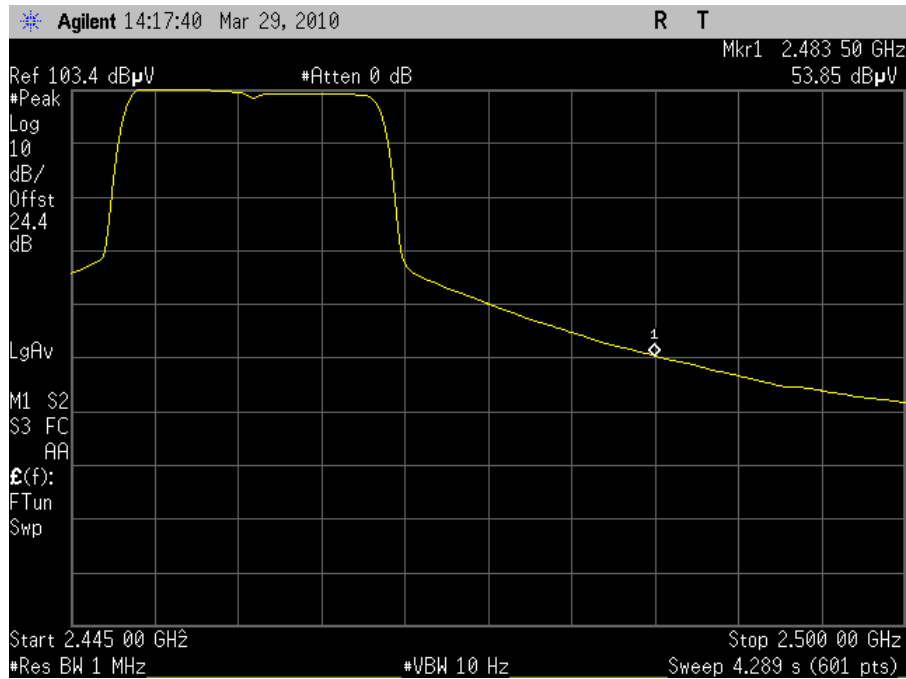


Plot 58. Radiated Band Edge 2462MHz Channel 10 802.11g (Average)

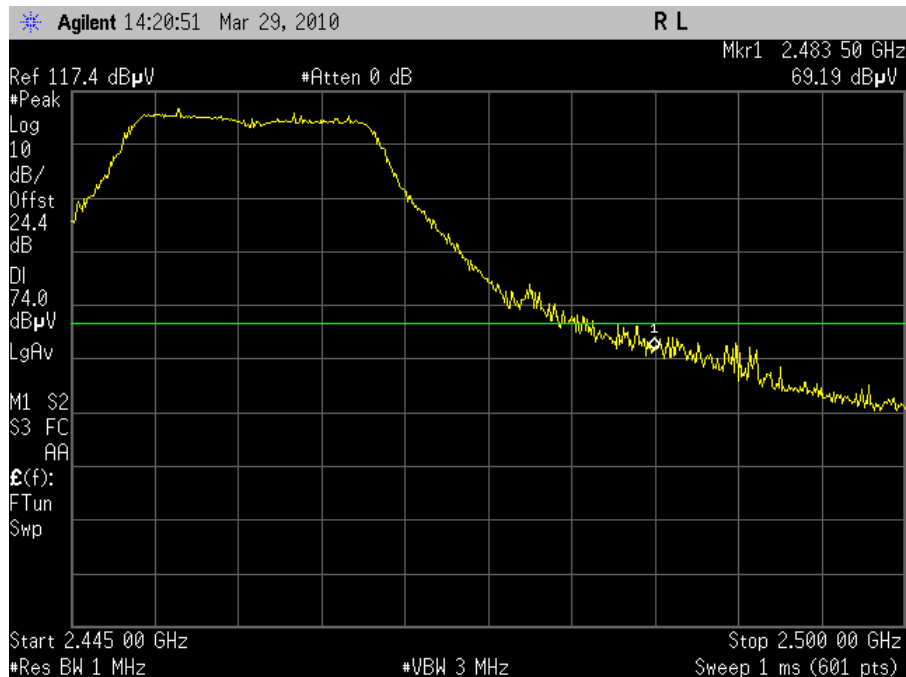


Plot 59. Radiated Band Edge 2462MHz Channel 10 802.11g (Peak)

Radiated Band Edge Measurements

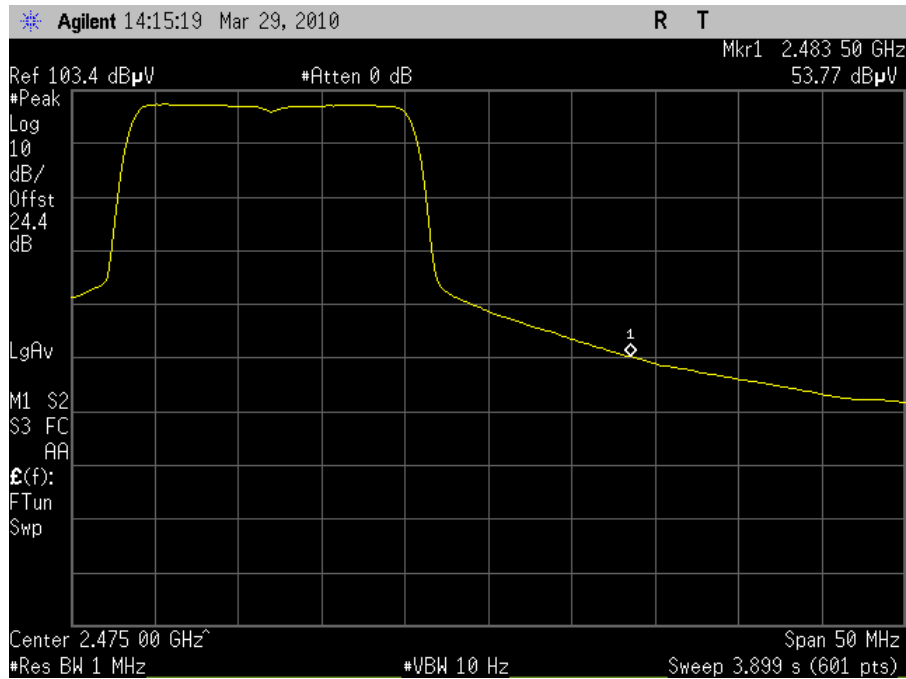


Plot 60. Radiated Band Edge 2462MHz Channel 11 802.11g (Average)

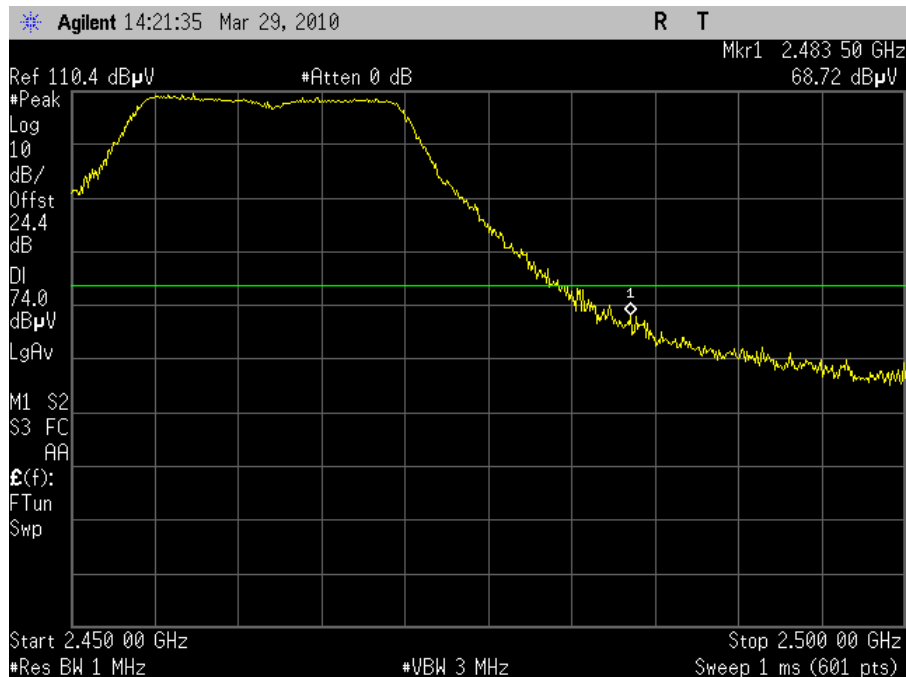


Plot 61. Radiated Band Edge 2462MHz Channel 11 802.11g (Peak)

Radiated Band Edge Measurements

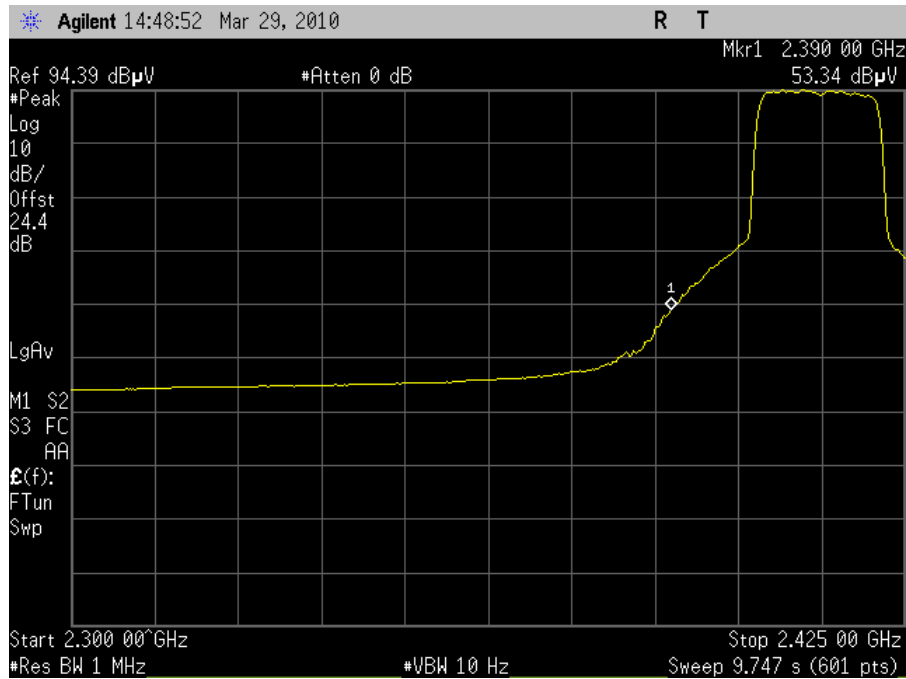


Plot 62. Radiated Band Edge 2412MHz Channel 1 802.11n (Average)

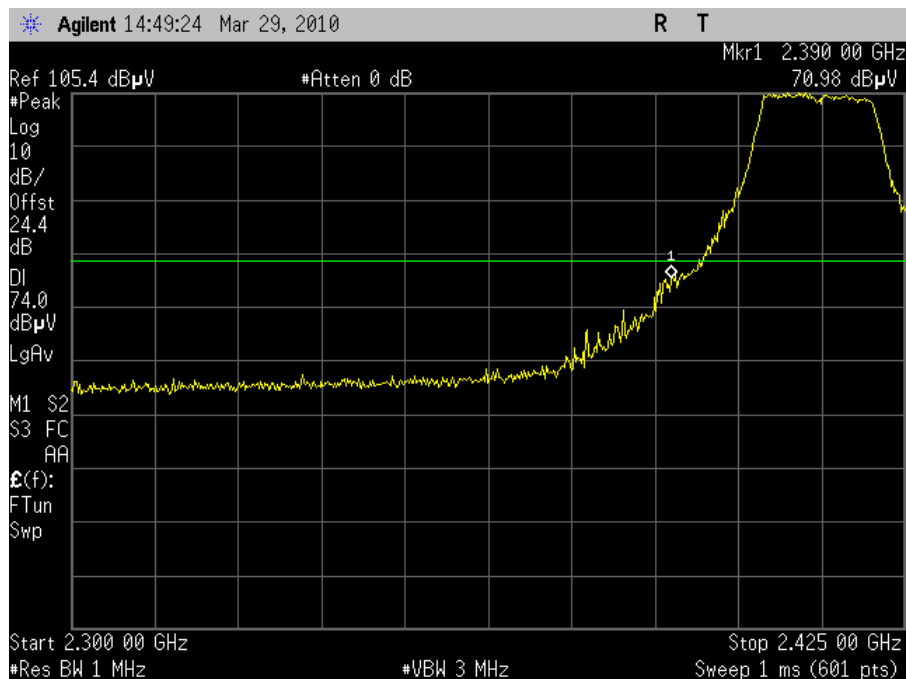


Plot 63. Radiated Band Edge 2412MHz Channel 1 802.11n (Peak)

Radiated Band Edge Measurements

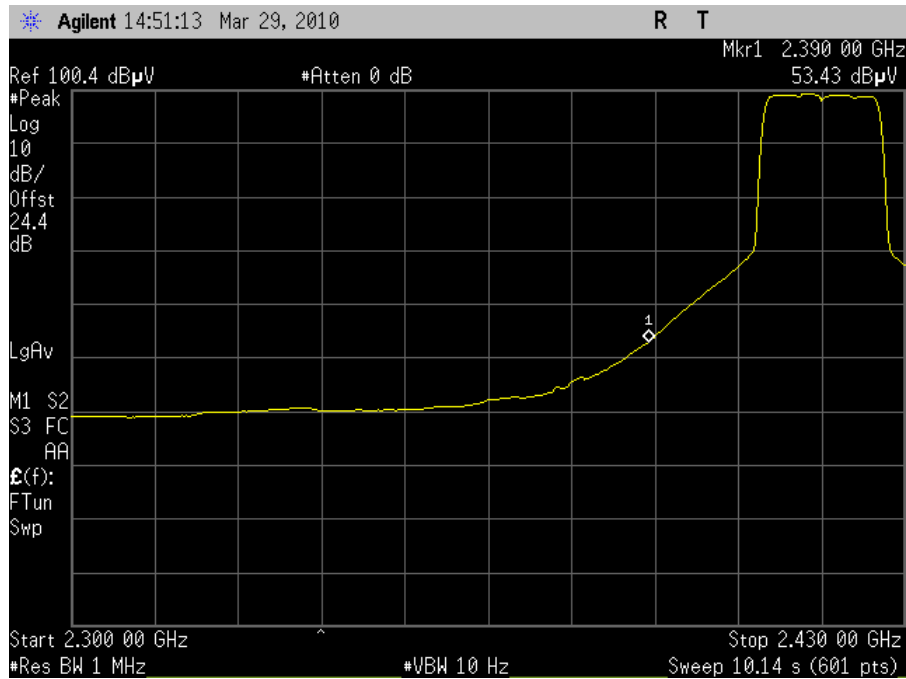


Plot 64. Radiated Band Edge 2417MHz Channel 2 802.11n (Average)

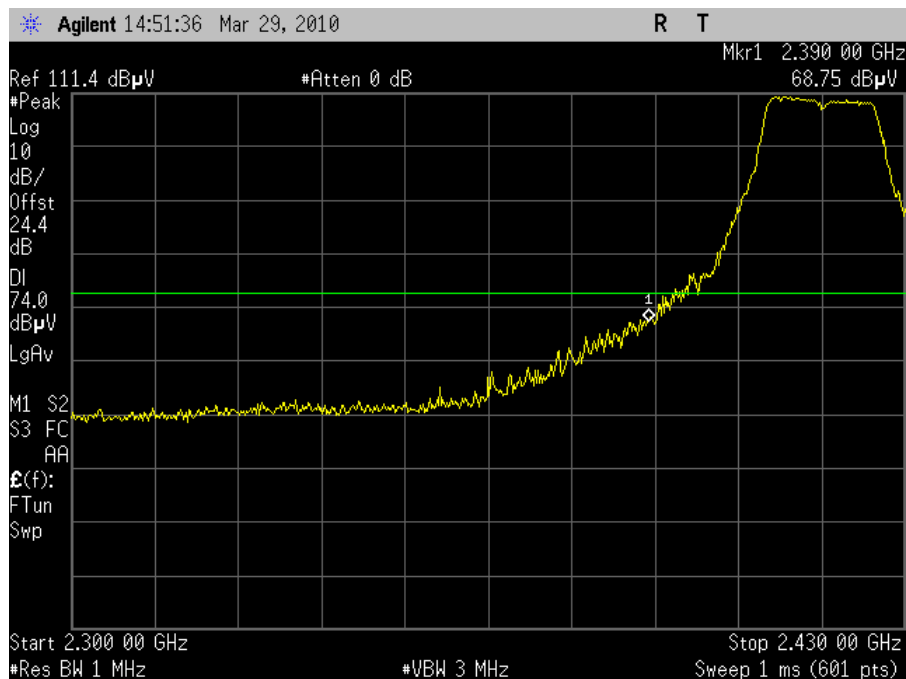


Plot 65. Radiated Band Edge 2417MHz Channel 2 802.11n (Peak)

Radiated Band Edge Measurements

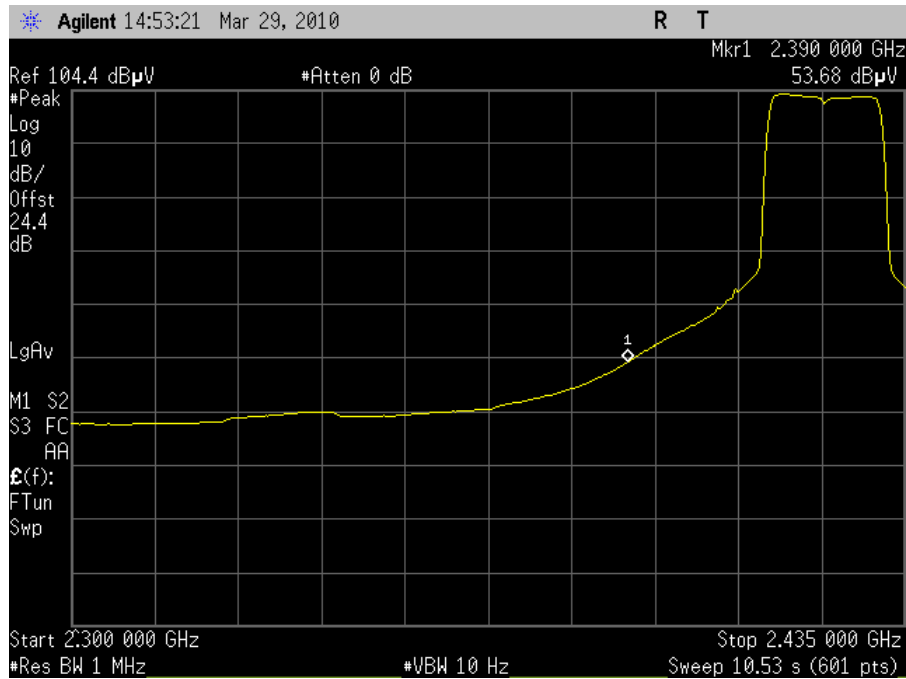


Plot 66. Radiated Band Edge 2422MHz Channel 3 802.11n (Average)

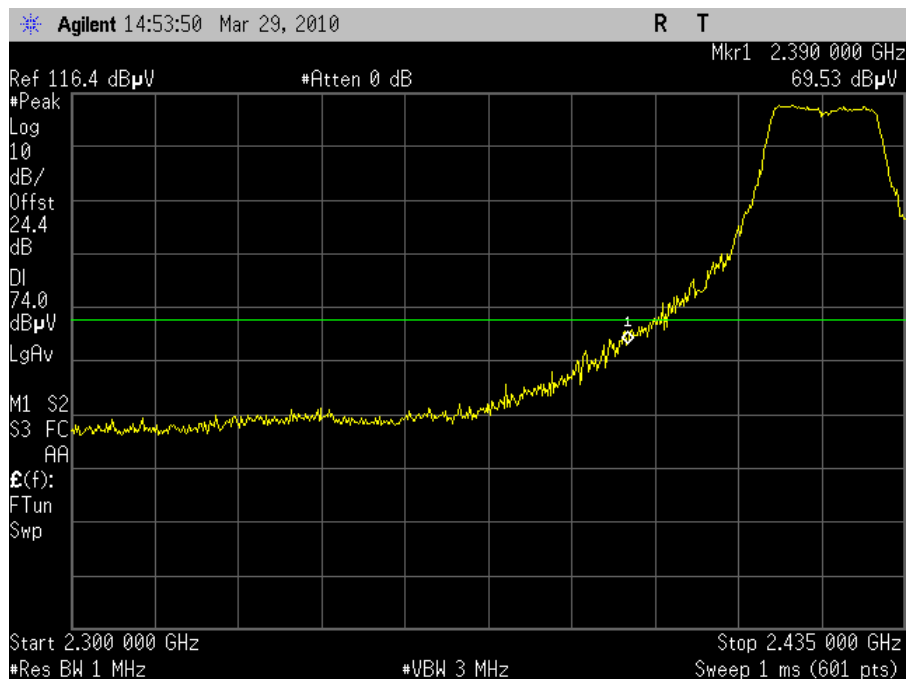


Plot 67. Radiated Band Edge 2422MHz Channel 3 802.11n (Peak)

Radiated Band Edge Measurements

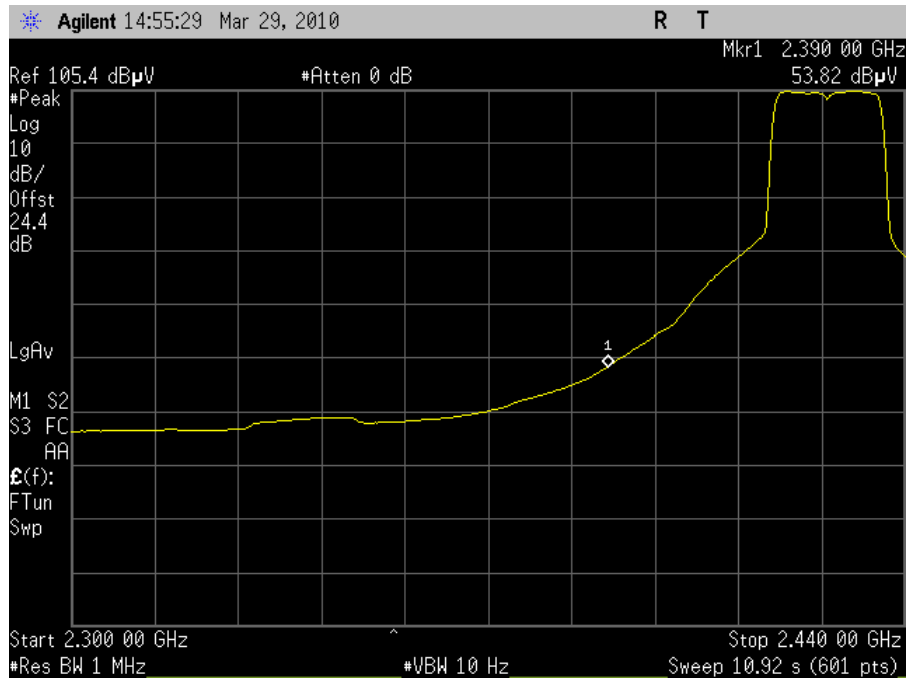


Plot 68. Radiated Band Edge 2427MHz Channel 4 802.11n (Average)

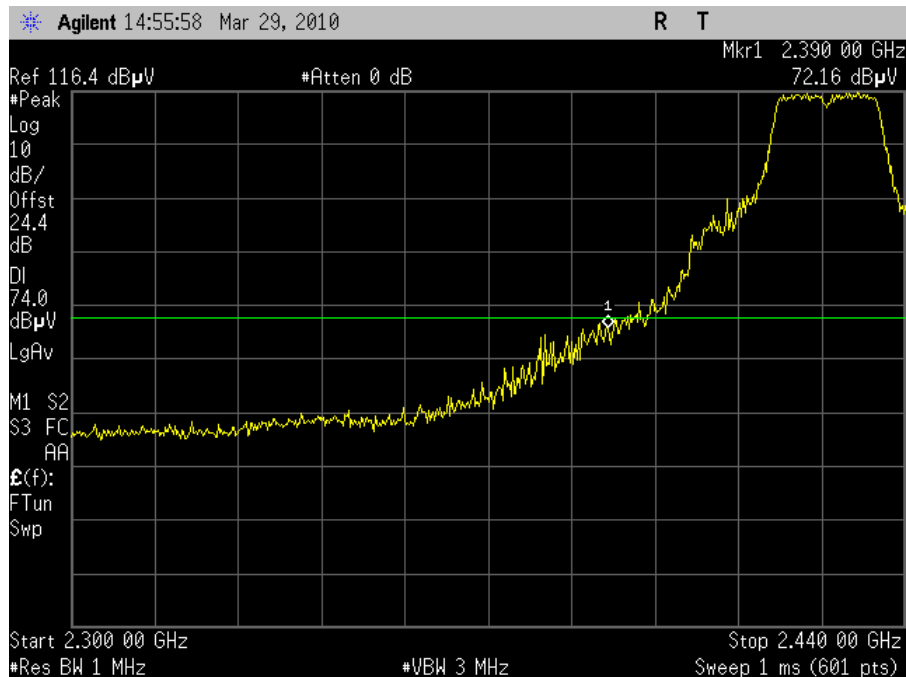


Plot 69. Radiated Band Edge 2427MHz Channel 4 802.11n (Peak)

Radiated Band Edge Measurements

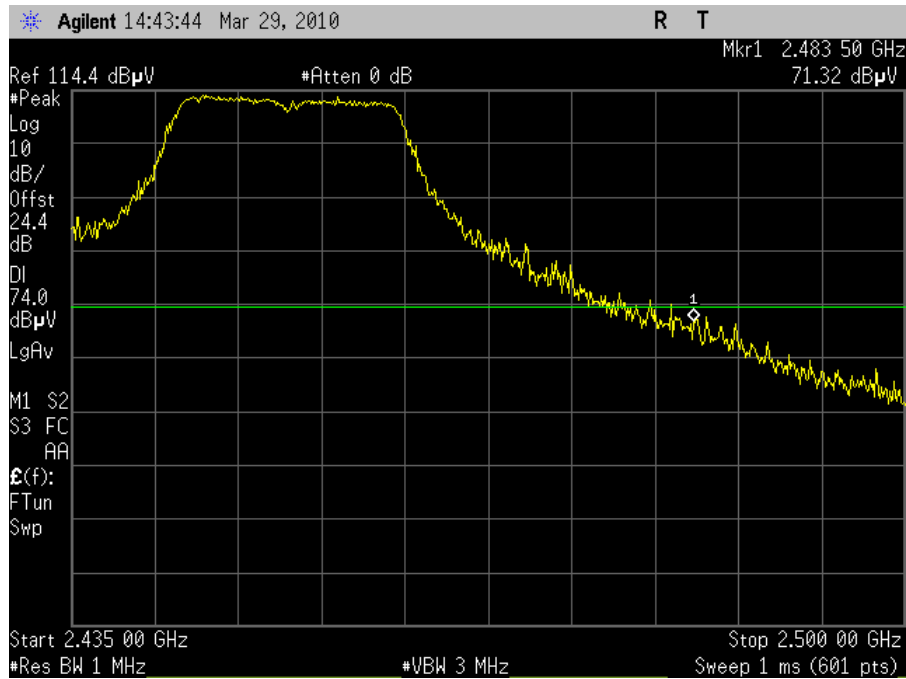


Plot 70. Radiated Band Edge 2462MHz Channel 9 802.11n (Average)

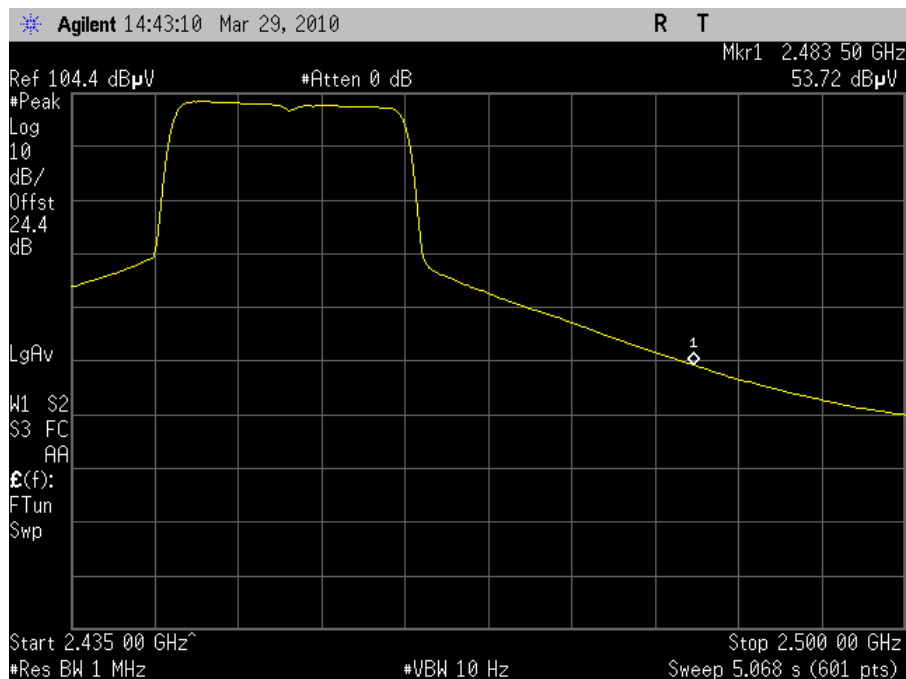


Plot 71. Radiated Band Edge 2462MHz Channel 9 802.11n (Peak)

Radiated Band Edge Measurements

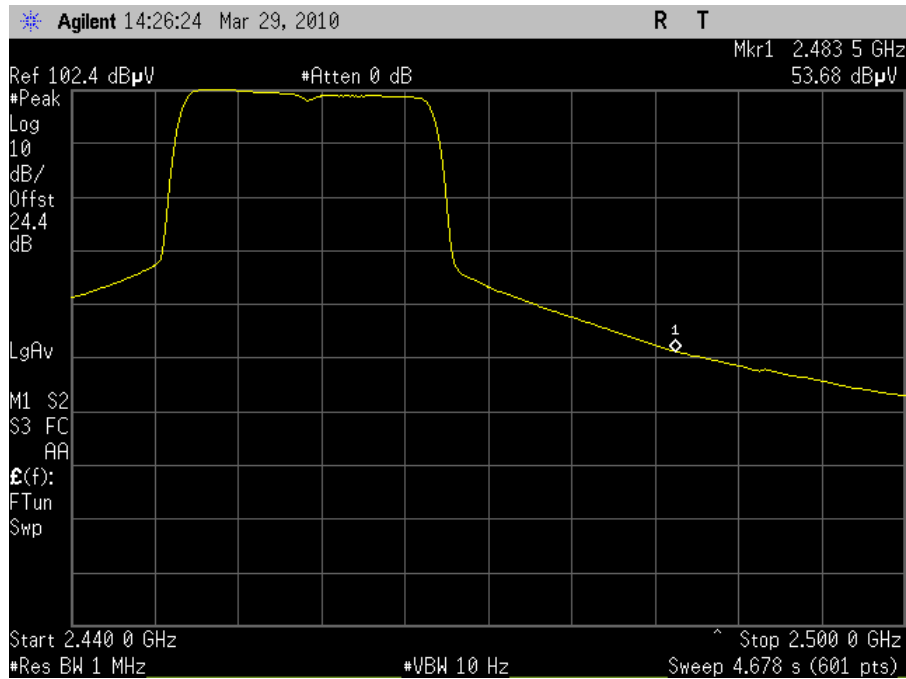


Plot 72. Radiated Band Edge 2462MHz Channel 10 802.11n (Average)

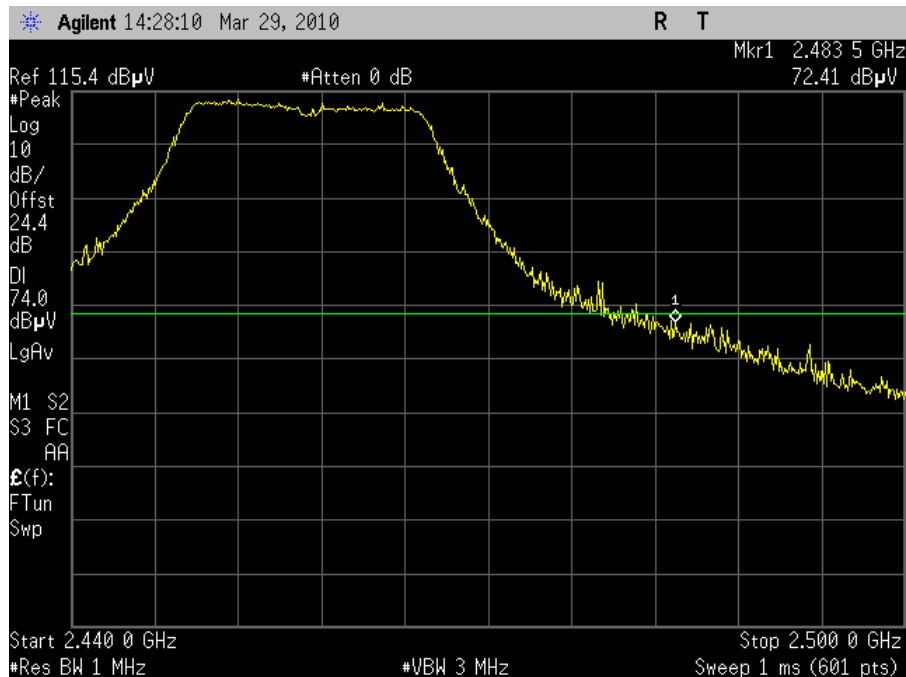


Plot 73. Radiated Band Edge 2462MHz Channel 10 802.11n (Peak)

Radiated Band Edge Measurements

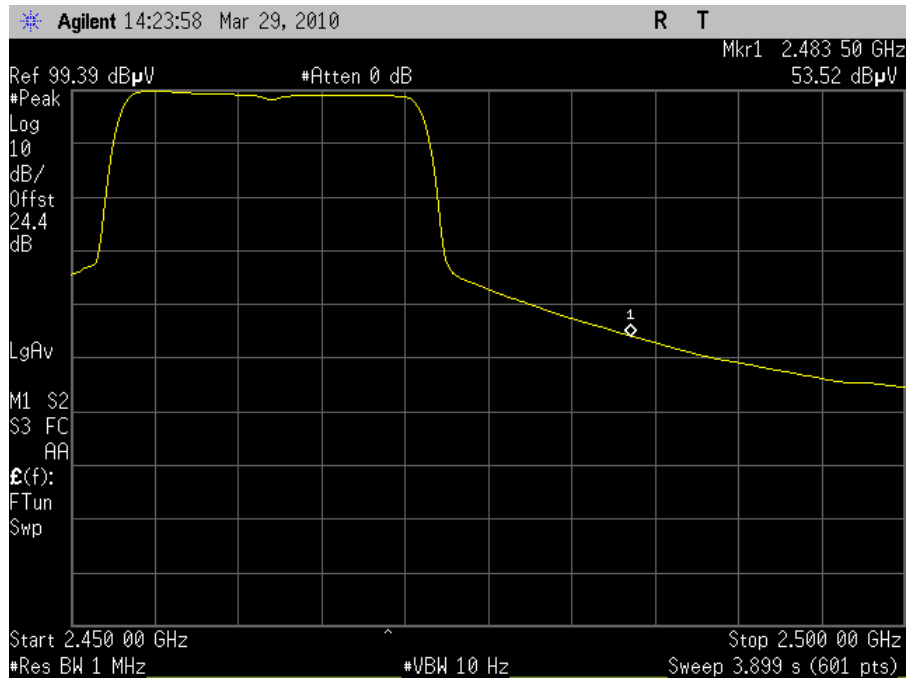

Plot 74. Radiated Band Edge 2462MHz Channel 11 802.11n (Average)

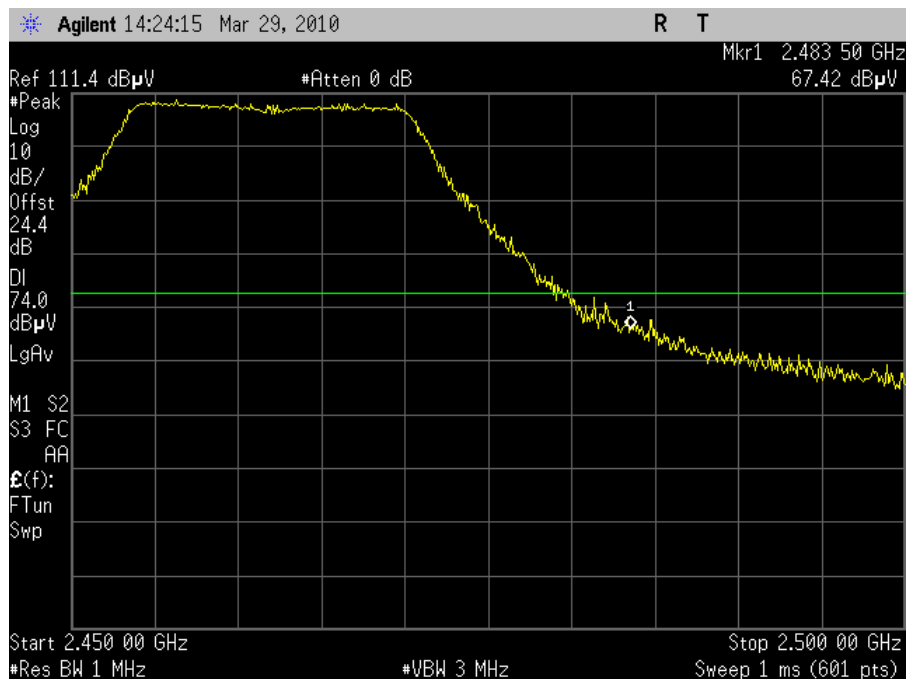

Plot 75. Radiated Band Edge 2462MHz Channel 11 802.11n (Peak)

Radiated Spurious Emissions Test Setup



Photograph 6. Radiated Spurious Emissions, 3 meter Test Setup

Radiated Harmonics Emissions Test Setup



Photograph 7. Radiated Harmonics Emissions, 1 meter Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 27.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 27. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 100 kHz resolution bandwidth was used from 30 MHz - 1 GHz and 1 MHz resolution was used for measurements done above 1 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Anderson Soungpanya

Test Date(s): 03/31/2010






Figure 4. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Conducted Receiver Spurious Emissions

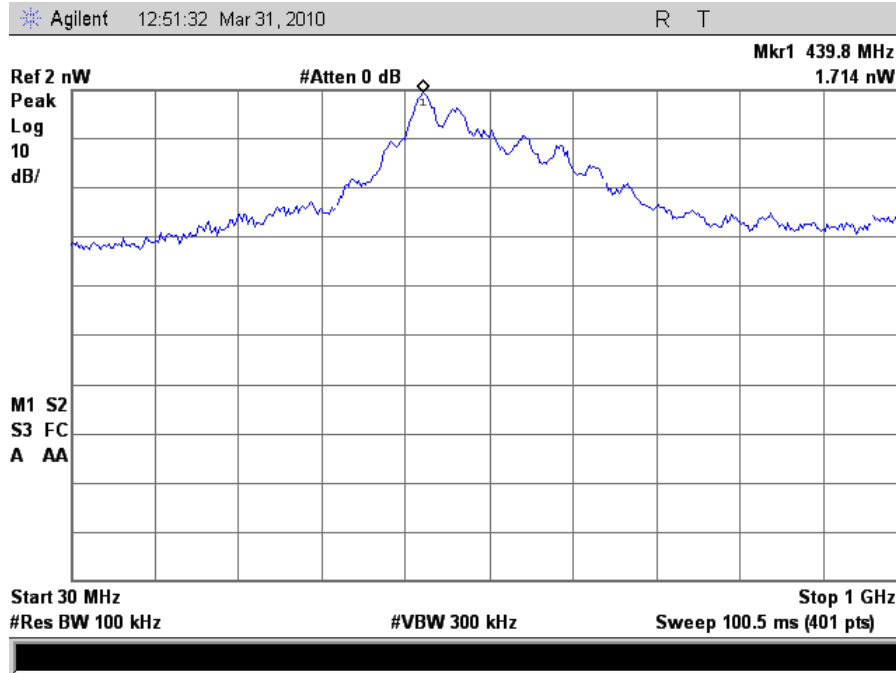

Plot 76. Receiver Spurious Emission, 30MHz – 1 GHz

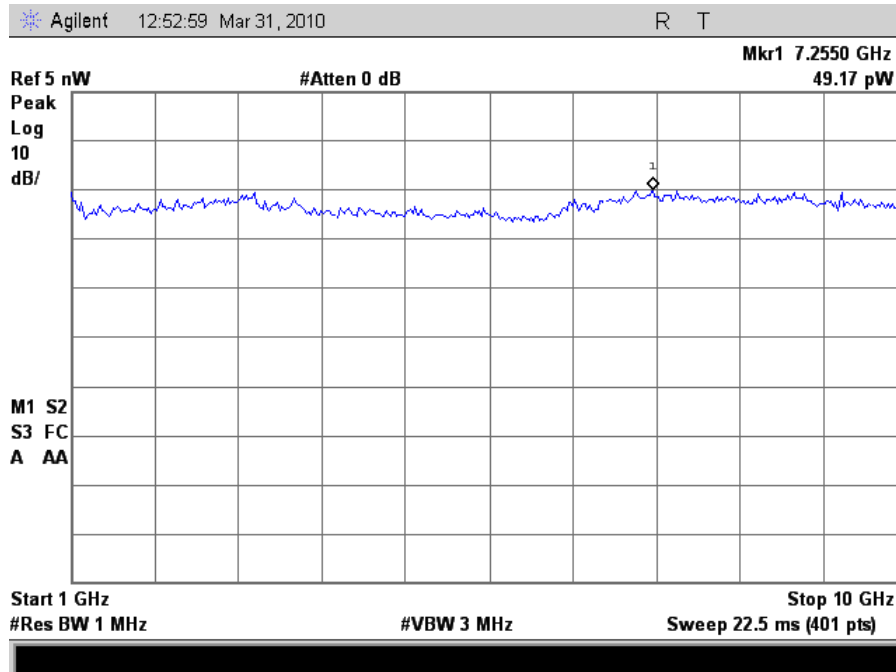

Plot 77. Receiver Spurious Emission, 1 GHz – 10 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

A conducted version of the EUT was provided with an MMCX connector at the antenna port. The spectrum analyzer was set to a 100 kHz resolution bandwidth and 300 kHz video bandwidth. Measurements were taken at antenna port. Plots are corrected for external attenuation and cable loss.

See following pages for detailed test results with RF Conducted Spurious Emissions.

Test Results: The EUT was Compliant with the Conducted Spurious Emission limits of §15.247(d).

Test Engineer(s): Anderson Soungpanya

Test Date(s): 03/31/10






Figure 5. Block Diagram, Conducted Spurious Emissions Test Setup

Conducted Spurious Emissions Test Results

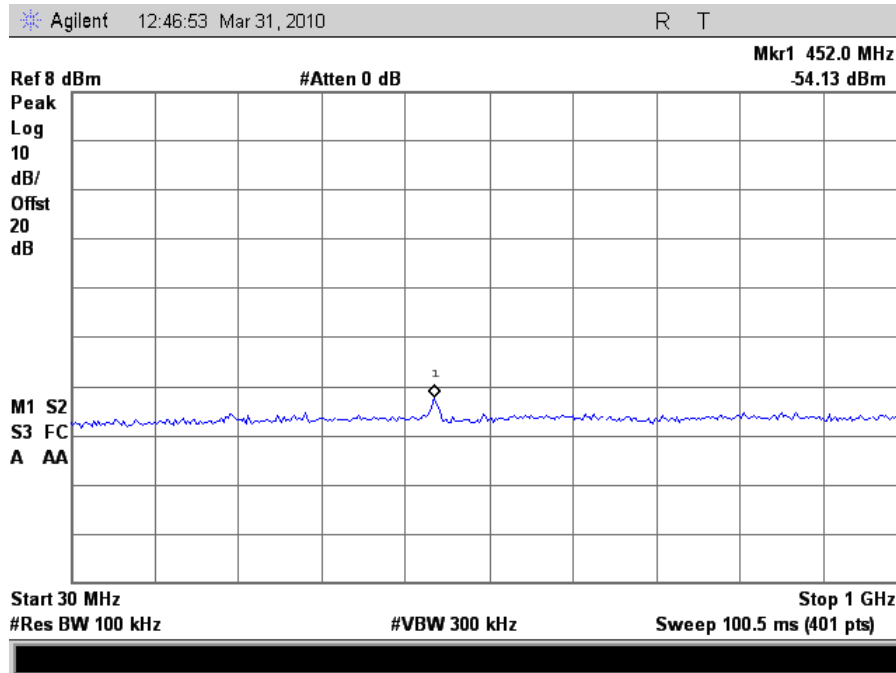


Plot 78. Conducted Spurious 2412MHz Low Channel 802.11g (30MHz-1GHz)

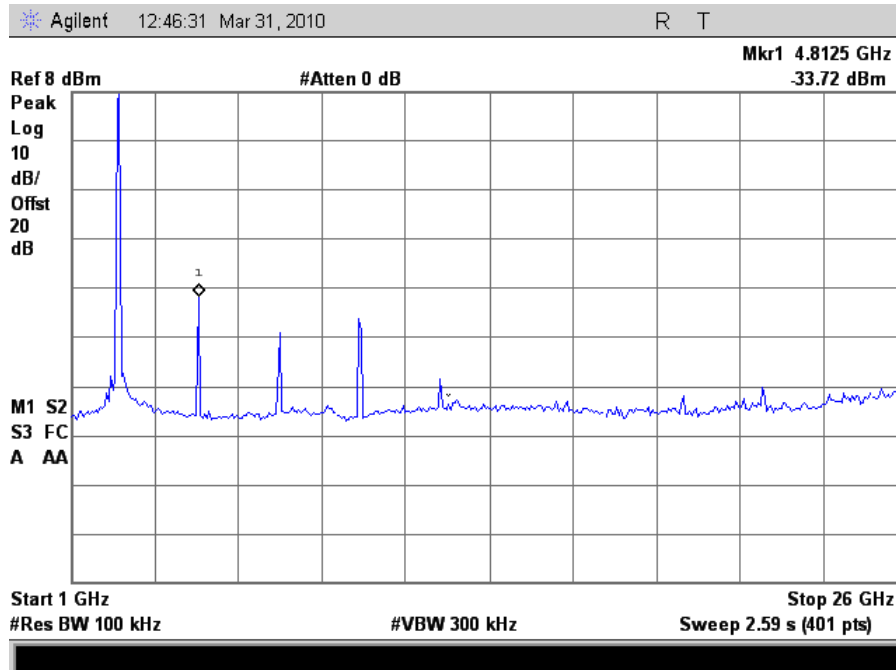


Plot 79. Conducted Spurious 2412MHz Low Channel 802.11g (1-26GHz)

Conducted Spurious Emissions Test Results

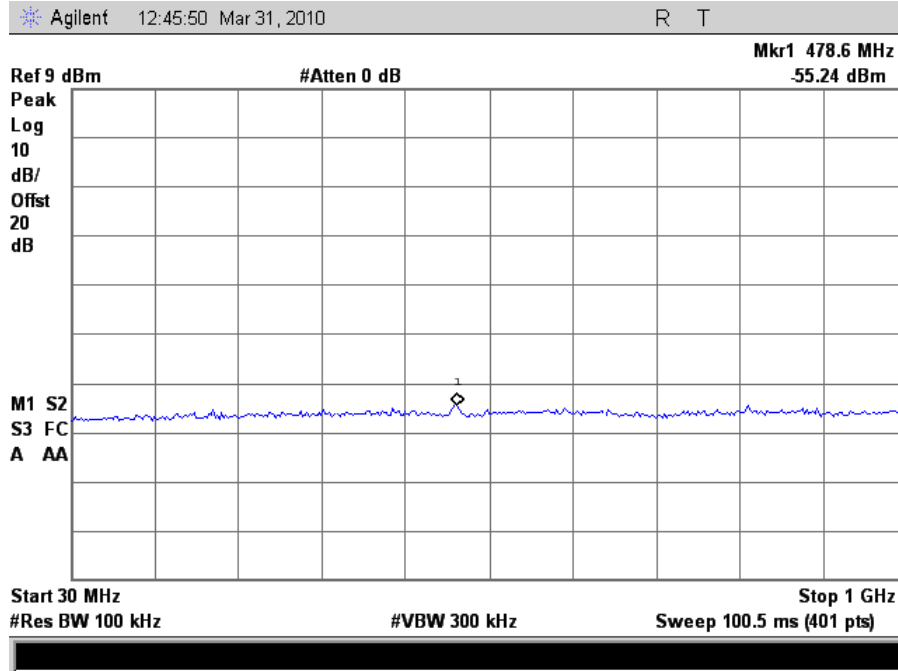


Plot 80. Conducted Spurious 2437MHz Mid Channel 802.11g (30MHz-1GHz)

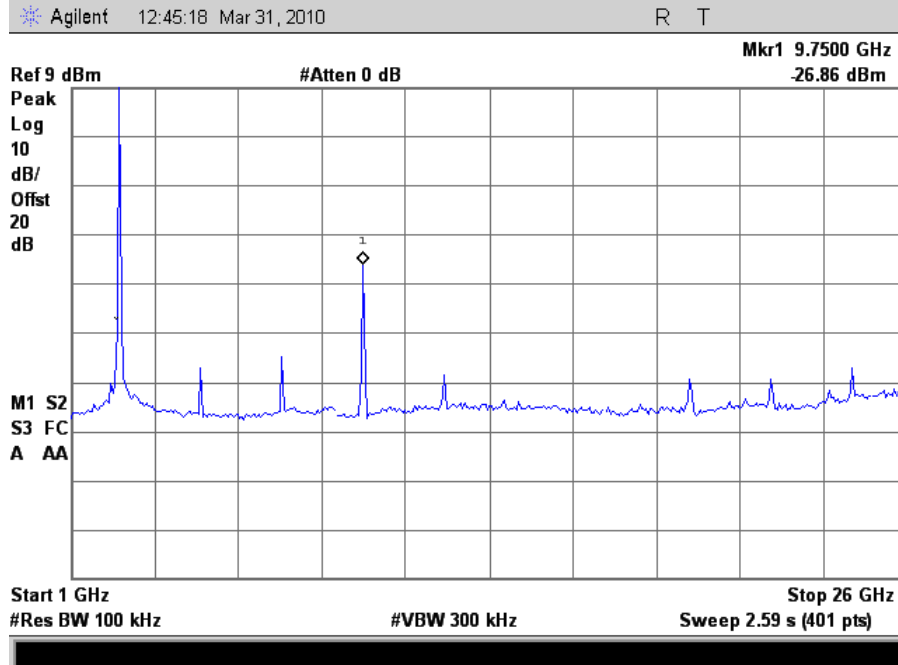


Plot 81. Conducted Spurious 2437MHz Mid Channel 802.11g (1-26GHz)

Conducted Spurious Emissions Test Results

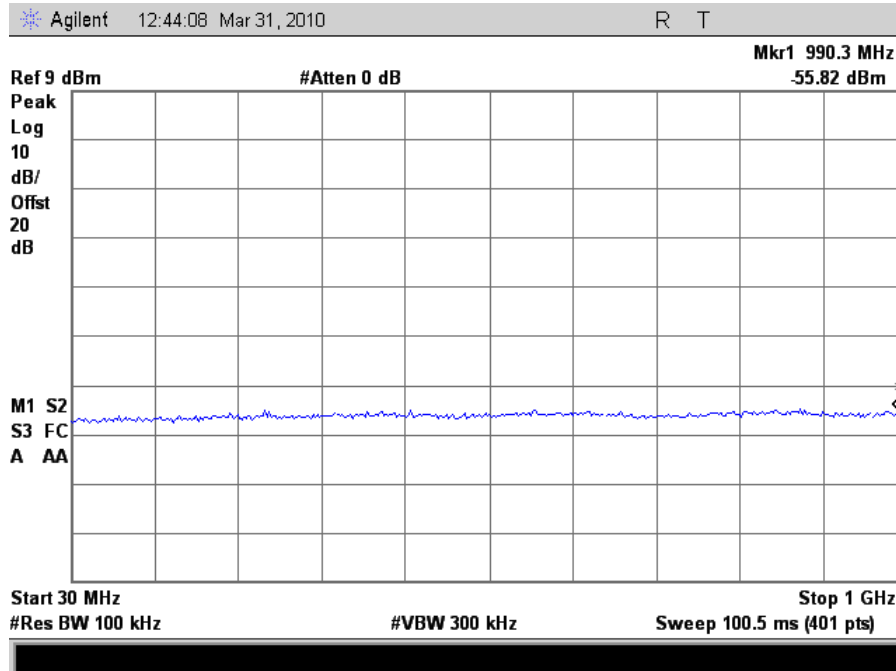


Plot 82. Conducted Spurious 2462MHz High Channel 802.11g (30MHz-1GHz)

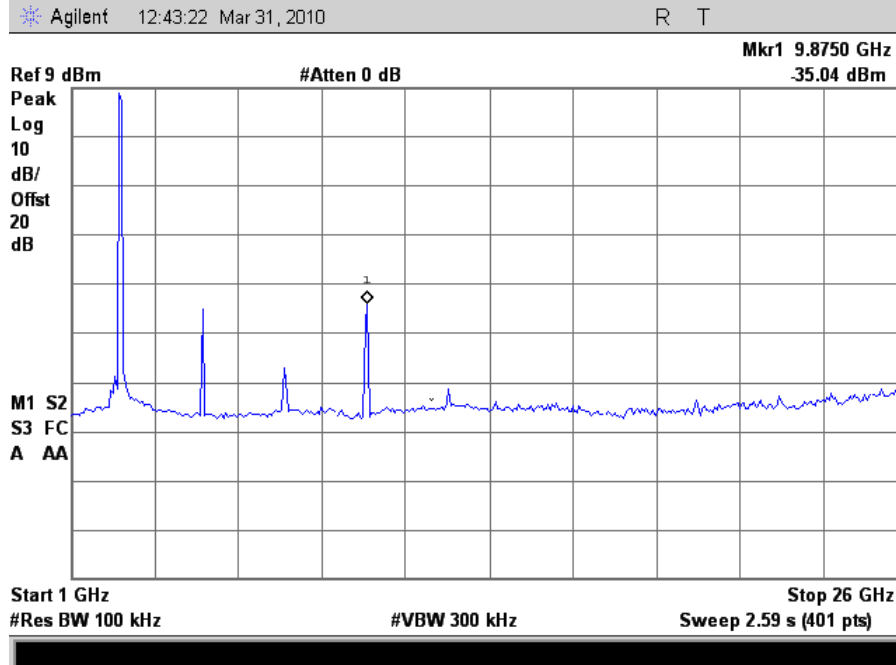


Plot 83. Conducted Spurious 2462MHz High Channel 802.11g (1-26GHz)

Conducted Spurious Emissions Test Results

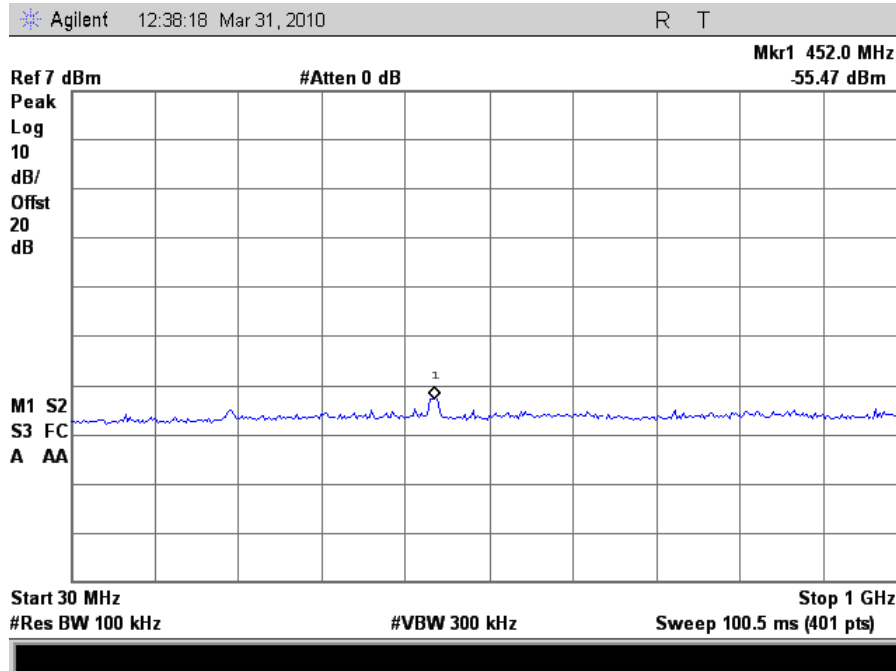


Plot 84. Conducted Spurious 2412MHz Low Channel 802.11n (30MHz-1GHz)

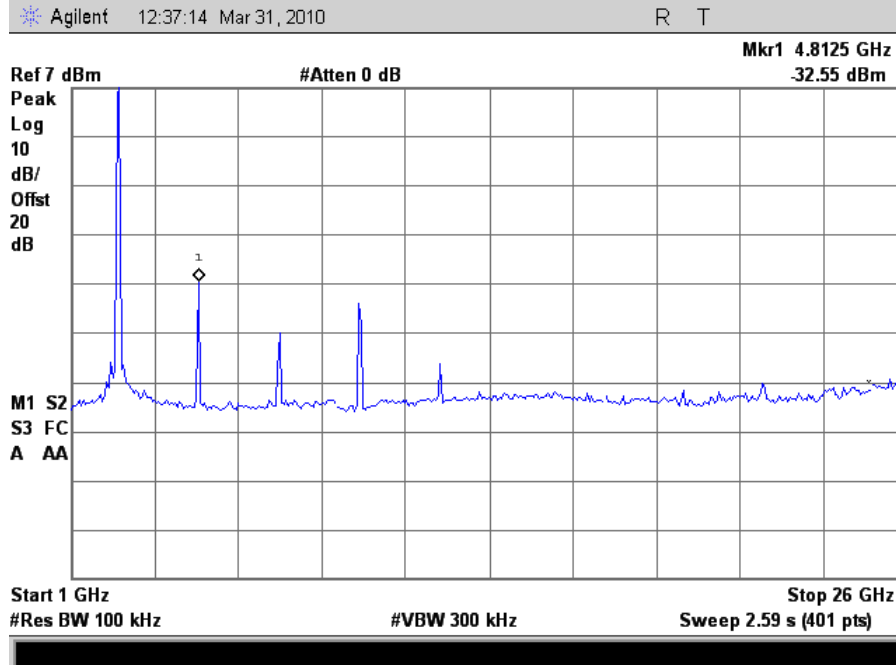


Plot 85. Conducted Spurious 2412MHz Low Channel 802.11n (1-26GHz)

Conducted Spurious Emissions Test Results

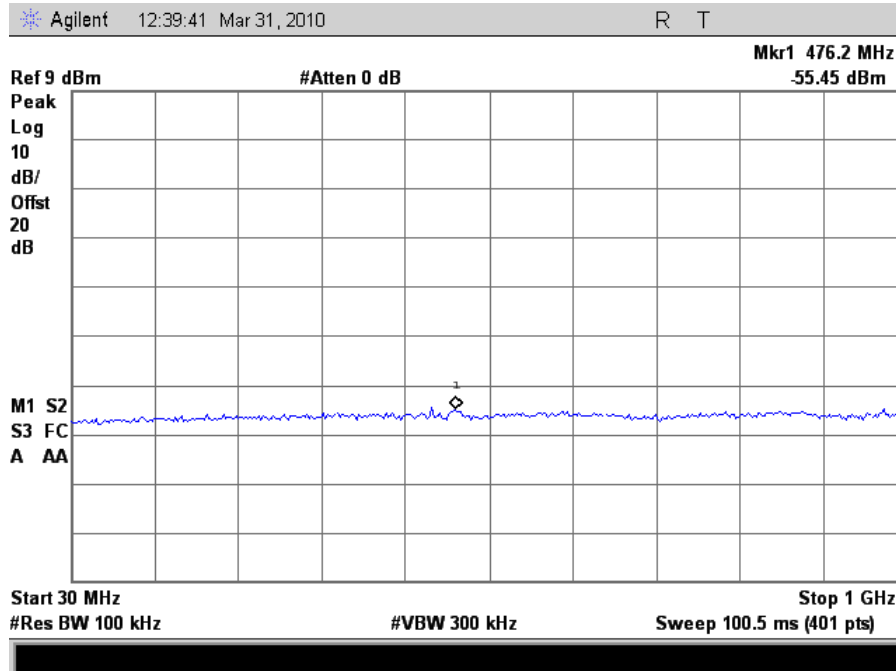


Plot 86. Conducted Spurious 2437MHz Mid Channel 802.11n (30MHz-1GHz)

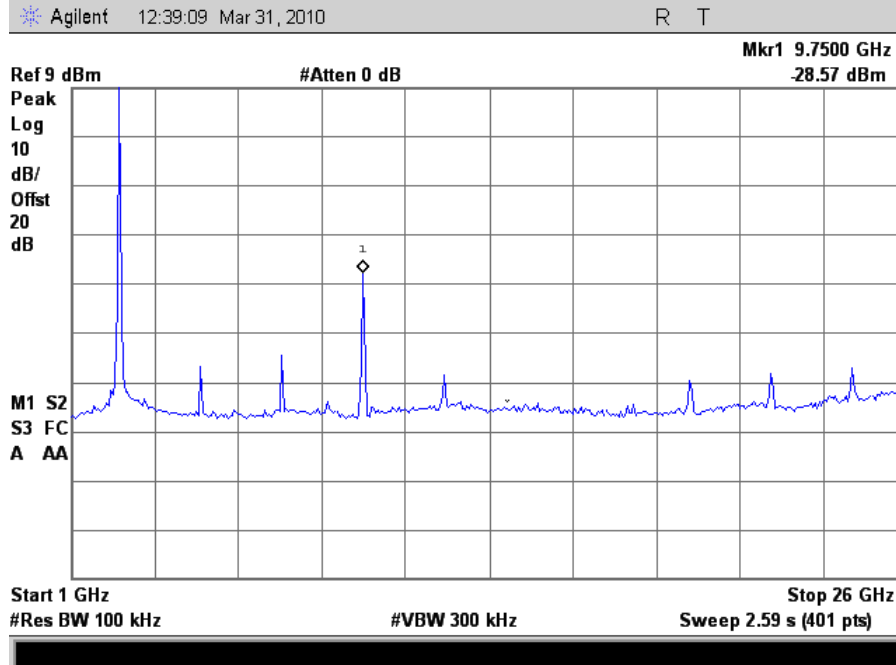


Plot 87. Conducted Spurious 2437MHz Mid Channel 802.11n (1-26GHz)

Conducted Spurious Emissions Test Results

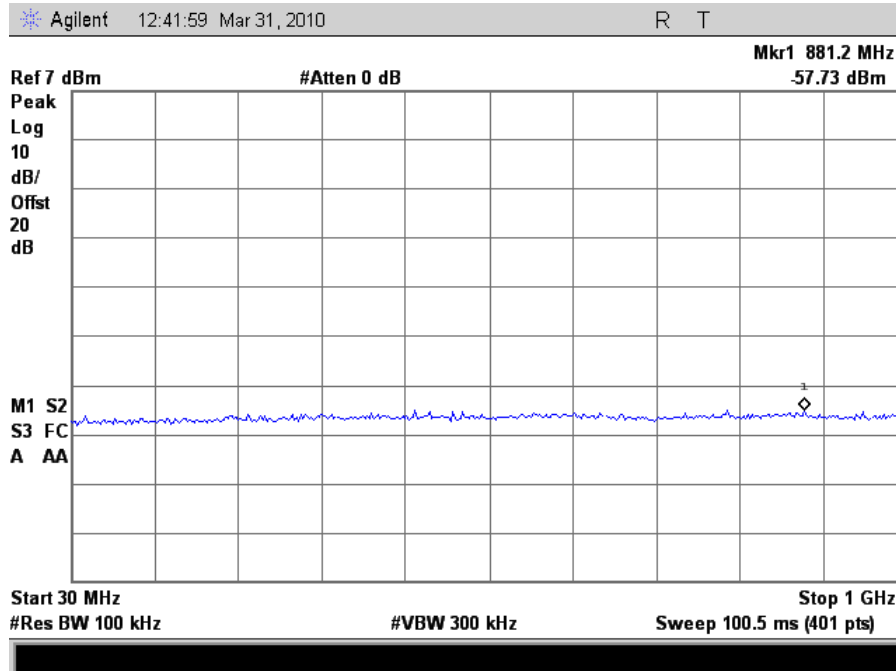


Plot 88. Conducted Spurious 2462MHz High Channel 802.11n (30MHz-1GHz)

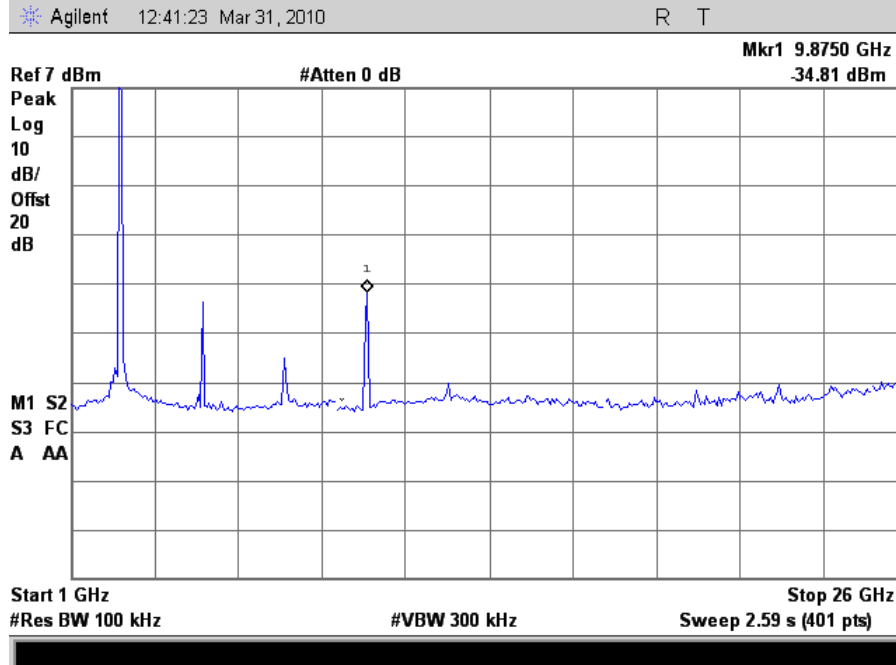


Plot 89. Conducted Spurious 2462MHz High Channel 802.11n (1-26GHz)

Conducted Band Edge Test Results

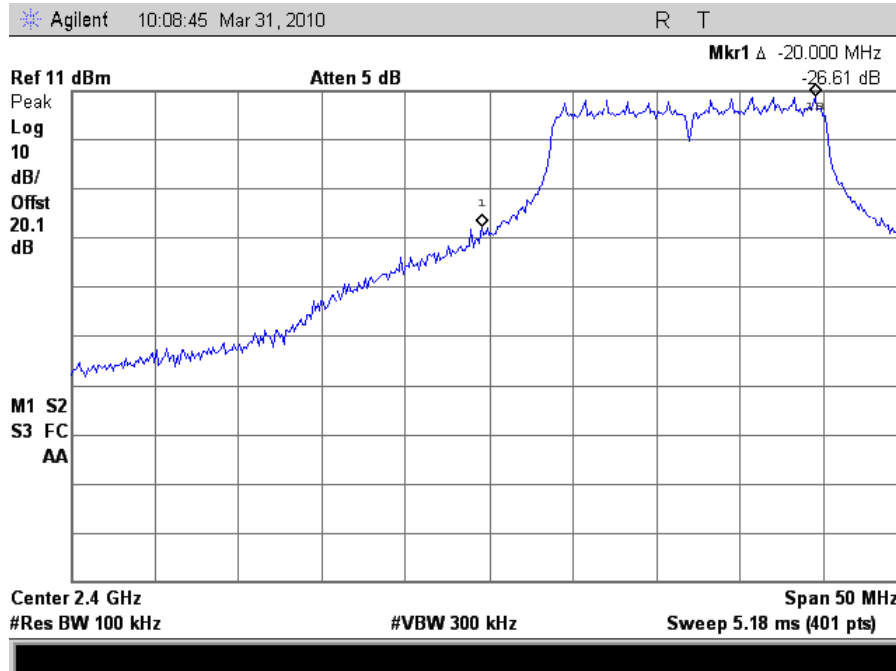


Plot 90. Conducted Band Edge 2412MHz Low Channel 802.11g

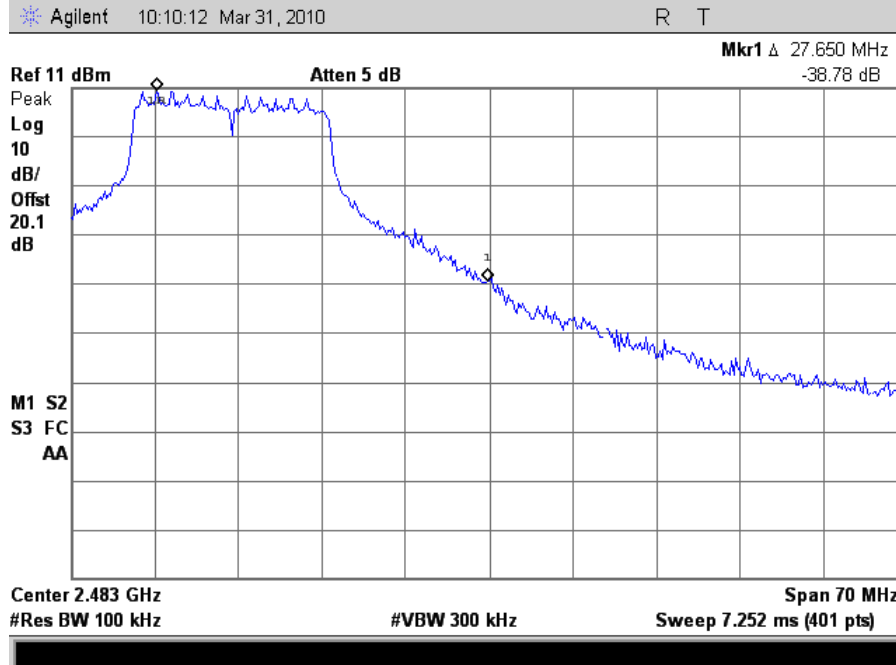


Plot 91. Conducted Band Edge 2462MHz High Channel 802.11g

Conducted Band Edge Test Results

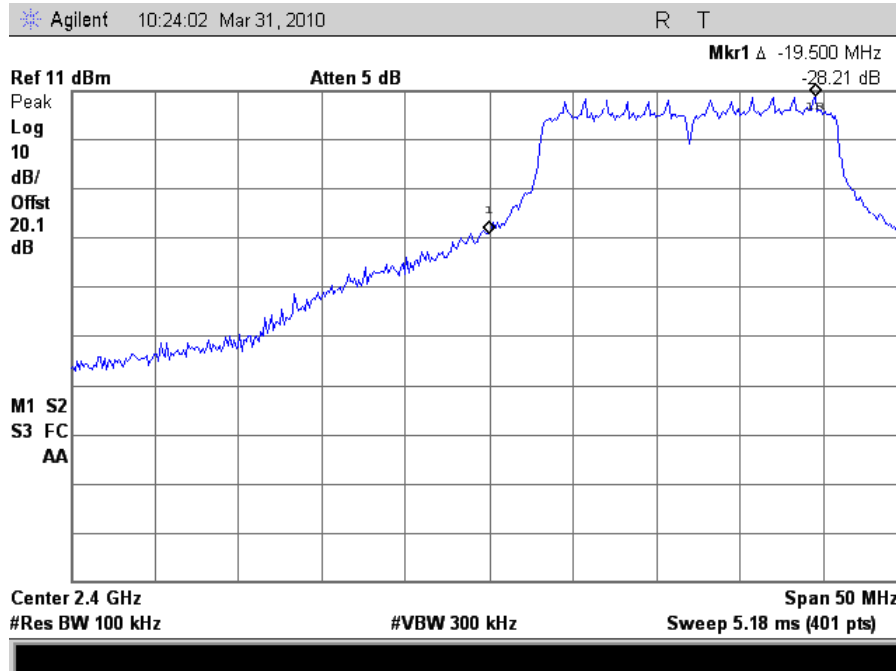

Plot 92. Conducted Band Edge 2412MHz Low Channel 802.11n

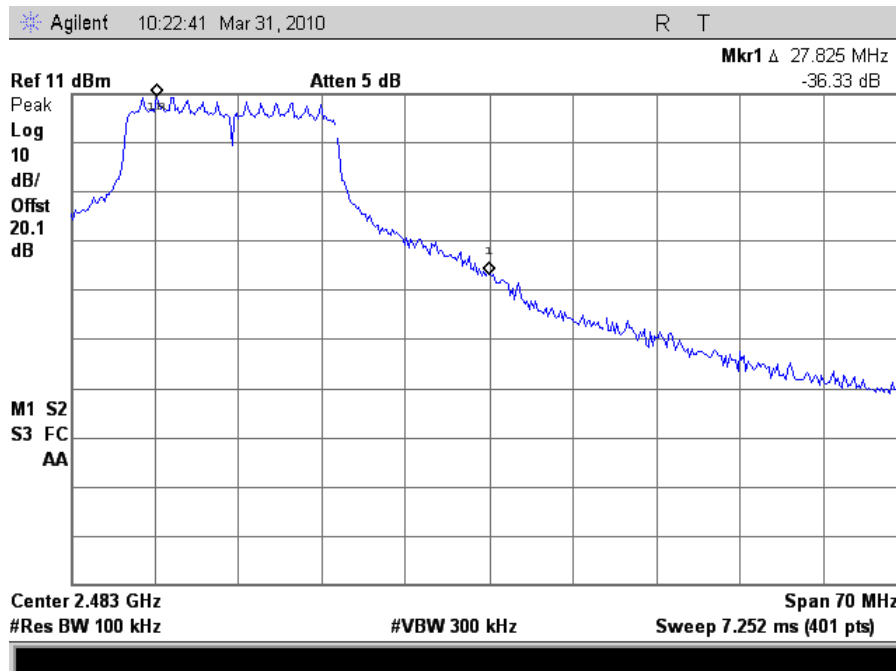

Plot 93. Conducted Band Edge 2462MHz High Channel 802.11n

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level. A RBW of 1 MHz and VBW of 3 MHz were used to determine the peak emissions within the band. The Spectrum analyzer was then set to a RBW of 3 kHz and VBW was set to 10 kHz. The SPAN of the analyzer was set to 1 MHz with a 333.3 second sweep. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).
The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Anderson Soungpanya

Test Date: 03/31/10




Figure 6. Block Diagram, Peak Power Spectral Density Test Setup

Peak Power Spectral Density Test Results


Peak Power Spectral Density				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.012	8	11.012
Mid	2437	-2.793	8	10.793
High	2462	-3.372	8	11.372

Table 28. Spectral Density, 802.11g Mode Test Results


Peak Power Spectral Density				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.645	8	11.645
Mid	2437	-1.367	8	9.367
High	2462	-3.048	8	11.048

Table 29. Spectral Density, 802.11n Mode Test Results


Peak Power Spectral Density Test Results – 802.11g Mode

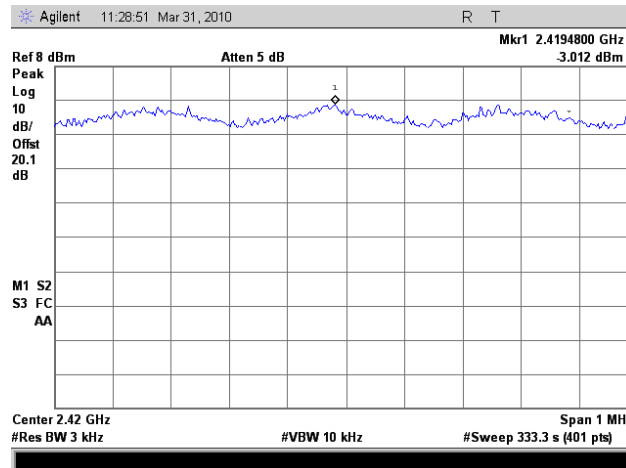

Plot 94. Power Spectral Density 2412MHz Low Channel 802.11g

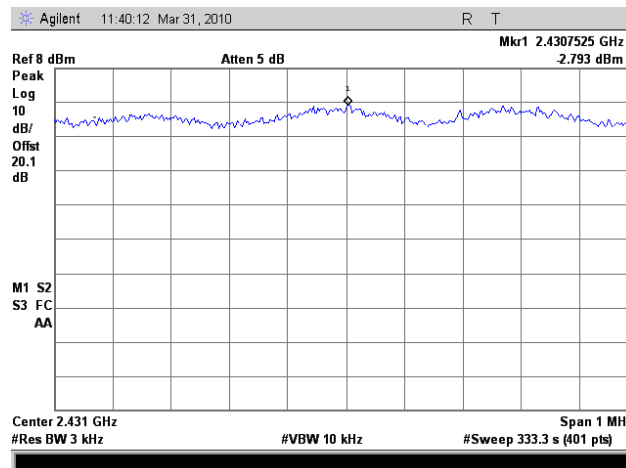


Plot 95. Power Spectral Density 2437MHz Mid Channel 802.11g

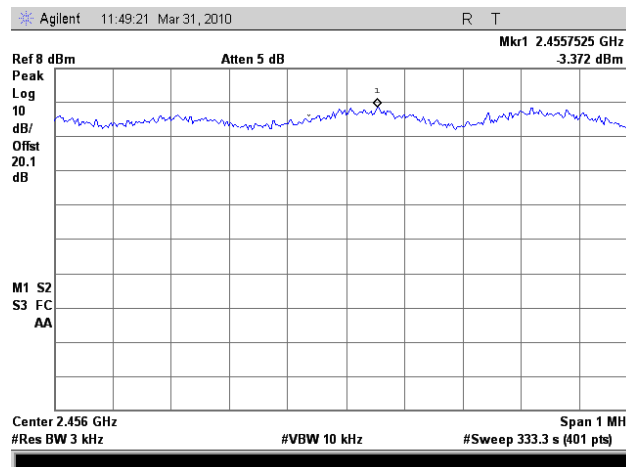


Plot 96. Power Spectral Density 2462MHz High Channel 802.11g


Peak Power Spectral Density Test Results – 802.11n Mode

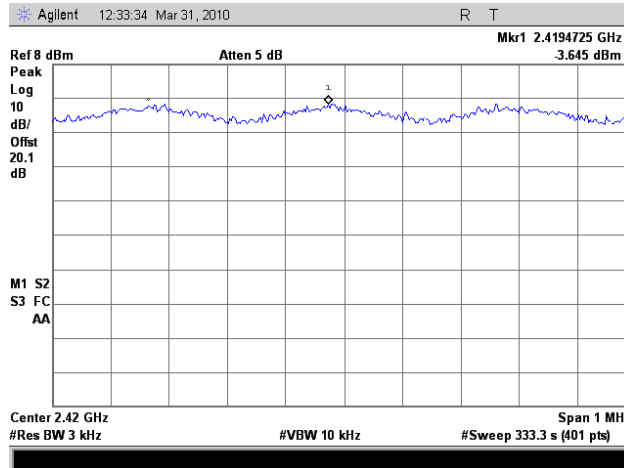

Plot 97. Power Spectral Density 2412MHz Low Channel 802.11n

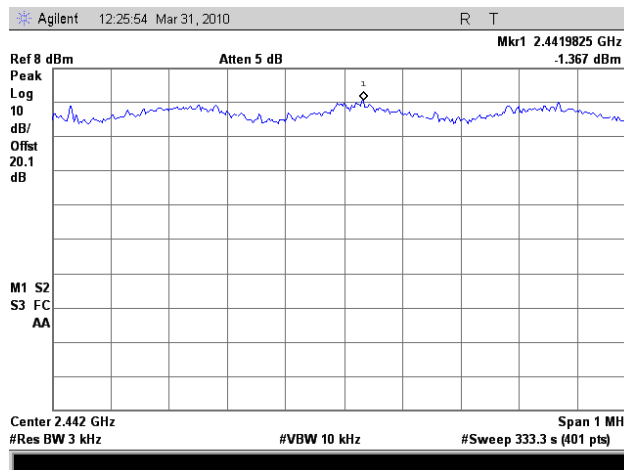

Plot 98. Power Spectral Density 2437MHz Mid Channel 802.11n

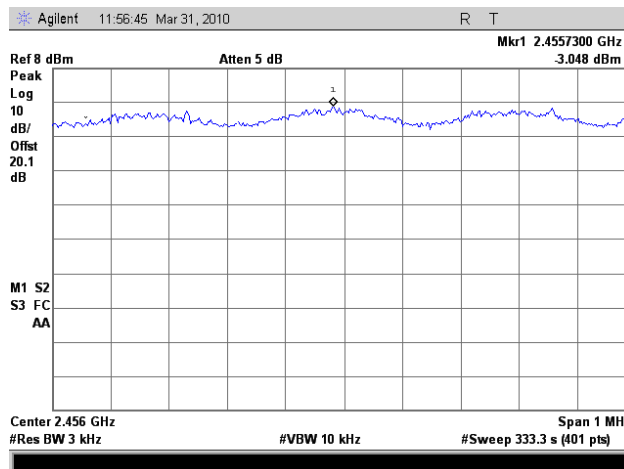

Plot 99. Power Spectral Density 2462MHz High Channel 802.11n

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET ASSET #	EQUIPMENT	MANUFACTURER	MODEL	LAST CAL DATE	CAL DUE DATE
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	05/27/2009	05/27/2010
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	SEE NOTE	
1S2501	EMI RECEIVER	Rohde & Schwarz	ESU40	4/27/2009	4/27/2010
1S2198	HORN ANTENNA	EMCO	3115	09/03/2009	09/03/2010
1S2603	HORN ANTENNA	ETS-LINDGREN	3117	4/9/2009	4/9/2011
1S2202	HORN ANTENNA	EMCO	3116	4/10/2007	4/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	04/14/2009	04/14/2010
1S508	LISN	SOLAR ELECTRONICS	9252-50-R24-BNC	06/05/2009	06/05/2010
1S2512	TRANSIENT LIMITER	AGILENT	11947A	SEE NOTE	
1S2482	CHAMBER, 5 METER	PANASHIELD	641431	10/16/2009	10/16/2010
1S2108	RECEIVER, EMI, RF FILTER SECTION	HP	85460A	11/10/2009	11/10/2010
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	SEE NOTE	
1S2485	BILOG ANTENNA	TESEQ	CBL6112D	03/20/2009	03/20/2010

Table 30. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.

End of Report