

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.179	46.290	59.469	-14.531	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	13.179	30.860	44.039	-9.961	54.000
Vertical					
Peak Detector:					
11650.000	14.634	44.760	59.394	-14.606	74.000
17475.000	*	*	*	*	74.000
20960.000	*	*	*	*	74.000
26200.000	*	*	*	*	74.000
31440.000	*	*	*	*	74.000
36680.000	*	*	*	*	74.000
Average Detector:					
11650.000	14.634	30.050	44.684	-9.316	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11510.000	14.402	52.874	67.276	-6.724	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
11510.000	14.402	37.234	51.636	-2.364	54.000
Vertical					
Peak Detector:					
11510.000	15.894	52.071	67.965	-6.035	74.000
17265.000	*	*	*	*	74.000
20760.000	*	*	*	*	74.000
25950.000	*	*	*	*	74.000
31140.000	*	*	*	*	74.000
36330.000	*	*	*	*	74.000
Average Detector:					
11510.000	15.894	34.461	50.355	-3.645	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) (5795MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11590.000	15.138	48.174	63.312	-10.688	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
11590.000	15.138	32.424	47.562	-6.438	54.000
Vertical					
Peak Detector:					
11590.000	16.461	45.134	61.595	-12.405	74.000
17385.000	*	*	*	*	74.000
20920.000	*	*	*	*	74.000
26150.000	*	*	*	*	74.000
31380.000	*	*	*	*	74.000
36610.000	*	*	*	*	74.000
Average Detector:					
11590.000	16.461	30.354	46.815	-7.185	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5745MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11490.000	14.326	52.130	66.455	-7.545	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	14.326	37.830	52.155	-1.845	54.000
Vertical					
Peak Detector:					
11490.000	15.842	51.760	67.601	-6.399	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11490.000	15.842	37.130	52.971	-1.029	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11570.000	14.849	50.360	65.209	-8.791	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11570.000	14.849	34.790	49.639	-4.361	54.000
Vertical					
Peak Detector:					
11570.000	16.215	48.080	64.294	-9.706	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average Detector:					
11570.000	16.215	34.100	50.314	-3.686	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5825MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11650.000	13.179	47.320	60.499	-13.501	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11650.000	13.179	33.310	46.489	-7.511	54.000
Vertical					
Peak Detector:					
11650.000	14.634	44.720	59.354	-14.646	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11650.000	14.634	31.340	45.974	-8.026	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11510.000	14.402	50.910	65.312	-8.688	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11510.000	14.402	35.460	49.862	-4.138	54.000
Vertical					
Peak Detector:					
11510.000	15.894	50.300	66.194	-7.806	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11510.000	15.894	34.980	50.874	-3.126	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5795Hz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11590.000	15.138	48.040	63.178	-10.822	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11590.000	15.138	32.880	48.018	-5.982	54.000
Vertical					
Peak Detector:					
11590.000	16.461	47.550	64.011	-9.989	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11590.000	16.461	32.740	49.201	-4.799	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5775MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
11550.000	14.599	52.700	67.299	-6.701	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11550.000	14.599	35.130	49.729	-4.271	54.000
Vertical					
Peak Detector:					
11550.000	16.007	51.080	67.087	-6.913	74.000
17325.000	*	*	*	*	74.000
20720.000	*	*	*	*	74.000
25900.000	*	*	*	*	74.000
31080.000	*	*	*	*	74.000
36260.000	*	*	*	*	74.000
Average					
Detector:					
11550.000	16.007	34.510	50.517	-3.483	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
------------------	-------------------------	--------------------------------	--------------------------------------	--------------	-----------------------

Horizontal
Peak Detector

136.700	-7.491	43.361	35.870	-7.630	43.500
307.420	-4.120	37.336	33.216	-12.784	46.000
429.640	0.630	35.110	35.739	-10.261	46.000
489.780	1.498	33.602	35.100	-10.900	46.000
600.360	3.472	38.415	41.887	-4.113	46.000
806.000	6.206	31.823	38.029	-7.971	46.000

Vertical
Peak Detector

169.680	-4.326	40.608	36.282	-7.218	43.500
299.660	-4.061	36.542	32.481	-13.519	46.000
375.320	0.388	37.134	37.522	-8.478	46.000
499.480	-0.199	40.069	39.869	-6.131	46.000
600.360	1.302	33.395	34.697	-11.303	46.000
749.740	2.023	34.468	36.491	-9.509	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
295.780	-4.747	38.062	33.315	-12.685	46.000
375.320	0.918	41.260	42.178	-3.822	46.000
489.780	1.498	32.891	34.389	-11.611	46.000
625.580	1.419	35.154	36.574	-9.426	46.000
749.740	3.963	36.610	40.573	-5.427	46.000
809.880	6.266	33.695	39.961	-6.039	46.000
Vertical					
Peak Detector					
181.320	-1.910	41.694	39.784	-3.716	43.500
249.220	-5.096	38.365	33.269	-12.731	46.000
375.320	0.388	35.971	36.359	-9.641	46.000
499.480	-0.199	39.501	39.301	-6.699	46.000
606.180	2.246	31.244	33.490	-12.510	46.000
807.940	3.361	33.179	36.540	-9.460	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
171.620	-9.641	43.221	33.580	-9.920	43.500
375.320	0.918	37.426	38.344	-7.656	46.000
499.480	1.991	38.102	40.092	-5.908	46.000
600.360	3.472	36.661	40.133	-5.867	46.000
691.540	3.722	30.135	33.857	-12.143	46.000
807.940	6.231	31.909	38.140	-7.860	46.000
Vertical					
Peak Detector					
179.380	-0.824	38.614	37.790	-5.710	43.500
280.260	-6.065	38.085	32.020	-13.980	46.000
375.320	0.388	36.421	36.809	-9.191	46.000
499.480	-0.199	38.894	38.694	-7.306	46.000
606.180	2.246	31.835	34.081	-11.919	46.000
749.740	2.023	32.838	34.861	-11.139	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5785MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
156.100	-8.497	43.338	34.841	-8.659	43.500
313.240	-4.640	41.276	36.636	-9.364	46.000
375.320	0.918	41.691	42.609	-3.391	46.000
460.680	4.030	33.021	37.051	-8.949	46.000
516.940	3.200	30.989	34.189	-11.811	46.000
600.360	3.472	36.175	39.647	-6.353	46.000
Vertical					
Peak Detector					
181.320	-1.910	38.653	36.743	-6.757	43.500
375.320	0.388	36.520	36.908	-9.092	46.000
499.480	-0.199	39.621	39.421	-6.579	46.000
625.580	0.299	35.260	35.560	-10.440	46.000
749.740	2.023	33.525	35.548	-10.452	46.000
809.880	3.026	31.873	34.899	-11.101	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5755MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
375.320	0.918	40.649	41.567	-4.433	46.000
441.280	0.444	37.159	37.603	-8.397	46.000
563.500	1.950	33.015	34.965	-11.035	46.000
687.660	3.302	32.447	35.749	-10.251	46.000
807.940	6.231	31.612	37.843	-8.157	46.000
903.000	5.938	32.822	38.760	-7.240	46.000
Vertical					
Peak Detector					
375.320	0.388	35.590	35.978	-10.022	46.000
499.480	-0.199	39.246	39.046	-6.954	46.000
606.180	2.246	31.948	34.194	-11.806	46.000
625.580	0.299	35.768	36.068	-9.932	46.000
749.740	2.023	34.253	36.276	-9.724	46.000
809.880	3.026	32.297	35.323	-10.677	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Access Point
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5775MHz)

Frequency MHz	Correct Factor dB	Reading Level dB μ V	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m
Horizontal					
Peak Detector					
249.220	-6.216	42.017	35.801	-10.199	46.000
530.520	3.062	32.755	35.817	-10.183	46.000
625.580	1.419	35.695	37.115	-8.885	46.000
749.740	3.963	36.292	40.255	-5.745	46.000
809.880	6.266	32.784	39.050	-6.950	46.000
901.060	5.878	34.074	39.952	-6.048	46.000
Vertical					
Peak Detector					
173.560	-2.713	40.476	37.763	-5.737	43.500
249.220	-5.096	39.002	33.906	-12.094	46.000
375.320	0.388	35.592	35.980	-10.020	46.000
499.480	-0.199	39.492	39.292	-6.708	46.000
625.580	0.299	35.986	36.286	-9.714	46.000
749.740	2.023	34.460	36.483	-9.517	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

6. Band Edge

6.1. Test Equipment

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	Quietek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	Quietek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Radiated Measurement:

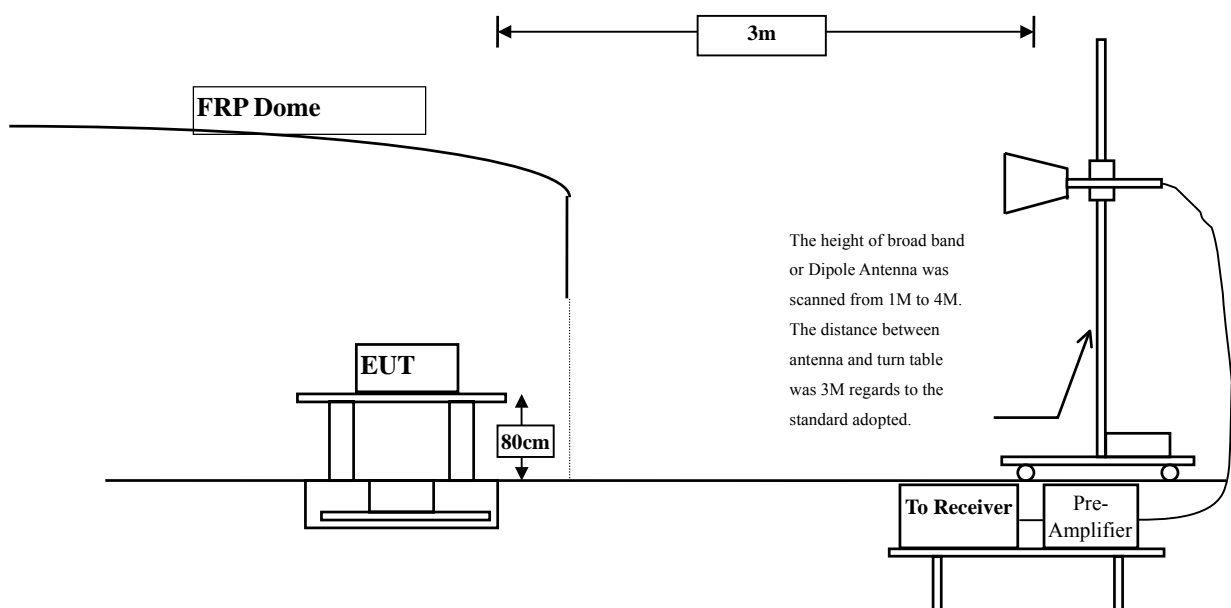

6.3. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBuV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

6.5. Uncertainty

- ± 3.8 dB below 1GHz
- ± 3.9 dB above 1GHz

6.6. Test Result of Band Edge

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 149

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-83.030	-35.183	-8.183	-27.000	Pass
Horizontal	5725.000	47.768	-74.430	-26.662	-9.662	-17.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.900	-82.610	-34.710	-7.710	-27.000	Pass
Vertical	5725.000	47.827	-75.410	-27.583	-10.583	-17.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps)-Channel 165

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5850.000	48.094	-85.180	-37.086	-20.086	-17.000	Pass
Horizontal	5860.000	48.211	-87.110	-38.899	-11.899	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5850.000	48.448	-83.910	-35.462	-18.462	-17.000	Pass
Vertical	5860.000	48.603	-81.450	-32.847	-5.847	-27.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) -Channel 149

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-84.560	-36.713	-9.713	-27.000	Pass
Horizontal	5725.000	47.768	-76.000	-28.232	-11.232	-17.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.900	-83.920	-36.020	-9.020	-27.000	Pass
Vertical	5725.000	47.827	-75.650	-27.823	-10.823	-17.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) -Channel 165

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5850.000	48.094	-84.560	-36.466	-19.466	-17.000	Pass
Horizontal	5860.000	48.211	-87.710	-39.499	-12.499	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5850.000	48.448	-84.320	-35.872	-18.872	-17.000	Pass
Vertical	5860.000	48.603	-87.610	-39.007	-12.007	-27.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) -Channel 151

RF Radiated Measurement :

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-75.810	-27.963	-0.963	-27.000	Pass
Horizontal	5725.000	47.768	-66.560	-18.792	-1.792	-17.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.900	-75.410	-27.510	-0.510	-27.000	Pass
Vertical	5725.000	47.827	-67.280	-19.453	-2.453	-17.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) -Channel 159

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5850.000	48.094	-85.410	-37.316	-20.316	-17.000	Pass
Horizontal	5860.000	48.211	-87.380	-39.169	-12.169	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5850.000	48.448	-83.010	-34.562	-17.562	-17.000	Pass
Vertical	5860.000	48.603	-85.560	-36.957	-9.957	-27.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps)-Channel 149

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-82.720	-34.873	-7.873	-27.000	Pass
Horizontal	5725.000	47.768	-72.920	-25.152	-8.152	-17.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.847	-82.720	-34.873	-7.873	-27.000	Pass
Vertical	5725.000	47.768	-72.920	-25.152	-8.152	-17.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps)-Channel 165

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5850.000	48.094	-85.110	-37.016	-20.016	-17.000	Pass
Horizontal	5860.000	48.211	-87.850	-39.639	-12.639	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5850.000	48.448	-83.710	-35.262	-18.262	-17.000	Pass
Vertical	5860.000	48.603	-87.140	-38.537	-11.537	-27.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps)-Channel 151

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-75.940	-28.093	-1.093	-27.000	Pass
Horizontal	5725.000	47.768	-66.840	-19.072	-2.072	-17.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.900	-75.560	-27.660	-0.660	-27.000	Pass
Vertical	5725.000	47.827	-67.830	-20.003	-3.003	-17.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps)-Channel 159

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5850.000	48.094	-85.220	-37.126	-20.126	-17.000	Pass
Horizontal	5860.000	48.211	-87.330	-39.119	-12.119	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5850.000	48.448	-82.410	-33.962	-16.962	-17.000	Pass
Vertical	5860.000	48.603	-85.410	-36.807	-9.807	-27.000	Pass

Product : Access Point
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps)-Channel 155

RF Radiated Measurement:

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Horizontal	5715.000	47.847	-75.440	-27.593	-0.593	-27.000	Pass
Horizontal	5725.000	47.768	-70.210	-22.442	-5.442	-17.000	Pass
Horizontal	5850.000	48.094	-81.910	-33.816	-16.816	-17.000	Pass
Horizontal	5860.000	48.211	-85.120	-36.909	-9.909	-27.000	Pass

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBm)	Measure Level (dBm/m)	Margin (dB)	Limit (dBm/m)	Result
Vertical	5715.000	47.900	-75.560	-27.660	-0.660	-27.000	Pass
Vertical	5725.000	47.827	-70.920	-23.093	-6.093	-17.000	Pass
Vertical	5850.000	48.448	-83.220	-34.772	-17.772	-17.000	Pass
Vertical	5860.000	48.603	-84.910	-36.307	-9.307	-27.000	Pass

7. Occupied Bandwidth


7.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

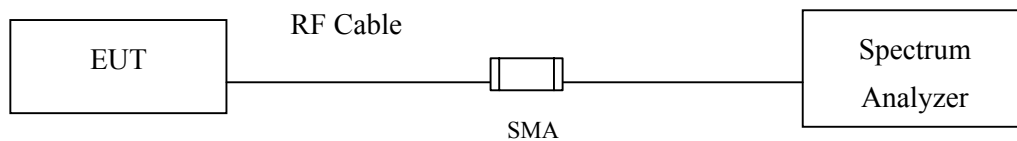

7.3. Limits

For the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz

7.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

7.5. Uncertainty


± 150Hz

7.6. Test Result of Occupied Bandwidth

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5745MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	16450	>500	Pass


Figure Channel 149:

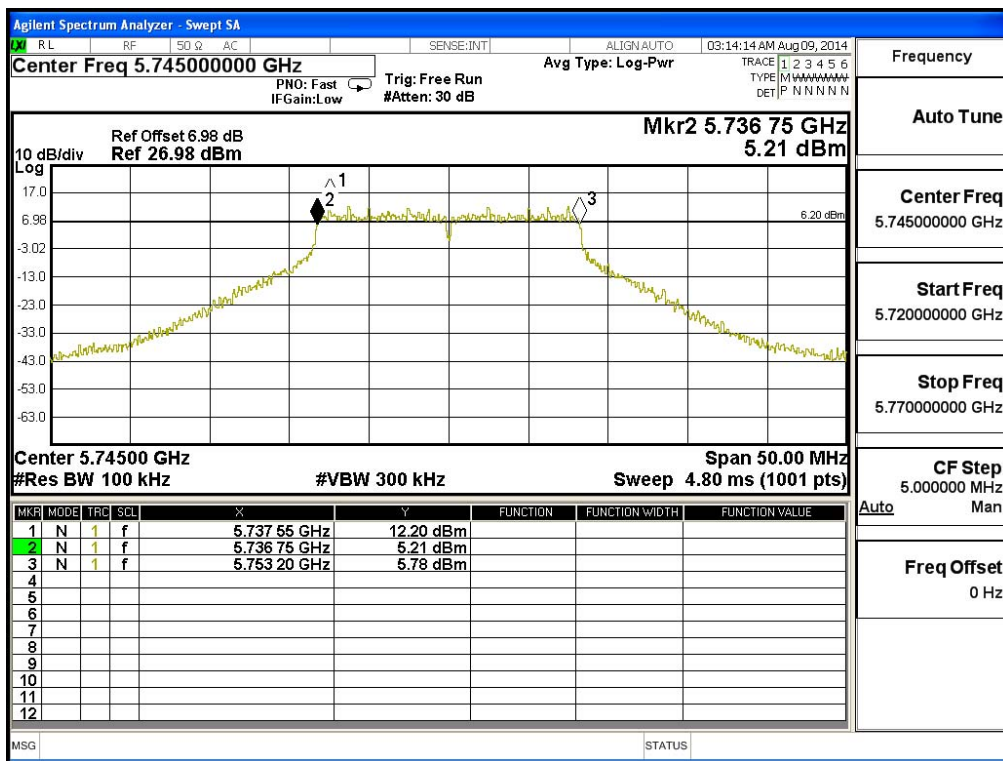

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5785MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16450	>500	Pass


Figure Channel 157:

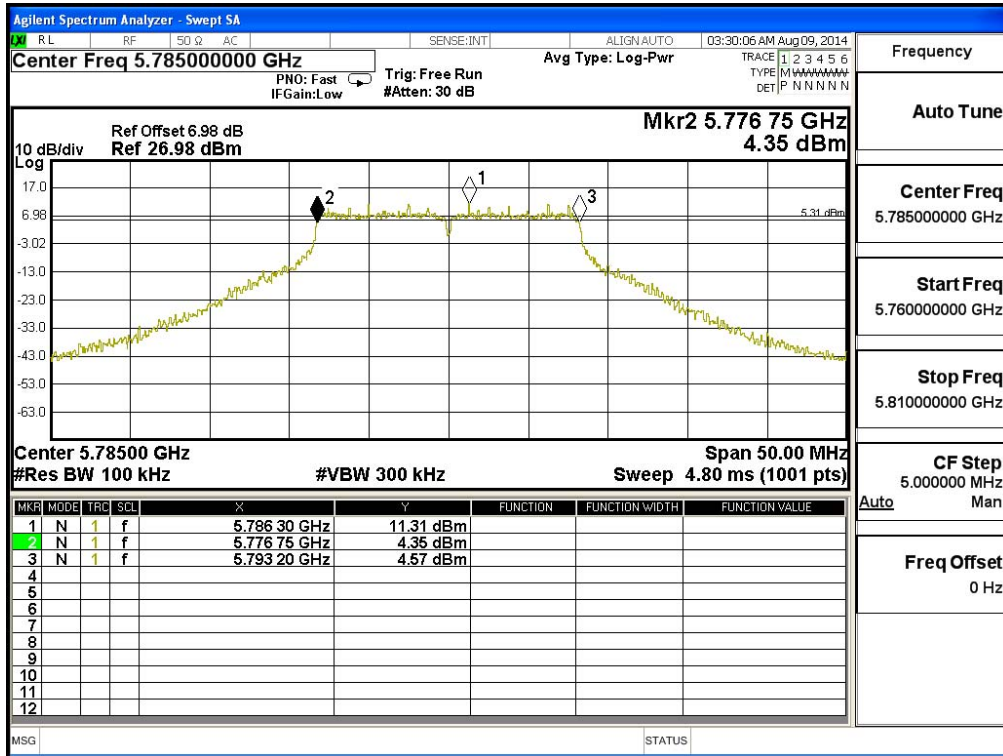

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11a-6Mbps) (5825MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	16450	>500	Pass


Figure Channel 165:

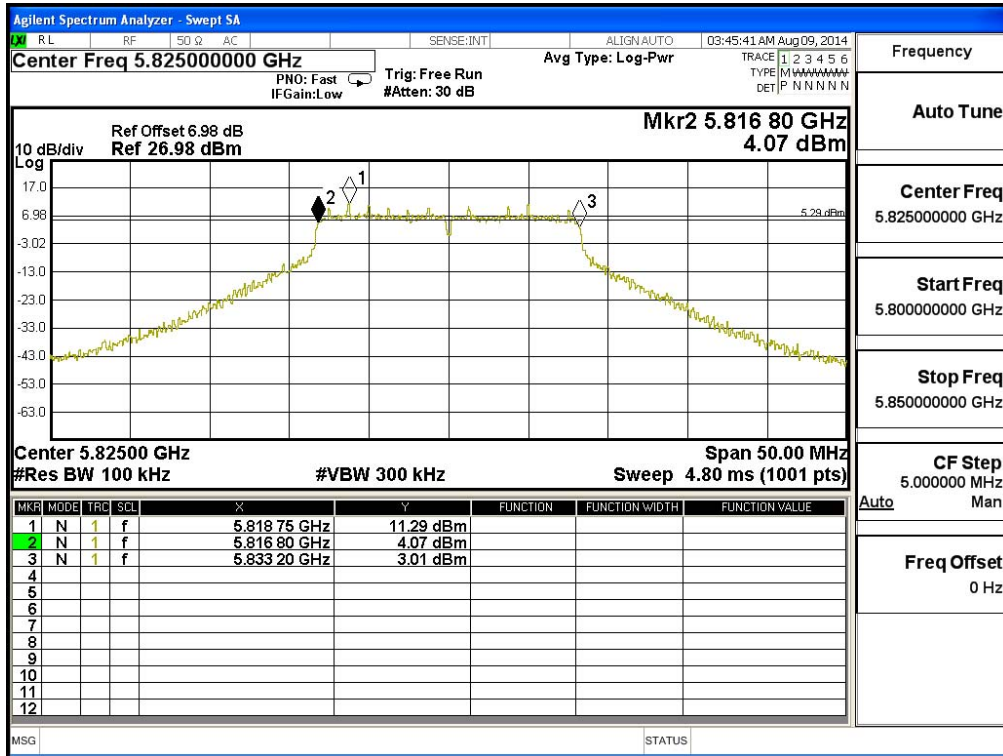

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) (5745MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17700	>500	Pass

Figure Channel 149: (Chain A)

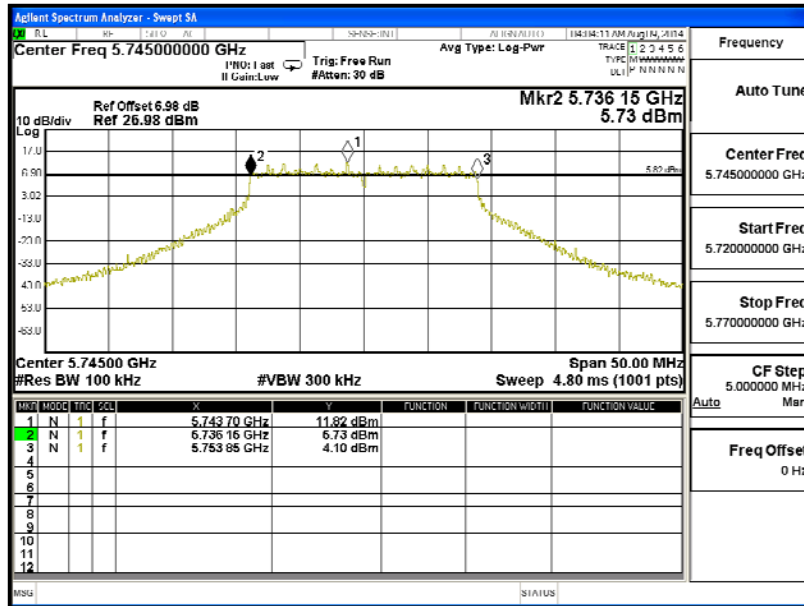

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17750	>500	Pass


Figure Channel 149: (Chain B)

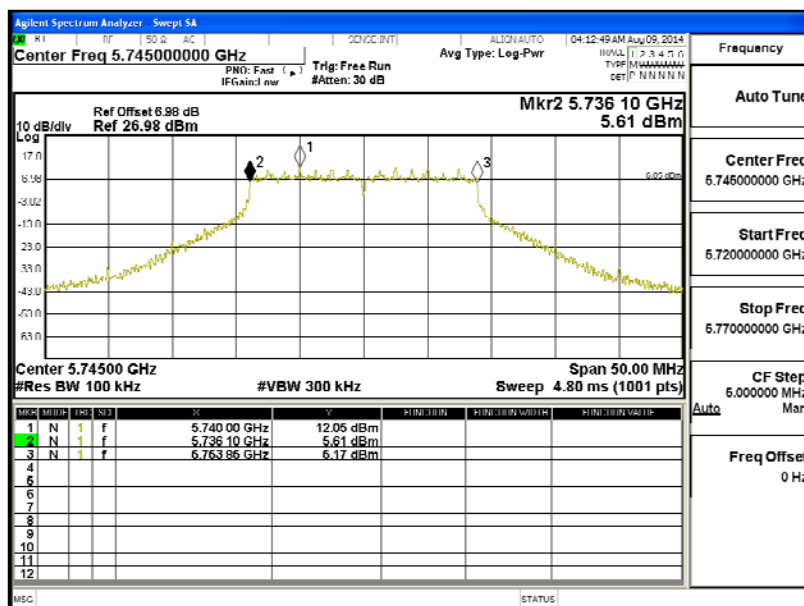

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) (5785MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16450	>500	Pass

Figure Channel 157: (Chain A)

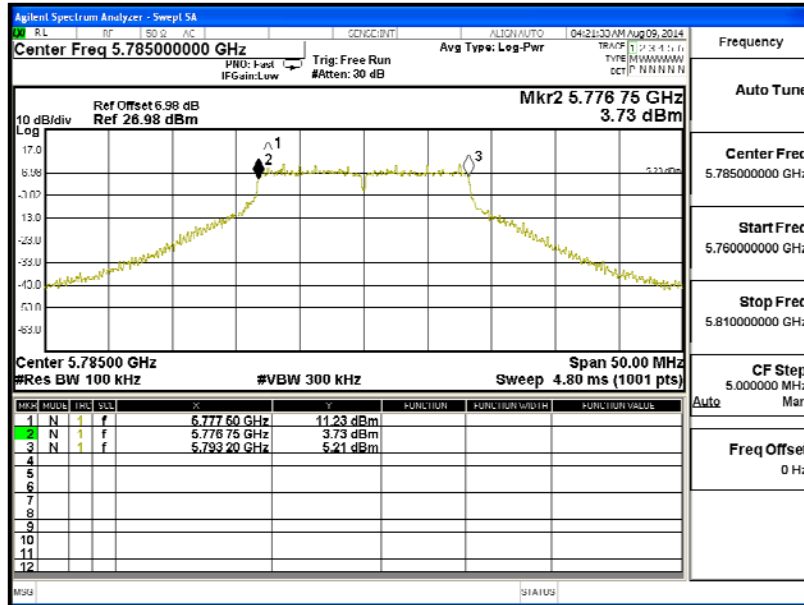

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	16450	>500	Pass


Figure Channel 157: (Chain B)

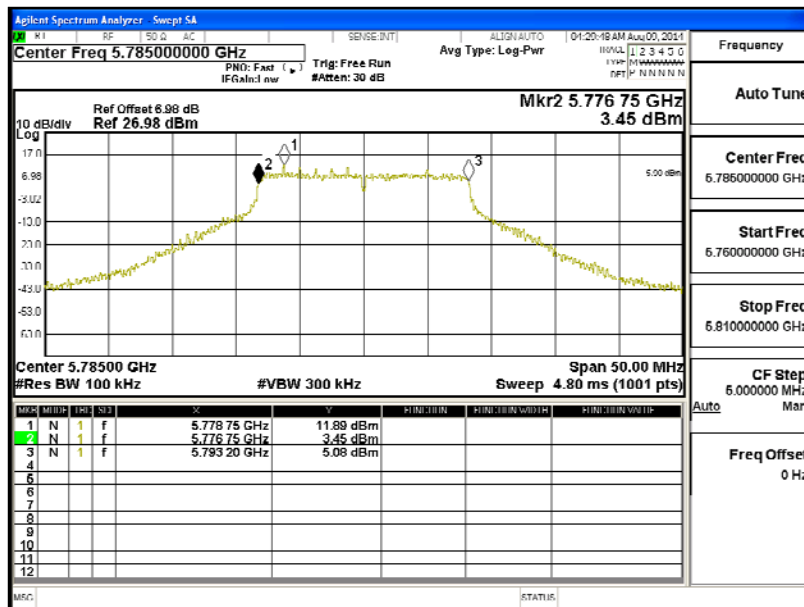

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11n-20BW-14.4Mbps) (5825MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17700	>500	Pass

Figure Channel 165: (Chain A)

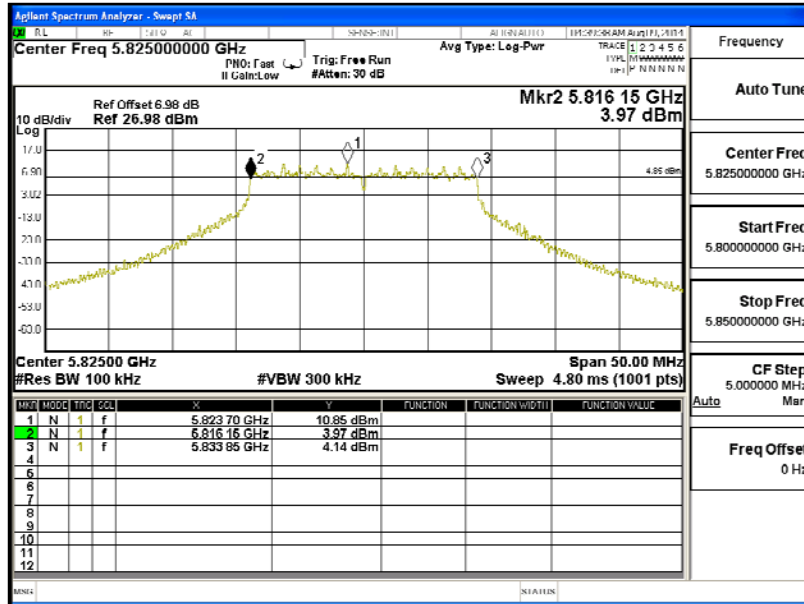

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17700	>500	Pass


Figure Channel 165: (Chain B)

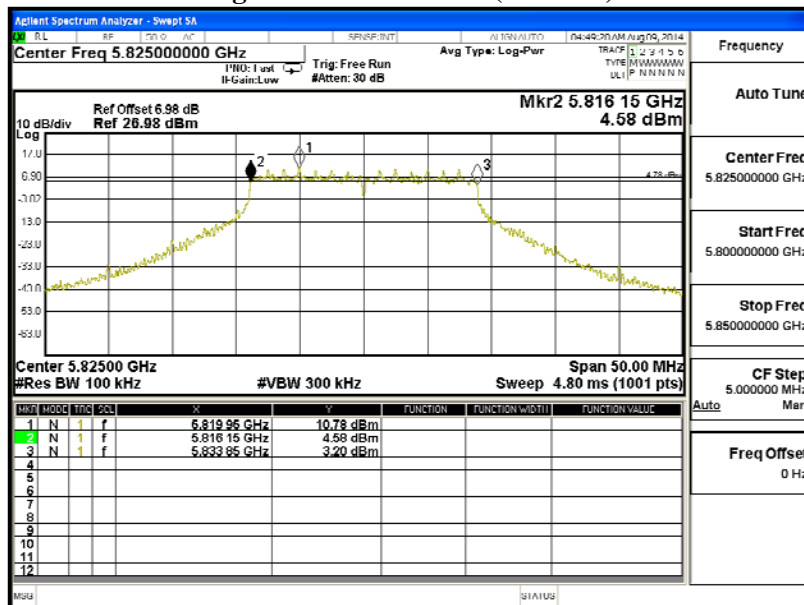

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) (5755MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36300	>500	Pass

Figure Channel 151: (Chain A)

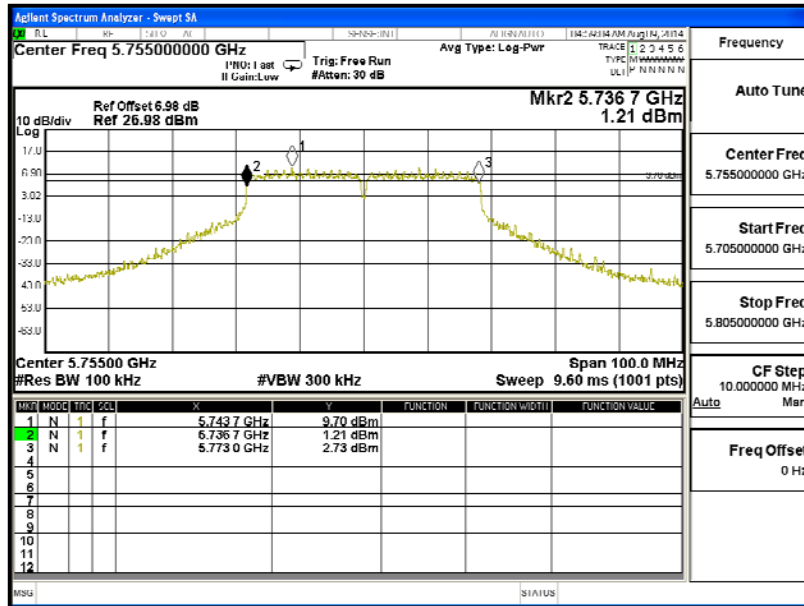

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36300	>500	Pass


Figure Channel 151: (Chain B)

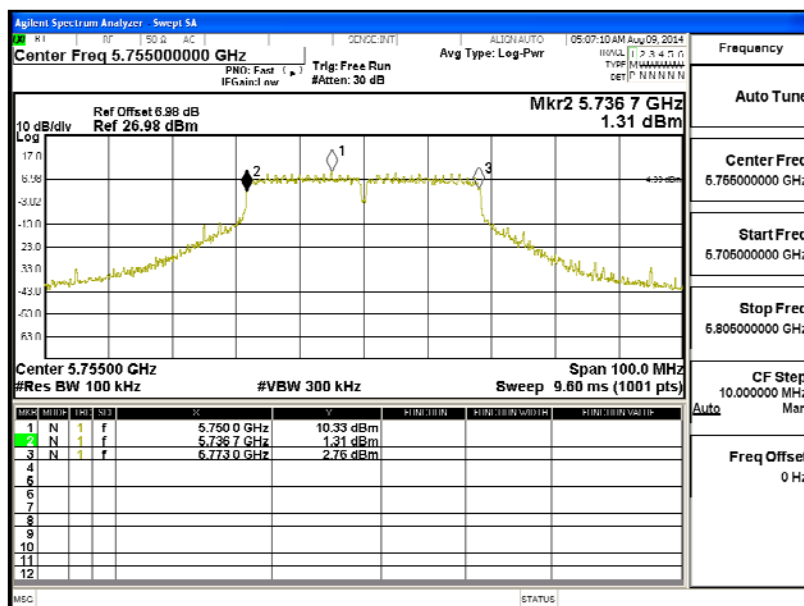

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 3: Transmit (802.11n-40BW-30Mbps) (5795MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	29600	>500	Pass

Figure Channel 159: (Chain A)

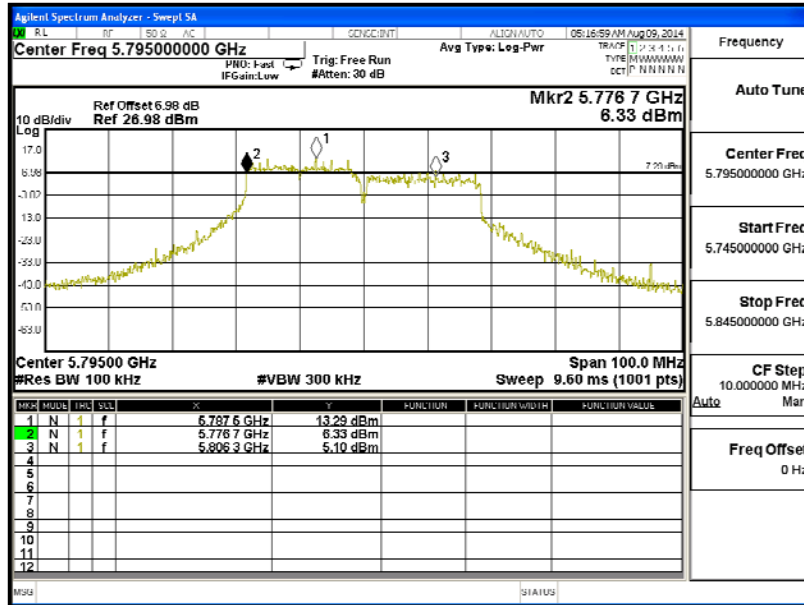

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	36200	>500	Pass


Figure Channel 159: (Chain B)

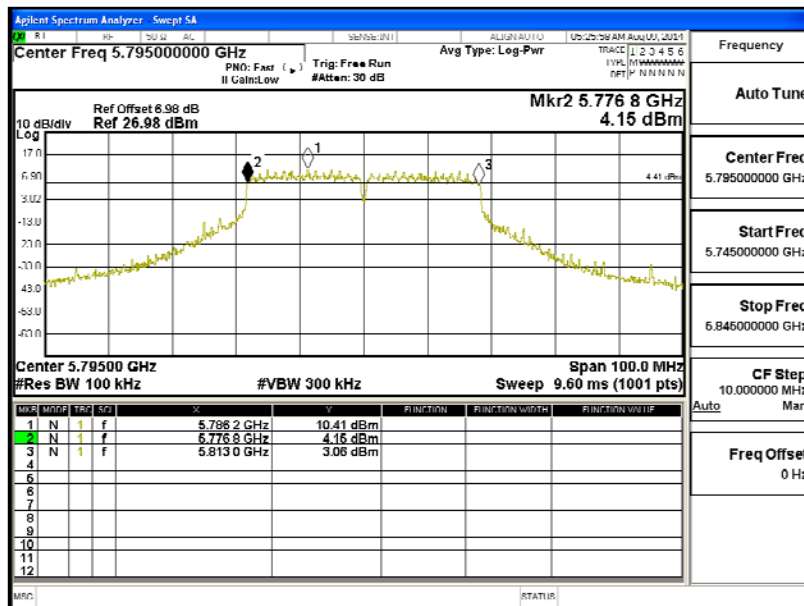

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5745MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17350	>500	Pass

Figure Channel 149: (Chain A)

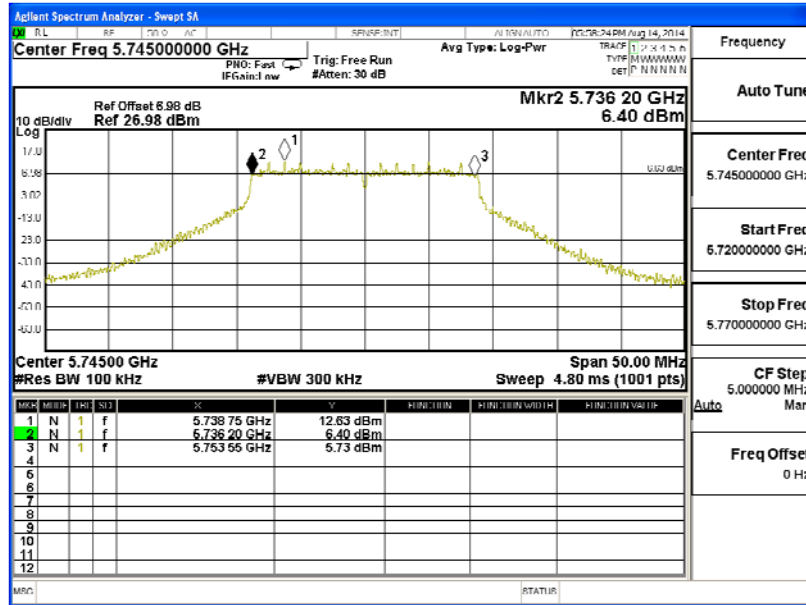

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
149	5745.00	17650	>500	Pass


Figure Channel 149: (Chain B)

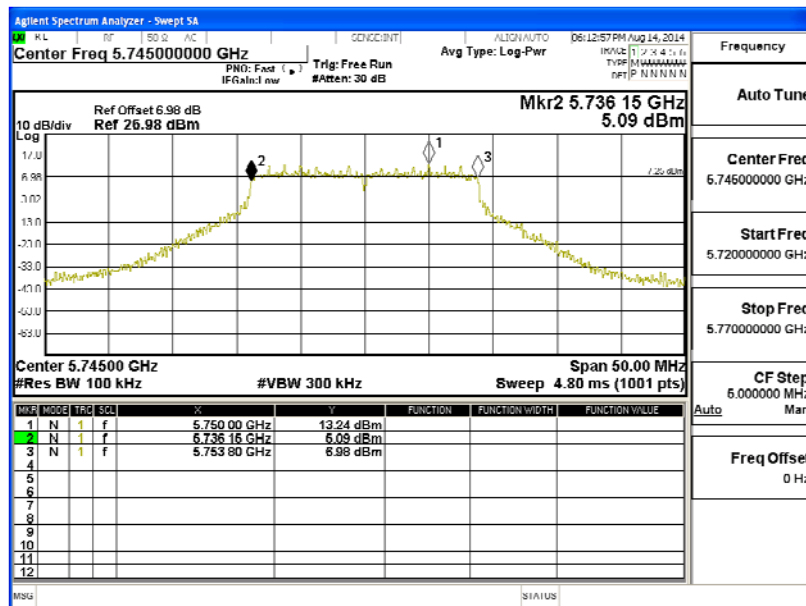

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5785MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17650	>500	Pass

Figure Channel 157: (Chain A)

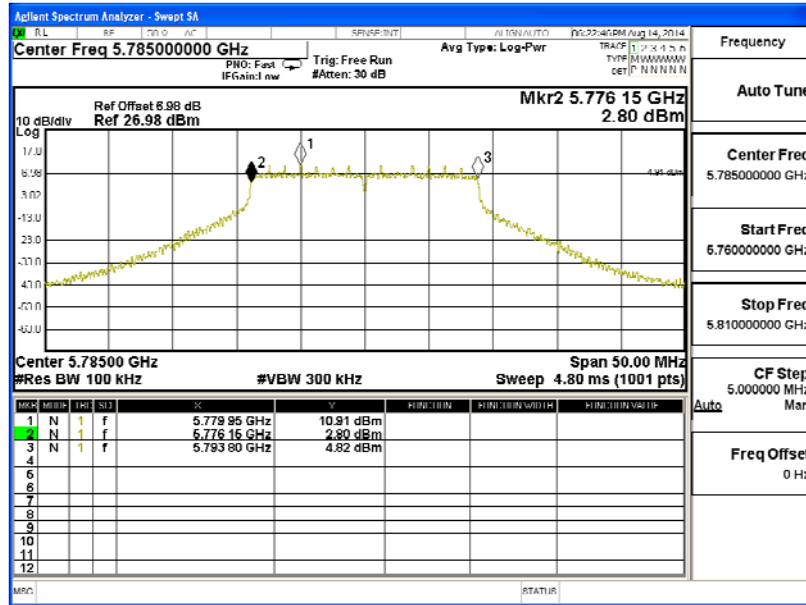

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
157	5785.00	17400	>500	Pass


Figure Channel 157: (Chain B)

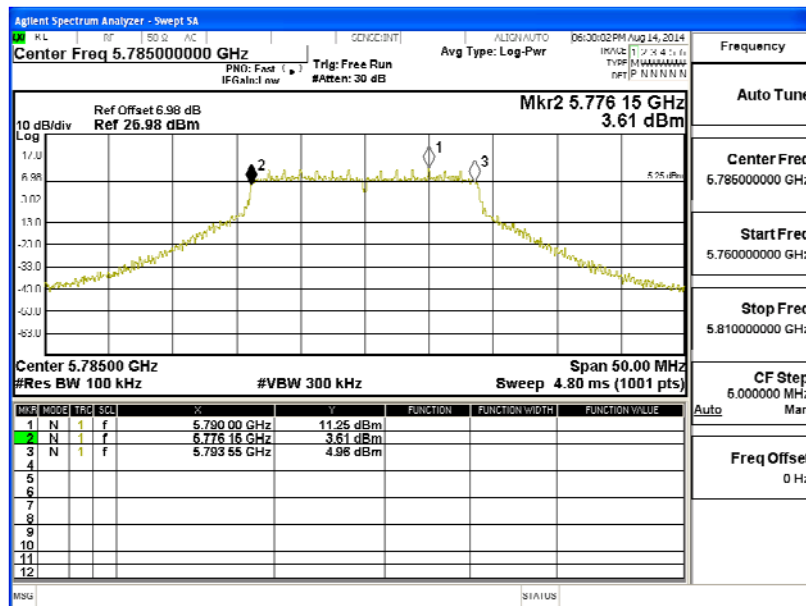

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 4: Transmit (802.11ac-20BW-7.2Mbps) (5825MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17400	>500	Pass

Figure Channel 165: (Chain A)

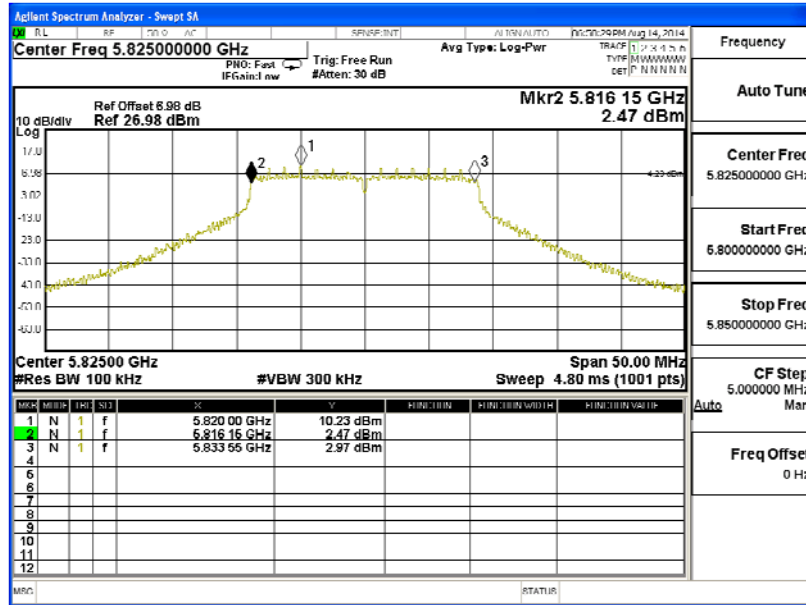

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
165	5825.00	17650	>500	Pass


Figure Channel 165: (Chain B)

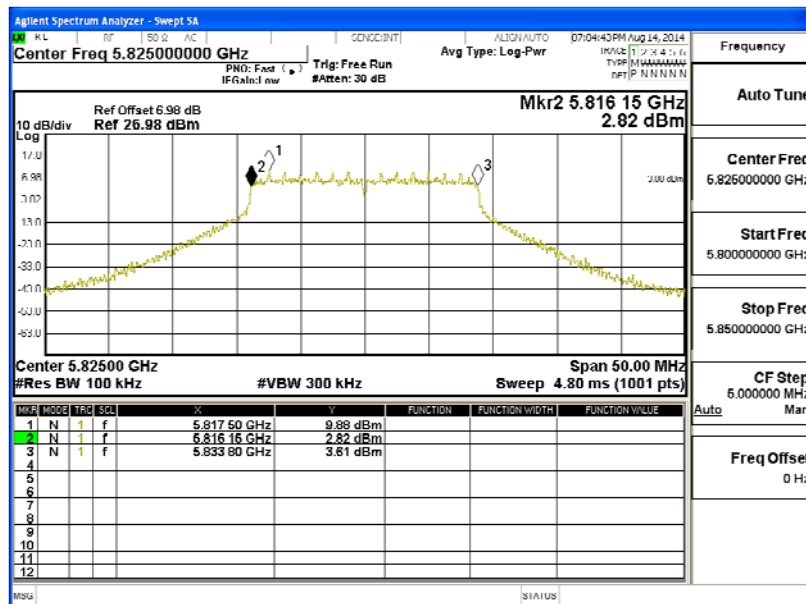

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5755MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36200	>500	Pass

Figure Channel 151: (Chain A)

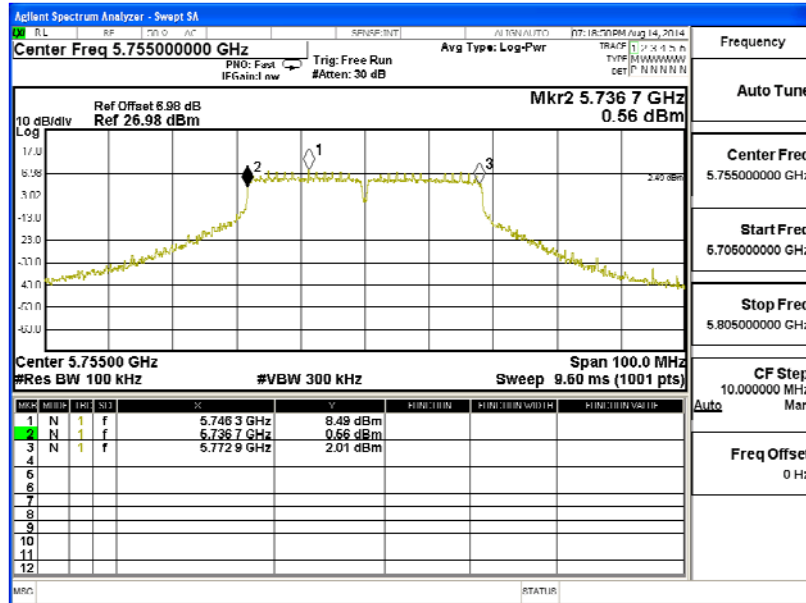

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
151	5755.00	36500	>500	Pass


Figure Channel 151: (Chain B)

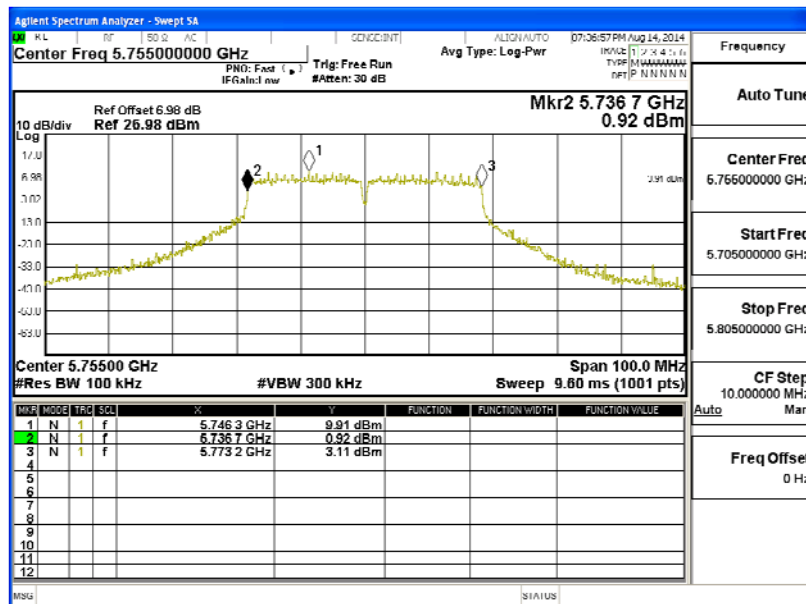

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 5: Transmit (802.11ac-40BW-15Mbps) (5795MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	36500	>500	Pass

Figure Channel 159: (Chain A)

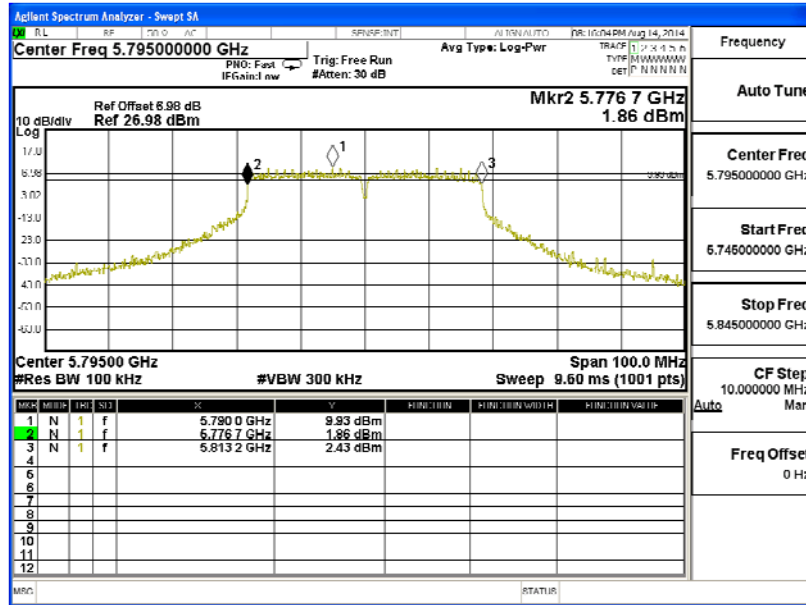

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
159	5795.00	36100	>500	Pass


Figure Channel 159: (Chain B)

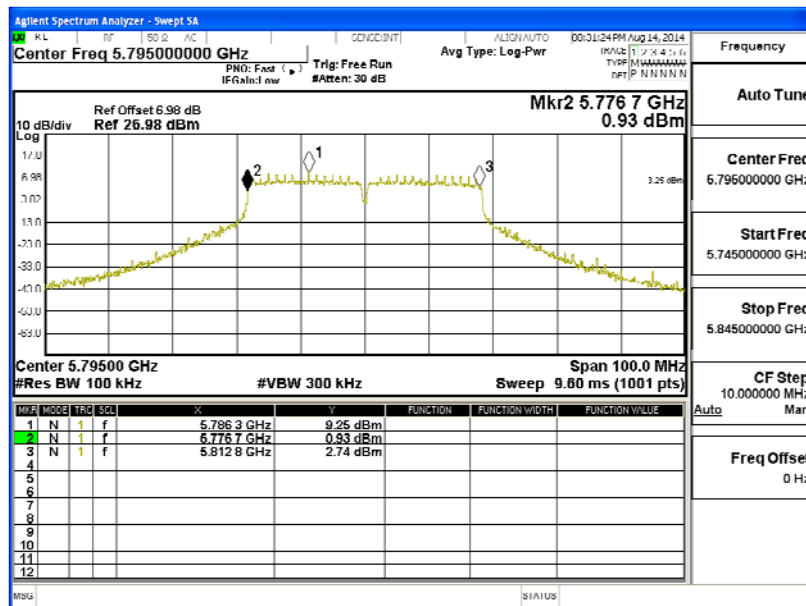

Product : Access Point
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 6: Transmit (802.11ac-80BW-65Mbps) (5775MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
155	5775.00	73300	>500	Pass

Figure Channel 155: (Chain A)

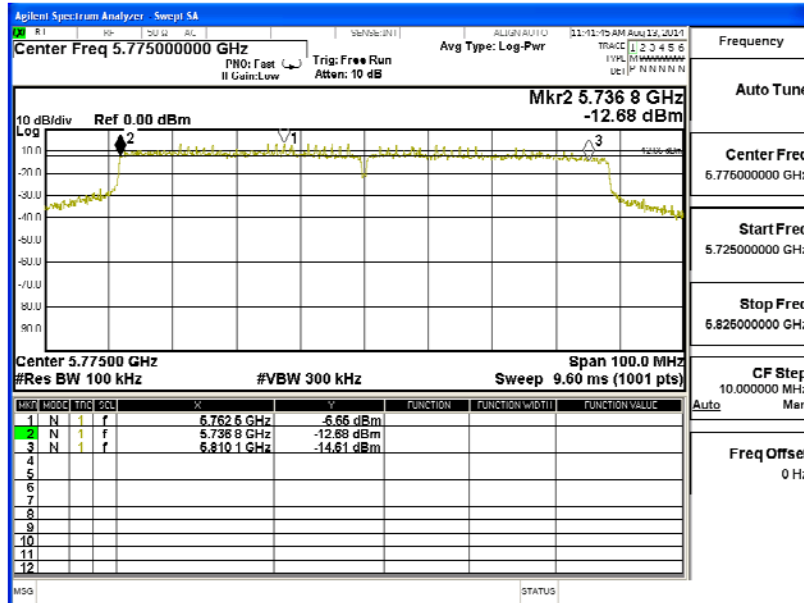

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
155	5775.00	73400	>500	Pass

Figure Channel 155: (Chain B)

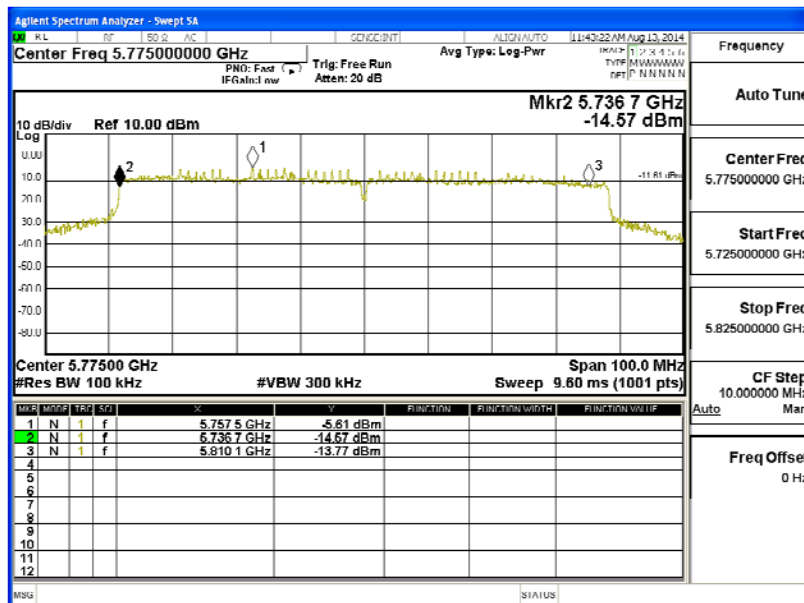

8. Frequency Stability


8.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

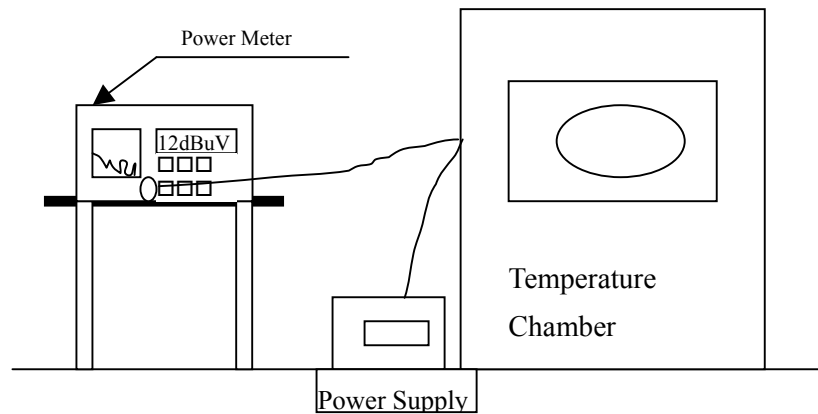

8.3. Limits

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified

8.4. Test Procedure

The EUT was setup to ANSI C63.10, 2009; tested to DTS test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

8.5. Uncertainty

± 150 Hz

8.6. Test Result of Frequency Stability

Product : Access Point
 Test Item : Frequency Stability
 Test Site : Temperature Chamber
 Test Mode : Carrier Wave

Chain A

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	149	5745.0000	5745.0113	-0.0113
		151	5755.0000	5755.0076	-0.0076
		155	5775.0000	5775.0084	-0.0084
		157	5785.0000	5785.0106	-0.0106
		159	5795.0000	5795.0084	-0.0084
		165	5825.0000	5825.0102	-0.0102
Tmax (50) °C	Vmax (138)V	149	5745.0000	5745.0107	-0.0107
		151	5755.0000	5755.0072	-0.0072
		155	5775.0000	5775.0079	-0.0079
		157	5785.0000	5785.0102	-0.0102
		159	5795.0000	5795.0079	-0.0079
		165	5825.0000	5825.0098	-0.0098
Tmax (50) °C	Vmin (102)V	149	5745.0000	5745.0107	-0.0107
		151	5755.0000	5755.0072	-0.0072
		155	5775.0000	5775.0079	-0.0079
		157	5785.0000	5785.0102	-0.0102
		159	5795.0000	5795.0079	-0.0079
		165	5825.0000	5825.0098	-0.0098
Tmin (0) °C	Vmax (138)V	149	5745.0000	5745.0109	-0.0109
		151	5755.0000	5755.0073	-0.0073
		155	5775.0000	5775.0095	-0.0095
		157	5785.0000	5785.0109	-0.0109
		159	5795.0000	5795.0092	-0.0092
		165	5825.0000	5825.0101	-0.0101
Tmin (0) °C	Vmin (102)V	149	5745.0000	5745.0109	-0.0109
		151	5755.0000	5755.0073	-0.0073
		155	5775.0000	5775.0095	-0.0095
		157	5785.0000	5785.0109	-0.0109
		159	5795.0000	5795.0092	-0.0092
		165	5825.0000	5825.0101	-0.0101

Chain B

Test Conditions		Channel	Frequency (MHz)	Frequency (MHz)	ΔF (MHz)
Tnom (20) °C	Vnom (120)V	149	5745.0000	5745.0089	-0.0089
		151	5755.0000	5755.0101	-0.0101
		155	5775.0000	5775.0093	-0.0093
		157	5785.0000	5785.0078	-0.0078
		159	5795.0000	5795.0088	-0.0088
		165	5825.0000	5825.0102	-0.0102
Tmax (50) °C	Vmax (138)V	149	5745.0000	5745.0094	-0.0094
		151	5755.0000	5755.0095	-0.0095
		155	5775.0000	5775.0096	-0.0096
		157	5785.0000	5785.0103	-0.0103
		159	5795.0000	5795.0111	-0.0111
		165	5825.0000	5825.0094	-0.0094
Tmax (50) °C	Vmin (102)V	149	5745.0000	5745.0094	-0.0094
		151	5755.0000	5755.0095	-0.0095
		155	5775.0000	5775.0096	-0.0096
		157	5785.0000	5785.0103	-0.0103
		159	5795.0000	5795.0111	-0.0111
		165	5825.0000	5825.0094	-0.0094
Tmin (0) °C	Vmax (138)V	149	5745.0000	5745.0089	-0.0089
		151	5755.0000	5755.0100	-0.0100
		155	5775.0000	5775.0084	-0.0084
		157	5785.0000	5785.0099	-0.0099
		159	5795.0000	5795.0103	-0.0103
		165	5825.0000	5825.0087	-0.0087
Tmin (0) °C	Vmin (102)V	149	5745.0000	5745.0089	-0.0089
		151	5755.0000	5755.0100	-0.0100
		155	5775.0000	5775.0084	-0.0084
		157	5785.0000	5785.0099	-0.0099
		159	5795.0000	5795.0103	-0.0103
		165	5825.0000	5825.0087	-0.0087

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.