

FCC 47 CFR PART 15 SUBPART C

Product Type : NBE-M5
Applicant : Ubiquiti Networks, Inc.
Address : 12F, No105, Song Ren Rd., SinYi District, Taipei, Taiwan
Trade Name : UBIQUITI
Model Number : NBE-M5
Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4-2009
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
Application Purpose : Original
Receive Date : Apr. 12, 2013
Test Period : Jun. 04 ~ 10, 2013
Issue Date : Jun. 14, 2013

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jun. 14, 2013	Initial Issue	

Verification of Compliance

Issued Date: 06/14/2013

Product Type : NBE-M5
Applicant : Ubiquiti Networks, Inc.
Address : 12F, No105, Song Ren Rd., SinYi District, Taipei, Taiwan
Trade Name : UBIQUITI
Model Number : NBE-M5
FCC ID : SWX-NBM5HP
EUT Rated Voltage : DC 24V, 0.5A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2012
ANSI C63.4-2009
Canada RSS-210 ISSUE 8: Dec., 2010
Canada RSS-Gen ISSUE 3: Dec., 2010
Test Result : Complied
Application Purpose : Original

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.


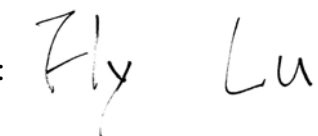
Approved By :  Reviewed By : 
(Manager) (Murphy Wang) (Testing Engineer) (Fly Lu)

TABLE OF CONTENTS

1	General Information	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Exercise Software	9
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	10
4	Conducted Emission Measurement	11
4.1.	Limit	11
4.2.	Test Instruments	11
4.3.	Test Setup.....	11
4.4.	Test Procedure	12
4.5.	Test Result.....	13
5	Radiated Emission Measurement.....	15
5.1.	Limit	15
5.2.	Test Instruments	15
5.3.	Setup	16
5.4.	Test Procedure	17
5.5.	Test Result.....	19
6	Maximum Conducted Output Power Measurement.....	25
6.1.	Limit	25
6.2.	Test Setup.....	25
6.3.	Test Instruments	25
6.4.	Test Procedure	25
6.5.	Test Result.....	26
7	6dB RF Bandwidth & 99 % Occupied Bandwidth Measurement.....	28
7.1.	Limit	28
7.2.	Test Setup.....	28
7.3.	Test Instruments	28
7.4.	Test Procedure	29
7.5.	Test Result.....	30
7.6.	Test Graphs	31

8	Maximum Power Density Measurement	34
8.1.	Limit	34
8.2.	Test Setup.....	34
8.3.	Test Instruments	34
8.4.	Test Procedure	34
8.5.	Test Result.....	35
8.6.	Test Graphs	36
9	Out of Band Conducted Emissions Measurement	39
9.1.	Limit	39
9.2.	Test Setup.....	39
9.3.	Test Instruments	39
9.4.	Test Procedure	39
9.5.	Test Graphs	40
10	Antenna Measurement.....	43
10.1.	Limit	43
10.2.	Antenna Connector Construction	43

1 General Information

1.1 Summary of Test Result

Standard		Item	Result	Remark
15.247	RSS-GEN			
15.207	7.2.2	AC Power Conducted Emission	PASS	----
----	6	Receiver Radiated Emissions	PASS	----
Standard		Item	Result	Remark
15.247	RSS-210			
15.247(d)	A8.5	Transmitter Radiated Emissions	PASS	----
15.247(b)(3)	A8.4	Max. Output Power	PASS	----
15.247(a)(2)	A8.2 (a)	6dB RF Bandwidth	PASS	----
15.247(e)	A8.2 (b)	Power Spectral Density	PASS	----
15.247(c)	A8.5	Out of Band Conducted Spurious Emission	PASS	----
15.247(d)	A8.5	Band Edge Measurement	N/A	----
15.247(c)	A8.5	Occupied Bandwidth Measurement	PASS	----
15.203	-	Antenna Requirement	PASS	----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2 Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.02 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.96 dB for horizontal in 30MHz ~ 1000MHz.

The measurement uncertainty is evaluated as ± 3.57 dB for vertical in 30MHz ~ 1000MHz.

The measurement uncertainty is evaluated as ± 3.072 dB for horizontal in 1000MHz ~ 18000MHz.

The measurement uncertainty is evaluated as ± 3.028 dB for vertical in 1000MHz ~ 18000MHz.

The measurement uncertainty is evaluated as ± 3.622 dB for horizontal in 18000MHz ~ 40000MHz.

The measurement uncertainty is evaluated as ± 3.506 dB for vertical in 18000MHz ~ 40000MHz.

2 EUT Description

Product	NBE-M5
Trade Name	UBIQUiTi
Model No.	NBE-M5
Applicant	Ubiquiti Networks, Inc. 12F, No105, Song Ren Rd., SinYi District, Taipei, Taiwan
Manufacturer	Ubiquiti Networks, Inc. 12F, No105, Song Ren Rd., SinYi District, Taipei, Taiwan
FCC ID	SWX-NBM5HP
Frequency Range	IEEE 802.11a / IEEE 802.11n (5 GHz) 20MHz U-NII Band IV: 5745 ~ 5850 MHz IEEE 802.11n (5 GHz) 40MHz U-NII Band IV: 5755 ~ 5795 MHz
Modulation Type	IEEE 802.11a U-NII Band IV: OFDM IEEE 802.11n (5 GHz) 20MHz U-NII Band IV: OFDM IEEE 802.11n (5 GHz) 40MHz U-NII Band IV: OFDM
Antenna Type	Dish Antenna
Antenna Gain	25 dBi
Antenna Delivery	1TX + 1RX
RF Output Power	IEEE 802.11a U-NII Band IV: 0.109 W / 20.39 dBm IEEE 802.11n (5 GHz) 20MHz U-NII Band IV: 0.096 W / 19.83 dBm IEEE 802.11n (5 GHz) 40MHz U-NII Band IV: 0.124 W / 20.93 dBm

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: IEEE 802.11a U-NII Band IV Link Mode
Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode
Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode
Mode 5: Receiver Mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

IEEE 802.11a mode:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n (5 GHz) 20MHz U-NII Band IV mode:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6.5Mbps data rate were chosen for full testing.

IEEE 802.11n (5 GHz) 40MHz U-NII Band IV mode:


Channel Low (5755MHz) and Channel High (5795MHz) with 13.5Mbps data rate were chosen for full testing.

3.2. EUT Exercise Software


1.	Setup the EUT shown on 3.3.
2.	Turn on the power of all equipment.
3.	The EUT LAN port connects to the Notebook and data will communicate between Notebook through EUT.
4.	The EUT will start to operate function.

3.3. Configuration of Test System Details

Conducted Emission

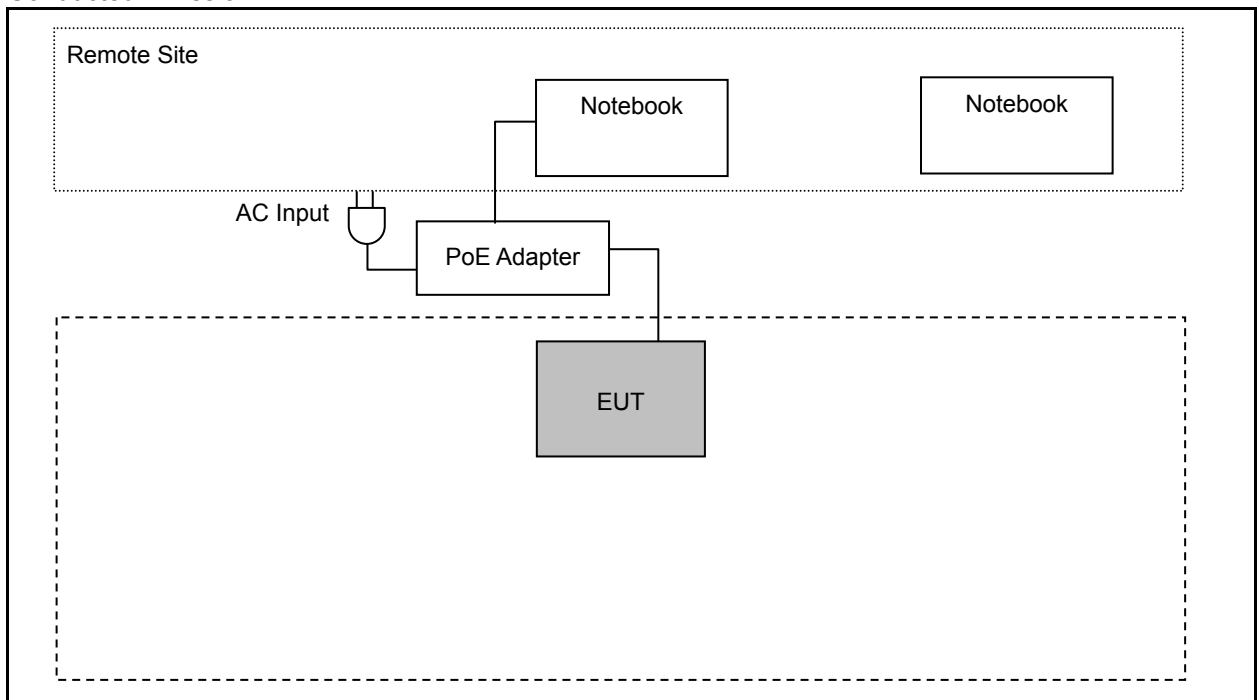

Radiated Emission

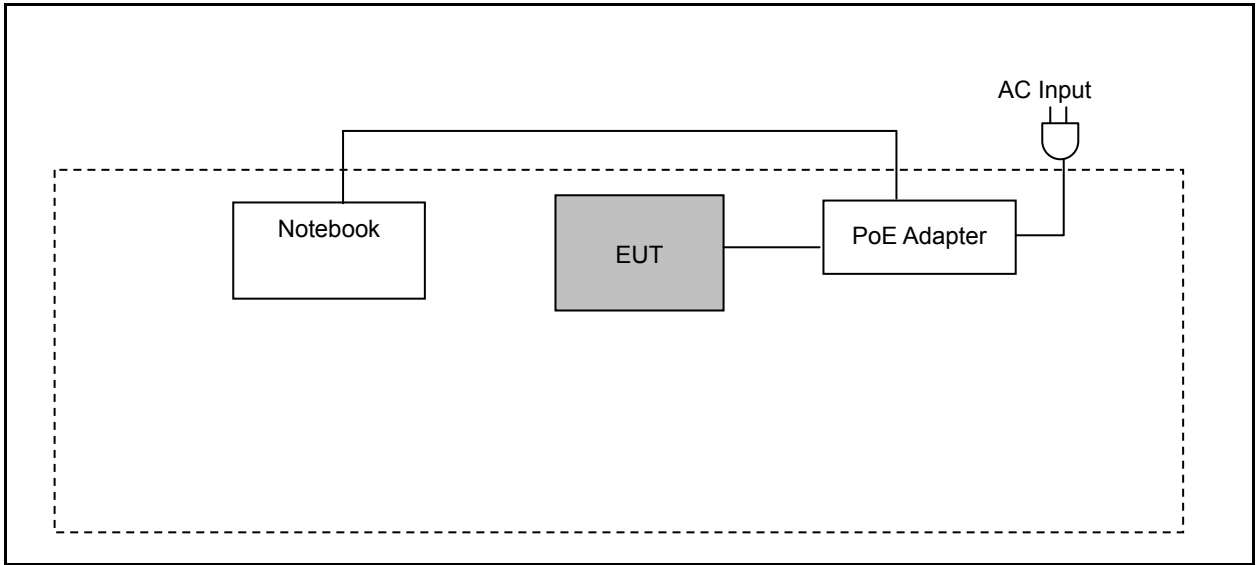

3.4. Test Site Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Conducted Emission Measurement

4.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


4.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/18/2012	(1)
LISN	R&S	ENV216	101040	03/04/2013	(1)
LISN	R&S	ENV216	101041	03/04/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

4.3. Test Setup

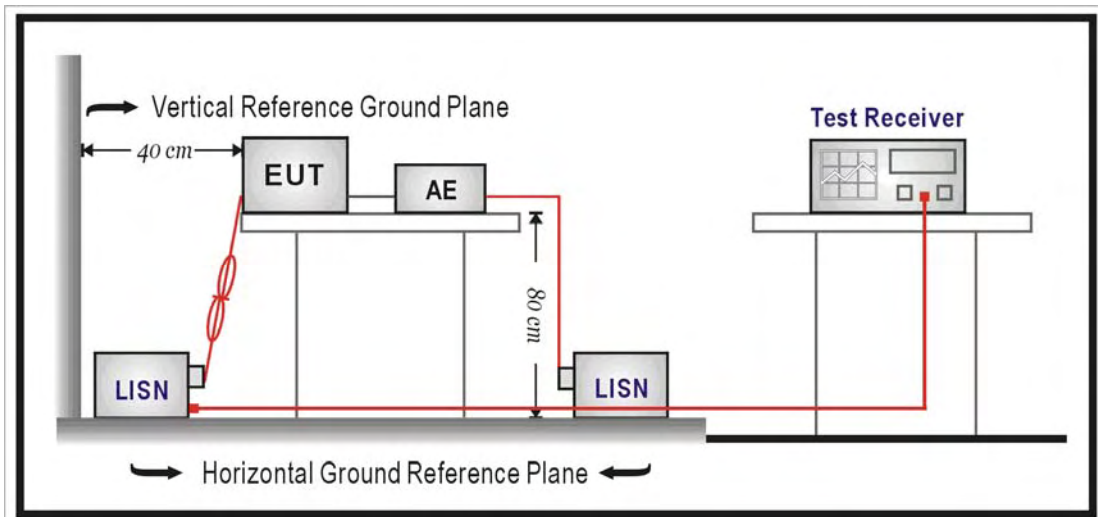

4.4. Test Procedure


The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

4.5. Test Result

Standard:	FCC Part 15C	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	06/10/2013
		Test By:	Fly Lu
Description:			

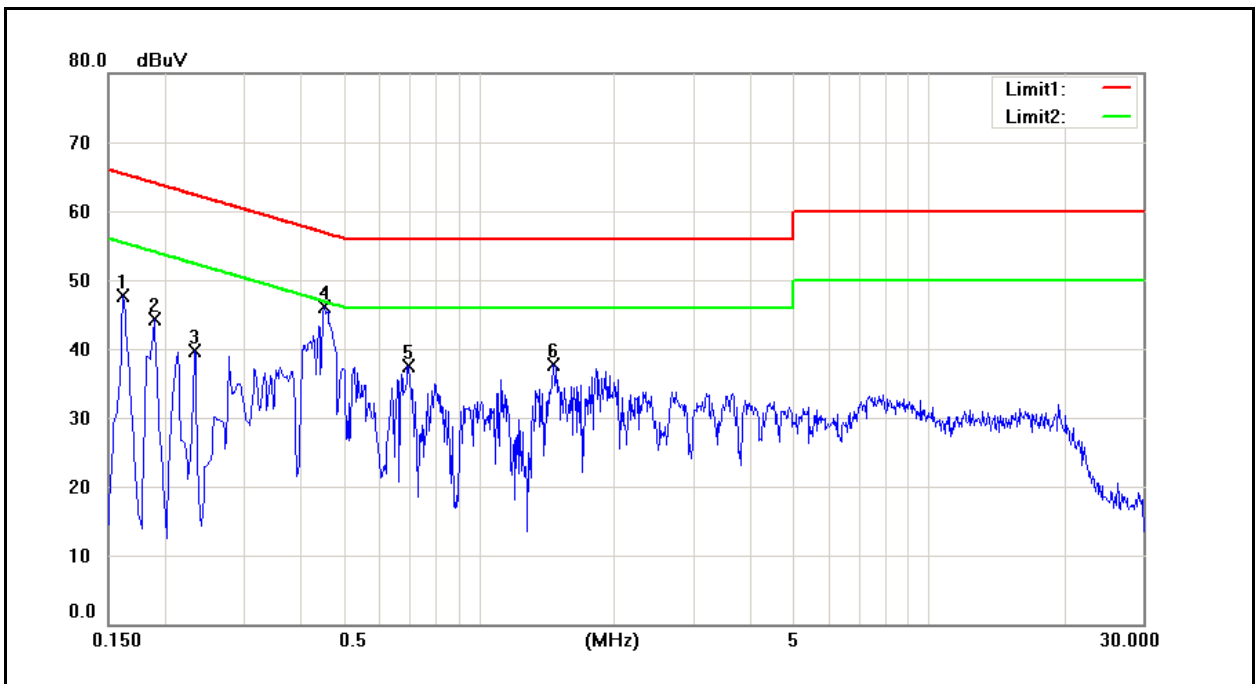


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1620	36.37	22.48	9.62	45.99	32.10	65.36	55.36	-19.37	-23.26	Pass
2	0.1900	32.49	18.83	9.62	42.11	28.45	64.04	54.04	-21.93	-25.59	Pass
3	0.2340	26.60	9.16	9.62	36.22	18.78	62.31	52.31	-26.09	-33.53	Pass
4	0.4540	34.92	25.76	9.62	44.54	35.38	56.80	46.80	-12.26	-11.42	Pass
5	0.6980	26.40	18.23	9.64	36.04	27.87	56.00	46.00	-19.96	-18.13	Pass
6	1.4700	24.58	18.13	9.68	34.26	27.81	56.00	46.00	-21.74	-18.19	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15C	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	06/10/2013
		Test By:	Fly Lu
Description:			

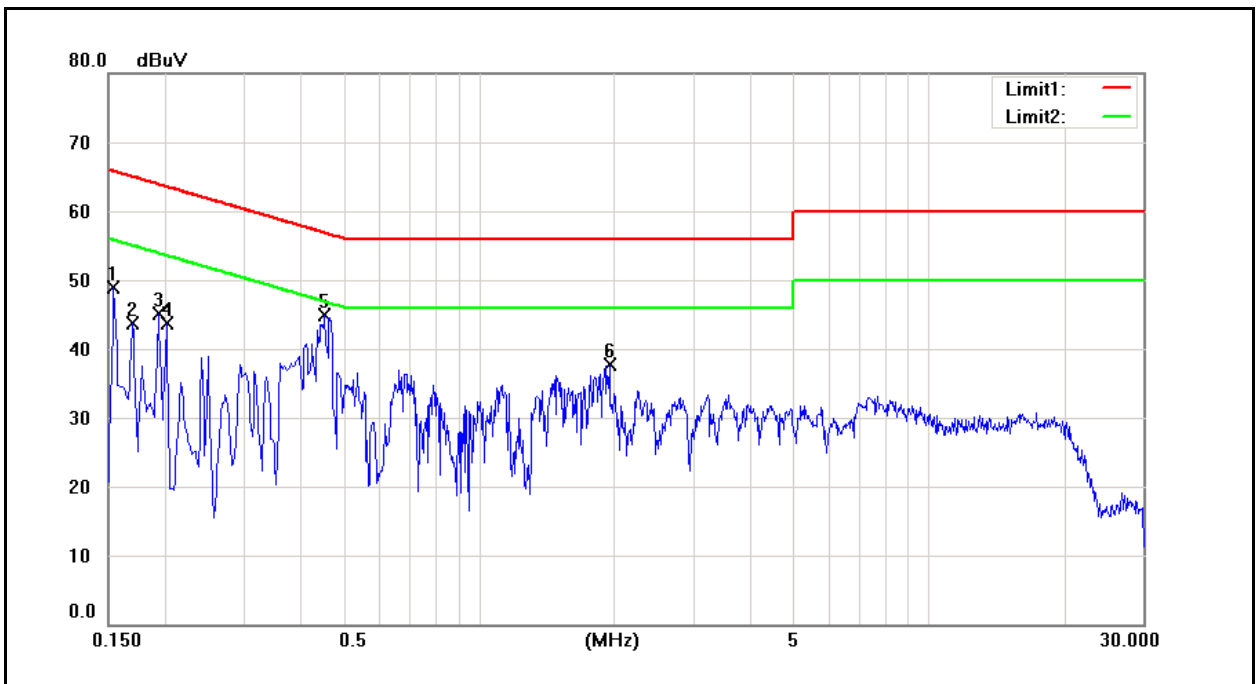

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	36.08	17.13	9.63	45.71	26.76	65.78	55.78	-20.07	-29.02	Pass
2	0.1700	33.18	15.78	9.63	42.81	25.41	64.96	54.96	-22.15	-29.55	Pass
3	0.1940	31.86	17.59	9.63	41.49	27.22	63.86	53.86	-22.37	-26.64	Pass
4	0.2020	24.95	8.08	9.63	34.58	17.71	63.53	53.53	-28.95	-35.82	Pass
5	0.4540	34.89	25.75	9.63	44.52	35.38	56.80	46.80	-12.28	-11.42	Pass
6	1.9580	22.87	15.33	9.70	32.57	25.03	56.00	46.00	-23.43	-20.97	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

5 Radiated Emission Measurement

5.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/21/2013	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/21/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2013	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2013	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	06/29/2012	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/15/2012	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/21/2012	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2012	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


Note: N.C.R. = No Calibration Request.

5.3. Setup

Below 1GHz

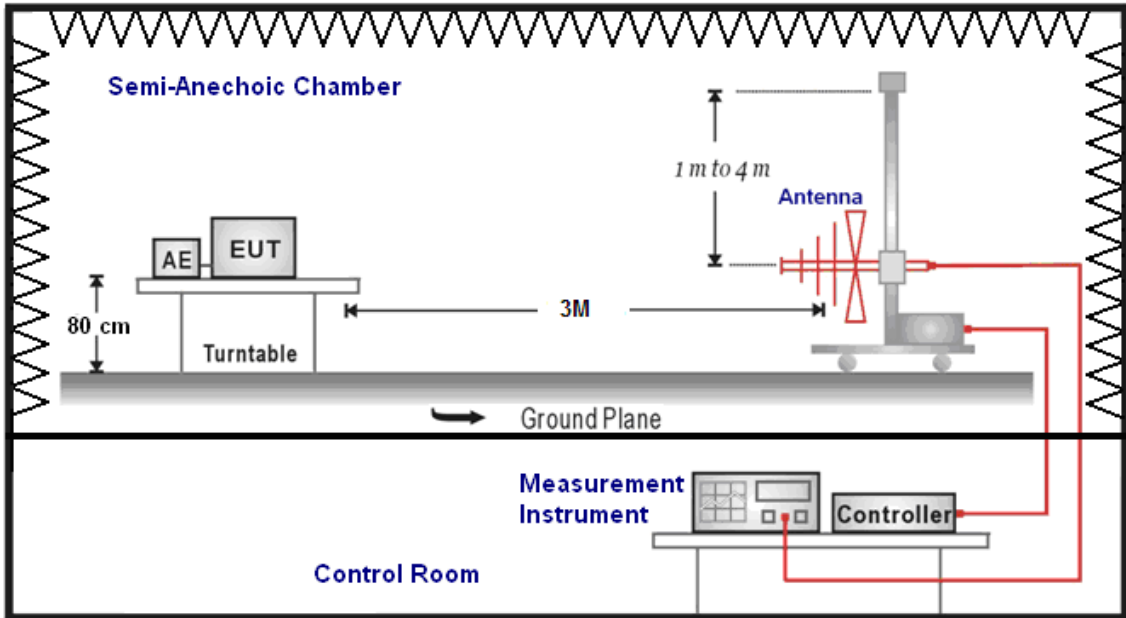

Above 1GHz

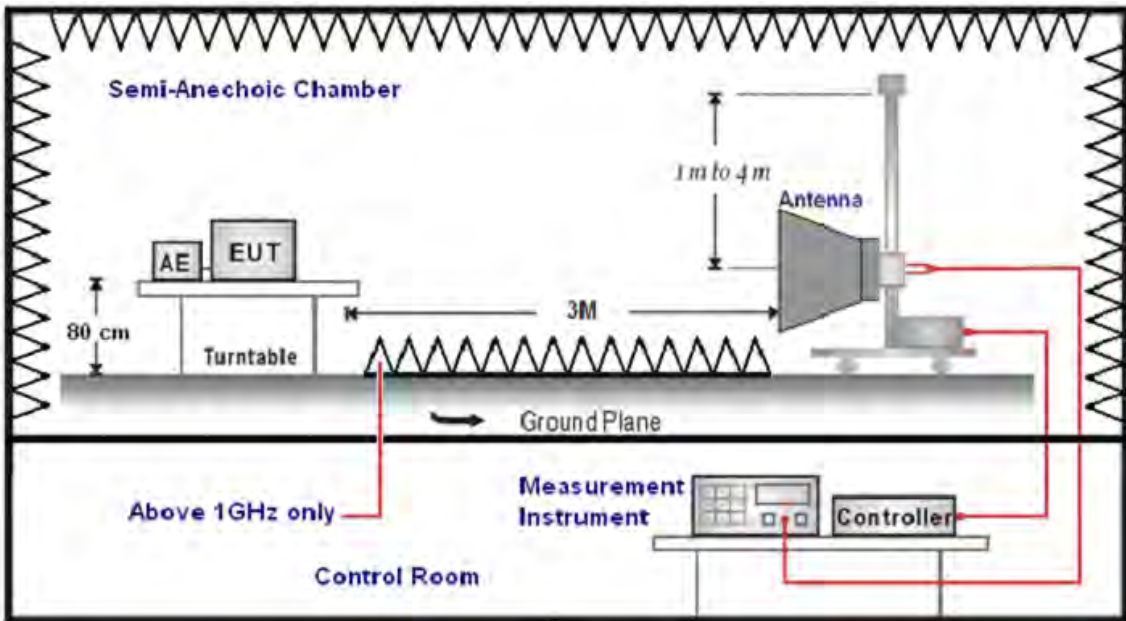

5.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (mode VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) $\text{Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) $\text{Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5. Test Result

Below 1GHz

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	1	Date:	06/04/2013
		Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
120.0000	45.41	-16.06	29.35	43.50	-14.15	QP	H
215.0000	48.54	-13.67	34.87	43.50	-8.63	QP	H
250.0000	49.46	-11.95	37.51	46.00	-8.49	QP	H
399.0000	46.88	-8.60	38.28	46.00	-7.72	QP	H
644.5000	35.91	-4.16	31.75	46.00	-14.25	QP	H
796.5000	34.67	-1.62	33.05	46.00	-12.95	QP	H
120.0000	46.89	-16.06	30.83	43.50	-12.67	QP	V
201.5000	49.33	-13.91	35.42	43.50	-8.08	QP	V
399.5000	45.85	-8.60	37.25	46.00	-8.75	QP	V
587.0000	40.02	-5.43	34.59	46.00	-11.41	QP	V
798.0000	35.27	-1.60	33.67	46.00	-12.33	QP	V
942.5000	30.09	0.94	31.03	46.00	-14.97	QP	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Above 1GHz

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	06/04/2013		
Frequency:	5745MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3149.000	36.88	6.24	43.12	74.00	-30.88	peak	H
4591.000	35.86	11.11	46.97	74.00	-27.03	peak	H
6341.000	33.20	16.92	50.12	74.00	-23.88	peak	H
3079.000	38.43	6.08	44.51	74.00	-29.49	peak	V
4570.000	35.80	11.06	46.86	74.00	-27.14	peak	V
6341.000	32.91	16.92	49.83	74.00	-24.17	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	2			Date:	06/04/2013		
Frequency:	5785MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3023.000	36.10	5.96	42.06	74.00	-31.94	peak	H
4591.000	35.89	11.11	47.00	74.00	-27.00	peak	H
6257.000	31.37	16.66	48.03	74.00	-25.97	peak	H
3051.000	37.21	6.02	43.23	74.00	-30.77	peak	V
4577.000	34.98	11.07	46.05	74.00	-27.95	peak	V
6362.000	33.69	16.99	50.68	74.00	-23.32	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	2	Date:	06/04/2013
Frequency:	5825MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3177.000	37.68	6.30	43.98	74.00	-30.02	peak	H
4577.000	34.71	11.07	45.78	74.00	-28.22	peak	H
6369.000	33.19	17.00	50.19	74.00	-23.81	peak	H
3086.000	37.14	6.10	43.24	74.00	-30.76	peak	V
4598.000	34.22	11.14	45.36	74.00	-28.64	peak	V
6397.000	33.01	17.10	50.11	74.00	-23.89	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	3	Date:	06/04/2013
Frequency:	5745MHz	Test By:	Fly Lu

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2967.000	37.31	5.82	43.13	74.00	-30.87	peak	H
4542.000	35.24	10.99	46.23	74.00	-27.77	peak	H
6362.000	33.06	16.99	50.05	74.00	-23.95	peak	H
3030.000	36.33	5.97	42.30	74.00	-31.70	peak	V
4542.000	34.78	10.99	45.77	74.00	-28.23	peak	V
6341.000	32.24	16.92	49.16	74.00	-24.84	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	06/04/2013		
Frequency:	5785MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.59	5.99	43.58	74.00	-30.42	peak	H
4591.000	36.05	11.11	47.16	74.00	-26.84	peak	H
6222.000	33.07	16.56	49.63	74.00	-24.37	peak	H
2974.000	37.38	5.84	43.22	74.00	-30.78	peak	V
4591.000	36.33	11.11	47.44	74.00	-26.56	peak	V
6383.000	32.83	17.06	49.89	74.00	-24.11	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	3			Date:	06/04/2013		
Frequency:	5825MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3107.000	37.26	6.14	43.40	74.00	-30.60	peak	H
4577.000	35.47	11.07	46.54	74.00	-27.46	peak	H
6215.000	32.08	16.54	48.62	74.00	-25.38	peak	H
3037.000	36.00	5.99	41.99	74.00	-32.01	peak	V
4577.000	34.32	11.07	45.39	74.00	-28.61	peak	V
6355.000	32.21	16.97	49.18	74.00	-24.82	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	06/04/2013		
Frequency:	5755MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2981.000	35.86	5.86	41.72	74.00	-32.28	peak	H
4570.000	34.72	11.06	45.78	74.00	-28.22	peak	H
6390.000	32.14	17.08	49.22	74.00	-24.78	peak	H
3114.000	36.68	6.16	42.84	74.00	-31.16	peak	V
4570.000	34.55	11.06	45.61	74.00	-28.39	peak	V
6397.000	33.45	17.10	50.55	74.00	-23.45	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	FCC Part 15C			Test Distance:	3m		
Test item:	Radiated Emission			Power:	AC 120V/60Hz		
Model Number:	NBE-M5			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Mode:	4			Date:	06/04/2013		
Frequency:	5795MHz			Test By:	Fly Lu		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3149.000	36.91	6.24	43.15	74.00	-30.85	peak	H
4549.000	34.37	11.01	45.38	74.00	-28.62	peak	H
6390.000	32.18	17.08	49.26	74.00	-24.74	peak	H
3170.000	37.71	6.28	43.99	74.00	-30.01	peak	V
4563.000	35.18	11.05	46.23	74.00	-27.77	peak	V
6390.000	33.01	17.08	50.09	74.00	-23.91	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

Standard:	RSS-Gen	Test Distance:	3m
Test item:	Radiated Emission	Power:	AC 120V/60Hz
Model Number:	NBE-M5	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	5	Date:	06/04/2013
Modulation:	IEEE 802.11a	Test By:	Fly Lu
Frequency:	5745MHz		

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/)	Peak Limit (dBuV/m)	AVG. Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pola H / V
2911.000	36.03	5.68	41.71	74.00	54.00	-32.29	peak	H
4493.000	32.11	10.86	42.97	74.00	54.00	-31.03	peak	H
6425.000	33.03	17.18	50.21	74.00	54.00	-23.79	peak	H
3009.000	35.79	5.93	41.72	74.00	54.00	-32.28	peak	V
4535.000	33.55	10.97	44.52	74.00	54.00	-29.48	peak	V
6362.000	31.85	16.99	48.84	74.00	54.00	-25.16	peak	V

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).


2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

6 Maximum Conducted Output Power Measurement

6.1. Limit

For systems using digital modulation, the limit for peak output power is 30dBm.

6.2. Test Setup

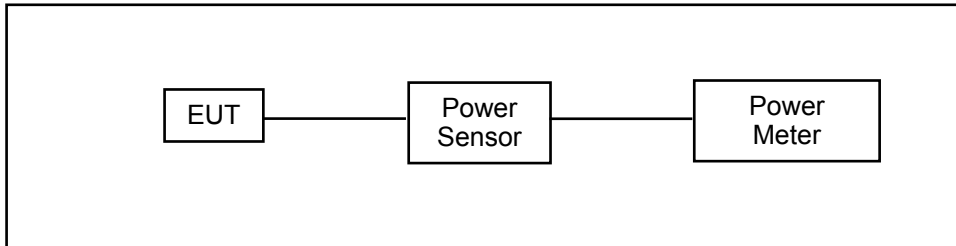

6.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	06/04/2013	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	06/04/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

6.4. Test Procedure

The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.

For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm.

The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

6.5. Test Result

Model Number	NBE-M5									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 2: IEEE 802.11a U-NII Band IV Link Mode									
Date of Test	06/04/2013							Test Site	TE05	
Frequency (MHz)	Data Rate	ANT 0				ANT1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5745	6 M	8.62	0.007	19.80	0.095	7.48	0.006	18.38	0.069	< 30
5765		8.95	0.008	19.94	0.099	8.46	0.007	19.33	0.086	< 30
5785		9.33	0.009	20.39	0.109	8.54	0.007	19.68	0.093	< 30
5805		9.19	0.008	20.17	0.104	8.58	0.007	19.76	0.095	< 30
5825		8.39	0.007	19.76	0.095	8.56	0.007	19.73	0.094	< 30
5745	54 M	7.95	0.006	20.05	0.101	6.81	0.005	18.98	0.079	< 30
5765		8.02	0.006	20.15	0.104	7.72	0.006	18.89	0.077	< 30
5785		8.69	0.007	20.21	0.105	8.03	0.006	19.36	0.086	< 30
5805		8.28	0.007	20.04	0.101	7.90	0.006	19.19	0.083	< 30
5825		7.75	0.006	20.23	0.105	7.89	0.006	19.17	0.083	< 30

Model Number	NBE-M5									
Test Item	Maximum Conducted Output Power									
Test Mode	Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode									
Date of Test	06/04/2013							Test Site	TE05	
Frequency (MHz)	Data Rate	ANT 0				ANT1				Limit (dBm)
		Average Power		Peak Power		Average Power		Peak Power		
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5745	6.5 M	8.41	0.007	19.60	0.091	6.57	0.005	17.81	0.060	< 30
5765		8.09	0.006	19.22	0.084	7.05	0.005	17.81	0.060	< 30
5785		8.48	0.007	19.83	0.096	7.69	0.006	18.78	0.076	< 30
5805		8.11	0.006	19.44	0.088	7.56	0.006	18.73	0.075	< 30
5825		7.52	0.006	18.71	0.074	7.53	0.006	18.68	0.074	< 30
5745	130 M	6.96	0.005	19.78	0.095	5.19	0.003	16.94	0.049	< 30
5765		6.77	0.005	19.51	0.089	5.96	0.004	17.70	0.059	< 30
5785		6.94	0.005	19.76	0.095	6.45	0.004	18.15	0.065	< 30
5805		6.69	0.005	19.44	0.088	6.82	0.005	18.42	0.070	< 30
5825		6.38	0.004	19.11	0.081	6.54	0.005	18.23	0.067	< 30

Model Number	NBE-M5										
Test Item	Maximum Conducted Output Power										
Test Mode	Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode										
Date of Test	06/04/2013							Test Site	TE05		
Frequency (MHz)	Data Rate	ANT 0				ANT1				Limit (dBm)	
		Average Power		Peak Power		Average Power		Peak Power			
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	(dBm)	(W)		
5755	13.5 M	7.45	0.006	20.71	0.118	4.42	0.003	17.86	0.061	< 30	
5795		7.49	0.006	20.93	0.124	5.38	0.003	18.99	0.079	< 30	
5755	270 M	5.96	0.004	19.09	0.081	3.53	0.002	16.99	0.050	< 30	
5795		6.02	0.004	19.26	0.084	4.19	0.003	17.35	0.054	< 30	

7 6dB RF Bandwidth & 99 % Occupied Bandwidth Measurement

7.1. Limit


6dB RF Bandwidth

Systems using digital modulation techniques may operate in the 2400–2483.5 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

99 % Occupied Bandwidth

N/A

7.2. Test Setup

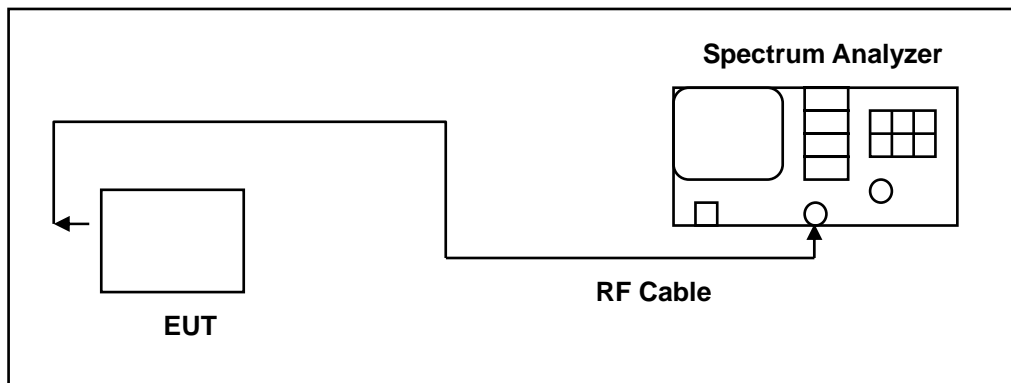

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	06/04/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

dRemark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

7.4. Test Procedure

6dB RF Bandwidth

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of Oct 2012 KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels (Channel 1, 6, 11)

99 % Occupied Bandwidth

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.

The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.




7.5. Test Result

Model Number	NBE-M5		
Test Item	6dB RF Bandwidth & 99 % Occupied Bandwidth		
Test Mode	Mode 2: IEEE 802.11a U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)
5745	16387	16434.7	> 500
5785	16364	16413.0	> 500
5825	16344	16422.1	> 500

Model Number	NBE-M5		
Test Item	6dB RF Bandwidth & 99 % Occupied Bandwidth		
Test Mode	Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)
5745	17595	17590.0	> 500
5785	17596	17588.0	> 500
5825	17310	17587.0	> 500

Model Number	NBE-M5		
Test Item	6dB RF Bandwidth & 99 % Occupied Bandwidth		
Test Mode	Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	6dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)
5755	36390	36056.6	> 500
5795	36165	36086.1	> 500

7.6. Test Graphs

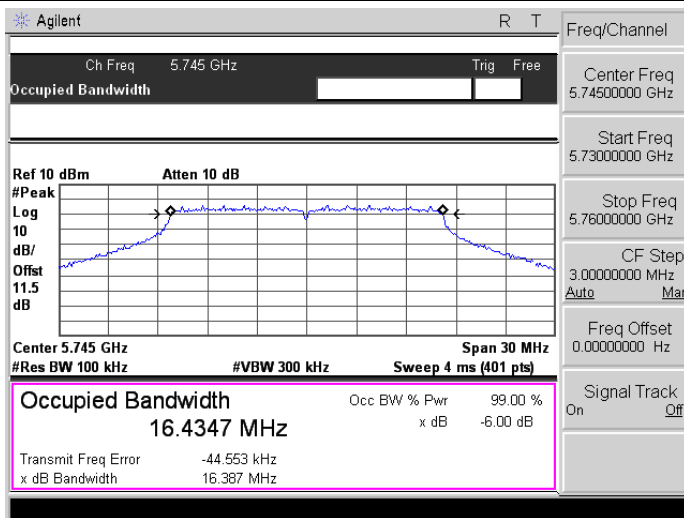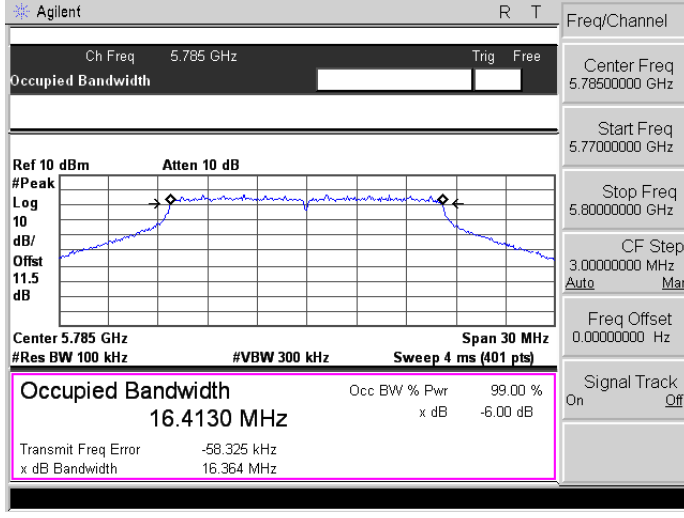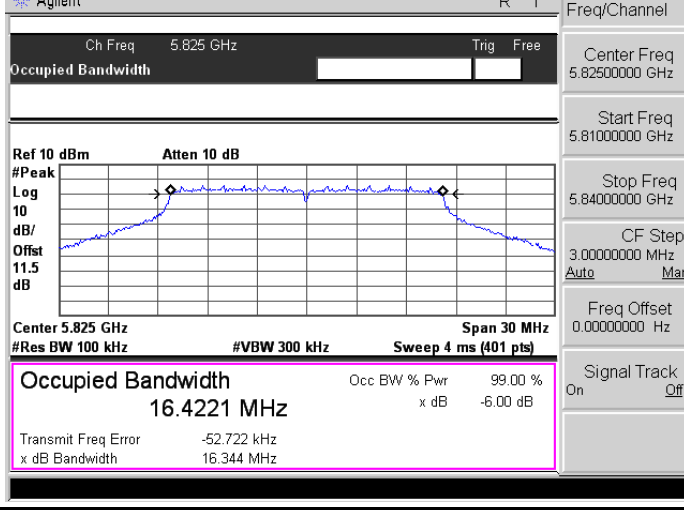Mode 2: IEEE 802.11a U-NII Band IV Link Mode	
5745	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.745 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4347 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -44.553 kHz x dB Bandwidth 16.387 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.73000000 GHz</p> <p>Stop Freq 5.76000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
5785	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.785 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4130 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -58.325 kHz x dB Bandwidth 16.364 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.77000000 GHz</p> <p>Stop Freq 5.80000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
5825	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.825 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 16.4221 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -52.722 kHz x dB Bandwidth 16.344 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.81000000 GHz</p> <p>Stop Freq 5.84000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode

<p>5745</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.745 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.5900 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -36.757 kHz x dB Bandwidth 17.595 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.73000000 GHz</p> <p>Stop Freq 5.76000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5785</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.785 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.5880 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -45.961 kHz x dB Bandwidth 17.596 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.77000000 GHz</p> <p>Stop Freq 5.80000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5825</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.825 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.5870 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -49.163 kHz x dB Bandwidth 17.310 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.81000000 GHz</p> <p>Stop Freq 5.84000000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode


5755	<p>Agilent R T</p> <p>Ch Freq 5.755 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.755 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth 36.0566 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.355 kHz x dB Bandwidth 36.390 MHz</p> <p>Freq/Channel Center Freq 5.75500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.78500000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>
5795	<p>Agilent R T</p> <p>Ch Freq 5.795 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 10 dBm Atten 10 dB</p> <p>#Peak Log 10 dB/Offset 11.5 dB</p> <p>Center 5.795 GHz Span 60 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 6.216 ms (401 pts)</p> <p>Occupied Bandwidth 36.0861 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -34.755 kHz x dB Bandwidth 36.165 MHz</p> <p>Freq/Channel Center Freq 5.79500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.82500000 GHz CF Step 6.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off</p>

8 Maximum Power Density Measurement

8.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2. Test Setup

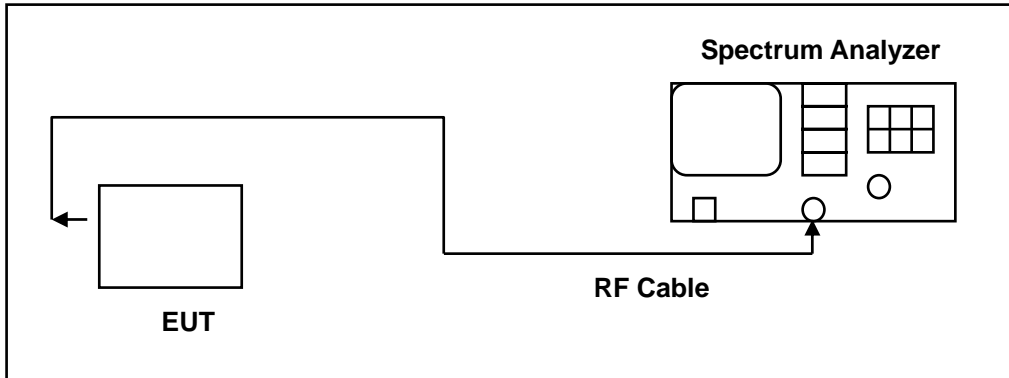

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	06/04/2013	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

8.4. Test Procedure

The EUT was setup to ANSI C63.4, 2009; tested to DTS test procedure of KDB558074D01 for compliance to FCC 47CFR 15.247 requirements.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW ≥ 3 RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.5. Test Result

Model Number	NBE-M5		
Test Item	Maximum Power Density		
Test Mode	Mode 2: IEEE 802.11a U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/100KHz)		Limit (dBm)
5745	-3.911		< 8
5785	-3.507		< 8
5825	-3.985		< 8

Model Number	NBE-M5		
Test Item	Maximum Power Density		
Test Mode	Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/100KHz)		Limit (dBm)
5745	-4.699		< 8
5785	-4.495		< 8
5825	-4.876		< 8

Model Number	NBE-M5		
Test Item	Maximum Power Density		
Test Mode	Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode		
Date of Test	06/04/2013	Test Site	TE05
Frequency (MHz)	Reading (dBm/100KHz)		Limit (dBm)
5755	-8.909		< 8
5795	-8.371		< 8


8.6. Test Graphs

Mode 2: IEEE 802.11a U-NII Band IV Link Mode	
5745	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 5.7399375 GHz -3.911 dBm Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 5.745 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p>
5785	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 5.7787225 GHz -3.507 dBm Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 5.785 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p>
5825	<p>Agilent R T Ref 15 dBm Atten 15 dB Mkr1 5.8187225 GHz -3.985 dBm Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm M1 S2 S3 FC AA Center 5.825 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p>

Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode

<p>5745</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 5.7399375 GHz 4.699 dBm</p> <p>Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 5.745 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.73150000 GHz</p> <p>Stop Freq 5.75850000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5785</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 5.7799375 GHz 4.495 dBm</p> <p>Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 5.785 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.77150000 GHz</p> <p>Stop Freq 5.79850000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>
<p>5825</p>	<p>Agilent R T</p> <p>Ref 15 dBm Atten 15 dB Mkr1 5.8200050 GHz 4.876 dBm</p> <p>Peak Log 10 dB/ Offst 11.5 dB DI 8.0 dBm</p> <p>M1 S2 S3 FC AA</p> <p>Center 5.825 GHz Span 27 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.81150000 GHz</p> <p>Stop Freq 5.83850000 GHz</p> <p>CF Step 2.70000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p>

Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode _ANT1

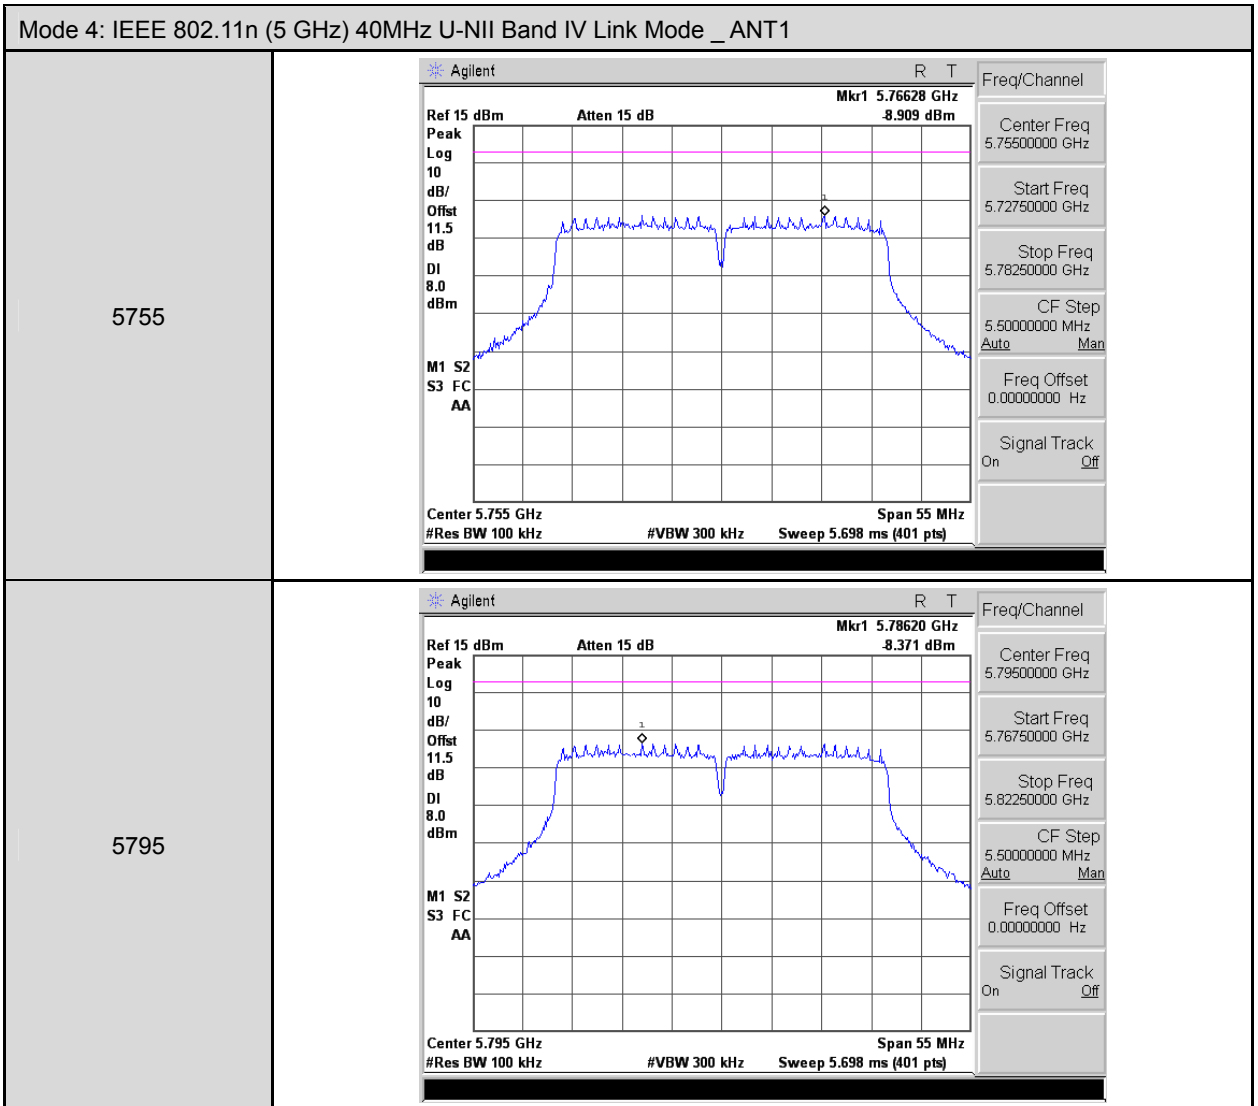


9 Out of Band Conducted Emissions Measurement

9.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

9.2. Test Setup

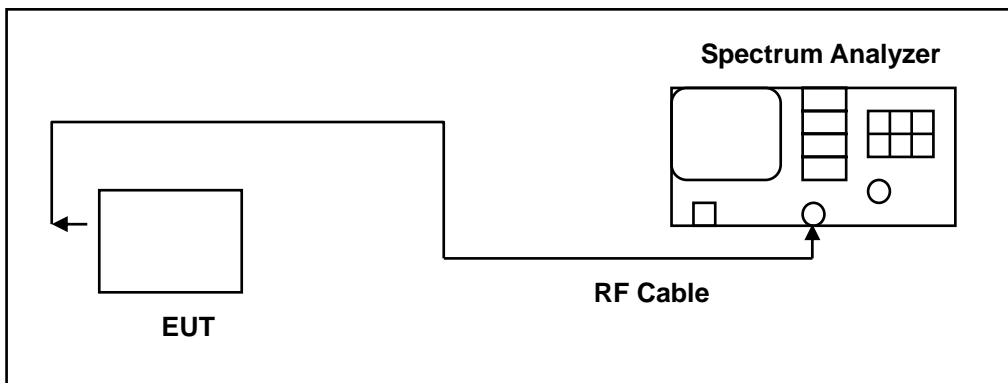

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	06/04/2013	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/09/2012	(1)
Test Site	ATL	TE05	TE05	N.C.R.	----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.

Note: N.C.R. = No Calibration Request.

9.4. Test Procedure

In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band.

The test was performed at 3 channels (Channel 1, 6, 11)


9.5. Test Graphs

Mode 2: IEEE 802.11a U-NII Band IV Link Mode											
5745	<p>Agilent 03:24:22 Jul 8, 1970</p> <p>Ref 10 dBm Atten 10 dB</p> <p>Mkr1 5.745 GHz -6.77 dBm</p> <p>#Peak Log 10 dB/Offst 11.5 dB DI -23.9 dBm LgAv</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts) Stop 40.00 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.745 GHz</td> <td>-6.77 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.745 GHz	-6.77 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.745 GHz	-6.77 dBm							
5785	<p>Agilent 03:25:50 Jul 8, 1970</p> <p>Ref 10 dBm Atten 10 dB</p> <p>Mkr1 5.785 GHz -5.13 dBm</p> <p>#Peak Log 10 dB/Offst 11.5 dB DI -23.5 dBm LgAv</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts) Stop 40.00 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.785 GHz</td> <td>-5.13 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.785 GHz	-5.13 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.785 GHz	-5.13 dBm							
5825	<p>Agilent 03:32:04 Jul 8, 1970</p> <p>Ref 10 dBm Atten 10 dB</p> <p>Mkr1 5.825 GHz -8.29 dBm</p> <p>#Peak Log 10 dB/Offst 11.5 dB DI -24.0 dBm LgAv</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts) Stop 40.00 GHz</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.825 GHz</td> <td>-8.29 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.825 GHz	-8.29 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.825 GHz	-8.29 dBm							

Mode 3: IEEE 802.11n (5 GHz) 20MHz U-NII Band IV Link Mode

<p>5745</p>	<p>Agilent 03:28:17 Jul 8, 1970 R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 5.745 GHz -8.23 dBm</p> <p>#Peak Log 10 dB/ Offst 11.5 dB DI -24.7 dBm LgAv</p> <p>Start 30 MHz Stop 40.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.745 GHz</td> <td>-8.23 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p> <p>Freq/Channel Center Freq 20.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 40.0000000 GHz CF Step 3.99700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.745 GHz	-8.23 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.745 GHz	-8.23 dBm							
<p>5785</p>	<p>Agilent 03:29:16 Jul 8, 1970 R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 5.785 GHz -8.36 dBm</p> <p>#Peak Log 10 dB/ Offst 11.5 dB DI -24.5 dBm LgAv</p> <p>Start 30 MHz Stop 40.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.785 GHz</td> <td>-8.36 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p> <p>Freq/Channel Center Freq 20.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 40.0000000 GHz CF Step 3.99700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.785 GHz	-8.36 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.785 GHz	-8.36 dBm							
<p>5825</p>	<p>Agilent 03:30:16 Jul 8, 1970 R T</p> <p>Ref 10 dBm Atten 10 dB Mkr1 5.825 GHz -8.97 dBm</p> <p>#Peak Log 10 dB/ Offst 11.5 dB DI -24.9 dBm LgAv</p> <p>Start 30 MHz Stop 40.00 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 3.82 s (8192 pts)</p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Type</th> <th>X Axis</th> <th>Amplitude</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>(1)</td> <td>Freq</td> <td>5.825 GHz</td> <td>-8.97 dBm</td> </tr> </tbody> </table> <p>Copyright 2000-2007 Agilent Technologies</p> <p>Freq/Channel Center Freq 20.0150000 GHz Start Freq 30.0000000 MHz Stop Freq 40.0000000 GHz CF Step 3.99700000 GHz Auto Man Freq Offset 0.0000000 Hz Signal Track On Off</p>	Marker	Trace	Type	X Axis	Amplitude	1	(1)	Freq	5.825 GHz	-8.97 dBm
Marker	Trace	Type	X Axis	Amplitude							
1	(1)	Freq	5.825 GHz	-8.97 dBm							

Mode 4: IEEE 802.11n (5 GHz) 40MHz U-NII Band IV Link Mode

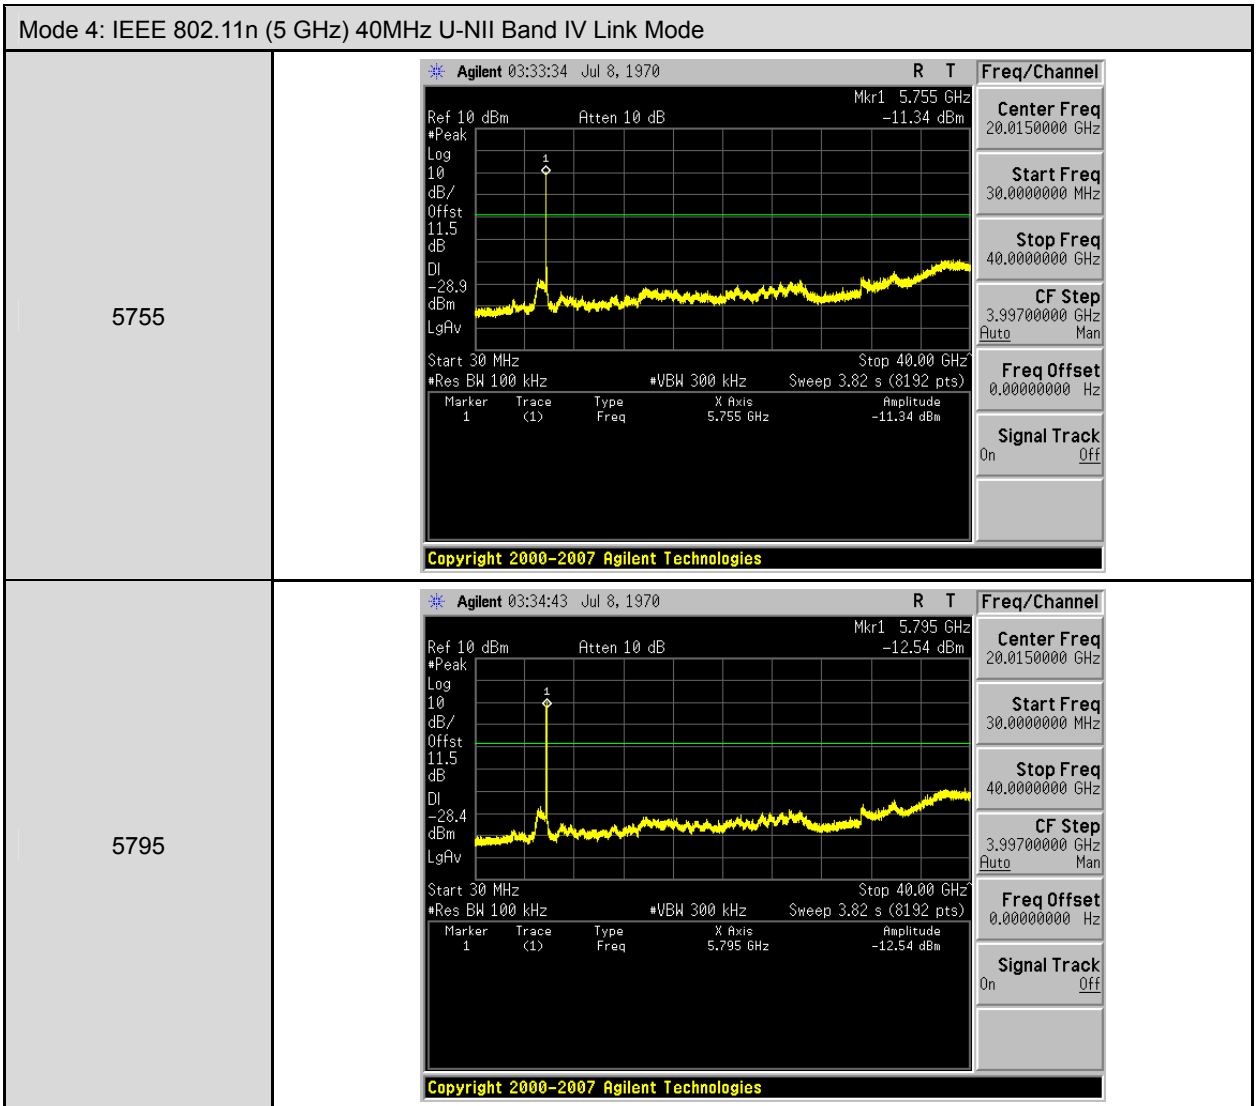

10 Antenna Measurement

10.1.Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2.Antenna Connector Construction

The antenna used in this product is Dish antenna. And the maximum Gain of this antenna is 25 dBi.

Following 15.247(b)(4) (ii), systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.