



427 West 12800 South
 Draper, UT 84020

Test Report Certification

FCC ID	SWX-U7PROM
ISED ID	6545A-U7PROM
Equipment Under Test	U7-Pro-Max
Test Report Serial Number	TR8850_01
Date of Tests	9, 24 January; 5, 17 February; 6 – 7 March 2024
Report Issue Date	12 March 2024

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	U7-Pro-Max
FCC ID	SWX-U7PROM
ISED ID	6545A-U7PROM


On this 16th day of February 2024, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory



Written By: Kimberly Rodriguez



Reviewed By: Richard L. Winter

Revision History		
Revision	Description	Date
01	Original Report Release	12 March 2024

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT.....	6
2.2	Description of EUT.....	6
2.3	EUT and Support Equipment.....	7
2.4	Interface Ports on EUT.....	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	8
2.7	EUT Exercise Software.....	8
2.8	Block Diagram of Test Configuration.....	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	9
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	10
3.5	Test Location.....	10
4	Test Equipment.....	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions.....	12
4.4	Contention Base Protocol Tests.....	13
4.5	Equipment Calibration.....	14
4.6	Measurement Uncertainty.....	14
5	Test Results.....	15
5.1	§15.203 Antenna Requirements.....	15
5.2	Conducted Emissions at Mains Ports Data.....	16
5.3	§15.403(i) 26 dB Emissions Bandwidth.....	18
5.4	§15.407(a)(3) Maximum Average Output Power.....	19
5.5	§15.407(b)(7) Spurious Emissions.....	21
5.6	§15.407(a) Maximum Power Spectral Density.....	28
5.7	§15.407(d) Contention Based Protocol.....	34

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	U7-Pro-Max
Serial Number	1FB64B
Dimensions (cm)	20.6 x 20.6 x 4.6

2.2 Description of EUT

The U7-Pro-Max is a PoE powered WiFi 7 access point with a 2.5 GbE PoE port. The U7-Pro-Max provides a 12.2 Gbps aggregate throughput rate. The U7-Pro-Max transmits in the 2.4 GHz, 5 GHz, and 6 GHz frequency bands and uses integral antennas and a dedicated spectral scanning radio. The U7-Pro-Max is powered by an 802.3at PoE power adapter. The U7-Pro-Max has a receiver York Scanner Module.

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

The table below show the channels used within the different modulation bandwidths.

Band	Modulation Bandwidth	Frequency (MHz)	Maximum Power Setting
UNII-8	be (EHT20)	6895	TP10
		7015	TP10
		7115	TP10
	be (EH40)	6925	TP13
		7005	TP14
		7085	TP13
	be (EHT80)	6945	TP16
		7025	TP17
	be (EHT160)	6985	TP19
	be (EHT320)	6905	TP20

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: U7-Pro-Max SN: 1FB64B	Access Point	PoE Input / Shielded Cat 5E cable
BN: UBIQUITI MN: GP-h480-065G SN: N/A	PoE Injector	PoE Output / Shielded Cat 5E to U7-Pro-Max, and Ethernet / unshielded Cat 5E to PC
BN: DELL MN: XPS SN: N/A	Laptop PC	Ethernet / un-shielded Cat 5E

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
PoE Input	1	7m Shielded Cat 5E
PoE Output (PoE Injector)	1	7m Shielded Cat 5E to U7-Pro- Max PoE Input
LAN (PoE Injector)	1	unshielded Cat 5E to Laptop PC
AC (PoE Injector)	1	3 Conductor power cord to AC mains/80cm

2.5 Operating Environment

Power Supply	120 VAC
AC Mains Frequency	60 Hz
Temperature	20.6 – 23.3 °C
Humidity	14.24 – 23.86 %
Barometric Pressure	1024 mBar

2.6 Operating Modes

The U7-Pro-Max was tested using test software in order to enable to constant transmission. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11ax were investigated. All measurements are reported with the worst-case mode (802.11ax) unless otherwise stated.

This device does not support Channel Puncturing.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

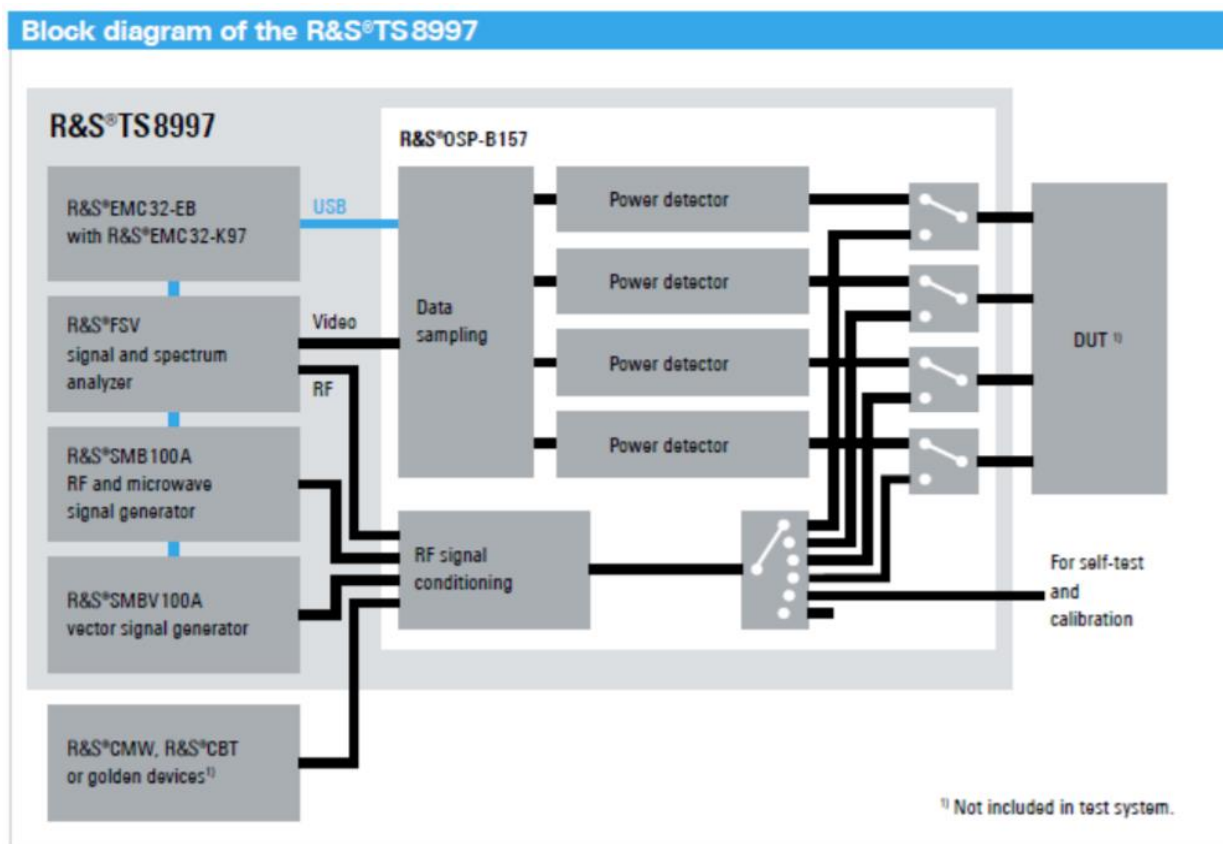


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

3.3 FCC Part 15, Subpart E

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.203	N/A	Antenna requirements	Structural Requirement	Compliant
15.207	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(c)	RSS-247 §6.2.2, §6.2.3	Bandwidth Requirement	6875 to 7115	Compliant
15.407(e)	RSS-247 §6.2.2, §6.2.3	Peak Output Power ¹	6875 to 7115	Compliant
15.407(f)	RSS-247 §6.2.2, §6.2.3	Antenna Conducted Spurious Emissions ¹	0.009 to 40000	N/A
15.407(g)	RSS-247 §6.2.2, §6.2.3	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(h)	RSS-247 §6.2.2, §6.2.3	Peak Power Spectral Density ¹	6875 to 7115	Compliant
15.407(d)	RSS-247 §6.2.2, §6.2.3	Contention Based Protocol	6875 to 7115	Compliant
The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033, KDB 987594 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.				

Note ¹: Various RU modes were considered for RF Power, PSD, and Spurious Emissions, and the "single client" RU mode is the worst case - the results herein are "single client" RU mode.

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-meter and 10-meter chamber located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2024. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2024.

Unified Compliance Laboratory has been assigned Designation Number US5037 by the FCC and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	7/13/2023	7/13/2024
LISN	AFJ	LS16C/10	UCL-2512	5/26/2023	5/26/2024
ISN	Teseq	ISN T800	UCL-2974	6/27/2022	6/27/2024
LISN	AFJ	LS16C\10	UCL-6749	1/29/2024	1/29/2025
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

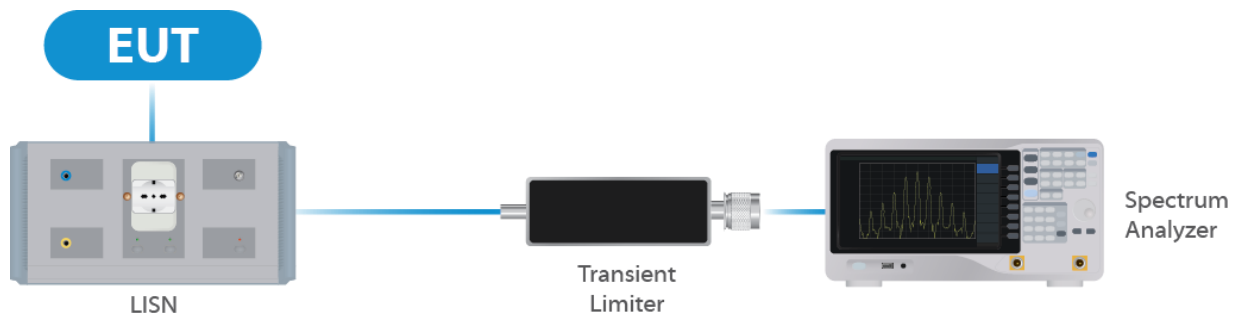


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	11/27/2023	11/27/2024
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	2/22/2023	3/20/2024
Switch Extension	R&S	OSP-150W	UCL-2870	2/22/2023	2/22/2024

Table 2: List of equipment used for Direct Connect at the Antenna Port

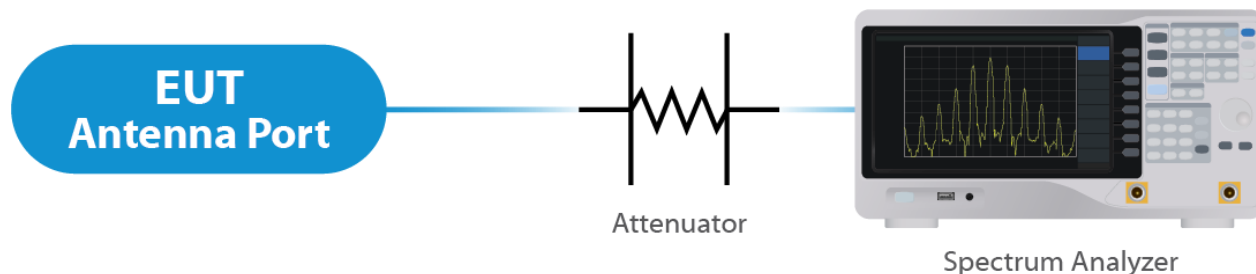


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	1/25/2024	1/29/2025
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	1/19/2024	1/19/2026
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3062	9/13/2022	9/13/2024
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3071	6/08/2022	6/22/2024
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	9/22/2022	9/22/2024
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	1/27/2023	1/27/2025
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	6/09/2022	6/09/2024
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	1/19/2024	1/19/2026
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

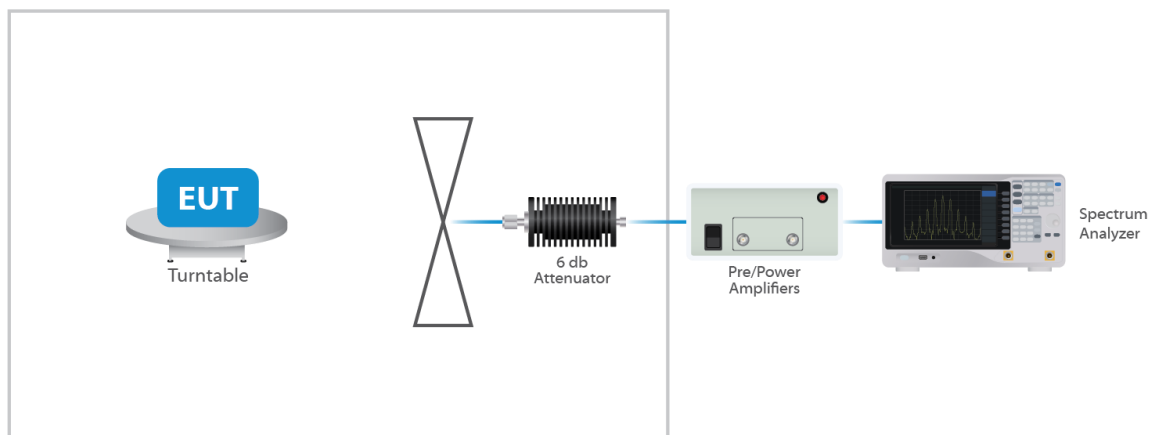


Figure 3: Radiated Emissions Test

4.4 Contention Base Protocol Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Keysight	N9010B EXA	UCL-7069	4/25/2023	4/25/2024
Signal Generator	Keysight	MXG-B	UCL-6291	6/29/2023	6/29/2024
MIMO Test Set	Keysight	X8750A	UCL-7373	9/19/2023	9/19/2024

Table 4: List of equipment used for Direct Connect at the Antenna Port

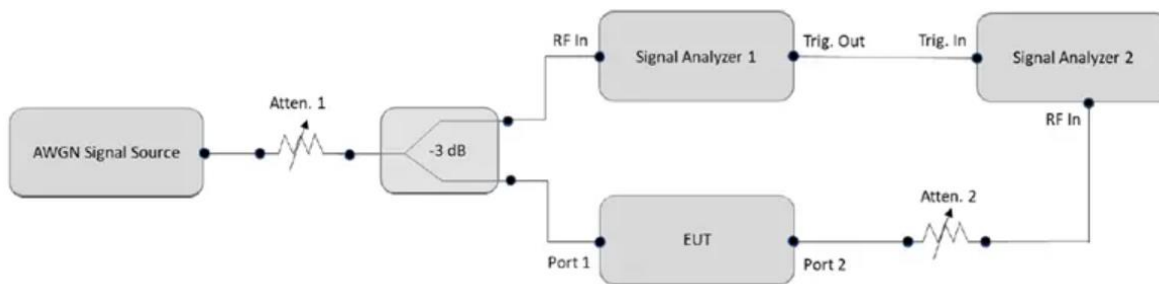


Figure 1. CBP conducted test setup diagram. Source: KDB 987594 D02 V01r01

Figure 4: Contention Base Protocol Test

4.5 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.6 Measurement Uncertainty

Test	Uncertainty (\pm dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements

The EUT uses an integrated antenna structure. Per the manufacturer, the Maximum gain of the antenna per chain is 5.9 dBi.

This is an 802.11 device and utilizes CDD as described in KDB 662911 D01. The antenna is not user replaceable. For CDD transmissions, directional gain is calculated as follows.

Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB

NANT = number of transmit antennas and

NSS = number of spatial streams. NSS = 1 considered worst case.

For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $\text{NANT} \leq 4$;


For PSD measurements when $\text{Nss}=1$: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB + Antenna Gain (dBi). Or $3.01 \text{ dB} + 5.9 \text{ dBi} = 8.91 \text{ dBi}$.

Results


The EUT complied with the specification

5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

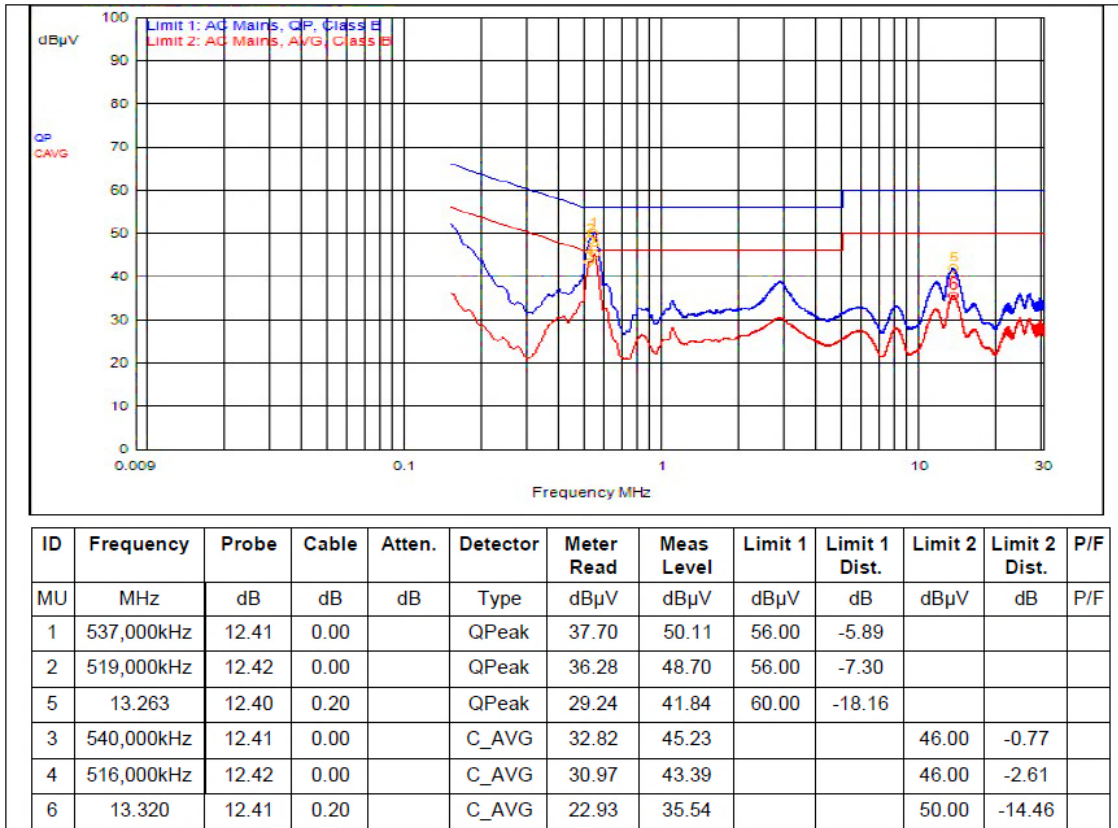

5.2.2 Neutral

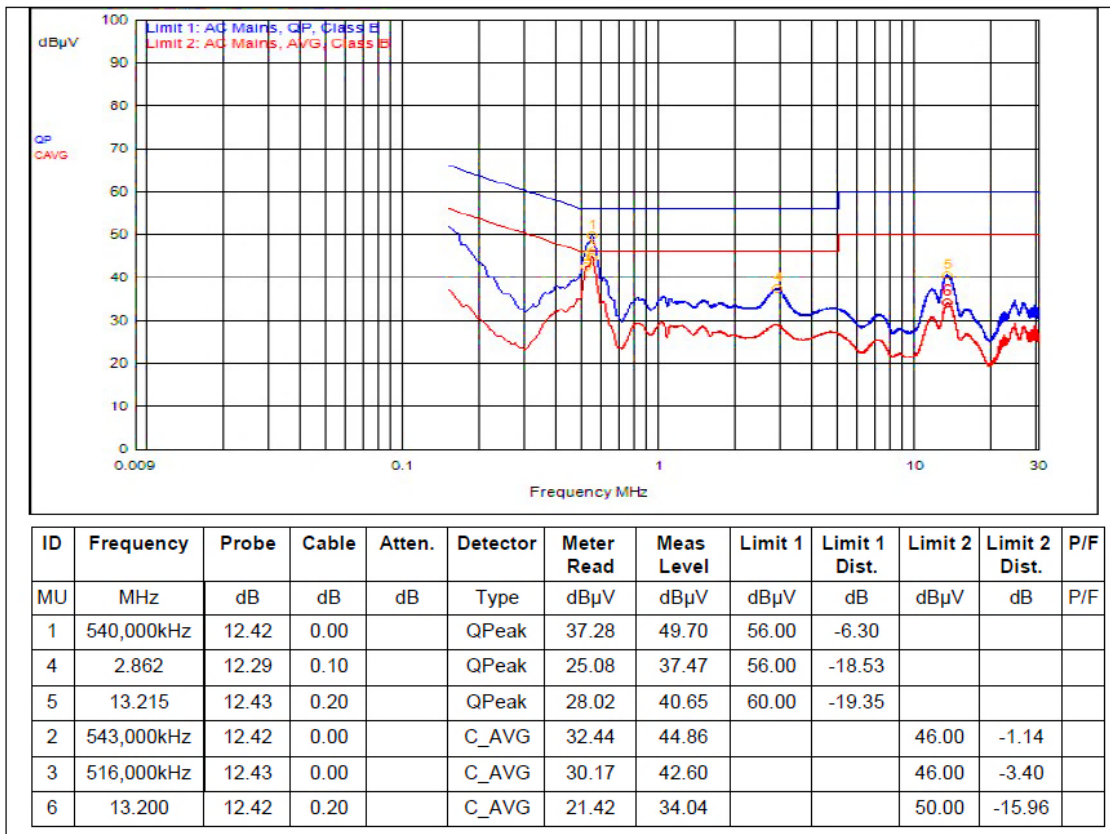

Result

The EUT complied with the specification limit.

5.3 §15.403(i) 26 dB Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 66291 D01. Please see associated annex for details on instrument settings.

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)
20	6895	19.10	23.20
20	7015	19.10	23.00
20	7115	19.10	23.30
40	6925	38.25	44.58
40	7005	38.25	44.88
40	7085	38.25	44.73
80	6945	78.50	86.50
80	7025	78.00	87.50
160	6985	158.00	166.00
320	6905	317.50	337.50

Result

All chains were tested and the highest bandwidth per chain is reported above.

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

5.4 §15.407(a)(3) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 789033 Section II. E.2. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average RF conducted output power measured for this device was 22.18 dBm or 165.2 mW. The limit is 30 dBm EIRP, or 1 Watt EIRP. The antenna has a gain of 5.9 dBi.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power *	EIRP	Measured PSD
EHT20	6895	Mcs0_Nss2	13	15.23	21.13	-1.16
EHT20	7015	Mcs0_Nss2	14	14.61	20.51	-1.78
EHT20	7115	Mcs0_Nss2	14	14.29	20.19	-1.77
EHT40	6925	Mcs0_Nss2	16	17.66	23.56	-1.61
EHT40	7005	Mcs0_Nss2	18	18.43	24.33	-1.03
EHT40	7085	Mcs0_Nss2	18	17.82	23.72	-1.47
EHT80	6945	Mcs0_Nss2	20	21.03	26.93	-1.30
EHT80	7025	Mcs0_Nss2	21	21.26	27.16	-1.14
EHT160	6985	Mcs0_Nss2	21	21.91	27.81	-2.44
EHT320	6905	Mcs0_Nss2	20	22.18	28.08	-6.17

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power *	EIRP	Measured PSD
EHT20	6895	Mcs0_Nss1	10	12.15	18.05	-4.27
EHT20	7015	Mcs0_Nss1	10	12.24	18.14	-4.17
EHT20	7115	Mcs0_Nss1	10	11.44	17.34	-4.46
EHT40	6925	Mcs0_Nss1	13	14.93	20.83	-4.51
EHT40	7005	Mcs0_Nss1	14	15.89	21.79	-3.92
EHT40	7085	Mcs0_Nss1	13	14.42	20.32	-4.76
EHT80	6945	Mcs0_Nss1	16	17.95	23.85	-4.51
EHT80	7025	Mcs0_Nss1	17	18.57	24.47	-3.89
EHT160	6985	Mcs0_Nss1	19	20.88	26.78	-4.43

Result

In the configuration tested, the maximum average RF outpower was less than 1 watt EIRP; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in attached Annex).

5.5 §15.407(b)(7) Spurious Emissions

5.5.1 Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The graphs show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency and upper frequency. Shown below are plots with the EUT turned to the upper and lower channels with the antenna gain of 5.9 dBi accounted for. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be remain below -27 dBm EIRP.

Result

Conducted spurious emissions were attenuated below the limit; therefore, the EUT complies with the specification.

5.5.2 Radiated Spurious Emissions in the Restricted Bands of § 15.205


The EUT uses various power settings based on the channel in use. In order to reduce test time, the radiated spurious emissions at the lowest, middle, and highest channel were measured at the maximum power of TP23.

Correction Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain, and is added to the Receiver reading.

Result

All emissions in the restricted bands of § 15.205 met the limits specified in § 15.209; therefore, the EUT complies with the specification. See Annex for Conducted Band edge plots.


EUT

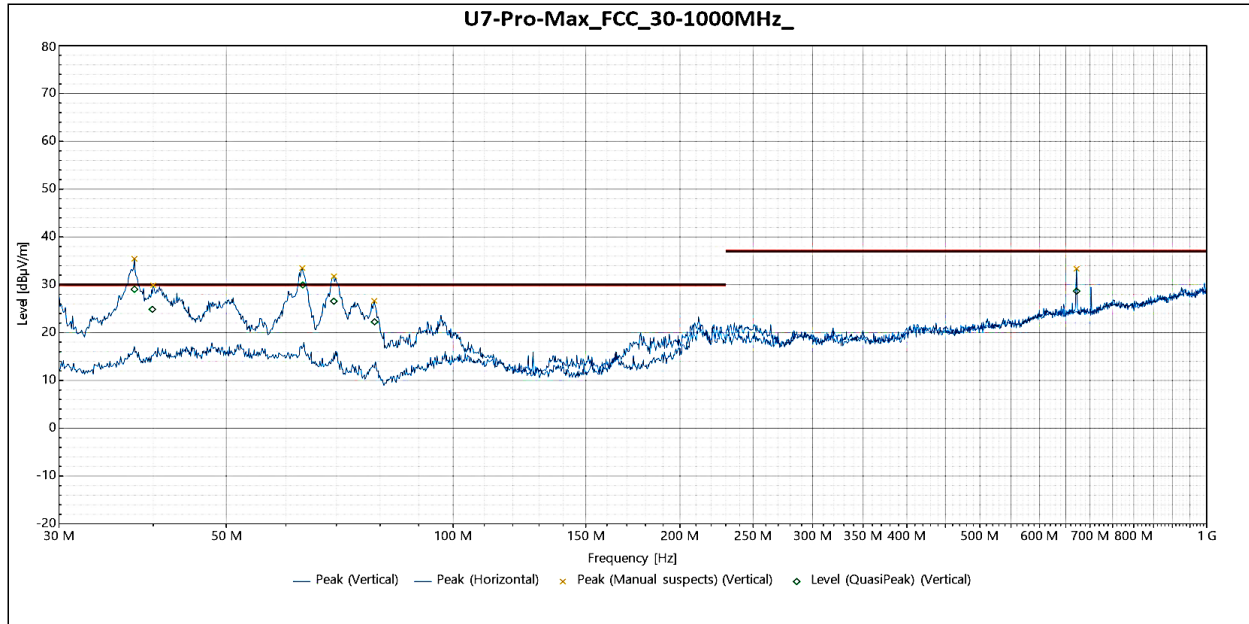

QuasiPeak


Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
37.769 MHz	29.054	30	-0.946	215	1.821	Vertical	-14.696
39.89 MHz	24.87	30	-5.13	75	1.108	Vertical	-13.531
63.164 MHz	29.972	30	-0.028	123	3.455	Vertical	-14.834
69.458 MHz	26.573	30	-3.427	99	3.459	Vertical	-16.754
78.66 MHz	22.249	30	-7.751	272	3.715	Vertical	-19.447
671.8 MHz	28.679	37	-8.321	77	2.965	Vertical	-6.121
No significant emissions	-	-	-	-	-	Horizontal	-

Table 5: Radiated Emissions within 30MHz - 1GHz

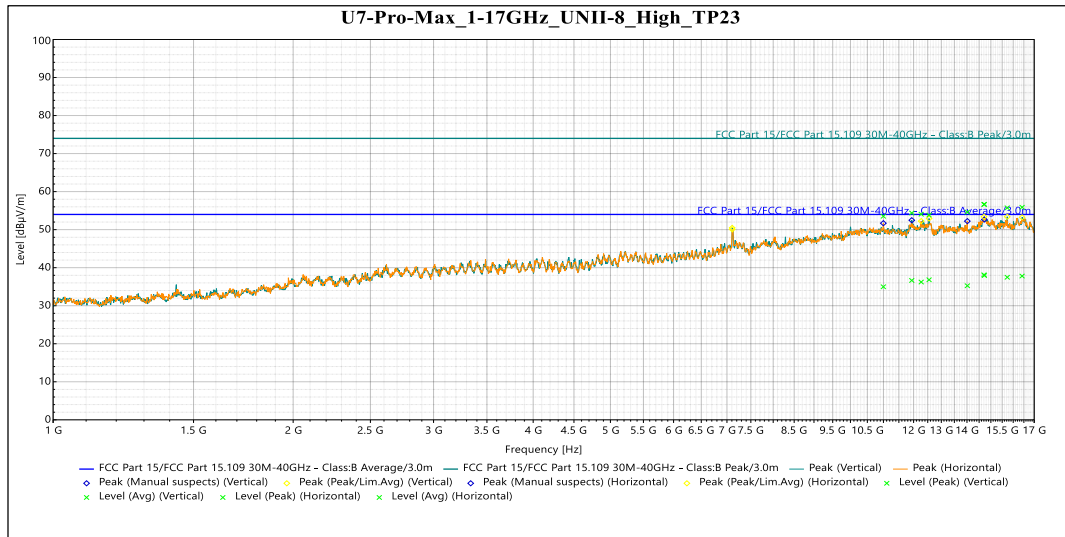

Frequency	SR #	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
11.937 GHz	Peak	54.377	74	-19.623	198	2.57	Vertical	16.508
12.549 GHz	Peak	53.841	74	-20.159	101	3.803	Vertical	16.626
14.722 GHz	Peak	56.665	74	-17.335	70	1.521	Vertical	17.245
15.728 GHz	Peak	55.738	74	-18.262	140	1.638	Vertical	15.983
16.416 GHz	Peak	55.888	74	-18.112	348	1.643	Vertical	18.106
11.937 GHz	AVG	36.646	54	-17.354	198	2.57	Vertical	16.508
12.549 GHz	AVG	36.821	54	-17.179	101	3.803	Vertical	16.626
14.722 GHz	AVG	37.94	54	-16.06	70	1.521	Vertical	17.245
15.728 GHz	AVG	37.484	54	-16.516	140	1.638	Vertical	15.983
16.416 GHz	AVG	37.796	54	-16.204	348	1.643	Vertical	18.106
10.997 GHz	Peak	53.528	74	-20.472	296	3.448	Horizontal	15.456
12.267 GHz	Peak	54.066	74	-19.934	150	3.1	Horizontal	16.442
14.016 GHz	Peak	54.609	74	-19.391	259	1.522	Horizontal	15.284
14.706 GHz	Peak	56.627	74	-17.373	296	3.621	Horizontal	17.394
10.997 GHz	AVG	34.98	54	-19.02	296	3.448	Horizontal	15.456
12.267 GHz	AVG	36.228	54	-17.772	150	3.1	Horizontal	16.442
14.016 GHz	AVG	35.252	54	-18.748	259	1.522	Horizontal	15.284
14.706 GHz	AVG	38.129	54	-15.871	296	3.621	Horizontal	17.394


Table 6: Transmitting on the Highest Frequency 7115 MHz

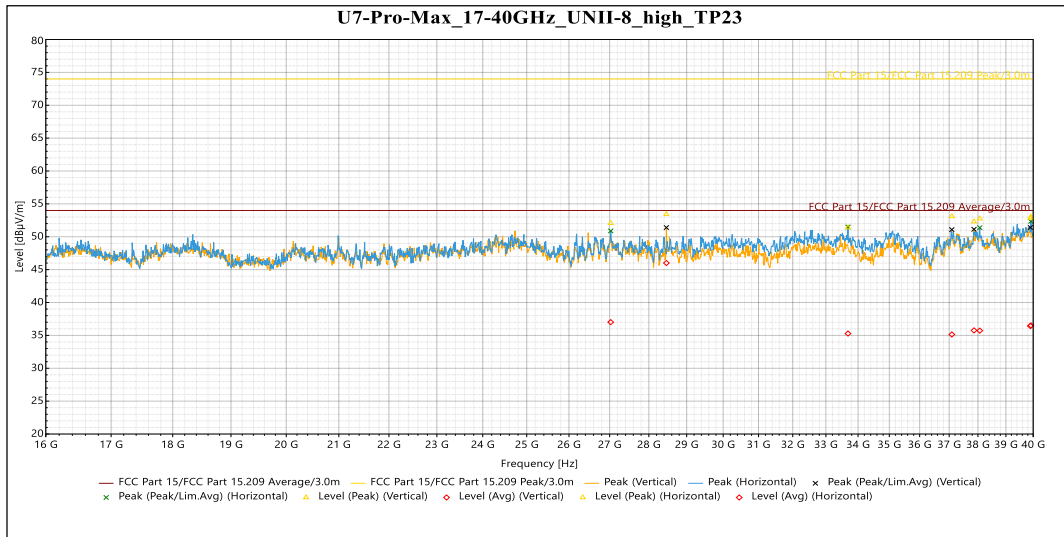

Frequency	SR #	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
28.46 GHz	Peak	53.416	74	-20.584	351	Vertical	-0.392
37.091 GHz	Peak	53.102	74	-20.898	81	Vertical	4.236
37.863 GHz	Peak	52.295	74	-21.705	244	Vertical	3.728
39.895 GHz	Peak	52.848	74	-21.152	347	Vertical	3.187
28.46 GHz	AVG	46.014	54	-7.986	351	Vertical	-0.392
37.091 GHz	AVG	35.136	54	-18.864	81	Vertical	4.236
37.863 GHz	AVG	35.756	54	-18.244	244	Vertical	3.728
39.895 GHz	AVG	36.419	54	-17.581	347	Vertical	3.187
27.027 GHz	Peak	52.061	74	-21.939	2	Horizontal	1.933
33.684 GHz	Peak	51.399	74	-22.601	211	Horizontal	2.251
38.066 GHz	Peak	52.759	74	-21.241	221	Horizontal	3.258
39.915 GHz	Peak	53.013	74	-20.987	102	Horizontal	2.872
27.027 GHz	AVG	37.012	54	-16.988	2	Horizontal	1.933
33.684 GHz	AVG	35.276	54	-18.724	211	Horizontal	2.251
38.066 GHz	AVG	35.722	54	-18.278	221	Horizontal	3.258
39.915 GHz	AVG	36.516	54	-17.484	102	Horizontal	2.872

Table 7: Transmitting on the Highest Frequency 7115 MHz


York Module

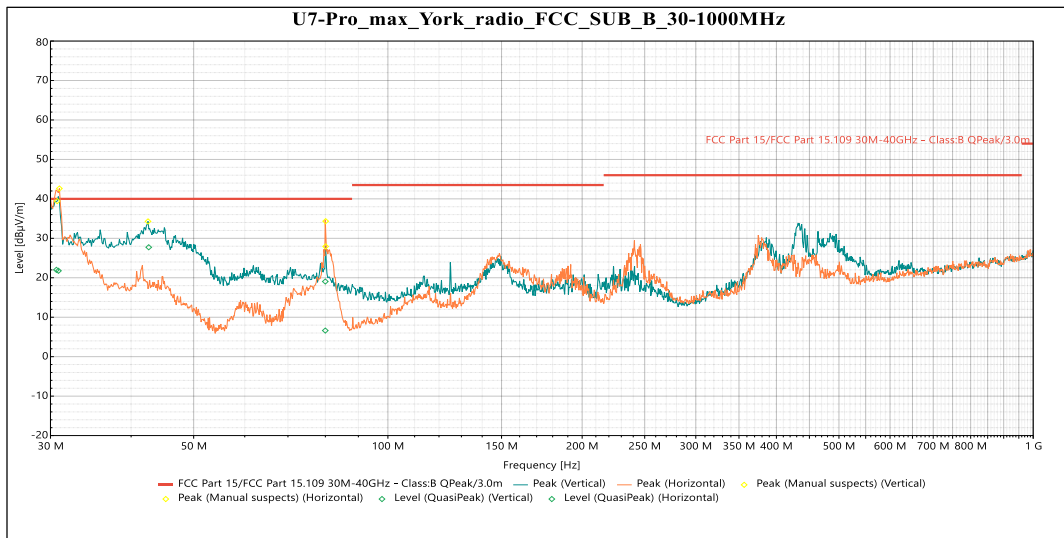

QuasiPeak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.64 MHz	22.014	40	-17.986	307	1.128	Vertical	-8.155
42.595 MHz	27.726	40	-12.274	36	1.132	Vertical	-16.243
79.988 MHz	19.05	40	-20.95	289	2.207	Vertical	-20.517
30.865 MHz	21.773	40	-18.227	265	3.65	Horizontal	-8.335
79.98 MHz	6.624	40	-33.376	296	3.868	Horizontal	-20.517

Table 8: Radiated Emissions 30 – 1000 MHz

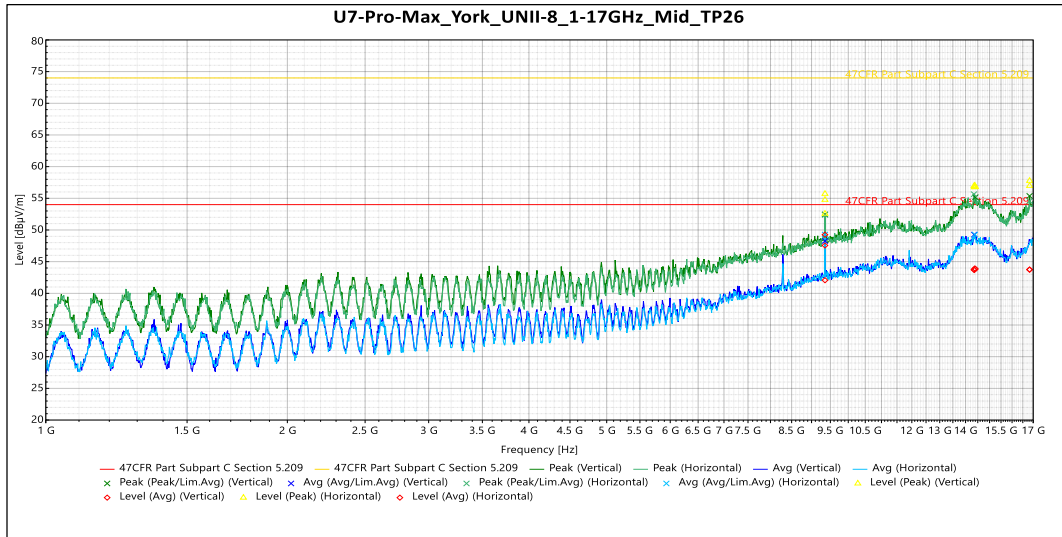

Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
9.3534 GHz	54.771	74	-19.229	166	1.63	Vertical	5.27
14.353 GHz	56.737	74	-17.263	99	1.63	Vertical	11.895
14.402 GHz	56.788	74	-17.212	127	4	Vertical	12.031
16.824 GHz	56.968	74	-17.032	3	3.808	Vertical	13.141
9.3534 GHz	55.714	74	-18.286	130	3.319	Horizontal	5.27
9.3539 GHz	52.572	74	-21.428	129	3.316	Horizontal	5.27
14.344 GHz	56.925	74	-17.075	197	2.824	Horizontal	11.815
14.378 GHz	57.016	74	-16.984	132	3.812	Horizontal	11.981
16.825 GHz	57.76	74	-16.24	19	3.81	Horizontal	13.154

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
9.3534 GHz	47.556	54	-6.444	166	1.63	Vertical	5.27
14.353 GHz	43.681	54	-10.319	99	1.63	Vertical	11.895
14.402 GHz	43.838	54	-10.162	127	4	Vertical	12.031
16.824 GHz	43.74	54	-10.26	3	3.808	Vertical	13.141
9.3534 GHz	49.252	54	-4.748	130	3.319	Horizontal	5.27
9.3539 GHz	42.067	54	-11.933	129	3.316	Horizontal	5.27
14.344 GHz	43.764	54	-10.236	197	2.824	Horizontal	11.815
14.378 GHz	43.925	54	-10.075	132	3.812	Horizontal	11.981
16.825 GHz	43.755	54	-10.245	19	3.81	Horizontal	13.154

Table 9: Radiated Emissions 1 – 17 GHz on the Middle Frequency (worse case)

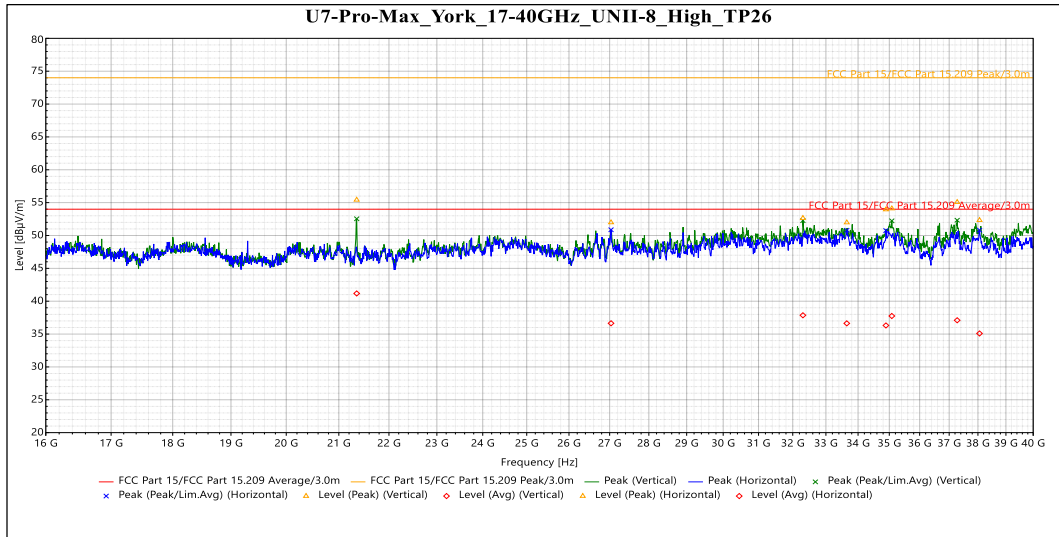
Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
21.351 GHz	55.419	74	-18.581	81	Vertical	0.342
32.304 GHz	52.641	74	-21.359	218	Vertical	1.918
35.082 GHz	54.103	74	-19.897	140	Vertical	3.557
37.275 GHz	55.068	74	-18.932	187	Vertical	4.087
27.035 GHz	51.984	74	-22.016	44	Horizontal	1.725
33.646 GHz	51.97	74	-22.03	172	Horizontal	2.23
34.891 GHz	53.953	74	-20.047	17	Horizontal	3.264
38.056 GHz	52.331	74	-21.669	230	Horizontal	3.245

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
21.351 GHz	41.176	54	-12.824	81	Vertical	0.342
32.304 GHz	37.861	54	-16.139	218	Vertical	1.918
35.082 GHz	37.749	54	-16.251	140	Vertical	3.557
37.275 GHz	37.103	54	-16.897	187	Vertical	4.087
27.035 GHz	36.64	54	-17.36	44	Horizontal	1.725
33.646 GHz	36.627	54	-17.373	172	Horizontal	2.23
34.891 GHz	36.305	54	-17.695	17	Horizontal	3.264
38.056 GHz	35.087	54	-18.913	230	Horizontal	3.245

Table 10: Radiated Emissions 17 – 40 GHz on the Highest Frequency (worse case)

5.6 §15.407(a) Maximum Power Spectral Density

All chains were measured and summed under the guidance of KDB 789033 Section II. F. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 5 dBm EIRP in any 1 MHz band during any time interval of continuous transmission. As per KDB 662911, When the EUT is using spatial-multiplexing in HE modes, there is not additional array gain to accommodate. When the EUT uses Nss=1 data rates, the antenna gain is 5.9 dBi + Array gain of 3.01 dB which is a total of 8.91 dBi.

Results of this testing are summarized.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power *	Measured PSD
EHT20	6895	Mcs0_Nss2	13	15.23	-1.16
EHT20	7015	Mcs0_Nss2	14	14.61	-1.78
EHT20	7115	Mcs0_Nss2	14	14.29	-1.77
EHT40	6925	Mcs0_Nss2	16	17.66	-1.61
EHT40	7005	Mcs0_Nss2	18	18.43	-1.03
EHT40	7085	Mcs0_Nss2	18	17.82	-1.47
EHT80	6945	Mcs0_Nss2	20	21.03	-1.30
EHT80	7025	Mcs0_Nss2	21	21.26	-1.14
EHT160	6985	Mcs0_Nss2	21	21.91	-2.44
EHT320	6905	Mcs0_Nss2	20	22.18	-6.17

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power *	Measured PSD
EHT20	6895	Mcs0_Nss1	10	12.15	-4.27
EHT20	7015	Mcs0_Nss1	10	12.24	-4.17
EHT20	7115	Mcs0_Nss1	10	11.44	-4.46
EHT40	6925	Mcs0_Nss1	13	14.93	-4.51
EHT40	7005	Mcs0_Nss1	14	15.89	-3.92
EHT40	7085	Mcs0_Nss1	13	14.42	-4.76

EHT80	6945	Mcs0_Nss1	16	17.95	-4.51
EHT80	7025	Mcs0_Nss1	17	18.57	-3.89
EHT160	6985	Mcs0_Nss1	19	20.88	-4.43

Result

The maximum average power spectral density was less than the limit of 5 dBm EIRP; therefore, the EUT complies with the specification.

5.6.1 OFDMA RU Check

If EUT supports OFDMA multiple partial Resource Unit (RU) configurations were verified and the worst case mode was tested.

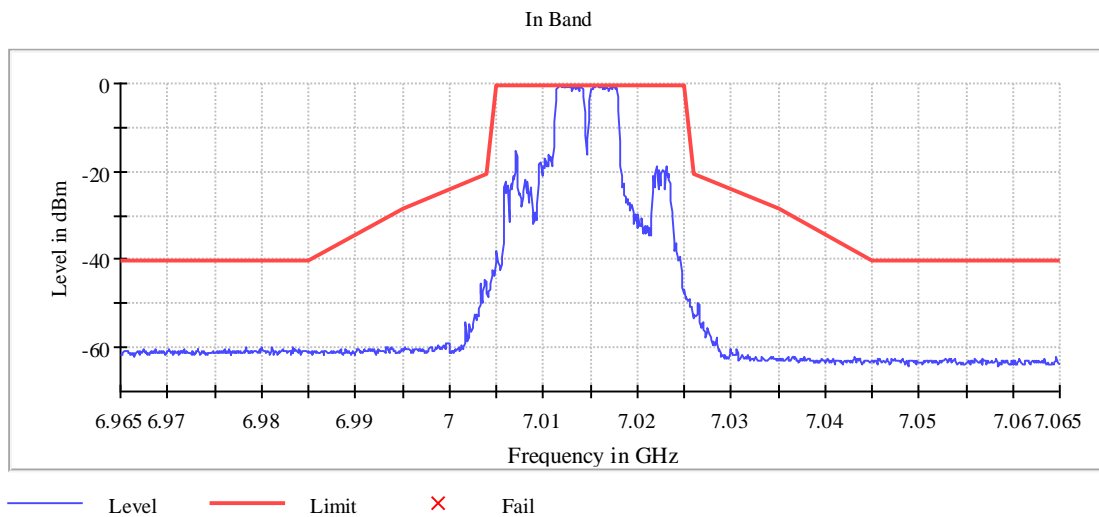


Figure 5: 7015 20MHz RU Verification - Center

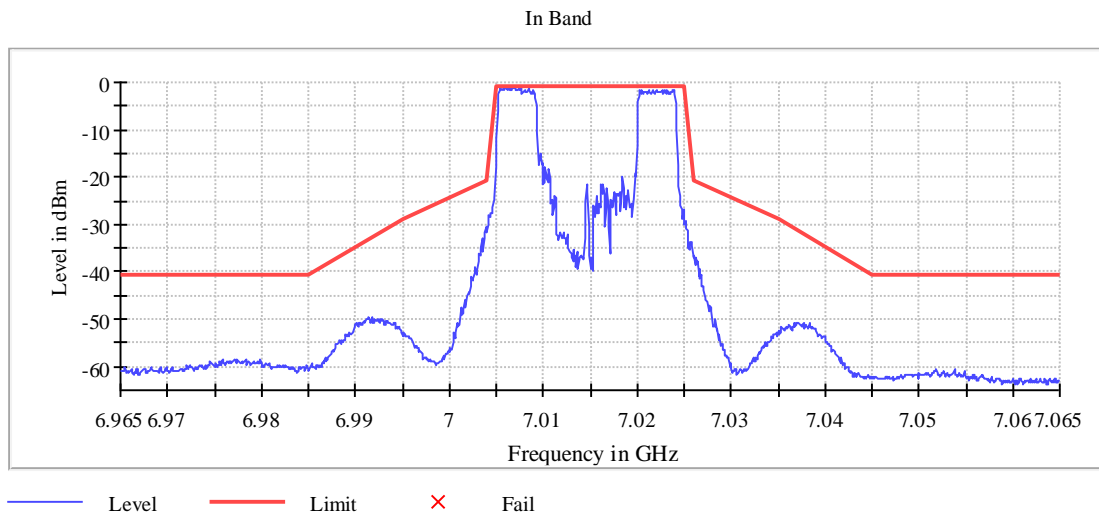


Figure 6: 7015 20MHz RU Verification - Edge

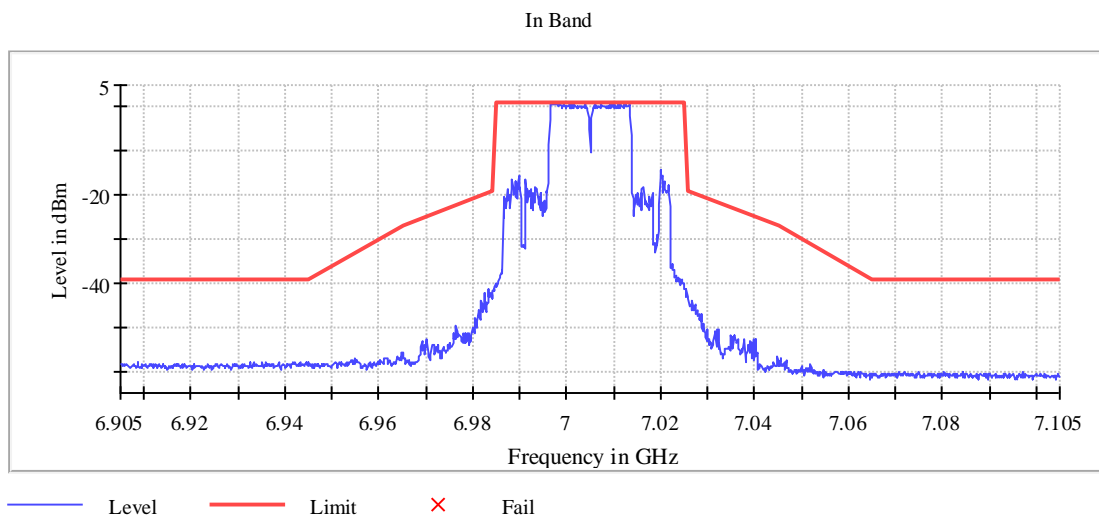


Figure 7: 7005 40MHz RU Verification - Center

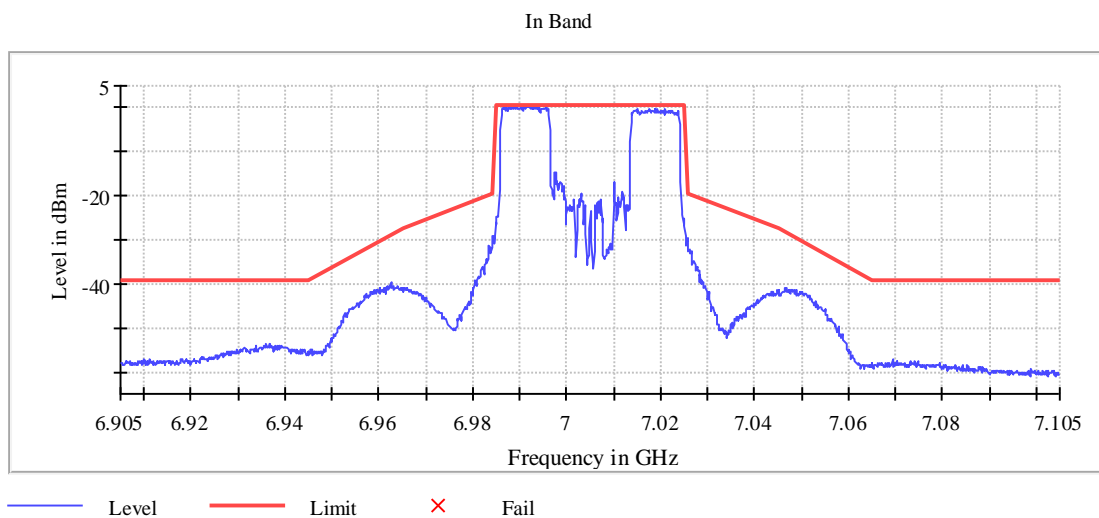


Figure 8: 7005 40MHz RU Verification - Edge

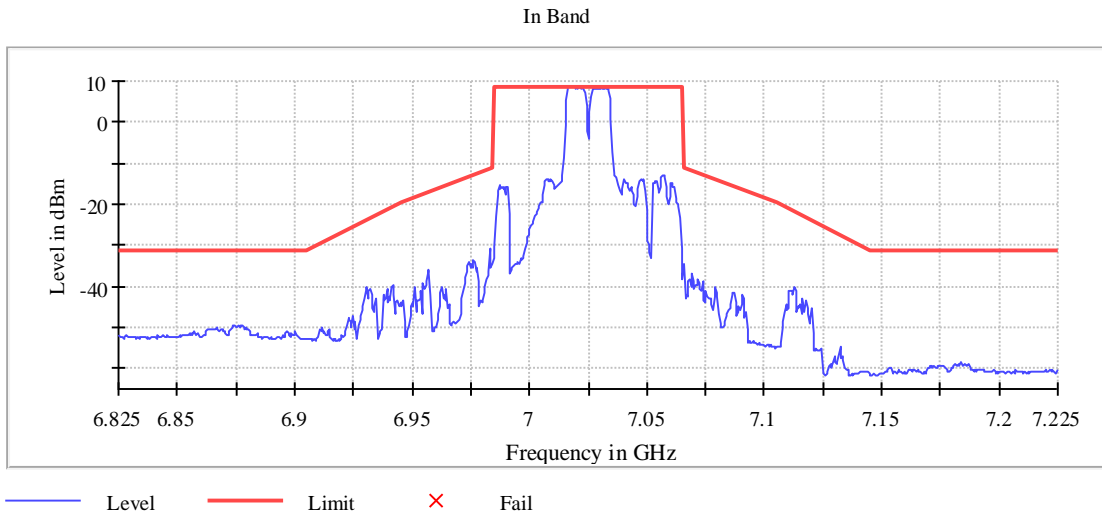


Figure 9: 7025 80MHz RU Verification - Center

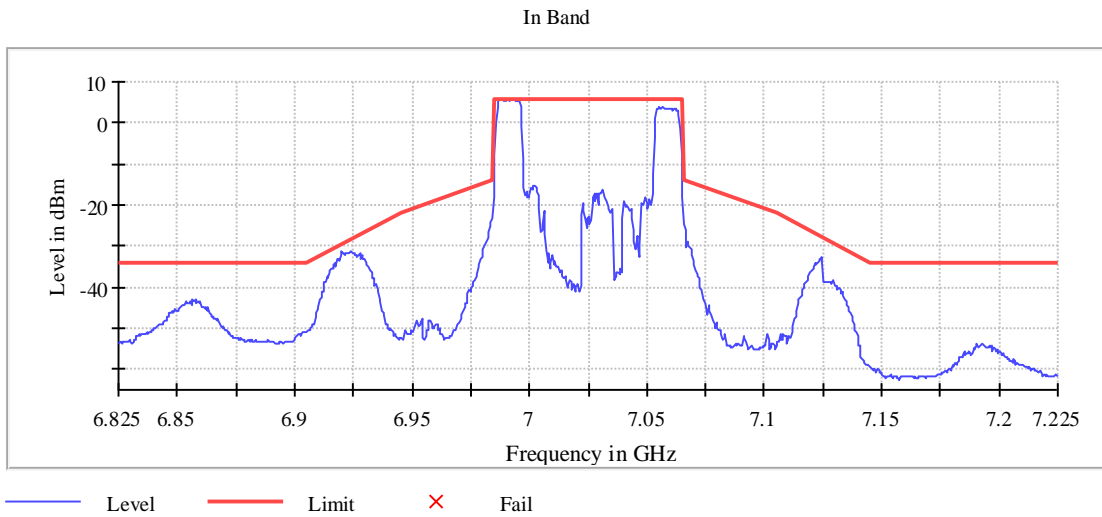


Figure 10: 7025 80MHz RU Verification - Edge

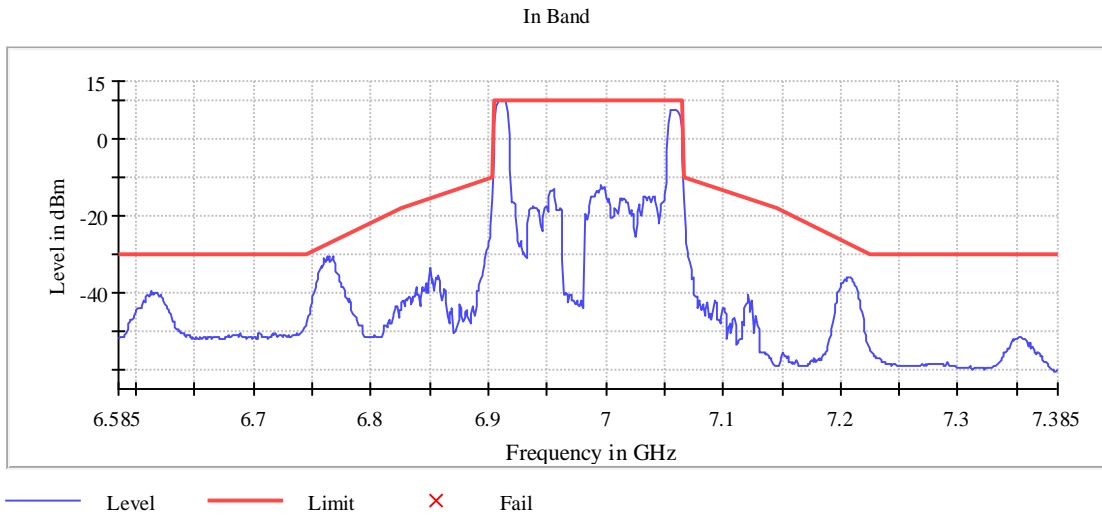


Figure 11: 6985 160MHz RU Verification - Center

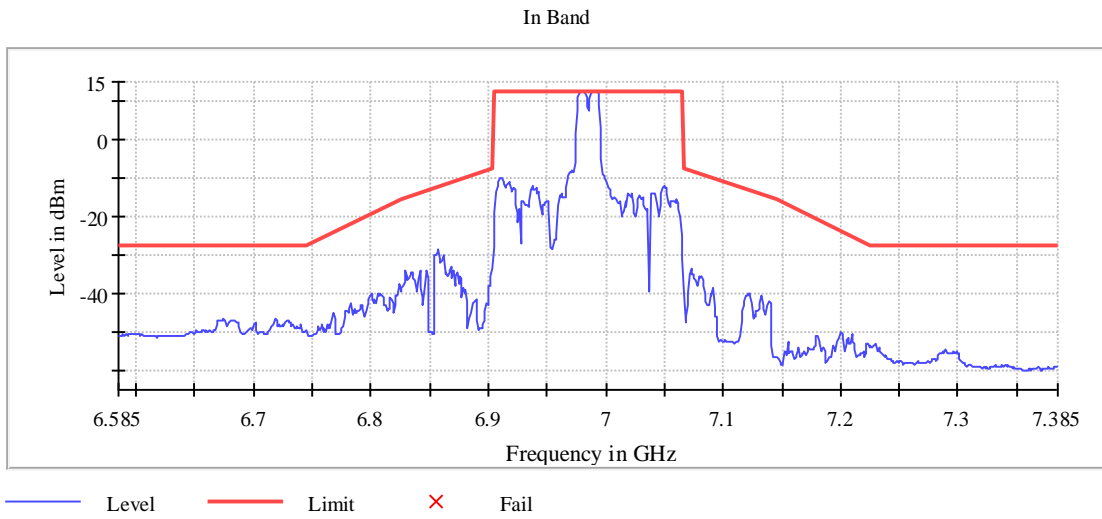


Figure 12: 6985 160MHz RU Verification - Edge

5.7 §15.407(d) Contention Based Protocol

This product was tested and found to be compliant with the requirements of Contention-based Protocol as specified in FCC Part 15.407 and KDB 987594 D02.

Initially the test setup was connected directly to the signal source with all splitters (splitters terminated with a 50-ohm loads on unused ports) and cables in place to verify the AWGN signal is 10MHz wide at a signal level of less than or equal to -82dBm and for conducted measurements the threshold was adjusted for an antenna gain of 0 dBi. The level at the signal generator required to achieve the required signal level at the DUT was recorded for use during testing.


The DUT was connected as shown in figure 4 above and set to transmit at a constant duty cycle at each frequency and bandwidth noted in the table below and verified to be communicating with the companion device as intended.

Starting at the levels established above, the AWGN signal was introduced to the DUT and increased to determine a threshold level at where the DUT will terminate with at least a 90% detection rate. The level at the DUT, which the 90% detection rate was achieved was recorded as the “Sensitivity Level” below.


Testing shall be repeated at each applicable channel and bandwidth as noted in Table 1 of KDB 987594 D02.




Plot 1: Signal BW Details

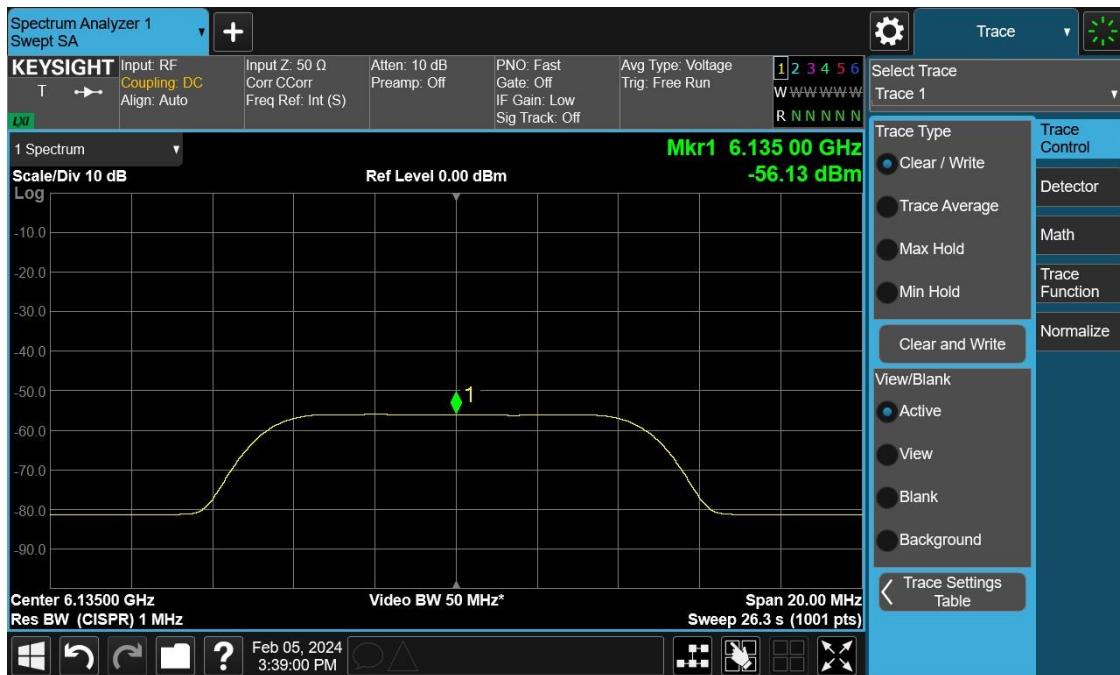


Plot 2: AWGN Signal Level Details

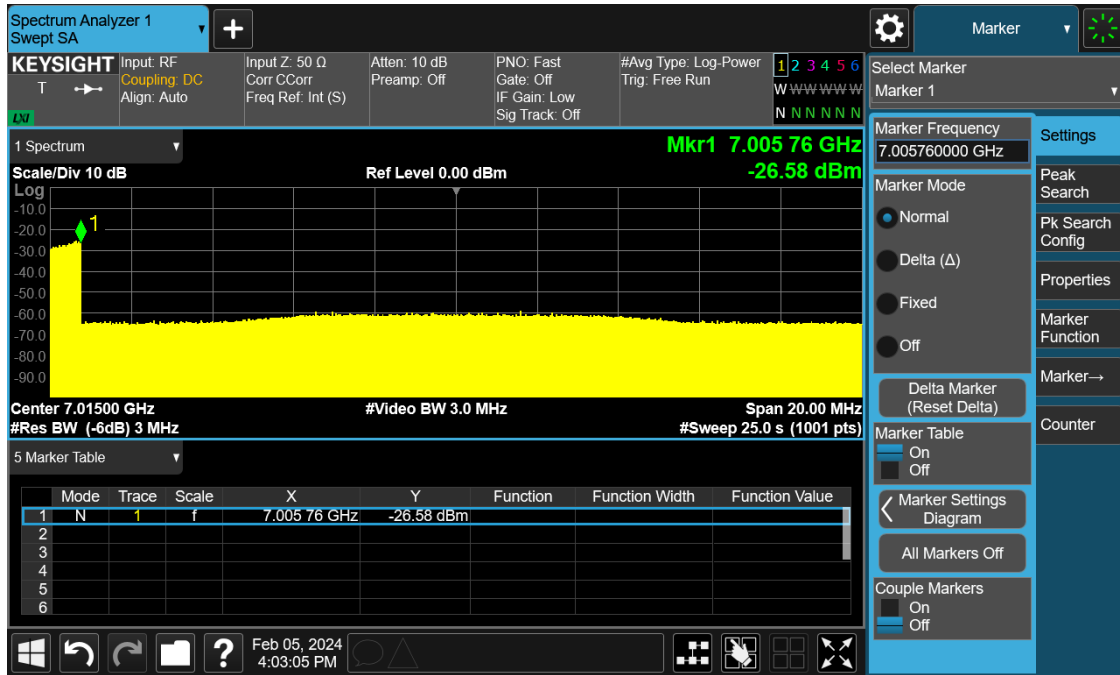


Plot 3: AWGN Signal Detection Details 20MHzBW, 7015MHz

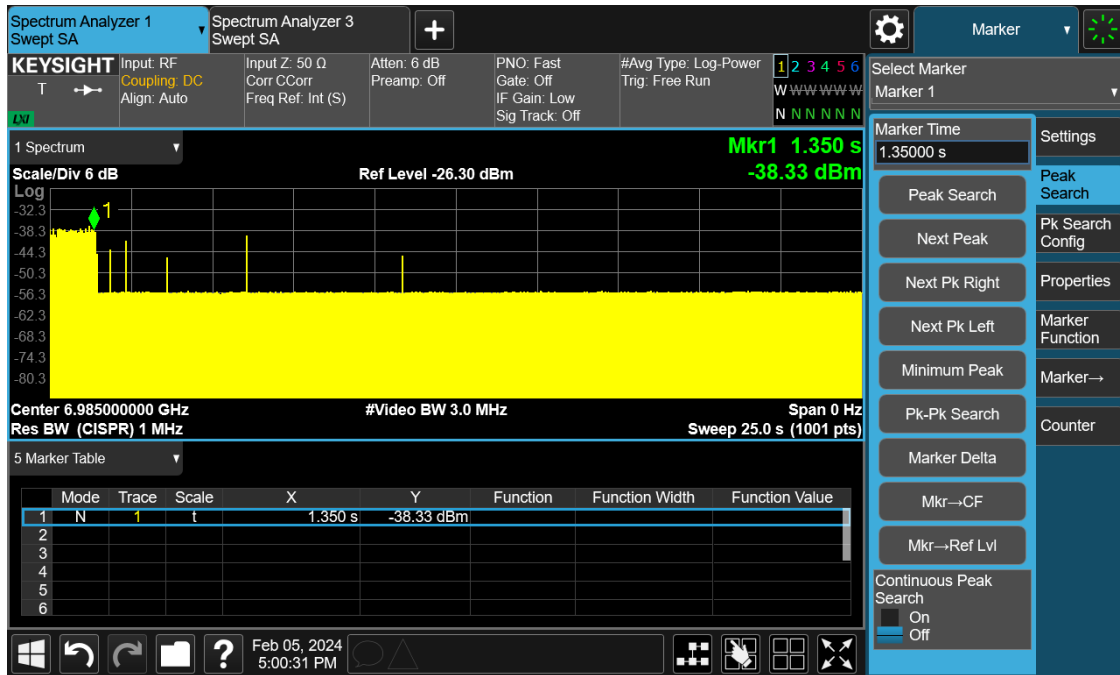

Plot 4: AWGN Signal Detection Details 160MHzBW, 6985-6910MHz

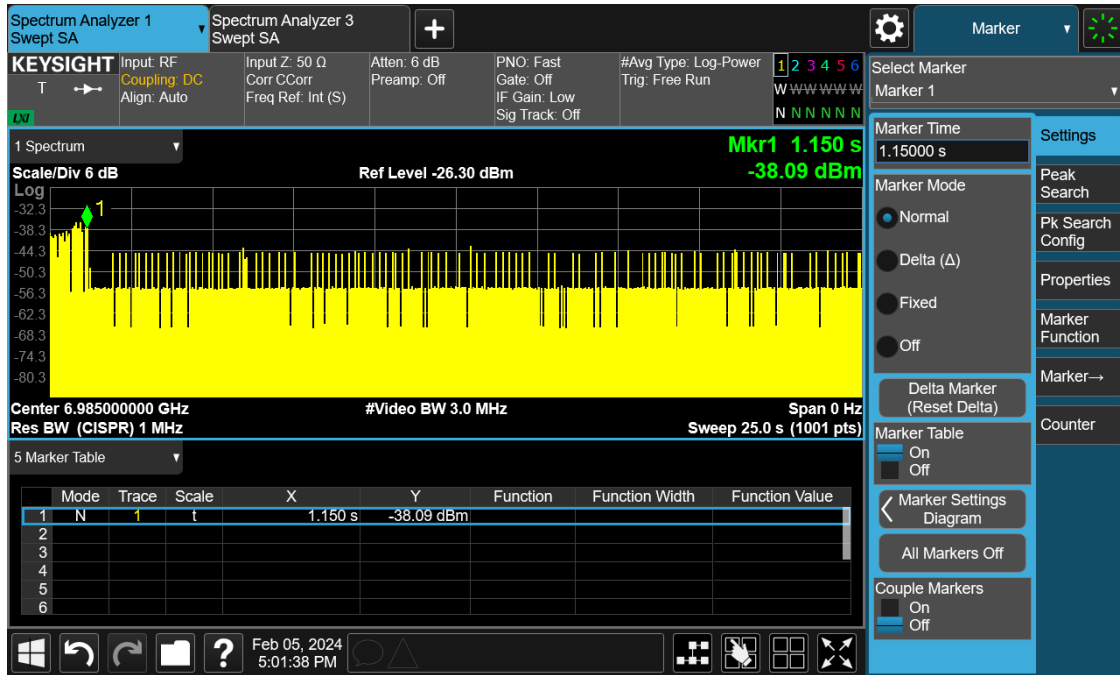

Plot 5: AWGN Signal Detection Details 160MHzBW, 6985-6985MHz

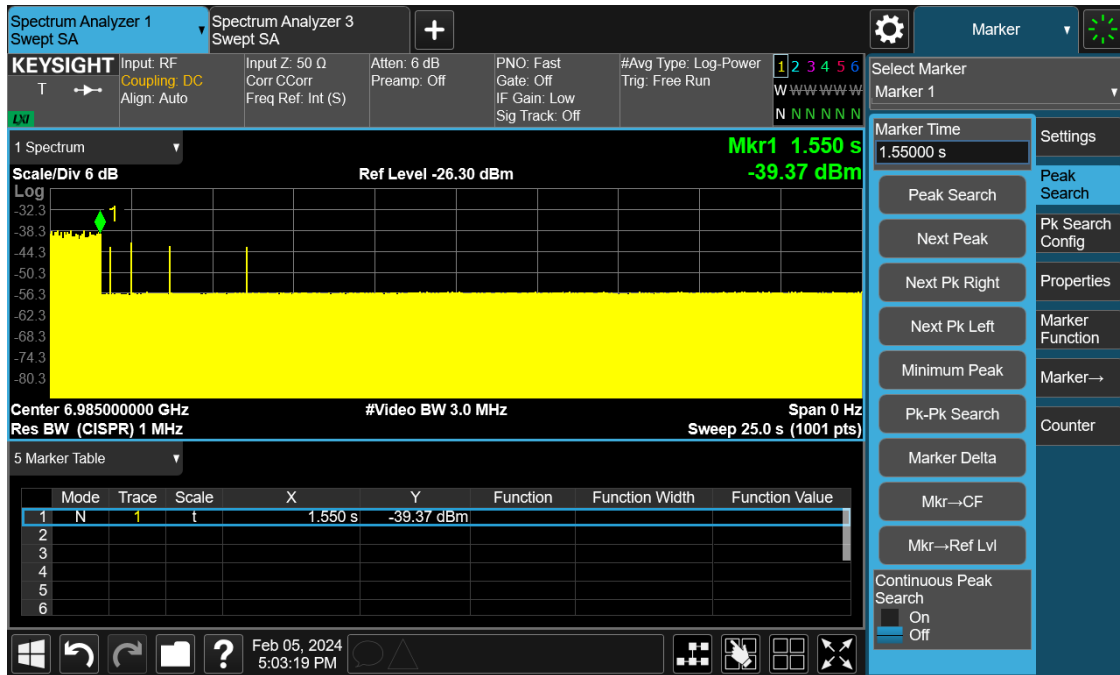

Plot 6: AWGN Signal Detection Details 160MHzBW, 6985-7060MHz

Contention Based Protocol 987594 D02 U-NNI 6 GHz EMC Measurement							
Band	BW _{EUT}	F _{c1}	F _{c2}	Signal Power Level (dBm)	Limit (dBm)	Detection Rate (%)	Margin (dB)
UNII-5 5.925 - 6.425GHz	20	6135	6135	-76	-56.1	100	19.9
	160	6185	6110	-67	-56.1	100	10.9
			6185	-76	-56.1	100	19.9
			6260	-73	-56.1	100	16.9
	320	6105	5950	-62	-56.1	100	5.9
			6105	-67	-56.1	100	10.9
			6250	-67	-56.1	100	10.9
UNII-6 6.425 - 6.525GHz	20	6455	6455	-65	-56.1	100	8.9
	160	6505	6430	-67	-56.1	100	10.9
			6505	-74	-56.1	100	17.9
			6580	-65	-56.1	100	8.9
UNII-7 6.525 - 6.875GHz	20	6695	6695	-76	-56.1	100	19.9
	160	6665	6595	-67	-56.1	100	10.9
			6665	-76	-56.1	100	19.9
			6740	-65	-56.1	100	8.9
	320	6745	6590	-60	-56.1	100	3.9
			6745	-76	-56.1	100	19.9
			6890	-62	-56.1	100	5.9
UNII-8 6.875 - 7.125GHz	20	7015	7015	-76	-56.1	100	19.9
	160	6985	6910	-72	-56.1	100	15.9
			6985	-76	-56.1	100	19.9
			7060	-67	-56.1	100	10.9
Min. Antenna Gain (dBi)		5.9	Ports: 6G0 & 6G1				
Max Threshold Level (TL)		-56.1	FJ5,FJ6				

Table 11: Trial Table
Result

The EUT complies with the specification.

-- End of Test Report --