



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-U7PROM
ISED ID	6545A-U7PROM
Equipment Under Test	U7-Pro-Max
Test Report Serial Number	TR8824_01
Date of Test(s)	8 – 11, 16 January and 5, 12, 29 February 2024
Report Issue Date	12 March 2024

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



NVLAP LAB CODE 600241-0

Certification of Engineering Report

This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	U7-Pro-Max
FCC ID	SWX-U7PROM
ISED ID	6545A-U7PROM

On this 13th day of February 2024, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory



Written By: Joseph W. Jackson



Reviewed By: Richard L. Winter

Revision History		
Revision	Description	Date
01	Original Report Release	12 March 2024

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT	6
2.2	Description of EUT	6
2.3	EUT and Support Equipment.....	6
2.4	Interface Ports on EUT	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	7
2.7	EUT Exercise Software.....	7
2.8	Block Diagram of Test Configuration	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	8
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	9
3.5	Test Location	10
4	Test Equipment	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions.....	12
4.4	Contention Base Protocol Tests	13
4.5	Equipment Calibration	13
4.6	Measurement Uncertainty	14
5	Test Results	15
5.1	§15.203 Antenna Requirements.....	15
5.2	Conducted Emissions at Mains Ports Data	16
5.3	§15.403(i) 26 dB Emissions Bandwidth	18
5.4	§15.407(a)(3) Maximum Average Output Power	19
5.5	§15.407(b)(7) Spurious Emissions.....	20
5.6	§15.407(a) Maximum Power Spectral Density	29
5.7	§15.407(d) Contention Based Protocol.....	34

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	U7-Pro-Max
Serial Number	1FB64B
Dimensions (cm)	20.6 x 20.6 x 4.6

2.2 Description of EUT

The U7-Pro-Max is a PoE powered WiFi 7 access point with a 2.5 GbE PoE port. The U7-Pro-Max provides a 12.2 Gbps aggregate throughput rate. The U7-Pro-Max transmits in the 2.4 GHz, 5 GHz, and 6 GHz frequency bands and uses integral antennas and a dedicated spectral scanning radio. The U7-Pro-Max is powered by an 802.3at PoE power adapter. The U7-Pro-Max has a receiver York Scanner Module.

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

The table below show the channels used within the different modulation bandwidths.

Band	Modulation Bandwidth	Frequency (MHz)	Maximum Power Setting
UNII-6	be (EHT 20)	6435, 6515	TP13
		6475	TP14
	be (EHT 40)	6445	TP17
		6485	TP18
	be (EHT 80)	6465	TP20
	be (EHT 160)	6505	TP22

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: U7-Pro-Max SN: F4E2C61FB6AF	Access Point	See Section 2.4

BN: UBIQUITI MN: GP-H480-065G SN: N/A	PoE Injector	Shielded or Un-shielded cat 5e cable
BN: DELL MN: XPS SN: N/A	Laptop PC	Shielded or Un-shielded cat 5e cable

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
AC Mains	1	3 conductor power cord/80cm
PoE	1	Shielded or Un-Shielded Cat 5e Cable/> 3 meters
Data	1	Shielded or Un-Shielded Cat 5e Cable/> 3 Meters

2.5 Operating Environment

Power Supply	120 Volts AC to 48 Volts PoE
AC Mains Frequency	60 Hz
Temperature	21.2 – 21.8 °C
Humidity	16.1 – 18.1 %
Barometric Pressure	1007 mBar

2.6 Operating Modes

The U7-Pro-Max was tested using test software in order to enable to constant transmission. The measurements within this report are corrected to reference a 100% duty cycle. All emission modes of 802.11be were investigated. All measurements are reported with the worst-case mode (802.11be) unless otherwise stated.

This device does not support Channel Puncturing.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

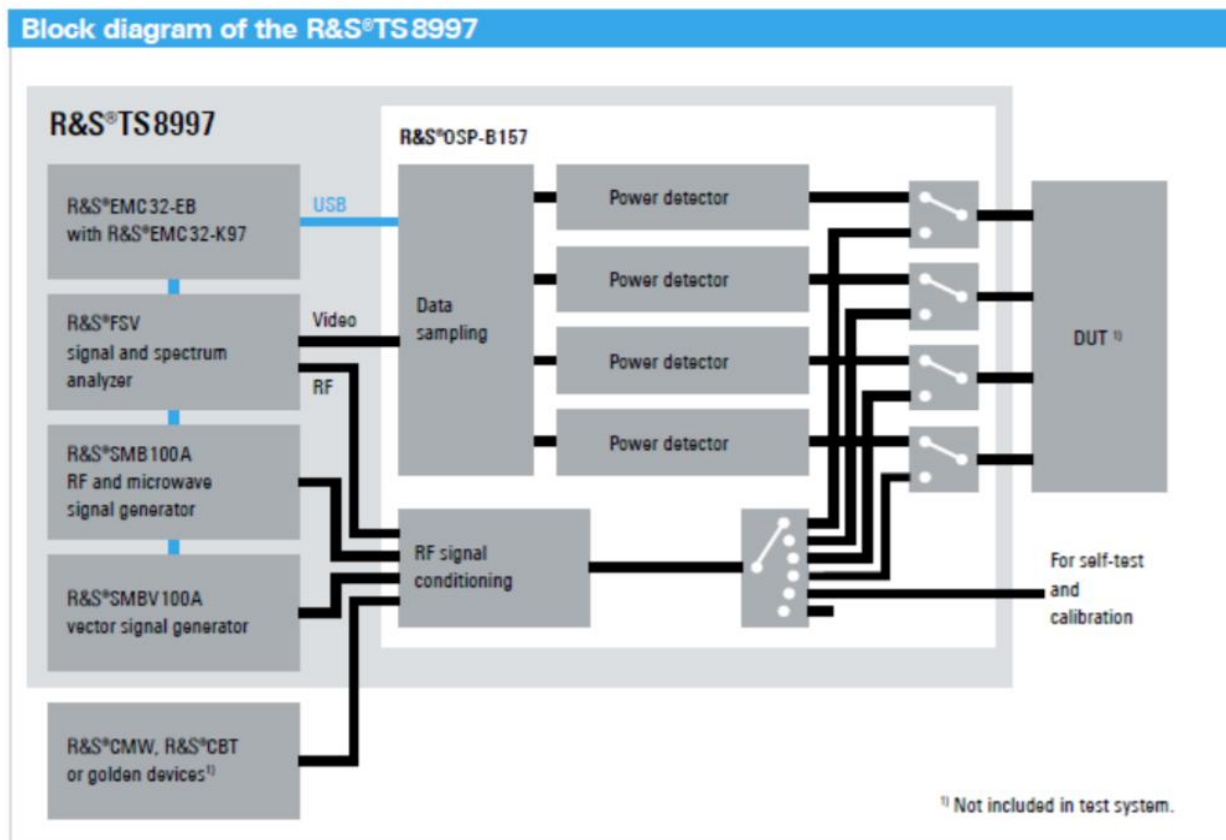


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

3.3 FCC Part 15, Subpart E

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.203	N/A	Antenna requirements	Structural Requirement	Compliant
15.207	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(c)	RSS-247 §6.2.2, §6.2.3	Bandwidth Requirement	6435 to 6515	Compliant
15.407(e)	RSS-247 §6.2.2, §6.2.3	Peak Output Power ¹	6435 to 6515	Compliant
15.407(f)	RSS-247 §6.2.2, §6.2.3	Antenna Conducted Spurious Emissions ¹	0.009 to 40000	N/A
15.407(g)	RSS-247 §6.2.2, §6.2.3	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(h)	RSS-247 §6.2.2, §6.2.3	Peak Power Spectral Density ¹	6435 to 6515	Compliant
15.407(d)	RSS-247 §6.2.2, §6.2.3	Contention Based Protocol	6435 to 6515	Compliant

The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033, KDB 987594 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.

Note ¹: Various RU modes were considered for RF Power, PSD, and Spurious Emissions, and the "single client" RU mode is the worst case - the results herein are "single client" RU mode.

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-Meter and 10-Meter chambers located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2024. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2024.

Unified Compliance Laboratory has been assigned Designation Number US5037 by the FCC and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	7/13/2023	7/13/2024
LISN	AFJ	LS16C/10	UCL-2512	5/26/2023	5/26/2024
ISN	Teseq	ISN T800	UCL-2974	6/27/2022	6/27/2024
LISN	AFJ	LS16C\10	UCL-6749	1/29/2024	1/29/2025
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

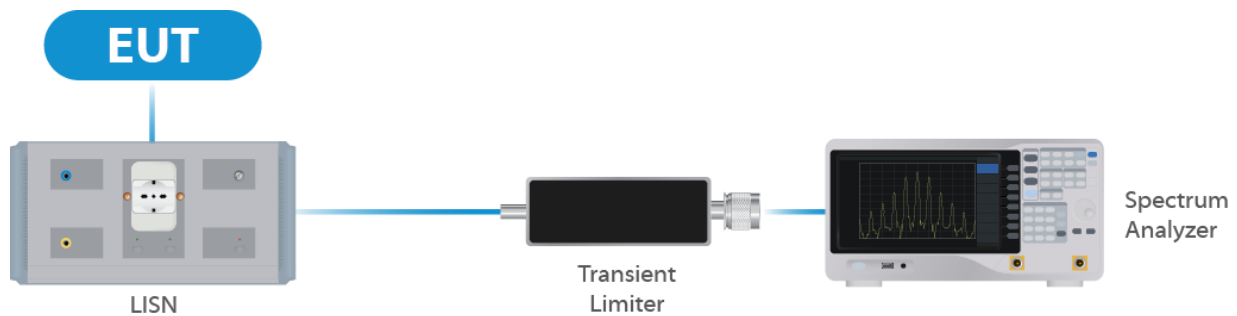


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	11/27/2023	11/27/2024
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	2/22/2023	3/20/2024
Switch Extension	R&S	OSP-150W	UCL-2870	2/22/2023	2/22/2024

Table 2: List of equipment used for Direct Connect at the Antenna Port

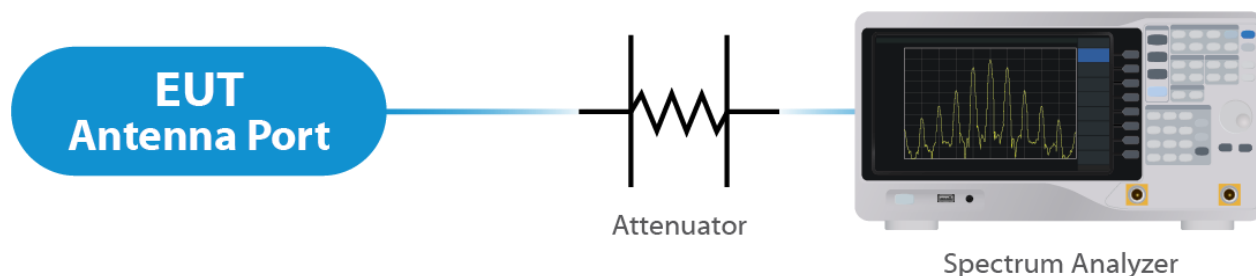


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	1/25/2024	1/29/2025
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	1/19/2024	1/19/2026
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3062	9/13/2022	9/13/2024
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3071	6/08/2022	6/22/2024
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	9/22/2022	9/22/2024
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	1/27/2023	1/27/2025
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	6/09/2022	6/09/2024
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	1/19/2024	1/19/2026
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

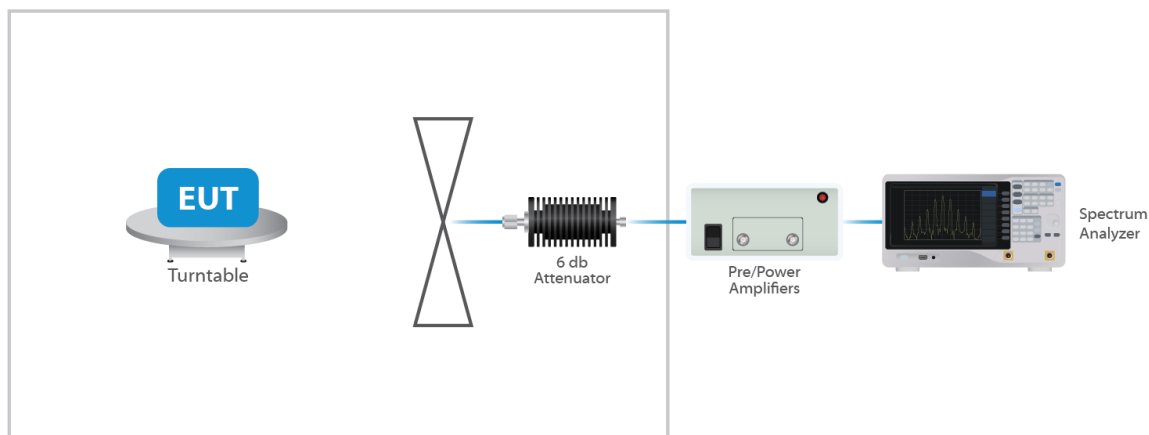


Figure 3: Radiated Emissions Test

4.4 Contention Base Protocol Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Keysight	N9010B EXA	UCL-7069	4/25/2023	4/25/2024
Signal Generator	Keysight	MXG-B	UCL-6291	6/29/2023	6/29/2024
MIMO Test Set	Keysight	X8750A	UCL-7373	9/19/2023	9/19/2024

Table 4: List of equipment used for Direct Connect at the Antenna Port

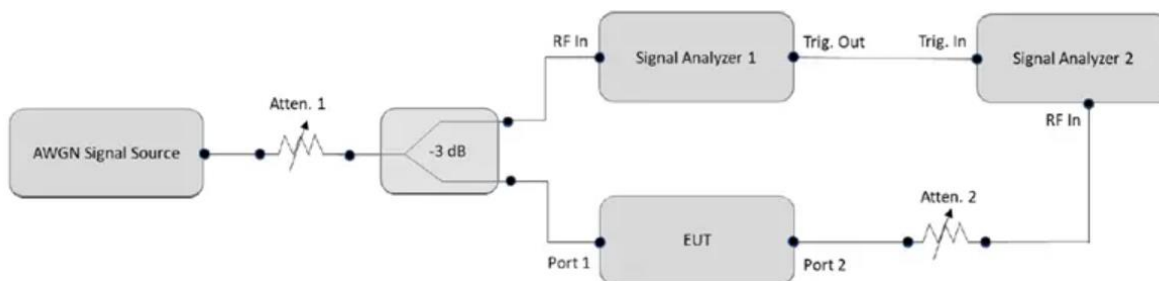


Figure 1. CBP conducted test setup diagram. Source: KDB 987594 D02 V01r01

Figure 4: Contention Base Protocol Test

4.5 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and

Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.6 Measurement Uncertainty

Test	Uncertainty (\pm dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements

The EUT uses an integrated antenna structure. Per the manufacturer, the Maximum gain of the antenna per chain is 5.9 dBi.

This is an 802.11 device and utilizes CDD as described in KDB 662911 D01. The antenna is not user replaceable. For CDD transmissions, directional gain is calculated as follows.

Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB

NANT = number of transmit antennas and

NSS = number of spatial streams. NSS = 1 considered worst case.

For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $\text{NANT} \leq 4$;


For PSD measurements when $\text{Nss}=1$: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB + Antenna Gain (dBi). Or $3.01 \text{ dB} + 5.9 \text{ dBi} = 8.91 \text{ dBi}$.

Results

The EUT complied with the specification


5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

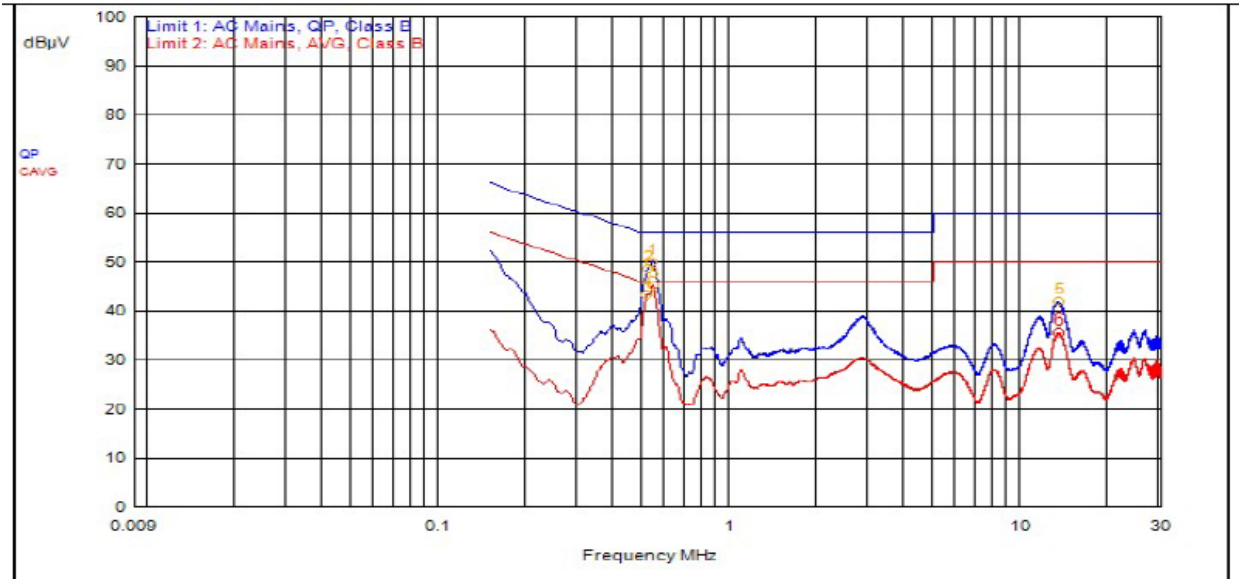

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBµV	dBµV	dBµV	dB	dBµV	dB	P/F
1	537,000kHz	12.41	0.00		QPeak	37.70	50.11	56.00	-5.89			
2	519,000kHz	12.42	0.00		QPeak	36.28	48.70	56.00	-7.30			
5	13.263	12.40	0.20		QPeak	29.24	41.84	60.00	-18.16			
3	540,000kHz	12.41	0.00		C_AVG	32.82	45.23			46.00	-0.77	
4	516,000kHz	12.42	0.00		C_AVG	30.97	43.39			46.00	-2.61	
6	13.320	12.41	0.20		C_AVG	22.93	35.54			50.00	-14.46	

5.2.2 Neutral

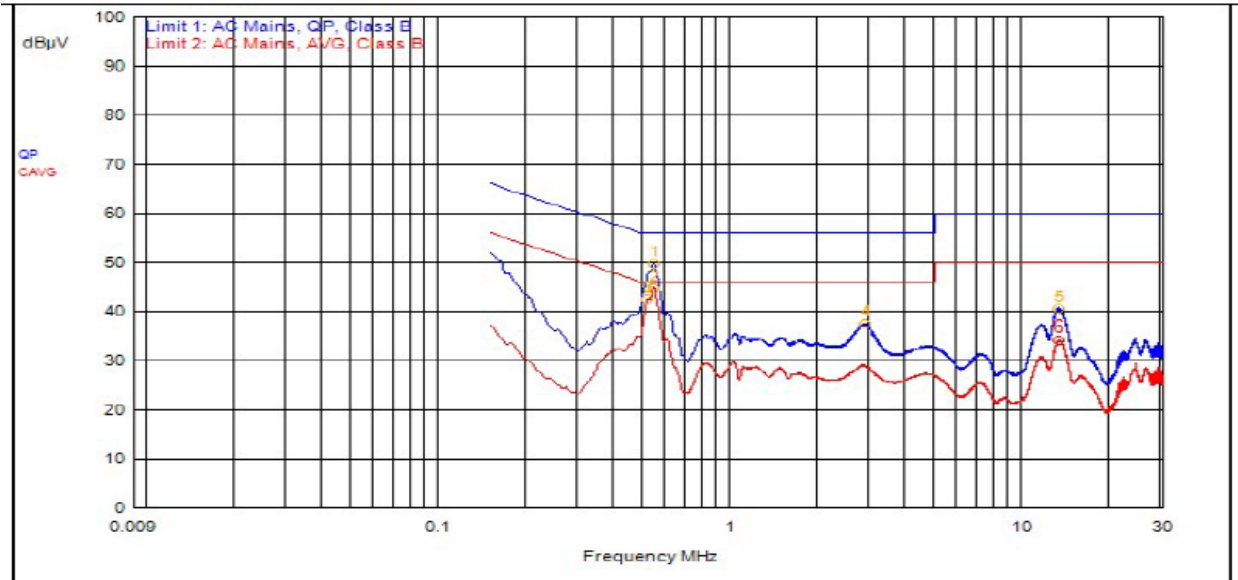

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBµV	dBµV	dBµV	dB	dBµV	dB	P/F
1	540,000kHz	12.42	0.00		QPeak	37.28	49.70	56.00	-6.30			
4	2.862	12.29	0.10		QPeak	25.08	37.47	56.00	-18.53			
5	13.215	12.43	0.20		QPeak	28.02	40.65	60.00	-19.35			
2	543,000kHz	12.42	0.00		C_AVG	32.44	44.86			46.00	-1.14	
3	516,000kHz	12.43	0.00		C_AVG	30.17	42.60			46.00	-3.40	
6	13.200	12.42	0.20		C_AVG	21.42	34.04			50.00	-15.96	

Result

The EUT complied with the specification limit.

5.3 §15.403(i) 26 dB Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 66291 D01. Please see associated annex for details on instrument settings.

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)
20	6435	19.1	22.8
20	6475	19.1	22.4
20	6515	19.1	22.3
40	6445	38.3	42.5
40	6485	38.3	42.0
80	6465	78.0	91.5
160	6505	158.0	171.0

Result

All chains were tested and the highest bandwidth per chain is reported above.

The 26 dB bandwidths are reported for information purposes. Please see Annex for all bandwidth measurements.

5.4 §15.407(a)(3) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 789033 Section II. E.2. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average RF conducted output power measured for this device was 22.89 dBm or 194.54 mW. The limit is 30 dBm EIRP, or 1 Watt EIRP. The antenna has a gain of 5.9 dBi.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	EIRP	Measured PSD
HE20	6435	Mcs0_Nss2	13	14.84	20.74	-1.86
HE20	6475	Mcs0_Nss2	14	14.77	20.67	-1.35
HE20	6515	Mcs0_Nss2	13	15.03	20.93	-1.29
HE40	6445	Mcs0_Nss2	17	17.85	23.75	-1.32
HE40	6485	Mcs0_Nss2	18	18.22	24.12	-1.14
HE80	6465	Mcs0_Nss2	20	20.55	26.45	-1.55
HE160	6505	Mcs0_Nss2	22	22.89	28.79	-1.45

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	EIRP	Measured PSD
HE20	6435	Mcs0_Nss1	10	12.58	18.48	-4.30
HE20	6475	Mcs0_Nss1	10	12.41	18.31	-4.27
HE20	6515	Mcs0_Nss1	10	12.17	18.07	-4.37
HE40	6445	Mcs0_Nss1	13	15.06	20.96	-4.49
HE40	6485	Mcs0_Nss1	13	15.14	21.04	-4.45
HE80	6465	Mcs0_Nss1	16	17.95	23.84	-4.49
HE160	6505	Mcs0_Nss1	18	20.36	26.26	-4.69

Result

In the configuration tested, the maximum average RF outpower was less than 1 watt EIRP; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in attached Annex).

5.5 §15.407(b)(7) Spurious Emissions

5.5.1 Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The graphs show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency and upper frequency. Shown below are plots with the EUT turned to the upper and lower channels with the antenna gain of 5.9 dBi accounted for. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be remain below -27 dBm EIRP.

Result

Conducted spurious emissions were attenuated below the limit; therefore, the EUT complies with the specification.

5.5.2 Radiated Spurious Emissions in the Restricted Bands of § 15.205


The EUT uses various power settings based on the channel in use. In order to reduce test time, the radiated spurious emissions at the lowest, middle, and highest channel were measured at the maximum power of TP22.

Correction Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain, and is added to the Receiver reading.

Result

All emissions in the restricted bands of § 15.205 met the limits specified in § 15.209; therefore, the EUT complies with the specification. See Annex for Conducted Band edge plots.

EUT

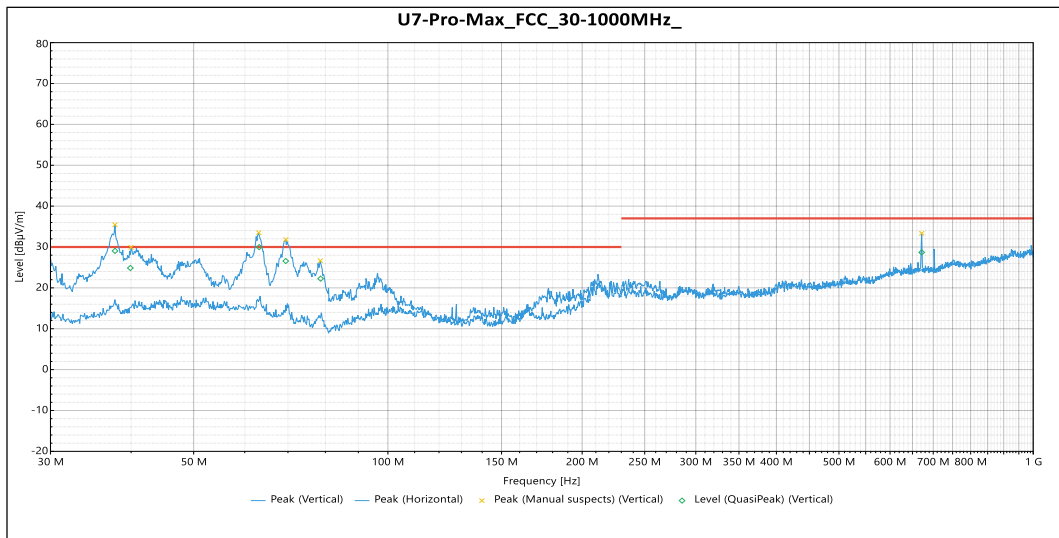


QuasiPeak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
37.769 MHz	29.054	30	-0.946	215	1.821	Vertical	-14.696
39.89 MHz	24.87	30	-5.13	75	1.108	Vertical	-13.531
63.164 MHz	29.972	30	-0.028	123	3.455	Vertical	-14.834
69.458 MHz	26.573	30	-3.427	99	3.459	Vertical	-16.754
78.66 MHz	22.249	30	-7.751	272	3.715	Vertical	-19.447
671.8 MHz	28.679	37	-8.321	77	2.965	Vertical	-6.121

NOTE: No significant emissions were observed in the horizontal orientation of the antenna

Table 5: Radiated Emissions 30 – 1000 MHz

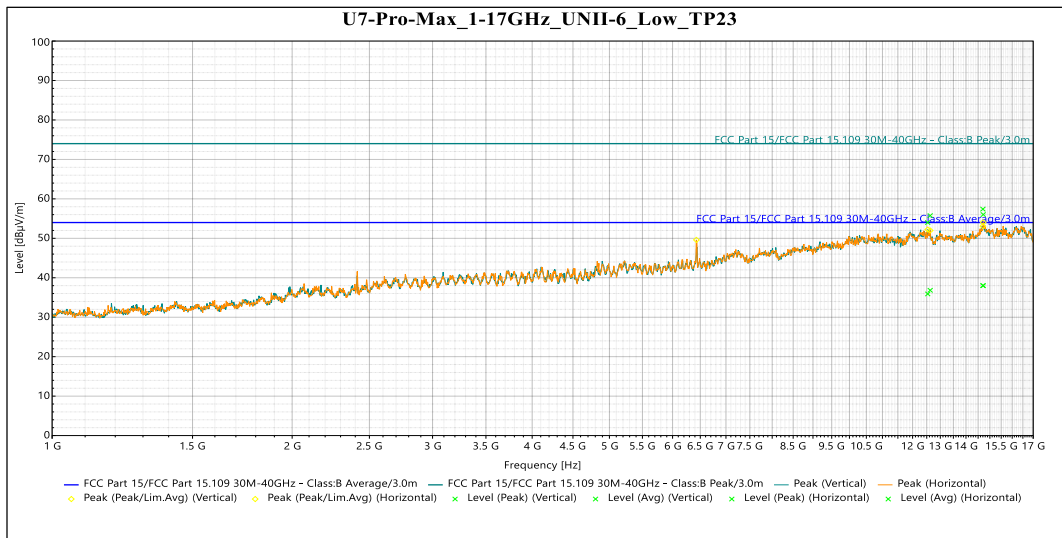

Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
12.536 GHz	53.995	74	-20.005	97	1.5	Vertical	16.589
14.702 GHz	57.395	74	-16.605	324	3.264	Vertical	17.44
12.626 GHz	55.747	74	-18.253	158	3.083	Horizontal	16.343
14.715 GHz	56.018	74	-17.982	137	2.218	Horizontal	17.289

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
12.536 GHz	35.9	54	-18.1	97	1.5	Vertical	16.589
14.702 GHz	38.013	54	-15.987	324	3.264	Vertical	17.44
12.626 GHz	36.828	54	-17.172	158	3.083	Horizontal	16.343
14.715 GHz	37.989	54	-16.011	137	2.218	Horizontal	17.289

Table 6: Radiated Emissions 1 – 17 GHz Lowest Frequency

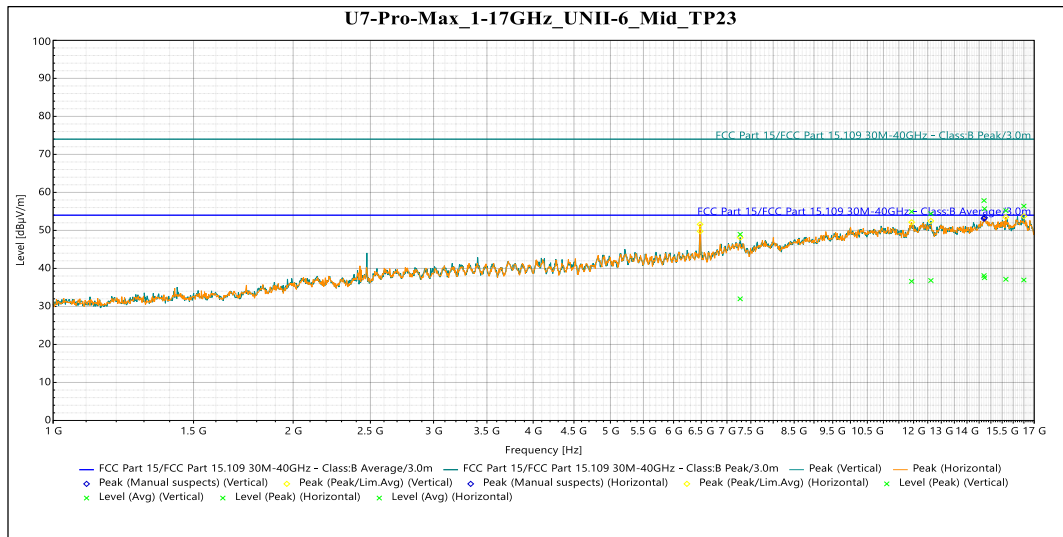

Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2729 GHz	48.968	74	-25.032	78	2.923	Vertical	11.16
12.615 GHz	54.393	74	-19.607	121	3.625	Vertical	16.526
14.707 GHz	57.851	74	-16.149	66	2.222	Vertical	17.382
16.499 GHz	56.388	74	-17.612	17	2.182	Vertical	18.278
11.932 GHz	54.934	74	-19.066	328	3.621	Horizontal	16.515
14.728 GHz	55.698	74	-18.302	270	2.397	Horizontal	17.206
15.665 GHz	55.187	74	-18.813	48	3.798	Horizontal	16.025

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2729 GHz	31.998	54	-22.002	78	2.923	Vertical	11.16
12.615 GHz	36.82	54	-17.18	121	3.625	Vertical	16.526
14.707 GHz	38.114	54	-15.886	66	2.222	Vertical	17.382
16.499 GHz	36.945	54	-17.055	17	2.182	Vertical	18.278
11.932 GHz	36.603	54	-17.397	328	3.621	Horizontal	16.515
14.728 GHz	37.551	54	-16.449	270	2.397	Horizontal	17.206
15.665 GHz	37.139	54	-16.861	48	3.798	Horizontal	16.025

Table 7: Radiated Emissions 1 – 17 GHz Middle Frequency

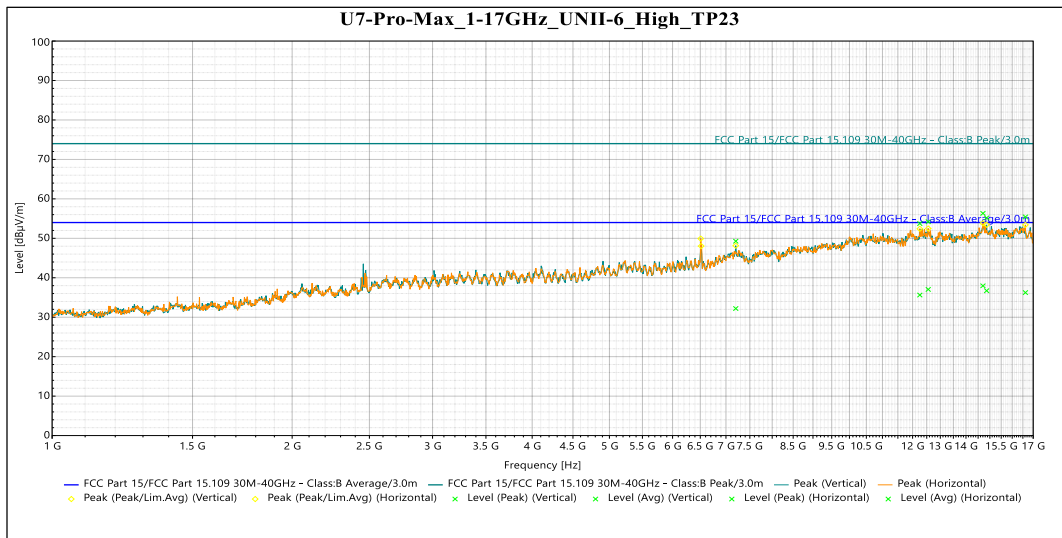

Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2014 GHz	49.268	74	-24.732	144	1.692	Vertical	11.112
12.253 GHz	53.739	74	-20.261	206	1.638	Vertical	16.272
14.861 GHz	55.168	74	-18.832	136	1.643	Vertical	16.401
12.555 GHz	54.21	74	-19.79	310	2.045	Horizontal	16.644
14.704 GHz	56.319	74	-17.681	339	2.721	Horizontal	17.417
16.622 GHz	55.424	74	-18.576	140	3.078	Horizontal	18.094

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2014 GHz	32.201	54	-21.799	144	1.692	Vertical	11.112
12.253 GHz	35.617	54	-18.383	206	1.638	Vertical	16.272
14.861 GHz	36.716	54	-17.284	136	1.643	Vertical	16.401
12.555 GHz	37.05	54	-16.95	310	2.045	Horizontal	16.644
14.704 GHz	37.959	54	-16.041	339	2.721	Horizontal	17.417
16.622 GHz	36.235	54	-17.765	140	3.078	Horizontal	18.094

Table 8: Radiated Emissions 1 – 17 GHz Highest Frequency

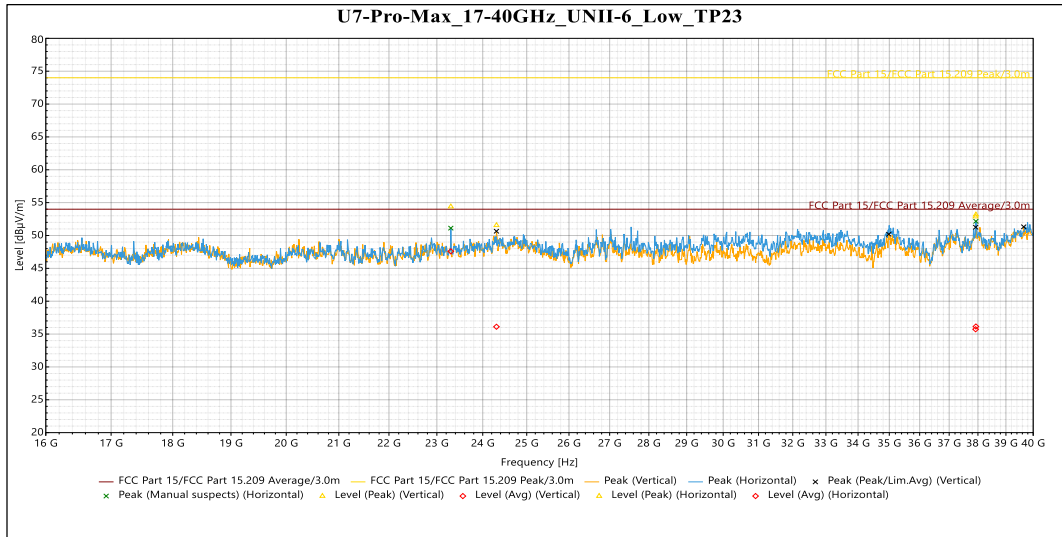
Peak


Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
24.308 GHz	51.549	74	-22.451	227	Vertical	1.656
37.919 GHz	52.868	74	-21.132	251	Vertical	3.91
23.3 GHz	54.39	74	-19.61	35	Horizontal	0.407
37.929 GHz	53.173	74	-20.827	103	Horizontal	3.903

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
24.308 GHz	36.109	54	-17.891	227	Vertical	1.656
37.919 GHz	35.734	54	-18.266	251	Vertical	3.91
23.3 GHz	47.59	54	-6.41	35	Horizontal	0.407
37.929 GHz	36.152	54	-17.848	103	Horizontal	3.903

Table 9: Radiated Emissions 17 – 40 GHz Lowest Frequency (worse case)


York Module

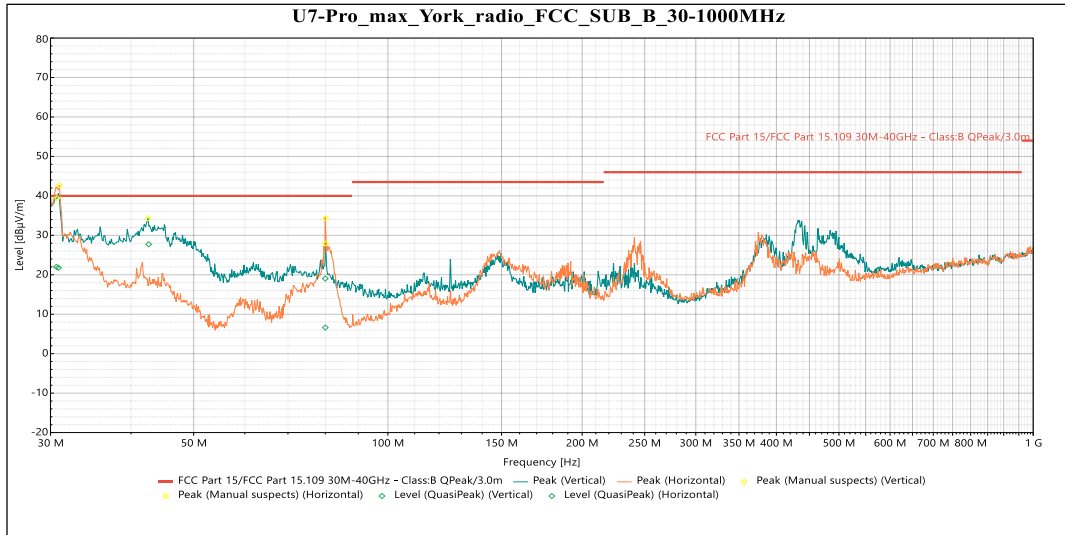

QuasiPeak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.64 MHz	22.014	40	-17.986	307	1.128	Vertical	-8.155
42.595 MHz	27.726	40	-12.274	36	1.132	Vertical	-16.243
79.988 MHz	19.05	40	-20.95	289	2.207	Vertical	-20.517
30.865 MHz	21.773	40	-18.227	265	3.65	Horizontal	-8.335
79.98 MHz	6.624	40	-33.376	296	3.868	Horizontal	-20.517

Table 10: Radiated Emissions 30 – 1000 MHz

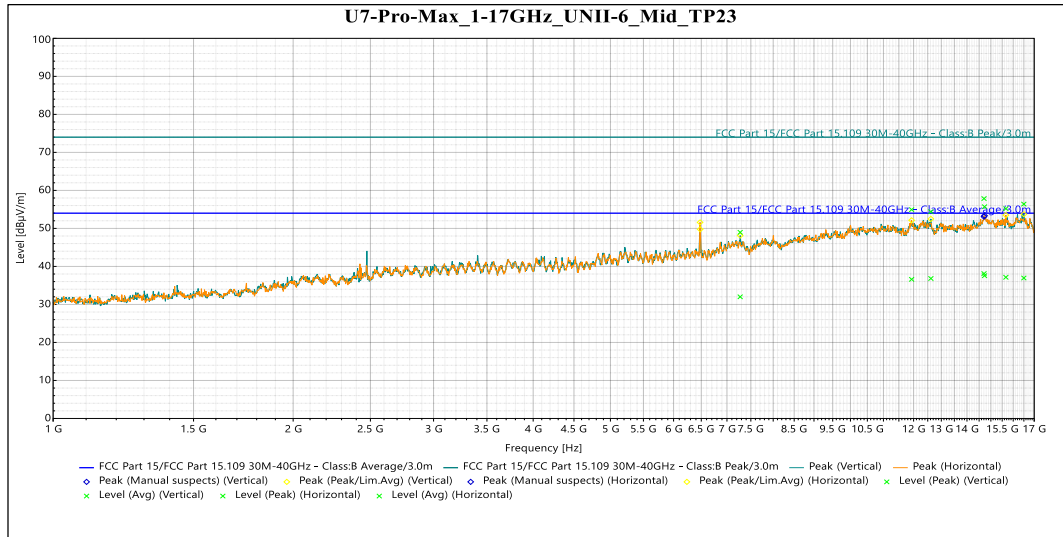

Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2729 GHz	48.968	74	-25.032	78	2.923	Vertical	11.16
12.615 GHz	54.393	74	-19.607	121	3.625	Vertical	16.526
14.707 GHz	57.851	74	-16.149	66	2.222	Vertical	17.382
16.499 GHz	56.388	74	-17.612	17	2.182	Vertical	18.278
11.932 GHz	54.934	74	-19.066	328	3.621	Horizontal	16.515
14.728 GHz	55.698	74	-18.302	270	2.397	Horizontal	17.206
15.665 GHz	55.187	74	-18.813	48	3.798	Horizontal	16.025

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
7.2729 GHz	31.998	54	-22.002	78	2.923	Vertical	11.16
12.615 GHz	36.82	54	-17.18	121	3.625	Vertical	16.526
14.707 GHz	38.114	54	-15.886	66	2.222	Vertical	17.382
16.499 GHz	36.945	54	-17.055	17	2.182	Vertical	18.278
11.932 GHz	36.603	54	-17.397	328	3.621	Horizontal	16.515
14.728 GHz	37.551	54	-16.449	270	2.397	Horizontal	17.206
15.665 GHz	37.139	54	-16.861	48	3.798	Horizontal	16.025

Table 11: Radiated Emissions 1 – 17 GHz on the Middle Frequency (worse case)

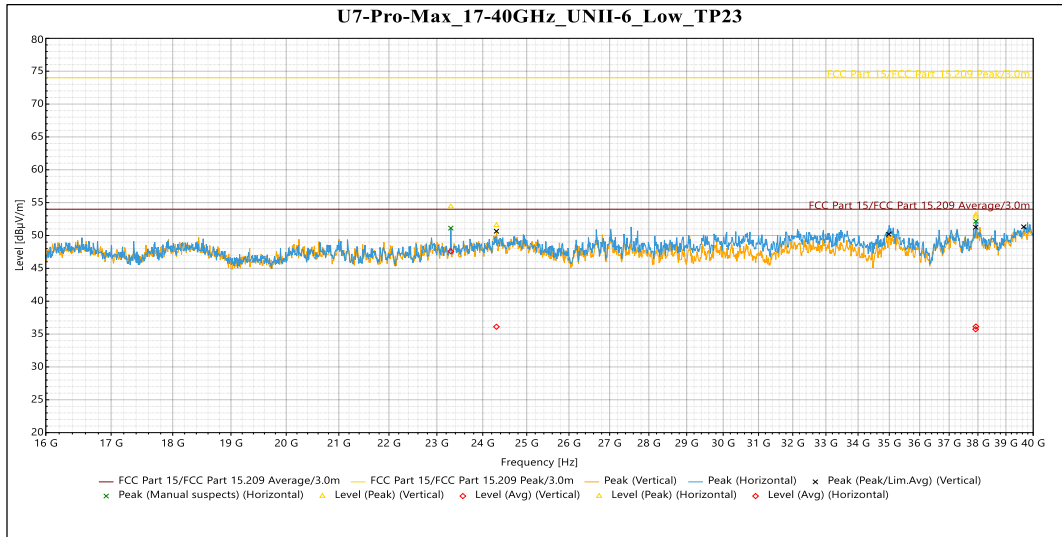
Peak

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
24.308 GHz	51.549	74	-22.451	227	Vertical	1.656
37.919 GHz	52.868	74	-21.132	251	Vertical	3.91
23.3 GHz	54.39	74	-19.61	35	Horizontal	0.407
37.929 GHz	53.173	74	-20.827	103	Horizontal	3.903

Avg

Frequency	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
24.308 GHz	36.109	54	-17.891	227	Vertical	1.656
37.919 GHz	35.734	54	-18.266	251	Vertical	3.91
23.3 GHz	47.59	54	-6.41	35	Horizontal	0.407
37.929 GHz	36.152	54	-17.848	103	Horizontal	3.903

Table 12: Radiated Emissions 17 – 40 GHz on the Lowest Frequency (worse case)

5.6 §15.407(a) Maximum Power Spectral Density

All chains were measured and summed under the guidance of KDB 789033 Section II. F. and KDB 66291 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 5 dBm EIRP in any 1 MHz band during any time interval of continuous transmission. As per KDB 662911, When the EUT is using spatial-multiplexing in HE modes, there is not additional array gain to accommodate. When the EUT uses Nss=1 data rates, the antenna gain is 5.9 dBi + Array gain of 3.01 dB which is a total of 8.91 dBi.

Results of this testing are summarized.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured PSD
HE20	6435	Mcs0_Nss2	13	14.84	-1.86
HE20	6475	Mcs0_Nss2	14	14.77	-1.35
HE20	6515	Mcs0_Nss2	13	15.03	-1.29
HE40	6445	Mcs0_Nss2	17	17.85	-1.32
HE40	6485	Mcs0_Nss2	18	18.22	-1.14
HE80	6465	Mcs0_Nss2	20	20.55	-1.55
HE160	6505	Mcs0_Nss2	22	22.89	-1.45

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	Measured PSD
HE20	6435	Mcs0_Nss1	10	12.58	-4.30
HE20	6475	Mcs0_Nss1	10	12.41	-4.27
HE20	6515	Mcs0_Nss1	10	12.17	-4.37
HE40	6445	Mcs0_Nss1	13	15.06	-4.49
HE40	6485	Mcs0_Nss1	13	15.14	-4.45
HE80	6465	Mcs0_Nss1	16	17.95	-4.49
HE160	6505	Mcs0_Nss1	18	20.36	-4.69

Result

The maximum average power spectral density was less than the limit of 5 dBm EIRP; therefore, the EUT complies with the specification.

5.6.1 OFDMA RU Check

If EUT supports OFDMA multiple partial Resource Unit (RU) configurations were verified and the worst case mode was tested.

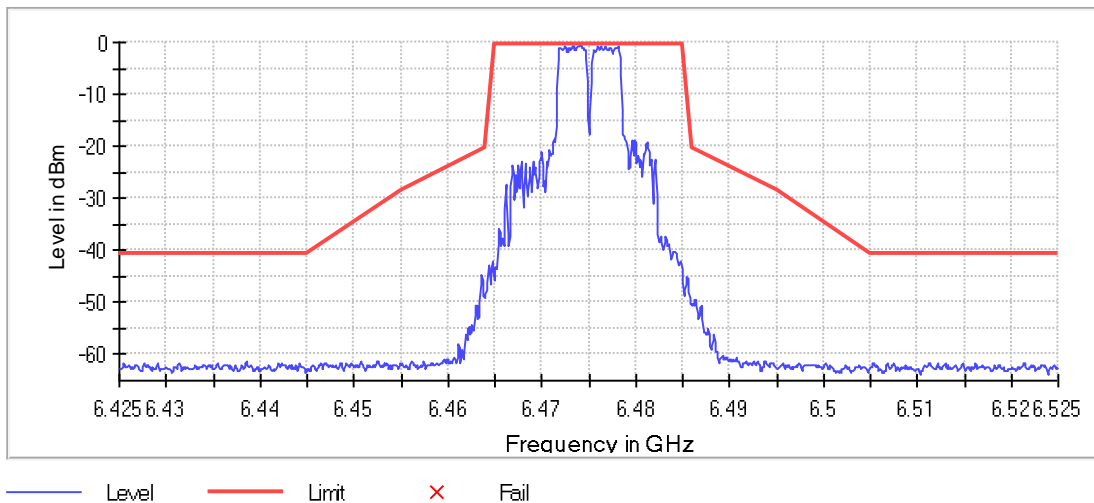


Figure 5: 6475 20MHz RU Vérification - Center

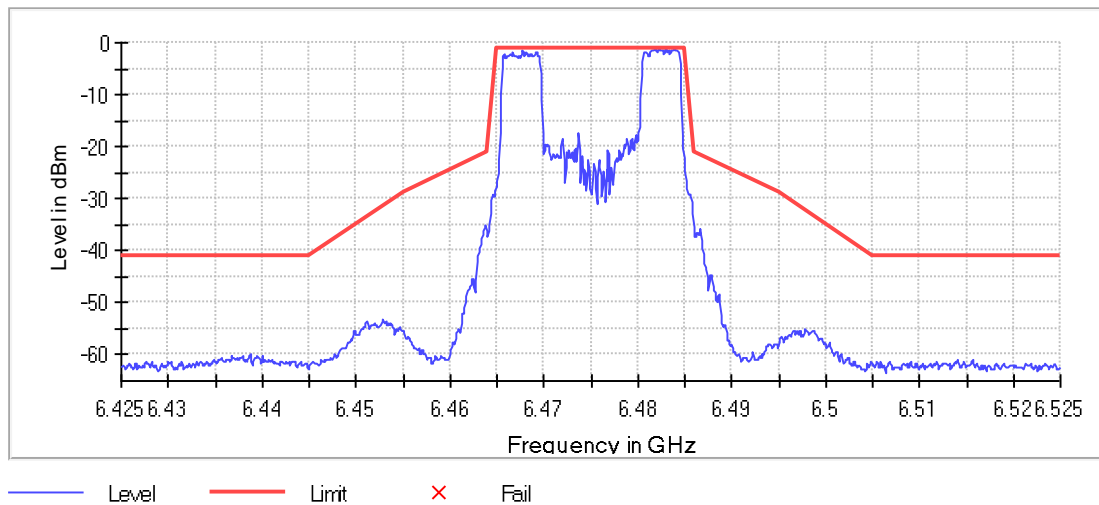


Figure 6: 6475 20MHz RU Vérification – Edge

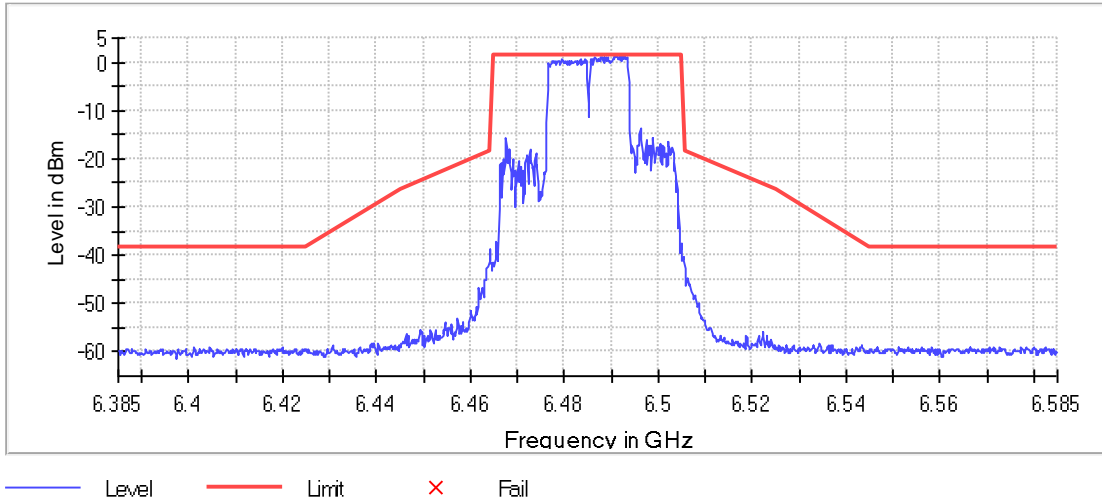


Figure 7: 6485 40MHz RU Vérification - Center

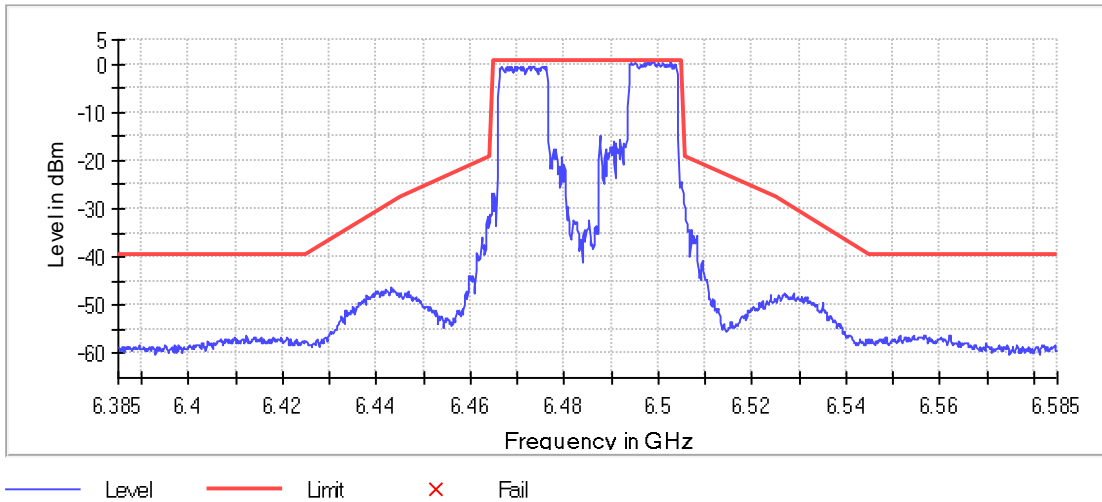


Figure 8: 6485 40MHz RU Vérification - Edge

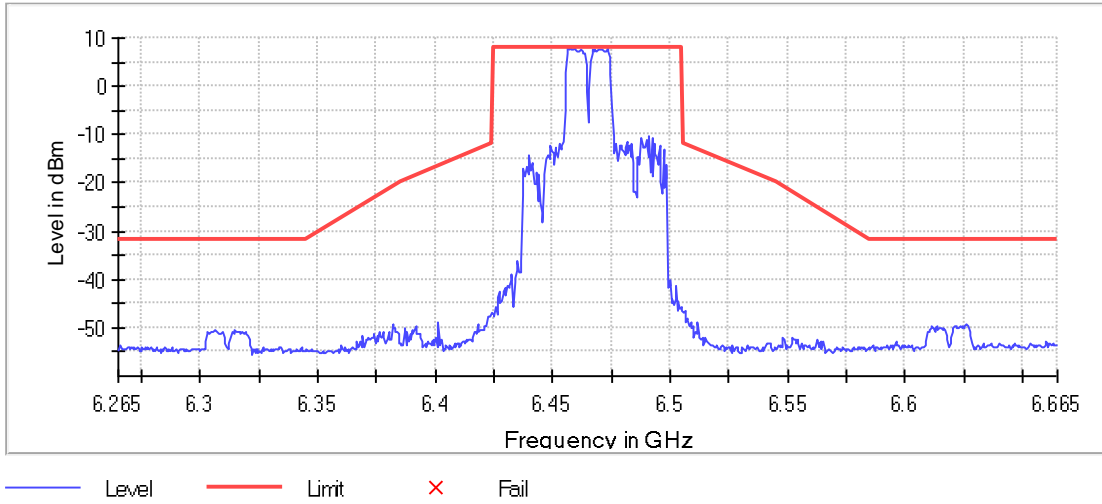


Figure 9: 6465 80MHz RU Vérification - Center

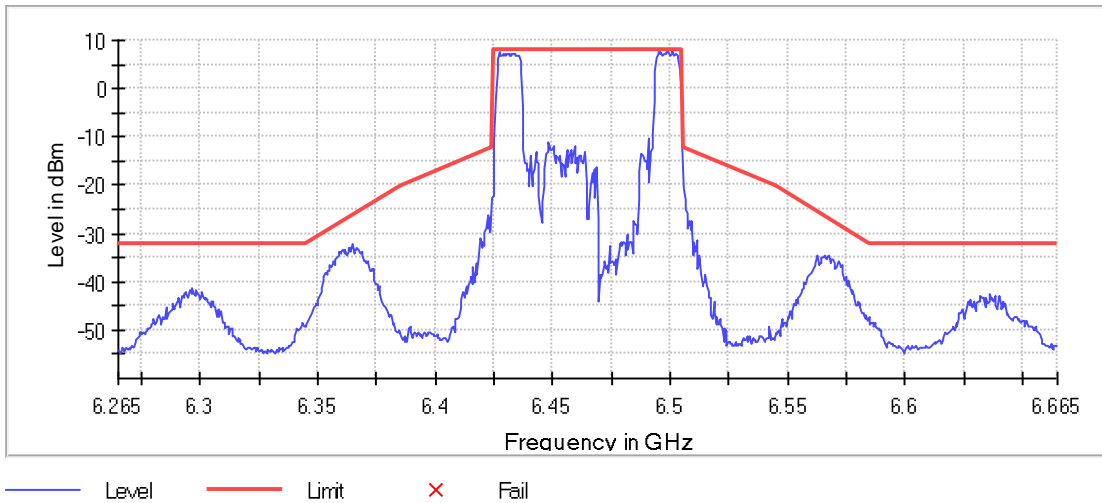


Figure 10: 6465 80MHz RU Vérification - Edge

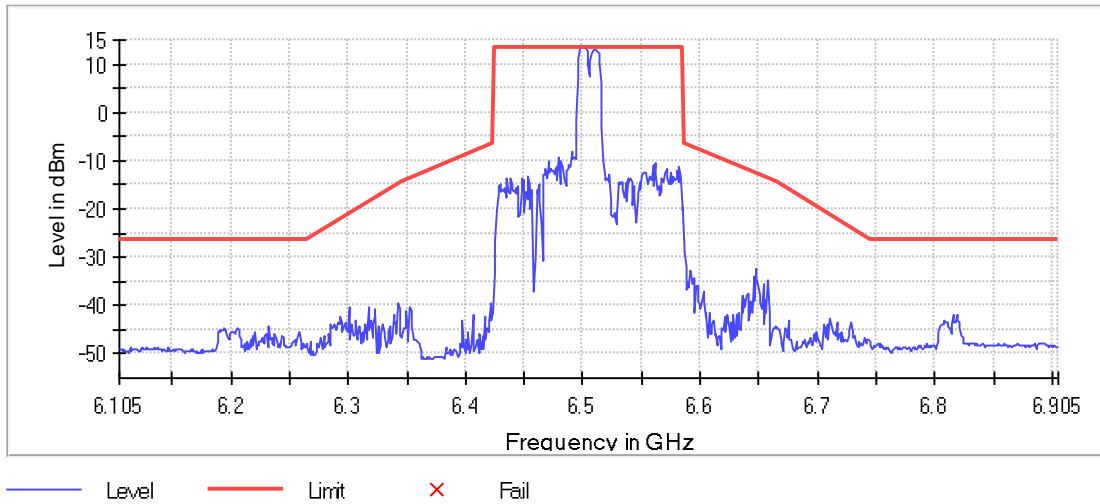


Figure 11: 6505 160MHz RU Vérification - Center
In Band

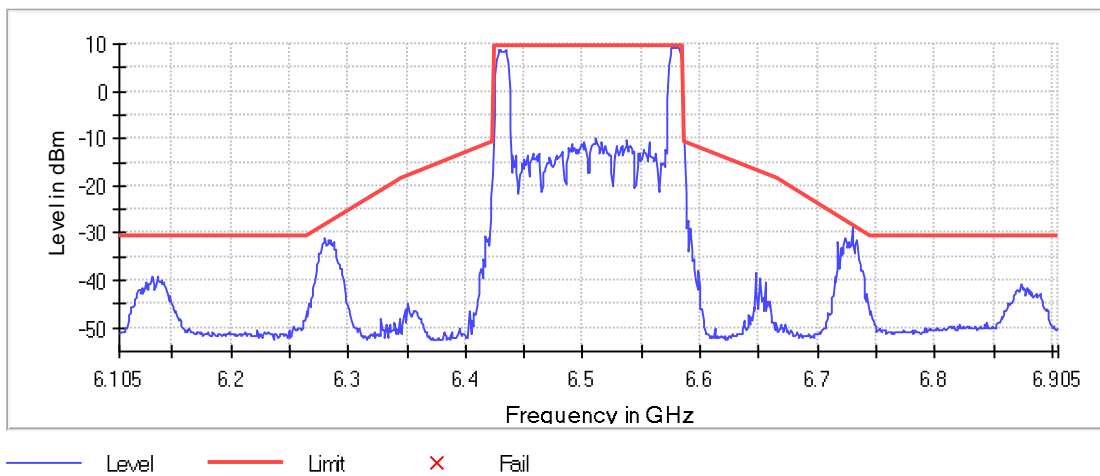


Figure 12: 6505 160MHz RU Vérification - Edge

5.7 §15.407(d) Contention Based Protocol


This product was tested and found to be compliant with the requirements of Contention-based Protocol as specified in FCC Part 15.407 and KDB 987594 D02.

Initially the test setup was connected directly to the signal source with all splitters (splitters terminated with a 50-ohm loads on unused ports) and cables in place to verify the AWGN signal is 10MHz wide at a signal level of less than or equal to -82dBm and for conducted measurements the threshold was adjusted for an antenna gain of 0 dBi. The level at the signal generator required to achieve the required signal level at the DUT was recorded for use during testing.


The DUT was connected as shown in figure 4 above and set to transmit at a constant duty cycle at each frequency and bandwidth noted in the table below and verified to be communicating with the companion device as intended.

Starting at the levels established above, the AWGN signal was introduced to the DUT and increased to determine a threshold level at where the DUT will terminate with at least a 90% detection rate. The level at the DUT, which the 90% detection rate was achieved was recorded as the “Sensitivity Level” below.



Testing shall be repeated at each applicable channel and bandwidth as noted in Table 1 of KDB 987594 D02.

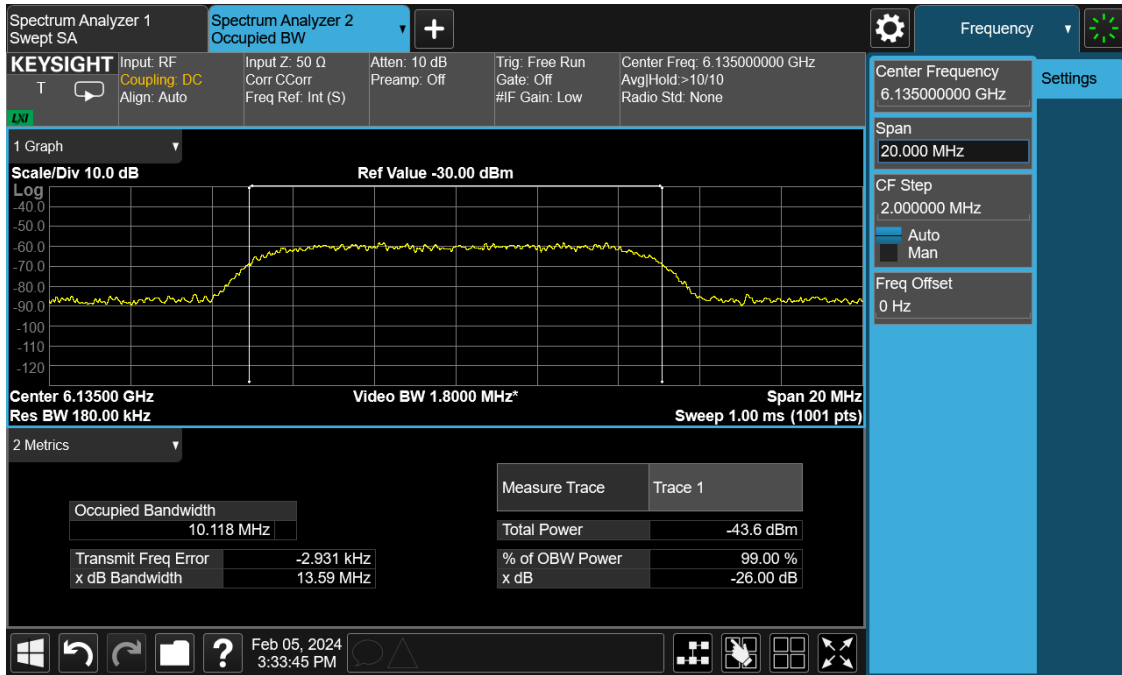


Plot 1: Signal BW Details

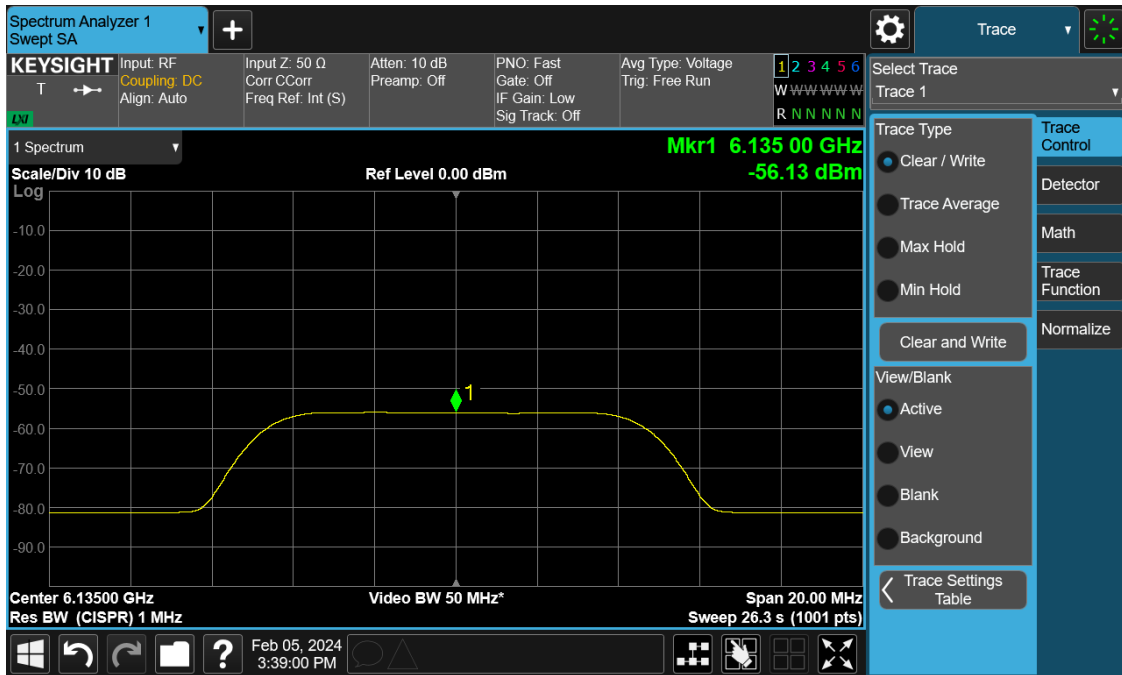


Plot 2: AWGN Signal Level Details

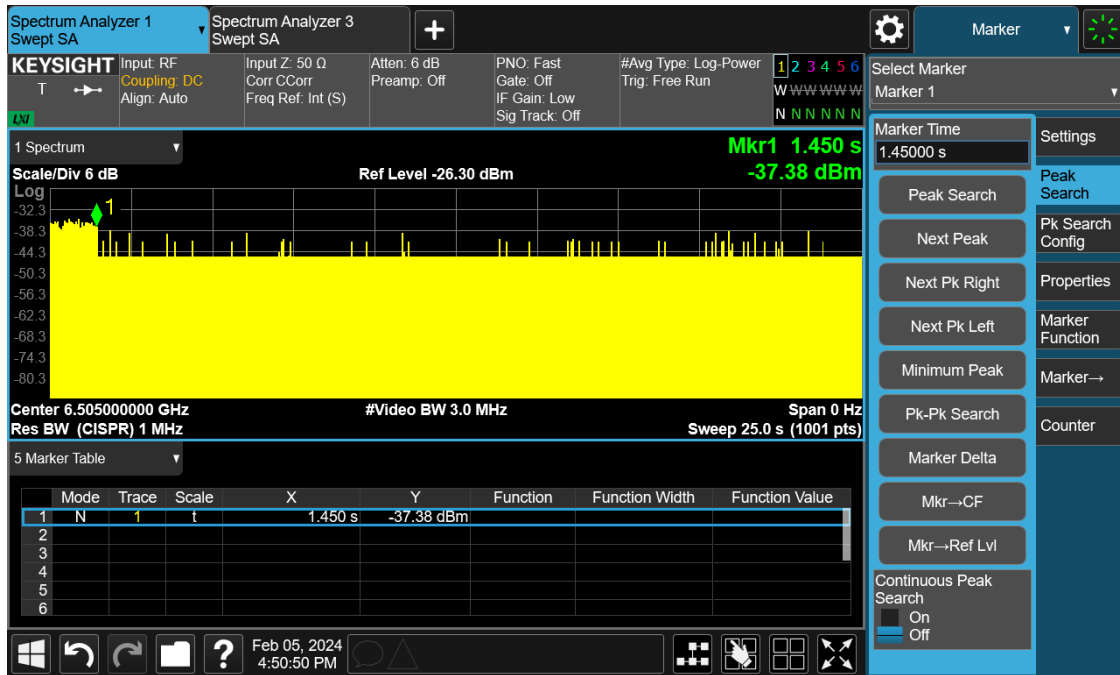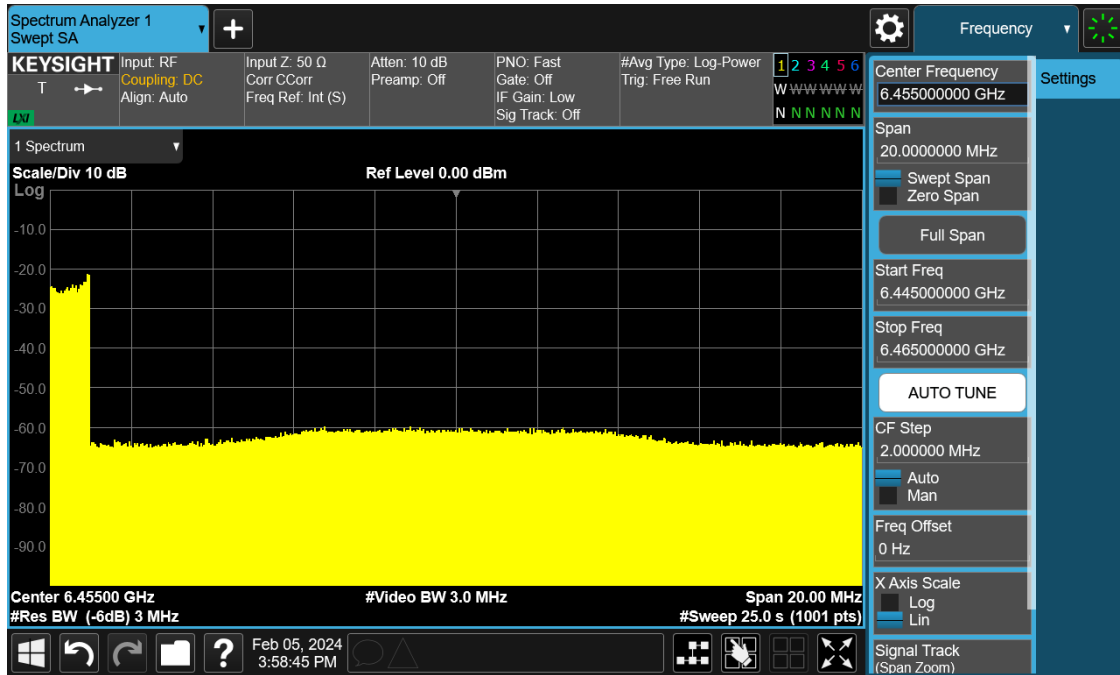

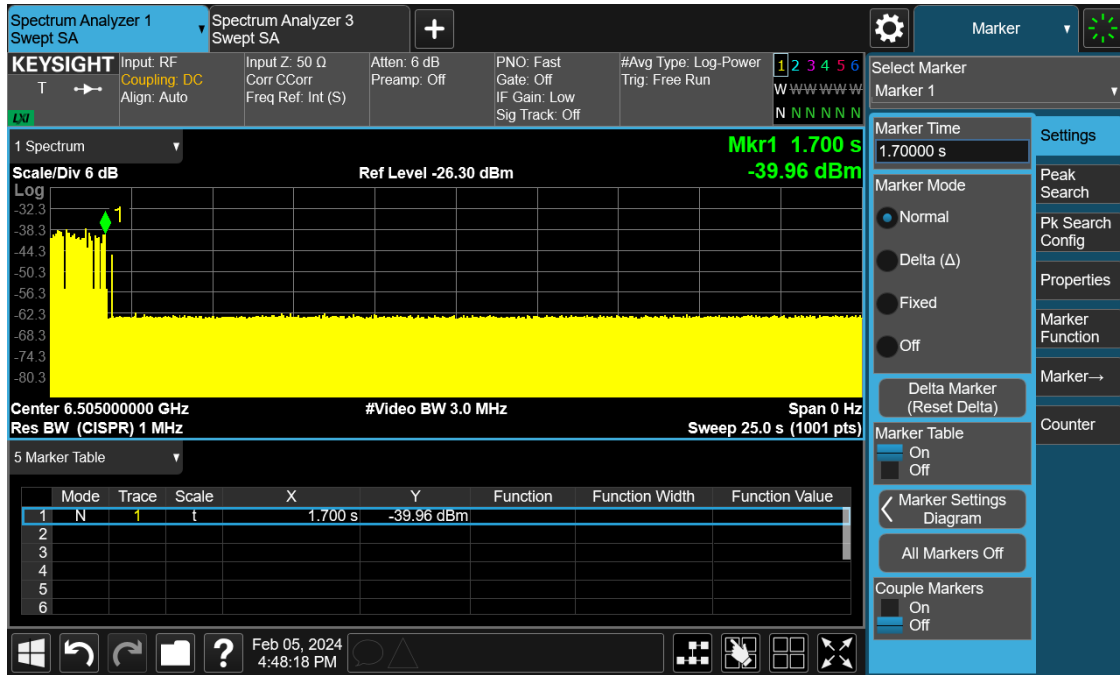

Plot 5: AWGN Signal Detection Details 160MHz BW 6505 - 6505

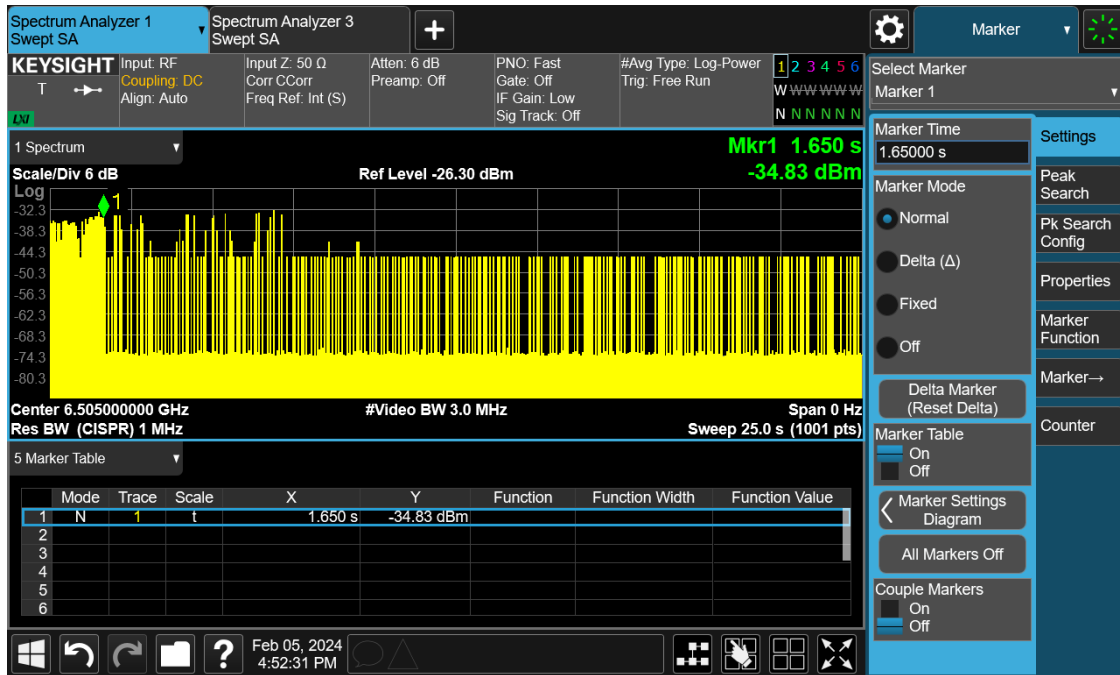

Plot 6: AWGN Signal Detection Details 160MHz BW 6505 - 6580

Contention Based Protocol 987594 D02 U-NNI 6 GHz EMC Measurement

Band	BW _{EUT}	F _{c1}	F _{c2}	Signal Power Level (dBm)	Limit (dBm)	Detection Rate (%)	Margin (dB)
UNII-5 5.925 - 6.425GHz	20	6135	6135	-76	-56.1	100	19.9
			6110	-67	-56.1	100	10.9
	160	6185	6185	-76	-56.1	100	19.9
			6260	-73	-56.1	100	16.9
	320	6105	5950	-62	-56.1	100	5.9
			6105	-67	-56.1	100	10.9
6250			-67	-56.1	100	10.9	
UNII-6 6.425 - 6.525GHz	20	6455	6455	-65	-56.1	100	8.9
			6430	-67	-56.1	100	10.9
	160	6505	6505	-74	-56.1	100	17.9
			6580	-65	-56.1	100	8.9
UN11-7 6.525 - 6.875GHz	20	6695	6695	-76	-56.1	100	19.9
			6595	-67	-56.1	100	10.9
	160	6665	6665	-76	-56.1	100	19.9
			6740	-65	-56.1	100	8.9
	320	6745	6590	-60	-56.1	100	3.9
			6745	-76	-56.1	100	19.9
6890	-62	-56.1	100	5.9			
UNII-8 6.875 - 7.125GHz	20	7015	7015	-76	-56.1	100	19.9
			6910	-72	-56.1	100	15.9
	160	6985	6985	-76	-56.1	100	19.9
			7060	-67	-56.1	100	10.9

Table 13: Trial Table

Result

The EUT complies with the specification.

-- End of Test Report --